



Permit Application

# Colon Mine Site Structural Fill

---

Charah, Inc.

*Sanford, North Carolina*

**November 2014**

**Revised December 2014**





**Permit Application**

# Colon Mine Site Structural Fill

---

Charah, Inc.

*Sanford, NC*

**November 2014**

**Revised December 2014**



HDR Engineering, Inc. of the Carolinas  
440 South Church St, Suite 1000  
Charlotte, NC 28202-2075  
704.338.6700

NC License F0116

This page intentionally left blank.



# Permit Application Overview

## Purpose

The purpose of this permit application is to obtain a permit to construct a structural fill project at the Colon Mine Site in Lee County, North Carolina. North Carolina General Statutes (NCGS) §130A-309.215 (a) (2) mandates that no person shall commence or operate a project using coal combustion residuals as structural fill involving the placement of 8,000 or more tons of coal combustion products (CCP) per acre or 80,000 or more tons of CCP in total per project without first receiving an individual permit from the North Carolina Department of Environment and Natural Resources (NCDENR). This permit application is intended to meet that requirement.

## General

NCGS §130A-309.215 (b) (2) requires that, for projects involving placement of 8,000 or more tons of CCP per acre or 80,000 or more tons of CCP in total per project, all information required pursuant to subdivision (1) of NCGS §130A-309.215 (b) including construction plans for the project must be provided to NCDENR. In addition, NCGS §130A-309.215 (b) (2) mandates that, if required by NCDENR, a stability analysis must be prepared, signed, and sealed by a professional engineer in accordance with sound engineering practices. The construction plan shall, at a minimum, include a groundwater monitoring system and an encapsulation liner system in compliance with the requirements of NCGS §130A-309.216.

## Content

This permit application includes the following sections and is intended to meet the NCGS requirements and mandates.

- Correspondence
- Facility Plan
- Engineering Plan
- Operations Plan
- Closure and Post-Closure Plan
- Calculations
- Design Hydrogeologic Report (includes Water Quality Monitoring Plan)
- Related Documents
- Construction Quality Assurance Plan
- Technical Specifications
- Drawings

This permit application does not include a wetland/stream impact permit. This permit must be obtained prior to construction of the structural fill areas impacting wetlands and streams.



This page intentionally left blank.

Correspondence

# Colon Mine Site Structural Fill

---

Charah, Inc.

*Sanford, NC*

**November 2014**

**Revised December 2014**

HDR Response to Comments, Dec 31, 2014  
NCDENR Completeness Review Letter, Dec 19, 2014  
Application for Transfer/Amendment Transmittal  
Letter, Nov 21, 2014  
Structural Fill Permit Application Transmittal Letter,  
Nov 21, 2014

This page intentionally left blank.





December 31, 2014

Mr. Ed Mussler, III, PE, Supervisor  
Permitting Branch, Solid Waste Section  
Division of Waste Management, NCDENR  
1646 Mail Service Center  
Raleigh NC 27699

Dear Mr. Mussler,

On behalf of Green Meadow, LLC and Charah, Inc., HDR provides the following response to NCDENR's December 19, 2014 completeness review letter (DIN 22354) regarding the permit application entitled:

*Permit Application, Colon Mine Site, Structural Fill, Charah, Inc., Sanford, North Carolina.*  
Prepared for Charah, Inc. Prepared by HDR Inc. November 2014. DIN 22354.

As requested, the Division's comments have been addressed, the previously submitted Addendum No. 1 (issued December 9, 2014 via e-mail to Mr. Ed Mussler) has been incorporated into the application, and two hard copies of the application binder and associated drawings are attached herewith. A compact disc (CD) containing the entire revised application and drawings in PDF format is included in the inside pocket of each application.

As a reminder, the application includes a Correspondence section which is intended to be used to track communication received from DENR or provided to DENR on behalf of the applicant while the application is under review. To that end, HDR had included copies of the Division's December 19, 2014 completeness review letter as well as this response letter in that section of the application. Future correspondence will be handled similarly.

The December 19, 2014 comments from the Division of Waste Management are restated below; HDR's responses on behalf of the applicant follow in *italics*.

### **Hydrogeological Review Comments**

1. Submit a site map showing the proposed base grades along with the potentiometric surface in order to determine the required 4-foot vertical separation between bottom of waste and long-term seasonal high groundwater in hard copy and electronic format (pdf).

*A new Figure 6 has been included showing the requested surfaces. [The Water Quality Monitoring Plan, which was Figure 6 in the previous submittal, has now been renumbered as Figure 7.]*

2. Submit boring logs and well construction records (Form GW-1b) for each of the nine (9) compliance groundwater monitoring wells in electronic format (pdf).

*Some of the original piezometers are intended to function as future compliance wells, while some compliance wells are yet to be installed. In Section 13.1 of the Design Hydrogeologic Report piezometers PZ-1 (MW-1) and PZ-7 (MW-2), which were installed during the Design Hydrogeologic investigation, are identified to be utilized as compliance wells. For the existing wells, the construction records are included. Construction records for any compliance wells installed in the future will be submitted at that time.*

3. Submit revised *Figure 6-Water Quality Monitoring Plan* with the groundwater monitoring wells and surface water monitoring locations properly labeled in hard copy and electronic format (pdf).

*The Water Quality Monitoring Plan, now Figure 7, has been revised as requested.*

## **Engineering Review Comments**

### **FACILITY PLAN**

4. 2.4.1 -The method of leachate storage is not chosen. Please submit the method chosen for permit review.

*The Facility Plan and Drawings have been revised to clarify the intent to use a tank for leachate storage.*

5. Financial assurance- Appendix G- Financial assurance numbers could be subject to change depending on the final design plans. General Statute 130A-309.217 specifies that coverage be posted to cover any sudden and nonsudden accidental occurrences. Please submit information to document coverage for sudden and nonsudden accidental occurrences. This coverage is for the corporation's operation in North Carolina rather than specific to an individual facility.

*Any sudden and nonsudden accidental occurrences will be covered by an insurance policy that will provide four million dollars (\$4,000,000) for each individual occurrence and eight million dollars (\$8,000,000) for the aggregate of occurrences as directed by the State. The certificate of insurance has been added to Appendix G of the Calculations section.*

6. 4.4.5 CQA Plan- Refers to backfilling of the anchor trench. The plan must address the handling and protection of the runout of the liner, construction and filling of the anchor trench as well as welding/joining to the next cell for continued construction. Items such as welding a cap strip over the joining seam, verifying integrity of GCL, joining of the low permeability soil component and the like must be addressed.

*Section 4.4.5 of the CQA Plan has been revised to address handling and protection of the anchor trench and runout of the low permeability soil component, GCL, and liner during construction and backfilling as well as welding/joining to the next cell for continued construction.*

#### **TECHNICAL SPECS**

7. Specifications and engineering designs for leachate storage tanks and secondary containment, or leachate lagoons must be provided for the permitting of the leachate handling infrastructure.

*The Leachate Storage Capacity calculation has been revised to address sizing the leachate storage tank and is included in Part D of the Calculations section. A specification for the leachate storage tank is provided in the Specifications section.*

#### **DRAWINGS**

8. 01-07 the plan must address protection of liner runout and liner tie in and joining of subcells etc.

*Drawing 00C-07 has been revised to include a construction detail to illustrate a subcell tie-in.*

#### **Information and Planning Purposes Comments**

##### **GENERAL**

- Transfer/offloading sites that will feed coal ash to this site must have environmental controls and operation plans in place that are protective of public health and the environment. Please describe those plans.

*Transfer/offloading infrastructure is being developed in conjunction with the railroad providers identifying site access and traffic patterns. The offloading of rail cars will be performed by using a straddle-excavator that will work along the rail car spur line. Material shall be removed from the car and loaded into an off-road dump truck and then transported to the structural fill for placement inside the lined placement area. The off-loading spur line(s) will be constructed with a containment liner that will consist of an HDPE flexible membrane liner. All leachate from the offloading area will be collected and conveyed onsite to the storage tank and on to the wastewater treatment plant.*

**PRIOR TO CONSTRUCTION** – the following must be provided to the Section prior to commencement of construction:

- Submit well abandonment records (Form GW-30) for each abandoned piezometer as needed during the progression of construction of each Subcell in electronic format (pdf).

*Requirement acknowledged.*

- Provide the approved Erosion and Sedimentation Control permit from the Division of Energy, Mining and Land Resources, in electronic format (pdf), for the Section's database record.

*Requirement acknowledged.*

- In areas with streams and/or wetlands, provide the approved 404/401 from U.S. Army Corps of Engineers and/or the N.C. Division of Water Resources, in electronic format (pdf), for the Section's database record.

*Requirement acknowledged.*

**PRIOR TO INITIAL OPERATION** – the following must be provided to the Section prior to commencement of operations:

- A leachate disposal permit must be provided, in electronic format (pdf), for the Section's database record.

*Requirement acknowledged.*

- Submit a monitoring report of the four (4) independent background monitoring events for the nine (9) compliance groundwater monitoring wells and one (1) background monitoring event for the two (2) surface water monitoring locations in electronic format (pdf).

*Requirement acknowledged.*

- The CCP generator location forms must be provided for each generator site, in electronic format (pdf), for the Section's database record.

*Requirement acknowledged. Information is provided for Duke Energy's Riverbend and Sutton plants in this application.*

- Submit TCLP analysis reports for each new CCP generator site identified, in electronic format (pdf), for the Section's database record.

*Requirement acknowledged. Information is provided for Duke Energy's Riverbend and Sutton plants in this application.*

- An approved Financial Assurance mechanism must be established.

*Requirement acknowledged.*

If you have any questions, comments, or require additional information, please contact me at 704.338.6843.

Sincerely,  
HDR Engineering, Inc. of the Carolinas



Michael D. Plummer, PE  
*Project Manager*

Enclosures: Permit Application Binder (2)  
Drawings 22x34 (2 sets)





North Carolina Department of Environment and Natural Resources

Pat McCrory  
Governor

John E. Skvarla, III  
Secretary

December 19, 2014

Mr. Norman Divers, Environmental Manager  
Charah, Inc. and Green Meadow, LLC  
Post Office Box 287  
Belmont, North Carolina 28012

Subject: Permit Application – Completeness Review  
Colon Mine Site, Structural Fill  
Lee County, DIN 22536

Dear Mr. Divers:

On November 21, 2014 the Division of Waste Management, Solid Waste Section (Section) received Charah Inc.'s Permit Application, entitled:

*Permit Application, Colon Mine Site, Structural Fill, Charah, Inc., Sanford, North Carolina.*  
Prepared for Charah, Inc. Prepared by HDR Inc. November 2014. DIN 22354.

The Section has determined that additional information is needed to allow the division to make a completeness determination. Please provide the following:

**Hydrogeological Review**

1. Submit a site map showing the proposed base grades along with the potentiometric surface in order to determine the required 4-foot vertical separation between bottom of waste and long-term seasonal high groundwater in hard copy and electronic format (pdf).
2. Submit boring logs and well construction records (Form GW-1b) for each of the nine (9) compliance groundwater monitoring wells in electronic format (pdf).
3. Submit revised *Figure 6-Water Quality Monitoring Plan* with the groundwater monitoring wells and surface water monitoring locations properly labeled in hard copy and electronic format (pdf).

**Engineering Review**

Facility Plan

4. 2.4.1 -The method of leachate storage is not chosen. Please submit the method chosen for permit review.
5. Financial assurance- Appendix G- Financial assurance numbers could be subject to change depending on the final design plans. General statute 130A-309.217 specifies that coverage be posted to cover any sudden and nonsudden accidental occurrences. Please submit information to support coverage for sudden and nonsudden accidental occurrence. This

coverage is for the corporation's operation in North Carolina rather than specific to an individual facility.

6. 4.4.5 CQA Plan- Refers to backfilling of the anchor trench. The plan must address the handling and protection of the runout of the liner, construction and filling of the anchor trench as well as welding/joining to the next cell for continued construction. Items such as welding a cap strip over the joining seam, verifying integrity of GCL, joining of the low permeability soil component and the like must be addressed.

#### Technical Specs

7. Specifications and engineering designs for leachate storage tanks and secondary containment, or leachate lagoons must be provided for permitting the leachate handling infrastructure.

#### Drawings

8. 01-07- The written plan must address protection of liner runout and liner tie-in and joining of subcells etc.

### **The following items are requested to provide clarification or additional information.**

#### General

Transfer/offloading sites that will feed coal ash to this site must have environmental controls and operation plans in place that are protective of public health and the environment. Please describe those plans.

Prior to Construction – the following must be provided to the Section prior to commencement of construction:

Submit well abandonment records (Form GW-30) for each abandoned piezometer as needed during the progression of construction of each Subcell, in electronic format (pdf).

Provide the approved Erosion and Sedimentation Control permit from the Division of Energy, Mining and Land Resources, in electronic format (pdf), for the Section's database record.

In areas with streams and/or wetlands, provide the approved 404/401 from U.S. Army Corps of Engineers and/or the N.C. Division of Water Resources, in electronic format (pdf), for the Section's database record.

Prior to Initial Operation – the following must be provided to the Section prior to commencement of operations:

A leachate disposal permit must be provided, in electronic format (pdf), for the Section's database record.



Submit a monitoring report of the four (4) independent background monitoring events for the nine (9) compliance groundwater monitoring wells and one (1) background monitoring event for the two (2) surface water monitoring locations in electronic format (pdf).

The CCP generator location forms must be provided for each generator site, in electronic format (pdf), for the Section's database record.

Submit TCLP analysis reports for each new CCP generator site identified in electronic format (pdf), for the Section's database record.

An approved Financial Assurance mechanism must be established.

Additional technical information to supplement the permit application will be requested upon further permit review.

Please address the above issues from the original application and combine any addendums provided to the Section in an amended permit application. Two (2) hard copies and an electronic (pdf) copy of the amended application must be provided to the Section. Should you have any questions, contact Mr. Larry Frost at (828) 296-4704 [larry.frost@ncdenr.gov](mailto:larry.frost@ncdenr.gov) or Mrs. Elizabeth Werner (919) 707-8253 [elizabeth.werner@ncdenr.gov](mailto:elizabeth.werner@ncdenr.gov).

Sincerely,



Digitally signed by Edward F. Mussler III, P.E.  
DN: cn=Edward F. Mussler III, P.E.,  
o=NCDWM, ou=Solid Waste  
Section,  
email=ed.mussler@ncdenr.gov,  
c=US

Edward F. Mussler, III, P.E., Supervisor  
Permitting Branch, Solid Waste Section  
Division of Waste Management, NCDENR

Cc:	Joe Readling	HDR Engineering
	Larry Frost	DWM
	Elizabeth Werner	DWM
	Linda Culpepper	DWM
	Judy Wehner	DEMLR
	Tracy Davis	DEMLR
	Tom Reeder	DWR





November 21, 2014

Tracy Davis  
Director  
Division of Energy, Mineral and Land Resources  
North Carolina Department of Environment and Natural Resources  
1646 Mail Service Center  
Raleigh, NC 27699-1646

RE: Application for Transfer and Amendment  
Mine Permit No. 53-05  
Colon Mine Site – Lee County, NC  
HDR Project No. 235691

Dear Director Davis,

On behalf of Green Meadow, LLC and Charah, Inc., HDR is submitting this application for a transfer and amendment/modification of the referenced permit to allow for structural fill to be located at the Colon Mine Site (the "Site") in Lee County, North Carolina. Two copies of the application document are enclosed; each contains an electronic copy of the application on CD and is accompanied by a full size set of drawings (bound separately). The applicants understand that the provisions of Subpart 3 of the North Carolina Coal Ash Management Act of 2014 (codified at North Carolina General Statutes Chapter 130A Article 9 Part 2I) will apply to the placement of structural fill at the Site, and that the requirements of Subpart 3 will be expressly included as specific requirements in the transferred, amended/modified permit. If you have any questions about this permit application, please feel free to contact me at (704) 338-6843.

Sincerely,  
HDR Engineering Inc., of the Carolinas

Michael D. Plummer, PE  
*Project Manager*

Enclosure





November 21, 2014

Ms. Linda Culpepper  
NCDENR Division of Waste Management Director  
1646 Mail Service Center  
Raleigh, NC 27699-1646

RE: Structural Fill Permit Application  
Colon Mine Site – Lee County, NC  
HDR Project No. 235961

Dear Ms. Culpepper,

On behalf of Green Meadow, LLC and Charah, Inc., this letter is to confirm today's hand delivery of a permit application for a structural fill to be located at the Colon Mine Site in Lee County, North Carolina (North Carolina Department of Environment and Natural Resources (NCDENR) Mine Permit No. 53-05). This permit application has been completed in accordance with the North Carolina Coal Ash Management Act of 2014 Subpart 3 - Use of Coal Combustion Products in Structural Fill (codified at North Carolina General Statutes Chapter 130A Article 9 Part 2I). A separate mining permit transfer/modification application covering this site has been sent to Tracy Davis, Director of the Division of Energy, Mineral, and Land Resources of NCDENR.

If you have any questions about this permit application, please feel free to contact me at (704) 338-6843.

Sincerely,  
HDR Engineering Inc., of the Carolinas

Michael D. Plummer, PE  
*Project Manager*

Enclosure

cc: Tracy Davis



Facility Plan

# Colon Mine Site Structural Fill

---

Charah, Inc.

*Sanford, NC*

**November 2014**

**Revised December 2014**



This page intentionally left blank.





# Table of Contents

1	Introduction .....	1
1.1	Background .....	1
1.2	Responsible Party .....	1
2	Facility Plan .....	7
2.1	Facility Plan .....	7
2.1.1	Facility Services .....	7
2.1.2	Facility Description .....	7
2.1.3	Separation Requirements.....	7
2.1.4	Types of CCP .....	8
2.1.5	Estimated Placement Rates .....	8
2.1.6	Service Area.....	8
2.1.7	Procedures for CCP Acceptance .....	9
2.1.8	Equipment Requirements.....	9
2.2	Containment and Environmental Control Systems.....	9
2.2.1	Base Liner System .....	9
2.2.2	Final Cap System .....	10
2.2.3	Drainage, Erosion and Sediment Control.....	10
2.3	Total Structural Fill Capacity.....	11
2.3.1	Available Soil Resources and Required Soil Quantities .....	11
2.4	Leachate Management.....	12
2.4.1	Leachate Collection System.....	12
2.4.2	Leachate Generation Rates .....	12
2.4.3	Leachate Management Systems.....	13
2.5	Landowner Statement .....	13
2.6	Generator Contact Information .....	14
2.7	Coal Combustion Product Generation Location .....	14

## List of Figures and Tables

Figure 1	Colon Mine Site Overview .....	3
Figure 2	Property Survey .....	5



Table 1 Structural Fill Horizontal Separation Requirements Summary ..... 8  
Table 2 Final Cap System Design: Soil and Geomembrane Option ..... 10  
Table 3 Final Cap System: Soil, Geocomposite Drainage Layer and Geomembrane Option .... 10  
Table 4 Structural Fill Soil Requirements..... 11

## Appendices

- A Landowner Statement
- B Coal Combustion Product Generator and Location Information

# 1 Introduction

This is a facility plan to reclaim the Colon Mine Site located in Lee County, North Carolina with coal combustion products (CCP) structural fill. The mine, once complete, will be reclaimed by encapsulating CCPs in a lined containment in order to re-establish the mine contours to a useful design.

Construction of the structural fill will begin once the North Carolina Department of Environment and Natural Resources (NCDENR) approves this permit application. Construction of the composite base liner system is anticipated to be completed in two phases. The Owner anticipates placing approximately 1,600,000 tons of CCPs a year in the 7.25 million cubic yard (cy) structural fill; therefore, placement will last approximately 5 to 5.5 years. The final closure cap is designed to minimize infiltration and erosion. In accordance with the North Carolina General Statutes, post-closure care will be performed for 30 years unless a revised schedule is approved by NCDENR.

## 1.1 Background

Green Meadow, LLC owns and Charah, Inc. will operate the Colon Mine Site located in Lee County, off Brickyard Road in Sanford, North Carolina under NCDENR Permit No. 53-05. The mine property, consisting of approximately 411 acres, is shown in the permit drawings. The property was previously owned and operated by General Shale. The mine was originally permitted in October 1972 according to information on the NCDENR website.

The structural fill, including associated perimeter berms, channels, and haul roads, will encompass approximately 137 acres, of which approximately 118 acres will be covered with a composite liner system for subsequent CCP placement. The proposed structural fill area is bounded on the east by the CSX railroad; on the north by a tributary to Roberts Creek; and on the south by Norfolk Southern railroad.

The structural fill is scheduled for construction in early 2015 with ash placement scheduled to begin in March 2015 to be in a position to comply with the schedule defined in the Coal Ash Management Act of 2014.

Figure 1 shows various site features including the proposed structural fill cells and the current property boundaries superimposed on an aerial photo. Figure 2 contains a survey of the structural fill property.

## 1.2 Responsible Party

The owner of the Colon Mine Site is as follows.


Owner: Green Meadow, LLC  
12601 Plantside Drive Louisville, KY 40299  
(877) 314-7724, (502) 245-1353  
Facility Contact: Mr. Charles E. Price

The Owner is also the Permittee and is responsible for this permit application



The company responsible for the operation and maintenance of the Colon Mine Site is as follows.

Operator: Charah, Inc.  
12601 Plantside Drive Louisville, KY 40299  
(877) 314-7724, (502) 245-1353  
Facility Contact: Mr. Charles E. Price

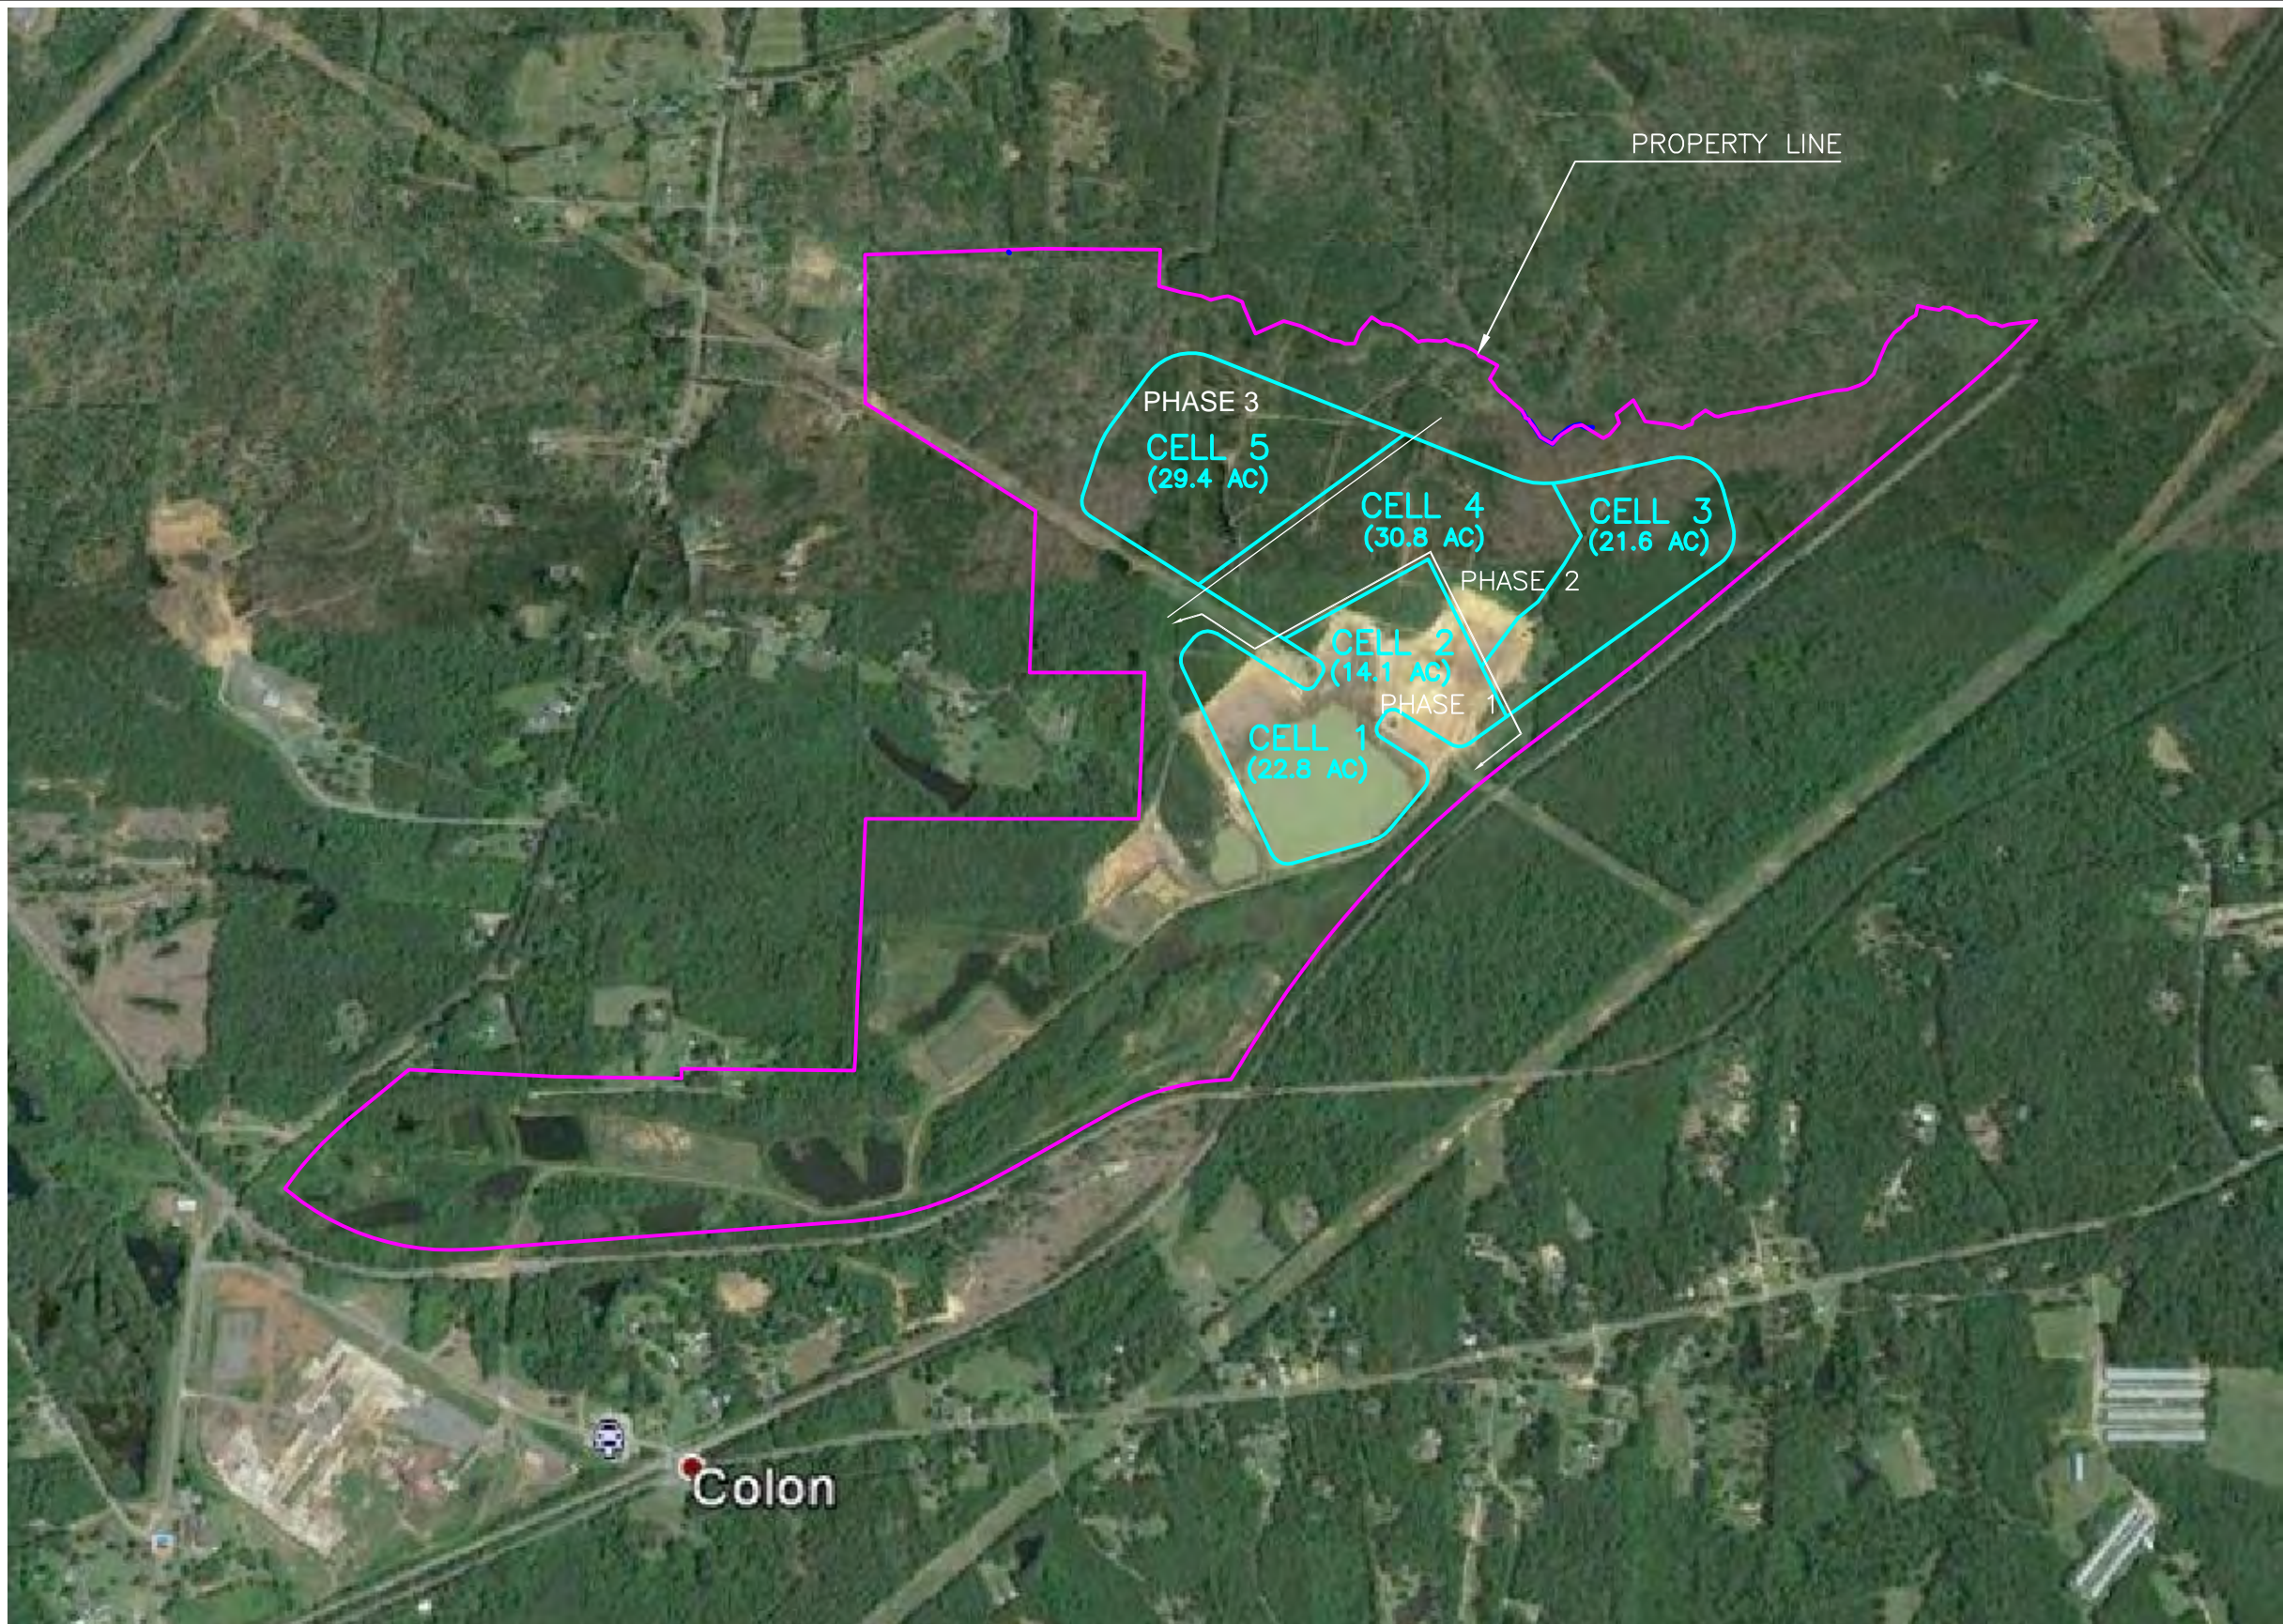

HDR Engineering Inc.  
of the Carolinas  
440 S. Church St. Suite 1000  
Charlotte, NC 28202-2075  
704.338.6700  
N.C.B.E.L.S. F-0116

### COLON MINE SITE OVERVIEW



COLON MINE SITE

DATE 11/2014

FIGURE 1

*This page intentionally left blank.*



*This page intentionally left blank.*



## 2 Facility Plan

### 2.1 Facility Plan

#### 2.1.1 Facility Services

The Colon Mine Site facilities and activities may consist of the following.

- Administrative offices
- Equipment maintenance facility
- Mining/stockpiling operations and equipment
- CCP placement
- Railway off-loading area
- Structural fill operations
- Stormwater management devices

#### 2.1.2 Facility Description

Sheet 00G-02, Facility Plan and Buffers, shows the Colon Mine Site property line. The plan includes all property, structures, and appurtenances designated as Colon Mine Site property, inclusive of the mining operations and the structural fill area; a total of approximately 411 acres.

The Colon Mine Site is located approximately five miles northeast of Sanford, North Carolina. The area surrounding the site consists of rural residential, wooded, and agricultural property. The site is bounded on the north by an unnamed tributary to Roberts Creek, on the east by the CSX railroad, and on the south by the Norfolk Southern railroad. The site is bisected by a Duke Energy power line right-of-way and consists of previously mined and wooded, unmined areas. There are several ponds on the southern half from previous mining activities. Onsite elevations range from approximately 226 to 336 mean sea level.

As described in Section 1 above, the structural fill, including stormwater management, leachate management, and haul roads, etc. will encompass approximately 137 acres, of which approximately 118 acres will be covered with a composite liner system for subsequent CCP placement.

#### 2.1.3 Separation Requirements

Horizontal and vertical separation requirements are mandated in NCGS §130A-309.216 (c) and are discussed below.

##### 2.1.3.1 HORIZONTAL SEPARATION REQUIREMENTS - LOCATION RESTRICTION DEMONSTRATION

Table 2 below summarizes the horizontal separation requirements.



**Table 1 Structural Fill Horizontal Separation Requirements Summary**

<b>Feature</b>	<b>Restriction: A structural fill cannot be within</b>
Property boundary	50 feet
Private dwelling or well	300 feet
Perennial stream or other surface water body <sup>a</sup>	50 feet
Floodplain	A 100-year floodplain <sup>b</sup>
Wetland	50 feet <sup>c</sup>

<sup>a</sup> The structural fill cannot be within 50 feet of the top of the bank of a perennial stream or other surface water body.

<sup>b</sup> In accordance with NCGS §130A-309.216 (c) (5), the structural fill cannot be placed “within a 100-year floodplain except as authorized under [NC]G.S. 143-215.54A(b). A site located in a floodplain shall not restrict the flow of the 100-year flood, reduce the temporary water storage capacity of the floodplain or result in washout of solid waste so as to pose a hazard to human life, wildlife, or land or water resources.”

<sup>c</sup> In accordance with NCGS §130A-309.216 (c) (6), the structural fill cannot be placed “within 50 horizontal feet of a wetland, unless, after consideration of the chemical and physical impact on the wetland, the United States Army Corps of Engineers issues a permit or waiver for the fill.”

The property boundary, private dwellings, groundwater wells, and floodplain buffers have been maintained as shown on Sheet G-02, Facility Plan and Buffers . Streams and wetlands were delineated and located onsite by Clearwater Environmental on August 8, 2014. The structural fill design impacts approximately 2,040 linear feet of streams and 0.62 acres of wetlands. Impacts to these will be permitted by the US Army Corp of Engineers and the NCDENR Division of Water Quality before construction occurs in these areas.

**2.1.3.2 VERTICAL SEPARATION REQUIREMENT**

NCGS §130A-309.216 (c) also mandates a vertical separation requirement for CCPs used as structural fill. The structural fill can not be placed within four feet of the seasonal high groundwater table per NCGS §130A-309.216 (c) (4). The bottom of ash has been designed to be a minimum four feet above the estimated seasonal high groundwater table. The proposed design satisfies the vertical separation requirements as shown on drawings provided with the Design Hydrogeological Report included in this Permit Application.

**2.1.4 Types of CCP**

The types of CCP specified for placement in the structural fill area are anticipated to be consistent with the CCP definition found in NCGS §130A-309.201 (4). This includes fly ash, bottom ash, boiler slag, or flue gas desulfurization materials.

**2.1.5 Estimated Placement Rates**

The anticipated filling rates of 6,000 to 8,000 tons per day which equates to 130,000 to 140,000 tons per month or 1,560,000 to 1,680,000 tons per year. This material will be brought to the site by truck, rail, or a combination thereof. Placement methods are detailed in the Operations Plan included in this Permit Application. Based on these filling rates, an assumed CCP density of 1.25 tons per cy, and an overall CCP capacity of approximately 7.25 million cy, this structural fill should take approximately 5.4 TO 5.8 years to complete.

**2.1.6 Service Area**

CCPs may come from power generation facilities located in North Carolina and South Carolina. Initial operations will receive ash from Duke Energy's Riverbend and Sutton facilities.

### **2.1.7 Procedures for CCP Acceptance**

The structural fill will only accept CCPs that it is permitted to receive. The appropriate toxicity characteristic leaching procedure (TCLP) analyses are included in the Related Documents section of this application. The process will be repeated if the source changes. Any load that contains materials or CCPs that the structural fill is not allowed to accept will not be placed in the structural fill.

### **2.1.8 Equipment Requirements**

Equipment requirements may vary in accordance with the method or scope of structural fill operations at any given time. Additional or different types of equipment may be provided as necessary to enhance operational efficiency; however, in order to ensure adequate operation of the proposed facility, arrangements shall be made to ensure that equipment is available for the following activities.

- Excavation of onsite soil
- Preparing the cells for CCP reception
- Spreading and compacting the CCP
- Moisture conditioning the CCP or structural fill
- Excavating and transporting cover soil
- Spreading and compacting cover soil
- Site maintenance, dust control, and clean-up work

The equipment onsite is currently used to manage mining operations. When the proposed structural fill is ready to accept CCPs, the equipment will use the procedures and techniques for spreading, compacting, and covering CCPs outlined in the Operations Plan included in this Permit Application. In the event the amount of CCP placement increases significantly, the need for additional equipment will be evaluated. Additional equipment may be rented to accommodate short term needs or purchased to accommodate increased CCP placement rates.

## **2.2 Containment and Environmental Control Systems**

The base liner and final cap system will be constructed in accordance with NCGS §130A-309.216.

### **2.2.1 Base Liner System**

The purpose of the base liner system is to contain CCPs within the structural fill and prevent groundwater contamination by the CCPs. The base liner area for the structural fill is approximately 118 acres and is shown on Sheet No. 00C-03, Top of Liner. The post-settlement bottom elevation of the ash will meet the minimum requirement of four feet above the seasonal high groundwater table. North Carolina law allows two different types of baseliner systems. The following describes the components of the regulatory base liner system options from top down and as shown on the drawings.

#### **2.2.1.1 COMPOSITE BASE LINER SYSTEM OPTION 1**

- 60 mil HDPE geosynthetic liner
- 24 inches of compacted soil liner with a permeability of  $1 \times 10^{-7}$  cm/sec



**2.2.1.2 COMPOSITE BASE LINER SYSTEM OPTION 2**

- 60 mil HDPE geosynthetic liner
- geosynthetic clay liner
- 18 inches of compacted soil liner with a permeability of  $1 \times 10^{-5}$  cm/sec

Option 2 was used as the basis of design for this permit application.

**2.2.2 Final Cap System**

The purpose of the final cap system is to contain CCP within the structural fill, prevent exposure of CCP, prevent infiltration into the structural fill, minimize erosion, and prevent stormwater from contacting CCP. The total area for the final cap system for the structural fill is approximately 118 acres (see Sheet 00C-04, Reclamation Plan). There are two proposed final cap system designs: a soil and geomembrane cap system option and a soil, geocomposite drainage layer and geomembrane cap system option. Each cap system has a top design and a side slope design. The components of the two proposed final cap systems are shown in Tables 2 and 3 below. The soil permeabilities are shown on the drawings.

**Table 2 Final Cap System Design: Soil and Geomembrane Option**

<b>2% Top Design</b>	<b>4:1 Sideslope Design</b>
• 6 inches topsoil	• 6 inches topsoil
• 12 inches low permeable soil layer	• 12 inches low permeable soil layer
• 24 inches unclassified soil layer	• 12 inches unclassified soil layer
• 30 inches drainage soil layer	• 18 inches drainage soil layer
• 40 mil polyethylene geomembrane	• 40 mil polyethylene geomembrane

**Table 3 Final Cap System: Soil, Geocomposite Drainage Layer and Geomembrane Option**

<b>2% Top Design</b>	<b>4:1 Sideslope Design</b>
• 6 inches topsoil	• 6 inches topsoil
• 66 inches soil layer	• 42 inches soil layer
• 250 mil geocomposite drainage layer	• 250 mil geocomposite drainage layer
• 40 mil polyethylene geomembrane	• 40 mil polyethylene geomembrane

**2.2.3 Drainage, Erosion and Sediment Control**

The erosion and sediment control structures are designed and maintained to manage the run-off generated by the 25-year storm event, convey it to the sediment basins, and conform to the requirements of the Sedimentation Pollution Control Law. Sediment basins were designed to pass the 10-year 24-hour design storm without employing use of the emergency spillways. Additional routing was performed to confirm that the emergency spillways can successfully pass the 25-year and 100-year storm events.

As part of the final cap system, diversion berms, side slope swales, and slope drains will be constructed to intercept run-off and prevent erosion. The side slope swales and diversion berms will be longitudinally sloped will carry run-off to slope drains that discharge into a perimeter channel. Channels will direct stormwater flow to sediment basins within the property.



Vegetation shall be established to protect the final cover system from erosion and to enhance the aesthetics of the closed structural fill. Plant species shall be selected based on the following criteria.

- Vegetation depth of rooting shall not extend to the geosynthetics per final cover design
- Final cover vegetation to be generally tolerant to local cover soil conditions
- Site climate adaptability (temperature, rainfall or drought tolerance, wind effects, exposure, and sunshine)
- Plant species shall be persistent and self-propagating
- Plant species shall exhibit a high percentage of surface coverage
- Plant species shall exhibit low long-term maintenance needs
- Additional procedures will be developed to implement and protect the integrity and quality of the final cover, and prevent soil erosion in disturbed areas

Calculations demonstrating the adequacy of the drainage and erosion and sediment control structures are provided in the Calculations portion of this Permit Application.

## 2.3 Total Structural Fill Capacity

The estimated volume of CCPs in the structural fill once it is complete is approximately 7.25 million cubic yards.

### 2.3.1 Available Soil Resources and Required Soil Quantities

The available soil resources for the construction of the proposed structural fill may come from a combination of onsite excavated soil from the structural fill footprint, onsite borrow soils, and offsite resources. Based on laboratory test data obtained from the Design Hydrogeologic Report, the hydraulic conductivity (k) of the onsite soils ranges from  $6.23 \times 10^{-5}$  cm/sec to  $1.35 \times 10^{-7}$  cm/sec. Generally the soils exhibiting the lower hydraulic conductivities were within the first few feet of the surface and tended to be more clayey. Construction of a base liner system using either onsite  $k \leq 1 \times 10^{-7}$  cm/sec soils, or an alternate liner system design utilizing 18 inches of  $k \leq 1 \times 10^{-5}$  cm/sec soil and a geosynthetic clay liner (GCL) is proposed. Soil borings indicate suitable onsite soils are available; however, a detailed borrow area study to determine the amount of suitable soils has not been completed.

The following table presents the estimates of the soil requirements for the structural fill construction based on the latest topographic survey available which is dated August 2014.

**Table 4 Structural Fill Soil Requirements**

Purpose	Material	Cap System Option 1 Quantity (cy) <sup>a</sup>	Cap System Option 2 Quantity (cy) <sup>a</sup>
Base Liner System <sup>b</sup>	18" of $1 \times 10^{-5}$ cm/sec	305,000	305,000
Final Cap System	Topsoil	114,000	114,000
Final Cap System	Low Permeable Soil Layer	209,000	NA
Final Cap System	Unclassified Soil Layer	335,000	937,000
Final Cap System	Soil Drainage Layer	430,000	NA
<b>Total</b>		<b>~1.4 million</b>	<b>~1.4 million</b>

<sup>a</sup> Each layer of the base liner and cap system assumes a 0.1 foot overbuild.

<sup>b</sup>  $1 \times 10^{-7}$  cm/sec base liner system was not used for this soil estimate.

Based on the topography shown on Sheet 00C-01, Existing Conditions, approximately 1.83 million cy of cut and 250,000 cy of fill are anticipated to construct the structural fill basegrades, perimeter berms, and perimeter roads. This represents an excess of approximately 1.58 million cy of soil that can be used for liner system or final cover construction if the soil meets the applicable specifications. Soils unsuitable for these uses can be stockpiled for operations or sold under the existing mining permit. Since Table 4 indicates that approximately 1.4 million cy will be required for the base system and closure, a net soil surplus of approximately 180,000 cy is anticipated, assuming all the soils onsite are suitable for use in the construction. Should there be a deficit in soils, the soil necessary to compensate for this deficit will be obtained from onsite borrow areas unidentified at this time or offsite sources. Two areas on Sheet 00C-02, Base Grade Plan, identified locations for potential future stockpiling of onsite soils. Erosion and sedimentation controls will be designed and permitted and any other necessary permits will be obtained prior to construction.

## 2.4 Leachate Management

The leachate management system includes features for collection, storage and disposal of leachate.

### 2.4.1 Leachate Collection System

NCGS §130A-309.216 (b) (2) mandates that, “[a] leachate collection system, which is constructed directly above the base liner and shall be designed to effectively collect and remove leachate from the project.” The base liner system will be constructed to maintain positive drainage post settlement to encourage leachate to drain to the sump.

The general leachate management system includes the collection, storage, treatment, and disposal of the leachate generated. The collection of leachate will be facilitated within the structural fill by the geocomposite drainage layer located directly on top of the base liner system and the use of perforated HDPE pipe laterals and header designed to hydraulically convey leachate to sump areas, which will contain submersible pumps. From there, leachate will be pumped through a solid wall HDPE forcemain to a leachate storage tank that will be located at the site. Clean-out riser pipes will be provided as shown on the drawings to allow for cleaning as necessary.

Leachate storage is provided in a 250,000 gallon storage tank with a secondary containment. Leachate storage may be managed in the structural fill as needed.

The Operator will dispose of the leachate properly at a wastewater treatment plant and will obtain a discharge permit for the leachate.

### 2.4.2 Leachate Generation Rates

Leachate is generated from a couple of sources: the liquids present in the ash at the time of placement and stormwater that infiltrates the CCP. Disposal of large quantities of liquid is currently prohibited in structural fills and unless it has rained during collection, most CCP is relatively dry; therefore, the majority of all leachate is derived from precipitation. Operations can greatly influence the diversion of precipitation from the placed CCP and hence impact the amount entering the system to be collected as leachate at some future date.

Construction of structural fill will result in a total lined area of approximately 118 acres. For a subcell 15.3 acres in size and using an estimated leachate generation rate of 43,761 cubic feet per acre per year as determined through HELP Model runs (see Calculations section of this Permit Application), a typical daily generation rate of 13,721 gallons per day is anticipated. A 250,000 gallon leachate storage tank represents approximately 18 days of storage capacity for the entire structural fill in operation. Storage capacity is also available within the subcell.

### **2.4.3 Leachate Management Systems**

#### **2.4.3.1 LEACHATE PIPELINE OPERATING CAPACITY**

The 8-inch diameter design for the leachate collection laterals and headers is sufficient to drain leachate and allow for pipe cleaning and video recording. The maximum drainage length is 950 feet, as modeled on a two percent slope. The maximum drainage length will vary as the slope of the base liner varies. Leachate pipe spacing should be verified prior to leachate pipe placement. HDPE pipe will be used due to its chemical resistance to corrosion from leachate. The thickness and other physical properties of the pipe were selected to provide adequate structural strength to support the maximum static and dynamic loads and stresses imposed by the overlying materials and any equipment used in construction and operation of the structural fill.

The material surrounding the leachate collection pipes will consist of a coarse aggregate installed to provide a direct conduit between the pipe and CCP. The aggregate will be chemically compatible with the leachate generated and will be placed to provide adequate support to the pipes.

Calculations for various materials and conditions are included in the Calculations portion this Permit Application.

#### **2.4.3.2 CAPACITY OF STORAGE AND TREATMENT FACILITIES**

The proposed method for storing the extracted leachate from the structural fill will be to pump it to a 250,000 gallon storage tank with a secondary containment. Leachate will be stored until the tank can be emptied. Additional leachate can be stored in the structural fill as needed.

#### **2.4.3.3 FINAL DISPOSAL PLANS AND DISCHARGE LIMITS**

Leachate will be hauled by tanker trucks for disposal at a wastewater treatment plant. A discharge permit has not yet been obtained from a wastewater treatment plant. A copy of the discharge permit for the leachate will be included in the Operations Plan. The industrial discharge permit will be provided prior to the placement of ash within the structural fill.

## **2.5 Landowner Statement**

NCGS §130A-309.215 (b) (1) e. requires that this permit application include a signed and dated statement by the owner of the land on which the structural fill is to be placed, acknowledging and consenting to the use of CCP as structural fill on the property and agreeing to record the fill in accordance with the requirements of G.S. 130A-[309].219. The Landowner Statement can be found in Appendix A of this Facility Plan.



## **2.6 Generator Contact Information**

In accordance with NCGS §130A-309.215 (b) (1) f., the name, address, and contact information for the generator of the CCP is provided in Appendix B. Initial generators listed are Duke Energy's Riverbend and Sutton facilities. This information will be updated if new generators or new sources of CCP will be used as structural fill at the site.

## **2.7 Coal Combustion Product Generation Location**

In accordance with NCGS §130A-309.215 (b) (1) g. the physical location of the project at which the CCP were generated is provided in Appendix B. This information will be updated if new generators or new sources of CCP will be used as structural fill at the site.





# A

## Landowner Statement





This page intentionally left blank.



# Landowner Statement

In accordance with North Carolina General Statute §130A-309.215 (b) (1) e., I certify that Green Meadows, LLC own(s) the Colon Mine Site and I acknowledge and consent to the use of coal combustion products as structural fill on the property. I agree to record the fill in accordance with the requirements of North Carolina General Statute §130A-309.219.

Charles E. Price  
Printed Name



Charles Price  
Signature

Green Meadows, LLC  
Company

President / CEO  
Title

11-6-14  
Date

This page intentionally left blank.



# B

## Coal Combustion Product Generator and Location Information





This page intentionally left blank.



# Coal Combustion Product Generator and Location Information

## Coal Combustion Product Generator Information

Company Name: Duke Energy

Company Address: 550 South Tryon Street

Charlotte, NC 28202

Contact Person: Chris Varner

Contact Person Email: chris.varner@duke-energy.com

Contact Person Telephone: (980) 373-2510

## Coal Combustion Product Generation Location

Generation Location Address: Duke Energy – Riverbend Steam Station

175 Steam Plant Road

Mt. Holly, NC 28120

Generation Location Coordinates:

Latitude: 35.36022

Longitude: -80.97432

Generation Location Address: Duke Energy – Sutton Plant

801 Sutton Plant Road

Wilmington, NC 28401

Generation Location Coordinates:

Latitude: 34.28324

Longitude: -77.98595

This page intentionally left blank.



Engineering Plan

# Colon Mine Site Structural Fill

---

Charah, Inc.

*Sanford, NC*

**November 2014**

**Revised December 2014**

This page intentionally left blank.



# Table of Contents

1	Facility Design .....	1
2	Subgrade Settlement Analysis.....	1
3	Base Liner System Design .....	2
3.1	Base Liner System 1 .....	2
3.2	Base Liner System 2 .....	2
4	Leachate Management System Details .....	2
5	Stormwater Segregation Features .....	3
6	Cap System .....	4
7	Slope Stability Analyses .....	5
8	Leachate/Stormwater Storage and Treatment Facilities.....	6
9	Site Access .....	7
10	Construction Practices .....	7
11	Design Hydrogeologic Report .....	7



This page intentionally left blank.

# 1 Facility Design

The facility has been designed and will be constructed, operated, closed, and maintained in general accordance with NCGS §130A-309.216 to minimize the potential for harmful release of constituents of coal combustion residuals to the environment or create a nuisance to the public. The design includes an encapsulation liner system constructed below and above the structural fill designed to efficiently contain, collect, and remove leachate generated by the coal combustion products (CCP), as well as separate the CCP from any exposure to surrounding environs. Site development will include excavation of mine/borrow areas, construction of the lined containment, perimeter roadway, stormwater conveyance system, environmental control systems, and leachate collection systems.

The facility is currently surrounded on all sides by natural barriers, fencing, or an equivalent means of controlling vehicular access and preventing illegal disposal. All access is limited by gates, and such gates are securable and equipped with locks.

Internal roads will be maintained to be passable in all weather by vehicles. All operations areas and units will be accessible. Roads will be finished with either gravel or asphalt. Internal roads will be a minimum of 20 feet wide and will not have slopes steeper than 8 percent.

Preparation and development of the facility will require a number of activities including some site clearing, subgrade preparation, soil liner placement, high density polyethylene flexible membrane liner (HDPE FML) installation, and placement of the leachate collection system.

Site clearing will be staged to limit the area required for development and structural filling operations. Portions are currently cleared and are within the boundary of the structural fill footprint. Trees, stumps, and other wood debris will be disposed of offsite or burned in accordance with state requirements for disposal of land-clearing debris.

Topsoil will be removed and stockpiled for later use in closure operations. During any site clearing activity, appropriate erosion and sediment control procedures will be followed to control erosion from disturbed areas.

# 2 Subgrade Settlement Analysis

The foundation of the structural fill is anticipated to consist primarily of the undisturbed naturally occurring soils with structural fill comprised of onsite or imported natural soils being required to construct the perimeter containment berms and to fill the existing drainage features on site. In addition, the pond in the Cell 1 area will be drained and backfilled to construct a stable base for the liner system.

Based on the geologic exploration of the subsurface (see Design Hydrogeological Report) no areas of gross instabilities are expected. After excavation and/or filling of the site to the design subgrade, the area will be tested for stability confirmation and any areas noted to exhibit signs of instability will be excavated and backfilled with suitable soil fill material.

Boring logs from the Design Hydrogeological Report were used to determine the soil types, depths and SPT values for each well and piezometer location within the structural fill footprint. Proposed base grades, final grades, and water table elevations were determined at each well and piezometer location. The existing vertical stress was calculated in each soil layer based on laboratory test data obtained for the foundation soils and published information for similar materials. The structural fill loading due to CCP and final cover was also determined using laboratory test data provided for compacted CCP obtained from the Riverbend Steam Station in Mount Holly, North Carolina. The total settlement was calculated using standard equations for elastic settlement and primary and secondary consolidation settlement as appropriate for the types of soils encountered at each location. The controlling surface (bedrock or water) was determined and the post settlement separation of the base grade from the controlling surface was verified. Also determined was the post settlement slope of the base grade. The pre- and post-settlement average slopes at several locations were analyzed for local settlement based on the anticipated loading and the boring log information. The calculations indicated positive drainage toward the leachate sumps would be maintained after settlement.

### 3 Base Liner System Design

In accordance with NCGS §130A-309.216 a base liner consisting of one of two liner systems are allowed for CCP structural fills.

#### 3.1 Base Liner System 1

- A composite liner that consists of two components: a geomembrane liner installed above and in direct and uniform contact with a compacted clay liner with a minimum thickness of 24 inches (0.61 m) and a permeability of no more than  $1.0 \times 10^{-7}$  centimeters per second.

#### 3.2 Base Liner System 2

- A composite liner that consists of three components: a geomembrane liner installed above and in uniform contact with a geosynthetic clay liner overlying a compacted clay liner with a minimum thickness of 18 inches (0.46 m) and a permeability of no more than  $1.0 \times 10^{-5}$  centimeters per second.

For the purposes of this Permit Application, Base Liner System 2 has been shown in the calculations; however, either liner system is allowed.

### 4 Leachate Management System Details

The general leachate management system includes the collection, storage, treatment, and disposal of the leachate generated. The collection of leachate will be facilitated within the structural fill by use of a series of interconnected perforated and solid HDPE pipe laterals and headers designed to hydraulically convey leachate to a sump area along with a geocomposite that covers the geomembrane barrier layer. The leachate collection pipes are surrounded by stone and geotextile. The solid and perforated pipes contain valves to allow the pipes to convey either stormwater or leachate depending on whether the subcell has received CCP. In addition

to the valves each subcell divider berm will have a rain flap welded to the bottom geomembrane. When the Operator is ready to activate a subcell for CCP placement the valves will be opened and the rain flap removed to allow leachate to flow downstream to a sump area that will contain two submersible pumps. There are three sump locations with pumps installed in HDPE riser pipes that will pump the leachate into a forcemain which discharges to a leachate storage tank to be located south of Cell 1. The leachate will then be pumped from the tank into trucks for hauling to and disposal at the local treatment plant. Depending on availability, the leachate may be discharged directly to the sanitary sewer system.

Clean-out riser pipes will be provided for each lateral and header as shown on the drawings to allow for periodic cleaning and maintenance. The leachate collection system has been designed to manage a 2-year, 24 hour storm event during an open subcell condition and has been modeled through the HELP model for prediction of long term leachate generated at varying stages of fill.

## 5 Stormwater Segregation Features

In order to minimize leachate generation during initial filling, stormwater will be segregated by using subcell divider berms, pipes, and a rain flap over the divider berms. The subcell divider berms have been sized to manage a 2-year 24-hour storm. The stormwater that is collected in the subcells will be pumped out to the perimeter channel. Stormwater that is in contact with the CCP structural fill will be collected and handled as leachate. As filling progresses, the areas where CCP has reached final grade will be covered with intermediate cover soil to minimize leachate generation.

Site development is intended to comply with the North Carolina Sedimentation Pollution Control Act of 1973, as amended.

The plans provide for a pre- and post-development erosion control plan that splits the onsite drainage areas into nine separate basins during the initial grading operations. As the fill project comes out of the ground and begins to take shape with permanent drainage, four of these initial basins will be removed and drainage redirected to one of the five remaining basins to serve as the final erosion control primary measures. The drainage areas for these basins range in size from 3 to 86 acres. The ponds are designed to discharge the 10-year storm (Type II, 24 hour) through the principal spillways (Risers and Barrels) and are capable of passing the 100-year storm in a controlled manner through an emergency spillway with one foot of freeboard.

Initial development will include the installation of all perimeter erosion control measures (construction entrance, silt fence, tree protection), and temporary diversion swales as necessary to direct sediment laden run-off to the primary treatment basins. Along all sensitive boundaries (streams and wetlands not to be disturbed), double silt fence will be installed. The ponds that are to exist in both pre and post conditions are to be installed for the most conservative condition and outlet protection is designed for the maximum flow that a particular basin and its drainage area may produce.

Post development erosion controls include maintaining the pre-development erosion controls establishing permanent slope stabilization and channel stabilization on the permanent fill slopes. This would include erosion control fabric and permanent vegetation immediately upon reaching final grade. The contractor shall minimize disturbance opened at any given time to the greatest extent possible.

## 6 Cap System

There are two proposed final cap system designs: a soil and geomembrane cap system and a soil, geocomposite drainage layer and geomembrane cap system.

### 6.1 Cap System Option 1

To meet the requirements of NCGS §130A-309.216(b), the proposed components of the final soil and geomembrane cap system will be as follows from the top down.

- On the 2% Top Slope: a 6-inch thick topsoil layer, a 12-inch thick low permeable soil layer, a 24-inch thick unclassified soil layer, a 30-inch thick drainage soil layer, and an 40 mil polyethylene geomembrane.
- On the side slopes: a 6-inch thick topsoil layer, a 12-inch thick low permeable soil layer, a 12-inch thick unclassified soil layer, an 18-inch thick drainage soil layer, and an 40 mil polyethylene geomembrane.

### 6.2 Cap System Option 2

To meet the requirements of NCGS §130A-309.216(b), the proposed components of the final soil, geocomposite drainage layer and geomembrane cap system will be as follows from the top down.

- On the 2% top slope: a 6-inch thick topsoil layer, a 66-inch thick low permeable soil layer, a 250 mil geocomposite drainage layer, and an 40 mil polyethylene geomembrane.
- On the side slopes: a 6-inch thick topsoil layer, a 42-inch thick low permeable soil layer, 250 mil geocomposite drainage layer, and an 40 mil polyethylene geomembrane.

A veneer slope stability analysis was conducted to demonstrate that the proposed final cover design would be capable of maintaining a minimum factor of safety of 1.5. The analysis indicated that the proposed materials for cap construction should be capable of maintaining adequate stability (see the final cover stability analysis in the calculations section of this Permit Application).

The maximum design sideslope is 4H:1V and benches will be constructed every 30 vertical feet. The final surface of the structural fill will be graded to a 2% slope and provided with drainage systems that minimizes erosion of cover materials, promotes drainage, and prevents ponding of surface water.



## 7 Slope Stability Analyses

In accordance with the EPA Guidance Document EPA/600/R-95/051 and ASTM E2277 Design and Construction of Coal Ash Structural Fills, slope stability analyses were conducted for the proposed final grades for the proposed Colon Mine Structural Fill. ASTM E2277 requires minimum factors of safety against slope failures of 1.5 statically and 1.2 dynamically for completed structural fills. Structural fills located within seismic impact zones should be designed to resist the maximum horizontal acceleration in lithified earth material at the site. Seismic impact zones are defined as an area with a ten percent or greater probability that the maximum horizontal acceleration in lithified earth material, expressed as a percentage of the earth's gravitational pull (g), will exceed 0.10 g in 250 years. A review of the USGS 2008 National Seismic Hazard Maps, Peak Horizontal Acceleration with 2% Probability of Exceedance in 50 years, which is equivalent to 10% probability of exceedance in 250 years, indicates that the structural fill is located in an area with a maximum horizontal acceleration of 0.09g and is therefore not located within a seismic impact zone. Dynamic slope stability analyses were still performed, however, to verify stability under seismic conditions.

The computer program PCSTABL5M was used to evaluate the slope stability of the structural fill. Two types of analyses were conducted on a cross-section through the structural fill. These included sliding block failures along the bottom liner surface and circular arc failures through the CCP and foundation soils. The cross-section represents a critical location based on maximum fill height and minimum buttressing effect at the base of the structural fill slope.

The cross-section analyzed extends from north to south along the north slope of the structural fill and represents a final CCP fill condition with a maximum elevation of 320 feet at the top of the 4H:1V slope. After this slope break, the top of the structural CCP fill extends at a 2% slope to a maximum elevation of approximately 330 feet at the center of the CCP fill.

The bottom liner design proposed for the structural fill was evaluated to determine the interface that represented the potential sliding surface with the least shear strength. Direct shear test results for materials similar to those that may be used for the structural fill were evaluated to select the critical interface, which was determined to be between the geonet composite and the textured 60-mil HDPE geomembrane. The strength parameters selected for this interface were a peak friction angle ( $\phi$ ) of 26° and cohesion (c) of 0. Peak values were selected since sufficient movement along the interface to mobilize residual strength is not anticipated. A minimum peak shear strength of  $\phi = 26^\circ$  and  $c = 0$  will therefore be required for all liner system interfaces in the project technical specifications.

The strength of the compacted CCP material was selected as  $\phi = 8^\circ$  and  $c = 4,300$  psf under total stress (i.e. short-term undrained conditions) and  $\phi = 22^\circ$  and  $c = 2,600$  psf under effective stress (i.e. long-term drained conditions based on testing data on compacted CCP samples obtained from the Riverbend Steam Station located in Mount Holly, NC. Similarly, a unit weight of 83.8 pounds per cubic foot (pcf) was selected to represent the compacted CCP based on the Riverbend testing data. The strengths of the foundation soils were determined based on correlations with standard penetration test (SPT) blowcounts, or N values, recorded during the Hydrogeologic study and unit weights were selected based on typical weights of similar

materials. A detailed description of the parameter selection process is provided in the slope stability Calculations section of this permit application.

A search routine within PCSTABL5M was used to determine the critical sliding block surface based on the modified Janbu method and critical circular arc surface using the modified Bishop method. Analyses were performed under both total stress and effective stress conditions. The estimated high groundwater potentiometric surface was also used in the analyses. Two types of circular arc analyses were performed by adjusting the limits of the search routine. These included global circular arc failure surfaces extending through the foundation soils and into or beyond the perimeter berm as well as failure surfaces originating and terminating within the CCP fill. A summary of the minimum factors of safety associated with each analysis under both static and seismic conditions is provided in the slope stability calculations included in this permit application. The critical analysis was determined to be the sliding block analysis along the bottom liner system under effective stress conditions with static and seismic factors of safety of 4.33 and 3.03, respectively. All factors of safety are satisfactory and meet EPA guidelines.

Final cover veneer stability analyses were performed for both final cover options to determine the minimum interface friction angle required for the final cover system. The analysis for Option 1, which included an 18-inch thick soil drainage layer placed directly over the final cover geomembrane, assumed that this layer would be fully saturated due to lateral seepage. The analysis for Option 2, which included a geocomposite placed directly over the final cover geomembrane in lieu of the soil drainage layer used for Option 1, assumed the geocomposite would be designed to contain the lateral seepage and therefore the overlying soil would not become saturated. The analyses that were performed for the proposed final slope of 25% (4H:1V) under both static and seismic conditions resulted in a minimum required interface friction angle of 25.0 degrees for Option 1 and 20.5 degrees for Option 2. These minimum required interface friction angles should be readily achieved using geosynthetic products readily available in the market. Project specific interface testing, however, should be performed to confirm that the minimum required interface friction angle can be achieved using the actual materials that will be used during construction.

## 8 Leachate/Stormwater Storage and Treatment Facilities

Determination of leachate storage capacity was based on average annual leachate collection rate from the HELP model. The maximum average annual leachate collection calculated was 43,761 cf/acre. Based on the largest subcell at 15.3 acres the leachate generation volume is 669,543 cf/year (13,721 gal/day). Considering the 250,000 gal capacity available onsite, the storage capability is approximately 18 days. Note that the above estimate is based on average leachate generation rate and the storage capacity needed could be significantly more if peak day leachate generation rates are used. Therefore, the owner may need increased leachate trucking capabilities during peak demands.

Determination of storage capacity is based on the 2-year, 24-hr rain event which is 3.6 inches. Each subcell has been analyzed for its storage capacity based on grading and the height of the subcell divider berms. Most subcells are capable of holding the design storm event. The largest subcell 2 (15.3 acres) will generate 1,495,554 gals of stormwater during the design event. Its holding capacity is 2,533,311 gals based on the containment berm height. Subcells 1B, 4B, and 5B can manage the stormwater generated in upper subcells meaning the owner can manage stormwater for both subcells within the lower subcell. Subcells 3B and 4D cannot manage the stormwater from the upstream subcell and therefore should be maintained independently.

Storage capacity onsite is governed by average leachate generation rates based on HELP model. Since the peak storage capacity is greater than leachate subcell capacities, the methods of filling and leachate pumping from a subcell may need to be altered to facilitate filling.

## 9 Site Access

Security for the site consists of fencing, gates, berms, and wooded buffers. Unauthorized vehicle access to the site is prevented around the property by woodlands, fencing, gates, and stormwater conveyance features.

The access road to the site is of all-weather construction and will be maintained in good condition. Potholes, ruts, and debris on the road(s) will receive immediate attention in order to avoid damage to vehicles.

## 10 Construction Practices

A test pad will be constructed of the soils proposed for use as the soil liner to determine the construction methods necessary to achieve the design criteria.

Placement will begin by “ramping in” with material from a corner of the cell. Low ground pressure dozers will be used to spread the material. A minimum thickness of 24 inches will be maintained between the liner and the tracks of the spreading equipment and 24 inches above the HDPE pipes. The CCP material will be end-dumped onto previously placed material and then spread out by the dozer. A spotter assisting the operator will observe placement of protective cover material to ensure that spreading is not causing excessive wrinkling or other damage to the synthetic liner, pipes, or geocomposite drainage media. The spotter will measure the forward edge of material placement to ensure that the proper thickness is being applied. The contractor will confirm adequate thickness by surveying before and after placement. The operator shall observe the top of the completed protective cover layer for a smooth, uniform surface free of depressions or high-spots. Refer to the Technical Specifications and Construction Quality Assurance (CQA) Plan included in this Permit Application

## 11 Design Hydrogeologic Report

The subsurface geology and hydrogeology beneath the proposed structural fill is detailed in the Design Hydrogeologic Report included in this Permit Application.

This page intentionally left blank.

Operations Plan

# Colon Mine Site Structural Fill

---

Charah, Inc.

*Sanford, NC*

**November 2014**

**Revised December 2014**

This page intentionally left blank.



# Table of Contents

1	Introduction .....	1
1.1	Plan History .....	1
1.2	Purpose .....	1
1.3	Contact Information .....	1
1.4	Safety .....	1
1.5	Access and Security Requirements.....	1
1.6	Equipment .....	2
1.7	Operating Hours .....	2
1.8	Signs.....	2
1.9	Training.....	2
1.10	Recordkeeping .....	2
1.11	Permit Drawings .....	3
2	Operations Management .....	3
2.1	Structural Fill Placement and Sequencing.....	3
2.1.1	Structural Fill Capacity .....	3
2.1.2	Structural Fill Acceptance Requirements .....	3
2.1.3	Fill Sequencing.....	4
2.1.4	Fill Placement.....	4
2.1.5	Compaction Requirements and Testing.....	4
2.1.6	Cover Requirements .....	5
2.1.7	Dust, Litter, Odor, and Vector Control .....	6
2.2	Leachate and Contact Water Management.....	7
2.2.1	Leachate Collection System.....	8
2.2.2	LCS Maintenance.....	8
2.2.3	LCS Record Keeping and Sampling.....	9
2.3	Stormwater Management System .....	9
2.3.1	Stormwater Discharge .....	10
2.3.2	Contact and Stormwater Maintenance Requirements.....	11
2.4	Water Quality Monitoring Requirements and Management.....	11
3	Erosion and Sedimentation Control .....	11
4	Vegetation Management.....	11



5	Site Closure .....	11
6	Required Regulatory Submittals .....	12





# 1 Introduction

## 1.1 Plan History

The following table provides a brief description of the revisions to the Operations Plan.

<i>Revision</i>	<i>Date of Document</i>	<i>Description of Revisions</i>
Initial Issue	October 15, 2014	Initial issuance of document.

## 1.2 Purpose

The purpose of this Operations Plan is to provide for the safe and efficient operation of the Colon Mine Site Structural Fill. This Operations Plan presents the operational requirements for 1) general facility operations, 2) operations management, 3) erosion and sedimentation control, and 4) vegetation management along with guidance for structural fill closure and required regulatory submittals. The Operations Plan also includes a structural fill life estimate.

The Colon Mine Site is located in Lee County, North Carolina at 1600 Colon Road, Sanford, NC 27330.

## 1.3 Contact Information

Correspondence and questions concerning the operation of the Colon Mine Site should be directed as follows.

Owner  
Green Meadow, LLC  
12601 Plantside Drive Louisville, KY 40299  
(877) 314-7724  
Facility Contact: Mr. Charles E. Price

Operator  
Charah, Inc.  
12601 Plantside Drive, Louisville, KY 40299  
(502) 245-1353  
Operations Contact: Mr. Scott Sewell

## 1.4 Safety

Operations at the Colon Mine Site were developed considering the health and safety of the facility’s operating staff. The operating staff is provided with site-specific safety training prior to operations, and onsite activities are to be conducted according to the applicable sections of the Operator’s Health and Safety Plan which shall be written to comply with all applicable OSHA standards. The Operator will prepare an Emergency Action Plan to address potential emergency situations at the site.

## 1.5 Access and Security Requirements

Security for the site consists of fencing, gates, berms, and wooded buffers. Unauthorized vehicle access to the site is prevented around the property by woodlands, fencing, gates, and stormwater conveyance features.

The access road to the site is of all-weather construction and will be maintained in good condition. Potholes, ruts, and debris on the road(s) will receive immediate attention in order to avoid damage to vehicles.

## 1.6 Equipment

In accordance with NCGS §130A-309.216 (a) (4) equipment will be provided that is capable of placing and compacting the coal combustion products (CCP) and handling the earthwork required during the periods that CCPs are received at the fill project. The structural fill site will have sufficient equipment to provide structural fill placement and compaction operations. Where possible, spare or substitute equipment will be provided as needed. If spare or substitute equipment is not available, other equipment may be obtained from other onsite operations. If other equipment is not available after 14 days, arrangements will be made for replacement equipment until the original equipment can be placed back in service.

## 1.7 Operating Hours

The Colon Mine Site is open for operation between the hours of 7:00 AM and 7:00 PM, Monday through Saturday. It is anticipated that this schedule will continue; however, operational hours may change as the need arises.

## 1.8 Signs

A sign providing facility name and operating hours will be posted at the site entrance and shall be maintained in good condition. Additional signs may be posted to facilitate facility operations as needed.

## 1.9 Training

Due to the diversity and nature of job tasks required at the site, personnel shall be adequately trained to handle facility operations and maintenance.

The site superintendent shall have a general understanding of all the tasks required for site operations. Individuals performing the various tasks shall have adequate training for the site-specific tasks they are assigned.

Noteworthy operations and maintenance tasks to be addressed in training include the following.

- Maintaining accurate records of fill loading (quantitative and qualitative)
- Operating requirements for stormwater segregation from exposed CCP material
- Operating and maintaining the leachate collection system (LCS)

## 1.10 Recordkeeping

An operating record is to be maintained onsite and include the following records.

- Leachate Collection System – Maintenance Documentation & Disposal Records
- Erosion and Sedimentation Control Inspection Logs
- Groundwater Monitoring (and Sampling) Report
- Precipitation Totals
- Daily Operation Record
- or anything else as indicated in the Operations Plan

The above records are to be kept in the operating record for the active life of the Colon Mine Site and the 30-year post-closure period. Information contained in the operating record must be furnished upon request to the North Carolina Department of Environment and Natural Resources (NCDENR). Additional records kept onsite should include the following.

- Facility permit application
- Facility permits
- Record of the amount of structural fill placed on a monthly basis
- Regulatory agency inspection reports
- Construction documents
- Employee training records
- As-built drawings and specifications
- Health & Safety Plan
- Emergency Action Plan

### **1.11 Permit Drawings**

Permit drawings are included in the structural fill permit application.

## **2 Operations Management**

The primary objective of operations management at the Colon Mine Site is to place structural fill in the form of CCPs in compliance with permit conditions while operating in a safe manner.

The structural fill site has been designed to provide separation of contact water from non-contact water. Contact water is defined as water that contacts CCP material within the geomembrane lined limits of structural fill. Contact water will be managed as leachate while non-contact water will be managed as stormwater. Contact water and non-contact water separation are further described in subsequent sections of this plan.

Filling operations will generally proceed from high to low. The working face will be limited to as small an area as practical, at the owner's discretion. Contact water from the active face will be directed to the leachate collection system.

Intermediate cover will be placed as CCP fill reaches final grades to prevent contact water from entering the stormwater control features.

### **2.1 Structural Fill Placement and Sequencing**

#### **2.1.1 Structural Fill Capacity**

The total anticipated airspace capacity for the Colon Mine Site is approximately 7.25million cubic yards and is based on a proposed 118-acre fill area.

#### **2.1.2 Structural Fill Acceptance Requirements**

In accordance with NCGS §130A-309.216 (a) (2) CCPs shall be collected and transported in a manner that will prevent nuisances and hazards to public health and safety. CCPs shall be moisture conditioned, as necessary, and transported in covered trucks or rail cars to prevent

dusting. As such, the Colon Mine Site can accept CCPs defined as fly ash, bottom ash, boiler slag, or flue gas desulfurization materials in NCGS §130A-309.216 (4).

In accordance with NCGS §130A-309.215 (b) (1) d, a Toxicity Characteristic Leaching Procedure (TCLP) analysis has been performed on a representative sample from Duke Energy's Sutton Plant and Riverbend Steam Station CCP sources to be used in the structural fill project. Each was analyzed for, at a minimum, the following constituents: arsenic, barium, cadmium, lead, chromium, mercury, selenium, and silver. The TCLP results are included in the Related Documents section of this application.

Asbestos containing material will not be placed in the structural fill site. In addition, the removal of CCP structural fill material from the site is prohibited without owner approval. Structural fill will be hauled and placed by dedicated and consistent operators.

### **2.1.3 Fill Sequencing**

The Colon Mine Site will be developed in sequence from Cell 1 through Cell 5. CCP product will be placed in three to five foot operational lifts, high to low. A conceptual schematic of fill sequencing from high to low is included in the permit drawings; however, actual fill sequencing and lift heights may be modified at the Owner's discretion. More than one cell may be operational at a time. The cells may also be subdivided into subcells.

### **2.1.4 Fill Placement**

Structural fill placed at the Colon Mine Site will be transported to the facility via railcar or highway-rated vehicles. Upon reaching the site, off-road equipment may be utilized, within the facility boundary, to transport material to the active working area. After initial placement, additional operational equipment generally consisting of vibratory smooth drum rollers, sheepsfoot compactors, bulldozers, water trucks, spray trailers, track hoes, and service trucks may be utilized in fill placement.

Fill progression will be maintained to provide controlled drainage of contact water to the leachate collection system and stormwater runoff to the stormwater benches and perimeter ditches. No fill shall be placed in standing water.

### **2.1.5 Compaction Requirements and Testing**

After the bottom liner is placed and approved, CCP placement may begin. The initial CCP lift placed should be two to three feet thick to protect the liner system. The initial lift shall be placed in a manner that minimizes development of folds in the geosynthetics. The surface should be lightly compacted to help avoid potential damage to the liner system.

Subsequent lifts of CCP should be placed in 12-inch thick loose lifts and compacted to at least 95 percent of its Standard Proctor (ASTM D698) maximum dry density. It may be necessary to adjust the moisture content of the CCP fill to achieve the specified compaction.

#### **2.1.5.1 IN-PLACE DENSITY AND MOISTURE CONTENT TESTING**

In-place density and moisture content testing shall be performed at a minimum frequency of one test per 10,000 tons placed. CCP shall be compacted to a minimum 95 percent of its Standard Proctor (ASTM D698) maximum dry density. Compacted moisture content shall be within five

percent of the material's optimum moisture content as determined by ASTM D698. If field density tests indicate that the relative compaction or moisture content requirements are not met, the material shall be moisture conditioned and/or re-worked and re-tested until the compaction density and moisture requirements are met. The field density testing report should document any failing tests and re-work required to meet testing requirements.

In-place density tests shall be performed using the Sand Cone Method (ASTM D1556), Drive-Cylinder Method (ASTM D2937), or Nuclear Method (ASTM D6938). If the nuclear method is selected, a minimum of one comparison density test using the Sand Cone or Drive Cylinder method shall be performed for every three nuclear density tests, and correlations between the test methods shall be developed and reviewed by the Engineer. A sample of CCP material shall be collected from each density test location and placed in a sealed container for subsequent field and laboratory moisture testing.

A family of Proctor curves shall be developed for the onsite CCP material as standard Proctor moisture-density tests are performed as a reference for the field density testing. Laboratory proctors shall be conducted at one test per 50,000 tons of CCP placed. A minimum of one (1) one-point field Proctor test shall be performed for each week of field density testing or if there is a noticeable change in material. Additional Standard Proctor samples shall be obtained and tested if one-point Proctor testing indicates that the estimated maximum dry density of the material varies by more than five pounds per cubic foot (pcf) from the nearest representative standard Proctor moisture-density relationship as determined by the one-point Proctor method.

Field moisture content testing shall be performed for each density test using the Direct Heating Method (ASTM D4959). The Nuclear Method (ASTM D6938) shall not be used for moisture content testing on the CCP material. Comparison laboratory moisture content testing shall be performed using the Oven Method (ASTM D2216), at an oven temperature of 60 degrees Celsius. The laboratory moisture content shall control in the event of a discrepancy between laboratory moisture content and in-place moisture content.

#### **2.1.5.2 LABORATORY TESTING**

Laboratory moisture content testing shall be performed in conjunction with the field density testing as described above. The laboratory moisture content testing shall be performed using the Oven Method (ASTM D2216), at an oven temperature of 60 degrees Celsius.

### **2.1.6 Cover Requirements**

#### **2.1.6.1 INTERIM COVER SOIL**

Interim cover soil should be applied, as needed, for dust control and stormwater management. The interim cover may be applied at a thickness suited to its purpose. For example, the interim cover soil may be applied in thinner layers to provide dust control and it may be applied in thicker layers where protection from surface erosion is desired.

Interim cover layer may be placed on exterior slopes and in areas where final structural fill grades have been reached. Interim cover will be seeded within seven days in accordance with erosion and sediment control requirements. Vegetation shall be removed and the interim cover soil shall be scarified or removed prior to placing any overlying CCP material or final cover



system. Interim cover soil is not required, but may be used to protect the CCP materials and segregate contact water from stormwater.

**2.1.6.2 FINAL COVER**

The final cover consists of a six foot thick system of layers for the top slopes and a four foot thick system of layers for the sideslopes. Each area has two options. Option 1 has a one foot thick drainage soil placed directly above the HDPE geomembrane. Option 2 replaces the drainage layer soils with unclassified soils and has a geocomposite placed immediately above the HDPE geomembrane. See the table below and the details on the drawings for additional information.

Layer	Sideslope Option 1	Top slope Option 1	Sideslope Option 2	Top slope Option 2
Topsoil	6 inches	6 inches	6 inches	6 inches
Low Perm Soil	12 inches	12 inches	NA	Not used
Unclassified Soil	12 Inches	24 inches	42 inches	66 inches
Drainage Soil	18 inches	30 inches	NA	NA
Geocomposite	Not used	Not used	used	used
HDPE Geomembrane	40 mil	40 mil	40 mil	40 mil

The final cover system construction for the structural fill site will begin 30 working days or 60 calendar days, whichever is less, after CCP placement completion unless otherwise approved by NCDENR.

Please refer to the Closure/Post-Closure Plan included in this Permit Application for final cover specifications and maintenance requirements.

**2.1.7 Dust, Litter, Odor, and Vector Control**

Litter, odors, and vectors are not anticipated to be concerns. The material placed in the structural fill does not attract vectors, and windblown material is not anticipated to be a problem. Additionally, CCP materials are not typically associated with odors.

**2.1.7.1 DUST CONTROL**

In accordance with NCGS §130A-309.216 (a) (9) the structural fill project will be operated with sufficient dust control measures to minimize airborne emissions and to prevent dust from creating a nuisance or safety hazard and shall not violate applicable air quality regulations.

The primary potential source of dust emissions on site is the top deck area and active area of structural fill placement. These areas are at a higher risk for producing dust due to vehicular and equipment traffic and earthwork-like construction. Exterior slopes are less of a dust control concern, as they have interim cover soil which is vegetated.

Dust emissions can be controlled through a variety of methods identified herein. Dust control methods may be characterized as products and/or applications, structural wind breaks and/or covers, and operational methods.

Dust control methods for the facility include the following.

- Watering
- Establishing vegetative cover
- Mulching
- Structural controls consisting of:
  - Wind breaks (i.e. fencing and/or berms), and
  - Temporary coverings (i.e. tarps)
- Spray applied dust suppressants consisting of, and not limited to:
  - Anionic asphalt emulsion
  - Latex emulsion
  - Resin in water
  - Polymer based emulsion
  - Mineral mortar coatings (i.e. posi-shell)
- Calcium chloride
- Soil stabilizers (i.e. soil cements)
- Operational soil cover
- Modifying the active working area
- Modifying operations during dry and windy conditions

The operator may use, and is not limited to, combinations of these dust control methods or any method that is technically sound to control dust for specific site conditions. If the operator intends to use a dust control method not presented above, the proposed dust control method will be evaluated on a case by case basis to assess the effectiveness with specific site conditions. For the purposes of this Operations Plan, interim cover soil will be defined as soil material applied at a suitable thickness to provide dust control.

The effectiveness of the dust control methods implemented should be evaluated through visual observations of dust prone areas. Equipment operators shall continuously observe the active face and other areas within the facility for dust emissions.

If fugitive dust emissions are observed and observations indicate dust control measures are not achieving their intended purpose, then appropriate corrective actions will be taken. Dust control measures should be reapplied, repaired, or added, as necessary, to control dust emissions. The operator will construct, install, apply, and/or repair dust control measures prior to the end of the work day to control dust emissions during non-operating hours. The operator shall also implement dust control measures as preventative controls rather than in response to fugitive dust emissions.

A wheel wash system may be necessary to minimize dust and tracking of CCPs outside the facility.

## **2.2 Leachate and Contact Water Management**

In accordance with NCGS §130A-309.216 (a) (5) the CCP structural fill project will be effectively maintained and operated as a nondischarge system to prevent discharge to surface water resulting from the project.

As previously described, the structural fill site has been designed to provide separation of contact water from non-contact water (stormwater). Contact water will be treated as leachate and conveyed to the LCS. Contact water which contacts exposed CCP material within the lined footprint will be conveyed through the LCS. Stormwater will be routed to onsite sediment basins prior to discharge from the site.

### **2.2.1 Leachate Collection System**

The LCS includes a synthetic composite drainage layer and leachate collection pipes with clean-outs. Leachate generated in each cell drains by gravity via perforated header pipes to a series of sumps and then pumped to a central lift station where it is then pumped into a 250,000 gallon storage tank with a secondary containment. Leachate will either be transported to a wastewater treatment plant or discharged directly into a sanitary sewer system. New leachate collection systems should be water pressure cleaned or inspected by video recording after a year of initial placement of CCPs in order to ensure proper drainage.

All loading of leachate tankers will take place on the loading pad next to the storage tank. Prior to loading the operator will insure that the leachate diverter valve is open on the drain pad so any leachate that may be spilled during loading operations will drain back into the lift station.

It will be the responsibility of the tanker operator to ensure that the load is within legal transportable limits. If the load exceeds permissible limits then the tanker operator will:

- Go back to the loading drain pad
- Verify that the leachate diverter valve is open
- Discharge a quantity of leachate sufficient to meet the maximum transport weight capacity

The owner is responsible for the operation of the leachate collection and removal system and for maintaining the system as designed for the life of the structural fill and the post-closure period. The department may allow the constructor or operator to stop managing leachate upon a satisfactory demonstration that leachate from the project no longer poses a threat to human health and the environment. Leachate shall be collected and treated as necessary so that water quality standards and criteria are not violated. A recording rain gauge will be maintained onsite to record precipitation at the structural fill site. Precipitation records are included with the operating record and are maintained and used by the Operator to compare with leachate generation rates.

### **2.2.2 LCS Maintenance**

The maintenance of the leachate collection system's physical facilities (consisting of high-density polyethylene (HDPE) piping and storage unit(s)) and records will be performed by or under the direct supervision of the Owner or Owner's representative. Visual observations of proper LCS performance will be made periodically to verify that the LCS is performing properly.

New leachate collection systems may be water pressure cleaned or inspected by video recording if it becomes apparent that the system is not functioning properly. Results of the



collection system cleanings or inspections shall be kept onsite in accordance with recordkeeping requirements. The documentation shall include at the minimum following details.

- General details (a signed letter/report with company name that performed the cleaning/video inspection, dates & time for jet-cleaning/video inspection, any historical issues associated with jet-cleaning/video inspection, etc.)
- Pipe IDs that were jet-cleaned/video inspected; for example: Cleanout 1 was jet cleaned/video inspected
- Length of each pipe jet-cleaned/video inspected; for example: Cleanout 1 was jet cleaned/video inspected for 400 feet
- Any obstruction or unusual situation that occurs during jet-cleaning/video inspection. For example: Cleanout 2 was jet cleaned 20 feet only as pressure hose did not go beyond
- The maintenance frequency of the LCS may be modified based on consecutive inspection results and observed operating conditions

### **2.2.3 LCS Record Keeping and Sampling**

Records will be maintained documenting the leachate line maintenance. Untreated leachate shall be sampled and analyzed at least semi-annually concurrently with the groundwater sampling. Leachate will be sampled as a composite grab sample from the effluent line of the leachate collection system. The leachate must be analyzed for the same constituents as the groundwater monitoring wells in the Water Quality Monitoring Plan included with the Design Hydrogeological Report contained in this Permit Application. The results must be submitted to NCDENR with groundwater results.

## **2.3 Stormwater Management System**

The stormwater management system includes slope drains, culverts, perimeter channels, etc., that convey stormwater to the sediment basins. Stormwater that does not come in contact with structural fill will be treated as non-contact water. To improve operations, stormwater should be diverted from the active area. Excessive surface water at the working face creates difficulties for maneuvering equipment and prevents the operator from achieving maximum compaction of structural fill. To divert stormwater runoff away from the working face, temporary diversion berms may be installed as dictated by the direction of grade. In addition, interim soil cover may be placed over structural fill that has reached final grade. This cover will be uniformly graded and compacted to prevent the formation of erosion channels. In the event that channels do form, the cover should be promptly repaired.

Typically, all stormwater runoff that has not contacted structural fill will be drained from the active fill areas and routed to the peripheral drainage channels that surround each working area. The stormwater channels, culverts, and sedimentation ponds are designed to convey and discharge all stormwater runoff from a 25-year, 24-hour-duration storm event. Within the active portion of the site, all working areas are to be maintained and graded to allow stormwater to flow away from the active face and toward the peripheral drainage channels. Interceptor berms to control the flow of runoff from the surface are to be constructed so that runoff will not be allowed to cascade down the side slopes.

The stormwater management system within the structural fill boundary will be constructed during each phase of partial closure. A series of permanent swales and structures to control the flow of runoff from the finished and capped structural fill will be used. These swales and structures will assist in the prevention of erosion damage to the structural fill's final cover. The stormwater management structures will be in accordance with the closure plan for the full buildout. Minor modifications to the locations of terraces, inlet structures and slope drains may be required depending on the prevailing grades of the structural fill cover at the time of closure due to settlement. If such modifications are needed, an investigation will be performed to confirm that worst case input parameters will not be exceeded. If any of the worst case input parameters exceed, original calculations will be revised prior to closure to confirm that original design intent is met.

The stormwater management system outside the structural fill footprint will be constructed along with each cell construction. The stormwater channels are constructed around the perimeter of the site as shown on the closure plan so that stormwater from the closed fill areas will flow into these ditches and then into the stormwater detention ponds. The stormwater detention areas are designed to control all runoff from this nearly impervious final cover cap.

Stormwater collection and conveyance measures will be inspected and maintained in accordance with the current Erosion and Sedimentation Control (E&SC) Plan.

The following shall be performed on all permitted systems.

- Removal of debris, if any
- Inspection of inlets, outlets and culverts
- Removal of sediments when the storage volume or conveyance capacity of the system is below design level or when the system is rendered ineffective on account of clogging/sedimentation of the pond bottom
- Any breach of the system's integrity shall be immediately repaired. Whenever erosion is detected, measures shall be taken to stabilize and protect the affected area
- Mowing and removal of grass clippings

### **2.3.1 Stormwater Discharge**

The stormwater system at the site was designed to assist in preventing the discharge of pollutants. Structural fill operation shall not cause a discharge of pollutants into waters of the United States, including wetlands, that violates any requirement of the Clean Water Act, including but not limited to NPDES requirements, pursuant of Section 402. In addition, under the requirements of Section 404 of the Clean Water Act, the discharge of dredge or fill material into waters of the state that would be a violation of the requirements shall not be allowed.

Operations of the site shall not cause the discharge of a non-point source of pollution to waters of the United States, including wetlands, that violates any requirements of an area-wide or statewide water quality management plan that has been approved under Section 208 or 319 of the Clean Water Act, as amended.

### **2.3.2 Contact and Stormwater Maintenance Requirements**

All drainage features (i.e., diversion ditches, berms, risers, discharge pipes, etc.) will be inspected and maintained in accordance with the current E&SC Plan and documented for signs of damage, settlement, clogging, silt buildup, or washouts. If necessary, repairs to drainage control features will be made as early as practical. The stormwater controls and/or erosion control measures shall be employed to correct any erosion which exposes CCP or causes malfunction of the stormwater management system. Such measures shall be implemented within three days of occurrence. If the erosion cannot be corrected within seven days of occurrence the structural fill site operator shall notify the Department and propose a correction schedule.

## **2.4 Water Quality Monitoring Requirements and Management**

In accordance with NCGS §130A-309.216 (a) (6) the structural fill project will be effectively maintained and operated to ensure no violations of groundwater standards adopted by the Commission pursuant to Article 21 of Chapter 143 of the General Statutes due to the project. Groundwater and surface water will be monitored in accordance with the Water Quality Monitoring Plan included with the Design Hydrogeological Report contained in this Permit Application.

Groundwater monitoring wells are located around the facility's perimeter. A readily accessible, unobstructed path shall be maintained so that monitoring wells may be accessed using four-wheel drive vehicles. Care must be taken to prevent any damage to the wells.

# **3 Erosion and Sedimentation Control**

Erosion and sedimentation control during filling operations will consist of monitoring and repairing E&SC stormwater conveyance features and surface erosion as defined in this Operations Plan and the current E&SC plan. Monitoring and maintenance of the E&SC system will be in accordance with the current E&SC Plan.

# **4 Vegetation Management**

Vegetation will be established to minimize erosion and to ensure no visible CCP migration to adjacent properties. Temporary and permanent seeding will be applied as required. Temporary and permanent seeding will be applied in accordance with Technical Specification 02485, Seeding included in this Permit Application.

# **5 Site Closure**

The Colon Mine Site will be closed in accordance with the design drawings and Closure/Post-Closure Plan. The Closure/Post-Closure Plan outlines the sequence for closing the site and the post-closure maintenance activities. Closure is designed to minimize the need for long-term maintenance and to control the post-closure release of contaminants. Closure activities may be revised as appropriate for materials, specifications, technology advancements, or changes in

regulations at the time the site is closed or in post-closure. In general, the site development is designed so that final cover can be established as soon as practical.

## 6 Required Regulatory Submittals

Water Quality Monitoring Reports will be submitted to NCDENR in accordance with the Water Quality Monitoring Plan included with the Design Hydrogeological Report contained in this Permit Application.

Closure and Post-Closure Plan

# Colon Mine Site Structural Fill

---

Charah, Inc.

*Sanford, NC*

**November 2014**

**Revised December 2014**

This page intentionally left blank.



# Table of Contents

1	Introduction .....	1
2	Closure Plan .....	1
2.1	Cap System Description .....	2
2.2	Surface Water Runoff and Run-on .....	3
2.3	Erosion Control.....	3
2.4	Dust Control.....	3
2.5	Estimate of Largest Area to Require Closure .....	3
2.6	Estimate of Maximum Inventory of Coal Combustion Products.....	3
2.7	Closure Schedule .....	3
2.8	Closure Cost Estimate.....	4
2.9	Certification.....	4
2.10	Recordation .....	4
3	Post-Closure Plan.....	5
3.1	Post-Closure Monitoring and Maintenance Requirements .....	5
3.2	General Site Inspection & Maintenance .....	6
3.2.1	Cap System Inspection & Maintenance .....	6
3.2.2	Stormwater Management System Inspection & Maintenance.....	6
3.2.3	Utilities.....	7
3.2.4	Leachate Collection System Operation, Inspection & Maintenance.....	7
3.2.5	Other Miscellaneous Inspection & General Maintenance.....	7
3.3	Mowing .....	8
3.4	Water Quality Monitoring, System Inspection & Maintenance.....	8
3.5	Administrative Costs.....	8
3.6	Contact Person Information.....	8
3.7	Proposed Post-Closure Use of the Property .....	8
3.8	Post-Closure Cost Estimate .....	9
3.9	Post-Closure Care Completion Certification.....	9



## List of Tables

Table 1 Cap System Thickness .....	2
Table 2 Post-Closure Monitoring & Maintenance Activities and Their Frequencies .....	6

## Appendix

- A Closure/Post-Closure Cost Estimates
- B Post-Closure Inspection Checklists





# 1 Introduction

The purpose of the Closure/Post-Closure Plan is to outline the steps for the Operator to follow during closing of the structural fill and the post-closure maintenance activities for the structural fill. Closure is designed to minimize the need for long term maintenance and to control the post-closure release of contaminants. The proposed Closure Plan should be re-evaluated by a registered professional engineer prior to closure activities. Closure activities may be revised as appropriate for materials, specifications, technological advances or changes in regulations at that time. The proposed top of coal combustion products (CCP) contours for the structural fill are shown on Sheet 00C-04, Reclamation Plan, contained in the facility permit application.

Phasing of the structural fill development is designed so that final cover can be established as soon as possible. The final cover will be constructed in stages as cells of the structural fill reach final grade. The final structural fill contours will have erosion control benches and side slopes at a maximum 4H:1V. The top of the structural fill is designed for a minimum two percent slope.

Final closure of each structural fill cell will commence when the Operator declares that no more CCP will be placed or as directed by the North Carolina Department of Environment and Natural Resources (NCDENR).

Prior to beginning closure of each structural fill cell, the Operator shall notify NCDENR that a notice of intent to close the structural fill cell has been placed in the operating record. Closure activities for the structural fill cell shall begin no later than 30 working days or 60 calendar days, whichever is less, after CCP placement has ceased (in accordance with North Carolina General Statute (NCGS) §130A-309.218(a)(1)) unless otherwise approved by NCDENR.

The final cover system for the closed phase will be certified by a professional engineer as being completed in accordance with the Closure/Post-Closure Plan.

Following closure operations, the facility may be developed.

If the structural fill must be closed prior to reaching the final contours, the surface of the structural fill will be sloped to a minimum grade of two percent and maximum grade of 4H:1V. A final cover will be established over the structural fill cell being closed.

# 2 Closure Plan

A Closure Plan is required by North Carolina General Statute (NCGS) §130A-309.218 (b) (1) to be submitted to the North Carolina Department of Environment and Natural Resources (NCDENR) for large structural fill projects. Large structural fill projects are defined in NCGS §130A-309.218 (b) as involving placement of 8,000 or more tons of CCP per acre or 80,000 or more tons of CCP in total per project. NCGS §130A-309.218 (b) (1) requires a closure plan to describe the cap system and the methods and procedures used to install the cap system; provide an estimate of the largest area of the structural fill that will require a cap system; provide an estimate of the maximum inventory of CCPs onsite; and provide a schedule for completing



closure. In addition, NCGS §130A-309.219 requires specific recordation once closure is complete.

## 2.1 Cap System Description

NCGS §130A-309.218 (b) (1) a. requires the Closure Plan describe the cap liner system and the methods and procedures that will be used to install the cap in conformance with NCGS § 130A-309.216 (b). The cap will be built in accordance with NCGS §130A-309.216 (b) (3), minimizing infiltration and erosion. There are two proposed cap systems for the structural fill. A decision on which cap system to use will be made before closure begins and will be based on cost, soil availability and other factors. One proposed cap system consists of (from top down to CCP): topsoil, a low permeable soil layer, an unclassified soil layer, a drainage soil layer and a geomembrane. The other proposed cap system consists of (from top down to CCP): topsoil, a low permeable soil layer, a geocomposite drainage layer and a geomembrane. The thickness of some of the layers will vary depending on the location of the cap on the structural fill. The top of the structural fill will have a six foot cap and the side slopes of the structural fill will have a four foot cap as shown in Table 1 below.

**Table 1 Cap System Thickness**

Layer	Soil/Geomembrane Cap		Soil/Geocomposite Drainage Layer/Geomembrane Cap	
	Top	Side Slope	Top	Side Slope
Topsoil thickness	6 inches	6 inches	6 inches	6 inches
Low permeable soil layer thickness	12 inches	12 inches	66 inches	42 inches
Unclassified soil layer thickness	24 inches	12 inches	NA	NA
Drainage soil layer thickness	30 inches	18 inches	NA	NA
Geocomposite drainage layer	NA	NA	250 mil	250 mil
PE geomembrane	40 mil	40 mil	40 mil	40 mil
<b>Total Cap Thickness<sup>a</sup></b>	<b>6 feet</b>	<b>4 feet</b>	<b>6 feet</b>	<b>4 feet</b>

<sup>a</sup> Ignores the nominal thickness of the geocomposite drainage layer and the PE geomembrane.

The Operator will prepare the supporting CCP surface or interim cover for the closure cap. Vegetation shall be removed and the interim cover soil shall be scarified or removed prior to placing any overlying material. The surface to be covered with geomembrane will be rolled and compacted so as to be free of irregularities, protrusions, loose materials, and abrupt changes in grade. Prior to geomembrane placement, perimeter anchor trenches will be excavated. The geomembrane panels will be placed one at a time and field seamed.

Soil materials will be placed directly on top of a geomembrane or geocomposite in such a manner as to ensure there is no damage to the geomembrane or geocomposite. Typically, a minimum thickness of one foot of soil is specified between a low ground-pressure dozer and the geomembrane or geocomposite. The soils must be free of objects that could cause damage to the geomembrane or geocomposite.

Soil materials will be placed in six-inch compacted lifts with equipment only operating over previously placed soil material. The lifts will be placed with sufficient number of passes to achieve 90% compaction (Standard Proctor) and compacted by tracking using low-ground pressure construction equipment meeting the requirements of the project specifications. The

topsoil will be a six-inch thick layer of soil capable of promoting the growth of vegetation. The total thickness of the final cover shall be at least six feet on the top of the structural fill and at least four feet on the side slopes of the structural fill.

## **2.2 Surface Water Runoff and Run-on**

Surface water running off the structural fill during and after a rainfall event will be collected and routed off the cover by erosion control benches and slope drains. Surface water that flows toward the structural fill from uphill areas (run-on) will be intercepted and channeled away from the structural fill and final cover surface by diversion channels and perimeter berms.

## **2.3 Erosion Control**

Erosion will be controlled by vegetation, erosion control benches and diversion of run-off. Vegetation will aid in reducing soil erosion. Benches break the velocity of sheet flow over the closed structural fill, control development of erosion features before they damage the final cover, and divert runoff into manageable flow volumes. Sediment laden runoff will be collected in the sediment basins.

## **2.4 Dust Control**

Dust control during closure construction will be managed as outlined in the Operations Plan and appropriate for closure construction.

## **2.5 Estimate of Largest Area to Require Closure**

NCGS §130A-309.218 (b) (1) b. requires the Closure Plan to provide an estimate of the largest area of the structural fill project that will require a cap at any time during the overall construction period. The largest area requiring closure at any time will be 51.2 acres.

## **2.6 Estimate of Maximum Inventory of Coal Combustion Products**

NCGS §130A-309.218 (b) (1) c. requires the Closure Plan to provide an estimate of the maximum inventory of CCPs ever onsite over the construction duration of the structural fill. The structural fill is sized to hold an estimated total of approximately 7.25 million cubic yards of CCPs in five cells.

## **2.7 Closure Schedule**

NCGS §130A-309.218 (b) (1) d. requires the Closure Plan to provide a schedule for completing all activities necessary to satisfy the closure criteria. In accordance with NCGS §130A-309.218 (a) (1), cap application will start no later than 30 working days or 60 calendar days, whichever is less, after CCP placement has ceased. Closure construction is anticipated to take up to a year to complete. Refer to the Reclamation Timeline in the Earthwork Calculations section for the anticipated closure schedule.

## 2.8 Closure Cost Estimate

The cost to complete closure is calculated on a per acre basis. The final cap thickness varies between the top (i.e., flatter slope) and the side slopes (i.e., 4H:1V slope). In addition, both of the cap cross-sections have the option to be constructed with or without a geocomposite. The calculations included in Appendix A of this section cover each of the possible options. The cost estimates include, as warranted, the items listed below.

- Mobilization, Administration & Bonds
- Surveying & Control
- Topsoil Layer
- Low Permeable Soil Layer
- Unclassified Soil Layer
- Lateral Drainage Soil Layer (depending on option)
- Geocomposite Drainage Layer (depending on option)
- Geomembrane (40 mil double sided textured polyethylene)
- Seeding/Fertilizing/Mulching
- Contingency
- Engineering - Plans & Specs
- CQA & Certification
- Construction Management

Selection of the closure cap option will depend on the availability and pricing of materials at the time of closure.

## 2.9 Certification

A certification signed and sealed by a registered professional engineer will be submitted to NCDENR within 30 days of the completion of the closure cap system construction. The certification will verify that the closure has been completed in accordance with the Closure Plan and the law.

## 2.10 Recordation

NCGS §130A-309.219 requires recordation of the structural fill project (with more than 1,000 cubic yards of CCP) with the Register of Deeds. The recordation will include a statement with the volume and location of the coal combustion residuals and will identify the parcel of land where the structural fill is located. The statement will be signed and acknowledged by the landowners in the form prescribed by NCGS 47-38 through NCGS 47-43. NCGS §130A-309.219 will be consulted for all the information required in the statement and the format of the statement prior to the creation of the statement. In accordance with NCGS §130A-309.219 (b) the statement will be submitted to the Register of Deeds within 90 days after completion of the structural fill project using coal combustion residuals. NCDENR will be notified by the Operator of the closure completion, certification by a professional engineer that closure was completed in accordance with the Closure/Post-Closure Plan, deed notation, and placement of these records into the structural fill's operating record.

## 3 Post-Closure Plan

A Post-Closure Plan is required by NCGS §130A-309.218 (b) (2) to be submitted for large structural fill projects. NCGS §130A-309.218 (b) (2) requires a post-closure plan to describe the monitoring and maintenance activities required for the structural fill project; provide contact information for a person or office responsible for the structural fill project during the post-closure period; describe the planned uses of the property during the post-closure period; and provide a cost estimate for the post-closure period activities.

Large structural fill projects are required by NCGS §130A-309.218 (b) to perform post-closure care. In accordance with NCGS §130A-309.218 (b), the post-closure care will be conducted for 30 years, unless NCDENR permits a decrease in the post-closure care period or requires an increase in the post-closure care period.

Post-closure care of the facility after closure will consist of the following elements:

- Inspection and maintenance of final cap systems, including
  - Repairs to the cover as necessary to correct the effects of settlement, subsidence, erosion, or other events
  - Preventing run-on and run-off from eroding and damaging the cap system (see Sections 2.2 and 2.3 of this Closure/Post-Closure Plan)
- Operation, inspection and maintenance of the leachate collection system.
- Control of access with fences and/or signs.

The final cover system will be inspected quarterly for signs of settlement, erosion, and bare spots. Additional inspections will be performed after large storm events. Depressions in the cover that pond water or otherwise impair the function of the final cover will be filled and/or regraded. Areas subject to regrading will be revegetated. Erosion damage will be repaired, and the source of the damage will be corrected, if possible. The grass will be mowed at least twice annually. Bare spots will be revegetated with grass seed. Any deep-rooted or woody vegetation that may have established itself on the cover soil will be removed so that deep root growth will not compromise the integrity of the geosynthetics of the final cover.

The leachate collection system shall be inspected on a quarterly basis. The pipeline, manholes, pumps, and the leachate storage system will be inspected and maintained as needed.

Following completion of the post-closure care period of the structural fill, the Operator will submit NCDENR a certification, signed by a registered professional engineer, verifying that post-closure care has been completed in accordance with the post-closure plan and will place the certification in the operating record.

### 3.1 Post-Closure Monitoring and Maintenance Requirements

In accordance with NCGS §130A-309.218 (b) (2) a., a description of the monitoring and maintenance activities required is listed in Table 2.



**Table 2 Post-Closure Monitoring & Maintenance Activities and Their Frequencies**

<b>Activity</b>	<b>Frequency</b>
General Site Inspection	Quarterly <sup>a</sup>
Cap System	
Stormwater Management System	
Utilities	
Leachate Collection System	
Other Miscellaneous Inspections	
Mowing	at least twice per year or as needed
Water Quality Monitoring	per Water Quality Monitoring Plan
Groundwater Monitoring System Inspection	Semiannually

<sup>a</sup>The cap system and stormwater management system will be inspected within seven days of a major storm event.

A description of the monitoring and maintenance activities follows.

### **3.2 General Site Inspection & Maintenance**

A general site inspection will occur quarterly. This inspection will include a cap system inspection, a stormwater management system inspection, utilities inspection, a leachate collection system inspection, and other miscellaneous inspections. In addition to inspections, general maintenance will be performed. This general maintenance includes maintaining the vegetation onsite, removing woody waste, and mowing at least twice per year or as needed. The quarterly site inspection has been allocated \$5,000 per inspection; actual costs may vary. A checklist for quarterly inspection tasks is provided in Appendix B. These and other inspection records must be maintained in a central location and made available for any NCDENR inspections.

#### **3.2.1 Cap System Inspection & Maintenance**

In accordance with NCGS §130A-309.218 (b) (3) the integrity and effectiveness of the cap system will be maintained. This will include repairing the system as necessary to correct the defects of settlement, subsidence, erosion, or other events and preventing run-on and runoff from eroding or otherwise damaging the cap system (NCGS §130A-309.218 (b) (3)). The cap system will be inspected quarterly or within seven days of a major storm event, whichever is more frequent. The cap system will be inspected for evidence of settlement, subsidence, erosion, and other damage or potential damage.

Cap maintenance will be performed as necessary to maintain the integrity and effectiveness of the cap system. To account for erosion control and cover maintenance in the post-closure period, some reconstruction of the cap (including grassing and soil fill material) has been considered. An annual average cap maintenance of one acre per year of regrassing, and 400 CY of top soil replacement and 400 CY of protective cover replacement per year have been estimated.

#### **3.2.2 Stormwater Management System Inspection & Maintenance**

The stormwater management system (sediment basins, perimeter channels, etc.) will be inspected at least quarterly or within seven days of a major storm event, whichever is more frequent, to ensure the system is functioning properly. The current Erosion & Sediment Control

Plan may require more frequent inspections and should be followed. Maintenance will be performed as necessary. A lump sum amount of \$2,000 has been allocated for annual stormwater management system maintenance and a lump sum amount of \$1,200 has been allocated for each stormwater monitoring event. Two stormwater monitoring events have been allocated each year for an annual total of \$2,400 for stormwater monitoring; actual costs may vary.

### **3.2.3 Utilities**

Some utilities at the site will be maintained in operational condition during the post-closure period and will be inspected quarterly. The estimated power requirement is \$500 a month which is equal to \$6,000 a year; actual costs may vary.

### **3.2.4 Leachate Collection System Operation, Inspection & Maintenance**

In accordance with NCGS §130A-309.218 (b) (4) the leachate collection system will continue to operate and be maintained during the post-closure care period. The parts of the leachate collection system that are above ground or easily accessible will be inspected quarterly. This will include inspections of the pipelines, manholes, pumps, and the leachate storage system. Maintenance will be performed as necessary in order to ensure the leachate collection system is functioning properly.

Leachate disposal has been measured using the HELP Model to estimate the average quantity of leachate requiring offsite treatment and disposal. The 30-year average during the post-closure period is approximately 9,200 gallons per acre per year. For the 118 acre footprint (based on the construction baseline), the average annual volume of leachate is 1,094,800 gallons. The annual post-closure leachate treatment cost is estimated to be \$0.0235 per gallon for an annual leachate treatment amount of \$25,500; actual costs may vary. In addition, a lump sum leachate system maintenance cost has been assumed to be \$2,500 per year.

The owner may request from the Department to stop managing leachate from the project if the owner can demonstrate that leachate from the project through a post-closure care leachate monitoring program no longer poses a threat to human health and the environment (NCGS §130A-309.218 (b) (4)). If the owner is allowed to stop managing leachate from the project, the owner will stop operating the leachate collection system and may dismantle portions of the leachate collection system that are not under the structural fill project. The leachate collection system inspection and maintenance frequency will be revised if the structural fill is no longer required to operate the leachate collection system.

### **3.2.5 Other Miscellaneous Inspection & General Maintenance**

Any security control devices such as fences and gates located at the site will be inspected quarterly. Repairs will be made as necessary to ensure the security of the structural fill project. A lump sum amount of \$500 is assumed as cost associated with fence repairs and other security management; actual costs may vary.

### 3.3 Mowing

Vegetation on the cap system will be maintained. Mowing will occur at least twice per year or as needed. The unit cost of mowing is assumed to be \$24.00 per acre; actual cost may vary. Therefore two events at \$24.00/acre x 118 acres = \$5,700 per year (or \$2,850 per event).

### 3.4 Water Quality Monitoring, System Inspection & Maintenance

In accordance with NCGS §130A-309.218 (b) (5), the groundwater monitoring system will be monitored and maintained in accordance with NCGS §130A-309.216. The groundwater monitoring system will be inspected at least semiannually, or at least during a groundwater monitoring event, whichever is sooner. A checklist for semiannual inspection tasks is provided in Appendix B. Groundwater monitoring system inspections will include inspecting the groundwater monitoring wells, covers, pads, etc. for damage. Maintenance will be performed as necessary. Groundwater and surface water will continue to be monitored according to the Water Quality Monitoring Plan for the structural fill throughout post-closure.

There are nine groundwater monitoring wells and two surface water sampling locations that require semi-annual sampling and reporting per the Water Quality Monitoring Plan. The unit cost per semiannual monitoring event is estimated to be \$6,000. Groundwater monitoring well maintenance is assumed to have a lump sum amount of \$1,000 per year for well maintenance and replacement; actual cost may vary.

### 3.5 Administrative Costs

Professional engineering services expected during the post-closure period include investigations of documented problems from the inspection reports. An annual cost of \$2,000 per year has been estimated to cover miscellaneous administrative costs; actual costs may vary.

### 3.6 Contact Person Information

In accordance with NCGS §130A-309.218 (b) (2) b., the name, address, and telephone number of the person or office responsible for the project during the post-closure period is listed below.

Charles E. Price  
12601 Plantside Drive  
Louisville, KY 40299  
(877) 314.7724

### 3.7 Proposed Post-Closure Use of the Property

NCGS §130A-309.218 (b) (2) c. requires that a description of the planned uses of the property during the post-closure period be included in the post-closure plan. At this time, no planned uses have been identified for the property. The property will be actively marketed as an industrial use site for development through the local and state economic development commission. In accordance with NCGS §130A-309.218 (b) (2) c., any post-closure use of the property will not disturb the integrity of the cap system, base liner system, or any other components of the containment system or the function of the monitoring systems, unless





necessary to comply with the requirements of this subsection. NCDENR will be consulted prior to any disturbance of the structural fill project and/or its containment system. Prior to any disturbance, the Operator will demonstrate that disturbance of the cap system, base liner system, or other component of the containment system will not increase the potential threat to public health, safety, and welfare; the environment; and natural resources as required by NCGS §130A-309.218 (b) (2) c.

### **3.8 Post-Closure Cost Estimate**



Reference Appendix A in this section for an annual cost estimate for the post-closure activities in accordance with NCGS §130A-309.218 (b) (2) d.

### **3.9 Post-Closure Care Completion Certification**

In accordance with NCGS §130A-309.218 (c), “following completion of the post-closure care period, [the Operator will] submit a certification, signed by a registered professional engineer, to [NCDENR], verifying that post-closure care has been completed in accordance with the post-closure plan, and include the certification in the operating record.”



This page intentionally left blank.



# A

## Closure/Post-Closure Cost Estimates





This page intentionally left blank.



### Closure Cost Estimate – Soil/Geomembrane Cap

The following is an estimate of closure costs; actual costs may vary.

										Soil/Geomembrane Cap					
										Top		Side Slope			
Item	Description	Unit Price	Unit	Thickness (in)	Quantity	Total	Thickness (in)	Quantity	Total						
1	Mobilization, Administration & Bonds	4%	of Items 2-9		4%	\$ 4,000		4%	\$ 3,200						
2	Surveying & Control	\$ 1,600	Acres		1	\$ 1,600		1	\$ 1,600						
3	Topsoil Layer	\$ 11.60	CY	6	900	\$ 10,400	6	900	\$ 10,400						
4	Low Permeable Soil Layer*	\$ 6.70	CY	12	1,700	\$ 11,400	12	1,700	\$ 11,400						
5	Unclassified Soil Layer*	\$ 6.70	CY	24	3,300	\$ 22,100	12	1,700	\$ 11,400						
6	Drainage Soil Layer*	\$ 6.70	CY	30	4,100	\$ 27,500	18	2,500	\$ 16,800						
7	Geocomposite Drainage Layer	\$ 0.70	SF		0	\$ -		0	\$ -						
8	Geomembrane (40 mil double sided textured polyethylene)	\$ 0.60	SF		43,560	\$ 26,100		43,560	\$ 26,100						
9	Seeding/Fertilizing/Mulching	\$ 1,500	Acre		1	\$ 1,500		1	\$ 1,500						
10	Contingency	10%	of Items 1-9		10%	\$ 10,500		10%	\$ 8,200						
11	Engineering - Plans & Specs	6%	of Items 1-9		6%	\$ 6,300		6%	\$ 4,900						
12	CQA & Certification	6%	of Items 1-9		6%	\$ 6,300		6%	\$ 4,900						
13	Construction Management	5%	of Items 1-9		5%	\$ 5,200		5%	\$ 4,100						
						Cost Per Acre	\$ 132,900	Cost Per Acre	\$ 104,500						

\*The permeabilities for the soil layers may be different; however, the costs have been assumed to be the same with the exception of the topsoil.



### Closure Cost Estimate – Soil/Geocomposite Drainage Layer/Geomembrane Cap

The following is an estimate of closure costs; actual costs may vary.

										Soil/Geocomposite Drainage Layer/Geomembrane Cap					
										Top		Side Slope			
Item	Description	Unit Price	Unit	Thickness (in)	Quantity	Total	Thickness (in)	Quantity	Total						
1	Mobilization, Administration & Bonds	4%	of Items 2-9		4%	\$ 5,200		4%	\$ 4,300						
2	Surveying & Control	\$ 1,600	Acres		1	\$ 1,600		1	\$ 1,600						
3	Topsoil Layer	\$ 11.60	CY	6	900	\$ 10,400	6	900	\$ 10,400						
4	Low Permeable Soil Layer*	\$ 6.70	CY	66	8,900	\$ 59,600	42	5,700	\$ 38,200						
5	Unclassified Soil Layer*	\$ 6.70	CY		0	\$ -		0	\$ -						
6	Drainage Soil Layer*	\$ 6.70	CY		0	\$ -		0	\$ -						
7	Geocomposite Drainage Layer	\$ 0.70	SF		43,560	\$ 30,500		43,560	\$ 30,500						
8	Geomembrane (40 mil double sided textured polyethylene)	\$ 0.60	SF		43,560	\$ 26,100		43,560	\$ 26,100						
9	Seeding/Fertilizing/Mulching	\$ 1,500	Acre		1	\$ 1,500		1	\$ 1,500						
10	Contingency	10%	of Items 1-9		10%	\$ 13,500		10%	\$ 11,300						
11	Engineering - Plans & Specs	6%	of Items 1-9		6%	\$ 8,100		6%	\$ 6,800						
12	CQA & Certification	6%	of Items 1-9		6%	\$ 8,100		6%	\$ 6,800						
13	Construction Management	5%	of Items 1-9		5%	\$ 6,700		5%	\$ 5,600						
						Cost Per Acre	\$ 171,300	Cost Per Acre	\$ 143,100						

\*The permeabilities for the soil layers may be different; however, the costs have been assumed to be the same with the exception of the topsoil.



### Annual Post-Closure Care Cost Estimate


The following is an estimate of post-closure costs; actual costs may vary.

1	Quarterly Site Inspections	4	Events	\$5,000	\$20,000
2	Cap System Maintenance				
	a. Seeding/Fertilizing/Mulching	1	acres	\$1,500	\$1,500
	b. Topsoil Replacement	400	CY	\$11.60	\$4,600
	c. Protective Cover Replacement	400	CY	\$6.70	\$2,700
3	Stormwater Management	1	LS	\$2,000	\$2,000
4	Stormwater Monitoring	2	Events	\$1,200	\$2,400
5	Utilities	12	Events	\$500	\$6,000
6	Mowing	2	Events	\$2,850	\$5,700
7	Fence Repairs and Security	1	LS	\$500	\$500
8	Administration	1	Events	\$2,000	\$2,000
9	Leachate System Maintenance	1	Events	\$2,500	\$2,500
10	Leachate Collection and Treatment	1,085,600	gallons	\$0.0235	\$25,500
11	Water Quality Monitoring & Report	2	Events	\$6,000	\$12,000
12	Groundwater Monitoring System Maintenance	1	Events	\$1,000	\$1,000
13	Contingency	10%		\$88,400	\$8,800
	<b>Annual Total</b>				<b>\$97,200</b>
	<b>30-YR Total</b>				<b>\$2,916,000</b>



This page intentionally left blank.



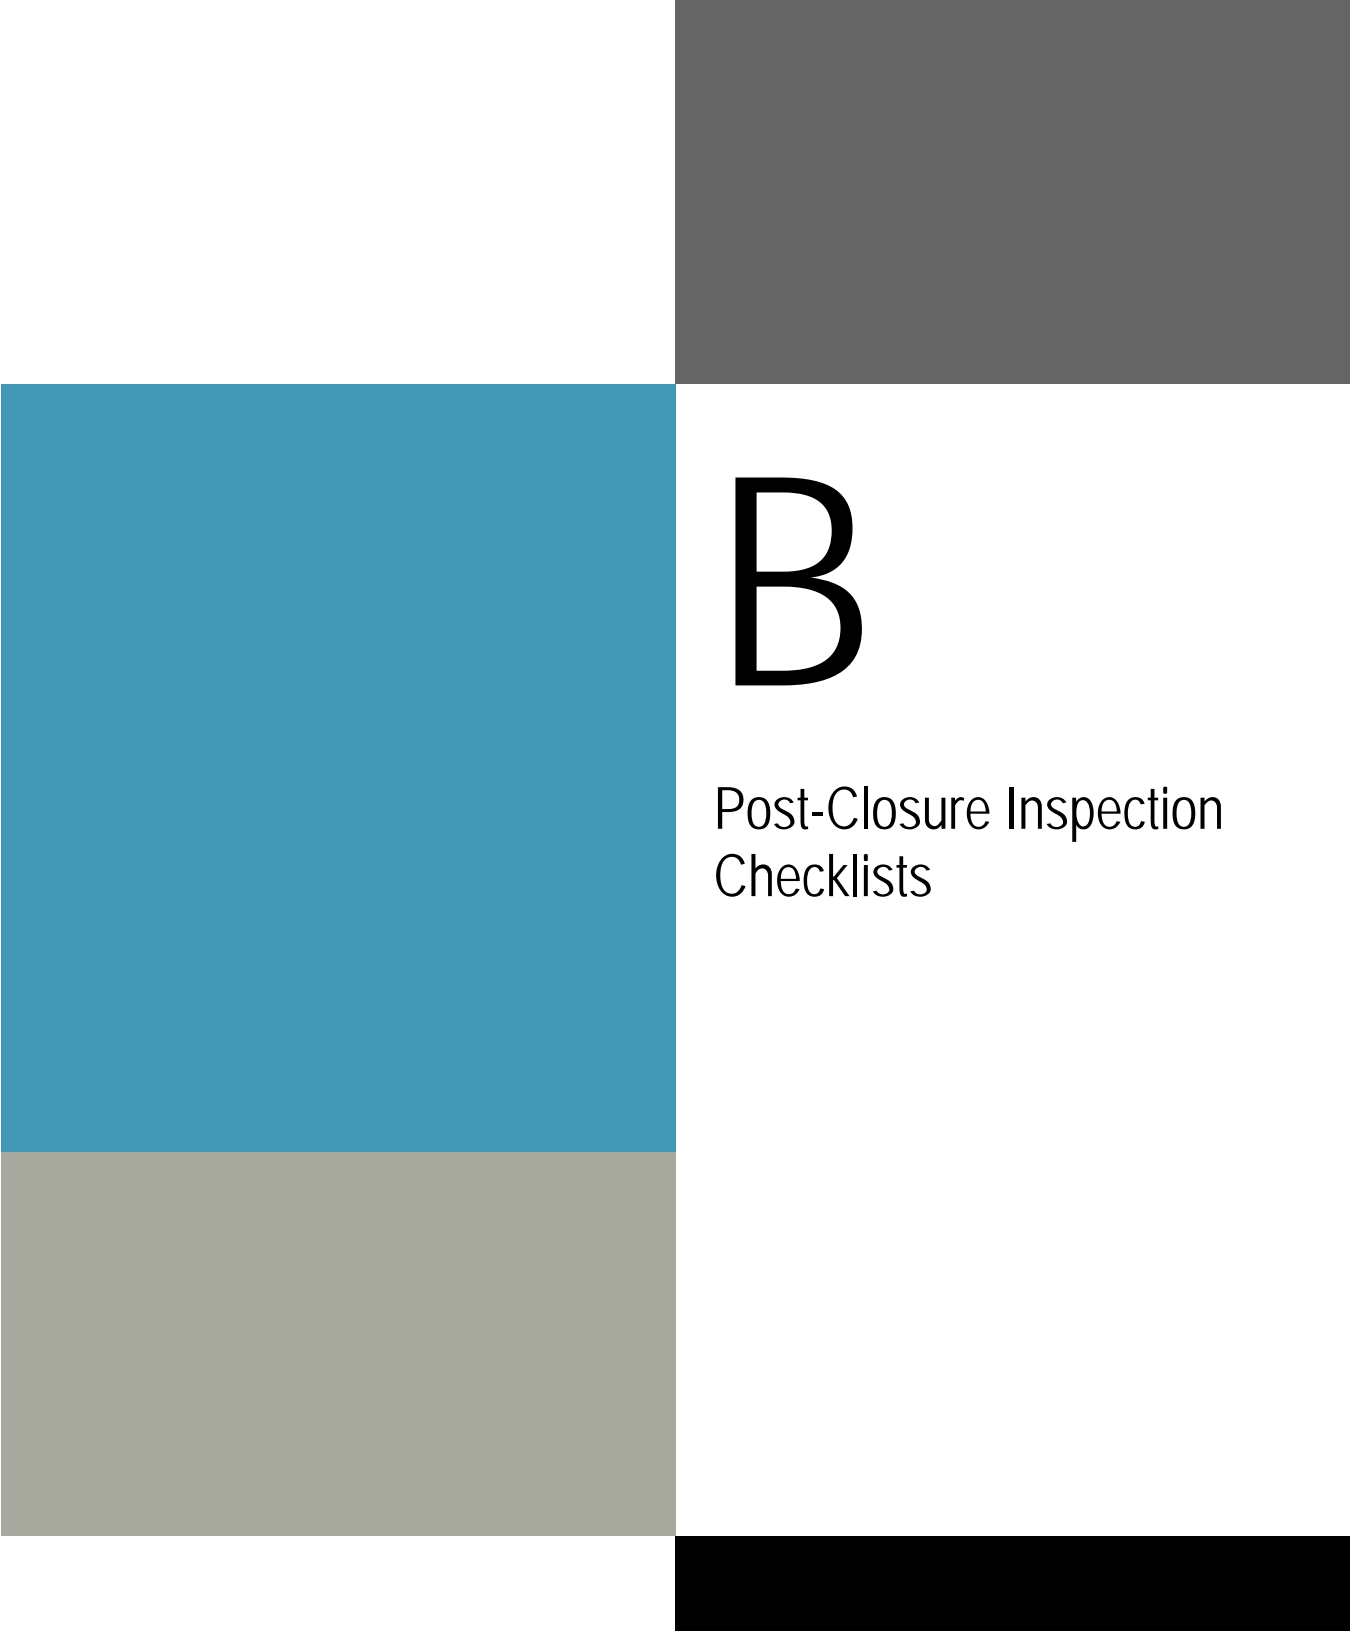

# B

## Post-Closure Inspection Checklists



This page intentionally left blank.

# Quarterly Tasks

Date: \_\_\_\_\_

Name: \_\_\_\_\_

Action	Action Completed	Comments/Follow up
Inspection of leachate pipelines, manholes, pumps		
Inspection of leachate storage system		
Inspection of power to leachate sump pumps (if applicable)		
Inspection of grass condition & removal of woody waste		
Inspection of security control devices		
Inspection of utilities		
Inspection of cap system for evidence of settlement, subsidence, erosion or other damage*		
Inspection of stormwater management system (sediment basins, perimeter channels, etc.)*		
Other:		
Other:		
Other:		
Other:		

\*Complete these tasks quarterly or within seven days of a major storm event, whichever is more frequent.

**Notes:**

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

# Semiannual Tasks

Date: \_\_\_\_\_

Name: \_\_\_\_\_

Action	Action Completed	Comments/Follow up
Inspection of groundwater monitoring wells, covers, pads, etc		
Other:		
Other:		
Other:		

## Notes:

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

This page intentionally left blank.