

**Redesignation Demonstration  
and  
Maintenance Plan**

**for**

**The Rocky Mount, North Carolina  
8-Hour Ozone Nonattainment Area**



**Prepared by  
North Carolina Department of Environment and Natural Resources  
Division of Air Quality**

**June 19, 2006  
Supplement February 7, 2011**

**Preface:** This document contains the technical support for North Carolina's Division of Air Quality to request the Rocky Mount 8-hour ozone nonattainment area be redesignated as attainment for the 8-hour ozone national ambient air quality standard pursuant to §§107(d)(3)(D) and (E) of the Clean Air Act, as amended.

# EXECUTIVE SUMMARY

## Introduction

Ozone is formed by a complex set of chemical reactions involving volatile organic compounds (VOCs), nitrogen oxides (NO<sub>x</sub>) and to a lesser extent carbon monoxide. These gases are generated by utilities, combustion processes, certain industrial processes and even by natural sources such as trees. Tailpipe emissions from mobile sources (vehicles) are also significant sources of these pollutants. Even the emissions from such sources as boat engines, lawn mowers and construction equipment contribute to the formation of ozone. Ozone formation is promoted by strong sunlight, warm temperatures and light winds and is hence a problem predominantly during the hot summer months.

The 8-hour ozone national ambient air quality standard (NAAQS) is 0.08 parts per million (ppm). An exceedance of the 8-hour ozone NAAQS occurs when a monitor measures ozone above 0.084 ppm on average for an eight-hour period. A violation of this NAAQS occurs when the average of the annual fourth highest daily maximum 8-hour ozone values over three consecutive years is greater than or equal to 0.085 ppm. This three-year average is termed the “design value” for the monitor.

## Rocky Mount Nonattainment Designation

The area surrounding Rocky Mount, North Carolina was designated nonattainment for the 8-hour ozone NAAQS on April 30, 2004 (69 Federal Register 23858). The Rocky Mount nonattainment area includes both Edgecombe and Nash Counties. The nonattainment designation was an action taken by the U. S. Environmental Protection Agency (USEPA) under Section 107(d) of the Clean Air Act (CAA). The CAA requires that some area be designated as nonattainment if a monitor is found to be in violation of a NAAQS. The USEPA took designation action in 2004 based on the ambient data from 2001-2003. At that time, the monitor in this area had a design value of 0.089 ppm.

## Current Air Quality

The ozone monitor is located in the small community of Leggett, east of Rocky Mount in Edgecombe County, and is the only ozone monitor in this nonattainment area. The latest design value for the monitor is 0.079 ppm based on the data from 2003-2005, and is therefore in attainment of the 8-hour ozone NAAQS, and eligible to be considered for redesignation to attainment.

## **Maintenance Plan Requirements**

The State of North Carolina has implemented permanent and enforceable reductions in ozone precursor emissions in the Rocky Mount area. These actions include implementing the on-board diagnostic vehicle inspection and maintenance program that began on January 1, 2005, and an open burning ban during ozone action days. In addition, there have been several State rules that have resulted in reductions in emissions in nearby areas that have resulted in lower ozone levels at the monitor. These State actions include the NO<sub>x</sub> SIP Call, the Clean Smokestacks legislation, and heavy-duty engine stop-gap rule for model years 2005 and 2006. Finally, several actions at the Federal level by the USEPA have resulted in lower emissions throughout the eastern portion of the country. These Federal actions include the Tier 2 engine standards for light and medium duty vehicles, heavy-duty engine standards, the low sulfur gasoline and diesel requirements, off-road engine standards, and the Clean Air Interstate Rule.

This combination of State and Federal actions have resulted in cleaner air in the Rocky Mount area, and the anticipated future benefits from these programs are expected to result in continued maintenance of the 8-hour ozone NAAQS in this region. An attainment year emissions inventory for NO<sub>x</sub> and VOC's was developed for 2005, since the design value for the 2003-2005 period showed attainment of the 8-hour ozone NAAQS. Future year emissions inventories were also developed for the interim years 2008, 2011, 2014, and a final year emission inventory was developed for 2017. The future year emissions were lower than the 2005 emissions in all cases. This demonstrates that the Rocky Mount area is expected to maintain the 8-hour ozone NAAQS through 2017, since in no future year are the emissions expected to be greater than they were in 2005. The area is also in compliance with Section 110 and Part D requirements of the CAA.

## **Conclusion and Request for Redesignation**

Based on the information above and criteria established in Section 107(d)(3)(E) of the CAA, North Carolina is requesting that the USEPA redesignate the Rocky Mount nonattainment area to attainment. The monitor data clearly shows that the region has attained the 8-hour ozone standard, and the maintenance demonstration shows that the future emission inventories are expected to be lower than the attainment year inventory through the implementation of the various control measures listed above.

## TABLE OF CONTENTS

EXECUTIVE SUMMARY .....	ii
1.0 INTRODUCTION .....	1-1
1.1 WHAT IS TROPOSPHERIC OZONE? .....	1-1
1.2 CLEAN AIR ACT OF 1990 .....	1-1
1.3 ROCKY MOUNT AIR QUALITY HISTORY .....	1-1
1.4 CLEAN AIR ACT REDESIGNATION CRITERIA.....	1-2
2.0 AIR QUALITY .....	2-1
2.1 HISTORIC AIR QUALITY (1996 – 2004).....	2-1
2.2 RECENT AIR QUALITY VALUES (2003 –2005).....	2-2
2.3 PERMANENT AND ENFORCEABLE EMISSIONS REDUCTIONS .....	2-2
3.0 MAINTENANCE PLAN.....	3-1
3.1 CONCEPT OF NORTH CAROLINA'S MAINTENANCE PLAN .....	3-1
3.2 FOUNDATION CONTROL PROGRAM.....	3-1
3.2.1 Federal Control Measures .....	3-2
3.2.2 State Control Measures .....	3-3
3.2.3 Additional Programs Supporting Maintenance.....	3-6
3.3 EMISSIONS INVENTORIES AND MAINTENANCE DEMONSTRATION .....	3-7
3.3.1 Theory of Approach.....	3-7
3.3.2 Emission Inventories.....	3-7
3.3.3 Summary of Emissions .....	3-8
3.3.4 Maintenance Demonstration .....	3-10
3.4 CONTINGENCY PLAN .....	3-11
3.4.1 Overview.....	3-11
3.4.2 Primary and Secondary Triggers .....	3-12
3.4.3 Action Resulting From Trigger Activation.....	3-12
3.4.4 Ongoing Maintenance Strategy Program.....	3-13
4.0 MOTOR VEHICLE EMISSIONS BUDGET FOR CONFORMITY .....	4-1
4.1 TRANSPORTATION CONFORMITY .....	4-1
4.2 HIGHWAY MOBILE SOURCE VOC INSIGNIFICANCE .....	4-1
4.3 SAFETY MARGIN .....	4-2
5.0 STATE IMPLEMENTATION PLAN APPROVAL.....	5-1
5.1 INTRODUCTION .....	5-1
5.2 EVIDENCE OF COMPLIANCE .....	5-1
6.0 STATE COMPLIANCE WITH CLEAN AIR ACT REQUIREMENTS.....	6-1
7.0 CONCLUSION.....	7-1

**LIST OF APPENDICES**

APPENDIX A: CORRESPONDENCE AND GUIDANCE DOCUMENTS

APPENDIX B: HEARING REPORT, COMMENTS RECEIVED AND RESPONSES

APPENDIX C.1: POINT SOURCE INVENTORY DOCUMENTATION

APPENDIX C.2: AREA SOURCE INVENTORY DOCUMENTATION

APPENDIX C.3: MOBILE SOURCE INVENTORY DOCUMENTATION

**LIST OF TABLES**

Table 2-1 Rocky Mount Area’s Historic 4<sup>th</sup> Highest 8-hour Ozone Values (1996-2004)..... 2-1

Table 2-2 Rocky Mount Area’s Historic Design Values (1996 - 2004)..... 2-2

Table 2-3 Rocky Mount Area’s Current Air Quality Data (2003 -2005) ..... 2-2

Table 2-4. NOx Emissions from NC Sources in USEPA Acid Rain Database ..... 2-4

Table 2-5. April – September NOx Emissions for Roxboro and Mayo (tons/period)..... 2-4

Table 3-1 Point Source Emissions for the Rocky Mount Area..... 3-9

Table 3-2 Area Source Emissions for the Rocky Mount Area ..... 3-9

Table 3-3 Highway Mobile Source Emissions for the Rocky Mount Area..... 3-9

Table 3-4 Non-Road Mobile Source Emissions for the Rocky Mount Area..... 3-10

Table 3-5 Total Man-Made Emissions for the Rocky Mount Area..... 3-10

Table 3-6 Maintenance Demonstration for Rocky Mount..... 3-11

Table 3-7 Safety Margin for Rocky Mount ..... 3-11

Table 4-1 Percent Increase To Mobile Vehicle Emissions Budget in Both Counties ..... 4-2

Table 4-2 Edgecombe County MVEB in kilograms per day ..... 4-3

Table 4-3 Nash County MVEB in kilograms per day..... 4-3

Table 4-4 New Safety Margins for the Rocky Mount Area..... 4-4

**LIST OF FIGURES**

Figure 1. USEPA Designated 8-Hour Ozone Nonattainment Areas in North Carolina ..... 1-2

Figure 2. Ozone Monitor Location in the Rocky Mount Nonattainment Area..... 2-1

Figure 3. Relationship Between High Temperature Days and Number of Exceedances at the Leggett Monitor ..... 2-5

Figure 4. North Carolina’s NOx Inspection & Maintenance (I/M) Phase-In Map..... 3-4

## LIST OF ACRONYMS

Acronym	Definition
°F	Degrees Fahrenheit
CAA	Clean Air Act
CERR	Consolidated Emissions Reporting Rule
CFR	Code of Federal Regulations
CO	Carbon Monoxide
E-GAS 5.0	Economic Growth Analysis System version 5.0
FR	Federal Register
HC	Hydrocarbons
I/M	Inspection and Maintenance
MVEB	Motor Vehicle Emission Budget
NAAQS	National Ambient Air Quality Standard
NCDAQ	North Carolina Division of Air Quality
NCDENR	North Carolina Department of Natural Resources
NCDOT	North Carolina Department of Transportation
NO <sub>x</sub>	Nitrogen Oxides
PM	Particulate Matter
ppm	Parts per million
QA	Quality Assure
SIP	State Implementation Plan
SUV	Sports Utility Vehicle
TIP	Transportation Improvement Program
USEPA	U.S. Environmental Protection Agency
VMT	Vehicle Miles Traveled
VOC	Volatile Organic Compounds

## **1.0 INTRODUCTION**

### **1.1 WHAT IS TROPOSPHERIC OZONE?**

Ozone, a strong chemical oxidant, adversely impacts human health through effects on respiratory function and can also damage forests and crops. Ozone is not emitted directly by the utilities, industrial sources or motor vehicles but instead, is formed in the lower atmosphere, the troposphere, by a complex series of chemical reactions involving nitrogen oxides (NO<sub>x</sub>), resulting from the utilities, combustion processes and motor vehicles, and reactive volatile organic compounds (VOCs). VOCs include many industrial solvents, toluene, xylene and hexane as well as the various hydrocarbons (HC) that are evaporated from the gasoline used by motor vehicles or emitted through the tailpipe following combustion.

Ozone formation is promoted by strong sunlight, warm temperatures, and light winds. High concentrations tend to be a problem in the eastern United States only during the hot summer months when these conditions frequently occur. Therefore, the U. S. Environmental Protection Agency (USEPA) mandates seasonal monitoring of ambient ozone concentrations in North Carolina only from April 1 through October 31 (40 CFR 58 App. D, 2.5).

In 1997, the USEPA revised the primary (health) and secondary (welfare) national ambient air quality standards (NAAQS) for ozone by establishing 8-hour standards. The 8-hour ozone standards are met when the 3-year average of the annual fourth highest daily maximum 8-hour average ozone concentration is less than or equal to 0.084 parts per million (ppm). The resulting concentration represents an 8-hour ozone design value. A violation of the 8-hour ozone NAAQS occurs when the design value exceeds 0.084 ppm.

### **1.2 CLEAN AIR ACT OF 1990**


Since the 1977 amendments to the Clean Air Act (CAA), areas of the country that had not attained the ambient standard for a particular pollutant were formally designated as nonattainment for that pollutant. This formal designation concept was retained in the 1990 Amendments.

### **1.3 ROCKY MOUNT AIR QUALITY HISTORY**

On April 15, 2004, the USEPA designated the Rocky Mount, North Carolina area (i.e., Edgecombe and Nash Counties) as “basic” nonattainment for the 8-hour ozone standard (Figure 1). The official designation and classification was published in the Federal Register (FR) on April 30, 2004 (69 FR 23858). The designation became effective on June 15, 2004. Prior to



the implementation of the new 8-hour ozone standard, this area had always been in attainment of the 1-hour ozone standard.

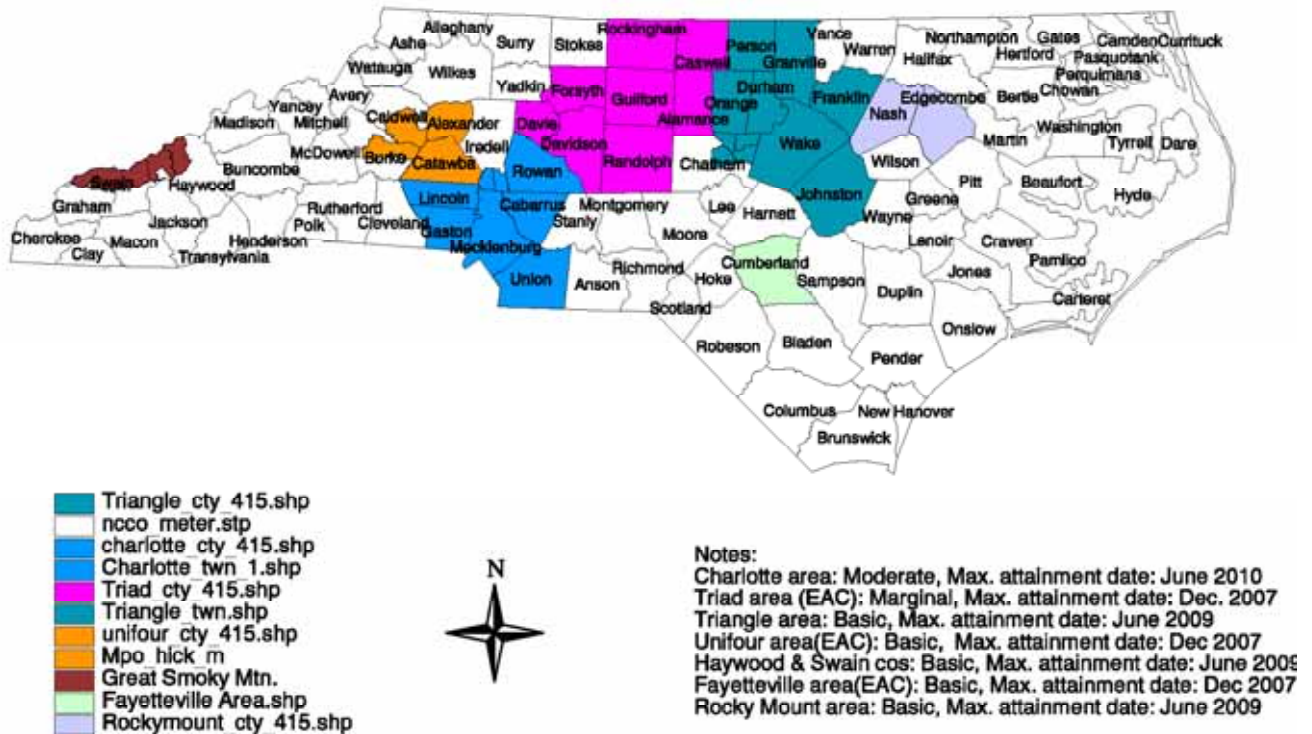

**Figure 1. USEPA Designated 8-Hour Ozone Nonattainment Areas in North Carolina**

There is one monitor located in the Rocky Mount nonattainment area in the town of Leggett, just east of Rocky Mount. In 2005, this monitor came into attainment of the 8-hour ozone NAAQS with a 2003-2005 design value of 0.079 ppm.

#### 1.4 CLEAN AIR ACT REDESIGNATION CRITERIA

Section 107(d)(3)(E) of the CAA, as amended, states an area can be redesignated to attainment if the following conditions are met:

1. The USEPA has determined that the NAAQS have been attained. For ozone, the areas must show that the average of the fourth highest 8-hour ozone values from three (3) complete, consecutive calendar years of quality-assured air quality monitoring data must be below 0.085 ppm.
2. The applicable implementation plan has been fully approved by the USEPA under section 110(k).


3. The USEPA has determined that the improvement in air quality is due to permanent and enforceable reductions in emissions. To demonstrate this, the State should estimate the percent reduction (from the year used to determine the design value for designation and classification) achieved from Federal, State, and local measures.
4. The State has met all applicable requirements for the area under section 110 and Part D.
5. The USEPA has fully approved a maintenance plan, including a contingency plan, for the areas under section 175A.

In the sections to follow, the North Carolina Department of Environment and Natural Resources, Division of Air Quality (NCDAQ) will provide the technical data necessary to show that the Rocky Mount nonattainment area has attained and is expected to maintain the 8-hour ozone standard, and has met the requirements for redesignation set forth above.

## 2.0 AIR QUALITY

### 2.1 HISTORIC AIR QUALITY (1996 – 2004)

The NCDAQ has collected ambient monitoring data for the Rocky Mount area since 1986. The monitor was operated as an industrial expansion monitor, i.e., operated every third ozone season, until 1996, when NCDAQ began operating the monitor every year. The Rocky Mount area has one ambient ozone monitoring station located in the town of Leggett (see Figure 2) installed in accordance with the Code of Federal Regulations (CFR) 40 CFR 58. This monitor provides adequate coverage of the entire nonattainment area. Tables 2-1 and 2-2 below show the air quality data and corresponding design values for the Leggett monitor, respectively, from 1996 to 2004. As you can see, this monitor was in violation of the 8-hour ozone NAAQS for this period.

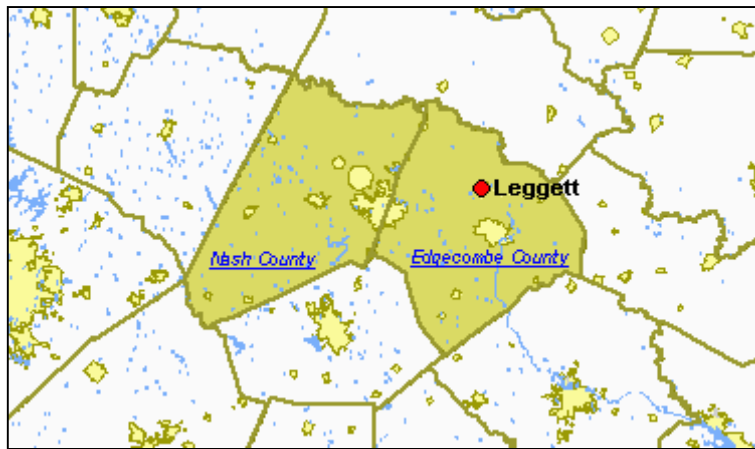

**Figure 2. Ozone Monitor Location in the Rocky Mount Nonattainment Area**

**Table 2-1 Rocky Mount Area’s Historic 4<sup>th</sup> Highest 8-hour Ozone Values (1996-2004)**

Monitor	4 <sup>th</sup> Highest 8-hour Ozone Values (ppm)								
	1996	1997	1998	1999	2000	2001	2002	2003	2004
Leggett AIRS ID #37-065-0099 Edgecombe County	0.080	0.089	0.090	0.092	0.085	0.085	0.095	0.088	0.072

**Table 2-2 Rocky Mount Area's Historic Design Values (1996 - 2004)**

Monitor	Design Value (ppm)						
	96-98	97-98	98-00	99-01	00-02	01-03	02-04
Leggett AIRS ID #37-065-0099 Edgecombe County	0.086	0.090	0.089	0.087	0.088	0.089	0.085

The NCDAQ has evaluated the wind patterns on a number of days when the Leggett monitor exceeded the 8-hour ozone NAAQS. A limited number of days were due to local recirculation. The majority of the days showed impacts at the monitor from the Raleigh/Durham area. Several other days showed impacts from the Fayetteville area and the I-95 corridor. The emissions reductions realized over all of North Carolina have helped the Leggett monitor reach attainment and are expected to help the area maintain the 8-hour ozone NAAQS.

**2.2 RECENT AIR QUALITY VALUES (2003 –2005)**

The most recent three years of ozone monitoring data (2003-2005) for the Rocky Mount, North Carolina area demonstrate compliance with the 8-hour ozone NAAQS. Table 2-3 is a summary of the fourth highest 8-hour average at the Leggett monitor for 2003-2005 and the design value. The 2005 8-hour ozone monitoring data has been fully quality assured (QA'ed) and officially submitted to the USEPA. A letter from NCDAQ certifying the data will be submitted to USEPA Region 4 by no later than the required date of June 30, 2006.

**Table 2-3 Rocky Mount Area's Current Air Quality Data (2003 -2005)**

Monitor	Year	4 <sup>th</sup> Highest 8-hour ozone values (ppm)	Design Value (ppm) 2003-2005
Leggett Monitor AIRS ID #37-065-0099 Edgecombe County	2003	0.088	0.079
	2004	0.072	
	2005	0.079	

**2.3 PERMANENT AND ENFORCEABLE EMISSIONS REDUCTIONS**

There are several State and Federal measures that have been enacted in recent years that are resulting in permanent and enforceable emissions reductions. A list of those measures that contributed to the permanent and enforceable emission reductions are listed below and are more fully described in Section 3.2.

The federal measures that have been implemented include:

- Tier 2 vehicle standards: Began implementation in 2004 and will require all passenger vehicles in the manufactures fleet to meet an average standard of 0.07 grams of NOx per mile.
- Heavy-duty gasoline and diesel highway vehicle standards: Began to take effect in 2004 and is designed to reduce NOx and VOC emissions.
- Nonroad spark-ignition engines and recreational engines standards: Began to take effect in 2003 and will reduce NOx and HC emissions.

The state measures that have been implemented include:

- Clean Air Bill: Expanded the inspection and maintenance (I/M) program from 9 counties to 48. It was phased-in in the Rocky Mount area on January 1, 2005.
- Open burning ban: The rule prohibits open burning in areas that NCDAQ forecasts ozone and will reduce NOx and VOC emissions, as well as CO and fine particulate matter.
- Air toxics control program: The rule was effective in 1990 and reduce VOC emissions across the state.
- Heavy duty diesel engine gap filling rule: This rule requires engine manufacturers to perform the supplemental testing requirements for heavy duty diesel engines for model years 2005 and 2006 due to delays in the USEPA's rule. It was estimated to reduce the 2005 emissions by 5.3 tons per day.
- NOx State Implementation Plan (SIP) Call rule: the NOx that will result in a 68 percent reduction in NOx emissions from the State's large stationary combustion sources by 2006.

A recent review of the NOx emissions in the USEPA's acid rain database shows a reduction in over 36,000 tons of NOx from the utilities subject to the NOx SIP call between 2002 and 2005. Table 2-4 presents the annual emissions for the North Carolina sources in the USEPA acid rain database.

**Table 2-4. NOx Emissions from NC Sources in USEPA Acid Rain Database**


Year	Annual NOx Emissions from NC Sources (Tons)
2002	142,564.7
2003	129,461.2
2004	115,422.7
2005	106,386.8

Table 2-5 displays the NOx emission reductions, as the result of the NOx SIP call rule, from two power plants that potentially impacts the Rocky Mount nonattainment area. These two facilities are located in Person County (Northwest of Rocky Mount) and are the two largest utilities located in the area. This data is also from the USEPA acid rain database and represents the second and third quarters of the year (April through September), the period during which ozone levels are the highest. It is clearly demonstrated that the emissions from these facilities have significantly decreased during the ozone season since 2002, with over an 8,600 tons of NOx per period reduction since 2002.

**Table 2-5. April – September NOx Emissions for Roxboro and Mayo (tons/period)**

Year	Roxboro	Mayo
2002	10,045	4,703
2003	9,451	3,597
2004	7,245	1,630
2005	4,966	1,165

One measure to consider in determining how all of the emissions reductions have impacted air quality is whether the relationship of exceedance days and high temperature days has changed over this time period. Temperature is one of the key meteorological factors that determines the ozone production potential of a given day. In North Carolina, many exceedance days occur when the maximum daily temperature is 90 degrees Fahrenheit (°F) or greater. Figure 3 shows this relationship from 1996 through 2005 for the Leggett monitor.

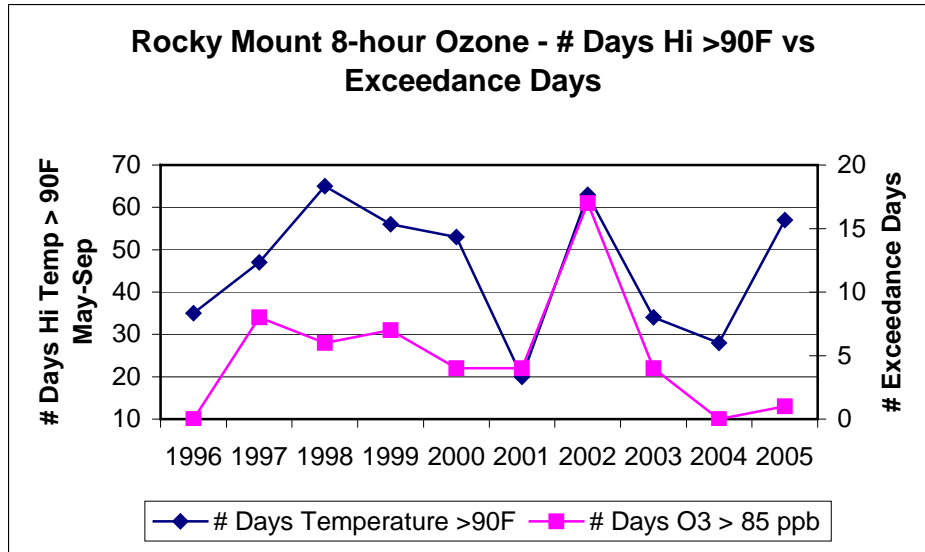

**Figure 3. Relationship Between High Temperature Days and Number of Exceedances at the Leggett Monitor**

It is important to see how the ozone levels have changed between 2002 and 2005 in response to lower NOx emissions in the State. In 2002, there were 63 days when the temperature was 90 °F or greater, and the Leggett monitor observed a record high 17 exceedances of the 8-hour ozone NAAQS. In 2005, there were a similar number of hot days, 57, but only one exceedance occurred in the ozone season at the Leggett monitor. North Carolina believes that this represents compelling evidence that the improvement in air quality is due to the real, permanent and enforceable reduction in NOx emissions in the State.

Further evidence that the area will continue to maintain the 8-hour ozone standard is that the monitor would need to measure a value of 0.104 ppm in 2006 to violate the 8-hour ozone NAAQS. The highest 4<sup>th</sup> high value observed at this site was 0.095 ppm, measured in the summer of 2002. Therefore, the NCDAQ believes that a future violation of the 8-hour standard at this monitor is extremely unlikely, given the expected downward trend in NOx emissions in North Carolina and the surrounding States.

## **3.0 MAINTENANCE PLAN**

### **3.1 CONCEPT OF NORTH CAROLINA'S MAINTENANCE PLAN**

The State's plan for maintaining compliance with the ambient air quality standard for 8-hour ozone in the Rocky Mount nonattainment area consists of three major parts: a foundation control program, a maintenance demonstration, and a contingency plan. The foundation control program consists of the current Federal and State control measures already in effect, as well as the future benefits of the federal Clean Air Interstate Rule, cleaner engine programs, and low sulfur gasoline and low sulfur diesel fuel programs.

For the maintenance demonstration, the base year of 2005 was chosen since this is the year the Rocky Mount area came into attainment. The interim years chosen were: 2008, 2011, and 2014 since the USEPA recommends three-year increments for interim years. The final year of the maintenance demonstration is 2017, since the CAA requires maintenance for at least ten years after redesignation. The maintenance demonstration consists of a comparison between the 2005 baseline emissions inventory and the projected emissions inventories (for 2008, 2011, 2014 and 2017), which consider economic and population growth. The comparison shows that the total emissions in each of the interim years and the final year will be lower than in the attainment year, which demonstrates maintenance of the 8-hour ozone standard. The reductions in emissions are due to the foundation control programs outlined below.

The North Carolina contingency plan involves tracking and triggering mechanisms to determine when contingency measures are needed and a process of implementing appropriate control measures. The primary trigger of the contingency plan will be a violation of the ambient air quality standard for 8-hour ozone. The secondary trigger will be a monitored air quality pattern that suggests an actual 8-hour ozone NAAQS violation may be imminent.

### **3.2 FOUNDATION CONTROL PROGRAM**

The main element of the maintenance plan is the foundation control program. The foundation control program contains the controls necessary to maintain the ambient air quality standards. The purpose of the foundation control program is to prevent the ambient air quality standards from being violated and thereby eliminate the need for more costly controls being imposed on industry and the general public. Each component of the State's foundation control program is essential in demonstrating maintenance of the air quality standards.

The foundation control program consists of Federal and State measures. The Federal measures include the cleaner fuel programs and the federal highway motor vehicle and off-road equipment



control program. State measures include the I/M program, the air toxics program, the NOx SIP Call rule, the Clean Smokestacks Act, heavy duty diesel engine gap filling requirements and an open burning regulation. All of these programs have already been implemented or are in the process of being implemented.

### **3.2.1 Federal Control Measures**

#### Tier 2 Vehicle Standards

Federal Tier 2 vehicle standards will require all passenger vehicles in a manufacturer's fleet, including light-duty trucks and Sports Utility Vehicles (SUVs), to meet an average standard of 0.07 grams of NOx per mile. Implementation began in 2004, and most vehicles will be phased in by 2007. Tier 2 standards will also cover passenger vehicles over 8,500 pounds gross vehicle weight rating (the larger pickup trucks and SUVs), which are not covered by current Tier 1 regulations. For these vehicles, the standards will be phased in beginning in 2008, with full compliance in 2009. The new standards require vehicles to be 77% to 95% cleaner than those on the road today. Tier 2 rule also reduces the sulfur content of gasoline to 30 ppm starting in January of 2006. Most gasoline sold in North Carolina prior to January 2006 had a sulfur content of about 300 ppm. Sulfur occurs naturally in gasoline but interferes with the operation of catalytic converters on vehicles resulting in higher NOx emissions. Lower-sulfur gasoline is necessary to achieve Tier 2 vehicle emission standards.

#### Heavy-Duty Gasoline and Diesel Highway Vehicles Standards

New USEPA standards designed to reduce NOx and VOC emissions from heavy-duty gasoline and diesel highway vehicles began to take effect in 2004. A second phase of standards and testing procedures, beginning in 2007, will reduce particulate matter from heavy-duty highway engines, and will also reduce highway diesel fuel sulfur content to 15 ppm since the sulfur damages emission control devices. The total program is expected to achieve a 90% reduction in particulate matter (PM) emissions and a 95% reduction in NOx emissions for these new engines using low sulfur diesel, compared to existing engines using higher-content sulfur diesel.

#### Large Nonroad Diesel Engines Rule

The USEPA promulgated in May 2004 new rules for large nonroad diesel engines, such as those used in construction, agricultural, and industrial equipment, to be phased in between 2008 and 2014. The nonroad diesel rules also reduce the allowable sulfur in nonroad diesel fuel by over 99%. Nonroad diesel fuel currently averages about 3,400 ppm sulfur. The proposed rules limit nonroad diesel sulfur content to 500 ppm in late 2006 and 15 ppm in 2010. The combined engine and fuel rules would reduce NOx and PM emissions from large nonroad diesel engines by over 90 %, compared to current nonroad engines using higher-content sulfur diesel.

## Nonroad Spark-Ignition Engines and Recreational Engines Standard

The new standard, effective in July 2003, will regulate NO<sub>x</sub>, HC and carbon monoxide (CO) for groups of previously unregulated nonroad engines. The new standard will apply to all new engines sold in the United States and imported after these standards begin and will apply to large spark-ignition engines (forklifts and airport ground service equipment), recreational vehicles (off-highway motorcycles and all-terrain-vehicles), and recreational marine diesel engines. The regulation varies based upon the type of engine or vehicle.

The large spark-ignition engines contribute to ozone formation and ambient CO and PM levels in urban areas. Tier 1 of this standard was implemented in 2004 and Tier 2 is scheduled to start in 2007. Like the large spark-ignition, recreational vehicles contribute to ozone formation and ambient CO and PM levels. They can also be a factor in regional haze and other visibility problems in both state and national parks. For the off-highway motorcycles and all-terrain-vehicles, model year 2006, the new exhaust emissions standard will be phased-in by 50% and for model years 2007 and later at 100%. Recreational marine diesel engines over 37 kilowatts are used in yachts, cruisers, and other types of pleasure craft. Recreational marine engines contribute to ozone formation and PM levels, especially in marinas. Depending on the size of the engine, the standard for will begin phase-in in 2006.

When all of the nonroad spark-ignition engines and recreational engines standards are fully implemented, an overall 72% reduction in HC, 80% reduction in NO<sub>x</sub>, and 56% reduction in CO emissions are expected by 2020. These controls will help reduce ambient concentrations of ozone, CO, and fine PM.

### **3.2.2 State Control Measures**

North Carolina has adopted a number of regulations and legislation to address pollution issues across the State. These are summarized below.

#### Clean Air Bill

The 1999 Clean Air Bill expanded the vehicle emissions I/M program from 9 counties to 48, phased in between July 1, 2002 through January 1, 2006 (see Figure 4). Vehicles will be tested using the onboard diagnostic system, an improved method of testing, which will indicate NO<sub>x</sub> emissions, among other pollutants. The previously used tailpipe test did not measure NO<sub>x</sub>. Beginning January 1, 2005, vehicles registered in Edgecombe and Nash Counties were required to be inspected.

## *I/M County Phase-In*



**Figure 4. North Carolina's NO<sub>x</sub> Inspection & Maintenance (I/M) Phase-In Map**

### NO<sub>x</sub> SIP Call Rule

In response to the USEPA's NO<sub>x</sub> SIP call, North Carolina adopted rules to control the emissions of NO<sub>x</sub> from large stationary combustion sources. These rules cover (1) fossil fuel-fired stationary boilers, combustion turbines, and combined cycle systems serving a generator with a nameplate capacity greater than 25 megawatts electrical and selling any amount of electricity, (2) fossil fuel-fired stationary boilers, combustion turbines, and combined cycle systems having a maximum design heat input greater than 250 million British thermal units per hour, and (3) reciprocating stationary internal combustion engines rated at equal or greater than 2400 brake horsepower (3000 brake horsepower for diesel engines and 4400 brake horsepower for dual fuel engines). As part of the NO<sub>x</sub> SIP call, the USEPA rules established a NO<sub>x</sub> budget for sources in North Carolina and other states. North Carolina has a Phase II budget (i.e., emissions allowance) of 165,022 tons of NO<sub>x</sub> per ozone season.

Besides amending existing NO<sub>x</sub> rules and adopting new NO<sub>x</sub> rules specifically to address the USEPA NO<sub>x</sub> SIP call, the North Carolina rules also require new sources to control emissions of NO<sub>x</sub>. The objective of this requirement is (1) to aid in meeting the NO<sub>x</sub> budget for North Carolina for minor sources and (2) to aid in attaining and maintaining the ambient air quality standard for ozone in North Carolina.

North Carolina's NOx SIP Call rule will reduce summertime NOx emissions from power plants and other industries by 68% by 2006. The North Carolina Environmental Management Commission adopted rules requiring the reductions in October 2000.

### Clean Smokestacks Act

In June 2002, the North Carolina General Assembly enacted the Clean Smokestacks Act, requiring coal-fired power plants to reduce annual NOx emissions by 78% by 2009. These power plants must also reduce annual sulfur dioxide emissions by 49% by 2009 and by 74% by 2013. The Clean Smokestacks Act could reduce NOx emissions beyond the requirements of the NOx SIP Call Rule. One of the first state laws of its kind in the nation, this legislation provides a model for other states in controlling multiple air pollutants from old coal-fired power plants.

### Open Burning Bans

The Environmental Management Commission approved revisions to the open burning regulation banning open burning during the ozone season on forecasted code orange and code red ozone action days for those counties that the NCDAQ forecasts ozone. Since 2001, the NCDAQ has forecasted ozone in the Rocky Mount area, therefore this area is subject to this rule.

### Air Toxics Control Program

Although the purpose of North Carolina's air toxic program is to control toxic air pollutants rather than volatile organic compounds, it will also reduce emissions of volatile organic compounds because many toxic air pollutants are also volatile organic compounds. The air toxic program was effective May 1, 1990. All new facilities are required to comply with the air toxic rules before beginning operation. Existing facilities that are modified such that there are additional emissions of toxic air pollutants are required to comply with the air toxic rules.

### Prevention of Significant Deterioration

All new major sources of volatile organic compounds and nitrogen dioxide will be evaluated under the prevention of significant deterioration program and are required to use best available control technology.

### Heavy Duty Diesel Engine Gap Filling Requirements

In October of 2001, the Environmental Management Commission adopted a rule to fill a gap in federal requirements for improved heavy duty diesel engine emissions testing in order to prevent excess NOx emissions from occurring over the lengthy life of such vehicles. Without the rule, estimated excess NOx emissions of 5.3 tons per day would occur in 2005 and 10.91 tons per day

in 2006 from heavy-duty diesels registered in North Carolina. The rule requires that all model year 2005 and 2006 heavy-duty diesel engines sold, leased, or registered in North Carolina to be of the type which have been certified by the California Air Resources Board as meeting supplemental test procedures that are more representative of actual on-road operating conditions than the federal test procedures for those model years. On January 1, 2002, the rule became effective.

### **3.2.3 Additional Programs Supporting Maintenance**

#### Air Awareness Program

The North Carolina Air Awareness Program is a public outreach and education program of the NCDAQ. The goal of the program is to reduce air pollution through voluntary actions by individuals and organizations. The program seeks to educate individuals about (1) the sources of air pollution; (2) the health effects of air pollution and how these effects can be mitigated by modification of outdoor activities on ozone action days; and (3) simple "action tips", such as carpooling, vehicle maintenance, and energy conservation, that reduce individual contributions to air pollution. One of the major program components is the ozone forecast. The NCDAQ produces the 8-hour ozone forecasts and corresponding air quality index for the Rocky Mount forecast area from May 1 through September 30 of each year.

#### Transportation Conformity

The NCDAQ will work closely with the North Carolina Department of Transportation (NCDOT) and local transportation agencies to assure that Transportation Improvement Programs (TIPs) in the nonattainment area are consistent with and conform to the State's air quality program, including the SIP, and meet the Federal requirements on conformity. This conformity review shall be performed for all Federally funded and all other major projects contained in TIPs, regardless of source of funding. Technical analysis of transportation plans, programs, and projects for conformity will be done cooperatively by the Statewide Planning Branch of the NCDOT and the NCDAQ. In the event that the NCDAQ disagrees with the NCDOT on a conformity determination or issue, the NCDAQ and the NCDOT will present the issue to the Governor for resolution. Additionally, the State will prepare NO<sub>x</sub> emissions analyses in the ozone conformity determinations.

The public and interested parties will be given an early and reasonable opportunity to comment on transportation plans, programs, projects and proposed conformity determinations in accordance with procedures adopted by metropolitan planning organizations pursuant to the requirements of the Safe, Accountable, Flexible, Efficient Transportation Equity Act: A Legacy for Users (and any updated transportation legislation) and the CAA as amended.

### **3.3 EMISSIONS INVENTORIES AND MAINTENANCE DEMONSTRATION**

#### **3.3.1 Theory of Approach**

There are two basic approaches used to demonstrate continued maintenance. The first is the comparison of a projected emissions inventory with a baseline emissions inventory. The second approach involves complex analysis using gridded dispersion modeling. The approach used by the NCDAQ is the comparison of emissions inventories for the years 2005 and 2017.

The maintenance demonstration is made by comparing the 2005 baseline emissions inventory to the 2017 projected emissions inventory. The baseline emissions inventory represents an emission level that did not cause the ambient air quality standard to be violated. If the projected emissions remain at or below the baseline emissions, continued maintenance is demonstrated and it then follows, if the projected emissions remain at or below the baseline emissions, then the ambient air quality standard should not be violated in the future. In addition to comparing the final year of the plan, all of the interim years are compared to the 2005 baseline to demonstrate that these years are also expected to show continued maintenance of the 8-hour ozone standard.

The emissions inventories are comprised of four major types of sources: point, area, highway mobile and off-road mobile. The projected emissions inventories have been estimated using projected rates of growth in population, traffic, economic activity, and other parameters.

#### **3.3.2 Emission Inventories**

There are four different man-made emission inventory source classifications: (1) stationary point, (2) area, (3) highway mobile and (4). off-road mobile sources.

Point sources are those stationary sources that emit more than 10 tons per year VOC or 100 tons per year of NO<sub>x</sub> from a single facility. The source emissions are tabulated from data collected by direct on-site measurements of emissions or mass balance calculations utilizing emission factors from the USEPA's AP-42. There are usually several emission sources for each facility. Emission data is collected for each point source at a facility and the data is entered into an in-house database system. For the projected year's inventory, point sources are adjusted by growth factors based on Standard Industrial Classification codes. The growth factors are generated using the USEPA's Economic Growth Analysis System version 5.0 (E-GAS 5.0) program.

Area sources are those stationary sources whose emissions are relatively small but due to the large number of these sources, the collective emissions could be significant (i.e., dry cleaners, service stations, etc.). For area sources, emissions are estimated by multiplying an emission factor by some known indicator of collective activity such as production, number of employees,

or population. These types of emissions are estimated on the county level. For the projected year's inventory, area source emissions are changed by population growth, projected production growth, or when applicable, by E-GAS 5.0 growth factors.

For highway mobile sources, the USEPA's MOBILE6.2 mobile model is run to generate the twelve functional road class (i.e. urban interstate, rural interstate, rural local, etc.) emission factors. The emissions are calculated by multiplying the road class vehicle miles traveled (VMT) by the road class emission factor and summed to the county level. For the projected years' inventories, the highway mobile sources emissions are calculated by running the MOBILE6.2 mobile model for the future year to generate emission factors that take into consideration expected Federal tailpipe standards, fleet turnover and new fuels. The new emission factors are multiplied by the projected VMT.

Off-road mobile sources are equipment that can move but do not use the roadways, i.e., lawn mowers, construction equipment, railroad locomotives, aircraft, etc. The emissions from this category are calculated using the USEPA's NONROAD2005a nonroad mobile model, with the exception of the railroad locomotives and aircraft engine. The railroad locomotive and aircraft engine emissions are estimated by taking an activity and multiply by an emission factor. These emissions are also estimated at the county level. For the projected years' inventories, the emissions are estimated using the USEPA's NONROAD2005a nonroad mobile model, E-GAS 5.0 growth factors or projected landing and take off data for aircraft.

A complete description of how these inventories were developed is discussed in detail in Appendix C.

### **3.3.3 Summary of Emissions**

The tables below contain the estimated emissions from all of the emission source sectors, i.e., point, area, highway mobile and off-road mobile. Additionally, the sum total of these man-made emissions for the Rocky Mount area is tabulated in Table 3-5.

**Table 3-1 Point Source Emissions for the Rocky Mount Area**

County	2005	2008	2011	2014	2017
<i>VOC Emissions (tons/day)</i>					
Edgecombe	3.86	4.35	4.74	5.20	5.65
Nash	1.35	1.45	1.56	1.65	1.78
Total	5.21	5.80	6.30	6.85	7.43
<i>NOx Emissions (tons/day)</i>					
Edgecombe	2.95	2.68	2.70	2.73	2.76
Nash	0.60	0.60	0.63	0.69	0.72
Total	3.55	3.28	3.33	3.42	3.48

**Table 3-2 Area Source Emissions for the Rocky Mount Area**

County	2005	2008	2011	2014	2017
<i>VOC Emissions (tons/day)</i>					
Edgecombe	5.62	5.88	6.12	6.35	6.58
Nash	7.04	7.43	7.79	8.14	8.52
Total	12.66	13.31	13.91	14.49	15.10
<i>NOx Emissions (tons/day)</i>					
Edgecombe	0.53	0.54	0.55	0.56	0.57
Nash	1.08	1.12	1.16	1.20	1.24
Total	1.61	1.66	1.71	1.76	1.81

**Table 3-3 Highway Mobile Source Emissions for the Rocky Mount Area**

County	2005	2008	2011	2014	2017
<i>VOC Emissions (tons/day)</i>					
Edgecombe	2.50	2.08	1.83	1.50	1.27
Nash	5.98	4.96	4.37	4.05	3.09
Total	8.48	7.04	6.20	5.55	4.36
<i>NOx Emissions (tons/day)</i>					
Edgecombe	3.36	2.73	2.14	1.62	1.27
Nash	12.07	9.70	7.42	5.39	4.16
Total	15.43	12.43	9.56	7.01	5.43



**Table 3-4 Non-Road Mobile Source Emissions for the Rocky Mount Area**

County	2005	2008	2011	2014	2017
<i>VOC Emissions (tons/day)</i>					
Edgecombe	0.95	0.78	0.70	0.68	0.65
Nash	1.39	1.17	1.07	1.05	1.08
Total	2.34	1.95	1.77	1.73	1.73
<i>NOx Emissions (tons/day)</i>					
Edgecombe	2.35	2.10	1.82	1.60	1.40
Nash	2.10	1.90	1.69	1.48	1.29
Total	4.45	4.00	3.51	3.08	2.69

**Table 3-5 Total Man-Made Emissions for the Rocky Mount Area**

County	2005	2008	2011	2014	2017
<i>VOC Emissions (tons/day)</i>					
Edgecombe	12.93	13.09	13.39	13.73	14.15
Nash	15.76	15.01	14.79	14.89	14.47
Total	28.69	28.10	28.18	28.62	28.62
<i>NOx Emissions (tons/day)</i>					
Edgecombe	9.19	8.05	7.21	6.51	6.00
Nash	15.85	13.32	10.90	8.76	7.41
Total	25.04	21.37	18.11	15.27	13.41

### 3.3.4 Maintenance Demonstration

As discussed above, maintenance is demonstrated when the future years total man-made emissions are less than the 2005 baseline emissions. The following table summarized the VOC and NOx emissions for the entire Rocky Mount nonattainment area. The difference between the base year and the final year of the plan illustrates that the continued maintenance of the 8-hour ozone NAAQS is expected.

**Table 3-6 Maintenance Demonstration for Rocky Mount**

Year	VOC TPD	NO <sub>x</sub> TPD
2005	28.69	25.04
2008	28.10	21.37
2011	28.18	18.11
2014	28.62	15.27
2017	28.62	13.41
Difference from 2005 to 2017	-0.07	-11.63

The difference between the attainment level of emissions (2005) from all man-made sources and the projected level of emissions from all man-made sources in the nonattainment area is considered the “safety margin”. The safety margin for each projected year is listed below in Table 3-7.

**Table 3-7 Safety Margin for Rocky Mount**

Year	VOC TPD	NO <sub>x</sub> TPD
2005	N/A	N/A
2008	-0.59	-3.67
2011	-0.51	-6.93
2014	-0.07	-9.77
2017	-0.07	-11.63

### **3.4 CONTINGENCY PLAN**

#### **3.4.1 Overview**

The two main elements of the North Carolina contingency plan are tracking and triggering mechanisms to determine when contingency measures are needed and a process of developing and adopting appropriate control measures. The primary trigger of the contingency plan will be a violation of the 8-hour ozone NAAQS at the Leggett monitor. The secondary trigger will be a monitored air quality pattern that suggests an actual 8-hour ozone NAAQS violation may be imminent. Upon either of these triggers being activated, the NCDAQ will commence analyses to determine what additional measures, if any, will be necessary to attain or maintain the 8-hour ozone standard. If activation of either of the triggers occurs, this plan provides a regulatory adoption process for revising emission control strategies. Each adopted rule will include a

schedule that will require compliance with the rule no later than 3 years after adoption of the rule. In addition, there will be a tracking mechanism that requires a comparison of the actual emissions inventory submitted under the Consolidated Emissions Reporting Rule (CERR) to the projected inventory, and to the attainment year inventory contained in this maintenance plan. The CERR reporting years coincide with the attainment, interim and final years of the emission inventory in this maintenance demonstration.

### **3.4.2 Primary and Secondary Triggers**

The primary trigger of the contingency plan will be a violation of the 8-hour ozone standard, or when the three-year average of the 4<sup>th</sup> highest values is equal to or greater than 0.085 ppm. The trigger date will be 60 days from the date that the State observes a 4<sup>th</sup> highest value that, when averaged with the two previous ozone seasons' fourth highest values, would result in a three-year average equal to or greater than 0.085 ppm.

The secondary trigger will apply where no actual violation of the 8-hour ozone standard has occurred, but where the State finds monitored ozone levels indicating that an actual ozone NAAQS violation may be imminent. A pattern will be deemed to exist when there are two consecutive ozone seasons in which the 4<sup>th</sup> highest values are 0.085 ppm or greater. The trigger date will be 60 days from the date that the State observes a 4<sup>th</sup> highest value of 0.085 ppm or greater, following a season in which the 4<sup>th</sup> highest value was 0.085 ppm or greater.

### **3.4.3 Action Resulting From Trigger Activation**

Once the primary or secondary trigger is activated, the Planning Section of the NCDAQ shall commence analyses including trajectory analyses of high ozone days, and emissions inventory assessment to determine those emission control measures that will be required for attaining or maintaining the 8-hour ozone standard. Since transport from the Raleigh/Durham and Fayetteville areas often impact the Leggett monitor, an evaluation to determine the amount of local emission contribution to the high ozone days will be conducted.

By May 1 of the year following the ozone season in which the primary or secondary trigger has been activated (violation of the 8-hour ozone NAAQS), North Carolina will complete sufficient analyses to begin adoption of necessary rules for ensuring attainment and maintenance of the 8-hour ozone NAAQS. The rules would become State effective by the following January 1, unless legislative review is required.

The measures that will be considered for adoption upon a trigger of the contingency plan include: NOx Reasonably Available Control Technology on stationary sources in Nash and

Edgecombe Counties, diesel inspection and maintenance program, implementation of diesel retrofit programs, including incentives for performing retrofits, and additional controls in upwind areas, since much of the pollution measured at the Leggett monitor is transported in from nearby larger urban areas.

#### **3.4.4 Ongoing Maintenance Strategy Program**

In addition to the measures listed above, the future CERR inventories that coincide with the attainment, interim and final year inventories will be compared to determine if additional steps are necessary for continued maintenance of the 8-hour ozone standard in this area.

## **4.0 MOTOR VEHICLE EMISSIONS BUDGET FOR CONFORMITY**

### **4.1 TRANSPORTATION CONFORMITY**

The purpose of transportation conformity is to ensure that Federal transportation actions occurring in nonattainment areas do not hinder the area from attaining and maintaining the 8-hour ozone standard. This means that the level of emissions estimated by the NCDOT or the metropolitan planning organizations for the Transportation Implementation Plan (TIP) and Long Range Transportation Plan must not exceed the motor vehicle emission budget (MVEB) as defined in this maintenance plan.

### **4.2 HIGHWAY MOBILE SOURCE VOC INSIGNIFICANCE**

Section 93.109(k) in the Transportation Conformity Rule Amendments for the new 8-hour ozone and fine particulate matter NAAQS addresses areas with insignificant motor vehicle emissions. The rule suggests that such a finding would be based on a number of factors, including the percentage of motor vehicle emissions in the context of the total SIP inventory, the current state of air quality as determined by monitoring data for that NAAQS, the absence of SIP motor vehicle control measures, and historical trends and future projections of the growth of motor vehicle emissions.

The NCDAQ has examined the sources of VOC emissions and their contribution to ozone formation in North Carolina. Because of the generally warm and moist climate of North Carolina, vegetation abounds in many forms, and forested lands naturally cover much of the state. The biogenic sector is the most abundant source of VOCs in North Carolina and accounts for approximately 90% of the total VOCs statewide. The overwhelming abundance of biogenic VOCs makes the majority of North Carolina a NO<sub>x</sub> limited environment for the formation of ozone. This holds true in Edgecombe and Nash Counties.

Also noteworthy are the projected decreases in highway mobile VOC emissions through the year 2017 despite projected VMT increases. These reductions are due mainly to the retirement of older vehicles and the growing fleet of Tier 2 vehicles on the roads in future years. Some additional reductions are attributable to North Carolina's inspection and maintenance program in Edgecombe and Nash Counties.

Additionally, the NCDAQ has performed a number of modeling sensitivities to determine the impact of highway mobile source VOCs on ozone formation in the Rocky Mount area. The results of these sensitivities indicate no change in future ozone concentrations in the Rocky

Mount area when highway mobile VOCs are significantly changed. These sensitivities are discussed in more detail in Appendix C.3.

The NCDAQ believes highway mobile VOCs are insignificant contributors to ozone formation in the Rocky Mount nonattainment area. Emission estimates indicate highway mobile VOC is a small percentage of the total VOC emissions inventory. Highway mobile VOC emissions are projected to decrease into the future notwithstanding VMT increases. The area is currently well below the NAAQS and emission sensitivity modeling indicates no change in future ozone concentrations when VOC emissions are significantly changed. Further, the NCDAQ considers it unreasonable to expect that Edgecombe and Nash Counties will experience enough motor vehicle emissions growth for a future ozone violation to occur. For these reasons, the NCDAQ will not be setting MVEB for VOC for the Rocky Mount area.

### **4.3 SAFETY MARGIN**

As stated in Section 3.3.4, a safety margin is the difference between the attainment level of emissions from all source categories (i.e., point, area, and mobile) and the projected level of emissions from all source categories. The safety margins for the Rocky Mount area are listed in Table 3-7 above. The State may choose to allocate some of the safety margin to the MVEB, for transportation conformity purposes, so long as the total level of emissions from all source categories remains equal to or less than the attainment level of emissions.

The NCDAQ has decided to allocate safety margin to the MVEB to account for new emissions models, VMT projections models, as well as changes to future vehicle mix assumptions, etc. that influence the emission estimations. Since 2008 is a historic year, the NCDAQ decided to allocate the entire safety margin available to the MVEBs. For 2017, the NCDAQ estimated the amount needed to account for the current emission model and VMT projections model and then added an additional 21% to account for any future changes to the emission model, projection model and other input data.

#### Motor Vehicle Emission Budgets

The NCDAQ did not receive any comments regarding the geographic extent of the MVEB from any of the Rocky Mount transportation partners during the maintenance plan interagency consultation process. However, there was discussion through the interagency consultation process on the years to set MVEB for the Rocky Mount maintenance plan. According to Section 93.118 of the transportation conformity rule, a maintenance plan must establish a MVEB for the last year of the maintenance plan (in this case, 2017). Through the interagency consultation

process, it was decided that another MVEB would be set for the year 2008 in the Rocky Mount maintenance plan.

The NCDAQ will set MVEB, for transportation conformity purposes, as county budgets within the Rocky Mount maintenance area for 2008 and 2017. Tables 4-1 and 4-2 below list out the NOx MVEB, for transportation conformity purposes, by county for the years 2008 and 2017. Upon the USEPA’s approval of these county-by-county sub-area MVEB, these MVEB will become the applicable MVEB for each county.

**Table 4-1 Edgecombe County MVEB in kilograms per day**

	2008	2017
<i>NOx Emissions (kg/day)</i>		
Base Emissions	2,483	1,143
Safety Margin Allocated to MVEB	1,674	1,108
<b>NOx Conformity MVEB</b>	<b>4,157</b>	<b>2,251</b>

**Table 4-2 Nash County MVEB in kilograms per day**

	2008	2017
<i>NOx Emissions (kg/day)</i>		
Base Emissions	8,790	3,767
Safety Margin Allocated to MVEB	1,655	2,374
<b>NOx Conformity MVEB</b>	<b>10,444</b>	<b>6,141</b>

New Safety Margins

A total of 3,329 kg (3.67 tons) and 3,482 kg (3.84 tons) of 2008 and 2017 NOx safety margin, respectively, were added to the MVEB for the Rocky Mount area. Taking into consideration the portion of the safety margin applied to the MVEB the resulting difference between the attainment level of emissions from all sources and the projected level of emissions from all sources in the maintenance area, i.e., the new safety margins, for each projected year is listed below in Table 4-3.

**Table 4-3 New Safety Margins for the Rocky Mount Area**

Year	VOC TPD	NO <sub>x</sub> TPD
2005	N/A	N/A
2008	-0.59	0.0
2011	-0.51	-6.93
2014	-0.07	-9.77
2017	-0.07	-7.79



## **5.0 STATE IMPLEMENTATION PLAN APPROVAL**

### **5.1 INTRODUCTION**

For an area to be redesignated and have an approved maintenance plan, the SIP must include evidence of compliance with the rules relied on to show maintenance of the standard. This section provides the evidence of compliance with such rules for the Rocky Mount 8-hour ozone nonattainment area.

### **5.2 EVIDENCE OF COMPLIANCE**

The Rocky Mount area has not been required to make a SIP revision, since they have not been designated nonattainment for ozone prior to the 1990 CAA. Therefore, North Carolina has fully approved SIPs for this area. However, the following rules regulating emissions of VOCs and NO<sub>x</sub> in Edgecombe and Nash Counties have been approved, or have been submitted with a request to be approved, as part of the SIP:

15A NCAC 2D .0958, Work Practices For Sources of Volatile Organic Compounds,  
15A NCAC 2D .0530, Prevention of Significant Deterioration,  
15A NCAC 2D .0925, Petroleum Liquid Storage in Fixed Roof Tanks,  
15A NCAC 2D .0926, Bulk Gasoline Plants,  
15A NCAC 2D .0927, Bulk Gasoline Terminals,  
15A NCAC 2D .0928, Gasoline Service Stations Stage I,  
15A NCAC 2D .0932, Gasoline Truck Tanks and Vapor Collection Systems,  
15A NCAC 2D .0933 Petroleum Liquid Storage in External Floating Roof Tanks  
15A NCAC 2D .1000, Motor Vehicle Emission Control Standards.  
15A NCAC 2D .1409(b), Stationary Internal Combustion Engines  
15A NCAC 2D .1416 - .1423, NO<sub>x</sub> SIP rules, and  
15A NCAC 2D .1700, Municipal Solid Waste Landfills

Although 15A NCAC 2D .0925, .0926, .0927, .0928, .0932, and .0933, have been approved as part of the SIP, their applicability to these counties has not been submitted to the USEPA for approval as part of the federally-approved state implementation plan. These rules are, however, state enforceable in these counties. The extension of these rules to these counties was part of the State's air toxic program and not part of any federally mandated program.

Section 15A NCAC 2D .1000 also regulates emissions from motor vehicles in the counties near the Rocky Mount nonattainment area.

Another important set of rules that control volatile organic compound emissions in these counties is Section 15A NCAC 2D .1100, Control of Toxic Air Pollutants. These rules, however, have not been submitted to the USEPA to be approved as part of the SIP.

There are two other rules that control emissions of volatile organic compounds in these areas. They are 15A NCAC 2D .0524, New Source Performance Standards, and .2D.1110, National Emission Standards for Hazardous Air Pollutants. Also, rule 2D.1111, Maximum Achievable Control Technology applies to control of emissions of volatile organic compounds. They are not part of the SIP, but the USEPA has delegated the State enforcement authority for standards that have been adopted by the State. (The standards adopted by the State are state-enforceable regardless of the USEPA delegation.)

## **6.0 STATE COMPLIANCE WITH CLEAN AIR ACT REQUIREMENTS**

Section 107(d)(3)(E)(v) of the CAA requires that the provisions of Section 110 and part D of the Act be met within the area to be redesignated. This means that North Carolina must meet all requirements, if any, that had come due as of the date of the redesignation request.

The USEPA in its latest guidance on meeting redesignation requirements as contained in a memorandum from John Calcagni, Director, Air Quality Management Division, Office of Air Quality Planning and Standards to the USEPA Regional Offices dated September 4, 1992, (See Appendix A), states that "For the purposes of redesignation, a State must meet all requirements of Section 110 and Part D that were applicable prior to submittal of the complete redesignation request. When evaluating a redesignation request, Regions should not consider whether the State has met requirements that come due under the Act after submittal of a complete redesignation request."

## **7.0 CONCLUSION**

The most recent three years of ozone monitoring data for the Rocky Mount nonattainment area demonstrate compliance with the NAAQS for 8-hour ozone. Since the 1990's, there have been many major programs enacted in North Carolina that have led to significant actual, enforceable emissions reductions, which have led to improvements in the air quality in Rocky Mount. This redesignation demonstration and maintenance plan has been prepared to meet the requirements of the 1990 Clean Air Act Amendments.