



MONITORING YEAR 5 ANNUAL REPORT

Final

NORKETT BRANCH STREAM MITIGATION SITE

Union County, NC
DEQ Contract 004673
DMS Project Number 95360

Data Collection Period: June - October 2018
Final Submission Date: December 12, 2018

PREPARED FOR:



North Carolina Department of Environmental Quality
Division of Mitigation Services
1652 Mail Service Center
Raleigh, NC 27699-1652

Mitigation Project Name Norkett Branch
 DMS ID 95360
 River Basin Yadkin
 Cataloging Unit 0304C105

County Union
 Date Project Instituted 7/5/2012
 Date Prepared 5/22/2018

USACE Action ID 2012-01082
 NCDWR Permit No 2013-0250

| Credit Release Milestone | Stream Credits | | | | | Wetland Credits | | | | | | | | |
|-------------------------------------|-----------------------------|------------|------|------|-----------------------------------|------------------------------|-------------------------------|-----------------|---------------------|--------------|------------------------------|---------|------------------------------------|-------------------------------|
| | Scheduled Releases (Stream) | Warm | Cool | Cold | Anticipated Release Year (Stream) | Actual Release Date (Stream) | Scheduled Releases (Forested) | Riparian Rivine | Riparian Non-rivine | Non-riparian | Scheduled Releases (Coastal) | Coastal | Anticipated Release Year (Wetland) | Actual Release Date (Wetland) |
| Potential Credits (Mitigation Plan) | | 9,929,800 | | | | | | | | | | | | |
| Potential Credits (As-Built Survey) | | 10,098,000 | | | | | | | | | | | | |
| 1 (Site Establishment) | N/A | | | | N/A | N/A | N/A | | | | N/A | | N/A | N/A |
| 2 (Year 0 / As-Built) | 30% | 3,029,400 | | | 2014 | 7/24/2014 | 30% | | | | 30% | | N/A | N/A |
| 3 (Year 1 Monitoring) | 10% | 1,009,800 | | | 2015 | 4/23/2015 | 10% | | | | 10% | | N/A | N/A |
| 4 (Year 2 Monitoring) | 10% | 1,009,800 | | | 2016 | 4/25/2016 | 10% | | | | 15% | | N/A | N/A |
| 5 (Year 3 Monitoring) | 10% | 1,009,800 | | | 2017 | 8/8/2017 | 15% | | | | 20% | | N/A | N/A |
| 6 (Year 4 Monitoring) | 5% | 504,900 | | | 2018 | 4/25/2018 | 5% | | | | 10% | | N/A | N/A |
| 7 (Year 5 Monitoring) | 10% | | | | 2018 | | 15% | | | | 15% | | N/A | N/A |
| 8 (Year 6 Monitoring) | 5% | | | | 2020 | | 5% | | | | N/A | | N/A | N/A |
| 9 (Year 7 Monitoring) | 10% | | | | 2021 | | 10% | | | | N/A | | N/A | N/A |
| Stream Bankfull Standard | 10% | 1,009,800 | | | 2016 | 4/25/2016 | N/A | | | | N/A | | N/A | N/A |
| Total Credits Released to Date | | 7,573,500 | | | | | | | | | | | | |

DEBITS (released credits only)

| | Ratios | 1 | 1.5 | 2.5 | 5 | 1 | 3 | 2 | 5 | 1 | 3 | 2 | 5 | 1 | 3 | 2 | 5 |
|---------------------------------------|-----------------|-----------------------------------------------------------------------|--------------------|-----------------------|---------------------|----------------------|-------------------|----------------------|-----------------------|-------------------------|----------------------|-------------------------|--------------------------|---------------------------|------------------------|---------------------------|----------------------------|
| | | Stream Restoration | Stream Enhancement | Stream Enhancement II | Stream Preservation | Riparian Restoration | Riparian Creation | Riparian Enhancement | Riparian Preservation | Nonriparian Restoration | Nonriparian Creation | Nonriparian Enhancement | Nonriparian Preservation | Coastal Marsh Restoration | Coastal Marsh Creation | Coastal Marsh Enhancement | Coastal Marsh Preservation |
| As-Built Amounts (feet and acres) | | 9,186,000 | | 2,255,000 | | | | | | | | | | | | | |
| As-Built Amounts (mitigation credits) | | 9,186,000 | | 902,000 | | | | | | | | | | | | | |
| Percentage Released | | 75% | | 75% | | | | | | | | | | | | | |
| Released Amounts (feet / acres) | | 6,897,000 | | 1,691,250 | | | | | | | | | | | | | |
| Released Amounts (credits) | | 6,897,000 | | 676,500 | | | | | | | | | | | | | |
| NCDWR Permit | USACE Action ID | Project Name | | | | | | | | | | | | | | | |
| 2002-0672 | 2009-00876 | NCDOT TIP R-2559 / R-3329 - Monros Bypass and Connector, Union County | 2,758,800 | 676,500 | | | | | | | | | | | | | |
| | 2010-01630 | NCDOT TIP P-5208A C G | | | | | | | | | | | | | | | |
| 2015-0362 | 2008-03229 | NCDOT TIP I-3702A / B-5804 - I-77 Improvements, Cabarrus County | 2,758,800 | 676,500 | | | | | | | | | | | | | |
| 2011-0431 | 2011-01237 | NCDOT TIP R-2248E - Charlotte Outer Loop | 1,379,400 | 338,250 | | | | | | | | | | | | | |
| Remaining Amounts (feet / acres) | | 0,000 | | 0,000 | | | | | | | | | | | | | |
| Remaining Amounts (credits) | | 0,000 | | 0,000 | | | | | | | | | | | | | |

Contingencies (if any): None

Signature of Wilmington District Official Approving Credit Release

Date

9/6/18

- 1 - For DMS, no credits are released during the first milestone
- 2 - For DMS projects, the second credit release milestone occurs automatically when the as-built report (baseline monitoring report) has been made available to the NCIRT by posting it to the NCEP Portal, provided the following criteria have been met:
 - 1) Approval of the final Mitigation Plan
 - 2) Recordation of the preservation mechanism, as well as a title opinion acceptable to the USACE covering the property
 - 3) Completion of all physical and biological improvements to the mitigation site pursuant to the mitigation plan
 - 4) Receipt of necessary DA permit authorization or written DA approval for projects where DA permit issuance is not required
- 3 - A 10% reserve of credits is to be held back until the bankfull event performance standard has been met

PREPARED BY:



Wildlands Engineering, Inc.
1430 South Mint Street, Suite 104
Charlotte, NC 28203

Phone: 704.332.7754
Fax: 704.332.3306



December 12, 2018

Mr. Matthew Reid
NC Department of Environmental Quality
Division of Mitigation Services
5 Ravenscroft Dr., Suite 102
Asheville, NC 28801

RE: Norkett Branch Stream Mitigation Site-Year 5 Monitoring Report
Final Submittal for DMS
Contract Number 004673, RFP Number 16-004110, DMS# 95360
Yadkin River Basin – CU# 03040105; Union County, NC

Dear Mr. Reid:

Wildlands Engineering, Inc. (Wildlands) has reviewed the Division of Mitigation Services (DMS) comments and observations from the Norkett Branch Stream Mitigation Site Draft Year 5 Monitoring Report. The following are Wildlands responses to your comments and observations from the report noted in italics lettering.

DMS Comment; Section 1.3 Monitoring Year 5 Summary – Second sentence indicates 440 stems per acre. This should be 442 according to vegetation monitoring data.

Wildlands Response; The text has been updated to 440 stems per acre as reported in the vegetation monitoring data.

DMS Comment; Table 2 – Please add invasive treatment to the table for the parrot feather that was treated with glyphosate in 2018.

Wildlands Response; The MY5 invasive treatment was added to Table 2.

DMS Comment; Table 2 – Section 1.2.1 discusses a significant replant that occurred in February 2015. Please also include information in the table.

Wildlands Response; The replanting was previously reported on Table 2 as part of the Maintenance and Replanting that took place after MY1 however the window the work was completed was reported as October 2014-January 2014. The timing for the Maintenance and Replanting has been corrected to October 2014-February 2015.



DMS Comment; CCPV – The photo point labels on Sheet 4 were inadvertently not shown in the draft. Please update for final.

Wildlands Response; The photo point labels have been added to Sheet 4..

DMS Comment; Cross-sections – Please turn off markers for previous monitoring years data and only show markers for current year. With multiple years shown, it becomes difficult to view results.

Wildlands Response; Previous monitoring year markers have been turned off and only MY5 markers are shown.

DMS Comment; Appendix 5 – Please include the stream flow gage data plots like previous monitoring years.

Wildlands Response; Stream flow gage data plots have been included in the final report.

Enclosed please find three (3) hard copies of the Year 5 Final Monitoring Report and one (1) CD with the final corrected electronic files for DMS distribution. Please contact me at 704-332-7754 x110 if you have any questions.

Sincerely,

A handwritten signature in black ink that reads "Kirsten Y. Gimbert".

Kirsten Y. Gimbert
Environmental Scientist
kgimbert@wildlandseng.com

EXECUTIVE SUMMARY

Wildlands Engineering (Wildlands) restored and enhanced a total of 10,706 linear feet (LF) of stream on a full-delivery mitigation site in Union County, NC. The project streams consist of Norkett Branch, a third order stream, two unnamed first order tributaries to Norkett Branch (UT1 and UT2), and two intermittent tributaries to Norkett Branch (UT2A and UT3). Water quality treatment Best Management Practices (BMPs) were installed to treat water quality on the non-jurisdictional headwaters of UT3 and an adjacent ephemeral drainage feature. The project is expected to provide 10,098 stream mitigation units (SMUs).

The Norkett Branch Stream Mitigation Site (Site) is located in southeastern Union County, NC, approximately ten miles southeast of the City of Monroe and five miles north of the South Carolina state line. The Site is located in the Yadkin River Basin; eight-digit Cataloging Unit (CU) 03040105 and the 14-digit Hydrologic Unit Code (HUC) 03040105081020 (Figure 1). This CU was identified as a targeted local watershed in the *2009 Lower Yadkin- Pee Dee River Basin Restoration Priority* (RBRP) plan. This plan identifies agricultural practices and runoff as the probable major sources of water quality impairment in the Middle Lanes Creek watershed. The 2008 North Carolina Division of Water Resources' (NCDWR) Basinwide Water Quality Plan (BWQP) lists turbidity and nutrient concentrations of nitrogen and phosphorus as specific concerns in the Rocky River watershed portion of the Yadkin- Pee Dee River basin. Other pollutants of concern cited in this report are fecal coliform bacteria, iron, and copper. The project reaches flow off-site, directly into Lanes Creek, which is included on the NCDWR 303d list of impaired streams. The section of Lanes Creek downstream of the project Site is listed as impaired due to turbidity (NCDWR, 2012). The project goals established in the Mitigation Plan (Wildlands, 2013) were completed with careful consideration of goals and objectives that were described in the RBRP and NCDWR BWQR and to meet the North Carolina Division of Mitigation Services (DMS) mitigation needs while maximizing the ecological and water quality uplift within the watershed.

The following project goals were established to address the watershed and project Site stressors:

- Improve aquatic and terrestrial habitat within the riparian corridor and provide habitat corridor extension from adjacent downstream forested habitat;
- Improve additional water quality aspects within stream channels on Site;
- Decrease sediment inputs to the stream channels and decrease turbidity in receiving Lanes Creek; and
- Decrease phosphorus, nitrogen, and fecal coliform inputs to the stream channels.

Stream restoration and enhancement, water quality treatment BMP construction, and planting efforts were completed between December 2013 and April 2014. Baseline as-built monitoring activities were completed between April and May 2014. A conservation easement is in place on the 31.6 acres of riparian corridor and stream resources to protect them in perpetuity.

Overall, the Site has met the required stream and vegetation mitigation success criteria for MY5. The average planted stem density for the site is 442 stems per acre and is on track to meet final density criteria. Visual assessment revealed good herbaceous cover across the site with only isolated spots of invasive plant populations. A small portion (2.56 acres) of planted woody vegetation located along Norkett Branch Reaches 1 and 2 are shorter than expected for five-year-old trees. Geomorphically, the stability of each restored and enhanced stream remains in good standing, with cross-section dimensions falling within the range of parameters for the appropriate Rosgen (1996) stream type. Based on visual assessment the channels show little sign of instability within the bed, bank, or engineered structures, except isolated instances of relic bank erosion. Vegetation at these isolated spots has not fully re-established. If necessary, adaptive management during the upcoming monitoring year may address areas of concern. The Site met final hydrological success criteria after MY3. During MY5, all three of the



restored reaches (Norkett Branch, UT1, and UT2) recorded at least three bankfull or greater events. Water quality monitoring results indicate an overall trend of pollutant removal capacity of both storm water BMPs.

NORKETT BRANCH STREAM MITIGATION SITE
Monitoring Year 5 Annual Report

TABLE OF CONTENTS

| | |
|---------------------------------------------|------------|
| Section 1: PROJECT OVERVIEW | 1-1 |
| 1.1 Project Goals and Objectives | 1-1 |
| 1.2 Monitoring Year 5 Data Assessment | 1-3 |
| 1.2.1 Vegetative Assessment..... | 1-3 |
| 1.2.2 Vegetation Problem Areas | 1-3 |
| 1.2.3 Stream Assessment | 1-4 |
| 1.2.4 Stream Problem Areas..... | 1-5 |
| 1.2.5 Hydrology Assessment | 1-5 |
| 1.2.6 Water Quality BMPs | 1-5 |
| 1.2.7 Existing Wetland Monitoring..... | 1-6 |
| 1.3 Monitoring Year 5 Summary | 1-6 |
| Section 2: METHODOLOGY | 2-1 |
| Section 3: REFERENCES | 3-1 |

APPENDICES

| | |
|-------------------|---------------------------------------------------------------------------|
| Appendix 1 | General Figures and Tables |
| Figure 1 | Project Vicinity Map |
| Figure 2 | Project Component/Asset Map |
| Table 1 | Project Components and Mitigation Credits |
| Table 2 | Project Activity and Reporting History |
| Table 3 | Project Contact Table |
| Table 4 | Project Information and Attributes |
| Table 5 | Monitoring Component Summary |
| Appendix 2 | Visual Assessment Data |
| Figure 3.0-3.6 | Integrated Current Condition Plan View |
| Table 6a-g | Visual Stream Morphology Stability Assessment Table |
| Table 7 | Vegetation Condition Assessment Table |
| | Stream Photographs |
| | Vegetation Photographs |
| | Areas of Concern |
| Appendix 3 | Vegetation Plot Data |
| Table 8 | Vegetation Plot Criteria Attainment |
| Table 9 | CVS Vegetation Plot Metadata |
| Table 10 | Planted and Total Stem Counts (Species by Plot with Annual Means) |
| Appendix 4 | Morphological Summary Data and Plots |
| Table 11a-c | Baseline Stream Data Summary |
| Table 12a-c | Morphology and Hydraulic Summary (Dimensional Parameters – Cross-Section) |
| Table 13a-g | Monitoring Data – Stream Reach Data Summary |
| | Cross-Section Plots |
| | Reachwide and Cross-Section Pebble Count Plots |
| Appendix 5 | Hydrology Data |
| Table 14 | Verification of Bankfull Events |
| | Stream Flow Gage Plots |
| Appendix 6 | Water Quality BMPs |
| Table 15 | Water Quality Sampling Results |
| Table 16 | Pollutant Removal Rates |
| | Water Quality Data |
| | Pollutant Removal Plot |

Section 1: PROJECT OVERVIEW

The Site is located in southeastern Union County, NC, approximately ten miles southeast of the City of Monroe and five miles north of the South Carolina state line. The Site is located in the Yadkin River Basin; eight-digit Cataloging Unit (CU) 03040105 and the 14-digit Hydrologic Unit Code (HUC) 03040105081020 (Figure 1). The Site is located in the Carolina Slate Belt of the Piedmont physiographic province (USGS, 1998). The project watershed consists primarily of agricultural land, pasture, and forest. A conservation easement was recorded on 31.6 acres within the seven parcels (Deed Book 06095, Pages 0530-0589).

The Site is located within the North Carolina Division of Water Resources (NCDWR) subbasin 03-07-14. The project streams consist of Norkett Branch, a third order stream, two unnamed first order tributaries to Norkett Branch (UT1 and UT2), and two intermittent tributaries to Norkett Branch (UT2A and UT3). Norkett Branch (DWQ Index No. 13-17-40-8) is the main tributary of the project and is classified as WS-V waters. Class WS-V waters are protected as water supplies draining to Class WS-IV waters or waters used by industry to supply drinking water or waters formerly used as water supply, and are protected for secondary recreation, fishing, wildlife and aquatic life, maintenance of biotic integrity, and agriculture. The drainage area for the project Site is 2,034 acres (3.18 sq mi) at the lower end of Norkett Branch Reach 2.

Mitigation work at the Site included restoration on Norkett Branch, UT1, and UT2. Enhancement II was implemented on UT2A and UT3. Water quality treatment BMPs were also implemented to treat agricultural drainage upstream of UT3 and agricultural drainage in the right floodplain of Norkett Branch Reach 2. All onsite riparian areas were planted with native species. Construction and planting activities were completed in April 2014. Directions and a map of the Site are provided in Figure 1 and project components are illustrated in Figure 2.

1.1 Project Goals and Objectives

Prior to construction activities, the streams were routinely maintained to provide drainage for agricultural purposes. Impacts to the stream included straightening and ditching, eroding banks, and a lack of stabilizing riparian vegetation. The streams were used as a water source for cattle in some areas, resulting in over-widened, unstable trampled banks. Algal blooms, presumably from agricultural nutrient loading, were observed during Site visits. Trampled stream banks, over-widened channels, and banks illustrating signs of instability were a common occurrence throughout the Site. The alterations of the Site to promote farming resulted in impairment of the ecological function of Site's streams. Specific functional losses at the Site include degraded aquatic habitat, altered hydrology, and reduction of quality of in-stream and riparian wetland habitats and related water quality benefits. Table 4 in Appendix 1 and Tables 11 a-c in Appendix 4 present the Site's pre-restoration conditions in detail.

The mitigation project is intended to provide numerous ecological benefits such as pollutant removal and improved aquatic and terrestrial habitat. Expected improvements to water quality and ecological processes are outlined below as project goals and objectives. The agricultural stressors and pollutants have been specifically addressed by the Site design. The major goals of the stream mitigation project are to provide ecological and water quality enhancements to the Norkett Branch, Lane's Creek, Rocky River and Yadkin River Basins while creating a functional riparian corridor at the Site level and restoring a Piedmont Bottomland Forest as described by Schafale and Weakley (1990). These project goals were established with careful consideration of goals and objectives that were described in the RBRP and to meet the North Carolina Division of Mitigation Services (DMS) mitigation needs while maximizing the ecological and water quality uplift within the watershed.



The following project goals and objectives were established and listed in the Mitigation Plan (Wildlands, 2013) to address the effects listed above:

- *Improve aquatic and terrestrial habitat within the riparian corridor and provide habitat corridor extension from adjacent downstream forested habitat.* By restoring appropriate channel cross section and profile, including riffle and pool sequences, coarse substrate zones for macroinvertebrates and deep pool habitat for fish will also be restored. Introduction of large woody debris, rock structures, brush toe, and native stream bank vegetation will provide additional habitat and cover for both fish and macroinvertebrates. Adjacent buffer areas will be restored by planting native vegetation which will provide habitat and forage for terrestrial species. These areas will be allowed to receive more regular inundating flows, and vernal pools may develop over time increasing habitat diversity. A watershed approach, restoring riparian corridor functions on multiple interconnected tributaries as well as treating agricultural drainage from headwater features with Best Management Practices (BMPs), will allow for large-scale riparian corridor connectivity.
- *Improve additional water quality aspects within stream channels on Site.* Riffle/pool sequences will be restored to provide re-aeration allowing for oxygen levels to be maintained in the perennial reaches. Creation of deep pool zones will lower temperature, helping to maintain dissolved oxygen concentrations. Establishment and maintenance of riparian buffers will create long-term shading of the stream to minimize thermal heating. Water quality BMPs situated in the headwaters upstream of jurisdictional streams will treat agricultural runoff before it reaches project streams.
- *Decrease sediment inputs to the stream channels and decrease turbidity in receiving Lanes Creek.* Cattle will be fenced out of the riparian corridor, eliminating bank trampling. Sediment input from eroding stream banks will be reduced by bioengineering and installing in-stream structures while creating a stable channel form using geomorphic design principles. Sediment from off-site sources will be captured by deposition on restored floodplain areas where native vegetation will slow overland flow velocities. By allowing for more overbank flooding and by increasing channel roughness, in-channel velocities can be reduced. This will lower bank shear stress and decrease bank erosion.
- *Decrease phosphorus, nitrogen, and fecal coliform inputs to the stream channels.* Nitrogen and phosphorus chemical fertilizers, pesticides, and cattle waste will be decreased by buffering adjacent agricultural operations from the restored channels. Cattle will be fenced out to eliminate in-channel fecal pollution. Off-site nutrient input will be absorbed on-site by filtering flood flows through restored floodplain areas, water quality BMPs, and vernal pools positioned to treat concentrated overland flow. Flood flows will be allowed to disperse through native vegetation across the reconnected floodplain. Increased surface water residency time will provide contact treatment time and groundwater recharge potential.



1.2 Monitoring Year 5 Data Assessment

Annual monitoring was conducted between June and October 2018 to assess the condition of the project. The stream restoration success criteria for the Site follows the approved success criteria presented in the Mitigation Plan (Wildlands, 2013).

1.2.1 Vegetative Assessment

A total of 26 vegetation plots were established during the baseline monitoring within the project easement area using standard 10-meter by 10-meter vegetation monitoring plots. Plots were randomly established within planted portions of the stream restoration and enhancement areas to capture the heterogeneity of the designed vegetative communities. The plot corners were marked and are recoverable either through field identification or with the use of a GPS unit. Reference photographs were taken at the plot origin looking diagonally across the plot to the opposite corner to capture the same reference photograph locations as the as-built. The final vegetative success criteria will be the survival of 210 planted stems per acre in the riparian corridor along restored and enhanced reaches at the end of the seventh year of monitoring (MY7). Planted vegetation must average 10 feet in height in each plot by MY7. The interim measure of vegetative success for the Site will be the survival of at least 260 stems per acre at the end of the fifth year of monitoring (MY5). If this performance standard is met by MY5 and stem density is trending towards success (i.e., no less than 260 five-year-old stems per acre), monitoring of vegetation on the Site may be terminated provided written approval is provided by the USACE in consultation with the NC Interagency Review Team.

The MY5 vegetation survey was completed in August 2018 and resulted in all 26 vegetation plots meeting the year five interim success criteria (260 stems per acre). Overall, the Site's average planted stem density resulted in 442 stems per acre which exceeds the year five interim success criteria. The average woody stem density of the Site with volunteers included is 559 stems per acre. Supplemental planting added 6,000 stems (37% of the MY1 stem total) on reaches east of Philadelphia Church Road in February 2015. The supplemental planting was in response to low stem vigor of many plots and high bare root mortality between the as-built and MY1 which is attributed to dry site conditions, soil fertility, scouring flows shortly after installation, insects, and disease. An additional supplemental planting in MY5 added 400 stems (3% of the MY5 stem total) on portions of Norkett Branch and UT1 in response to low stem density. Some of the monitoring plots showed an increase in planted stem densities in MY2 and MY5 because of the supplemental planting. In MY5, planted stems heights averaged 6.6 feet which is a 28% increase in height compared to the MY4 stem height average of 5.2 feet. A portion of the planted stems along Norkett Reaches 1 and 2 are shorter than expected for five-year-old trees. The slower growth is likely attributable to soil infertility. A majority of woody stems (82%) had a vigor rating of 3 or more (indicating that the stem is healthy and more likely to survive) during MY5.

Refer to Appendix 3 for vegetation summary tables and raw data tables and Appendix 2 for vegetation plot photographs, the Current Condition Plan View (CCPV) maps, and the vegetation condition assessment table.

1.2.2 Vegetation Problem Areas

Site vegetation continues to establish with little to no bare areas in MY5. During the late winter/early spring of MY4, several areas previously identified as "Bare/Poor Herbaceous Cover" were addressed through a combination of reseeding and the installation of hügelkultur (hugel) beds. The hugel beds have provided additional organic matter and aid in moisture retention to encourage herbaceous and woody vegetation growth. Hugel bed installation involved the excavation of small floodplain trenches that were backfilled with organic matter, covered in a mixture of soil and brush, and planted with live whips, live stakes and seeded. The live stakes and whips were planted to anchor the beds. As the woody

species establish they will help diffuse the energy of out of bank events and trap additional organic matter. Debris wracklines were observed on the upstream side of several hugel beds during MY5.

Isolated pockets of invasive species including cattail (*Typha latifolia*), Chinaberry tree (*Melia azedarach*), Chinese privet (*Ligustrum sinense*), and parrot feather (*Myriophyllum aquaticum*) were observed during MY5, however most are too small to map (less than 1,000 square feet) and are not impacting planted vegetation. A few pockets of parrot feather between Station 123+00 and 125+00 on Norkett Branch were treated with glyphosate, however this aquatic invasive may persist in pockets until the streambed is fully shaded. Areas of dense groundsel tree (*Baccharis halimifolia*); an aggressive coastal plain native evergreen shrub, were mechanically and chemically treated during MY4. This species is not typically considered a species of high concern for DMS-required monitoring; however, portions of the Site were infested with dense thickets of this shrub that were competing with planted woody and herbaceous vegetation. The cut/spray treatment was considered successful, with only minor pockets of groundsel re-sprouts observed during MY5.

Adaptive Management

If warranted, future adaptive management activities may be employed to continue to improve herbaceous vegetative cover and improve the growth rates of planted woody stems such as soil amendments in targeted areas. Areas noted with invasive plant populations will be treated in accordance with herbicide, not to exceed label prescribed application rates. If necessary, cut/spray techniques and/or application of a broadleaf-selective herbicide may be used to control groundsel tree re-sprouts.

1.2.3 Stream Assessment

A total of 20 cross-sections were installed along the stream restoration reaches. One permanent cross-section was installed per 20 bankfull widths along stream restoration reaches, with riffle and pool sections in proportion to DMS guidance. Each cross-section was permanently marked with pins to establish its location. Annual cross-section survey includes points measured at all breaks in slope, including top of bank, bankfull, edge of water, and thalweg. Photographs were taken looking upstream and downstream at each cross-section. Stream photographs were also taken at 51 permanent photograph reference points throughout the project area. A reach-wide pebble count was conducted in all restoration reaches (Norkett Branch Reach 1, Norkett Branch Reach 2, UT1, UT2 Reach 1, UT2 Reach 2, UT2 Reach 3A, and UT2 Reach 3B) for classification purposes. A wetted perimeter pebble count was conducted at each permanent riffle cross-section to characterize the pavement.

Riffle cross-sections on the restoration reaches should be stable and should show little change in bankfull area, maximum depth ratio, and width-to-depth ratio. All riffle cross-sections should fall within the parameters defined for channels of the appropriate Rosgen stream type. If any changes do occur, these changes will be evaluated to assess whether the stream channel is showing signs of instability. Indicators of instability include a vertically incising thalweg or eroding channel banks. Changes in the channel that indicate a movement toward stability or enhanced habitat include a decrease in the width-to-depth ratio in meandering channels or an increase in pool depth. Substrate materials in the restoration reaches should indicate a progression towards or the maintenance of coarser materials in the riffle features and smaller particles in the pool features.

Morphological surveys for MY5 were conducted between June and August 2018. In MY5 cross-section dimensional measurements were calculated. All streams within the Site appear stable and have met the success criteria for MY5. Riffle cross-sections surveyed along the restoration reaches appear stable and typically show little change in the bankfull area, maximum depth ratio, or width-to-depth ratio. Slight downcutting observed during MY3 on the left channel edge of riffle cross-section 15 on UT2 Reach 2 exhibited no progression in MY5 and appears stable. The minor adjustment is not currently an area of



concern. All surveyed riffle cross-section dimensions fell within the parameters defined for channels of the appropriate Rosgen stream type (Rosgen 1996). In-stream structures used to enhance channel habitat and stability on the outside bank of meander bends; such as brush toe, are providing stability and habitat as designed. Pattern data will be completed in MY7 only if there are indicators from the dimensions that significant geomorphic adjustments have occurred. No changes were observed that indicated a change in the radius of curvature or channel belt width; therefore, pattern data was not collected or included in the MY5 report. Visual assessment during MY5 revealed a couple isolated instances of bare or scoured banks. These are discussed in more detail in section 1.2.4.

In general, substrate materials in the restoration reaches indicate maintenance of coarser materials in the riffle features and finer particles in the pool features. Increases in the silt/clay particle size class were observed in reachwide counts for Norkett Branch Reach 1, Norkett Branch Reach 2, UT1, and UT2 Reach 3B as well as riffle 100-counts conducted on Norkett Branch Reach 1 (Cross-section 5), Norkett Branch Reach 2 (Cross-section 7), and UT1 (Cross-section 9). The increases may be a result of low flow conditions reducing transport capacity during the monitoring year. Increased fines in riffle cross-sections may also be the result of low-flow conditions that allow in-stream vegetation to establish and accumulate a thin layer of fines on top of coarser substrate.

Please refer to Appendix 2 for the stream visual assessment tables, the CCPV maps, and stream reference photographs. Refer to Appendix 4 for the morphological data and plots.

1.2.4 Stream Problem Areas

Stream areas of concern include two isolated areas of relic bare and scoured stream bank at Stations 103+00 and 132+75 of Norkett Branch. The relic bank scour at Station 103+00 was hidden by groundsel trees until they were removed in late MY4. Herbaceous vegetation is beginning to regenerate on this section of bank however the area lacks woody vegetation. The bare bank at Station 132+75 is not actively eroding but does not appear to be re-establishing vegetation.

Adaptive Management

Bare or eroded banks will be watched for advancement in the upcoming monitoring years and if necessary, repairs may be implemented. Refer to Appendix 2 for the stream visual assessment tables, the CCPV maps, reference photographs, and photographs of the stream problem areas.

1.2.5 Hydrology Assessment

Hydrologic monitoring was accomplished using both manual crest gage readings and In-situ Rugged Troll 100 pressure transducers installed at three surveyed cross-sections throughout the site (XS6 on Norkett Branch Reach 2, XS9 on UT1, and XS18 on UT2 Reach 3A). Rainfall amounts were measured by an Onset HOBO rain gauge located at the site and supplemented with data from a nearby weather station at the Monroe Airport (KEQY). To meet hydrological success criteria, two or more bankfull events must occur in separate years within the restored reaches by the end of MY7. The success criteria have already been met for the seven-year monitoring period after MY3. During MY5, at least three bankfull or greater events was recorded along Norkett Branch, UT1, and UT2 which includes the remnants of Hurricane Florence that led to over 5 inches of rain on September 16, 2018. Immediately following the large storm event malfunctions occurred at the pressure transducers on UT1 and UT2 Reach 3A. The pressure transducers will be fixed or replaced for MY6. Please refer to Appendix 5 for hydrology data.

1.2.6 Water Quality BMPs

Water quality grab samples were collected during the monitoring period to assess the functionality of the Step Pool Storm Conveyance BMP (SPSC BMP) and the Pocket Wetland BMP (PW BMP). This sampling is not part of the success criteria for the project. The following expected rates for pollutant removal were established in the Mitigation Plan (Wildlands, 2013) and in accordance with published

rates of removal from similar BMP approaches. The SPSC BMP is expected to provide similar pollutant removal rates as the published removal rates of a bioretention area with internal water storage (NCDWQ, 2007), which are 85% TSS removal, 40% TN removal, and 40% TP removal. The PW BMP is expected to provide 60% TSS removal, 20% TN removal, and 45% TP removal, which is similar to extended detention wetlands (Center for Watershed Protection, 2000 and United States Environmental Protection Agency, 2012).

The monitoring plan calls for quarterly sampling; however, samples were unable to be obtained during Q2 due to the timing and intensity of rain events. Inflow and outflow were sampled at each BMP after storm events on 3/12/2018 (Q1) and 8/6/2018 (Q3). First flush style sample bottles were used to capture stormflow, which filled during the rain event at a pre-determined stage height and were retrieved within 24 hours. Samples were analyzed for total suspended solids (TSS), phosphorus as total phosphorus (TP), nitrogen as total nitrogen (TN), Nitrate/Nitrite (NO_x), and Total Kjeldahl Nitrogen (TKN), by Prism Laboratories Inc. Refer to in Appendix 6 for water quality sampling results and pollutant removal rates.

The SPSC BMP provided pollutant removal of TN in both sampling events with removal ranging from 33% to 83%. TP increased 31% between the inlet and outlet samples during the Q1 sample. A TP removal of 87% was recorded during Q3 sampling. TSS was reduced by 68% in the Q1 sample. TSS was not analyzed in the Q3 sample due to insufficient sample volume.

Increases in TN were documented in both sampling events in the PW BMP ranging from 8% to 580%. The PW BMP provided pollutant removal of TP in both sampling events ranging from 60% to 83%. TSS was reduced by 92% in the Q1 sample. TSS was not analyzed in the Q3 sample due to insufficient sample volume.

1.2.7 Existing Wetland Monitoring

A permanent photo station (photo point #16) was established in the stream-to-wetland conversion area in Norkett Branch Reach 1 near station 104+00 on the left floodplain. The former channel area is maintaining wetland hydrology and supports a wetland plant community composition. The photo point (#16) is included in the Stream Photographs section of Appendix 2.

1.3 Monitoring Year 5 Summary

Overall, the Site has met the required stream and vegetation mitigation success criteria for MY5. The average planted stem density for the site is 442 stems per acre and is on track to meet upcoming density criteria. The MY5 average stem height was 6.6 feet which is a 28% increase from the MY4 average stem height of 5.2 feet. Morphological surveys indicate that the channel dimensions are stable and functioning as designed. Visual assessment indicates the channels show little sign of instability within the bed, bank, or engineered structures. All restored channels (Norkett Branch, UT1, and UT2) each recorded multiple bankfull or greater events during MY5. The MY7 hydrological success criteria for the Site was achieved after MY3. Water quality monitoring results indicate continued pollutant removal capacity of both storm water BMPs.

Summary information/data related to various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting data can be found in the Mitigation Plan documents available on the DMS website. All raw data supporting the tables and figures in the appendices are available upon request.



Section 2: METHODOLOGY

Geomorphic data collected followed the standards outlined in *The Stream Channel Reference Site: An Illustrated Guide to Field Techniques* (Harrelson et al., 1994) and in the *Stream Restoration: A Natural Channel Design Handbook* (Doll et al., 2003). Longitudinal and cross-sectional data were collected using a total station and were georeferenced to established benchmarks and NC State Plane coordinates. Morphological surveys were conducted using a total station tied to these geo-referenced (control) points. Reachwide pebble counts were conducted along each restored reach for channel classification. Cross-section substrate analyses conducted in each surveyed riffle followed the 100 count wetted perimeter methodology to characterize pavement. All CCPV mapping was recorded using a Trimble handheld GPS with sub-meter accuracy and processed using Pathfinder and ArcView. Crest gauges were installed during the baseline monitoring period in surveyed riffle cross-sections and are monitored quarterly. Hydrology attainment installation and monitoring methods are in accordance with the USACE (2003) standards. Vegetation monitoring protocols followed the Carolina Vegetation Survey-NCEEP Level 2 Protocol (Lee et al., 2008).




Section 3: REFERENCES

- Center for Watershed Protection, 2000. National Pollutant Removal Performance Database for Stormwater Treatment Practices, 2nd Edition. Elliot City, Maryland.
- Doll, B.A., Grabow, G.L., Hall, K.A., Halley, J., Harman, W.A., Jennings, G.D., and Wise, D.E. 2003. Stream Restoration: A Natural Channel Design Handbook.
- Harrelson, C.C., Rawlins, C.L., Potyondy, J.P. 1994. *Stream Channel Reference Sites: An Illustrated Guide to Field Techniques*. Gen. Tech. Rep. RM-245. Fort Collins, CO: U.S. Department of Agriculture, Forest Service, Rocky Mountain Forest and Range Experiment Station. 61 p.
- Lee, M.T., Peet, R.K., S.D., Wentworth, T.R. 2008. CVS-EEP Protocol for Recording Vegetation Version 4.2. Retrieved from: <http://cvs.bio.unc.edu/protocol/cvs-eep-protocol-v4.2-lev1-5.pdf>.
- North Carolina Division of Water Quality (NCDWQ), 2007. Stormwater Best Management Practices Manual. Retrieved from: <http://portal.ncdenr.org/web/wq/ws/su/bmp-ch9>
- North Carolina Division of Water Resources (NCDWR) Basinwide Planning Program, 2008. Yadkin Pee-Dee River Basinwide Water Quality Plan. Retrieved from: <http://portal.ncdenr.org/web/wq/ps/bpu/basin/yadkinpeedee/2008>
- North Carolina Division of Water Resources (NCDWR), 2012. North Carolina 303(d) List - Category 5. August 24, 2012. Retrieved from: http://portal.ncdenr.org/c/document_library/get_file?uuid=9d45b3b4-d066-4619-82e6-ea8ea0e01930&groupId=38364
- North Carolina Ecosystem Enhancement Program (NCEEP), 2009. Lower Yadkin-Pee Dee River Basin Restoration Priorities (RBRP). Retrieved from: http://www.nceep.net/services/restplans/Yadkin_Pee_Deer_RBRP_2009_Final.pdf
- Rosgen, D.L. 1996. Applied River Morphology. Pagosa Springs, CO: Wildland Hydrology Books.
- Schafale, M.P. and A.S. Weakley. 1990. Classification of the Natural Communities of North Carolina, 3rd approx. North Carolina Natural Heritage Program, Raleigh, North Carolina.
- United States Army Corps of Engineers (USACE). 2003. Stream Mitigation Guidelines. USACE, NCDENR-DWQ, USEPA, NCWRC
- United States Environmental Protection Agency (EPA), 2012. Stormwater Wetland Factsheet. Retrieved from: <https://www.epa.gov/npdes/national-menu-best-management-practices-bmps-stormwater#edu>
- United States Geological Survey (USGS). 1998. North Carolina Geology. Retrieved from: <http://www.geology.enr.state.nc.us/usgs/carolina.htm>
- Weakley, A.S. 2008. *Flora of the Carolinas, Virginia, Georgia, Northern Florida, and Surrounding Areas* (Draft April 2008). University of North Carolina at Chapel Hill: Chapel Hill, NC.
- Wildlands Engineering, Inc. 2013. Norkett Branch Stream Mitigation Site Mitigation Plan. DMS, Raleigh, NC.
- Wildlands Engineering, Inc. 2014. Norkett Branch Stream Mitigation Site Baseline Monitoring Document and As-Built Baseline Report. DMS, Raleigh, NC.



APPENDIX 1. General Figures and Tables

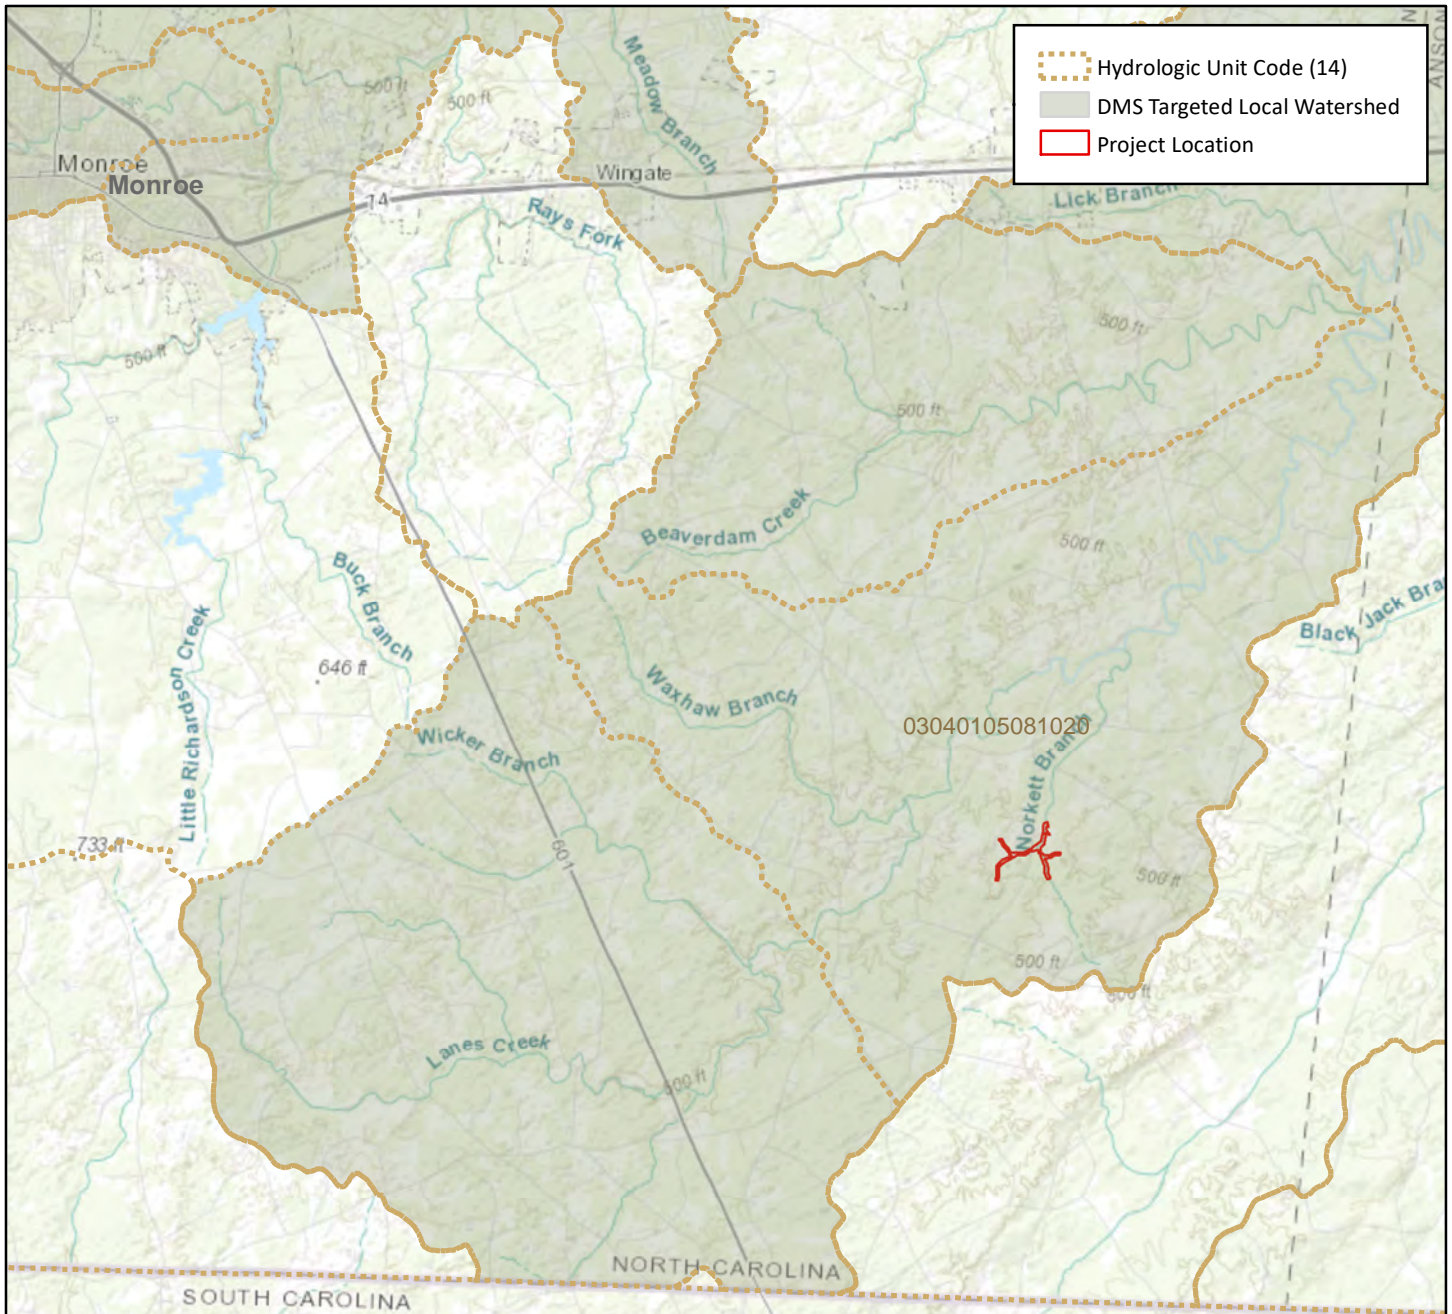

Hydrologic Unit Code (14)
 DMS Targeted Local Watershed
 Project Location

Directions:
 The Norkett Branch Stream Mitigation Site is located in the southeastern portion of Union County, NC. From Charlotte, NC, take US-74 south approximately 25 miles to US-601 in Monroe, NC. Turn right on US-601 South and continue approximately 10.5 miles and then turn left onto Landsford Road. Travel approximately 3 miles and take a left onto Philadelphia Church Road. Travel 2 miles and cross over UT2 to Norkett Branch. The project site is located upstream and downstream of the Philadelphia Church Road stream crossing.

The subject project site is an environmental restoration site of the Department of Environmental Quality (DEQ) Division of Mitigation Services (DMS) and is encompassed by a recorded conservation easement, but is bordered by land under private ownership. Accessing the site may require traversing areas near or along the easement boundary and therefore access by the general public is not permitted. Access by authorized personnel of state and federal agencies or their designees/contractors involved in the development, oversight, and stewardship of the restoration site is permitted within the terms and timeframes of their defined roles. Any intended site visitation or activity by any person outside of these previously sanctioned roles and activities requires prior coordination with DMS.




Figure 1 Project Vicinity Map
 Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018
 Union County, NC


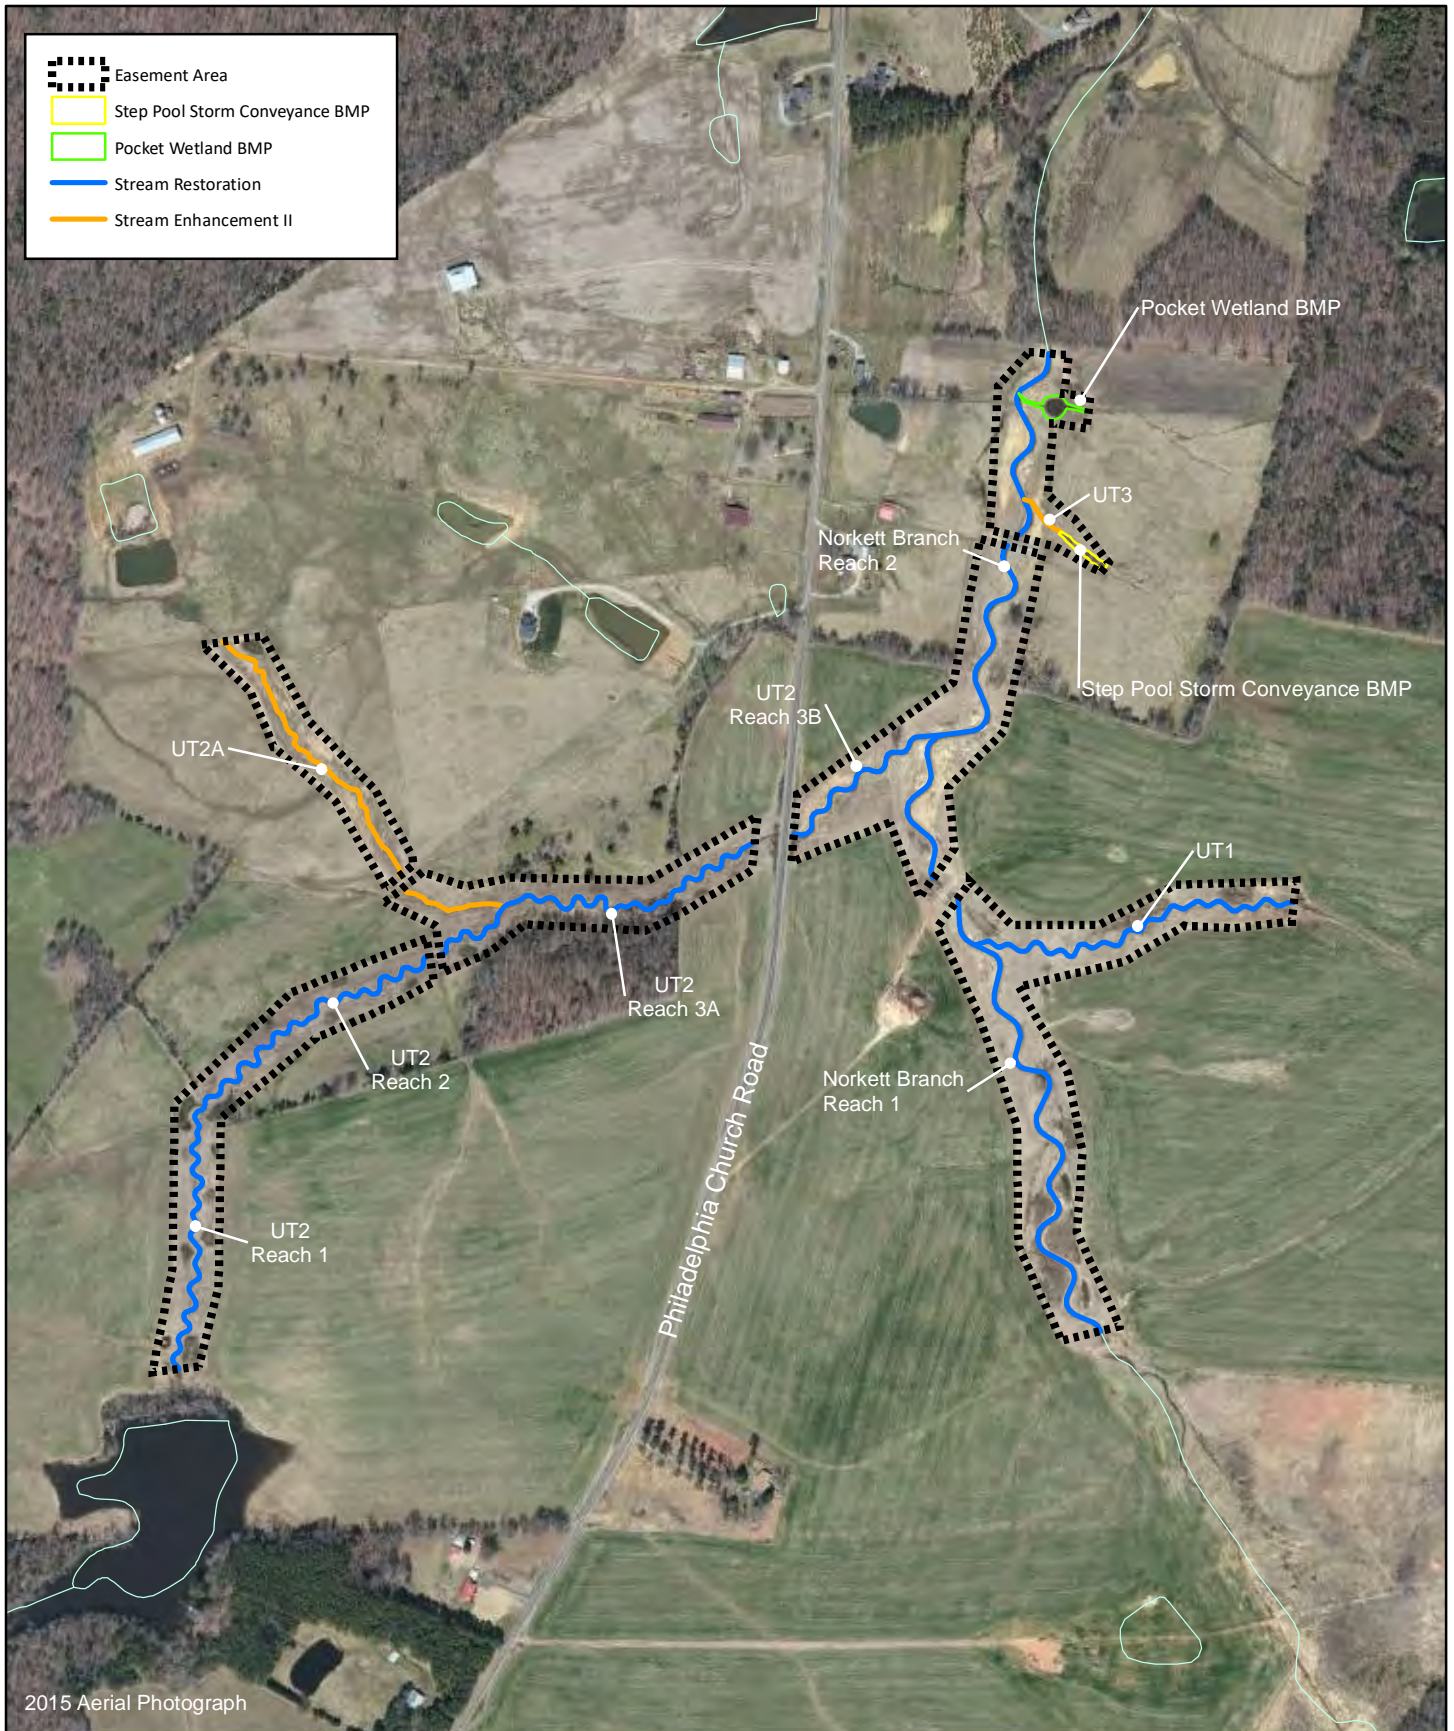


Figure 2 Project Component/Asset Map
 Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018
 Union County, NC

Table 1. Project Components and Mitigation Credits

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

| Mitigation Credits | | | | | | | | | |
|------------------------|------------------------------------------------------------------|--------------------------|----------------------------|---------------------------------------|------------------------------------------|------------------|----------------------------|--------------------------|-----------------------------|
| | Stream | | Riparian Wetland | | Non-Riparian Wetland | | Buffer | Nitrogen Nutrient Offset | Phosphorous Nutrient Offset |
| Type | R | RE | R | RE | R | RE | | | |
| Totals | 9,196.000 | 902.000 | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Project Components | | | | | | | | | |
| Reach ID | As-Built Stationing ¹ | Existing Footage/Acreage | Approach | Restoration or Restoration Equivalent | Restoration Footage/Acreage ² | Mitigation Ratio | Credits (SMU) ² | | |
| STREAMS | | | | | | | | | |
| Norkett Branch Reach 1 | 100+31-117+60 & 118+60-124+00 | 1,980 LF | P1 | R | 2,313 | 1:1 | 2313.000 | | |
| Norkett Branch Reach 2 | 124+00-131+84 & 132+25-138+99 | 1,505 LF | P1 | R | 1,513 | 1:1 | 1513.000 | | |
| UT1 | 200+00-211+98 | 840 LF | P1 | R | 1,212 | 1:1 | 1212.000 | | |
| UT2 Reach 1 | 300+41-310+80 | 820 LF | P1 | R | 1,033 | 1:1 | 1033.000 | | |
| UT2 Reach 2 | 310+80-321+71 & 322+06-325+20 | 1,272 LF | P1 | R | 1,416 | 1:1 | 1416.000 | | |
| UT2 Reach 3A | 325+20-335+58 | 923 LF | P1 | R | 1,041 | 1:1 | 1041.000 | | |
| UT2 Reach 3B | 336+90-343+48 | 380 LF | P1/2 | R | 668 | 1:1 | 668.000 | | |
| UT2A | 401+53-411+46 & 411+84-415+31 | 1,296 LF | EII | EII | 1,340 | 2.5:1 | 536.000 | | |
| UT3 | 505+42-507+12 | 163 LF | EII | EII | 170 | 2.5:1 | 68.000 | | |
| SPSC BMP | Upstream of UT3 intermittent drainage | | Step Pool Storm Conveyance | WQ BMP | 29.7 ac treated | 1:8 | 238.000 ³ | | |
| PW BMP | non-jurisdictional drainage in eastern Norkett Branch floodplain | | Pocket Wetland | WQ BMP | 19.9 ac treated | 1:3 | 60.000 ³ | | |

| Component Summation | | | | | | |
|---------------------------|-----------------|--------------------------|----------------------|----------------------|----------------|--|
| Restoration Level | Stream (LF) | Riparian Wetland (acres) | Non-Riparian Wetland | Buffer (square feet) | Upland (acres) | |
| Restoration | 9,196 | | | | | |
| Enhancement | | | | | | |
| Enhancement I | | | | | | |
| Enhancement II | 1,510 | | | | | |
| Creation | | | | | | |
| Preservation | | | | | | |
| High Quality Preservation | | | | | | |
| Alternative Mitigation | 49.6 ac treated | | | | | |

N/A: not applicable

1. Stationing based off of centerline as-built alignment which matched with the design alignment.

2. Credits are based off of the as-built thalweg alignment.

3. Credits determined for the BMPs were established in the mitigation plan (2013).

Table 2. Project Activity and Reporting History

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

| Activity or Report | Data Collection Complete | Completion or Scheduled Delivery |
|---------------------------------------------------------------|------------------------------|----------------------------------|
| Mitigation Plan | July 2012 - October 2012 | July 2013 |
| Final Design - Construction Plans | July 2013 - November 2013 | November 2013 |
| Construction | December 2013 - April 2014 | April 2014 |
| Temporary S&E mix applied to entire project area ¹ | December 2013 - April 2014 | April 2014 |
| Permanent seed mix applied to reach/segments | December 2013 - April 2014 | April 2014 |
| Bare root and live stake plantings for reach/segments | March 2014 - April 2014 | April 2014 |
| Baseline Monitoring Document (Year 0) | April 2014 - May 2014 | June 2014 |
| Year 1 Monitoring | Stream Assessment | October 2014 |
| | Vegetation Assessment | September 2014 |
| Maintenance and Replanting | October 2014 - February 2015 | February 2015 |
| Year 2 Monitoring | Stream Assessment | April 2015 |
| | Vegetation Assessment | September 2015 |
| Year 3 Monitoring | Stream Assessment | April 2016 |
| | Vegetation Assessment | June 2016 |
| Invasive Treatment | July 2016 | December 2016 |
| Bank repairs and hugel bed installation in bare areas | March 2017 | Spring 2017 |
| Year 4 Monitoring | Stream Assessment | August 2017 |
| | Vegetation Assessment | August 2017 |
| Invasive Treatment | June - July, November 2017 | N/A |
| Supplemental planting | January - March 2018 | Spring 2018 |
| Invasive Treatment | June 2018 | N/A |
| Year 5 Monitoring | Stream Assessment | June-August 2018 |
| | Vegetation Assessment | August 2018 |
| Year 6 Monitoring | 2019 | December 2019 |
| Year 7 Monitoring | 2020 | December 2020 |

¹Seed and mulch is added as each section of construction is completed.**Table 3. Project Contact Table**

Norkett Branch Stream Mitigation Site

DMS Project No.95360

Monitoring Year 5 - 2018

| | |
|---------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Designer Emily Reinicker, PE, CFM | Wildlands Engineering, Inc. 1430 S Mint St. Suite 104 Charlotte, NC 28203 704.332.7754 |
| Construction Contractor | Land Mechanic Designs, Inc. 126 Circle G Lane Willow Spring, NC 27592 |
| Planting Contractor | Bruton Natural Systems, Inc P.O. Box 1197 Fremont, NC 27830 |
| Seeding Contractor | Bruton Natural Systems, Inc P.O. Box 1197 Fremont, NC 27830 |
| Seed Mix Sources | Green Resource, Colfax, NC |
| Nursery Stock Suppliers Bare Roots Live Stakes | Bruton Natural Systems, Inc Dykes and Son Nursery, McMinnville, TN Foggy Bottom Nursery, Lansing, NC |
| Monitoring Performers | Wildlands Engineering, Inc. |
| Monitoring, POC | Kirsten Gimbert 704.332.7754, ext. 110 |

Table 4. Project Information and Attributes

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

| Project Information | | | | | | |
|-----------------------------------------------------------------------|-----------------------------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------|--------------------|----------|---------|
| Project Name | Norkett Branch Stream Mitigation Site | | | | | |
| County | Union County | | | | | |
| Project Area (acres) | 31.6 | | | | | |
| Project Coordinates (latitude and longitude) | 34°52'47.56"N, 80°22'9.19"W | | | | | |
| Project Watershed Summary Information | | | | | | |
| Physiographic Province | Carolina Slate Belt of the Piedmont Physiographic Province | | | | | |
| River Basin | Yadkin | | | | | |
| USGS Hydrologic Unit 8-digit | 03040105 | | | | | |
| USGS Hydrologic Unit 14-digit | 03040105081020 | | | | | |
| DWQ Sub-basin | 03-07-14 | | | | | |
| Project Drainage Area (acres) | 2,034 | | | | | |
| Project Drainage Area Percentage of Impervious Area | <1% | | | | | |
| CGIA Land Use Classification | 43% forested, 29% managed herbaceous cover, 28% cultivated land | | | | | |
| Reach Summary Information | | | | | | |
| Parameters | Norkett Branch Reach 1 | Norkett Branch Reach 2 | UT1 | UT2 | UT2A | UT3 |
| Length of reach (linear feet) - Post-Restoration ¹ | 2,369 | 1,499 | 1,198 | 4,175 | 1,378 | 170 |
| Drainage area (acres) | 1490 | 2034 | 48 | 457 | 72 | 28 |
| Drainage area (sqmi) | 2.3 | 3.2 | 0.08 | 0.72 | 0.11 | 0.04 |
| NCDWQ stream identification score | 43.75 | 41.5 | 32.25 | 35.75 | 23;30.75 | 25.75 |
| NCDWQ Water Quality Classification | WS-V | | | | | |
| Morphological Description (stream type) | P | P | P | P | I | I |
| Evolutionary trend (Simon's Model) - Pre- Restoration | III | III/IV | II/III | II, IV | IV | II/ III |
| Underlying mapped soils | Floodplain Soil Types for Site | | | | | |
| | Badin channery silt loam | Badin channery silt clay loam | Cid channery silt loam | Secret-Cid complex | | |
| Drainage class | well-drained | well-drained | well-drained with moderate shrink-swell potential | well-drained | | |
| Soil Hydric status | N | N | N | Y | | |
| Slope | 2-8% | 2-8% | 1-5% | 0-3% | | |
| FEMA classification | AE | AE | N/A | N/A | N/A | N/A |
| Native vegetation community | Piedmont Bottomland Forest | | | | | |
| Percent composition exotic invasive vegetation - Post-Restoration | 0% | | | | | |
| Regulatory Considerations | | | | | | |
| Regulation | Applicable? | Resolved? | Supporting Documentation | | | |
| Waters of the United States - Section 404 | X | X | USACE Nationwide Permit No.27 and DWQ 401 Water Quality Certification No. 3885. | | | |
| Waters of the United States - Section 401 | X | X | | | | |
| Division of Land Quality (Dam Safety) | N/A | N/A | N/A | | | |
| Endangered Species Act | X | X | Norkett Branch Mitigation Plan; Wildlands determined "no effect" on Union County listed endangered species. | | | |
| Historic Preservation Act | X | X | No historic resources were found to be impacted (letter from SHPO dated 8/20/2012). | | | |
| Coastal Zone Management Act (CZMA)/Coastal Area Management Act (CAMA) | N/A | N/A | N/A | | | |
| FEMA Floodplain Compliance | X | X | CLOMR and LOMR Approved | | | |
| Essential Fisheries Habitat | N/A | N/A | N/A | | | |

1. Total stream length does not exclude easement crossings.

Table 5. Monitoring Component Summary

Norkett Branch Stream Mitigation Site

DMS Project No. 95360


Monitoring Year 5 - 2018

| Parameter | Monitoring Feature | Quantity/ Length by Reach | | | | | | | | | Frequency |
|--------------------------------|---------------------------------------------------|---------------------------|------------------------|------------|-------------|-------------|--------------|--------------|-----|------------------|-----------|
| | | Norkett Branch Reach 1 | Norkett Branch Reach 2 | UT1 | UT2 Reach 1 | UT2 Reach 2 | UT2 Reach 3A | UT2 Reach 3B | UT3 | Storm Water BMPs | |
| | Riffle Cross Section | 3 | 2 | 1 | 1 | 2 | 1 | 1 | N/A | N/A | Annual |
| | Pool Cross Section | 2 | 1 | 1 | 1 | 2 | 1 | 1 | N/A | N/A | |
| Pattern | Pattern | N/A | | | | | | | | | N/A |
| Profile | Longitudinal Profile | N/A | | | | | | | | | N/A |
| Substrate | Reach Wide (RW) / Riffle (RF) 100 Pebble Count | RW-1, RF-3 | RW-1, RF-2 | RW-1, RF-1 | RW-1, RF-1 | RW-1, RF-2 | RW-1, RF-1 | RW-1, RF-1 | N/A | N/A | Annual |
| Stream Hydrology | Crest Gage | 1 | | 1 | | 1 | | | N/A | N/A | Quarterly |
| Wetland Hydrology | Groundwater Gages | N/A | | | | | | | | | N/A |
| Vegetation ¹ | CVS Level 2 | 26 | | | | | | | | | Annual |
| Visual Assessment | All Streams | Y | Y | Y | Y | Y | Y | Y | Y | Y | Annual |
| Exotic and nuisance vegetation | | | | | | | | | | | |
| Project Boundary | | | | | | | | | | | |
| Reference Photos ² | Photographs | 51 | | | | | | | | | Annual |

¹A deviation from the vegetation plot quantity indicated in the Mitigation Plan is due to a smaller than expected planted area.

²Additional reference photo locations were added for site documentation to exceed quantity indicated in the Mitigation Plan.

APPENDIX 2. Visual Assessment Data

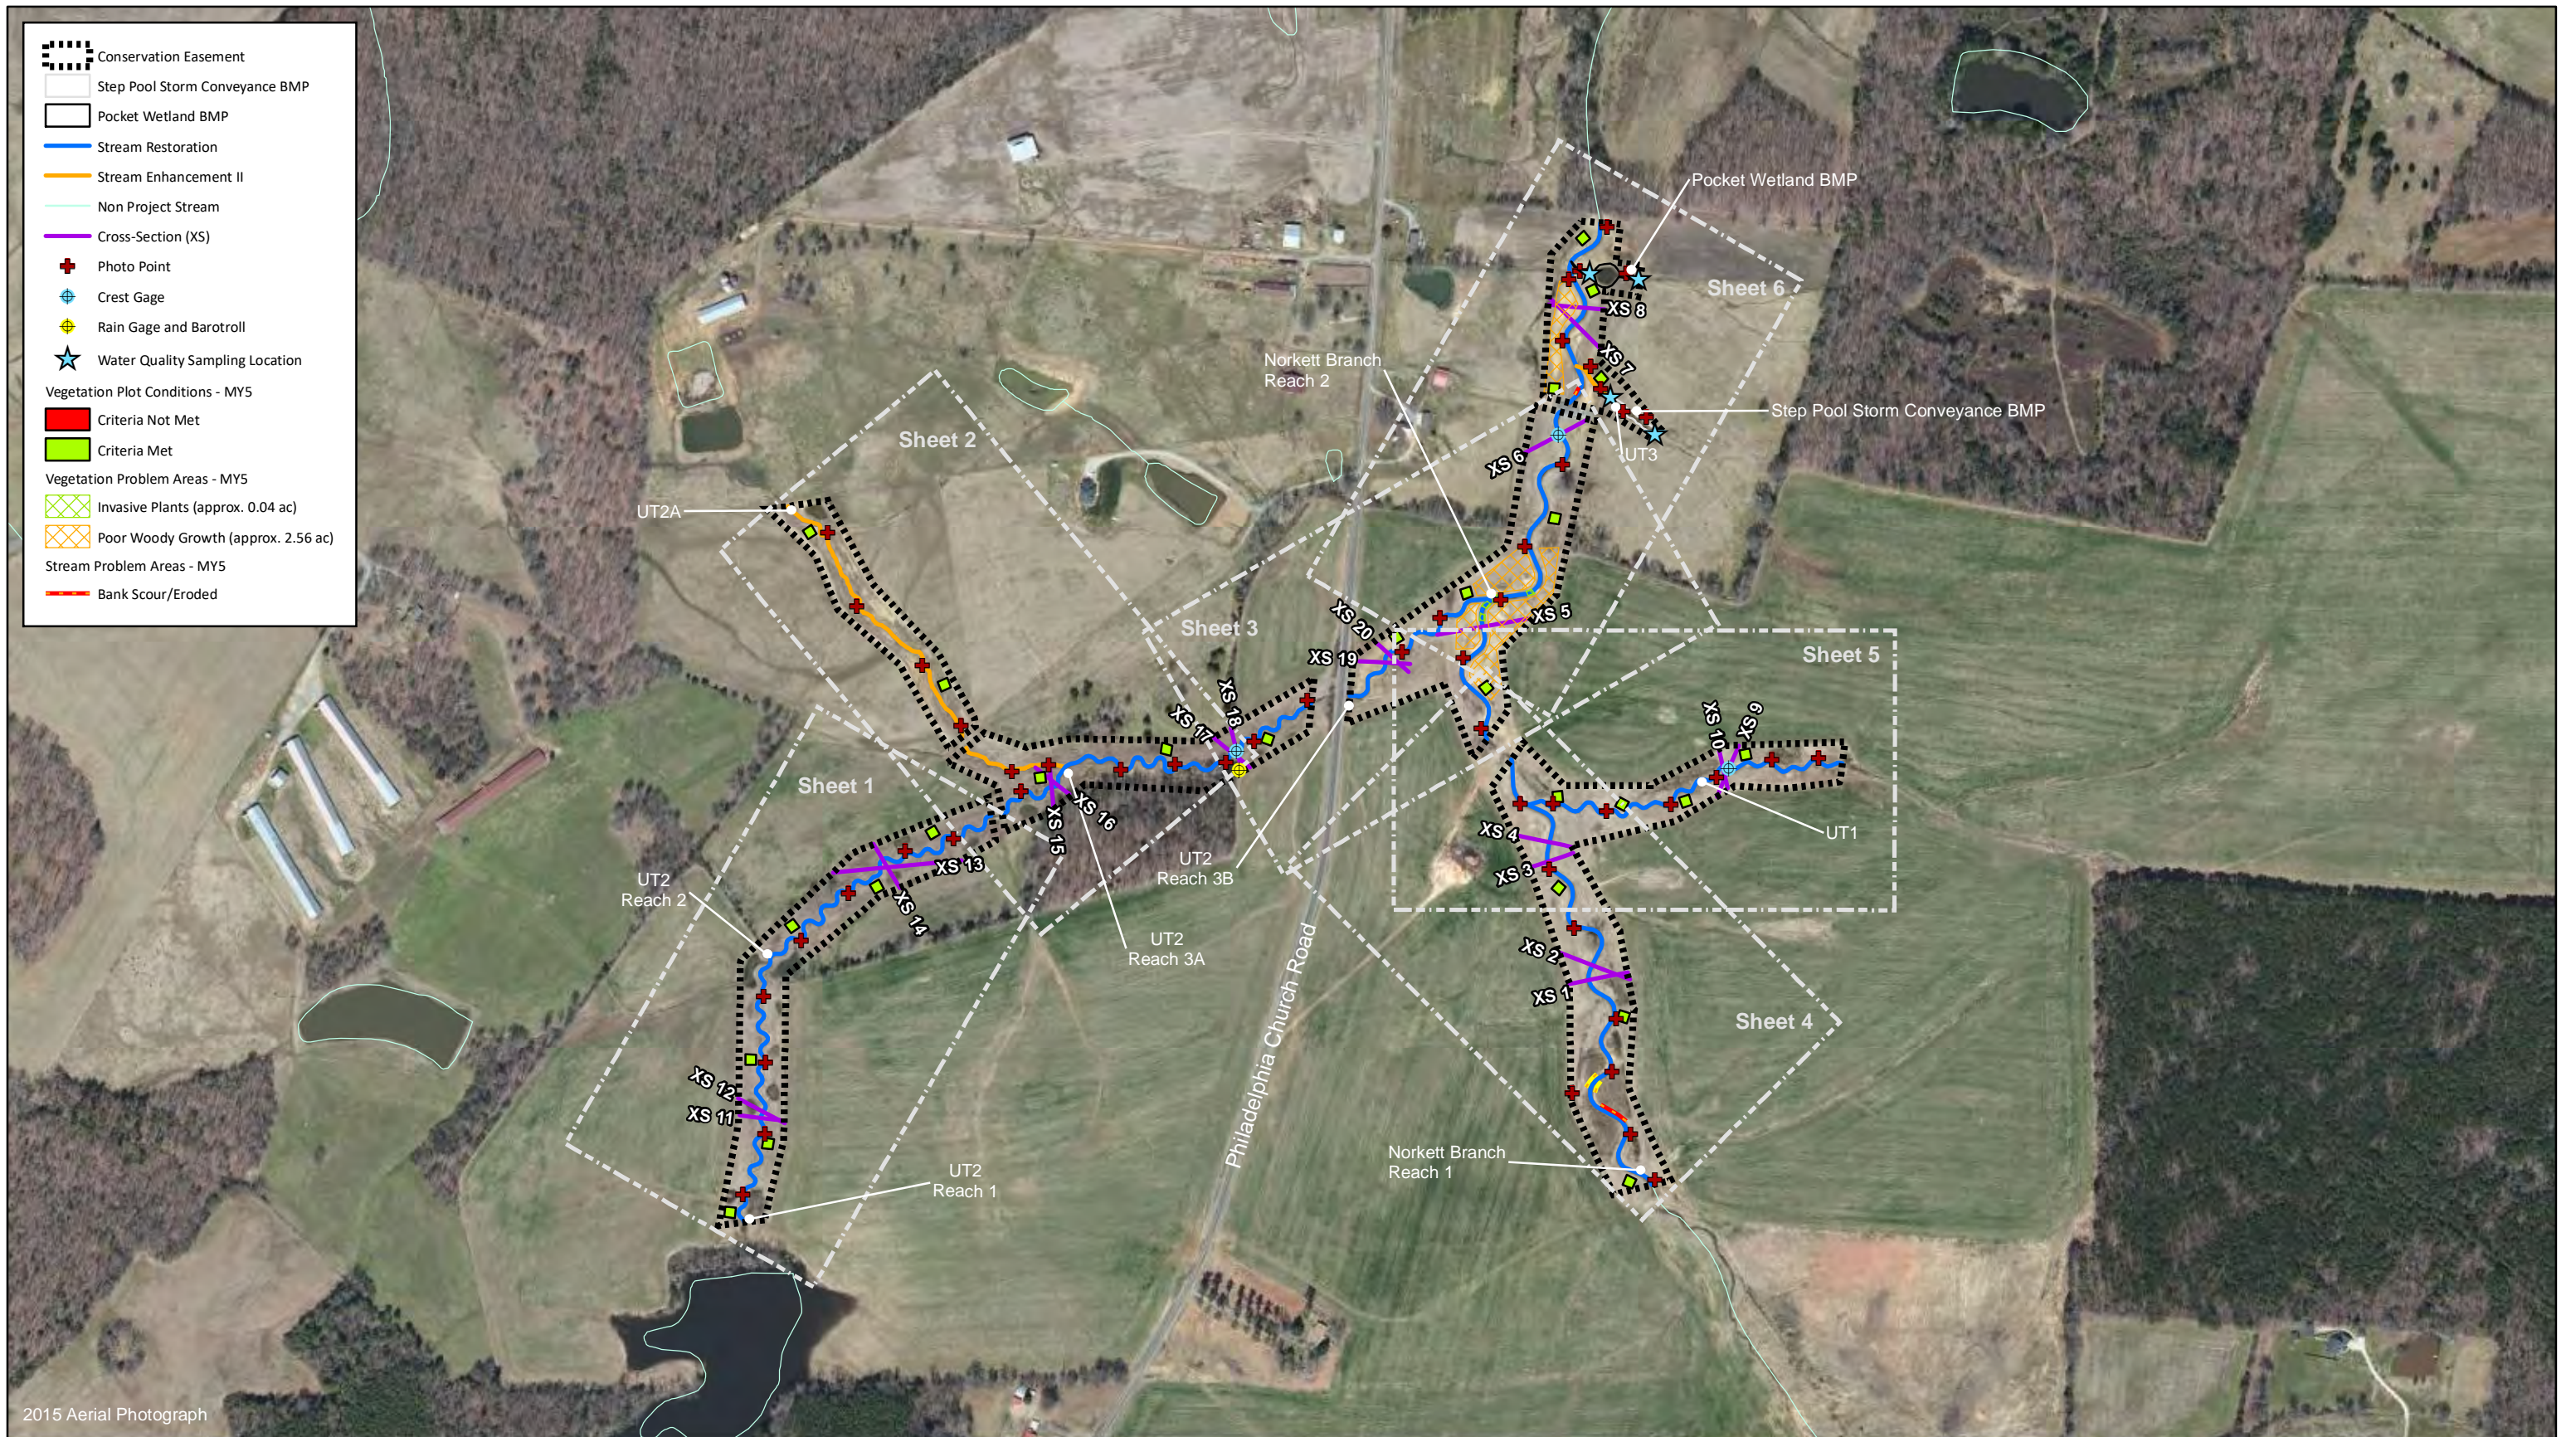

2015 Aerial Photograph




Figure 3.0 Integrated Current Condition Plan View (Key)
 Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018
 Union County, NC



2015 Aerial Photograph




Figure 3.1 Integrated Current Condition Plan View (Sheet 1 of 6)
 Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018
 Union County, NC



2015 Aerial Photograph




Figure 3.2 Integrated Current Condition Plan View (Sheet 2 of 6)
 Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018
 Union County, NC






Figure 3.3 Integrated Current Condition Plan View (Sheet 3 of 6)
 Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018
 Union County, NC



Figure 3.4 Integrated Current Condition Plan View (Sheet 4 of 6)
 Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018
 Union County, NC

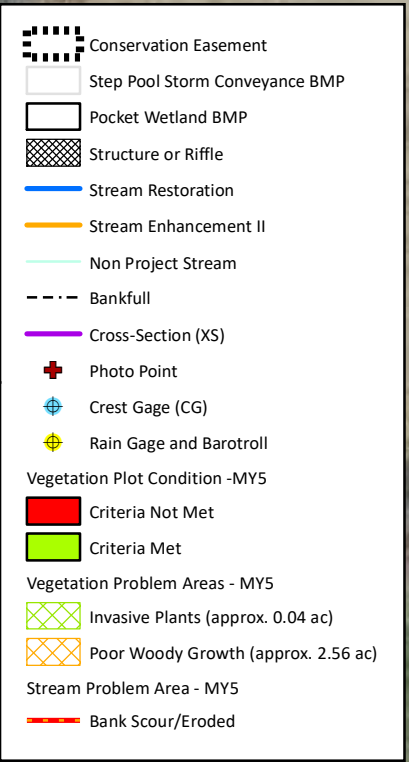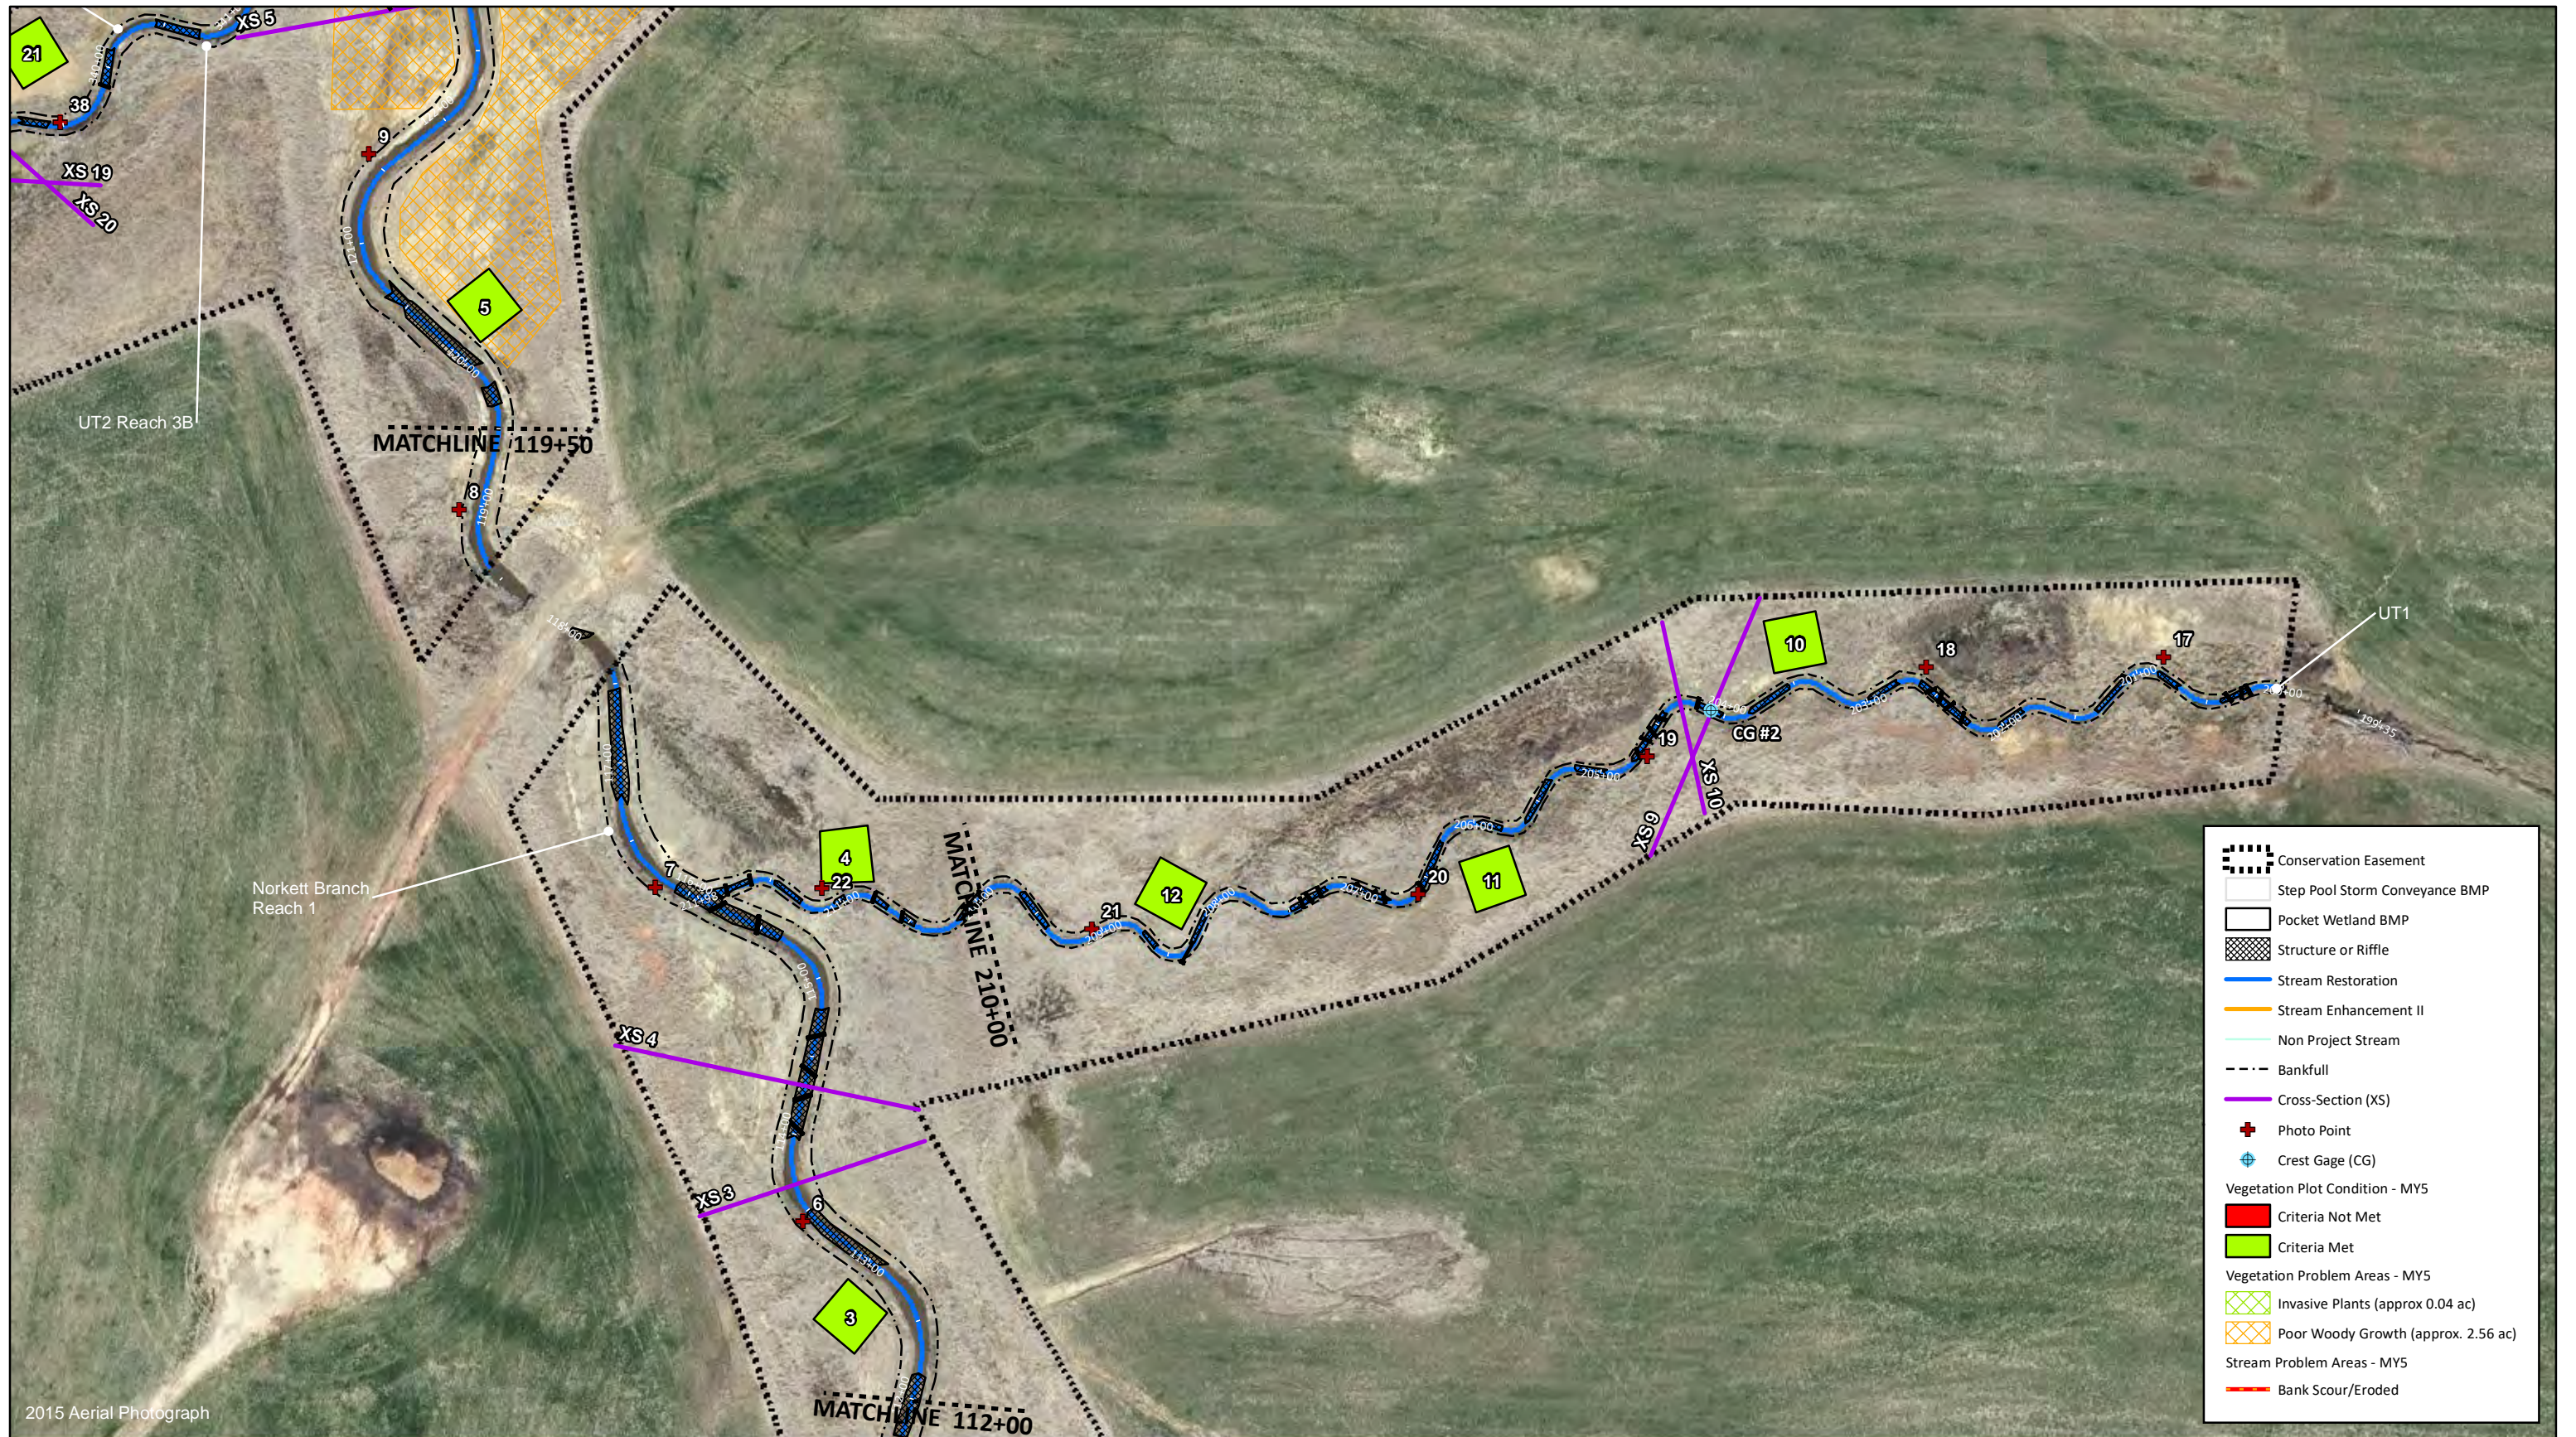

- Conservation Easement
- Step Pool Storm Conveyance BMP
- Pocket Wetland BMP
- Structure or Riffle
- Stream Restoration
- Stream Enhancement II
- Non Project Stream
- Bankfull
- Cross-Section (XS)
- Photo Point
- Crest Gage (CG)
- Vegetation Plot Condition - MYS
 - Criteria Not Met
 - Criteria Met
- Vegetation Problem Areas - MYS
 - Invasive Plants (approx 0.04 ac)
 - Poor Woody Growth (approx. 2.56 ac)
- Stream Problem Areas - MYS
 - Bank Scour/Eroded



Table 6a. Visual Stream Morphology Stability Assessment Table

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Norkett Branch Reach 1 - 2,313 LF

| Major Channel Category | Channel Sub-Category | Metric | Number Stable, Performing as Intended | Total Number in As-Built | Number of Unstable Segments | Amount of Unstable Footage | % Stable, Performing as Intended | Number with Stabilizing Woody Vegetation | Footage with Stabilizing Woody Vegetation | Adjust % for Stabilizing Woody Vegetation |
|---------------------------------------------------------|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------------------|-----------------------------|----------------------------|----------------------------------|------------------------------------------|-------------------------------------------|-------------------------------------------|
| 1. Bed | 1. Vertical Stability (Riffle and Run units) | Aggradation | | | 0 | 0 | 100% | | | |
| | | Degradation | | | 0 | 0 | 100% | | | |
| | 2. Riffle Condition | Texture/Substrate | 17 | 17 | | | 100% | | | |
| | | 3. Meander Pool Condition | Depth Sufficient | 16 | | | 16 | | | |
| | Length Appropriate | | 16 | 16 | | | 100% | | | |
| | 4. Thalweg Position | Thalweg centering at upstream of meander bend (Run) | 17 | 17 | | | 100% | | | |
| Thalweg centering at downstream of meander bend (Glide) | | 17 | 17 | 100% | | | | | | |
| Totals | | | | | | | | | | |
| 2. Bank | 1. Scoured/Eroded | Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion | | | 1 | 97 | 98% | 100% | 100% | 100% |
| | 2. Undercut | Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat. | | | 0 | 0 | 100% | 100% | 100% | 100% |
| | 3. Mass Wasting | Bank slumping, calving, or collapse | | | 0 | 0 | 100% | 100% | 100% | 100% |
| Totals | | | | | | | | | | |
| 3. Engineered Structures ¹ | 1. Overall Integrity | Structures physically intact with no dislodged boulders or logs. | 2 | 2 | | | 100% | | | |
| | 2. Grade Control | Grade control structures exhibiting maintenance of grade across the sill | 2 | 2 | | | 100% | | | |
| | 2a. Piping | Structures lacking any substantial flow underneath sills or arms. | 2 | 2 | | | 100% | | | |
| | 3. Bank Protection | Bank erosion within the structures extent of influence does not exceed 15%. | 2 | 2 | | | 100% | | | |
| | 4. Habitat | Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow. | 2 | 2 | | | 100% | | | |

¹Excludes constructed riffles since they are evaluated in section 1.

Table 6b. Visual Stream Morphology Stability Assessment Table

Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018

Norkett Branch Reach 2 - 1,513 LF

| Major Channel Category | Channel Sub-Category | Metric | Number Stable, Performing as Intended | Total Number in As-Built | Number of Unstable Segments | Amount of Unstable Footage | % Stable, Performing as Intended | Number with Stabilizing Woody Vegetation | Footage with Stabilizing Woody Vegetation | Adjust % for Stabilizing Woody Vegetation |
|---------------------------------------|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------------------|-----------------------------|----------------------------|----------------------------------|------------------------------------------|-------------------------------------------|-------------------------------------------|
| 1. Bed | 1. Vertical Stability (Riffle and Run units) | Aggradation | | | 0 | 0 | 100% | | | |
| | | Degradation | | | 0 | 0 | 100% | | | |
| | 2. Riffle Condition | Texture/Substrate | 10 | 10 | | | 100% | | | |
| | 3. Meander Pool Condition | Depth Sufficient | 11 | 11 | | | 100% | | | |
| | | Length Appropriate | 11 | 11 | | | 100% | | | |
| | 4. Thalweg Position | Thalweg centering at upstream of meander bend (Run) | 12 | 12 | | | 100% | | | |
| | | Thalweg centering at downstream of meander bend (Glide) | 12 | 12 | | | 100% | | | |
| Totals | | | | | | | | | | |
| 2. Bank | 1. Scoured/Eroded | Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion | | | 1 | 27 | 99% | 100% | 100% | 100% |
| | 2. Undercut | Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat | | | 0 | 0 | 100% | 100% | 100% | 100% |
| | 3. Mass Wasting | Bank slumping, calving, or collapse | | | 0 | 0 | 100% | 100% | 100% | 100% |
| Totals | | | | | | | | | | |
| 3. Engineered Structures ¹ | 1. Overall Integrity | Structures physically intact with no dislodged boulders or logs. | 1 | 1 | | | 100% | | | |
| | 2. Grade Control | Grade control structures exhibiting maintenance of grade across the sill | 1 | 1 | | | 100% | | | |
| | 2a. Piping | Structures lacking any substantial flow underneath sills or arms. | 1 | 1 | | | 100% | | | |
| | 3. Bank Protection | Bank erosion within the structures extent of influence does not exceed 15%. | 1 | 1 | | | 100% | | | |
| | 4. Habitat | Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow. | 1 | 1 | | | 100% | | | |

¹Excludes constructed riffles since they are evaluated in section 1.

Table 6c. Visual Stream Morphology Stability Assessment Table

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

UT1 - 1,212 LF

| Major Channel Category | Channel Sub-Category | Metric | Number Stable, Performing as Intended | Total Number in As-Built | Number of Unstable Segments | Amount of Unstable Footage | % Stable, Performing as Intended | Number with Stabilizing Woody Vegetation | Footage with Stabilizing Woody Vegetation | Adjust % for Stabilizing Woody Vegetation |
|---------------------------------------------------------|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------------------|-----------------------------|----------------------------|----------------------------------|------------------------------------------|-------------------------------------------|-------------------------------------------|
| 1. Bed | 1. Vertical Stability (Riffle and Run units) | Aggradation | | | 0 | 0 | 100% | | | |
| | | Degradation | | | 0 | 0 | 100% | | | |
| | 2. Riffle Condition | Texture/Substrate | 27 | 27 | | | 100% | | | |
| | 3. Meander Pool Condition | Depth Sufficient | 26 | 26 | | | 100% | | | |
| | | Length Appropriate | 27 | 27 | | | 100% | | | |
| | 4. Thalweg Position | Thalweg centering at upstream of meander bend (Run) | 27 | 27 | | | 100% | | | |
| Thalweg centering at downstream of meander bend (Glide) | | 27 | 27 | 100% | | | | | | |
| 2. Bank | 1. Scoured/Eroded | Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion | | | 0 | 0 | 100% | 100% | 100% | 100% |
| | 2. Undercut | Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat | | | 0 | 0 | 100% | 100% | 100% | 100% |
| | 3. Mass Wasting | Bank slumping, calving, or collapse | | | 0 | 0 | 100% | 100% | 100% | 100% |
| Totals | | | | | 0 | 0 | 100% | 100% | 100% | 100% |
| 3. Engineered Structures ¹ | 1. Overall Integrity | Structures physically intact with no dislodged boulders or logs. | 1 | 1 | | | 100% | | | |
| | 2. Grade Control | Grade control structures exhibiting maintenance of grade across the sill | 1 | 1 | | | 100% | | | |
| | 2a. Piping | Structures lacking any substantial flow underneath sills or arms. | 1 | 1 | | | 100% | | | |
| | 3. Bank Protection | Bank erosion within the structures extent of influence does not exceed 15%. | 1 | 1 | | | 100% | | | |
| | 4. Habitat | Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow. | 1 | 1 | | | 100% | | | |

¹Excludes constructed riffles since they are evaluated in section 1.

Table 6d. Visual Stream Morphology Stability Assessment Table

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 1 - 1,033 LF

| Major Channel Category | Channel Sub-Category | Metric | Number Stable, Performing as Intended | Total Number in As-Built | Number of Unstable Segments | Amount of Unstable Footage | % Stable, Performing as Intended | Number with Stabilizing Woody Vegetation | Footage with Stabilizing Woody Vegetation | Adjust % for Stabilizing Woody Vegetation |
|---------------------------------------|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------------------|-----------------------------|----------------------------|----------------------------------|------------------------------------------|-------------------------------------------|-------------------------------------------|
| 1. Bed | 1. Vertical Stability (Riffle and Run units) | Aggradation | | | 0 | 0 | 100% | | | |
| | | Degradation | | | 0 | 0 | 100% | | | |
| | 2. Riffle Condition | Texture/Substrate | 24 | 24 | | | 100% | | | |
| | 3. Meander Pool Condition | Depth Sufficient | 24 | 24 | | | 100% | | | |
| | | Length Appropriate | 24 | 24 | | | 100% | | | |
| | 4. Thalweg Position | Thalweg centering at upstream of meander bend (Run) | 25 | 25 | | | 100% | | | |
| | | Thalweg centering at downstream of meander bend (Glide) | 25 | 25 | 100% | | | | | |
| 2. Bank | 1. Scoured/Eroded | Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion | | | 0 | 0 | 100% | 100% | 100% | 100% |
| | 2. Undercut | Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat | | | 0 | 0 | 100% | 100% | 100% | 100% |
| | 3. Mass Wasting | Bank slumping, calving, or collapse | | | 0 | 0 | 100% | 100% | 100% | 100% |
| Totals | | | | | 0 | 0 | 100% | 100% | 100% | 100% |
| 3. Engineered Structures ⁴ | 1. Overall Integrity | Structures physically intact with no dislodged boulders or logs. | 2 | 2 | | | 100% | | | |
| | 2. Grade Control | Grade control structures exhibiting maintenance of grade across the sill | 2 | 2 | | | 100% | | | |
| | 2a. Piping | Structures lacking any substantial flow underneath sills or arms. | 2 | 2 | | | 100% | | | |
| | 3. Bank Protection | Bank erosion within the structures extent of influence does not exceed 15%. | 2 | 2 | | | 100% | | | |
| | 4. Habitat | Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow. | 2 | 2 | | | 100% | | | |

⁴Excludes constructed riffles since they are evaluated in section 1.

Table 6e. Visual Stream Morphology Stability Assessment Table

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 2 - 1,416 LF

| Major Channel Category | Channel Sub-Category | Metric | Number Stable, Performing as Intended | Total Number in As-Built | Number of Unstable Segments | Amount of Unstable Footage | % Stable, Performing as Intended | Number with Stabilizing Woody Vegetation | Footage with Stabilizing Woody Vegetation | Adjust % for Stabilizing Woody Vegetation |
|---------------------------------------------------------|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------------------|-----------------------------|----------------------------|----------------------------------|------------------------------------------|-------------------------------------------|-------------------------------------------|
| 1. Bed | 1. Vertical Stability (Riffle and Run units) | Aggradation | | | 0 | 0 | 100% | | | |
| | | Degradation | | | 0 | 0 | 100% | | | |
| | 2. Riffle Condition | Texture/Substrate | 31 | 31 | | | 100% | | | |
| | 3. Meander Pool Condition | Depth Sufficient | 31 | 31 | | | 100% | | | |
| | | Length Appropriate | 33 | 33 | | | 100% | | | |
| | 4. Thalweg Position | Thalweg centering at upstream of meander bend (Run) | 34 | 34 | | | 100% | | | |
| Thalweg centering at downstream of meander bend (Glide) | | 34 | 34 | 100% | | | | | | |
| 2. Bank | 1. Scoured/Eroded | Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion | | | 0 | 0 | 100% | 100% | 100% | 100% |
| | 2. Undercut | Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat | | | 0 | 0 | 100% | 100% | 100% | 100% |
| | 3. Mass Wasting | Bank slumping, calving, or collapse | | | 0 | 0 | 100% | 100% | 100% | 100% |
| Totals | | | | | 0 | 0 | 100% | 100% | 100% | 100% |
| 3. Engineered Structures ¹ | 1. Overall Integrity | Structures physically intact with no dislodged boulders or logs. | 4 | 4 | | | 100% | | | |
| | 2. Grade Control | Grade control structures exhibiting maintenance of grade across the sill | 4 | 4 | | | 100% | | | |
| | 2a. Piping | Structures lacking any substantial flow underneath sills or arms. | 4 | 4 | | | 100% | | | |
| | 3. Bank Protection | Bank erosion within the structures extent of influence does not exceed 15%. | 4 | 4 | | | 100% | | | |
| | 4. Habitat | Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow. | 4 | 4 | | | 100% | | | |

¹Excludes constructed riffles since they are evaluated in section 1.

Table 6f. Visual Stream Morphology Stability Assessment Table

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 3A - 1,041 LF

| Major Channel Category | Channel Sub-Category | Metric | Number Stable, Performing as Intended | Total Number in As-Built | Number of Unstable Segments | Amount of Unstable Footage | % Stable, Performing as Intended | Number with Stabilizing Woody Vegetation | Footage with Stabilizing Woody Vegetation | Adjust % for Stabilizing Woody Vegetation |
|---------------------------------------------------------|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------------------|-----------------------------|----------------------------|----------------------------------|------------------------------------------|-------------------------------------------|-------------------------------------------|
| 1. Bed | 1. Vertical Stability (Riffle and Run units) | Aggradation | | | 0 | 0 | 100% | | | |
| | | Degradation | | | 0 | 0 | 100% | | | |
| | 2. Riffle Condition | Texture/Substrate | 25 | 25 | | | 100% | | | |
| | 3. Meander Pool Condition | Depth Sufficient | 24 | 24 | | | 100% | | | |
| | | Length Appropriate | 24 | 24 | | | 100% | | | |
| | 4. Thalweg Position | Thalweg centering at upstream of meander bend (Run) | 25 | 25 | | | 100% | | | |
| Thalweg centering at downstream of meander bend (Glide) | | 25 | 25 | 100% | | | | | | |
| 2. Bank | 1. Scoured/Eroded | Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion | | | 0 | 0 | 100% | 100% | 100% | 100% |
| | 2. Undercut | Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat | | | 0 | 0 | 100% | 100% | 100% | 100% |
| | 3. Mass Wasting | Bank slumping, calving, or collapse | | | 0 | 0 | 100% | 100% | 100% | 100% |
| Totals | | | | | 0 | 0 | 100% | 100% | 100% | 100% |
| 3. Engineered Structures ¹ | 1. Overall Integrity | Structures physically intact with no dislodged boulders or logs. | 1 | 1 | | | 100% | | | |
| | 2. Grade Control | Grade control structures exhibiting maintenance of grade across the sill | 1 | 1 | | | 100% | | | |
| | 2a. Piping | Structures lacking any substantial flow underneath sills or arms. | 1 | 1 | | | 100% | | | |
| | 3. Bank Protection | Bank erosion within the structures extent of influence does not exceed 15%. | 1 | 1 | | | 100% | | | |
| | 4. Habitat | Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow. | 1 | 1 | | | 100% | | | |

¹Excludes constructed riffles since they are evaluated in section 1.

Table 6g. Visual Stream Morphology Stability Assessment Table

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 3B - 668 LF

| Major Channel Category | Channel Sub-Category | Metric | Number Stable, Performing as Intended | Total Number in As-Built | Number of Unstable Segments | Amount of Unstable Footage | % Stable, Performing as Intended | Number with Stabilizing Woody Vegetation | Footage with Stabilizing Woody Vegetation | Adjust % for Stabilizing Woody Vegetation |
|---------------------------------------|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------------------|-----------------------------|----------------------------|----------------------------------|------------------------------------------|-------------------------------------------|-------------------------------------------|
| 1. Bed | 1. Vertical Stability (Riffle and Run units) | Aggradation | | | 0 | 0 | 100% | | | |
| | | Degradation | | | 0 | 0 | 100% | | | |
| | 2. Riffle Condition | Texture/Substrate | 10 | 10 | | | 100% | | | |
| | 3. Meander Pool Condition | Depth Sufficient | 10 | 10 | | | 100% | | | |
| | | Length Appropriate | 10 | 10 | | | 100% | | | |
| | 4. Thalweg Position | Thalweg centering at upstream of meander bend (Run) | 11 | 11 | | | 100% | | | |
| | | Thalweg centering at downstream of meander bend (Glide) | 11 | 11 | | | 100% | | | |
| 2. Bank | 1. Scoured/Eroded | Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion | | | 0 | 0 | 100% | 100% | 100% | 100% |
| | 2. Undercut | Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat | | | 0 | 0 | 100% | 100% | 100% | 100% |
| | 3. Mass Wasting | Bank slumping, calving, or collapse | | | 0 | 0 | 100% | 100% | 100% | 100% |
| Totals | | | | | 0 | 0 | 100% | 100% | 100% | 100% |
| 3. Engineered Structures ¹ | 1. Overall Integrity | Structures physically intact with no dislodged boulders or logs. | 2 | 2 | | | 100% | | | |
| | 2. Grade Control | Grade control structures exhibiting maintenance of grade across the sill | 2 | 2 | | | 100% | | | |
| | 2a. Piping | Structures lacking any substantial flow underneath sills or arms. | 2 | 2 | | | 100% | | | |
| | 3. Bank Protection | Bank erosion within the structures extent of influence does not exceed 15%. | 2 | 2 | | | 100% | | | |
| | 4. Habitat | Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow. | 2 | 2 | | | 100% | | | |

¹Excludes constructed riffles since they are evaluated in section 1.

Table 7. Vegetation Condition Assessment Table

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Planted Acreage 29.9

| Vegetation Category | Definitions | Mapping Threshold (acres) | Number of Polygons | Combined Acreage | % of Planted Acreage |
|-------------------------------------|------------------------------------------------------------------------------------------------|---------------------------|--------------------|------------------|----------------------|
| Bare Areas | Very limited cover of both woody and herbaceous material | 0.1 | 0 | 0.0 | 0% |
| Low Stem Density Areas ¹ | Woody stem densities clearly below target levels based on MY3, 4, 5, or 7 stem count criteria. | 0.1 | 0 | 0.0 | 0% |
| Total | | | 0 | 0.0 | 0% |
| Areas of Poor Growth Rates or Vigor | Areas with woody stems of a size class that are obviously small given the monitoring year. | 0 | 4 | 2.6 | 9% |
| Cumulative Total | | | 4 | 2.6 | 9% |

Easement Acreage 31.6

| Vegetation Category | Definitions | Mapping Threshold (SF) | Number of Polygons | Combined Acreage | % of Planted Acreage |
|-----------------------------|--------------------------------------------------------------------|------------------------|--------------------|------------------|----------------------|
| Invasive Areas of Concern | Areas or points (if too small to render as polygons at map scale). | 1000 | 4 | 0.0 | 0% |
| Easement Encroachment Areas | Areas or points (if too small to render as polygons at map scale). | none | 0 | 0 | 0% |

¹Acreage calculated from vegetation plots monitored for site.

Stream Photographs



Photo Point 1 – looking upstream (06/08/2018)



Photo Point 1 – looking downstream (06/08/2018)



Photo Point 2 – looking upstream (06/08/2018)



Photo Point 2 – looking downstream (06/08/2018)



Photo Point 3 – looking upstream (06/08/2018)



Photo Point 3 – looking downstream (06/08/2018)



Photo Point 4 – looking upstream (06/08/2018)



Photo Point 4 – looking downstream (06/08/2018)



Photo Point 5 – looking upstream (06/08/2018)



Photo Point 5 – looking downstream (06/08/2018)



Photo Point 6 – looking upstream (06/08/2018)



Photo Point 6 – looking downstream (06/08/2018)



Photo Point 7 – looking upstream (06/08/2018)



Photo Point 7 – looking downstream (06/08/2018)



Photo Point 8 – looking upstream (06/08/2018)



Photo Point 8 – looking downstream (06/08/2018)



Photo Point 9 – looking upstream (06/08/2018)



Photo Point 9 – looking downstream (06/08/2018)



Photo Point 10 – looking upstream (06/08/2018)



Photo Point 10 – looking downstream (06/08/2018)



Photo Point 11 – looking upstream (06/08/2018)



Photo Point 11 – looking downstream (06/08/2018)



Photo Point 12 – looking upstream (06/08/2018)



Photo Point 12 – looking downstream (06/08/2018)



Photo Point 13 – looking upstream (06/08/2018)



Photo Point 13 – looking downstream (06/08/2018)



Photo Point 14 – looking upstream (06/08/2018)



Photo Point 14 – looking downstream (06/08/2018)



Photo Point 15 – looking upstream (06/08/2018)



Photo Point 15 – looking downstream (06/08/2018)



Photo Point 16 – looking upstream (06/08/2018)



Photo Point 16 – looking downstream (06/08/2018)



Photo Point 17 – looking upstream (06/08/2018)



Photo Point 17 – looking downstream (06/08/2018)



Photo Point 18 – looking upstream (06/08/2018)



Photo Point 18 – looking downstream (06/08/2018)



Photo Point 19 – looking upstream (06/08/2018)



Photo Point 19 – looking downstream (06/08/2018)



Photo Point 20 – looking upstream (06/08/2018)



Photo Point 20 – looking downstream (06/08/2018)



Photo Point 21 – looking upstream (06/08/2018)



Photo Point 21 – looking downstream (06/08/2018)



Photo Point 22 – looking upstream (06/08/2018)



Photo Point 22 – looking downstream (06/08/2018)



Photo Point 23 – looking upstream (06/07/2018)



Photo Point 23 – looking downstream (06/07/2018)



Photo Point 24 – looking upstream (06/07/2018)



Photo Point 24 – looking downstream (06/07/2018)



Photo Point 25 – looking upstream (06/07/2018)



Photo Point 25 – looking downstream (06/07/2018)



Photo Point 26 – looking upstream (06/07/2018)



Photo Point 26 – looking downstream (06/07/2018)



Photo Point 27 – looking upstream (06/07/2018)



Photo Point 27 – looking downstream (06/07/2018)



Photo Point 28 – looking upstream (06/07/2018)



Photo Point 28 – looking downstream (06/07/2018)



Photo Point 29 – looking upstream (06/07/2018)



Photo Point 29 – looking downstream (06/07/2018)



Photo Point 30 – looking upstream (06/07/2018)



Photo Point 30 – looking downstream (06/07/2018)



Photo Point 31 – looking upstream (06/07/2018)



Photo Point 31 – looking downstream (06/07/2018)



Photo Point 32 – looking upstream (07/27/2018)



Photo Point 32 – looking downstream (07/27/2018)



Photo Point 33 – looking upstream (06/07/2018)



Photo Point 33 – looking downstream (06/07/2018)



Photo Point 34 – looking upstream (06/07/2018)



Photo Point 34 – looking downstream (06/07/2018)



Photo Point 35 – looking upstream (06/07/2018)



Photo Point 35 – looking downstream (06/07/2018)



Photo Point 36 – looking upstream (06/07/2018)



Photo Point 36 – looking downstream (06/07/2018)



Photo Point 37 – looking upstream (06/07/2018)



Photo Point 37 – looking downstream (06/07/2018)



Photo Point 38 – looking upstream (06/08/2018)



Photo Point 38 – looking downstream (06/08/2018)



Photo Point 39 – looking upstream (06/08/2018)



Photo Point 39 – looking downstream (06/08/2018)



Photo Point 40 – looking upstream (06/07/2018)



Photo Point 40 – looking downstream (06/07/2018)



Photo Point 41 – looking upstream (06/07/2018)



Photo Point 41 – looking downstream (06/07/2018)



Photo Point 42 – looking upstream (06/07/2018)



Photo Point 42 – looking downstream (06/07/2018)



Photo Point 43 – looking upstream (06/07/2018)



Photo Point 43 – looking downstream (06/07/2018)



Photo Point 44 – looking upstream (06/07/2018)



Photo Point 44 – looking downstream (06/07/2018)



Photo Point 45 – looking upstream (06/07/2018)



Photo Point 45 – looking downstream (06/07/2018)



Photo Point 46 – looking upstream (06/08/2018)



Photo Point 46 – looking downstream (06/08/2018)



Photo Point 47 – looking upstream (06/08/2018)



Photo Point 47 – looking downstream (06/08/2018)



Photo Point 48 – looking upstream (06/08/2018)



Photo Point 48 – looking downstream (06/08/2018)



Photo Point 49 – looking upstream (06/08/2018)



Photo Point 49 – looking downstream (06/08/2018)



Photo Point 50 – looking downstream (06/08/2018)



Photo Point 51 – looking upstream (06/08/2018)

Vegetation Photographs



Vegetation Plot 1 – (08/06/2018)



Vegetation Plot 2 – (08/07/2018)



Vegetation Plot 3 – (08/07/2018)



Vegetation Plot 4 – (08/07/2018)



Vegetation Plot 5 – (08/06/2018)



Vegetation Plot 6 – (08/06/2018)



Vegetation Plot 7 – (08/08/2018)



Vegetation Plot 8 – (08/08/2018)



Vegetation Plot 9 – (08/08/2018)



Vegetation Plot 10 – (08/07/2018)



Vegetation Plot 11 – (08/07/2018)



Vegetation Plot 12 – (08/07/2018)



Vegetation Plot 13 – (08/09/2018)



Vegetation Plot 14 – (08/09/2018)



Vegetation Plot 15 – (08/09/2018)



Vegetation Plot 16 – (08/09/2018)



Vegetation Plot 17 – (08/08/2018)



Vegetation Plot 18 – (08/08/2018)



Vegetation Plot 19 – (08/08/2018)



Vegetation Plot 20 – (08/08/2018)



Vegetation Plot 21 – (08/06/2018)



Vegetation Plot 22 – (08/06/2018)



Vegetation Plot 23 – (08/08/2018)



Vegetation Plot 24 – (08/08/2018)



Vegetation Plot 25 – (08/08/2018)



Vegetation Plot 26 – (08/06/2018)

Areas of Concern



Old Scour: Norkett Branch Station 103+00 – 10/9/2018



Bare Bank: Norkett Branch Station 132+75) – 10/17/2018



Invasive Plant Population (Parrotfeather) – 10/17/2018



Poor Woody Growth Norkett Branch – 10/17/2018

APPENDIX 3. Vegetation Plot Data

Table 8. Vegetation Plot Criteria Attainment

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

| Plot | MY5 Success Criteria Met (Y/N) | Tract Mean |
|------|--------------------------------|------------|
| 1 | Y | 100% |
| 2 | Y | |
| 3 | Y | |
| 4 | Y | |
| 5 | Y | |
| 6 | Y | |
| 7 | Y | |
| 8 | Y | |
| 9 | Y | |
| 10 | Y | |
| 11 | Y | |
| 12 | Y | |
| 13 | Y | |
| 14 | Y | |
| 15 | Y | |
| 16 | Y | |
| 17 | Y | |
| 18 | Y | |
| 19 | Y | |
| 20 | Y | |
| 21 | Y | |
| 22 | Y | |
| 23 | Y | |
| 24 | Y | |
| 25 | Y | |
| 26 | Y | |

Table 9. CVS Vegetation Plot Metadata

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

| | |
|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Report Prepared By | Ian Eckardt |
| Date Prepared | 9/19/2018 11:39 |
| database name | cvs-eep-entrytool-v2.3.1 MY5.mdb |
| database location | Q:\ActiveProjects\005-02134 Norkett Branch FDP\Monitoring\Monitoring Year 5\Vegetation Assessment |
| computer name | IAN-PC |
| file size | 46764032 |
| DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT----- | |
| Metadata | Description of database file, the report worksheets, and a summary of project(s) and project data. |
| Proj, planted | Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes. |
| Proj, total stems | Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems. |
| Plots | List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.). |
| Vigor | Frequency distribution of vigor classes for stems for all plots. |
| Vigor by Spp | Frequency distribution of vigor classes listed by species. |
| Damage | List of most frequent damage classes with number of occurrences and percent of total stems impacted by each. |
| Damage by Spp | Damage values tallied by type for each species. |
| Damage by Plot | Damage values tallied by type for each plot. |
| Planted Stems by Plot and Spp | A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded. |
| ALL Stems by Plot and spp | A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded. |
| PROJECT SUMMARY----- | |
| Project Code | 95360 |
| project Name | Norkett Branch Stream Mitigation Site |
| Description | |
| River Basin | |
| length(ft) | 10706 |
| stream-to-edge width (ft) | 50 |
| area (sq m) | 127880.66 |
| Required Plots (calculated) | 22 |
| Sampled Plots | 26 |

Table 10. Planted and Total Stem Counts (Species by Plot with Annual Means)

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

| Scientific Name | Common Name | Species Type | Current Plot Data (MY5 2018) | | | | | | | | | | | | | | | | | | | | |
|---------------------------|---------------------|---------------|------------------------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|
| | | | 95360-WEI-0001 | | | 95360-WEI-0002 | | | 95360-WEI-0003 | | | 95360-WEI-0004 | | | 95360-WEI-0005 | | | 95360-WEI-0006 | | | 95360-WEI-0007 | | |
| | | | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T |
| Acer rubrum | red maple | Tree | | | | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | | | | | | | | | |
| Betula nigra | river birch | Tree | 3 | 3 | 5 | 1 | 1 | 1 | 1 | 1 | 1 | | | | 3 | 3 | 3 | 2 | 2 | 3 | 2 | 2 | 2 |
| Carya sp. | hickory | Tree | | | | | | | | | | | | | | | | | | | | | |
| Celtis laevigata | sugarberry | Tree | | | | | | | | | | | | | | | | | | | | | |
| Cephalanthus occidentalis | common buttonbush | Shrub | | | | | | | | | | | | | | | | | | | | | |
| Cercis canadensis | eastern redbud | Tree | | | | | | | | | | 1 | 1 | 1 | 1 | | | | | | | | |
| Cornus florida | flowering dogwood | Tree | | | | | | | | | | | | | | | | | | | | | |
| Diospyros virginiana | common persimmon | Tree | | | | | | 5 | | | | | | | | | | | | | | | |
| Fraxinus pennsylvanica | green ash | Tree | 2 | 2 | 2 | 5 | 5 | 6 | | | | | | 1 | 1 | 1 | 4 | 4 | 5 | 3 | 3 | 3 | |
| Hamamelis virginiana | American witchhazel | Tree | | | | | | | | | | | | | | | | | | | | | |
| Liquidambar styraciflua | sweetgum | Tree | | | | | | | | | | | | | | | | | | | | | |
| Liriodendron tulipifera | tuliptree | Tree | | | | | | | | | | | | | | | | | | | | | |
| Pinus rigida | pitch pine | Tree | | | | | | | | 1 | | | | | | | | | | | | | |
| Pinus strobus | eastern white pine | Tree | | | | | | | | | | | | | | | | | | | | | |
| Pinus | pine | Tree | | | | | | | | | | | | | | | | | | | | | |
| Platanus occidentalis | American sycamore | Tree | 5 | 5 | 5 | 6 | 6 | 6 | 7 | 7 | 8 | 8 | 8 | 8 | 3 | 3 | 3 | 3 | 3 | 3 | 2 | 2 | 2 |
| Populus deltoides | eastern cottonwood | Tree | | | | | | | | | | | | | | | | | | | | | |
| Quercus michauxii | swamp chestnut oak | Tree | | | | | | | | | | | | | | | | | | | | | |
| Quercus phellos | willow oak | Tree | | | | | | | | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | | | |
| Quercus rubra | northern red oak | Tree | 2 | 2 | 2 | | | | 3 | 3 | 3 | 1 | 1 | 1 | | | | | | | | | |
| Salix | unknown willow | Shrub or Tree | | | | | | | | | | | | | | | | | | | | | |
| Salix nigra | black willow | Tree | | | | | | | | | | | | | | | | | | 1 | | | |
| Sambucus canadensis | common elderberry | Shrub | | | | | | | | | | 1 | 1 | 2 | | | | | | | | | |
| Taxodium distichum | bald cypress | Tree | | | | | | | | | | | | | | | | | | | | | |
| Ulmus alata | winged elm | Tree | | | | | | | | | | | | | | | | | | | | | |
| Ulmus americana | American elm | Tree | | | | | | | | | | | | | | | | | | | | | |
| Unknown | | Shrub or Tree | | | | | | | | | | | | | | | | | | | | | |
| Stem count | | | 12 | 12 | 14 | 13 | 13 | 19 | 12 | 12 | 14 | 12 | 12 | 14 | 9 | 9 | 9 | 10 | 10 | 13 | 7 | 7 | 7 |
| size (ares) | | | 1 | | | 1 | | | 1 | | | 1 | | | 1 | | | 1 | | | 1 | | |
| size (ACRES) | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | |
| Species count | | | 4 | 4 | 4 | 4 | 4 | 5 | 4 | 4 | 5 | 4 | 4 | 5 | 5 | 5 | 5 | 4 | 4 | 5 | 3 | 3 | 3 |
| Stems per ACRE | | | 486 | 486 | 567 | 526 | 526 | 769 | 486 | 486 | 567 | 486 | 486 | 567 | 364 | 364 | 364 | 405 | 405 | 526 | 283 | 283 | 283 |

Color for Density

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Planted Stems excluding live stakes

P-all: All planted stems

T: Total stems including volunteers

* Supplemental planting was performed in MY2 (February 2015) included 6,000 stems or approximately 37% of MY1 stem total.

Supplemental planting performed in MY5 (January 2018) included 400 stems or approximately 3% of MY5 stem total.

Table 10. Planted and Total Stem Counts (Species by Plot with Annual Means)

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

| Scientific Name | Common Name | Species Type | Current Plot Data (MY5 2018) | | | | | | | | | | | | | | | | | | | | |
|---------------------------|---------------------|---------------|------------------------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|---|
| | | | 95360-WEI-0008 | | | 95360-WEI-0009 | | | 95360-WEI-0010 | | | 95360-WEI-0011 | | | 95360-WEI-0012 | | | 95360-WEI-0013 | | | 95360-WEI-0014 | | |
| | | | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T |
| Acer rubrum | red maple | Tree | | | 1 | | | | | | | | | | | | | | | | | | |
| Betula nigra | river birch | Tree | 3 | 3 | 3 | | | | 2 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| Carya sp. | hickory | Tree | | | | | | | | | | | | | | | | | | | | | |
| Celtis laevigata | sugarberry | Tree | | | | | | | | | | | | | | | | | | | | | |
| Cephalanthus occidentalis | common buttonbush | Shrub | | | | | | | | | | | | | | | | | | | | | |
| Cercis canadensis | eastern redbud | Tree | | | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | | | | | | | | |
| Cornus florida | flowering dogwood | Tree | | | | | | | | | | | | | | | | | | | | | |
| Diospyros virginiana | common persimmon | Tree | | | | | | | | | | | | | | | | | | | | | |
| Fraxinus pennsylvanica | green ash | Tree | 5 | 5 | 6 | 2 | 2 | 5 | 2 | 2 | 2 | 6 | 6 | 6 | 1 | 1 | 1 | 2 | 2 | 2 | 3 | 3 | |
| Hamamelis virginiana | American witchhazel | Tree | | | | | | | | | | | | | | | | | | | | | |
| Liquidambar styraciflua | sweetgum | Tree | | | | | | | | | | | | | | | | | | 1 | | | |
| Liriodendron tulipifera | tuliptree | Tree | 1 | 1 | 1 | | | | 2 | 2 | 2 | | | | | | | | | | | | |
| Pinus rigida | pitch pine | Tree | | | | | | | | | | | | | | | | | | | | | |
| Pinus strobus | eastern white pine | Tree | | | | | | | | | | | | | | | | | | | | | |
| Pinus | pine | Tree | | | | | | 1 | | | | | | | | 1 | | | | | | | |
| Platanus occidentalis | American sycamore | Tree | 4 | 4 | 4 | 6 | 6 | 7 | 2 | 2 | 2 | 4 | 4 | 4 | 7 | 7 | 7 | 4 | 4 | 4 | 2 | 2 | |
| Populus deltoides | eastern cottonwood | Tree | | | | | | | | | | | | | | | | | | | | | |
| Quercus michauxii | swamp chestnut oak | Tree | 1 | 1 | 1 | | | | | | | | | | | | | | | | | | |
| Quercus phellos | willow oak | Tree | | | | 2 | 2 | 2 | | | | | | | | | 1 | 1 | 1 | | | | |
| Quercus rubra | northern red oak | Tree | 1 | 1 | 1 | | | | | | | | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| Salix | unknown willow | Shrub or Tree | | | | | | | | | | | | | | | | | | | | | |
| Salix nigra | black willow | Tree | | | | | | | | | | | | 8 | | | | | | | | | |
| Sambucus canadensis | common elderberry | Shrub | | | | | | | | | | | | | | | | | | | | | |
| Taxodium distichum | bald cypress | Tree | 2 | 2 | 2 | | | | | | | | | | | | | | | | | | |
| Ulmus alata | winged elm | Tree | | | | | | 5 | | | | | | | | | | | | | | | |
| Ulmus americana | American elm | Tree | | | | | | | | | | | | | | | | | | 6 | | | |
| Unknown | | Shrub or Tree | | | | | | | | | | | | | | | | | | | | | |
| Stem count | | | 17 | 17 | 19 | 10 | 10 | 20 | 9 | 9 | 9 | 12 | 12 | 20 | 10 | 10 | 11 | 9 | 9 | 16 | 7 | 7 | |
| size (ares) | | | 1 | | | 1 | | | 1 | | | 1 | | | 1 | | | 1 | | | 1 | | |
| size (ACRES) | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | |
| Species count | | | 7 | 7 | 8 | 3 | 3 | 5 | 5 | 5 | 5 | 4 | 4 | 5 | 4 | 4 | 5 | 5 | 5 | 7 | 4 | 4 | |
| Stems per ACRE | | | 688 | 688 | 769 | 405 | 405 | 809 | 364 | 364 | 364 | 486 | 486 | 809 | 405 | 405 | 445 | 364 | 364 | 647 | 283 | 283 | |

Color for Density

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Planted Stems excluding live stakes

P-all: All planted stems

T: Total stems including volunteers

* Supplemental planting was performed in MY2 (February 2015) included 6,000 stems or approximately 37% of MY1 stem total.

Supplemental planting performed in MY5 (January 2018) included 400 stems or approximately 3% of MY5 stem total.

Table 10. Planted and Total Stem Counts (Species by Plot with Annual Means)

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

| Scientific Name | Common Name | Species Type | Current Plot Data (MY5 2018) | | | | | | | | | | | | | | | | | | | | |
|---------------------------|---------------------|---------------|------------------------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|
| | | | 95360-WEI-0015 | | | 95360-WEI-0016 | | | 95360-WEI-0017 | | | 95360-WEI-0018 | | | 95360-WEI-0019 | | | 95360-WEI-0020 | | | 95360-WEI-0021 | | |
| | | | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T |
| Acer rubrum | red maple | Tree | | | | | | | | | | | | | | | | | | | | | |
| Betula nigra | river birch | Tree | 1 | 1 | 1 | | | | 1 | 1 | 1 | | | | 1 | 1 | 1 | 1 | 1 | 1 | | | |
| Carya sp. | hickory | Tree | | | | | | | | | | | | | | | | | | | | | |
| Celtis laevigata | sugarberry | Tree | | | | | | | | | | | | | | | | | | | | | |
| Cephalanthus occidentalis | common buttonbush | Shrub | | | | | | | | | | | | | | | | | | | | | |
| Cercis canadensis | eastern redbud | Tree | | | | 1 | 1 | 1 | | | | | | | | | 1 | 1 | 1 | 4 | 4 | 4 | |
| Cornus florida | flowering dogwood | Tree | | | | | | | | | | | | | | | | | | | | | |
| Diospyros virginiana | common persimmon | Tree | | | | | | | | | | | | | | | | | | | | | |
| Fraxinus pennsylvanica | green ash | Tree | 4 | 4 | 4 | 3 | 3 | 3 | 3 | 3 | 5 | 3 | 3 | 3 | 3 | 3 | 4 | 3 | 3 | 3 | | | |
| Hamamelis virginiana | American witchhazel | Tree | | | | | | | | | | | | | | | | | | 2 | 2 | 2 | |
| Liquidambar styraciflua | sweetgum | Tree | | | | | | | | | 4 | | | | | | | | 1 | | | | |
| Liriodendron tulipifera | tuliptree | Tree | | | | | | | | | | | | | 1 | 1 | 1 | | | 1 | 1 | 1 | |
| Pinus rigida | pitch pine | Tree | | | | | | | | | | | | | | | | | | | | | |
| Pinus strobus | eastern white pine | Tree | | | | | | | | | | | | | | | | | | | | | |
| Pinus | pine | Tree | | | | | | | | | | | | | | | | | | | | 2 | |
| Platanus occidentalis | American sycamore | Tree | 3 | 3 | 3 | 1 | 1 | 1 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 6 | 6 | 6 | |
| Populus deltoides | eastern cottonwood | Tree | | | | | | | | | | | | | | | | | | | | | |
| Quercus michauxii | swamp chestnut oak | Tree | | | | | | | | | | | | | 1 | 1 | 1 | 1 | 1 | 1 | | | |
| Quercus phellos | willow oak | Tree | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 1 | 1 | 1 |
| Quercus rubra | northern red oak | Tree | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | | | 1 | 1 | 1 | |
| Salix | unknown willow | Shrub or Tree | | | | | | | | | | | | | | | | | | | | | |
| Salix nigra | black willow | Tree | | | | | | | | | | | | | | | | | | | | | |
| Sambucus canadensis | common elderberry | Shrub | | | | | | | | | | | | | | | | | | | | | |
| Taxodium distichum | bald cypress | Tree | | | | | | | | | | | | | | | 1 | | | | | | |
| Ulmus alata | winged elm | Tree | | | | | | 2 | | | 4 | | | | | 5 | | | 3 | | | | |
| Ulmus americana | American elm | Tree | | | | | | | | | | | | | | | | | | | | | |
| Unknown | | Shrub or Tree | | | | | | | | | | | | | | | | | | | | | |
| Stem count | | | 10 | 10 | 10 | 7 | 7 | 9 | 12 | 12 | 22 | 9 | 9 | 9 | 12 | 12 | 22 | 12 | 12 | 16 | 15 | 15 | 17 |
| size (ares) | | | 1 | | | 1 | | | 1 | | | 1 | | | 1 | | | 1 | | | 1 | | |
| size (ACRES) | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | |
| Species count | | | 5 | 5 | 5 | 5 | 5 | 6 | 5 | 5 | 7 | 4 | 4 | 4 | 7 | 7 | 10 | 6 | 6 | 8 | 6 | 6 | 7 |
| Stems per ACRE | | | 405 | 405 | 405 | 283 | 283 | 364 | 486 | 486 | 890 | 364 | 364 | 364 | 486 | 486 | 890 | 486 | 486 | 647 | 607 | 607 | 688 |

Color for Density

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Planted Stems excluding live stakes

P-all: All planted stems

T: Total stems including volunteers

* Supplemental planting was performed in MY2 (February 2015) included 6,000 stems or approximately 37% of MY1 stem total.

Supplemental planting performed in MY5 (January 2018) included 400 stems or approximately 3% of MY5 stem total.

Table 10. Planted and Total Stem Counts (Species by Plot with Annual Means)

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

| Scientific Name | Common Name | Species Type | Current Plot Data (MY5 2018) | | | | | | | | | | | | | | |
|---------------------------|---------------------|---------------|------------------------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|----------------|-------|-----|
| | | | 95360-WEI-0022 | | | 95360-WEI-0023 | | | 95360-WEI-0024 | | | 95360-WEI-0025 | | | 95360-WEI-0026 | | |
| | | | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T |
| Acer rubrum | red maple | Tree | | | | | | | | | | | | | | | |
| Betula nigra | river birch | Tree | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | |
| Carya sp. | hickory | Tree | | | | | | | | | | | | | | | |
| Celtis laevigata | sugarberry | Tree | | | | | | | | | | | | | | | |
| Cephalanthus occidentalis | common buttonbush | Shrub | | | | | | | | | | | | | | | |
| Cercis canadensis | eastern redbud | Tree | | | | 1 | 1 | 1 | | | | 1 | 1 | 1 | | | |
| Cornus florida | flowering dogwood | Tree | | | | | | | | | | 1 | 1 | 1 | | | |
| Diospyros virginiana | common persimmon | Tree | | | | | | | | | | | | | | | |
| Fraxinus pennsylvanica | green ash | Tree | 6 | 6 | 6 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 4 | 4 | 4 | |
| Hamamelis virginiana | American witchhazel | Tree | | | | | | | | | | | | 1 | 1 | 1 | |
| Liquidambar styraciflua | sweetgum | Tree | | | 1 | | | | | | | | | | | | |
| Liriodendron tulipifera | tuliptree | Tree | | | | 1 | 1 | 1 | | | | 1 | 1 | 1 | | 1 | |
| Pinus rigida | pitch pine | Tree | | | | | | | | | | | | | | | |
| Pinus strobus | eastern white pine | Tree | | | | | | | | | | | | | | | |
| Pinus | pine | Tree | | | | | | 2 | | | | | | | | | |
| Platanus occidentalis | American sycamore | Tree | 5 | 5 | 5 | 3 | 3 | 3 | 4 | 4 | 4 | 2 | 2 | 2 | 2 | 2 | |
| Populus deltoides | eastern cottonwood | Tree | | | | | | | | | | | | | | | |
| Quercus michauxii | swamp chestnut oak | Tree | | | | | | | | | | 1 | 1 | 1 | | | |
| Quercus phellos | willow oak | Tree | 2 | 2 | 2 | 2 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | | | |
| Quercus rubra | northern red oak | Tree | | | | 2 | 2 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | |
| Salix | unknown willow | Shrub or Tree | | | | | | | | | | | | | | | |
| Salix nigra | black willow | Tree | | | | | | | | | | | | | | | |
| Sambucus canadensis | common elderberry | Shrub | | | 1 | | | | | | | | | | | | |
| Taxodium distichum | bald cypress | Tree | | | | | | | | | | | | | | | |
| Ulmus alata | winged elm | Tree | | | | | | | | | | | | | | | |
| Ulmus americana | American elm | Tree | | | | | | | | | | | | | | | |
| Unknown | | Shrub or Tree | | | | | | | | | | | | | | | |
| Stem count | | | 14 | 14 | 16 | 13 | 13 | 15 | 10 | 10 | 10 | 12 | 12 | 12 | 9 | 9 | 10 |
| size (ares) | | | 1 | | | 1 | | | 1 | | | 1 | | | 1 | | |
| size (ACRES) | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | | 0.02 | | |
| Species count | | | 4 | 4 | 6 | 7 | 7 | 8 | 5 | 5 | 5 | 9 | 9 | 9 | 4 | 4 | 5 |
| Stems per ACRE | | | 567 | 567 | 647 | 526 | 526 | 607 | 405 | 405 | 405 | 486 | 486 | 486 | 364 | 364 | 405 |

Color for Density

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Planted Stems excluding live stakes

P-all: All planted stems

T: Total stems including volunteers

* Supplemental planting was performed in MY2 (February 2015) included 6,000 stems or approximately 37% of MY1 stem total. Supplemental planting performed in MY5 (January 2018) included 400 stems or approximately 3% of MY5 stem total.

Table 10. Planted and Total Stem Counts (Species by Plot with Annual Means)

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

| Scientific Name | Common Name | Species Type | Annual Summary | | | | | | | | | | | | | | | | | |
|---------------------------|---------------------|---------------|----------------|-------|-----|--------------|-------|-----|--------------|-------|-----|--------------|-------|-----|--------------|-------|-----|--------------|-------|-----|
| | | | MY5 (8/2018) | | | MY4 (8/2017) | | | MY3 (6/2016) | | | MY2 (9/2015) | | | MY1 (9/2014) | | | MY0 (4/2014) | | |
| | | | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T | PnoLS | P-all | T |
| Acer rubrum | red maple | Tree | 4 | 4 | 5 | 4 | 4 | 7 | 4 | 4 | 6 | 4 | 4 | 4 | | | | | | |
| Betula nigra | river birch | Tree | 29 | 29 | 32 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 25 | 25 | 25 | 32 | 32 | 32 |
| Carya sp. | hickory | Tree | | | | | | | | | 6 | | | | | | | | | |
| Celtis laevigata | sugarberry | Tree | | | | | | 6 | | | | | | | 1 | 1 | 1 | 7 | 7 | 7 |
| Cephalanthus occidentalis | common buttonbush | Shrub | | | | | | 2 | 1 | 1 | 1 | 1 | 1 | 2 | | | | | | |
| Cercis canadensis | eastern redbud | Tree | 11 | 11 | 12 | 10 | 10 | 10 | 12 | 12 | 12 | 14 | 14 | 14 | 25 | 25 | 25 | 42 | 42 | 42 |
| Cornus florida | flowering dogwood | Tree | 1 | 1 | 1 | | | | 8 | 8 | 8 | 10 | 10 | 10 | 48 | 48 | 48 | 75 | 75 | 75 |
| Diospyros virginiana | common persimmon | Tree | | | 5 | | | 3 | | | 2 | | | 3 | | | | | | |
| Fraxinus pennsylvanica | green ash | Tree | 74 | 74 | 83 | 75 | 75 | 83 | 76 | 76 | 82 | 73 | 73 | 75 | 63 | 63 | 63 | 67 | 67 | 67 |
| Hamamelis virginiana | American witchhazel | Tree | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 7 | 7 | 7 | 8 | 8 | 8 |
| Liquidambar styraciflua | sweetgum | Tree | | | 10 | | | 9 | | | | | | 5 | | | | | | |
| Liriodendron tulipifera | tuliptree | Tree | 7 | 7 | 8 | 6 | 6 | 6 | 9 | 9 | 16 | 11 | 11 | 11 | 24 | 24 | 24 | 59 | 59 | 59 |
| Pinus rigida | pitch pine | Tree | | | | | | 2 | | | | | | | | | | | | |
| Pinus strobus | eastern white pine | Tree | | | | | | 1 | | | | | | | | | | | | |
| Pinus | pine | Tree | | | 7 | | | | | | | | | | | | | | | |
| Platanus occidentalis | American sycamore | Tree | 105 | 105 | 107 | 100 | 100 | 100 | 105 | 105 | 106 | 106 | 106 | 106 | 67 | 67 | 67 | 57 | 57 | 57 |
| Populus deltoides | eastern cottonwood | Tree | | | | | | 1 | | | 1 | | | 1 | | | | | | |
| Quercus michauxii | swamp chestnut oak | Tree | 4 | 4 | 4 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 18 | 18 | 18 | 36 | 36 | 36 | |
| Quercus phellos | willow oak | Tree | 20 | 20 | 20 | 17 | 17 | 17 | 19 | 19 | 19 | 20 | 20 | 20 | 34 | 34 | 34 | 27 | 27 | 27 |
| Quercus rubra | northern red oak | Tree | 23 | 23 | 23 | 19 | 19 | 19 | 20 | 20 | 20 | 23 | 23 | 23 | 24 | 24 | 24 | 24 | 24 | 24 |
| Salix | unknown willow | Shrub or Tree | | | | | | 5 | | | | | | | | | | | | |
| Salix nigra | black willow | Tree | | | 9 | | | | | | 7 | | | 1 | | | | | | |
| Sambucus canadensis | common elderberry | Shrub | 1 | 1 | 2 | 1 | 1 | 1 | 2 | 2 | 3 | 2 | 2 | 2 | 10 | 10 | 11 | 13 | 13 | 13 |
| Taxodium distichum | bald cypress | Tree | 2 | 2 | 3 | | | | | | | 1 | 1 | 1 | | | | | | |
| Ulmus alata | winged elm | Tree | | | 19 | | | 15 | | | 17 | | | 6 | | | | | | |
| Ulmus americana | American elm | Tree | | | 6 | | | | | | | | | | | | | | | |
| Unknown | | Shrub or Tree | | | | | | 1 | | | | | | | | | | | | |
| Stem count | | | 284 | 284 | 359 | 269 | 269 | 325 | 293 | 293 | 343 | 302 | 302 | 321 | 346 | 346 | 347 | 447 | 447 | 447 |
| size (ares) | | | 26 | | | 26 | | | 26 | | | 26 | | | 26 | | | 26 | | |
| size (ACRES) | | | 0.64 | | | 0.64 | | | 0.64 | | | 0.64 | | | 0.64 | | | 0.64 | | |
| Species count | | | 13 | 13 | 19 | 11 | 11 | 21 | 13 | 13 | 18 | 14 | 14 | 19 | 12 | 12 | 12 | 12 | 12 | 12 |
| Stems per ACRE | | | 442 | 442 | 559 | 419 | 419 | 506 | 456 | 456 | 534 | 470 | 470 | 500 | 539 | 539 | 540 | 696 | 696 | 696 |

Color for Density

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Planted Stems excluding live stakes

P-all: All planted stems

T: Total stems including volunteers

* Supplemental planting was performed in MY2 (February 2015) included 6,000 stems or approximately 37% of MY1 stem total. Supplemental planting performed in MY5 (January 2018) included 400 stems or approximately 3% of MY5 stem total.

APPENDIX 4. Morphological Summary Data and Plots

Table 11a. Baseline Stream Data Summary

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Norkett Branch Reaches 1 and 2

| Parameter | Gage | PRE-RESTORATION CONDITION | | | | REFERENCE REACHES | | | | | | DESIGN | | | | AS-BUILT/BASELINE | | | |
|----------------------------------------------------|------|---------------------------|----------------------------|------------------------|--------|-------------------|--------|---------------------|--------|---------------------------|------------------|------------------------|------------------|------------------------|----------------------------|-------------------------------|--------|------------------------|-----|
| | | Norkett Branch Reach 1 | | Norkett Branch Reach 2 | | Spencer Creek | | UT to Spencer Creek | | UT Richland Creek Reach 2 | | Norkett Branch Reach 1 | | Norkett Branch Reach 2 | | Norkett Branch Reach 1 | | Norkett Branch Reach 2 | |
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| Dimension and Substrate - Riffle | | | | | | | | | | | | | | | | | | | |
| Bankfull Width (ft) | n/a | 12.8 | 21.5 | 22.0 | 29.5 | 10.7 | 11.2 | 7.0 | 13.3 | 15.2 | 22.0 | 23.0 | 22.5 | 26.6 | 25.6 | 25.7 | | | |
| Floodprone Width (ft) | | 35 | 58 | 72 | 85 | 60 | 114+ | >81 | >50 | | 48 | >110 | 61 | >115 | >200 | >200 | >200 | >200 | |
| Bankfull Mean Depth | | 1.7 | 1.8 | 1.4 | 2.4 | 1.6 | 1.8 | 2.0 | 1.1 | 1.3 | 1.8 | 1.9 | 1.6 | 1.8 | 1.8 | 2.0 | | | |
| Bankfull Max Depth | | 3.1 | 3.2 | 2.3 | 2.9 | 2.1 | 2.6 | 1.1 | 1.8 | 2.1 | 2.8 | 2.8 | 2.6 | 3.3 | 3.0 | 3.3 | | | |
| Bankfull Cross-sectional Area (ft ²) | | 28.1 | 35.6 | 40.6 | 52.8 | 17.8 | 19.7 | 7.7 | 16.5 | 17.5 | 40.6 | 43.2 | 38.8 | 44.6 | 46.7 | 50.8 | | | |
| Width/Depth Ratio | | 5.9 | 13.0 | 9.2 | 21.4 | 5.8 | 7.1 | 6.4 | 10.1 | 13.9 | 11.9 | 12.2 | 13.1 | 16.7 | 13.0 | 14.1 | | | |
| Entrenchment Ratio | | 2.1 | 4.5 | 2.9 | 3.3 | 5.5 | 10.2 | >11.6 | >2.5 | | 2.2 | >5.0 | 2.2 | >5.0 | >2.2 | >2.2 | | | |
| Bank Height Ratio | | 1.0 | 1.4 | 1.3 | 1.6 | 1.0 | | 1.0 | 1.0 | | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | | | |
| D50 (mm) | | 8.6 | | 0.4 | | | | | | | | | 18.4 | 59.6 | 7.3 | 9.9 | | | |
| Profile | | | | | | | | | | | | | | | | | | | |
| Riffle Length (ft) | n/a | | | | | | | | | | | | | | 14 | 84 | 19 | 111 | |
| Riffle Slope (ft/ft) | | 0.0036 | 0.0039 | 0.0032 | 0.0120 | 0.0130 | 0.0140 | 0.0183 | 0.0355 | 0.0018 | 0.0120 | 0.0023 | 0.0180 | 0.0000 | 0.0152 | 0.0009 | 0.0163 | | |
| Pool Length (ft) | | | | | | | | | | | | | | 12 | 88 | 51 | 102 | | |
| Pool Max Depth (ft) | | 4.0 | 4.0 | 2.9 | 4.0 | 3.3 | 2.5 | 1.8 | | 2.8 | 7.8 | 2.8 | 7.9 | 3.3 | 5.1 | 3.5 | 4.8 | | |
| Pool Spacing (ft) ^a | | 62 | 300 | 60 | 300 | 71.0 | 19 | 42 | 33.0 | 93.0 | 29 | 163 | 30 | 170 | 67 | 183 | 98 | 172 | |
| Pool Volume (ft ³) | | | | | | | | | | | | | | | | | | | |
| Pattern | | | | | | | | | | | | | | | | | | | |
| Channel Beltwidth (ft) | n/a | N/A | N/A | N/A | N/A | 38 | 41 | 11 | 27 | N/A | 35 | 161 | 37 | 168 | 38 | 147 | 38 | 155 | |
| Radius of Curvature (ft) | | N/A | N/A | N/A | N/A | 11 | 15 | 6 | 16 | N/A | 40 | 66 | 41 | 69 | 38 | 65 | 40 | 64 | |
| Rc:Bankfull Width (ft/ft) | | N/A | N/A | N/A | N/A | 1.0 | 1.3 | 0.8 | 2.3 | N/A | 1.8 | 3.0 | 1.8 | 3.0 | 1.7 | 2.4 | 1.6 | 2.5 | |
| Meander Length (ft) | | N/A | N/A | N/A | N/A | 46 | 48 | 37.7 | 43 | N/A | 66 | 264 | 69 | 276 | 167 | 263 | 181 | 277 | |
| Meander Width Ratio | | N/A | N/A | N/A | N/A | 3.6 | 3.7 | 1.6 | 3.8 | N/A | 1.6 | 7.3 | 1.6 | 7.3 | 1.7 | 5.5 | 1.5 | 6.0 | |
| Substrate, Bed and Transport Parameters | | | | | | | | | | | | | | | | | | | |
| Ri%/Ru%/P%/G%/S% | n/a | | | | | | | | | | | | | | | | | | |
| SC%/Sa%/G%/C%/B%/Be% | | | | | | | | | | | | | | | | | | | |
| d16/d35/d50/d84/d95/d100 | | SC/4.6/8.7/28.5/64/2048 | SC/SC/0.4/21.1/>2048/>2048 | | | | | | | | | | | | 0.4/3.6/7.4/52.3/139.4/362 | 2.6/6.7/13.0/62.6/210.9/>2048 | | | |
| Reach Shear Stress (Competency) lb/ft ² | | 0.41 | 0.44 | 0.17 | 0.38 | | | | | | 0.28 | 0.40 | 0.27 | 0.29 | 0.30 | 0.32 | | | |
| Max part size (mm) mobilized at bankfull | | | | | | | | | | | 15-25 | 20-35 | 15-25 | 20-35 | | | | | |
| Stream Power (Capacity) W/m ² | | | | | | | | | | | | | | | | | | | |
| Additional Reach Parameters | | | | | | | | | | | | | | | | | | | |
| Drainage Area (SM) | n/a | 2.3 | 3.2 | 0.96 | 0.01 | 0.28 | 2.3 | 3.2 | 2.3 | 3.2 | 2.3 | 3.2 | 2.3 | 3.2 | 2.3 | 3.2 | | | |
| Watershed Impervious Cover Estimate (%) | | <1% ¹ | <1% ¹ | | | | | | | | <1% ¹ | <1% ¹ | <1% ¹ | <1% ¹ | <1% ¹ | <1% ¹ | | | |
| Rosgen Classification | | E4 | C/E5 | E4 | E5 | C4/E4 | C4 | C5 | C4 | C5 | C4 | C4 | C4/E4 | | | | | | |
| Bankfull Velocity (fps) | | 3.5 | 4.0 | 2.5 | 3.5 | 4.9 | 5.4 | 3.2 | 3.5 | 4.1 | 2.8 | 3.3 | 2.6 | 2.8 | 2.8 | 2.9 | | | |
| Bankfull Discharge (cfs) | | 110 | 140 | 97 | 25 | 29 | 32 | 110 | 140 | 105 | 124 | 130 | 148 | | | | | | |
| Q-NFF regression | | | | | | | | | | | | | | | | | | | |
| Q-USGS extrapolation | | | | | | | | | | | | | | | | | | | |
| Q-Mannings | | | | | | | | | | | | | | | | | | | |
| Valley Length (ft) | | | | | | | | | | | 1,910 | 1,249 | 1,910 | 1,249 | | | | | |
| Channel Thalweg Length (ft) ² | | 1,980 | 1,505 | | | | | | | | 2,369 | 1,499 | 2,369 | 1,499 | | | | | |
| Sinuosity (ft) ² | | 1.10 | 1.10 | 2.30 | 2.50 | 1.00 | 1.24 | 1.20 | 1.24 | 1.20 | | | | | | | | | |
| Water Surface Slope (ft/ft) ² | | 0.0039 | 0.0013 | 0.0046 | | | | | | | 0.0025 | 0.0036 | 0.0031 | 0.0033 | | | | | |
| Bankfull Slope (ft/ft) | | | | | | | | | | | | | 0.0029 | 0.0034 | | | | | |

¹ No impervious land use is present within the project watershed per the CGIA Land Use Classification data set.

² Channel Length represented does not include easement breaks.

(---): Data was not provided

N/A: Not Applicable

SC: Silt/Clay

Table 11b. Baseline Stream Data Summary

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

UT1 and UT2 Reaches 1 and 2

| Parameter | Gage | PRE-RESTORATION CONDITION | | | | | | REFERENCE REACHES | DESIGN | | | | | | AS BUILT/ BASELINE | | | | | | | | | | | | | | | | | | | | | |
|----------------------------------------------------|------|---------------------------|-------|---------------------------|-------|---------------------------|-------|-------------------|------------------|-------|------------------|---------------|------------------|-------|--------------------|-------|------------------|-------------------------|------------------|--------------------------|-------|-----------------------------|-------|--|-------|--|-------|--|-------|--|-------|--|-----|--|-----|--|
| | | UT1 | | UT2 Reach 1 | | UT2 Reach 2 | | See Table 11a | UT1 | | UT2 Reach 1 | | UT2 Reach 2 | | UT1 | | UT2 Reach 1 | | UT2 Reach 2 | | | | | | | | | | | | | | | | | |
| | | Min | Max | Min | Max | Min | Max | Min | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | | | | | | | | | | | | | | | | |
| Dimension and Substrate - Riffle | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Bankfull Width (ft) | n/a | 2.9 | 8.2 | 13.6 | | 7.1 | | See Table 11a | 7.5 | | 8.0 | | 8.0 | | 10.5 | | 9.4 | | 9.0 | | 9.6 | | | | | | | | | | | | | | | |
| Floodprone Width (ft) | | 6 | 40 | 29 | | 53 | | | 16.5 | >38 | >40 | | >40 | | 136 | | 144 | | >200 | | >200 | | | | | | | | | | | | | | | |
| Bankfull Mean Depth | | 0.9 | 1 | 0.6 | | 0.7 | | | 0.6 | | 0.6 | | 0.7 | | 0.4 | | 0.5 | | 0.5 | | 0.6 | | | | | | | | | | | | | | | |
| Bankfull Max Depth | | 1.2 | 2 | 1 | | 1.5 | | | 0.9 | | 0.9 | | 1.0 | | 0.8 | | 1.2 | | 1.1 | | 1.2 | | | | | | | | | | | | | | | |
| Bankfull Cross-sectional Area (ft ²) | | 2.6 | 8.6 | 7.9 | | 5.1 | | | 4.6 | | 4.6 | | 5.3 | | 4.5 | | 4.5 | | 5.2 | | 5.3 | | | | | | | | | | | | | | | |
| Width/Depth Ratio | | 2.6 | 8.6 | 23.4 | | 9.8 | | | 12.2 | | 13.9 | | 12.1 | | 24.5 | | 19.8 | | 15.3 | | 17.6 | | | | | | | | | | | | | | | |
| Entrenchment Ratio | | 2.2 | 4.9 | >7 | | >8 | | | 2.2 | | >5 | | >5 | | >2.2 | | >2.2 | | >2.2 | | >2.2 | | | | | | | | | | | | | | | |
| Bank Height Ratio | | 1.5 | 2.4 | 1 | | 1 | | | 1 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | | | | | | | | | | | | | | |
| D50 (mm) | | SC | | 7.3 | | 7.3 | | | | | | | | | 20.9 | | 19.5 | | 20.1 | | 27.4 | | | | | | | | | | | | | | | |
| Profile | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Riffle Length (ft) | n/a | | | | | | | See Table 11a | --- | | --- | | --- | | 7 | | 39 | | 7 | | 34 | | 6 | | 27 | | | | | | | | | | | |
| Riffle Slope (ft/ft) | | 0.017 | 0.054 | 0.009 | | 0.032 | | | 0.013 | | 0.045 | | 0.01 | | 0.032 | | 0.013 | | 0.028 | | 0.007 | | 0.044 | | 0.006 | | 0.037 | | 0.009 | | 0.039 | | | | | |
| Pool Length (ft) | | | | | | | | | --- | | --- | | --- | | 12 | | 69 | | 11 | | 35 | | 11 | | 45 | | | | | | | | | | | |
| Pool Max Depth (ft) | | 1.4 | 1.7 | 1.3 | | 2.5 | | | 0.9 | | 2.6 | | 0.9 | | 2.4 | | 1.0 | | 2.8 | | 1.2 | | 2.5 | | 1.5 | | 2.6 | | 1.5 | | 2.5 | | | | | |
| Pool Spacing (ft) ^A | | 61 | 295 | 190 | | 51 | | | 130 | | 10 | | 56 | | 10 | | 56 | | 30 | | 58 | | 21 | | 64 | | 22 | | 71 | | | | | | | |
| Pool Volume (ft ³) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pattern | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Channel Beltwidth (ft) | n/a | N/A | | N/A | | N/A | | 26.9 | | 49.5 | | See Table 11a | 12 | | 55 | | 13 | | 44 | | 13 | | 44 | | 13 | | 49 | | 10 | | 42 | | 12 | | 52 | |
| Radius of Curvature (ft) | | N/A | | N/A | | N/A | | 6.92 | | 33.39 | | | 12 | | 23 | | 13.0 | | 24.0 | | 13 | | 24 | | 14 | | 23 | | 15 | | 21 | | 14 | | 22 | |
| Rc:Bankfull Width (ft/ft) | | N/A | | N/A | | N/A | | 0.98 | | 4.73 | | | 1.6 | | 3 | | 1.6 | | 3.0 | | 1.6 | | 3 | | 1.3 | | 2.2 | | 1.6 | | 2.2 | | 1.6 | | 2.3 | |
| Meander Length (ft) | | N/A | | N/A | | N/A | | 83.5 | | 141.4 | | | 23 | | 90 | | 24.0 | | 96.0 | | 24 | | 96 | | 61 | | 88 | | 45 | | 92 | | 44 | | 83 | |
| Meander Width Ratio | | N/A | | N/A | | N/A | | 3.8 | | 7.01 | | | 1.6 | | 7.3 | | 1.6 | | 5.5 | | 1.6 | | 5.5 | | 1.2 | | 4.7 | | 1.0 | | 4.4 | | 1.3 | | 5.4 | |
| Substrate, Bed and Transport Parameters | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Ri%/Ru%/P%/G%/S% | n/a | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SC%/Sa%/G%/C%/B%/Be% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| d16/d35/d50/d84/d95/d100 | | SC/SC/SC/0.77/9.38/>2048 | | SC/SC/7.3/47.7/85.7/>2048 | | SC/SC/7.3/47.7/85.7/>2048 | | See Table 11a | | | | | | | | | | SC/1.0/12.7/55.3/90/256 | | SC/7.1/12.2/28.5/42.9/90 | | 2.4/11.6/20.7/56.1/86.7/180 | | | | | | | | | | | | | | |
| Reach Shear Stress (Competency) lb/ft ² | | 0.57 | 0.82 | 0.14 | | 0.42 | | 0.38 | | 0.18 | | 0.27 | | 0.27 | | 0.16 | | 0.21 | | 0.23 | | | | | | | | | | | | | | | | |
| Max part size (mm) mobilized at bankfull | | | | | | | | 20-35 | | 10-20 | | 15-25 | | 15-25 | | 10-20 | | 15-25 | | | | | | | | | | | | | | | | | | |
| Stream Power (Capacity) W/m ² | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Additional Reach Parameters | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Drainage Area (SM) | n/a | 0.08 | | 0.40 | | 0.48 | | See Table 5a | 0.08 | | 0.15 | | 0.22 | | 0.08 | | 0.15 | | 0.22 | | | | | | | | | | | | | | | | | |
| Watershed Impervious Cover Estimate (%) | | <1% ¹ | | <1% ¹ | | <1% ¹ | | | <1% ¹ | | <1% ¹ | | <1% ¹ | | <1% ¹ | | <1% ¹ | | <1% ¹ | | | | | | | | | | | | | | | | | |
| Rosgen Classification | | E6 | | C/E4 | | E4 | | | C/E6 | | C/E4 | | C/E4 | | C4 | | C4 | | C4 | | | | | | | | | | | | | | | | | |
| Bankfull Velocity (fps) | | 3.3 | 4.2 | 1.4 | | 3.4 | | | 2.6 | | 2.4 | | 3.2 | | 2.1 | | 1.6 | | 1.9 | | 2.0 | | | | | | | | | | | | | | | |
| Bankfull Discharge (cfs) | | 12 | | 11 | | 17 | | | 12 | | 11 | | 17 | | 10 | | 7 | | 10 | | 11 | | | | | | | | | | | | | | | |
| Q-NFF regression | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Q-USGS extrapolation | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Q-Mannings | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Valley Length (ft) | | 840 | | 820 | | 1156 | | | 998 | | 866 | | 1108 | | 998 | | 866 | | 1108 | | | | | | | | | | | | | | | | | |
| Channel Thalweg Length (ft) ² | 840 | | 820 | | 1,272 | | 1,198 | | 1,039 | | 1,440 | | 1,198 | | 1,039 | | 1,440 | | | | | | | | | | | | | | | | | | | |
| Sinuosity (ft) ³ | 1.0 | | 1.0 | | 1.1 | | 1.20 | | 1.20 | | 1.30 | | 1.20 | | 1.20 | | 1.30 | | | | | | | | | | | | | | | | | | | |
| Water Surface Slope (ft/ft) ² | 0.15 | | 0.004 | | 0.012 | | 0.010 | | 0.005 | | 0.007 | | 0.011 | | 0.006 | | 0.007 | | | | | | | | | | | | | | | | | | | |
| Bankfull Slope (ft/ft) | | | | | | | --- | | --- | | --- | | 0.011 | | 0.006 | | 0.007 | | | | | | | | | | | | | | | | | | | |

¹ No impervious land use is present within the project watershed per the CGIA Land Use Classification data set.

² Channel Length represented does not include easement breaks.

(---): Data was not provided

N/A: Not Applicable

SC: Silt/Clay

Table 11c. Baseline Stream Data Summary

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reaches 3A and 3B

| Parameter | Gage | RE-RESTORATION CONDITION | | REFERENCE REACHES | | DESIGN | | | | AS BUILT/BASELINE | | | | | |
|----------------------------------------------------|-------|---------------------------|-------|-------------------|-------|------------------|-------|------------------|-------|-------------------|-----|----------------------------|-----|---------------------------|--|
| | | UT2 Reach 3 | | See Table 11a | | UT2 Reach 3A | | UT2 Reach 3B | | UT2 Reach 3A | | UT2 Reach 3B | | | |
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | | |
| Dimension and Substrate - Riffle | | | | | | | | | | | | | | | |
| Bankfull Width (ft) | n/a | 7.5 | | See Table 11a | | 9.0 | | 11.0 | | 10.5 | | 13.9 | | | |
| Floodprone Width (ft) | | 24 | | | | 45+ | | 55+ | | >200 | | 130 | | | |
| Bankfull Mean Depth | | 1.1 | | | | 0.8 | | 1.0 | | 0.7 | | 0.8 | | | |
| Bankfull Max Depth | | 1.6 | | | | 1.2 | | 1.5 | | 1.2 | | 1.6 | | | |
| Bankfull Cross-sectional Area (ft ²) | | 8.3 | | | | 6.9 | | 10.8 | | 7.2 | | 11.8 | | | |
| Width/Depth Ratio | | 6.7 | | | | 11.7 | | 11.2 | | 15.3 | | 16.5 | | | |
| Entrenchment Ratio | | 3.2 | | | | 5.0+ | | 5.0+ | | >2.2 | | >2.2 | | | |
| Bank Height Ratio | | 1.3 | 1.8 | | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | | |
| D50 (mm) | | 7.32 | | | | | | | | | | 32.0 | | 33.4 | |
| Profile | | | | | | | | | | | | | | | |
| Riffle Length (ft) | n/a | | | See Table 11a | | --- | | --- | | 8 | | 25 | | | |
| Riffle Slope (ft/ft) | | 0.014 | 0.025 | | | 0.011 | | 0.032 | | 0.008 | | 0.017 | | 0.010 | |
| Pool Length (ft) | | | | | | --- | | --- | | 10 | | 42 | | 32 | |
| Pool Max Depth (ft) | | 2 | | | | 1.20 | | 3.20 | | 1.50 | | 4.10 | | 1.77 | |
| Pool Spacing (ft) ² | | 26 | 53 | | | 12 | | 63 | | 14 | | 77 | | 26 | |
| Pool Volume (ft ³) | | | | | | | | | | | | | | | |
| Pattern | | | | | | | | | | | | | | | |
| Channel Beltwidth (ft) | n/a | N/A | | See Table 11a | | 14 | | 50 | | 18 | | 61 | | | |
| Radius of Curvature (ft) | | 15 | | | | 63.4 | | 14 | | 27 | | 20 | | 33 | |
| Rc:Bankfull Width (ft/ft) | | 2 | | | | 8.45 | | 1.6 | | 3.0 | | 1.8 | | 3.0 | |
| Meander Length (ft) | | N/A | | | | N/A | | 27 | | 108 | | 33 | | 132 | |
| Meander Width Ratio | | N/A | | | | N/A | | 1.6 | | 5.5 | | 1.6 | | 5.5 | |
| Substrate, Bed and Transport Parameters | | | | | | | | | | | | | | | |
| Ri%/Ru%/P%/G%/S% | n/a | | | See Table 11a | | | | | | | | | | | |
| SC%/Sa%/G%/C%/B%/Be% | | | | | | | | | | | | | | | |
| d16/d35/d50/d84/d95/d100 | | SC/SC/7.3/47.7/85.7/>2048 | | | | | | | | | | 22.6/27.4/32/53.7/69.7/128 | | SC/4.9/13.3/67.2/89.9/128 | |
| Reach Shear Stress (Competency) lb/ft ² | | | | | | | | 0.29 | | 0.23 | | 0.23 | | 0.14 | |
| Max part size (mm) mobilized at bankfull | | | | | | | | 15 | | 25 | | 12 | | 20 | |
| Stream Power (Capacity) W/m ² | | | | | | | | | | | | | | | |
| Additional Reach Parameters | | | | | | | | | | | | | | | |
| Drainage Area (SM) | n/a | 0.71 | | See Table 5a | | 0.46 | | 0.46 | | 0.46 | | 0.46 | | | |
| Watershed Impervious Cover Estimate (%) | | <1% ¹ | | | | <1% ¹ | | <1% ¹ | | <1% ¹ | | <1% ¹ | | <1% ¹ | |
| Rosgen Classification | | E4 | | | | C/E4 | | C/E4 | | E4 | | C4 | | C4 | |
| Bankfull Velocity (fps) | | 3.7 | | | | 3.7 | | 3.0 | | 3.0 | | 2.1 | | 1.7 | |
| Bankfull Discharge (cfs) | | 26 | 33 | | | 26 | | 33 | | 15 | | 20 | | | |
| Q-NFF regression | | | | | | | | | | | | | | | |
| Q-USGS extrapolation | | | | | | | | | | | | | | | |
| Q-Mannings | | | | | | | | | | | | | | | |
| Valley Length (ft) | | 1184 | | | | 830 | | 548 | | 830 | | 548 | | | |
| Channel Thalweg Length (ft) ² | | 1,303 | | | | 1,038 | | 658 | | 1,038 | | 658 | | | |
| Sinuosity (ft) ³ | 1.1 | | 1.25 | | 1.20 | | 1.25 | | 1.20 | | | | | | |
| Water Surface Slope (ft/ft) ² | 0.009 | | 0.006 | | 0.004 | | 0.006 | | 0.003 | | | | | | |
| Bankfull Slope (ft/ft) | | | --- | | --- | | 0.007 | | 0.002 | | | | | | |

¹ No impervious land use is present within the project watershed per the CGIA Land Use Classification data set.

² Channel Length represented does not include easement breaks.

(---): Data was not provided

N/A: Not Applicable

SC: Silt/Clay

Table 12a. Morphology and Hydraulic Summary (Dimensional Parameters - Cross-Section)

Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018

Norkett Branch Reach 1 and 2

| Dimension ¹ | Cross-Section 1, Norkett Branch Reach 1 (Pool) | | | | | | | Cross-Section 2, Norkett Branch Reach 1, (Riffle) | | | | | | | Cross-Section 3, Norkett Branch Reach 1, (Pool) | | | | | | | Cross-Section 4, Norkett Branch Reach 1, (Riffle) | | | | | | | | | | |
|--------------------------------------------------|--------------------------------------------------|--------|--------|--------|--------|--------|-----|---------------------------------------------------|-------|-------|-------|-------|-------|-------|---------------------------------------------------|-----|-------|-------|-------|-------|-------|---------------------------------------------------|-----|-----|-------|-------|-------|------------------|-------|-------|-----|-----|
| | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 |
| Bankfull Elevation (ft) ¹ | 466.1 | 466.1 | 466.1 | 466.1 | 466.1 | 466.0 | | | 465.8 | 465.8 | 465.8 | 465.8 | 465.8 | 465.9 | | | 464.2 | 464.2 | 464.2 | 464.2 | 464.2 | 463.9 | | | 464.3 | 464.3 | 464.3 | 464.3 | 464.3 | 464.3 | | |
| Low Bank Elevation (ft) | 466.07 | 466.07 | 466.07 | 466.07 | 466.07 | 466.07 | | | 465.8 | 465.8 | 465.8 | 465.8 | 465.8 | 465.8 | | | 464.2 | 464.2 | 464.2 | 464.2 | 464.2 | 464.2 | | | 464.3 | 464.3 | 464.3 | 464.3 | 464.3 | 464.3 | | |
| Bankfull Width (ft) | 33.2 | 34.1 | 34.3 | 29.1 | 31.3 | 28.5 | | | 26.6 | 23.2 | 23.4 | 22.8 | 21.8 | 21.8 | | | 26.7 | 29.2 | 25.8 | 24.3 | 24.8 | 24.0 | | | 25.1 | 23.1 | 26.2 | 22.4 | 23.4 | 23.0 | | |
| Floodprone Width (ft) | --- | --- | --- | --- | --- | --- | | | >200 | >200 | >200 | >200 | >200 | >200 | | | --- | --- | --- | --- | --- | --- | | | >200 | >200 | >200 | >200 | >200 | >200 | | |
| Bankfull Mean Depth (ft) | 1.8 | 2.0 | 2.0 | 2.2 | 2.0 | 2.0 | | | 1.6 | 2.0 | 2.0 | 1.9 | 2.0 | 2.0 | | | 2.3 | 2.3 | 2.4 | 2.7 | 3.0 | 2.5 | | | 1.8 | 2.1 | 1.9 | 2.0 | 1.9 | 1.9 | | |
| Bankfull Max Depth (ft) | 3.6 | 3.7 | 3.8 | 3.7 | 3.6 | 3.6 | | | 2.9 | 3.0 | 3.0 | 2.9 | 2.9 | 3.0 | | | 3.9 | 4.4 | 4.6 | 5.0 | 5.6 | 4.8 | | | 3.3 | 3.4 | 3.4 | 3.3 | 3.3 | 3.2 | | |
| Bankfull Cross-Sectional Area (ft ²) | 58.4 | 68.3 | 68.7 | 64.3 | 61.7 | 58.4 | | | 42.6 | 45.5 | 48.0 | 44.1 | 42.6 | 42.6 | | | 60.3 | 67.5 | 62.9 | 64.9 | 74.4 | 60.3 | | | 44.6 | 47.7 | 48.8 | 44.0 | 45.2 | 44.6 | | |
| Bankfull Width/Depth Ratio | 18.9 | 17.1 | 17.1 | 13.2 | 15.9 | 13.9 | | | 16.7 | 11.9 | 11.4 | 11.8 | 11.1 | 11.2 | | | 11.8 | 12.7 | 10.6 | 9.1 | 8.2 | 9.5 | | | 14.1 | 11.1 | 14.1 | 11.4 | 12.1 | 11.9 | | |
| Bankfull Entrenchment Ratio | --- | --- | --- | --- | --- | --- | | | >8 | >12 | >9 | >9 | >12 | >9 | | | --- | --- | --- | --- | --- | --- | | | >8 | >9 | >8 | >9 | >9 | >9 | | |
| Bankfull Bank Height Ratio | --- | --- | --- | --- | --- | --- | | | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | | | --- | --- | --- | --- | --- | --- | | | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | | |
| Dimension ¹ | Cross-Section 5, Norkett Branch Reach 1 (Riffle) | | | | | | | Cross-Section 6, Norkett Branch Reach 2, (Riffle) | | | | | | | Cross-Section 7, Norkett Branch Reach 2, (Riffle) | | | | | | | Cross-Section 8, Norkett Branch Reach 2, (Pool) | | | | | | | | | | |
| | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 ² | MY4 | MY5 | MY6 | MY7 |
| Bankfull Elevation (ft) ¹ | 461.5 | 461.5 | 461.5 | 461.5 | 461.5 | 461.6 | | | 459.9 | 459.9 | 459.9 | 459.9 | 459.9 | 460.0 | | | 458.1 | 458.1 | 458.1 | 458.1 | 458.1 | 458.3 | | | 457.7 | 457.7 | 457.7 | 457.7 | 457.7 | 457.9 | | |
| Low Bank Elevation (ft) | 461.5 | 461.5 | 461.5 | 461.5 | 461.5 | 461.5 | | | 459.9 | 459.9 | 459.9 | 459.9 | 459.9 | 459.9 | | | 458.1 | 458.1 | 458.1 | 458.1 | 458.1 | 458.1 | | | 457.7 | 457.7 | 457.7 | 457.7 | 457.7 | 457.7 | | |
| Bankfull Width (ft) | 22.5 | 23.5 | 23.3 | 22.3 | 24.1 | 23.1 | | | 25.7 | 26.0 | 25.6 | 25.0 | 24.3 | 24.9 | | | 25.6 | 24.9 | 25.6 | 23.2 | 23.0 | 25.4 | | | 30.1 | 26.8 | 29.1 | 28.7 | 30.1 | 30.8 | | |
| Floodprone Width (ft) | >200 | >200 | >200 | >200 | >200 | >200 | | | >200 | >200 | >200 | >200 | >200 | >200 | | | >200 | >200 | >200 | >200 | >200 | >200 | | | --- | --- | --- | --- | --- | --- | | |
| Bankfull Mean Depth (ft) | 1.7 | 1.8 | 1.7 | 1.7 | 1.6 | 1.7 | | | 2.0 | 2.0 | 2.1 | 2.0 | 2.0 | 2.0 | | | 1.8 | 2.0 | 1.9 | 1.9 | 1.9 | 1.8 | | | 2.4 | 2.7 | 2.5 | 2.5 | 2.4 | 2.4 | | |
| Bankfull Max Depth (ft) | 2.6 | 3.0 | 2.9 | 2.7 | 2.9 | 2.8 | | | 3.3 | 3.3 | 3.6 | 3.2 | 3.1 | 3.3 | | | 3.0 | 3.2 | 3.1 | 3.1 | 3.1 | 3.3 | | | 4.5 | 4.4 | 4.5 | 4.6 | 4.7 | 4.8 | | |
| Bankfull Cross-Sectional Area (ft ²) | 38.8 | 42.3 | 40.5 | 37.4 | 39.5 | 38.8 | | | 50.8 | 52.0 | 53.4 | 49.6 | 48.5 | 50.8 | | | 46.7 | 48.7 | 48.5 | 44.6 | 43.3 | 46.7 | | | 72.5 | 71.0 | 73.2 | 71.5 | 71.9 | 72.5 | | |
| Bankfull Width/Depth Ratio | 13.1 | 13.1 | 13.3 | 13.2 | 14.7 | 13.7 | | | 13.0 | 13.0 | 12.3 | 12.6 | 12.2 | 12.2 | | | 14.1 | 12.7 | 13.6 | 12.1 | 12.3 | 13.8 | | | 12.5 | 10.1 | 11.6 | 11.5 | 12.6 | 13.1 | | |
| Bankfull Entrenchment Ratio | >9 | >9 | >9 | >9 | >8 | >9 | | | >8 | >8 | >8 | >8 | >9 | >8 | | | >8 | >8 | >8 | >9 | >9 | >8 | | | --- | --- | --- | --- | --- | --- | | |
| Bankfull Bank Height Ratio | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | | | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | | | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | <1.0 | | | --- | --- | --- | --- | --- | --- | | |

¹ Prior to MY5, bankfull dimensions were calculated using a fixed bankfull elevation. For MY5 through MY7, bankfull elevation is calculated using a fixed Abkf as described in the Standard Measurement of the BHR Monitoring Parameter document provided by NCIRT and NCDMS (9/2018).

² MY3 calculations were adjusted on Cross-section 8 because they were found to omit a portion of the bankfull area.

--- : Not Applicable

Table 12b. Morphology and Hydraulic Summary (Dimensional Parameters - Cross-Section)
 Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018

UT1 and UT2 Reaches 1 and 2

| Dimension ¹ | Cross-Section 9, UT1, (Riffle) | | | | | | | | Cross-Section 10, UT1, (Pool) | | | | | | | | Cross-Section 11, UT2 Reach 1, (Pool) | | | | | | | | Cross-Section 12, UT2 Reach 1, (Riffle) | | | | | | | |
|--------------------------------------------------|-----------------------------------------|-------|-------|-------|-------|-------|-----|-----|---------------------------------------|-------|-------|-------|-------|-------|-------|-----|-----------------------------------------|-------|-------|-------|-------|-------|-------|-----|-----------------------------------------|-------|-------|-------|-------|-------|-------|-----|
| | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 |
| Bankfull Elevation (ft) | 472.0 | 472.0 | 472.0 | 472.0 | 472.0 | 472.0 | | | 471.7 | 471.7 | 471.7 | 471.7 | 471.7 | 471.5 | 472.0 | | 484.1 | 484.1 | 484.1 | 484.1 | 484.1 | 484.1 | 484.0 | | 484.0 | 484.0 | 484.0 | 484.0 | 484.0 | 484.0 | 483.9 | |
| Low Bank Elevation (ft) | 472.0 | 472.0 | 472.0 | 472.0 | 472.0 | 472.0 | | | 471.7 | 471.7 | 471.7 | 471.7 | 471.7 | 471.7 | | | 484.1 | 484.1 | 484.1 | 484.1 | 484.1 | 484.1 | 484.1 | | 484.0 | 484.0 | 484.0 | 484.0 | 484.0 | 484.0 | 484.0 | |
| Bankfull Width (ft) | 10.5 | 11.6 | 11.1 | 10.2 | 10.2 | 9.3 | | | 18.1 | 15.9 | 17.3 | 13.5 | 11.7 | 10.4 | | | 10.6 | 11.1 | 11.3 | 12.1 | 9.1 | 9.5 | | | 9.4 | 11.1 | 9.5 | 10.8 | 9.9 | 9.3 | | |
| Floodprone Width (ft) | 136 | 136 | 138 | 131 | 107.3 | 129.8 | | | --- | --- | --- | --- | --- | --- | | | --- | --- | --- | --- | --- | --- | | | 144 | 151 | 155 | 146.5 | 152.9 | 152.7 | | |
| Bankfull Mean Depth (ft) | 0.4 | 0.5 | 0.6 | 0.4 | 0.4 | 0.5 | | | 0.5 | 0.9 | 0.9 | 0.8 | 1.0 | 0.9 | | | 0.7 | 0.8 | 0.8 | 0.6 | 1.0 | 0.8 | | | 0.5 | 0.5 | 0.6 | 0.4 | 0.6 | 0.5 | | |
| Bankfull Max Depth (ft) | 0.8 | 1.1 | 0.9 | 0.6 | 0.9 | 0.8 | | | 1.8 | 2.0 | 2.1 | 1.9 | 2.1 | 1.9 | | | 1.9 | 2.0 | 0.8 | 1.7 | 1.9 | 1.7 | | | 1.2 | 1.1 | 1.2 | 1.0 | 1.1 | 1.0 | | |
| Bankfull Cross-Sectional Area (ft ²) | 4.5 | 6.2 | 6.7 | 4.0 | 4.4 | 4.5 | | | 9.8 | 14.0 | 12.7 | 10.3 | 12.2 | 9.8 | | | 7.5 | 9.4 | 8.8 | 6.7 | 9.1 | 7.5 | | | 4.5 | 5.6 | 5.5 | 3.9 | 5.8 | 4.5 | | |
| Bankfull Width/Depth Ratio | 24.5 | 21.7 | 18.5 | 25.7 | 23.6 | 19.1 | | | 33.3 | 18.0 | 23.5 | 17.7 | 11.2 | 11.0 | | | 15.2 | 13.2 | 14.6 | 21.9 | 9.0 | 12.0 | | | 19.8 | 22.0 | 16.4 | 29.6 | 17.1 | 19.4 | | |
| Bankfull Entrenchment Ratio | 13.0 | 11.7 | 12.4 | 12.9 | 10.6 | 14.0 | | | --- | --- | --- | --- | --- | --- | | | --- | --- | --- | --- | --- | --- | | | 15.2 | 13.6 | 16.3 | 13.6 | 15.4 | 16.3 | | |
| Bankfull Bank Height Ratio | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | | | --- | --- | --- | --- | --- | --- | | | --- | --- | --- | --- | --- | --- | | | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.1 | | |
| Dimension ¹ | Cross-Section 13, UT2 Reach 2, (Riffle) | | | | | | | | Cross-Section 14, UT2 Reach 2, (Pool) | | | | | | | | Cross-Section 15, UT2 Reach 2, (Riffle) | | | | | | | | Cross-Section 16, UT2 Reach 2, (Pool) | | | | | | | |
| | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 |
| Bankfull Elevation (ft) | 477.6 | 477.6 | 477.6 | 477.6 | 477.6 | 477.6 | | | 477.5 | 477.5 | 477.5 | 477.5 | 477.5 | 477.5 | | | 472.3 | 472.3 | 472.3 | 472.3 | 472.3 | 471.9 | | | 472.1 | 472.1 | 472.1 | 472.1 | 472.1 | 471.9 | | |
| Low Bank Elevation (ft) | 477.6 | 477.6 | 477.6 | 477.6 | 477.6 | 477.6 | | | 477.5 | 477.5 | 477.5 | 477.5 | 477.5 | 477.5 | | | 472.3 | 472.3 | 472.3 | 472.3 | 472.3 | 472.3 | | | 472.1 | 472.1 | 472.1 | 472.1 | 472.1 | 472.1 | | |
| Bankfull Width (ft) | 9.0 | 9.5 | 9.1 | 8.9 | 8.2 | 8.2 | | | 13.9 | 13.7 | 14.8 | 12.9 | 15.3 | 12.5 | | | 9.6 | 10.5 | 11.5 | 11.9 | 11.2 | 7.6 | | | 9.6 | 9.4 | 7.9 | 9.6 | 8.6 | 8.1 | | |
| Floodprone Width (ft) | >200 | >200 | >200 | >200 | >200 | >200 | | | --- | --- | --- | --- | --- | --- | | | >200 | >200 | >200 | >200 | >200 | >200 | | | --- | --- | --- | --- | --- | --- | | |
| Bankfull Mean Depth (ft) | 0.6 | 0.7 | 0.7 | 0.6 | 0.7 | 0.6 | | | 0.8 | 1.0 | 0.8 | 0.9 | 0.8 | 0.9 | | | 0.5 | 0.7 | 0.8 | 0.7 | 0.8 | 0.7 | | | 0.7 | 0.9 | 1.0 | 1.0 | 1.0 | 0.9 | | |
| Bankfull Max Depth (ft) | 1.2 | 1.2 | 1.2 | 1.1 | 1.0 | 1.0 | | | 2.1 | 2.2 | 2.0 | 2.0 | 1.9 | 2.0 | | | 1.1 | 1.4 | 1.3 | 1.6 | 1.5 | 1.1 | | | 1.8 | 1.9 | 1.9 | 2.0 | 1.9 | 1.8 | | |
| Bankfull Cross-Sectional Area (ft ²) | 5.3 | 7.1 | 6.4 | 5.6 | 5.5 | 5.3 | | | 11.7 | 14.1 | 12.0 | 11.3 | 11.6 | 11.7 | | | 5.2 | 7.6 | 8.7 | 8.8 | 8.7 | 5.2 | | | 7.0 | 8.1 | 8.1 | 9.2 | 8.8 | 7.0 | | |
| Bankfull Width/Depth Ratio | 15.3 | 12.8 | 13.0 | 14.1 | 12.4 | 12.8 | | | 16.4 | 13.2 | 18.2 | 14.7 | 20.1 | 13.4 | | | 17.6 | 14.5 | 15.4 | 15.9 | 14.5 | 11.0 | | | 13.3 | 10.9 | 7.7 | 10.1 | 8.4 | 8.6 | | |
| Bankfull Entrenchment Ratio | >22 | >21 | >22 | >23 | >24 | >25 | | | --- | --- | --- | --- | --- | --- | | | >15 | >19 | >17 | >17 | >18 | >18 | | | --- | --- | --- | --- | --- | --- | | |
| Bankfull Bank Height Ratio | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | | | --- | --- | --- | --- | --- | --- | | | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.3 | | | --- | --- | --- | --- | --- | --- | | |

¹ Prior to MY5, bankfull dimensions were calculated using a fixed bankfull elevation. For MY5 through MY7, bankfull elevation is calculated using a fixed Abkf as described in the Standard Measurement of the BHR Monitoring Parameter document provided by NCIRT and NCDMS (9/2018).

---: Not Applicable

Table 12c. Morphology and Hydraulic Summary (Dimensional Parameters - Cross-Section)

Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018

UT2 Reaches 3A and 3B

| Dimension ¹ | Cross-Section 17, UT2 Reach 3A, (Pool) | | | | | | | Cross-Section 18, UT2 Reach 3A, (Riffle) | | | | | | | Cross-Section 19, UT2 Reach 3B, (Riffle) | | | | | | | Cross-Section 20, UT2 Reach 3B, (Pool) | | | | | | | | | | | |
|--------------------------------------------------|----------------------------------------|-------|-------|-------|-------|-------|-----|------------------------------------------|-------|-------|-------|-------|-------|-------|------------------------------------------|-----|------|-------|-------|-------|-------|----------------------------------------|-------|-----|------|-------|-------|-------|-------|-------|-------|-----|--|
| | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | Base | MY1 | MY2 | MY3 | MY4 | MY5 | MY6 | MY7 | |
| Bankfull Elevation (ft) | 466.9 | 466.9 | 466.9 | 466.9 | 466.9 | 466.6 | | | 466.8 | 466.8 | 466.8 | 466.8 | 466.8 | 466.8 | 466.6 | | | 461.2 | 461.2 | 461.2 | 461.2 | 461.2 | 461.1 | | | 461.2 | 461.2 | 461.2 | 461.2 | 461.2 | 461.2 | | |
| Low Bank Elevation (ft) | 466.9 | 466.9 | 466.9 | 466.9 | 466.9 | 466.9 | | | 466.8 | 466.8 | 466.8 | 466.8 | 466.8 | 466.8 | 466.8 | | | 461.2 | 461.2 | 461.2 | 461.2 | 461.2 | 461.2 | | | 461.2 | 461.2 | 461.2 | 461.2 | 461.2 | 461.2 | | |
| Bankfull Width (ft) | 10.5 | 10.9 | 11.3 | 10.1 | 10.2 | 10.1 | | | 10.5 | 11.1 | 10.1 | 10.5 | 10.2 | 10.4 | | | 13.9 | 12.6 | 14.3 | 13.6 | 13.2 | 13.0 | | | 14.7 | 15.0 | 15.5 | 14.5 | 14.5 | 14.5 | | | |
| Floodprone Width (ft) | --- | --- | --- | --- | --- | --- | | | >200 | >200 | >200 | >200 | >200 | >200 | | | 130 | 130 | 146 | 131.9 | 135.3 | 142.6 | | | --- | --- | --- | --- | --- | --- | | | |
| Bankfull Mean Depth (ft) | 1.0 | 1.2 | 1.1 | 1.3 | 1.3 | 1.1 | | | 0.7 | 0.7 | 0.7 | 0.9 | 0.9 | 0.7 | | | 0.8 | 1.2 | 1.0 | 0.9 | 1.0 | 0.9 | | | 1.4 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | | | |
| Bankfull Max Depth (ft) | 2.0 | 2.0 | 2.2 | 2.1 | 2.3 | 1.9 | | | 1.2 | 1.3 | 1.4 | 1.5 | 1.5 | 1.3 | | | 1.6 | 1.8 | 1.8 | 1.7 | 1.6 | 1.7 | | | 2.6 | 2.7 | 2.7 | 2.8 | 2.6 | 2.6 | | | |
| Bankfull Cross-Sectional Area (ft ²) | 10.7 | 12.9 | 12.1 | 13.0 | 13.7 | 10.7 | | | 7.2 | 7.6 | 7.6 | 9.3 | 9.5 | 7.2 | | | 11.8 | 14.9 | 14.3 | 12.6 | 12.6 | 11.8 | | | 21.2 | 22.7 | 23.0 | 21.3 | 21.5 | 21.2 | | | |
| Bankfull Width/Depth Ratio | 10.2 | 9.2 | 10.5 | 7.8 | 7.6 | 9.5 | | | 15.3 | 16.2 | 13.6 | 11.9 | 11.1 | 14.9 | | | 16.5 | 10.6 | 14.4 | 14.7 | 13.7 | 14.3 | | | 10.2 | 9.9 | 10.4 | 9.8 | 9.8 | 10.0 | | | |
| Bankfull Entrenchment Ratio | --- | --- | --- | --- | --- | --- | | | >19 | >18 | >9 | >19 | >16 | >19 | | | 9.3 | 10.3 | 10.2 | 9.7 | 10.3 | 11.0 | | | --- | --- | --- | --- | --- | --- | | | |
| Bankfull Bank Height Ratio | --- | --- | --- | --- | --- | --- | | | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.2 | | | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.1 | | | --- | --- | --- | --- | --- | --- | | | |

¹ Prior to MY5, bankfull dimensions were calculated using a fixed bankfull elevation. For MY5 through MY7, bankfull elevation is calculated using a fixed Abfk as described in the Standard Measurement of the BHR Monitoring Parameter document provided by NCIRT and NCDMS (9/2018).

---: Not Applicable

Table 13a. Monitoring Data - Stream Reach Data Summary

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Norkett Branch Reach 1

| Parameter | As-Built/Baseline | | MY1 | | MY2 | | MY3 | | MY4 | | MY5 | | MY6 | | MY7 | |
|--------------------------------------------------|----------------------------|--------|---------------------------|------|------------------------------|------|--------------------------------|------|----------------------------|------|--------------------------|------|-----|-----|-----|-----|
| | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| Dimension and Substrate - Riffle | | | | | | | | | | | | | | | | |
| Bankfull Width (ft) | 22.5 | 26.6 | 23.1 | 23.5 | 23.3 | 26.2 | 22.3 | 22.8 | 21.8 | 24.1 | 21.8 | 23.1 | | | | |
| Floodprone Width (ft) | >200 | | >200 | | >200 | | >200 | | >200 | | >200 | | | | | |
| Bankfull Mean Depth | 1.6 | 1.8 | 1.8 | 2.1 | 1.7 | 2.0 | 1.7 | 2.0 | 1.6 | 2.0 | 1.7 | 2.0 | | | | |
| Bankfull Max Depth | 2.6 | 3.3 | 3.0 | 3.4 | 2.9 | 3.4 | 2.7 | 3.3 | 2.9 | 3.3 | 2.8 | 3.2 | | | | |
| Bankfull Cross-sectional Area (ft ²) | 38.8 | 44.6 | 42.3 | 47.7 | 40.5 | 48.8 | 37.4 | 44.1 | 39.5 | 45.2 | 38.8 | 44.6 | | | | |
| Width/Depth Ratio | 13.1 | 16.7 | 11.1 | 13.1 | 11.4 | 14.1 | 11.4 | 13.2 | 11.1 | 14.7 | 11.2 | 13.7 | | | | |
| Entrenchment Ratio | >2.2 | | >2.2 | | >2.2 | | >2.2 | | >2.2 | | >2.2 | | | | | |
| Bank Height Ratio | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | | | | |
| D50 (mm) | 18.4 | 59.6 | 13.3 | 26.9 | 24.7 | 90.0 | 20.9 | 51.8 | 4.0 | 34.3 | Silt/Clay | 68.0 | | | | |
| Profile | | | | | | | | | | | | | | | | |
| Riffle Length (ft) | 14 | 84 | | | | | | | | | | | | | | |
| Riffle Slope (ft/ft) | 0.0000 | 0.0152 | | | | | | | | | | | | | | |
| Pool Length (ft) | 12 | 88 | | | | | | | | | | | | | | |
| Pool Max Depth (ft) | 3.3 | 5.1 | | | | | | | | | | | | | | |
| Pool Spacing (ft) | 67 | 183 | | | | | | | | | | | | | | |
| Pool Volume (ft ³) | | | | | | | | | | | | | | | | |
| Pattern | | | | | | | | | | | | | | | | |
| Channel Beltwidth (ft) | 38 | 147 | | | | | | | | | | | | | | |
| Radius of Curvature (ft) | 38 | 65 | | | | | | | | | | | | | | |
| Rc:Bankfull Width (ft/ft) | 1.7 | 2.4 | | | | | | | | | | | | | | |
| Meander Wave Length (ft) | 167 | 263 | | | | | | | | | | | | | | |
| Meander Width Ratio | 1.7 | 5.5 | | | | | | | | | | | | | | |
| Additional Reach Parameters | | | | | | | | | | | | | | | | |
| Rosgen Classification | C4 | | C4 | | C4 | | C4 | | C4 | | C5 | | | | | |
| Channel Thalweg Length (ft) | 2,369 | | | | | | | | | | | | | | | |
| Sinuosity (ft) | 1.24 | | | | | | | | | | | | | | | |
| Water Surface Slope (ft/ft) | 0.003 | | | | | | | | | | | | | | | |
| Bankfull Slope (ft/ft) | 0.003 | | | | | | | | | | | | | | | |
| Ri%/Ru%/P%/G%/S% | | | | | | | | | | | | | | | | |
| SC%/Sa%/G%/C%/B%/Be% | | | | | | | | | | | | | | | | |
| d16/d35/d50/d84/d95/d100 | 0.4/3.6/7.4/52.3/139.4/362 | | 1.0/8.0/16.7/50.6/90/1024 | | 0.3/11.0/29.3/121.7/180/1024 | | SC/0.79/18.4/132.0/214.7/>2048 | | SC/6.40/11.8/39.8/89.6/180 | | SC/SC/1.0/56.9/119.3/180 | | | | | |
| % of Reach with Eroding Banks | | | 6% | | 0% | | 6% | | 3% | | 2% | | | | | |

Table 13b. Monitoring Data - Stream Reach Data Summary

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Norkett Branch Reach 2

| Parameter | As-Built/Baseline | | MY1 | | MY2 | | MY3 | | MY4 | | MY5 | | MY6 | | MY7 | |
|--------------------------------------------------|-------------------------------|--------|---------------------------|------|----------------------------|------|------------------------------|------|----------------------------|------|--------------------------|------|------|-----|-----|-----|
| | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| Dimension and Substrate - Riffle | | | | | | | | | | | | | | | | |
| Bankfull Width (ft) | 25.6 | 25.7 | 24.9 | 26.0 | 25.6 | 25.6 | 23.2 | 25.0 | 23.0 | 24.3 | 24.9 | 25.4 | | | | |
| Floodprone Width (ft) | >200 | | >200 | | >200 | | >200 | | >200 | | >200 | | | | | |
| Bankfull Mean Depth | 1.8 | 2.0 | 2.0 | 2.0 | 1.9 | 2.1 | 1.9 | 2.0 | 1.9 | 2.0 | 1.8 | 2.0 | | | | |
| Bankfull Max Depth | 3.0 | 3.3 | 3.2 | 3.3 | 3.1 | 3.6 | 3.1 | 3.2 | 3.1 | 3.1 | 3.3 | | | | | |
| Bankfull Cross-sectional Area (ft ²) | 46.7 | 50.8 | 48.7 | 52.0 | 48.5 | 53.4 | 44.6 | 49.6 | 43.3 | 48.5 | 46.7 | 50.8 | | | | |
| Width/Depth Ratio | 13.0 | 14.1 | 12.7 | 13.0 | 12.3 | 13.6 | 12.1 | 12.6 | 12.2 | 12.3 | 12.2 | 13.8 | | | | |
| Entrenchment Ratio | >2.2 | | >2.2 | | >2.2 | | >2.2 | | >2.2 | | >2.2 | | | | | |
| Bank Height Ratio | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | <1.0 | 1.0 | | |
| D50 (mm) | 7.3 | 9.9 | 3.6 | 12.1 | 1.0 | 27.8 | 4.4 | 11.0 | 1.7 | 5.6 | 1.7 | 16.0 | | | | |
| Profile | | | | | | | | | | | | | | | | |
| Riffle Length (ft) | 19 | 111 | | | | | | | | | | | | | | |
| Riffle Slope (ft/ft) | 0.0009 | 0.0163 | | | | | | | | | | | | | | |
| Pool Length (ft) | 51 | 102 | | | | | | | | | | | | | | |
| Pool Max Depth (ft) | 3.5 | 4.8 | | | | | | | | | | | | | | |
| Pool Spacing (ft) | 98 | 172 | | | | | | | | | | | | | | |
| Pool Volume (ft ³) | | | | | | | | | | | | | | | | |
| Pattern | | | | | | | | | | | | | | | | |
| Channel Beltwidth (ft) | 38 | 155 | | | | | | | | | | | | | | |
| Radius of Curvature (ft) | 40 | 64 | | | | | | | | | | | | | | |
| Rc:Bankfull Width (ft/ft) | 1.6 | 2.5 | | | | | | | | | | | | | | |
| Meander Wave Length (ft) | 181 | 277 | | | | | | | | | | | | | | |
| Meander Width Ratio | 1.5 | 6.0 | | | | | | | | | | | | | | |
| Additional Reach Parameters | | | | | | | | | | | | | | | | |
| Rosgen Classification | C4/E4 | | C4/E4 | | C4/E4 | | C4/E4 | | C4/E4 | | C5/E5 | | | | | |
| Channel Thalweg Length (ft) | 1,499 | | | | | | | | | | | | | | | |
| Sinuosity (ft) | 1.20 | | | | | | | | | | | | | | | |
| Water Surface Slope (ft/ft) | 0.003 | | | | | | | | | | | | | | | |
| Bankfull Slope (ft/ft) | 0.003 | | | | | | | | | | | | | | | |
| Ri%/Ru%/P%/G%/S% | | | | | | | | | | | | | | | | |
| SC%/Sa%/G%/C%/B%/Be% | | | | | | | | | | | | | | | | |
| d16/d35/d50/d84/d95/d100 | 2.6/6.7/13.0/62.6/210.9/>2048 | | 0.3/10.4/15.3/49.1/90/362 | | 4.2/16/24.9/83.4/151.8/362 | | 5C/6.7/17.6/52.6/101.2/256.0 | | SC/2.95/11.9/56.9/90.8/180 | | SC/SC/0.6/64/151.8/>2048 | | | | | |
| % of Reach with Eroding Banks | | | 7% | | 5% | | 12% | | 2% | | 1% | | | | | |

Table 13c. Monitoring Data - Stream Reach Data Summary

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

UT1

| Parameter | As-Built/Baseline | | MY1 | | MY2 | | MY3 | | MY4 | | MY5 | | MY6 | | MY7 | |
|--------------------------------------------------|-------------------------|-------|-----------------------------|-----|---------------------------|-----|----------------------------|-----|--------------------------|-----|-------------------------|-----|-----|-----|-----|-----|
| | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| Dimension and Substrate - Riffle | | | | | | | | | | | | | | | | |
| Bankfull Width (ft) | 10.5 | | 11.6 | | 11.1 | | 10.2 | | 10.2 | | 9.3 | | | | | |
| Floodprone Width (ft) | 136 | | 136 | | 138 | | 131 | | 107.3 | | 129.8 | | | | | |
| Bankfull Mean Depth | 0.4 | | 0.5 | | 0.6 | | 0.4 | | 0.4 | | 0.5 | | | | | |
| Bankfull Max Depth | 0.8 | | 1.1 | | 0.9 | | 0.6 | | 0.9 | | 0.8 | | | | | |
| Bankfull Cross-sectional Area (ft ²) | 4.5 | | 6.2 | | 6.7 | | 4.0 | | 4.4 | | 4.5 | | | | | |
| Width/Depth Ratio | 24.5 | | 21.7 | | 18.5 | | 20.8 | | 23.6 | | 19.1 | | | | | |
| Entrenchment Ratio | 13.0 | | 11.7 | | 12.4 | | 14.4 | | 10.6 | | 14 | | | | | |
| Bank Height Ratio | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | | | | |
| D50 (mm) | 20.9 | | 48.3 | | 21.9 | | 68.2 | | 8.3 | | 34.5 | | | | | |
| Profile | | | | | | | | | | | | | | | | |
| Riffle Length (ft) | 7 | 39 | | | | | | | | | | | | | | |
| Riffle Slope (ft/ft) | 0.007 | 0.044 | | | | | | | | | | | | | | |
| Pool Length (ft) | 12 | 69 | | | | | | | | | | | | | | |
| Pool Max Depth (ft) | 1.2 | 2.5 | | | | | | | | | | | | | | |
| Pool Spacing (ft) | 30 | 58 | | | | | | | | | | | | | | |
| Pool Volume (ft ³) | | | | | | | | | | | | | | | | |
| Pattern | | | | | | | | | | | | | | | | |
| Channel Beltwidth (ft) | 13 | 49 | | | | | | | | | | | | | | |
| Radius of Curvature (ft) | 14 | 23 | | | | | | | | | | | | | | |
| Rc:Bankfull Width (ft/ft) | 1.3 | 2.2 | | | | | | | | | | | | | | |
| Meander Wave Length (ft) | 61 | 88 | | | | | | | | | | | | | | |
| Meander Width Ratio | 1.2 | 4.7 | | | | | | | | | | | | | | |
| Additional Reach Parameters | | | | | | | | | | | | | | | | |
| Rosgen Classification | C4 | | C4 | | C4 | | C4 | | C4 | | C6 | | | | | |
| Channel Thalweg Length (ft) | 1,198 | | | | | | | | | | | | | | | |
| Sinuosity (ft) | 1.20 | | | | | | | | | | | | | | | |
| Water Surface Slope (ft/ft) | 0.011 | | | | | | | | | | | | | | | |
| Bankfull Slope (ft/ft) | 0.011 | | | | | | | | | | | | | | | |
| Ri%/Ru%/P%/G%/S% | | | | | | | | | | | | | | | | |
| SC%/Sa%/G%/C%/B%/Be% | | | | | | | | | | | | | | | | |
| d16/d35/d50/d84/d95/d100 | SC/1.0/12.7/55.3/90/256 | | SC/2.4/9.4/61.2/139.4/256.0 | | SC/0.1/8.6/82.6/139.4/256 | | SC/SC/5.6/49.8/107.3/>2048 | | SC/1.04/8.3/69.2/143/256 | | SC/SC/SC/61.5/101.2/180 | | | | | |
| % of Reach with Eroding Banks | | | 0% | | 0% | | 0% | | 0% | | 0% | | | | | |

Table 13d. Monitoring Data - Stream Reach Data Summary

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 1

| Parameter | As-Built/Baseline | | MY1 | | MY2 | | MY3 | | MY4 | | MY5 | | MY6 | | MY7 | |
|--------------------------------------------------|--------------------------|-------|---------------------------|-----|----------------------------|-----|-------------------------------|-----|------------------------|-----|-----------------------|-----|-----|-----|-----|-----|
| | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| Dimension and Substrate - Riffle | | | | | | | | | | | | | | | | |
| Bankfull Width (ft) | 9.4 | | 11.1 | | 9.5 | | 10.8 | | 9.9 | | 9.3 | | | | | |
| Floodprone Width (ft) | 144 | | 151 | | 155 | | 147 | | 152.9 | | 152.7 | | | | | |
| Bankfull Mean Depth | 0.5 | | 0.5 | | 0.6 | | 0.4 | | 0.6 | | 0.5 | | | | | |
| Bankfull Max Depth | 1.2 | | 1.1 | | 1.2 | | 1.0 | | 1.1 | | 1 | | | | | |
| Bankfull Cross-sectional Area (ft ²) | 4.5 | | 5.6 | | 5.5 | | 3.9 | | 5.8 | | 4.5 | | | | | |
| Width/Depth Ratio | 19.8 | | 22.0 | | 16.4 | | 29.6 | | 17.1 | | 19.4 | | | | | |
| Entrenchment Ratio | 15.2 | | 13.6 | | 16.3 | | 13.6 | | 15.4 | | 16.3 | | | | | |
| Bank Height Ratio | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.1 | | | | | |
| D50 (mm) | 19.5 | | 32.0 | | 37.9 | | 49.8 | | 53.7 | | 39.4 | | | | | |
| Profile | | | | | | | | | | | | | | | | |
| Riffle Length (ft) | 7 | 34 | | | | | | | | | | | | | | |
| Riffle Slope (ft/ft) | 0.006 | 0.037 | | | | | | | | | | | | | | |
| Pool Length (ft) | 11 | 35 | | | | | | | | | | | | | | |
| Pool Max Depth (ft) | 1.5 | 2.6 | | | | | | | | | | | | | | |
| Pool Spacing (ft) | 21 | 64 | | | | | | | | | | | | | | |
| Pool Volume (ft ³) | | | | | | | | | | | | | | | | |
| Pattern | | | | | | | | | | | | | | | | |
| Channel Beltwidth (ft) | 10 | 42 | | | | | | | | | | | | | | |
| Radius of Curvature (ft) | 15 | 21 | | | | | | | | | | | | | | |
| Rc:Bankfull Width (ft/ft) | 1.6 | 2.2 | | | | | | | | | | | | | | |
| Meander Wave Length (ft) | 45 | 92 | | | | | | | | | | | | | | |
| Meander Width Ratio | 1.0 | 4.4 | | | | | | | | | | | | | | |
| Additional Reach Parameters | | | | | | | | | | | | | | | | |
| Rosgen Classification | C4 | | C4 | | C4 | | C4 | | C4 | | C6 | | | | | |
| Channel Thalweg Length (ft) | 1,039 | | | | | | | | | | | | | | | |
| Sinuosity (ft) | 1.20 | | | | | | | | | | | | | | | |
| Water Surface Slope (ft/ft) | 0.006 | | | | | | | | | | | | | | | |
| Bankfull Slope (ft/ft) | 0.006 | | | | | | | | | | | | | | | |
| Ri%/Ru%/P%/G%/S% | | | | | | | | | | | | | | | | |
| SC%/Sa%/G%/C%/B%/Be% | | | | | | | | | | | | | | | | |
| d16/d35/d50/d84/d95/d100 | SC/7.1/12.2/28.5/42.9/90 | | SC/12/20.6/58.1/111.2/256 | | SC/5.6/16.7/57.4/107.3/362 | | SC/0.25/12.9/69.7/120.7/362.0 | | SC/SC/SC/52.8/96.6/180 | | SC/SC/SC/45/103.6/180 | | | | | |
| % of Reach with Eroding Banks | | | 0% | | 0% | | 0% | | 0% | | 0% | | | | | |

Table 13e. Monitoring Data - Stream Reach Data Summary

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 2

| Parameter | As-Built/Baseline | | MY1 | | MY2 | | MY3 | | MY4 | | MY5 | | MY6 | | MY7 | |
|--------------------------------------------------|-----------------------------|-------|--------------------------|------|------------------------------|------|---------------------------|------|---------------------------|------|---------------------------|------|-----|-----|-----|-----|
| | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| Dimension and Substrate - Riffle | | | | | | | | | | | | | | | | |
| Bankfull Width (ft) | 9.0 | 9.6 | 9.5 | 10.5 | 9.1 | 11.5 | 8.9 | 11.9 | 8.2 | 11.2 | 7.6 | 8.2 | | | | |
| Floodprone Width (ft) | >200 | | >200 | | >200 | | >200 | | >200 | | >200 | | | | | |
| Bankfull Mean Depth | 0.5 | 0.6 | 0.7 | 0.7 | 0.7 | 0.8 | 0.6 | 0.7 | 0.7 | 0.8 | 0.6 | 0.7 | | | | |
| Bankfull Max Depth | 1.1 | 1.2 | 1.2 | 1.4 | 1.2 | 1.3 | 1.1 | 1.6 | 1.0 | 1.5 | 1.0 | 1.1 | | | | |
| Bankfull Cross-sectional Area (ft ²) | 5.2 | 5.3 | 7.1 | 7.6 | 6.4 | 8.7 | 5.6 | 8.8 | 5.5 | 8.7 | 5.2 | 5.3 | | | | |
| Width/Depth Ratio | 15.3 | 17.6 | 12.8 | 14.5 | 13.0 | 15.4 | 14.1 | 15.9 | 12.4 | 14.5 | 11.0 | 12.8 | | | | |
| Entrenchment Ratio | >2.2 | | >2.2 | | >2.2 | | >2.2 | | >2.2 | | >2.2 | | | | | |
| Bank Height Ratio | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | | | | |
| D50 (mm) | 20.1 | 27.4 | 41.3 | 50.6 | 39.0 | 39.3 | 35.4 | 51.4 | 53.7 | 68.5 | 49.3 | 69.0 | | | | |
| Profile | | | | | | | | | | | | | | | | |
| Riffle Length (ft) | 6 | 27 | | | | | | | | | | | | | | |
| Riffle Slope (ft/ft) | 0.009 | 0.039 | | | | | | | | | | | | | | |
| Pool Length (ft) | 11 | 45 | | | | | | | | | | | | | | |
| Pool Max Depth (ft) | 1.5 | 2.5 | | | | | | | | | | | | | | |
| Pool Spacing (ft) | 22 | 71 | | | | | | | | | | | | | | |
| Pool Volume (ft ³) | | | | | | | | | | | | | | | | |
| Pattern | | | | | | | | | | | | | | | | |
| Channel Beltwidth (ft) | 12 | 52 | | | | | | | | | | | | | | |
| Radius of Curvature (ft) | 14 | 22 | | | | | | | | | | | | | | |
| Rc:Bankfull Width (ft/ft) | 1.6 | 2.3 | | | | | | | | | | | | | | |
| Meander Wave Length (ft) | 44 | 83 | | | | | | | | | | | | | | |
| Meander Width Ratio | 1.3 | 5.4 | | | | | | | | | | | | | | |
| Additional Reach Parameters | | | | | | | | | | | | | | | | |
| Rosgen Classification | C4 | | C4 | | C4 | | C4 | | C4 | | C4 | | | | | |
| Channel Thalweg Length (ft) | 1,440 | | | | | | | | | | | | | | | |
| Sinuosity (ft) | 1.30 | | | | | | | | | | | | | | | |
| Water Surface Slope (ft/ft) | 0.007 | | | | | | | | | | | | | | | |
| Bankfull Slope (ft/ft) | 0.007 | | | | | | | | | | | | | | | |
| Ri%/Ru%/P%/G%/S% | | | | | | | | | | | | | | | | |
| SC%/Sa%/G%/C%/B%/Be% | | | | | | | | | | | | | | | | |
| d16/d35/d50/d84/d95/d100 | 2.4/11.6/20.7/56.1/86.7/180 | | 8.5/20.1/32/90/160.7/512 | | 0.3/18.4/45/119.3/196.6/1024 | | SC/SC/SC/73.4/118.9/180.0 | | SC/SC/12.5/71.7/112.2/180 | | SC/SC/13.3/67.2/120.7/180 | | | | | |
| % of Reach with Eroding Banks | | | 0% | | 0% | | 0% | | 0% | | 0% | | | | | |

Table 13f. Monitoring Data - Stream Reach Data Summary

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 3A

| Parameter | As-Built/Baseline | | MY1 | | MY2 | | MY3 | | MY4 | | MY5 | | MY6 | | MY7 | |
|--------------------------------------------------|----------------------------|-------|---------------------------------|-----|--------------------------------|-----|---------------------------------|-----|------------------------------|-----|--------------------------|-----|-----|-----|-----|-----|
| | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| Dimension and Substrate - Riffle | | | | | | | | | | | | | | | | |
| Bankfull Width (ft) | 10.5 | | 11.1 | | 10.1 | | 10.5 | | 10.2 | | 10.4 | | | | | |
| Floodprone Width (ft) | >200 | | >200 | | >200 | | >200 | | >200 | | >200 | | | | | |
| Bankfull Mean Depth | 0.7 | | 0.7 | | 0.7 | | 0.9 | | 0.9 | | 0.7 | | | | | |
| Bankfull Max Depth | 1.2 | | 1.3 | | 1.4 | | 1.5 | | 1.5 | | 1.3 | | | | | |
| Bankfull Cross-sectional Area (ft ²) | 7.2 | | 7.6 | | 7.6 | | 9.3 | | 9.5 | | 7.2 | | | | | |
| Width/Depth Ratio | 15.3 | | 16.2 | | 13.6 | | 11.9 | | 11.1 | | 14.9 | | | | | |
| Entrenchment Ratio | >2.2 | | >2.2 | | >2.2 | | >2.2 | | >2.2 | | >2.2 | | | | | |
| Bank Height Ratio | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.2 | | | | | |
| D50 (mm) | 32.0 | | 45.0 | | 25.7 | | 40.8 | | 53.7 | | 28.6 | | | | | |
| Profile | | | | | | | | | | | | | | | | |
| Riffle Length (ft) | 8 | 25 | | | | | | | | | | | | | | |
| Riffle Slope (ft/ft) | 0.010 | 0.046 | | | | | | | | | | | | | | |
| Pool Length (ft) | 10 | 42 | | | | | | | | | | | | | | |
| Pool Max Depth (ft) | 1.77 | 2.98 | | | | | | | | | | | | | | |
| Pool Spacing (ft) | 26 | 66 | | | | | | | | | | | | | | |
| Pool Volume (ft ³) | | | | | | | | | | | | | | | | |
| Pattern | | | | | | | | | | | | | | | | |
| Channel Beltwidth (ft) | 8 | 37 | | | | | | | | | | | | | | |
| Radius of Curvature (ft) | 14 | 27 | | | | | | | | | | | | | | |
| Rc:Bankfull Width (ft/ft) | 1.3 | 2.6 | | | | | | | | | | | | | | |
| Meander Wave Length (ft) | 58 | 88 | | | | | | | | | | | | | | |
| Meander Width Ratio | 0.8 | 3.5 | | | | | | | | | | | | | | |
| Additional Reach Parameters | | | | | | | | | | | | | | | | |
| Rosgen Classification | C4 | | C4 | | C4 | | C4 | | C4 | | C4 | | | | | |
| Channel Thalweg Length (ft) | 658 | | | | | | | | | | | | | | | |
| Sinuosity (ft) | 1.20 | | | | | | | | | | | | | | | |
| Water Surface Slope (ft/ft) | 0.003 | | | | | | | | | | | | | | | |
| Bankfull Slope (ft/ft) | 0.002 | | | | | | | | | | | | | | | |
| Ri%/Ru%/P%/G%/S% | | | | | | | | | | | | | | | | |
| SC%/Sa%/G%/C%/B%/Be% | | | | | | | | | | | | | | | | |
| d16/d35/d50/d84/d95/d100 | 22.6/27.4/32/53.7/69.7/128 | | 16.0/30.3/41.5/87.0/202.4/362.0 | | 6.7/24.8/40.6/116.3/173.3/1024 | | 12.8/27.8/41.3/85.7/128.0/180.0 | | SC/11/42.5/112.6/>2048/>2048 | | SC/14.9/28.6/62.6/90/180 | | | | | |
| % of Reach with Eroding Banks | | | 0% | | 0% | | 0% | | 0% | | 0% | | | | | |

Table 13g. Monitoring Data - Stream Reach Data Summary

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 3B

| Parameter | As-Built/Baseline | | MY1 | | MY2 | | MY3 | | MY4 | | MY5 | | MY6 | | MY7 | |
|--------------------------------------------------|---------------------------|-------|-----------------------------|-----|--------------------------|-----|------------------------|-----|-----------------------------|-----|-------------------------|-----|-----|-----|-----|-----|
| | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| Dimension and Substrate - Riffle | | | | | | | | | | | | | | | | |
| Bankfull Width (ft) | 13.9 | | 12.6 | | 14.3 | | 13.6 | | 13.2 | | 13 | | | | | |
| Floodprone Width (ft) | 130 | | 130 | | 146 | | 132 | | 135.3 | | 142.6 | | | | | |
| Bankfull Mean Depth | 0.8 | | 1.2 | | 1.0 | | 0.9 | | 1 | | 0.9 | | | | | |
| Bankfull Max Depth | 1.6 | | 1.8 | | 1.8 | | 1.7 | | 1.6 | | 1.7 | | | | | |
| Bankfull Cross-sectional Area (ft ²) | 11.8 | | 14.9 | | 14.3 | | 12.6 | | 13.2 | | 11.8 | | | | | |
| Width/Depth Ratio | 16.5 | | 10.6 | | 14.4 | | 14.7 | | 13.7 | | 14.3 | | | | | |
| Entrenchment Ratio | 9.3 | | 10.3 | | 10.2 | | 9.7 | | 10.3 | | 11 | | | | | |
| Bank Height Ratio | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.0 | | 1.1 | | | | | |
| D50 (mm) | 33.4 | | 30.6 | | 68.5 | | 48.3 | | 45 | | 24.2 | | | | | |
| Profile | | | | | | | | | | | | | | | | |
| Riffle Length (ft) | 13 | 28 | | | | | | | | | | | | | | |
| Riffle Slope (ft/ft) | 0.001 | 0.024 | | | | | | | | | | | | | | |
| Pool Length (ft) | 32 | 45 | | | | | | | | | | | | | | |
| Pool Max Depth (ft) | 2.45 | 3.32 | | | | | | | | | | | | | | |
| Pool Spacing (ft) | 38 | 72 | | | | | | | | | | | | | | |
| Pool Volume (ft ³) | | | | | | | | | | | | | | | | |
| Pattern | | | | | | | | | | | | | | | | |
| Channel Beltwidth (ft) | 20 | 61 | | | | | | | | | | | | | | |
| Radius of Curvature (ft) | 24 | 31 | | | | | | | | | | | | | | |
| Rc:Bankfull Width (ft/ft) | 1.7 | 2.2 | | | | | | | | | | | | | | |
| Meander Wave Length (ft) | 87 | 105 | | | | | | | | | | | | | | |
| Meander Width Ratio | 1.4 | 4.4 | | | | | | | | | | | | | | |
| Additional Reach Parameters | | | | | | | | | | | | | | | | |
| Rosgen Classification | C4 | | C4 | | C4 | | C4 | | C4 | | C6 | | | | | |
| Channel Thalweg Length (ft) | 658 | | | | | | | | | | | | | | | |
| Sinuosity (ft) | 1.20 | | | | | | | | | | | | | | | |
| Water Surface Slope (ft/ft) | 0.003 | | | | | | | | | | | | | | | |
| Bankfull Slope (ft/ft) | 0.002 | | | | | | | | | | | | | | | |
| Ri%/Ru%/P%/G%/S% | | | | | | | | | | | | | | | | |
| SC%/Sa%/G%/C%/B%/Be% | | | | | | | | | | | | | | | | |
| d16/d35/d50/d84/d95/d100 | SC/4.9/13.3/67.2/89.9/128 | | SC/4.5/14.8/60.0/98.3/180.0 | | SC/0.7/12.7/71.7/128/362 | | SC/SC/60.4/107.3/180.0 | | SC/6.12/19/82.6/151.8/>2048 | | SC/SC/SC/90/151.8/>2048 | | | | | |
| % of Reach with Eroding Banks | | | 3% | | 0% | | 0% | | 0% | | 0% | | | | | |


Cross-Section Plots

Norkett Branch Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 1-Norkett Branch Reach 1

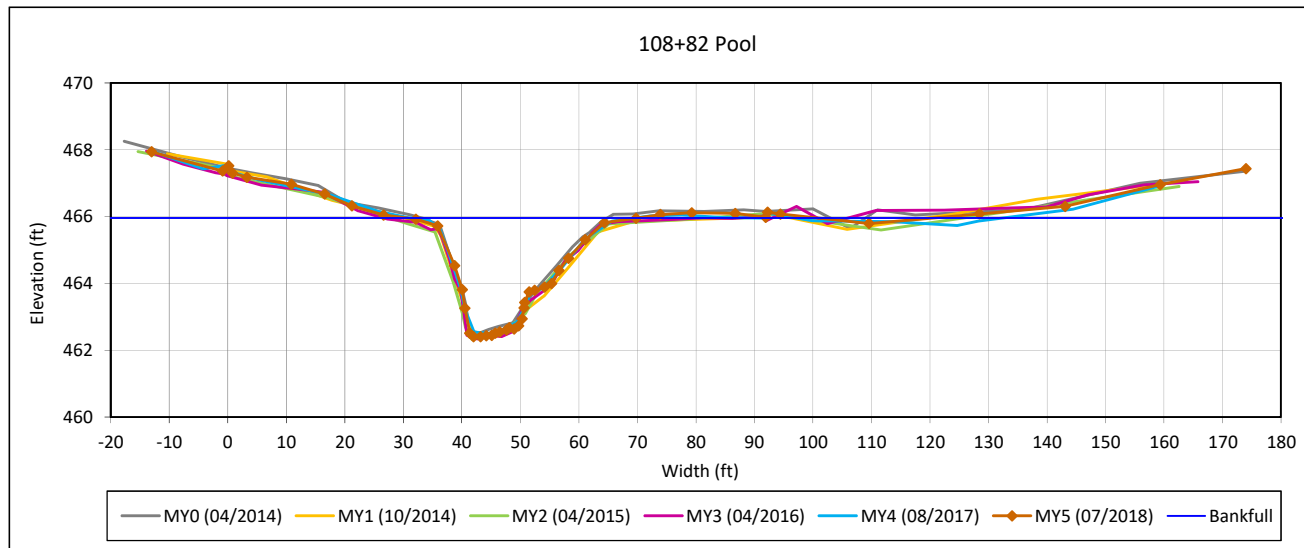

Bankfull Dimensions

| | |
|------|-------------------------|
| 58.4 | x-section area (ft.sq.) |
| 28.5 | width (ft) |
| 2.0 | mean depth (ft) |
| 3.6 | max depth (ft) |
| 30.0 | wetted perimeter (ft) |
| 1.9 | hyd radi (ft) |
| 13.9 | width-depth ratio |

Survey Date: 07/2018

Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Norkett Branch Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 2-Norkett Branch Reach 1

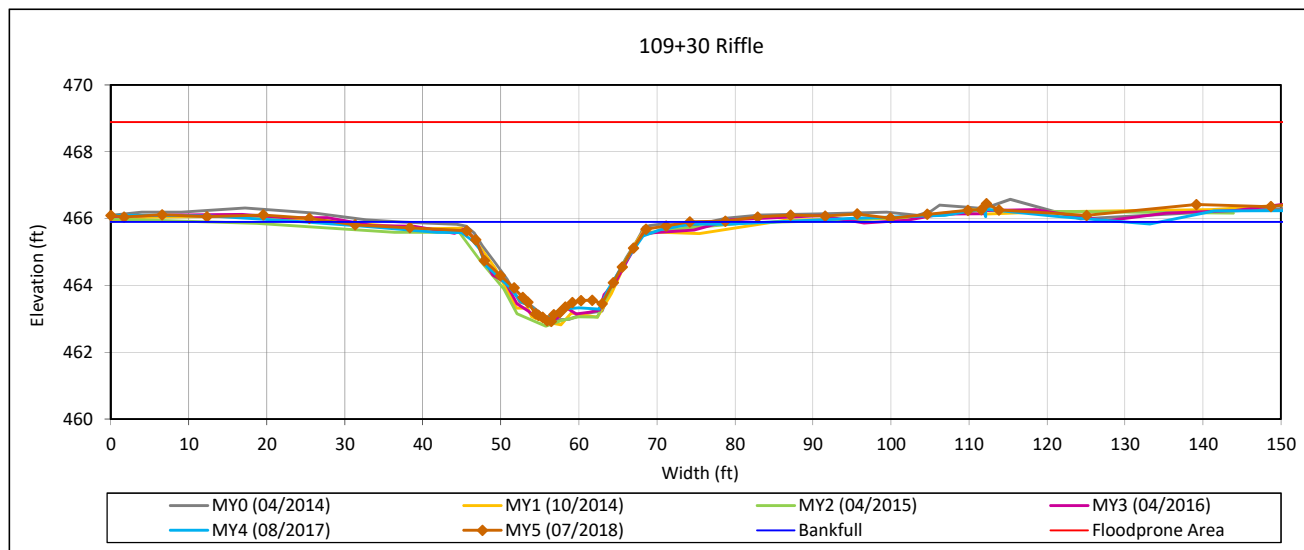

Bankfull Dimensions

- 42.6 x-section area (ft.sq.)
- 21.8 width (ft)
- 2.0 mean depth (ft)
- 3.0 max depth (ft)
- 22.7 wetted perimeter (ft)
- 1.9 hyd radi (ft)
- 11.2 width-depth ratio
- >200 W flood prone area (ft)
- >9.2 entrenchment ratio
- 1.0 low bank height ratio

Survey Date: 07/2018

Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Norkett Branch Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 3-Norkett Branch Reach 1

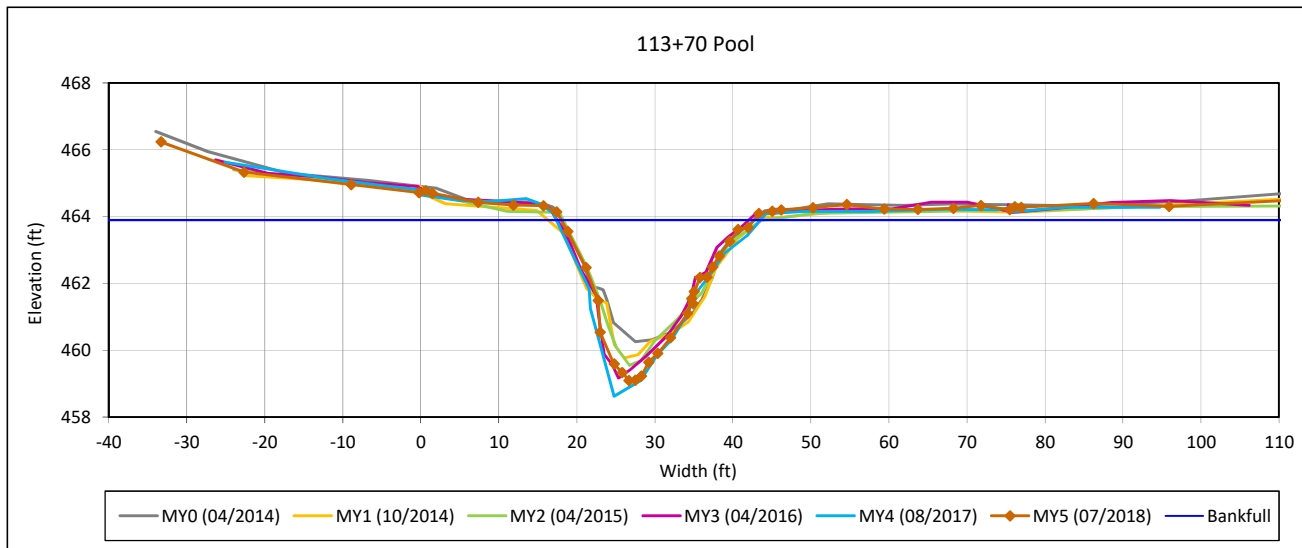

Bankfull Dimensions

| | |
|------|-------------------------|
| 60.3 | x-section area (ft.sq.) |
| 24.0 | width (ft) |
| 2.5 | mean depth (ft) |
| 4.8 | max depth (ft) |
| 26.7 | wetted perimeter (ft) |
| 2.3 | hyd radi (ft) |
| 9.5 | width-depth ratio |

Survey Date: 07/2018
Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Norkett Branch Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 4-Norkett Branch Reach 1

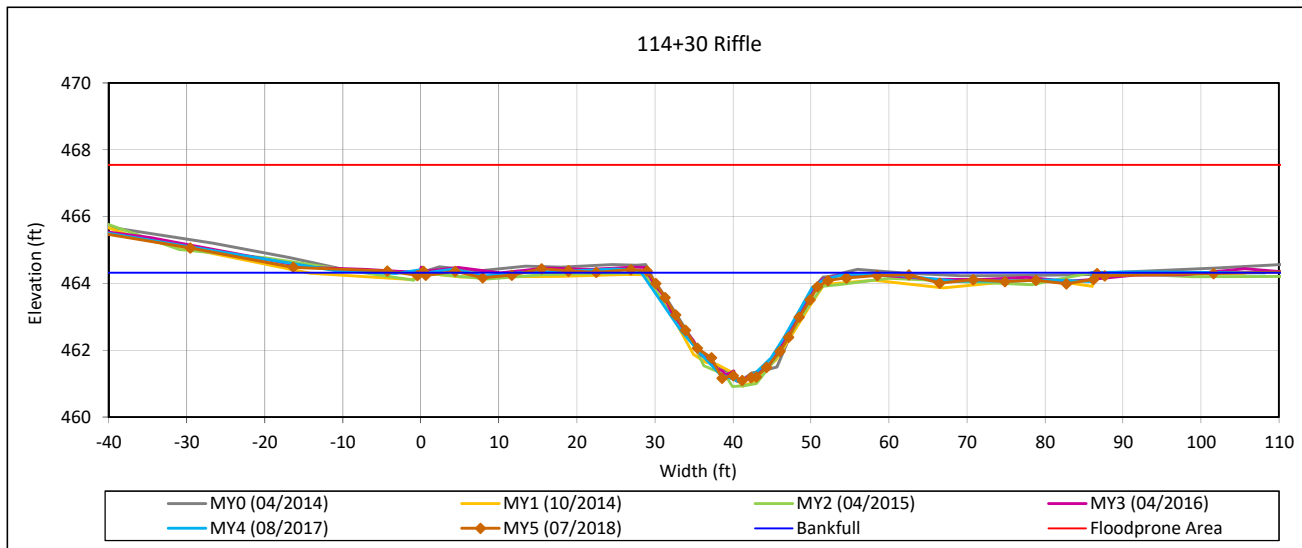

Bankfull Dimensions

| | |
|------|-------------------------|
| 44.6 | x-section area (ft.sq.) |
| 23.0 | width (ft) |
| 1.9 | mean depth (ft) |
| 3.2 | max depth (ft) |
| 24.1 | wetted perimeter (ft) |
| 1.9 | hyd radi (ft) |
| 11.9 | width-depth ratio |
| >200 | W flood prone area (ft) |
| >8.7 | entrenchment ratio |
| 1.0 | low bank height ratio |

Survey Date: 07/2018

Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Norkett Branch Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 5-Norkett Branch Reach 1

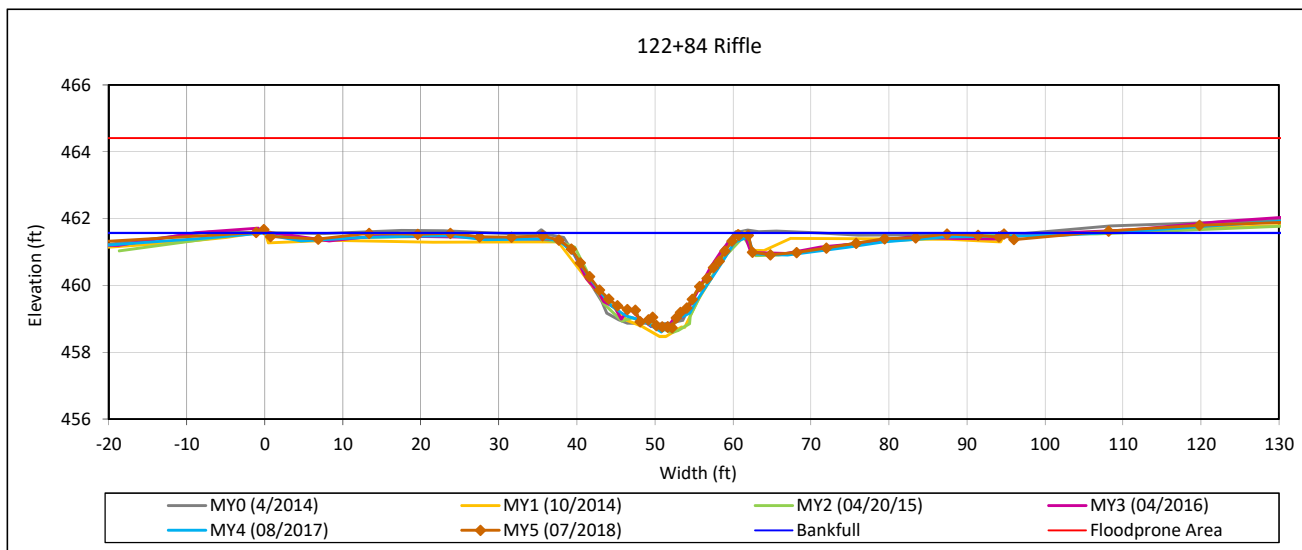

Bankfull Dimensions

- 38.8 x-section area (ft.sq.)
- 23.1 width (ft)
- 1.7 mean depth (ft)
- 2.8 max depth (ft)
- 24.0 wetted perimeter (ft)
- 1.6 hyd radi (ft)
- 13.7 width-depth ratio
- >200 W flood prone area (ft)
- >8.8 entrenchment ratio
- 1.0 low bank height ratio

Survey Date: 07/2018

Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Norkett Branch Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 6-Norkett Branch Reach 2

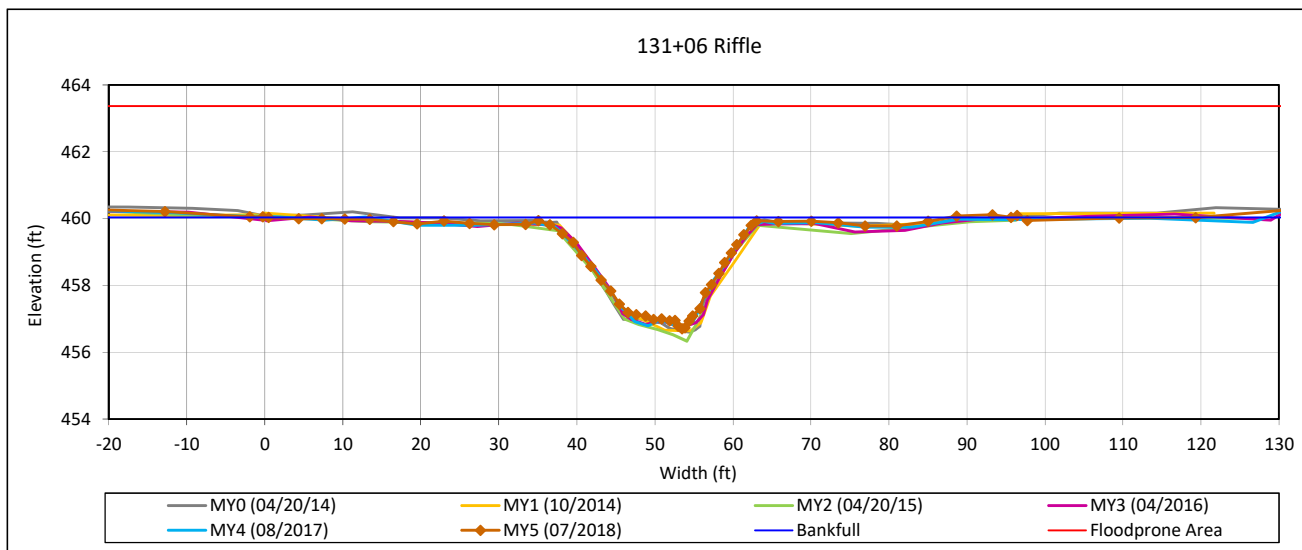

Bankfull Dimensions

| | |
|------|-------------------------|
| 50.8 | x-section area (ft.sq.) |
| 24.9 | width (ft) |
| 2.0 | mean depth (ft) |
| 3.3 | max depth (ft) |
| 25.9 | wetted perimeter (ft) |
| 2.0 | hyd radi (ft) |
| 12.2 | width-depth ratio |
| >200 | W flood prone area (ft) |
| >8.1 | entrenchment ratio |
| 1.0 | low bank height ratio |

Survey Date: 07/2018

Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Norkett Branch Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 7-Norkett Branch Reach 2

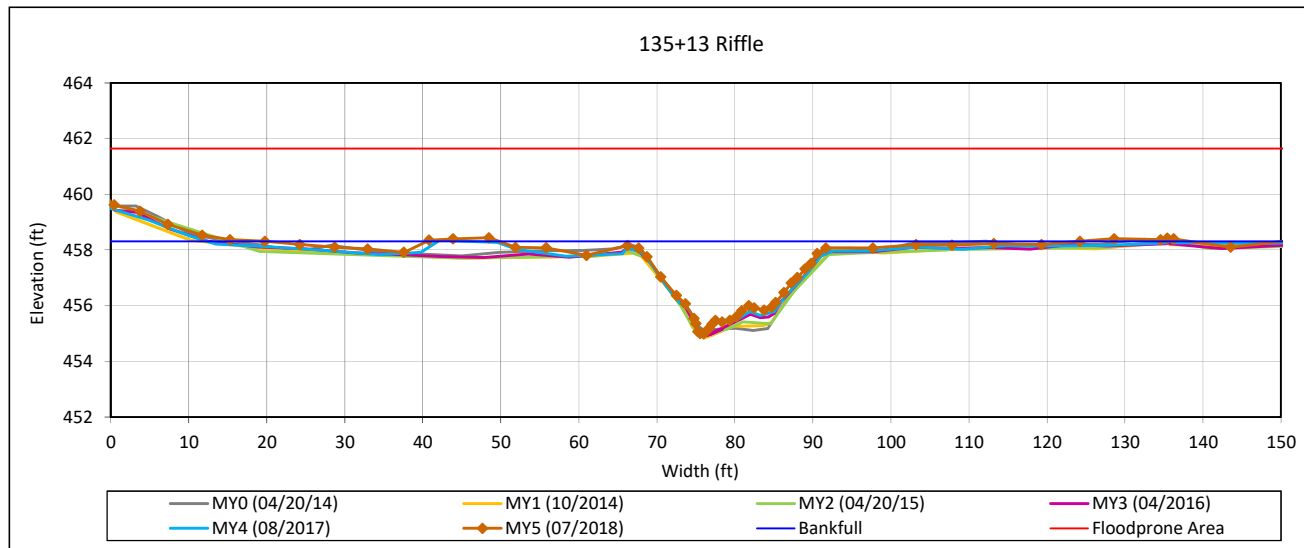

Bankfull Dimensions

- 46.7 x-section area (ft.sq.)
- 25.4 width (ft)
- 1.8 mean depth (ft)
- 3.3 max depth (ft)
- 26.6 wetted perimeter (ft)
- 1.8 hyd radi (ft)
- 13.8 width-depth ratio
- >200 W flood prone area (ft)
- >8.4 entrenchment ratio
- <1.0 low bank height ratio

Survey Date: 07/2018

Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Norkett Branch Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 8-Norkett Branch Reach 2

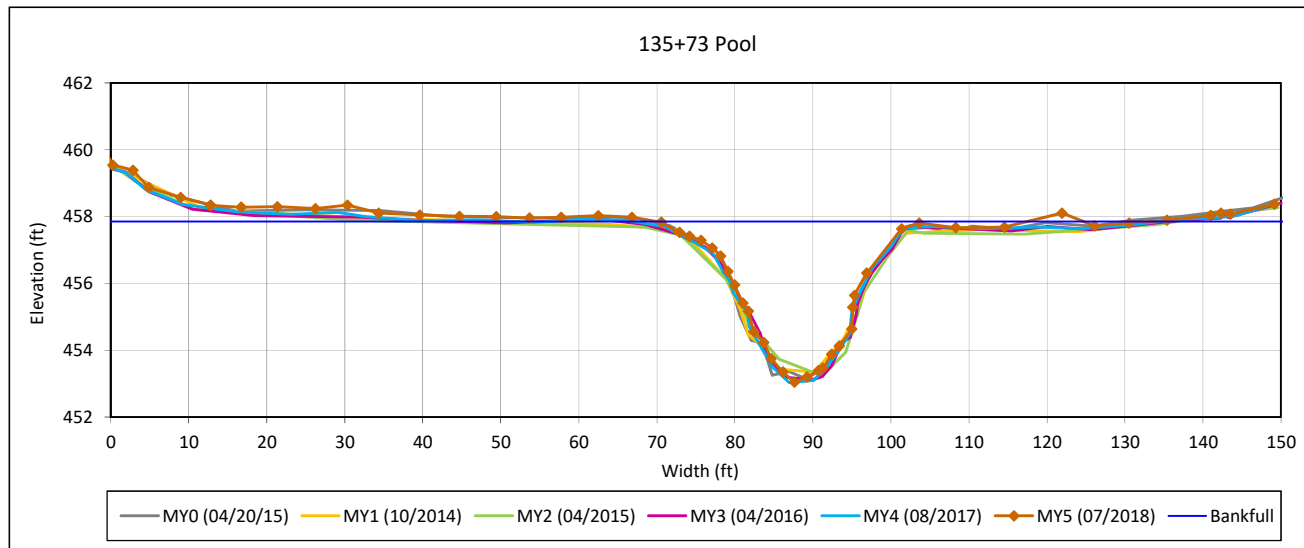

Bankfull Dimensions

| | |
|------|-------------------------|
| 72.5 | x-section area (ft.sq.) |
| 30.8 | width (ft) |
| 2.4 | mean depth (ft) |
| 4.8 | max depth (ft) |
| 33.0 | wetted perimeter (ft) |
| 2.2 | hyd radi (ft) |
| 13.1 | width-depth ratio |

Survey Date: 07/2018

Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Norkett Branch Mitigation Site
DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 9-UT1

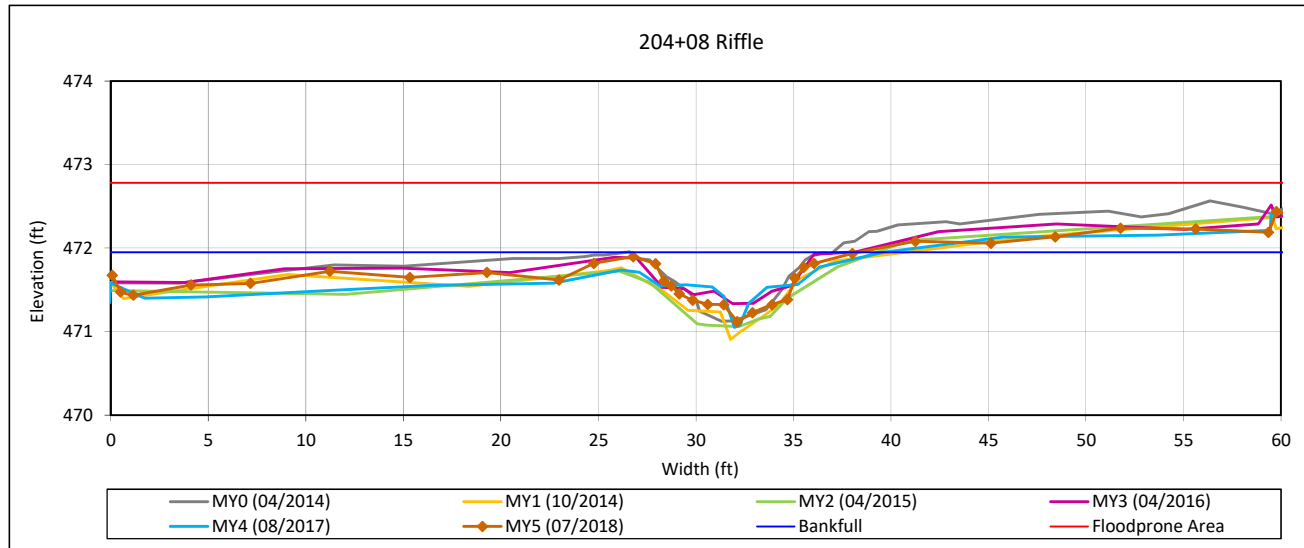

Bankfull Dimensions

- 4.5 x-section area (ft.sq.)
- 9.3 width (ft)
- 0.5 mean depth (ft)
- 0.8 max depth (ft)
- 9.5 wetted perimeter (ft)
- 0.5 hyd radi (ft)
- 19.1 width-depth ratio
- 129.8 W flood prone area (ft)
- 14.0 entrenchment ratio
- 1.0 low bank height ratio

Survey Date: 07/2018

Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Norkett Branch Mitigation Site
DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 10-UT1

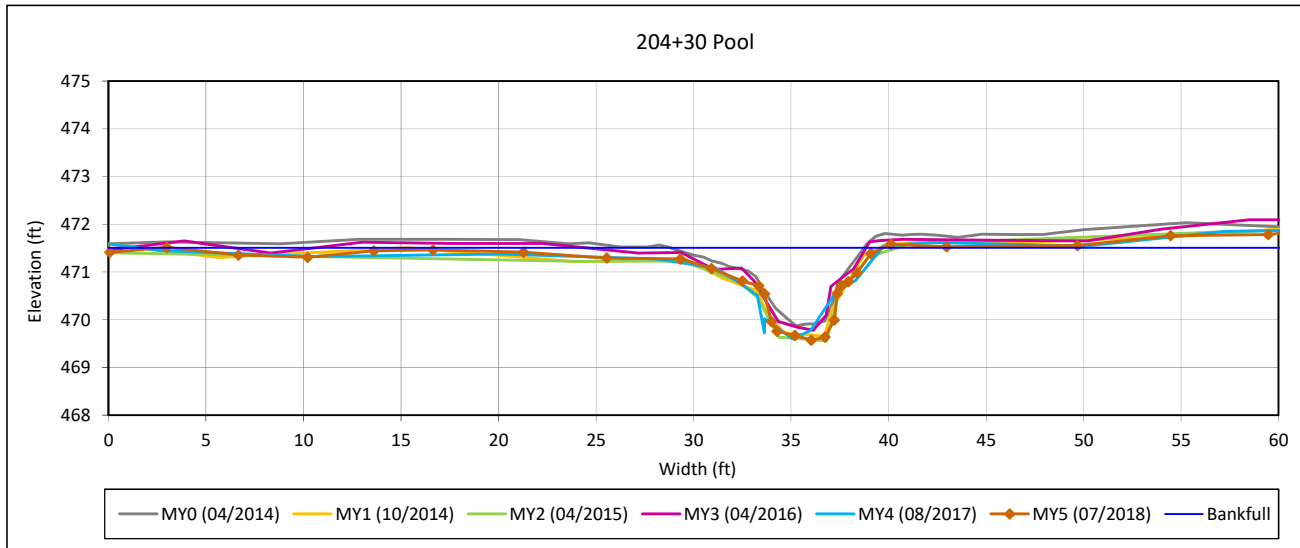

Bankfull Dimensions

| | |
|------|-------------------------|
| 9.8 | x-section area (ft.sq.) |
| 10.4 | width (ft) |
| 0.9 | mean depth (ft) |
| 1.9 | max depth (ft) |
| 11.7 | wetted perimeter (ft) |
| 0.8 | hyd radi (ft) |
| 11.0 | width-depth ratio |

Survey Date: 07/2018
Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Norkett Branch Mitigation Site
DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 11-UT2 Reach 1

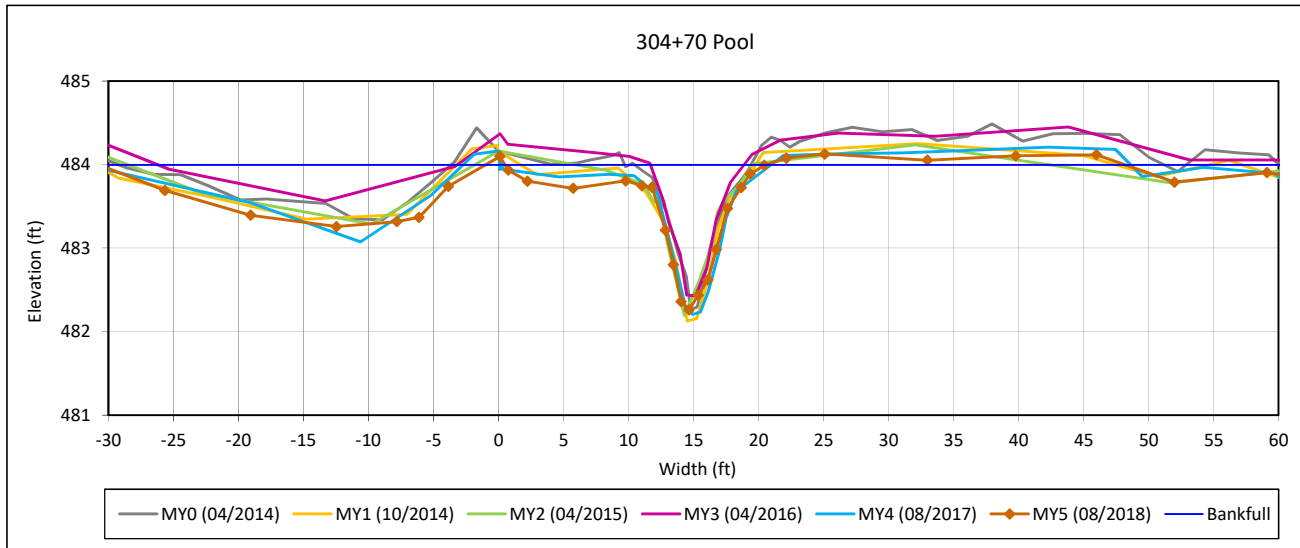

Bankfull Dimensions

- 7.5 x-section area (ft.sq.)
- 9.5 width (ft)
- 0.8 mean depth (ft)
- 1.7 max depth (ft)
- 10.2 wetted perimeter (ft)
- 0.7 hyd radi (ft)
- 12.0 width-depth ratio

Survey Date: 08/2018
Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Norkett Branch Mitigation Site
DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 12-UT2 Reach 1

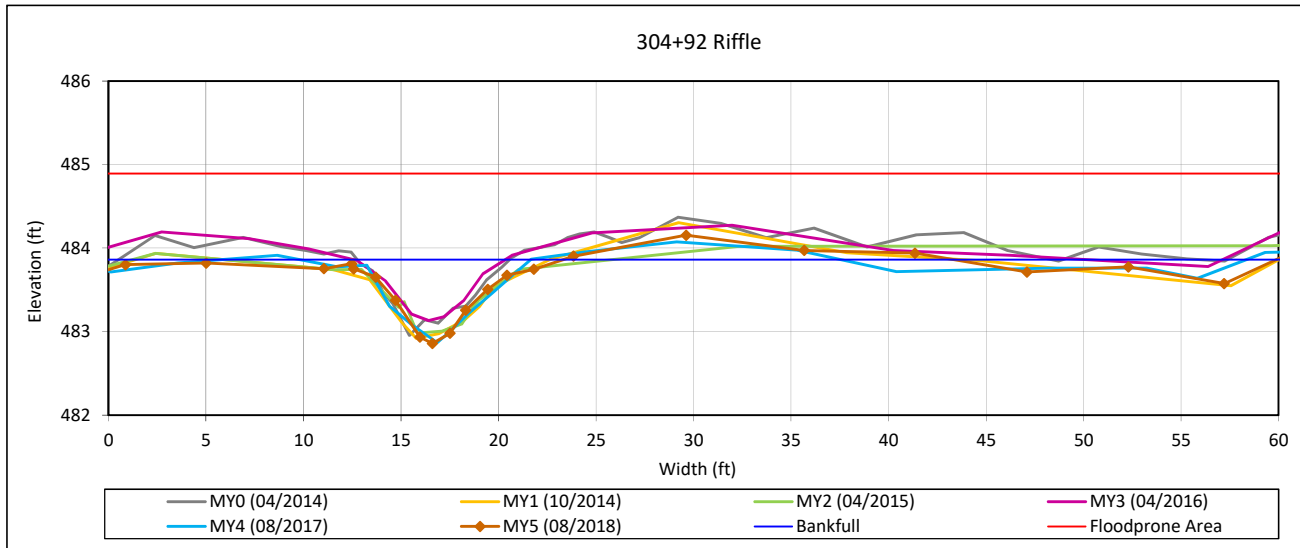

Bankfull Dimensions

- 4.5 x-section area (ft.sq.)
- 9.3 width (ft)
- 0.5 mean depth (ft)
- 1.0 max depth (ft)
- 9.6 wetted perimeter (ft)
- 0.5 hyd radi (ft)
- 19.4 width-depth ratio
- 152.7 W flood prone area (ft)
- 16.3 entrenchment ratio
- 1.1 low bank height ratio

Survey Date: 08/2018
Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Norkett Branch Mitigation Site
DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 13-UT2 Reach 2

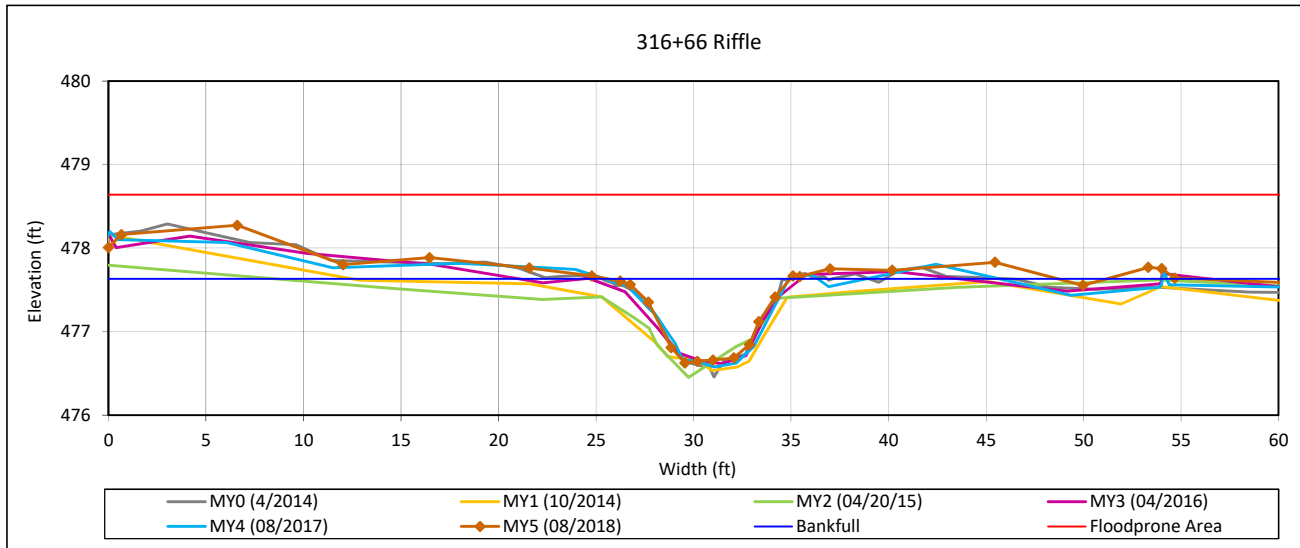

Bankfull Dimensions

- 5.3 x-section area (ft.sq.)
- 8.2 width (ft)
- 0.6 mean depth (ft)
- 1.0 max depth (ft)
- 8.6 wetted perimeter (ft)
- 0.6 hyd radi (ft)
- 12.8 width-depth ratio
- >200 W flood prone area (ft)
- >24.7 entrenchment ratio
- 1.0 low bank height ratio

Survey Date: 08/2018

Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Norkett Branch Mitigation Site
DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 14-UT2 Reach 2

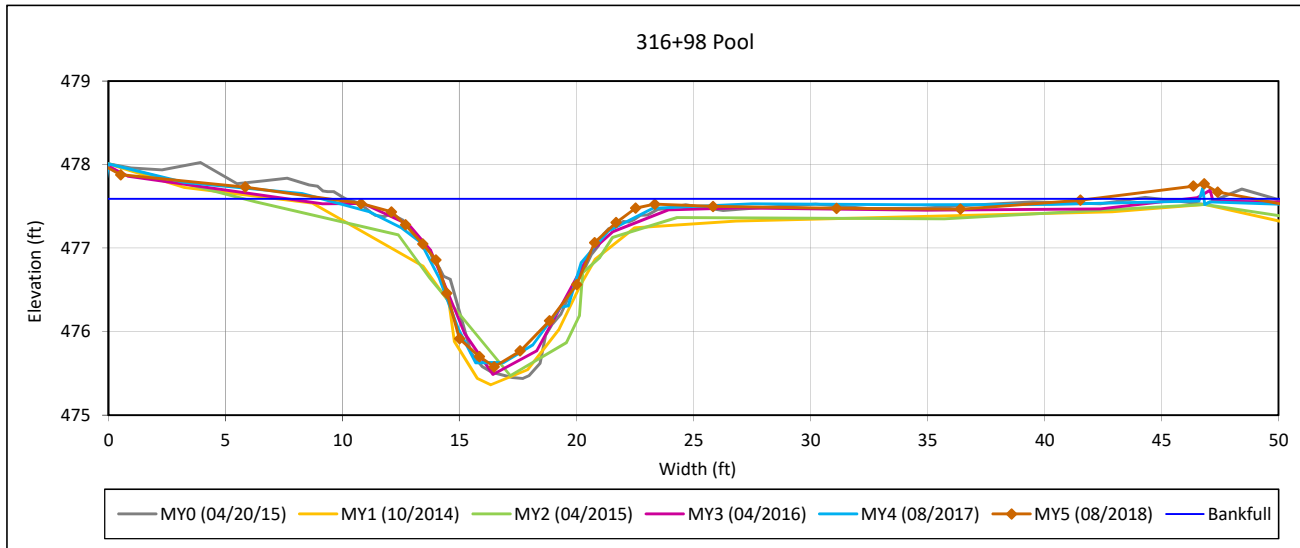

Bankfull Dimensions

- 11.7 x-section area (ft.sq.)
- 12.5 width (ft)
- 0.9 mean depth (ft)
- 2.0 max depth (ft)
- 13.4 wetted perimeter (ft)
- 0.9 hyd radi (ft)
- 13.4 width-depth ratio

Survey Date: 08/2018
Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Norkett Branch Mitigation Site
DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 15-UT2 Reach 2

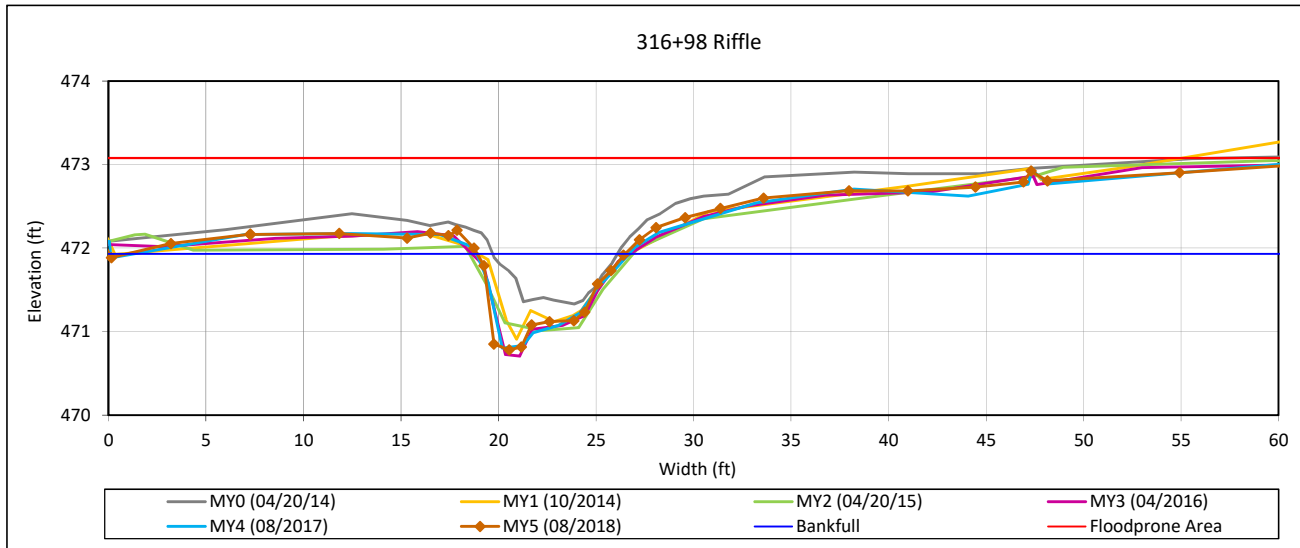

Bankfull Dimensions

- 5.2 x-section area (ft.sq.)
- 7.6 width (ft)
- 0.7 mean depth (ft)
- 1.1 max depth (ft)
- 8.3 wetted perimeter (ft)
- 0.6 hyd radi (ft)
- 11.0 width-depth ratio
- >200 W flood prone area (ft)
- >18.0 entrenchment ratio
- 1.3 low bank height ratio

Survey Date: 08/2018
Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Norkett Branch Mitigation Site
DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 16-UT2 Reach 2

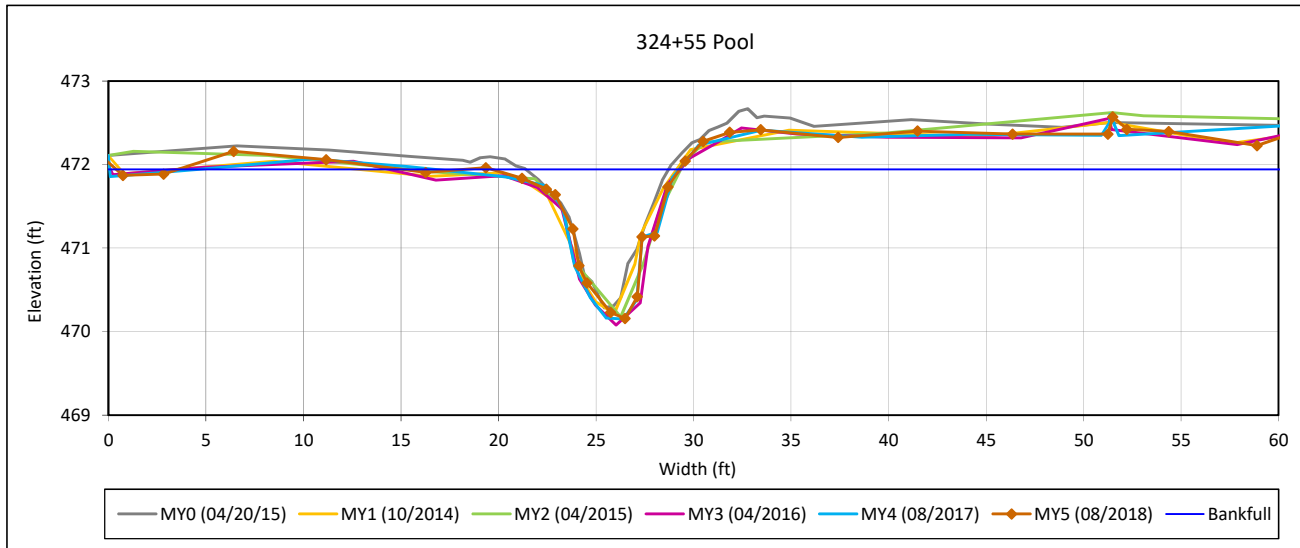

Bankfull Dimensions

- 7.0 x-section area (ft.sq.)
- 8.1 width (ft)
- 0.9 mean depth (ft)
- 1.8 max depth (ft)
- 9.3 wetted perimeter (ft)
- 0.7 hyd radi (ft)
- 8.6 width-depth ratio

Survey Date: 08/2018
Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Norkett Branch Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 17-UT2 Reach 3A

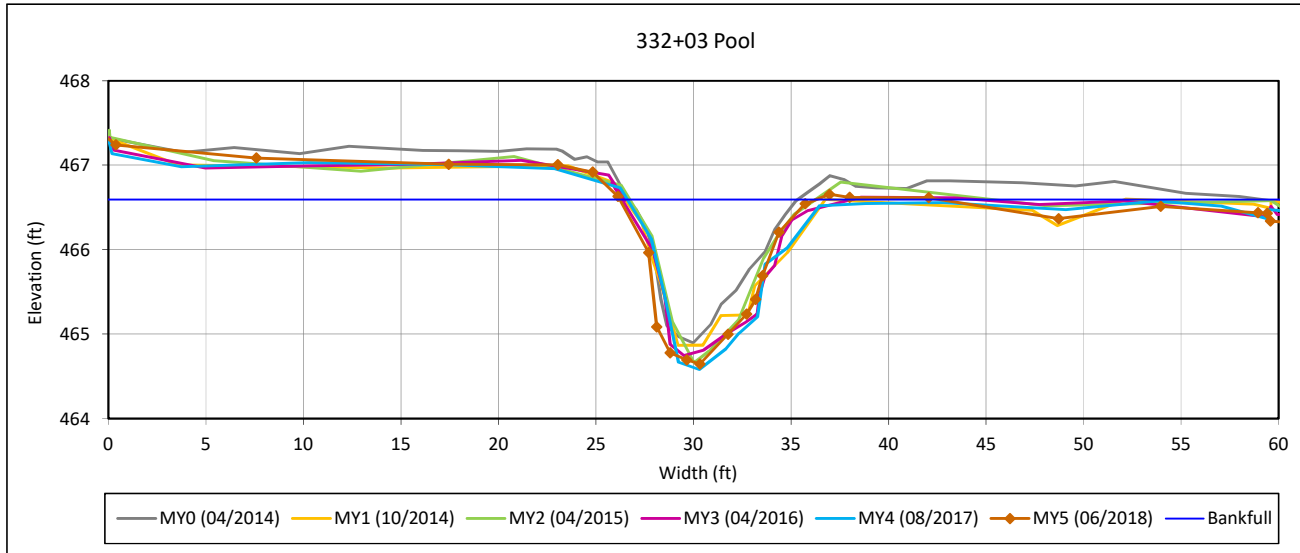

Bankfull Dimensions

- 10.7 x-section area (ft.sq.)
- 10.1 width (ft)
- 1.1 mean depth (ft)
- 1.9 max depth (ft)
- 11.2 wetted perimeter (ft)
- 1.0 hyd radi (ft)
- 9.5 width-depth ratio

Survey Date: 06/2018

Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Norkett Branch Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 18-UT2 Reach 3A

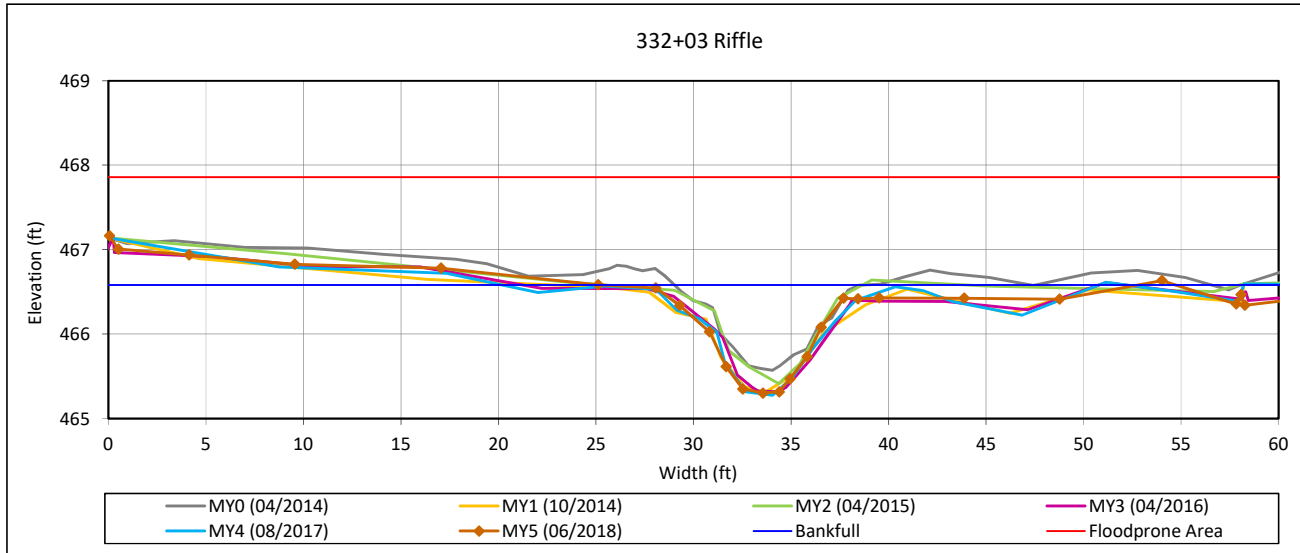

Bankfull Dimensions

- 7.2 x-section area (ft.sq.)
- 10.4 width (ft)
- 0.7 mean depth (ft)
- 1.3 max depth (ft)
- 10.7 wetted perimeter (ft)
- 0.7 hyd radi (ft)
- 14.9 width-depth ratio
- >200 W flood prone area (ft)
- >19.2 entrenchment ratio
- 1.2 low bank height ratio

Survey Date: 06/2018

Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Norkett Branch Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 19-UT2 Reach 3B

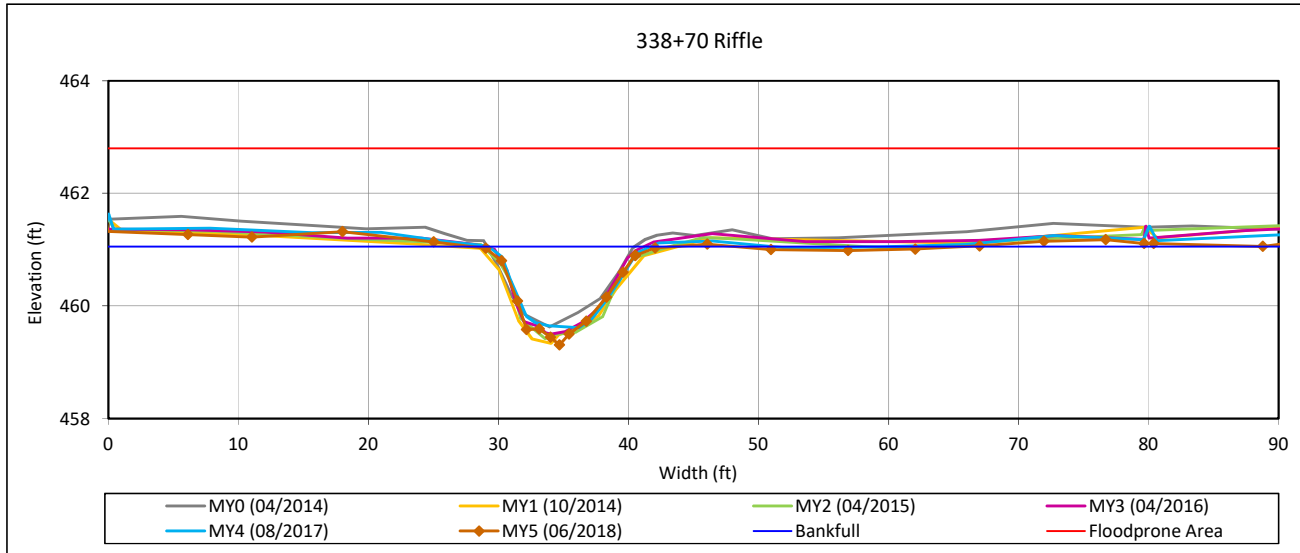

Bankfull Dimensions

| | |
|-------|-------------------------|
| 11.8 | x-section area (ft.sq.) |
| 13.0 | width (ft) |
| 0.9 | mean depth (ft) |
| 1.7 | max depth (ft) |
| 13.7 | wetted perimeter (ft) |
| 0.9 | hyd radi (ft) |
| 14.3 | width-depth ratio |
| 142.6 | W flood prone area (ft) |
| 11.0 | entrenchment ratio |
| 1.1 | low bank height ratio |

Survey Date: 06/2018

Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Norkett Branch Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

Cross-Section 20-UT2 Reach 3B

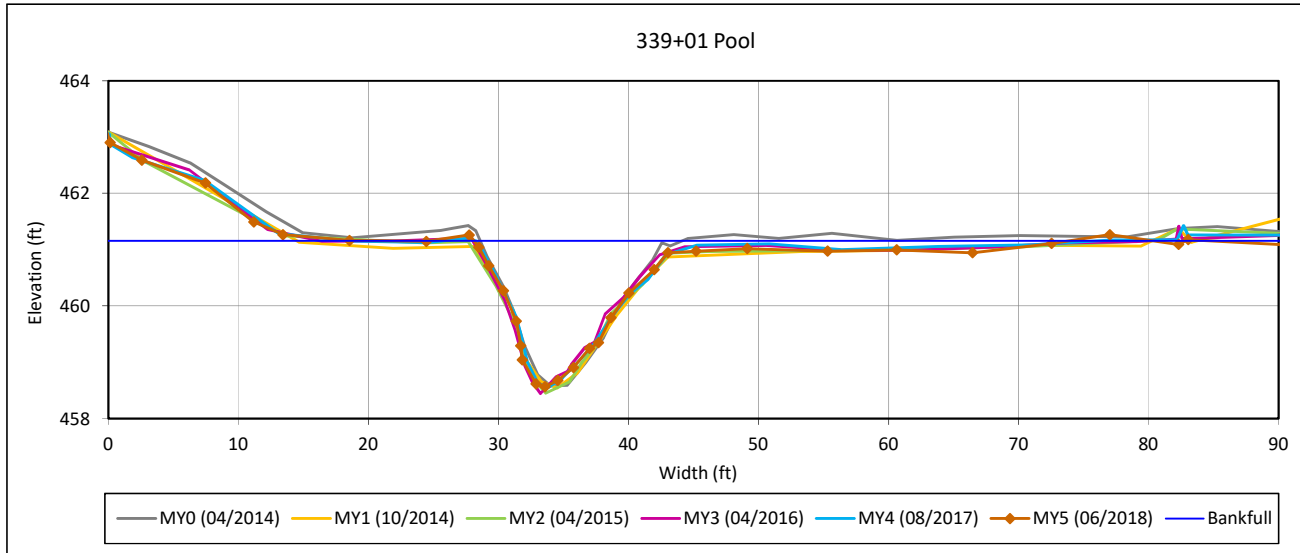

Bankfull Dimensions

| | |
|------|-------------------------|
| 21.2 | x-section area (ft.sq.) |
| 14.5 | width (ft) |
| 1.5 | mean depth (ft) |
| 2.6 | max depth (ft) |
| 15.6 | wetted perimeter (ft) |
| 1.4 | hyd radi (ft) |
| 10.0 | width-depth ratio |

Survey Date: 06/2018

Field Crew: Wildlands Engineering



View Downstream



Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018

Norkett Branch Reach 1, Reachwide

| Particle Class | | Diameter (mm) | | Particle Count | | | Reach Summary | |
|------------------|------------------|---------------|-------|----------------|-----------|------------|------------------|--------------------|
| | | min | max | Riffle | Pool | Total | Class Percentage | Percent Cumulative |
| SILT/CLAY | Silt/Clay | 0.000 | 0.062 | 12 | 35 | 47 | 47 | 47 |
| SAND | Very fine | 0.062 | 0.125 | | | | | 47 |
| | Fine | 0.125 | 0.250 | | 1 | 1 | 1 | 48 |
| | Medium | 0.25 | 0.50 | | | | 2 | 48 |
| | Coarse | 0.5 | 1.0 | | 2 | 2 | 2 | 50 |
| | Very Coarse | 1.0 | 2.0 | | | | | 50 |
| GRAVEL | Very Fine | 2.0 | 2.8 | | | | | 50 |
| | Very Fine | 2.8 | 4.0 | | | | | 50 |
| | Fine | 4.0 | 5.6 | 1 | 1 | 2 | 2 | 52 |
| | Fine | 5.6 | 8.0 | | 2 | 2 | 2 | 54 |
| | Medium | 8.0 | 11.0 | 2 | 4 | 6 | 6 | 60 |
| | Medium | 11.0 | 16.0 | 2 | 3 | 5 | 5 | 65 |
| | Coarse | 16.0 | 22.6 | 5 | | 5 | 5 | 70 |
| | Coarse | 22.6 | 32 | 5 | 1 | 6 | 6 | 76 |
| | Very Coarse | 32 | 45 | 6 | | 6 | 6 | 82 |
| | Very Coarse | 45 | 64 | 3 | | 3 | 3 | 85 |
| COBBLE | Small | 64 | 90 | 5 | 1 | 6 | 6 | 91 |
| | Small | 90 | 128 | 5 | | 5 | 5 | 96 |
| | Large | 128 | 180 | 4 | | 4 | 4 | 100 |
| | Large | 180 | 256 | | | | | 100 |
| BOULDER | Small | 256 | 362 | | | | | 100 |
| | Small | 362 | 512 | | | | | 100 |
| | Medium | 512 | 1024 | | | | | 100 |
| | Large/Very Large | 1024 | 2048 | | | | | 100 |
| BEDROCK | Bedrock | 2048 | >2048 | | | | | 100 |
| Total | | | | 50 | 50 | 100 | 100 | 100 |

| Reachwide Channel materials (mm) | |
|----------------------------------|-----------|
| D ₁₆ = | Silt/Clay |
| D ₃₅ = | Silt/Clay |
| D ₅₀ = | 1.0 |
| D ₈₄ = | 56.9 |
| D ₉₅ = | 119.3 |
| D ₁₀₀ = | 180.0 |

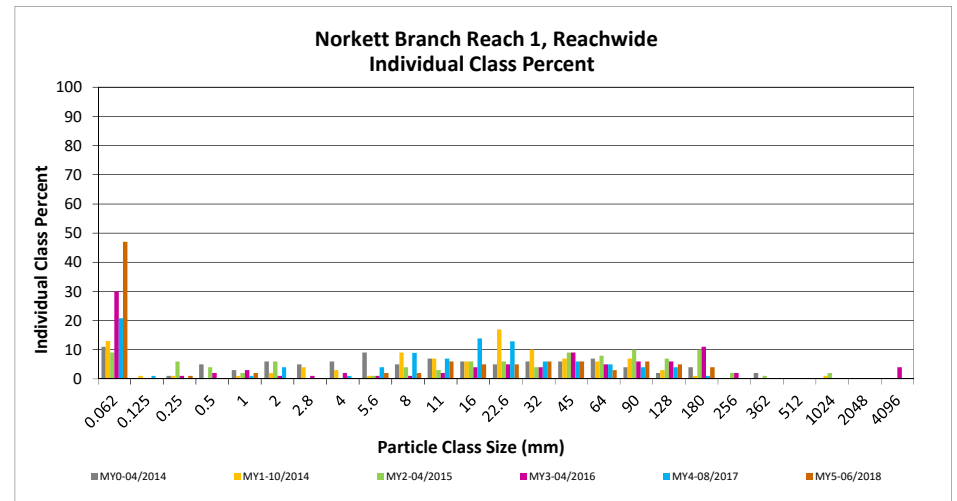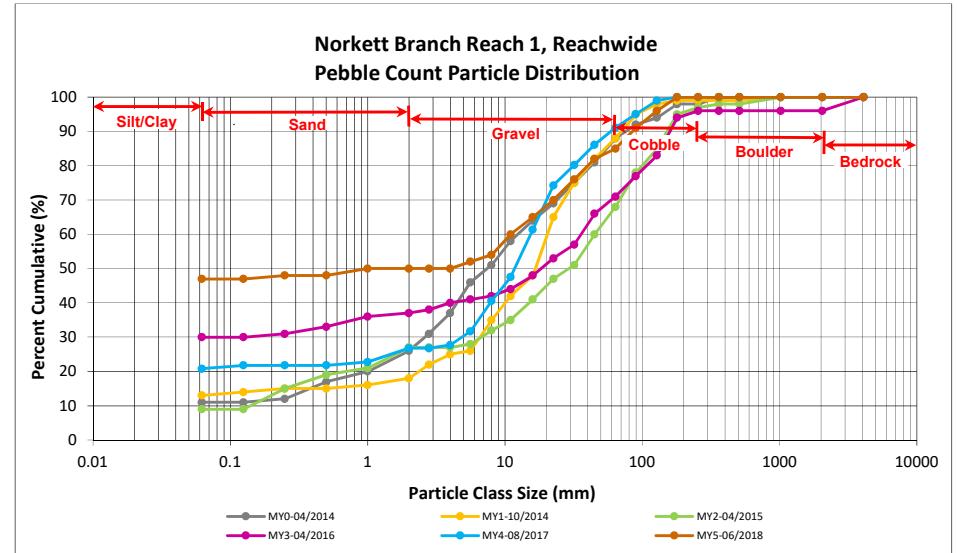

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

Norkett Branch Reach 1, Cross-Section 2

| Particle Class | | Diameter (mm) | | Riffle 100-Count | Summary | |
|------------------|------------------|---------------|-------|------------------|------------------|--------------------|
| | | min | max | | Class Percentage | Percent Cumulative |
| <i>SILT/CLAY</i> | Silt/Clay | 0.000 | 0.062 | | | 0 |
| <i>SAND</i> | Very fine | 0.062 | 0.125 | | | 0 |
| | Fine | 0.125 | 0.250 | | | 0 |
| | Medium | 0.25 | 0.50 | | | 0 |
| | Coarse | 0.5 | 1.0 | 2 | 2 | 2 |
| | Very Coarse | 1.0 | 2.0 | | | 2 |
| <i>GRAVEL</i> | Very Fine | 2.0 | 2.8 | 1 | 1 | 3 |
| | Very Fine | 2.8 | 4.0 | | | 3 |
| | Fine | 4.0 | 5.6 | | | 3 |
| | Medium | 5.6 | 8.0 | 9 | 9 | 12 |
| | Medium | 8.0 | 11.0 | 6 | 6 | 18 |
| | Medium | 11.0 | 16.0 | 19 | 19 | 37 |
| | Coarse | 16.0 | 22.6 | 19 | 19 | 55 |
| | Coarse | 22.6 | 32 | 14 | 14 | 69 |
| | Very Coarse | 32 | 45 | 7 | 7 | 76 |
| | Very Coarse | 45 | 64 | 5 | 5 | 81 |
| <i>COBBLE</i> | Small | 64 | 90 | 7 | 7 | 88 |
| | Small | 90 | 128 | 5 | 5 | 93 |
| | Large | 128 | 180 | 7 | 7 | 100 |
| | Large | 180 | 256 | | | 100 |
| <i>BOULDER</i> | Small | 256 | 362 | | | 100 |
| | Small | 362 | 512 | | | 100 |
| | Medium | 512 | 1024 | | | 100 |
| | Large/Very Large | 1024 | 2048 | | | 100 |
| <i>BEDROCK</i> | Bedrock | 2048 | >2048 | | | 100 |
| Total | | | | 101 | 100 | 100 |

| Cross-Section 2 | |
|------------------------|-------|
| Channel materials (mm) | |
| D ₁₆ = | 9.98 |
| D ₃₅ = | 15.49 |
| D ₅₀ = | 20.4 |
| D ₈₄ = | 73.5 |
| D ₉₅ = | 140.8 |
| D ₁₀₀ = | 180.0 |

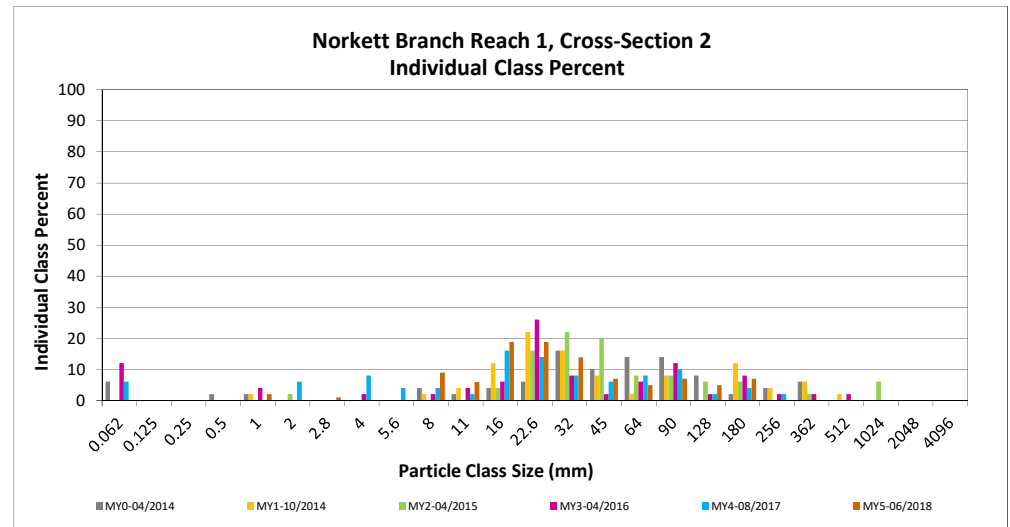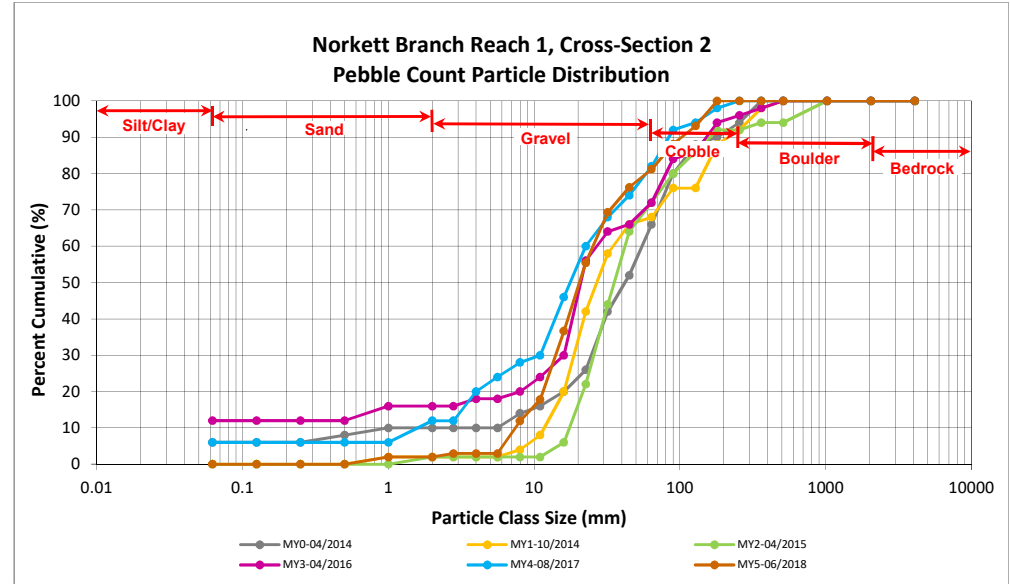

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

Norkett Branch Reach 1, Cross-Section 4

| Particle Class | | Diameter (mm) | | Riffle 100-Count | Summary | |
|------------------|------------------|---------------|-------|------------------|------------------|--------------------|
| | | min | max | | Class Percentage | Percent Cumulative |
| SILT/CLAY | | Silt/Clay | | 15 | 15 | 15 |
| SAND | Very fine | 0.062 | 0.125 | | | 15 |
| | Fine | 0.125 | 0.250 | 1 | 1 | 16 |
| | Medium | 0.25 | 0.50 | 2 | 2 | 18 |
| | Coarse | 0.5 | 1.0 | 3 | 3 | 21 |
| | Very Coarse | 1.0 | 2.0 | 2 | 2 | 23 |
| GRAVEL | Very Fine | 2.0 | 2.8 | | | 23 |
| | Very Fine | 2.8 | 4.0 | 2 | 2 | 25 |
| | Fine | 4.0 | 5.6 | | | 25 |
| | Fine | 5.6 | 8.0 | 1 | 1 | 26 |
| | Medium | 8.0 | 11.0 | 3 | 3 | 29 |
| | Medium | 11.0 | 16.0 | 1 | 1 | 30 |
| | Coarse | 16.0 | 22.6 | 1 | 1 | 31 |
| | Coarse | 22.6 | 32 | 1 | 1 | 32 |
| | Very Coarse | 32 | 45 | 5 | 5 | 37 |
| | Very Coarse | 45 | 64 | 11 | 11 | 48 |
| COBBLE | Small | 64 | 90 | 14 | 14 | 61 |
| | Small | 90 | 128 | 21 | 21 | 82 |
| | Large | 128 | 180 | 16 | 16 | 98 |
| | Large | 180 | 256 | 2 | 2 | 100 |
| BOULDER | Small | 256 | 362 | | | 100 |
| | Small | 362 | 512 | | | 100 |
| | Medium | 512 | 1024 | | | 100 |
| | Large/Very Large | 1024 | 2048 | | | 100 |
| BEDROCK | Bedrock | 2048 | >2048 | | | 100 |
| Total | | | | 101 | 101 | 100 |

| Cross-Section 4 | |
|------------------------|-------|
| Channel materials (mm) | |
| D ₁₆ = | 0.26 |
| D ₃₅ = | 40.21 |
| D ₅₀ = | 68.0 |
| D ₈₄ = | 133.1 |
| D ₉₅ = | 168.7 |
| D ₁₀₀ = | 256.0 |

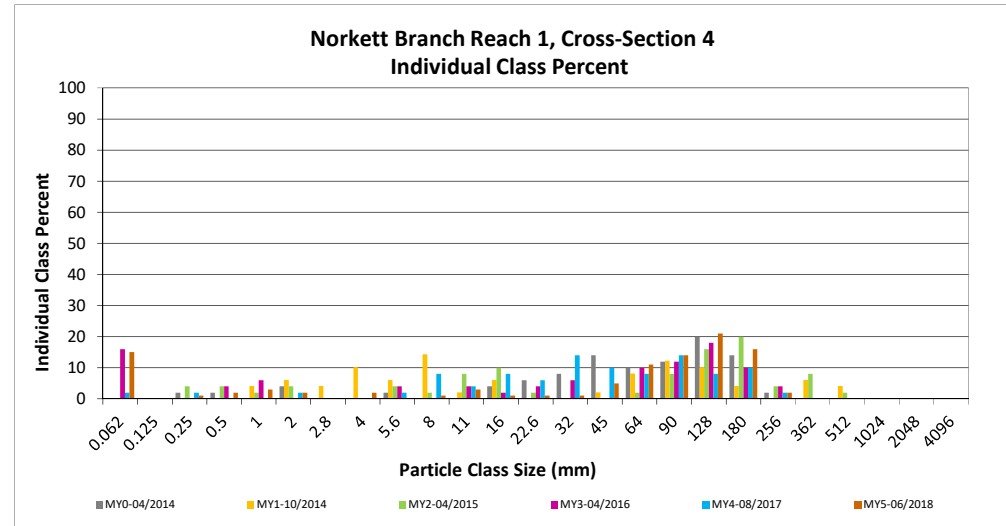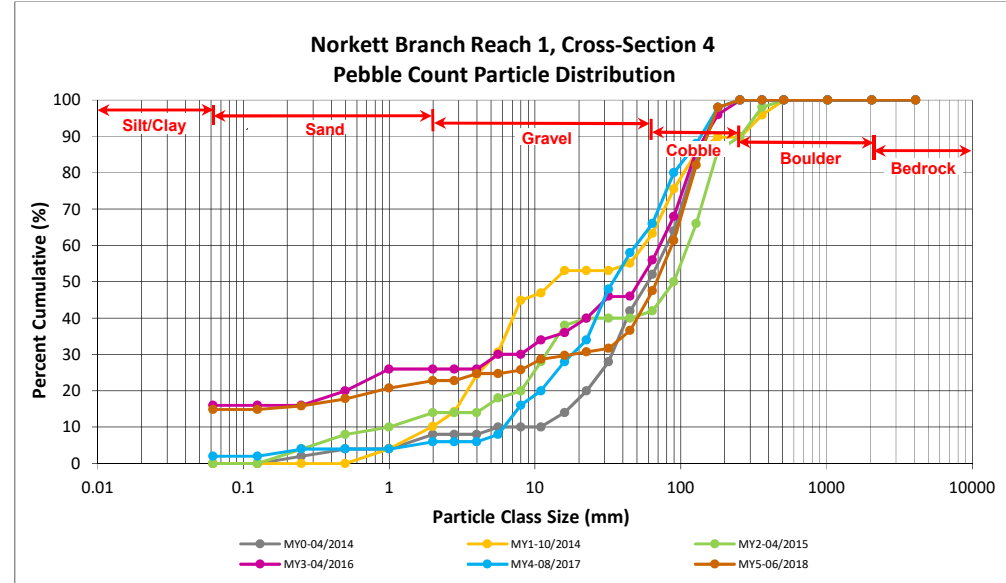

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

Norkett Branch Reach 1, Cross-Section 5

| Particle Class | | Diameter (mm) | | Riffle 100-Count | Summary | |
|------------------|------------------|---------------|-------|------------------|------------------|--------------------|
| | | min | max | | Class Percentage | Percent Cumulative |
| SILT/CLAY | | Silt/Clay | | 65 | 65 | 64 |
| SAND | Very fine | 0.062 | 0.125 | | | 64 |
| | Fine | 0.125 | 0.250 | | | 64 |
| | Medium | 0.25 | 0.50 | | | 64 |
| | Coarse | 0.5 | 1.0 | 1 | 1 | 65 |
| | Very Coarse | 1.0 | 2.0 | 1 | 1 | 66 |
| GRAVEL | Very Fine | 2.0 | 2.8 | | | 66 |
| | Very Fine | 2.8 | 4.0 | | | 66 |
| | Fine | 4.0 | 5.6 | | | 66 |
| | Fine | 5.6 | 8.0 | 1 | 1 | 67 |
| | Medium | 8.0 | 11.0 | | | 67 |
| | Medium | 11.0 | 16.0 | 1 | 1 | 68 |
| | Coarse | 16.0 | 22.6 | 2 | 2 | 70 |
| | Coarse | 22.6 | 32 | 3 | 3 | 73 |
| | Very Coarse | 32 | 45 | 4 | 4 | 76 |
| | Very Coarse | 45 | 64 | 8 | 8 | 84 |
| COBBLE | Small | 64 | 90 | 5 | 5 | 89 |
| | Small | 90 | 128 | 3 | 3 | 92 |
| | Large | 128 | 180 | 8 | 8 | 100 |
| | Large | 180 | 256 | | | 100 |
| BOULDER | Small | 256 | 362 | | | 100 |
| | Small | 362 | 512 | | | 100 |
| | Medium | 512 | 1024 | | | 100 |
| BEDROCK | Large/Very Large | 1024 | 2048 | | | 100 |
| | Bedrock | 2048 | >2048 | | | 100 |
| Total | | | | 102 | 102 | 100 |

| Cross-Section 5 | |
|------------------------|-----------|
| Channel materials (mm) | |
| D ₁₆ = | Silt/Clay |
| D ₃₅ = | Silt/Clay |
| D ₅₀ = | Silt/Clay |
| D ₈₄ = | 63.1 |
| D ₉₅ = | 144.8 |
| D ₁₀₀ = | 180.0 |

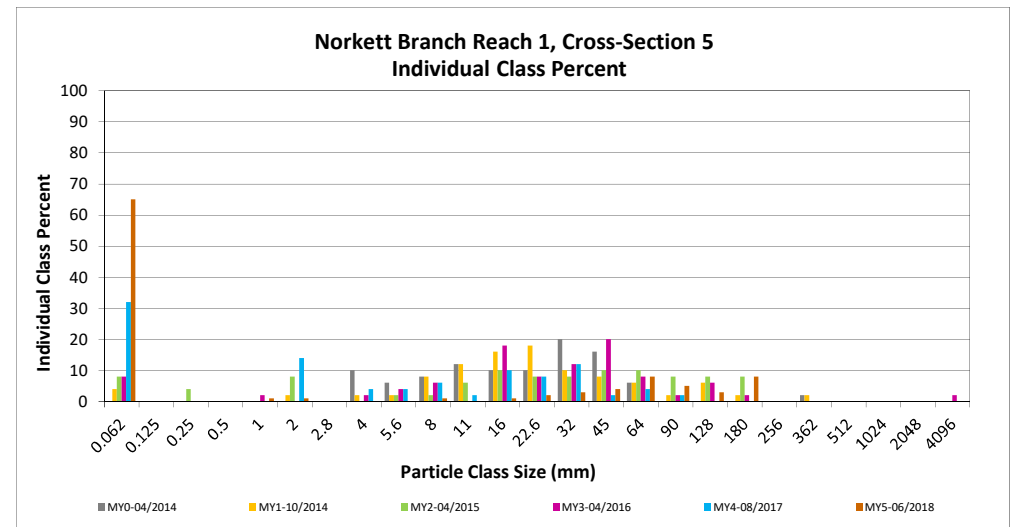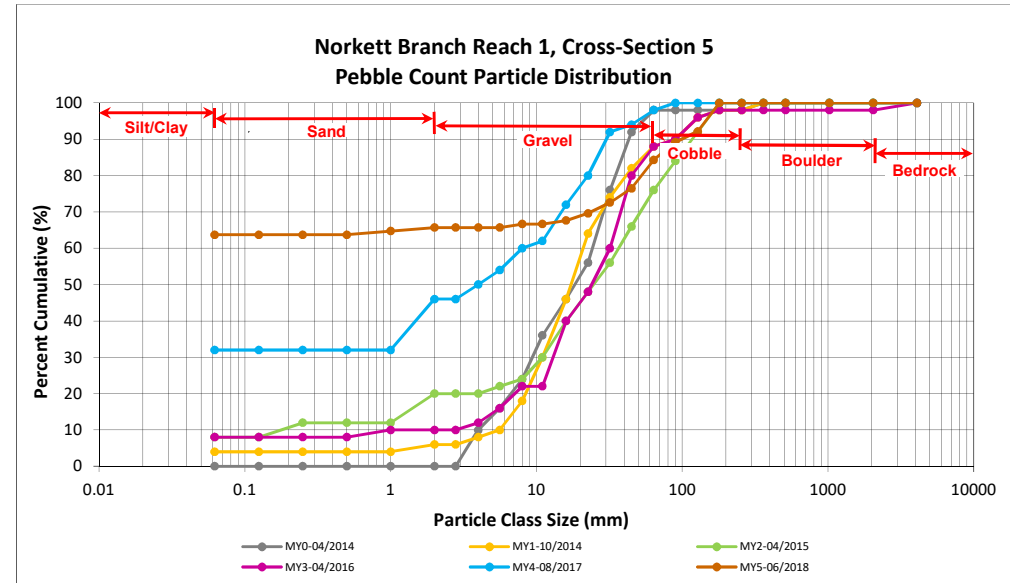



Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018

Norkett Branch Reach 2, Reachwide

| Particle Class | | Diameter (mm) | | Particle Count | | | Reach Summary | |
|------------------|------------------|---------------|-------|----------------|-----------|------------|------------------|--------------------|
| | | min | max | Riffle | Pool | Total | Class Percentage | Percent Cumulative |
| SILT/CLAY | Silt/Clay | 0.000 | 0.062 | 26 | 21 | 47 | 47 | 47 |
| SAND | Very fine | 0.062 | 0.125 | | | | | 47 |
| | Fine | 0.125 | 0.250 | | | | | 47 |
| | Medium | 0.25 | 0.50 | | 1 | 1 | 1 | 48 |
| | Coarse | 0.5 | 1.0 | 5 | 3 | 8 | 8 | 56 |
| | Very Coarse | 1.0 | 2.0 | | | | | 56 |
| GRAVEL | Very Fine | 2.0 | 2.8 | | | | | 56 |
| | Very Fine | 2.8 | 4.0 | | | | | 56 |
| | Fine | 4.0 | 5.6 | | 1 | 1 | 1 | 57 |
| | Fine | 5.6 | 8.0 | | 1 | 1 | 1 | 58 |
| | Medium | 8.0 | 11.0 | 2 | 3 | 5 | 5 | 63 |
| | Medium | 11.0 | 16.0 | 1 | 1 | 2 | 2 | 65 |
| | Coarse | 16.0 | 22.6 | 3 | 2 | 5 | 5 | 70 |
| | Coarse | 22.6 | 32 | | 5 | 5 | 5 | 75 |
| | Very Coarse | 32 | 45 | | 3 | 3 | 3 | 78 |
| | Very Coarse | 45 | 64 | 2 | 4 | 6 | 6 | 84 |
| COBBLE | Small | 64 | 90 | 3 | 1 | 4 | 4 | 88 |
| | Small | 90 | 128 | 3 | 2 | 5 | 5 | 93 |
| | Large | 128 | 180 | 3 | 1 | 4 | 4 | 97 |
| | Large | 180 | 256 | 2 | | 2 | 2 | 99 |
| BOULDER | Small | 256 | 362 | | | | | 99 |
| | Small | 362 | 512 | | | | | 99 |
| | Medium | 512 | 1024 | | | | | 99 |
| | Large/Very Large | 1024 | 2048 | | | | | 99 |
| BEDROCK | Bedrock | 2048 | >2048 | | 1 | 1 | 1 | 100 |
| Total | | | | 50 | 50 | 100 | 100 | 100 |

| Reachwide Channel materials (mm) | |
|----------------------------------|-----------|
| D ₁₆ = | Silt/Clay |
| D ₃₅ = | Silt/Clay |
| D ₅₀ = | 0.6 |
| D ₈₄ = | 64.0 |
| D ₉₅ = | 151.8 |
| D ₁₀₀ = | >2048 |

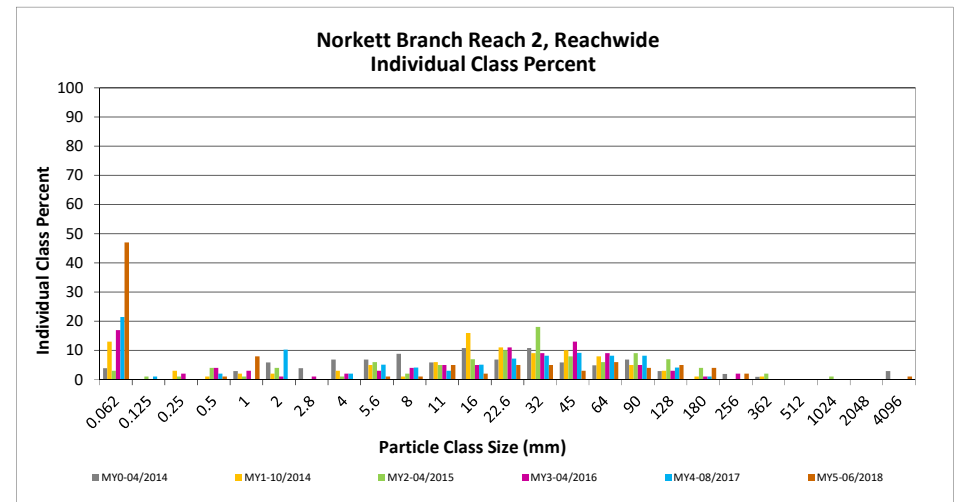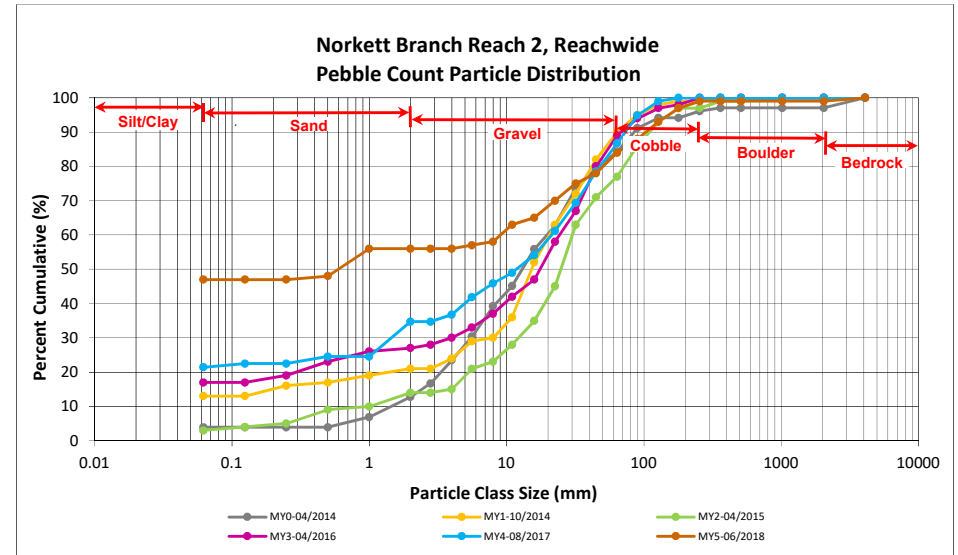

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

Norkett Branch Reach 2, Cross-Section 6

| Particle Class | | Diameter (mm) | | Riffle 100-Count | Summary | |
|------------------|------------------|---------------|-------|------------------|------------------|--------------------|
| | | min | max | | Class Percentage | Percent Cumulative |
| SILT/CLAY | Silt/Clay | 0.000 | 0.062 | 30 | 29 | 29 |
| SAND | Very fine | 0.062 | 0.125 | | | 29 |
| | Fine | 0.125 | 0.250 | | | 29 |
| | Medium | 0.25 | 0.50 | 2 | 2 | 31 |
| | Coarse | 0.5 | 1.0 | 13 | 13 | 43 |
| | Very Coarse | 1.0 | 2.0 | 9 | 9 | 52 |
| GRAVEL | Very Fine | 2.0 | 2.8 | 4 | 4 | 56 |
| | Very Fine | 2.8 | 4.0 | 5 | 5 | 61 |
| | Fine | 4.0 | 5.6 | 6 | 6 | 66 |
| | Fine | 5.6 | 8.0 | 7 | 7 | 73 |
| | Medium | 8.0 | 11.0 | 11 | 11 | 84 |
| | Medium | 11.0 | 16.0 | 9 | 9 | 92 |
| | Coarse | 16.0 | 22.6 | 7 | 7 | 99 |
| | Coarse | 22.6 | 32 | 1 | 1 | 100 |
| | Very Coarse | 32 | 45 | | | 100 |
| | Very Coarse | 45 | 64 | | | 100 |
| COBBLE | Small | 64 | 90 | | | 100 |
| | Small | 90 | 128 | | | 100 |
| | Large | 128 | 180 | | | 100 |
| | Large | 180 | 256 | | | 100 |
| BOULDER | Small | 256 | 362 | | | 100 |
| | Small | 362 | 512 | | | 100 |
| | Medium | 512 | 1024 | | | 100 |
| | Large/Very Large | 1024 | 2048 | | | 100 |
| BEDROCK | Bedrock | 2048 | >2048 | | | 100 |
| Total | | | | 104 | 100 | 100 |

| Cross-Section 6 | |
|------------------------|-----------|
| Channel materials (mm) | |
| D ₁₆ = | Silt/Clay |
| D ₃₅ = | 0.63 |
| D ₅₀ = | 1.7 |
| D ₈₄ = | 11.2 |
| D ₉₅ = | 18.4 |
| D ₁₀₀ = | 32.0 |

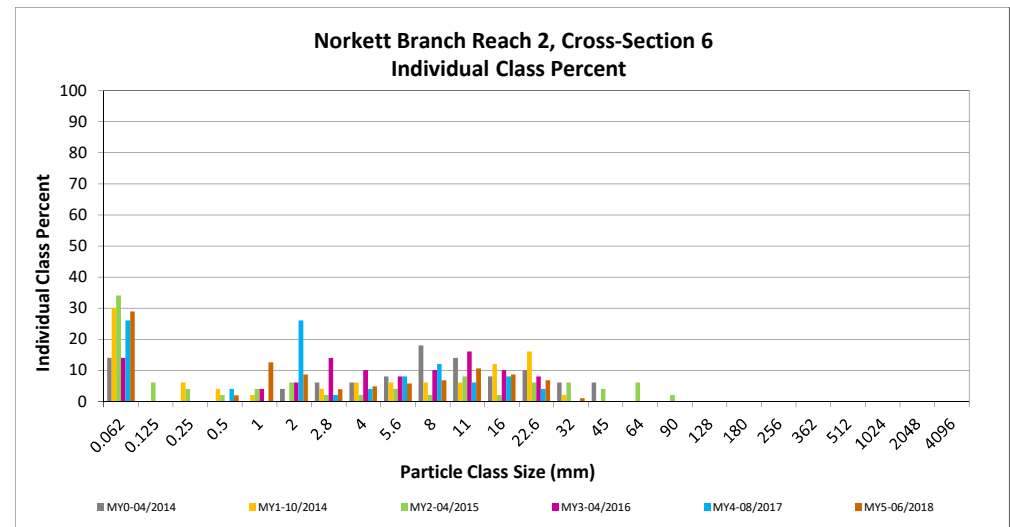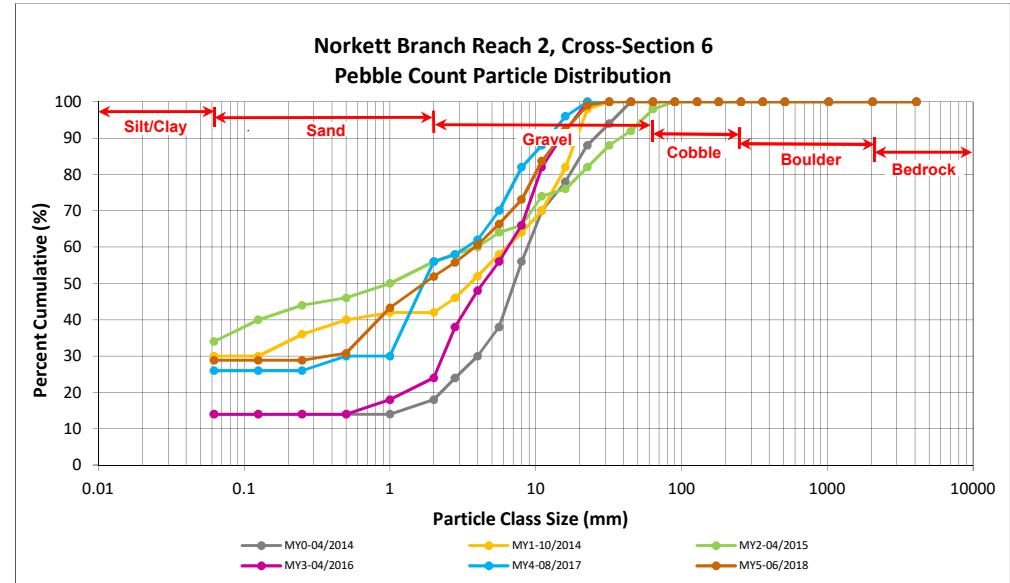

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

Norkett Branch Reach 2, Cross-Section 7

| Particle Class | | Diameter (mm) | | Riffle 100-Count | Summary | | |
|-------------------------|-------------|---------------|-------|------------------|------------------|--------------------|----|
| | | min | max | | Class Percentage | Percent Cumulative | |
| SILT/CLAY | | Silt/Clay | 0.000 | 0.062 | 28 | 28 | 28 |
| SAND | Very fine | 0.062 | 0.125 | | | 28 | |
| | Fine | 0.125 | 0.250 | | | 28 | |
| | Medium | 0.25 | 0.50 | | | 28 | |
| | Coarse | 0.5 | 1.0 | 2 | 2 | 30 | |
| | Very Coarse | 1.0 | 2.0 | 1 | 1 | 31 | |
| GRAVEL | Very Fine | 2.0 | 2.8 | 2 | 2 | 33 | |
| | Very Fine | 2.8 | 4.0 | 1 | 1 | 34 | |
| | Fine | 4.0 | 5.6 | | | 34 | |
| | Fine | 5.6 | 8.0 | 3 | 3 | 37 | |
| | Medium | 8.0 | 11.0 | 6 | 6 | 43 | |
| | Medium | 11.0 | 16.0 | 7 | 7 | 50 | |
| | Coarse | 16.0 | 22.6 | 11 | 11 | 61 | |
| | Coarse | 22.6 | 32 | 9 | 9 | 70 | |
| | Very Coarse | 32 | 45 | 9 | 9 | 79 | |
| | Very Coarse | 45 | 64 | 10 | 10 | 89 | |
| COBBLE | Small | 64 | 90 | 2 | 2 | 91 | |
| | Small | 90 | 128 | 2 | 2 | 93 | |
| | Large | 128 | 180 | 3 | 3 | 96 | |
| | Large | 180 | 256 | 2 | 2 | 98 | |
| BOULDER | Small | 256 | 362 | 2 | 2 | 100 | |
| | Small | 362 | 512 | | | 100 | |
| | Medium | 512 | 1024 | | | 100 | |
| Large/Very Large | | 1024 | 2048 | | | 100 | |
| BEDROCK | | Bedrock | 2048 | >2048 | | 100 | |
| Total | | | | 100 | 100 | 100 | |

| Cross-Section 7 | |
|------------------------|-----------|
| Channel materials (mm) | |
| D ₁₆ = | Silt/Clay |
| D ₃₅ = | 6.31 |
| D ₅₀ = | 16.0 |
| D ₈₄ = | 53.7 |
| D ₉₅ = | 160.7 |
| D ₁₀₀ = | 362.0 |

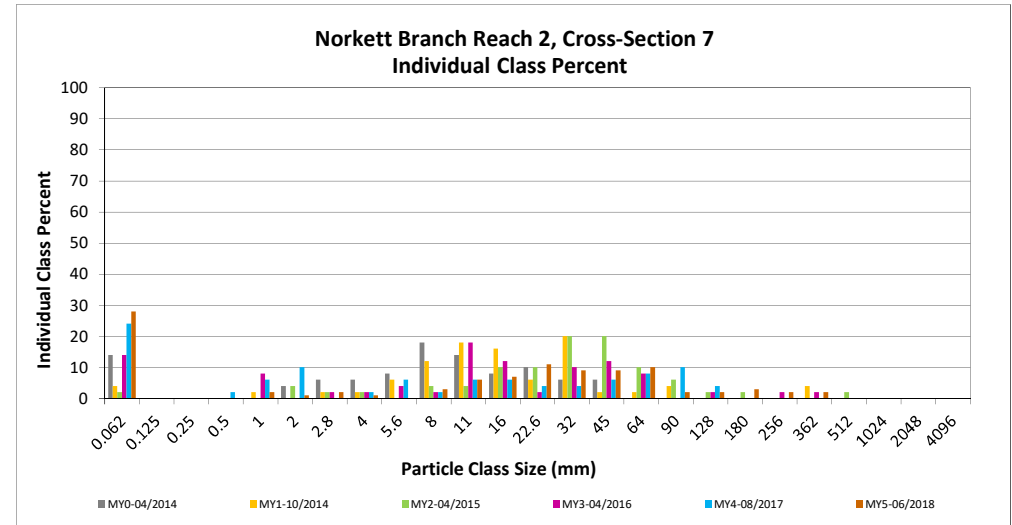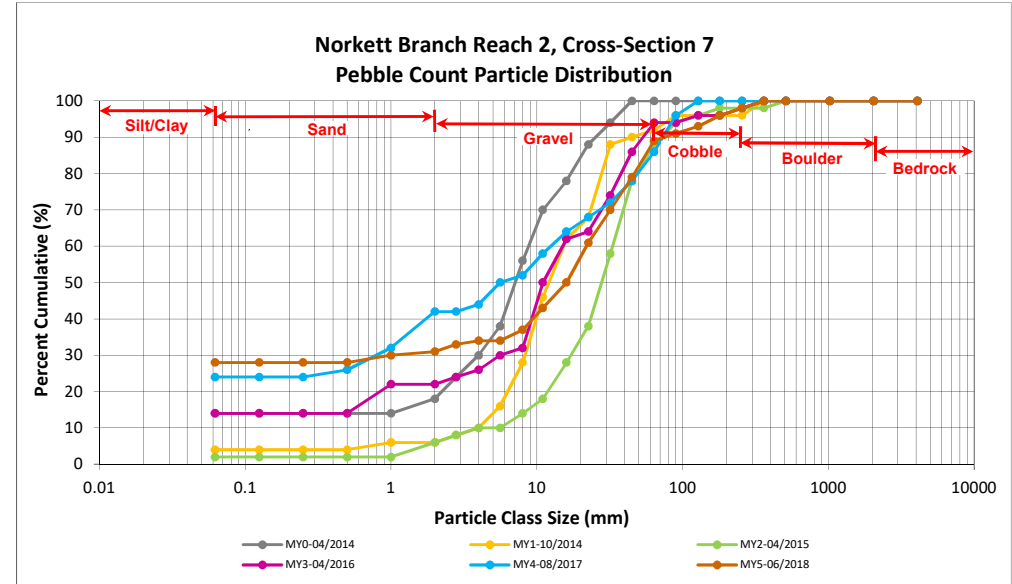

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

UT1, Reachwide

| Particle Class | | Diameter (mm) | | Particle Count | | | Reach Summary | |
|------------------|------------------|---------------|-------|----------------|-----------|------------|------------------|--------------------|
| | | min | max | Riffle | Pool | Total | Class Percentage | Percent Cumulative |
| SILT/CLAY | Silt/Clay | 0.000 | 0.062 | 13 | 38 | 51 | 51 | 51 |
| SAND | Very fine | 0.062 | 0.125 | | | | | 51 |
| | Fine | 0.125 | 0.250 | | | | | 51 |
| | Medium | 0.25 | 0.50 | 1 | | 1 | 1 | 52 |
| | Coarse | 0.5 | 1.0 | 3 | 1 | 4 | 4 | 56 |
| | Very Coarse | 1.0 | 2.0 | | 3 | 3 | 3 | 59 |
| GRAVEL | Very Fine | 2.0 | 2.8 | | | | | 59 |
| | Very Fine | 2.8 | 4.0 | 1 | | 1 | 1 | 60 |
| | Fine | 4.0 | 5.6 | | | | | 60 |
| | Fine | 5.6 | 8.0 | 3 | 1 | 4 | 4 | 64 |
| | Medium | 8.0 | 11.0 | 1 | | 1 | 1 | 65 |
| | Medium | 11.0 | 16.0 | 1 | 1 | 2 | 2 | 67 |
| | Coarse | 16.0 | 22.6 | 2 | 1 | 3 | 3 | 70 |
| | Coarse | 22.6 | 32 | 3 | 1 | 4 | 4 | 74 |
| | Very Coarse | 32 | 45 | 1 | 1 | 2 | 2 | 76 |
| COBBLE | Very Coarse | 45 | 64 | 8 | 1 | 9 | 9 | 85 |
| | Small | 64 | 90 | 8 | 1 | 9 | 9 | 94 |
| | Small | 90 | 128 | 3 | | 3 | 3 | 97 |
| Boulder | Large | 128 | 180 | 2 | 1 | 3 | 3 | 100 |
| | Large | 180 | 256 | | | | | 100 |
| Bedrock | Small | 256 | 362 | | | | | 100 |
| | Small | 362 | 512 | | | | | 100 |
| | Medium | 512 | 1024 | | | | | 100 |
| Bedrock | Large/Very Large | 1024 | 2048 | | | | | 100 |
| | Bedrock | 2048 | >2048 | | | | | 100 |
| Total | | | | 50 | 50 | 100 | 100 | 100 |

| Reachwide Channel materials (mm) | |
|----------------------------------|-----------|
| D ₁₆ = | Silt/Clay |
| D ₃₅ = | Silt/Clay |
| D ₅₀ = | Silt/Clay |
| D ₈₄ = | 61.5 |
| D ₉₅ = | 101.2 |
| D ₁₀₀ = | 180.0 |

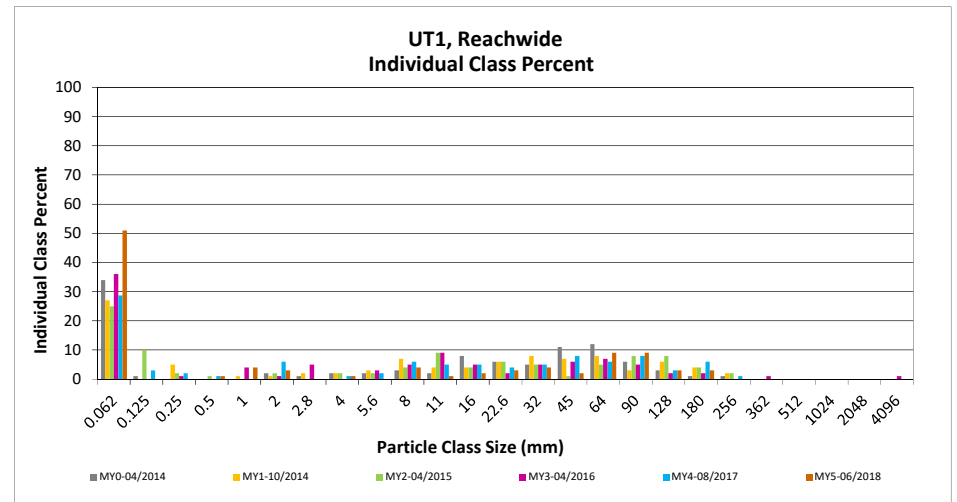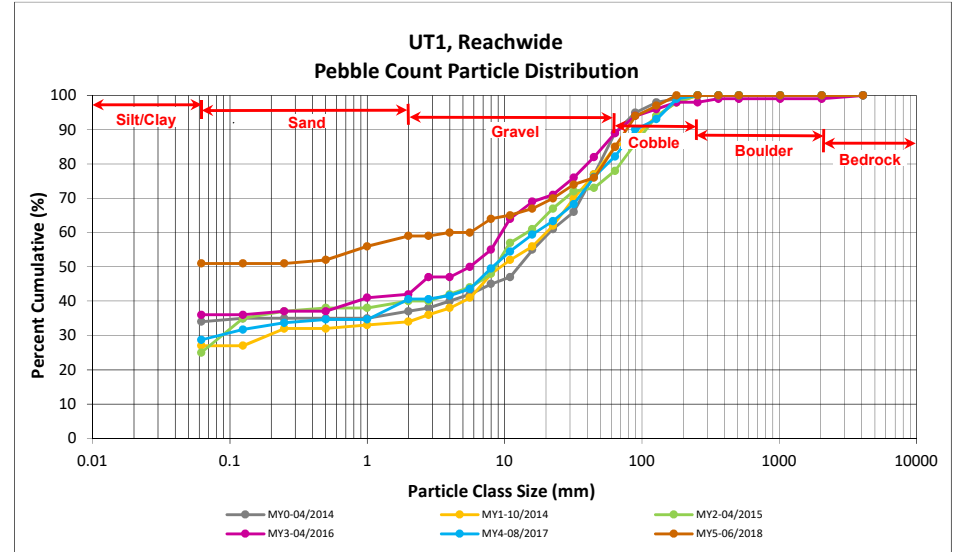

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

UT1, Cross-Section 9

| Particle Class | | Diameter (mm) | | Riffle 100-Count | Summary | |
|------------------|------------------|---------------|-------|------------------|------------------|--------------------|
| | | min | max | | Class Percentage | Percent Cumulative |
| <i>SILT/CLAY</i> | Silt/Clay | 0.000 | 0.062 | 19 | 19 | 19 |
| <i>SAND</i> | Very fine | 0.062 | 0.125 | | | 19 |
| | Fine | 0.125 | 0.250 | 2 | 2 | 21 |
| | Medium | 0.25 | 0.50 | 2 | 2 | 23 |
| | Coarse | 0.5 | 1.0 | 3 | 3 | 26 |
| | Very Coarse | 1.0 | 2.0 | | | 26 |
| <i>GRAVEL</i> | Very Fine | 2.0 | 2.8 | | | 26 |
| | Very Fine | 2.8 | 4.0 | | | 26 |
| | Fine | 4.0 | 5.6 | 1 | 1 | 27 |
| | Fine | 5.6 | 8.0 | | | 27 |
| | Medium | 8.0 | 11.0 | 1 | 1 | 28 |
| | Medium | 11.0 | 16.0 | 4 | 4 | 32 |
| | Coarse | 16.0 | 22.6 | 4 | 4 | 36 |
| | Coarse | 22.6 | 32 | 12 | 12 | 48 |
| | Very Coarse | 32 | 45 | 9 | 9 | 57 |
| | Very Coarse | 45 | 64 | 19 | 19 | 76 |
| <i>COBBLE</i> | Small | 64 | 90 | 14 | 14 | 90 |
| | Small | 90 | 128 | 4 | 4 | 94 |
| | Large | 128 | 180 | 4 | 4 | 98 |
| | Large | 180 | 256 | | | 98 |
| <i>BOULDER</i> | Small | 256 | 362 | 2 | 2 | 100 |
| | Small | 362 | 512 | | | 100 |
| | Medium | 512 | 1024 | | | 100 |
| | Large/Very Large | 1024 | 2048 | | | 100 |
| <i>BEDROCK</i> | Bedrock | 2048 | >2048 | | | 100 |
| Total | | | | 100 | 100 | 100 |

| Cross-Section 9 | |
|------------------------|-----------|
| Channel materials (mm) | |
| D ₁₆ = | Silt/Clay |
| D ₃₅ = | 20.73 |
| D ₅₀ = | 34.5 |
| D ₈₄ = | 77.8 |
| D ₉₅ = | 139.4 |
| D ₁₀₀ = | 362.0 |

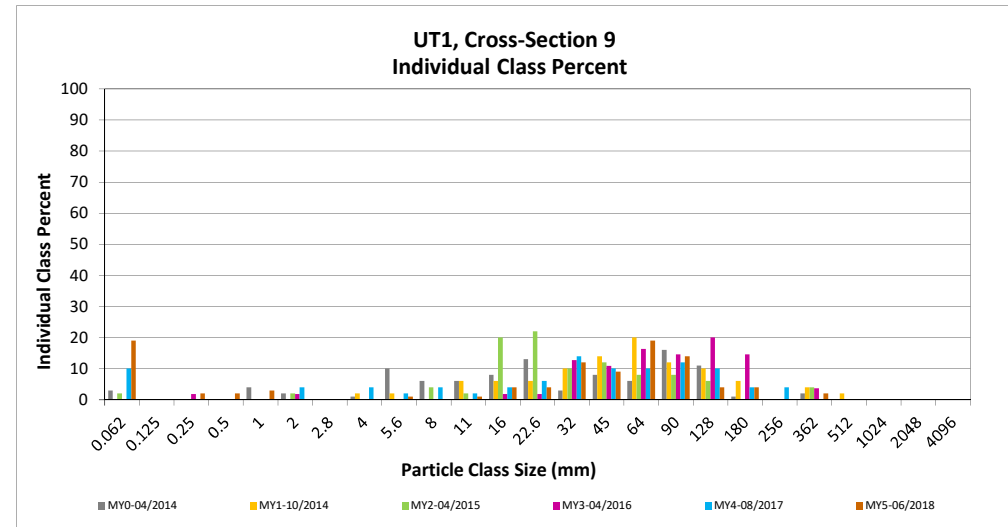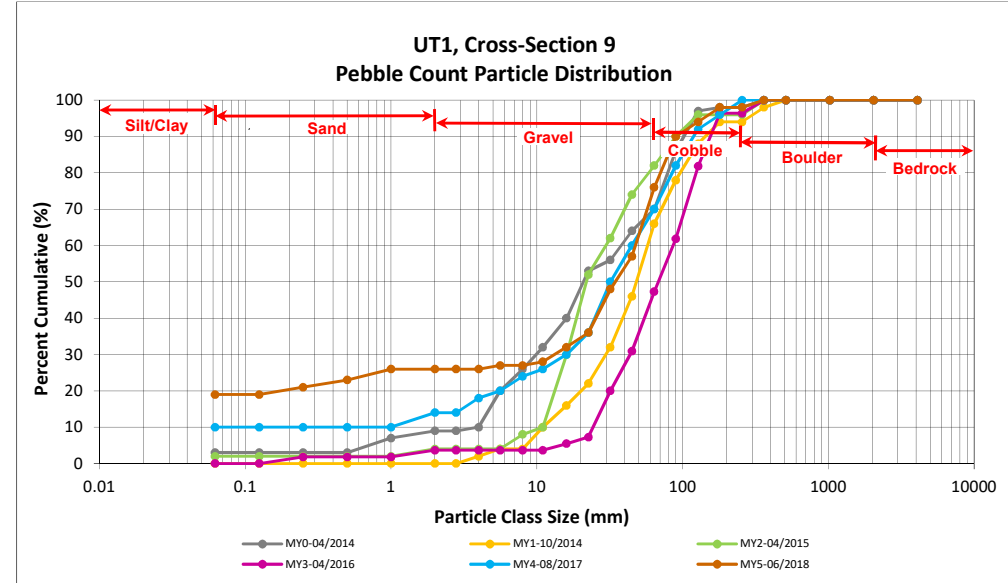

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 1, Reachwide

| Particle Class | | Diameter (mm) | | Particle Count | | | Reach Summary | |
|------------------|------------------|---------------|-------|----------------|-----------|------------|------------------|--------------------|
| | | min | max | Riffle | Pool | Total | Class Percentage | Percent Cumulative |
| SILT/CLAY | Silt/Clay | 0.000 | 0.062 | 11 | 40 | 51 | 51 | 51 |
| SAND | Very fine | 0.062 | 0.125 | | | | | 51 |
| | Fine | 0.125 | 0.250 | | | | | 51 |
| | Medium | 0.25 | 0.50 | | | | | 51 |
| | Coarse | 0.5 | 1.0 | | | | | 51 |
| | Very Coarse | 1.0 | 2.0 | 2 | | 2 | 2 | 53 |
| GRAVEL | Very Fine | 2.0 | 2.8 | | | | | 53 |
| | Very Fine | 2.8 | 4.0 | | 1 | 1 | 1 | 54 |
| | Fine | 4.0 | 5.6 | 1 | 1 | 2 | 2 | 56 |
| | Fine | 5.6 | 8.0 | | 2 | 2 | 2 | 58 |
| | Medium | 8.0 | 11.0 | 3 | 1 | 4 | 4 | 62 |
| | Medium | 11.0 | 16.0 | 4 | | 4 | 4 | 66 |
| | Coarse | 16.0 | 22.6 | 3 | 2 | 5 | 5 | 71 |
| | Coarse | 22.6 | 32 | 6 | 2 | 8 | 8 | 79 |
| | Very Coarse | 32 | 45 | 4 | 1 | 5 | 5 | 84 |
| | Very Coarse | 45 | 64 | 4 | | 4 | 4 | 88 |
| COBBLE | Small | 64 | 90 | 5 | | 5 | 5 | 93 |
| | Small | 90 | 128 | 5 | | 5 | 5 | 98 |
| | Large | 128 | 180 | 2 | | 2 | 2 | 100 |
| BOULDER | Large | 180 | 256 | | | | | 100 |
| | Small | 256 | 362 | | | | | 100 |
| | Small | 362 | 512 | | | | | 100 |
| | Medium | 512 | 1024 | | | | | 100 |
| BEDROCK | Large/Very Large | 1024 | 2048 | | | | | 100 |
| | Bedrock | 2048 | >2048 | | | | | 100 |
| Total | | | | 50 | 50 | 100 | 100 | 100 |

| Reachwide Channel materials (mm) | |
|----------------------------------|-----------|
| D ₁₆ = | Silt/Clay |
| D ₃₅ = | Silt/Clay |
| D ₅₀ = | Silt/Clay |
| D ₈₄ = | 45.0 |
| D ₉₅ = | 103.6 |
| D ₁₀₀ = | 180.0 |

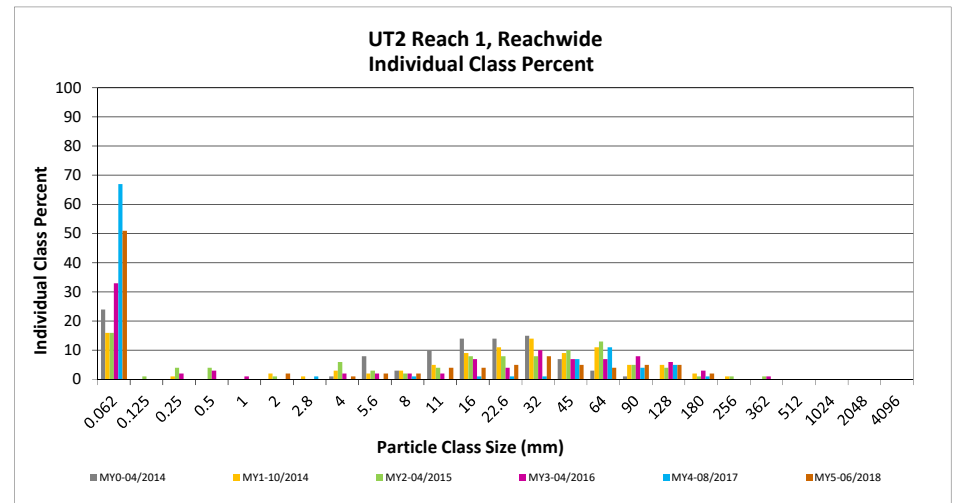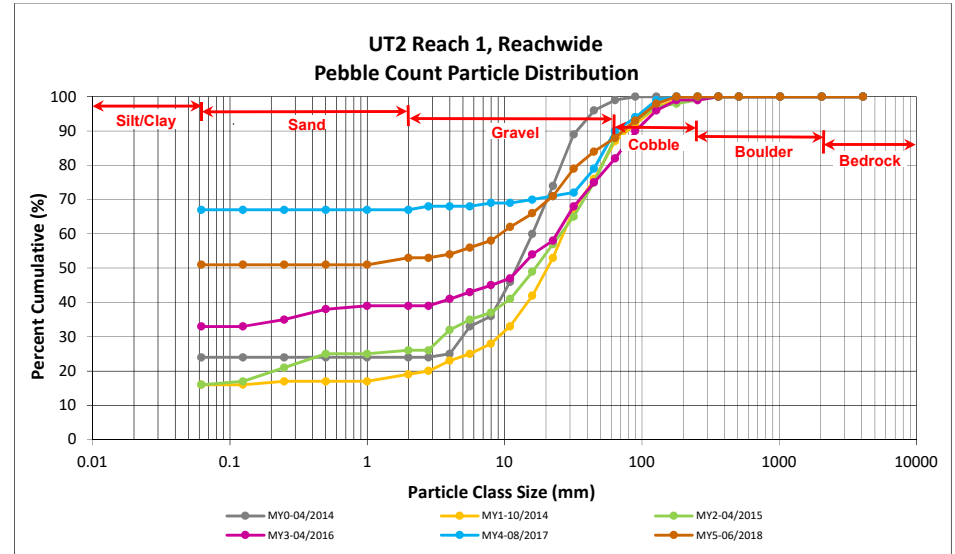

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 1, Cross-Section 12

| Particle Class | | Diameter (mm) | | Riffle 100-Count | Summary | |
|------------------|------------------|---------------|-------|------------------|------------------|--------------------|
| | | min | max | | Class Percentage | Percent Cumulative |
| <i>SILT/CLAY</i> | Silt/Clay | 0.000 | 0.062 | 6 | 6 | 6 |
| <i>SAND</i> | Very fine | 0.062 | 0.125 | | | 6 |
| | Fine | 0.125 | 0.250 | | | 6 |
| | Medium | 0.25 | 0.50 | | | 6 |
| | Coarse | 0.5 | 1.0 | | | 6 |
| | Very Coarse | 1.0 | 2.0 | 2 | 2 | 8 |
| <i>GRAVEL</i> | Very Fine | 2.0 | 2.8 | | | 8 |
| | Very Fine | 2.8 | 4.0 | 1 | 1 | 9 |
| | Fine | 4.0 | 5.6 | 1 | 1 | 10 |
| | Fine | 5.6 | 8.0 | 1 | 1 | 11 |
| | Medium | 8.0 | 11.0 | 2 | 2 | 13 |
| | Medium | 11.0 | 16.0 | 3 | 3 | 16 |
| | Coarse | 16.0 | 22.6 | 6 | 6 | 22 |
| | Coarse | 22.6 | 32 | 14 | 14 | 36 |
| | Very Coarse | 32 | 45 | 23 | 23 | 59 |
| | Very Coarse | 45 | 64 | 15 | 15 | 74 |
| <i>COBBLE</i> | Small | 64 | 90 | 15 | 15 | 89 |
| | Small | 90 | 128 | 8 | 8 | 97 |
| | Large | 128 | 180 | 3 | 3 | 100 |
| | Large | 180 | 256 | | | 100 |
| <i>BOULDER</i> | Small | 256 | 362 | | | 100 |
| | Small | 362 | 512 | | | 100 |
| | Medium | 512 | 1024 | | | 100 |
| | Large/Very Large | 1024 | 2048 | | | 100 |
| <i>BEDROCK</i> | Bedrock | 2048 | >2048 | | | 100 |
| | | Total | | 100 | 100 | 100 |

| Cross-Section 12 | |
|------------------------|-------|
| Channel materials (mm) | |
| D ₁₆ = | 16.00 |
| D ₃₅ = | 31.21 |
| D ₅₀ = | 39.4 |
| D ₈₄ = | 80.3 |
| D ₉₅ = | 117.2 |
| D ₁₀₀ = | 180.0 |

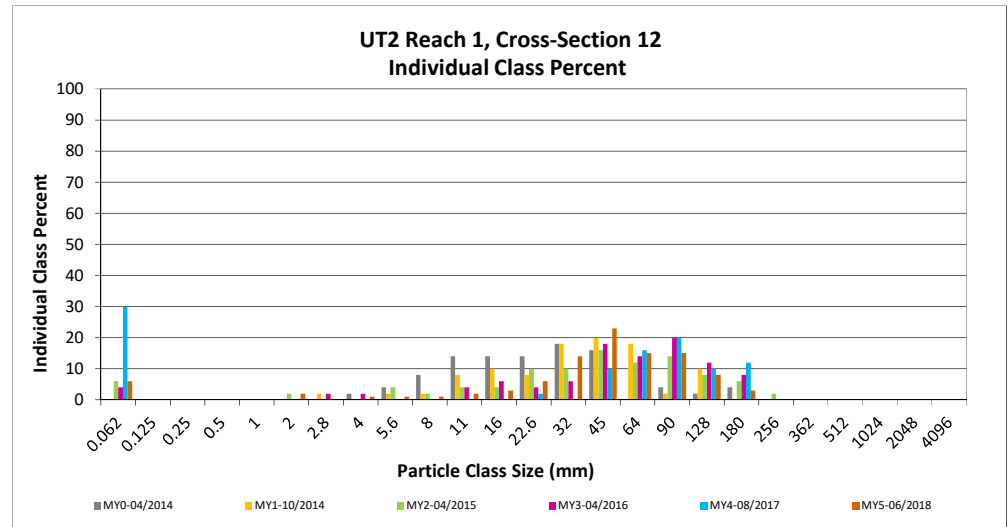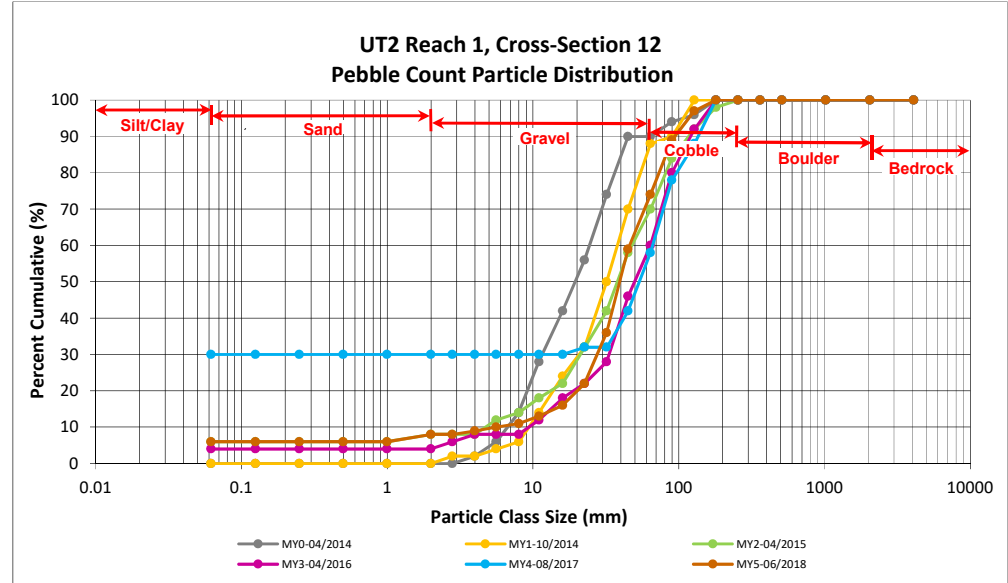

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 2, Reachwide

| Particle Class | | Diameter (mm) | | Particle Count | | | Reach Summary | |
|------------------|------------------|---------------|-------|----------------|-----------|------------|------------------|--------------------|
| | | min | max | Riffle | Pool | Total | Class Percentage | Percent Cumulative |
| SILT/CLAY | Silt/Clay | 0.000 | 0.062 | 5 | 38 | 43 | 43 | 43 |
| SAND | Very fine | 0.062 | 0.125 | | | | | 43 |
| | Fine | 0.125 | 0.250 | | | | | 43 |
| | Medium | 0.25 | 0.50 | | | | | 43 |
| | Coarse | 0.5 | 1.0 | | | | | 43 |
| | Very Coarse | 1.0 | 2.0 | | | | | 43 |
| GRAVEL | Very Fine | 2.0 | 2.8 | | 1 | 1 | 1 | 44 |
| | Very Fine | 2.8 | 4.0 | | | | | 44 |
| | Fine | 4.0 | 5.6 | | | | | 44 |
| | Fine | 5.6 | 8.0 | 1 | 1 | 2 | 2 | 46 |
| | Medium | 8.0 | 11.0 | 1 | 1 | 2 | 2 | 48 |
| | Medium | 11.0 | 16.0 | 2 | 2 | 4 | 4 | 52 |
| | Coarse | 16.0 | 22.6 | 2 | 3 | 5 | 5 | 57 |
| | Coarse | 22.6 | 32 | 4 | 1 | 5 | 5 | 62 |
| | Very Coarse | 32 | 45 | 7 | 1 | 8 | 8 | 70 |
| Very Coarse | 45 | 64 | 12 | 1 | 13 | 13 | 83 | |
| COBBLE | Small | 64 | 90 | 7 | | 7 | 7 | 90 |
| | Small | 90 | 128 | 5 | 1 | 6 | 6 | 96 |
| | Large | 128 | 180 | 4 | | 4 | 4 | 100 |
| | Large | 180 | 256 | | | | | 100 |
| BOULDER | Small | 256 | 362 | | | | | 100 |
| | Small | 362 | 512 | | | | | 100 |
| | Medium | 512 | 1024 | | | | | 100 |
| | Large/Very Large | 1024 | 2048 | | | | | 100 |
| BEDROCK | Bedrock | 2048 | >2048 | | | | | 100 |
| Total | | | | 50 | 50 | 100 | 100 | 100 |

| Reachwide Channel materials (mm) | |
|----------------------------------|-----------|
| D ₁₆ = | Silt/Clay |
| D ₃₅ = | Silt/Clay |
| D ₅₀ = | 13.3 |
| D ₈₄ = | 67.2 |
| D ₉₅ = | 120.7 |
| D ₁₀₀ = | 180.0 |

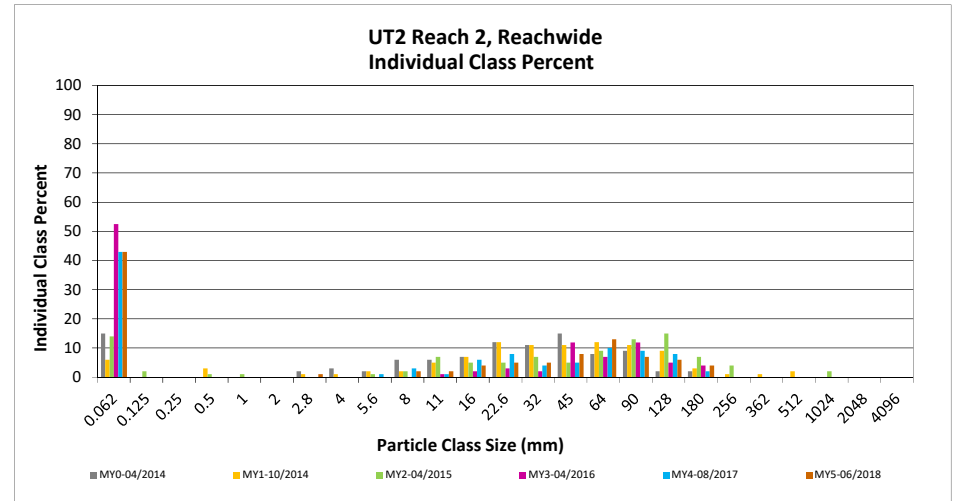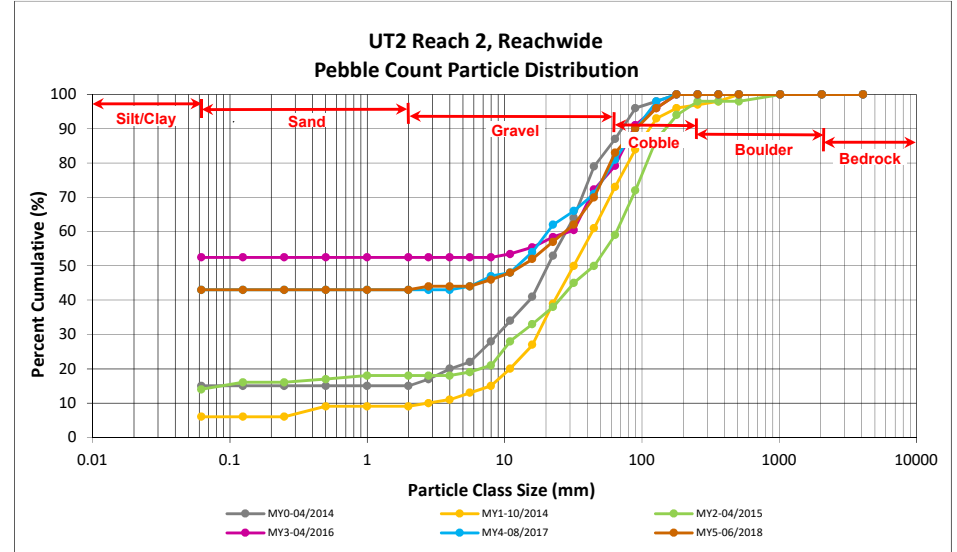

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 2, Cross-Section 13

| Particle Class | | Diameter (mm) | | Riffle 100-Count | Summary | | | |
|------------------|------------------|---------------|-------|------------------|------------------|--------------------|---|------------|
| | | min | max | | Class Percentage | Percent Cumulative | | |
| SILT/CLAY | | Silt/Clay | | 0.000 | 0.062 | 1 | 1 | 1 |
| SAND | Very fine | 0.062 | 0.125 | | | | | 1 |
| | Fine | 0.125 | 0.250 | | | | | 1 |
| | Medium | 0.25 | 0.50 | | | | | 1 |
| | Coarse | 0.5 | 1.0 | 1 | | 1 | | 2 |
| | Very Coarse | 1.0 | 2.0 | | | | | 2 |
| GRAVEL | Very Fine | 2.0 | 2.8 | | | | | 2 |
| | Very Fine | 2.8 | 4.0 | | | | | 2 |
| | Fine | 4.0 | 5.6 | 1 | | 1 | | 3 |
| | Fine | 5.6 | 8.0 | | | | | 3 |
| | Medium | 8.0 | 11.0 | 2 | | 2 | | 5 |
| | Medium | 11.0 | 16.0 | 3 | | 3 | | 8 |
| | Coarse | 16.0 | 22.6 | 3 | | 3 | | 11 |
| | Coarse | 22.6 | 32 | 9 | | 9 | | 20 |
| | Very Coarse | 32 | 45 | 24 | | 24 | | 44 |
| | Very Coarse | 45 | 64 | 23 | | 23 | | 67 |
| COBBLE | Small | 64 | 90 | 18 | | 18 | | 85 |
| | Small | 90 | 128 | 12 | | 12 | | 97 |
| | Large | 128 | 180 | 1 | | 1 | | 98 |
| | Large | 180 | 256 | 2 | | 2 | | 100 |
| BOULDER | Small | 256 | 362 | | | | | 100 |
| | Small | 362 | 512 | | | | | 100 |
| | Medium | 512 | 1024 | | | | | 100 |
| | Large/Very Large | 1024 | 2048 | | | | | 100 |
| BEDROCK | Bedrock | 2048 | >2048 | | | | | 100 |
| Total | | | | 100 | | | | 100 |

| Cross-Section 13 | |
|------------------------|-------|
| Channel materials (mm) | |
| D ₁₆ = | 27.42 |
| D ₃₅ = | 39.60 |
| D ₅₀ = | 49.3 |
| D ₈₄ = | 88.3 |
| D ₉₅ = | 120.7 |
| D ₁₀₀ = | 256.0 |

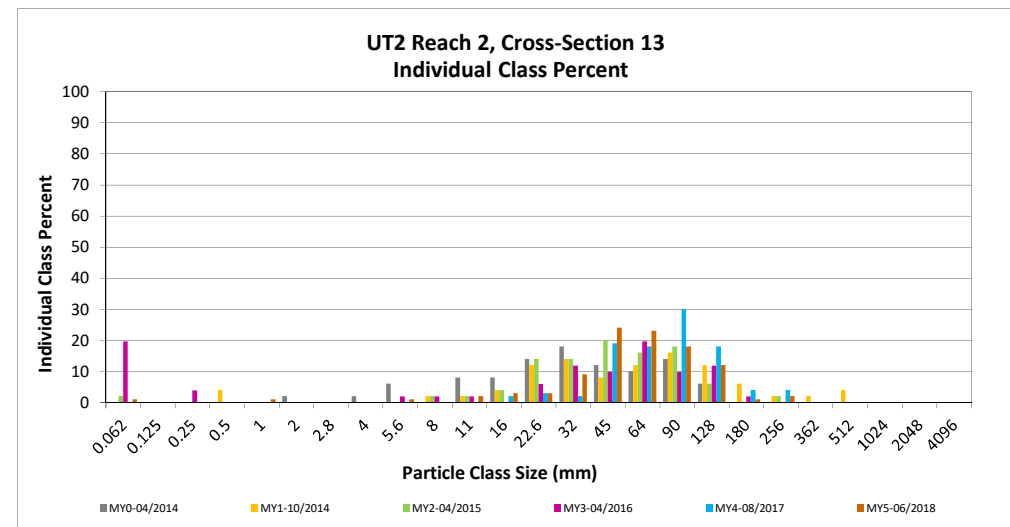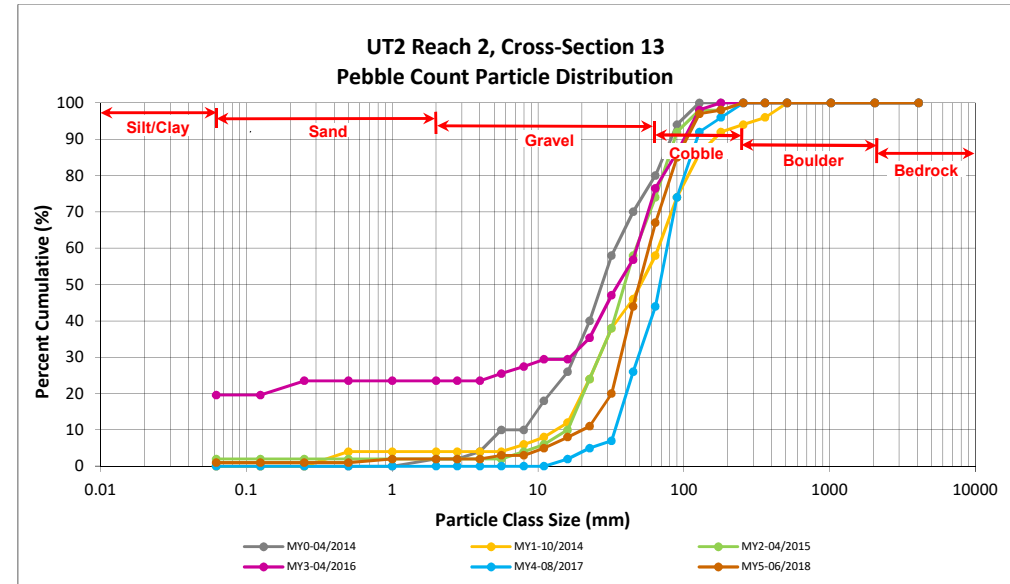

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 2, Cross-Section 15

| Particle Class | | Diameter (mm) | | Riffle 100-Count | Summary | |
|------------------|------------------|---------------|-------|------------------|------------------|--------------------|
| | | min | max | | Class Percentage | Percent Cumulative |
| <i>SILT/CLAY</i> | Silt/Clay | 0.000 | 0.062 | 8 | 8 | 8 |
| <i>SAND</i> | Very fine | 0.062 | 0.125 | | | 8 |
| | Fine | 0.125 | 0.250 | | | 8 |
| | Medium | 0.25 | 0.50 | | | 8 |
| | Coarse | 0.5 | 1.0 | | | 8 |
| | Very Coarse | 1.0 | 2.0 | | | 8 |
| <i>GRAVEL</i> | Very Fine | 2.0 | 2.8 | | | 8 |
| | Very Fine | 2.8 | 4.0 | | | 8 |
| | Fine | 4.0 | 5.6 | 1 | 1 | 9 |
| | Fine | 5.6 | 8.0 | | | 9 |
| | Medium | 8.0 | 11.0 | 3 | 3 | 12 |
| | Medium | 11.0 | 16.0 | | | 12 |
| | Coarse | 16.0 | 22.6 | 4 | 4 | 16 |
| | Coarse | 22.6 | 32 | 5 | 5 | 21 |
| <i>COBBLE</i> | Very Coarse | 32 | 45 | 11 | 11 | 32 |
| | Very Coarse | 45 | 64 | 12 | 12 | 44 |
| | Small | 64 | 90 | 27 | 27 | 71 |
| | Small | 90 | 128 | 15 | 15 | 86 |
| <i>BOULDER</i> | Large | 128 | 180 | 14 | 14 | 100 |
| | Large | 180 | 256 | | | 100 |
| <i>BOULDER</i> | Small | 256 | 362 | | | 100 |
| | Small | 362 | 512 | | | 100 |
| | Medium | 512 | 1024 | | | 100 |
| <i>BOULDER</i> | Large/Very Large | 1024 | 2048 | | | 100 |
| | Bedrock | 2048 | >2048 | | | 100 |
| Total | | | | 100 | 100 | 100 |

| Cross-Section 15 | |
|------------------------|-------|
| Channel materials (mm) | |
| D ₁₆ = | 22.60 |
| D ₃₅ = | 49.14 |
| D ₅₀ = | 69.0 |
| D ₈₄ = | 122.1 |
| D ₉₅ = | 159.4 |
| D ₁₀₀ = | 180.0 |

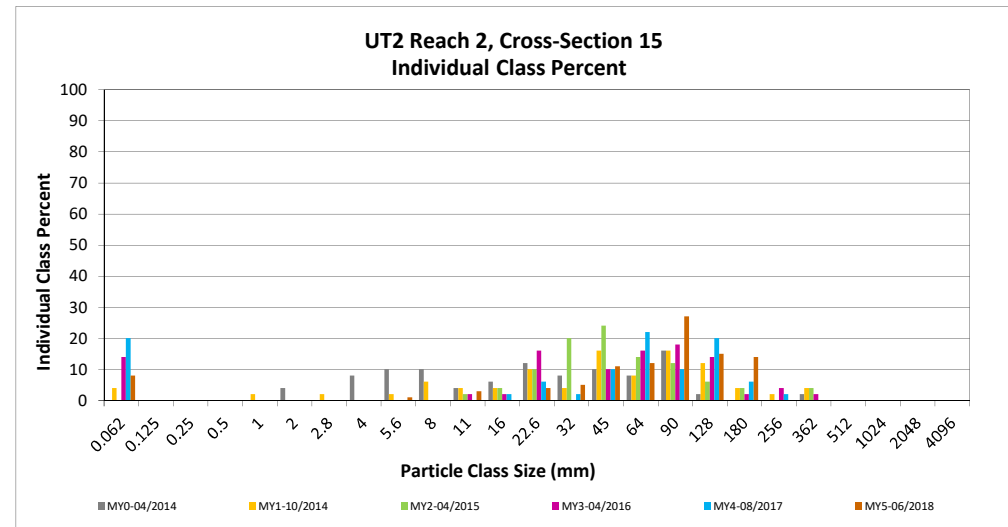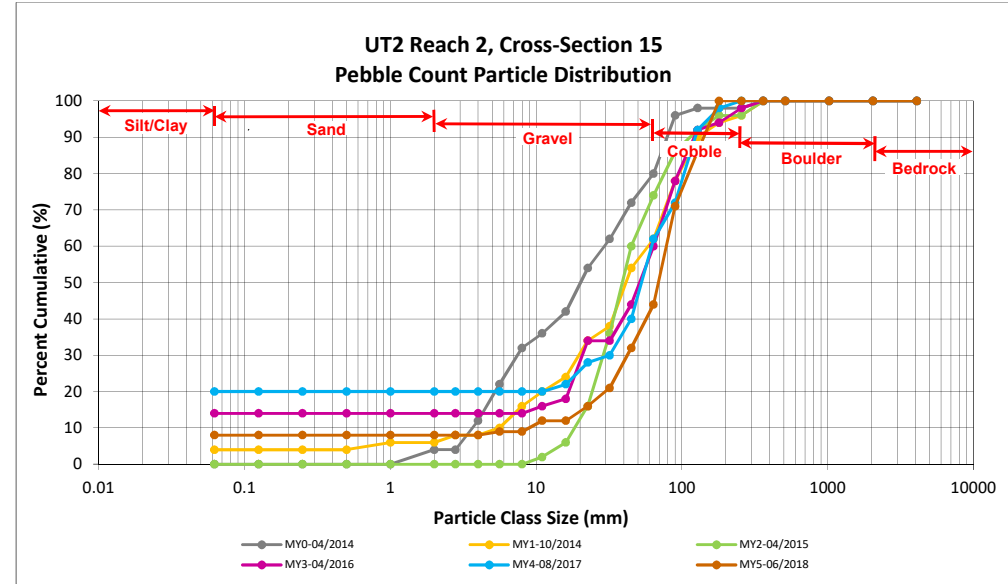

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 3A, Reachwide

| Particle Class | | Diameter (mm) | | Particle Count | | | Reach Summary | |
|------------------|------------------|---------------|-------|----------------|-----------|------------|------------------|--------------------|
| | | min | max | Riffle | Pool | Total | Class Percentage | Percent Cumulative |
| SILT/CLAY | Silt/Clay | 0.000 | 0.062 | 4 | 16 | 20 | 20 | 20 |
| SAND | Very fine | 0.062 | 0.125 | | | | | 20 |
| | Fine | 0.125 | 0.250 | | | | | 20 |
| | Medium | 0.25 | 0.50 | | | | | 20 |
| | Coarse | 0.5 | 1.0 | | | | | 20 |
| | Very Coarse | 1.0 | 2.0 | | | | | 20 |
| GRAVEL | Very Fine | 2.0 | 2.8 | | | | | 20 |
| | Very Fine | 2.8 | 4.0 | | | | | 20 |
| | Fine | 4.0 | 5.6 | 1 | | 1 | 1 | 21 |
| | Fine | 5.6 | 8.0 | 1 | 1 | 2 | 2 | 23 |
| | Medium | 8.0 | 11.0 | 4 | 1 | 5 | 5 | 28 |
| | Medium | 11.0 | 16.0 | 4 | 5 | 9 | 9 | 37 |
| | Coarse | 16.0 | 22.6 | | 4 | 4 | 4 | 41 |
| | Coarse | 22.6 | 32 | 10 | 4 | 14 | 14 | 54 |
| | Very Coarse | 32 | 45 | 7 | 6 | 13 | 13 | 67 |
| | Very Coarse | 45 | 64 | 13 | 5 | 18 | 18 | 85 |
| COBBLE | Small | 64 | 90 | 4 | 6 | 10 | 10 | 95 |
| | Small | 90 | 128 | 2 | 2 | 4 | 4 | 99 |
| | Large | 128 | 180 | | 1 | 1 | 1 | 100 |
| | Large | 180 | 256 | | | | | 100 |
| BOULDER | Small | 256 | 362 | | | | | 100 |
| | Small | 362 | 512 | | | | | 100 |
| | Medium | 512 | 1024 | | | | | 100 |
| BEDROCK | Large/Very Large | 1024 | 2048 | | | | | 100 |
| | Bedrock | 2048 | >2048 | | | | | 100 |
| Total | | | | 50 | 51 | 101 | 100 | 100 |

| Reachwide Channel materials (mm) | |
|----------------------------------|-----------|
| D ₁₆ = | Silt/Clay |
| D ₃₅ = | 14.94 |
| D ₅₀ = | 28.6 |
| D ₈₄ = | 62.6 |
| D ₉₅ = | 90.0 |
| D ₁₀₀ = | 180.0 |

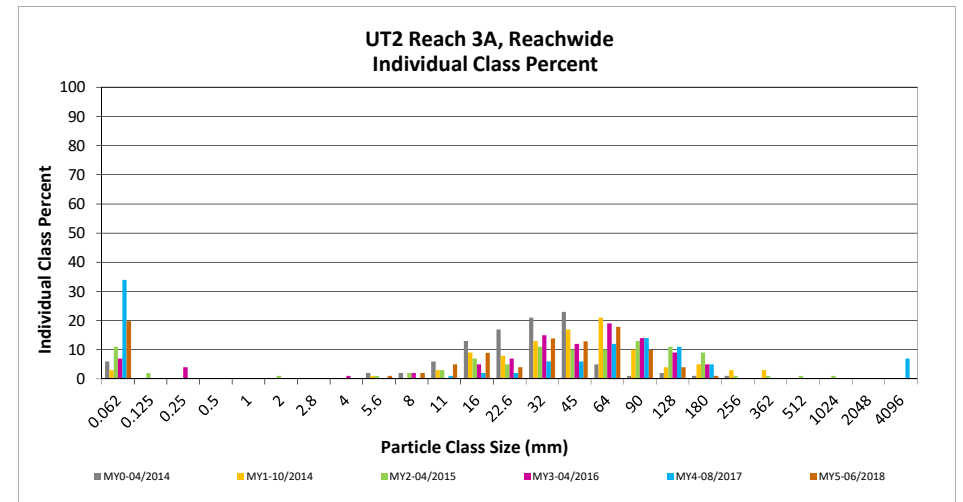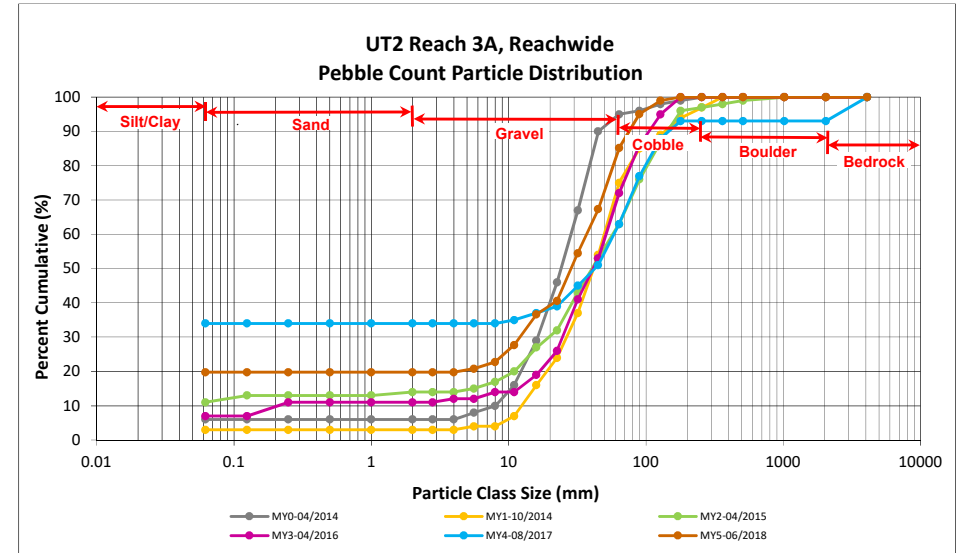

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 3A, Cross-Section 18

| Particle Class | | Diameter (mm) | | Riffle 100-Count | Summary | |
|------------------|------------------|---------------|-------|------------------|------------------|--------------------|
| | | min | max | | Class Percentage | Percent Cumulative |
| <i>SILT/CLAY</i> | Silt/Clay | 0.000 | 0.062 | 3 | 3 | 3 |
| <i>SAND</i> | Very fine | 0.062 | 0.125 | | | 3 |
| | Fine | 0.125 | 0.250 | | | 3 |
| | Medium | 0.25 | 0.50 | | | 3 |
| | Coarse | 0.5 | 1.0 | | | 3 |
| | Very Coarse | 1.0 | 2.0 | | | 3 |
| <i>GRAVEL</i> | Very Fine | 2.0 | 2.8 | | | 3 |
| | Very Fine | 2.8 | 4.0 | | | 3 |
| | Fine | 4.0 | 5.6 | | | 3 |
| | Fine | 5.6 | 8.0 | 6 | 6 | 9 |
| | Medium | 8.0 | 11.0 | 5 | 5 | 14 |
| | Medium | 11.0 | 16.0 | 12 | 12 | 26 |
| | Coarse | 16.0 | 22.6 | 10 | 10 | 36 |
| | Coarse | 22.6 | 32 | 14 | 14 | 50 |
| | Very Coarse | 32 | 45 | 15 | 15 | 65 |
| | Very Coarse | 45 | 64 | 11 | 11 | 76 |
| <i>COBBLE</i> | Small | 64 | 90 | 12 | 12 | 88 |
| | Small | 90 | 128 | 10 | 10 | 98 |
| | Large | 128 | 180 | 1 | 1 | 99 |
| | Large | 180 | 256 | 1 | 1 | 100 |
| <i>BOULDER</i> | Small | 256 | 362 | | | 100 |
| | Small | 362 | 512 | | | 100 |
| | Medium | 512 | 1024 | | | 100 |
| | Large/Very Large | 1024 | 2048 | | | 100 |
| <i>BEDROCK</i> | Bedrock | 2048 | >2048 | | | 100 |
| Total | | | | 100 | 100 | 100 |

| Cross-Section 18 | |
|------------------------|-------|
| Channel materials (mm) | |
| D ₁₆ = | 11.71 |
| D ₃₅ = | 21.83 |
| D ₅₀ = | 32.0 |
| D ₈₄ = | 80.3 |
| D ₉₅ = | 115.2 |
| D ₁₀₀ = | 256.0 |

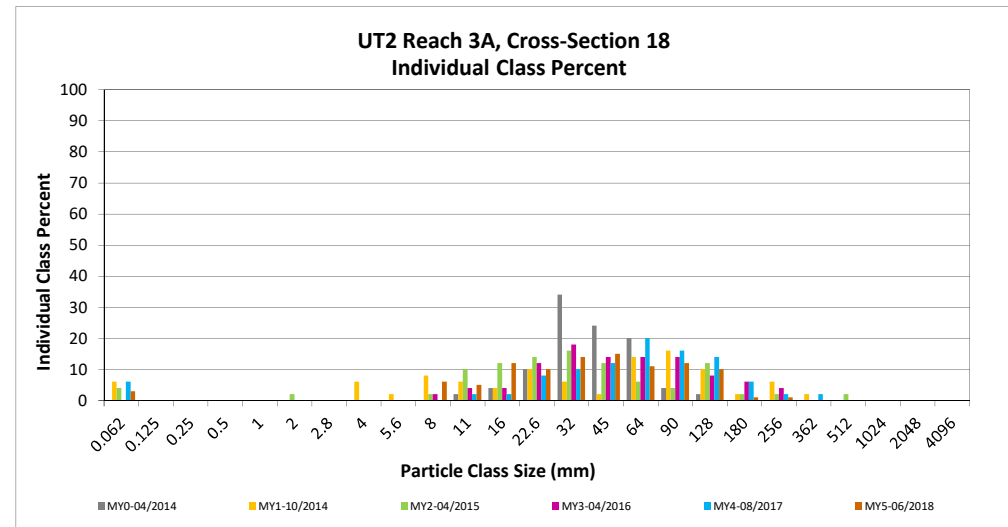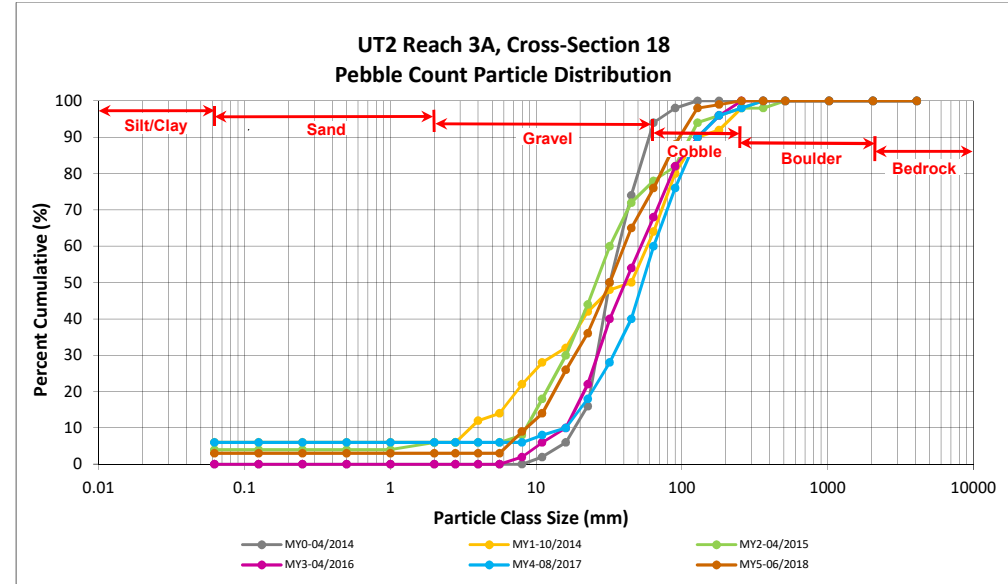



Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018

UT2 Reach 3B, Reachwide

| Particle Class | | Diameter (mm) | | Particle Count | | | Reach Summary | |
|------------------|------------------|---------------|-------|----------------|-----------|------------|------------------|--------------------|
| | | min | max | Riffle | Pool | Total | Class Percentage | Percent Cumulative |
| SILT/CLAY | Silt/Clay | 0.000 | 0.062 | 17 | 39 | 56 | 56 | 56 |
| SAND | Very fine | 0.062 | 0.125 | | | | | 56 |
| | Fine | 0.125 | 0.250 | | | | | 56 |
| | Medium | 0.25 | 0.50 | | | | | 56 |
| | Coarse | 0.5 | 1.0 | | | | | 56 |
| | Very Coarse | 1.0 | 2.0 | | | | | 56 |
| GRAVEL | Very Fine | 2.0 | 2.8 | | | | | 56 |
| | Very Fine | 2.8 | 4.0 | | | | | 56 |
| | Fine | 4.0 | 5.6 | 1 | | 1 | 1 | 57 |
| | Fine | 5.6 | 8.0 | | 1 | 1 | 1 | 58 |
| | Medium | 8.0 | 11.0 | | 2 | 2 | 2 | 60 |
| | Medium | 11.0 | 16.0 | | | | | 60 |
| | Coarse | 16.0 | 22.6 | 1 | | 1 | 1 | 61 |
| | Coarse | 22.6 | 32 | | | | | 61 |
| | Very Coarse | 32 | 45 | 2 | 2 | 4 | 4 | 65 |
| Very Coarse | 45 | 64 | 7 | 2 | 9 | 9 | 74 | |
| COBBLE | Small | 64 | 90 | 9 | 1 | 10 | 10 | 84 |
| | Small | 90 | 128 | 8 | 1 | 9 | 9 | 93 |
| | Large | 128 | 180 | 4 | | 4 | 4 | 97 |
| | Large | 180 | 256 | 1 | 1 | 1 | 1 | 98 |
| BOULDER | Small | 256 | 362 | | | | | 98 |
| | Small | 362 | 512 | | | | | 98 |
| | Medium | 512 | 1024 | | | | | 98 |
| | Large/Very Large | 1024 | 2048 | | | | | 98 |
| BEDROCK | Bedrock | 2048 | >2048 | | | 2 | 2 | 100 |
| Total | | | | 50 | 50 | 100 | 100 | 100 |

| Reachwide Channel materials (mm) | |
|----------------------------------|-----------|
| D ₁₆ = | Silt/Clay |
| D ₃₅ = | Silt/Clay |
| D ₅₀ = | Silt/Clay |
| D ₈₄ = | 90.0 |
| D ₉₅ = | 151.8 |
| D ₁₀₀ = | >2048 |

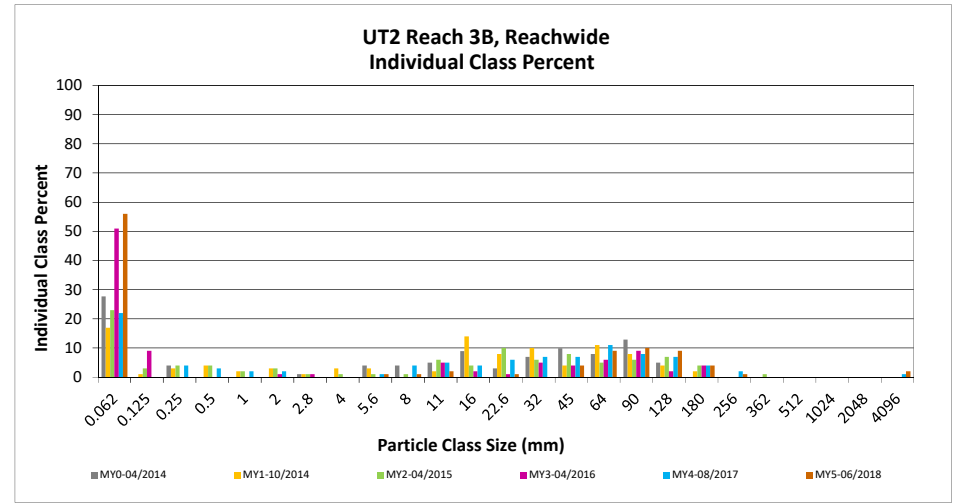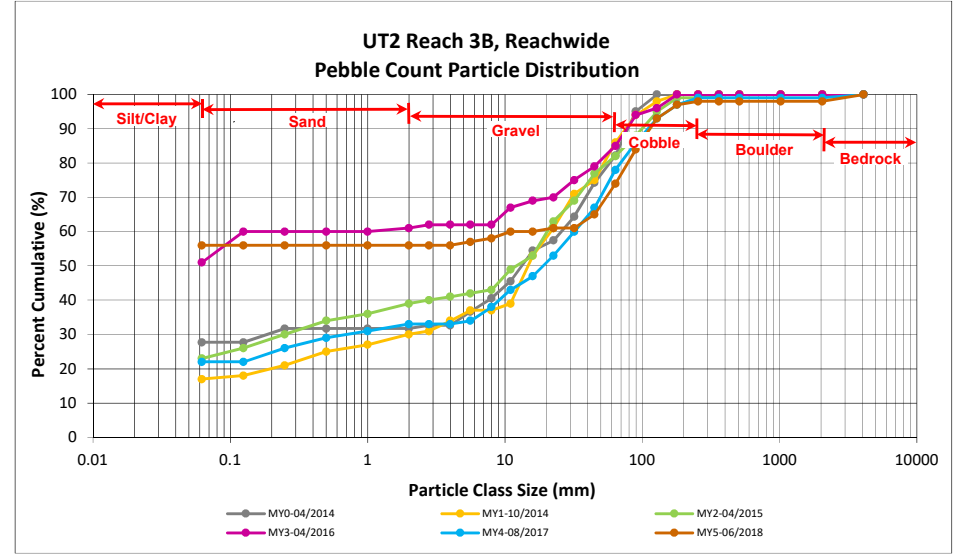

Reachwide and Cross-Section Pebble Count Plots

Norkett Branch Stream Mitigation Site



DMS Project No. 95360

Monitoring Year 5 - 2018

UT2 Reach 3B, Cross-Section 19

| Particle Class | | Diameter (mm) | | Riffle 100-Count | Summary | |
|---------------------------|-------------|---------------|---------------|------------------|------------------|--------------------|
| | | min | max | | Class Percentage | Percent Cumulative |
| SILT/CLAY | | Silt/Clay | 0.000 - 0.062 | 5 | 5 | 5 |
| SAND | Very fine | 0.062 - 0.125 | | | | 5 |
| | Fine | 0.125 - 0.250 | | | | 5 |
| | Medium | 0.25 - 0.50 | | | | 5 |
| | Coarse | 0.5 - 1.0 | 2 | 2 | 7 | |
| | Very Coarse | 1.0 - 2.0 | 3 | 3 | 10 | |
| GRAVEL | Very Fine | 2.0 - 2.8 | | | | 10 |
| | Very Fine | 2.8 - 4.0 | | | | 10 |
| | Fine | 4.0 - 5.6 | 5 | 5 | 15 | |
| | Fine | 5.6 - 8.0 | 7 | 7 | 22 | |
| | Medium | 8.0 - 11.0 | 9 | 9 | 31 | |
| | Medium | 11.0 - 16.0 | 12 | 12 | 43 | |
| | Coarse | 16.0 - 22.6 | 5 | 5 | 48 | |
| | Coarse | 22.6 - 32 | 10 | 10 | 58 | |
| | Very Coarse | 32 - 45 | 8 | 8 | 66 | |
| | Very Coarse | 45 - 64 | 11 | 11 | 77 | |
| COBBLE | Small | 64 - 90 | 11 | 11 | 88 | |
| | Small | 90 - 128 | 10 | 10 | 98 | |
| | Large | 128 - 180 | 1 | 1 | 99 | |
| | Large | 180 - 256 | 1 | 1 | 100 | |
| BOULDER | Small | 256 - 362 | | | 100 | |
| | Small | 362 - 512 | | | 100 | |
| | Medium | 512 - 1024 | | | 100 | |
| Bedrock/Very Large | | 1024 - 2048 | | | 100 | |
| BEDROCK | | Bedrock | 2048 - >2048 | | | 100 |
| Total | | | | 100 | 100 | 100 |

| Cross-Section 19 | |
|------------------------|-------|
| Channel materials (mm) | |
| D ₁₆ = | 5.89 |
| D ₃₅ = | 12.46 |
| D ₅₀ = | 24.2 |
| D ₈₄ = | 79.5 |
| D ₉₅ = | 115.2 |
| D ₁₀₀ = | 256.0 |

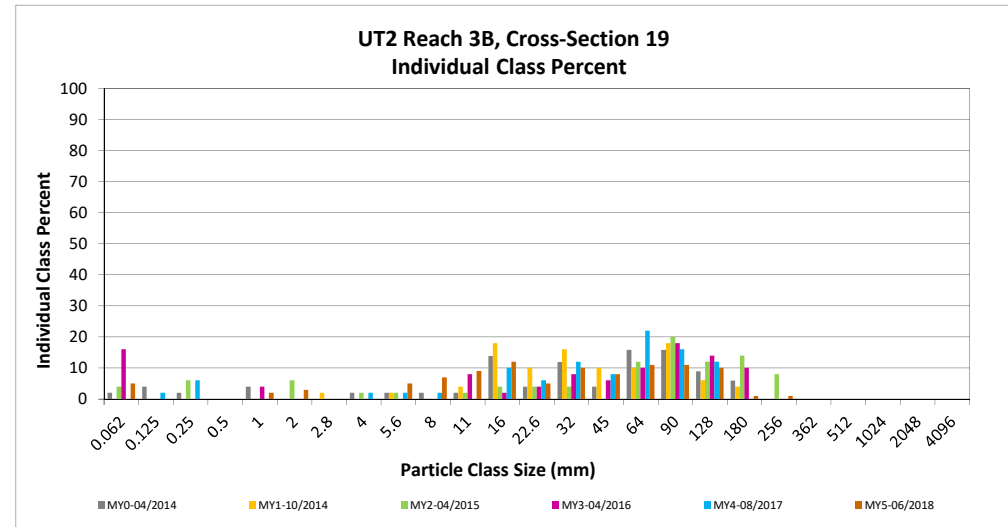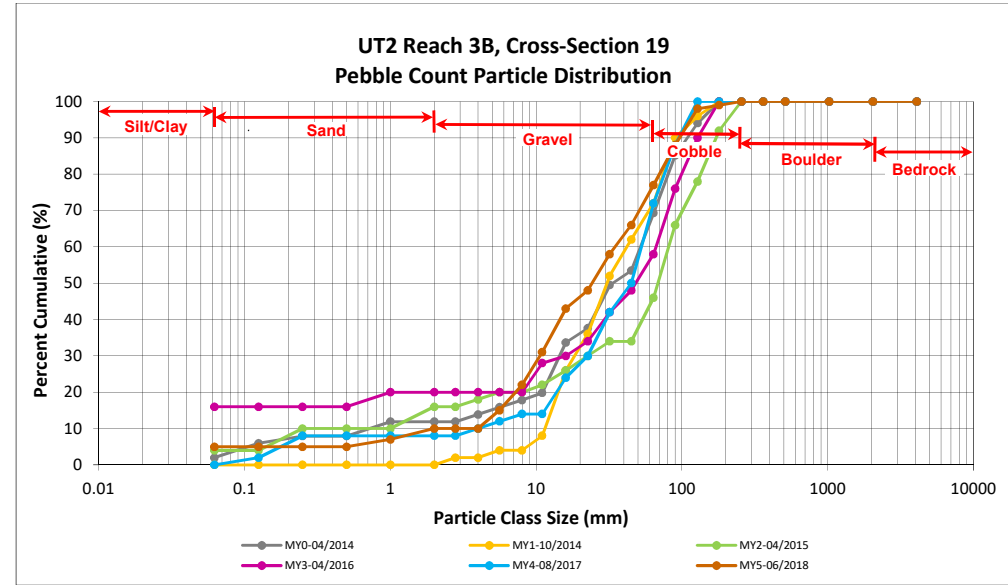

APPENDIX 5. Hydrology Data

Table 14. Verification of Bankfull Events

Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018


| Monitoring Year | Reach | Date of Data Collection | Date of Occurrence | Method |
|-----------------|------------------------------------|-------------------------|------------------------|-------------------------|
| MY1 | UT2 Reach 3A (CG #1 XS18) | 6/3/2014 | 5/30/2014 | Stream Gage |
| | | 9/4/2014 | 7/21/2014 | Stream Gage |
| | | 10/17/2014 | 9/16/2014 | Wrack Line |
| | UT1 (CG #2 XS9) | 6/3/2014 | 5/30/2014 | Stream Gage |
| | | 9/4/2014 | 7/21/2014 | Stream Gage |
| | | 6/3/2014 | 5/30/2014 | Stream Gage |
| | Norkett Branch Reach 2 (CG #3 XS6) | 9/4/2014 | 7/21/2014 | Stream Gage |
| | | 10/17/2014 | 9/16/2014 | Stream Gage |
| | | 1/4/2015 | 1/4/2015 | Stream Gage |
| MY2 | UT2 Reach 3A (CG #1 XS18) | 1/12/2015 | 1/12/2015 | Stream Gage |
| | | 2/26/2015 | 2/26/2015 | Stream Gage |
| | | 3/5/2015 | 3/5/2015 | Stream Gage |
| | | 4/19/2015 | 4/19/2015 | Stream Gage |
| | | 10/3/2015 | 10/3/2015 | Stream Gage, Crest Gage |
| | | 1/4/2015 | 1/4/2015 | Stream Gage |
| | Norkett Branch Reach 2 (CG #3 XS6) | 1/12/2015 | 1/12/2015 | Stream Gage |
| | | 2/26/2015 | 2/26/2015 | Stream Gage |
| | | 3/5/2015 | 3/5/2015 | Stream Gage, Crest Gage |
| | | 4/19/2015 | 4/19/2015 | Stream Gage, Crest Gage |
| | | 10/3/2015 | 10/3/2015 | Stream Gage, Crest Gage |
| | | 2/3/2016 | 2/3/2016 | Stream Gage |
| | | 2/16/2016 | 2/16/2016 | Stream Gage |
| | | 2/24/2016 | 2/24/2016 | Stream Gage |
| | | 3/28/2016 | 3/28/2016 | Stream Gage, Crest Gage |
| MY3 | UT2 Reach 3A (CG #1 XS18) | 10/8/2016 | 10/8/2016 | Stream Gage |
| | | 4/22/2016 | Spring 2016 | Crest Gage |
| | | 10/8/2016 | 10/8/2016 | Stream Gage |
| | | 2/3/2016 | 2/3/2016 | Stream Gage |
| | | 2/16/2016 | 2/16/2016 | Stream Gage |
| | UT1 (CG #2 XS9) | 2/24/2016 | 2/24/2016 | Stream Gage |
| | | 3/28/2016 | 3/28/2016 | Stream Gage, Crest Gage |
| | | 10/8/2016 | 10/8/2016 | Stream Gage |
| | | 2/3/2016 | 2/3/2016 | Stream Gage |
| | | 2/16/2016 | 2/16/2016 | Stream Gage |
| | | 2/24/2016 | 2/24/2016 | Stream Gage |
| | | 3/28/2016 | 3/28/2016 | Stream Gage, Crest Gage |
| MY4 | UT2 Reach 3A (CG #1 XS18) | 10/8/2016 | 10/8/2016 | Stream Gage |
| | | 1/22/2017 | 1/22/2017 | Stream Gage |
| | | 4/24/2017 | 4/24/2017 | Stream Gage |
| | | 5/22/2017 | 5/22/2017 | Stream Gage |
| | | 5/24/2017 | 5/24/2017 | Stream Gage |
| | | 6/20/2017 | 6/20/2017 | Stream Gage |
| | Norkett Branch Reach 2 (CG #3 XS6) | 6/29/2017 | N/A | Crest Gage |
| | | 1/23/2017 | 1/23/2017 | Stream Gage |
| | | 5/24/2017 | 5/24/2017 | Stream Gage |
| | | 2/4/2018 | 2/4/2018 | Stream Gage |
| MY5 | UT2 Reach 3A (CG #1 XS18) | 2/7/2018 | 2/7/2018 | Stream Gage |
| | | 3/12/2018 | 3/12/2018 | Stream Gage, Crest Gage |
| | | 4/24/2018 | 4/24/2018 | Stream Gage |
| | | 5/24/2018 | 5/24/2018 | Stream Gage, Crest Gage |
| | | 9/16/2018 | 9/16/2018 | Stream Gage, Crest Gage |
| | | 5/24/2018 | 5/24/2018 | Stream Gage |
| | UT1 (CG #2 XS9) | 9/16/2018 ¹ | 9/16/2018 ¹ | Stream Gage |
| | | 9/16/2018 ¹ | 9/16/2018 ¹ | Stream Gage |
| | | 2/4/2018 | 2/4/2018 | Stream Gage, Crest Gage |
| | Norkett Branch Reach 2 (CG #3 XS6) | 4/24/2018 | 4/24/2018 | Stream Gage |
| | | 5/24/2018 | 5/24/2018 | Stream Gage, Crest Gage |
| | | 9/16/2018 | 9/16/2018 | Stream Gage, Crest Gage |
| | | 9/16/2018 | 9/16/2018 | Stream Gage, Crest Gage |

¹ Two bankfull events were recorded on UT1 when the site received more than 5 inches of rain from the remnants of Hurricane Florence (9/16/18).

Recorded Bankfull Events

Norkett Branch Mitigation Project (DMS Project No. 95360)


Monitoring Year 5 - 2018

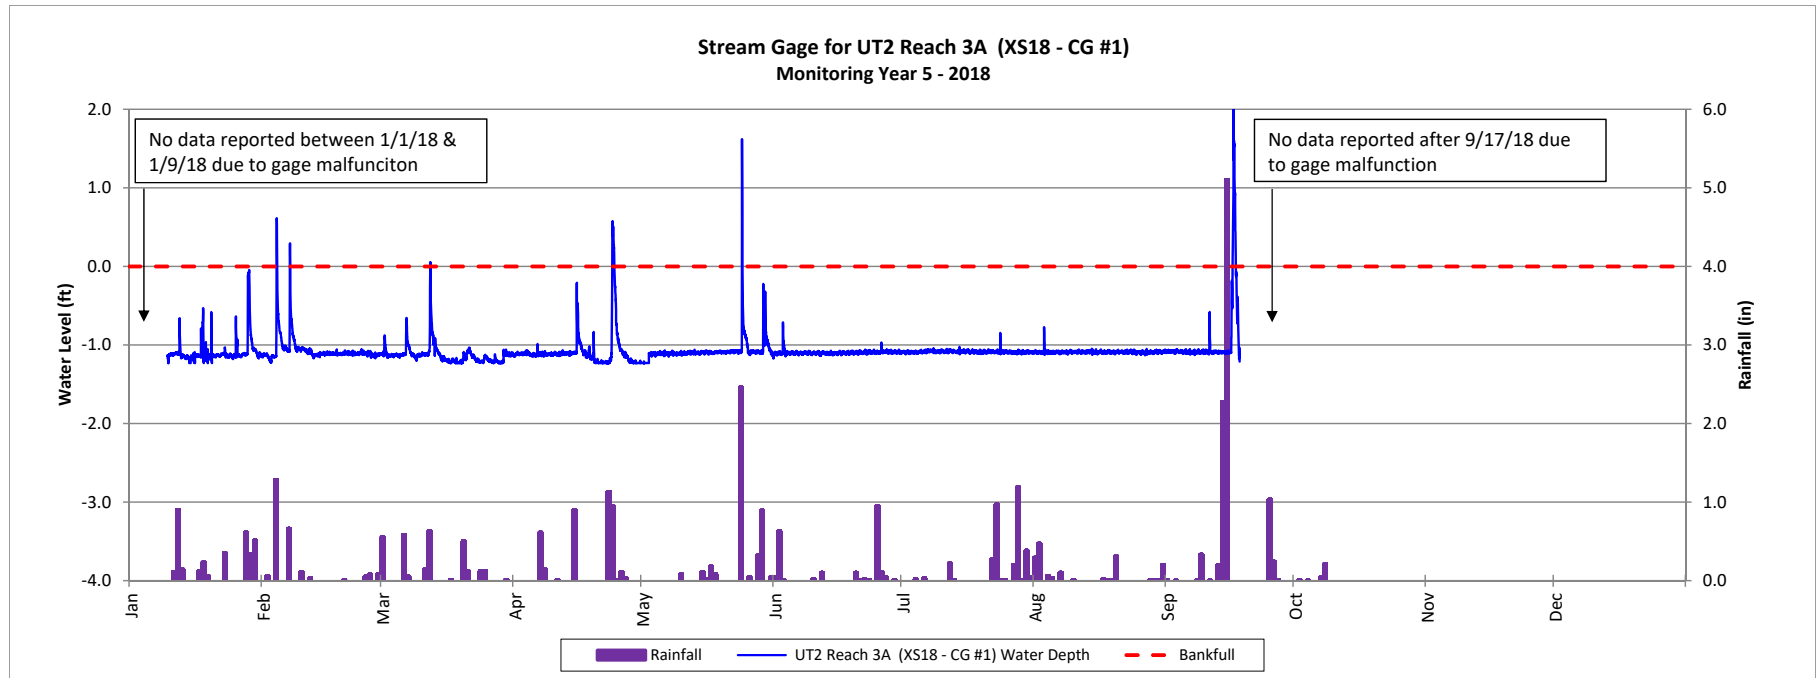

Recorded Bankfull Events

Norkett Branch Mitigation Project (DMS Project No. 95360)


Monitoring Year 5 - 2018

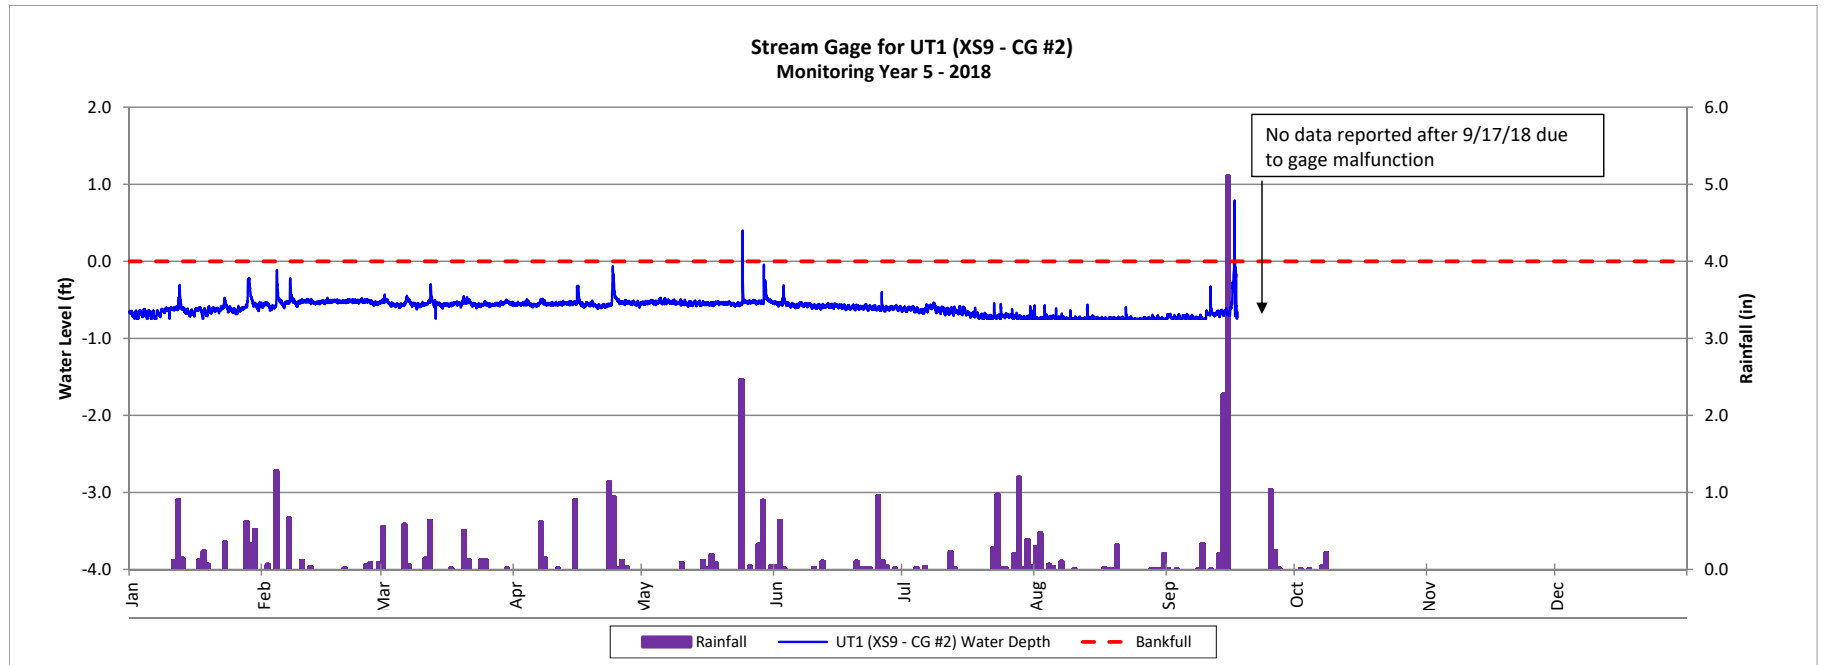

Recorded Bankfull Events

Norkett Branch Mitigation Project (DMS Project No. 95360)

Monitoring Year 5 - 2018

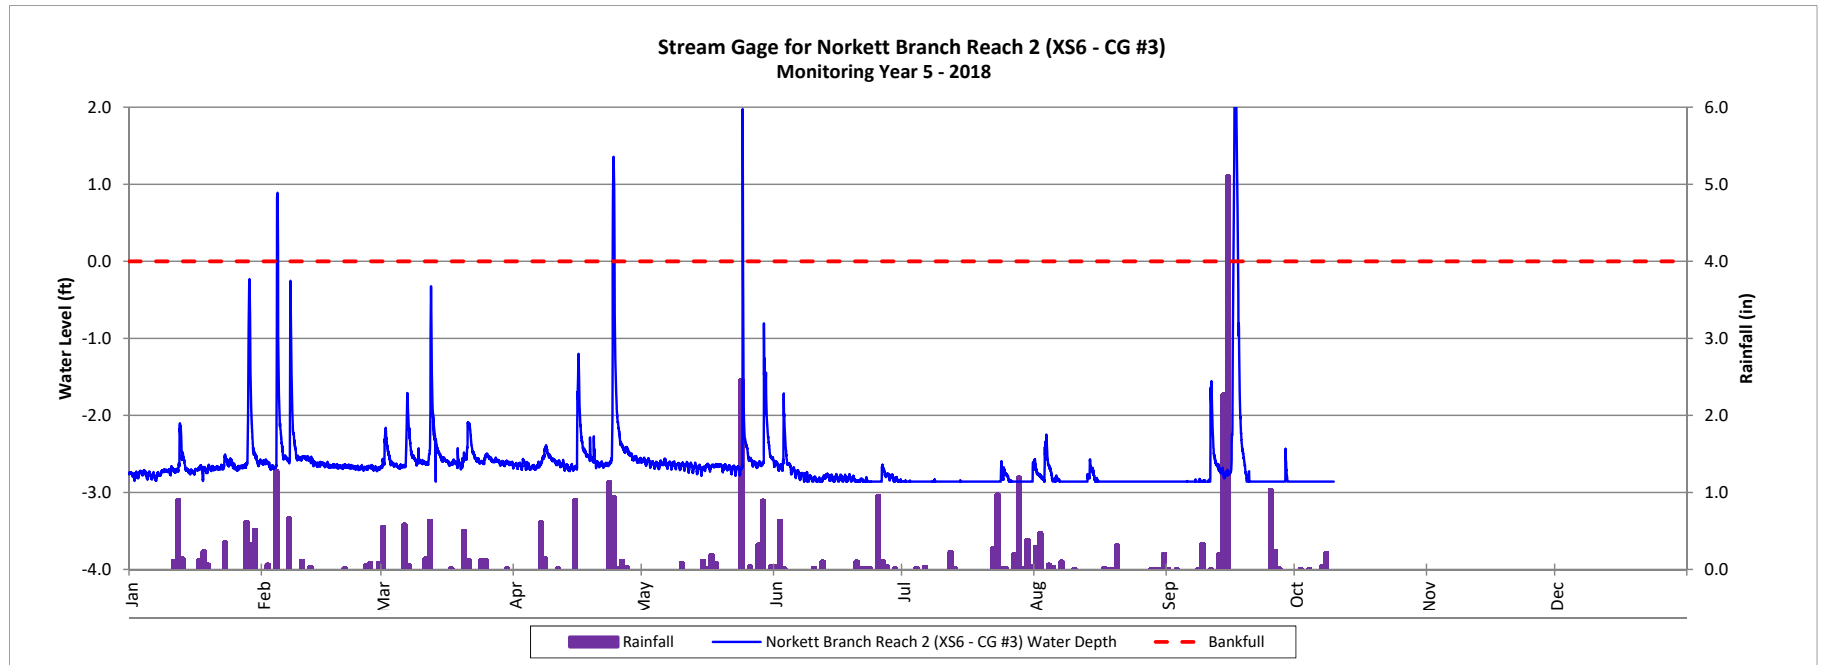

APPENDIX 6. Water Quality BMPs

Table 15. Water Quality Sampling Results

Norkett Branch Stream Mitigation Site
DMS Project No. 95360
Monitoring Year 5 - 2018

| Monitoring Year | Location | Sample Collection Date | TN (mg/L) | NO _x (mg/L) | TKN (mg/L) | TP (mg/L) | TSS (mg/L) | FC (CFU/100mL) | Conductivity (µS/cm) | Temp °C | pH |
|-----------------|-----------------|-------------------------|-----------|------------------------|------------|-----------|------------|----------------|----------------------|---------|-----|
| MY1 | SPSC BMP Inlet | 4/22/2014 (Baseflow) | 1.1 | 0.2 | 0.9 | 0.4 | 16.0 | 31 | 151.0 | 21.4 | 7.0 |
| | SPSC BMP Outlet | | 0.9 | DL | 0.9 | 0.5 | 25.0 | 11 | 127.6 | 23.5 | 7.3 |
| | PW BMP Inlet | | DL | DL | 0.5 | 0.2 | 11.0 | 68 | 65.0 | 25.3 | 7.4 |
| | PW BMP Outlet | | DL | 0.1 | DL | 0.3 | 39.0 | 110 | 69.8 | 26.2 | 7.0 |
| | SPSC BMP Inlet | 5/15/2014 | 100.0 | 50.0 | 50.0 | 19.0 | 970.0 | 20000 | 1230.0 | 21.0 | 6.8 |
| | SPSC BMP Outlet | | 47.0 | 18.0 | 29.0 | 7.0 | 410.0 | 20000 | 1185.0 | 21.0 | 6.9 |
| | PW BMP Inlet | | 2.5 | 0.2 | 2.3 | 0.6 | 15.0 | 5600 | 95.5 | 22.9 | 6.9 |
| | PW BMP Outlet | | 1.8 | 0.2 | 1.6 | 0.5 | 150.0 | 2100 | 11.3 | 23.8 | 6.9 |
| | SPSC BMP Inlet | 10/15/2014 | 5.5 | 1.3 | 4.2 | 5.4 | 27.0 | 490 | 437.0 | 19.8 | 7.1 |
| | SPSC BMP Outlet | | 1.8 | 0.2 | 1.7 | 0.7 | 1.7 | 2300 | 333.0 | 21.0 | 7.1 |
| | PW BMP Inlet | | NF | | | | | | | | |
| | PW BMP Outlet | | NF | | | | | | | | |
| SPSC BMP Inlet | 11/26/2014 | 7.2 | 2.2 | 5.0 | 5.0 | 30.0 | HT | 201.1 | 10.1 | 7.2 | |
| SPSC BMP Outlet | | 6.5 | 2.0 | 4.6 | 4.9 | 32.0 | | 196.2 | 10.0 | 7.2 | |
| PW BMP Inlet | | 2.8 | 1.1 | 1.7 | 0.6 | 6.6 | | 57.8 | 11.2 | 6.7 | |
| PW BMP Outlet | | 2.6 | 1.0 | 1.7 | 1.0 | 6.3 | | 82.0 | 11.1 | 6.8 | |
| MY2 | SPSC BMP Inlet | 3/30/2015 | 1.2 | 0.16 | 1.0 | 0.3 | 6.2 | 120 | 277.8 | 10.0 | 7.1 |
| | SPSC BMP Outlet | | 1.5 | 0.12 | 1.3 | 0.3 | DL | DL | 329.9 | 10.5 | 7.2 |
| | PW BMP Inlet | | DL | 0.12 | DL | 0.3 | 16.0 | 120 | 180.0 | 9.5 | 7.3 |
| | PW BMP Outlet | | 1.2 | 0.12 | 1.1 | 0.2 | 9.0 | 64 | 184.0 | 11.8 | 8.1 |
| | SPSC BMP Inlet | 10/28/2015 | 3.8 | 1.3 | 2.5 | 1.2 | 16.0 | 150.0 | 141.9 | 17.5 | 6.6 |
| | SPSC BMP Outlet | | 4.5 | 2.4 | 2.1 | 1.0 | 20.0 | 140.0 | 154.8 | 17.0 | 6.4 |
| | PW BMP Inlet | | 2.9 | 1.1 | 1.8 | 0.8 | 48.0 | DL | 97.7 | 17.1 | 4.2 |
| | PW BMP Outlet | | 1.7 | DL | 1.7 | 0.3 | 7.6 | DL | 92.7 | 18.7 | 7.2 |
| MY3 | SPSC BMP Inlet | 9/3/2016 | 13.0 | 1.6 | 11.0 | 5.2 | 140.0 | HT | --- | --- | --- |
| | SPSC BMP Outlet | | 8.5 | 5.2 | 3.2 | 2.5 | DL | | --- | --- | --- |
| | PW BMP Inlet | | 2.3 | 1.0 | 1.3 | 0.9 | 6.7 | | --- | --- | --- |
| | PW BMP Outlet | | NF | | | | | | | | |
| MY4 | SPSC BMP Inlet | 4/4/2017 | 5.9 | 0.7 | 5.2 | 0.2 | 480.0 | --- | --- | --- | --- |
| | SPSC BMP Outlet | | 3.2 | 1.2 | 2.1 | --- | --- | --- | --- | --- | --- |
| | PW BMP Inlet | | 6.1 | 1.4 | 4.7 | 0.3 | 840.0 | --- | --- | --- | --- |
| | PW BMP Outlet | | 5.3 | 0.3 | 5.0 | DL | 150.0 | --- | --- | --- | --- |
| | SPSC BMP Inlet | 5/23/2017 | 5.2 | 1.3 | 4.0 | 2.1 | 25.0 | --- | 170.0 | --- | 6.7 |
| | SPSC BMP Outlet | | 3.5 | 0.6 | 2.9 | 1.5 | 30.0 | --- | --- | --- | 6.6 |
| | PW BMP Inlet | | 2.6 | 0.4 | 2.2 | 0.2 | 21.0 | --- | 42.0 | --- | 5.8 |
| | PW BMP Outlet | | 1.3 | DL | 1.3 | 0.3 | 3.5 | --- | 51.0 | --- | 6.4 |
| MY5 | SPSC BMP Inlet | 3/12/2018 | 5.9 | 0.5 | 5.3 | 1.6 | 1700.0 | --- | 200.0 | --- | 7.1 |
| | SPSC BMP Outlet | | 3.6 | DL | 3.6 | 2.1 | 540.0 | --- | 180.0 | --- | 7.2 |
| | PW BMP Inlet | | 1.3 | 0.3 | 1.0 | 0.5 | 720.0 | --- | 300.0 | --- | 6.5 |
| | PW BMP Outlet | | 1.4 | 0.4 | 0.9 | 0.2 | 60.0 | --- | 96.0 | --- | 6.6 |
| | SPSC BMP Inlet | 8/6/2018 | 11.0 | 0.4 | 11.0 | 1.7 | 540.0 | --- | 96.0 | --- | 6.2 |
| | SPSC BMP Outlet | | 1.9 | 1.0 | 0.9 | 0.2 | --- | --- | 26.0 | --- | 6.8 |
| | PW BMP Inlet | | 2.5 | 0.8 | 1.8 | 1.2 | 390.0 | --- | 61.0 | --- | 6.2 |
| | PW BMP Outlet | | 17.0 | 0.3 | 17.0 | 0.2 | --- | --- | 22.0 | --- | 6.5 |

DL: Parameter was below the detection limit
 NF: No flow was available for sample collection/insufficient sample volume
 HT: Laboratory analysis was not available due to the short holding time for this parameter
 ---: Data was not provided




Table 16. Pollutant Removal Rates

Norkett Branch Stream Mitigation Site
DMS Project No. 95360
Monitoring Year 5 - 2018

| Monitoring Year | Location | Sample Collection Date | Percent Reduction ¹ | | | | | |
|-----------------|----------|-------------------------|--------------------------------|-----------------|-------|------|-------|-------|
| | | | TN | NO _x | TKN | TP | TSS | FC |
| MY1 | SPSC BMP | 4/22/2014 (Baseflow) | 18% | 57% | 1% | -29% | -56% | 65% |
| | PW BMP | | N/A | N/A | 0% | -74% | -255% | -62% |
| | SPSC BMP | 5/15/2014 | 53% | 64% | 42% | 63% | 58% | 0% |
| | PW BMP | | 28% | 27% | 30% | 18% | -900% | 63% |
| | SPSC BMP | 10/15/2014 | 67% | 88% | 60% | 88% | 94% | -369% |
| | PW BMP | | N/A | | | | | |
| MY2 | SPSC BMP | 11/26/2014 | 10% | 9% | 8% | 2% | -7% | N/A |
| | PW BMP | | 7% | 14% | 0% | -67% | 5% | |
| | SPSC BMP | 3/30/2015 | -25% | 25% | -30% | -3% | N/A | N/A |
| | PW BMP | | N/A | 0% | N/A | 24% | 44% | 47% |
| | SPSC BMP | 10/28/2015 | -18% | -85% | 16% | 17% | -25% | 7% |
| | PW BMP | | 41% | N/A | 6% | 57% | 84% | N/A |
| MY3 | SPSC BMP | 9/3/2016 | 35% | -225% | 71% | 52% | N/A | N/A |
| | PW BMP | | N/A | N/A | N/A | N/A | N/A | N/A |
| MY4 | SPSC BMP | 4/4/2017 | 46% | -67% | 60% | N/A | N/A | N/A |
| | PW BMP | | 13% | 78% | -6% | N/A | 82% | N/A |
| | SPSC BMP | 5/23/2017 | 33% | 55% | 28% | 29% | -20% | N/A |
| | PW BMP | | 50% | N/A | 41% | -89% | 83% | N/A |
| MY5 | SPSC BMP | 3/12/2018 | 39% | N/A | 32% | -31% | 68% | N/A |
| | PW BMP | | -8% | -64% | 6% | 60% | 92% | N/A |
| | SPSC BMP | 8/6/2018 | 83% | -163% | 92% | 87% | N/A | N/A |
| | PW BMP | | -580% | 56% | -844% | 83% | N/A | N/A |

¹Positive values indicate a reduction in pollutant concentration from inlet to outlet samples, negative values indicate an increase in concentration
 N/A: Metric cannot be calculated

Water Quality Data
 Norkett Branch Stream Mitigation Site
 DMS Project No. 95360
 Monitoring Year 5 - 2018

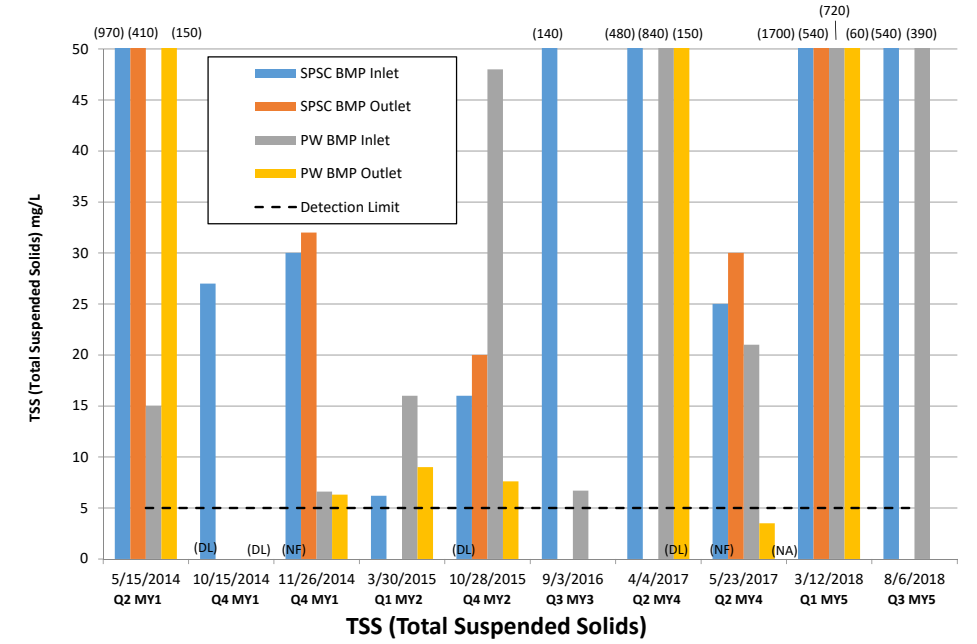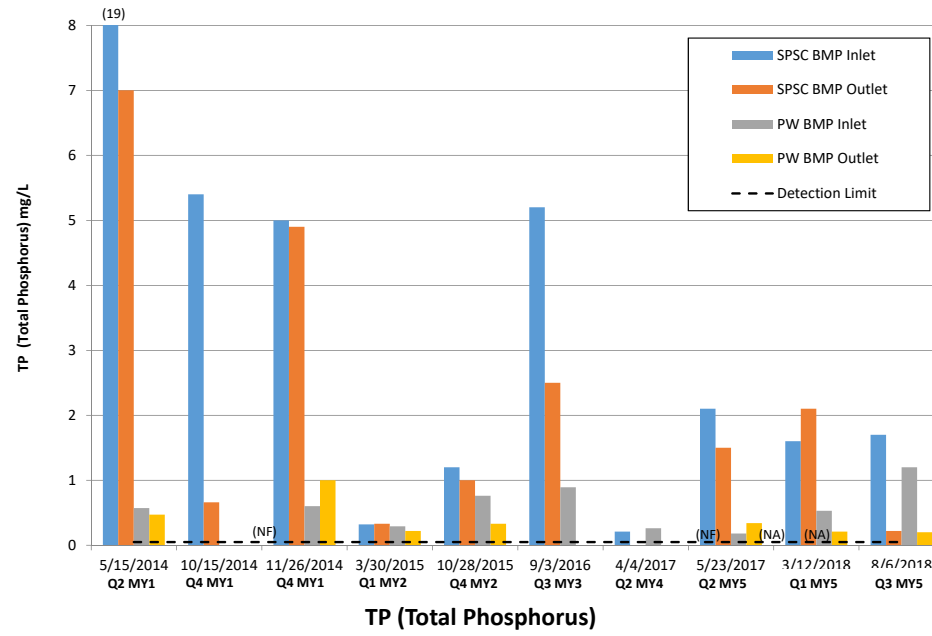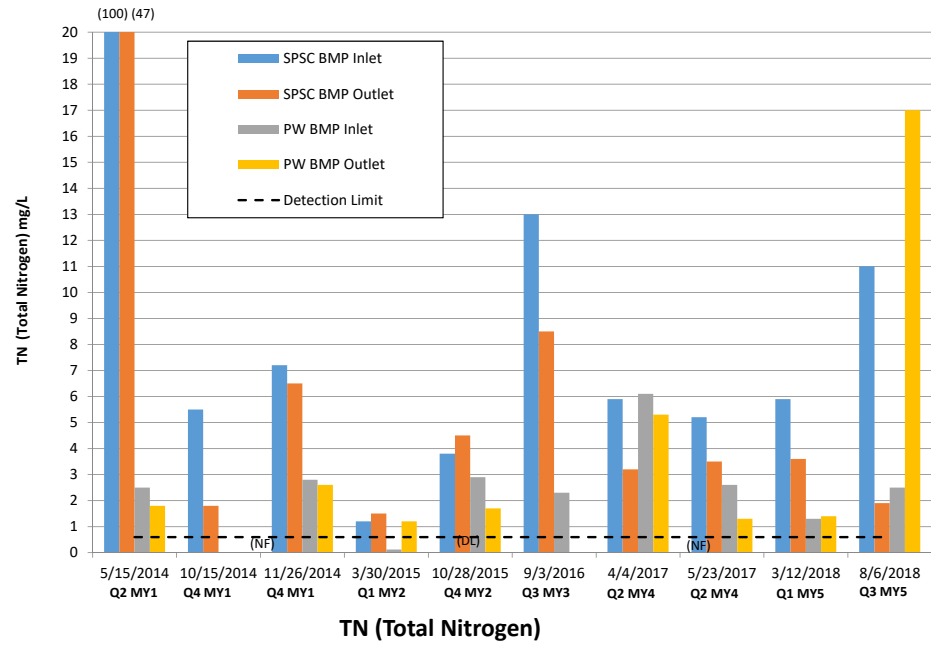


Pollutant Removal Plot

Norkett Branch Stream Mitigation Site

DMS Project No. 95360

Monitoring Year 5 - 2018

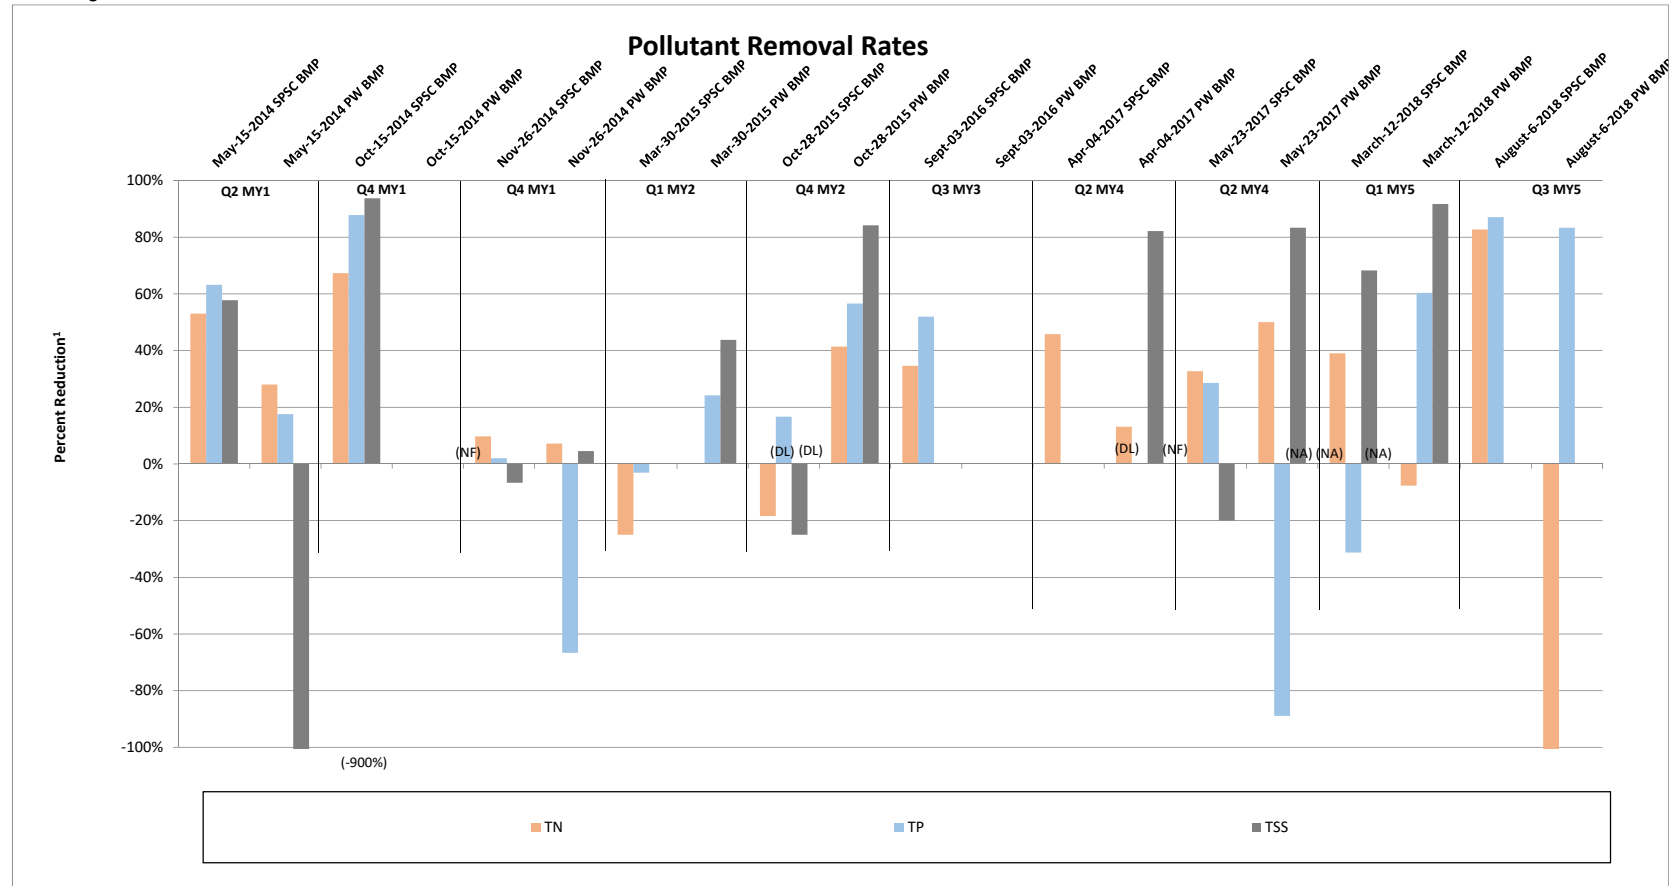

DL: Parameter was below the detection limit

NF: No flow was available for sample collection/insufficient sample volume

NA: No data available at inlet and/or outlet sample for comparison

¹Positive values indicate a reduction in pollutant concentration from inlet to outlet samples, negative values indicate an increase in concentration