Annual Monitoring Report

Mill Dam Creek Restoration Site Yadkin River Basin - 03040101 Monitoring Year 01 DEQ Contract 6898 DMS Project Number 97136

DWR #: 18-1349 USACE Action ID: 2016-01335 Yadkin County, North Carolina



Prepared for:
NC Department of Environmental Quality
Division of Mitigation Services
1652 Mail Service Center
Raleigh, NC 27699

Data Collected: 2020 Date Submitted: January 2021

Monitoring and Design Firm





KCI Associates of North Carolina 4505 Falls of Neuse Road Suite 400 Raleigh, NC 27609 (919) 783-9214

Project Contact: Tim Morris Email: tim.morris@kci.com



ENGINEERS • SCIENTISTS • SURVEYORS • CONSTRUCTION MANAGERS

4505 Falls of Neuse Road Suite 400 Raleigh, NC 27609 (919) 783-9214 (919) 783-9266 Fax

MEMORANDUM

Date: February 12, 2021

To: Matthew Reid, DMS Project Manager

From: Tim Morris, Project Manager

KCI Associates of North Carolina, PA

Subject: Mill Dam Creek Stream Restoration Site

MY-01 Monitoring Report Comments Yadkin River Basin CU 03040101

NCDMS Project # 97136

Contract # 6898

Please find below our responses in italics to the MY-00 Baseline Monitoring Report comments from NCDMS received on February 5, 2021, for the Mill Dam Creek Stream Restoration Site.

- Table of contents page numbers do not match report. Please update as necessary. *KCI Response: The issue with the page numbers has been fixed.*
- Project Summary: Last paragraph states that project planting and construction were completed in March 2020. According to Table 2, the construction/grading was completed in Dec 2019 and the repair was completed in March 2020. Please revise to state that construction was completed in Dec 2019 and planting was completed in March 2020. The March 2020 repair is discussed later in the same paragraph. This will make it consistent with the project activity and reporting history timeline in Table 2.

KCI Response: This change has been made.

 Monitoring Results: Please add short discussion in second paragraph concerning erosion areas noted on CCPV and the damaged boulder sill on UTHC4-1 in regards to heavy rainfall events in 2020.

KCI Response: This discussion has been added to the report.

- Monitoring Results: First paragraph states that vegetation monitoring results for the year are 822/970, Table 7 shows MY1 results to be 823/972. Please review and revise.
 KCI Response: A rounding error in Table 7 was causing this error. In the process of reviewing Table 7 (see below) other errors were noted and corrected that changed the average on-site. The totals for the site are 836/986.
- Monitoring Results: There were numerous gage failures on the site in 2020. Have the gages been repaired or replaced? Please update this section with a brief summary of the failure and solution.

KCI ASSOCIATES OF NORTH CAROLINA, P.A.

KCI Response: The failure was a result of the memory banks becoming full due to waiting too long between downloads. The stream gauges, which are set to record every 10 minutes, can hold approximately 5.5 months of data. The gauges were installed in January 2020 and not downloaded again until December 2020. This oversight will not be repeated in future monitoring years.

- Table 5: Please add a Visual Stream Morphology Stability Assessment for the EI reaches (UTHC2, UTHC4-1 and UTCH4-3). KCI Response: These tables have been added to the report.
- T
- Please submit the random vegetation plot as polygons.

 KCI Response: The point shapefiles mill_dam_rando_veg and mill_dam_veg_plots represent the vegetation plot locations shot during the baseline setup. These were unintentionally included in the digital submission and have been removed. The polygon shapefile MillDam_veg_plots contains the MY01 vegetation plot locations.
- Please review the mill_dam_erosion shapefile, and ensure that the number of features in this shapefile reflects the number of segment lengths reported in Table 5.

 **KCI Response: This shapefile has been reviewed and all features that are located along R or EI reaches are included in the appropriate visual assessment tables.
- Please review Table 7. The spreadsheet that was provided shows different planted and total values for Plot 6, 7, and 11, for example.

 KCI Response: Some of the calculations in the data sheets had not been updated from the previous year and so they did not match the numbers in Table 7. The calculations in Table 7 are performed independent of these and so in most cases the Table 7 numbers were accurate. The exception to this was Plot R12, which was not calculating correctly. This error has been updated.
- It appears that in some instances depressional features external to the main channel and below the low bank elevation were not excluded from the loop used in determining the BHR (XS15, XS18 for example). Please be sure the areas outside of the channel are excluded for these calculations. KCI Response: All of the XS sheets were reviewed and these errors were corrected. Table 9 was also updated to reflect the correct numbers.
- It is great to see KCI using a loop for the calculations. For the most part, KCI's calculations were the most accurate of the reports reviewed this year, but that accuracy relies entirely on the exclusion of the areas mentioned above.

KCI Response: The functionality to exclude these areas is built into the spreadsheets. We will be sure to review them more thoroughly in future monitoring years to ensure that all calculations are accurate.

Please contact me if you have any questions or would like clarification concerning these responses.

Sincerely,

Tim Morris Project Manager

TABLE OF CONTENTS

PROJECT SUMMARY	1
SUCCESS CRITERIA	
MONITORING RESULTS	3
REFERENCES	
Figure 1. Project Site Vicinity Map	5
Appendix A – Background Tables	
Table 1. Project Components and Mitigation Credits	7
Table 2. Project Activity and Reporting History	
Table 3. Project Contacts	10
Table 4. Project Information	11
Appendix B – Visual Assessment Data	
CCPV	13
Table 5. Visual Stream Morphology Stability Assessment	
Table 6. Vegetation Condition Assessment.	
Photo Reference Points	
Vegetation Plot Photos	
Problem Area Photos	
Annondin C Vocatation Diet Date	
Appendix C – Vegetation Plot Data Table 7. Stem Count Total and Planted by Plot and Species	40
Table 7. Stelli Count Total and Planted by Plot and Species	49
Appendix D – Stream Measurement and Geomorphology Data	
Table 8. Baseline Stream Data Summary	55
Table 9. Cross-section Morphology Data Table	
Cross-section Plots	
Pebble Counts	
Appendix E – Hydrologic Data	
Table 10. Verification of Bankfull Events	129
Stream Level Hydrographs	
Table 11. Verification of Stream Flow	
Table 12. Stream Flow Criteria Attainment	
Stream Flow Hydrographs	
Table 13. Wetland Hydrology Verification	
Wetland Hydrographs	138

PROJECT SUMMARY

The Mill Dam Creek Restoration Site (MDCRS) was completed in March 2020 and restored and enhanced a total of 13,505 linear feet of stream. The MDCRS is a riparian system in the Upper Yadkin Pee-Dee River Basin (3040101 8-digit cataloging unit) in Yadkin County, North Carolina. The site's natural hydrologic regime had been substantially modified through the relocation and straightening of the existing stream channels, livestock impacts, and clearing of riparian buffer. This completed project will restore streams impacted by pasture and agriculture to a stable headwater ecosystem with a functional riparian buffer and floodplain access.

The MDCRS is protected by a 40.2 acre permanent conservation easement, held by the State of North Carolina. The site is located approximately 0.5 miles north of East Bend, NC. Specifically, the site is 0.2 mile north on Shady Grove Church Road (SR-1538) from its intersection with Shoals Road (SR-1546).

The North Carolina Ecosystem Enhancement Program (NCEEP) published the Upper Yadkin Pee-Dee River Basin Restoration Priorities (RBRP) in 2009. The project's 14 digit CU (03040101110070, Grassy Creek and Horne Creek) was identified as a Targeted Local Watershed (TLW) in the RBRP. The goals and priorities for the MDCRS are based on the information presented in the Upper Yadkin Pee-Dee River Basin Restoration Priorities: maintaining and enhancing water quality, restoring hydrology, and improving fish and wildlife habitat (NCEEP, 2009). The project will support the following basin priorities:

- Managing stormwater runoff
- Reducing fecal coliform inputs
- Improving/restoring riparian buffers
- Reducing sediment loading
- Improving stream stability
- Reducing nutrient loading
- Excluding livestock and implementing other agricultural BMP's
- Protecting high-resource value waters, including water supply watershed designated waters

The project is also located in the Ararat River Local Watershed Plan (LWP) study area. The Ararat River was designated a LWP Study Area due to poor water quality and aquatic habitat degradation issues, as well as the presence of good candidate sites for stream restoration in rural catchments (NCEEP, 2009). The stressors within the Ararat River LWP are erosion and sedimentation, missing or degraded riparian buffers, stormwater runoff, and nutrient and fecal coliform "hot spots" (NCEEP, 2013).

The goals for the project are to:

- Restore channelized and livestock-impacted streams to stable C and B type channels.
- Restore a forested riparian buffer to provide bank stability, filtration, and shading.

The project goals will be addressed through the following objectives:

- Relocate or stabilize channelized and/or incised streams to connect to a floodplain or floodprone area.
- Install a cross-section sized to the bankfull discharge.
- Create bedform diversity with pools, riffles, and habitat structures
- Fence out livestock to reduce nutrient, bacterial, and sediment impacts from adjacent grazing and farming practices to the project tributaries
- Plant the site with native trees and shrubs and an herbaceous seed mix.

Project construction was completed in December 2019 and project planting was completed in March 2020. The 13,505 linear feet of streams at MDCRS were enhanced and restored by re-meandering the stream and by tying the bankfull elevation to the historic floodplain where feasible. The entire site was planted to

establish a forested riparian buffer. The site was constructed as designed with only minor modifications from the design plan. These modifications generally consisted of slight adjustments in the alignment and spacing of riffles/pools due to bedrock encountered during construction. Several areas of additional bank stabilization were also installed. On February 6, 2020, shortly after construction was completed and before woody stems had been planted, the site received over 6 inches of rain in a 24 hour period. This storm caused significant damage to portions of the site and required repairs to be completed in March 2020. These repairs mainly involved repair of bank erosion through the installation of live lifts, removal of aggradation from the stream channel, and regrading areas of floodplain scour. Approximately 500 cubic yards of topsoil were also brought in and placed on the floodplain in areas of severe floodplain scour.

The monitoring components were installed in March/April 2020. Five automatically recording pressure transducer stream gauges that take a reading every 10 minutes were installed: one each in the upper third of T1A, T5A, and T8A to document flow within those reaches, and two on UTHC to record the occurrence of bankfull events. Cameras were installed in the vicinity of each of the flow gauges and set to record a short video once a day to provide additional verification of flow. Two automatically recording pressure transducer groundwater monitoring gauges were installed within pre-existing wetlands on the site to monitor wetland hydrology and ensure the existing wetlands on the site are not adversely affected by the restoration project. One of these gauges is located in the vicinity of the pre-existing wetland on the left bank of T7 and the other is located within the pre-existing wetland on the right bank of T8. To determine the success of the planted mitigation areas, eighteen 10 m x 10 m permanent vegetation monitoring plots were established. An additional twelve 10 m x 10 m random temporary vegetation monitoring plots are sampled during each monitoring year as well. The locations of the planted stems relative to the origin were recorded within the permanent plots and the species and height of each planted stem were recorded for all plots. Any volunteers found within the plots were grouped into size categories by species, but separate from the planted stems. Twelve permanent photo reference points were established and are taken annually. Thirty-two permanent cross-sections (24 riffle cross-sections and 8 pool cross-sections) were also established and a detailed longitudinal profile of the stream was taken. Wolman pebble counts were performed at all of the riffle cross-sections. The cross-section measurements are repeated in monitoring years 1, 2, 3, 5, and 7, but the longitudinal profile will only be repeated if there are concerns about bed elevation adjustments. Reports will be submitted to DMS each year.

SUCCESS CRITERIA

Vegetative success criteria for the stream mitigation is 260 woody stems/acre after five years, and 210 woody stems/acre after seven years. Trees in each plot must average seven feet in height at Year 5 and ten feet in height at Year 7. Volunteer species must be present for a minimum of two growing seasons and must be a species from the approved planting list to count toward vegetative success. A single species may not account for more than 50% of the required number of stems within any plot.

A minimum of four bankfull events must also be recorded during the monitoring period. All project streams must show a minimum of 30 continuous days of flow within a calendar year (assuming normal precipitation) A "normal" year is based on NRCS climatological data for Yadkin County with the 30th and 70th percentile thresholds as the range of normal, as documented in the USACE Technical Report "Accessing and Using Meteorological Data to Evaluate Wetland Hydrology, April 2000."

Bank height ratios (BHR) should not exceed 1.2 and the entrenchment ratios (ER) should be 2.2 or greater. BHR and ER at any measured riffle cross-section should not change more than 10% from the previous condition during any given monitoring interval (e.g. no more than 10% between years 1 and 2, 2 and 3, 3 and 5, or 5 and 7). Visual assessments will also be used to identify problem areas.

MONITORING RESULTS

The MY01 vegetation monitoring was conducted October 26-29, 2020. 29 of the 30 vegetation monitoring plots had greater than 260 woody stems/acre. The average stem density across all the surveyed plots is 836 planted stems/acre. Including volunteers, the site averaged 986 stems/acre.


The cross-sections were surveyed for MY01 between December 17 and 22, 2020. None of the 32 cross-sections had a bank height ratio greater than 1.2 or an entrenchment ratio less than 2.2. Some of the pools on site have widened slightly from their baseline conditions (XS3, 8, and 25), while a few of the riffles have lowered slightly (XS2, 9, 13, 23, 32). These changes are a result of the normal settling that occurs after construction, and an unusually large number of high rainfall events that the site experienced in 2020. After the large storm on February 6 and the repairs that were completed, the site experienced four separate rainfalls of greater than 3" in 24 hours. Although these heavy rainfall events did cause some damage to the site, the majority of the site was undamaged and overall the site is functioning as designed. As a result of these heavy rainfall events, one area of aggradation formed at the beginning of UTHC4-3. Bank erosion is also present along several of the outer bends on UTHC and one of the boulders from the second boulder sill on UTHC4-1 was rolled approximately 15 feet downstream. KCI is currently evaluating the need for any additional repair work and will perform this work in 2021 as needed. Please see Appendix B – Visual Assessment Data for more information.

During 2020, the stream gauge on UTHC-1 recorded 10 bankful events, while the stream gauge on UTHC-3 recorded 5 bankful events. All three of the reaches being monitored for flow demonstrated more than 30 consecutive days of flow during 2020. The gauge on T1A recorded a maximum of 68 consecutive days, while the gauges on T5A and T8A both recorded a maximum of 152 consecutive days. These numbers would likely have been higher, but the stream gauges stopped recording on June 15, 2020 after their memories filled up. The gauge data was further backed up by the cameras on site. Based on the video recordings obtained from the cameras, T1A had a maximum of 44 consecutive days of flow, T5A had a maximum of 70 consecutive days of flow, and T8A had a maximum of 84 consecutive days of flow. These numbers also would likely have been higher, but the cameras were obscured by vegetation for the majority of the summer.

Overall the site is functioning as designed with no major problem areas or threats to project success identified during MY01. The few areas that were damaged by the heavy rains in 2020 are of limited extent and are being evaluated to determine if future repairs are necessary.

REFERENCES

- NCDENR, Ecosystem Enhancement Program. 2009. Upper Yadkin Pee-Dee River Basin Restoration Priorities 2009. Raleigh, NC.
 - $\frac{https://files.nc.gov/ncdeq/Mitigation\%20Services/Watershed_Planning/Yadkin_River_B}{asin/2009\%20Upper\%20Yadkin\%20RBRP_Final\%20Final\%2C\%2026feb\%2709.pdf}$
- NCDEQ, Division of Mitigation Services. June 2017. "As-built Baseline Monitoring Report Format, Data and Content Requirement."
 - $\frac{https://files.nc.gov/ncdeq/Mitigation\%20Services/Document\%20Management\%20Library/Guidance\%20and\%20Template\%20Documents/6_AB_Baseline_Rep_Templ_June\%202017.pdf$
- NCIRT. October 24, 2016. "Wilmington District Stream and Wetland Compensatory Mitigation Update." https://saw-reg.usace.army.mil/PN/2016/Wilmington-District-Mitigation-Update.pdf
- USACE, Sprecher, S. W.; Warne, A. G. 2000. "Accessing and Using Meteorological Data to Evaluate Wetland Hydrology."
 - https://ntrl.ntis.gov/NTRL/dashboard/searchResults/titleDetail/ADA378910.xhtml

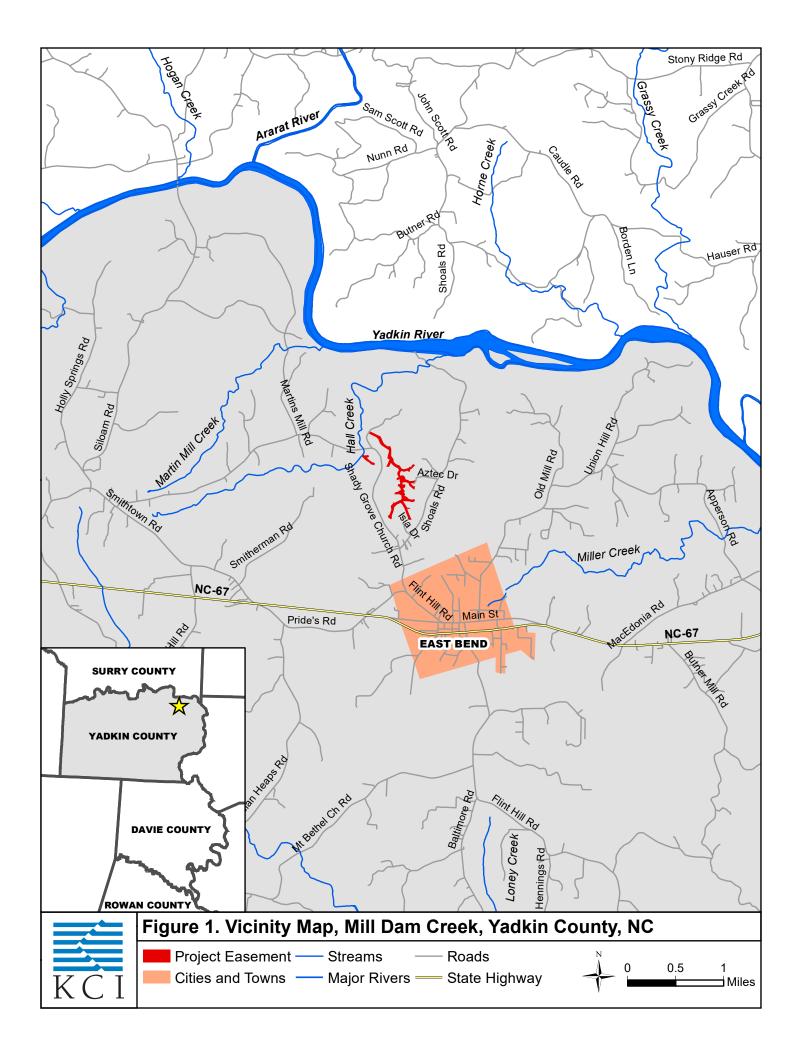

APPENDIX A

Background Tables

Table 1. Project Components and Mitigation Credits Mill Dam Creek Restoration Site, DMS Project #97136

Mitigation Credits

	Str	Stream		Riparian Wetland				ıffer	Nitrogen Nutrient Offset	Phosphorous Nutrient Offset
Type	R	RE	R	RE	R	RE	R	RE		
Linear Feet/Acres	7,166	6,340								
Credits	7,166.000	3,124.666								
TOTAL CREDITS	10,290.666									

Project Components

	Project Components									
Project Component -or- Reach ID	Stationing/ Location	Existing Footage/ Acreage	Restoration Footage or Acreage	Creditable Footage or Acreage	Restoration Level	Approach (PI, PII etc.)	Mitigation Ratio (X:1)	Mitigation Credits	Notes/Comments	
UTHC1 Top	10+00- 22+81	1,333	1,281	1,249	R	P2 10+00- 11+50, then P1	1	1,249.000	Crossing Exception STA 20+51 – 20+83	
UTHC1 Bottom	22+81- 27+39	541	457	438	R	P1, then P2 24+50-27+39	1	438.000	Crossing Exception STA 25+72 – 25+91	
UTHC2	27+39- 42+32	1,494	1,493	1,493	EI	N/A	1.5	995.333		
UTHC3	42+32- 55+57	1,411	1,325	1,240	R	P1 except P2 42+32-44+00 and 53+50- 55+57	1	1,240.000	Utility Exception STA54+07 – 54+49 Crossing Exception STA 55+14 – 55+57	
UTHC4-1	55+57- 58+53		297	297	EI	N/A	1.5	198.000		
UTHC4-2	58+53- 63+75	1.040	521	521	EII	N/A	2.5	208.400		
UTHC4-3	63+75- 68+55	1,840	481	419	EI	N/A	1.5	279.333	Crossing Exception STA 63+75 -64+37	
UTHC4-4	68+55- 73+97		542	497	EII	N/A	2.5	199.800	Utility Exception STA 68+55 – 69+00	
T1	100+00- 107+51	764	751	734	R	P2 100+00- 101+80, then P1	1	734.000	Crossing Exception STA 104+00-104+16	
T1A	150+00- 157+95	746	795	795	R	P2	1	795.000		

Project Component -or- Reach ID	Stationing/ Location	Existing Footage/ Acreage	Restoration Footage or Acreage	Creditable Footage or Acreage	Restoration Level	Approach (PI, PII etc.)	Mitigation Ratio (X:1)	Mitigation Credits	Notes/Comments
T2-1	200+00- 204+98	499	498	498	EII	N/A	2.5	199.200	
T2-2	204+98- 207+63	232	265	265	R	P2	1	265.000	
Т3	300+00- 303+69	378	369	369	R	P1/P2	1	369.000	
T4	400+00- 401+51	151	151	151	R	P1	1	151.000	
T5	1000+00- 1012+13	1,205	1,213	1,182	EII	N/A	2.5	472.800	Crossing Exception STA 1003+59- 1003+90
T5A	1200+00- 1200+65	65	65	65	EII	N/A	2.5	26.000	
T5B	1300+00- 1304+38	438	438	438	EII	N/A	2.5	175.200	
T6-1	600+00- 603+22	325	322	259	EII	N/A	2.5	103.600	Crossing Exception STA 602+59 – 603+22
T6-2	603+22- 609+80	621	658	658	R	P1	1	658.000	
T6A-1	650+00- 650+60	60	60	60	EII	N/A	2.5	24.000	
T6A-2	650+60- 651+61	97	101	101	R	P1	1	101.000	
T7-1	700+00- 701+65	165	165	165	EII	N/A	2.5	66.000	
T7-2	701+65- 705+13	335	348	348	R	P1	1	348.000	
T8-1	800+00- 804+45	445	445	445	EII	N/A	2.5	178.000	
T8-2	804+45- 808+94	486	448	426	R	P1	1	426.000	Crossing Exception STA 808+20 – 808+42
T8A	850+00- 852+63	258	263	263	R	P1	1	263.000	
Т9	900+00- 901+29	133	129	129	R	P1, then P2 900+71-901+29	1	129.000	
TOTAL		14,024	13,882	13,505				10,290.666	

	Component Summation										
Restoration Level	Stream (linear feet)		an Wetlands Acres)	Non-Riparian Wetlands (Acres)	Buffer (square feet)						
		Riverine	Non-Riverine								
Restoration	7,166										
Enhancement											
Enhancement I	2,209										
Enhancement II	4,130										
Creation											
Preservation											
High Quality Preservation											


Table 2. Project Activity & Reporting Histo Mill Dam Creek Restoration Site, DMS Proj		
Activity or Report	Data Collection Complete	Actual Completion or Delivery
Mitigation Plan		Dec. 7, 2018
Final Design - Construction Plans		Jan. 14, 2019
Construction Grading Completed		Dec. 12, 2019
Repairs from Storm Damage Completed		March 26, 2020
Planting Completed		March 26, 2020
Baseline Monitoring/Report		May 2020
Vegetation Monitoring	April 24, 2020	
Stream Survey	April 16, 2020	
Year 1 Monitoring		December 2020
Vegetation Monitoring	October 28, 2020	
Stream Survey	December 22, 2020	


Table 3. Project Contacts						
•	on Site, DMS Project #97136					
Design Firm	KCI Associates of North Carolina					
O	4505 Falls of Neuse Road					
	Suite 400					
	Raleigh, NC 27609					
	Contact: Mr. Tim Morris					
	Phone: (919) 278-2512					
	Fax: (919) 783-9266					
Construction Contractor	Carolina Environmental Contracting, Inc.					
	PO Box 1905					
	Mount Airy, NC 27030					
	Contact: Mr. Wayne Taylor					
	Phone: (336)320-3849					
Planting Contractor	Shenandoah Habitats					
	1983 Jefferson Highway					
	Waynesboro, VA 22980					
	Contact: Mr. David Coleman					
	Phone: (540) 941-0067					
Monitoring Performers						
	KCI Associates of North Carolina					
	4505 Falls of Neuse Road					
	Suite 400					
	Raleigh, NC 27609					
	Contact: Mr. Adam Spiller					
	Phone: (919) 278-2514					
	Fax: (919) 783-9266					


Project Name		Mill Dam Creek Restoration Site	Δ.						
County		Yadkin County							
•		·							
Project Area		40.2 acres							
Project Coordinates (lat. and long.)	36.2390 °N, 80.5201°W								
Planted Acreage (acres of woody stems planted)	29.2 acres								
parties,	Project Watershed Sumr	nary Information							
Physiographic Province		Piedmont							
River Basin		Yadkin							
USGS Hydrologic Unit 8-digit	030401014	USGS Hydrologic Unit 14	-digit	03010101110070					
DWQ Sub-basin		03-07-02							
Project Drainage Area (acres)		400 acres							
Project Drainage Area Percentage of Impervious Area		3%							
CGIA Land Use Classification	Forest (45%), Pasture/Farmlar Roads (1%)	nd (39%), Low-density Residentia	ıl Develop	oment (15%), and					
	Existing Reach Summa								
Parameters		All Reaches Combined							
Length of reach (linear feet) Valley confinement		14,024 Partially confined to confined							
Drainage area (acres)		400 acres							
Perennial, Intermittent, Ephemeral		Intermittent – Perennial							
NCDWQ Water Quality Classification	С	(Aquatic Life, Secondary Recreat	tion)						
Rosgen Stream Classification (Existing / Proposed)		F4/G4/C4/B4	,						
Evolutionary trend (Simon)		Stage III							
FEMA classification		confluence of T8 and Hall Creek,	otherwise	none					
n .	Existing Wetland Summ		,	WH, WI, WJ					
Parameters	WA, WB, WE, WG, WK	WC							
Size of Wetland (acres)	0.23	0.10	ъ.	0.10					
Wetland Type	Riparian Non-riverine	Riparian Non-riverine	Ripa	arian Non-riverine					
Mapped Soil Series	Fairview	Fairview		Siloam					
Drainage class	Well drained	Well drained		Well drained					
Soil Hydric Status	Non-Hydric	Non-Hydric		Non-Hydric					
Source of Hydrology Restoration or Enhancement Method	Groundwater N/A (Preservation)	Groundwater Areas of erosion to stabilize		Groundwater N/A (Preservation)					
Restoration of Edinancement Method	*		1	V/A (Freservation)					
	Regulatory Consi	derations	Suppor	ting					
Regulation	Applicable?	Resolved?		entation					
Waters of the United States – Section 404	Yes	NWP 27	Prelimi	nary JD					
Waters of the United States – Section 401	Yes	NWP 27	Prelimi	nary JD					
Endangered Species Act	Yes Yes USFWS								
Historic Preservation Act	No	Yes	NCSHI	Ю					
Coastal Zone Management Act (CZMA)/ Coastal Area Management Act (CAMA)	No	N/A	N/A						
FEMA Floodplain Compliance	No	Yes	N/A						
Essential Fisheries Habitat	No	N/A	N/A						


APPENDIX B


Visual Assessment Data

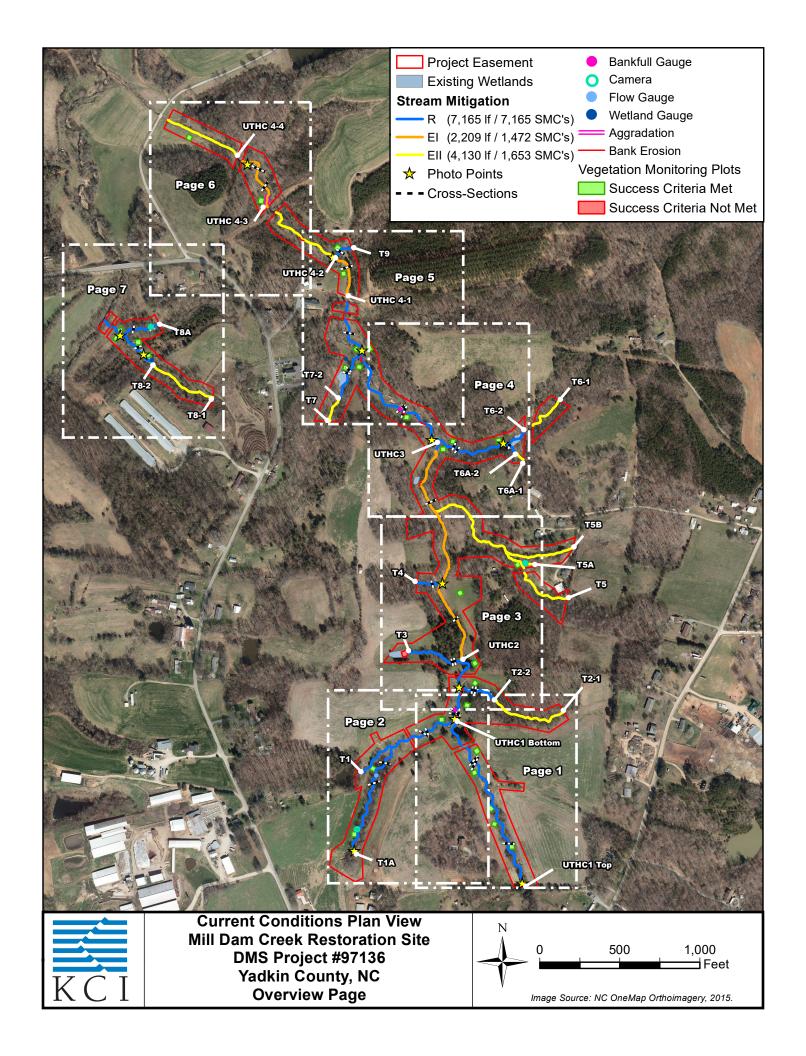


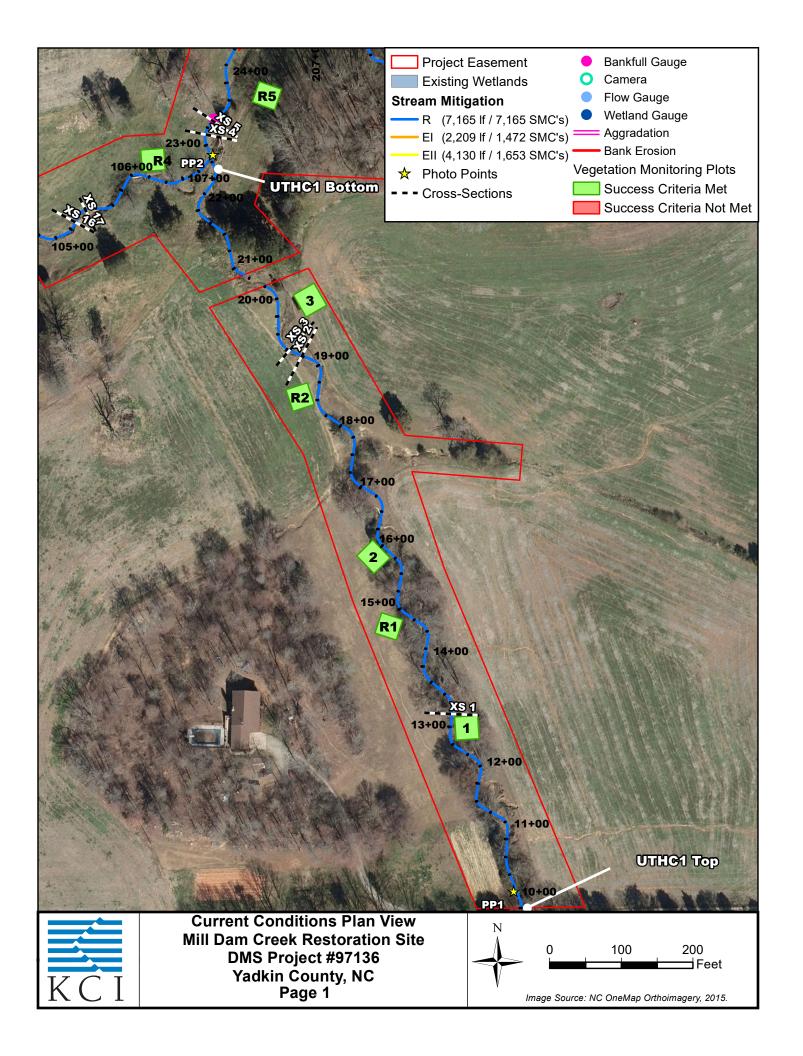


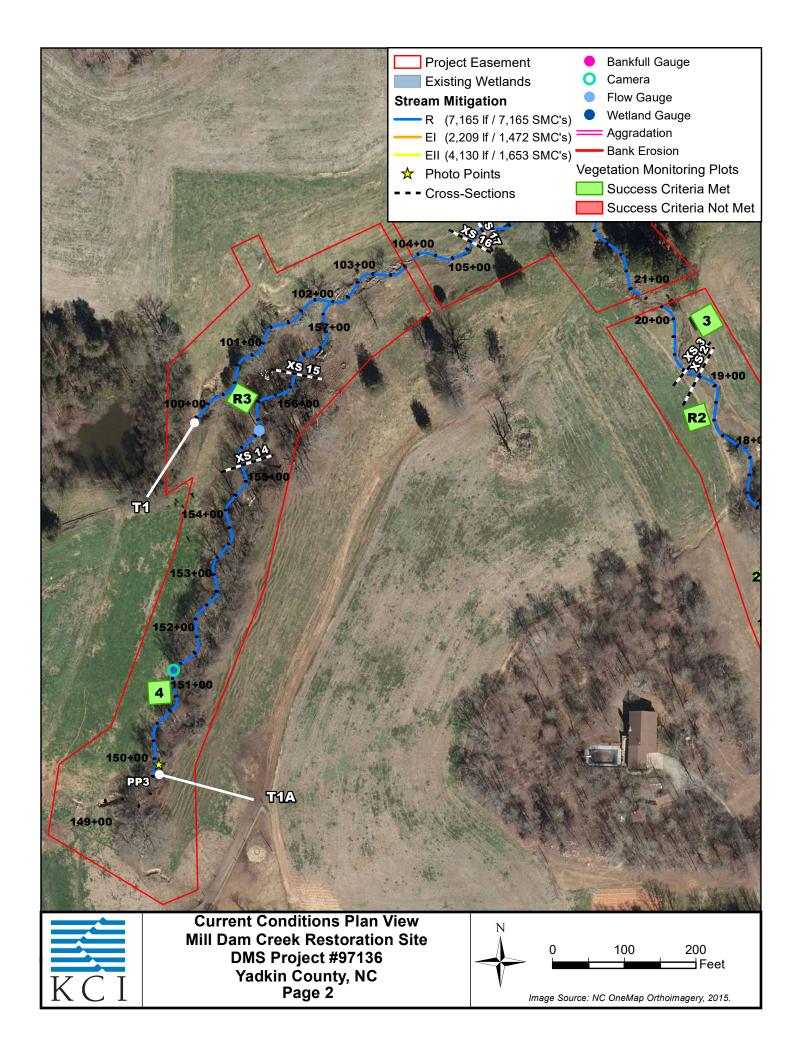

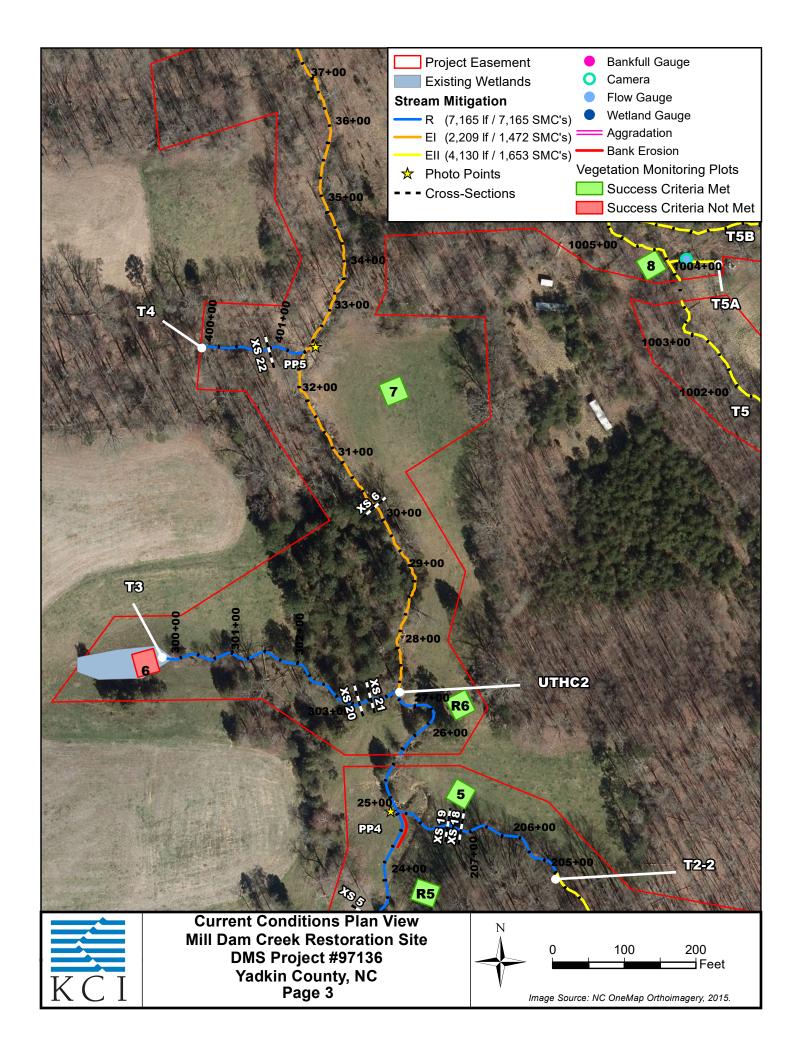

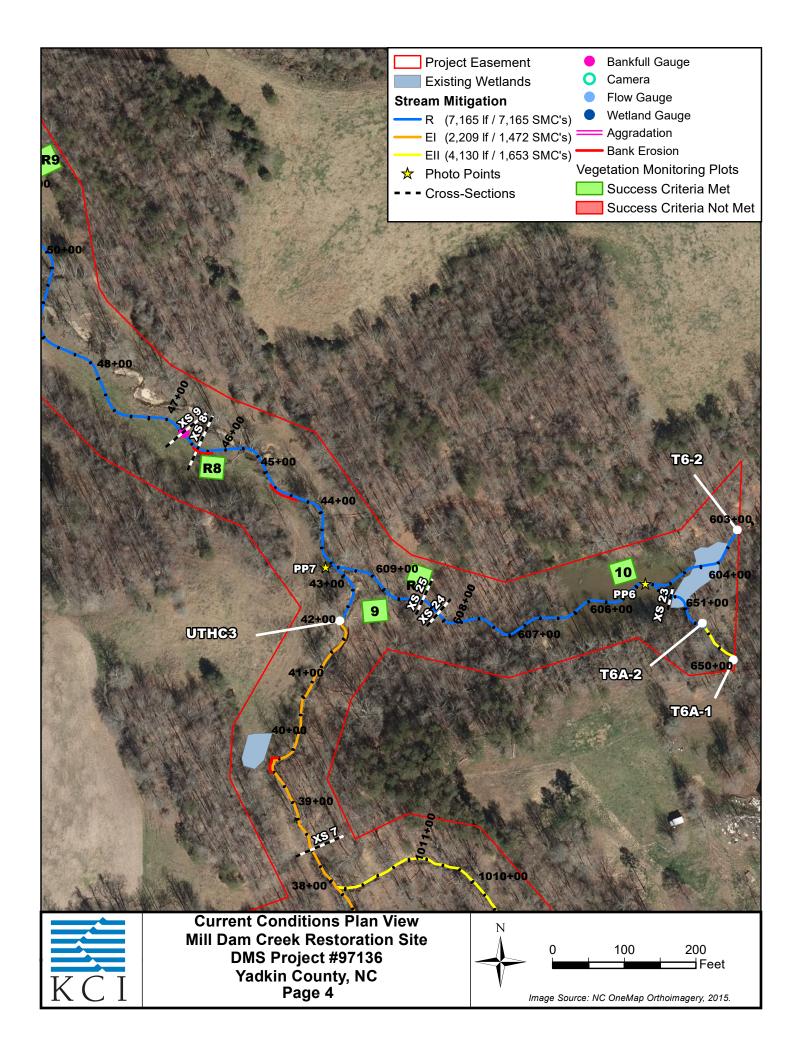

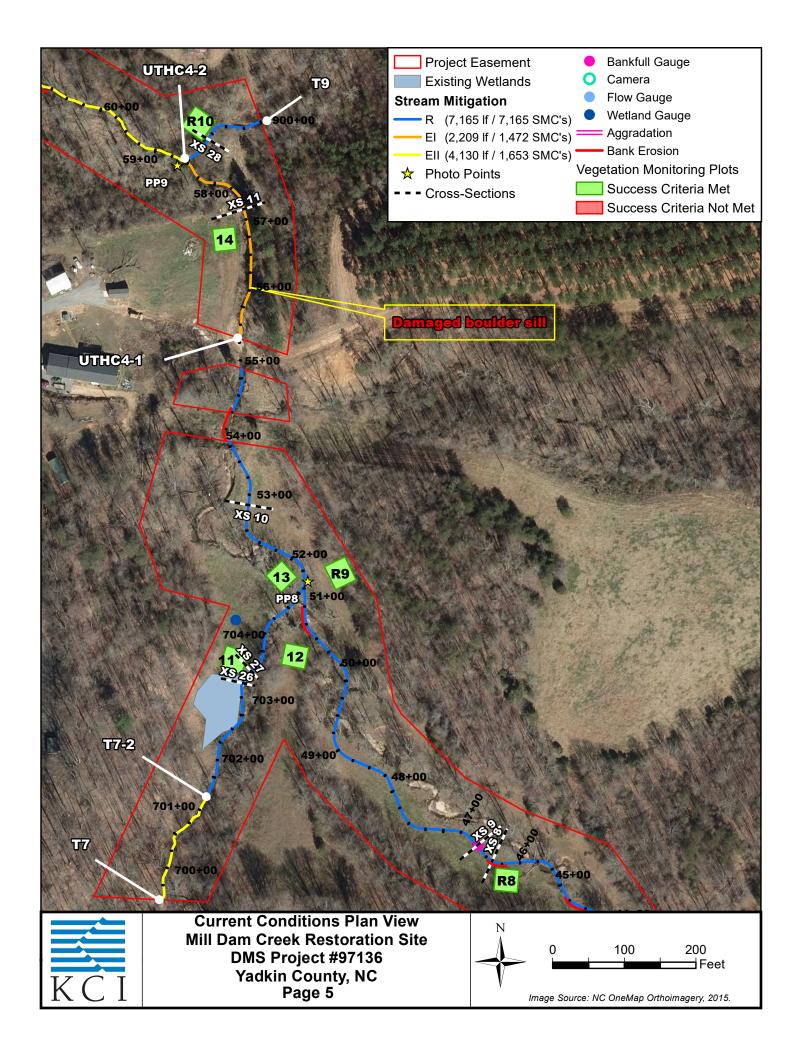

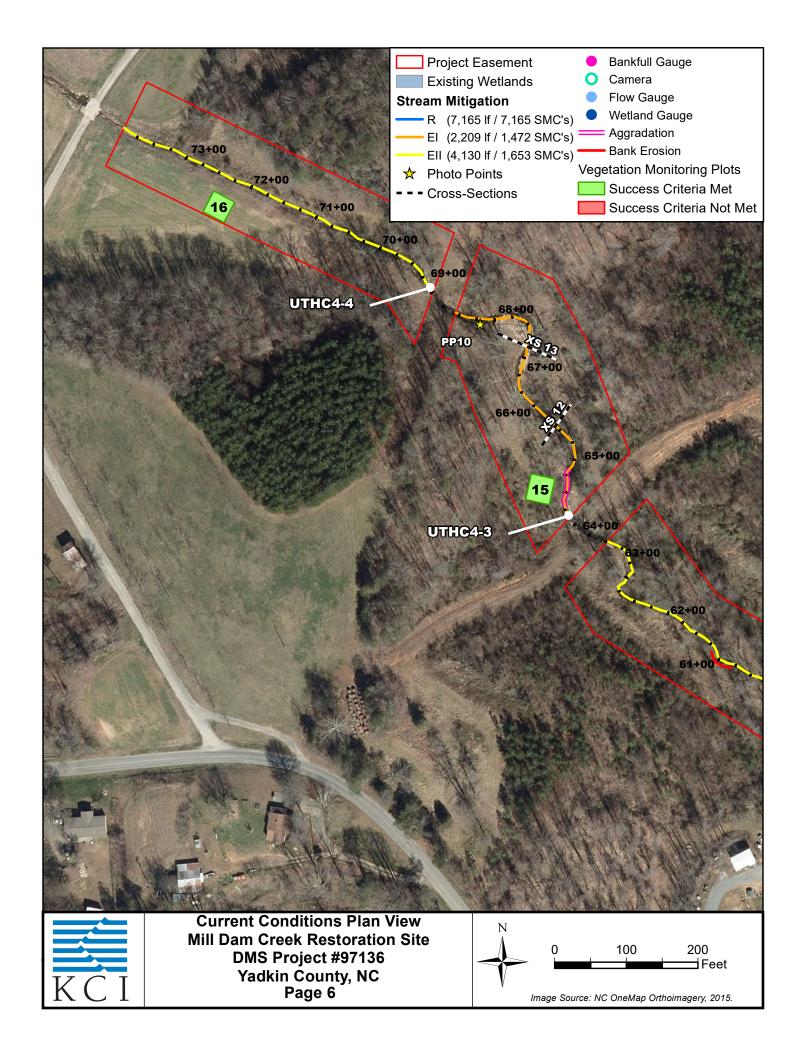

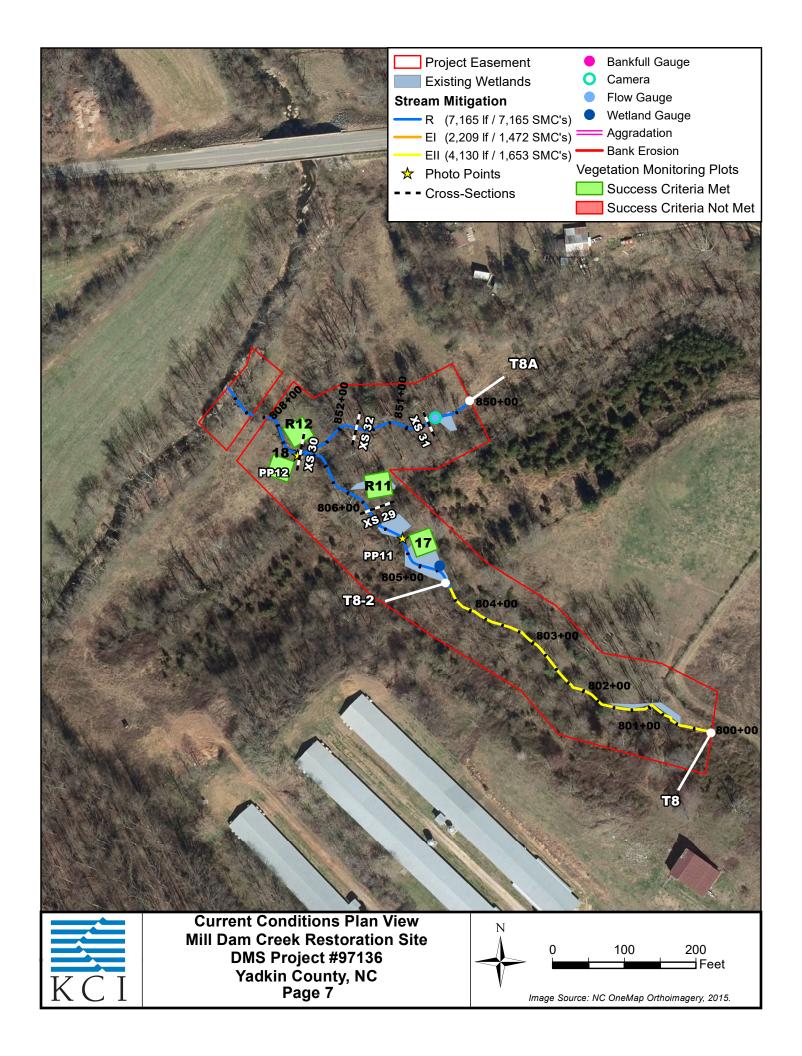


Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID UTHC1
Assessed Length 1,739

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)				-	
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	30	30			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	29	29			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of	29	29			100%
		upstream riffle and head of downstrem riffle)	-				
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	29	29			100%
		2. Thalweg centering at downstream of meander (Glide)	29	29			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			1	50	99%
		Banks undercut/overhanging to the extent that mass wasting appears					
	2. Undercut	likely. Does NOT include undercuts that are modest, appear sustainable			0	0	100%
		and are providing habitat.					
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
				Totals	1	50	99%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	22	22			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	22	22			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	22	22			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	22	22			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	22	22			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID UTHC2 Assessed Length 1,494

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. Aggradation - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)			-		
		Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	8	8			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	8	8			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	8	8			100%
	4.Thalweg Position	Thalweg centering at upstream of meander bend (Run)	8	8			100%
		2. Thalweg centering at downstream of meander (Glide)	8	8			100%
		27 That hog contenting at do white team of mountain (Ondo)		ű			10070
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			1	31	99%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
				Totals	1	31	99%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	0	0			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	0	0			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	0	0			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	0	0			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	0	0			

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID UTHC3
Assessed Length 1,325

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. Aggradation - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)			-		
		Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	18	18			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	17	17			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	17	17			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	17	17			100%
		2. Thalweg centering at downstream of meander (Glide)	17	17			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			4	161	94%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
	, ,			Totals	4	161	94%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	8	8			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	8	8			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	8	8			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	8	8			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	8	8			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID UTHC4-1 Assessed Length 297

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. Aggradation - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)				, and the second	
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	3	3			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	3	3			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	3	3			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	3	3			100%
		2. Thalweg centering at downstream of meander (Glide)	3	3			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
	•			Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	1	2			50%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	1	2			50%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	2	2			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	2	2			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	2	2			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID UTHC4-3

Assessed Length 419

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	Aggradation - Bar formation/growth sufficient to significantly deflect			1	56	87%
	(Riffle and Run units)	flow laterally (not to include point bars)			1		
		Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	4	4			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	3	3			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	3	3			100%
	4.Thalweg Position	Thalweg centering at upstream of meander bend (Run)	3	3			100%
		2. Thalweg centering at downstream of meander (Glide)	3	3			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
				Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	1	1			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	1	1			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	1	1			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	1	1			100%
	4. Habitat	Pool forming structures maintaining \sim Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	1	1			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID T1
Assessed Length 751

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. Aggradation - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)				_	
		Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	16	16			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	16	16			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	16	16			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	16	16			100%
		2. Thalweg centering at downstream of meander (Glide)	16	16			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
	<u> </u>			Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	8	8			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	8	8			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	8	8			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	8	8			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	8	8			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID T1A Assessed Length 795

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. Aggradation - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)					
		Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	16	16			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	16	16			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	16	16			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	16	16			100%
		2. Thalweg centering at downstream of meander (Glide)	16	16			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
				Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	11	11			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	11	11			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	11	11			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	11	11			100%
	4. Habitat	Pool forming structures maintaining \sim Max Pool Depth: Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	11	11			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID T2-2 Assessed Length 265

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. Aggradation - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)				_	
		Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	8	8			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	7	7			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	7	7			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	7	7			100%
		2. Thalweg centering at downstream of meander (Glide)	7	7			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
			•	Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	5	5			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	5	5			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	5	5			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	5	5			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	5	5			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID T3
Assessed Length 369

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%
	(Killie and Kun units)	Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	13	13	-		100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	12	12			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	12	12			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	12	12			100%
		2. Thalweg centering at downstream of meander (Glide)	12	12			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
				Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	14	14			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	14	14			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	14	14			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	14	14			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	14	14			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID T4
Assessed Length 151

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars) 2. Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	Degradation - Evidence of downcutting Texture/Substrate - Riffle maintains coarser substrate	7	7	0	0	100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	7	7			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	7	7			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	7	7			100%
		2. Thalweg centering at downstream of meander (Glide)	7	7			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
	•			Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	6	6			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	6	6			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	6	6			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	6	6			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	6	6			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID T6-2 Assessed Length 658

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. Aggradation - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)				_	
		Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	15	15			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	15	15			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	15	15			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	15	15			100%
		2. Thalweg centering at downstream of meander (Glide)	15	15			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
				Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	16	16			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	16	16			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	16	16			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	16	16			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	16	16			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID T6A-2 Assessed Length 101

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. Aggradation - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)				-	
		Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	3	3			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	3	3			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	3	3			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	3	3			100%
		2. Thalweg centering at downstream of meander (Glide)	3	3			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
	, ,		•	Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	6	6			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	6	6			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	6	6			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	6	6			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	6	6			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID T7-2 Assessed Length 348

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. Aggradation - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)					
		Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	6	6			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	6	6			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	6	6			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	6	6			100%
		2. Thalweg centering at downstream of meander (Glide)	6	6			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
	, , , ,			Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	4	4			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	4	4			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	4	4			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	4	4			100%
	4. Habitat	Pool forming structures maintaining \sim Max Pool Depth: Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	4	4			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID T8-2 Assessed Length 448

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. Aggradation - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)				-	
		Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	10	10			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	10	10			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	10	10			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	10	10			100%
		2. Thalweg centering at downstream of meander (Glide)	10	10			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
				Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	12	12			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	12	12			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	12	12			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	12	12			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	12	12			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID T8A Assessed Length 262

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. Aggradation - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)				-	
		Degradation - Evidence of downcutting			0	0	100%
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	7	7			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	7	7			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	7	7			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	7	7			100%
		2. Thalweg centering at downstream of meander (Glide)	7	7			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
	, ,		•	Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	7	7			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	7	7			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	7	7			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	7	7			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	7	7			100%

Table 5 <u>Visual Stream Morphology Stability Assessment</u>

Reach ID T9
Assessed Length 129

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect			0	0	100%
	(Riffle and Run units)	flow laterally (not to include point bars)				0	1000/
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	4	4			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	3	3			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	3	3			100%
	4.Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	3	3			100%
		2. Thalweg centering at downstream of meander (Glide)	3	3			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
	•		•	Totals	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	4	4			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	4	4			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	4	4			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	4	4			100%
	4. Habitat	Pool forming structures maintaining \sim Max Pool Depth: Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	4	4			100%

 Table 6
 Vegetation Condition Assessment

Planted Acreage 29.5

		Mapping		Number of	Combined	% of Planted
Vegetation Category	Definitions	Threshold	CCPV Depiction	Polygons	Acreage	Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	0.1 acres	Pattern and Color	0	0.00	0.0%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1 acres	Pattern and Color	0	0.00	0.0%
			Total	0	0.00	0.0%
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 acres	Pattern and Color	0	0.00	0.0%
			Cumulative Total	0	0.00	0.0%
Easement Acreage	20.6					
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage
4. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale).	1000 SF	Pattern and Color	0	0.00	0.0%
5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	none	Pattern and Color	0	0.00	0.0%

Photo Reference Photos



PP1 - MY00 - 4/17/20



PP2 - MY00 - 4/17/20



PP3 - MY00 - 4/17/20



PP1 - MY01 - 12/17/20



PP2 - MY01 - 12/17/20



PP3 - MY01 - 12/17/20



PP4 - MY00 - 4/17/20



PP5 - MY00 - 4/17/20



PP6 - MY00 - 4/16/20



PP4 - MY01 - 12/17/20



PP5 - MY01 - 12/17/20



PP6 - MY01 - 12/18/20



PP7 - MY00 - 4/16/20



PP8 - MY00 - 4/16/20



PP9 - MY00 - 4/17/20



PP7 - MY01 - 12/18/20



PP8 - MY01 - 12/18/20



PP9 - MY01 - 12/18/20



PP10 - MY00 - 4/17/20



PP11 - MY00 - 4/16/20



PP12 - MY00 - 4/16/20



PP10 - MY01 - 12/18/20



PP11 - MY01 - 12/18/20



PP12 - MY01 - 12/18/20

Vegetation Monitoring Plot Photos



Vegetation Plot 1 - MY01 - 10/28/20





Vegetation Plot 3 – MY01 – 10/28/20



Vegetation Plot 4 - MY01 - 10/27/20



Vegetation Plot 5 - MY01 - 10/27/20



Vegetation Plot 6 – MY01 - 10/27/20



Vegetation Plot 7 - MY01 - 10/27/20



Vegetation Plot 9 - MY01 - 10/26/20



Vegetation Plot 11 – MY01 – 10/26/20



Vegetation Plot 8 - MY01 - 10/27/20



Vegetation Plot 10 – MY01 – 10/26/20



Vegetation Plot 12 – MY01 – 10/26/20



Vegetation Plot 13 – MY00 – 10/26/20



Vegetation Plot 15 – MY01 – 10/26/20



Vegetation Plot 17 – MY01 – 10/27/20



Vegetation Plot 14 – MY01 – 10/27/20



 $Vegetation\ Plot\ 16-MY01-10/26/20$



Vegetation Plot 18 – MY01 – 10/27/20



Vegetation Plot R1 - MY01 - 10/28/20



Vegetation Plot R3 - MY01 - 10/27/20



Vegetation Plot R5 - MY01 - 10/27/20



 $Vegetation\ Plot\ R2-MY01-10/28/20$



Vegetation Plot R4 - MY01 - 10/27/20



Vegetation Plot R6 - MY01 - 10/27/20



Vegetation Plot R7 - MY01 - 10/26/20



Vegetation Plot R9 - MY01 - 10/26/20



Vegetation Plot R11 – MY01 – 10/27/20



Vegetation Plot R8 - MY01 - 10/26/20



Vegetation Plot R10 - MY01 - 10/26/20



Vegetation Plot R12 - MY01 - 10/27/20

Problem Area Photos



Outer bend erosion, Sta 39+50, 12/18/20



Outer bend erosion, Sta 50+75, 12/18/20



Damaged boulder sill, Sta 55+60, 12/18/20



Outer bend erosion, Sta 46+25, 12/18/20



Outer bend erosion, Sta 54+25, 12/18/20



Outer bend erosion, Sta 61+00, 12/18/20

APPENDIX C

Vegetation Plot Data

Table 7. Stem Count by Plot and Species														
Mill Dam Creek Restoration Site, DMS Project #9	Current Plot Data (MY01 2020)													
	Plo	ot 01	Plo	ot 02	Plo	t 03		ot 04		ot 05	Plo	ot 06	Plo	ot 07
Species	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total
American Holly (Ilex opaca)														
American Hornbeam (Carpinus caroliniana)														
American Sycamore (Platanus occidentalis)	2	. 2	5	5	2	2	6	6	2	2	1	. 1	. 1	1
Black Walnut (Juglans nigra)						2								
Black Willow (Salix nigra)														
Boxelder (Acer negundo)				1										
Eastern Red Cedar (Juniperus virginiana)														
Elderberry (Sambucus canadensis)														
Northern Red Oak (Quercus rubra)														
Oak (Quercus sp.)														
Persimmon (Diospyros virginiana)														
Pin Oak (Quercus palustris)													11	. 11
Red Maple (Acer rubrum)														
River Birch (Betula nigra)	6	6	5	5	2	2	5	5	4	4	1	. 1	. 5	5
Southern Red Oak (Quercus falcata)														
Swamp Chestnut Oak (Quercus michauxii)			1	1	1	1	1	1					1	1
Tulip Poplar (Liriodendron tulipifera)	1	. 1			4	5	4	4	4	4			2	. 2
White Oak (Quercus alba)													1	. 1
Willow Oak (Quercus phellos)	8	8	11	11	8	8	5	5	11	11	1	. 1	. 3	3
Unknown														
Stem count	17	17	22	23	17	20	21	21	21	21	3	3	24	24
size (ares)		1		1		1		1		1		1		1
size (ACRES)	0.0	025	0.0	025	0.0)25	0.0	025	0.0	025	0.	025	0.0	025
Species count	4	4	4	5	5	6	5	5	4	4	3	3	7	7
Stems per ACRE	688	688	890	931	688	809	850	850	850	850	121	121	971	971

Table 7. Stem Count by Plot and Species														
Mill Dam Creek Restoration Site, DMS Project #9	7136	Current Plot Data (MY01 2020)												
	Plo	ot 08	Plo	ot 09	Plo	t 10		t 11		ot 12	Plo	t 13	Plo	t 14
Species	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total
American Holly (<i>Ilex opaca</i>)														
American Hornbeam (Carpinus caroliniana)														
American Sycamore (Platanus occidentalis)	2	26		6	6	6	2	2		2		5	5	5
Black Walnut (Juglans nigra)												1		
Black Willow (Salix nigra)							2	2			3	3		
Boxelder (Acer negundo)		1												
Eastern Red Cedar (Juniperus virginiana)														
Elderberry (Sambucus canadensis)		1						1						
Northern Red Oak (Quercus rubra)		1												
Oak (Quercus sp.)														
Persimmon (Diospyros virginiana)														
Pin Oak (Quercus palustris)			2	2			1	1			5	5		
Red Maple (Acer rubrum)		1												
River Birch (Betula nigra)	1	2	5	5	8	8						1		
Southern Red Oak (Quercus falcata)										5				
Swamp Chestnut Oak (Quercus michauxii)														
Tulip Poplar (<i>Liriodendron tulipifera</i>)	10	11	2	2	1	1	5	5	8	13	4	5	6	6
White Oak (Quercus alba)			2	2					5	7	2	2		
Willow Oak (Quercus phellos)	8	8	7	7	4	4	5	5	8	11	8	8	20	20
Unknown														
Stem count	21	51	18	24	19	19	15	16	21	38	22	30	31	31
size (ares)		1		1		1		1		1		1		1
size (ACRES)	0.0	025	0.0	025	0.0	025	0.0)25	0.0	025	0.0	025	0.0)25
Species count	4	8	5	6	4	4	5	6	3	5	5	8	3	3
Stems per ACRE	850	2,064	728	971	769	769	607	647	850	1,538	890	1,214	1,255	1,255

Table 7. Stem Count by Plot and Species														
Mill Dam Creek Restoration Site, DMS Project #9	7136 	Current Plot Data (MY01 2020)												
	Plo	t 15	Plo	ot 16	Plo	ot 17		ot 18		t R1	Plo	t R2	Plo	t R3
Species	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total
American Holly (Ilex opaca)														
American Hornbeam (Carpinus caroliniana)														
American Sycamore (Platanus occidentalis)	9	9			2	2	11	22	6	6	4	4	4	4
Black Walnut (Juglans nigra)		1						2						
Black Willow (Salix nigra)														
Boxelder (Acer negundo)								6		1				
Eastern Red Cedar (Juniperus virginiana)														
Elderberry (Sambucus canadensis)														
Northern Red Oak (Quercus rubra)														
Oak (Quercus sp.)														
Persimmon (Diospyros virginiana)														
Pin Oak (Quercus palustris)														
Red Maple (Acer rubrum)										1				
River Birch (Betula nigra)	8	8	9	9					4	4	3	3	2	2
Southern Red Oak (Quercus falcata)														
Swamp Chestnut Oak (Quercus michauxii)	2	2	1	1							1	1	4	4
Tulip Poplar (Liriodendron tulipifera)	3	3	1	1	1	1	5	7	1	1	2	2	2	2
White Oak (Quercus alba)														
Willow Oak (Quercus phellos)	10	10	10	10	8	8	14	14	6	6	4	4	8	8
Unknown														
Stem count	32	33	21	21	11	11	30	51	17	19	14	14	20	20
size (ares)		1		1		1		1		1		1		1
size (ACRES)	0.0	025	0.0	025	0.0	025	0.0	025	0.0	025	0.0	025	0.0	025
Species count		6	4	4	3	3	3	5	4	6	5	5	5	5
Stems per ACRE	1,295	1,335	850	850	445	445	1,214	2,064	688	769	567	567	809	809

Table 7. Stem Count by Plot and Species														
Mill Dam Creek Restoration Site, DMS Project #9	7136 Current Plot Data (MY01 2020)													
	Plo	t R4	Plo	t R5	Plo	t R6		t R7		t R8	Plo	t R9	Plo	t R10
Species		Total	Planted	Total	Planted	Total	Planted	Total	Planted	-	Planted	Total	Planted	Total
American Holly (<i>Ilex opaca</i>)														
American Hornbeam (Carpinus caroliniana)														1
American Sycamore (Platanus occidentalis)	13	13	1	1	4	4	42	42	1	1	. 6	6		
Black Walnut (Juglans nigra)														
Black Willow (Salix nigra)													9	9
Boxelder (Acer negundo)														
Eastern Red Cedar (Juniperus virginiana)														
Elderberry (Sambucus canadensis)														
Northern Red Oak (Quercus rubra)														
Oak (Quercus sp.)														
Persimmon (Diospyros virginiana)														
Pin Oak (Quercus palustris)									1	1				
Red Maple (Acer rubrum)				5										1
River Birch (Betula nigra)			3	3	2	2	3	3			4	4	1	. 1
Southern Red Oak (Quercus falcata)														
Swamp Chestnut Oak (Quercus michauxii)			1	1	1	1	1	1						
Tulip Poplar (Liriodendron tulipifera)	6	6	10	10	4	4	1	1			1	1	4	4
White Oak (Quercus alba)														
Willow Oak (Quercus phellos)	6	6	2	2	7	7	6	6	5	5	7	7	6	6
Unknown														
Stem count	25	25	17	22	18	18	53	53	7	7	18	18	20	22
size (ares)		1		1		1		1		1		1		1
size (ACRES)	_)25	0.0)25	0.0)25	0.0)25	0.0	025	0.0	025	0.	025
Species count		3	5	6	5	5	5	5	3	3	4	4	4	6
Stems per ACRE	1,012	1,012	688	890	728	728	2,145	2,145	283	283	728	728	809	890

Table 7. Stem Count by Plot and Species								
Mill Dam Creek Restoration Site, DMS Project #9		ent Plot Da	ata (MY01	2020)		Annua	l Means	
		R11		R12	MY01	(2020)		(2020)
Species	Planted	Planted Total P		Planted Total		Total	Planted	Total
American Holly (Ilex opaca)		1				1		
American Hornbeam (Carpinus caroliniana)		1				2		
American Sycamore (Platanus occidentalis)	4	4	18	18	159	207	88	88
Black Walnut (Juglans nigra)						6		4
Black Willow (Salix nigra)					14	14	5	5
Boxelder (Acer negundo)		7		4		20		
Eastern Red Cedar (Juniperus virginiana)		1				1		
Elderberry (Sambucus canadensis)						2		
Northern Red Oak (Quercus rubra)						1		1
Oak (Quercus sp.)							206	206
Persimmon (Diospyros virginiana)			7	7			1	1
Pin Oak (Quercus palustris)					20	20		
Red Maple (Acer rubrum)						8		
River Birch (Betula nigra)	2	2			83	85	107	107
Southern Red Oak (Quercus falcata)						5		
Swamp Chestnut Oak (Quercus michauxii)					15	15	20	20
Tulip Poplar (Liriodendron tulipifera)	1	1	6	6	99	109	172	172
White Oak (Quercus alba)					10	12		
Willow Oak (Quercus phellos)	4	4	10	10	220	223	30	30
Unknown							89	89
Stem count	11	21	41	45	620	731	718	723
size (ares)		1		1	3	0	3	0
size (ACRES)	0.0)25	0.0)25	0.741		0.7	741
Species count	4	8	4	5	8	17	9	11
Stems per ACRE	445	850	1,659	1,821	836	986	969	975

APPENDIX D

Stream Measurement and Geomorphology Data

Parameter	Pre-Existing Condition	Reference Reach(es) Data	Design		As-bui	lt	
Dimension - Riffle				Min	Mean	Max	n
Bankfull Width (ft)	5.8 – 10.6	9.0 – 10.0	6.5 – 9	6.0	7.6	8.9	3
Floodprone Width (ft)	9.0 – 27.3	13 – 21	50	59.1	64.6	68.3	3
Bankfull Mean Depth (ft)	0.4 - 0.8	1.1 – 1.2	0.5 - 0.7	0.6	0.7	0.7	3
Bankfull Max Depth (ft)	0.4 - 1.2	1.3 – 1.5	0.8 - 1.0	1.0	1.1	1.2	3
Bankfull Cross-Sectional Area (ft²)	2.8 - 4.5	10.4 - 10.7	3.4 - 6.1	4.5	5.1	5.5	3
Width/Depth Ratio	7.6 - 28.2	8 – 10	12.4 – 13.4	8.2	11.6	14.4	3
Entrenchment Ratio	1.2 - 2.6	1.3 - 2.3	5.6 – 7.7	6.6	8.7	11.0	3
Bank Height Ratio	1.0 - 10.4	1.0	1.0	1.0	1.0	1.0	3
Pattern							
Channel Beltwidth (ft)	*	45	26 – 61		26 – 6	1	
Radius of Curvature (ft)	*	13 – 42	18 – 27		$18 - 2^{\circ}$	7	
Rc:Bankfull width (ft/ft)	*	1.3 – 4.4	2.0 – 4.1		2.0 - 4	.1	
Meander Wavelength (ft)	*	93 – 136	54 – 125		54 – 12	25	
Meander Width Ratio	*	4.5 – 5.0	4.0 – 7.5		4.0 - 7	.5	
Riffle Length (ft)	*			4.2	27.2	40.9	30
Riffle Slope (ft/ft)	0.024 - 0.033	0.013 - 0.028	0.018 - 0.046	0.011	0.024	0.059	30
Pool Length (ft)	*			9.8	61.1	161.9	28
Pool Spacing (ft)	*	30 – 59	48 – 70	31.3	59.3	118.6	27
SC% / Sa% / G% / C% / B% /Be%	2/18/51/28/0/0				1/19/51/20		
d16 / d35 / d50 / d84 / d95 (mm)	1.3/18/37/97/130	Gravel	Gravel	1	.3/9.7/31/9	01/147	
Channel length (ft)	1,874		1,739		1,739		
Drainage Area (acres)	114	Variable	114		1,739		
Rosgen Classification	F4	B4c	C4		C4		
Sinuosity	1.2	1.2	1.2		1.2		
-	0.021	0.013	0.025		0.026		
Water Surface Slope (ft/ft)	0.021	0.013	0.025		0.026	1	

^{*:} no data shown due to channelization / lack of bed diversity

Table 8b. UTHC3 Baseline Stream D	<u> •</u>							
Mill Dam Creek Restoration Site, DM Parameter	Pre-Existing Condition	Reference Reach(es) Data (SF)	Design		As-bu	ilt		
T ut unifered	The Emilian Continuous	Terrorence Teach (cs) 2 and (s1)	200811		115 00			
Dimension - Riffle				Min	Mean	Max	n	
Bankfull Width (ft)	8.5 – 14.1	9.0 – 10.0	12	10.9	11.3	11.7	2	
Floodprone Width (ft)	17.1	13 – 21	68	69.4	72.6	75.8	2	
Bankfull Mean Depth (ft)	0.8 – 1.6	1.1 – 1.2	0.9	1.0	1.1	1.1	2	
Bankfull Max Depth (ft)	1.1 – 2.0	1.3 – 1.5	1.5	1.4	1.5	1.7	2	
Bankfull Cross-Sectional Area (ft²)	8.5 – 12.5	10.4 – 10.7	11.4	10.6	12.0	13.3	2	
Width/Depth Ratio	17	8 – 10	12.7	10.2	10.7	11.1	2	
Entrenchment Ratio	1.2	1.3 – 2.3	5.7	5.9	6.5	7.0	2	
Bank Height Ratio	3.2	1.0	1.0	1.0	1.0	1.0	2	
Pattern								
Channel Beltwidth (ft)	*	45	39 – 57		39 – 57			
Radius of Curvature (ft)	*	13 – 42	24 – 36		24 – 3	36		
Rc:Bankfull width (ft/ft)	*	1.3 – 4.4	24 – 36		24 – 3	36		
Meander Wavelength (ft)	*	93 – 136	111 – 173		111 – 1	173		
Meander Width Ratio	*	4.5 – 5.0	3.3 - 4.8		3.3 – 4	1.8		
Profile								
Riffle Length (ft)	*			18.2	46.0	85.8	18	
Riffle Slope (ft/ft)	0.015	0.013 - 0.028	0.0007 - 0.032	0.003	0.015	0.040	18	
Pool Length (ft)	*			15.9	26.6	49.1	17	
Pool Spacing (ft)	*	30 – 59	52 – 101	48.8	75.5	113.5	16	
Substrate and Transport Parameters								
SC% / Sa% / G% / C% / B% /Be%	3/15/57/19/0/6				0/13/48/3	7/1/0		
d16 / d35 / d50 / d84 / d95 (mm)	2.7/15/26/40/92	Gravel	Gravel		2.5/23/48/1	25/165		
Channel length (ft)	1,411		1,325		1,32:	5		
Drainage Area (acres)	297	Variable	297		297			
Rosgen Classification	F4	B4c	C4		C4			
Sinuosity	1.2	1.2	1.2		1.2			
Water Surface Slope (ft/ft)	0.014	0.013	0.015		0.01:	5		

^{*:} no data shown due to channelization / lack of bed diversity

Table 8c.	11 Baseline Stream Data Summary	
Mill Dam	Creek Restoration Site, DMS Project #97136	

Parameter	Pre-Existing Condition	Reference Reach(es) Data (SF)	Design		As-bu	ilt		
Dimension – Riffle								
Bankfull Width (ft)	4.1 – 7.5		6.5		6.5			
Floodprone Width (ft)	6.0 - 32.8		35		48.4	1		
Bankfull Mean Depth (ft)	0.5 - 0.7		0.5		0.6			
Bankfull Max Depth (ft)	0.8 - 1.0		0.8		1.2			
Bankfull Cross-Sectional Area (ft ²)	2.7 - 3.8		3.4		3.9			
Width/Depth Ratio	6.2 - 14.9	12 – 18	12.4		10.9			
Entrenchment Ratio	1.5 – 4.4	2.2+	5.4		7.5			
Bank Height Ratio	1.0 – 4.5	1.0 – 1.1	1.0		1.0			
Pattern								
Channel Beltwidth (ft)	*		23 – 41		23 – 41			
Radius of Curvature (ft)	*		15 – 22		15 – 22			
Rc:Bankfull width (ft/ft)	*		2.2 - 3.4		2.2 - 3	3.4		
Meander Wavelength (ft)	*		60 – 83		60 – 8	83		
Meander Width Ratio	*		3.5 – 6.3		3.5 – 6	5.3		
Profile				<u>.</u>				
Riffle Length (ft)	*			7.8	22.0	42.2	16	
Riffle Slope (ft/ft)	0.019 - 0.028		0.015 - 0.60	0.002	0.022	0.035	16	
Pool Length (ft)	*			3.5	12.6	20.1	16	
Pool Spacing (ft)	*		25 - 63	24.4	41.3	58.4	15	
Substrate and Transport Parameters	3							
SC% / Sa% / G% / C% / B% /Be%	31/21/44/4/1/0				2/15/66/1	17/0/0		
d16 / d35 / d50 / d84 / d95 (mm)	0.13/0.37/3/38/66	Gravel	Gravel		1.9/8.8/22	/67/94		
Channel length (ft)	764		751		751			
Drainage Area (acres)	43	Variable	43		43			
Rosgen Classification	B4, C4, G4	B4c	C4b		C4b)		
Sinuosity	1.1	1.1 – 1.3	1.1		1.1			
Water Surface Slope (ft/ft)	0.026	N/A	0.026		0.02	5		

^{*:} no data shown due to channelization / lack of bed diversity

Mill Dam Creek Restoration Site, DMS		T						
Parameter	Pre-Existing Condition	Reference Reach(es) Data (SF)	Design		As-bı	ıilt		
D D.04				3.6	3.6	3.6		
Dimension - Riffle				Min	Mean	Max	n	
Bankfull Width (ft)	7.1		5.5	5.4	5.6	5.8	2	
Floodprone Width (ft)	7.7		35	44.5	49.4	54.4	2	
Bankfull Mean Depth (ft)	0.4		0.5	0.3	0.4	0.4	2	
Bankfull Max Depth (ft)	0.5		0.7	0.7	0.7	0.7	2	
Bankfull Cross-Sectional Area (ft ²)	2.8		2.5	1.8	2.1	2.3	2	
Width/Depth Ratio	18.2	12 – 18	12.1	14.1	15.0	15.9	2	
Entrenchment Ratio	1.1	2.2+	6.4	7.7	8.9	10.1	2	
Bank Height Ratio	19.6	1.0 - 1.1	1.0	1.0	1.0	1.0	2	
Pattern								
Channel Beltwidth (ft)	*		20 – 28		20 – 28			
Radius of Curvature (ft)	*		15 – 22		15 –	22		
Rc:Bankfull width (ft/ft)	*		2.3 – 3.4		2.3 –	3.4		
Meander Wavelength (ft)	*		72 - 84		72 –	84		
Meander Width Ratio	*		3.6 - 5.1		3.6 -	5.1		
Profile								
Riffle Length (ft)				1.4	20.7	51.8	16	
Riffle Slope (ft/ft)	0.025		0.020 - 0.062	0.000	0.025	0.046	16	
Pool Length (ft)				4.9	14.7	27.2	16	
Pool Spacing (ft)	*		32 - 58	32.8	44.7	65.8	15	
Substrate and Transport Parameters								
SC% / Sa% / G% / C% / B% /Be%	31/51/12/6/0/0				5/19/62/14/0/0			
d16 / d35 / d50 / d84 / d95 (mm)	0.062/0.072/0.13/2.9/71	Gravel	Gravel		0.7/5.8/20/59/99			
Channel length (ft)	746		795		795			
Drainage Area (acres)	29	Variable	29		29			
Rosgen Classification	F4	B4c	C4b		C4b			
Sinuosity	1.1	1.1 – 1.3	1.1		1.1			
Water Surface Slope (ft/ft)	0.022	N/A	0.030		0.03	0		

^{*:} no data shown due to channelization / lack of bed diversity

Parameter	Pre-Existing Condition	Reference Reach(es) Data	Design		As-bu	ilt	
1 at affects	Tre-Existing Condition	Reference Reach(es) Data	Design		715-0u	1110	
Dimension - Riffle				T			
Bankfull Width (ft)	3.1		4.5		4.7		
Floodprone Width (ft)	4		22		24.1		
Bankfull Mean Depth (ft)	0.5		0.4		0.5		
Bankfull Max Depth (ft)	0.8		0.6		0.9		
Bankfull Cross-Sectional Area (ft²)	1.5		1.7		2.3		
Width/Depth Ratio	6.3	12 – 18	12.0		9.9		
Entrenchment Ratio	1.3	2.2+	4.9		5.1		
Bank Height Ratio	3.3	1.0 – 1.1	1.0		1.0		
Pattern	·						
Channel Beltwidth (ft)	*		N/A		N/A		
Radius of Curvature (ft)	*		N/A		N/A		
Rc:Bankfull width (ft/ft)	*		N/A		N/A		
Meander Wavelength (ft)	*		N/A		N/A		
Meander Width Ratio	*		N/A		N/A		
Profile				Min	Mean	Max	n
Riffle Length (ft)				1.6	13.2	40.9	8
Riffle Slope (ft/ft)	0.04		0.024-0.063	0.023	0.049	0.099	8
Pool Length (ft)				3.6	14.8	31.4	7
Pool Spacing (ft)	*		21 – 34	24.1	37.8	55.6	6
Substrate and Transport Parameters							
SC% / Sa% / G% / C% / B% /Be%	11/14/63/13/0/0				14/30/27/30/0/0		
d16 / d35 / d50 / d84 / d95 (mm)	0.26/13/21/58/84	Gravel	Gravel	C	0.1/0.7/6/87/130		
Channel langth (ft)	232		265		265		
Channel length (ft)		V:-11-	16		265		
Drainage Area (acres)	16 G4	Variable B4c	C4b		16		
Rosgen Classification					C4b		
Sinuosity	1.1	1.1 – 1.3	1.1		1.1		
Water Surface Slope (ft/ft)	0.038	N/A	0.042		0.040)	

^{*:} no data shown due to channelization / lack of bed diversity

Mill Dam Creek Restoration Site, DM			1					
Parameter	Pre-Existing Condition	Reference Reach(es) Data	Design		As-bu	iilt		
Dimension - Riffle								
Bankfull Width (ft)	3.5		4.5		4.7			
Floodprone Width (ft)	4.2		18		19.2			
Bankfull Mean Depth (ft)	0.3		0.4		0.4			
Bankfull Max Depth (ft)	0.4		0.6		0.7			
Bankfull Cross-Sectional Area (ft²)	1.1		1.7		1.9			
Width/Depth Ratio	11.3	12 – 18	12.0		11.6	5		
Entrenchment Ratio	1.2	2.2+	4.0		4.1			
Bank Height Ratio	3.3	1.0 – 1.1	1.0		1.0			
Pattern	·			•				
Channel Beltwidth (ft)	*		N/A		N/A	1		
Radius of Curvature (ft)	*		N/A		N/A			
Rc:Bankfull width (ft/ft)	*		N/A		N/A	1		
Meander Wavelength (ft)	*		N/A		N/A	1		
Meander Width Ratio	*		N/A		N/A	1		
Profile				Min	Mean	Max	n	
Riffle Length (ft)				2.2	13.3	25.7	13	
Riffle Slope (ft/ft)	0.058		0.051 - 0.074	0.032	0.058	0.125	13	
Pool Length (ft)				3.4	9.5	20.7	12	
Pool Spacing (ft)	*		20 – 30	22.8	28.2	46.7	11	
Substrate and Transport Parameters								
SC% / Sa% / G% / C% / B% /Be%	28/5/38/27/4				6/11/71/13/0/0			
d16 / d35 / d50 / d84 / d95 (mm)	0.062/3.1/25/130/240	Gravel	Gravel		1.7/7.8/28/61/84			
Channel length (ft)	378		369		369			
Drainage Area (acres)	7	Variable	7		7			
Rosgen Classification	G4	B4c	C4b		C4b			
Sinuosity	1.1	1.1 – 1.3	1.1		1.1			
Water Surface Slope (ft/ft)	0.059	N/A	0.059		0.05	7		

^{*:} no data shown due to channelization / lack of bed diversity

Mill Dam Creek Restoration Site, DM			I	<u> </u>				
Parameter	Pre-Existing Condition	Reference Reach(es) Data	Design		As-bi	uilt		
D: ' D:69								
Dimension - Riffle	2.5		4.5		4.6	<u> </u>		
Bankfull Width (ft)	2.5		4.5		4.0			
Floodprone Width (ft)	4.7		16		18.			
Bankfull Mean Depth (ft)	0.3		0.6		0.5			
Bankfull Max Depth (ft)	0.4		0.6		0.8			
Bankfull Cross-Sectional Area (ft²)	0.7		1.7		1.9			
Width/Depth Ratio	9.4	12 – 18	12.0		8.3			
Entrenchment Ratio	1.9	2.2+	3.6		4.7			
Bank Height Ratio	6.9	1.0 – 1.1	1.0		1.0			
Pattern								
Channel Beltwidth (ft)	*		N/A		N/A			
Radius of Curvature (ft)	*		N/A		N/A	A		
Rc:Bankfull width (ft/ft)	*		N/A		N/A	4		
Meander Wavelength (ft)	*		N/A		N/A	4		
Meander Width Ratio	*		N/A		N/A	A		
Profile				Min	Mean	Max	n	
Riffle Length (ft)				7.9	13.4	22.2	7	
Riffle Slope (ft/ft)	0.1		0.102 - 0.103	0.039	0.11	0.23	7	
Pool Length (ft)				3.2	5.4	11.0	7	
Pool Spacing (ft)	*		24 – 27	9.5	19.5	26.5	6	
Substrate and Transport Parameters				•				
SC% / Sa% / G% / C% / B% /Be%	12/65/13/8/2/0				0/15/77	/8/0/0		
d16 / d35 / d50 / d84 / d95 (mm)	0.11/0.16/0.21/4.3/120	Gravel	Gravel		2.2/9.6/15/48/76			
Channel length (ft)	151		151		151			
Drainage Area (acres)	3	Variable	3		3			
Rosgen Classification	B4	B4c	C4b		C4b			
Sinuosity	1.0	1.1 – 1.3	1.0		1.0			
Water Surface Slope (ft/ft)	0.089	N/A	0.113		0.10			

^{*:} no data shown due to channelization / lack of bed diversity

Parameter	Pre-Existing Condition	Reference Reach(es) Data	Design		As-bu	ilt			
Dimension - Riffle									
Bankfull Width (ft)	4.4		5.5		5.6				
Floodprone Width (ft)	5.4		24		27.4				
Bankfull Mean Depth (ft)	0.6		0.5		0.5				
Bankfull Max Depth (ft)	0.7		0.7		1.0				
Bankfull Cross-Sectional Area (ft²)	2.6		2.5		2.6				
Width/Depth Ratio	7.5	12 – 18	12.1		11.9				
Entrenchment Ratio	1.1	2.2+	4.4		4.9				
Bank Height Ratio	4.4	1.0 – 1.1	1.0		1.0				
Pattern									
Channel Beltwidth (ft)	*		N/A		N/A				
Radius of Curvature (ft)	*		N/A		N/A				
Rc:Bankfull width (ft/ft)	*		N/A		N/A				
Meander Wavelength (ft)	*		N/A		N/A				
Meander Width Ratio	*		N/A		N/A				
Profile				Min	Mean	Max	n		
Riffle Length (ft)				15.4	25.1	37.9	15		
Riffle Slope (ft/ft)	0.02		0.020 - 0.063	0.007	0.033	0.070	15		
Pool Length (ft)				5.9	14.1	22.7	15		
Pool Spacing (ft)	*		32 – 47	28.8	42.9	50.9	14		
Substrate and Transport Parameters									
SC% / Sa% / G% / C% / B% /Be%	7/33/60/0/0/0				1/16/53/3	0/0/0			
d16 / d35 / d50 / d84 / d95 (mm)	0.19/1.6/4.1/13/27	Gravel	Gravel	1	1.7/16/38/93/140				
Channel length (ft)	621		658		658				
Drainage Area (acres)	29	Variable	29		29				
Rosgen Classification	G4	B4c	C4b		C4b				
Sinuosity	1.0	1.1 – 1.3	1.1		1.1				
Water Surface Slope (ft/ft)	0.041	N/A	0.034		0.037	7			

^{*:} no data shown due to channelization / lack of bed diversity

Parameter	Pre-Existing Condition	Reference Reach(es) Data	Design		As-bu	ilt		
,								
Dimension - Riffle								
Bankfull Width (ft)	**		4.5		4.4			
Floodprone Width (ft)	**		24		25.3	1		
Bankfull Mean Depth (ft)	**		0.4		0.4			
Bankfull Max Depth (ft)	**		0.6		0.6			
Bankfull Cross-Sectional Area (ft ²)	**		1.7		1.7			
Width/Depth Ratio	**	12 – 18	12.0		11.0			
Entrenchment Ratio	**	2.2+	5.3		5.8			
Bank Height Ratio	**	1.0 – 1.1	1.0		1.0			
Pattern	·							
Channel Beltwidth (ft)	**		N/A		N/A			
Radius of Curvature (ft)	**		N/A		N/A			
Rc:Bankfull width (ft/ft)	**		N/A		N/A	-		
Meander Wavelength (ft)	**		N/A		N/A			
Meander Width Ratio	**		N/A		N/A			
Profile	·			Min	Mean	Max	n	
Riffle Length (ft)	**			9.3	14.8	24.0	3	
Riffle Slope (ft/ft)	**		0.087 - 0.099	0.056	0.091	0.118	3	
Pool Length (ft)	**			14.2	16.7	19.5	3	
Pool Spacing (ft)	**		22 – 23	29.4	30.0	30.6	2	
Substrate and Transport Parameters								
SC% / Sa% / G% / C% / B% /Be%	**				0/14/70/16/0/0			
d16 / d35 / d50 / d84 / d95 (mm)	**	Gravel	Gravel		2.6/25/36/64/85			
Channel length (ft)	97		101		101			
Drainage Area (acres)	9	Variable	9		9			
Rosgen Classification	**	B4c	C4b		C4b			
Sinuosity	**	1.1 – 1.3	1.1		1.1			
Water Surface Slope (ft/ft)	**	N/A	0.091		0.095	5		

^{**} Existing conditions are ponded

Parameter	Pre-Existing Condition	Reference Reach(es) Data	Design		As-bu	ilt		
Dimension - Riffle								
Bankfull Width (ft)	3.2		6.5		10.1			
Floodprone Width (ft)	4.6		28		47.4			
Bankfull Mean Depth (ft)	0.8		0.5		0.4			
Bankfull Max Depth (ft)	1.1		0.8		1.0			
Bankfull Cross-Sectional Area (ft²)	2.4		3.4		4.3			
Width/Depth Ratio	4.1	12 – 18	12.4		23.9			
Entrenchment Ratio	1.4	2.2+	4.3		4.7			
Bank Height Ratio	1.7	1.0 – 1.1	1.0		1.0			
Pattern								
Channel Beltwidth (ft)	*		20 – 24		20 – 24			
Radius of Curvature (ft)	*		15 – 22		15 – 2	22		
Rc:Bankfull width (ft/ft)	*		2.3 – 3.4		2.3 - 3	3.4		
Meander Wavelength (ft)	*		85 – 88		85 – 8	38		
Meander Width Ratio	*		3.1 - 3.7		3.1 – 3	3.7		
Profile				Min	Mean	Max	n	
Riffle Length (ft)				4.5	32.4	68.1	6	
Riffle Slope (ft/ft)	0.032		0.017 - 0.043	0.015	0.025	0.029	6	
Pool Length (ft)				4.9	12.5	19.7	6	
Pool Spacing (ft)	*		36 – 57	45.7	54.6	86.6	5	
Substrate and Transport Parameters								
SC% / Sa% / G% / C% / B% /Be%	3/18/62/16/1/0				0/20/62/17/0/0			
d16 / d35 / d50 / d84 / d95 (mm)	1.2/7.9/22/66/89	Gravel	Gravel	0	0.8/8.5/17/67/110			
Channel length (ft)	335		348		348			
Drainage Area (acres)	41	Variable	41		41			
Rosgen Classification	G4	B4c	C4b		C4b			
Sinuosity	1.1	1.1 – 1.3	1.1		1.1			
Water Surface Slope (ft/ft)	0.033	N/A	0.024		0.022			

^{*:} no data shown due to channelization / lack of bed diversity

Table 8k. T8-2 Baseline Stream Data	•								
Mill Dam Creek Restoration Site, DM	IS Project #97136		1						
Parameter	Pre-Existing Condition	Reference Reach(es) Data	Design		As-bu	ilt			
						ı	<u> </u>		
Dimension - Riffle				Min	Mean	Max	n		
Bankfull Width (ft)	3.6		5.5	5.5	5.6	5.7	2		
Floodprone Width (ft)	4.1		25	34.8	39.1	43.4	2		
Bankfull Mean Depth (ft)	0.7		0.5	0.6	0.6	0.6	2		
Bankfull Max Depth (ft)	0.9		0.7	1.0	1.0	1.0	2		
Bankfull Cross-Sectional Area (ft²)	2.4		2.5	3.2	3.3	3.4	2		
Width/Depth Ratio	5.5	12 – 18	12.1	9.1	9.6	10.1	2		
Entrenchment Ratio	1.1	2.2+	4.4	6.3	7.0	7.6	2		
Bank Height Ratio	2.5	1.0 – 1.1	1.0	1.0	1.0	1.0	2		
Pattern									
Channel Beltwidth (ft)	*		N/A		N/A				
Radius of Curvature (ft)	*		N/A		N/A				
Rc:Bankfull width (ft/ft)	*		N/A		N/A				
Meander Wavelength (ft)	*		N/A		N/A				
Meander Width Ratio	*		N/A		N/A				
Profile				•					
Riffle Length (ft)				9.3	23.3	31.9	10		
Riffle Slope (ft/ft)	0.041		0.043 - 0.050	0.033	0.048	0.063	10		
Pool Length (ft)				7.9	13.4	16.6	10		
Pool Spacing (ft)	*		32 - 45	34.1	42.2	53.6	9		
Substrate and Transport Parameters	•		•						
SC% / Sa% / G% / C% / B% /Be%	18/27/40/14/0/0				4/17/52/27/0/0				
d16 / d35 / d50 / d84 / d95 (mm)	0.13/2.2/8.5/81/140	Gravel	Gravel	(0.7/14/37/95/135				
Channel length (ft)	486		448		448				
Drainage Area (acres)	21	Variable	21		21				
Rosgen Classification	G4	B4c	C4b						
Sinuosity	1.1	1.1 – 1.3	1.1		C4b				
Water Surface Slope (ft/ft)	0.044	N/A	0.045)			
water Surface Slope (II/II)	0.044	IN/A	0.045		0.048				

^{*:} no data shown due to channelization / lack of bed diversity

Table 8l. T8A Baseline Stream Data Mill Dam Creek Restoration Site, D	•							
Parameter	Pre-Existing Condition	Reference Reach(es) Data	Design		As-bu	ilt		
Dimension - Riffle				Min	Mean	Max	n	
Bankfull Width (ft)	3.1		4.5	4.7	5.7	6.6	2	
Floodprone Width (ft)	4.1		20	21.6	44.7	67.9	2	
Bankfull Mean Depth (ft)	0.3		0.4	0.4	0.5	0.5	2	
Bankfull Max Depth (ft)	0.9		0.6	0.9	1.0	1.1	2	
Bankfull Cross-Sectional Area (ft ²)	1.0		1.7	2.6	2.7	2.9	2	
Width/Depth Ratio	5.5	12 - 18	12.0	8.6	11.9	15.2	2	
Entrenchment Ratio	1.1	2.2+	4.4	4.6	7.4	10.3	2	
Bank Height Ratio	2.7	1.0 – 1.1	1.0	1.0	1.0	1.0	2	
Pattern								
Channel Beltwidth (ft)	*		N/A		N/A			
Radius of Curvature (ft)	*		N/A		N/A			
Rc:Bankfull width (ft/ft)	*		N/A		N/A			
Meander Wavelength (ft)	*		N/A		N/A			
Meander Width Ratio	*		N/A		N/A			
Profile			•	*				
Riffle Length (ft)				12.3	22.7	42.7	7	
Riffle Slope (ft/ft)	0.044		0.019 - 0.062	0.027	0.053	0.10	7	
Pool Length (ft)				6.3	12.4	22.4	6	
Pool Spacing (ft)	*		28 – 38	27.7	40.3	66.1	5	
Substrate and Transport Parameter								
SC% / Sa% / G% / C% / B% /Be%	100/0/0/0/0				4/17/54/2	5/0/0		
d16 / d35 / d50 / d84 / d95 (mm)	0.062/0.062/0.062/0.062/0.062	Gravel	Gravel	1	1.8/23/32/84/135			
GL 11 1 (0)	250		262		2.62			
Channel length (ft)	258	77 111	262		262			
Drainage Area (acres)	7	Variable	7		7			
Rosgen Classification	G4	B4c	C4b		C4b			
Sinuosity	1.1	1.1 – 1.3	1.1		1.1			
Water Surface Slope (ft/ft)	0.052	N/A	0.044		0.047	/		

^{*:} no data shown due to channelization / lack of bed diversity

Table 8m. T9 Baseline Stream Data 8 Mill Dam Creek Restoration Site, DM							
Parameter	Pre-Existing Condition	Reference Reach(es) Data	Design		As-built		
Dimension - Riffle							
Bankfull Width (ft)	2.9		5.5		4.1		
Floodprone Width (ft)	5.5		22		29.6		
Bankfull Mean Depth (ft)	0.7		0.5		0.7		
Bankfull Max Depth (ft)	0.9		0.7		0.9		
Bankfull Cross-Sectional Area (ft²)	2.0		2.5		2.8		
Width/Depth Ratio	4.3	12 - 18	12.1		6.0		
Entrenchment Ratio	1.9	2.2+	4.0		7.2		
Bank Height Ratio	1.7	1.0 – 1.1	1.0		1.0		
Pattern							
Channel Beltwidth (ft)	*		N/A		N/A		
Radius of Curvature (ft)	*		N/A		N/A		
Rc:Bankfull width (ft/ft)	*		N/A		N/A		
Meander Wavelength (ft)	*		N/A		N/A		
Meander Width Ratio	*		N/A		N/A		
Profile	·		•	Min	Mean	Max	n
Riffle Length (ft)				10.5	22.8	31.7	4
Riffle Slope (ft/ft)	0.031		0.037	0.033	0.039	0.056	4
Pool Length (ft)				3.9	6.2	7.7	3
Pool Spacing (ft)	*		34 – 36	37.02	39.1	41.1	2
Substrate and Transport Parameters							
SC% / Sa% / G% / C% / B% /Be%	26/66/8/0/0/0				3/7/59/31/0/0		
d16 / d35 / d50 / d84 / d95 (mm)	0.062/0.13/0.15/0.23/3.7	Gravel	Gravel	1	12/32/42/90/150		
Channel length (ft)	133		129		129		
Drainage Area (acres)	29	Variable	29		29		
Rosgen Classification	B4	B4c	C4b		C4b		
Sinuosity	1.0	1.1 – 1.3	1.1		1.1		
Water Surface Slope (ft/ft)	0.039	N/A	0.042		0.038		

^{*:} no data shown due to channelization / lack of bed diversity

Table 9. Cross Section Dimensional Morphology Sur Mill Dam Creek Restoration Site, DMS Project #971																				
Dimension and Substrate				Section 1 13+50, U	. ,						ection 2 (19+25, U					Cross-S Station 1	ection 3 9+50, U	. ,		
	MY00	MY01	MY02	MY03	MY05	MY07		MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07	
Bankfull Elevation (ft) based on AB BKF area	948.8	948.8						931.0	930.9					930.3	930.1					Г
Bankfull Width (ft)		6.6						8.0	7.0					8.4	7.8					Г
Floodprone Width (ft)	66.3	66.6						68.3	70.7											Т
Bankfull Mean Depth (ft)	0.7	0.7						0.7	0.8					0.9	0.9					Г
Bankfull Max Depth (ft)	1.2	1.2						1.2	1.4					1.7	1.7					T
Cross-Sectional Area (ft2) based on AB BKF area	4.5	4.5						5.3	5.3					7.4	7.4					Г
Cross-Sectional Area (ft2) based on AB BKF elevation	4.5	4.4						5.3	6.1					7.4	9.5					Г
Bankfull Width/Depth Ratio	8.2	9.6						12.1	9.2											T
Bankfull Entrenchment Ratio	11.0	10.1						8.6	10.1											Г
Bankfull Bank Height Ratio	1.0	1.0						1.0	0.9											Г
d50 (mm)	48	48						24	40											Г
		•		Section 4 23+17, U		-	•				ection 5 (23+32, U		•		•	Cross-Se Station 3	ection 6 (80+20, U			
	MY00	MY01	MY02	MY03	MY05	MY07		MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07	
Bankfull Elevation (ft) based on AB BKF area	923.0	922.9						922.8	922.9					908.7	908.7					Г
Bankfull Width (ft)	13.1	12.1						8.9	8.6					22.6	22.8					T
Floodprone Width (ft)								59.1	57.6					43.0	43.0					Г
Bankfull Mean Depth (ft)	1.2	1.3						0.6	0.6					2.5	2.4					Г
Bankfull Max Depth (ft)	2.2	2.4						1.0	0.9					3.7	3.6					Г
Cross-Sectional Area (ft2) based on AB BKF area	15.4	15.4						5.5	5.5					55.5	55.5					Г
Cross-Sectional Area (ft2) based on AB BKF elevation	15.4	16.8						5.5	4.9					55.5	55.9					
Bankfull Width/Depth Ratio								14.4	13.2					9.2	9.3					
Bankfull Entrenchment Ratio								6.6	6.7					1.9	1.9					Γ
Bankfull Bank Height Ratio								1.0	0.8					1.0	1.0					Γ
d50 (mm)								21	38					19	31					Г
		,		Section 7 38+52, U	. ,	•	•		,		Section 8 46+20, U	. ,	-		-	Cross-Se Station 4				
	MY00	MY01	MY02	MY03	MY05	MY07		MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07	
Bankfull Elevation (ft) based on AB BKF area	883.7	883.7						871.2	871.2					871.0	870.9					
Bankfull Width (ft)	12.9	11.8						10.4	10.4					10.9	11.2					
Floodprone Width (ft)	37.6	38.4												75.8	76.1					
Bankfull Mean Depth (ft)	1.3	1.4						2.0	2.0					1.0	1.0					
Bankfull Max Depth (ft)	2.0	2.2						3.8	3.8					1.4	1.6					Ι
Cross-Sectional Area (ft2) based on AB BKF area	16.7	16.7						20.8	20.8					10.6	10.6					I
Cross-Sectional Area (ft2) based on AB BKF elevation	16.7	16.6						20.8	20.8					10.6	11.4					Γ
Bankfull Width/Depth Ratio	9.9	8.3												11.1	11.7					
Bankfull Entrenchment Ratio	2.9	3.3												7.0	6.8					
Bankfull Bank Height Ratio	1.0	1.0												1.0	1.0					
d50 (mm)	19	55												50	64					Г

imension and Substrate				ection 10 53+10, U	. ,					ection 11 57+40, U	` ′					ction 12 (55+80, U	` '	
	MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07
Bankfull Elevation (ft) based on AB BKF are	861.6	861.7					853.8	853.9					845.4	845.4				
Bankfull Width (ft	11.7	14.0					11.9	12.1					17.6	19.0				
Floodprone Width (ft		69.5					43.2	43.8					30.7	17.7				
Bankfull Mean Depth (ft	1.1	1.0					1.4	1.4					1.7	1.6				
Bankfull Max Depth (ft	1.7	1.7					2.2	2.3					2.8	2.6				
Cross-Sectional Area (ft2) based on AB BKF area	13.3	13.3					17.3	17.3					30.2	29.7				
Cross-Sectional Area (ft2) based on AB BKF elevation	13.3	12.1					17.3	16.0					30.2	29.7				
Bankfull Width/Depth Ratio	10.2	14.7					8.2	8.5					10.3	12.2				
Bankfull Entrenchment Ratio	5.9	5.0					3.6	3.6					1.7	0.9				
Bankfull Bank Height Ratio	1.0	1.0					1.1	1.0					3.2	1.0				
d50 (mm	45	51					19	72					20	65				
			Station	ection 13 67+20, U	JTHC-6				Station	ection 14 n 155+00	,T1A	,			Station	ction 15 (156+20,	T1A	
	MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07
Bankfull Elevation (ft) based on AB BKF are	a 847.4	847.2					943.6	943.6					938.9	939.1				
Bankfull Width (ft	24.9	27.3					5.4	4.8					5.8	5.5				
Floodprone Width (ft		68.1					54.4	54.3					44.5	46.4				
Bankfull Mean Depth (ft	1.6	1.4					0.3	0.4					0.4	0.4				
Bankfull Max Depth (ft	2.6	3.2					0.7	0.8					0.7	0.7				
Cross-Sectional Area (ft2) based on AB BKF area	38.7	38.7					1.8	1.8					2.3	2.3				
Cross-Sectional Area (ft2) based on AB BKF elevation	_	42.1					1.8	1.9					2.3	1.7				
Bankfull Width/Depth Ratio	16.0	19.3					15.9	12.5					14.1	12.9				
Bankfull Entrenchment Ratio	_	2.5					10.1	11.4					7.7	8.4				
Bankfull Bank Height Ratio	1.0	0.9					1.0	1.0					1.0	0.8				
d50 (mm	21	37					24	29					16	19				
				ection 16 on 104+8	. ,					ection 17 on 105+10						n 206+60	, T2	
	MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07
Bankfull Elevation (ft) based on AB BKF area		929.2					928.4	928.4					923.4	923.4				
Bankfull Width (ft		8.6					8.7	7.8					4.7	5.8				
Floodprone Width (ft		49.6											24.1	24.6				
Bankfull Mean Depth (ft		0.4					1.0	1.1					0.5	0.4				
Bankfull Max Depth (ft		1.3					2.3	2.1					0.9	0.9				
Cross-Sectional Area (ft2) based on AB BKF area	a 3.9	3.9					8.3	8.3					2.3	2.3				
Cross-Sectional Area (ft2) based on AB BKF elevation	3.9	3.7					8.3	8.4					2.3	1.9				
Bankfull Width/Depth Ratio	_	19.3											9.9	14.7				
Bankfull Entrenchment Ratio		5.7											5.1	4.3				
Bankfull Bank Height Ratio		0.9											1.0	0.8				
d50 (mm) 22	27											6.4	69				

mension and Substrate				Section 19 on 206+8	,			(ction 20 (,				Cross-Sec Station	ction 21 (,	
	MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07
Bankfull Elevation (ft) based on AB BKF area		922.6					917.7	917.8					916.6	916.6				
Bankfull Width (ft	6.7	6.6					4.7	4.8					7.8	7.2				
Floodprone Width (ft)						19.2	19.0										
Bankfull Mean Depth (ft	0.8	0.8					0.4	0.4					1.0	1.1				
Bankfull Max Depth (ft	1.7	1.9					0.7	0.7					1.9	1.8				
Cross-Sectional Area (ft2) based on AB BKF area	5.6	5.6					1.9	1.9					7.7	7.7				
Cross-Sectional Area (ft2) based on AB BKF elevation	5.6	5.2					1.9	1.3					7.7	8.1				
Bankfull Width/Depth Ratio							11.6	12.3										
Bankfull Entrenchment Ratio							4.1	3.9										
Bankfull Bank Height Ratio							1.0	1.0										
d50 (mm))						28	26										
			Stati	ection 22 on 400+9	00, T4			(Station	ction 23 (651+25,	,			(Cross-Sec Station	tion 24 (l 608+15,		
	MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07
Bankfull Elevation (ft) based on AB BKF area	906.2	906.2					894.3	894.3					877.9	878.4				
Bankfull Width (ft	4.0	4.4					4.4	3.5					5.6	3.8				
Floodprone Width (ft	18.7	19.2					25.3	29.8					27.4	43.8				
Bankfull Mean Depth (ft	0.5	0.4					0.4	0.5					0.5	0.7				
Bankfull Max Depth (ft	0.8	0.9					0.6	0.9					1.0	1.0				
Cross-Sectional Area (ft2) based on AB BKF area		1.9					1.7	1.7					2.6	2.6				
Cross-Sectional Area (ft2) based on AB BKF elevation	1.9	1.9					1.7	1.8					2.6	0.8				
Bankfull Width/Depth Ratio	8.3	10.0					11.0	7.1					11.9	5.5				
Bankfull Entrenchment Ratio	4.7	4.4					5.8	8.5					4.9	11.6				
Bankfull Bank Height Ratio	1.0	0.5					1.0	1.1					1.0	0.6				
d50 (mm)	15	12					36	35					38	15				
				Section 25 on 608+4	. ,					ction 26 n 703+40				C	Cross-Sec Station	tion 27 (703+70,	,	
	MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07	MY00	MY01	MY02	MY03	MY05	MY07
Bankfull Elevation (ft) based on AB BKF area	877.6	877.7					868.2	868.0					867.5	867.6				
Bankfull Width (ft)	8.4	5.1					7.2	6.0					10.1	7.3				
Floodprone Width (ft))												47.4	47.0				
Bankfull Mean Depth (ft	0.6	1.0					0.6	0.8					0.4	0.6				
Bankfull Max Depth (ft	1.1	1.6					1.2	1.4					1.0	1.0				
Cross-Sectional Area (ft2) based on AB BKF area	5.1	5.1					4.6	4.6					4.3	4.3				
Cross-Sectional Area (ft2) based on AB BKF elevation	5.1	4.4					4.6	5.8					4.3	3.5				
Bankfull Width/Depth Ratio													23.9	12.4				
Bankfull Entrenchment Ratio													4.7	6.5				
Bankfull Bank Height Ratio													1.0	0.9				
d50 (mm)												17	22				


imension and Substrate		Cross-Section 28 (Riffle) Station 900+80, T9						Cross-Section 29 (Riffle) Station 806+10, T8							Cross-Section 30 (Riffle) Station 807+45, T8						
	MY00	MY01	MY02	MY03	MY05	MY07		MY00	MY01	MY02	MY03	MY05	MY07	MYO) MY01	MY02	MY03	MY05	MY07		
Bankfull Elevation (ft) based on AB BKF area	853.0	853.3						849.8	849.9					842.	842.8						
Bankfull Width (ft)	4.1	4.7						5.5	5.5					5.7	5.8						
Floodprone Width (ft)	29.6	31.9						34.8	43.8					43.4	42.0						
Bankfull Mean Depth (ft)	0.7	0.6						0.6	0.6					0.6	0.6						
Bankfull Max Depth (ft)	0.9	1.2						1.0	1.2					1.0	1.0						
Cross-Sectional Area (ft2) based on AB BKF area	2.8	2.8						3.4	3.4					3.2	3.2						
Cross-Sectional Area (ft2) based on AB BKF elevation	2.8	1.5						3.4	2.9					3.2	3.4						
Bankfull Width/Depth Ratio	6.0	7.9						9.1	9.0					10.1	10.5						
Bankfull Entrenchment Ratio	7.2	6.7						6.3	7.9					7.6	7.2						
Bankfull Bank Height Ratio	1.0	1.0						1.0	0.9					1.0	1.0						
d50 (mm)	42	6.7						36	68					37	16						
	Cross-Section 31 (Riffle) Station 850+60, T8A							Cross-Section 32 (Riffle) Station 851+75, T8A													
	MY00	MY01	MY02	MY03	MY05	MY07		MY00	MY01	MY02	MY03	MY05	MY07								
Bankfull Elevation (ft) based on AB BKF area	850.8	850.9						845.8	845.6												
Bankfull Width (ft)	4.7	5.2						4.8	4.1												
Floodprone Width (ft)	21.6	21.8						49.3	49.4												
Bankfull Mean Depth (ft)	0.5	0.5						0.4	0.5												
Bankfull Max Depth (ft)	1.1	1.1						0.9	1.0												
Cross-Sectional Area (ft2) based on AB BKF area	2.6	2.6						2.1	2.1												
Cross-Sectional Area (ft2) based on AB BKF elevation	2.6	2.3						2.1	2.8												
Bankfull Width/Depth Ratio	8.6	10.7						11.4	8.2												
Bankfull Entrenchment Ratio	4.6	4.2						10.2	12.0												
Bankfull Bank Height Ratio	1.0	1.0						1.0	1.2												
d50 (mm)	54	5						10	54												

River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS1
Drainage Area (sq mi):	0.18
Date:	12/17/2020
Field Crew:	TS, KB

Station	Elevation
0.0	949.92
0.0	949.20
6.0	948.52
11.9	948.33
18.2	948.67
24.1	948.74
28.9	948.74
34.2	948.83
36.1	948.88
37.7	948.91
38.7	948.62
40.0	947.87
40.1	947.87
40.4	947.80
41.0	947.65
41.7	947.64
42.0	947.68
43.0	948.13
44.6	948.84
46.1	948.86
50.2	948.93
54.7	949.02
59.6	949.00
63.4	949.14
66.9	950.08
71.5	952.06
73.4	952.34
76.5	952.69
76.6	953.70

Bankfull Elevation (ft) - Based on AB-Bankfull Area	948.82
Bankfull Cross-Sectional Area:	4.5
Total Cross-Sectional Area:	4.4
Bankfull Width:	6.6
Flood Prone Area Elevation:	950.00
Flood Prone Width:	66.6
Max Depth at Bankfull:	1.2
Mean Depth at Bankfull:	0.7
W / D Ratio:	9.6
Entrenchment Ratio:	10.1
Bank Height Ratio:	1.0
Thalweg Elevation:	947.64



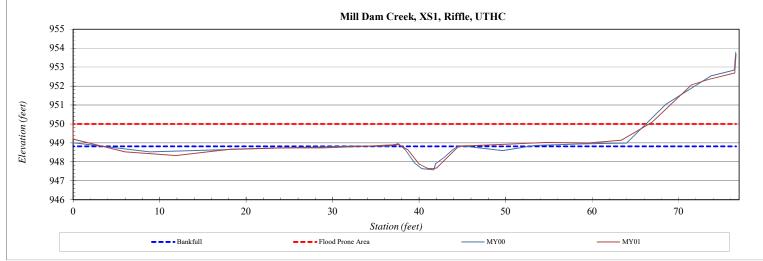



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS2
Drainage Area (sq mi):	0.18
Date:	12/17/2020
Field Crew:	TS, KB

Station	Elevation
0.0	935.88
0.0	935.27
3.0	935.20
5.2	934.98
7.1	934.19
10.7	933.08
14.0	931.81
15.3	931.54
17.5	931.35
20.9	931.23
25.4	931.14
29.6	931.38
33.7	931.36
37.9	930.92

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	930.86
Bankfull Cross-Sectional Area:	5.3
Total Cross-Sectional Area:	6.1
Bankfull Width:	7.0
Flood Prone Area Elevation:	932.30
Flood Prone Width:	70.7
Max Depth at Bankfull:	1.4
Mean Depth at Bankfull:	0.8
W / D Ratio:	9.2
Entrenchment Ratio:	10.1
Bank Height Ratio:	0.9
Thalweg Elevation:	929.43



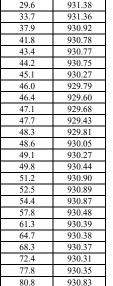

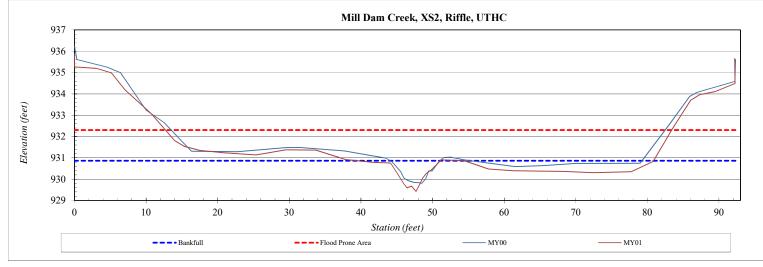



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS3
Drainage Area (sq mi):	0.18
Date:	12/17/2020
Field Crew:	TS, KB

Station	Elevation
0.0	934.94
0.2	934.27
1.5	934.01
3.2	932.92
6.1	931.79
8.0	931.30
10.9	930.99
14.7	930.67
18.0	930.22
20.9	930.42
22.8	930.39
24.5	930.28
25.0	930.06
25.7	929.79

Bankfull Elevation (ft) - Based on AB-Bankfull Area	930.10
Bankfull Cross-Sectional Area:	7.4
Total Cross-Sectional Area:	9.5
Bankfull Width:	7.8
Flood Prone Area Elevation:	
Flood Prone Width:	
Max Depth at Bankfull:	1.7
Mean Depth at Bankfull:	0.9
W / D Ratio:	
Entrenchment Ratio:	
Bank Height Ratio:	
Thalweg Elevation:	928.37



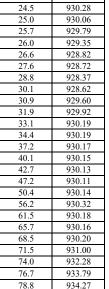

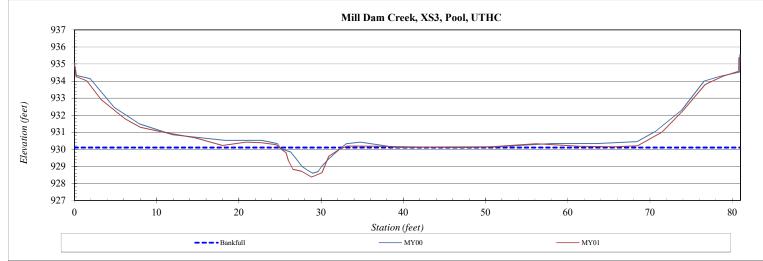



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS4
Drainage Area (sq mi):	0.18
Date:	12/17/2020
Field Crew:	TS KB

Station	Elevation
0.0	927.07
4.1	926.09
4.8	925.99
7.3	924.84
10.4	923.43
14.3	923.18
19.0	923.03
21.6	922.99
23.1	923.02
23.5	922.86
23.9	922.47
24.6	922.21
25.7	920.65
26.7	920.81
28.1	920.59
29.4	920.81

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	922.95
Bankfull Cross-Sectional Area:	15.4
Total Cross-Sectional Area:	16.8
Bankfull Width:	12.1
Flood Prone Area Elevation:	
Flood Prone Width:	
Max Depth at Bankfull:	2.4
Mean Depth at Bankfull:	1.3
W / D Ratio:	
Entrenchment Ratio:	
Bank Height Ratio:	
Thalweg Elevation:	920.59



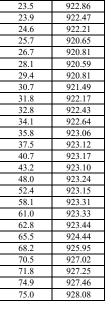

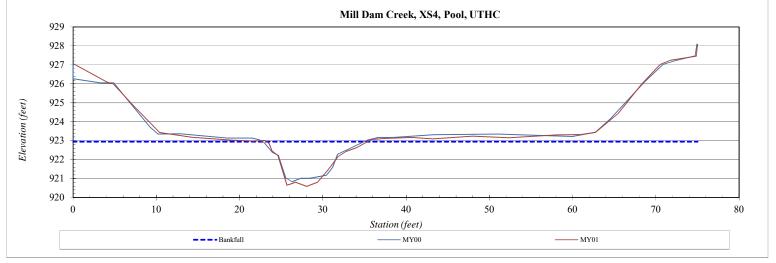



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS5
Drainage Area (sq mi):	0.18
Date:	12/22/2020
Field Crew:	TS, KB

Station	Elevation
0.0	926.30
0.1	925.59
2.0	925.50
3.2	925.40
5.5	924.39
7.0	923.49
8.3	922.98
10.8	922.74
14.7	922.73
19.3	922.78
24.0	922.79
26.9	922.84
29.1	923.01
29.9	922.91

Bankfull Elevation (ft) - Based on AB-Bankfull Area	922.93
	,,
Bankfull Cross-Sectional Area:	5.5
Total Cross-Sectional Area:	4.9
Bankfull Width:	8.6
Flood Prone Area Elevation:	923.83
Flood Prone Width:	57.6
Max Depth at Bankfull:	0.9
Mean Depth at Bankfull:	0.6
W / D Ratio:	13.2
Entrenchment Ratio:	6.7
Bank Height Ratio:	0.8
Thalweg Elevation:	922.03



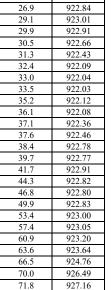

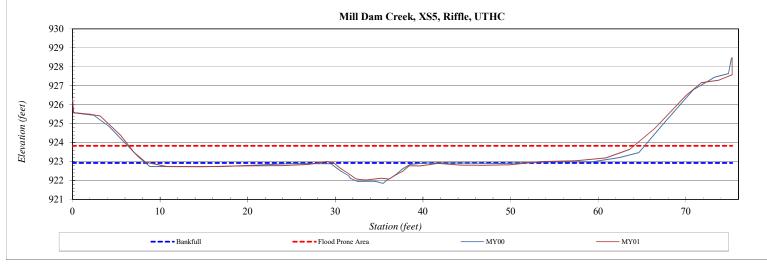



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS6
Drainage Area (sq mi):	0.22
Date:	12/17/2020
Field Crew:	TS KB

Station	Elevation
0.0	911.06
0.2	910.77
3.9	910.16
6.0	909.78
8.8	909.49
10.9	907.44
12.0	906.71
14.1	906.24
15.8	906.04
16.7	905.93
16.8	905.84
16.7	905.34
17.5	905.31
18.7	905.35
19.9	905.09
21.1	005.33

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	908.69
Bankfull Cross-Sectional Area:	55.5
Total Cross-Sectional Area:	55.9
Bankfull Width:	22.8
Flood Prone Area Elevation:	912.30
Flood Prone Width:	43.0
Max Depth at Bankfull:	3.6
Mean Depth at Bankfull:	2.4
W / D Ratio:	9.3
Entrenchment Ratio:	1.9
Bank Height Ratio:	1.0
Thalweg Elevation:	905.09



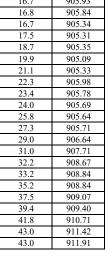

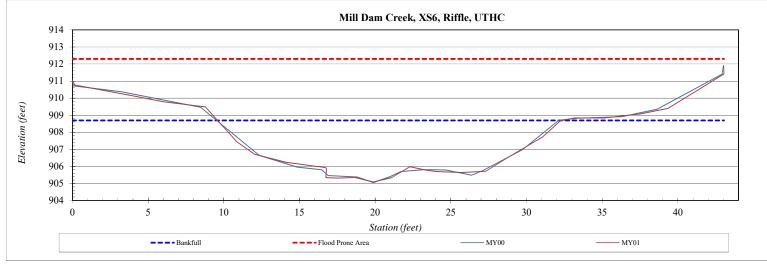



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS7
Drainage Area (sq mi):	0.22
Date:	12/22/2020
Field Crew:	TS KB

Elevation
889.03
888.47
888.46
888.40
888.04
886.39
885.54
884.97
884.92
884.79
884.40
883.86
882.24

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	883.73
Bankfull Cross-Sectional Area:	16.7
Total Cross-Sectional Area:	16.6
Bankfull Width:	11.8
Flood Prone Area Elevation:	885.98
Flood Prone Width:	38.4
Max Depth at Bankfull:	2.2
Mean Depth at Bankfull:	1.4
W / D Ratio:	8.3
Entrenchment Ratio:	3.3
Bank Height Ratio:	1.0
Thalweg Elevation:	881.48



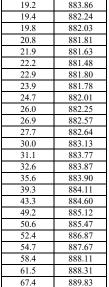

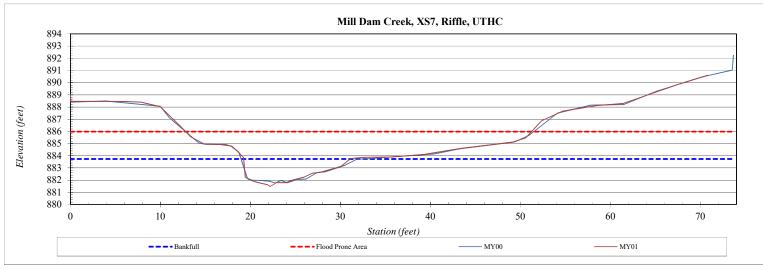



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS8
Drainage Area (sq mi):	1.07
Date:	12/22/2020
Field Crew	TS KB

Elevation
872.99
872.18
872.16
872.16
871.65
871.19
871.33
871.41
871.43
871.31
871.35
870.95
869.94
869.05
867.88
867.18
867.42

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	871.16
Bankfull Cross-Sectional Area:	20.8
Total Cross-Sectional Area:	20.8
Bankfull Width:	10.4
Flood Prone Area Elevation:	
Flood Prone Width:	
Max Depth at Bankfull:	3.8
Mean Depth at Bankfull:	2.0
W / D Ratio:	
Entrenchment Ratio:	
Bank Height Ratio:	
Thalweg Elevation:	867.37



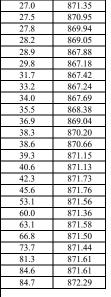

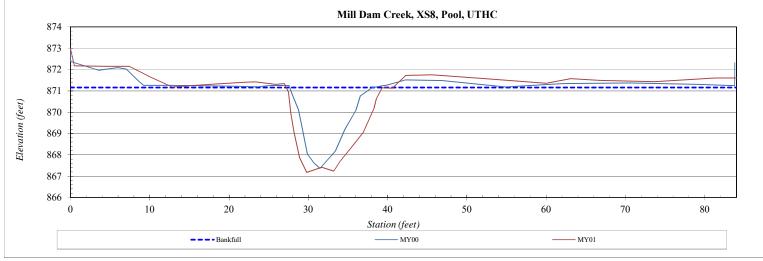



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS9
Drainage Area (sq mi):	0.46
Date:	12/22/2020
Field Crew:	TS KB

Station	Elevation
0.0	871.23
0.1	870.87
5.0	870.89
8.1	870.97
13.9	870.81
17.9	870.80
22.3	871.02
24.6	871.05
25.1	870.97
27.5	870.71
27.6	870.36
29.2	870.13
28.9	869.62
29.2	869.44

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	870.93
Bankfull Cross-Sectional Area:	10.6
Total Cross-Sectional Area:	11.4
Bankfull Width:	11.2
Flood Prone Area Elevation:	872.49
Flood Prone Width:	76.1
Max Depth at Bankfull:	1.6
Mean Depth at Bankfull:	1.0
W / D Ratio:	11.7
Entrenchment Ratio:	6.8
Bank Height Ratio:	1.0
Thalweg Elevation:	869.37



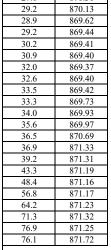

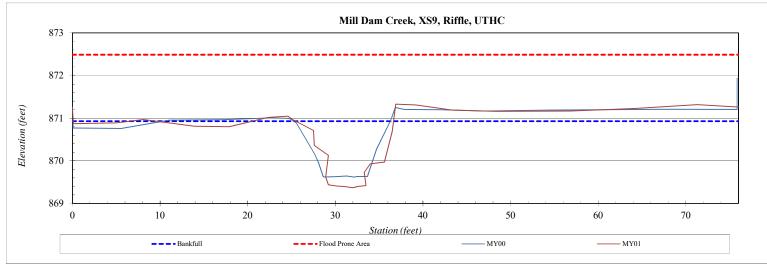



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS10
Drainage Area (sq mi):	0.46
Date:	12/22/2020
Field Crew:	TS, KB

Station	Elevation
0.0	861.90
0.1	861.34
3.7	861.30
5.5	861.28
6.5	860.89
7.2	860.88
7.5	860.47
7.9	860.54
8.6	860.91
10.0	860.97
10.8	861.33
13.0	861.33
15.7	861.50
25.1	861.49
28.3	861.64
28.9	861.53

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	861.67
Bankfull Cross-Sectional Area:	13.3
Total Cross-Sectional Area:	12.1
Bankfull Width:	14.0
Flood Prone Area Elevation:	863.38
Flood Prone Width:	69.5
Max Depth at Bankfull:	1.7
Mean Depth at Bankfull:	1.0
W / D Ratio:	14.7
Entrenchment Ratio:	5.0
Bank Height Ratio:	1.0
Thalweg Elevation:	859.97



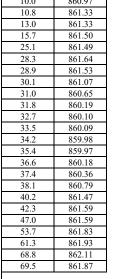

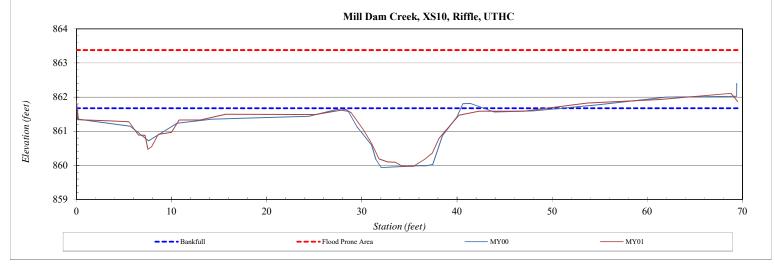



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS11
Drainage Area (sq mi):	0.46
Date:	12/22/2020
Field Crew:	TS KB

Station	Elevation
0.0	859.57
0.1	859.29
1.1	859.13
6.6	858.14
11.4	856.82
13.4	856.46
14.7	855.85
17.0	855.71
19.5	855.31
23.0	855.11
26.8	854.93
30.4	855.19
32.3	855.11
33.3	854.73

Bankfull Elevation (ft) - Based on AB-Bankfull Area	853.91
Bankfull Cross-Sectional Area:	17.3
Total Cross-Sectional Area:	16.0
Bankfull Width:	12.1
Flood Prone Area Elevation:	856.25
Flood Prone Width:	43.8
Max Depth at Bankfull:	2.3
Mean Depth at Bankfull:	1.4
W / D Ratio:	8.5
Entrenchment Ratio:	3.6
Bank Height Ratio:	1.0
Thalweg Elevation:	851.57



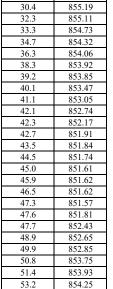

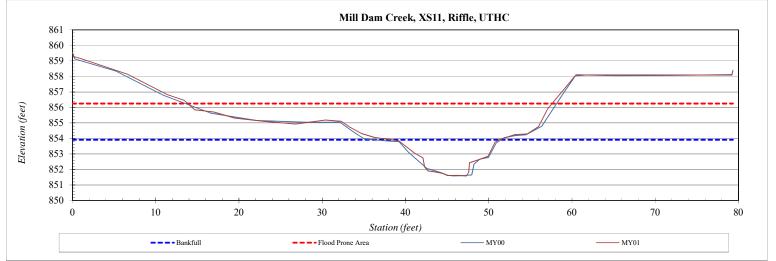



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS12
Drainage Area (sq mi):	0.61
Date:	12/22/2020
Field Crew:	TS KB

Station	Elevation
0.0	847.79
0.1	847.18
2.3	847.18
6.3	847.44
12.5	847.69
15.4	847.68
18.0	847.67
18.9	848.16
20.1	847.97
21.8	847.97
24.5	848.34
28.0	848.32
30.0	846.52
20.9	946.29

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	845.38
Bankfull Cross-Sectional Area:	29.7
Total Cross-Sectional Area:	29.7
Bankfull Width:	19.0
Flood Prone Area Elevation:	848.02
Flood Prone Width:	17.7
Max Depth at Bankfull:	2.6
Mean Depth at Bankfull:	1.6
W / D Ratio:	12.2
Entrenchment Ratio:	0.9
Bank Height Ratio:	1.0
Thalweg Elevation:	842.74



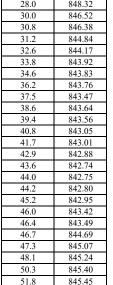


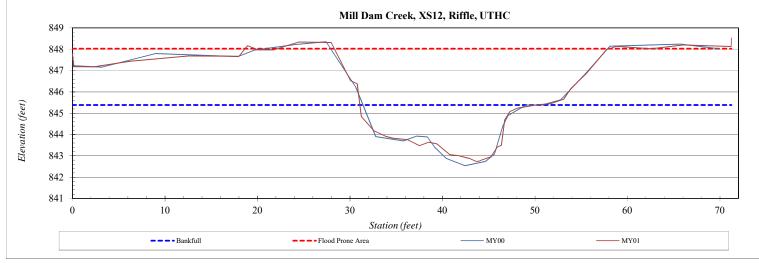

River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS13
Drainage Area (sq mi):	0.04
Date:	12/22/2020
Field Crew:	TS, KB

ation	Elevation
.0	849.59
	848.82
	848.66
	848.67
	848.33
	848.44
8	348.00
	847.47
	847.38
8	47.18
8	46.94
8	45.90
8	44 86



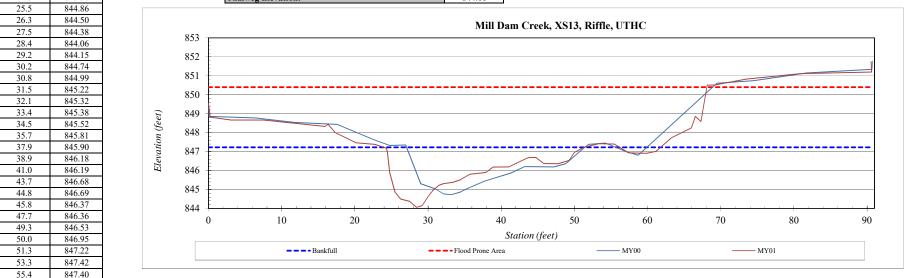


River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS14
Drainage Area (sq mi):	0.04
Date:	12/17/2020
Field Crew:	TS, KB

Station	Elevation
0.0	948.98
3.3	948.38
5.4	947.65
10.9	945.22
13.4	943.97
18.4	943.81
23.0	943.71
25.4	943.75
28.0	943.63
28.7	943.61
29.9	943.39
30.6	943.05
30.9	942.99
31.4	942.81
32.2	943.07
32.8	943.19
33.6	943.55
34.7	943.59
38.3	943.68
42.9	943.65
48.1	943.70
53.6	943.57
58.1	943.41
61.4	943.14
62.8	943.28
64.9	943.38
66.3	943.95
69.3	945.78
72.3	945.57
77.3	945.64
77.5	946.31

Bankfull Elevation (ft) - Based on AB-Bankfull Area	943.58
Bankfull Cross-Sectional Area:	1.8
Total Cross-Sectional Area:	1.9
Bankfull Width:	4.8
Flood Prone Area Elevation:	944.35
Flood Prone Width:	54.3
Max Depth at Bankfull:	0.8
Mean Depth at Bankfull:	0.4
W / D Ratio:	12.5
Entrenchment Ratio:	11.4
Bank Height Ratio:	1.0
Thalweg Elevation:	942.81



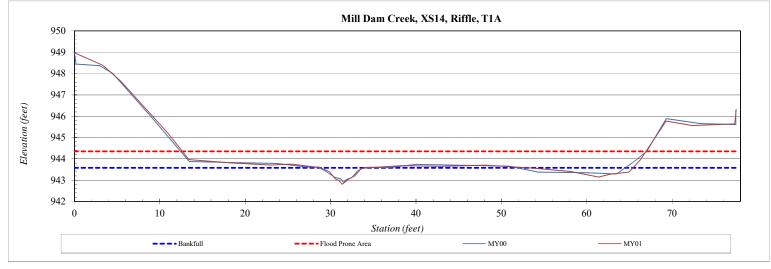



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS15
Drainage Area (sq mi):	0.07
Date:	12/17/2020
Field Crew:	TS, KB

Station	Elevation
0.0	943.49
0.1	942.77
3.2	942.75
7.6	942.42
9.9	941.30
12.7	940.24
15.1	939.26
17.6	938.94
22.9	939.14
27.9	939.22
30.9	939.04
31.9	939.03
32.6	938.89
33.6	938.62

D I. C. II El (6) D I AD D I C. II A	020.00
Bankfull Elevation (ft) - Based on AB-Bankfull Area	939.06
Bankfull Cross-Sectional Area:	2.3
Total Cross-Sectional Area:	1.7
Bankfull Width:	5.5
Flood Prone Area Elevation:	939.76
Flood Prone Width:	46.4
Max Depth at Bankfull:	0.7
Mean Depth at Bankfull:	0.4
W / D Ratio:	12.9
Entrenchment Ratio:	8.4
Bank Height Ratio:	0.8
Thalweg Elevation:	938.35



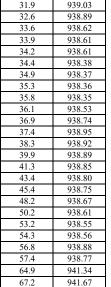

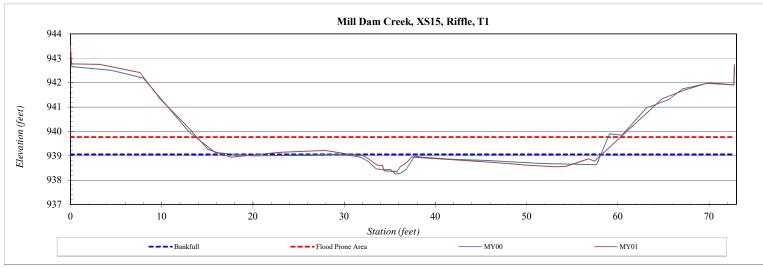



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS16
Drainage Area (sq mi):	0.07
Date:	12/17/2020
Field Crew:	TS KB

Station	Elevation
0.0	933.84
0.3	933.09
2.9	932.50
4.8	931.93
7.2	931.39
9.1	930.76
11.4	930.01
14.0	929.83
16.7	929.79
19.6	929.76
22.5	929.74
24.5	929.71
26.6	929.45
28.7	929.43

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	929.19
Bankfull Cross-Sectional Area:	3.9
Total Cross-Sectional Area:	3.7
Bankfull Width:	8.6
Flood Prone Area Elevation:	930.49
Flood Prone Width:	49.6
Max Depth at Bankfull:	1.3
Mean Depth at Bankfull:	0.4
W / D Ratio:	19.3
Entrenchment Ratio:	5.7
Bank Height Ratio:	0.9
Thalweg Elevation:	927.88



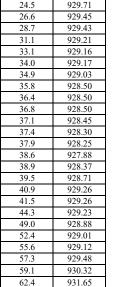

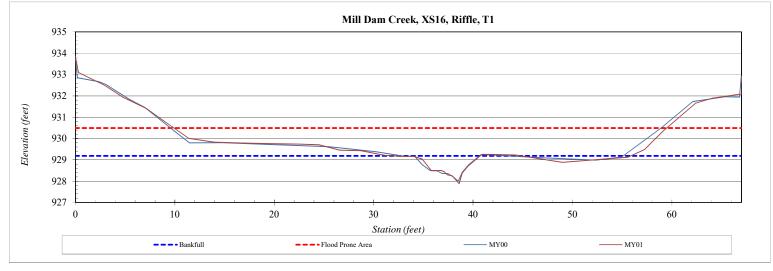

River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS17
Drainage Area (sq mi):	0.07
Date:	12/22/2020
Field Crew:	TS, KB


Station

12.0

15.5

Elevation	SUMMARY DATA	
931.34	Bankfull Elevation (ft) - Based on AB-Bankfull Area	928.3
930.74	Bankfull Cross-Sectional Area:	8.3
930.57	Total Cross-Sectional Area:	8.4
930.55	Bankfull Width:	7.8
929.98	Flood Prone Area Elevation:	
928.74	Flood Prone Width:	
928.52	Max Depth at Bankfull:	2.1
928.30	Mean Depth at Bankfull:	1.1
928.30	W / D Ratio:	
928.29	Entrenchment Ratio:	
927.84	Bank Height Ratio:	
926.66	Thalweg Elevation:	926.2
926.21		



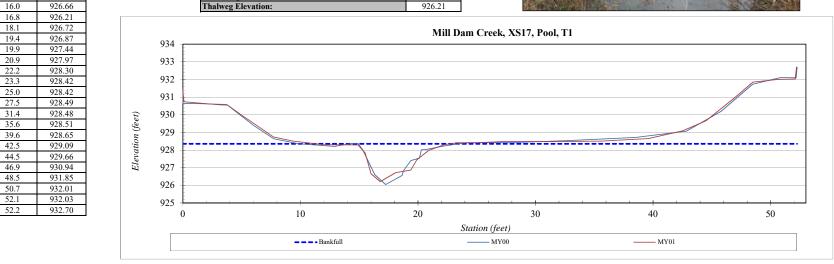



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS18
Drainage Area (sq mi):	0.02
Date:	12/22/2020
Field Crew:	TS, KB

Station	Elevation
0.0	927.11
0.0	926.58
2.8	926.42
5.8	926.45
6.9	926.44
7.9	926.02
9.6	924.81
12.0	923.67
13.2	923.50
15.3	923.47
18.3	923.46
18.6	923.38
19.2	923.18
19.8	922.82
20.6	922.81
20.7	022.52

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	923.43
Bankfull Cross-Sectional Area:	2.3
Total Cross-Sectional Area:	1.9
Bankfull Width:	5.8
Flood Prone Area Elevation:	924.36
Flood Prone Width:	24.6
Max Depth at Bankfull:	0.9
Mean Depth at Bankfull:	0.4
W / D Ratio:	14.7
Entrenchment Ratio:	4.3
Bank Height Ratio:	0.8
Thalweg Elevation:	922.50



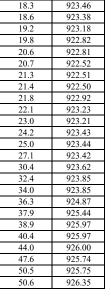

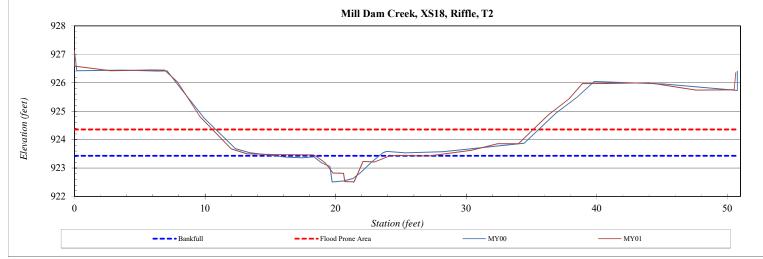


River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS19
Drainage Area (sq mi):	0.02
Date:	12/17/2020
Field Crew:	TS, KB

~ .	
Station	Elevation
0.0	925.74
0.3	924.67
3.1	924.43
6.3	924.07
7.7	923.96
9.7	923.00
11.6	922.48
15.2	922.53
19.0	922.70
20.5	922.63
21.7	922.27
22.3	922.10
23.4	921.35
24.0	920.75
24.7	920.85
25.8	921.59
25.9	922.12
27.3	922.69
28.5	922.67
30.1	922.66
31.5	922.65
32.4	923.05
33.6	923.87
34.5	923.99
36.1	924.00
38.8	923.98
43.1	923.96
46.5	923.94
18.3	024.12

48.6

Bankfull Elevation (ft) - Based on AB-Bankfull Area	922.63
Bankfull Cross-Sectional Area:	5.6
Total Cross-Sectional Area:	5.2
Bankfull Width:	6.6
Flood Prone Area Elevation:	
Flood Prone Width:	
Max Depth at Bankfull:	1.9
Mean Depth at Bankfull:	0.8
W / D Ratio:	
Entrenchment Ratio:	
Bank Height Ratio:	
Thalweg Elevation:	920.75



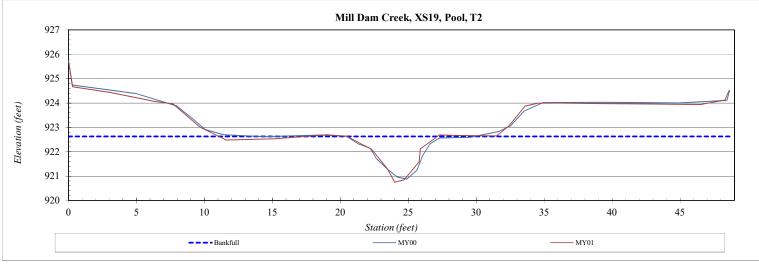


River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS20
Drainage Area (sq mi):	0.01
Date:	12/22/2020
Field Crew:	TS, KB

Station	Elevation
0.0	921.14
0.0	920.23
4.3	920.16
9.8	919.85
13.1	919.63
16.7	919.41
17.5	919.41
19.4	918.63
20.7	918.18
23.0	918.20
25.2	918.00
26.3	917.98
27.1	917.71
27.9	917.41
28.2	917.20
28.8	917.21
29.0	917.14

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	917.82
Bankfull Cross-Sectional Area:	1.9
Total Cross-Sectional Area:	1.3
Bankfull Width:	4.8
Flood Prone Area Elevation:	918.54
Flood Prone Width:	19.0
Max Depth at Bankfull:	0.7
Mean Depth at Bankfull:	0.4
W / D Ratio:	12.3
Entrenchment Ratio:	3.9
Bank Height Ratio:	1.0
Thalweg Elevation:	917.11



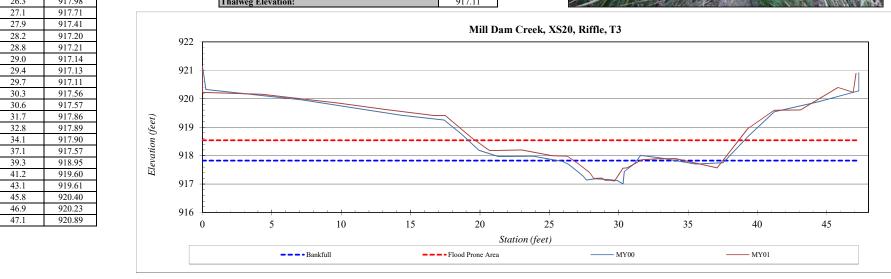



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS21
Drainage Area (sq mi):	0.01
Date:	12/22/2020
Field Crew:	TS KB

Station	Elevation
0.0	921.26
0.0	920.17
2.1	920.18
3.0	919.94
4.5	919.62
7.1	919.32
15.5	918.54
17.2	918.15
18.6	917.97
21.3	916.90
23.1	916.54
24.3	916.55
24.9	916.43
25.4	916.42
26.2	915.79
26.5	915.35

Bankfull Elevation (ft) - Based on AB-Bankfull Area	916.59
Bankfull Cross-Sectional Area:	7.7
Total Cross-Sectional Area:	8.1
Bankfull Width:	7.2
Flood Prone Area Elevation:	
Flood Prone Width:	
Max Depth at Bankfull:	1.8
Mean Depth at Bankfull:	1.1
W / D Ratio:	
Entrenchment Ratio:	
Bank Height Ratio:	
Thalweg Elevation:	914.74



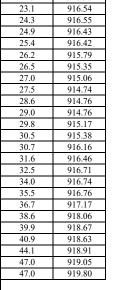

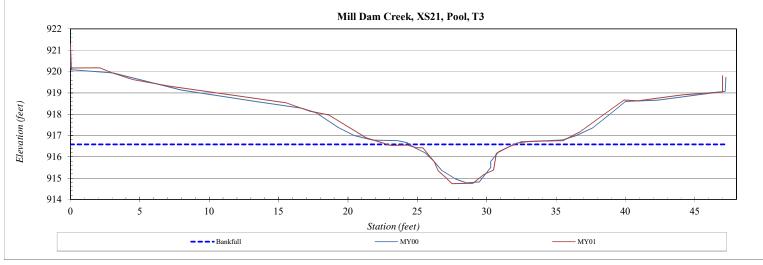


River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS22
Drainage Area (sq mi):	0.01
Date:	12/17/2020
Field Crew:	TS, KB

Station	Elevation
0.0	912.44
0.1	911.58
3.0	911.30
4.7	910.39
8.1	908.70
11.6	906.66
13.0	906.43
14.8	906.23
16.9	906.34
17.9	906.06
18.9	906.10
19.4	905.79
19.7	905.42
20.1	905.25
20.4	905.26
20.8	905.29
20.8	905.74
21.8	905.91
23.3	906.06
26.1	906.19
27.9	906.12
29.7	906.92
32.1	908.70
35.7	910.14
38.2	910.49
43.6	911.39
47.2	912.73
47.1	913.67

Bankfull Elevation (ft) - Based on AB-Bankfull Area	906.19
Bankfull Cross-Sectional Area:	1.9
Total Cross-Sectional Area:	1.9
Bankfull Width:	4.4
Flood Prone Area Elevation:	907.12
Flood Prone Width:	19.2
Max Depth at Bankfull:	0.9
Mean Depth at Bankfull:	0.4
W / D Ratio:	10.0
Entrenchment Ratio:	4.4
Bank Height Ratio:	0.5
Thalweg Elevation:	905.25



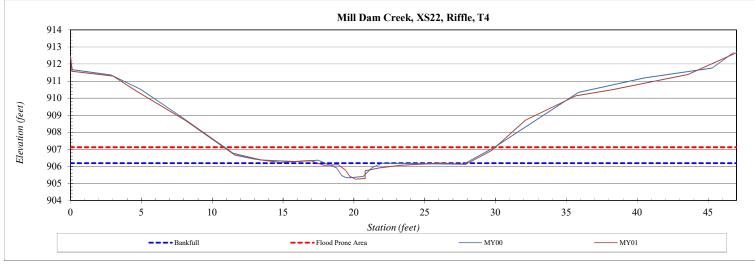


River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS23
Drainage Area (sq mi):	0.01
Date:	12/22/2020
Field Crew:	TS, KB

Station	Elevation
0.0	895.87
3.3	895.06
7.1	894.96
8.6	894.78
13.0	894.58
16.8	894.66
18.0	894.64
18.4	894.49
19.3	894.28
19.9	893.64
20.0	893.51
20.5	893.48
20.8	893.40
21.4	893.44
21.6	894.05
21.8	894.16
22.4	894.21
23.0	894.44
23.8	894.40
26.9	894.10
29.9	893.91
32.5	893.73
32.5	894.05

Bankfull Elevation (ft) - Based on AB-Bankfull Area	894.31
Bankfull Cross-Sectional Area:	1.7
Total Cross-Sectional Area:	1.8
Bankfull Width:	3.5
Flood Prone Area Elevation:	895.23
Flood Prone Width:	29.8
Max Depth at Bankfull:	0.9
Mean Depth at Bankfull:	0.5
W / D Ratio:	7.1
Entrenchment Ratio:	8.5
Bank Height Ratio:	1.1
Thalweg Elevation:	893.40



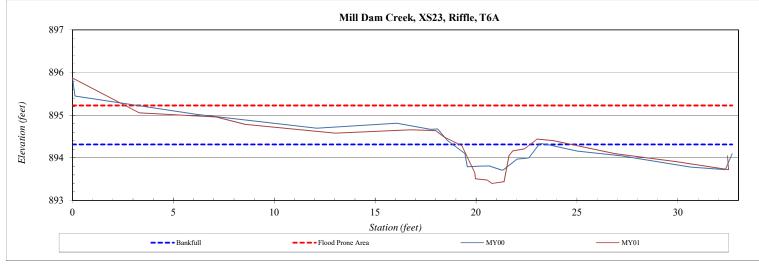


River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS24
Drainage Area (sq mi):	0.07
Date:	12/22/2020
Field Crew:	TS KB

Station	Elevation
0.0	879.77
4.1	879.10
10.7	879.07
12.7	878.18
13.5	877.91
14.8	877.85
18.0	877.87
20.2	877.94
22.6	877.96
23.2	877.80
23.5	877.55
23.8	877.54
24.4	877.39
24.8	877.54
25.4	877.66
25.5	877.66
26.4	979.04

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	878.36
Bankfull Cross-Sectional Area:	2.6
Total Cross-Sectional Area:	0.8
Bankfull Width:	3.8
Flood Prone Area Elevation:	879.33
Flood Prone Width:	43.8
Max Depth at Bankfull:	1.0
Mean Depth at Bankfull:	0.7
W / D Ratio:	5.5
Entrenchment Ratio:	11.6
Bank Height Ratio:	0.6
Thalweg Elevation:	877.39



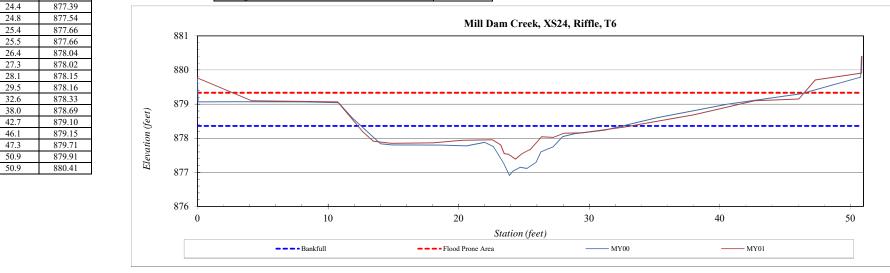


River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS25
Drainage Area (sq mi):	0.07
Date:	12/17/2020
Field Crew:	TS, KB

Station	Elevation
0.0	879.14
0.0	878.64
3.2	878.65
5.4	878.21
8.3	878.02
10.7	877.59
13.8	877.57
17.0	877.62
19.7	877.59
20.7	877.56
21.0	877.37
21.7	876.62
22.3	876.28
23.0	876.08
23.8	876.22
24.5	876.55
24.7	877.21
25.9	877.64
27.4	877.68
31.8	877.77
34.8	878.05
37.9	878.48
42.7	878.65
46.7	878.93
51.1	878.96
54.9	879.21
55.1	879.94

Bankfull Elevation (ft) - Based on AB-Bankfull Area	877.72
Bankfull Cross-Sectional Area:	5.1
Total Cross-Sectional Area:	4.4
Bankfull Width:	5.1
Flood Prone Area Elevation:	
Flood Prone Width:	
Max Depth at Bankfull:	1.6
Mean Depth at Bankfull:	1.0
W / D Ratio:	
Entrenchment Ratio:	
Bank Height Ratio:	
Thalweg Elevation:	876.08



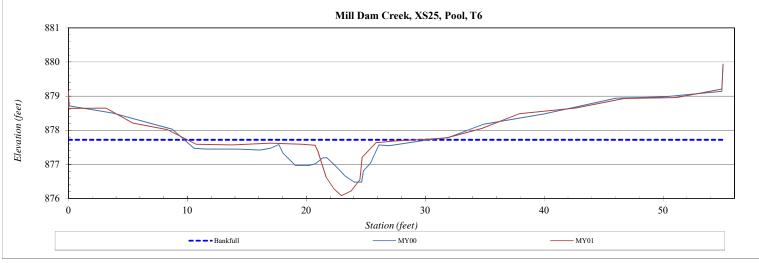


River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS26
Drainage Area (sq mi):	0.07
Date:	12/22/2020
Field Crew:	TS, KB

Station	Elevation
0.0	868.86
-0.1	868.53
6.1	868.44
12.7	868.34
14.1	868.84
16.2	868.54
21.3	868.51
25.3	868.25
27.4	868.11
28.3	867.68
29.2	867.19
29.4	866.93
30.0	866.73
30.4	866.68
30.8	866.84
31.1	866.84
31.6	866.69
32.0	866.93
32.4	867.68
33.4	868.00
34.3	868.21
35.8	868.23
37.4	868.07
39.9	867.90
42.5	867.94
45.8	867.76
48.4	867.74
48.7	867.84

Bankfull Elevation (ft) - Based on AB-Bankfull Area	868.03
Bankfull Cross-Sectional Area:	4.6
Total Cross-Sectional Area:	5.8
Bankfull Width:	6.0
Flood Prone Area Elevation:	
Flood Prone Width:	
Max Depth at Bankfull:	1.4
Mean Depth at Bankfull:	0.8
W / D Ratio:	
Entrenchment Ratio:	
Bank Height Ratio:	
Thalweg Elevation:	866.68



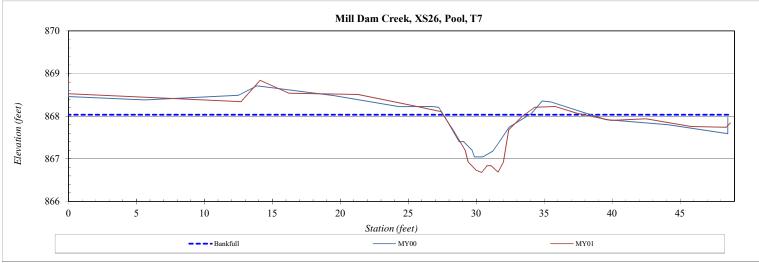


River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS27
Drainage Area (sq mi):	0.07
Date:	12/22/2020
Field Crew:	TS, KB

Station	Elevation
0.0	867.95
0.0	867.41
6.3	867.64
11.7	867.56
17.9	867.58
23.9	867.68
27.5	867.69
28.9	867.70
30.0	867.21
30.8	866.87
31.4	866.60
32.0	866.66
32.6	866.66
33.3	866.64
33.8	866.77
34.3	867.30
34.7	867.37
35.5	867.51
36.3	867.56
37.2	867.58
41.5	867.46
46.2	867.44
47.0	867.68
47.0	868.38

Bankfull Elevation (ft) - Based on AB-Bankfull Area	867.64
Bankfull Cross-Sectional Area:	4.3
Total Cross-Sectional Area:	3.5
Bankfull Width:	7.3
Flood Prone Area Elevation:	868.68
Flood Prone Width:	47.0
Max Depth at Bankfull:	1.0
Mean Depth at Bankfull:	0.6
W / D Ratio:	12.4
Entrenchment Ratio:	6.5
Bank Height Ratio:	0.9
Thalweg Elevation:	866.60



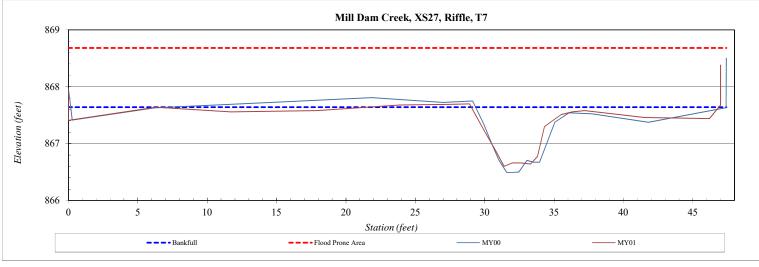



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS28
Drainage Area (sq mi):	0.04
Date:	12/22/2020
Field Crew:	TS KB

Station	Elevation
0.0	857.58
3.5	857.16
7.3	856.92
8.9	856.85
11.8	855.22
15.2	853.85
16.9	853.47
20.1	853.24
23.9	853.17
29.3	853.19
30.8	853.41
31.6	853.07
32.1	852.95
32.5	852.56
33.1	852.21

David Call Electrical (6) David and AD David Call Asset	052.24
Bankfull Elevation (ft) - Based on AB-Bankfull Area	853.34
Bankfull Cross-Sectional Area:	2.8
Total Cross-Sectional Area:	1.5
Bankfull Width:	4.7
Flood Prone Area Elevation:	854.51
Flood Prone Width:	31.9
Max Depth at Bankfull:	1.2
Mean Depth at Bankfull:	0.6
W / D Ratio:	7.9
Entrenchment Ratio:	6.7
Bank Height Ratio:	1.0
Thalweg Elevation:	852.16



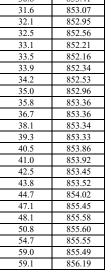

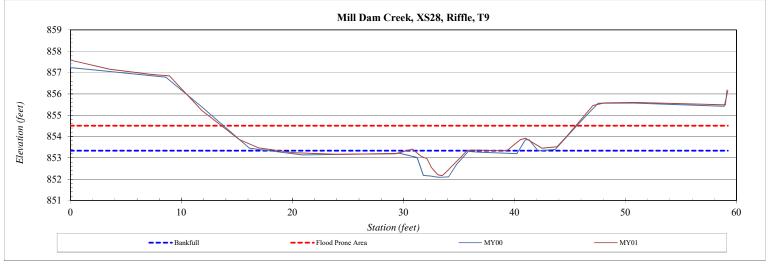


River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS29
Drainage Area (sq mi):	0.03
Date:	12/17/2020
Field Crew:	TS, KB

Station	Elevation
0.0	851.02
0.0	850.18
0.6	850.13
1.0	849.38
5.0	849.41
7.9	849.61
11.1	849.61
13.6	849.79
14.5	849.80
15.4	849.53
16.4	849.17
16.8	848.88
17.4	848.72
17.8	848.86
18.1	849.19
19.0	849.41
20.2	850.02
21.1	850.21
22.7	850.25
26.8	850.36
30.7	850.53
35.5	850.72
40.4	850.81
44.7	851.22
51.6	851.96
51.6	852.77

Bankfull Elevation (ft) - Based on AB-Bankfull Area	849.93
Bankfull Cross-Sectional Area:	3.4
Total Cross-Sectional Area:	2.9
Bankfull Width:	5.5
Flood Prone Area Elevation:	851.13
Flood Prone Width:	43.8
Max Depth at Bankfull:	1.2
Mean Depth at Bankfull:	0.6
W / D Ratio:	9.0
Entrenchment Ratio:	7.9
Bank Height Ratio:	0.9
Thalweg Elevation:	848.72



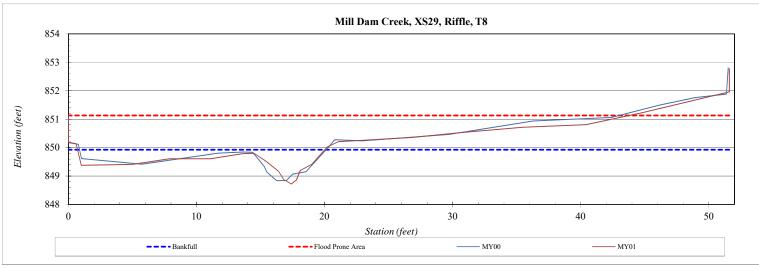



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS30
Drainage Area (sq mi):	0.03
Date:	12/17/2020
Field Crew:	TS, KB

Station	Elevation
0.0	845.92
0.0	844.63
3.0	844.56
6.6	844.45
10.4	843.34
12.9	843.23
18.1	842.86
20.4	842.70
22.1	842.79
23.3	842.53
23.7	842.01
24.2	841.94
24.9	841.85
25.2	841.84
25.7	841.94

SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	842.81
Bankfull Cross-Sectional Area:	3.2
Total Cross-Sectional Area:	3.4
Bankfull Width:	5.8
Flood Prone Area Elevation:	843.78
Flood Prone Width:	42.0
Max Depth at Bankfull:	1.0
Mean Depth at Bankfull:	0.6
W / D Ratio:	10.5
Entrenchment Ratio:	7.2
Bank Height Ratio:	1.0
Thalweg Elevation:	841.84





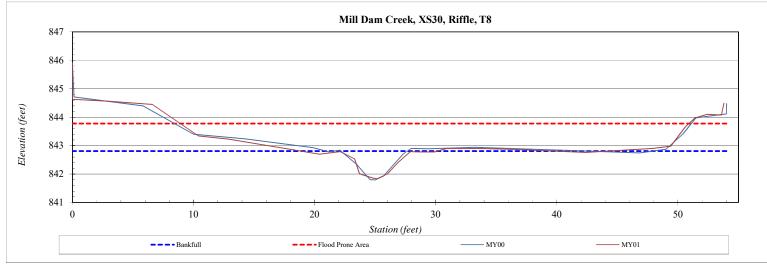


River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS31
Drainage Area (sq mi):	0.01
Date:	12/17/2020
Field Crew:	TS, KB

Station	Elevation
0.0	853.80
0.3	853.16
3.7	852.93
6.7	852.93
8.2	852.75
9.2	852.35
11.7	851.11
13.7	850.94
16.0	850.85
17.8	850.88
18.6	850.88
19.0	850.89
19.6	850.68
20.4	850.40
20.9	849.95
21.4	849.76
21.6	849.95

SUMMARY DATA	-
Bankfull Elevation (ft) - Based on AB-Bankfull Area	850.86
Bankfull Cross-Sectional Area:	2.6
Total Cross-Sectional Area:	2.3
Bankfull Width:	5.2
Flood Prone Area Elevation:	851.97
Flood Prone Width:	21.8
Max Depth at Bankfull:	1.1
Mean Depth at Bankfull:	0.5
W / D Ratio:	10.7
Entrenchment Ratio:	4.2
Bank Height Ratio:	1.0
Thalweg Elevation:	849.76



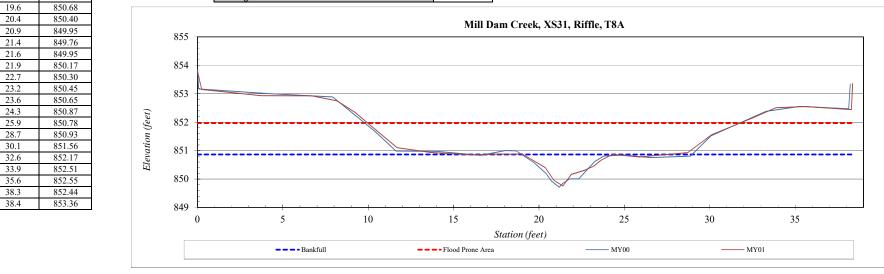



River Basin:	Yadkin River
Site:	Mill Dam Creek
XS ID	XS32
Drainage Area (sq mi):	0.01
Date:	12/17/2020
Field Crew	TS KB


Station	Elevation
0.0	846.94
0.0	846.38
5.8	846.33
9.5	846.30
12.7	845.70
15.3	845.90
16.9	846.06
18.4	845.79
19.7	845.64
21.1	845.70
21.9	845.79
23.1	845.24
23.5	844.80
23.9	844.64
24.1	844.56
24.4	044.50


SUMMARY DATA	
Bankfull Elevation (ft) - Based on AB-Bankfull Area	845.58
Bankfull Cross-Sectional Area:	2.1
Total Cross-Sectional Area:	2.8
Bankfull Width:	4.1
Flood Prone Area Elevation:	846.59
Flood Prone Width:	49.4
Max Depth at Bankfull:	1.0
Mean Depth at Bankfull:	0.5
W / D Ratio:	8.2
Entrenchment Ratio:	12.0
Bank Height Ratio:	1.2
Thalweg Elevation:	844.56







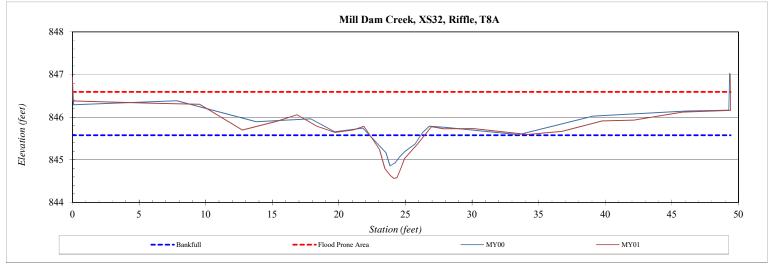

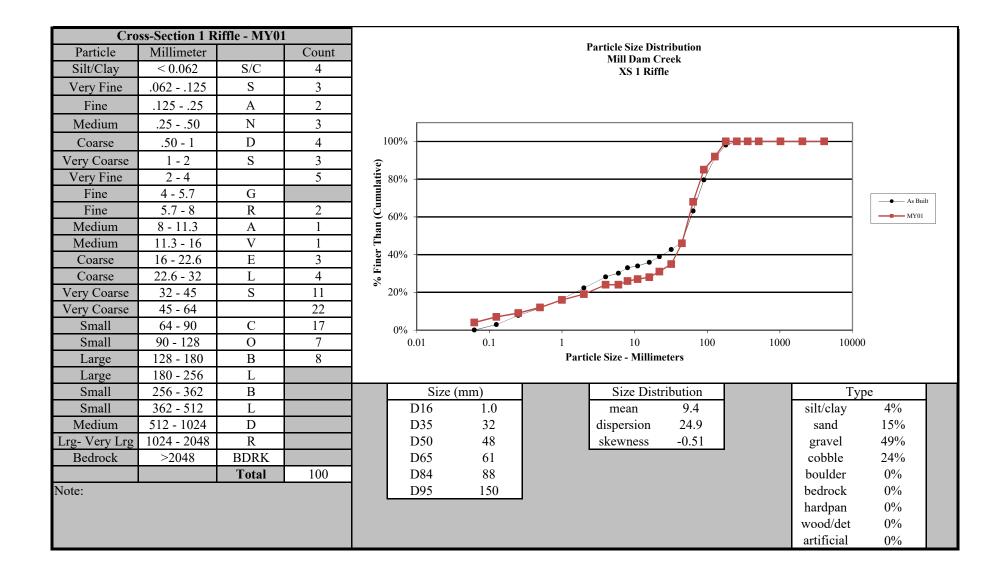


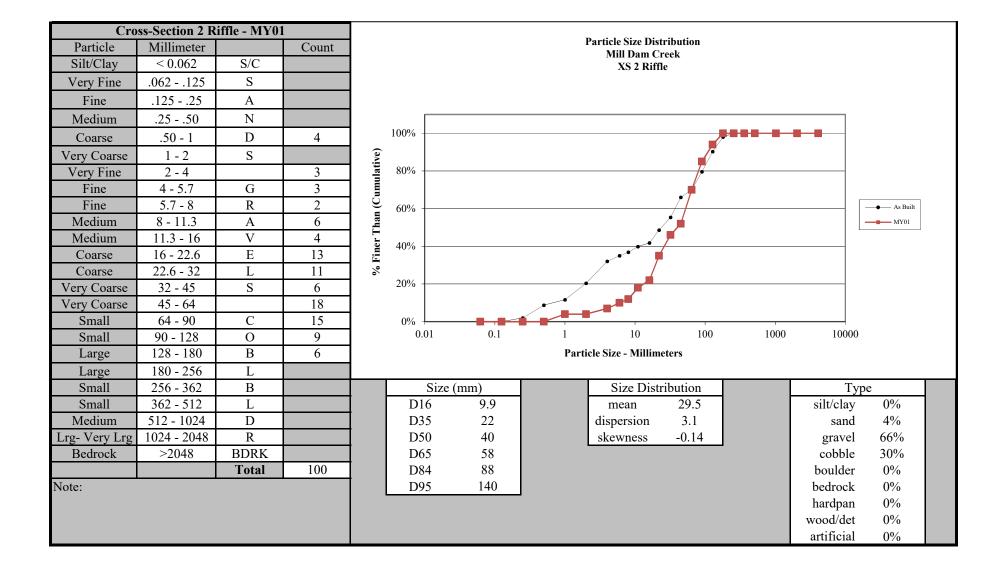


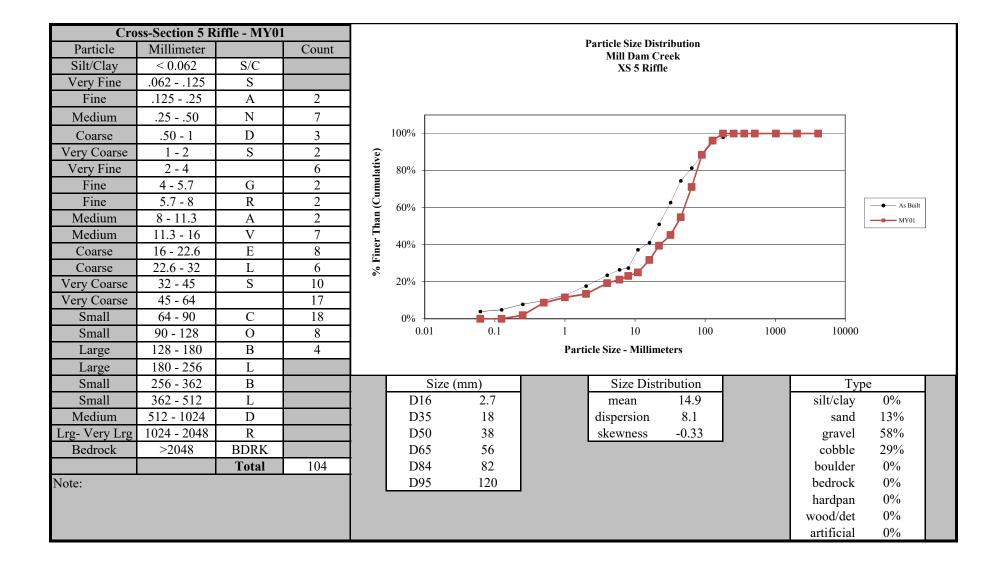

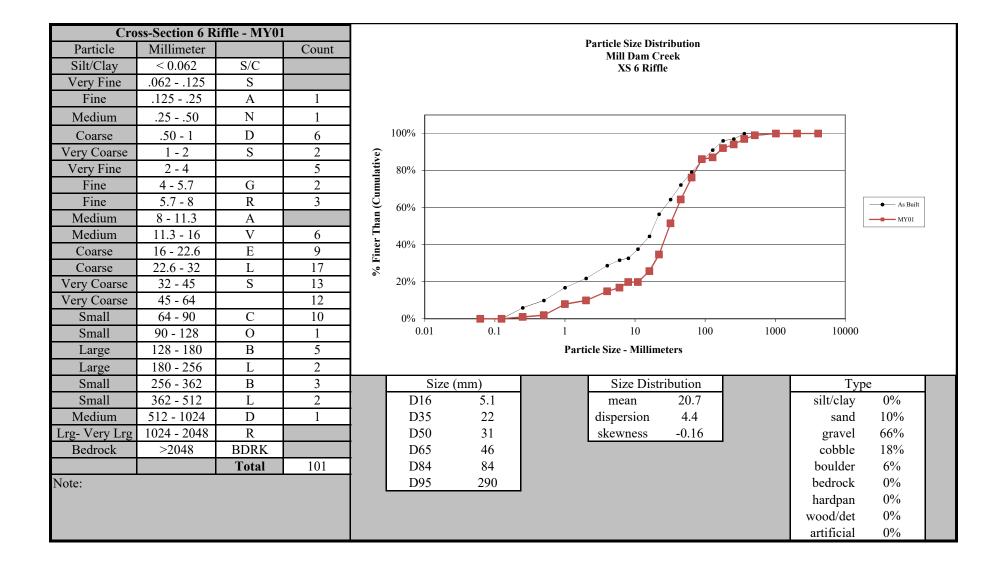



Cross-Section 7 Riffle -MY01				Particle Size Distribution									
Particle	Millimeter		Count				j	Particle Size Dis Mill Dam C					
Silt/Clay	< 0.062	S/C						XS 7 Riff					
Very Fine	.062125	S											
Fine	.12525	A											
Medium	.2550	N											
Coarse	.50 - 1	D	2		100%					•			
Very Coarse	1 - 2	S	4	ve)							_		
Very Fine	2 - 4		5	% Finer Than (Cumulative)	80%								
Fine	4 - 5.7	G	1										
Fine	5.7 - 8	R		اِ ق	60%				<u>/ [</u>			—◆— As Buil	lt
Medium	8 - 11.3	A	6	han				,	–			── MY01	
Medium	11.3 - 16	V	2	er T	40%			<u></u>					
Coarse	16 - 22.6	Е	9	Fin	4070			_					
Coarse	22.6 - 32	L	5	%	200/								
Very Coarse	32 - 45	S	6		20%								
Very Coarse	45 - 64		13										
Small	64 - 90	С	15	ļ	0%	0.1		10	100	1000	10000		
Small	90 - 128	0	9		0.01	0.1	1			1000	10000		
Large	128 - 180	В	9	ļ			Parti	cle Size - Millim	eters				
Large	180 - 256	L	7		~.	, ,							
Small	256 - 362	В	<u>l</u>			(mm)		Size Dist			Тур		
Small	362 - 512	L	l		D16	9.5		mean	36.5		silt/clay	0%	
Medium	512 - 1024	D			D35	30		dispersion	4.2		sand	6%	
Lrg- Very Lrg Bedrock	1024 - 2048 >2048	R BDRK	5		D50 D65	55 78		skewness	-0.17		gravel cobble	47% 33%	
Ведгоск	>2048	Total	100		D65 D84	78 140					boulder	33% 2%	
Note:		Total	100		D84 D95	220					bedrock	2% 5%	
Note.					D33	220	J				hardpan	0%	
											wood/det	0%	
											artificial	0%	
											artificial	070	

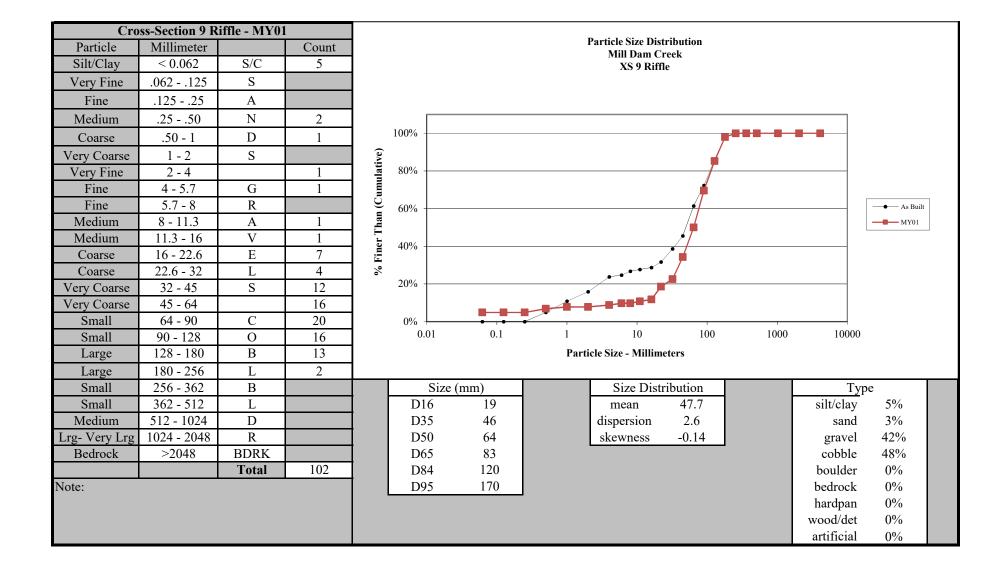


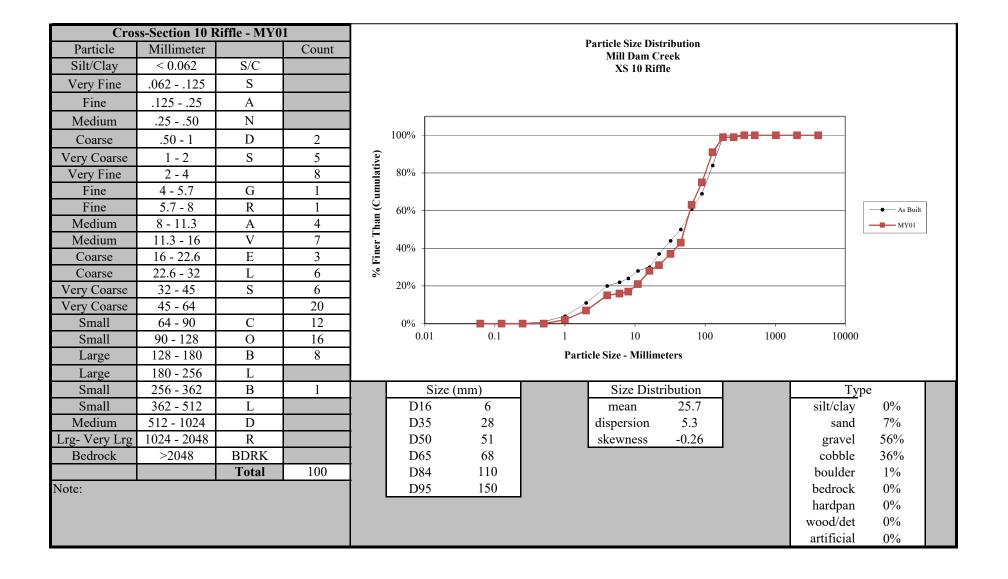



Cross-Section 11 Riffle -MY01															
Particle	Millimeter		Count						F	Particle Size Dist Mill Dam Cı					
Silt/Clay	< 0.062	S/C								XS 11 Riff					
Very Fine	.062125	S													
Fine	.12525	A													
Medium	.2550	N			Г										
Coarse	.50 - 1	D			100%										
Very Coarse	1 - 2	S	2	ve)							_/ <u>/</u>				
Very Fine	2 - 4		1	% Finer Than (Cumulative)	80%										
Fine	4 - 5.7	G		nur							/ /				
Fine	5.7 - 8	R	1	[C	60%						<u> </u>			—◆— As Buil	lt
Medium	8 - 11.3	A	2	han						<i>,</i> *	/			—■— MY01	
Medium	11.3 - 16	V	2	er T	40%					<u>, </u>					
Coarse	16 - 22.6	Е	2	Fin	4070					/					
Coarse	22.6 - 32	L	6	%	200/					المرمر	,				
Very Coarse	32 - 45	S	10		20% +					<u> </u>					
Very Coarse	45 - 64		16					•	_						
Small	64 - 90	C	22		0% 	1	0.1		1	10	100	1000	10000		
Small	90 - 128	0	17		0.0	I	0.1		1			1000	10000		
Large	128 - 180	В	13						Partic	ele Size - Millimo	eters				
Large	180 - 256	L	3 2			7:- (`			G D. t	14'		Т		
Small Small	256 - 362 362 - 512	B L	<u> </u>		D16	Size (mn	n) 32	-		Size Distr	66.9		Ty silt/clay	9% 0%	-
Medium	512 - 1024	D D			D16		54			mean dispersion	2.1		sin/ciay	0% 2%	
Lrg- Very Lrg	1024 - 2048	R			D50		72			skewness	-0.04		gravel	40%	
Bedrock	>2048	BDRK			D65		91		L	SKC WIICSS	-0.0-		cobble	56%	
Bedrock	2010	Total	99		D84		140						boulder	2%	
Note:					D95		180						bedrock	0%	
								4					hardpan	0%	
													wood/det	0%	
													artificial	0%	

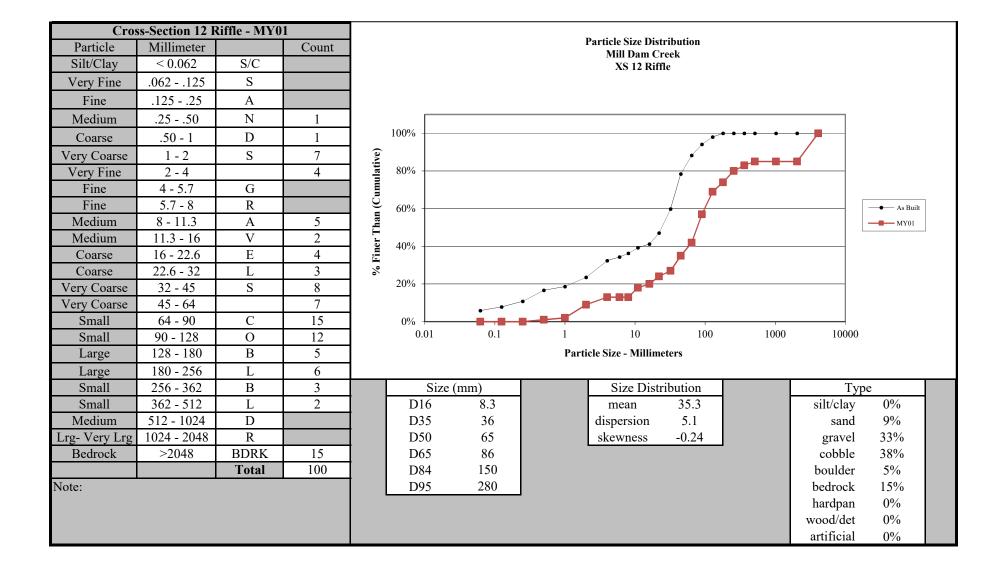


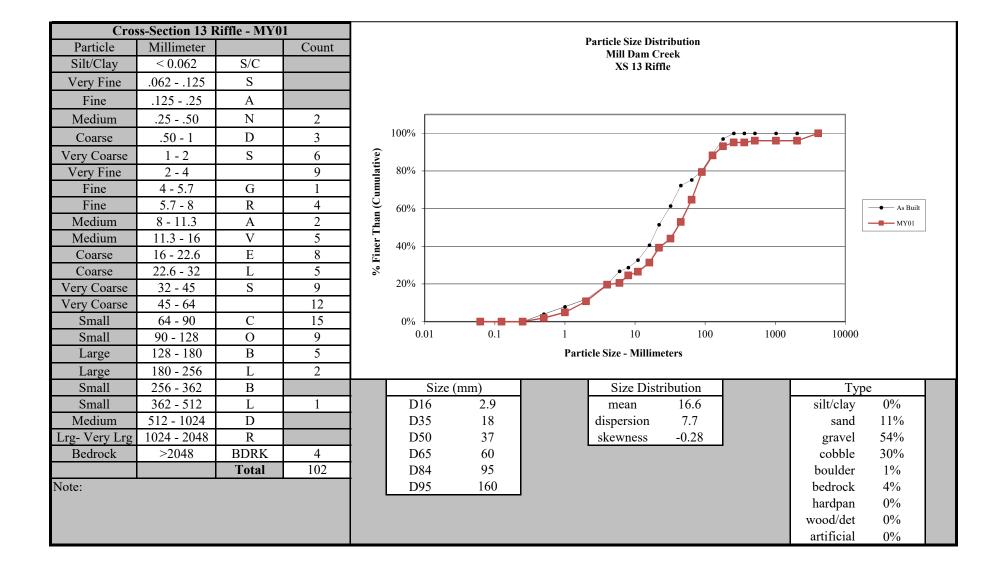


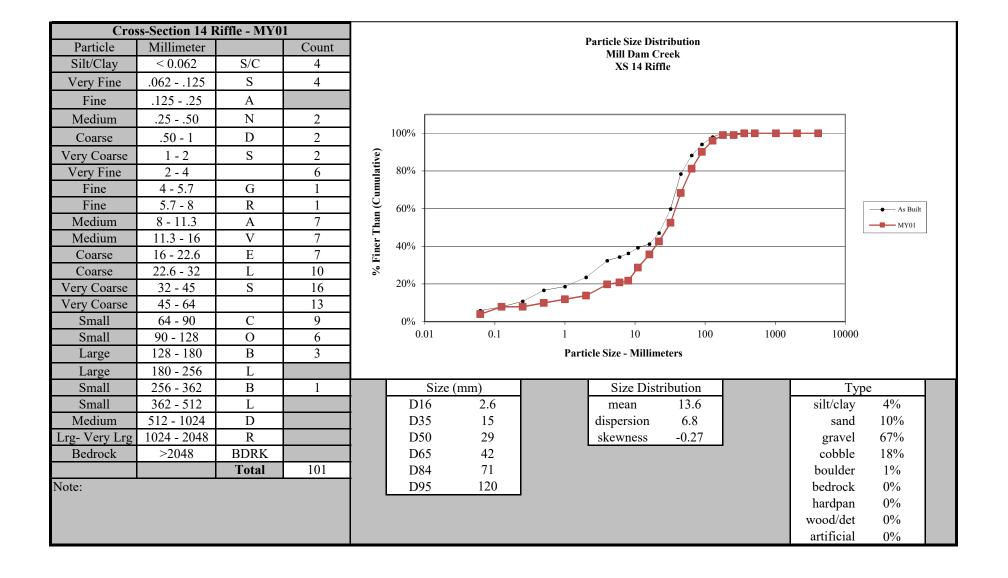


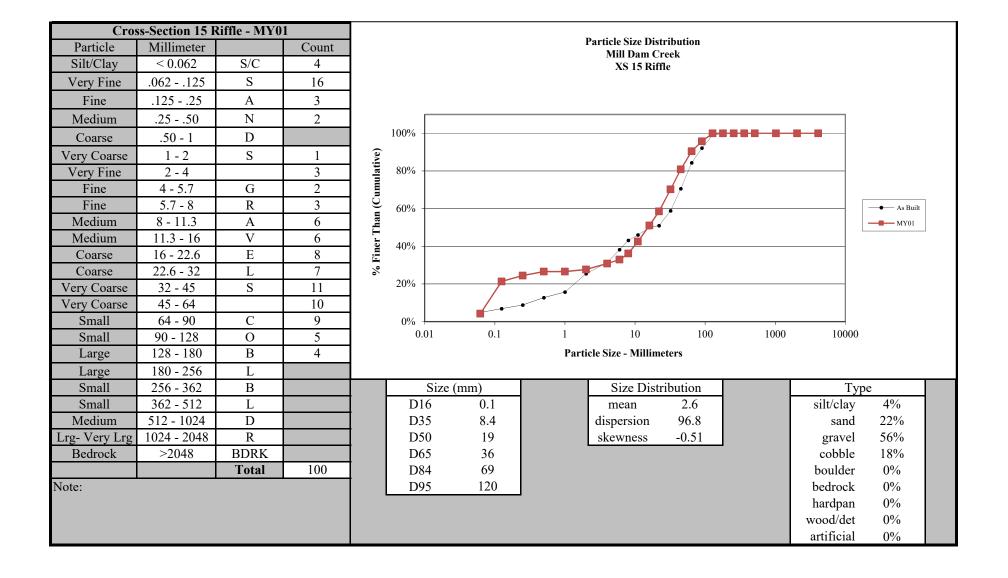


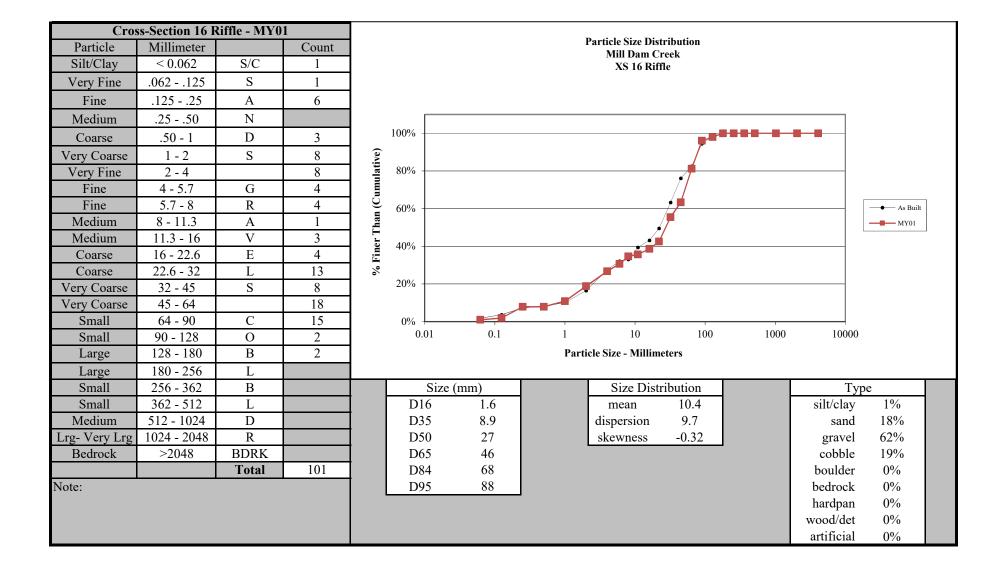


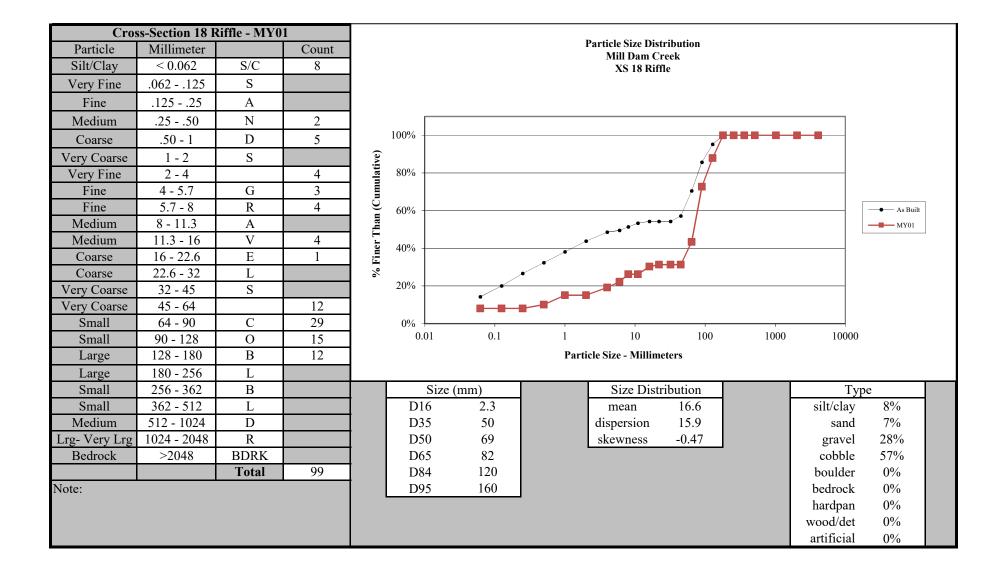


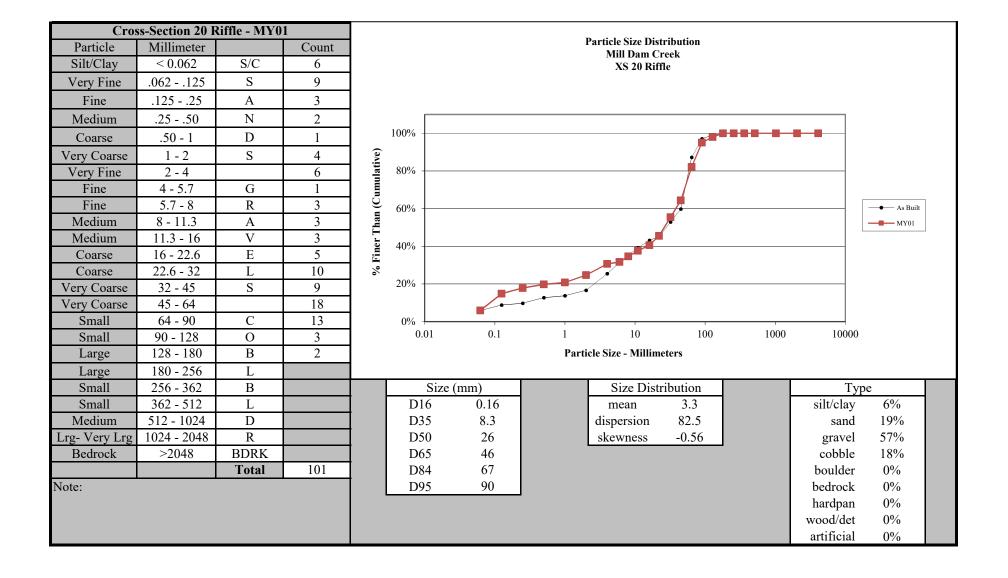


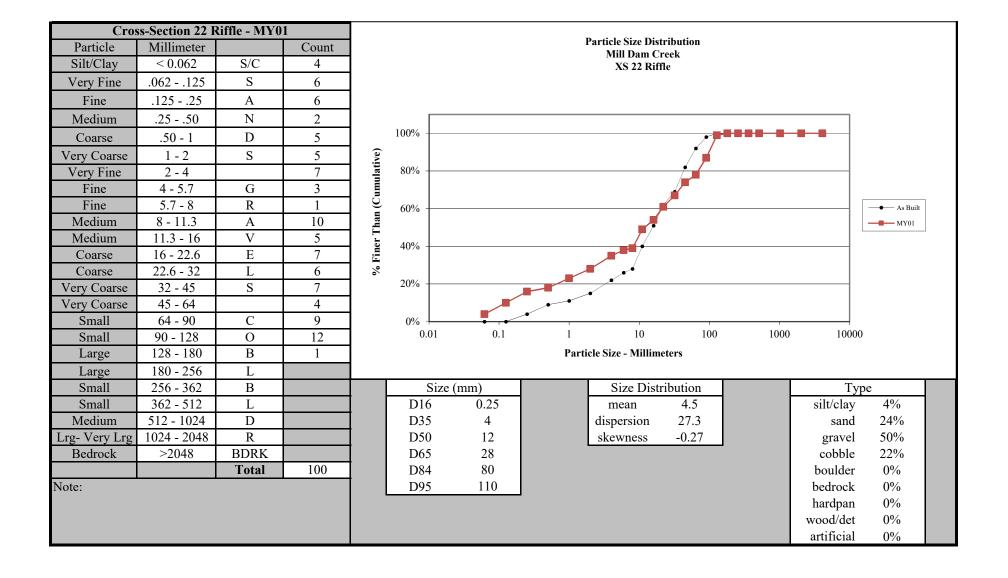


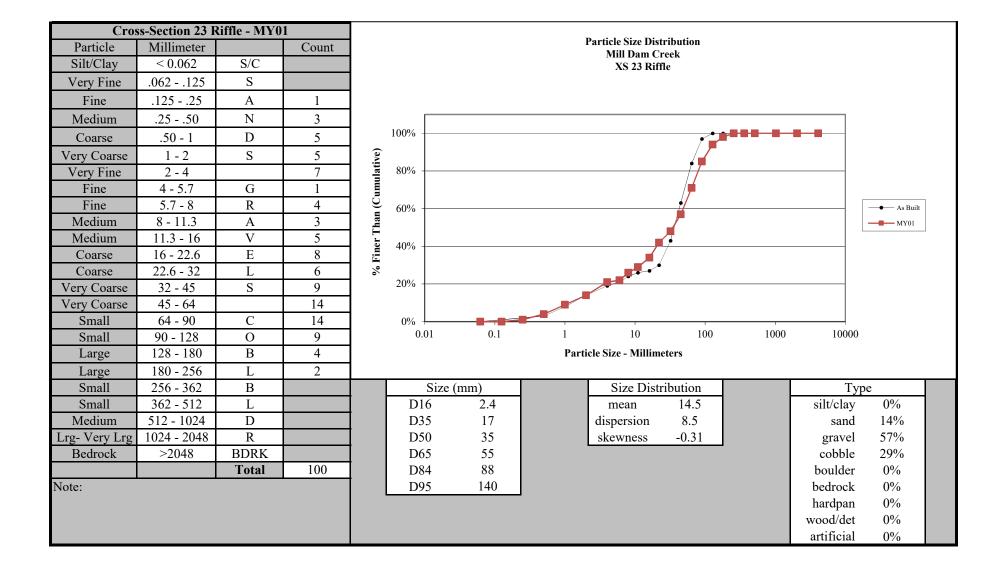


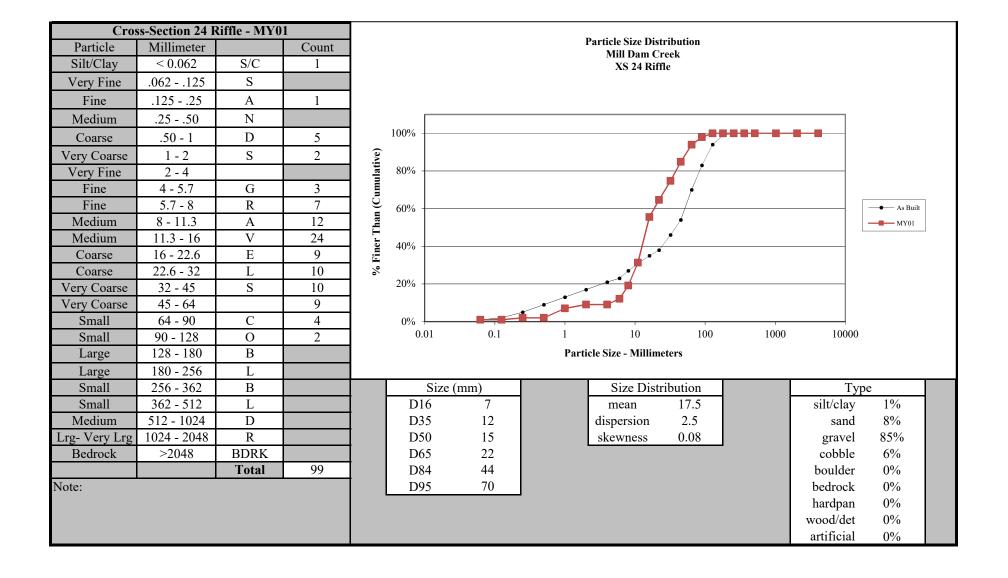


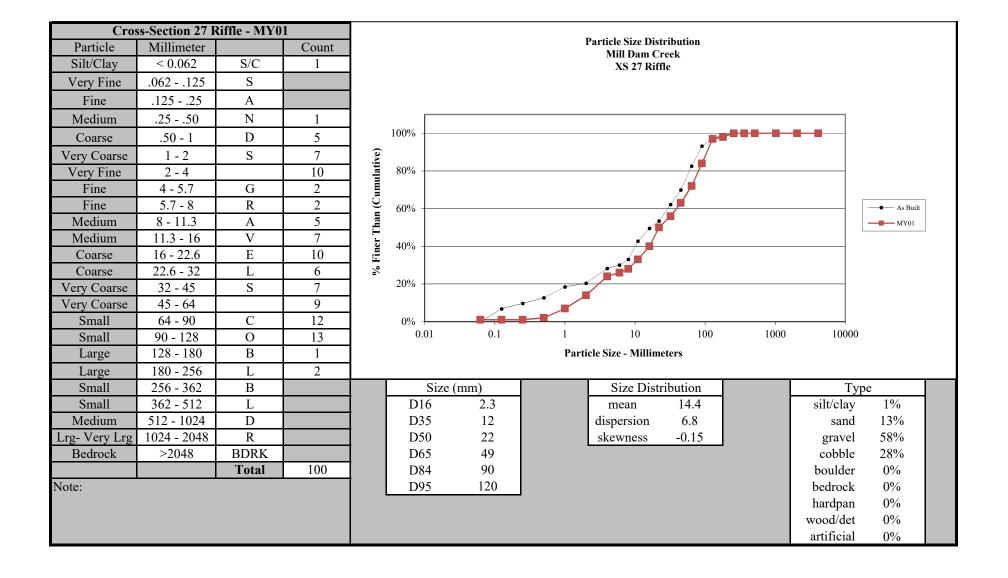


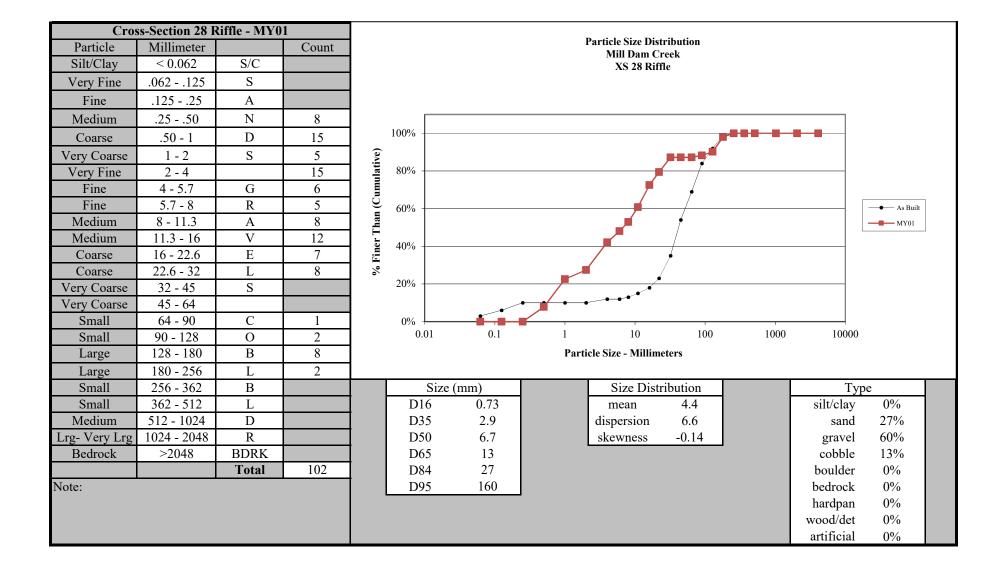

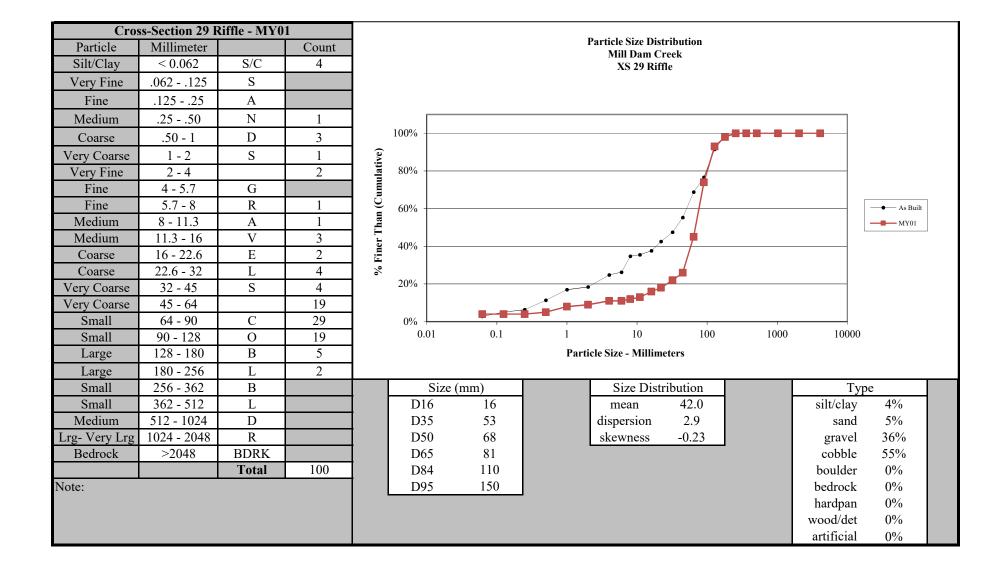

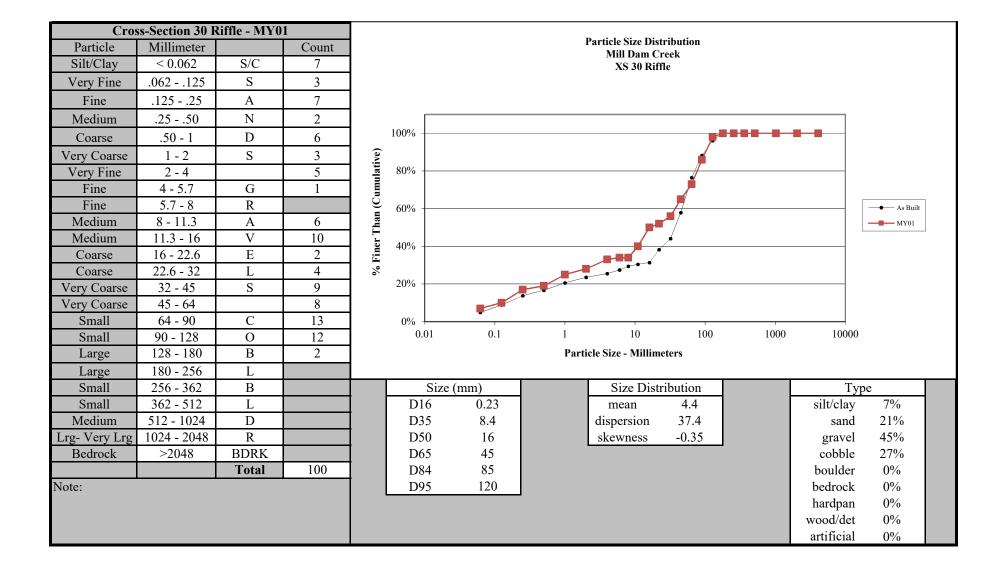

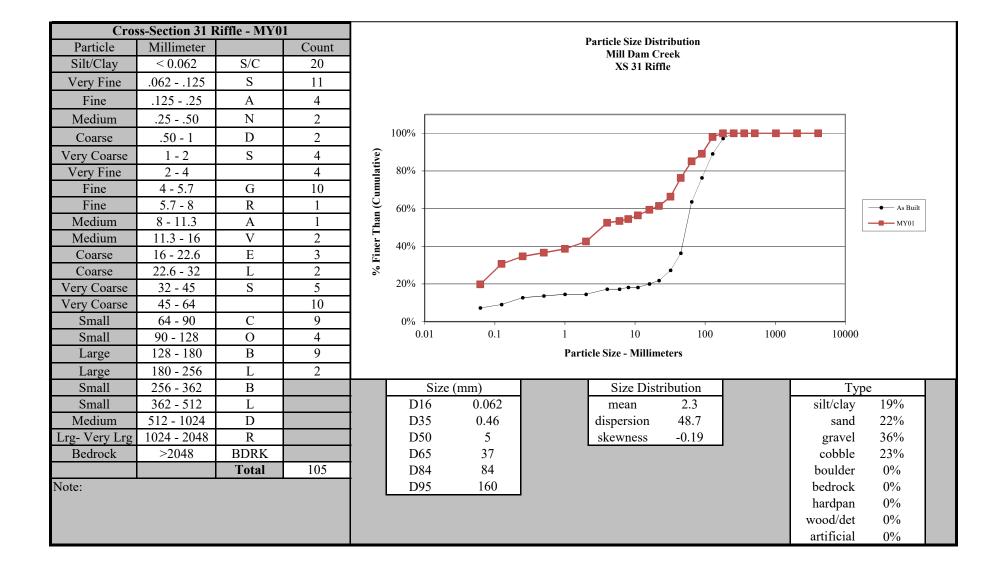

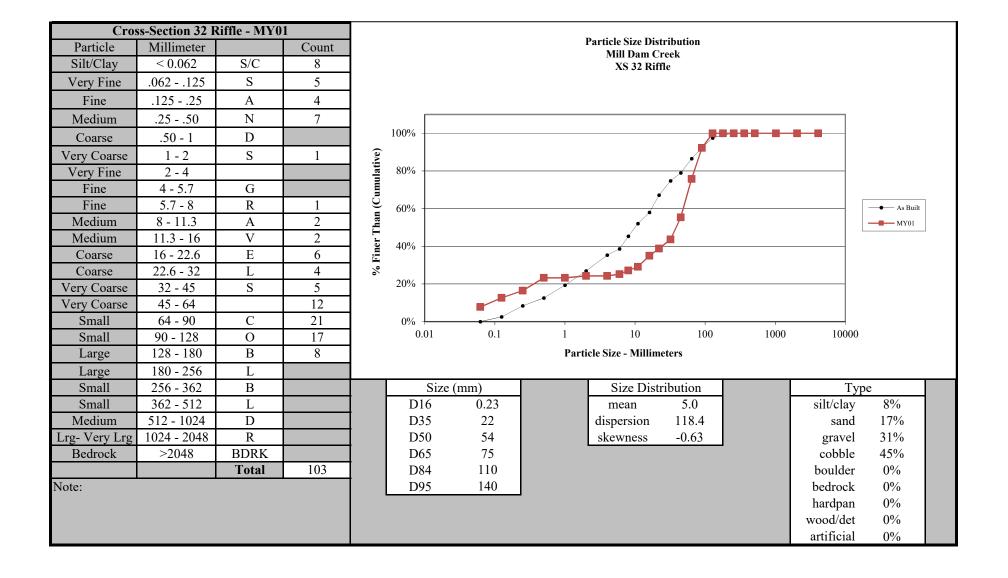

APPENDIX E

Hydrologic Data

Table 10. Verification of Bankfull Events									
Mill Dam Creek Restoration Site, DMS Project #97136									
Date of Occurrence	Method	Reach							
January 24, 2020	Onsite stream gauge	UTHC1							
February 6, 2020	Onsite stream gauge	UTHC1, UTHC3							
February 11, 2020	Onsite stream gauge	UTHC1							
February 13, 2020	Onsite stream gauge	UTHC1							
March 24, 2020	Onsite stream gauge	UTHC1							
April 13, 2020	Onsite stream gauge	UTHC1, UTHC3							
April 25, 2020	Onsite stream gauge	UTHC1							
April 29, 2020	Onsite stream gauge	UTHC1, UTHC3							
May 21, 2020	Onsite stream gauge	UTHC1, UTHC3							
May 27, 2020	Onsite stream gauge	UTHC1, UTHC3							
December 16, 2020	Photos taken on-site	UTHC1, UTHC3,							
December 10, 2020	1 Hotos taken on-site	T1, T2, T6, T8							



Photo 1. Wrack lines above bankfull, UTHC1 – 12/18/2020



Photo 2. Wrack lines above bankfull, UTHC3 – 12/18/2020



Photo 3. Wrack lines above bankfull, T1 - 12/18/2020



Photo 4. Wrack lines above bankfull, T2 – 12/18/2020









Photo 6. Wrack lines above bankfull, T8 – 12/18/2020

Mill Dam Creek Restoration Site Hydrograph UTHC-1 Stream Flow Gauge

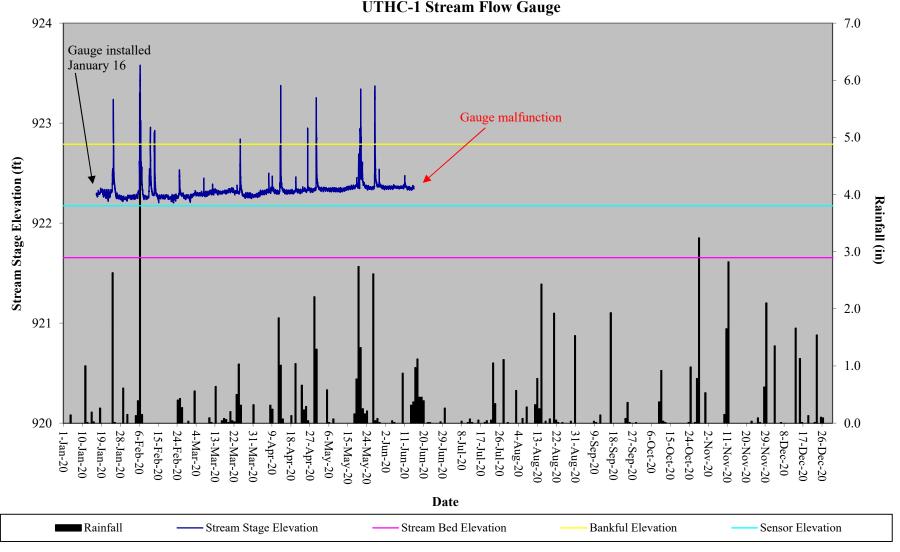

Mill Dam Creek Restoration Site Hydrograph UTHC-3 Stream Flow Gauge


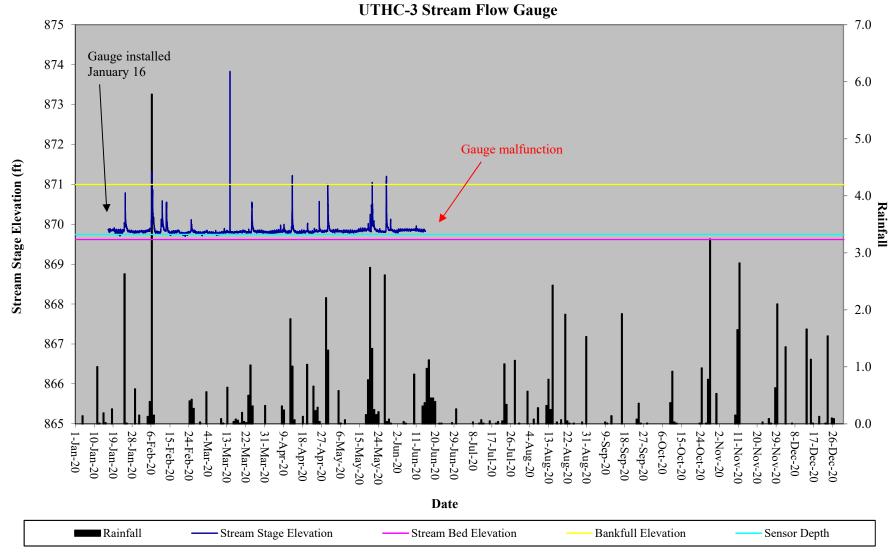



	Table 11. Verification of Stream Flow Mill Dam Creek Restoration Site, DMS Project #97136										
	Gauge	Camera	Camera								
Reach	Dates Achieving	Maximum Consecutive Days	Dates Achieving	Maximum Consecutive Days							
T1A	February 27 – April 5	68	February 27 – April 10	44							
T5A	January 16 – June 15	152	February 27 – April 8; October 10 – December 18	70							
T8A	January 16 – June 15	152	February 29 – May 22; July 31 – September 3; October 25 – December 18	84							

	Table 12. Stream Flow Criteria Attainment Mill Dam Creek Restoration Site, DMS Project #97136										
	Greater than 30 Days of Flow/Max Consecutive Days										
Reach	MY-01 2020	MY-02 2021	MY-03 2022	MY-04 2023	MY-05 2024	MY-06 2025	MY-07 2026				
T1A (Gauge)	Yes/68										
T1A (Camera)	Yes/44										
T5A (Gauge)	Yes/152										
T5A (Camera)	Yes/70										
T8A (Gauge)	Yes/152										
T8A (Camera)	Yes/84										

Mill Dam Creek Restoration Site Hydrograph T1A Stream Flow Gauge

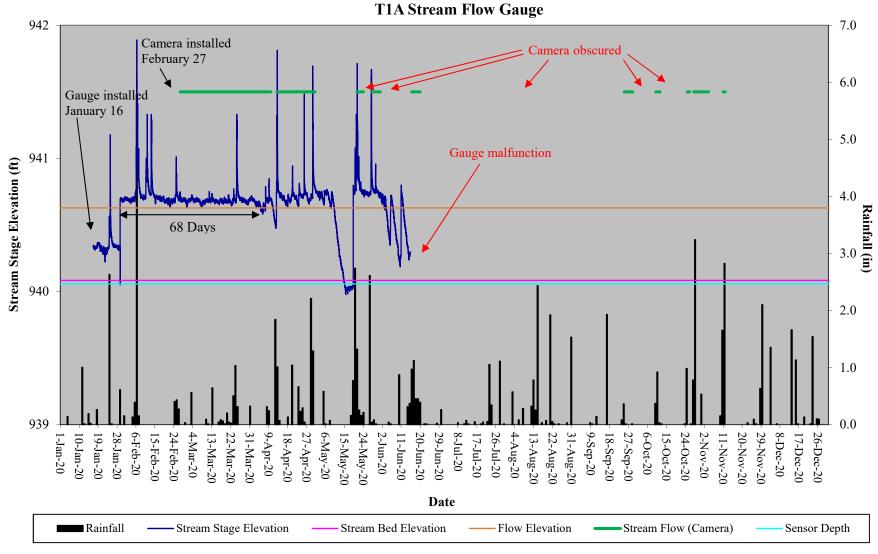

Mill Dam Creek Restoration Site Hydrograph T5A Stream Flow Gauge

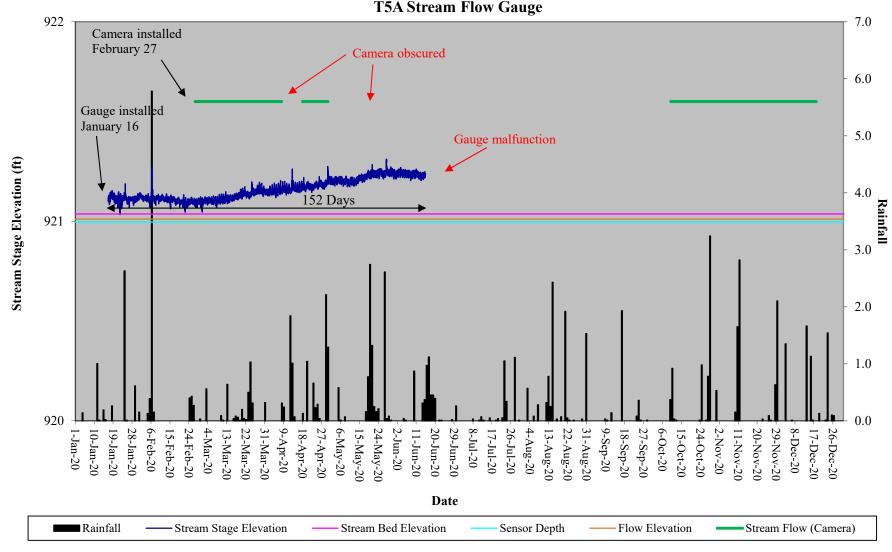

Mill Dam Creek Restoration Site Hydrograph T8A Stream Flow Gauge

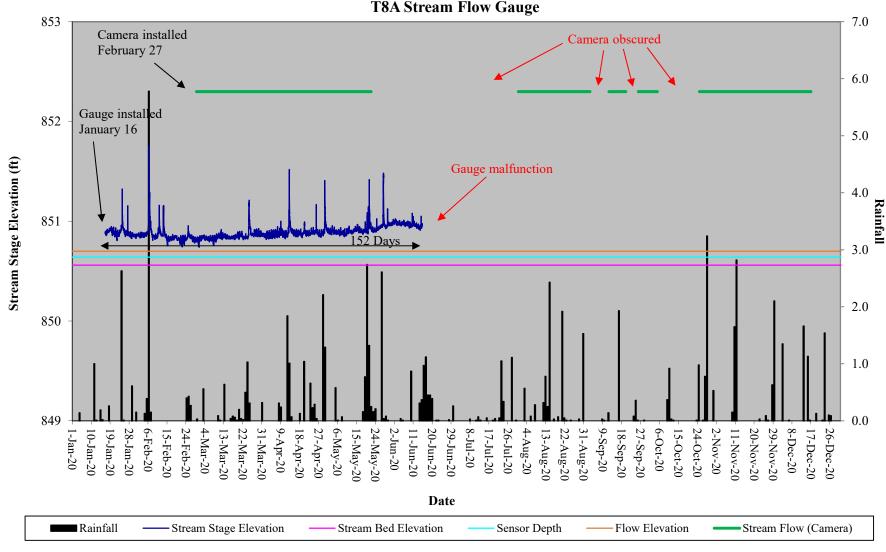


Table 13. Wetland Hydrology Verification Mill Dam Creek Restoration Site, DMS Project #97136												
	Max Consecutive Days During Growing Season (Percentage)											
Gauge #	Location	MY-01 2020	MY-02 2021	MY-03 2022	MY-04 2023	MY-05 2024	MY-06 2025	MY-07 2026				
Gauge 1	T7	45 (19.7%)										
Gauge 2	Т8	Gauge malfunction										

Mill Dam Creek Restoration Site Hydrograph Wetland Gauge 1, T7

