



**MONITORING YEAR 1
ANNUAL REPORT**
Final

AGONY ACRES MITIGATION SITE

Guilford County, NC

NCDEQ Contract 004949

NCDMS Project Number 95716

Data Collection Period: May 2015 – October 2015

Draft Submission Date: November 12, 2015

Final Submission Date: December 1, 2015

PREPARED FOR:



NC Department of Environmental Quality

Division of Mitigation Services

1652 Mail Service Center

Raleigh, NC 27699-1652

PREPARED BY:



Wildlands Engineering, Inc.
312 West Millbrook Road, Suite 225
Raleigh, NC 27609

Jason Lorch
jlorch@wildlandseng.com
Phone: 919.851.9986

EXECUTIVE SUMMARY

Wildlands Engineering, Inc. (Wildlands) completed a full delivery project at the Agony Acres Mitigation Site (Site) for the North Carolina Division of Mitigation Services (NCDMS) to restore, enhance, and preserve a total of 9,195 linear feet (LF) of perennial and intermittent stream in Guilford County, NC. The Site provides 6,596 Stream Mitigation Units (SMUs) and 3.0 Buffer Mitigation Units (BMUs). This site is located in the Reedy Fork Watershed within Cape Fear River Basin Hydrologic Unit Code (HUC) 03030002 (Cape Fear 02) near Ossipee, NC (Figure 1). The streams are all unnamed tributaries (UT) to Reedy Fork and are referred to herein as UT1, UT1A, UT1B, and UT2. The Site also includes 3.0 acres of riparian buffer restoration along Reedy Fork and UT1.

The Site is located within the Jordan Lake Water Supply Watershed which has been designated as a Nutrient Sensitive Water. The Site's watershed is within Cape Fear local watershed HUC 03030002020070, which was not identified as a Cape Fear 02 Targeted Local Watershed (TLW) in NCDMS's 2009 Cape Fear River Basin Restoration Priority (RBRP) plan; however, this local watershed was later designated as a Targeted Resource Area (TRA) in the 2011 Request for Proposals (RFP) in the Cape Fear 02. The Agony Acres Mitigation Site fully supports the Cataloging Unit (CU)-wide functional objectives stated in the 2011 RFP to reduce and control nutrient inputs, reduce and control sediment inputs, and protect and augment Significant Natural Heritage Areas in the Cape Fear 02 River Basin. The Project will contribute to meeting the CU-wide Functional Improvement Objectives by establishing the following project goals:

- Reduce sediment inputs by removing cattle from streams and restoring degraded and eroding stream channels;
- Return a network of streams to a stable form that is capable of supporting biological functions;
- Reduce fecal coliform, nitrogen, and phosphorous inputs through removing cattle from streams and establishing and augmenting a forested riparian corridor;
- Protect existing high quality streams and forested buffers; and
- Improve and protect hydrologic inputs to the adjacent Reedy Fork Aquatic Habitat Significant Natural Heritage Area.

The project is helping meet the goals for the watershed outlined in the RBRP and provide numerous ecological benefits within the Cape Fear River Basin. While many of these benefits are limited to the Agony Acres project area, others, such as pollutant removal, reduced sediment loading, and improved aquatic and terrestrial habitat, have farther-reaching effects.

Stream restoration and enhancement construction efforts were completed in December 2014. Baseline as-built monitoring activities (MY0) were completed between October and December 2014. A conservation easement is in place on 30.78 acres of stream and riparian corridors to protect them in perpetuity.

Monitoring Year 1 (MY1) assessment and site visits were completed between March and October, 2015 to assess the conditions of the project. Overall, the Site has met the required vegetation, and stream success criteria for MY1. The overall average stem density for the Site at MY1 is 645 stems/ acre which is greater than the 320 stems/ acre density required for MY3. All restored and enhanced streams are stable and functioning as designed. UT1B has two pressure transducers installed to monitor stream flow. Baseflow must be present for at least some portion of the year (most likely in the winter/early spring) during years with normal rainfall conditions. Both stream gages on UT1B met the hydrologic criteria for MY1 (Appendix 5).

AGONY ACRES MITIGATION SITE
Monitoring Year 1 Annual Report

TABLE OF CONTENTS

Section 1: PROJECT OVERVIEW 1

 1.1 Project Goals and Objectives 1

 1.2 Monitoring Year 1 Data Assessment..... 3

 1.2.1 Vegetative Assessment 3

 1.2.2 Vegetation Areas of Concern 4

 1.2.3 Stream Assessment..... 4

 1.2.4 Stream Areas of Concern 4

 1.2.5 Hydrology Assessment..... 4

 1.2.6 Maintenance Plan 4

 1.3 Monitoring Year 1 Summary..... 5

Section 2: METHODOLOGY..... 6

Section 3: REFERENCES 7

APPENDICES

Appendix 1	General Tables and Figures
Figure 1	Project Vicinity Map
Figure 2	Project Component/ Asset Map
Table 1	Project Components and Mitigation Credits
Table 2	Project Activity and Reporting History
Table 3	Project Contact Table
Table 4	Project Information and Attributes
Appendix 2	Visual Assessment Data
Figures 3.0 - 3.3	Integrated Current Condition Plan View
Tables 5a-d	Visual Stream Morphology Stability Assessment Table
Table 6	Vegetation Condition Assessment Table
Stream Photographs	
Vegetation Photographs	
Appendix 3	Vegetation Plot Data
Table 7	Vegetation Plot Criteria Attainment
Table 8	CVS Vegetation Plot Metadata
Table 9	Planted and Total Stem Counts
Appendix 4	Morphological Summary Data and Plots
Tables 10a-d	Baseline Stream Data Summary
Table 11	Morphology and Hydraulic Summary (Dimensional Parameters – Cross Section)
Tables 12a-f	Monitoring Data – Stream Reach Data Summary
Cross Section Plots	
Reachwide and Cross Section Pebble Count Plots	
Appendix 5	Hydrology Summary Data and Plots
Table 13	Verification of Bankfull Events
Monthly Rainfall Data	
Stream Flow Stage Plots and Stream Flow Gage Plots	
Bankfull Verification Photos	

Section 1: PROJECT OVERVIEW

The Agony Acres Mitigation Site (Site) is located in northeastern Guilford County, north of Gibsonville (Figure 1). From Gibsonville take NC 61 north 5.5 miles. Turn right on Sockwell Road and travel 1.4 miles. The project site is located north of Sockwell Road and is bound on the north by Reedy Fork. The Site is located in the Carolina Slate Belt of the Piedmont Physiographic Province. The project watershed is classified as approximately 65% managed herbaceous cover, 30% mixed upland hardwoods, 3% cultivated, 2% southern yellow pine, and the remaining 1% is low intensity development. The drainage area for the Agony Acres Mitigation Site is 358 acres.

The Site is located in the Reedy Fork Watershed within the Jordan Lake Water Supply Watershed which has been designated a Nutrient Sensitive Water. The project streams flow directly into Reedy Fork which flows into the Haw River and eventually into the Jordan Lake Reservoir. The Site's watershed is within Hydrologic Unit Code (HUC) 03030002020070 which was not identified as a Cape Fear 02 Targeted Local Watershed (TLW) in NCDMS's 2009 Cape Fear River Basin Restoration Priority (RBRP) plan; however, this HUC was later designated as a Targeted Resource Area (TRA) in the 2011 Request for Proposals (RFP) in the Cape Fear 02. The Site connects to Reedy Fork and three separate but connected Significant Natural Heritage areas. Reedy Fork Aquatic Habitat, Reedy Fork Slopes at NC 61, and Altamahaw Alluvial Forest are all listed on the NC Natural Heritage GIS database and are immediately adjacent to the Site. There are also records for several state threatened, special concern, and significantly rare mussel species in Reedy Fork.

NCDMS completed a Local Watershed Plan (LWP) in 2008 on the HUC immediately downstream which begins at the confluence of Reedy Fork and the Haw River and includes Travis and Tickle Creeks. The Site is located less than one mile outside of the LWP area and has a very similar land use pattern. The 2008 Little Alamance, Travis, and Tickle Creeks LWP identified nutrient inputs from agriculture and stream bank erosion in altered reaches as major stressors within this TLW. The Site was identified as a stream and buffer restoration and cattle exclusion opportunity to improve water quality and buffers within the TRA.

The Site consists of four tributaries to Reedy Fork which are located within the North Carolina Division of Water Resources (NCDWR) subbasin 03-06-02 of the Cape Fear River Basin. The project stream reaches include UT1, UT1A, UT1B, and UT2.

Mitigation work within the Site included restoration, enhancement, and preservation of 9,195 linear feet (LF) of perennial and intermittent stream channel and 3.0 acres (ac) of riparian buffer restoration. The Site provides 6,596 Stream Mitigation Units (SMUs) and 3.0 Buffer Mitigation Units (BMUs). The stream areas were also planted with native vegetation to improve habitat and protect water quality. Construction activities were completed by Land Mechanic Designs, Inc. in September 2014. Planting and seeding activities were completed by Bruton Natural Systems, Inc. in December 2014. Directions and a map of the Site are provided in Figure 1 and project components are illustrated for the Site in Figure 2.

1.1 Project Goals and Objectives

Prior to construction activities, the stream channels exhibited varying degrees of degradation across the Site. The Site was used as agricultural and pasture land and most of the buffers had been reduced to narrow corridors. Cattle had free access to the streams, which resulted in sporadic degraded stream banks and poor bed forms.

The stream channels on the Site that were restored were previously incised and overwidened in many locations, likely as a result of historic channelization. The alterations of the Site to promote cattle

grazing and farming resulted in elimination of many of the ecological functions of this small stream complex. Specifically, functional losses at the Site included degraded aquatic habitat, altered hydrology (related to loss of floodplain connection and lowered water table), and reduction of quality and amount of riparian wetland habitats and related water quality benefits. Ongoing bank erosion was also occurring at some locations due to high, overly steep banks and lack of bank vegetation. Table 4 in Appendix 1 and Tables 10a-d in Appendix 4 present the pre-restoration conditions in detail.

The mitigation project is intended to provide numerous ecological benefits within the Cape Fear River Basin. While many of these benefits are limited to the Agony Acres Mitigation Site project area, others, such as pollutant removal and improved aquatic and terrestrial habitat, have more far-reaching effects. Expected improvements to water quality and ecological processes are outlined below as project goals and objectives. These project goals were established and completed with careful consideration of goals and objectives that were described in the RBRP and to meet the North Carolina Division of Mitigation Service's (NCDMS) mitigation needs while maximizing the ecological and water quality uplift within the watershed.

The following project specific goals established in the Agony Acres Mitigation Plan (Wildlands, 2014) include:

- Reduce sediment inputs by removing cattle from streams and restoring degraded and eroding stream channels;
- Return a network of streams to a stable form that is capable of supporting biological functions important to sensitive species within and adjacent to the project site;
- Reduce fecal coliform, nitrogen, and phosphorous inputs through removing cattle from streams and establishing and augmenting a forested riparian corridor;
- Protect existing high quality streams and forested buffers that provide habitat important to sensitive species within and adjacent to the project site;
- Improve and protect hydrologic inputs to the adjacent Reedy Fork Aquatic Habitat Significant Natural Heritage Area; and
- Improve and protect hydrologic inputs to Reedy Fork, which is listed as impaired on the 2012 NC 303(d) list for impaired aquatic life and for elevated fecal coliform levels.

The project goals will be addressed through the following project objectives:

- On-site nutrient inputs were decreased by removing cattle from streams, re-establishing floodplain connectivity, and filtering on-site runoff through buffer zones. Off-site nutrient input will be absorbed on-site by filtering flood flows through restored floodplain areas, where flood flow will spread through native vegetation. Vegetation is expected to uptake excess nutrients.
- Stream bank erosion which contributes sediment load to the creeks was greatly reduced, if not eliminated, in the project area. Eroding stream banks were stabilized using bioengineering, natural channel design techniques, and grading to reduce bank angles and bank height. Storm flow containing grit and fine sediment is filtered through restored floodplain areas, where flow will spread through native vegetation. Spreading flood flows also reduces velocity and allows sediment to settle out. Sediment transport capacity of restored reaches was improved so that capacity balances more closely to load. Sediment load reduction will be monitored through assessing bank stability with cross section surveys and visual assessment through photo documentation which serves as an accepted surrogate for direct turbidity measurements.
- Restored riffle/pool sequences promote aeration of water and create deep water zones, helping to lower water temperature. Establishment and maintenance of riparian buffers creates long-



term shading of the channel flow to minimize thermal heating. Lower water temperatures will help maintain dissolved oxygen concentrations.

- In-stream structures were constructed to improve habitat diversity and trap detritus. Wood habitat structures were included in the stream as part of the restoration design. Such structures include log drops and rock structures that incorporate woody debris and native onsite rock.
- Adjacent buffer and riparian habitats were restored with native vegetation as part of the project. Native vegetation provides cover and food for terrestrial creatures. Native plant species were planted and invasive species treated. Eroding and unstable areas were stabilized with vegetation as part of this project.
- The restored land is protected in perpetuity through a conservation easement.

The design streams were restored to the appropriate form based on the surrounding landscape, climate, and natural vegetation communities but also with strong consideration to existing watershed conditions and trajectory. Specifically, the site design was developed to restore a small stream complex directly adjacent to Reedy Fork. Other key factors addressed in the design were to create stable habitats, improve riparian buffers, and restore the natural migration patterns for fish spawning. Figure 2 and Table 1 in Appendix 1 present the stream mitigation components for the Agony Acres Mitigation Site.

The final mitigation plan was submitted and accepted by the NCDMS in March 2014. Construction activities were completed by Land Mechanic Designs, Inc. in September 2014. The planting was completed by Bruton Natural Systems, Inc. in December 2014. The baseline as-built survey was completed by Kee Mapping and Surveying, in October 2014. Annual monitoring will be conducted for seven years with the close-out anticipated to occur in 2022 given the success criteria are met. Appendix 1 provides more detailed project activity, history, contact information, and watershed/site background information for this project.

1.2 Monitoring Year 1 Data Assessment

Annual monitoring and quarterly site visits were conducted during MY1 to assess the condition of the project. The stream and buffer success criteria for the Site follow the approved success criteria presented in the Agony Acres Mitigation Plan (Wildlands, 2014).

1.2.1 Vegetative Assessment

Planted woody vegetation is being monitored in accordance with the guidelines and procedures developed by the Carolina Vegetation Survey-NCDMS Level 2 Protocol (Lee et al., 2006). A total of 16 vegetation plots were established during the baseline monitoring within the project easement areas. All of the plots were installed using a standard 10 meter by 10 meter plot. The final vegetative success criteria for the stream restoration and enhancement areas will be the survival of 210 planted stems per acre in the riparian corridor at the end of the required monitoring period (MY7). The interim measure of vegetative success will be the survival of at least 320 planted stems per acre at the end of the third monitoring year (MY3) and at least 260 stems per acre at the end of the fifth year of monitoring (MY5). Planted vegetation must average 10 feet in height in each plot at the end of the seventh year of monitoring. If this success criteria is met by MY5 and stem density is trending towards success (i.e., no less than 260 five year old stems/acre), monitoring of vegetation on the Site may be terminated provided written approval is provided by the United States Army Corps of Engineers in consultation with the NC Interagency Review Team. The final vegetative success criteria for the buffer restoration areas will be the survival of 320 planted stems per acre in the riparian corridor at the end of the required monitoring period (MY5). However, Wildlands plans to monitor these areas the same as the rest of the project for seven years and have the same success criteria of 210 stems per acre at the end of MY7.

The MY1 vegetative survey was completed in September 2015. The 2015 vegetation monitoring resulted in an average stem density of 645 stems per acre, which is greater than the interim requirement of 320 stems/acre required at MY3, but approximately 1% less than the baseline density recorded at MY0, 650 stems/acre, in January 2015. There is an average of 16 stems per plot which has remained the same since MY0. All 16 of the plots are on track to meet the success criteria required for MY7 (Table 9, Appendix 3). Please refer to Appendix 2 for vegetation plot photographs and the vegetation condition assessment table and Appendix 3 for vegetation data tables.

1.2.2 Vegetation Areas of Concern

Tree of heaven (*Ailanthus altissima*) was observed growing sporadically in the easement downstream of the confluence of UT1 and UT1B. These seedlings were treated during MY1. This area will continue to be monitored for new seedlings and will be treated with the appropriate herbicide as needed. Since portions of the adjacent land is an organic farm, spraying herbicide is not allowed within 30 feet of active pasture or cropland. Any tree of heaven that is within 30 feet of active pasture or cropland will be pulled out of the ground and no herbicides will be used.

1.2.3 Stream Assessment

Morphological surveys for the MY1 were conducted in May 2015. All streams within the Site are stable with little to no erosion and have met the success criteria for MY1. Please refer to Appendix 2 for the visual assessment table, Integrated Current Condition Plan View, and reference photographs. Refer to Appendix 4 for the morphological data and plots.

While there have been some minor post-construction adjustments within the restored channels; the cross sections show little to no change in the bankfull area, maximum depth, or width-to-depth ratio. Surveyed riffle cross sections fell within the parameters defined for channels of the appropriate Rosgen stream type. Pebble counts indicated coarser materials in the riffle features and smaller particles in the pool features.

Longitudinal profile surveys are not required on the project unless visual inspection indicates reach wide vertical stability concerns. Refer to Appendix 2 for the visual stability assessment table, CCPV map, and reference photographs. Refer to Appendix 4 for the morphological data and plots.

1.2.4 Stream Areas of Concern

No stream areas of concern were identified during MY1.

1.2.5 Hydrology Assessment

Two bankfull flow events must be documented on the restoration and enhancement reaches within the seven-year monitoring period. The two bankfull events must occur in separate years. In addition, the presence of baseflow must be documented along portions of UT1B constructed with a Priority I restoration approach. Baseflow must be present for at least some portion of the year (most likely in the winter/early spring) during years with normal rainfall conditions.

Multiple bankfull events were recorded during MY1 at the Site. UT1 and UT1B each showed two bankfull events, and UT1A and UT2 each recorded one bankfull event. Therefore, the Site has partially met this stream hydrology criteria. UT1B did show presence of baseflow for most of MY1. There were periods in the summer and fall where baseflow went below ground surface, but the rest of the year the channel had baseflow. UT1B met baseflow criteria for MY1. Refer to Appendix 5 for hydrologic data and graphs.

1.2.6 Maintenance Plan

No maintenance plan is necessary at this time.



1.3 Monitoring Year 1 Summary

Stream, vegetation, and hydrology criteria have been met for MY1 on the Site. All streams within the Site are stable and functioning as designed. The average stem density for the Site is on track to meeting the MY7 success criteria; all individual vegetation plots meet the MY1 success criteria as noted in CCPV. All streams on the Site have recorded bankfull events, and UT1B has shown the presence of baseflow for some portion of the year. Therefore, hydrology criteria has been met for MY1.

Summary information and data related to the performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Mitigation Plan documents available on NCDMS's website. All raw data supporting the tables and figures in the appendices are available from NCDMS upon request.



Section 2: METHODOLOGY

Geomorphic data was collected following the standards outlined in The Stream Channel Reference Site: An Illustrated Guide to Field Techniques (Harrelson et al., 1994) and in the Stream Restoration: A Natural Channel Design Handbook (Doll et al., 2003). All Integrated Current Condition Plan View Mapping was recorded using a Trimble handheld GPS with sub-meter accuracy and processed using Pathfinder and ArcView. Crest gages were installed in surveyed riffle cross sections and monitored quarterly. Hydrology attainment installation and monitoring methods are in accordance with the USACE (USACE, 2003) standards. Vegetation monitoring protocols followed the Carolina Vegetation Survey-NCDMS Level 2 Protocol (Lee et al., 2006). Reporting follows the NCDMS Monitoring Report Template and Guidance Version 1.3 (NCDMS, 2010).



Section 3: REFERENCES

- Doll, B.A., Grabow, G.L., Hall, K.A., Halley, J., Harman, W.A., Jennings, G.D., and Wise, D.E. 2003. Stream Restoration A Natural Channel Design Handbook.
- Harrelson, Cheryl C; Rawlins, C.L.; Potyondy, John P. 1994. *Stream Channel Reference Sites: An Illustrated Guide to Field Technique*. Gen. Tech. Rep. RM-245. Fort Collins, CO: U.S. Department of Agriculture, Forest Service, Rocky Mountain Forest and Range Experiment Station. 61 p.
- Lee, Michael T., Peet, Robert K., Steven D., Wentworth, Thomas R. 2006. CVS-DMS Protocol for Recording Vegetation Version 4.0. Retrieved from <http://www.ncdms.net/business/monitoring/veg/datasheets.htm>.
- Multi-Resolution Land Characteristics Consortium (MRLC). 2001. National Land Cover Database. <http://www.mrlc.gov/nlcd.php>
- North Carolina Division of Water Resources (NCDWR). 2011. Surface Water Classifications. <http://portal.ncdeq.org/web/wq/ps/csu/classifications>
- North Carolina Division of Water Resources, 2005. Cape Fear River Basinwide Water Quality Plan. <http://h20.enr.state.nc.us/basinwide/draftCPFApril2005.htm>
- Rosgen, D. L. 1994. A classification of natural rivers. *Catena* 22:169-199.
- Rosgen, D.L. 1996. Applied River Morphology. Pagosa Springs, CO: Wildland Hydrology Books.
- United States Army Corps of Engineers (USACE), 2003. Stream Mitigation Guidelines. USACE, NCDEQ-DWR, USEPA, NCWRC.
- United States Geological Survey (USGS), 1998. North Carolina Geology. <http://www.geology.enr.state.nc.us/usgs/carolina.htm>
- Wildlands Engineering, Inc (2014). Agony Acres Mitigation Site Mitigation Plan. NCDMS, Raleigh, NC.



APPENDIX 1. General Tables and Figures


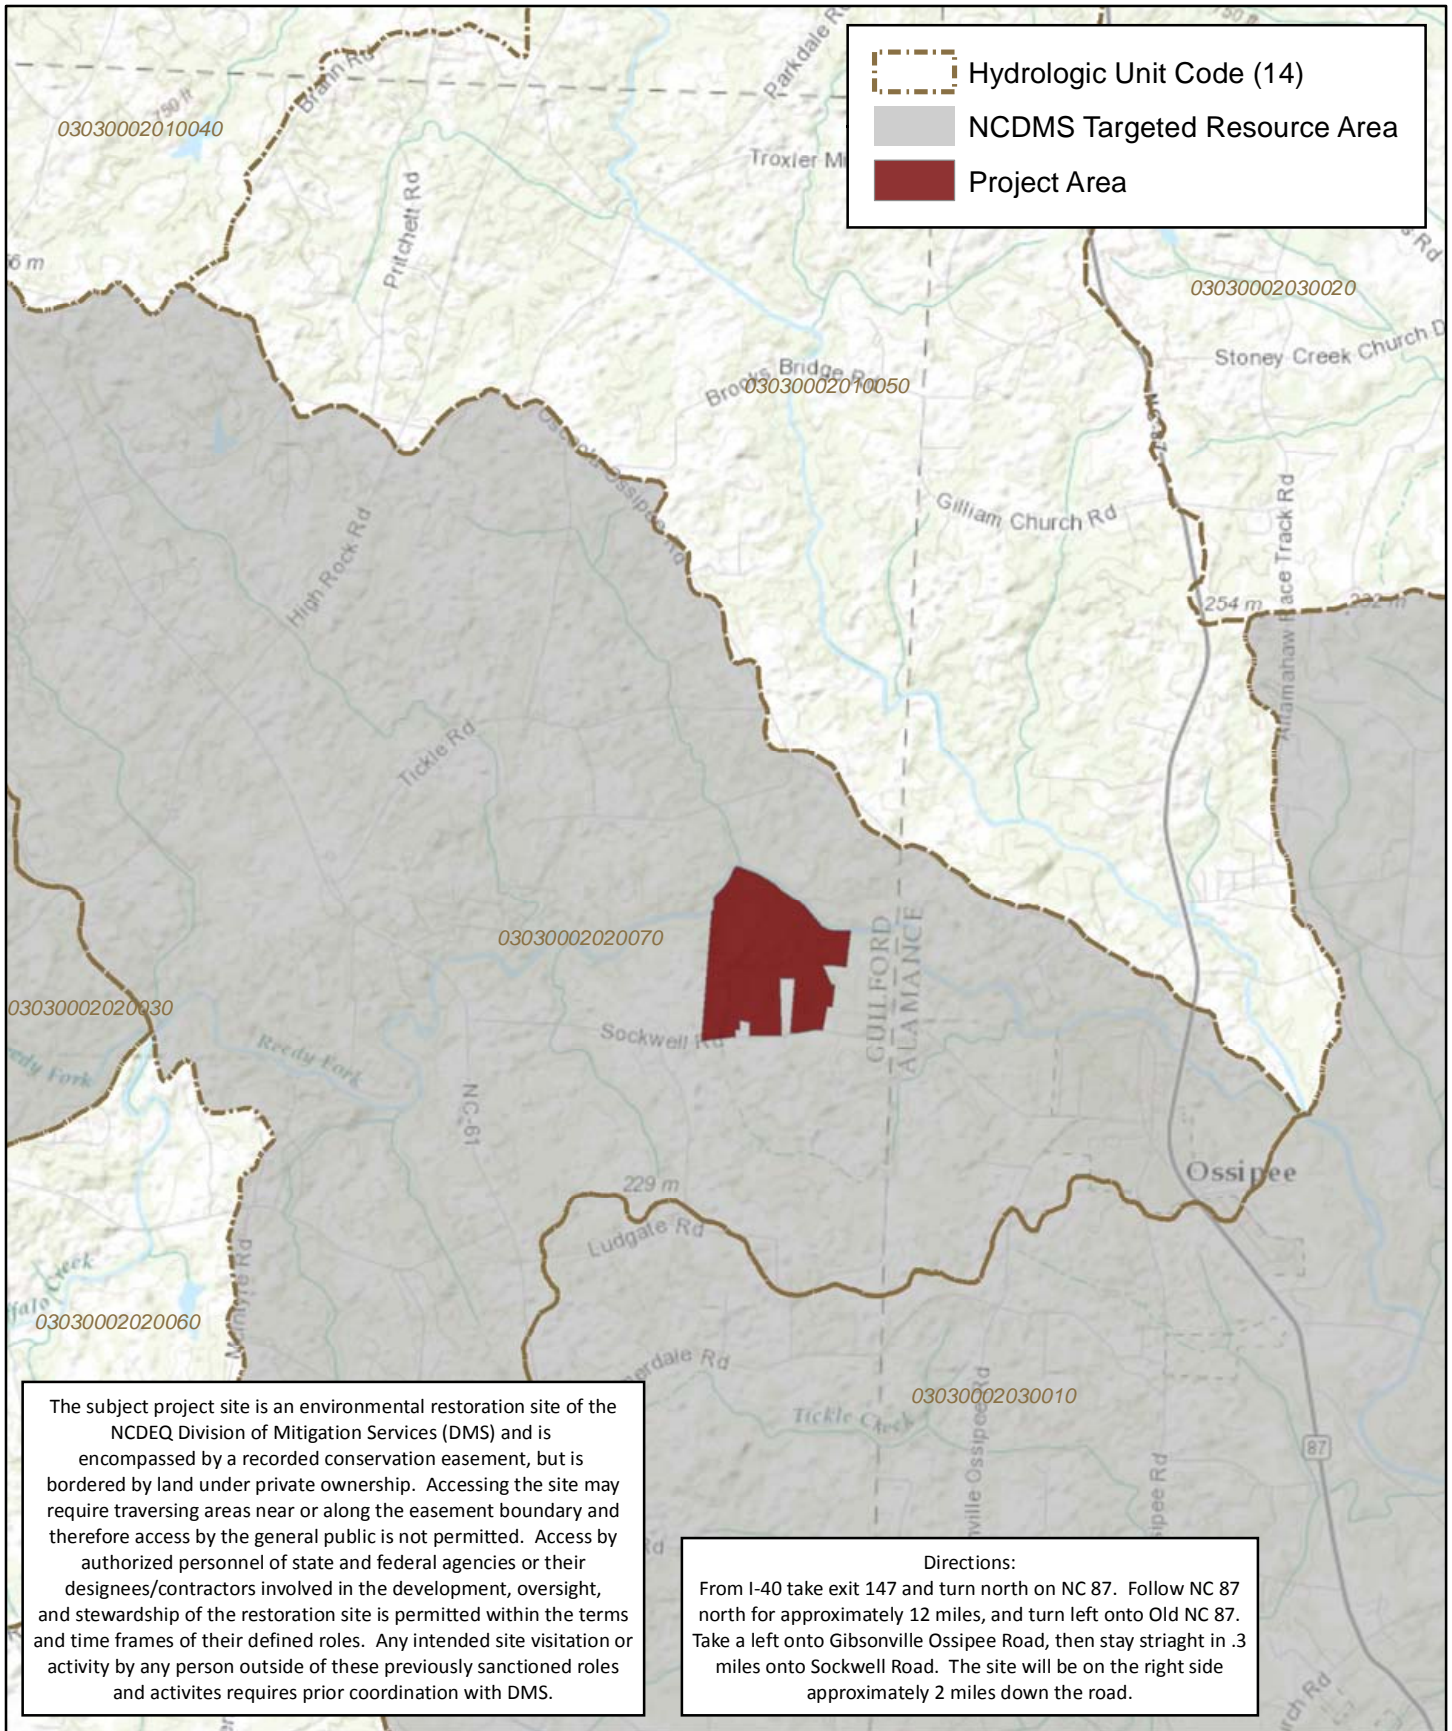


Figure 1 Project Vicinity Map
 Agony Acres Mitigation Site
 NCDMS Project No. 95716
 Monitoring Year 1 - 2015

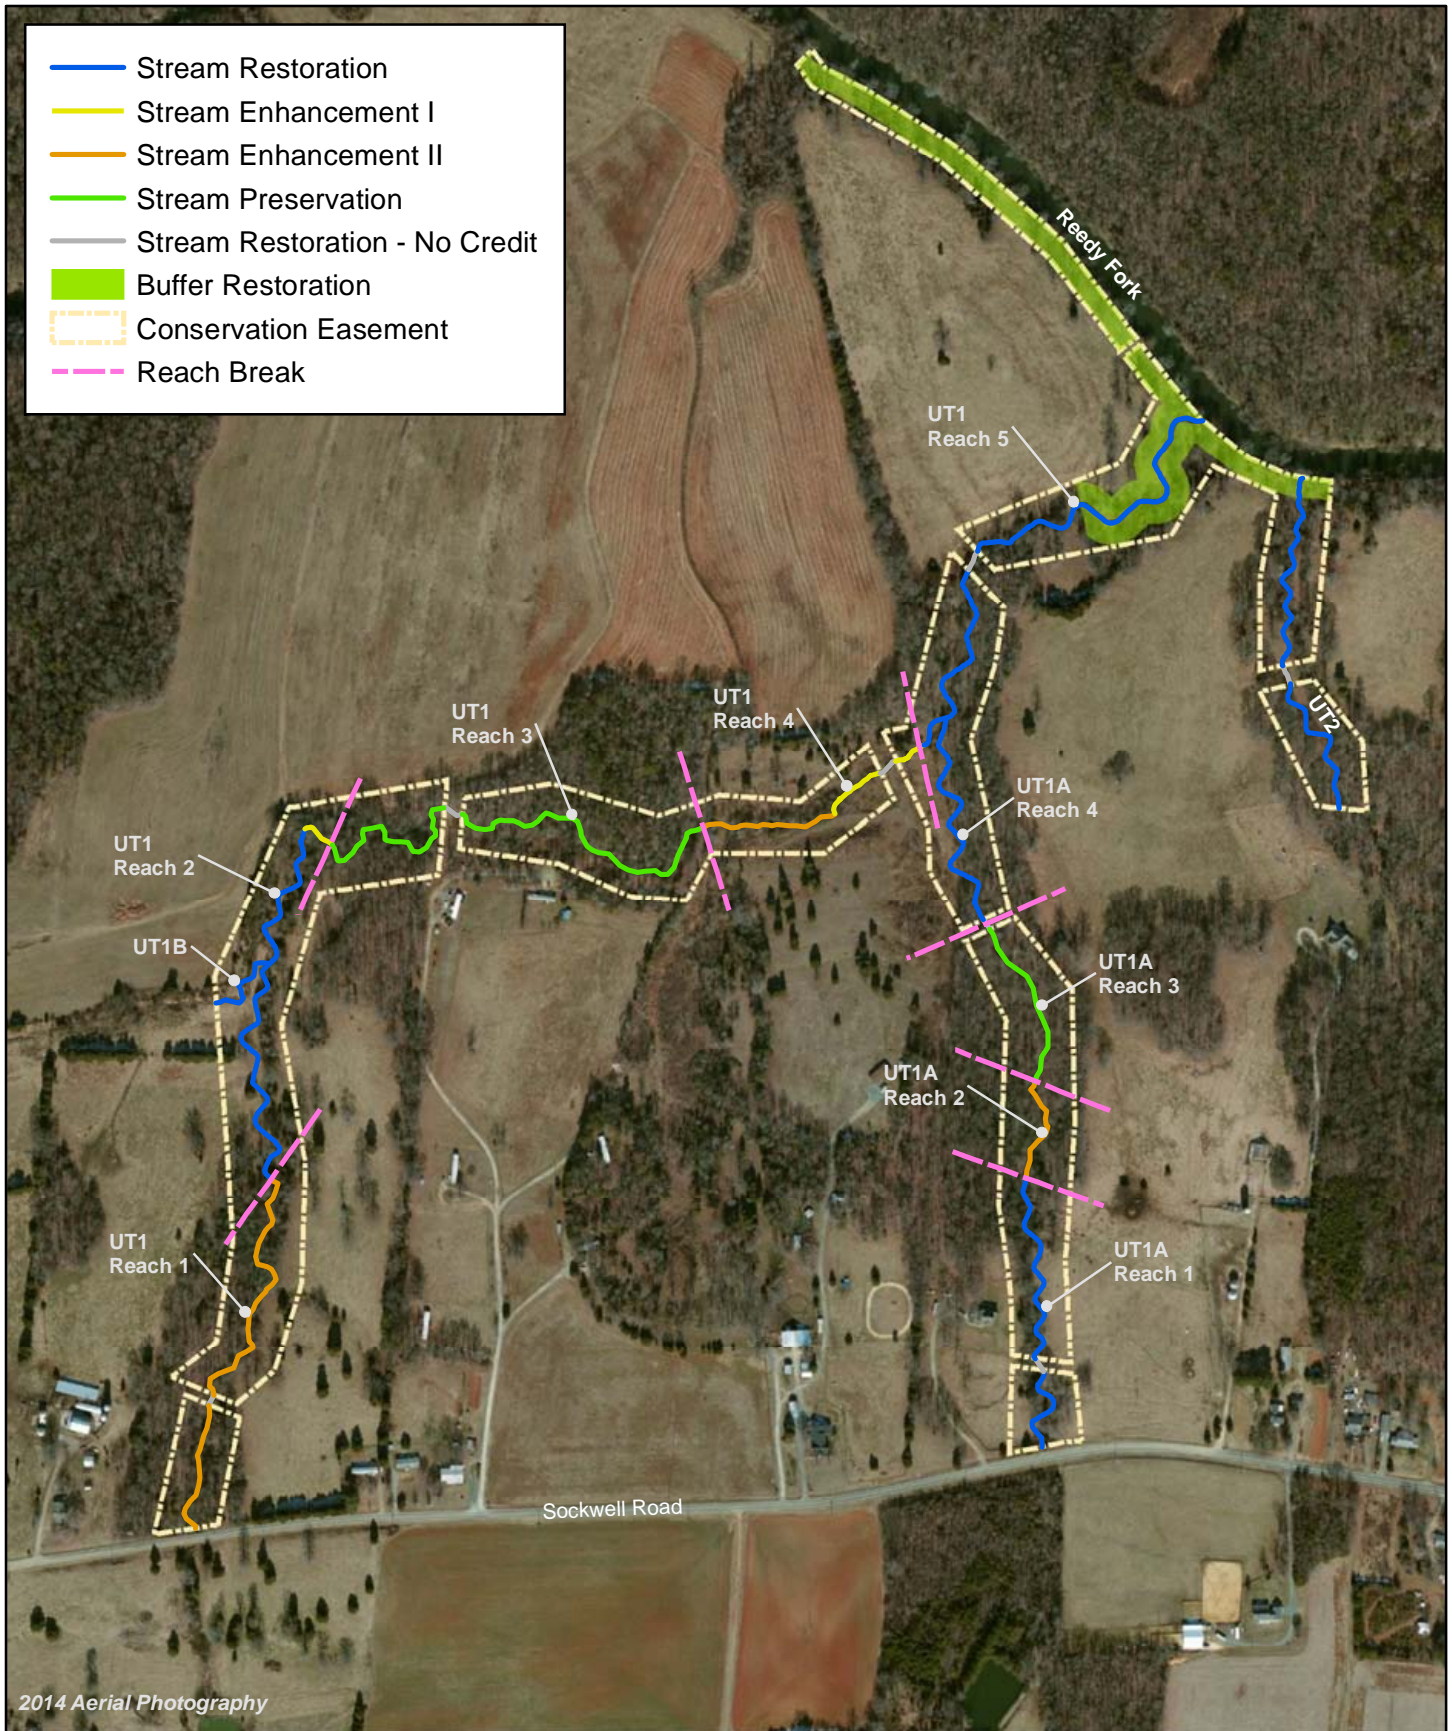


Figure 2 Project Component/ Asset Map
 Agony Acres Mitigation Site
 NCDMS Project No.95716
 Monitoring Year 1 - 2015




Table 1. Project Components and Mitigation Credits
 Agony Acres Mitigation Site (NCDMS Project No.95716)
 Monitoring Year 1 - 2015

MITIGATION CREDITS									
	Stream		Riparian Wetland		Non-Riparian Wetland		Buffer	Nitrogen Nutrient Offset	Phosphorous Nutrient Offset
Type	R	RE	R	RE	R	RE			
Totals	6,235	361	N/A	N/A	N/A	N/A	3.0	N/A	N/A
PROJECT COMPONENTS									
Reach ID	As-Built Stationing/ Location	Existing Footage/ Acreage	Approach	Restoration or Restoration Equivalent	Restoration Footage/ Acreage	Mitigation Ratio	Credits (SMU/ WMU)		
STREAMS									
UT1-Reach 1 (DOT ROW)	100+00 to 100+14	14	EII	Enhancement (No Credit)	14	---	---		
UT1-Reach 1	100+14 to 103+62; 103+93 to 111+24	1,079	EII	Enhancement	1,079	2.5	432		
UT1-Reach 1 (Easement Break)	103+62 to 103+93	31	EII	Enhancement (No Credit)	31	---	---		
UT1-Reach 2	111+24 to 122+61	1,039	P1	Restoration	1,137	1	1,137		
UT1-Reach 2	122+61 to 123+54	93	EI	Enhancement	93	1.5	62		
UT1-Reach 3	123+54 to 128+73; 129+29 to 137+60	1,350		Preservation	1,350	5	270		
UT1-Reach 3 (Easement Break)	128+73 to 129+29	56		Preservation (No Credit)	56	---	---		
UT1-Reach 4	137+60 to 141+15	355	EII	Enhancement	355	2.5	142		
UT1-Reach 4	141+15 to 142+90; 143+44 to 144+29	260	EI	Enhancement	260	1.5	173		
UT1-Reach 4 (Easement Break)	142+90 to 143+44	54	EI	Enhancement (No Credit)	54	---	---		
UT1-Reach 5	144+29 to 150+08; 150+62 to 159+64	1,355	P1/2	Restoration	1,481	1	1,481		
UT1-Reach 5 (Easement Break)	150+08 to 150+62	65	P1	Restoration (No Credit)	54	---	---		
UT1A-Reach 1 (DOT ROW)	200+00 to 200+05	5	P1	Restoration (No Credit)	5	---	---		
UT1A-Reach 1	200+05 to 202+69; 203+09 to 208+57	738	P1	Restoration	812	1	812		
UT1A-Reach 1 (Easement Break)	202+69 to 203+09	32	P1	Restoration (No Credit)	40	---	---		
UT1A-Reach 2	208+57 to 211+49	292	EII	Enhancement	292	2.5	117		
UT1A-Reach 3	211+49 to 216+06	457		Preservation	457	5	91		
UT1A-Reach 3 (Easement Break)	216+06 to 216+36	30	EII	Enhancement (No Credit)	30	---	---		
UT1A-Reach 4	216+36 to 223+02	461	P1	Restoration	666	1	666		
UT1B	300+00 to 302+32	243	P1	Restoration	232	1	232		
UT2	400+00 to 404+19; 404+70 to 410+32	975	P1	Restoration	981	1	981		
UT2 (Easement Break)	404+19 to 404+70	53	P1/2	Restoration (No Credit)	51	---	---		
COMPONENT SUMMATION									
Restoration Level	Stream (LF)	Riparian Wetland (acres)		Non-Riparian Wetland (acres)	Buffer (acres)	Upland (acres)			
		Riverine	Non-Riverine						
Restoration	5,309	-	-	-	3.0	-			
Enhancement		-	-	-	-	-			
Enhancement I	353								
Enhancement II	1,726								
Creation		-	-	-					
Preservation	1,807	-	-	-		-			
High Quality Preservation	-	-	-	-		-			

N/A: not applicable

Table 2. Project Activity and Reporting History
 Agony Acres Mitigation Site (NCDMS Project No.95716)
Monitoring Year 1 -2015

Activity or Report	Date Collection Complete	Completion or Scheduled Delivery
Mitigation Plan	October 2013- March 2014	March 2014
Final Design - Construction Plans	April 2014- June 2014	June 2014
Construction	June 2014- September 2014	September 2014
Temporary S&E mix applied to entire project area ¹	September 2014	September 2014
Permanent seed mix applied to reach/segments	September 2014	September 2014
Bare root and live stake plantings for reach/segments	December 2014	December 2014
Baseline Monitoring Document (Year 0)	October 2014- December 2014	February 2015
Year 1 Monitoring	March 2015- October 2015	December 2015
Year 2 Monitoring	2016	December 2016
Year 3 Monitoring	2017	December 2017
Year 4 Monitoring	2018	December 2018
Year 5 Monitoring	2019	December 2019
Year 6 Monitoring	2020	December 2020
Year 7 Monitoring	2021	December 2021

¹Seed and mulch is added as each section of construction is completed.

Table 3. Project Contact Table
 Agony Acres Mitigation Site (NCDMS Project No.95716)
Monitoring Year 1 - 2015

Designer Nicole Macaluso, PE, CFM	Wildlands Engineering, Inc. 312 West Millbrook Road, Suite 225 Raleigh, NC 27609 919.851.9986
Construction Contractor	Land Mechanic Designs, Inc. 126 Circle G Lane Willow Spring, NC 27592
Planting Contractor	Bruton Natural Systems, Inc P.O. Box 1197 Fremont, NC 27830
Seeding Contractor	Land Mechanic Designs, Inc. 126 Circle G Lane Willow Spring, NC 27592
Seed Mix Sources	Green Resource, LLC
Nursery Stock Suppliers	
Bare Roots	Dykes and Son Nursery
Live Stakes	Bruton Natural Systems, Inc
Monitoring Performers Monitoring, POC	Wildlands Engineering, Inc. Jason Lorch 919.851.9986, ext. 107


Table 4. Project Information and Attributes

Agony Acres Mitigation Site (NCDMS Project No.95716)

Monitoring Year 1 - 2015

PROJECT INFORMATION					
Project Name	Agony Acres Mitigation Site				
County	Guilford County				
Project Area (acres)	30.78 acres				
Project Coordinates (latitude and longitude)	36° 10' 40" N, 79° 33' 02" W				
PROJECT WATERSHED SUMMARY INFORMATION					
Physiographic Province	Piedmont				
River Basin	Cape Fear River				
USGS Hydrologic Unit 8-digit	03030002				
USGS Hydrologic Unit 14-digit	03030002020070				
DWR Sub-basin	03-06-02				
Project Drainage Area (acres)	358 acres				
Project Drainage Area Percentage of Impervious Area	<1%				
CGIA Land Use Classification	65% Managed Herbaceous Cover, 30% Mixed Upland Hardwoods, 3% Cultivated, 2% Southern Yellow Pine, <1% Low Intensity Development				
REACH SUMMARY INFORMATION					
Parameters	UT1 - Reaches 1 -3	UT1 - Reaches 4 & 5	UT1A	UT1B	UT2
Length of reach (linear feet) - Post-Restoration	3,760	2,204	2,302	232	1,032
Drainage area (acres)	228	358	103	61	61
NCDWR stream identification score	42.5	46.5	41	29.25	32.25
NCDWR Water Quality Classification	WS-V				
Morphological Description (stream type)	P	P	P/I	P	P
Evolutionary trend (Simon's Model) - Pre- Restoration	I, III	III, IV	I, II/III	II/III	II/III
Underlying mapped soils	Cecil sandy loam, Congaree loam, Coronaca clay loam, Enon fine sandy loam, Enon clay loam, Madison clay loam, Mecklenburg sandy clay loam, Wehadkee loam				
Drainage class	---	---	---	---	---
Soil Hydric status	---	---	---	---	---
Slope	---	---	---	---	---
FEMA classification	N/A				
Native vegetation community	Piedmont bottomland forest				
Percent composition exotic invasive vegetation -Post-Restoration	0%				
REGULATORY CONSIDERATIONS					
Regulation	Applicable?	Resolved?	Supporting Documentation		
Waters of the United States - Section 404	Yes	Yes	USACE Nationwide Permit No.27 and DWQ 401 Water Quality Certification No. 3885.		
Waters of the United States - Section 401	Yes	Yes	Certification No. 3885.		
Division of Land Quality (Dam Safety)	No	N/A	N/A		
Endangered Species Act	Yes	Yes	Agony Acres Mitigation Plan; Wildlands determined "no effect" on Guilford County listed endangered species.		
Historic Preservation Act	Yes	Yes	No historic resources were found to be impacted (letter from SHPO dated 1/15/13).		
Coastal Zone Management Act (CZMA)/Coastal Area Management Act (CAMA)	No	N/A	N/A		
FEMA Floodplain Compliance	N/A	N/A	The project streams do not have an associated regulatory floodplain; however portions of UT1, UT1A, and UT2 are located within the floodway and flood fringe of Reedy Fork (FEMA Zone AE, FIRM panels 8838 and 8848).		
Essential Fisheries Habitat	No	N/A	N/A		

APPENDIX 2. Visual Assessment Data

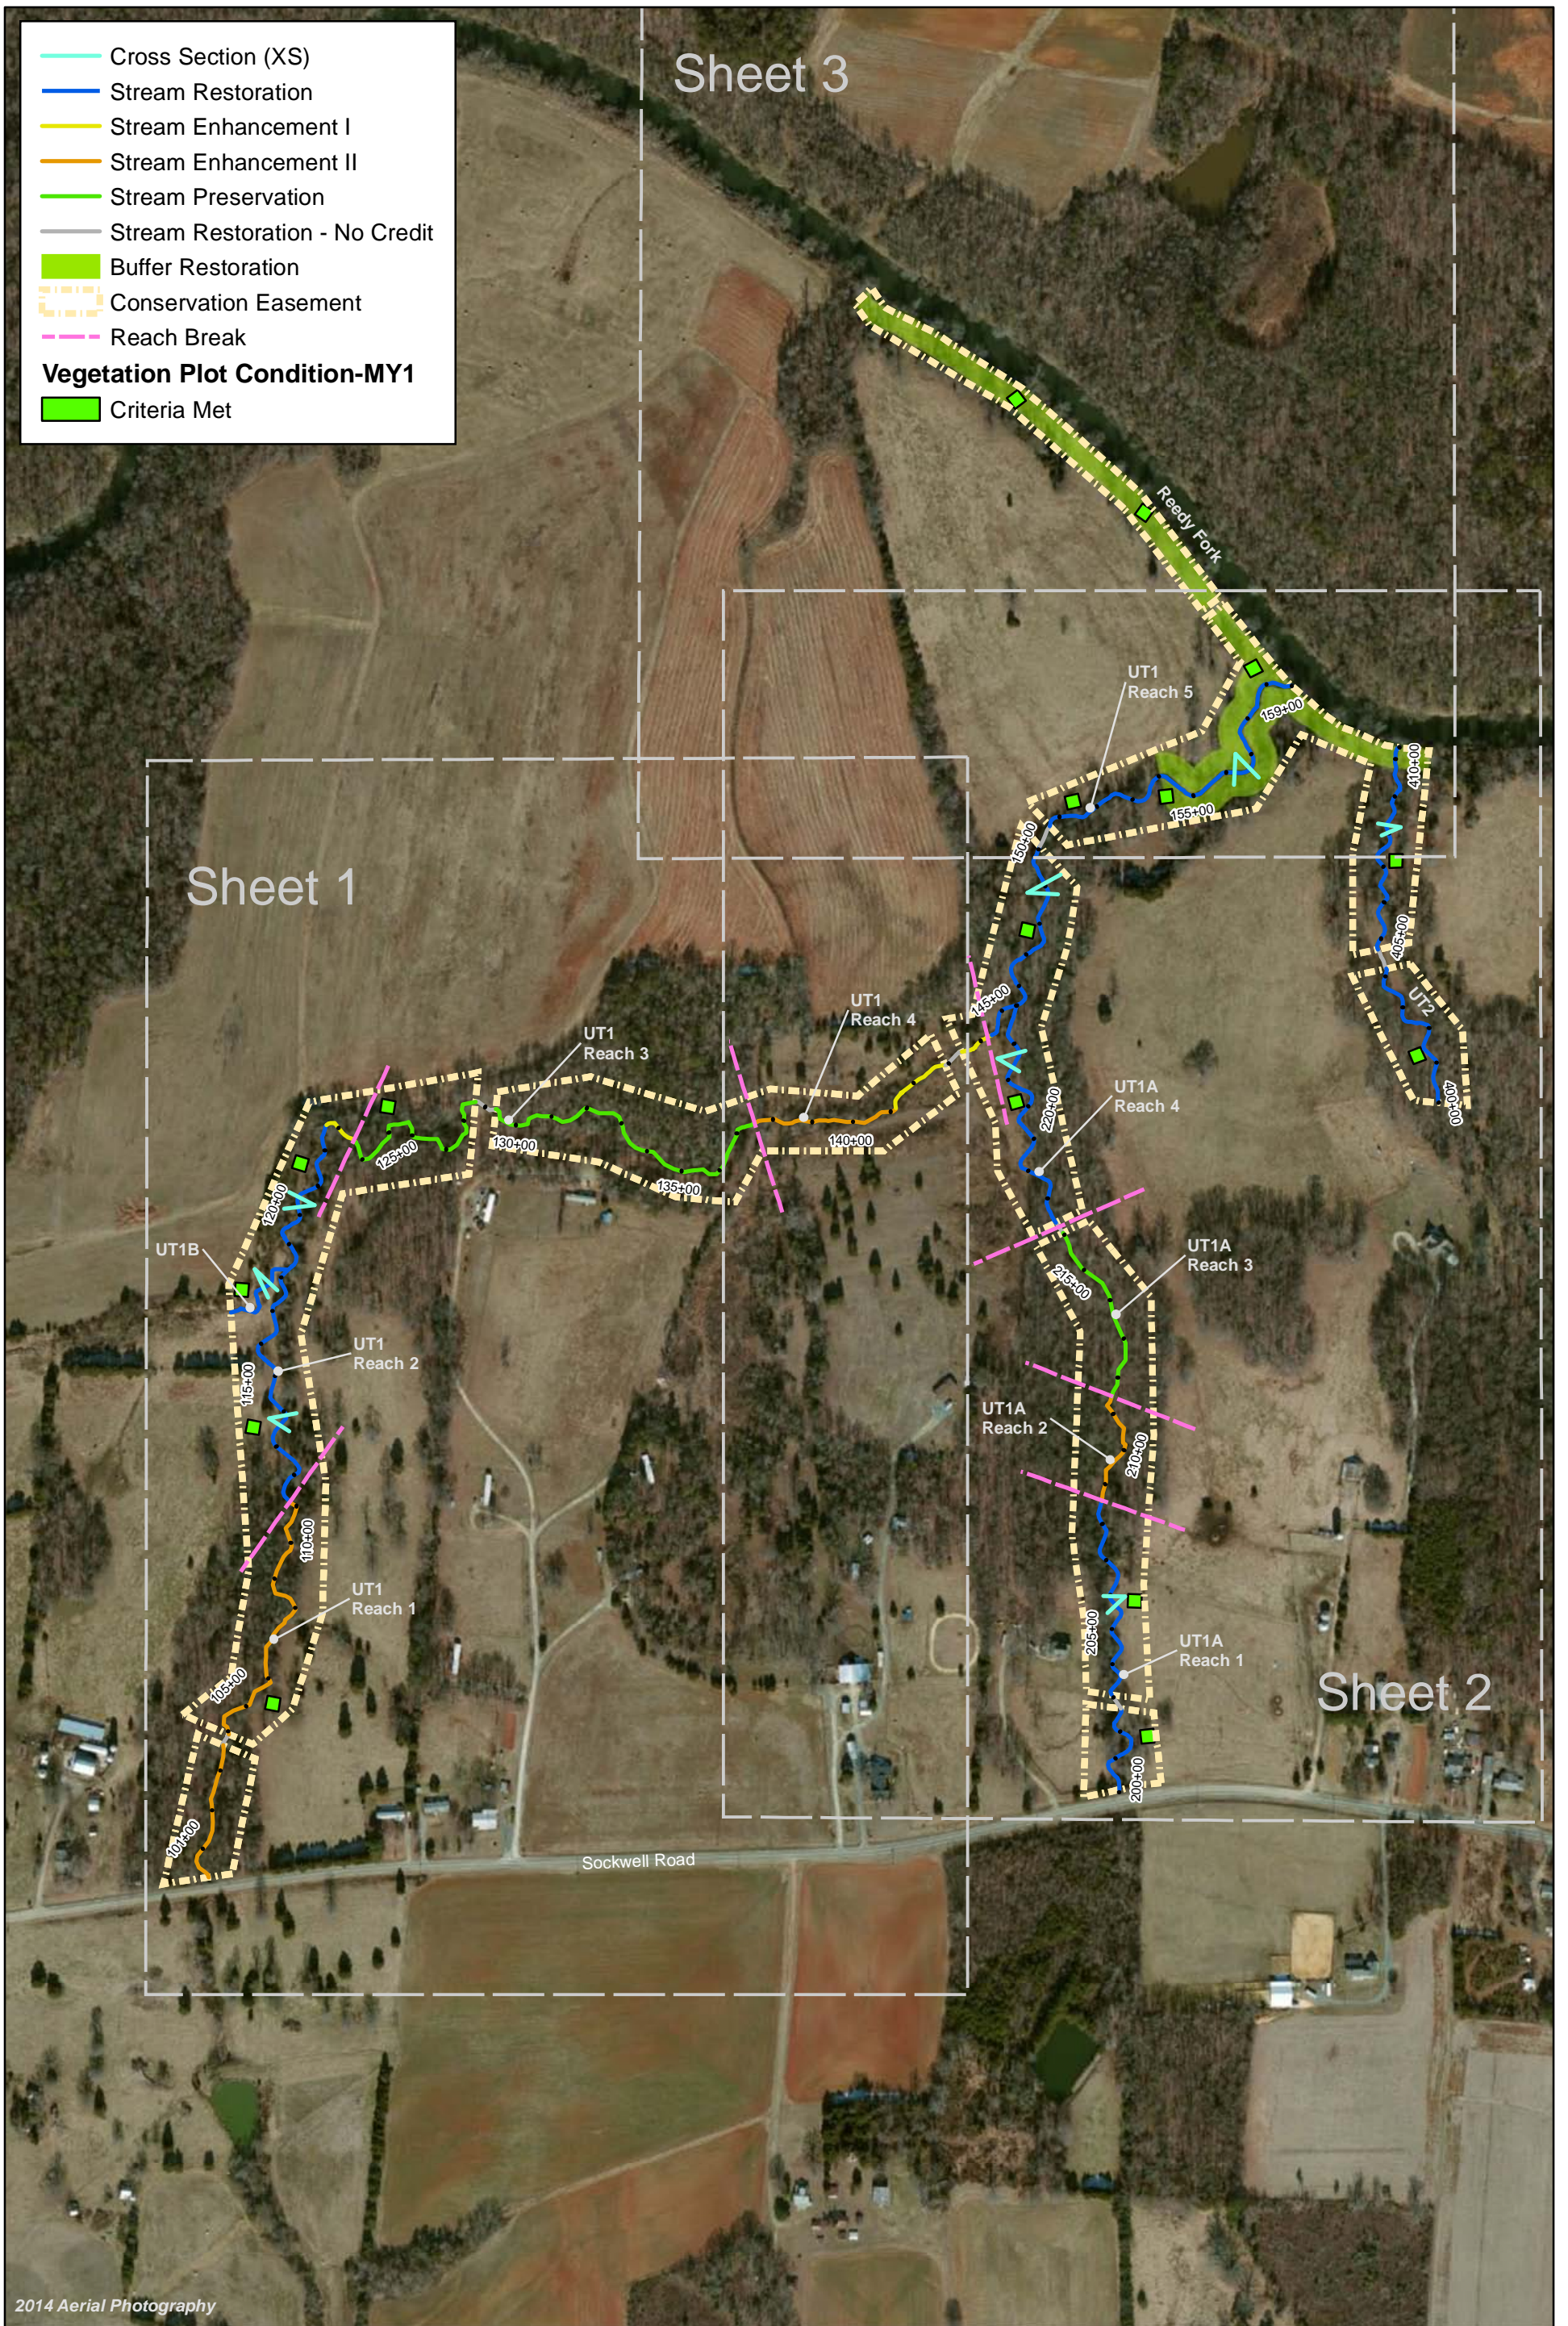

2014 Aerial Photography




0 250 500 Feet



Figure 3.0 Integrated Current Condition Plan View (Key)

Agony Acres Mitigation Site
 NCDMS Project No.95716
 Monitoring Year 1 - 2015

Guilford County, NC

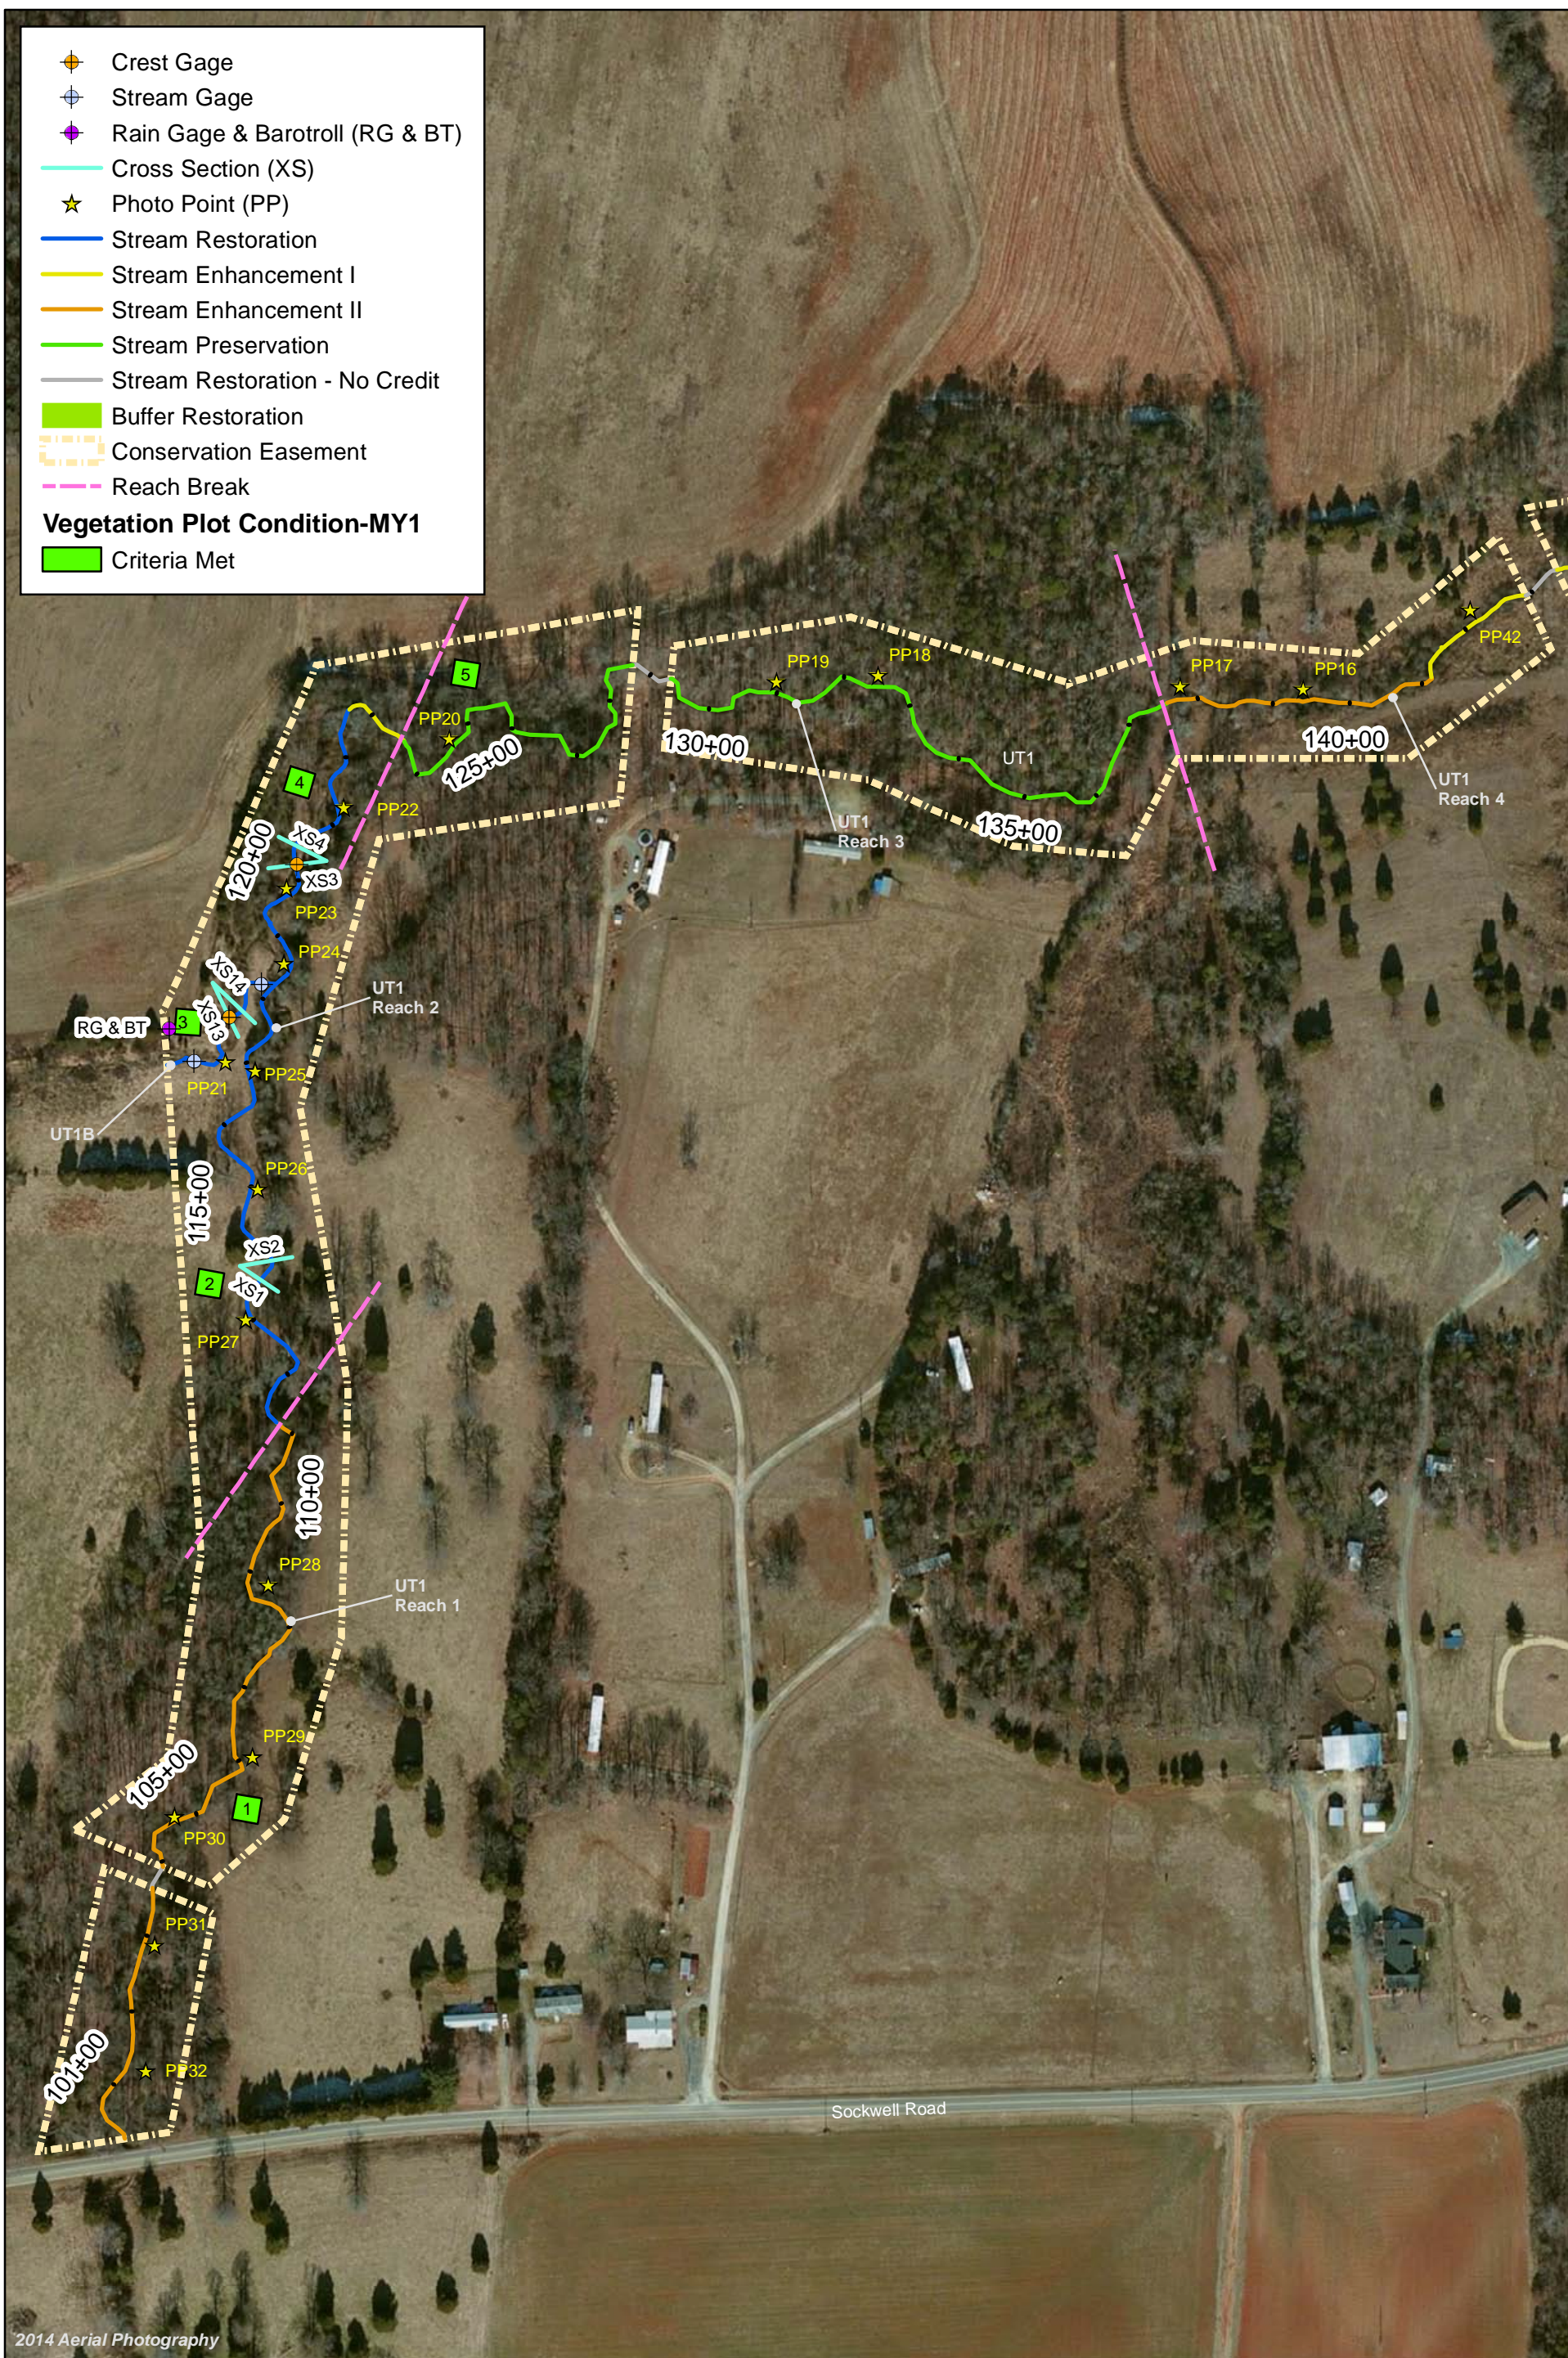

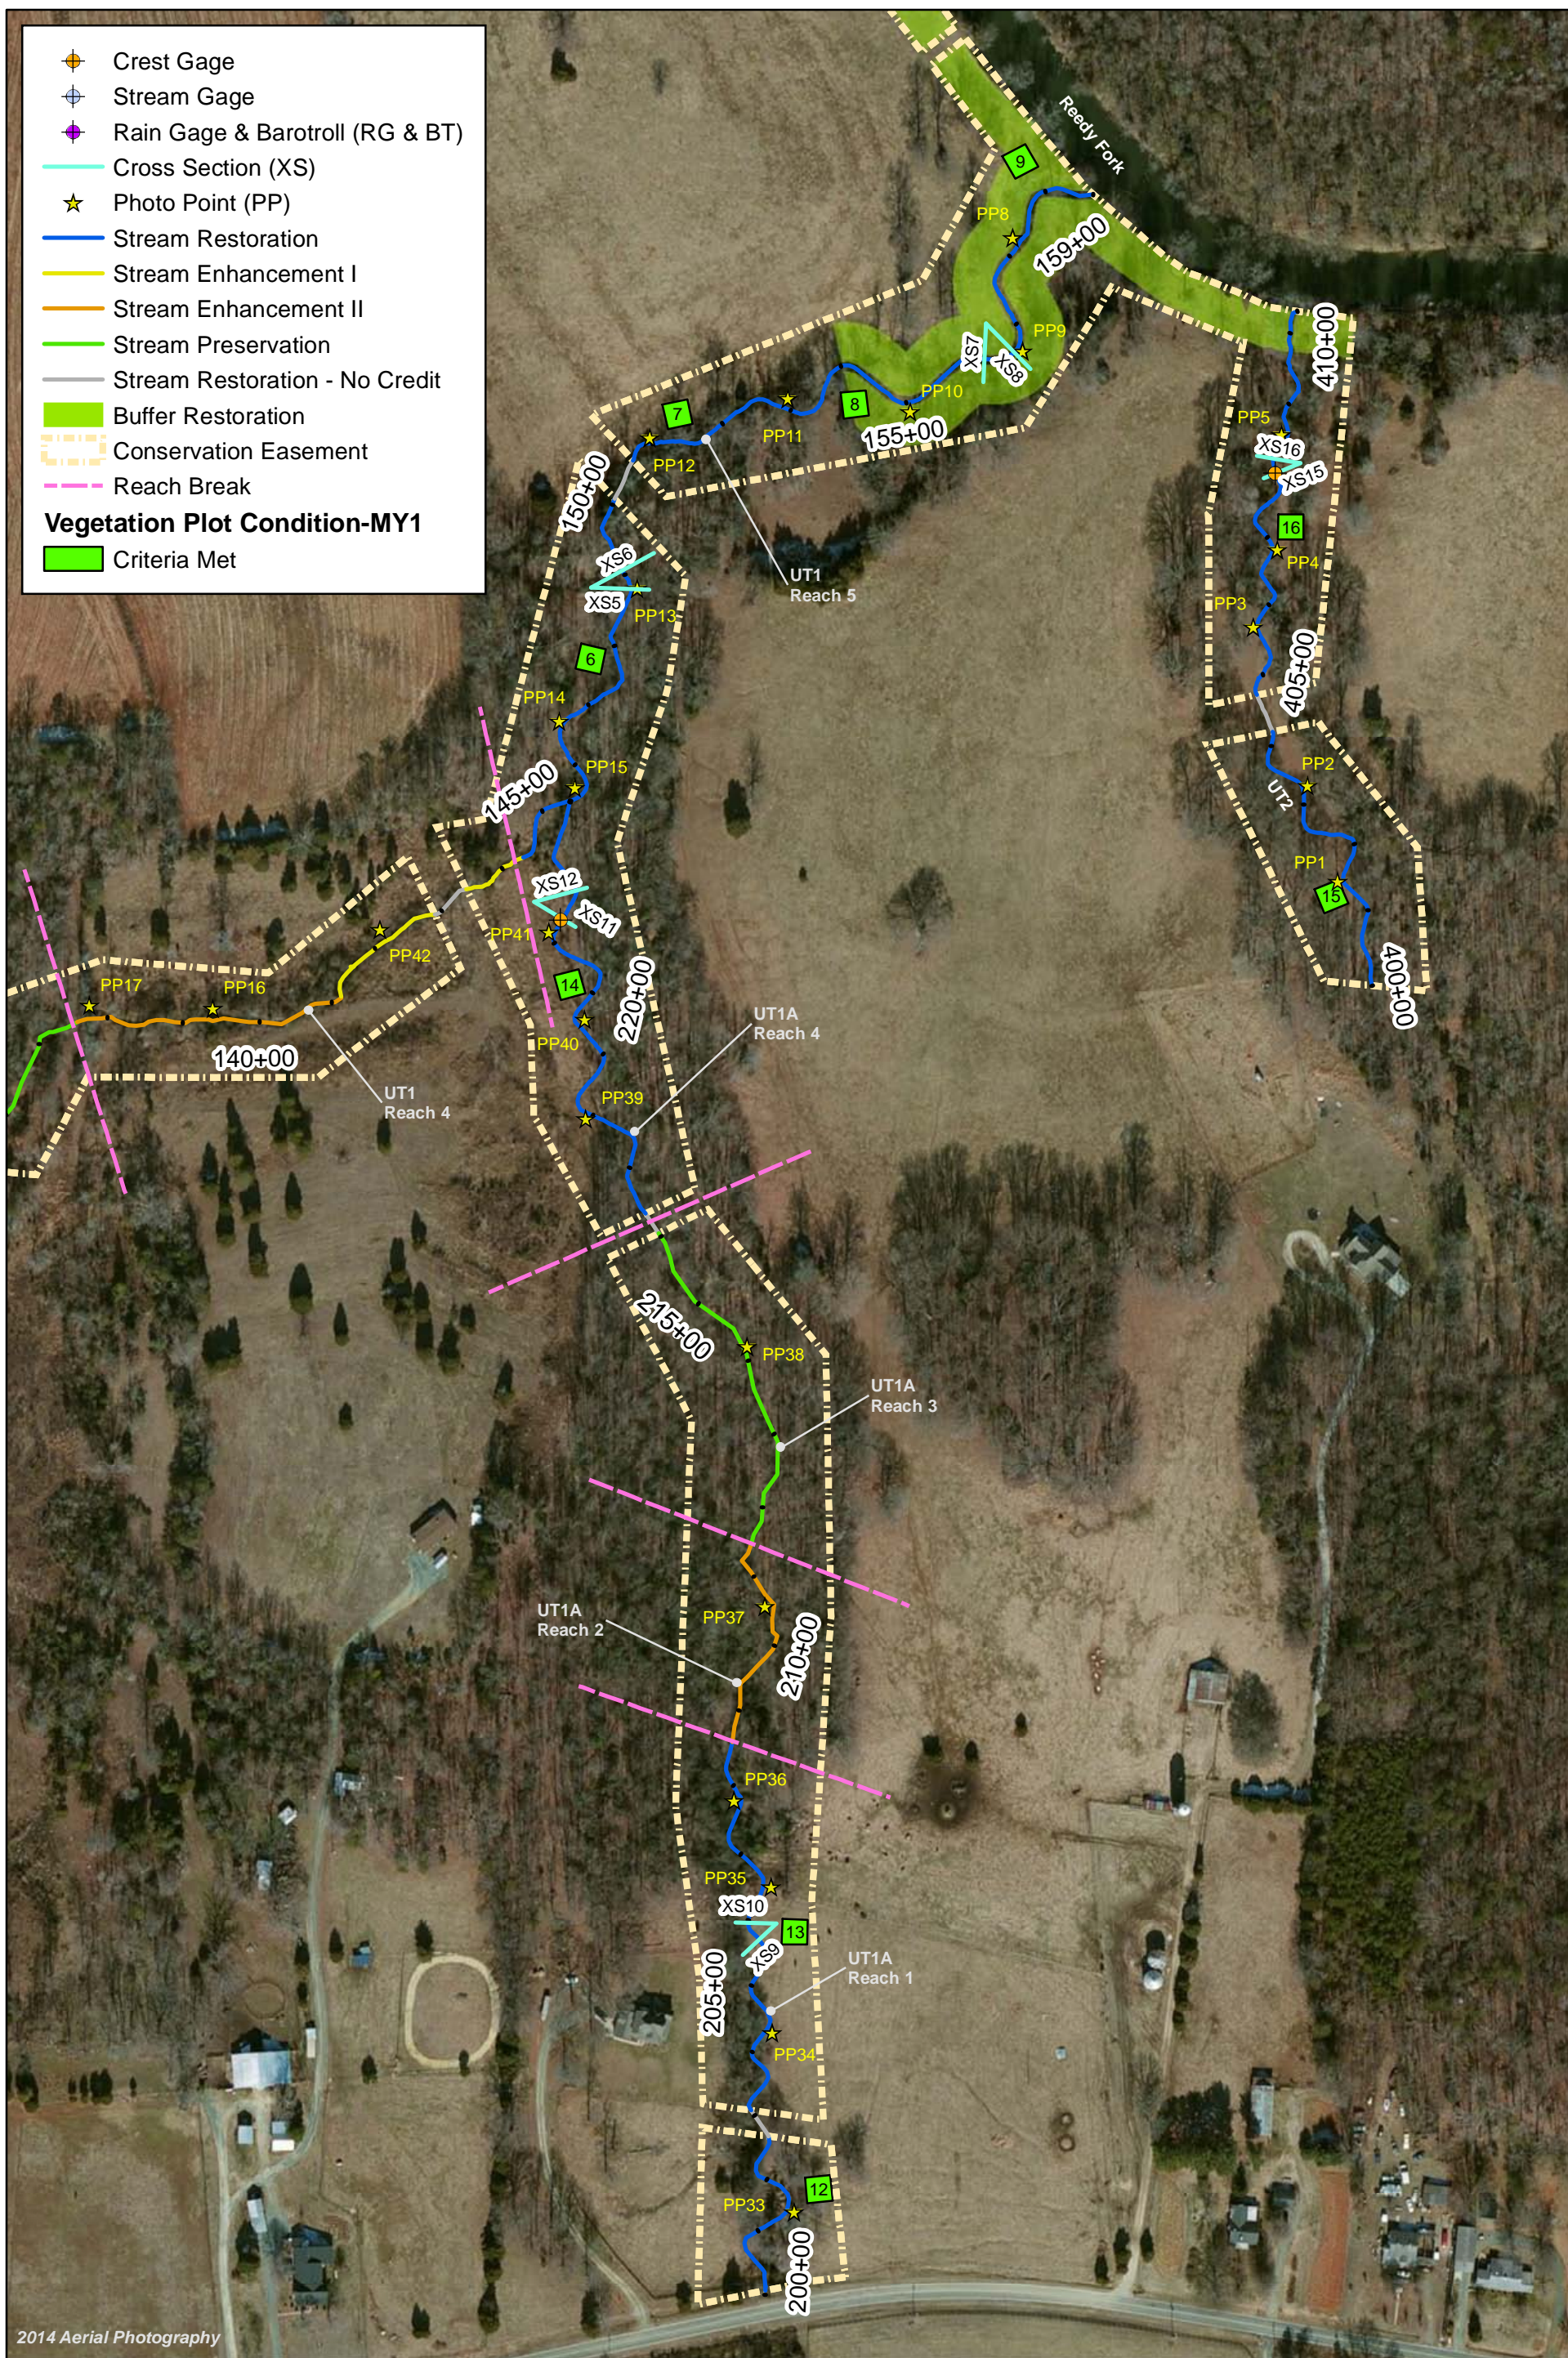




Table 5a. Visual Stream Morphology Stability Assessment Table

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	42	42			100%			
	3. Meander Pool Condition	Depth Sufficient	39	39			100%			
		Length Appropriate	39	39			100%			
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	39	39			100%			
Thalweg centering at downstream of meander bend (Glide)		39	39	100%						
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, caving, or collapse			0	0	100%	n/a	n/a	n/a
TOTALS					0	0	100%	n/a	n/a	n/a
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs	16	16			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	16	16			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms	16	16			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%	16	16			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow	16	16			100%			

Table 5b. Visual Stream Morphology Stability Assessment Table

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1A

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	26	26			100%			
	3. Meander Pool Condition	Depth Sufficient	26	26			100%			
		Length Appropriate	26	26			100%			
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	26	26			100%			
Thalweg centering at downstream of meander bend (Glide)		26	26	100%						
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, caving, or collapse			0	0	100%	n/a	n/a	n/a
TOTALS					0	0	100%	n/a	n/a	n/a
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs	3	3			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	3	3			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms	3	3			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%	3	3			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow	3	3			100%			

Table 5c. Visual Stream Morphology Stability Assessment Table

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1B

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	6	6			100%			
	3. Meander Pool Condition	Depth Sufficient	5	5			100%			
		Length Appropriate	5	5			100%			
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	5	5			100%			
Thalweg centering at downstream of meander bend (Glide)		5	5	100%						
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, caving, or collapse			0	0	100%	n/a	n/a	n/a
TOTALS					0	0	100%	n/a	n/a	n/a
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs	1	1			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	1	1			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms	1	1			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%	1	1			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow	1	1			100%			

Table 5d. Visual Stream Morphology Stability Assessment Table

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT2

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	20	20			100%			
	3. Meander Pool Condition	Depth Sufficient	21	21			100%			
		Length Appropriate	21	21			100%			
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	21	21			100%			
Thalweg centering at downstream of meander bend (Glide)		21	21	100%						
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, caving, or collapse			0	0	100%	n/a	n/a	n/a
TOTALS					0	0	100%	n/a	n/a	n/a
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs	5	5			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	5	5			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms	5	5			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%	5	5			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow	5	5			100%			

Table 6. Vegetation Condition Assessment Table
 Agony Acres Mitigation Site (NCDMS Project No. 95716)
 Monitoring Year 1 - 2015

Planted Acreage 18

Vegetation Category	Definitions	Mapping Threshold (Ac)	Number of Polygons	Combined Acreage	% of Planted Acreage
Bare Areas	Very limited cover of both woody and herbaceous material	0.1	0	0	0.0%
Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1	0	0.0	0.0%
Total			0	0.0	0.0%
Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 Ac	0	0	0%
Cumulative Total			0	0.0	0%

Easement Acreage 31

Vegetation Category	Definitions	Mapping Threshold (SF)	Number of Polygons	Combined Acreage	% of Planted Acreage
Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale).	1,000	0	0	0.0%
Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	none	0	0	0%

**STREAM PHOTOGRAPHS
UT2
Monitoring Year 1**



PHOTO POINT 1 – looking upstream (05/20/2015)



PHOTO POINT 1 – looking downstream (05/20/2015)



PHOTO POINT 2 – looking upstream (05/20/2015)



PHOTO POINT 2 – looking downstream (05/20/2015)





PHOTO POINT 3 – looking upstream (05/20/2015)



PHOTO POINT 3 – looking downstream (05/20/2015)



PHOTO POINT 4 – looking upstream (05/20/2015)



PHOTO POINT 4 – looking downstream (05/20/2015)



PHOTO POINT 5 – looking upstream (05/20/2015)



PHOTO POINT 5 – looking downstream (05/20/2015)



STREAM PHOTOGRAPHS
Reedy Fork (Buffer)
Monitoring Year 1



PHOTO POINT 6 – looking upstream (05/20/2015)



PHOTO POINT 6 – looking downstream (05/20/2015)



PHOTO POINT 7 – looking upstream (05/20/2015)



PHOTO POINT 7 – looking downstream (05/20/2015)



STREAM PHOTOGRAPHS
UT1 Reach 5
Monitoring Year 1



PHOTO POINT 8 – looking upstream (05/20/2015)



PHOTO POINT 8 – looking downstream (05/20/2015)



PHOTO POINT 9 – looking upstream (05/20/2015)



PHOTO POINT 9 – looking downstream (05/20/2015)





PHOTO POINT 10 – looking upstream (05/20/2015)



PHOTO POINT 10 – looking downstream (05/20/2015)



PHOTO POINT 11 – looking upstream (05/20/2015)



PHOTO POINT 11 – looking downstream (05/20/2015)



PHOTO POINT 12 – looking upstream (05/20/2015)



PHOTO POINT 12 – looking downstream (05/20/2015)





PHOTO POINT 13 – looking upstream (05/20/2015)



PHOTO POINT 13 – looking downstream (05/20/2015)



PHOTO POINT 14 – looking upstream (05/20/2015)



PHOTO POINT 14 – looking downstream (05/20/2015)



PHOTO POINT 15 – looking upstream (05/20/2015)



PHOTO POINT 15 – looking downstream (05/20/2015)



STREAM PHOTOGRAPHS
UT1 Reach 4
Monitoring Year 1



PHOTO POINT 16 – looking upstream (05/20/2015)



PHOTO POINT 16 – looking downstream (05/20/2015)

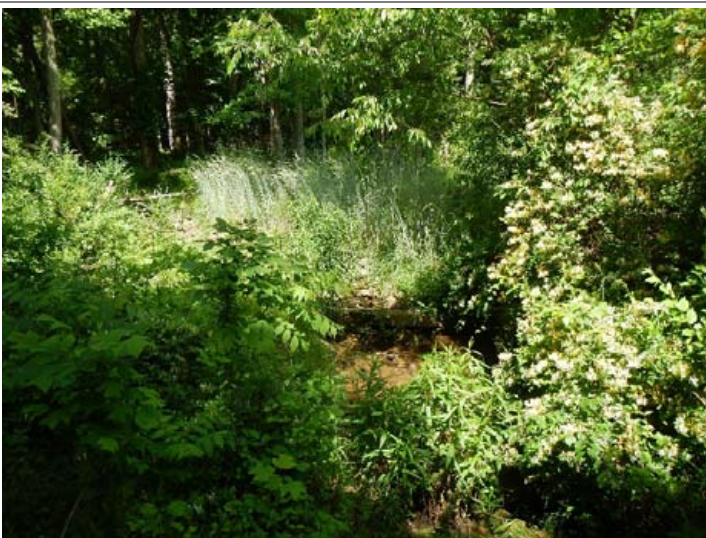


PHOTO POINT 17 – looking upstream (05/20/2015)



PHOTO POINT 17 – looking downstream (05/20/2015)





PHOTO POINT 42 – looking upstream (05/20/2015)



PHOTO POINT 42 – looking downstream (05/20/2015)



STREAM PHOTOGRAPHS
UT1 Reach 3
Monitoring Year 1



PHOTO POINT 18 – looking upstream (05/20/2015)



PHOTO POINT 18 – looking downstream (05/20/2015)



PHOTO POINT 19 – looking upstream (05/20/2015)



PHOTO POINT 19 – looking downstream (05/20/2015)





PHOTO POINT 20 – looking upstream (05/20/2015)



PHOTO POINT 20 – looking downstream (05/20/2015)



**STREAM PHOTOGRAPHS
UT1B
Monitoring Year 1**



PHOTO POINT 21 – looking upstream (05/20/2015)



PHOTO POINT 21 – looking downstream (05/20/2015)



STREAM PHOTOGRAPHS
UT1 Reach 2
Monitoring Year 1



PHOTO POINT 22 – looking upstream (05/20/2015)



PHOTO POINT 22 – looking downstream (05/20/2015)



PHOTO POINT 23 – looking upstream (05/20/2015)



PHOTO POINT 23 – looking downstream (05/20/2015)





PHOTO POINT 24 – looking upstream (05/20/2015)



PHOTO POINT 24 – looking downstream (05/20/2015)



PHOTO POINT 25 – looking upstream (05/20/2015)



PHOTO POINT 25 – looking downstream (05/20/2015)



PHOTO POINT 26 – looking upstream (05/20/2015)



PHOTO POINT 26 – looking downstream (05/20/2015)





PHOTO POINT 27 – looking upstream (05/20/2015)



PHOTO POINT 27 – looking downstream (05/20/2015)



STREAM PHOTOGRAPHS
UT1 Reach 1
Monitoring Year 1



PHOTO POINT 28 – looking upstream (05/20/2015)



PHOTO POINT 28 – looking downstream (05/20/2015)



PHOTO POINT 29 – looking upstream (05/20/2015)



PHOTO POINT 29 – looking downstream (05/20/2015)





PHOTO POINT 30 – looking upstream (05/20/2015)



PHOTO POINT 30 – looking downstream (05/20/2015)



PHOTO POINT 31 – looking upstream (05/20/2015)



PHOTO POINT 31 – looking downstream (05/20/2015)



PHOTO POINT 32 – looking upstream (05/20/2015)

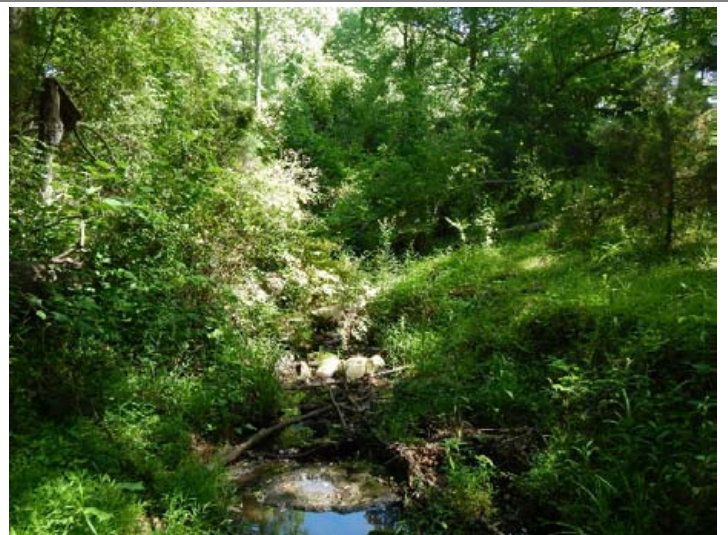


PHOTO POINT 32 – looking downstream (05/20/2015)



STREAM PHOTOGRAPHS
UT1A Reach 1
Monitoring Year 1



PHOTO POINT 33 – looking upstream (05/20/2015)



PHOTO POINT 33 – looking downstream (05/20/2015)



PHOTO POINT 34 – looking upstream (05/20/2015)



PHOTO POINT 34 – looking downstream (05/20/2015)





PHOTO POINT 35 – looking upstream (05/20/2015)



PHOTO POINT 35 – looking downstream (05/20/2015)



PHOTO POINT 36 – looking upstream (05/20/2015)



PHOTO POINT 36 – looking downstream (05/20/2015)



STREAM PHOTOGRAPHS
UT1A Reach 2
Monitoring Year 1



PHOTO POINT 37 – looking upstream (05/20/2015)



PHOTO POINT 37 – looking downstream (05/20/2015)



STREAM PHOTOGRAPHS
UT1A Reach 3
Monitoring Year 1



PHOTO POINT 38 – looking upstream (05/20/2015)



PHOTO POINT 38 – looking downstream (05/20/2015)



STREAM PHOTOGRAPHS
UT1A Reach 4
Monitoring Year 1



PHOTO POINT 39 – looking upstream (05/20/2015)



PHOTO POINT 39 – looking downstream (05/20/2015)



PHOTO POINT 40 – looking upstream (05/20/2015)



PHOTO POINT 40 – looking downstream (05/20/2015)





PHOTO POINT 41 – looking upstream (05/20/2015)



PHOTO POINT 41 – looking downstream (05/20/2015)



VEGETATION PHOTOGRAPHS
Agony Acres
Monitoring Year 1



VEG PLOT 1 (09/10/2015)



VEG PLOT 2 (09/10/2015)




VEG PLOT 3 (09/10/2015)



VEG PLOT 4 (09/10/2015)



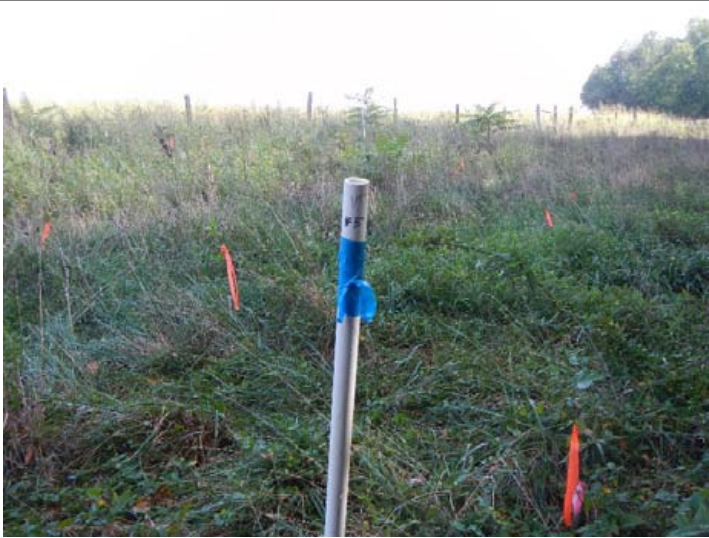


VEG PLOT 5 (09/10/2015)



VEG PLOT 6 (09/10/2015)




VEG PLOT 7 (09/10/2015)

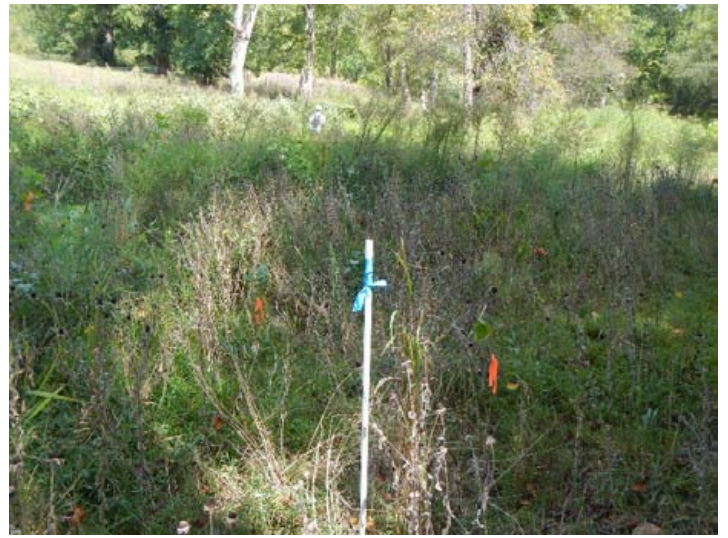

VEG PLOT 8 (09/10/2015)



VEG PLOT 9 (09/10/2015)

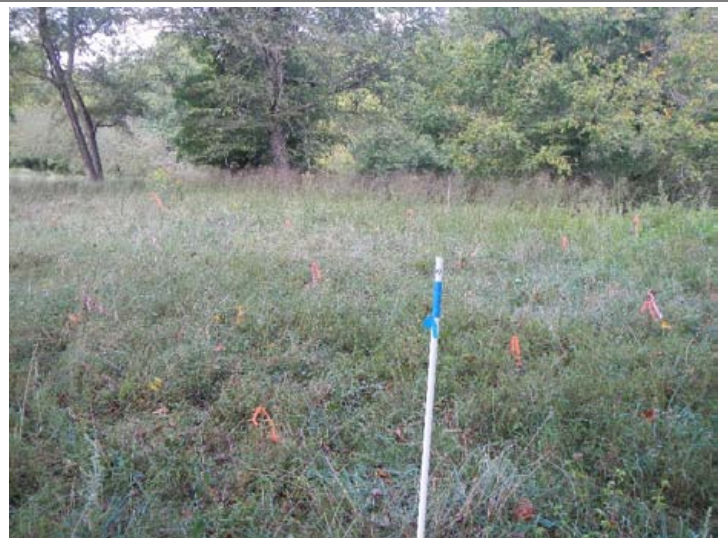

VEG PLOT 10 (09/10/2015)






VEG PLOT 11 (09/10/2015)



VEG PLOT 12 (09/10/2015)

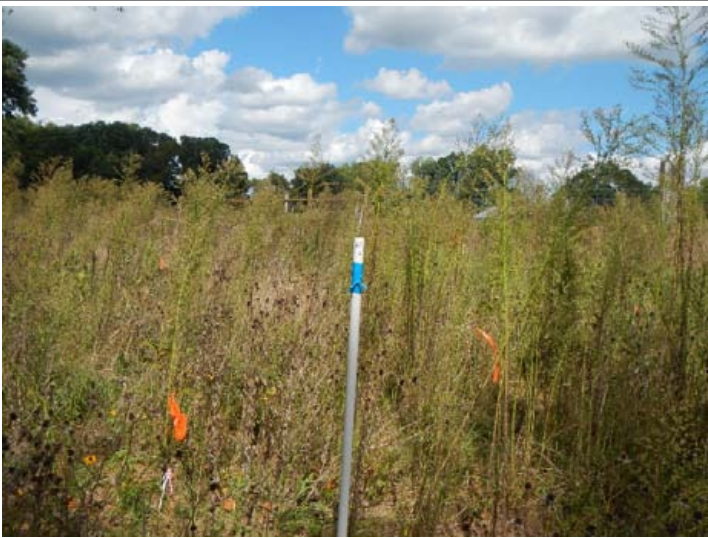

VEG PLOT 13 (09/10/2015)



VEG PLOT 14 (09/10/2015)



VEG PLOT 15 (09/10/2015)



VEG PLOT 16 (09/10/2015)



APPENDIX 3. Vegetation Plot Data

Table 7. Vegetation Plot Criteria Attainment
 Agony Acres Mitigation Site (NCDMS Project No. 95716)
Monitoring Year 1 - 2015

Plot	MY1 Success Criteria Met (Y/N)	Tract Mean
1	Y	100%
2	Y	
3	Y	
4	Y	
5	Y	
6	Y	
7	Y	
8	Y	
9	Y	
10	Y	
11	Y	
12	Y	
13	Y	
14	Y	
15	Y	
16	Y	

Table 8. CVS Vegetation Plot Metadata

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Database name	CVS-Agony Acres-v2.3.1.mdb
Database location	F:\Projects\005-02136 Agony Acres\Monitoring\Monitoring Year 1\Vegetation Assessment
Computer name	JASON-PC
File size	68157440
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
ALL Stems by Plot and spp	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
PROJECT SUMMARY	
Project Code	95716
project Name	Agony Acres Mitigation Site
Description	Stream & Buffer Site
River Basin	Cape Fear
Sampled Plots	16

Table 9. Planted and Total Stem Counts

Agony Acres Mitigation Site (NCDMS Project No.95716)

Monitoring Year 1 -2015

			Current Plot Data (MY1 2015)																	
Scientific Name	Common Name	Species Type	95716-WEI-0001			95716-WEI-0002			95716-WEI-0003			95716-WEI-0004			95716-WEI-0005			95716-WEI-0006		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
Acer negundo	boxelder	Tree																		
Acer rubrum	red maple	Tree																		10
Alnus serrulata	tag alder	Shrub	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	4	4	4
Betula nigra	river birch	Tree				1	1	1	2	2	2	3	3	3	1	1	1	4	4	4
Fraxinus pennsylvanica	green ash	Tree	5	5	5	4	4	4	3	3	3	2	2	2	2	2	2	2	2	2
Juglans nigra	black walnut	Tree			1															
Liquidambar styraciflua	sweetgum	Tree																		10
Liriodendron tulipifera	tuliptree	Tree																		20
Platanus occidentalis	American sycamore	Tree	5	5	5				4	4	4	4	4	4	4	4	4	2	2	22
Quercus michauxii	swamp chestnut oak	Tree							1	1	1	2	2	2	5	5	5	2	2	2
Quercus pagoda	cherrybark oak	Tree	2	2	2	5	5	5	2	2	2	2	2	2	1	1	1	1	1	1
Quercus phellos	willow oak	Tree	2	2	2	4	4	4	2	2	2	1	1	1	2	2	2			
Quercus rubra	northern red oak	Tree																		5
Stem count			16	16	17	16	16	16	16	16	16	15	15	15	16	16	16	15	15	80
size (ares)			1			1			1			1			1			1		
size (ACRES)			0.02			0.02			0.02			0.02			0.02			0.02		
Species count			5	5	6	5	5	5	7	7	7	7	7	7	7	7	7	6	6	10
Stems per ACRE			647.5	647.5	688	647.5	647.5	647.5	647.5	647.5	647.5	607	607	607	647.5	647.5	647.5	607	607	3237

Color Coding for Table

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes

P-all: Number of planted stems including live stakes,

T: Total Stems

Table 9. Planted and Total Stem Counts

Agony Acres Mitigation Site (NCDMS Project No.95716)

Monitoring Year 1 -2015

			Current Plot Data (MY1 2015)																	
Scientific Name	Common Name	Species Type	95716-WEI-0007			95716-WEI-0008			95716-WEI-0009			95716-WEI-0010			95716-WEI-0011			95716-WEI-0012		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
Acer negundo	boxelder	Tree																		
Acer rubrum	red maple	Tree																		
Alnus serrulata	tag alder	Shrub	1	1	1				1	1	1	4	4	4	1	1	1	2	2	2
Betula nigra	river birch	Tree	4	4	4	1	1	1							3	3	3			
Fraxinus pennsylvanica	green ash	Tree	4	4	4	5	5	5	6	6	7	2	2	2	8	8	8	3	3	3
Juglans nigra	black walnut	Tree																		
Liquidambar styraciflua	sweetgum	Tree																		
Liriodendron tulipifera	tuliptree	Tree																		
Platanus occidentalis	American sycamore	Tree	3	3	3	6	6	6	7	7	7	1	1	1	3	3	3	5	5	5
Quercus michauxii	swamp chestnut oak	Tree	4	4	4	4	4	4	1	1	1	1	1	1				2	2	2
Quercus pagoda	cherrybark oak	Tree										2	2	2				1	1	1
Quercus phellos	willow oak	Tree							2	2	2	6	6	6	1	1	1	3	3	3
Quercus rubra	northern red oak	Tree																		
Stem count			16	16	16	16	16	16	17	17	18	16	16	16	16	16	16	16	16	16
size (ares)			1			1			1			1			1			1		
size (ACRES)			0.02			0.02			0.02			0.02			0.02			0.02		
Species count			5	5	5	4	4	4	5	5	5	6	6	6	5	5	5	6	6	6
Stems per ACRE			647.5	647.5	647.5	647.5	647.5	647.5	688	688	728.4	647.5	647.5	647.5	647.5	647.5	647.5	647.5	647.5	647.5

Color Coding for Table

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes

P-all: Number of planted stems including live stakes,

T: Total Stems

Table 9. Planted and Total Stem Counts

Agony Acres Mitigation Site (NCDMS Project No.95716)

Monitoring Year 1 -2015

Scientific Name	Common Name	Species Type	Current Plot Data (MY1 2015)												Annual Means					
			95716-WEI-0013			95716-WEI-0014			95716-WEI-0015			95716-WEI-0016			MY1 (9/2015)			MY0 (1/2015)		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
Acer negundo	boxelder	Tree												2			2			
Acer rubrum	red maple	Tree															10			
Alnus serrulata	tag alder	Shrub	1	1	1	1	1	1	2	2	2	1	1	1	26	26	26	27	27	27
Betula nigra	river birch	Tree	4	4	4	2	2	2	1	1	1	1	1	1	27	27	27	28	28	28
Fraxinus pennsylvanica	green ash	Tree	2	2	2	2	2	2	3	3	3	2	2	2	55	55	56	55	55	55
Juglans nigra	black walnut	Tree															1			
Liquidambar styraciflua	sweetgum	Tree															10			
Liriodendron tulipifera	tuliptree	Tree						5			2			5			32			
Platanus occidentalis	American sycamore	Tree	1	1	1	3	3	13	5	5	5	3	3	18	56	56	101	56	56	56
Quercus michauxii	swamp chestnut oak	Tree	6	6	6	4	4	4	2	2	2	2	2	2	36	36	36	36	36	36
Quercus pagoda	cherrybark oak	Tree	2	2	2	3	3	3	1	1	1	3	3	3	25	25	25	25	25	25
Quercus phellos	willow oak	Tree				1	1	1	2	2	2	4	4	4	30	30	30	30	30	30
Quercus rubra	northern red oak	Tree						5									10			
Stem count			16	16	16	16	16	36	16	16	18	16	16	38	255	255	366	257	257	257
size (ares)			1			1			1			1			16			16		
size (ACRES)			0.02			0.02			0.02			0.02			0.40			0.40		
Species count			6	6	6	7	7	9	7	7	8	7	7	9	7	7	13	7	7	7
Stems per ACRE			647.5	647.5	647.5	647.5	647.5	1457	647.5	647.5	728.4	647.5	647.5	1538	645	645	925.7	650	650	650

Color Coding for Table

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes

P-all: Number of planted stems including live stakes,

T: Total Stems

APPENDIX 4. Morphological Summary Data and Plots

Table 10a. Baseline Stream Data Summary
 Agony Acres Mitigation Site (NCDMS Project No. 95716)
 Monitoring Year 1 - 2015

UT1

		PRE-RESTORATION CONDITION				REFERENCE REACH DATA								DESIGN				AS-BUILT/BASELINE					
Parameter	Gage	UT1 - Reach 2		UT1 - Reach 5		Onsite Reference Reach - UT1A - Reach 3		UT to Polecat Creek		Spencer Creek 1		Spencer Creek 2		UT To Cane Creek		UT1 - Reach 2		UT1 - Reach 5		UT1 - Reach 2		UT1 - Reach 5	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Dimension and Substrate - Riffle																							
Bankfull Width (ft)	N/A	6.5	13.9	16.0		11.1	5.3	10.9	10.7	11.2	6.3	9.3	11.5	12.3		10.2		12.8		10.2	10.4	11.9	13.6
Floodprone Width (ft)		10	20	>50		25	25	65	60	>114	14	125		31		22	51	28	64	60	100		200
Bankfull Mean Depth		0.8	1.5	4.3		0.7	1.0	1.1	1.6	1.8	0.8	1.0	0.8	1.0		0.8		0.9		0.6	0.9	0.8	0.9
Bankfull Max Depth		1.4	1.9	5.2		1.0	1.4	1.7	2.1	2.6	1.0	1.2	1.2	1.6		1.0	1.2	1.2	1.5	1.1	1.4	1.3	1.6
Bankfull Cross Sectional Area (ft ²)		5.2	24.6	59.0		7.4	5.4	12.4	17.8	19.7	6.6	8.7	8.9	12.2		7.9		12.0		6.2	9.0	9.1	11.9
Width/Depth Ratio		8.2	3.3	10.4		16.6	5.2	9.6	5.8	7.1	7.9	9.3	12.3	14.4		13.1		13.6		12.0	16.8	15.5	15.7
Entrenchment Ratio		1.5	1.2	>3.6		2	3.2	8.3	5.5	>10.2	1.7	4.3		>2.5		2.2	5.0	2.2	5.0	5.9	9.6	14.7	16.8
Bank Height Ratio		2.3	1.0	2.0		1.0	1.0	1.1		1.0	1.0		--	--		1.0	1.0	1.0	1.0		1.0		1.0
D50 (mm)		3.47		14.60																	Silt/Clay		0.11
Profile																							
Riffle Length (ft)	N/A					---		---		---		---		---		---		---		13.9	73.2	23.7	81.3
Riffle Slope (ft/ft)		---		---		N/A	0.0040	0.0470	0.0130	0.0184	0.0343	0.0188	0.0704	0.0148	0.0453	0.0118	0.0363			0.0078	0.0317	0.0090	0.0304
Pool Length (ft)						---		---		---		---		---		---		---		17.2	42.8	17.6	76.6
Pool Max Depth (ft)		2.4		2.5		1.6		1.8		3.3		1.2	1.8		2.6		0.9	3.2		1.1	3.9	1.6	3.7
Pool Spacing (ft)		---		---		N/A	34	52	71	9	46	27	73	13	67	17	84	31	78	35	103		
Pool Volume (ft ³)																							
Pattern																							
Channel Beltwidth (ft)	N/A	12	20	48	157	N/A	28	50	38	41	10	50		102		16	74	20	93	20	68	34	72
Radius of Curvature (ft)		6	18	13	86	N/A	19	50	11	15	12	85	23	38		18	31	23	38	18	26	23	38
Rc:Bankfull Width (ft/ft)		0.8	2.3	1.6	10.9	N/A	2.0	5.3	1.3	1.4	1.9	9.1	2.0	3.1		1.8	3.0	1.8	3.0	1.8	2.5	1.9	2.8
Meander Length (ft)		27	45	176	260	N/A	--	--	--	--	53	178	--	--		31	151	38	192	70	120	97	160
Meander Width Ratio		1.5	2.5	6.1	19.9	N/A	3.0	5.3	3.4	3.6	1.6	5.4	8.3	8.9		1.6	7.3	1.6	7.3	2.0	6.5	2.9	5.3
Substrate, Bed and Transport Parameters																							
Ri%/Ru%/P%/G%/S%	N/A																						
SC%/Sa%/G%/C%/B%/Be%																							
d16/d35/d50/d84/d95/d100		0.33/1.88/3.47/45.0/117/256		0.18/3.2/14.6/128/234/>2048		---		---		---		---		---						SC/SC/SC/41.3/79.2/128.0		SC/SC/0.11/45.0/104.7/180.0	
Reach Shear Stress (Competency) lb/ft ²		0.43		1.26												0.49		0.63			0.38		0.56
Max part size (mm) mobilized at bankfull																							
Stream Power (Capacity) W/m ²																							
Additional Reach Parameters																							
Drainage Area (SM)	N/A	0.25		0.56		0.15		0.41		0.96		0.37		0.29		0.25		0.56		0.25		0.56	
Watershed Impervious Cover Estimate (%)		<1%		<1%		---		---		---		---		---		<1%		<1%		<1%		<1%	
Rosgen Classification		G4		E4, G4		B3		E4		E4		E4		C4/E4		C4		C4		C4		C4	
Bankfull Velocity (fps)		2.7	1.7	5.7		4.9	2.2	3.5	4.9	5.4	5.0	5.6		3.8		2.5-5		2.5-5		2.6	3.4	3.3	3.6
Bankfull Discharge (cfs)		14		129		37		20		97		35		40		25.0		46.0		17.0	30.9	30.3	42.9
Q-NFF regression		---		---		---		---		---		---		---		---		---		---		---	
Q-USGS extrapolation		---		---		---		---		---		---		---		---		---		---		---	
Q-Mannings		---		---		---		---		---		---		---		---		---		---		---	
Valley Length (ft)		---		---		---		---		---		---		---		907		1,232					
Channel Thalweg Length (ft)		1,132		1,417		---		---		---		---		---		1,114		1,488		1,137		1,535	
Sinuosity		1.14		1.24		1.04		1.40		2.32		1.00	1.30		1.40	1.20	1.30	1.20	1.30	1.20	1.20		1.22
Water Surface Slope (ft/ft) ²		---		---		---		---		---		---		---		---		---		---		0.0111	0.0122
Bankfull Slope (ft/ft)		0.0093	0.0190	0.0005	0.0130	0.0490		0.0120		0.0047		0.0190	0.0220		0.0150	0.0070	0.0150	0.0054	0.0172		0.0096		0.0104

(---): Data was not provided
 N/A: Not Applicable

Table 10b. Baseline Stream Data Summary
 Agony Acres Mitigation Site (NCDMS Project No. 95716)
 Monitoring Year 1 - 2015

UT1A

		PRE-RESTORATION CONDITION				REFERENCE REACH DATA								DESIGN				AS-BUILT/BASELINE					
Parameter	Gage	UT1A - Reach 1		UT1A - Reach 4		Onsite Reference Reach - UT1A - Reach 3		UT to Polecat Creek		Spencer Creek 1		Spencer Creek 2		UT To Cane Creek		UT1A - Reach 1		UT1A - Reach 4		UT1A - Reach 1		UT1A - Reach 4	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Dimension and Substrate - Riffle																							
Bankfull Width (ft)	N/A	5.8	9.3	11.1	5.3	10.9	10.7	11.2	6.3	9.3	11.5	12.3	8.0	8.2	8.0	8.1							
Floodprone Width (ft)		15	>80	25	25	65	60	>114	14	125	31	18	40	18	41	50	200						
Bankfull Mean Depth		1.1	1.0	0.7	1.0	1.1	1.6	1.8	0.8	1.0	0.8	1.0	0.6	0.6	0.5	0.6							
Bankfull Max Depth		1.4	1.5	1.0	1.4	1.7	2.1	2.6	1	1.2	1.2	1.6	0.7	0.9	0.8	1.0	0.9	1.8					
Bankfull Cross Sectional Area (ft ²)		6.3	9.3	7.4	5.4	12.4	17.8	19.7	6.6	8.7	8.9	12.2	4.8	5.0	4.0	5.0							
Width/Depth Ratio		5.3	9.0	16.6	5.2	9.6	5.8	7.1	7.9	9.3	12.3	14.4	13.4	13.6	15.9	13.2							
Entrenchment Ratio		2.6	>8.6	2	3.2	8.3	5.5	>10.2	1.7	4.3	>2.5	2.2	5.0	2.2	5.0	6.3	24.8						
Bank Height Ratio		1.7	1.5	1.0	1.0	1.1	1.0	1.0	1.0	1.0	--	--	1.0	1.0	1.0	1.0	1.0						
D50 (mm)		4.31	5.06													1.41	0.25						
Profile																							
Riffle Length (ft)	N/A															15.5	42.0	20.5	51.9				
Riffle Slope (ft/ft)				N/A	0.0040	0.0470	0.0130	0.0184	0.0343	0.0188	0.0704	0.0148	0.0453	0.0212	0.0652	0.0077	0.0505	0.0109	0.0449				
Pool Length (ft)																5.4	52.2	9.1	35.5				
Pool Max Depth (ft)		1.8	3.6	1.6	1.8	3.3	1.2	1.8	2.6	0.7	2.4	0.7	2.5	1.6	3.5	1.4	3.1						
Pool Spacing (ft)				N/A	34	52	71	9	46	27	73	10	53	11	54	20	85	45	82				
Pool Volume (ft ³)																							
Pattern																							
Channel Beltwidth (ft)	N/A	30	35	N/A	N/A	N/A	28	50	38	41	10	50	102	13	58	13	60	24	60	35	55		
Radius of Curvature (ft)		12	57	N/A	N/A	N/A	19	50	11	15	12	85	23	38	14	24	15	25	14	23	15	23	
Rc:Bankfull Width (ft/ft)		1.5	7.2	N/A	N/A	N/A	2.0	5.3	1.3	1.4	1.9	9.1	2.0	3.1	1.8	3.0	1.8	3.0	1.8	2.9	1.9	2.8	
Meander Length (ft)		89	104	N/A	N/A	N/A	--	--	--	--	53	178	--	--	24	120	25	123	70	112	96	117	
Meander Width Ratio		3.8	4.4	N/A	N/A	N/A	3.0	5.3	3.4	3.6	1.6	5.4	8.3	8.9	1.6	7.3	1.6	7.3	3.0	7.5	4.3	6.8	
Substrate, Bed and Transport Parameters																							
Ri%/Ru%/P%/G%/S%	N/A																						
SC%/Sa%/G%/C%/B%/Be%																							
d16/d35/d50/d84/d95/d100		0.15/2.18/4.31/16/139/256	0.45/2.71/5.06/67.7/122/362													SC/SC/1.41/33.4/64.0/128.0	SC/SC/0.25/26.2/75.9/180.0						
Reach Shear Stress (Competency) lb/ft ²		0.50	1.76										0.48	0.54									
Max part size (mm) mobilized at bankfull																							
Stream Power (Capacity) W/m ²																							
Additional Reach Parameters																							
Drainage Area (SM)	N/A	0.12	0.16	0.15	0.41	0.96	0.37	0.29	0.12	0.16	0.12	0.16											
Watershed Impervious Cover Estimate (%)		<1%	<1%						<1%	<1%	<1%	<1%											
Rosgen Classification		E4	E4	B3	E4	E4	E4	C4/E4	C4	C4	C4	C4											
Bankfull Velocity (fps)		3.3	5.2	4.9	2.2	3.5	4.9	5.4	5.0	5.6	3.8	2.5-5	2.5-5	2.6	3.0								
Bankfull Discharge (cfs)		21	50	37	20	97	35	40	14.0	17.0	15.9	15.0											
Q-NFF regression																							
Q-USGS extrapolation																							
Q-Mannings																							
Valley Length (ft)											673	530											
Channel Thalweg Length (ft)		770	461								849	650	857	666									
Sinuosity		1.12	1.03	1.04	1.40	2.32	1.00	1.30	1.40	1.20	1.30	1.20	1.30	1.21	1.25								
Water Surface Slope (ft/ft) ²																0.0126	N/A						
Bankfull Slope (ft/ft)		0.0095	0.0150	0.0490	0.0120	0.0047	0.0190	0.0220	0.0150	0.0103	0.0175	0.0141	0.0153	0.0137	0.0129								

(---): Data was not provided
 N/A: Not Applicable

Table 10c. Baseline Stream Data Summary
 Agony Acres Mitigation Site (NCDMS Project No. 95716)
 Monitoring Year 1 - 2015

UT1B		PRE-RESTORATION	REFERENCE REACH DATA										DESIGN		AS-BUILT/BASELINE		
Parameter	Gage	UT1B	Onsite Reference Reach - UT1A - Reach 3		UT to Polecat Creek		Spencer Creek 1		Spencer Creek 2		UT To Cane Creek		UT1B		UT1B		
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
Dimension and Substrate - Riffle																	
Bankfull Width (ft)	N/A	4.9	11.1	5.3	10.9	10.7	11.2	6.3	9.3	11.5	12.3	7.3		7.7			
Floodprone Width (ft)		36	25	25	65	60	>114	14	125	31		16	37	70			
Bankfull Mean Depth		1.1	0.7	1.0	1.1	1.6	1.8	0.8	1.0	0.8	1.0	0.6		0.5			
Bankfull Max Depth		1.9	1.0	1.4	1.7	2.1	2.6	1.0	1.2	1.2	1.6	0.7	0.9	0.7			
Bankfull Cross Sectional Area (ft ²)		5.4	7.4	5.4	12.4	17.8	19.7	6.6	8.7	8.9	12.2	5.2		3.5			
Width/Depth Ratio		4.4	16.6	5.2	9.6	5.8	7.1	7.9	9.3	12.3	14.4	12.6		17.0			
Entrenchment Ratio		7.5	2.3	3.2	8.3	5.5	>10.2	1.7	4.3	>2.5		2.2	5.0	9.1			
Bank Height Ratio		1.6	1.0	1.0	1.1	1.0		1.0	1.0	--	--	1.0	1.0	1.0			
D50 (mm)		---															Silt/Clay
Profile																	
Riffle Length (ft)	N/A	---	---	---	---	---	---	---	---	---	---	---	---	12.1	24.4		
Riffle Slope (ft/ft)		---	N/A	0.0040	0.0470	0.0130	0.0184	0.0343	0.0188	0.0704	0.0222	0.0680	0.0219	0.0425			
Pool Length (ft)		---	---	---	---	---	---	---	---	---	---	---	11.9	30.9			
Pool Max Depth (ft)		2.5	1.6	1.8		3.3		1.2	1.8	2.6		0.7	2.4	1.7	2.5		
Pool Spacing (ft)		---	N/A	34	52	71		9	46	27	73	9	48	30	45		
Pool Volume (ft ³)		---															
Pattern																	
Channel Beltwidth (ft)	N/A	N/A	N/A	N/A	28	50	38	41	10	50	102		12	53	25	40	
Radius of Curvature (ft)		N/A	N/A	N/A	19	50	11	15	12	85	23	38	13	22	14	20	
Rc:Bankfull Width (ft/ft)		N/A	N/A	N/A	2.0	5.3	1.3	1.4	1.9	9.1	2.0	3.1	1.8	3.0	1.8	2.6	
Meander Length (ft)		N/A	N/A	N/A	--	--	--	--	53	178	--	--	22	110	60	72	
Meander Width Ratio		N/A	N/A	N/A	3.0	5.3	3.4	3.6	1.6	5.4	8.3	8.9	1.6	7.3	3.2	5.2	
Substrate, Bed and Transport Parameters																	
Ri%/Ru%/P%/G%/S%	N/A	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
SC%/Sa%/G%/C%/B%/Be%		---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
d16/d35/d50/d84/d95/d100		---	---	---	---	---	---	---	---	---	---	---	---	---	---	SC/SC/SC/ 19.5/40.2/90.0	
Reach Shear Stress (Competency) lb/ft ²		---	---	---	---	---	---	---	---	---	---	---	---	---	---	0.21	
Max part size (mm) mobilized at bankfull		---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	
Stream Power (Capacity) W/m ²	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---		
Additional Reach Parameters																	
Drainage Area (SM)	N/A	0.10	0.15	0.41	0.96	0.37	0.29	0.10	0.10								
Watershed Impervious Cover Estimate (%)		<1%	---	---	---	---	---	---	<1%	<1%							
Rosgen Classification		E4	B3	E4	E4	E4	C4/E4	C4	C4								
Bankfull Velocity (fps)		4.6	4.9	2.2	3.5	4.9	5.4	5.0	5.6	3.8	1.5-4	1.9					
Bankfull Discharge (cfs)		25	37	20	97	35	40	11	6.6								
Q-NFF regression		---	---	---	---	---	---	---	---								
Q-USGS extrapolation		---	---	---	---	---	---	---	---								
Q-Mannings		---	---	---	---	---	---	---	---								
Valley Length (ft)		---	---	---	---	---	---	---	199								
Channel Thalweg Length (ft)		243	---	---	---	---	---	---	219	232							
Sinuosity		1.06	1.04	1.40	2.32	1.00	1.30	1.40	1.20	1.30	1.34						
Water Surface Slope (ft/ft) ²		---	---	---	---	---	---	---	---	---	0.0095						
Bankfull Slope (ft/ft)		0.0200	0.0490	0.0120	0.0047	0.0190	0.0220	0.0150	0.0100	0.0200	0.0181						

(---): Data was not provided
 N/A: Not Applicable

Table 10d. Baseline Stream Data Summary
 Agony Acres Mitigation Site (NCDMS Project No. 95716)
 Monitoring Year 1 - 2015

UT2

Parameter	Gage	PRE-RESTORATION		REFERENCE REACH DATA								DESIGN		AS-BUILT/BASELINE				
		UT2		Onsite Reference Reach - UT1A - Reach 3		UT to Polecat Creek		Spencer Creek 1		Spencer Creek 2		UT To Cane Creek		UT2		UT2		
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
Dimension and Substrate - Riffle																		
Bankfull Width (ft)	N/A	6.2	9.6	11.1	5.3	10.9	10.7	11.2	6.3	9.3	11.5	12.3	6.6	6.7				
Floodprone Width (ft)		>20		25	25	65	60	>114	14	125	31		15	33	50			
Bankfull Mean Depth		0.6	1.1	0.7	1.0	1.1	1.6	1.8	0.8	1.0	0.8	1.0	0.5	0.5				
Bankfull Max Depth		1.0	2.0	1.0	1.4	1.7	2.1	2.6	1.0	1.2	1.2	1.6	0.6	0.8	0.7			
Bankfull Cross Sectional Area (ft ²)		5.2	7.0	7.4	5.4	12.4	17.8	19.7	6.6	8.7	8.9	12.2	3.4	3.4				
Width/Depth Ratio		5.5	15.5	16.6	5.2	9.6	5.8	7.1	7.9	9.3	12.3	14.4	12.8	12.9				
Entrenchment Ratio		>2.4		2.3	3.2	8.3	5.5	>10.2	1.7	4.3	>2.5		2.2	5.0	7.5			
Bank Height Ratio		1.0	2.1	1.0	1.0	1.1	1.0	1.0	1.0	1.0	--	--	1.0	1.0	1.0			
D50 (mm)		2.11															Silt/Clay	
Profile																		
Riffle Length (ft)	N/A			---	---	---	---	---	---	---	---	---	---	13.9	51.7			
Riffle Slope (ft/ft)		---	N/A	0.0040	0.0470	0.0130	0.0184	0.0343	0.0188	0.0704	0.0179	0.0549	0.0146	0.0525				
Pool Length (ft)		---		---	---	---	---	---	---	---	---	---	---	10.0	28.4			
Pool Max Depth (ft)		1.4	1.6	1.8	3.3	1.2	1.8	2.6	0.6	2.1	1.0	2.4						
Pool Spacing (ft)		---	N/A	34	52	71	9	46	27	73	9	44	25	66				
Pool Volume (ft ³)																		
Pattern																		
Channel Beltwidth (ft)	N/A	32	54	N/A	28	50	38	41	10	50	102	11	48	19	50			
Radius of Curvature (ft)		12	43	N/A	19	50	11	15	12	85	23	38	12	20	12	20		
Rc:Bankfull Width (ft/ft)		1.5	5.4	N/A	2.0	5.3	1.3	1.4	1.9	9.1	2.0	3.1	1.8	3.0	1.8	3.0		
Meander Length (ft)		102	103	N/A	--	--	--	--	53	178	--	--	20	99	58	98		
Meander Width Ratio		4.1	6.8	N/A	3.0	5.3	3.4	3.6	1.6	5.4	8.3	8.9	1.6	7.3	2.8	7.5		
Substrate, Bed and Transport Parameters																		
Ri%/Ru%/P%/G%/S%	N/A																	
SC%/Sa%/G%/C%/B%/Be%																		
d16/d35/d50/d84/d95/d100		0.2/0.68/2.11/20.7/98.3/256	---	---	---	---	---	---	---	---	---	---	---	---	SC/SC/30.2/64.0/128.0			
Reach Shear Stress (Competency) lb/ft ²		---													0.64			
Max part size (mm) mobilized at bankfull																		
Stream Power (Capacity) W/m ²																		
Additional Reach Parameters																		
Drainage Area (SM)	N/A	0.09	0.15	0.41	0.96	0.37	0.29	0.09	0.09									
Watershed Impervious Cover Estimate (%)		<1%	---	---	---	---	---	---	<1%	<1%								
Rosgen Classification		E4	B3	E4	E4	E4	C4/E4	C4	C4									
Bankfull Velocity (fps)		3.0	5.1	4.9	2.2	3.5	4.9	5.4	5.0	5.6	3.8	2.5-5	3.4					
Bankfull Discharge (cfs)		23	37	20	97	35	40	11.0	11.5									
Q-NFF regression		---																
Q-USGS extrapolation		---																
Q-Mannings		---																
Valley Length (ft)		---	---	---	---	---	---	---	905	---								
Channel Thalweg Length (ft)		1,028	---	---	---	---	---	---	1,023	1,032								
Sinuosity		1.06	1.04	1.40	2.32	1.00	1.30	1.40	1.20	1.30								
Water Surface Slope (ft/ft) ²		---	---	---	---	---	---	---	---	---								
Bankfull Slope (ft/ft)		0.0130	0.0220	0.0490	0.0120	0.0047	0.0190	0.0220	0.0150	0.0121	0.0231	0.0195						

(---): Data was not provided
 N/A: Not Applicable

Table 11. Morphology and Hydraulic Summary (Dimensional Parameters - Cross Section)

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015


UT1 Reach 2																																
		Cross Section 1 (Riffle)							Cross Section 2 (Pool)							Cross Section 3 (Riffle)							Cross Section 4 (Pool)									
Dimension and Substrate	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7
<i>based on fixed bankfull elevation (ft)</i>	651.7	651.7							651.0	651.0							644.0	644.0						643.6	643.6							
Bankfull Width (ft)	10.4	9.9							9.6	9.3							10.6	10.2						13.5	13.7							
Floodprone Width (ft)	100	100							N/A	N/A							60	60						N/A	N/A							
Bankfull Mean Depth (ft)	0.9	0.8							1.2	1.1							0.6	0.6						1.1	1.0							
Bankfull Max Depth (ft)	1.4	1.4							2.1	1.9							1.1	1.1						1.9	1.8							
Bankfull Cross Sectional Area (ft ²)	9.0	8.0							11.6	10.4							6.2	6.2						14.7	14.2							
Bankfull Width/Depth Ratio	12.0	12.2							7.9	8.3							18.2	16.7						12.4	13.2							
Bankfull Entrenchment Ratio	9.6	10.1							N/A	N/A							5.6	5.9						N/A	N/A							
Bankfull Bank Height Ratio	1.0	1.0							1.0	1.0							1.0	1.0						1.0	1.0							
d50 (mm)	18.0	64.0							N/A	N/A							13.3	46.6						N/A	N/A							
UT1 Reach 5																																
		Cross Section 5 (Pool)							Cross Section 6 (Riffle)							Cross Section 7 (Riffle)							Cross Section 8 (Pool)									
<i>based on fixed bankfull elevation (ft)</i>	610.4	610.4							610.0	610.0							600.9	600.9						600.6	600.6							
Bankfull Width (ft)	15.9	16.5							15.3	15.2							11.9	11.9						15.2	15.7							
Floodprone Width (ft)	N/A	N/A							200	200							200	200						N/A	N/A							
Bankfull Mean Depth (ft)	1.2	1.1							0.8	0.8							0.8	0.8						1.4	1.4							
Bankfull Max Depth (ft)	2.4	2.2							1.6	1.7							1.3	1.5						2.7	2.8							
Bankfull Cross Sectional Area (ft ²)	18.5	18.1							12.0	12.6							9.1	10.1						21.3	21.8							
Bankfull Width/Depth Ratio	13.6	15.1							19.5	18.4							15.7	14.0						10.9	11.3							
Bankfull Entrenchment Ratio	N/A	N/A							13.1	13.1							16.8	16.8						N/A	N/A							
Bankfull Bank Height Ratio	1.0	1.0							1.0	1.0							1.0	1.0						1.0	1.0							
d50 (mm)	N/A	N/A							15.4	30.8							16.0	52.1						N/A	N/A							
UT1A Reach 1														UT1A Reach 4																		
		Cross Section 9 (Riffle)							Cross Section 10 (Pool)							Cross Section 11 (Riffle)							Cross Section 12 (Pool)									
<i>based on fixed bankfull elevation (ft)</i>	656.4	656.4							656.0	656.0							615.8	615.8						615.1	615.1							
Bankfull Width (ft)	8.0	7.3							10.5	10.0							8.1	8.2						10.6	10.5							
Floodprone Width (ft)	50	50							N/A	N/A							200	200						N/A	N/A							
Bankfull Mean Depth (ft)	0.5	0.5							0.7	0.7							0.6	0.8						1.2	1.2							
Bankfull Max Depth (ft)	0.9	0.9							1.5	1.2							1.8	1.9						2.7	2.6							
Bankfull Cross Sectional Area (ft ²)	4.0	3.9							7.8	7.0							5.0	6.6						12.3	13.2							
Bankfull Width/Depth Ratio	15.9	13.7							14.1	14.4							13.2	10.1						9.1	8.4							
Bankfull Entrenchment Ratio	6.3	6.8							N/A	N/A							24.8	24.4						N/A	N/A							
Bankfull Bank Height Ratio	1.0	1.0							1.0	1.0							1.0	1.0						1.0	1.0							
d50 (mm)	18.0	17.8							N/A	N/A							18.3	42.1						N/A	N/A							
UT1B														UT2																		
		Cross Section 13 (Riffle)							Cross Section 14 (Pool)							Cross Section 15 (Riffle)							Cross Section 16 (Pool)									
<i>based on fixed bankfull elevation (ft)</i>	647.1	647.1							646.9	646.9							602.9	602.9						602.4	602.4							
Bankfull Width (ft)	7.7	7.8							9.7	10.1							7.1	7.0						9.5	9.5							
Floodprone Width (ft)	70	70							N/A	N/A							50	50						N/A	N/A							
Bankfull Mean Depth (ft)	0.5	0.5							0.8	0.7							0.5	0.5						0.6	0.6							
Bankfull Max Depth (ft)	0.7	0.9							1.4	1.3							0.7	0.9						1.3	1.3							
Bankfull Cross Sectional Area (ft ²)	3.5	3.6							7.8	7.2							3.4	3.8						5.8	5.5							
Bankfull Width/Depth Ratio	17.0	16.9							12.1	14.2							14.7	12.9						15.5	16.3							
Bankfull Entrenchment Ratio	9.1	9.0							N/A	N/A							7.0	7.2						N/A	N/A							
Bankfull Bank Height Ratio	1.0	1.0							1.0	1.0							1.0	1.0						1.0	1.0							
d50 (mm)	21.3	43.9							N/A	N/A							19.7	25.0						N/A	N/A							

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 1-UT1 Reach 2

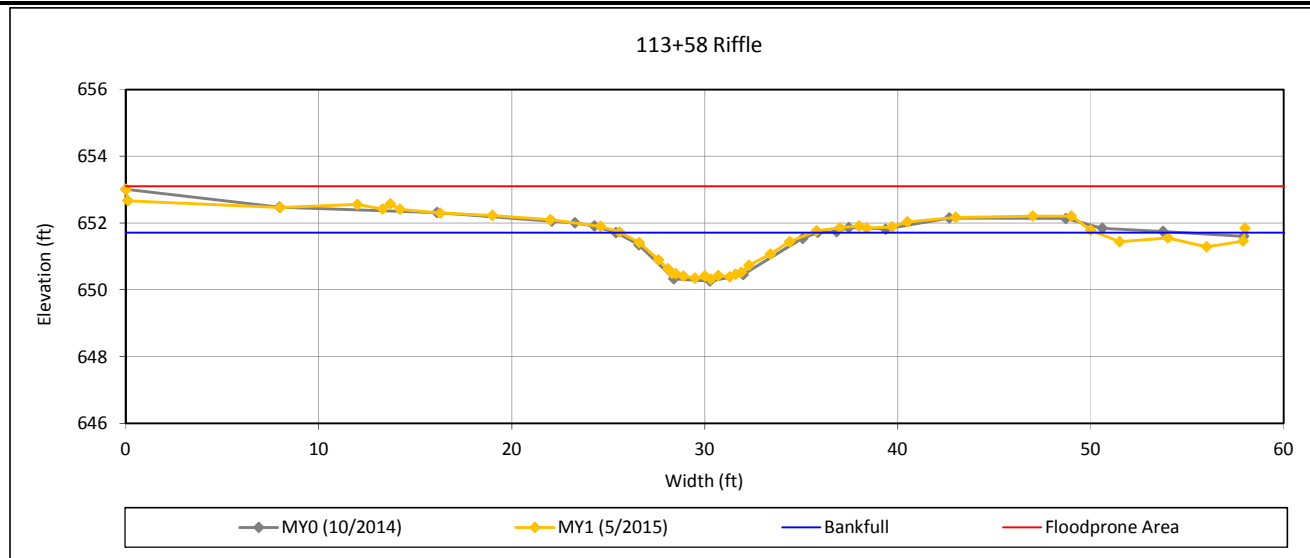

Bankfull Dimensions

8.0	x-section area (ft.sq.)
9.9	width (ft)
0.8	mean depth (ft)
1.4	max depth (ft)
10.4	wetted parimeter (ft)
0.8	hyd radi (ft)
12.2	width-depth ratio
100.0	W flood prone area (ft)
10.1	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2015

Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 2-UT1 Reach 2

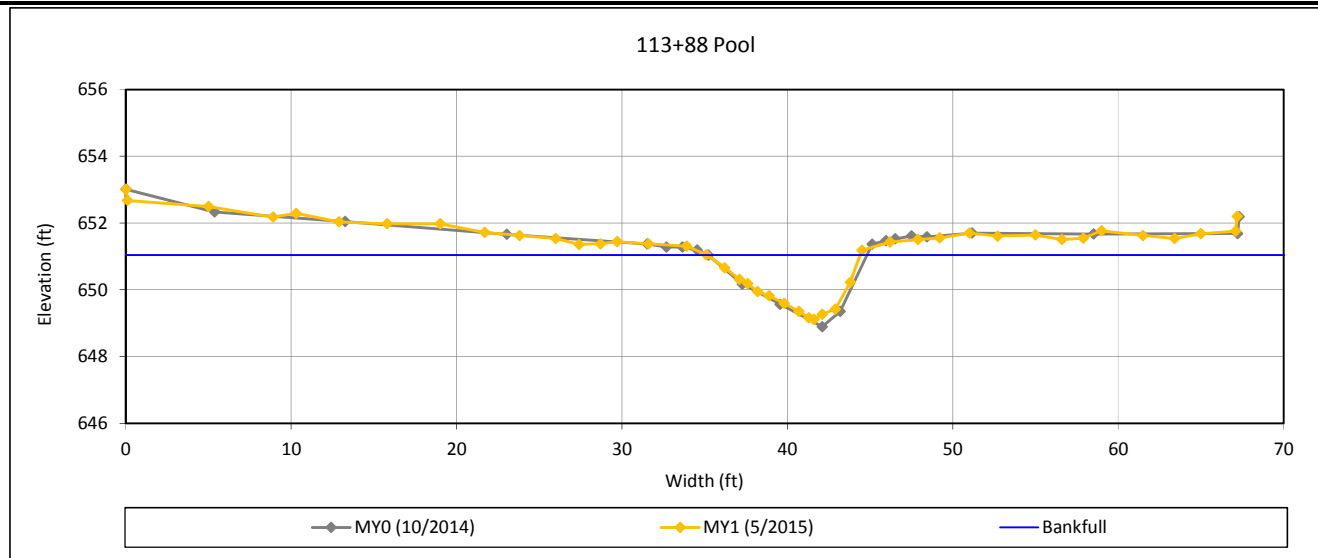

Bankfull Dimensions

10.4	x-section area (ft.sq.)
9.3	width (ft)
1.1	mean depth (ft)
1.9	max depth (ft)
10.3	wetted parimeter (ft)
1.0	hyd radi (ft)
8.3	width-depth ratio

Survey Date: 5/2015
Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 3-UT1 Reach 2

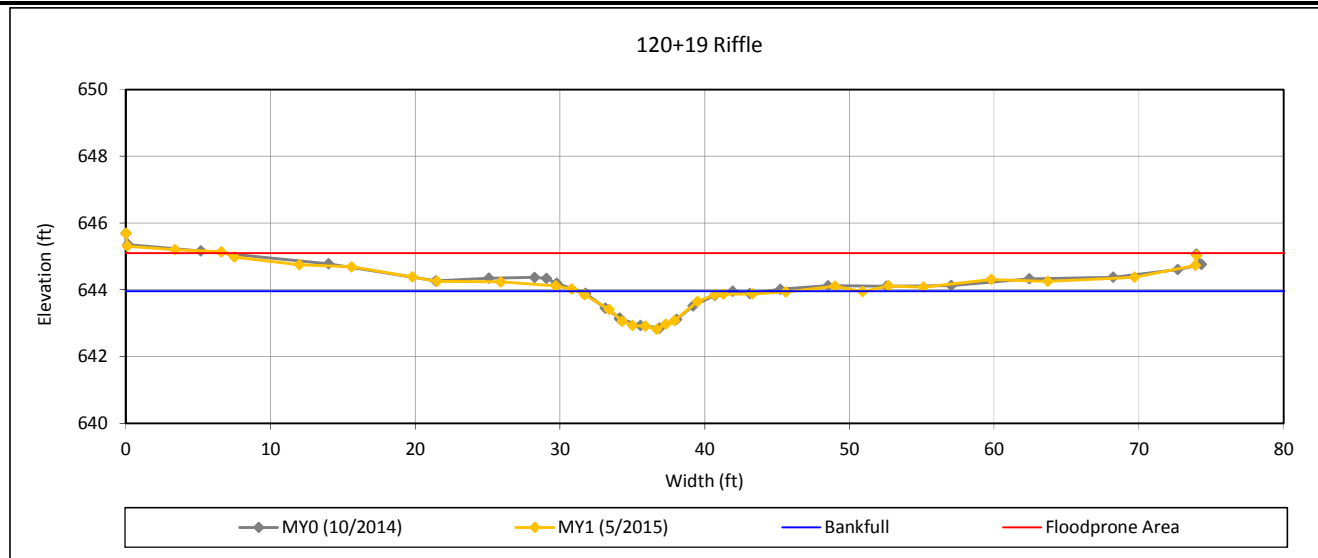

Bankfull Dimensions

6.2	x-section area (ft.sq.)
10.2	width (ft)
0.6	mean depth (ft)
1.1	max depth (ft)
10.5	wetted parimeter (ft)
0.6	hyd radi (ft)
16.7	width-depth ratio
60.0	W flood prone area (ft)
5.9	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2015

Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 4-UT1 Reach 2

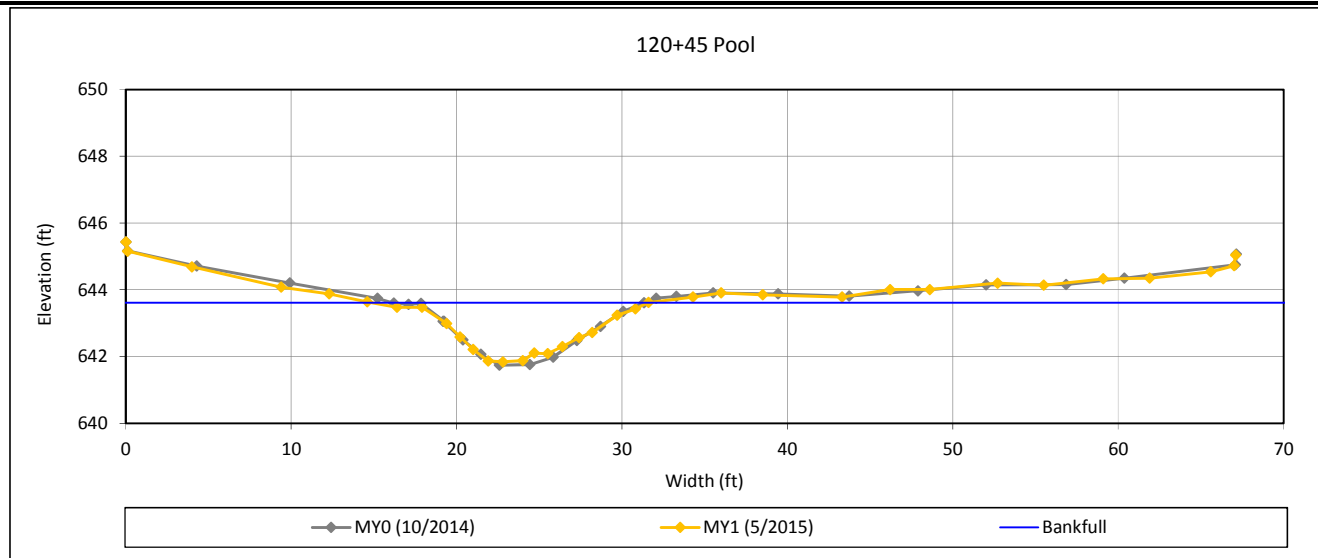

Bankfull Dimensions

14.2	x-section area (ft.sq.)
13.7	width (ft)
1.0	mean depth (ft)
1.8	max depth (ft)
14.2	wetted parimeter (ft)
1.0	hyd radi (ft)
13.2	width-depth ratio

Survey Date: 5/2015
Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 5-UT1 Reach 5

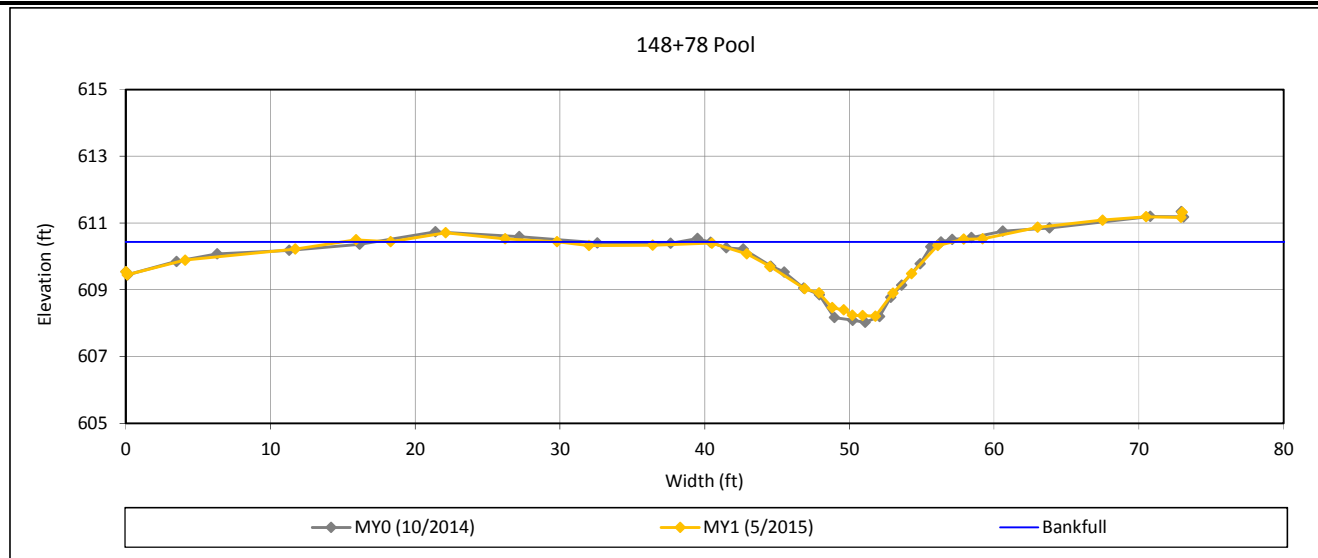

Bankfull Dimensions

18.1	x-section area (ft.sq.)
16.5	width (ft)
1.1	mean depth (ft)
2.2	max depth (ft)
17.3	wetted parimeter (ft)
1.0	hyd radi (ft)
15.1	width-depth ratio

Survey Date: 5/2015
Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 6-UT1 Reach 5

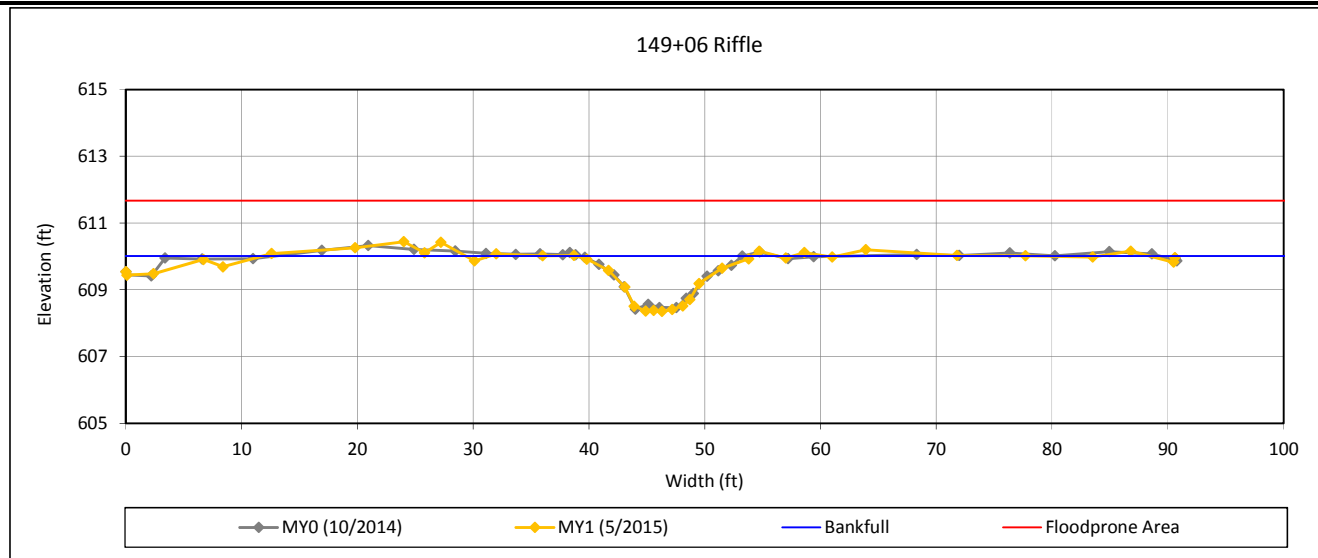

Bankfull Dimensions

12.6	x-section area (ft.sq.)
15.2	width (ft)
0.8	mean depth (ft)
1.7	max depth (ft)
15.8	wetted parimeter (ft)
0.8	hyd radi (ft)
18.4	width-depth ratio
200.0	W flood prone area (ft)
13.1	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2015

Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 7-UT1 Reach 5

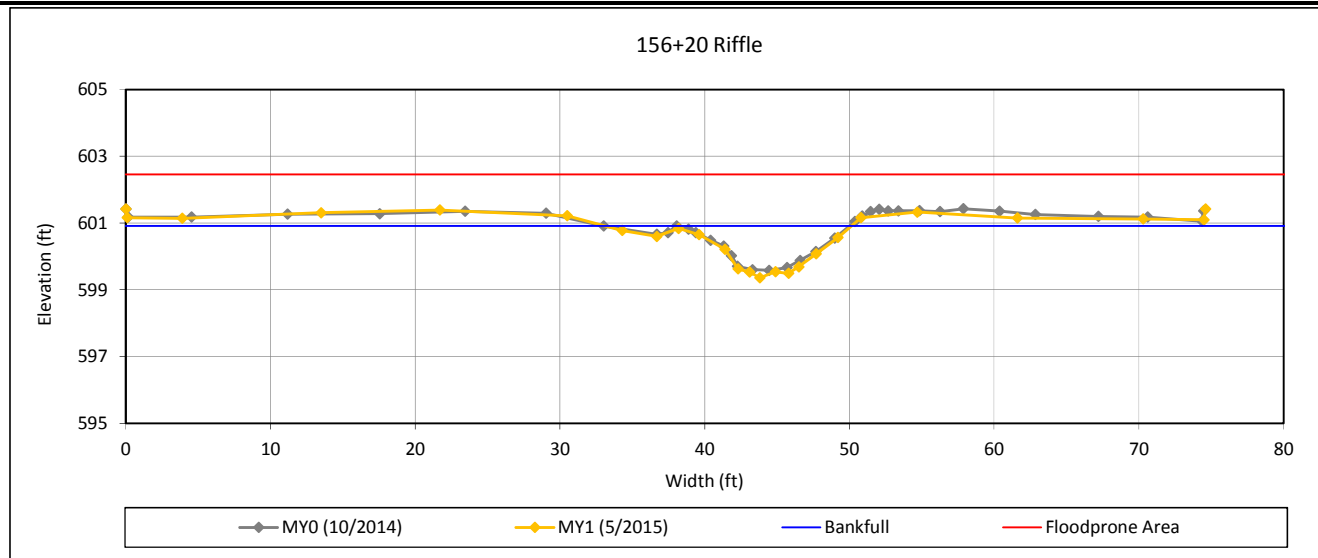

Bankfull Dimensions

10.1	x-section area (ft.sq.)
11.9	width (ft)
0.8	mean depth (ft)
1.5	max depth (ft)
12.4	wetted perimeter (ft)
0.8	hyd radi (ft)
14.0	width-depth ratio
200.0	W flood prone area (ft)
16.8	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2015

Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 8-UT1 Reach 5

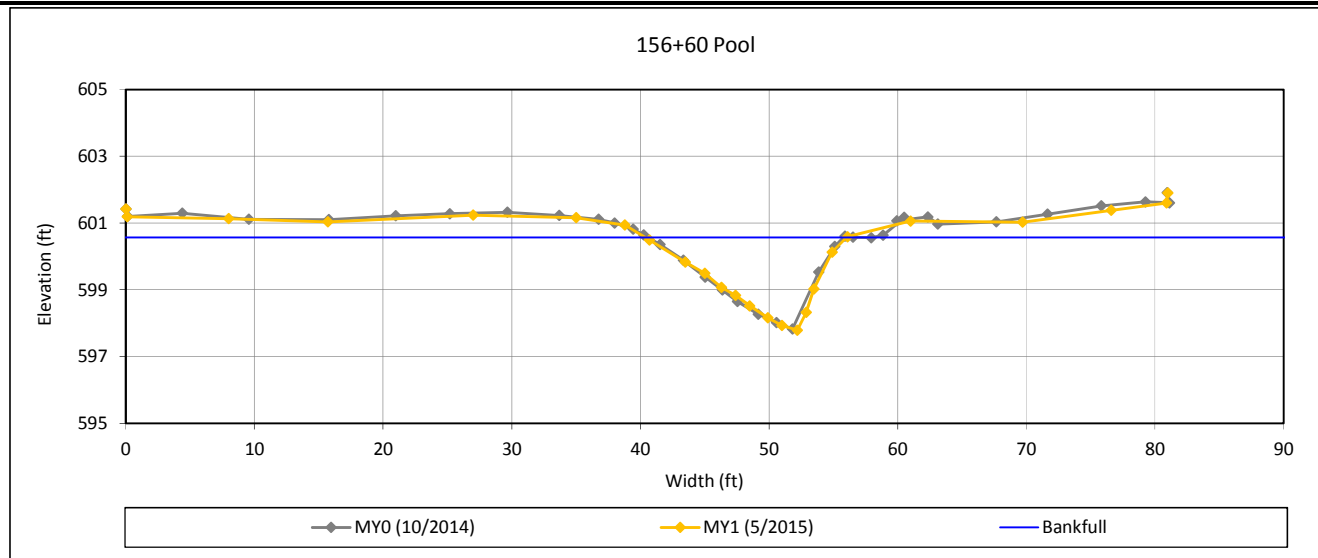

Bankfull Dimensions

21.8	x-section area (ft.sq.)
15.7	width (ft)
1.4	mean depth (ft)
2.8	max depth (ft)
17.0	wetted perimeter (ft)
1.3	hyd radi (ft)
11.3	width-depth ratio

Survey Date: 5/2015
Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 9-UT1A Reach 1

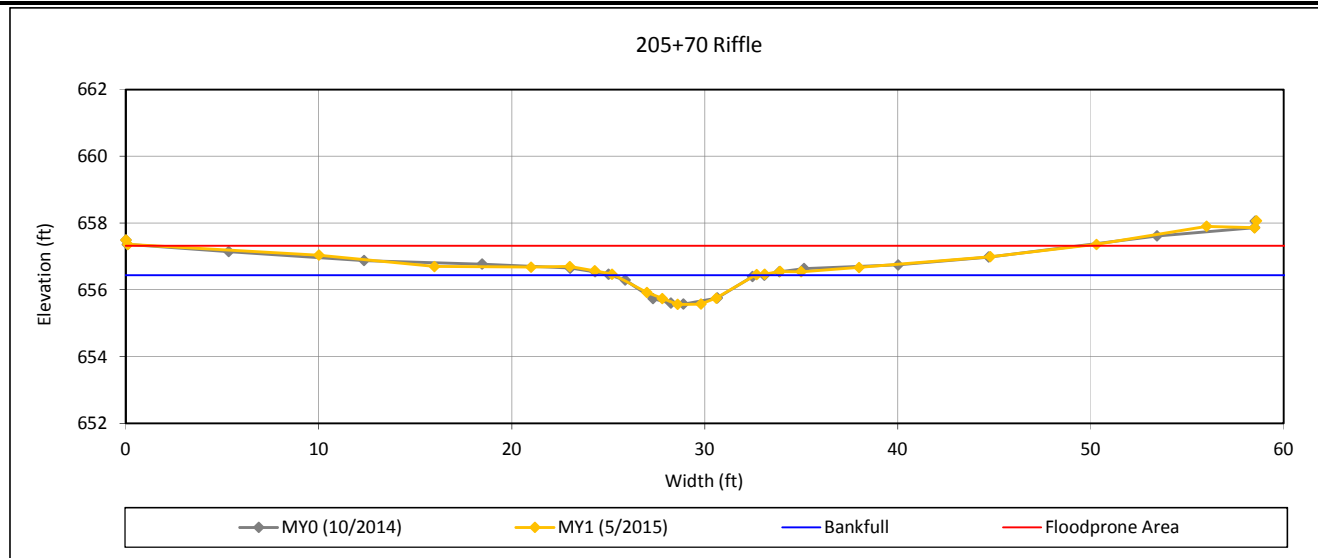

Bankfull Dimensions

3.9	x-section area (ft.sq.)
7.3	width (ft)
0.5	mean depth (ft)
0.9	max depth (ft)
7.6	wetted parimeter (ft)
0.5	hyd radi (ft)
13.7	width-depth ratio
50.0	W flood prone area (ft)
6.8	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2015

Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 10-UT1A Reach 1

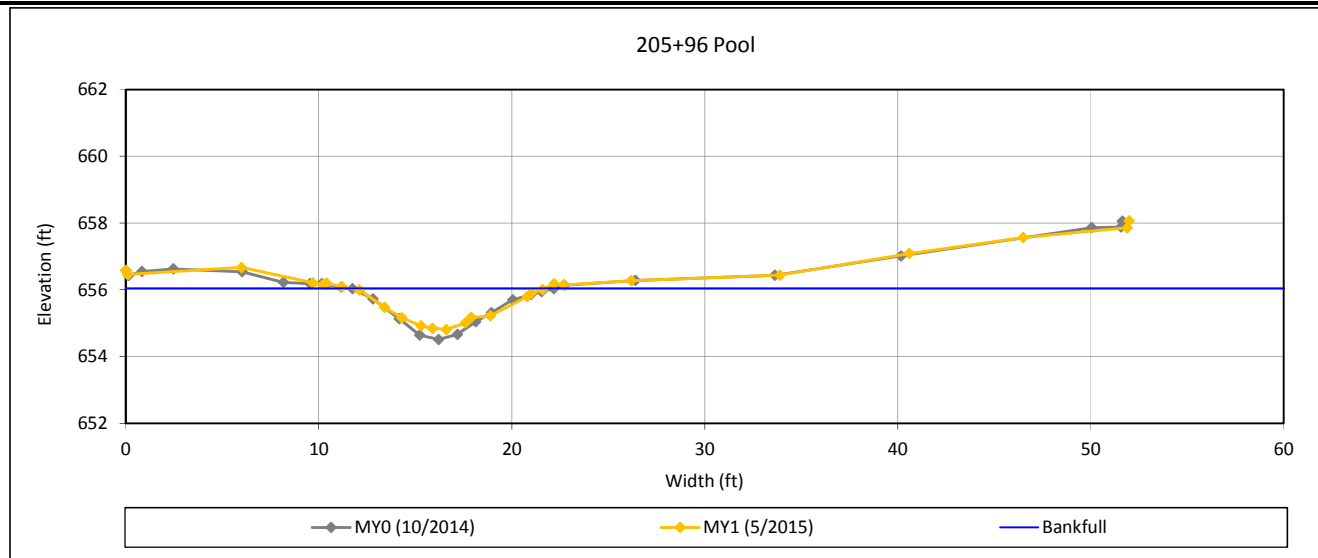

Bankfull Dimensions

7.0	x-section area (ft.sq.)
10.0	width (ft)
0.7	mean depth (ft)
1.2	max depth (ft)
10.4	wetted parimeter (ft)
0.7	hyd radi (ft)
14.4	width-depth ratio

Survey Date: 5/2015
Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 11-UT1A Reach 4

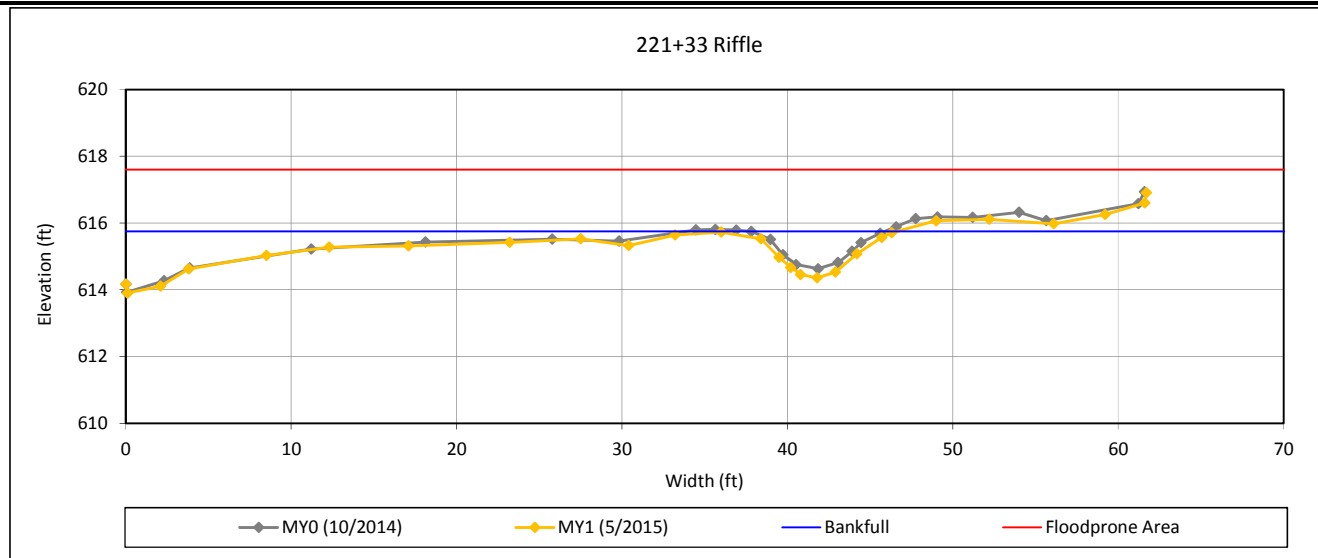

Bankfull Dimensions

6.6	x-section area (ft.sq.)
8.2	width (ft)
0.8	mean depth (ft)
1.9	max depth (ft)
8.7	wetted parimeter (ft)
0.8	hyd radi (ft)
10.1	width-depth ratio
200.0	W flood prone area (ft)
24.4	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2015

Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 12-UT1A Reach 4

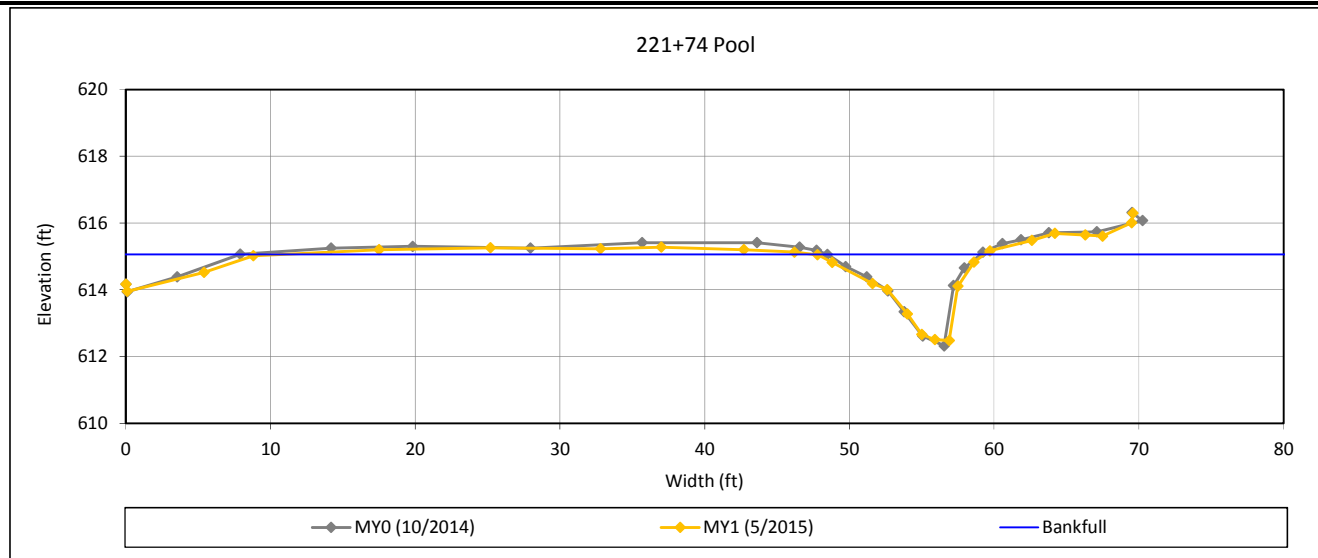

Bankfull Dimensions

13.2	x-section area (ft.sq.)
10.5	width (ft)
1.2	mean depth (ft)
2.6	max depth (ft)
12.4	wetted parimeter (ft)
1.1	hyd radi (ft)
8.4	width-depth ratio

Survey Date: 5/2015
Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 13-UT1B

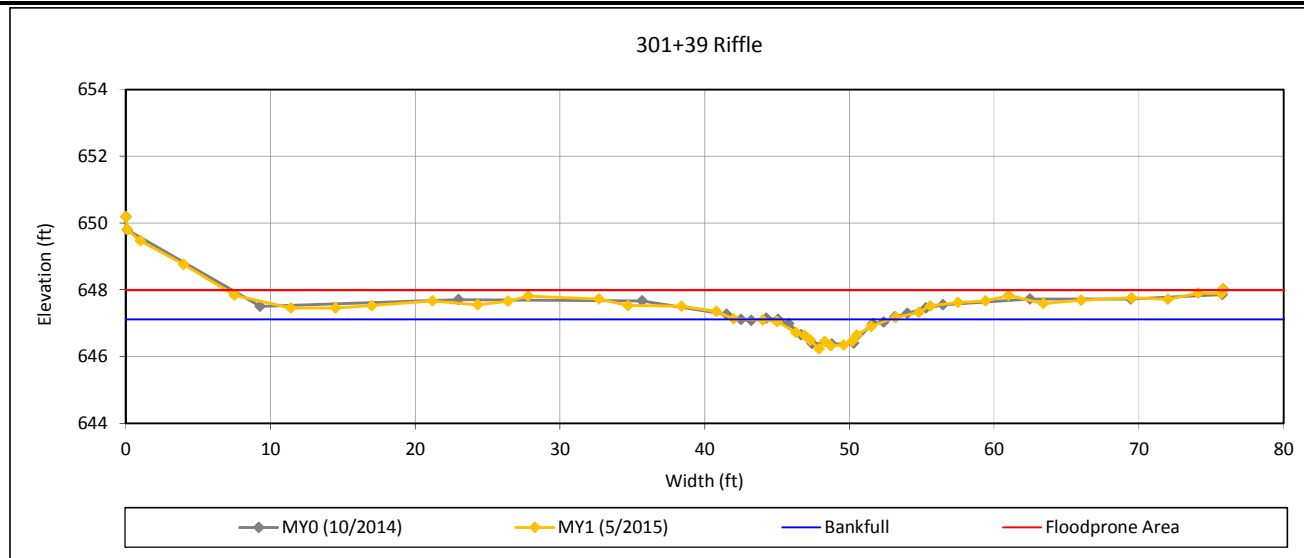

Bankfull Dimensions

3.6	x-section area (ft.sq.)
7.8	width (ft)
0.5	mean depth (ft)
0.9	max depth (ft)
8.1	wetted parimeter (ft)
0.4	hyd radi (ft)
16.9	width-depth ratio
70.0	W flood prone area (ft)
9.0	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2015

Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 14-UT1B

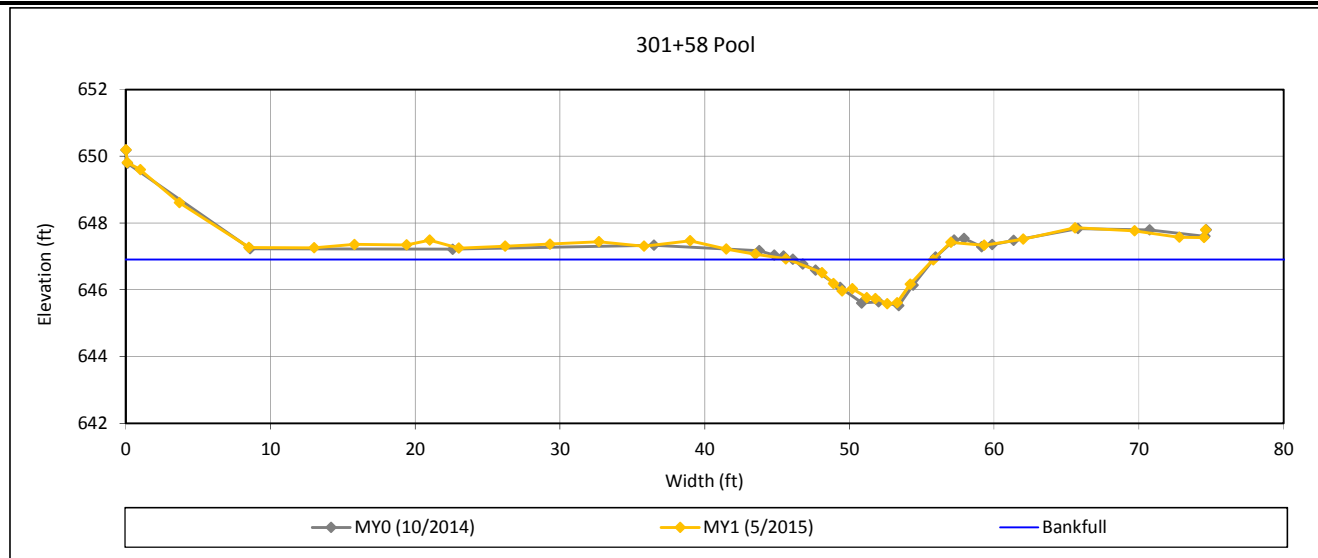

Bankfull Dimensions

7.2	x-section area (ft.sq.)
10.1	width (ft)
0.7	mean depth (ft)
1.3	max depth (ft)
10.6	wetted parimeter (ft)
0.7	hyd radi (ft)
14.2	width-depth ratio

Survey Date: 5/2015
Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 15-UT2

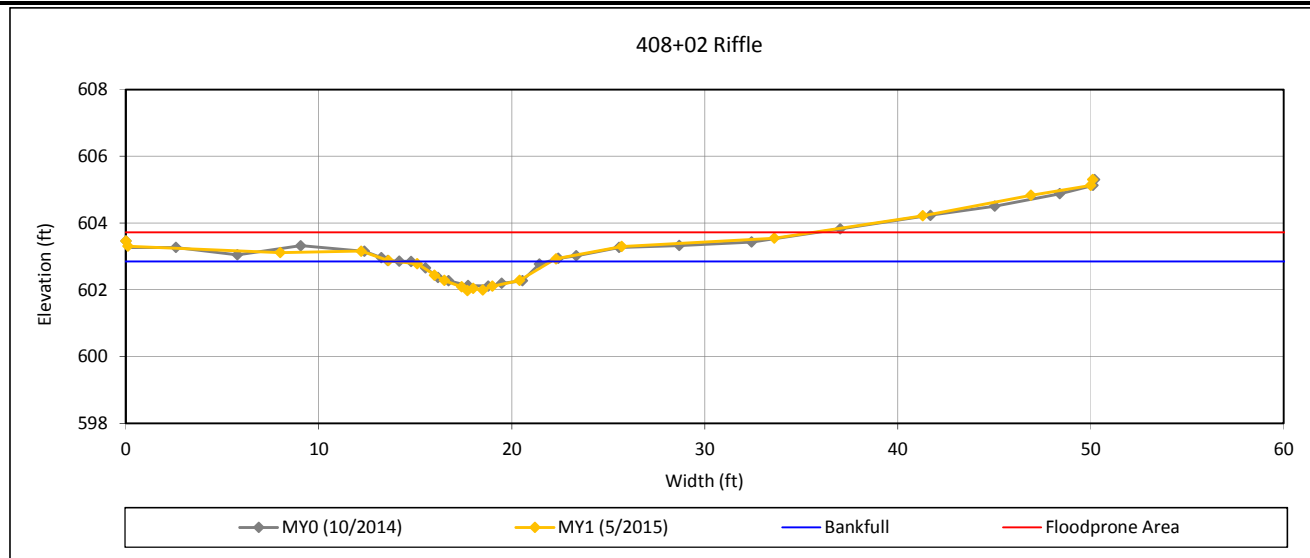

Bankfull Dimensions

3.8	x-section area (ft.sq.)
7.0	width (ft)
0.5	mean depth (ft)
0.9	max depth (ft)
7.2	wetted parimeter (ft)
0.5	hyd radi (ft)
12.9	width-depth ratio
50.0	W flood prone area (ft)
7.2	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2015

Field Crew: Wildlands Engineering




View Downstream

Cross Section Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

Cross Section 16-UT2

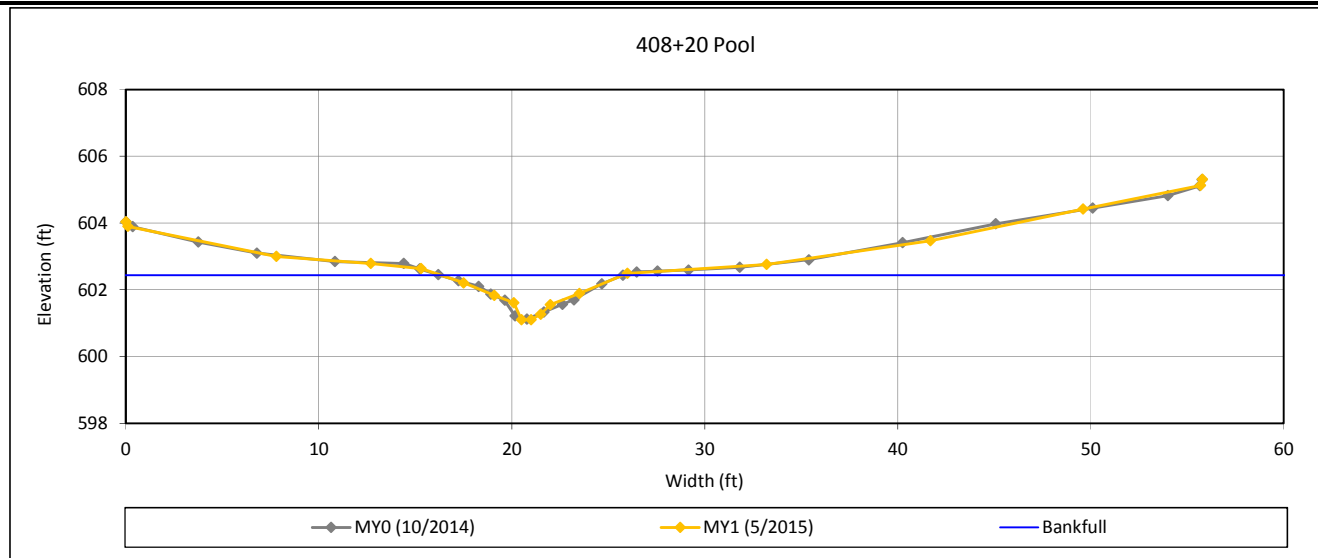

Bankfull Dimensions

5.5	x-section area (ft.sq.)
9.5	width (ft)
0.6	mean depth (ft)
1.3	max depth (ft)
10.0	wetted parimeter (ft)
0.5	hyd radi (ft)
16.3	width-depth ratio

Survey Date: 5/2015
Field Crew: Wildlands Engineering



View Downstream

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1 Reach 2, Reachwide

Particle Class		Diameter (mm)		Particle Count			Reach Summary	
		min	max	Riffle	Pool	Total	Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062	9	17	26	26	26
SAND	Very fine	0.062	0.125					26
	Fine	0.125	0.250		8	8	8	34
	Medium	0.25	0.50		7	7	7	41
	Coarse	0.5	1.0					41
	Very Coarse	1.0	2.0					41
GRAVEL	Very Fine	2.0	2.8					41
	Very Fine	2.8	4.0	1		1	1	42
	Fine	4.0	5.6	1	1	2	2	44
	Fine	5.6	8.0	1	3	4	4	48
	Medium	8.0	11.0	2	1	3	3	51
	Medium	11.0	16.0	2	1	3	3	54
	Coarse	16.0	22.6	2	1	3	3	57
	Coarse	22.6	32	2	1	3	3	60
	Very Coarse	32	45	5		5	5	65
	Very Coarse	45	64	8		8	8	73
COBBLE	Small	64	90	10		10	10	83
	Small	90	128	9		9	9	92
	Large	128	180	8		8	8	100
	Large	180	256					100
BOULDER	Small	256	362					100
	Small	362	512					100
	Medium	512	1024					100
	Large/Very Large	1024	2048					100
BEDROCK	Bedrock	2048	>2048					100
Total				60	40	100	100	100

Reachwide Channel materials (mm)	
D ₁₆ =	Silt/Clay
D ₃₅ =	0.28
D ₅₀ =	9.9
D ₈₄ =	93.6
D ₉₅ =	145.5
D ₁₀₀ =	180.0

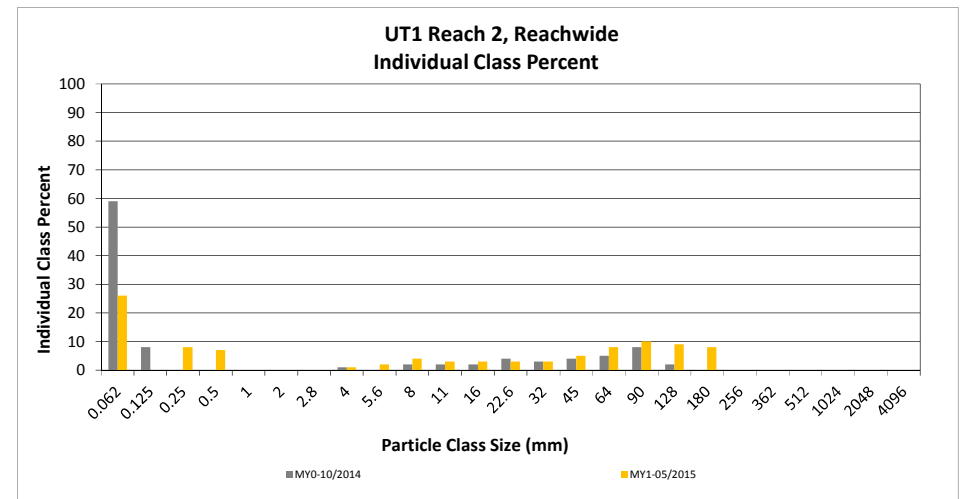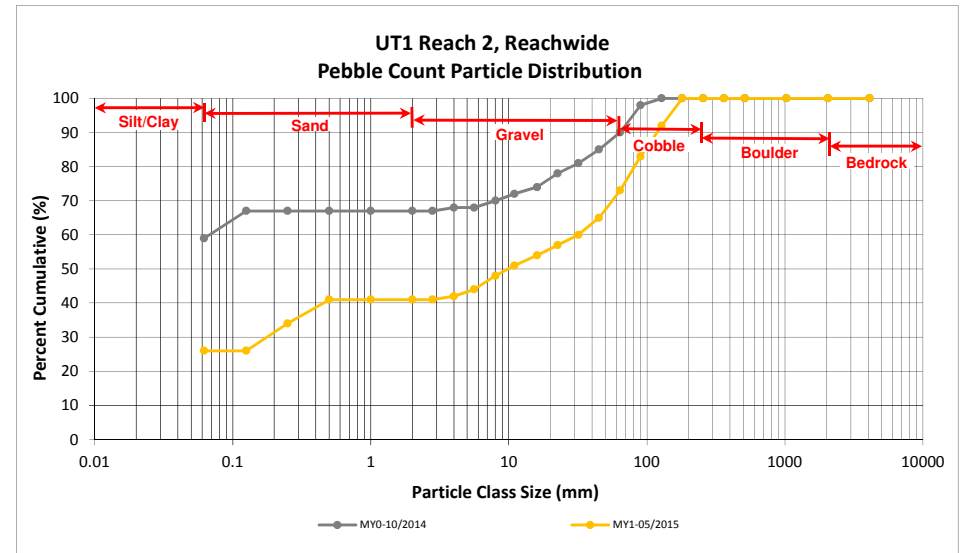

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1 Reach 2, Cross Section 1

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
<i>SILT/CLAY</i>	Silt/Clay	0.000	0.062	4	4	4
SAND	Very fine	0.062	0.125			4
	Fine	0.125	0.250			4
	Medium	0.25	0.50	4	4	8
	Coarse	0.5	1.0	1	1	9
	Very Coarse	1.0	2.0	1	1	10
GRAVEL	Very Fine	2.0	2.8			10
	Very Fine	2.8	4.0	1	1	11
	Fine	4.0	5.6	4	4	15
	Fine	5.6	8.0	4	4	19
	Medium	8.0	11.0	3	3	22
	Medium	11.0	16.0	3	3	25
	Coarse	16.0	22.6	3	3	28
	Coarse	22.6	32	5	5	33
	Very Coarse	32	45	4	4	37
	Very Coarse	45	64	13	13	50
COBBLE	Small	64	90	14	14	64
	Small	90	128	16	16	80
	Large	128	180	12	12	92
	Large	180	256	6	6	98
BOULDER	Small	256	362	2	2	100
	Small	362	512			100
	Medium	512	1024			100
	Large/Very Large	1024	2048			100
BEDROCK	Bedrock	2048	>2048			100
Total				100	100	100

Cross Section 1	
Channel materials (mm)	
D ₁₆ =	6.12
D ₃₅ =	37.95
D ₅₀ =	64.0
D ₈₄ =	143.4
D ₉₅ =	214.7
D ₁₀₀ =	362.0

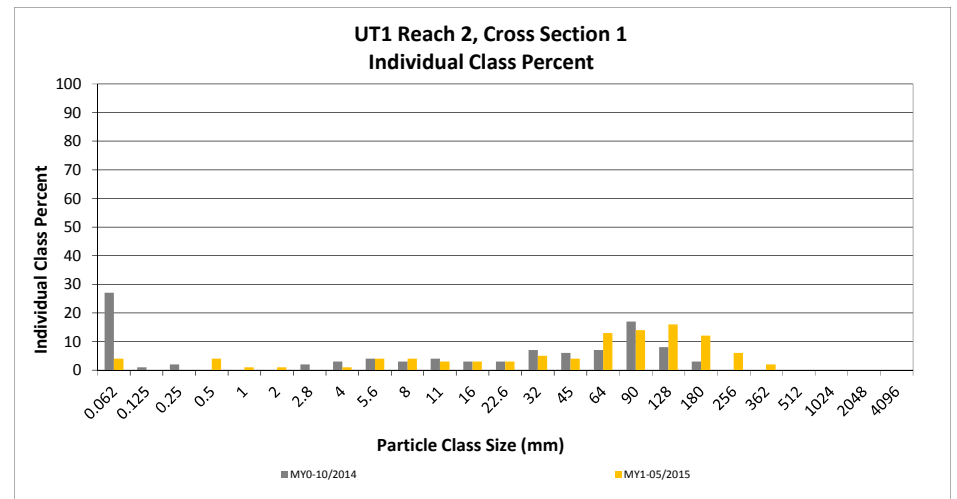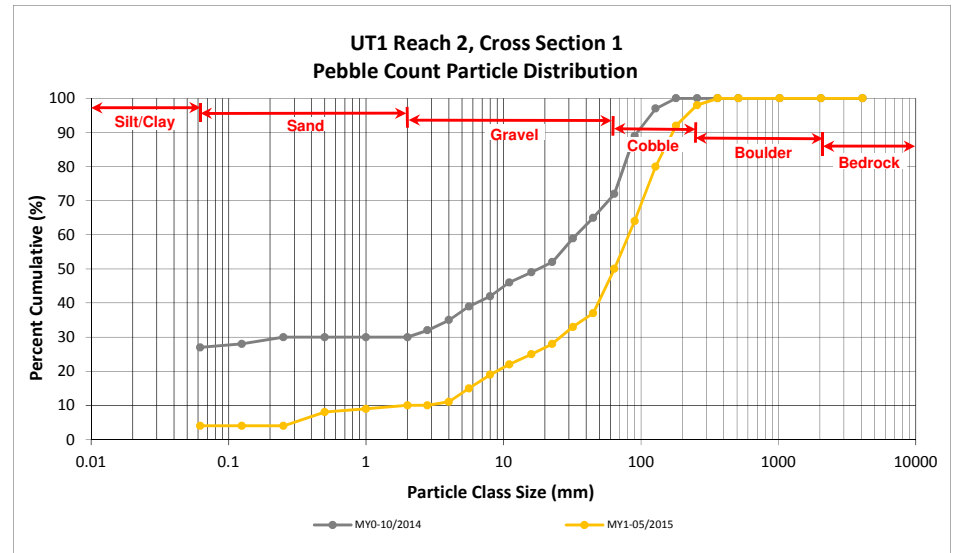

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1 Reach 2, Cross Section 3

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
<i>SILT/CLAY</i>	Silt/Clay	0.000	0.062	2	2	2
SAND	Very fine	0.062	0.125	1	1	3
	Fine	0.125	0.250	1	1	4
	Medium	0.25	0.50	1	1	5
	Coarse	0.5	1.0			5
	Very Coarse	1.0	2.0			5
GRAVEL	Very Fine	2.0	2.8	3	3	8
	Very Fine	2.8	4.0	3	3	11
	Fine	4.0	5.6	3	3	14
	Fine	5.6	8.0	6	6	20
	Medium	8.0	11.0	4	4	24
	Medium	11.0	16.0	6	6	30
	Coarse	16.0	22.6	4	4	34
	Coarse	22.6	32	5	5	39
	Very Coarse	32	45	10	10	49
	Very Coarse	45	64	10	10	59
COBBLE	Small	64	90	12	12	71
	Small	90	128	10	10	81
	Large	128	180	10	10	91
	Large	180	256	6	6	97
BOULDER	Small	256	362	3	3	100
	Small	362	512			100
	Medium	512	1024			100
	Large/Very Large	1024	2048			100
BEDROCK	Bedrock	2048	>2048			100
Total				100	100	100

Cross Section 3	
Channel materials (mm)	
D ₁₆ =	6.31
D ₃₅ =	24.23
D ₅₀ =	46.6
D ₈₄ =	141.8
D ₉₅ =	227.6
D ₁₀₀ =	362.0

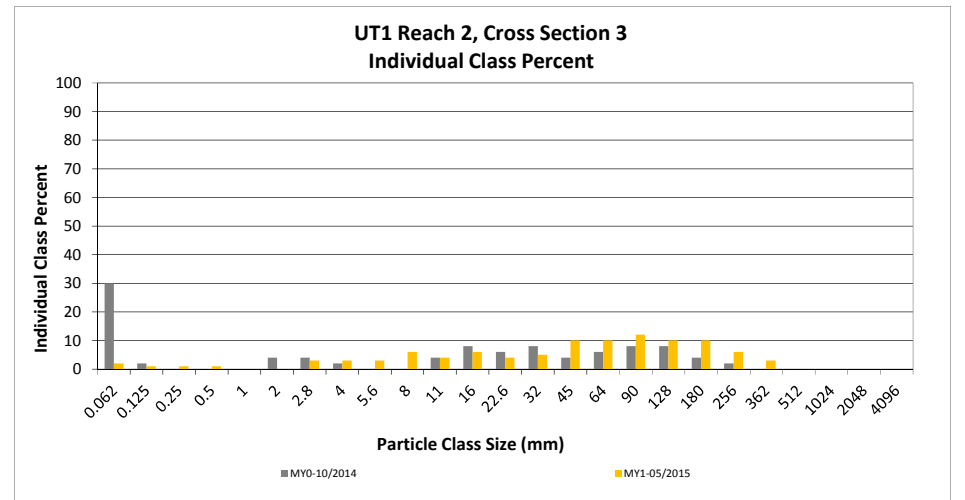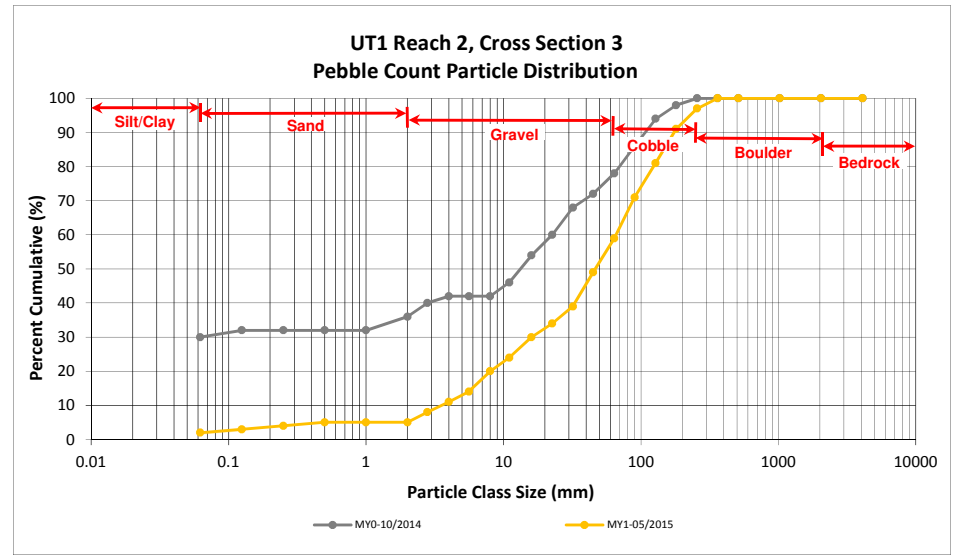

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1 Reach 4, Reachwide

Particle Class		Diameter (mm)		Particle Count			Reach Summary	
		min	max	Riffle	Pool	Total	Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062	4	17	21	21	21
SAND	Very fine	0.062	0.125					21
	Fine	0.125	0.250	1	1	2	2	23
	Medium	0.25	0.50	3	4	7	7	30
	Coarse	0.5	1.0		4	4	4	34
	Very Coarse	1.0	2.0					34
GRAVEL	Very Fine	2.0	2.8		1	1	1	35
	Very Fine	2.8	4.0	4	1	5	5	40
	Fine	4.0	5.6	4	4	8	8	48
	Fine	5.6	8.0	4		4	4	52
	Medium	8.0	11.0	3		3	3	55
	Medium	11.0	16.0	2		2	2	57
	Coarse	16.0	22.6	1		1	1	58
	Coarse	22.6	32	3		3	3	61
	Very Coarse	32	45	3		3	3	64
	Very Coarse	45	64	6		6	6	70
COBBLE	Small	64	90	10	4	14	14	84
	Small	90	128	8	4	12	12	96
	Large	128	180	3		3	3	99
	Large	180	256					99
BOULDER	Small	256	362	1		1	1	100
	Small	362	512					100
	Medium	512	1024					100
	Large/Very Large	1024	2048					100
BEDROCK	Bedrock	2048	>2048					100
Total				60	40	100	100	100

Reachwide Channel materials (mm)	
D ₁₆ =	Silt/Clay
D ₃₅ =	2.80
D ₅₀ =	6.7
D ₈₄ =	90.0
D ₉₅ =	124.3
D ₁₀₀ =	362.0

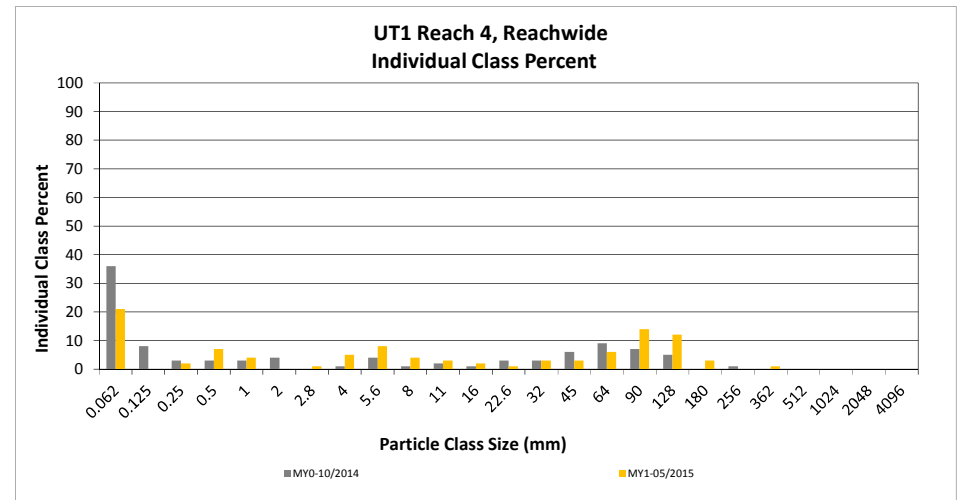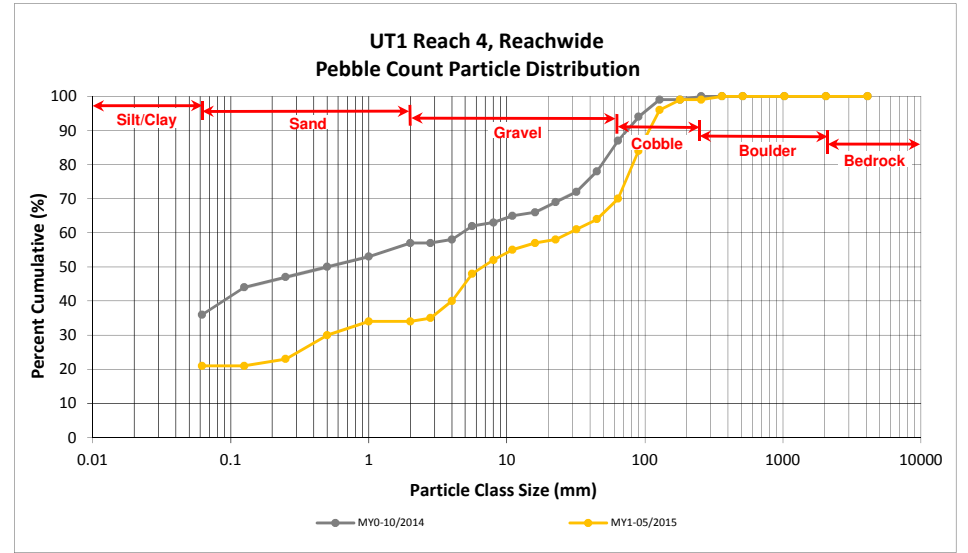

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1 Reach 5, Reachwide

Particle Class		Diameter (mm)		Particle Count			Reach Summary	
		min	max	Riffle	Pool	Total	Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062	2	16	18	18	18
SAND	Very fine	0.062	0.125					18
	Fine	0.125	0.250		7	7	7	25
	Medium	0.25	0.50		5	5	5	30
	Coarse	0.5	1.0					30
	Very Coarse	1.0	2.0					30
GRAVEL	Very Fine	2.0	2.8	1		1	1	31
	Very Fine	2.8	4.0	1	2	3	3	34
	Fine	4.0	5.6		3	3	3	37
	Fine	5.6	8.0	1		1	1	38
	Medium	8.0	11.0	2	2	4	4	42
	Medium	11.0	16.0	4		4	4	46
	Coarse	16.0	22.6	5	1	6	6	52
	Coarse	22.6	32	7	3	10	10	62
	Very Coarse	32	45	5	1	6	6	68
	Very Coarse	45	64	10		10	10	78
COBBLE	Small	64	90	13		13	13	91
	Small	90	128	4		4	4	95
	Large	128	180	2		2	2	97
	Large	180	256	1		1	1	98
BOULDER	Small	256	362	2		2	2	100
	Small	362	512					100
	Medium	512	1024					100
	Large/Very Large	1024	2048					100
BEDROCK	Bedrock	2048	>2048					100
Total				60	40	100	100	100

Reachwide	
Channel materials (mm)	
D ₁₆ =	Silt/Clay
D ₃₅ =	4.47
D ₅₀ =	20.1
D ₈₄ =	74.9
D ₉₅ =	128.0
D ₁₀₀ =	362.0

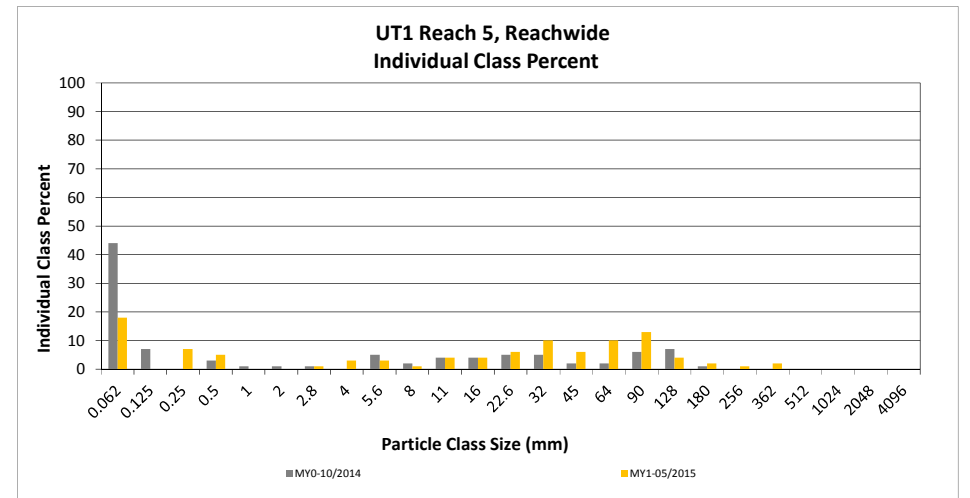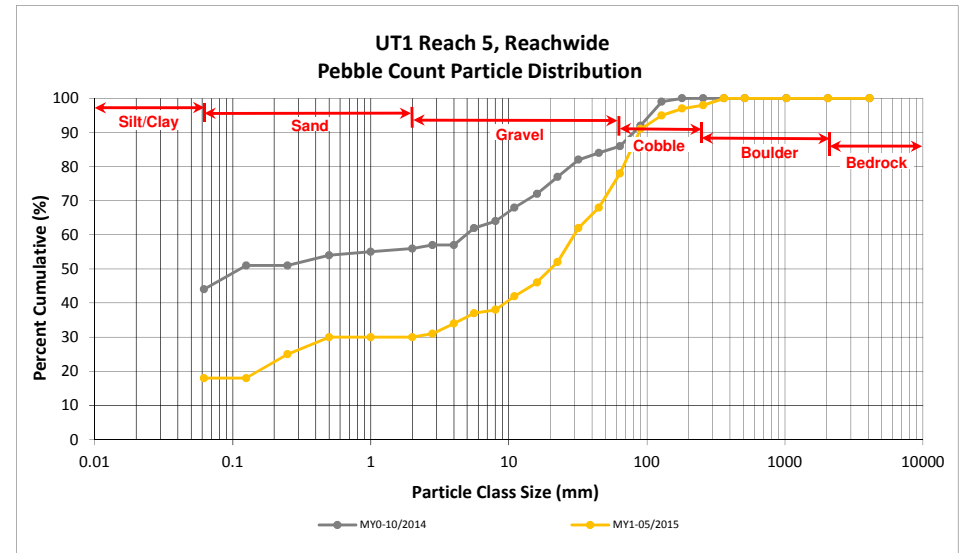

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1 Reach 5, Cross Section 6

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
<i>SILT/CLAY</i>	Silt/Clay	0.000	0.062			0
SAND	Very fine	0.062	0.125			0
	Fine	0.125	0.250			0
	Medium	0.25	0.50			0
	Coarse	0.5	1.0			0
	Very Coarse	1.0	2.0	1	1	1
GRAVEL	Very Fine	2.0	2.8			1
	Very Fine	2.8	4.0	3	3	4
	Fine	4.0	5.6	3	3	7
	Fine	5.6	8.0	2	2	9
	Medium	8.0	11.0	6	6	15
	Medium	11.0	16.0	9	9	24
	Coarse	16.0	22.6	11	11	34
	Coarse	22.6	32	18	18	52
	Very Coarse	32	45	13	13	65
	Very Coarse	45	64	14	14	78
COBBLE	Small	64	90	7	7	85
	Small	90	128	7	7	92
	Large	128	180	8	8	100
	Large	180	256			100
BOULDER	Small	256	362			100
	Small	362	512			100
	Medium	512	1024			100
	Large/Very Large	1024	2048			100
BEDROCK	Bedrock	2048	>2048			100
Total				102	100	100

Cross Section 6	
Channel materials (mm)	
D ₁₆ =	11.62
D ₃₅ =	22.91
D ₅₀ =	30.8
D ₈₄ =	84.4
D ₉₅ =	144.8
D ₁₀₀ =	180.0

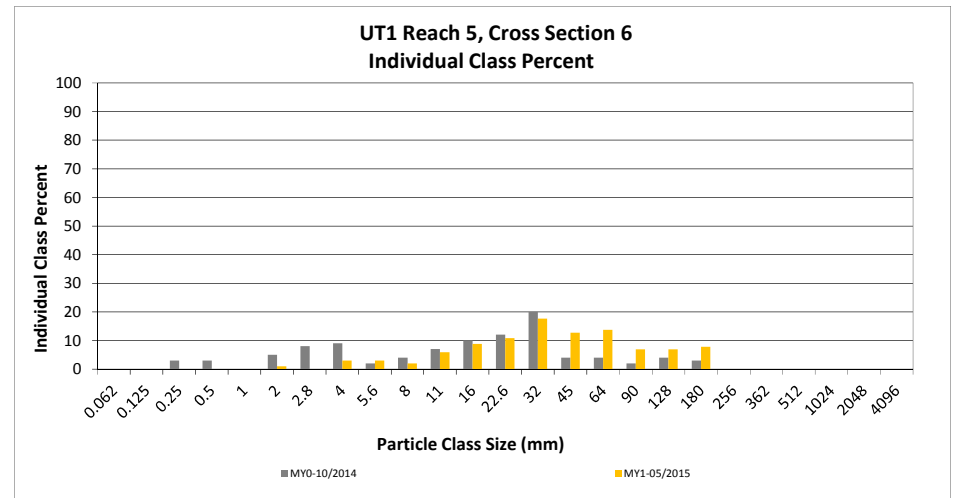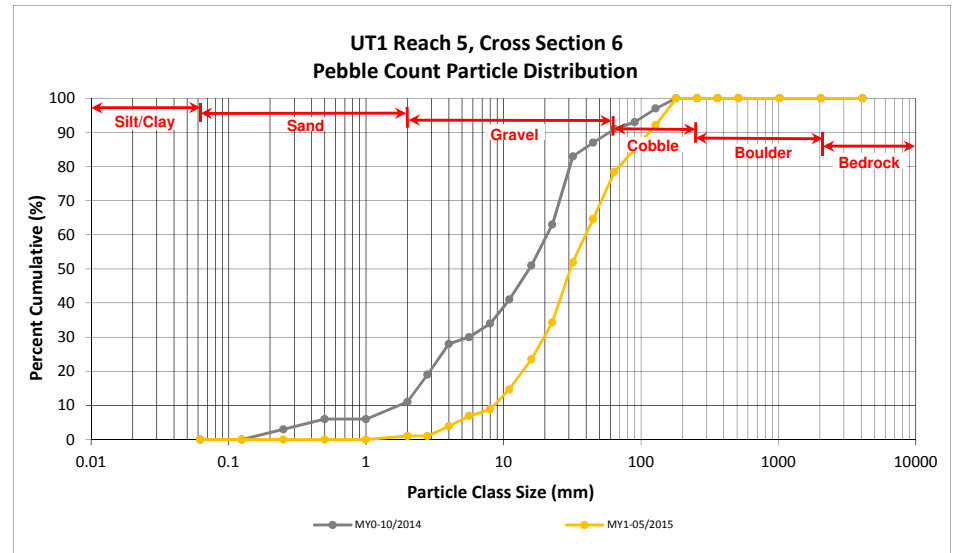

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1 Reach 5, Cross Section 7

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
<i>SILT/CLAY</i>	Silt/Clay	0.000	0.062			0
SAND	Very fine	0.062	0.125			0
	Fine	0.125	0.250			0
	Medium	0.25	0.50			0
	Coarse	0.5	1.0			0
	Very Coarse	1.0	2.0			0
GRAVEL	Very Fine	2.0	2.8			0
	Very Fine	2.8	4.0			0
	Fine	4.0	5.6	1	1	1
	Fine	5.6	8.0	2	2	3
	Medium	8.0	11.0	2	2	5
	Medium	11.0	16.0	4	4	9
	Coarse	16.0	22.6	6	6	15
	Coarse	22.6	32	9	9	24
	Very Coarse	32	45	16	16	40
	Very Coarse	45	64	24	24	64
COBBLE	Small	64	90	9	9	73
	Small	90	128	11	11	84
	Large	128	180	12	12	96
	Large	180	256	2	2	98
BOULDER	Small	256	362	2	2	100
	Small	362	512			100
	Medium	512	1024			100
	Large/Very Large	1024	2048			100
BEDROCK	Bedrock	2048	>2048			100
Total				100	100	100

Cross Section 7	
Channel materials (mm)	
D ₁₆ =	23.49
D ₃₅ =	40.45
D ₅₀ =	52.1
D ₈₄ =	128.0
D ₉₅ =	175.0
D ₁₀₀ =	362.0

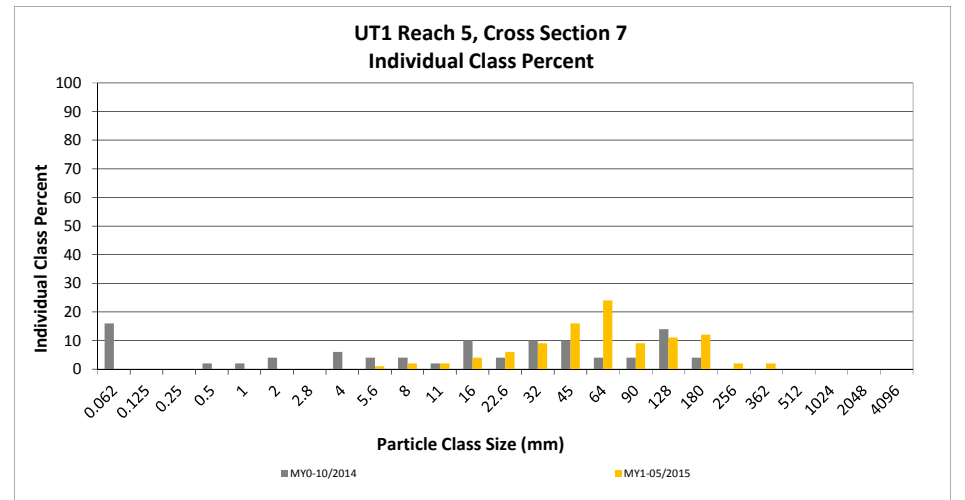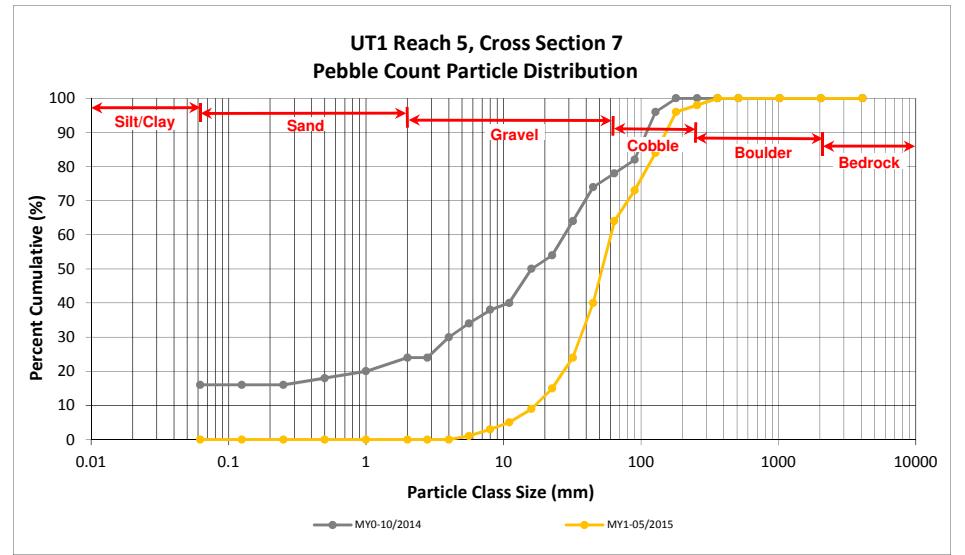

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1A Reach 1, Reachwide

Particle Class		Diameter (mm)		Particle Count			Reach Summary	
		min	max	Riffle	Pool	Total	Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062		14	14	14	14
SAND	Very fine	0.062	0.125		1	1	1	15
	Fine	0.125	0.250		3	3	3	18
	Medium	0.25	0.50		6	6	6	24
	Coarse	0.5	1.0		4	4	4	28
	Very Coarse	1.0	2.0	1	4	5	5	33
GRAVEL	Very Fine	2.0	2.8		6	6	6	39
	Very Fine	2.8	4.0	3	1	4	4	43
	Fine	4.0	5.6	3		3	3	46
	Fine	5.6	8.0	1	1	2	2	48
	Medium	8.0	11.0	2		2	2	50
	Medium	11.0	16.0	12		12	12	62
	Coarse	16.0	22.6	10		10	10	72
	Coarse	22.6	32	4		4	4	76
	Very Coarse	32	45	10		10	10	86
	Very Coarse	45	64	7		7	7	93
COBBLE	Small	64	90	5		5	5	98
	Small	90	128	1		1	1	99
	Large	128	180	1		1	1	100
	Large	180	256					100
Boulder	Small	256	362					100
	Small	362	512					100
	Medium	512	1024					100
	Large/Very Large	1024	2048					100
BEDROCK	Bedrock	2048	>2048					100
Total				60	40	100	100	100

Reachwide Channel materials (mm)	
D ₁₆ =	0.16
D ₃₅ =	2.24
D ₅₀ =	11.0
D ₈₄ =	42.0
D ₉₅ =	73.4
D ₁₀₀ =	180.0

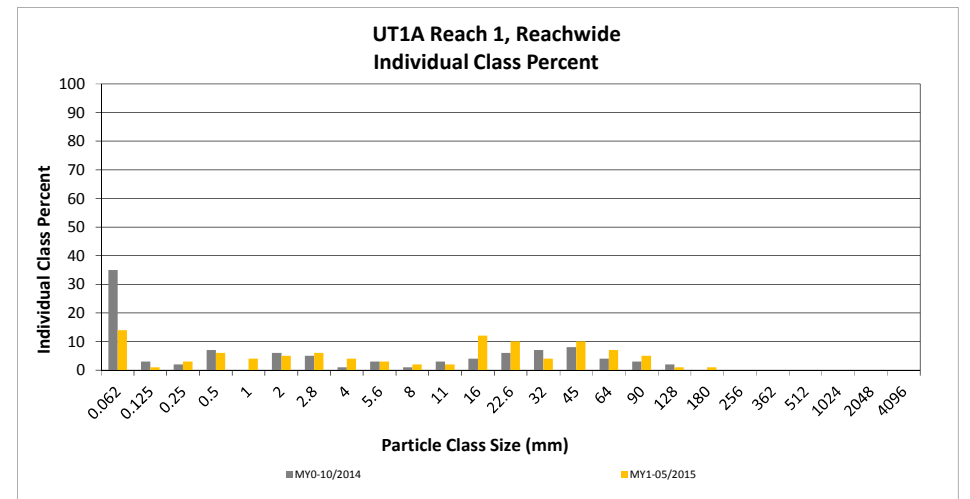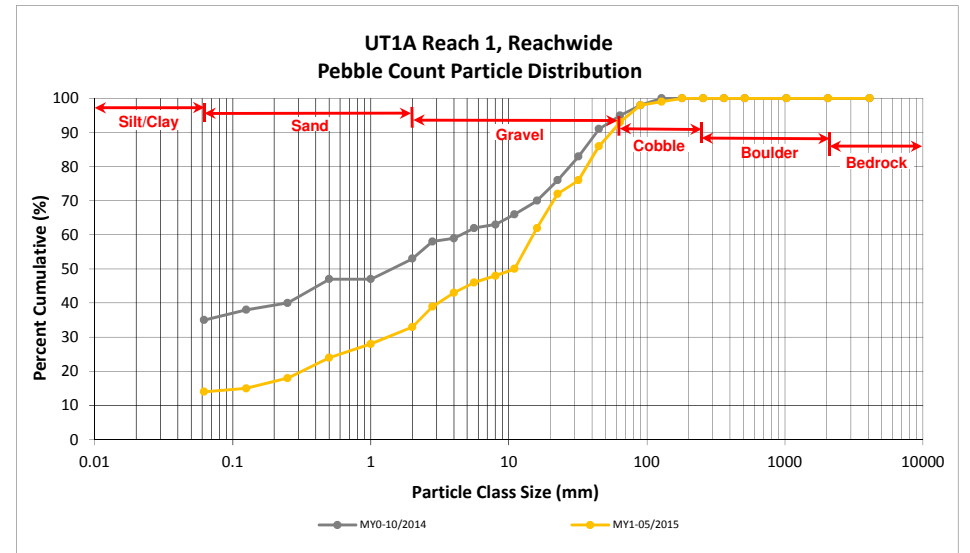

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1A Reach 1, Cross Section 9

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
<i>SILT/CLAY</i>	Silt/Clay	0.000	0.062	5	5	5
SAND	Very fine	0.062	0.125			5
	Fine	0.125	0.250			5
	Medium	0.25	0.50			5
	Coarse	0.5	1.0			5
	Very Coarse	1.0	2.0			5
GRAVEL	Very Fine	2.0	2.8			5
	Very Fine	2.8	4.0			5
	Fine	4.0	5.6	2	2	7
	Fine	5.6	8.0	4	4	11
	Medium	8.0	11.0	12	12	23
	Medium	11.0	16.0	23	23	46
	Coarse	16.0	22.6	13	13	59
	Coarse	22.6	32	12	12	71
	Very Coarse	32	45	17	17	88
	Very Coarse	45	64	5	5	93
COBBLE	Small	64	90	4	4	97
	Small	90	128	2	2	99
	Large	128	180	1	1	100
	Large	180	256			100
BOULDER	Small	256	362			100
	Small	362	512			100
	Medium	512	1024			100
	Large/Very Large	1024	2048			100
BEDROCK	Bedrock	2048	>2048			100
Total				100	100	100

Cross Section 9	
Channel materials (mm)	
D ₁₆ =	9.14
D ₃₅ =	13.38
D ₅₀ =	17.8
D ₈₄ =	41.5
D ₉₅ =	75.9
D ₁₀₀ =	180.0

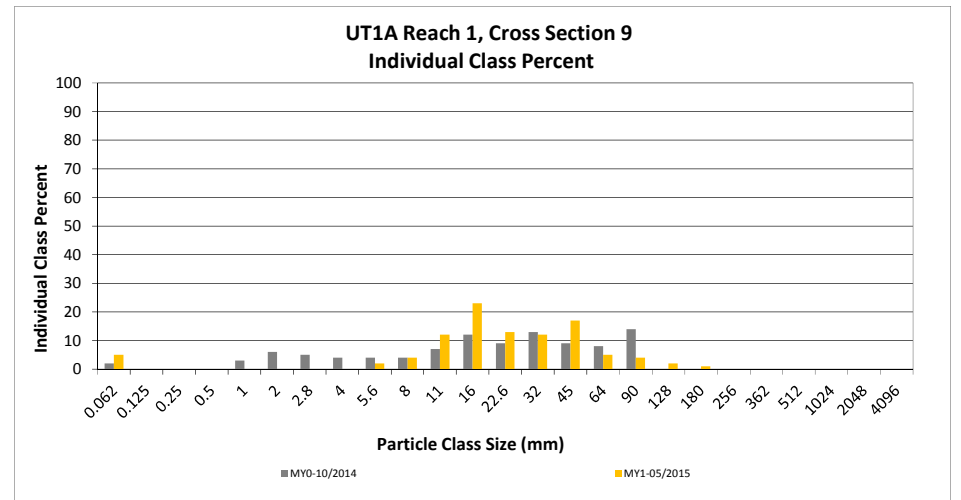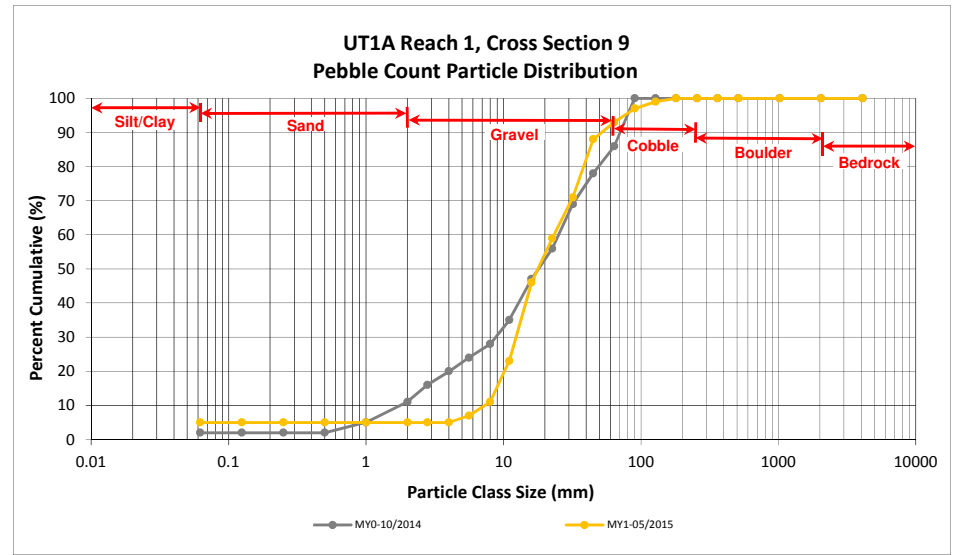

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1A Reach 4, Reachwide

Particle Class		Diameter (mm)		Particle Count			Reach Summary	
		min	max	Riffle	Pool	Total	Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062	4	16	20	20	20
SAND	Very fine	0.062	0.125		3	3	3	23
	Fine	0.125	0.250		5	5	5	28
	Medium	0.25	0.50		6	6	6	34
	Coarse	0.5	1.0					34
	Very Coarse	1.0	2.0					34
GRAVEL	Very Fine	2.0	2.8					34
	Very Fine	2.8	4.0		1	1	1	35
	Fine	4.0	5.6	1	5	6	6	41
	Fine	5.6	8.0	2	1	3	3	44
	Medium	8.0	11.0					44
	Medium	11.0	16.0	2	1	3	3	47
	Coarse	16.0	22.6	2		2	2	49
	Coarse	22.6	32	9	1	10	10	59
	Very Coarse	32	45	10		10	10	69
	Very Coarse	45	64	10	1	11	11	80
COBBLE	Small	64	90	7		7	7	87
	Small	90	128	10		10	10	97
	Large	128	180	3		3	3	100
	Large	180	256					100
BOULDER	Small	256	362					100
	Small	362	512					100
	Medium	512	1024					100
	Large/Very Large	1024	2048					100
BEDROCK	Bedrock	2048	>2048					100
Total				60	40	100	100	100

Reachwide Channel materials (mm)	
D ₁₆ =	Silt/Clay
D ₃₅ =	4.00
D ₅₀ =	23.40
D ₈₄ =	77.8
D ₉₅ =	119.3
D ₁₀₀ =	180.0

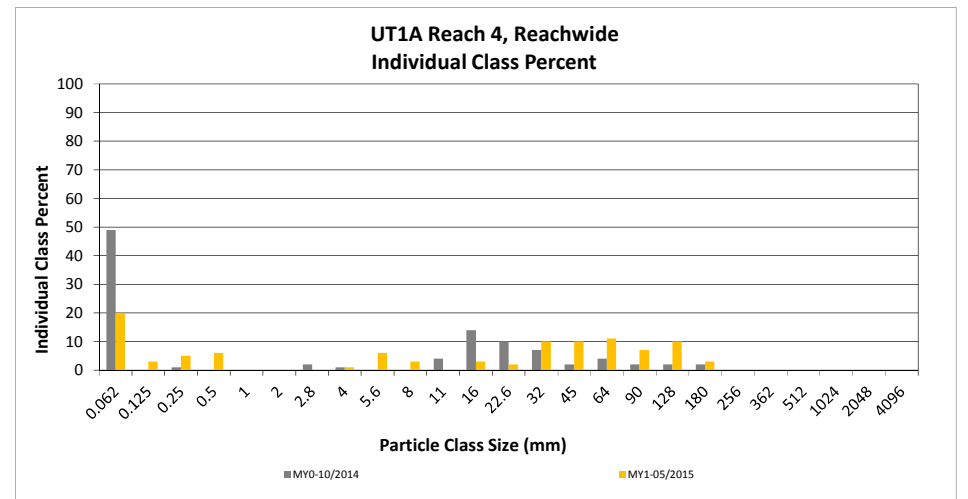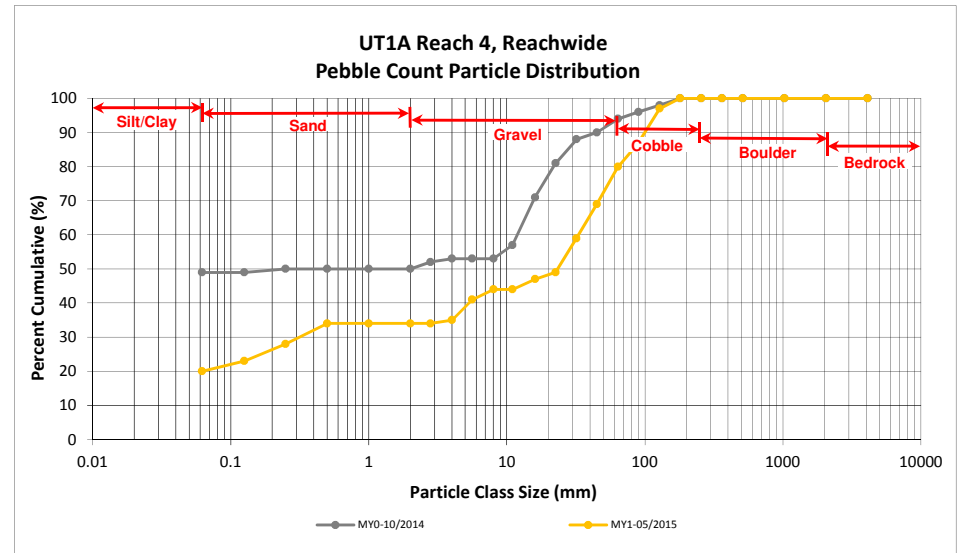

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1A Reach 4, Cross Section 11

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
<i>SILT/CLAY</i>	Silt/Clay	0.000	0.062	2	2	2
SAND	Very fine	0.062	0.125			2
	Fine	0.125	0.250			2
	Medium	0.25	0.50	2	2	4
	Coarse	0.5	1.0			4
	Very Coarse	1.0	2.0	1	1	5
GRAVEL	Very Fine	2.0	2.8	5	5	10
	Very Fine	2.8	4.0	6	6	16
	Fine	4.0	5.6	3	3	19
	Fine	5.6	8.0			19
	Medium	8.0	11.0			19
	Medium	11.0	16.0			19
	Coarse	16.0	22.6	6	6	25
	Coarse	22.6	32	10	10	35
	Very Coarse	32	45	18	18	54
	Very Coarse	45	64	16	16	70
COBBLE	Small	64	90	11	11	81
	Small	90	128	9	9	90
	Large	128	180	6	6	96
	Large	180	256	4	4	100
BOULDER	Small	256	362			100
	Small	362	512			100
	Medium	512	1024			100
	Large/Very Large	1024	2048			100
BEDROCK	Bedrock	2048	>2048			100
Total				99	100	100

Cross Section 11	
Channel materials (mm)	
D ₁₆ =	3.96
D ₃₅ =	31.61
D ₅₀ =	42.1
D ₈₄ =	101.8
D ₉₅ =	170.5
D ₁₀₀ =	256.0

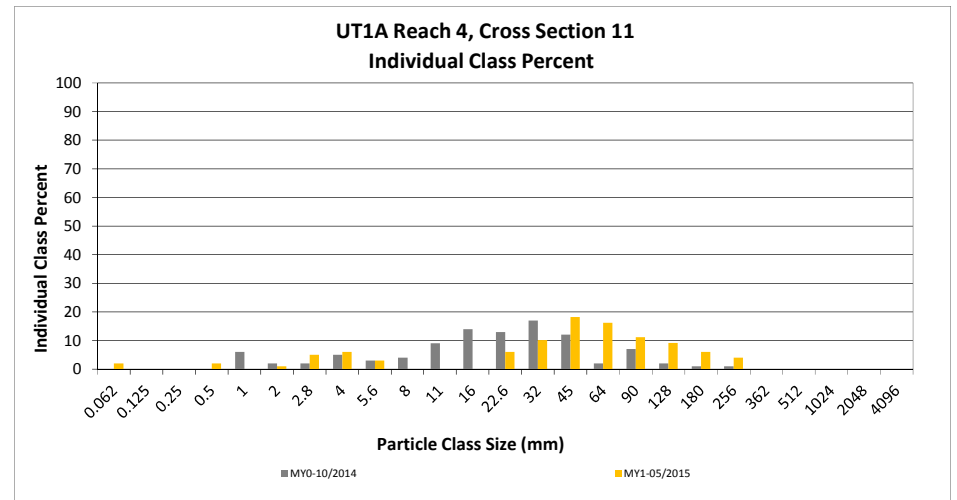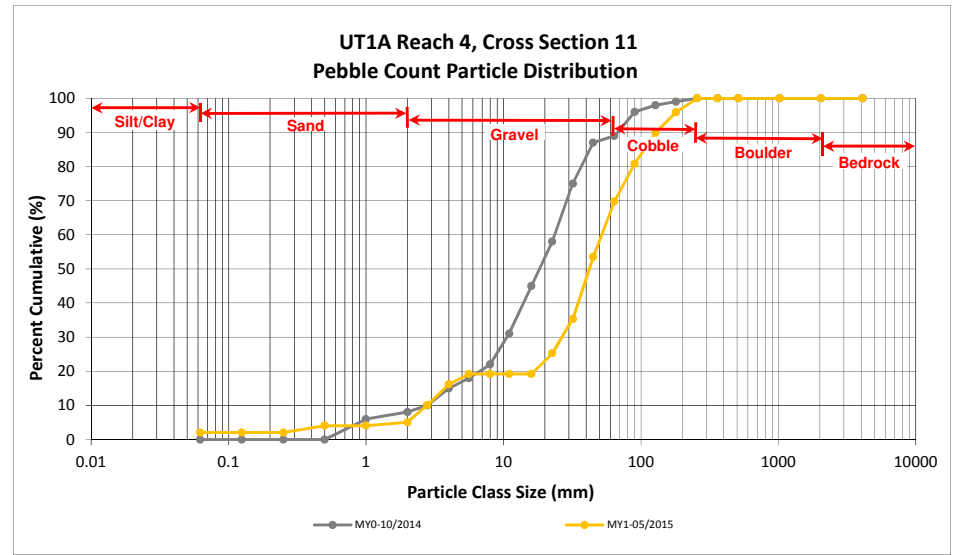

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1B, Reachwide

Particle Class		Diameter (mm)		Particle Count			Reach Summary	
		min	max	Riffle	Pool	Total	Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062	7	17	24	24	24
SAND	Very fine	0.062	0.125					24
	Fine	0.125	0.250		4	4	4	28
	Medium	0.25	0.50		5	5	5	33
	Coarse	0.5	1.0	1	3	4	4	37
	Very Coarse	1.0	2.0	1		1	1	38
GRAVEL	Very Fine	2.0	2.8		4	4	4	42
	Very Fine	2.8	4.0	2	2	4	4	46
	Fine	4.0	5.6	3	1	4	4	50
	Fine	5.6	8.0	2		2	2	52
	Medium	8.0	11.0	1	1	2	2	54
	Medium	11.0	16.0	4		4	4	58
	Coarse	16.0	22.6	5		5	5	63
	Coarse	22.6	32	3		3	3	66
	Very Coarse	32	45	7	2	9	9	75
	Very Coarse	45	64	8	1	9	9	84
COBBLE	Small	64	90	8		8	8	92
	Small	90	128	6		6	6	98
	Large	128	180	2		2	2	100
	Large	180	256					100
BOULDER	Small	256	362					100
	Small	362	512					100
	Medium	512	1024					100
	Large/Very Large	1024	2048					100
BEDROCK	Bedrock	2048	>2048					100
Total				60	40	100	100	100

Reachwide	
Channel materials (mm)	
D ₁₆ =	Silt/Clay
D ₃₅ =	0.71
D ₅₀ =	5.6
D ₈₄ =	64.0
D ₉₅ =	107.3
D ₁₀₀ =	180.0

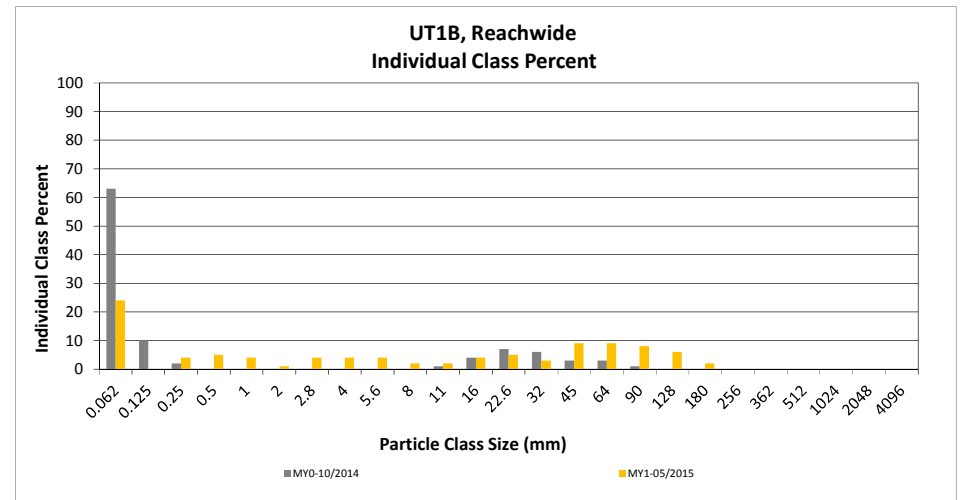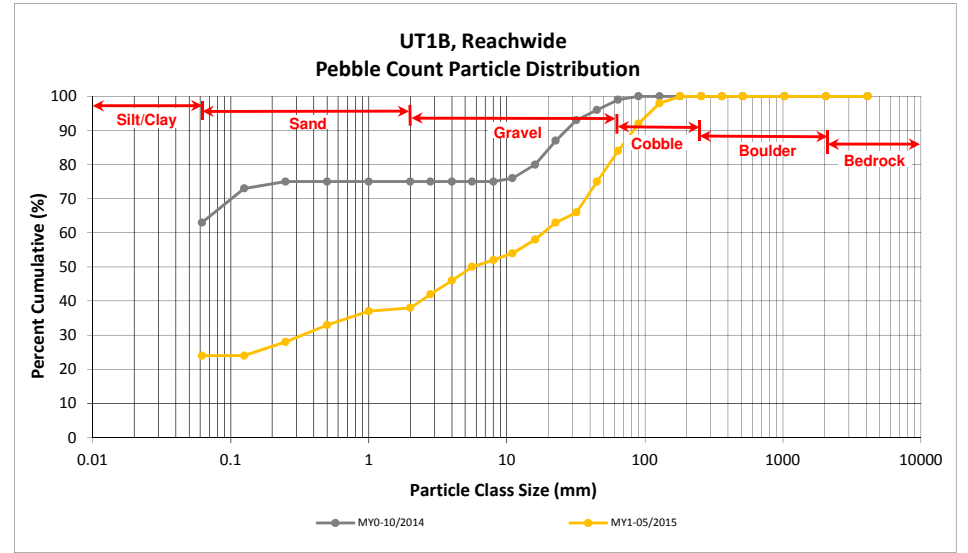

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT1B, Cross Section 13

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
<i>SILT/CLAY</i>	Silt/Clay	0.000	0.062	10	10	10
SAND	Very fine	0.062	0.125			10
	Fine	0.125	0.250	1	1	11
	Medium	0.25	0.50	4	4	15
	Coarse	0.5	1.0			15
	Very Coarse	1.0	2.0			15
GRAVEL	Very Fine	2.0	2.8			15
	Very Fine	2.8	4.0			15
	Fine	4.0	5.6	4	4	19
	Fine	5.6	8.0	6	6	25
	Medium	8.0	11.0	4	4	29
	Medium	11.0	16.0	2	2	31
	Coarse	16.0	22.6	2	2	33
	Coarse	22.6	32	4	4	37
	Very Coarse	32	45	14	14	51
	Very Coarse	45	64	17	17	68
COBBLE	Small	64	90	17	17	85
	Small	90	128	14	14	99
	Large	128	180	1	1	100
	Large	180	256			100
BOULDER	Small	256	362			100
	Small	362	512			100
	Medium	512	1024			100
	Large/Very Large	1024	2048			100
BEDROCK	Bedrock	2048	>2048			100
Total				100	100	100

Cross Section 13	
Channel materials (mm)	
D ₁₆ =	4.35
D ₃₅ =	26.89
D ₅₀ =	43.9
D ₈₄ =	88.2
D ₉₅ =	115.7
D ₁₀₀ =	180.0

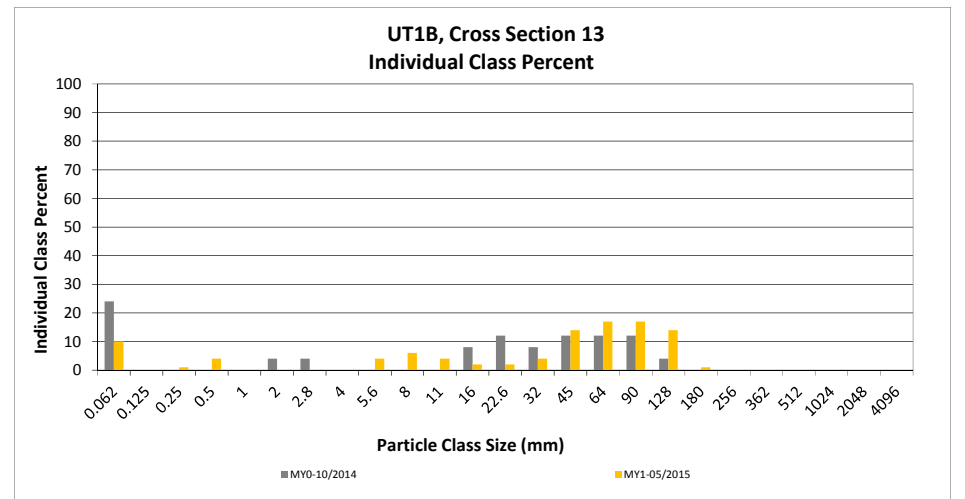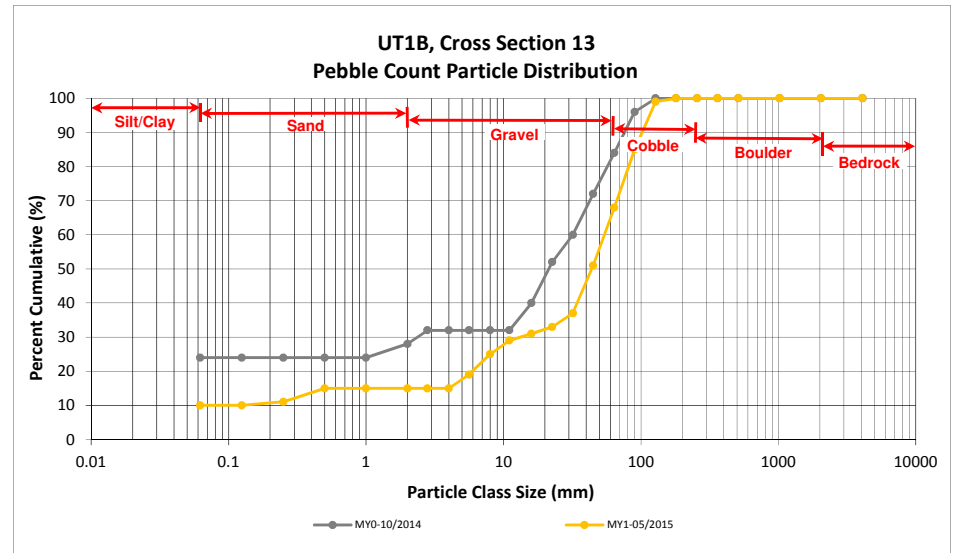

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT2, Reachwide

Particle Class		Diameter (mm)		Particle Count			Reach Summary	
		min	max	Riffle	Pool	Total	Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062	5	14	19	19	19
SAND	Very fine	0.062	0.125					19
	Fine	0.125	0.250		3	3	3	22
	Medium	0.25	0.50		6	6	6	28
	Coarse	0.5	1.0		4	4	4	32
	Very Coarse	1.0	2.0					32
GRAVEL	Very Fine	2.0	2.8	3		3	3	35
	Very Fine	2.8	4.0	1		1	1	36
	Fine	4.0	5.6					36
	Fine	5.6	8.0	3	2	5	5	41
	Medium	8.0	11.0	6	4	10	10	51
	Medium	11.0	16.0	4	5	9	9	60
	Coarse	16.0	22.6	8	2	10	10	70
	Coarse	22.6	32	11		11	11	81
	Very Coarse	32	45	9		9	9	90
	Very Coarse	45	64	4	4	4	4	94
COBBLE	Small	64	90	2		2	2	96
	Small	90	128	2		2	2	98
	Large	128	180	2		2	2	100
	Large	180	256					100
BOULDER	Small	256	362					100
	Small	362	512					100
	Medium	512	1024					100
	Large/Very Large	1024	2048					100
BEDROCK	Bedrock	2048	>2048					100
Total				60	40	100	100	100

Reachwide	
Channel materials (mm)	
D ₁₆ =	Silt/Clay
D ₃₅ =	2.80
D ₅₀ =	10.7
D ₈₄ =	35.9
D ₉₅ =	75.9
D ₁₀₀ =	180.0

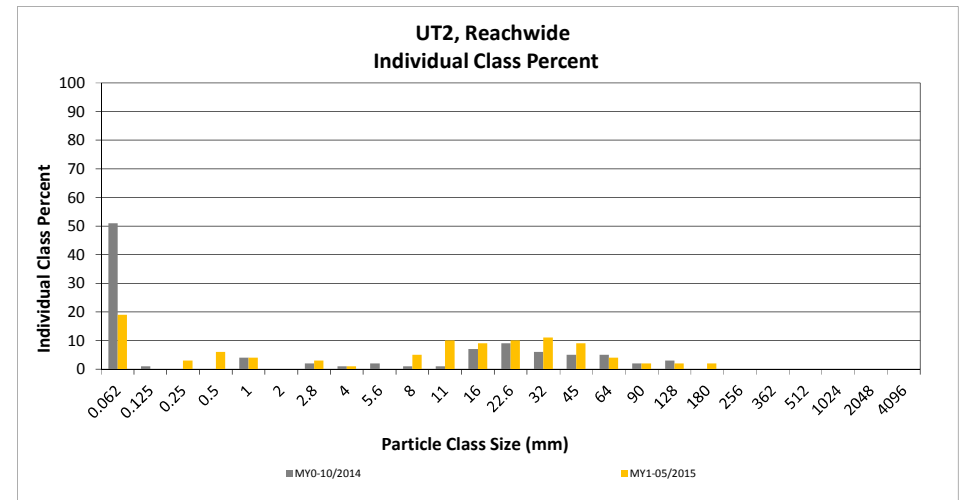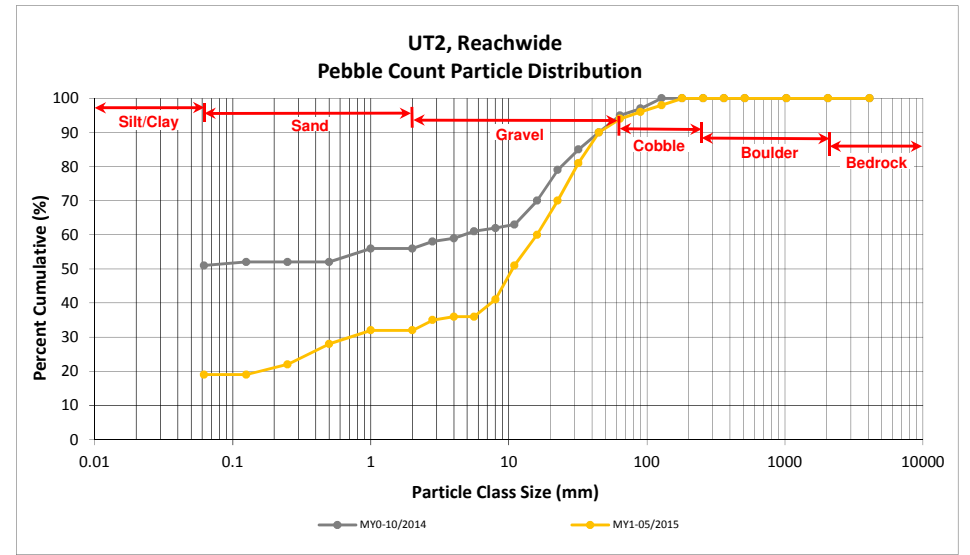

Reachwide and Cross Section Pebble Count Plots



Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

UT2, Cross Section 15

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
<i>SILT/CLAY</i>	Silt/Clay	0.000	0.062	6	6	6
SAND	Very fine	0.062	0.125			6
	Fine	0.125	0.250			6
	Medium	0.25	0.50			6
	Coarse	0.5	1.0			6
	Very Coarse	1.0	2.0	2	2	8
GRAVEL	Very Fine	2.0	2.8			8
	Very Fine	2.8	4.0	2	2	10
	Fine	4.0	5.6	2	2	12
	Fine	5.6	8.0	2	2	14
	Medium	8.0	11.0	8	8	22
	Medium	11.0	16.0	10	10	32
	Coarse	16.0	22.6	14	14	46
	Coarse	22.6	32	14	14	60
	Very Coarse	32	45	16	16	76
	Very Coarse	45	64	14	14	90
COBBLE	Small	64	90	4	4	94
	Small	90	128	6	6	100
	Large	128	180			100
	Large	180	256			100
BOULDER	Small	256	362			100
	Small	362	512			100
	Medium	512	1024			100
	Large/Very Large	1024	2048			100
BEDROCK	Bedrock	2048	>2048			100
Total				100	100	100

Cross Section 15	
Channel materials (mm)	
D ₁₆ =	8.66
D ₃₅ =	17.23
D ₅₀ =	25.0
D ₈₄ =	55.0
D ₉₅ =	95.4
D ₁₀₀ =	128.0

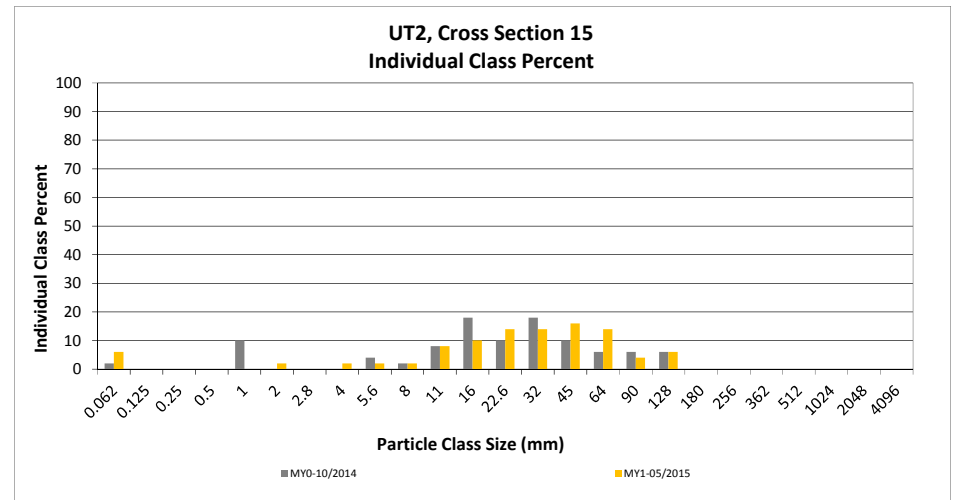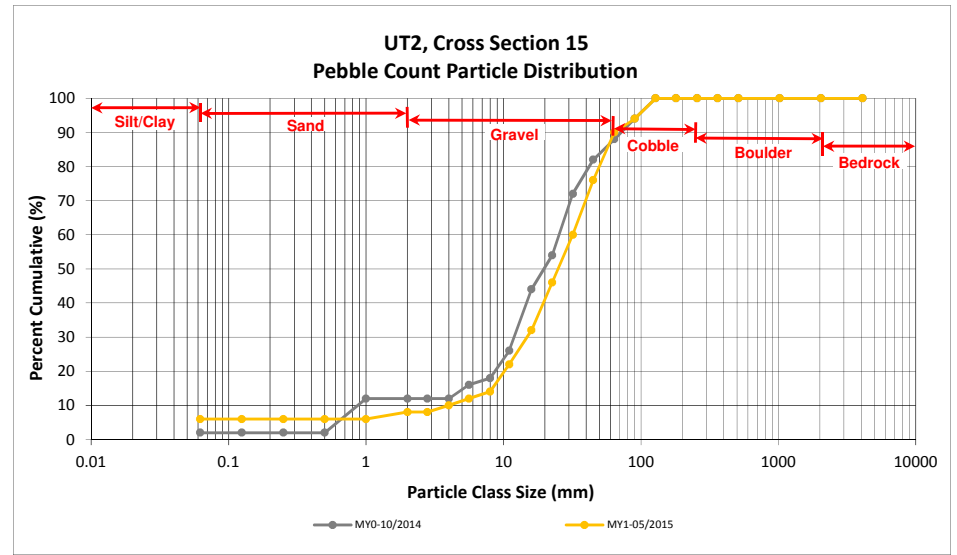

APPENDIX 5. Hydrology Summary Data and Plots

Table 13. Verification of Bankfull Events

Agony Acres Mitigation Site (NCDMS Project No.95716)


Monitoring Year 1 - 2015

Reach	Date of Data Collection	Date of Occurrence	Method
UT1	10/5/2015	10/3/2015	Crest Gage/ Pressure Transducer
UT1A	10/5/2015	10/3/2015	
UT1B	10/5/2015	10/3/2015	
UT2	10/5/2015	10/3/2015	

Monthly Rainfall Data

Agony Acres Mitigation Site (NCDMS Project No.95716)

Monitoring Year 1 - 2015

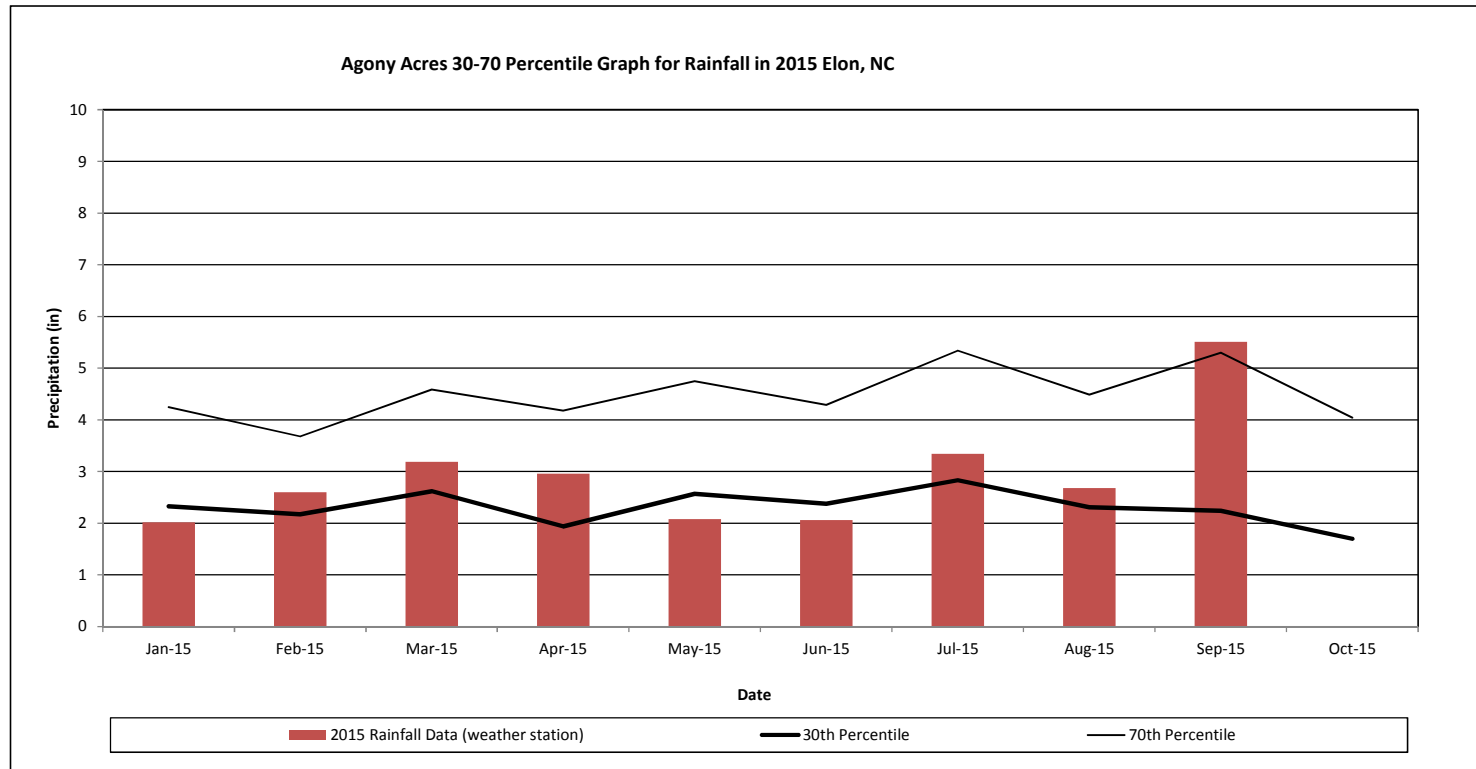


¹ 2015 monthly rainfall collected by Weather Underground Station KNCELONS (Elon, NC).

² 30th and 70th percentile rainfall data collected from weather station NC723, at Piedmont Tiad Intl AP, NC (USDA, 2002).

Stream Flow Stage Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)


Monitoring Year 1 - 2015

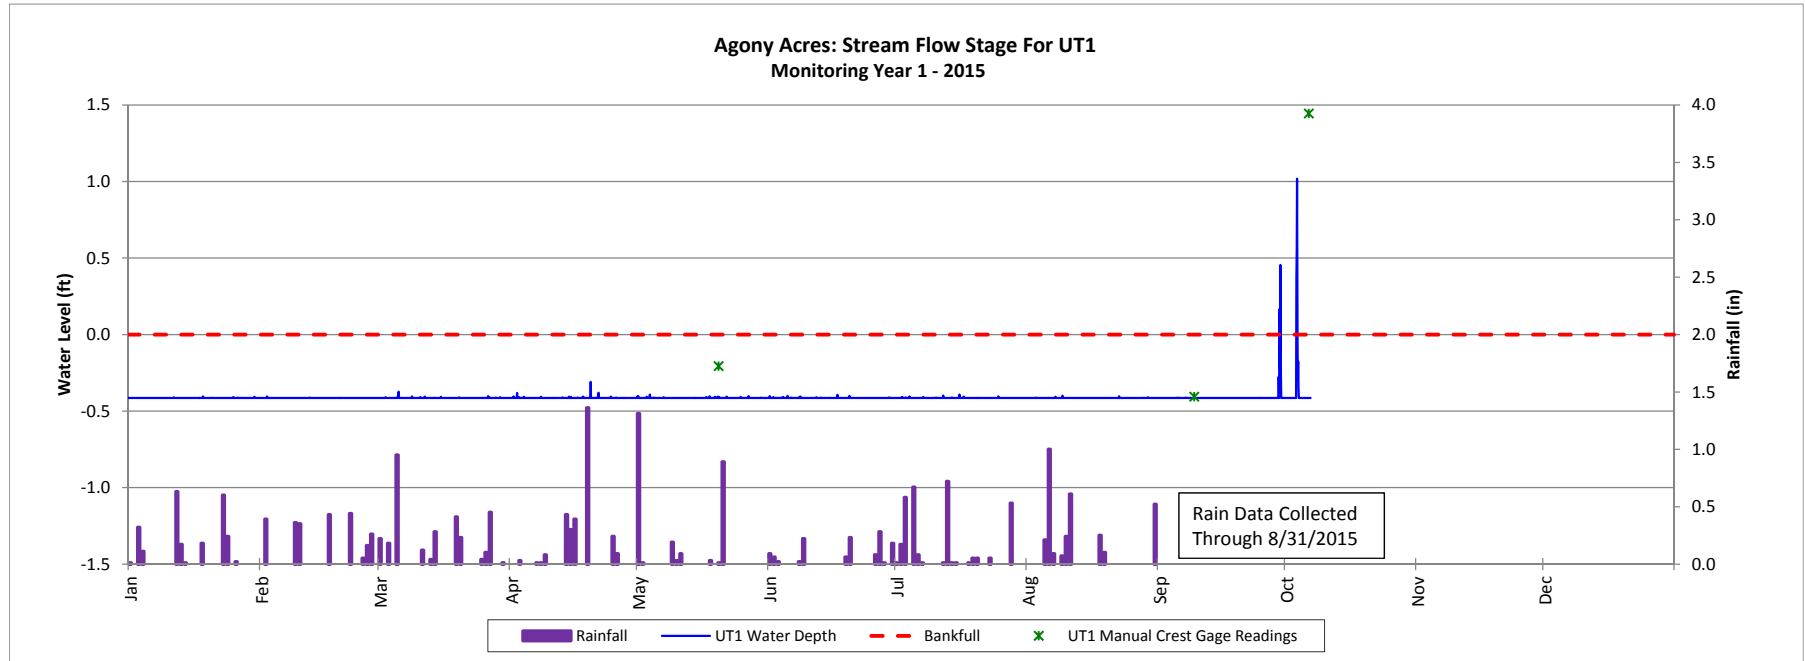

Stream Flow Stage Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)


Monitoring Year 1 - 2015

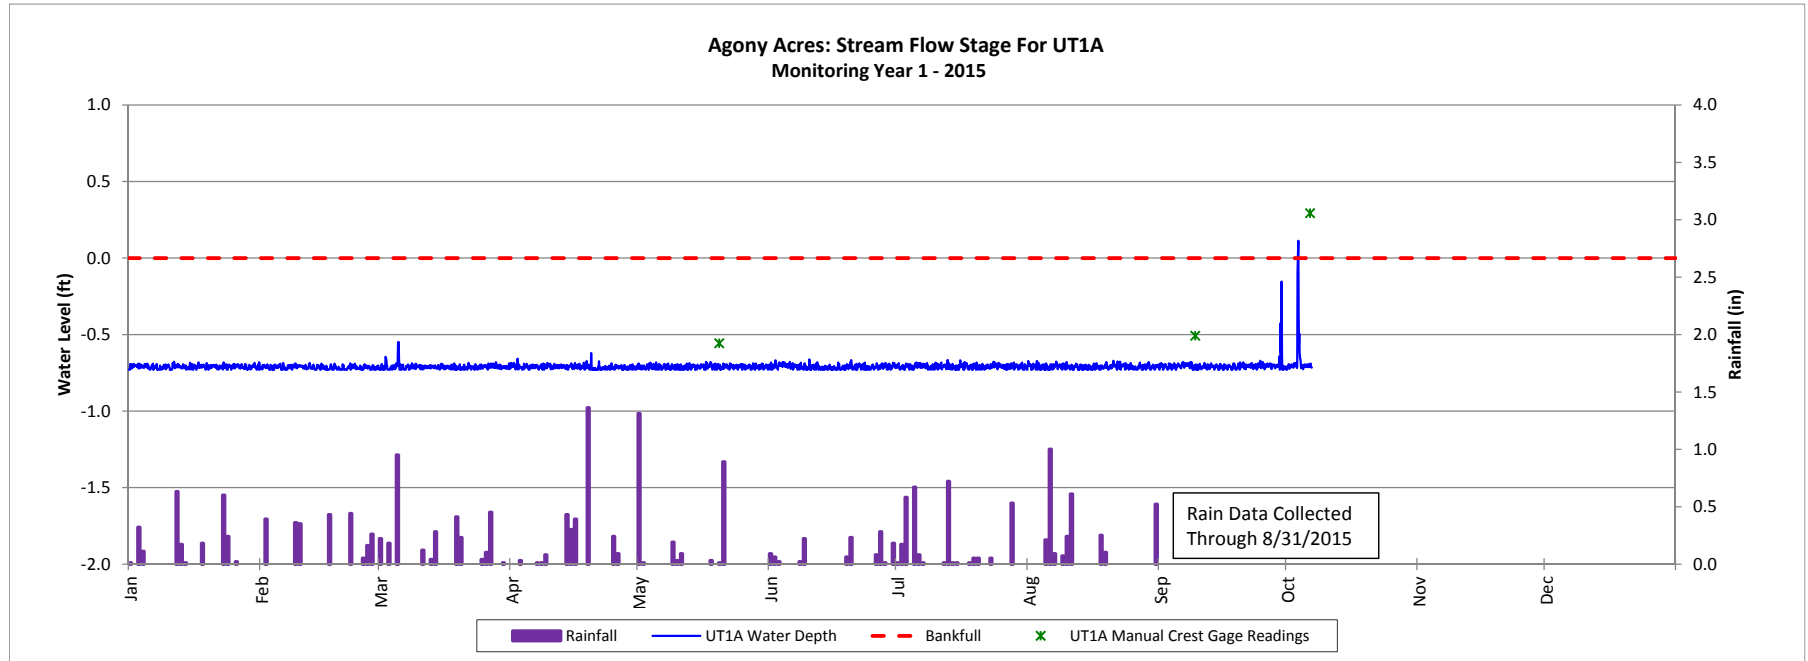

Stream Flow Stage Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)


Monitoring Year 1 - 2015

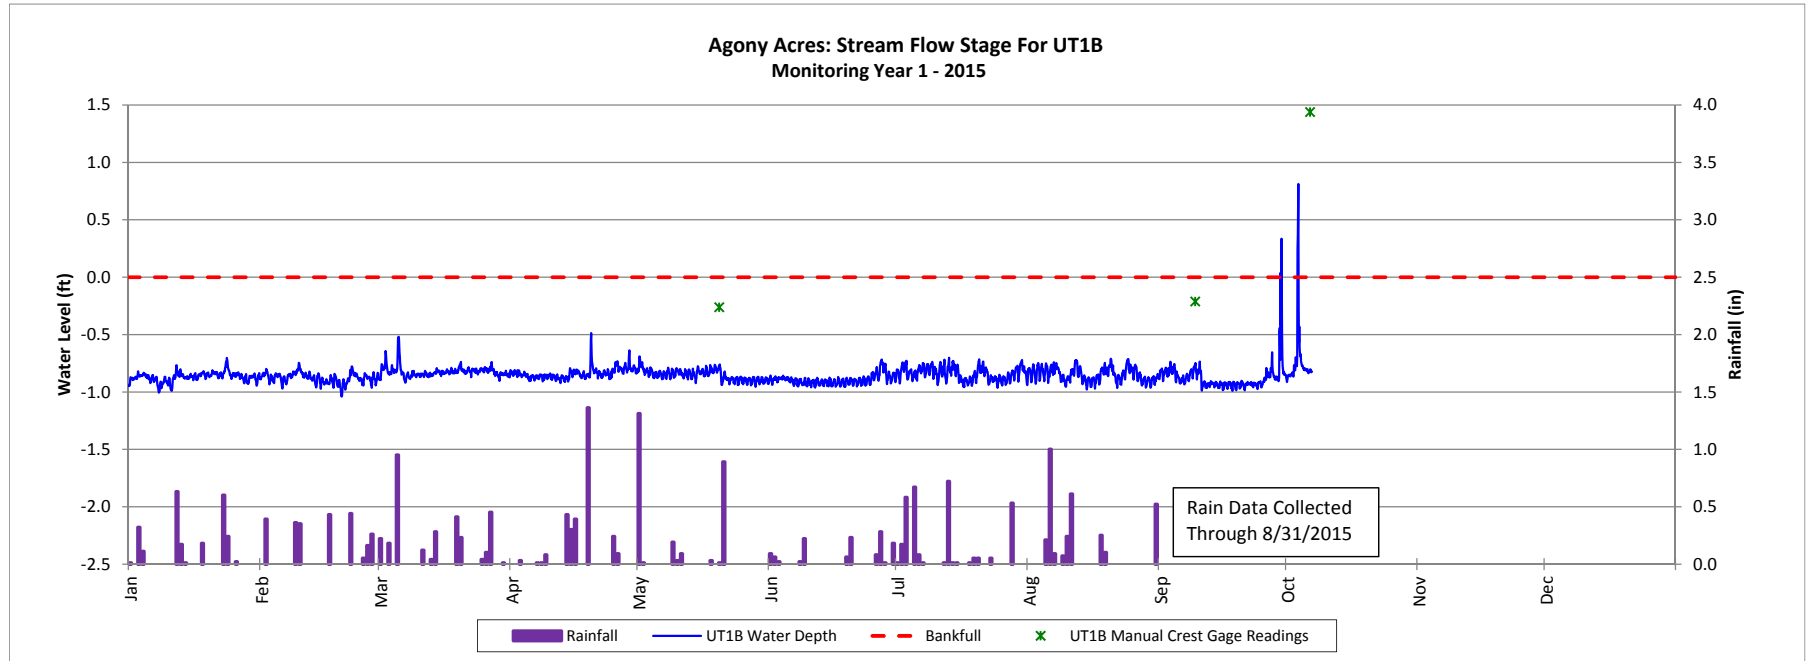

Stream Flow Stage Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)


Monitoring Year 1 - 2015

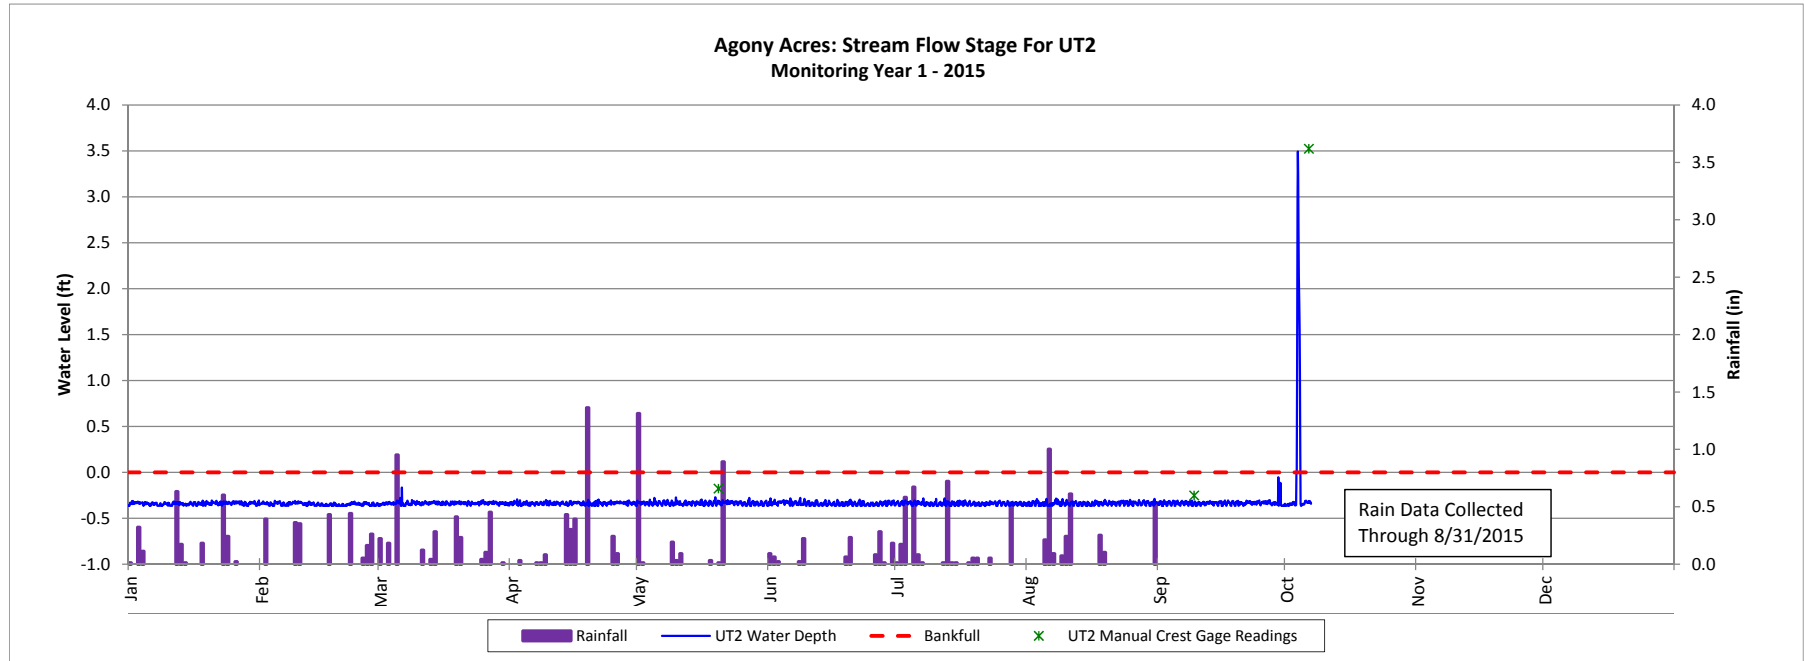

Stream Flow Gage Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)


Monitoring Year 1 - 2015

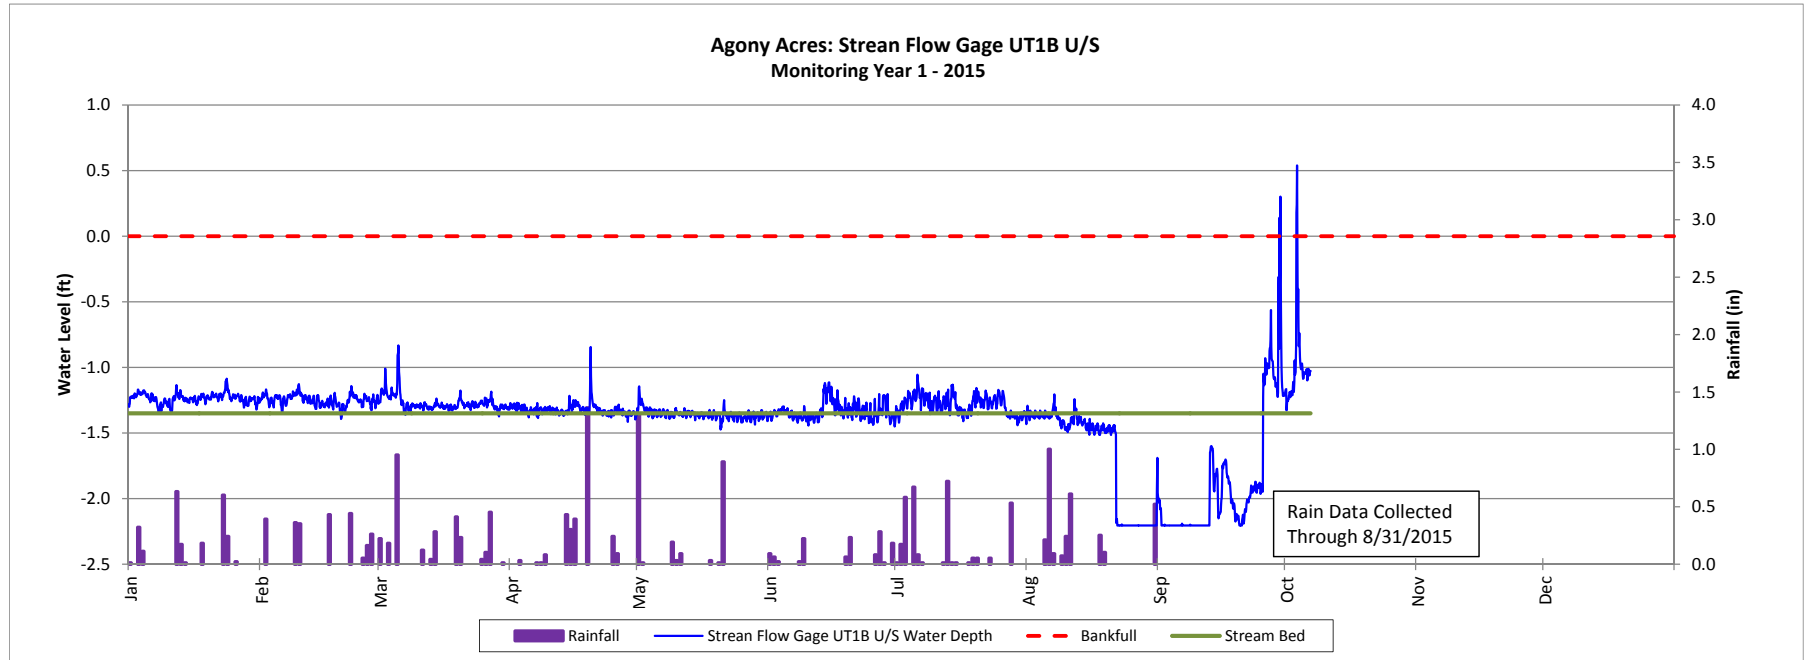

Stream Flow Gage Plots

Agony Acres Mitigation Site (NCDMS Project No. 95716)

Monitoring Year 1 - 2015

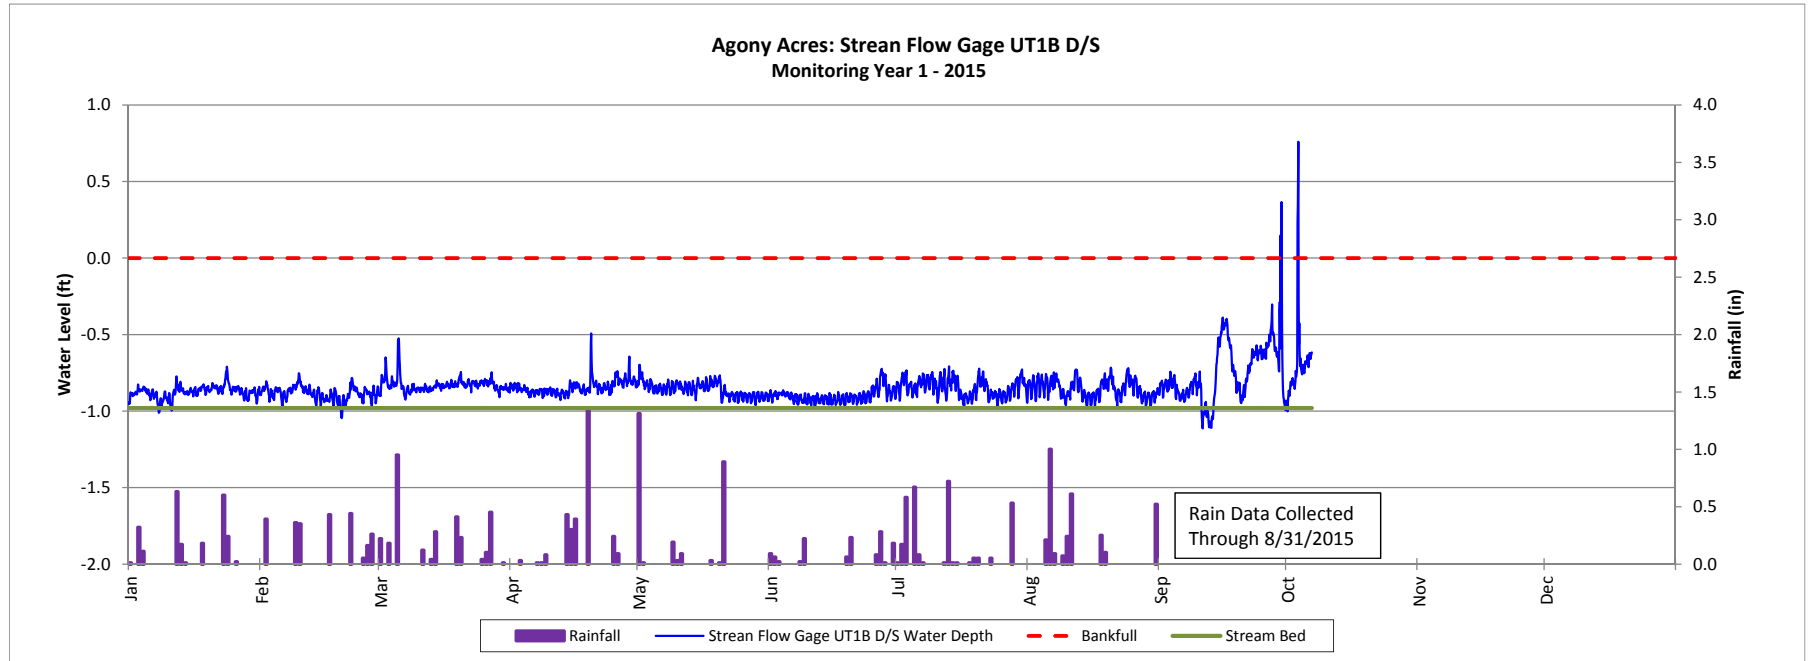

BANKFULL VERIFICATION PHOTOGRAPHS
Monitoring Year 1



UT1 – (10/5/2015)



UT1 – (10/5/2015)



UT1 – (10/5/2015)



UT1 – (10/5/2015)





UT1A – (10/5/2015)



UT1A – (10/5/2015)

