

**BEAVERDAM CREEK
STREAM RESTORATION PROJECT**
ANNUAL MONITORING REPORT FOR 2007-2008 (YEAR 2)

Project Number: D05016-1



Submitted to:

NC Ecosystem Enhancement Program
2728 Capital Blvd, Suite 1H 103
Raleigh, NC 27604



December, 2008

Prepared for: River Works, Inc.



8000 Regency Parkway
Suite 200
Cary, NC 27511

Prepared by: Michael Baker Engineering, Inc.



1447 South Tryon St., Ste. 200
Charlotte, NC 28203

TABLE OF CONTENTS

TITLE PAGE

TABLE OF CONTENTS	i
EXECUTIVE SUMMARY	1
1.0 PROJECT BACKGROUND	2
1.1 Project Location	2
1.2 Mitigation Goals and Objectives.....	2
1.3 Project Description and Restoration Approach.....	2
1.4 Project History and Background	4
1.5 Project Plan	8
2.0 VEGETATION MONITORING	8
2.1 Soil Data.....	8
2.2 Description of Species and Monitoring Protocol	9
2.3 Vegetation Success Criteria	9
2.4 Results of Vegetative Monitoring	10
2.5 Vegetation Observations	12
2.6 Vegetation Problem Areas	12
2.7 Vegetation Photos	12
3.0 STREAM MONITORING	12
3.1 Description of Stream Monitoring	12
3.2 Stream Restoration Success Criteria	13
3.3 Bankfull Discharge Monitoring Results.....	13
3.4 Stream Monitoring Data and Photos	14
3.5 Stream Stability Assessment	14
3.6 Cross-section, Longitudinal Profile, and Bed Material Analysis Monitoring Results...	15
3.7 Areas of Concern.....	16
4.0 HYDROLOGY	16
5.0 CONCLUSIONS AND RECOMMENDATIONS	18
6.0 WILDLIFE OBSERVATIONS	18
7.0 REFERENCES	19

APPENDICES

APPENDIX A – Project Photo Log

APPENDIX B – Stream Monitoring Data

APPENDIX C – As-built Plan Sheets

APPENDIX D – Baseline Stream Summary for Restoration Reaches

APPENDIX E – Morphology and Hydraulic Monitoring Summary – Year 2 Monitoring

LIST OF TABLES

Table 1.	Project Mitigation Approach
Table 2.	Project Activity and Reporting History
Table 3.	Project Contact Table
Table 4.	Project Background
Table 5.	Soil Data for Project
Table 6.	Tree Species Planted
Table 7.	Year 2 Stem Counts for Each Species Arranged by Plot
Table 8.	Verification of Bankfull Events
Table 9.	Categorical Stream Feature Visual Stability Assessment
Table 10.	Comparison of Historic Rainfall to Observed Rainfall
Table 11.	Hydrologic Monitoring Results for Year 2

LIST OF FIGURES

Figure 1.	Site Vicinity Map
Figure 2.	Site Topographic Map
Figure 3.	Restoration Summary Map
Figure 4.	Stage Recorder Locations
Figure 5.	Historic Average vs. Observed Rainfall

EXECUTIVE SUMMARY

This Annual Report details the monitoring activities during the 2008 growing season on the Beaverdam Creek Stream Restoration Site (“Site”). Construction of the Site, including planting of trees, was completed in March 2007. In order to document project success, twenty-four vegetation monitoring plots, eighteen permanent cross-sections, 3,000 linear feet (LF) of longitudinal profile survey, and two automated stage recorders were installed and assessed across the restoration Site. The 2008 data represents results from the second year of vegetation and hydrologic monitoring for streams.

Prior to restoration, stream and buffer functions on the Site were historically impaired as a result of heavy land timbering and subsequently farmed aggressively. Recently some areas have been reforested within the project site, but it has continued to be actively farmed and grazed or converted to medium density residential developments. After construction was finalized the project restored or enhanced 13,203 linear feet (LF) of channelized stream on two unnamed tributaries of Beaverdam Creek: UT1 and UT2, and preserved an additional 1,641 LF of Beaverdam Creek and 962 LF of UT2 to total 15,806 LF of restored, enhanced, or preserved stream.

Weather station data from the for NRCS National Climate and Water Center (Charlotte WSO AP WETS Station in Mecklenburg County – NC 1690) and the USGS Water Data for North Carolina (USGS 35090308100454 Withers Cove in Mecklenburg County, NC) were used to document precipitation amounts. For the 2008 growing season, March 2008 through October 2008 rainfall was recorded as below normal except for during August when rainfall was recorded higher than the 70 percentile mark.

Twenty-four monitoring plots that are 10 meter by 10 meters or 0.025 of an acre in size were used to assess survivability of the woody vegetation planted on Site. They are randomly located to represent the different zones within the project. The vegetation monitoring indicated a survivability range of 280 stems per acre to 680 stems per acre with an overall average of 483 stems per acre. Overall, the Site is on track for meeting the initial vegetation survival criteria of 320 stems per acre surviving after the third growing season and the final success criteria of 260 trees per acre by the end of year five.

In general, dimension, pattern, profile and in-stream structures remained stable during the first growing season. Remnant bed scour noted in Year 1 has remained largely unchanged through Year 2 along UT1. A few pools along UT1 experienced bed scour which is expected. The areas of pool scour are the result of a large storm event that coincided with the one bankfull event that occurred in August of 2008.

1.0 PROJECT BACKGROUND

The Beaverdam Creek site is located within the extraterritorial jurisdiction (ETJ) of the City of Charlotte, Mecklenburg County, and lies within the Catawba River Basin (Figure 1). The site lies within North Carolina Department of Water Quality (NCDWQ) sub-basin 03-08-34 and U.S. Geologic Survey (USGS) hydrologic unit 03050101170040. The recent land use of the site consists of agriculture and medium density residential development.

The project involved the restoration, enhancement and preservation of 15,806 LF of stream along Beaverdam Creek (the mainstem) and two unnamed tributaries (UT1 and UT2).

1.1 Project Location

The Beaverdam Creek site is located approximately 3 miles southwest of the Charlotte-Douglas International Airport. The site extends from the newly constructed Interstate 485 corridor to Brown's Cove of Lake Wylie, an impounded reservoir on the Catawba River. The site can be accessed from Dixie River Road (UT1 to the north and UT2 to the south) 1.5 miles northeast of the intersection with Steele Creek Road. See Figures 1 and 2 for an overview of the project site.

1.2 Mitigation Goals and Objectives

The specific goals for the Beaverdam Creek Restoration Project were as follows:


- Preserve/Restore/Enhance 15,806 LF of stream channel.
- Create geomorphically stable stream channel and floodplain conditions along UT1, UT2 and their associated tributaries within the Beaverdam Creek watershed.
- Improve the local hydrology through increased groundwater recharge, groundwater storage, and hydrologic connectivity between the channel and the adjacent floodplain.
- Improve water quality in the Beaverdam Creek watershed by increasing dissolved oxygen concentrations and reducing nutrient and sediment loads.
- Improve aquatic and riparian terrestrial habitat through improved hydraulic and biologic diversity.

1.3 Project Description and Restoration Approach

For analysis and design purposes, Beaverdam Creek and the two unnamed tributaries (UT1 and UT2) were subdivided into 15 individual reaches based on their hydrologic and geomorphic characteristics. The mainstem of Beaverdam Creek consists of only 1 of the 15 design reaches, where only preservation and no restoration activities were proposed. The remaining 14 reaches exist within UT1 (8 reaches) and UT2 (6 reaches). Among these 14 reaches, 12 were scheduled for restoration, the upstream reach of UT1 was scheduled for enhancement and the downstream reach of UT2 was scheduled for preservation. All reach locations are shown in Figure 3. The following describes the site's preconstruction conditions.

The project extents on UT1 began at I-485 flowing from the northeast direction. UT1 was divided into 5 reaches starting in the upstream with Reach 1 and continuing downstream to Reach 5 and changing designation at tributary confluences or at significant grade breaks. The three tributary confluences were included within the design parameters on UT1 and were identified as UT1B, UT1C, and UT1D from the upstream confluence and continuing downstream.

UT2 watershed abuts the UT1 watershed to the south, is bordered by Dixie River Road, and generally flows in the southwest direction. The mainstem of UT2 was divided into four reaches starting upstream at Reach 1 and continuing downstream to Reach 4. One tributary confluence, UT2A, was included within the design parameters of UT2. Reach UT2A, upstream of station 10+00, consisted only of a non-

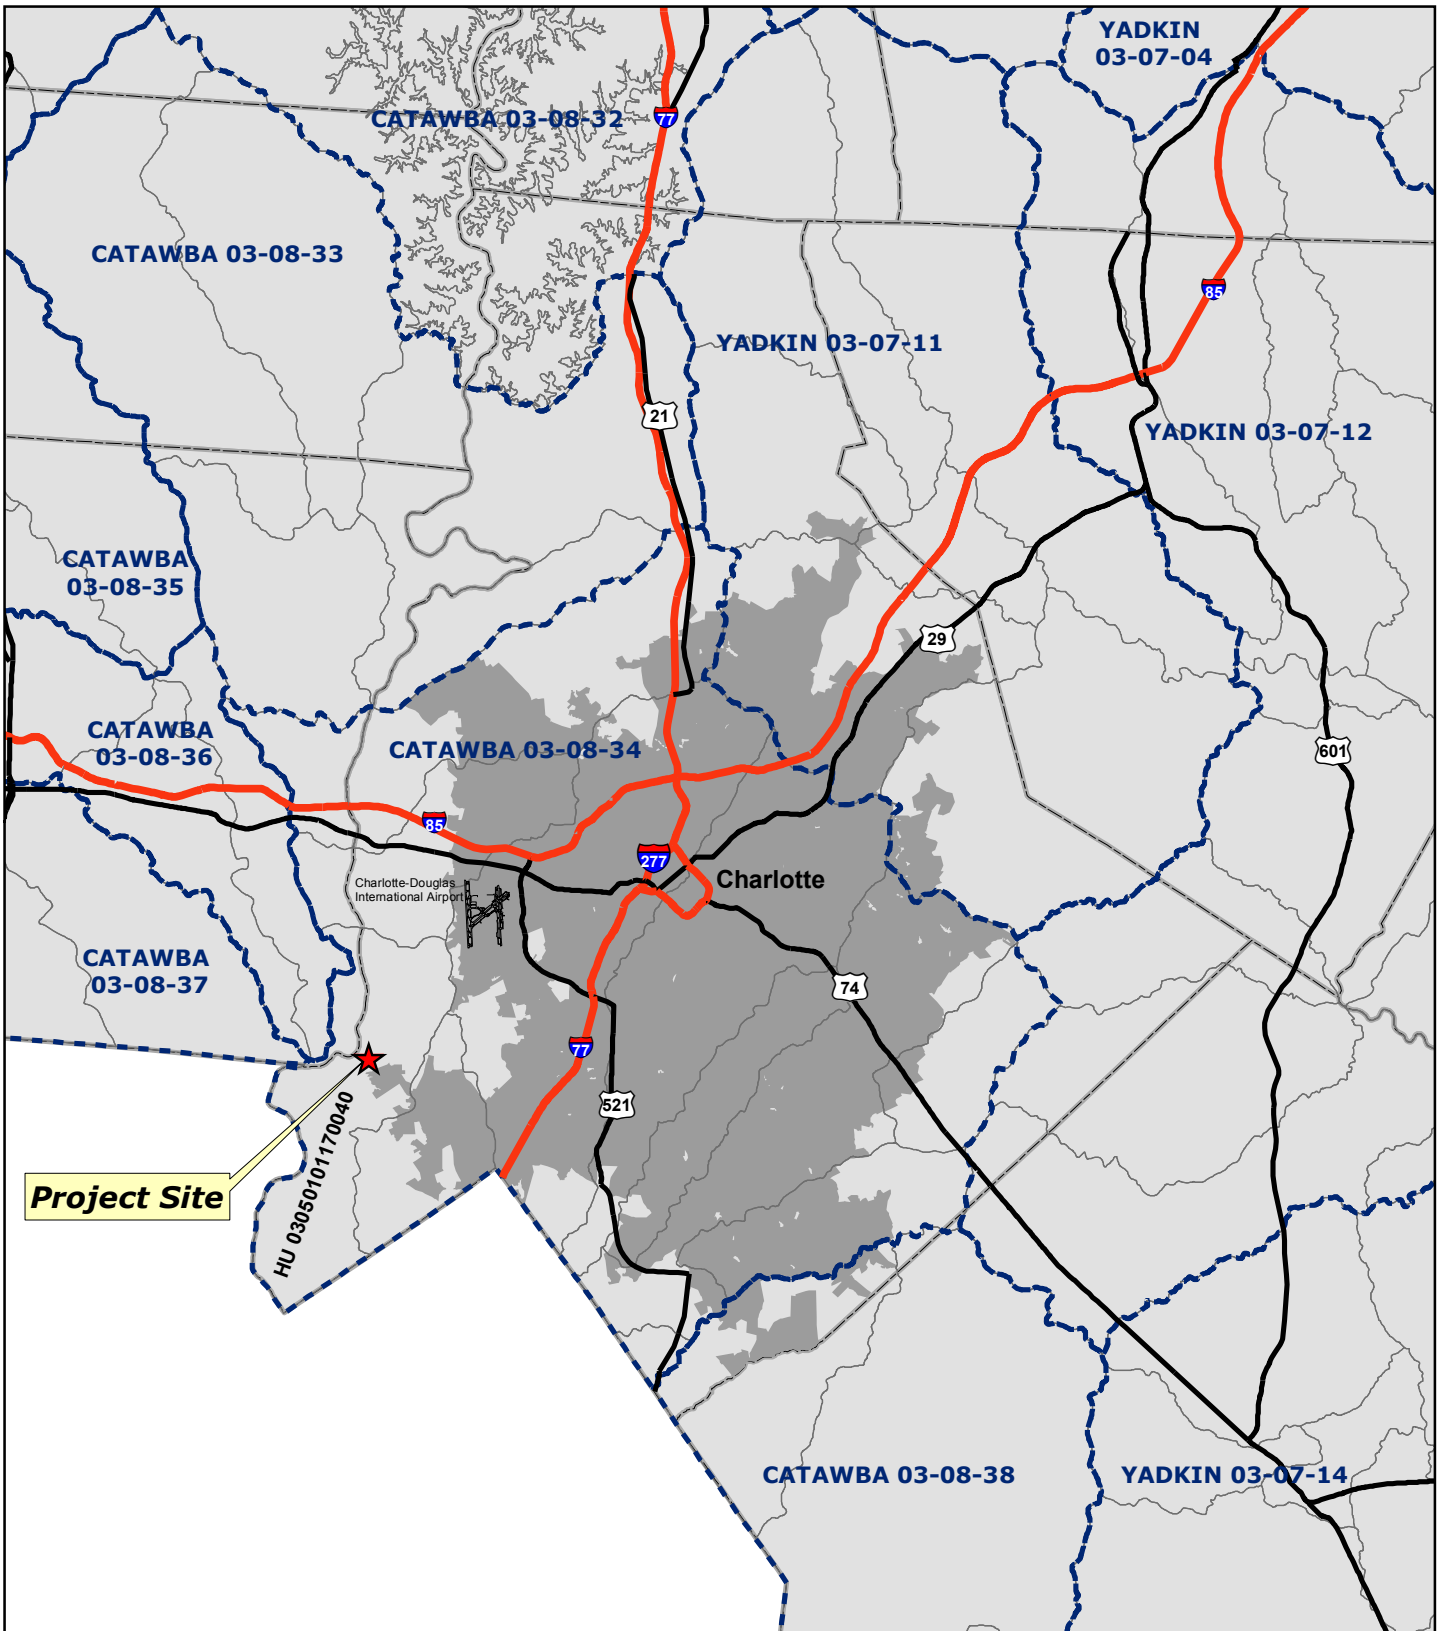


Project Site

HU 03050101170040

Charlotte-Douglas International Airport

Charlotte

Map Inset



Mecklenburg County, NC

LEGEND

- HUC
- DWQ Sub-basin
- Counties



EEP Contract No.: D05016-1

Figure 1: Project Vicinity Map



Beaverdam Creek
Year 2 Monitoring
Mecklenburg County, NC

Baker

December 2008



The site can be accessed from Dixie River Road (UT1 to the north and UT2 to the south) 1.5 miles northeast of the intersection with Steele Creek Road.

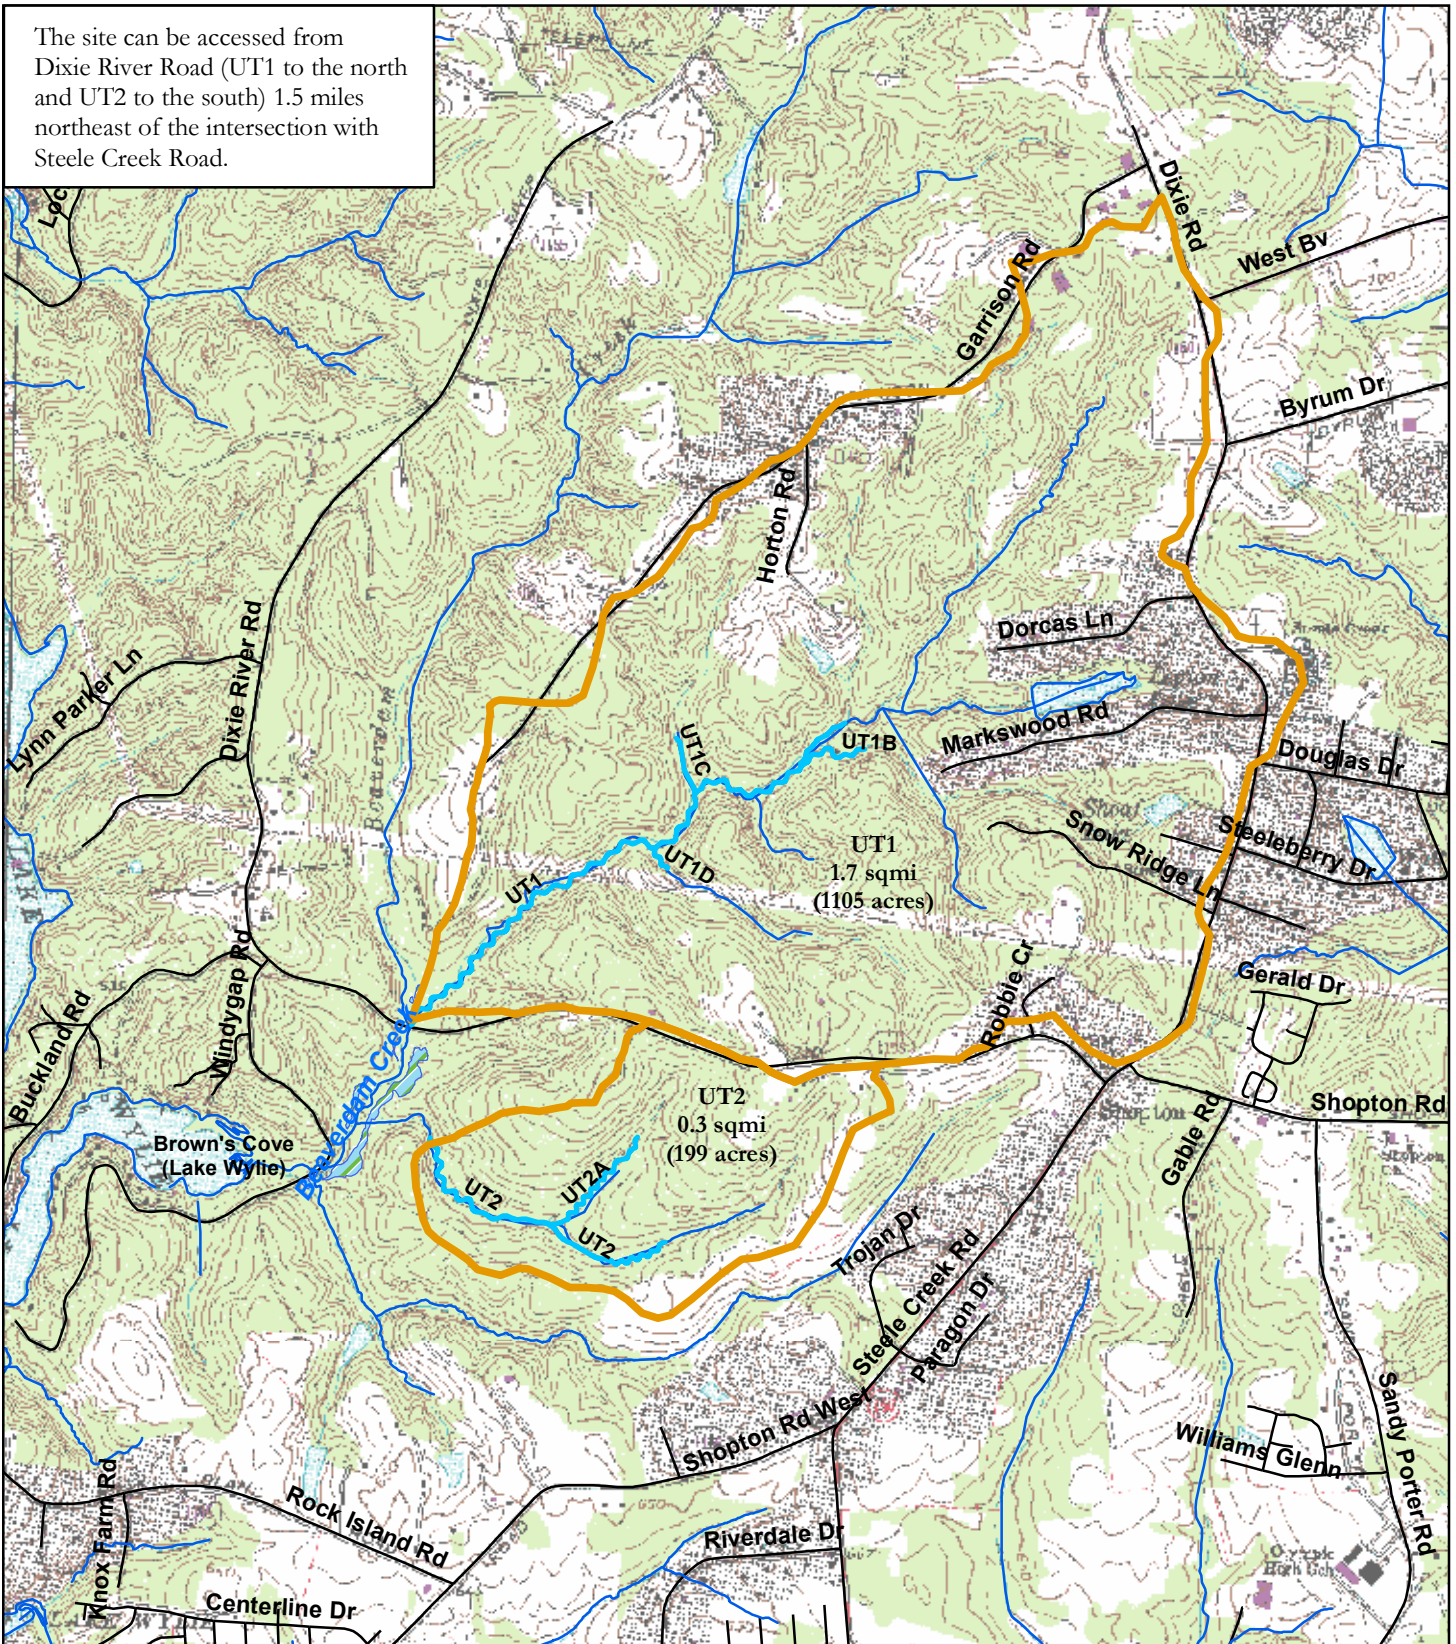

EEP Contract No.: D05016-1

LEGEND


- Project Watershed Boundary
- Project Reaches
- Creeks
- Roads

0 800 1,600 3,200 Feet

December 2008

Figure 2: Site Topographic Map


Beaverdam Creek
Year 2 Monitoring
Mecklenburg County, NC

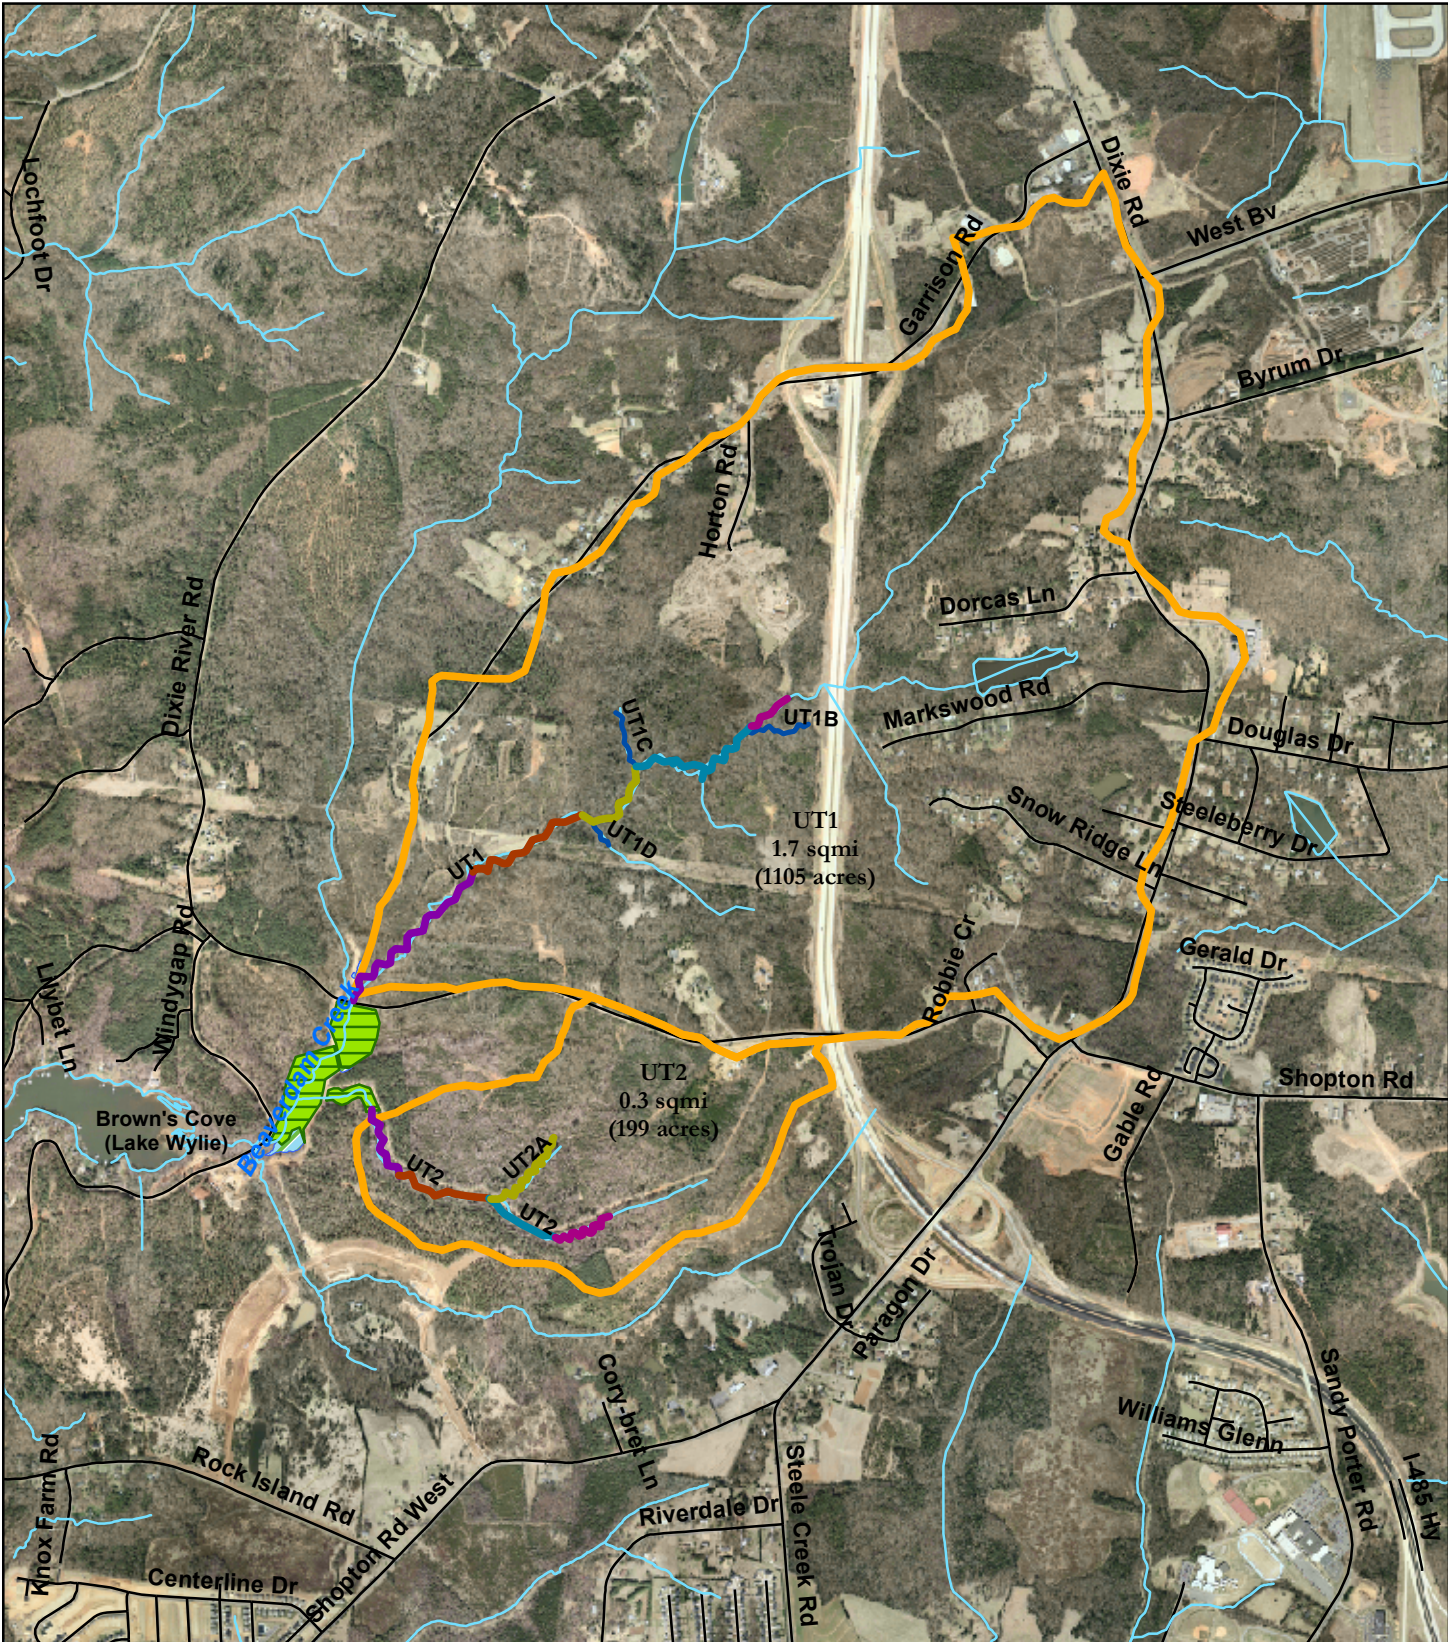

EEP Contract No.: D05016-1


Figure 3: Restoration Summary Map

Beaverdam Creek
Year 2 Monitoring
Mecklenburg County, NC



LEGEND

- Project Watershed Boundary
- Preservation Easement
- Creeks
- Roads



December 2008



disturbance area (not for credit). The downstream section of UT2A, from a headcut at station 10+00 to its confluence at the terminus of Reach 2, was 1138 LF with a channel slope of 1.4 percent.

Preservation was proposed for reaches within the project area that were currently in stable, functioning condition and did not warrant restoration. The two reaches proposed for preservation were along the mainstem of Beaverdam and the downstream section of UT2. The reach along the mainstem of Beaverdam Creek proposed for preservation had reach length of 1,641 LF. It began at the confluence with UT1 and extended downstream to the confluence of UT2. The reach along the mainstem of UT2 proposed for preservation had a length of 962 LF. It began immediately downstream of UT2 Reach 4 and ended at its confluence with the mainstem of Beaverdam Creek.

Throughout most of UT1, the restoration approach identified the existing evolutionary process and established a naturally successional stable C/E-type stream channel. Additionally, soil bioengineering, structural reinforcement, and revetments were applied to promote stability immediately following construction when the stream was most vulnerable. Given the wide floodplain, relatively flat slopes, generally stable nature of the soil, and favorable growing conditions at the site, this restoration approach was an achievable goal. Removal of the majority of invasive species and planting of native vegetative species throughout the existing riparian buffer complemented the channel restoration and promoted climax successional habitat.

Similar to UT1, the restoration approach throughout UT2 entailed establishing a successional C/E-type stream channel while maintaining the ability to accommodate subsequent natural channel evolution towards an E-type channel, as warranted by future influences to the discharge and sediment regime. This was accomplished through application of a Priority 1 design throughout with short segments of Priority 2 design to tie into the incised channels.

Table 1. Project Mitigation Approach

Beaverdam Creek Restoration Site: Project No. D05016-1								
Project Segment or Reach ID	Existing Footage/Acreage	Mitigation Type *	Approach**	Linear Footage or Acreage	Mitigation Ratio	Mitigation Units	Stationing	Comment
UT1 (Reach 1)	542	E	EI	567	1.5:1	378	10+00 - 15+67	Low slope, minimal meander and floodplain benching.
UT1 (Reach 2-5)	5796	R	P1	6,310	1:1	6,310	15+67 - 78+77	The beginning of channel utilizes the existing wide, flat floodplain then narrows through the valley and straightens through the Duke Power easement and connects into the mainstem of Beaverdam through a wide, flat floodplain.
UT1B	743	R	P2	778	1:1	778	10+00 - 17+78	The valley is pinched so floodplain grading will create adequate benching.
UT1C	744	R	P1	624	1:1	624	10+00 - 16+24	Step-pool design dominated by log drops. The valley is narrow resulting minimal meander.
UT1D	323	R	P1	338	1:1	338	10+00 - 13+38	The channel will have the appropriate belt width throughout the ample floodplain. A series of drop structures at the end of the reach will tie into UT1.
UT2	3130	R	P1	3,448	1:1	3,448	10+00 - 44+48	Increase sinuosity, pool development, and reestablish connection with the floodplain and construct in channel step-pools in areas where the valley is confined and steep.
UT2A	886	R	P1	1,138	1:1	1,138	10+00 - 21+38	A step-pool channel will be constructed in the areas where the valley is confined and steep. Transition connections constructed between the constructed channel and the existing channels.
Beaverdam Creek	1641	P	---	1,641	1:5	328	-	
UT2	962	P	---	962	1:5	192	-	
Total linear ft of channel restored or				15,806				
Mitigation Unit Summation for Streams:				13,534				

* R = Restoration
 E = Enhancement
 P = Preservation

** P1 = Priority I
 P2 = Priority II
 P3 = Priority III
 EI = Enhancement I

1.4 Project History and Background

The chronology of the Beaverdam Creek Restoration Project is presented in Table 2. The contact information for all designers, contractors, and relevant suppliers is presented in Table 3. Relevant project background information is presented in Table 4.

Table 2. Project Activity and Reporting History

Beaverdam Creek Restoration Site: Project No. D05016-1			
Activity or Report	Scheduled Completion	Data Collection Complete	Actual Completion or Delivery
Restoration Plan Prepared	Nov-05	N/A	
Restoration Plan Amended	Dec-05	N/A	
Restoration Plan Approved	Dec-05	N/A	
Final Design – (at least 90% complete)	Dec-05	N/A	
Construction Begins	May-06	N/A	Jun-06
Temporary S&E mix applied to entire project area	N/A	N/A	Jan-07
Permanent seed mix applied to entire project area	Mar-06	N/A	Jan-07
Planting of live stakes	Nov-06	N/A	Jan-07
Planting of bare root trees	Nov-06	N/A	Jan-07
Survey of As-built conditions (Year 0 Monitoring-baseline)	Jan-07	Mar-07	Apr-07
Repair work			
Year 1 Monitoring	Dec-07	Nov-07	Dec-07
Year 2 Monitoring	Dec-08	Nov-08	Dec-08
Year 3 Monitoring	Dec-09	Unknown	Unknown
Year 4 Monitoring	Dec-10	Unknown	Unknown
Year 5 Monitoring	Dec-11	Unknown	Unknown

Table 3. Project Contact

Beaverdam Creek Restoration Site: Project No. D05016-1	
Full Service Delivery Contractor	
River Works, Inc.	8000 Regency Parkway, Suite 200 Cary, NC 27518 <u>Contact:</u> Will Pedersen, Tel. 919-459-9001
Designer	
Michael Baker Engineering, Inc.	8000 Regency Parkway, Suite 200 Cary, NC 27518 <u>Contact:</u> Kevin Tweedy, Tel 919-463-5488

Table 3. Project Contact

Beaverdam Creek Restoration Site: Project No. D05016-1	
Construction Contractor	
River Works, Inc.	8000 Regency Parkway, Suite 200 Cary, NC 27518 <u>Contact:</u> Will Pedersen, Tel. 919-459-9001
Planting Contractor	
River Works, Inc.	8000 Regency Parkway, Suite 200 Cary, NC 27518 <u>Contact:</u> Will Pedersen, Tel. 919-459-9001
Seeding Contractor	
River Works, Inc.	8000 Regency Parkway, Suite 200 Cary, NC 27518 <u>Contact:</u> Will Pedersen, Tel. 919-459-9001
Seed Mix Sources	Mellow Marsh Farm, 919-742-1200
Nursery Stock Suppliers	Mellow Marsh Farm, 919-742-1200 International Paper, 1-888-888-7159
Monitoring Performers	
Michael Baker Engineering, Inc.	1447 S. Tryon Street, Suite 200 Charlotte, NC 28203
Stream Monitoring Point of Contact:	Ian Eckardt, Tel.704-334-4454
Vegetation Monitoring Point of Contact:	Ian Eckardt, Tel. 704-334-4454

Table 4. Project Background

Beaverdam Creek Restoration Site: Project No. D05016-1	
Project County:	Mecklenburg County, NC
Drainage Area:	
UT1 (Reach 1)	0.70 mi ²
UT1 (Reach 2-5)	1.73 mi ²
UT1B	0.34 mi ²
UT1C	0.15mi ²
UT1D	0.16 mi ²
UT2	0.3 mi ²
UT2A	0.1 mi ²
Estimated Drainage % Impervious Cover:	
UT1 (Reach 1)	15%
UT1 (Reach 2-5)	12%
UT1B	10%
UT1C	5%
UT1D	21%
UT2	4%
UT2A	2%

Table 4. Project Background Table

Beaverdam Creek Restoration Site: Project No. D05016-1	
Stream Order:	
UT1 (Reach 1)	1
UT1 (Reach 2-5)	2
UT1B	1
UT1C	1
UT1D	1
UT2	1
UT2A	1
Physiographic Region	Piedmont
Ecoregion	Southern Outer Piedmont
Rosgen Classification of As-Built	
UT1 (Reach 1)	C/E
UT1 (Reach 2-5)	C/E
UT1B	C/E
UT1C	C/E
UT1D	C/E
UT2	C/E
UT2A	C/E
Cowardin Classification	Riverine, Upper Perennial, Unconsolidated Bottom, Cobble-Gravel
Dominant Soil Types	
UT1 (Reach 1)	MO
UT1 (Reach 2-5)	MO, DaD, CeD2, PaE
UT1B	MO
UT1C	MO, PaE, CeD2
UT1D	MO, PaE, CeD2
UT2	MO, CeD2
UT2A	MO
Reference site ID	Spencer Creek, UT to Spencer Creek, McDowell Park, Latta Plantation, McClintock Creek (McNair & Stockwood), UT to Cleghorn, UT to Lake Jeanette, UT to Big Lost Cove
USGS HUC for Project and Reference sites	3050101170040
NCDWQ Sub-basin for Project and Reference	03-08-34
NCDWQ classification for Project and Reference	C
Any portion of any project segment 303d listed?	No
Any portion of any project segment upstream of a 303d listed segment?	No
Reasons for 303d listing or stressor?	N/A
% of project easement fenced	10%

1.5 Project Plan

Plans depicting the as-built conditions of the major project elements, location of permanent monitoring cross-sections, and locations of permanent vegetation monitoring plots are presented in Appendix C of this report.

2.0 VEGETATION MONITORING

2.1 Soil Data

The soil data for the Site are presented in Table 5.

Table 5. Soil Data for Project

Beaverdam Creek Restoration Site: Project No. D05016-1					
Series	Max Depth (in)	% Clay on Surface	K	T	OM %
Cecil Sandy Clay Loam (CeD2)	80	20-35	0.28	5	0.5-1
Monacan Loam (MO)	80	7-27	0.43	5	2-3
Davidson sandy clay loam (DaD)	75	20-35	0.28	5	0.5-2
Pacolet sandy loam (PaE)	62	8-20	0.2	5	0.5-2
Pacolet sandy loam (PaF)	62	8-20	0.2	5	0.5-2

(USDA, 2006. Official Soil Series Descriptions: <http://soils.usda.gov/technical/classification/osd/index.html>)

General taxonomy of soils:

Cecil: The Cecil series consists of well-drained soils with moderate permeability on and near floodplains. They formed in residuum weathered felsic igneous and metamorphic rock, such as granite. Slopes range from 8 to 15 percent (USDA, 2006. "Soil Taxonomy").

Monacan: Soils of the Monacan series are deep, moderately well and somewhat poorly drained with moderate permeability. They formed in recent alluvial sediments of the Piedmont and Coastal Plain. Slopes are commonly less than 2 percent (USDA, 2006. "Soil Taxonomy").

Pacolet: The Pacolet series consists of very deep, well drained, moderately permeable soils that formed in material weathered mostly from acid crystalline rocks of the Piedmont uplands. Slopes commonly are 15 to 25 percent but range up to 2 to 60 percent (USDA, 2006. "Soil Taxonomy").

Davidson: The Davidson series consists of very deep, well drained moderately permeable soils that formed in materials weathered from dark colored rocks high in ferromagnesian minerals. These soils are on gently sloping to moderately steep uplands in the Piedmont. Slopes are commonly 2 to 15 percent but range up to 25 percent (USDA, 2006. "Soil Taxonomy").

2.2 Description of Species and Monitoring Protocol

The Site was planted in bottomland hardwood forest species in early – mid March of 2007. There were twenty-four vegetation-monitoring plots established throughout the planting areas. The following tree species were planted in the restoration area:

Table 6. Tree Species Planted
Beaverdam Creek Restoration Site: Project No. D05016-1

ID	Scientific Name	Common Name	FAC Status
1	<i>Alnus serrulata</i>	Tag Alder	FACW+
2	<i>Asimina triloba</i>	Paw paw	FAC
3	<i>Cercis canadensis</i>	Redbud	FACU
4	<i>Celtis laevigata</i>	Sugarberry	FACW
5	<i>Cephalanthus occidentalis</i>	Buttonbush	OBL
6	<i>Cornus amomum</i>	Silky Dogwood	FACW+
7	<i>Cornus florida</i>	Flowering Dogwood	FACU
8	<i>Diospyros virginiana</i>	Persimmon	FAC
9	<i>Fraxinus pennsylvanica</i>	Green Ash	FACW
10	<i>Juglan nigra</i>	Black Walnut	FACU
11	<i>Liriodendron tulipifera</i>	Tulip poplar	FACW
12	<i>Platanus occidentalis</i>	Sycamore	FACW-
13	<i>Nyssa sylvatica</i>	Blackgum	FAC
14	<i>Quercus michauxii</i>	Swamp chestnut oak	FACW-
15	<i>Quercus phellos</i>	Willow oak	FACW-
16	<i>Quercus rubra</i>	Red oak	FACU
17	<i>Sambucus candensis</i>	Elderberry	FACW-
18	<i>Viburnum dentatum</i>	Arrow-wood viburnum	FAC

(USDA, 2007: <http://plants.usda.gov>)

The following monitoring protocol was designed to predict vegetative survivability. Twenty-four plots were established throughout the Beaverdam Creek Site. The number of sites was based on the species/area curve method and their location was based on EEP monitoring guidance. The size of individual quadrants was 100 square meters for woody tree species, 25 square meters for shrubs, and 1 square meter for herbaceous vegetation. The locations of the vegetation plots are shown on the as-built plan sheets in Appendix C.

Individual quadrant data provided includes density and coverage quantities. Relative values were calculated, and importance values were determined. Individual seedlings were marked to ensure that they can be found in succeeding monitoring years. Mortality was determined from the difference between the previous year's living, planted seedlings and the current year's living, planted seedlings.

2.3 Vegetation Success Criteria

The interim measure of vegetative success for the Site will be the survival of at least 320 3-year old planted trees per acre at the end of year three of the monitoring period. The final vegetative success

criteria will be the survival of 260 5-year old planted trees per acre at the end of year five of the monitoring period.

2.4 Results of Vegetative Monitoring

The following table presents stem counts for each of the monitoring plots. Each planted tree species is identified down the left column, and each plot is identified across the top row. The numbers on the top row correlate to the vegetation plot IDs. Trees are flagged in the field on an as-needed basis before the flags degrade. Flags are utilized, because they will not interfere with the growth of the tree. Volunteer species are also flagged during this process.

During the initial counts of species totals during the as-built monitoring report, some tree species were unidentifiable (no buds or leaves) and documented as *Unknown Quercus* in the stem plot counts or were labeled incorrectly. During Year 1 vegetative monitoring, three of the four *Unknown Quercus* were identified as *Quercus michauxii* and updated. Additional tree species that were labeled incorrectly have been updated and coded within Table 7 to represent the correction.

The average stem count per acre for Year 2 Monitoring was 483. The range of stem counts throughout the 24 vegetative monitoring plots was from 280 – 680. The current survivability rate for Year 2 is 77.3%. The data reflects that the overall site is on trajectory for meeting the minimum success interim criteria of 320 trees per acre by the end of year three and the final success criteria of 260 trees per acre by the end of year five.

No volunteer species were noted in any of the Site's vegetation plots, or were too small to verify. If any woody volunteer species are observed in subsequent monitoring years they will be flagged and added to the overall stems per acre assessment of the Site.

Table 7. Year 2 Stem Counts for Each Species Arranged by Plot

Beaverdam Creek Restoration Site : Project No. D05016-1																													
Tree Species	Plots																								As-built Totals	Year 1 Totals	Year 2 Totals	% Survival	
	UT1																	UT2											
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	1	2	3	4	5	6	7					
<i>Alnus serrulata</i>								0																		2	2	0	0.0
<i>Asimina tuloba</i>							3	4		2	3	1														21	18	13	61.9
<i>Cercis canadensis</i>								0						1		0									3	3	1	33.3	
<i>Celtis laevigata</i>	1				1								1												6	3	3	50.0	
<i>Cephalanthus occidentalis</i>								1																	1	1	1	100.0	
<i>Cornus amomum</i>								1																	1	0	1	100.0	
<i>Cornus florida</i>					0												0								2	3	0	0.0	
<i>Diospyros virginiana</i>		1														0							1		3	3	2	66.7	
<i>Fraxinus pennsylvanica</i>	4			4	6	1	6	1			1	3	3	3	6	5		3	13		2	8	5	1	77	76	75	97.4	
<i>Juglan nigra</i>	1	1	1	1		4	1	1		7	0	2	2			0						0			31	28	21	67.7	
<i>Liriodendron tulipifera</i>	1		1	0	0	0	2			2		3		2	0	1	2	2		1	2	0		2	36	29	21	58.3	
<i>Platanus occidentalis</i>		2		2	4	4	1	5		2				1		1	1	0		7	4		1	1	54	46	36	66.7	
<i>Nyssa sylvatica</i>	3	1	4	3		1		1				1	6		3	2	5	2		3	2		7	2	55	50	46	83.6	
<i>Quercus michauxii</i>	1	4	7	2			1	3			1	1	3	3	2	1	0	6			3	6	2	1	55	57	47	85.5	
<i>Quercus phellos</i>	1	1	2	1	1		1	1		1	4		1			4		0							20	20	18	90.0	
<i>Quercus rubra</i>							1	1						1											1	1	3	300.0	
<i>Sambucus canadensis</i>																									1	0	0	0.0	
<i>Viburnum dentatum</i>									1																2	2	1	50.0	
<i>Unknown Quercus</i>													1												4	1	1	25.0	
Stems/plot	12	10	15	13	12	10	13	16	7	12	8	13	17	11	12	14	8	13	13	11	13	14	16	7	375	343	290	77.3	
Stems/acre	480	400	600	520	480	400	520	640	280	480	320	520	680	440	480	560	320	520	520	440	520	560	640	280			483	Average	

- Tree # 3-7 was mislabelled as *Platanus occidentalis* in As-built Initial Counts
- Tree # 3-16 was mislabelled as *Liriodendron tulipifera* in As-built Initial Counts
- Tree # 7-10 was mislabelled as *Asimina tuloba* in As-built Initial Counts
- Tree # 7-2, -3, -4 were mislabelled as *Fraxinus pennsylvanica* in As-built Initial Counts
- Tree # 14-5, -8, -10 were labelled as unknown in As-built Initial Counts
- Tree # 7-21 was labelled as *Liriodendron tulipifera* in the field but was not added in the As-built Initial Counts
- Tree # 7-4 was mislabelled as *Quercus michauxii* in the Year 1 Monitoring Counts
- Tree # 16-6 was mislabelled as *Nyssa sylvatica* in the Year 1 Monitoring Counts
- Tree # 9-1 was incorrectly counted as *Cercis canadensis* instead of *Cornus amomum* in the Year 1 Monitoring Counts
- Tree # 8-10 was mislabelled as *Quercus phellos* in the As-built Initial Counts
- Tree # 1-6 was mislabelled as *Quercus phellos* in the As-built Initial Counts

2.5 Vegetation Observations

During September 2008 minor repairs were made to the stream-side vegetation. The repairs included the re-staking of matting at Stations 42+15, 48+40, 54+20, 55+92, and 68+60 along UT1. A portion of torn matting at Station 18+00 was re-matted. All of these locations will have live stakes installed during the winter of 2008/2009. Station 11+50 on UT1B and the surrounding floodplain were reseeded where a Department of Transportation fencing crew drove across the channel as they installed fencing along the 485 right-of-way immediately above the project site. Reseeding also took place around Station 10+00 of UT1C to address a small terrace scarp in the floodplain. Trees that had fallen across the channel were removed on UT2 at Station 17+40 and UT2A at Station 16+10. In both cases no damage was done to the stream. Beyond these minor repairs, the stream-side and floodplain vegetation has continued to successfully establish throughout the project site.

2.6 Vegetation Problem Areas

At this time, there seem to be no invasive species problem areas throughout the project site. However, though none seem to be posing any problems, invasive species can very quickly affect the survivability of the planted stems the weedy species should be maintained aggressively to prevent any major mortality issue.

2.7 Vegetation Photos

Photos of the project showing the on-site vegetation are included in Appendix A of this report.

3.0 STREAM MONITORING



3.1 Description of Stream Monitoring

To document the stated success criteria, the following monitoring program was instituted following construction completion on the Beaverdam Creek Restoration Project:

Bankfull Events: The occurrence of bankfull events within the monitoring period was documented by the use of two automated stage recorders. The University of North Carolina (UNCC) installed and monitored the readings from both stage recorders. Gauging station BD2 was installed on UT1 and gauging station BD3 was installed on UT2. Each data logger recorded the watermark at 15 minute intervals at each Site and was checked at each Site visit to determine if a bankfull event had occurred. Photos of the bankfull events were not available from UNCC. Figure 4 shows the locations of the stage recorders.

Cross-Sections: Two permanent cross-sections were installed per 1,000 linear feet of stream restoration work, with one located at a riffle cross-section and one located at a pool cross-section. Twenty four total cross sections were established. Each cross-section was marked on both banks with permanent pins to establish the exact transect used. A common benchmark was used for cross-sections and consistently referenced to facilitate comparison of year-to-year data. The annual cross-sectional survey included points measured at all breaks in slope, including top of bank, bankfull, inner berm, edge of water, and thalweg, if the features are present. Riffle cross-sections were classified using the Rosgen stream classification system (Rosgen, 1994). Permanent cross-sections for 2008 (Year 2) were surveyed in November 2008.

Longitudinal Profiles: A representative longitudinal profile was surveyed for 2008 (Year 2). The initial 3000 linear feet of profile was collected for the mainstem reach of UT1. Measurements included thalweg, water surface, bankfull, and top of low bank. Each of these measurements was taken at the head of each feature (e.g., riffle, pool, glide). In addition, maximum pool depth was recorded. All survey was tied to a single permanent benchmark.

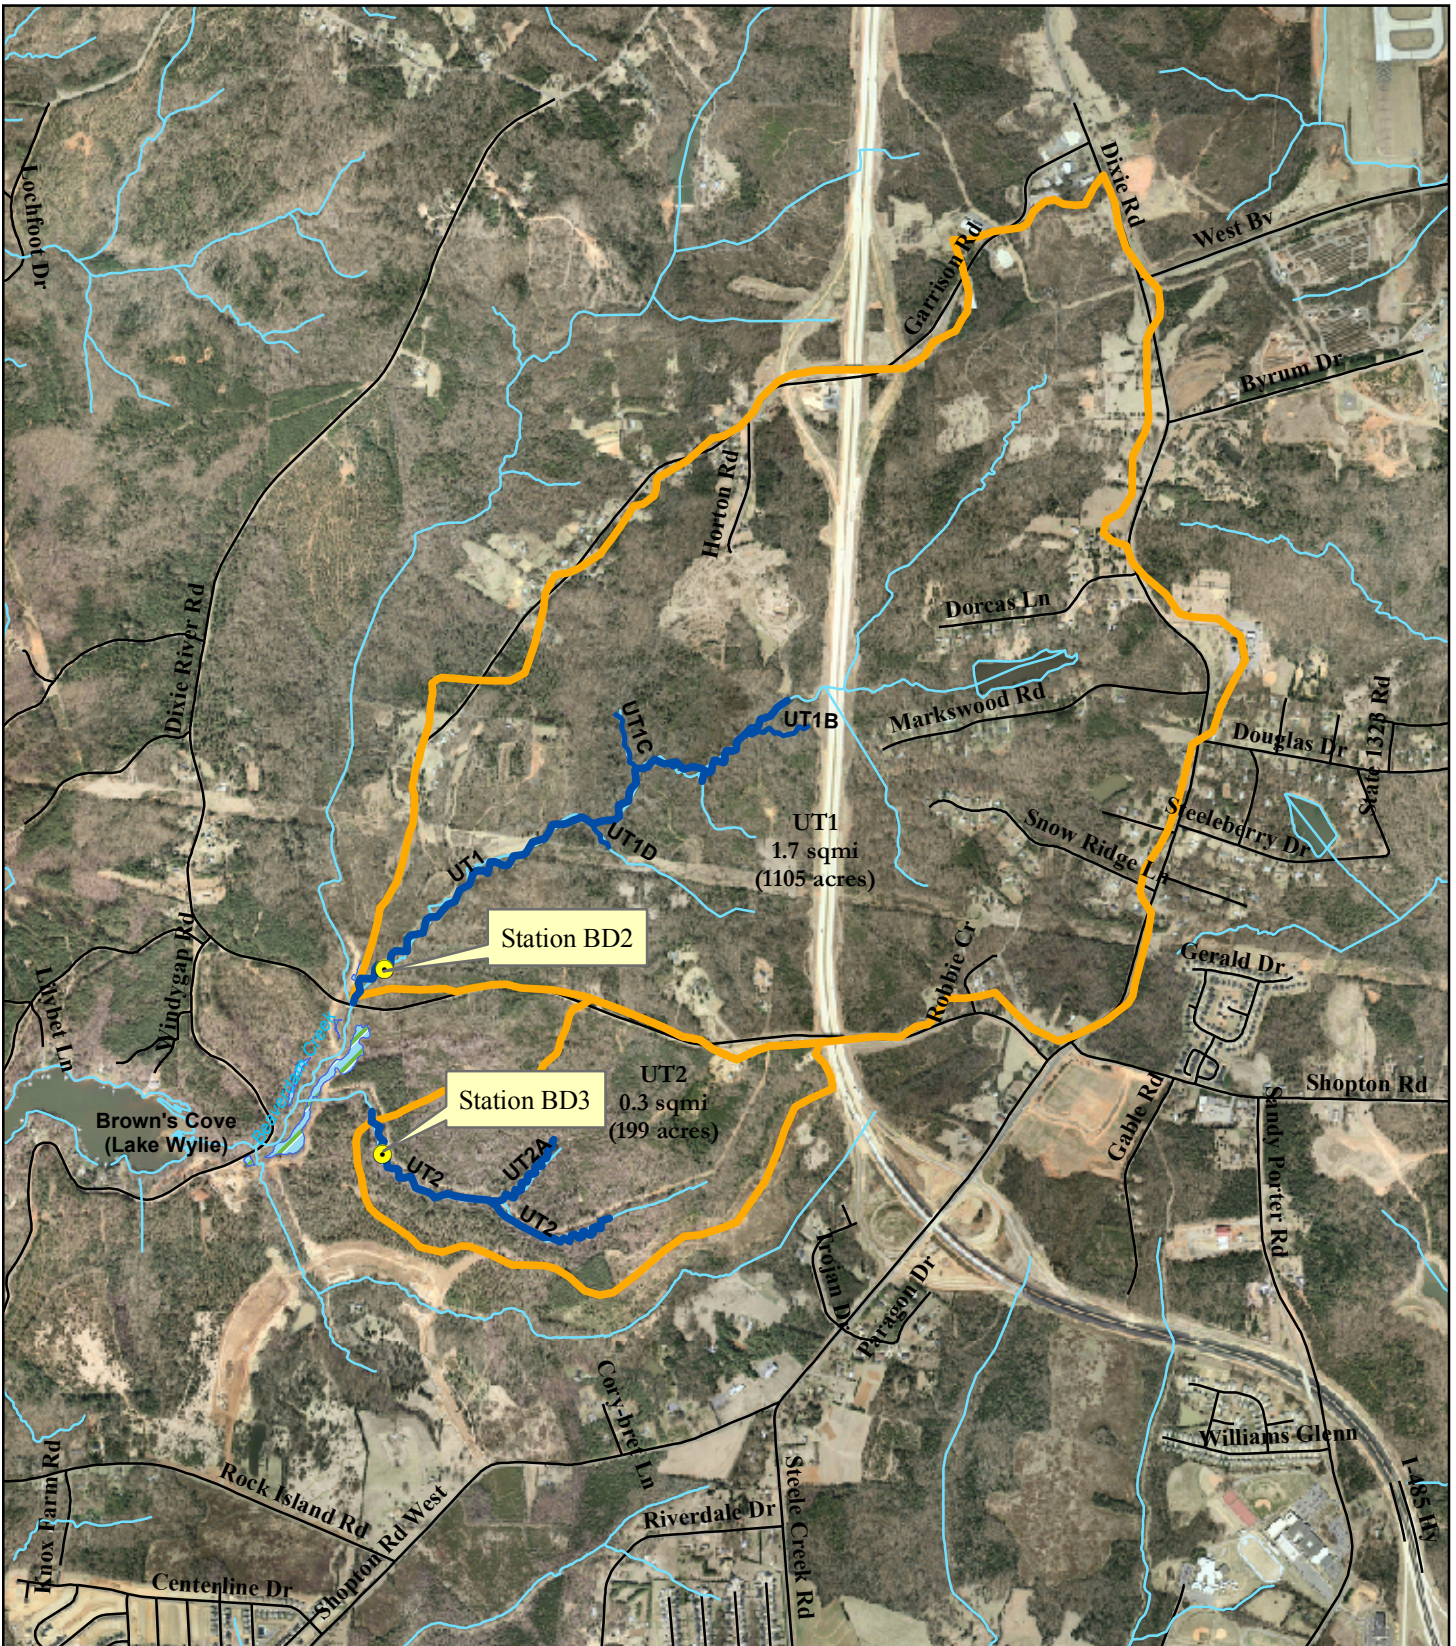

LEGEND

- Crest Gauges
- As-built Alignments
- Project Watershed Boundary
- Creeks
- Roads

0 950 1,900 3,800 Feet

December 2008

ECP Contract No.: D05016-1

Figure 4: Stage Recorder Locations

Beaverdam Creek
Year 2 Monitoring
Mecklenburg County, NC

Bed Material Analysis: Pebble counts were conducted for the permanent cross-sections (100 counts per cross-section) on the project reaches. Pebble count data was plotted on a semi-log graph and are included in Appendix B.

Photo Reference Stations: Photographs were used to visually document restoration success. Fifty-one (51) reference stations were established to document conditions at the constructed grade control structures across the Site. These photos are provided in Appendix A. The GPS coordinates of each photo station were noted as additional reference to ensure the same photo location was used throughout the monitoring period. These stations are included in the As-built Plan Sheets in Appendix C. Reference photos were taken once per year.

Each streambank was photographed at each permanent cross-section photo station. For each streambank photo, the photo view line followed a survey tape placed across the channel, perpendicular to flow (representing the cross-section line). The photograph was framed so that the survey tape is centered in the photo (appears as a vertical line at the center of the photograph), keeping the channel water surface line horizontal and near the lower edge of the frame. These photos are presented along with the cross-section monitoring data in Appendix B.

3.2 Stream Restoration Success Criteria

The approved Mitigation Plan requires the following criteria be met to achieve stream restoration success:

- *Bankfull Events:* Two bankfull flow events must be documented within the five-year monitoring period. The two bankfull events must occur in separate years.
- *Cross-Sections:* There should be little change in as-built cross-sections. If changes to channel cross-section take place, they should be minor changes representing an increase in stability (e.g., settling, vegetative changes, deposition along the banks, or decrease in width/depth ratio).
- *Longitudinal Profiles:* The longitudinal profiles should show that the bedform features are remaining stable (not aggrading or degrading). The pools should remain deep with flat water surface slopes and the riffles should remain steeper and shallower than the pools.
- *Bed Material Analysis:* Pebble counts should indicate maintenance of bed material.
- *Photo Reference Stations:* Photographs will be used to subjectively evaluate channel aggradation or degradation, bank erosion, success of riparian vegetation and effectiveness of erosion control measures. Photos should indicate the absence of developing bars within the channel, no excessive bank erosion or increase in channel depth over time, and maturation of riparian vegetation.

3.3 Bankfull Discharge Monitoring Results

On-site data loggers documented the occurrence of one bankfull flow event during the second year (2008) of the post-construction monitoring period (Table 8). The bankfull flow event measurements documented by the data loggers during Year2 monitoring were stage heights of 5.92 for BD2 and 0.86 feet for BD3.

Table 8. Verification of Bankfull Events

Beaverdam Creek Restoration Site: Project No. D05016-1				
Station Number	Date of Data Collection	Date of Occurrence of Bankfull Event	Method of Data Collection	Gage Height (feet)
BD2	N/A	8/26/2008	Datalogger	5.92
BD3	N/A	8/26/2008	Datalogger	0.86

3.4 Stream Monitoring Data and Photos

A photo log of the project showing each of the fifty-one (51) permanent photo locations is included in Appendix A of this report. Survey data and photos from each permanent cross-section are included in Appendix B of this report.

3.5 Stream Stability Assessment

Table 9 presents a summary of the results obtained from the visual inspection of in-stream structures performed during Year 2 of post-construction monitoring. The percentages noted are a general overall field evaluation of how the features were performing after repair work had been completed at the time of the last photo point survey on December 2, 2008. These percentages are solely based on the field evaluator's visual assessment at the time of the site visit.

Visual observations of the various structures throughout Year 2 growing season indicated that structures were functioning as designed and holding their elevation grade. Root wads placed on the outside of meander bends provided bank stability and in-stream cover for fish and other aquatic organisms. Cover logs placed in meander pool areas allowed scour to keep pools deep and provide cover for fish. During Year 1, scour was observed immediately underneath a few of the cover logs and other log vane structures. This was observed at stations 41+50, 53+80, 56+00, 56+50, and 63+90 of UT1. Isolated pockets of bed scour were also observed at stations 50+15, 56+00, 56+50, and 63+90 of UT1. This minor amount of scour was the result of the large storm event that dropped 3.5 inches of rain on the project site shortly after construction was completed. The channel at these stations and throughout the project has remained largely unchanged through Year 2.

In September of 2008 minor channel repair work was performed. The work included resealing the log sill at station 56+50 and the removal of the log vane structure at 56+60, which had been pulled out of the right bank during a storm event. The right bank at station 56+60 was filled in. A debris jam at station 39+25 on UT2 was also removed. The debris jam caused no damage to the channel.

Observations during the site visit on December 2, 2008 noted that log sill structures at stations 12+05, 25+90, 56+50, and 69+00 on UT1 had been bypassed either by scour under the structure or failure of the fabric seal. This is reflected in the slightly lower performance score of 95.

Table 9. Categorical Stream Feature Visual Stability Assessment

Beaverdam Creek Restoration Site : Project No. D05016-1						
Feature	Performance Percentage					
	Initial	MY-01	MY-02	MY-03	MY-04	MY-05
Riffles	100%	100%	100%			
Pools	100%	100%	100%			
Thalweg	100%	100%	100%			
Meanders	100%	100%	100%			
Bed General	100%	99%	99%			
Vanes / J Hooks etc.	100%	97%	95%			
Wads and Boulders	100%	100%	100%			

3.6 Cross-section, Longitudinal Profile, and Bed Material Analysis Monitoring Results

Cross Sections

Year 2 cross-section monitoring data for stream stability were collected during November 2008 and compared to as-built conditions (collected March 2007).

The twenty four permanent cross-sections along the restored channels (twelve located across riffles and twelve across pools) were re-surveyed to document stream dimension at the end of the second monitoring year (Year 2). Cross-sections are provided in Appendix B, and data from the cross-sections are summarized in Appendix E. The cross-sections show that there has been minor adjustment to stream dimension within the last year.

A couple cross-sections show point bar formation along UT1 and include cross-sections 10 and 11, which are located across pools found at the apex of a meander bend. Flow through a meander bend possesses higher conveyance velocity along its boundary with the outer bank of the bend, and lower flow velocity along its boundary with the bend's inner bank. As flow reduces, its sediment transport capacity also reduces, causing flow to drop some of its transported sediment as it slows down. Point bar formation along the inside of a meander bend indicates flow velocity vectors occurring as designed, and is therefore expected.

Year 1 observations of Cross-section 10 attributed a slight adjustment in channel geometry to aggradation along the outside bank of a meander. This slight adjustment was believed to reflect a plug of sediment deposited during the large storm event that occurred shortly after construction was completed. However, channel geometry has changed very little through Year 2 monitoring and may instead reflect a difference in where survey points were collected on the outside bank of the meander between the As-built and Year 1 surveys. Photographs of Cross-section 10 indicate that the banks of the stream are stable with vegetation.

A few cross-sections show evidence of bed scour along UT1 and include cross-sections 3, 13, 16, and 17, which are located across pools found at the apex of a meander bend. The outside of meander bends experience an increase in shear stress during large storm events that can cause scour. The project site experienced a 7.54 inch precipitation event between August 25 and 27, 2008, which likely lead to the scour in these pools. Scour and deepening of some pools is expected and has not resulted in any observed channel instability. The installation of cover logs at meander bends promotes habitat and encourages scour.

Cross-section 15 also experienced scour but unlike the other cross-sections it's located in a straight section of channel immediately upstream of a large in-stream boulder. During storm events streamflow is diverted around the boulder and has causes bed scour on the upstream side, which is seen in Cross-section 15. This change in channel geometry will be monitored but doesn't require other action.

Longitudinal Profiles

The Year 2 longitudinal profile was conducted during November 2008. The initial 3,000 LF of channel was surveyed along the mainstem of UT1. The longitudinal profile is included in Appendix B. A summary of parameters measured are provided in Appendix D. Please note that this summary represents only the portion of project that was surveyed.

The representative longitudinal profile along the restored channel was resurveyed to document stream profile at the end of monitoring Year 2. Riffle slopes and pool-to-pool spacing were calculated for Reach 1 and Reaches 2-5 of UT1. The Year 2 riffle slope for Reach 1 is 0.009 ft/ft and pool-to-pool spacing has a mean value of 54 ft. These values are on par with the design values, which are respectively 0.009 ft/ft and 44 ft. Reaches 2-5 riffle slopes range from 0.008 ft/ft to 0.018 ft/ft are also similar to their design values that range from 0.005 to 0.018 ft/ft. The Year 2 pool-to-pool spacing of Reaches 2-5 ranges from

72 to 144 ft with a mean value of 108. These values are similar to the design value range of 101 to 120 ft. Sinuosity for Reach 1 was 1.04, which is slightly lower than the Year 1 value of 1.05. The difference is the result of a five foot difference in surveyed channel length and thalweg migration. Reaches 2-5 had a sinuosity of 1.3 which is the same as that calculated in Year 1.

Profile remained largely unchanged with a few exceptions where pools had deepened due to scour. Overall pattern shows little to no change.

Bed Material Analysis

Year 2 bed material samples were collected at each permanent cross-section during November 2008. The pebble count data were plotted on a semi-log graph and will be compared with future monitoring data. Data indicates maintenance of a coarse bed in constructed riffles and a relative fining in the pools. All pebble count data are provided in Appendix B.

3.7 Areas of Concern

During Year 1 Monitoring several Best Management Practices (BMPs) were noted as areas of concern. The BMPs are located just within and immediately outside the conservation easement along UT2 and UT2A of the Restoration Project. The BMPs consist of both temporary and permanent detention ponds which are discharging stormwater into the Project Site, and a retaining wall. Locations of the BMPs are shown on the as-built plans included in Appendix C. Adjacent to the Site's property boundaries are new residential developments under construction.

During the site visit on December 2, 2008 the BMP, located within the conservation easement at the top of UT2A, had been removed and work was being done to restore the area to its existing slope. In Year 1, it was noted that discharge from the BMP adjacent to Station 20+00 along UT2 had caused some minor scour below the riffle at the log sill. The channel at station 20+00 on UT2 has remained stable through Year 2 and it appears that the BMP, which has been enlarged during Year 2, is no longer impacting the project site. Currently, none of the BMPs are impacting the restored channels. Therefore, they are no longer considered areas of concern.

4.0 HYDROLOGY

Rainfall data were collected to document the hydrologic conditions throughout the project area in the 2008 growing season. Since no rain gauges were installed within the project boundaries, monthly rainfall totals were calculated from data downloaded from the Withers Cove USGS gauge 35090308100454 in Mecklenburg County, NC. Historical rainfall data were collected from the Charlotte WSO AP WETS Station in Mecklenburg County (NC 1690) using NRCS National Water and Climate Data Center website.

Monthly rainfall data were recorded as less than the historic average for 2007-2008, except for August, which was recorded above the 70 percentile mark. Hydrologic monitoring results are shown in Table 10 and Figure 5.


Table 10. Comparison of Historic Rainfall to Observed Rainfall

Beaverdam Creek Restoration Site: EEP Contract No. D05016-1				
Month	Average	30%	70%	Observed 2008* Precipitation
January	4.00	3.21	5.15	2.19
February	3.55	2.34	4.42	2.71
March	4.39	3.01	5.54	4.14
April	2.95	1.98	3.73	2.81
May	3.66	2.33	4.29	2.11
June	3.42	2.43	4.68	1.42
July	3.79	2.49	4.76	2.48
August	3.72	2.34	4.57	9.34
September	3.83	2.00	4.68	2.44
October	3.66	1.80	4.49	1.18
November	3.36	2.51	4.24	1.2
December	3.18	2.11	3.81	4.24
Total Rainfall	43.51	28.55	54.36	36.26

(NRCS National Climate and Water Center, 2003 and USGS, 2008)

* Monthly rainfall data was calculated based on rainfall data from 12/1/07 – 11/25/08 using the nearest USGS rain gauge data (USGS 35090308100454 Withers Cove in Mecklenburg County) to the project site. (USGS, 2008)

Figure 5. Historic Average vs. Observed Rainfall

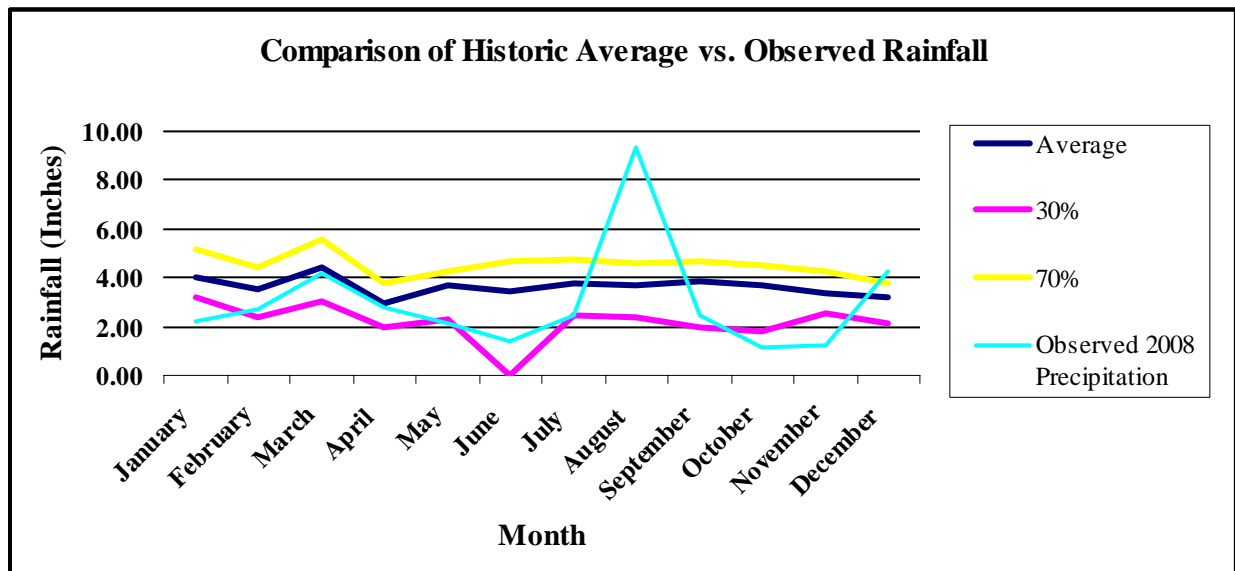

5.0 CONCLUSIONS AND RECOMMENDATIONS

Vegetation Monitoring. Vegetation monitoring efforts have calculated the range of stems per acre for each plot to be from 280 to 680 stems per acre on the 24 vegetation plots. The average number of stems per acre is 483, which is a survival rate of greater than 77%, based on the initial planting count of 625 stems per acre. Assuming that preventative methods will be used to maintain any invasive exotics, vegetation survivability should remain excellent on the Site and vegetative success criteria will be met.

Stream Monitoring. The total length of stream channel restored and/or preserved on the Site was 15,806 linear feet. This entire length was inspected during Year 2 of the monitoring period (2007) to assess stream performance. Based on the data collected, riffles, pools, and other constructed features along the restored channel are stable and functioning as designed. Minor bed scour was noted at isolated pockets along UT1. A few log sill structures should be resealed along UT1 to restore functionality. The lack of major problem areas along the length of the restored channels after the occurrence of two stream flow events larger than bankfull discharge further supports functionality of the design. It is expected that stability and in-stream habitat of the system will continue to improve in the coming years as permanent vegetation becomes more established.

6.0 WILDLIFE OBSERVATIONS

Observations of deer and raccoon tracks are common on the Site. During certain times of the year, frogs, turtles, turkey, and fish have also been periodically observed.

7.0 REFERENCES

Rosgen, D.L. 1994. A Classification of Natural Rivers. *Catena* 22:169-199.

Rosgen, D.L. 1996. Applied River Morphology. Pagosa Springs, CO: Wildland Hydrology Books.

United States Department of Agriculture (USDA), Natural Resources Conservation Service (NRCS). 2006. Soil Series Descriptions. <http://soils.usda.gov/technical/classification/osd/index.html>

USDA. NRCS. 2006. Soil Taxonomy, A Basic System of Soil Classification for Making and Interpreting Soil Surveys. ftp://ftp-fc.sc.egov.usda.gov/NSSC/Soil_Taxonomy/tax.pdf

USDA. NRCS. 2003. Climate Information for Mecklenburg County in the State of North Carolina (1971-2000). TAPS Station : CHARLOTTE WSO AP, NC1690
<ftp://ftp.wcc.nrcs.usda.gov/support/climate/taps/nc/37119.txt>

USDA, NRCS. 2007. The PLANTS Database (28 November 2007). National Plant Data Center, Baton Rouge, LA 70874-4490 USA. <http://plants.usda.gov>

U.S. Geological Service (USGS). 2007. Real-Time Data for North Carolina - Precipitation USGS Water-Data Site Information for North Carolina. USGS 35090308100454 Withers Cove in Mecklenburg County, NC. Retrieved on 2008-11-26 09:43:06 EDT
http://waterdata.usgs.gov/nc/nwis/current/?type=precip&group_key=county_cd

APPENDIX A

Photo Log

PHOTO LOG – UT1



UT1 – PID 1



UT1 – PID 2



UT1 – PID 3



UT1 – PID 4



UT1 – PID 5



UT1 – PID 6

PHOTO LOG – UT1



UT1 – PID 7



UT1 – PID 8



UT1 – PID 9



UT1 – PID 10



UT1 – PID 11



UT1 – PID 12

PHOTO LOG – UT1



UT1 – PID 13



UT1 – PID 14



UT1 – PID 15



UT1 – PID 16



UT1 – PID 17



UT1 – PID 18

PHOTO LOG – UT1



UT1 – PID 19



UT1 – PID 20



UT1 – PID 21



UT1 – PID 22



UT1 – PID 23

PHOTO LOG – UT1B, UT1C, & UT1D



UT1B – PID 1



UT1B – PID 2



UT1B – PID 3



UT1B – PID 4



UT1B – PID 5



UT1C – PID 6

PHOTO LOG – UT1B, UT1C, & UT1D



UT1C – PID 7



UTIC – PID 8



UT1C – PID 9



UTD – PID 10



UT1D – PID 11



UT1D – PID 12

PHOTO LOG – UT2 & UT2A



UT2 – PID 1



UT2 – PID 2



UT2 – PID 3



UT2 – PID 4



UT2 – PID 5



UT2 – PID 6

PHOTO LOG – UT2 & UT2A



UT2 – PID 7



UT2 – PID 8



UT2 – PID 9



UT2 – PID 10



UT2 – PID 11



UT2 – PID 12

PHOTO LOG – UT2 & UT2A



UT2A – PID 1



UT2A – PID 2



UT2A – PID 3



UT2A – PID 4

VEG PLOT PHOTOS – UT1 & UT1B – UT1D



UT1 – Veg Plot 1



UT1 – Veg Plot 2



UT1 – Veg Plot 3



UT1 – Veg Plot 4



UT1 – Veg Plot 5



UT1 – Veg Plot 6

VEG PLOT PHOTOS – UT1 & UT1B – UT1D



UT1 – Veg Plot 7



UT1 – Veg Plot 8



UT1 – Veg Plot 9



UT1 – Veg Plot 10



UT1 – Veg Plot 11




UT1 – Veg Plot 12

VEG PLOT PHOTOS – UT1 & UT1B – UT1D



UT1 – Veg Plot 13

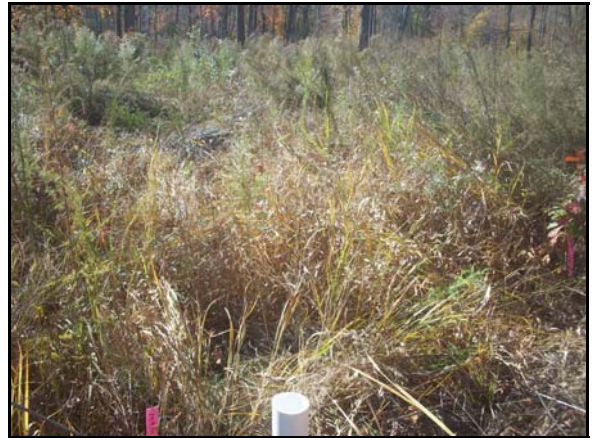

UT1 – Veg Plot 14



UT1B – Veg Plot 15



UT1C – Veg Plot 16



UT1D – Veg Plot 17

VEG PLOT PHOTOS – UT2 & UT2A



UT2A – Veg Plot 1



UT2A – Veg Plot 2



UT2 – Veg Plot 3



UT2 – Veg Plot 4



UT2 – Veg Plot 5



UT2 – Veg Plot 6

VEG PLOT PHOTOS – UT2 & UT2A




UT2 – Veg Plot 7


APPENDIX B

STREAM MONITORING DATA

Beaverdam Creek UT1 Mainstem Profile (2008 Monitoring)

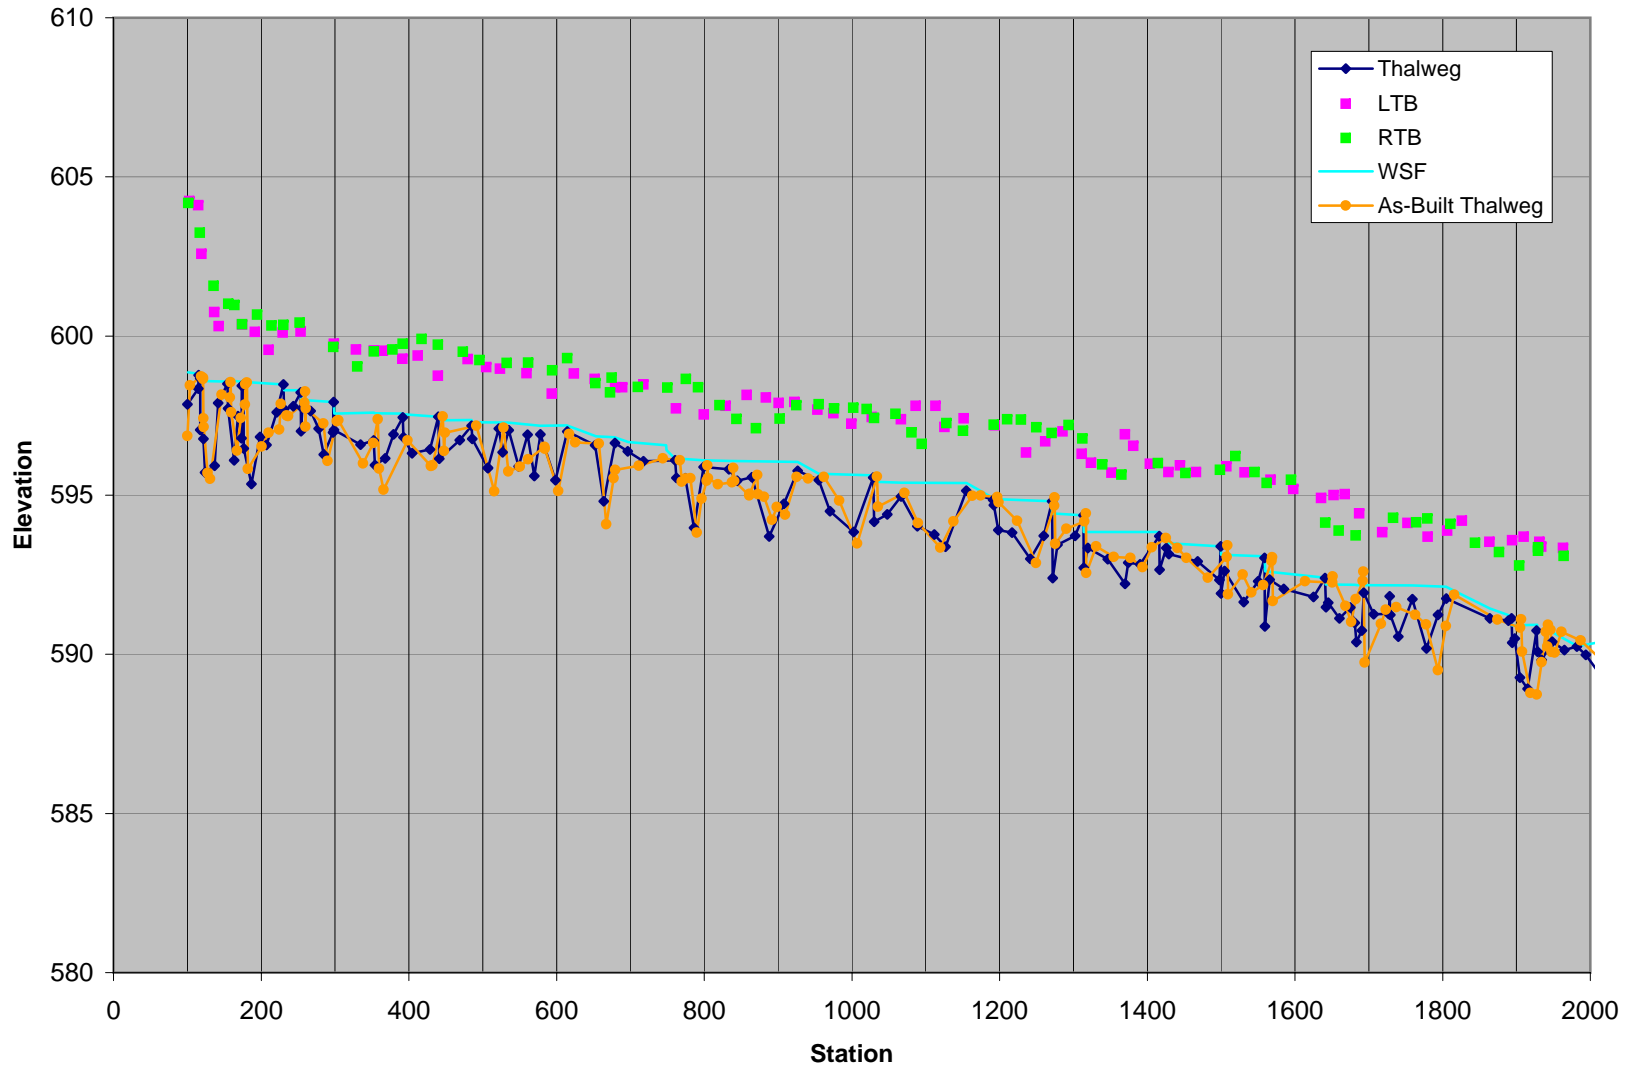

Beaverdam Creek UT1 Mainstem Profile (2008 Monitoring)

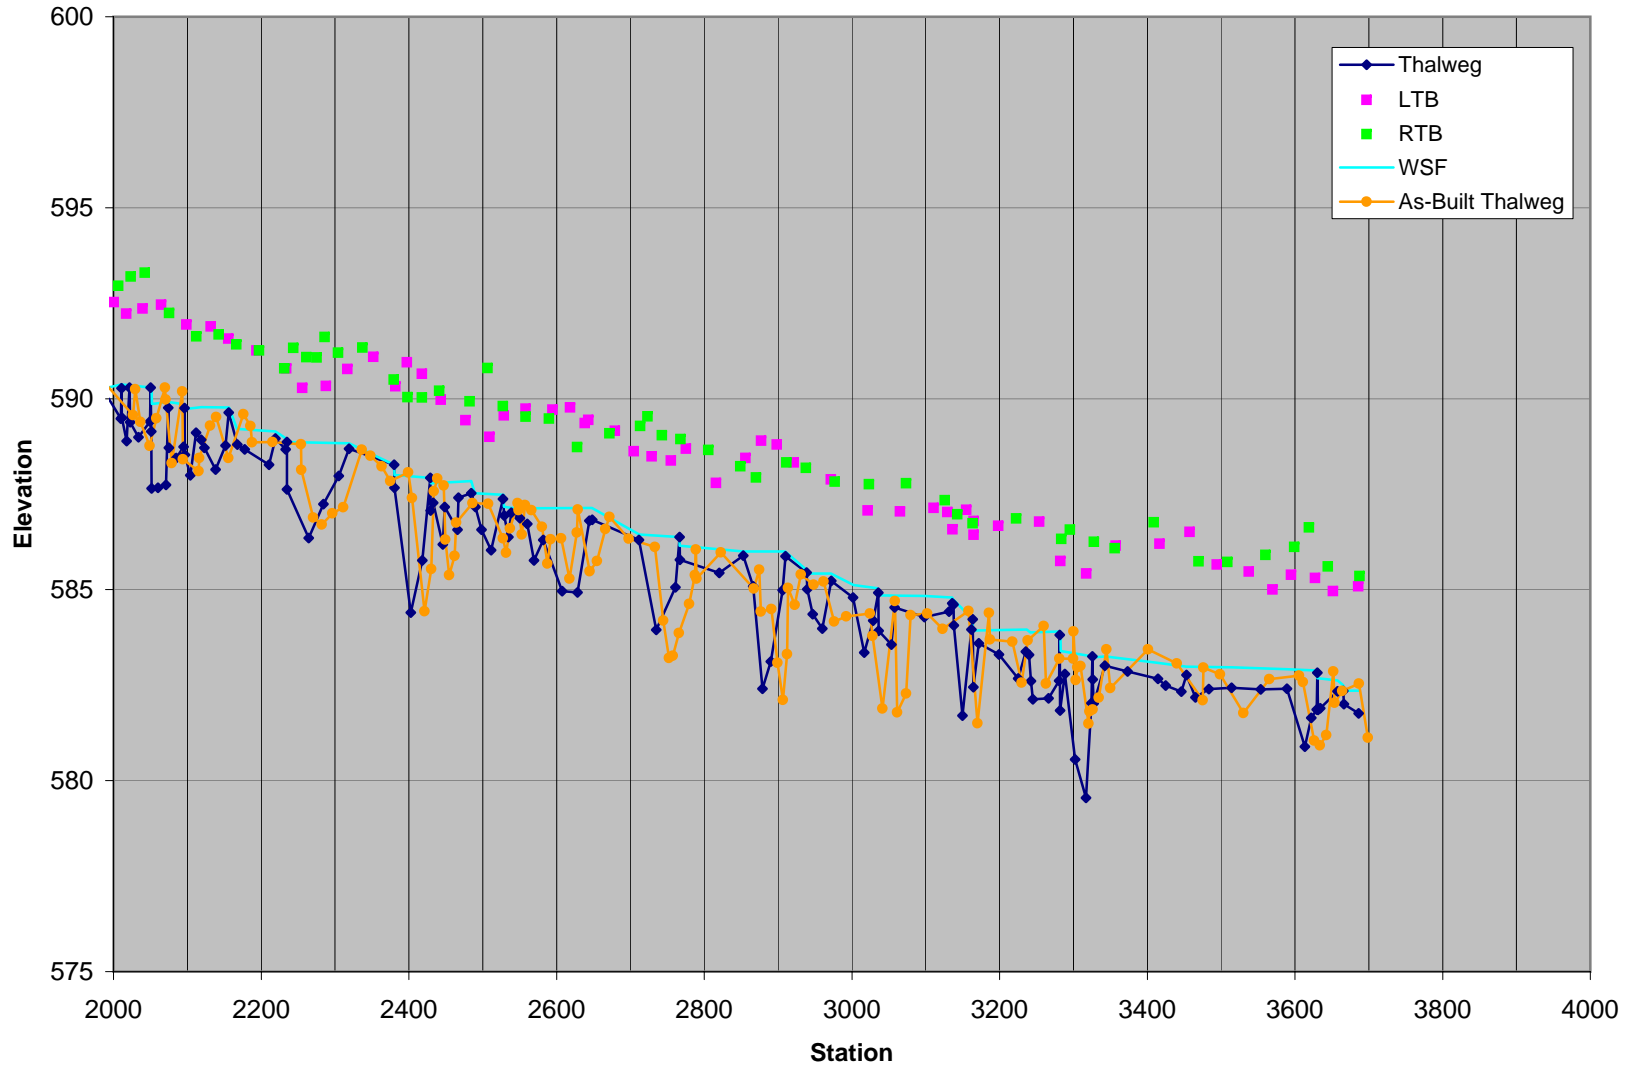

UT1 Permanent Cross Section X1
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		31.8	19.89	1.6	2.93	12.42	1		599.53	599.53

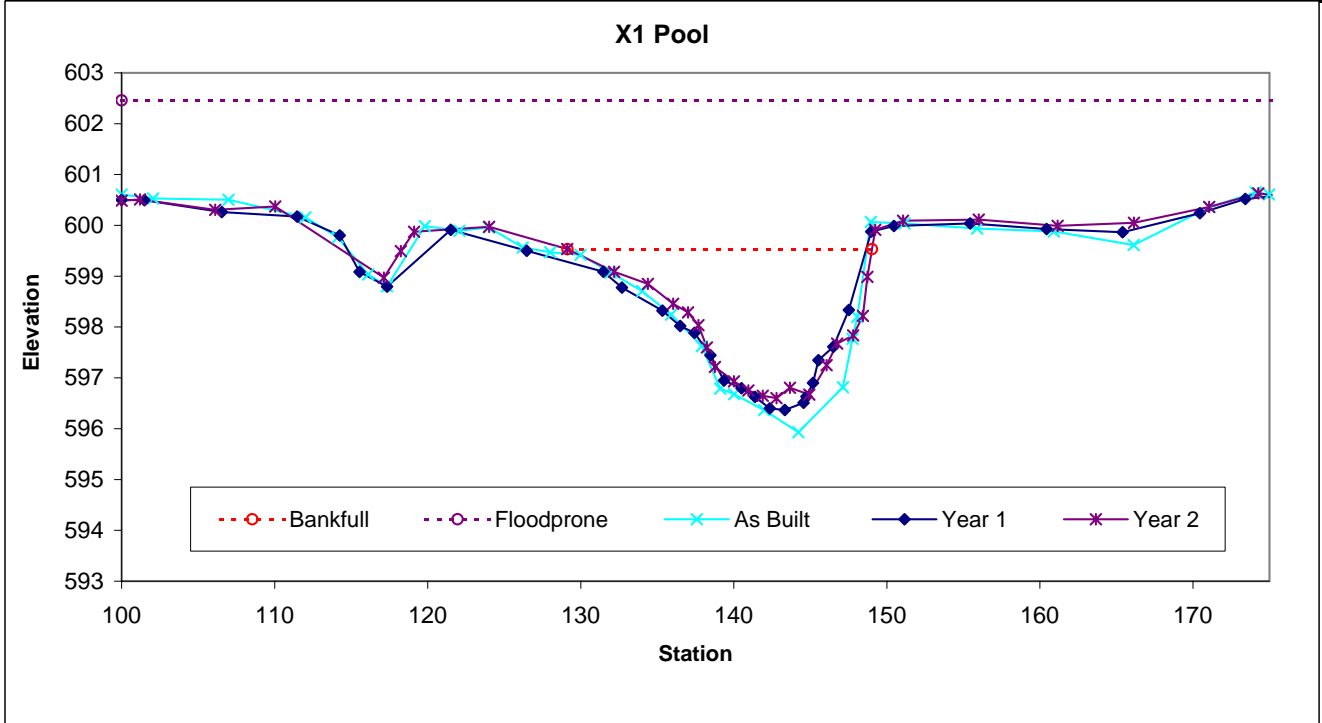

UT1 Permanent Cross Section X2
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C/E	17.8	12.75	1.4	1.97	9.11	1	5.9	598.85	598.85

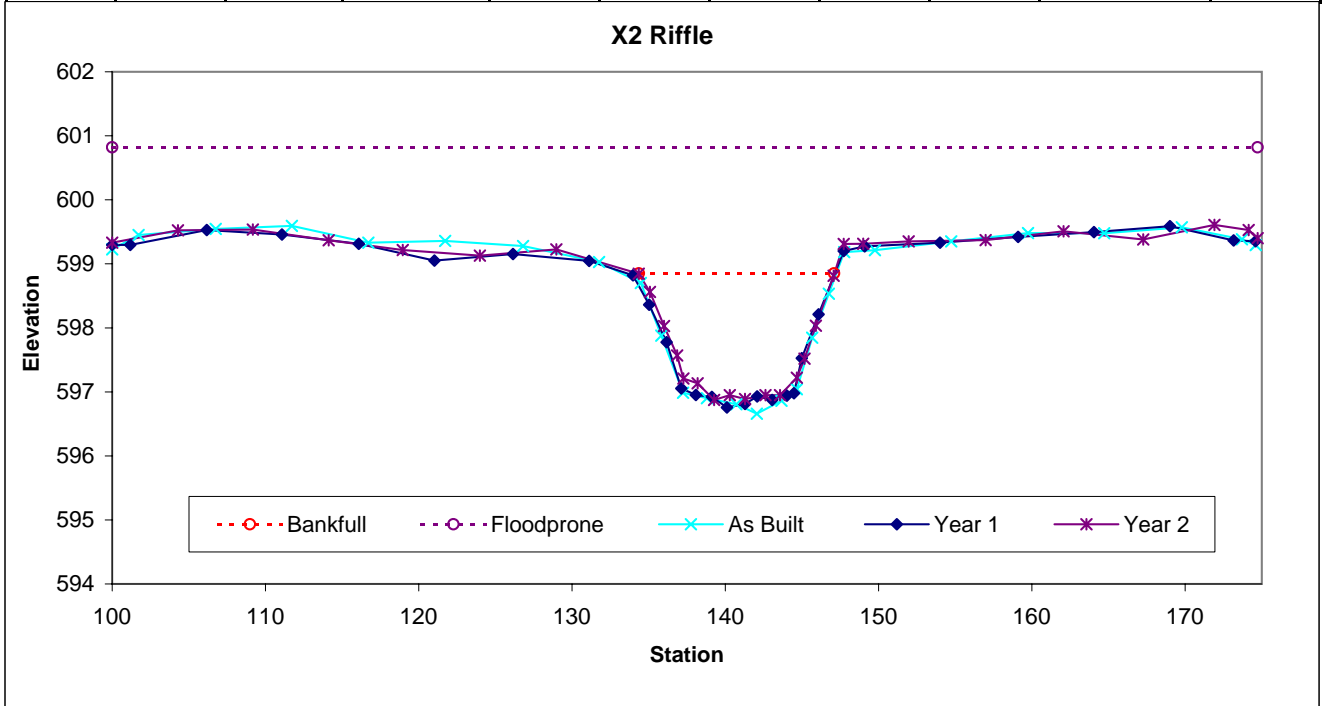

UT1 Permanent Cross Section X3
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		19.4	14.82	1.31	2.97	11.35	1		599.77	599.77

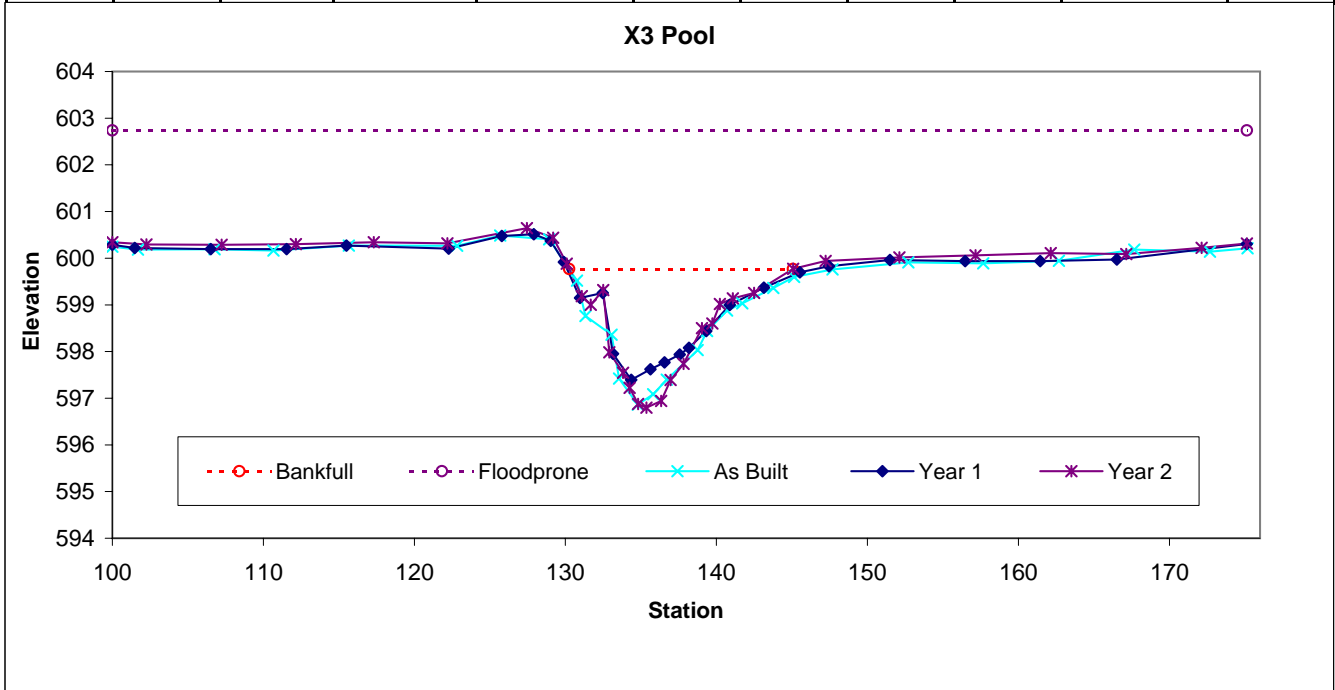

UT1 Permanent Cross Section X4
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C/E	15.6	11.09	1.41	2.35	7.89	1	6.8	599.75	599.75

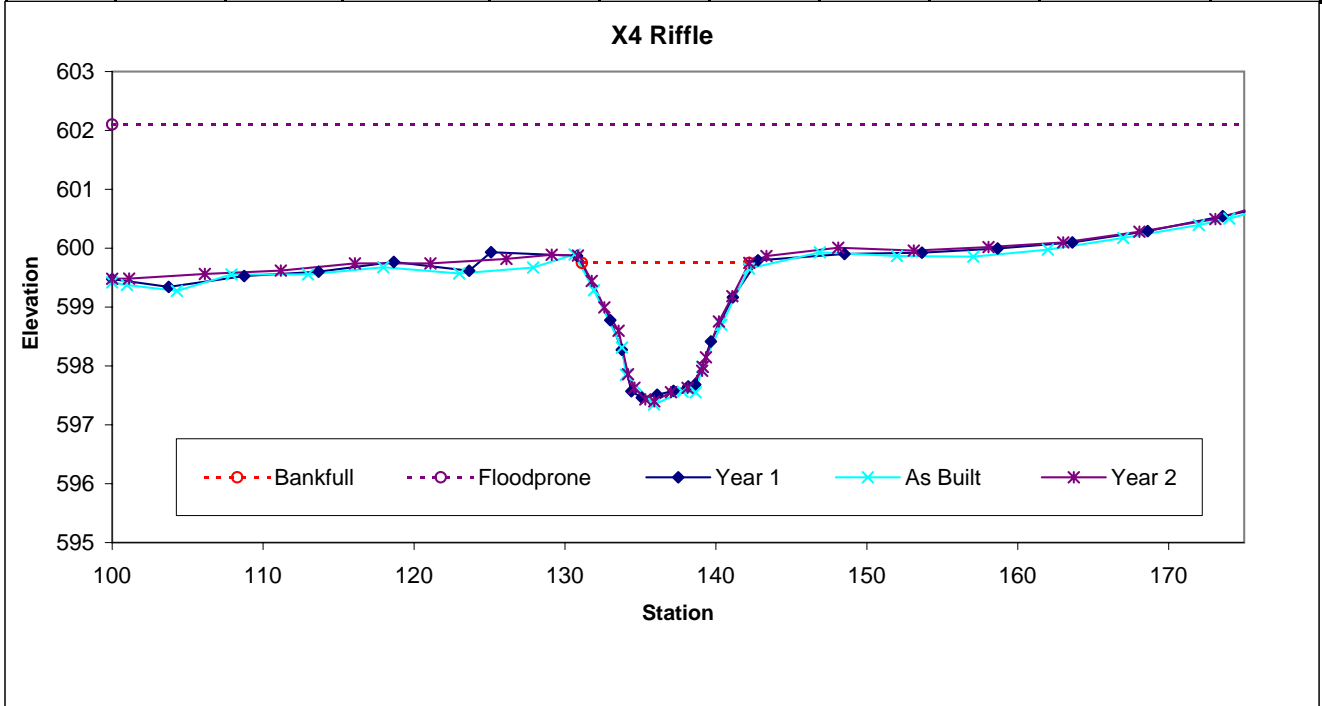

UT1 Permanent Cross Section X5
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C/E	23.6	15.32	1.54	2.36	9.94	1	4.9	597.93	597.93

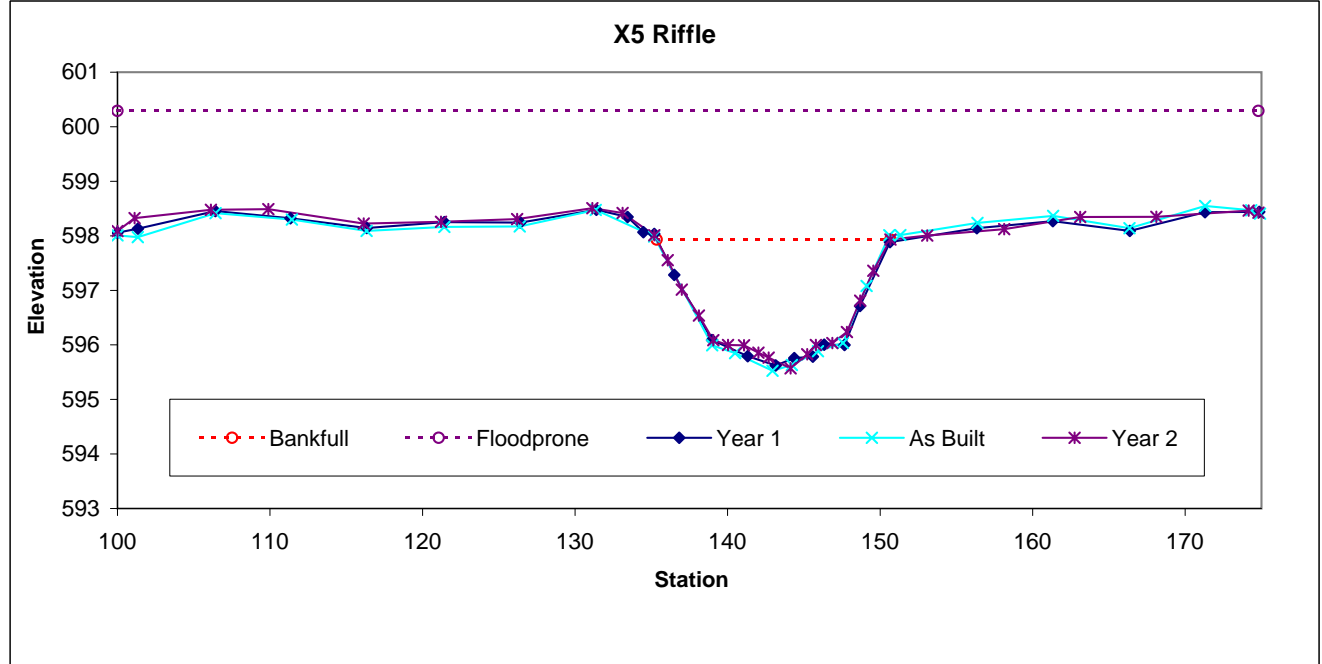

UT1 Permanent Cross Section X6
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		41.2	23.62	1.74	3.39	13.56	1		597.06	597.07

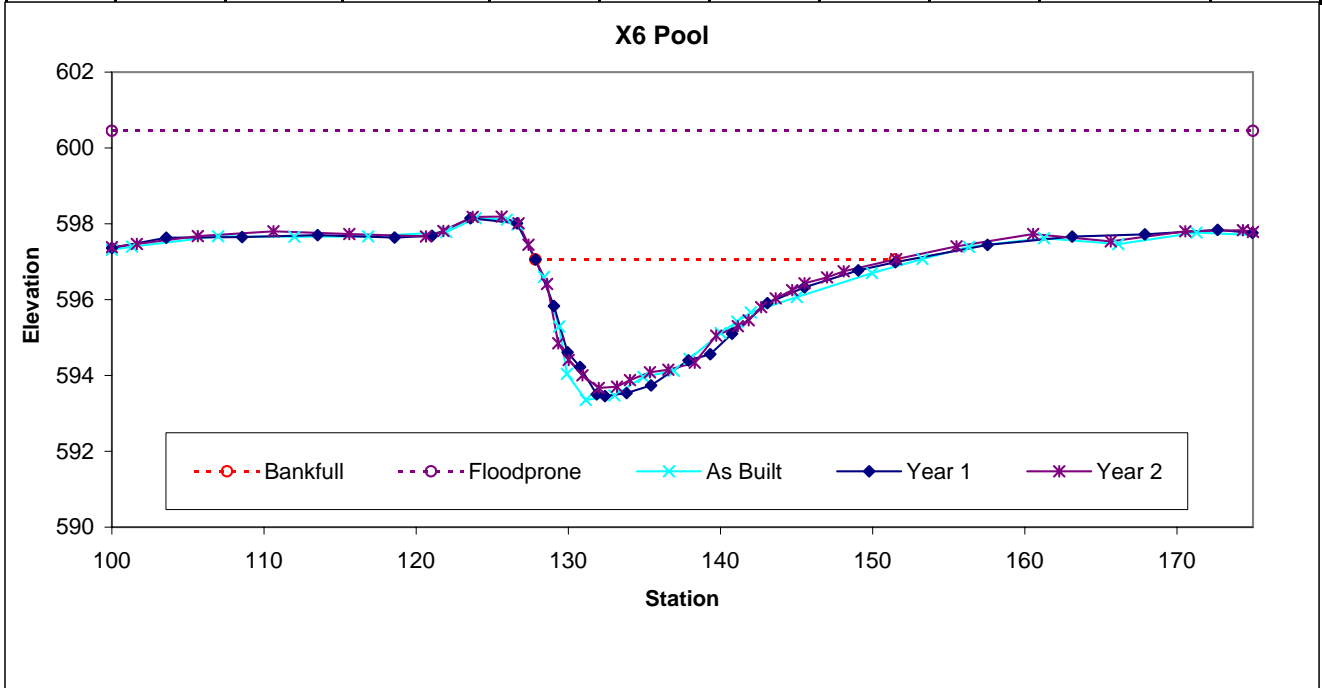

UT1 Permanent Cross Section X7
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C/E	9.5	13.2	0.72	1.14	18.38	1	5.4	594.95	594.96

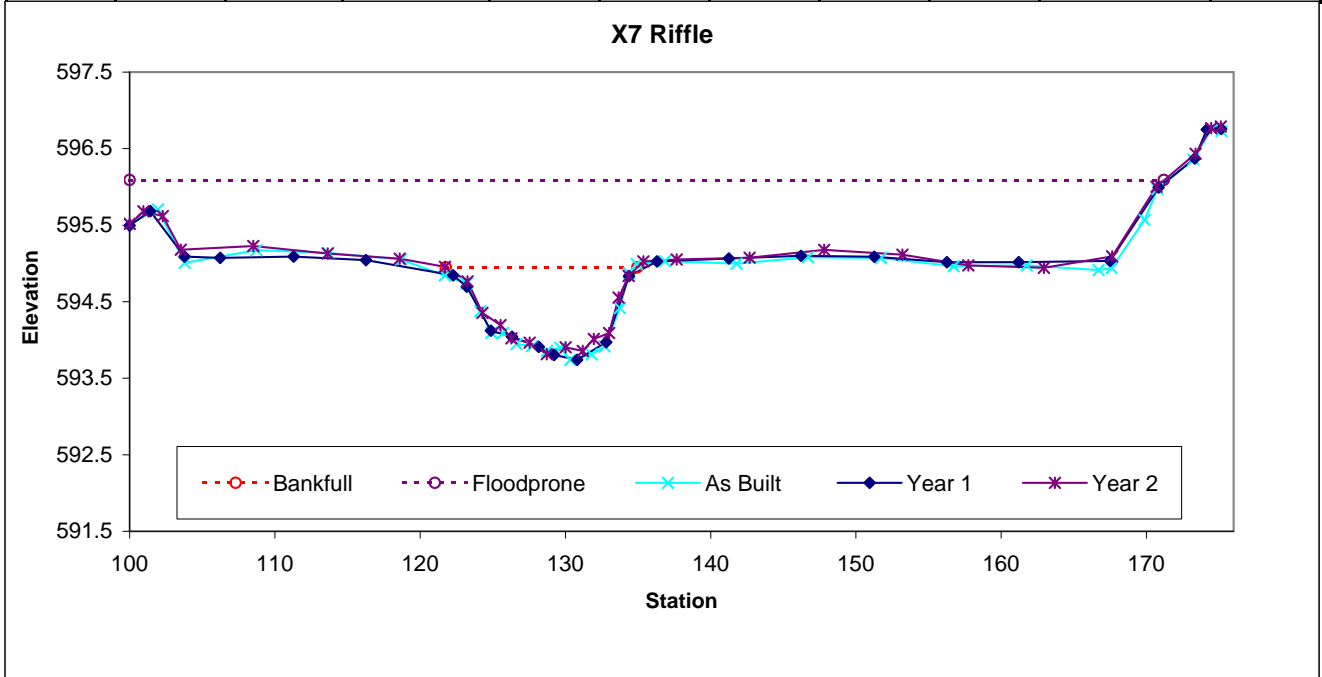

UT1 Permanent Cross Section X8
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		30.3	12.43	2.44	3.22	5.1	1		593.45	593.46

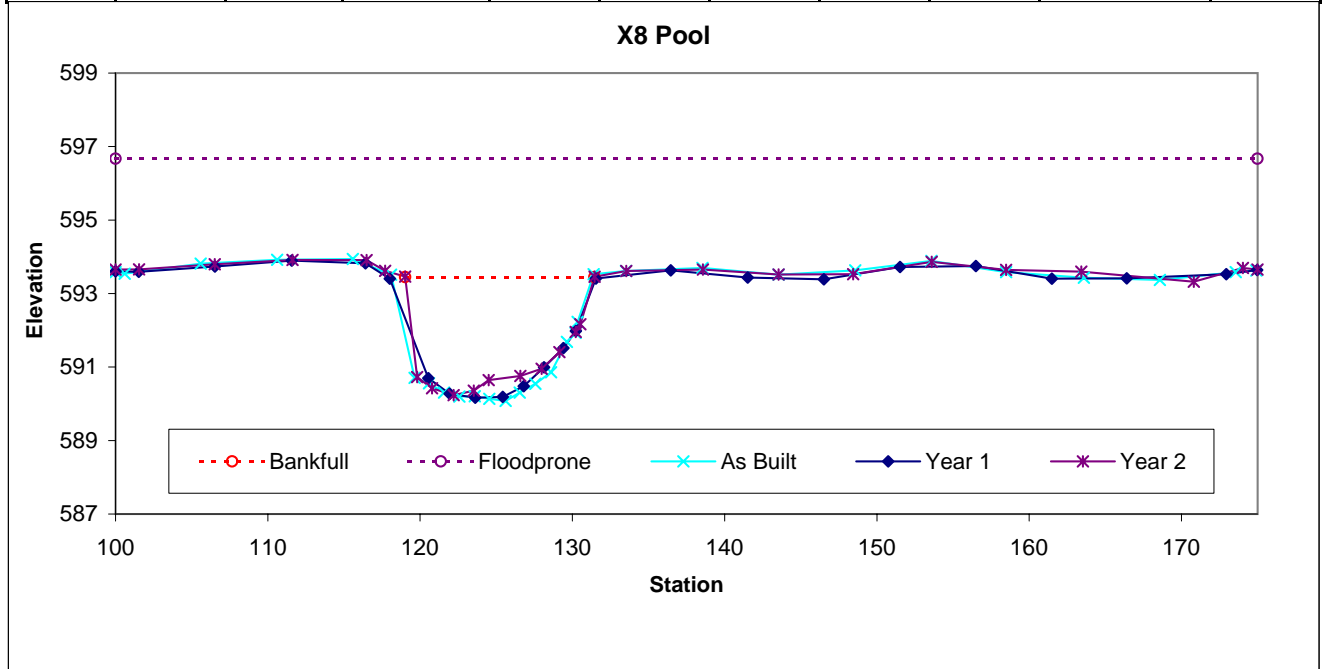

UT1 Permanent Cross Section X9
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C/E	29.4	17.62	1.67	2.76	10.56	1	4.3	590.86	590.86

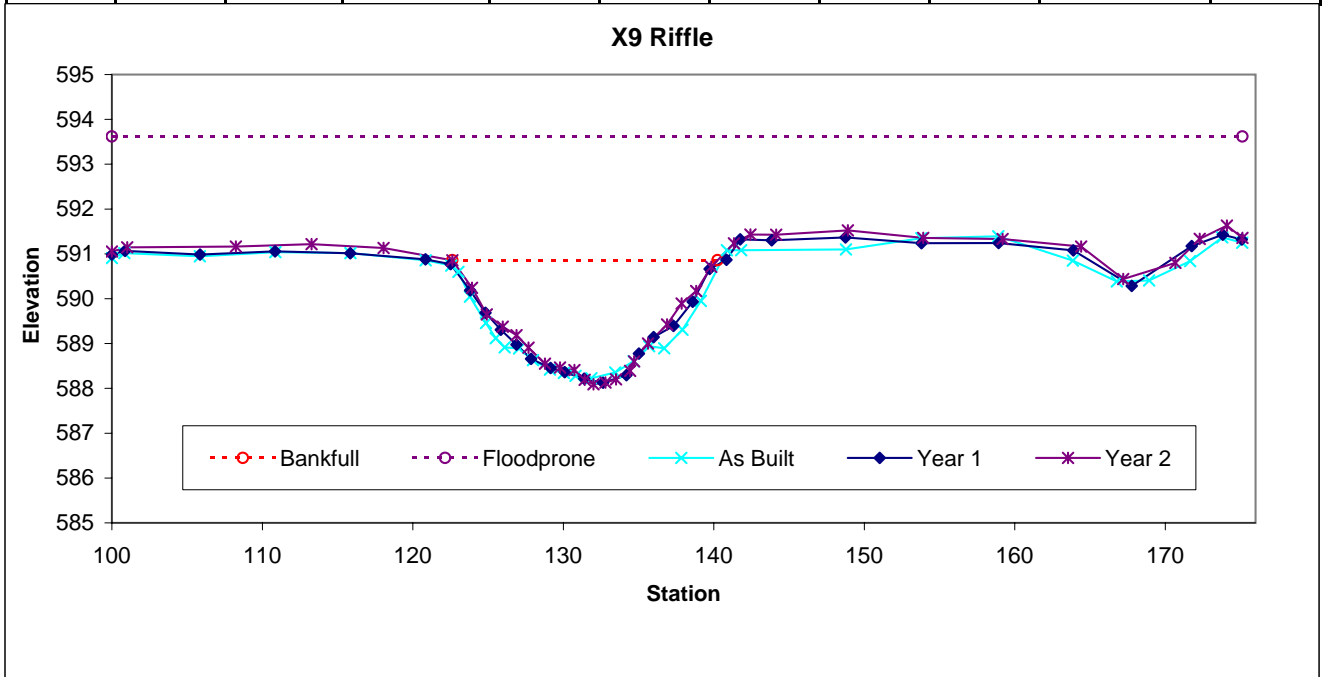

UT1 Permanent Cross Section X10
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		42.7	22.42	1.9	3.4	11.78	1		588.8	588.81

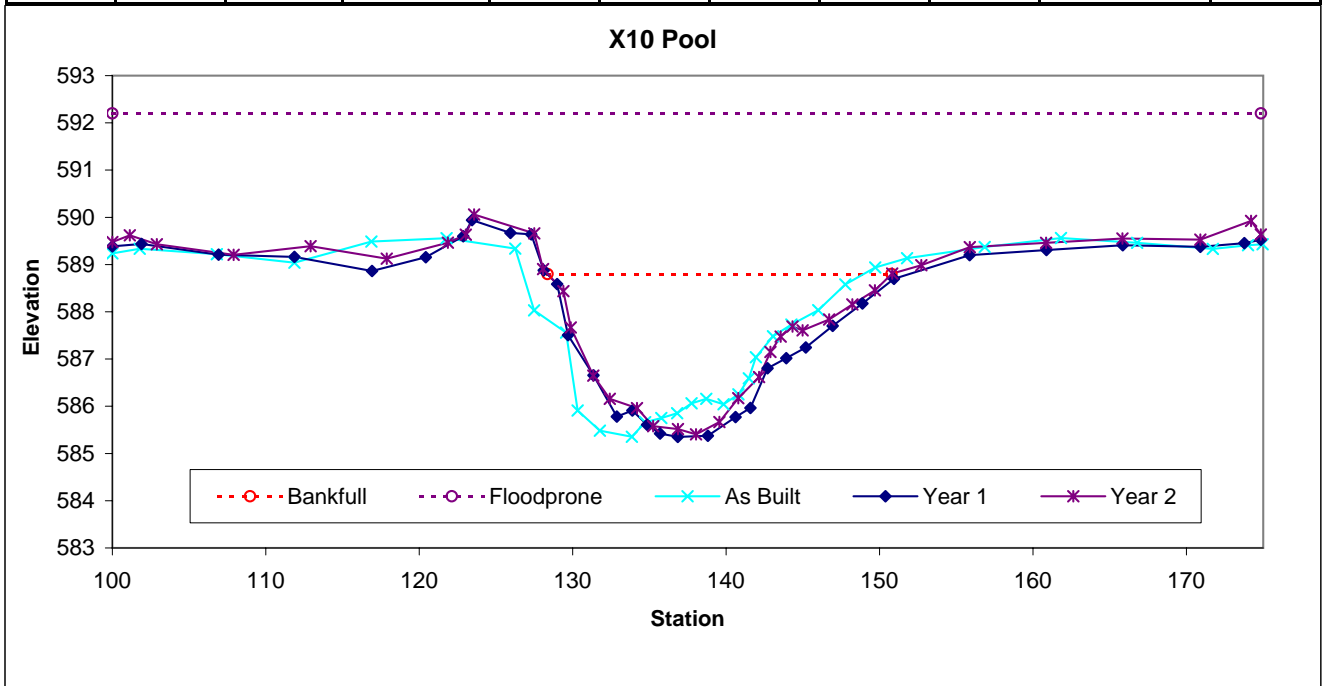

UT1 Permanent Cross Section X11
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		18.9	15.06	1.25	2.15	12.03	1		589.89	589.89

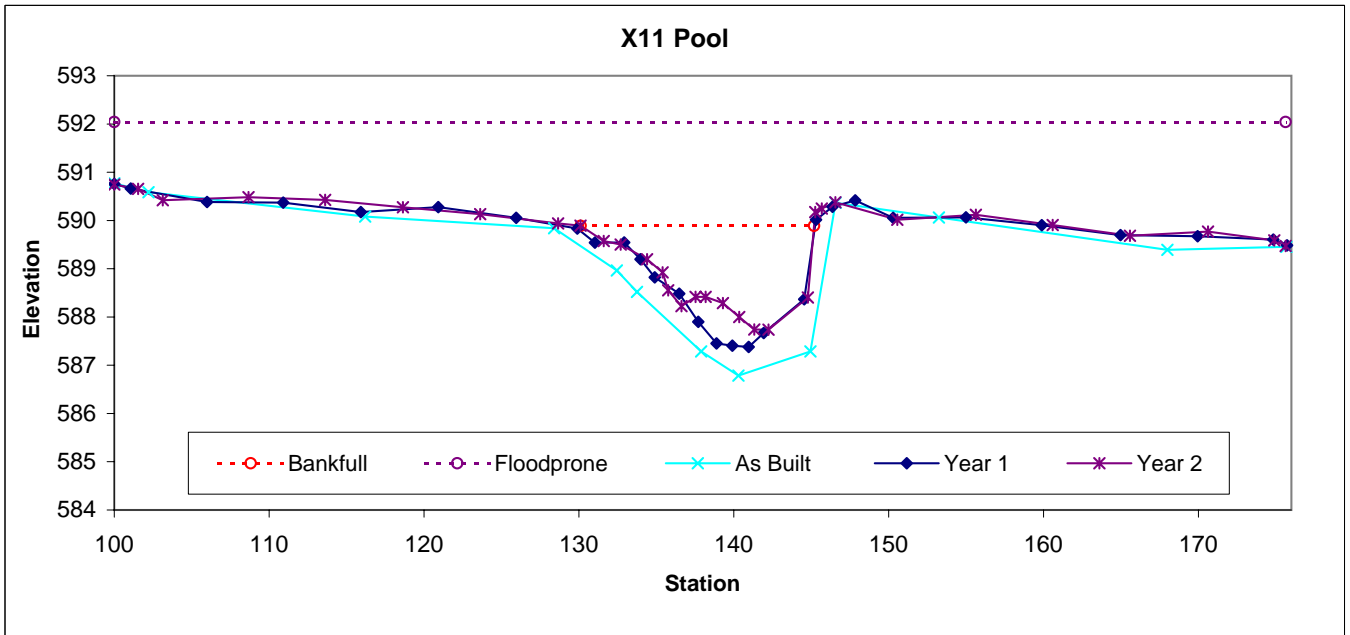

UT1 Permanent Cross Section X12
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C/E	9	11.39	0.79	1.07	14.37	1	6.6	589.02	589.02

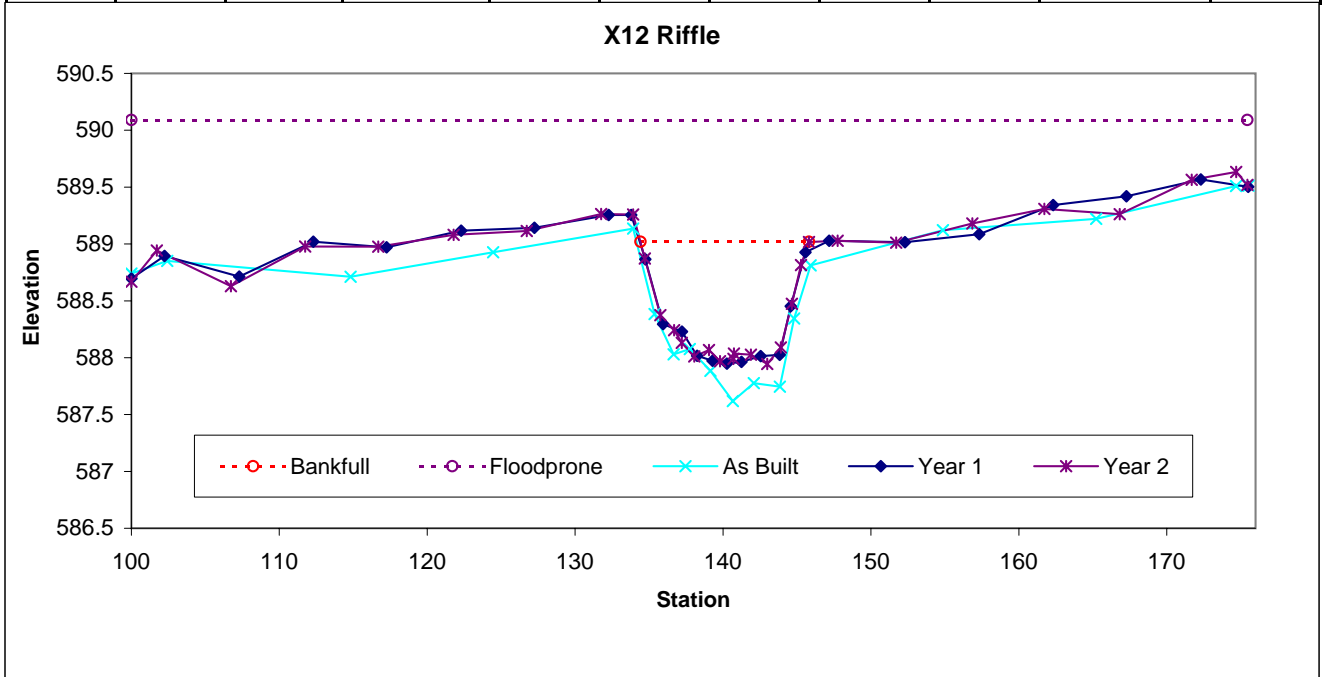

UT1 Permanent Cross Section X13
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		77.6	28.64	2.71	6.59	10.57	1		586.8	586.81

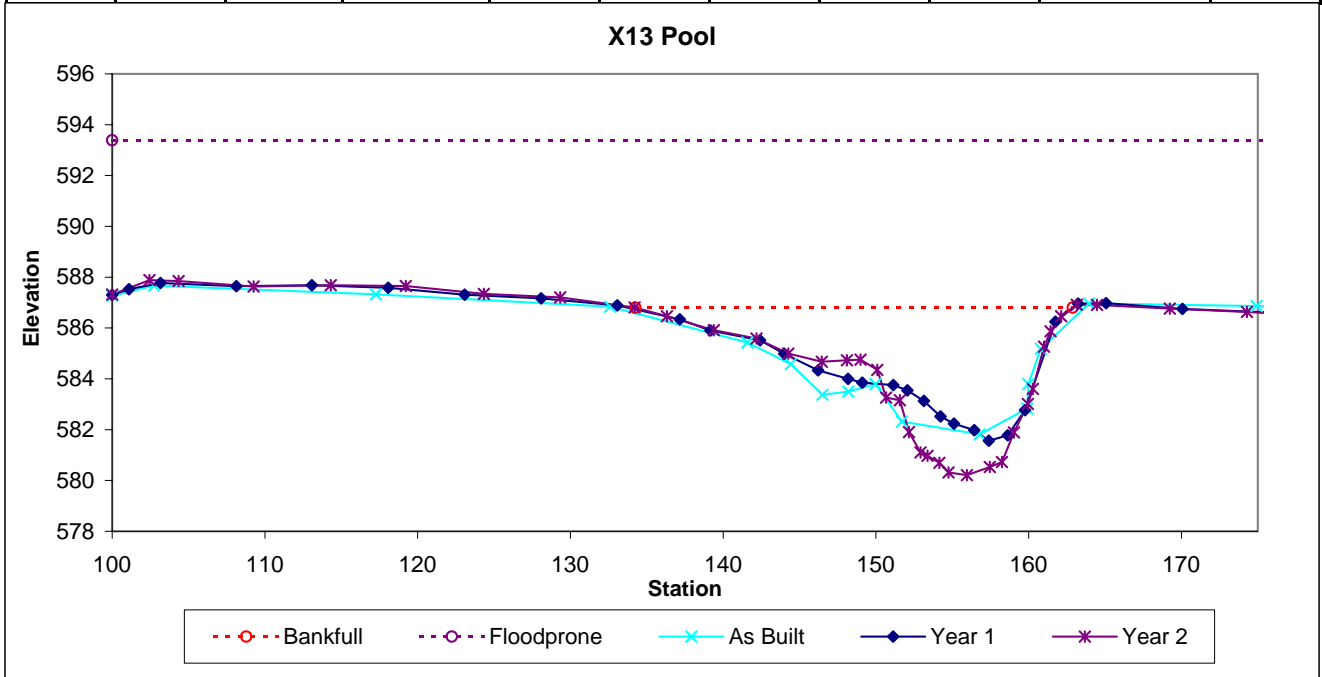

UT1 Permanent Cross Section X14
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C/E	39.4	20.15	1.95	3.26	10.31	1	3.7	585.27	585.27

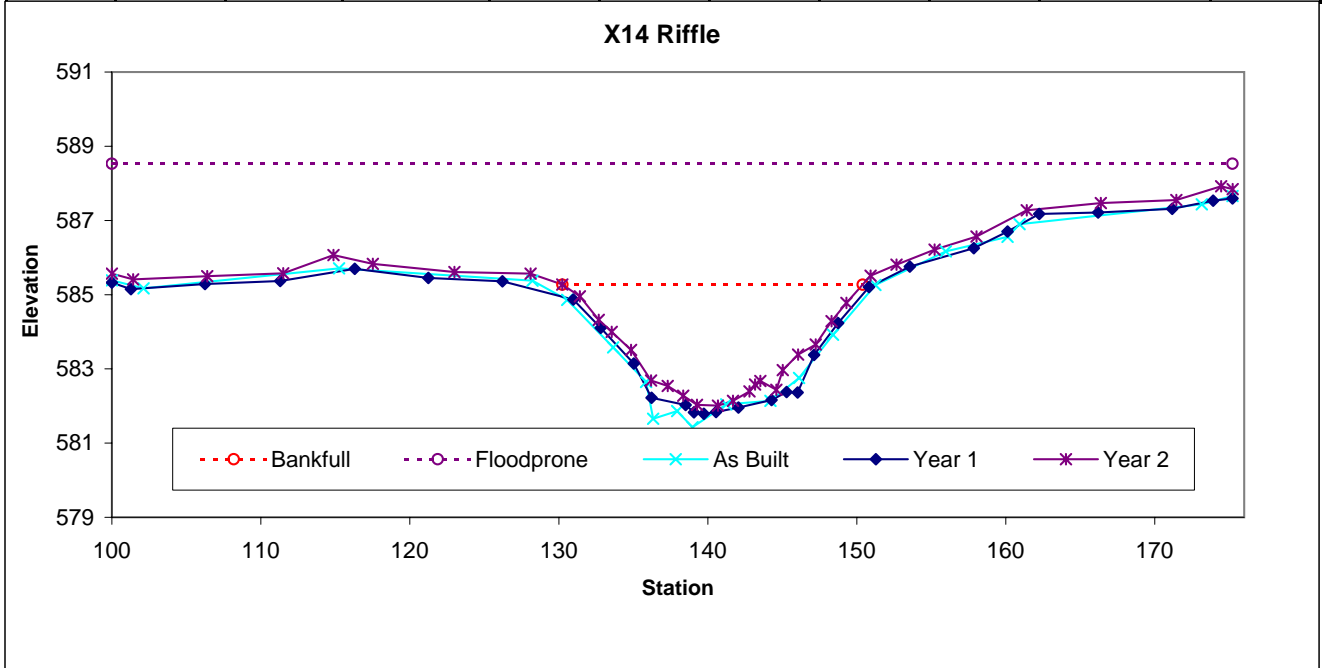

UT1 Permanent Cross Section X15
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C/E	62.4	26.01	2.4	4.72	10.84	1	3	579.55	579.55

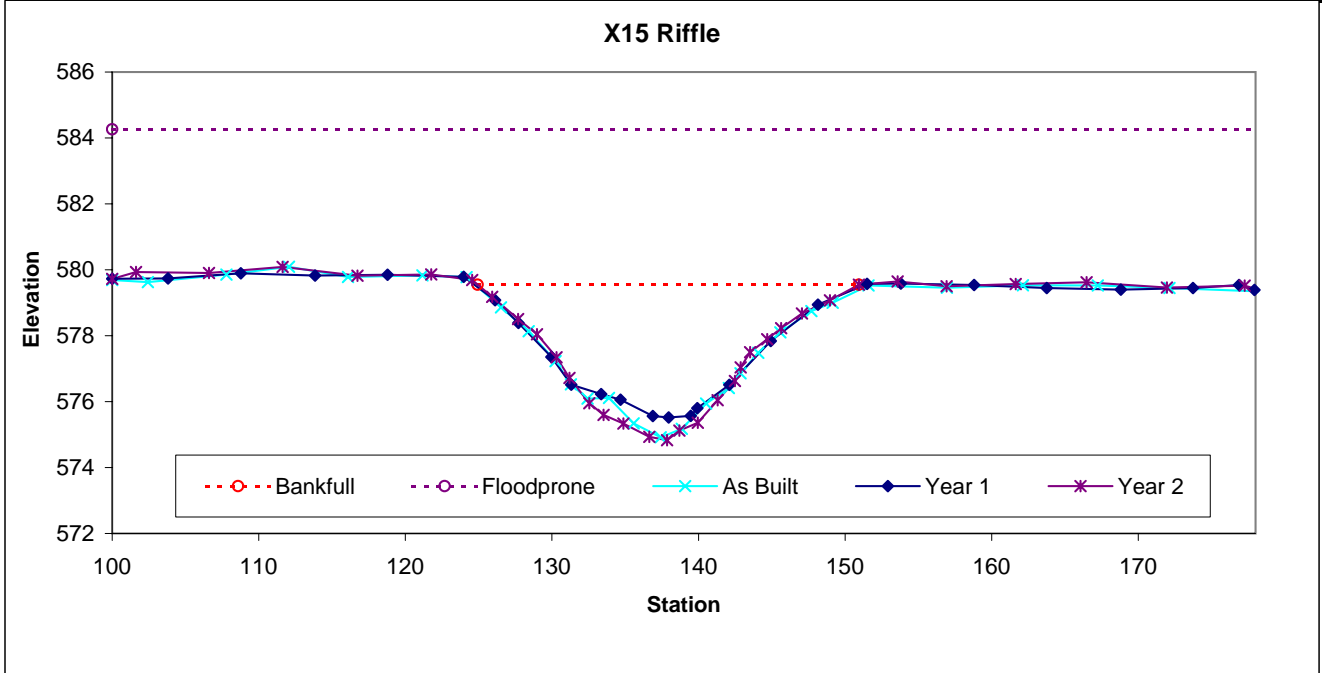

UT1 Permanent Cross Section X16
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		45.2	21.61	2.09	3.66	10.33	1		576.76	576.76

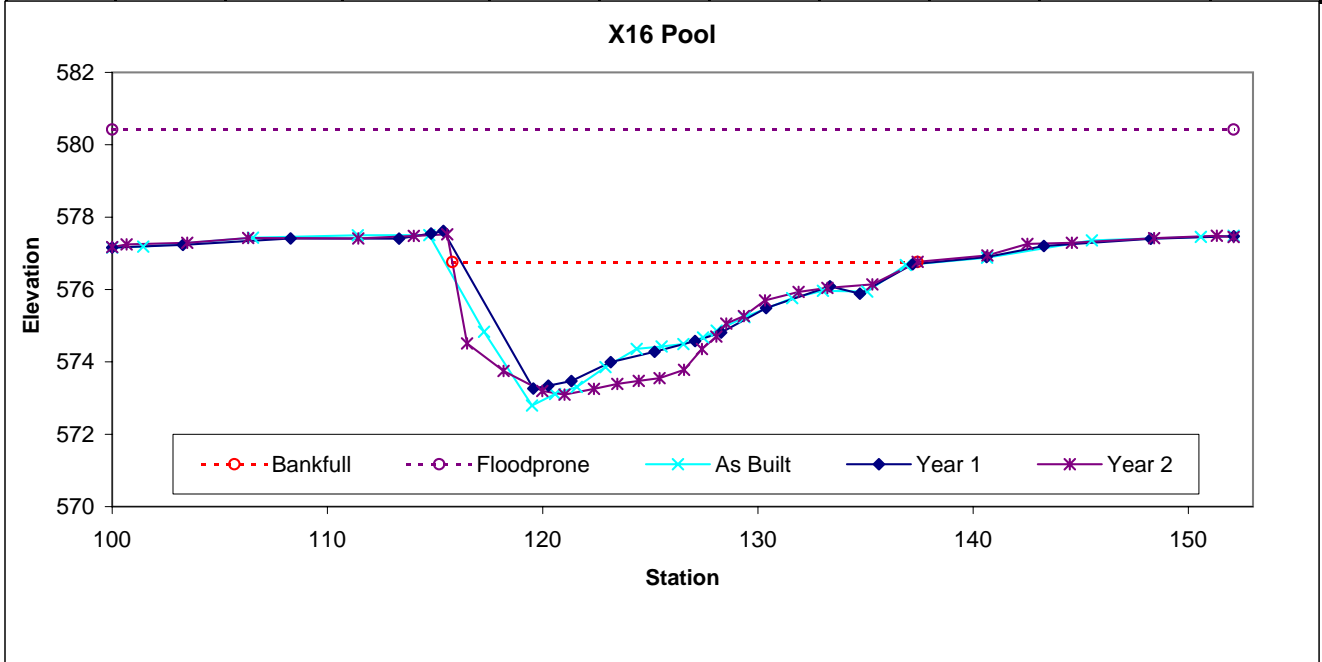

UT1 Permanent Cross Section X17
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		36.1	23.33	1.55	4.44	15.08	1		573.62	573.63

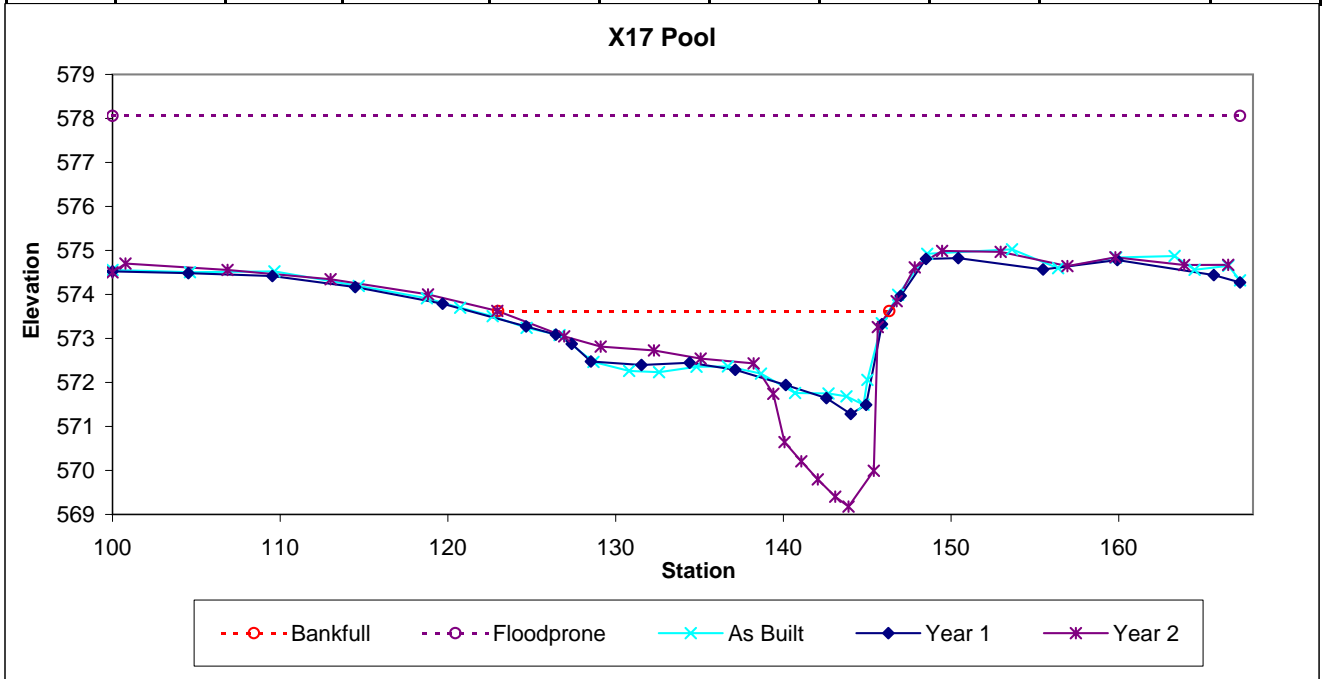

UT1 Permanent Cross Section X18
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C/E	34.8	23.39	1.49	2.73	15.71	1	3.4	574.27	574.28

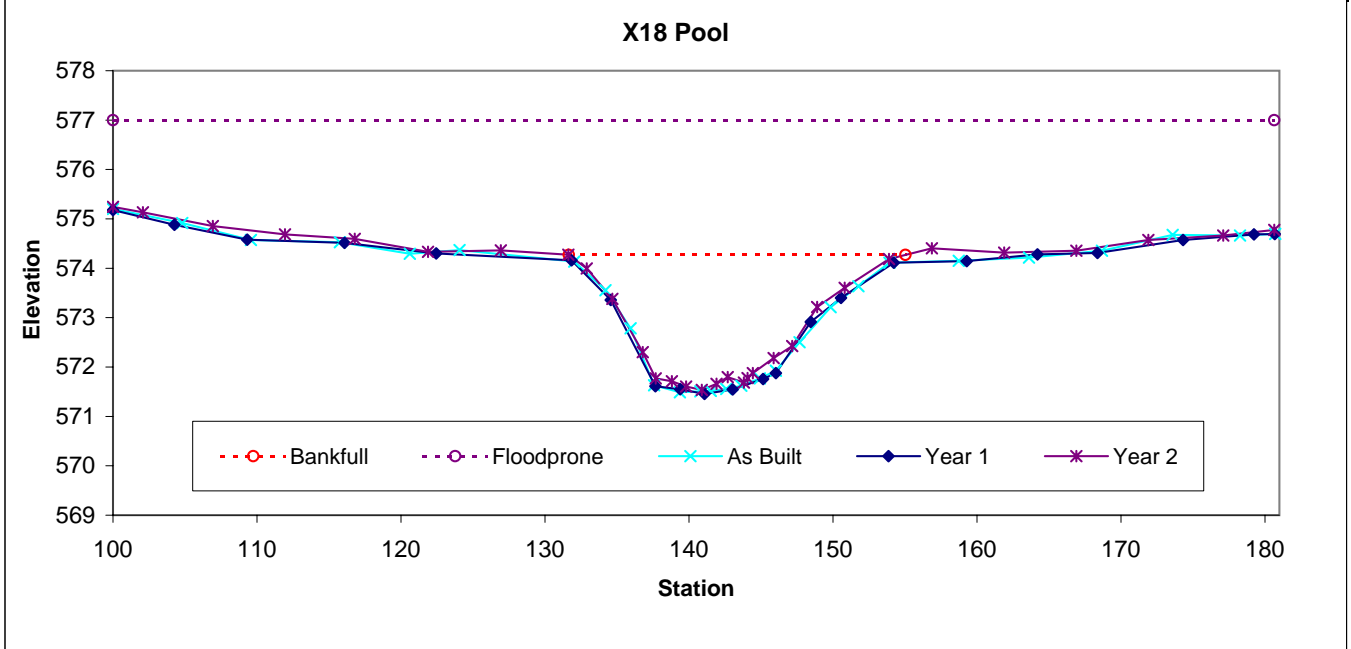

UT2 Permanent Cross Section X1
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C	10.4	13.4	0.78	1.15	17.24	1	3	612.78	612.78

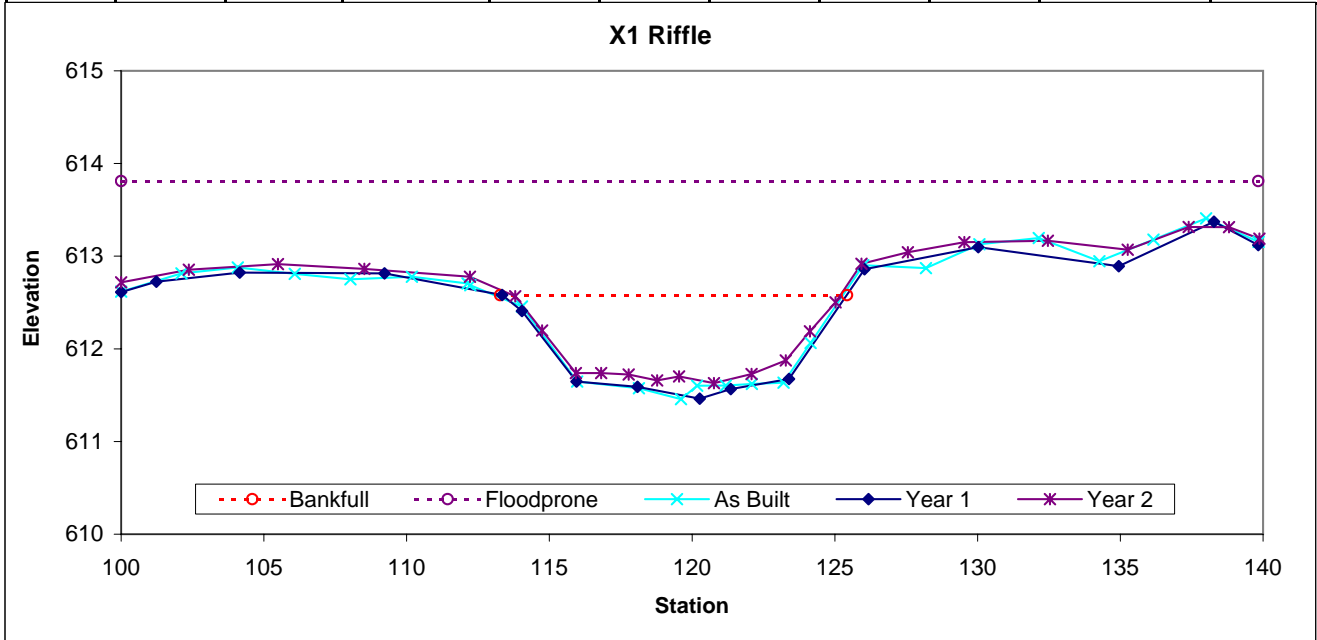

UT2 Permanent Cross Section X2
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		21.3	20.6	1.04	2.16	19.89	1		611.57	611.57

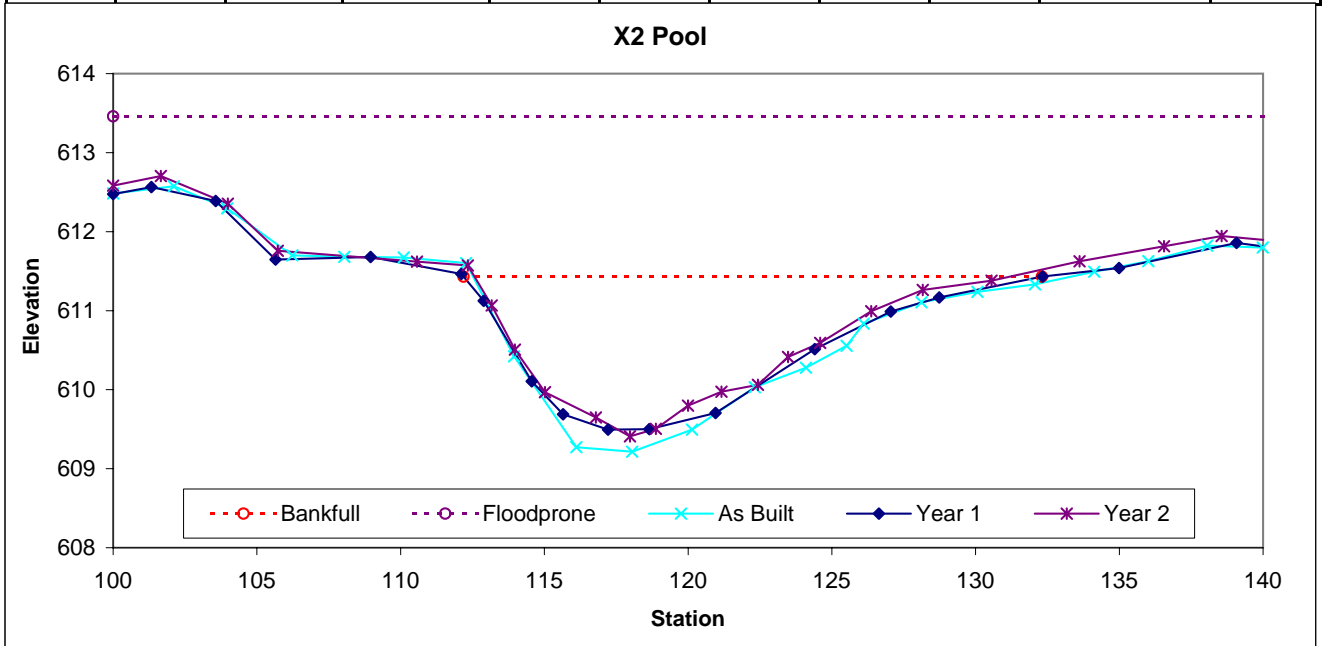

UT2 Permanent Cross Section X3
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C	11.2	17.25	0.65	1.07	26.58	1	2.3	623.18	623.18

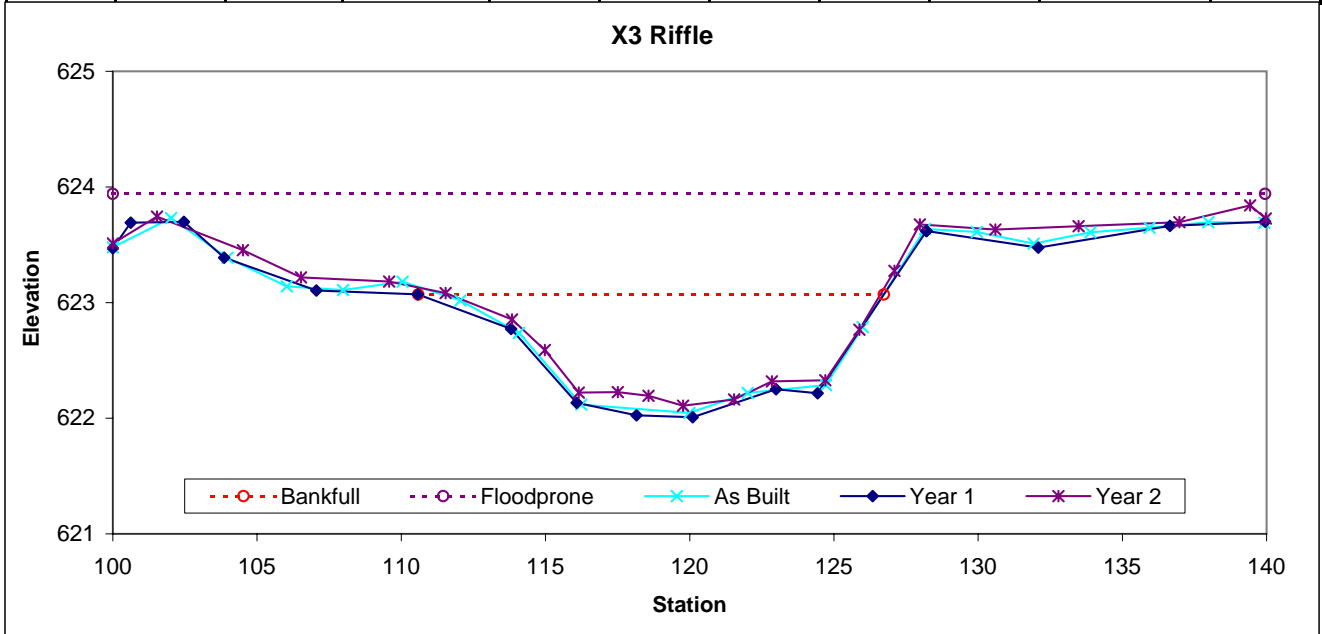

UT2 Permanent Cross Section X4
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		25.1	20.83	1.21	2.45	17.29	1		619.54	619.42

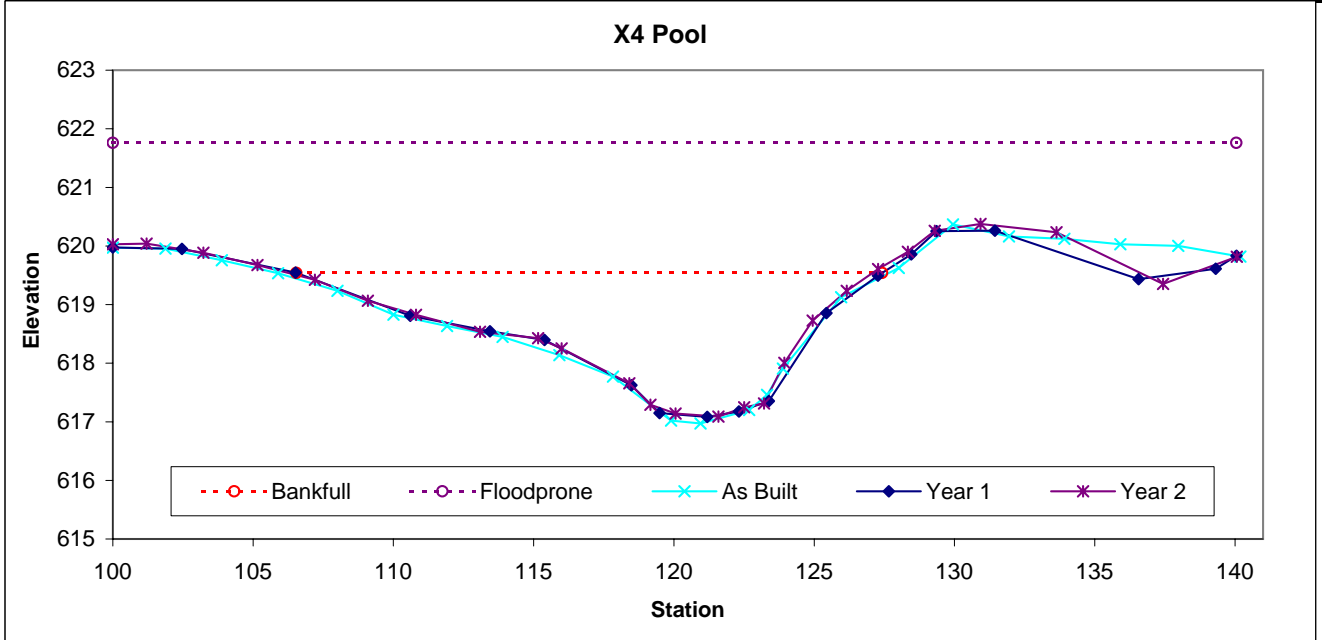

UT2 Permanent Cross Section X5
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank



Looking at the Right Bank


Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C	21.4	16.18	1.32	1.88	12.25	1	2.5	585.95	585.94

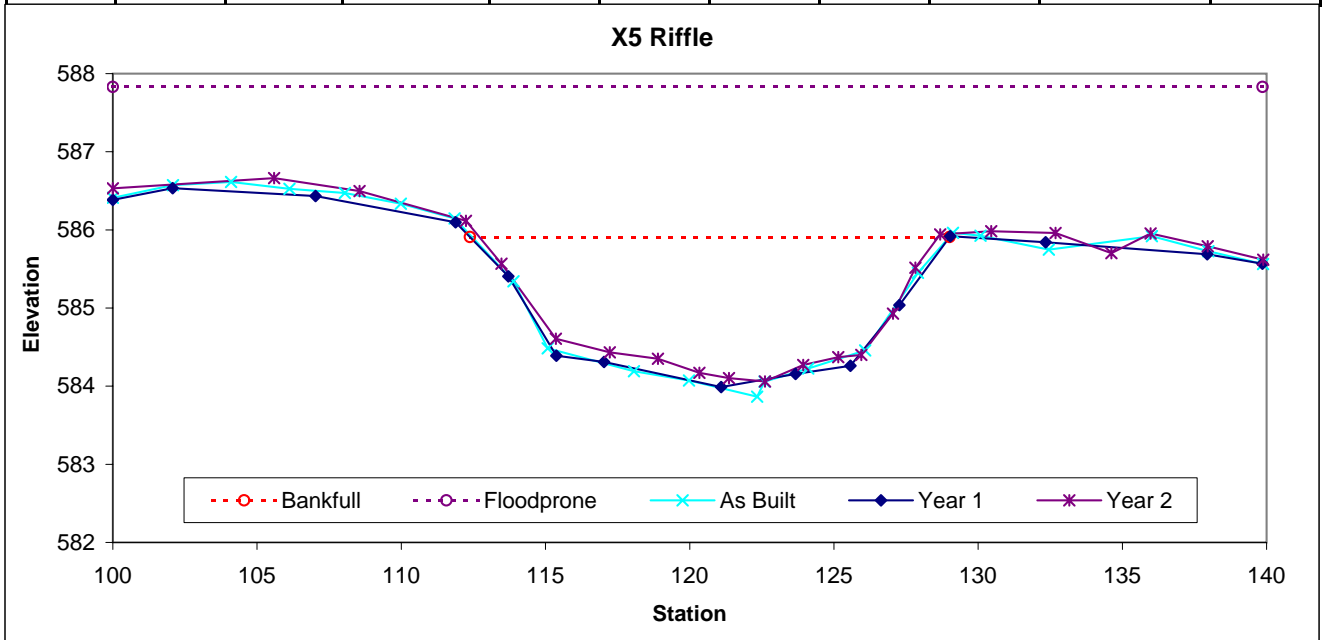

UT2 Permanent Cross Section X6
 (Year 2 Monitoring Data - collected November 2008)




Looking at the Left Bank

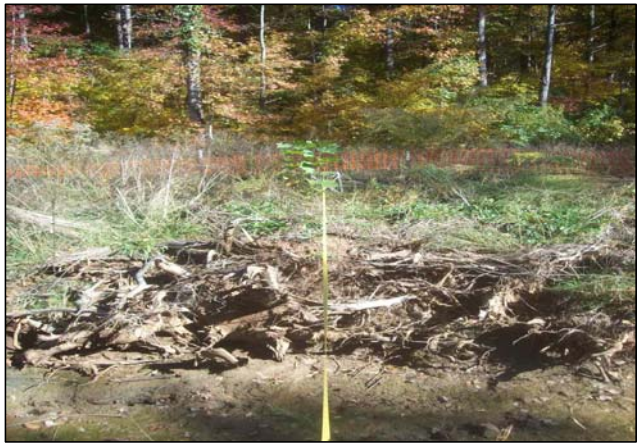

Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		24.8	14.42	1.72	2.61	8.37	1		583.7	583.7

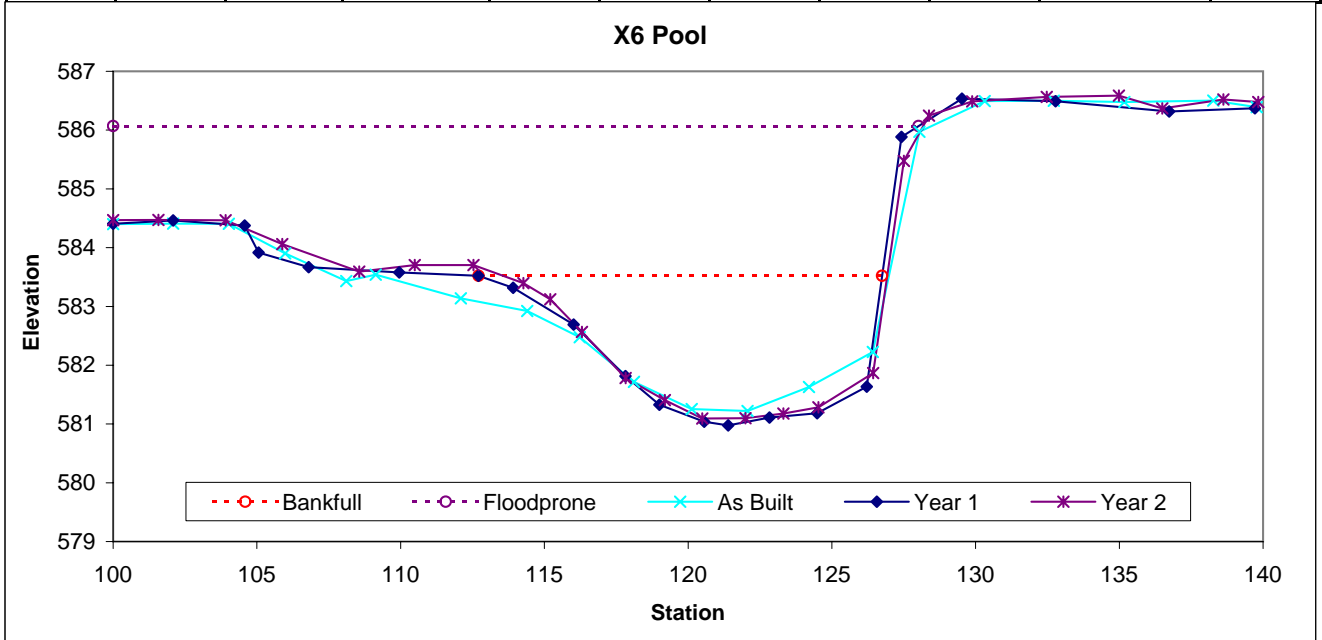

PEBBLE COUNT DATA SHEET: POOL 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1 X1-Pool
DATE COLLECTED:	11/12/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Pool		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	20		20%	20%	0.063
S A N D	Very Fine	.063 - .125	42		42%	62%	0.125
	Fine	.125 - .25	12		12%	74%	0.25
	Medium	.25 - .50	22		22%	96%	0.50
	Coarse	.50 - 1.0	4		4%	100%	1.0
	Very Coarse	1.0 - 2.0				100%	2.0
G R A V E L	Very Fine	2.0 - 2.8				100%	2.8
	Very Fine	2.8 - 4.0				100%	4.0
	Fine	4.0 - 5.6				100%	5.6
	Fine	5.6 - 8.0				100%	8.0
	Medium	8.0 - 11.0				100%	11.3
	Medium	11.0 - 16.0				100%	16.0
	Coarse	16.0 - 22.6				100%	22.6
	Coarse	22.6 - 32				100%	32
	Very Coarse	32 - 45				100%	45
	Very Coarse	45 - 64				100%	64
C O B B L E	Small	64 - 90				100%	90
	Small	90 - 128				100%	128
	Large	128 - 180				100%	180
	Large	180 - 256				100%	256
B O U L D E R	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(pool)

UT1
X1-Pool
Pebble Count Particle Size Distribution

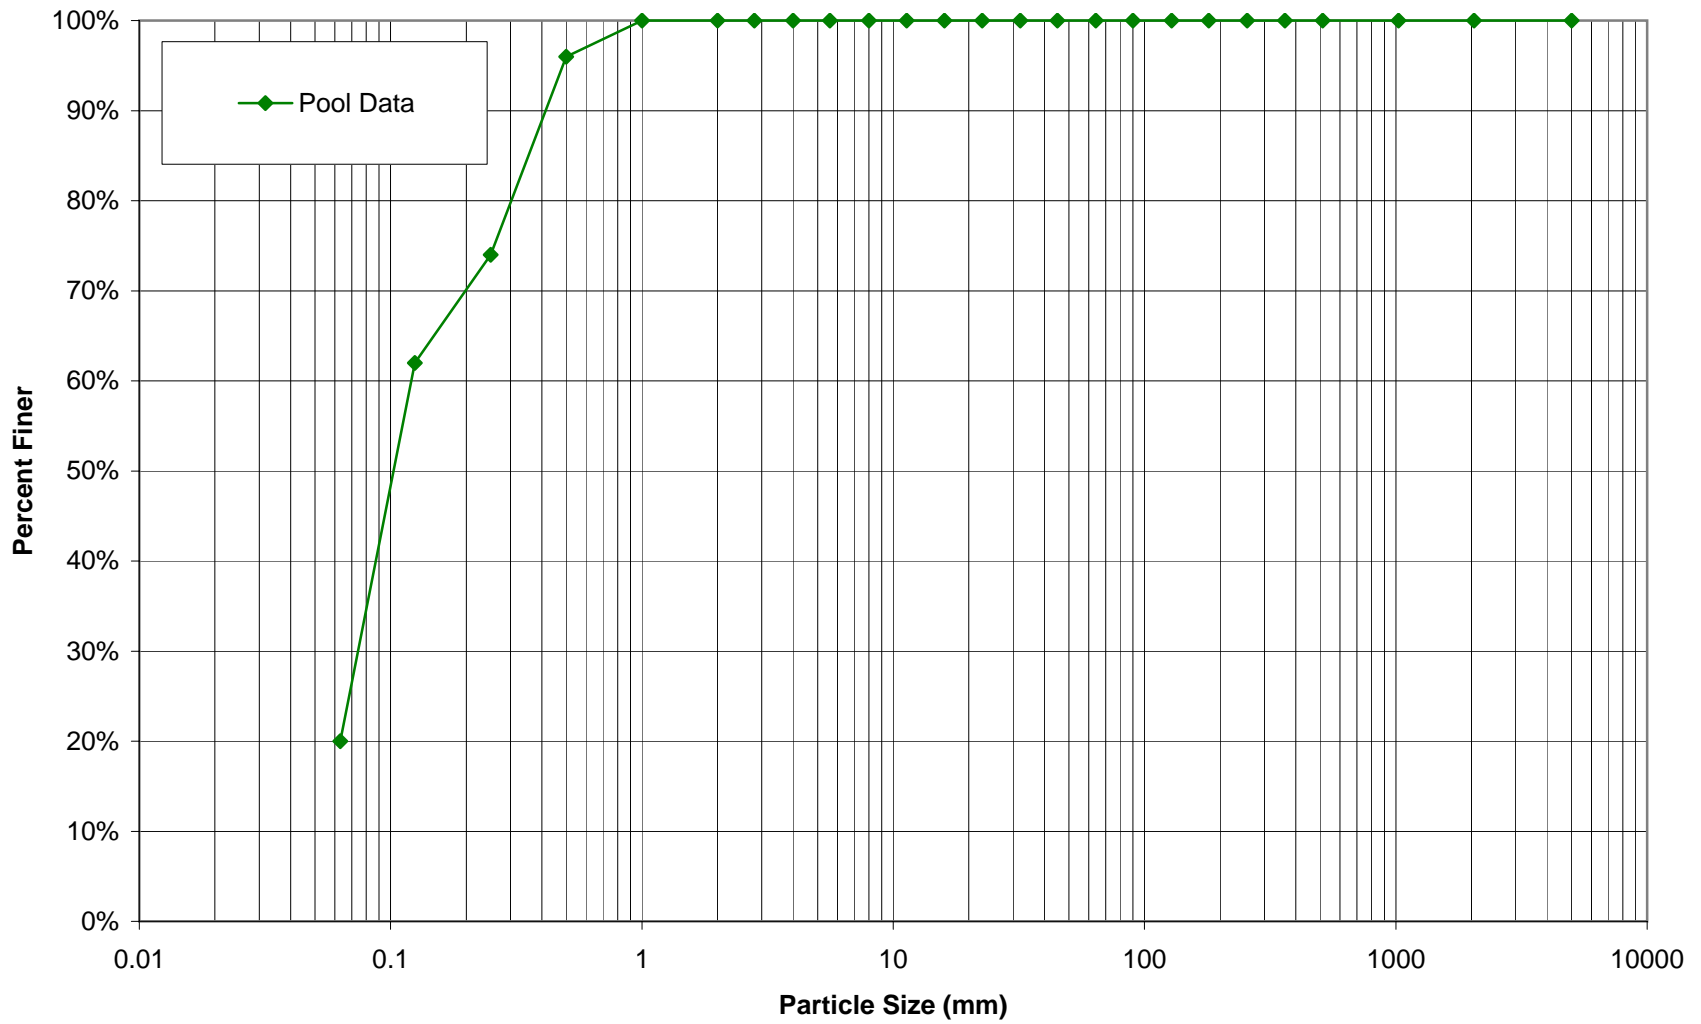

PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1 X2-Riffle
DATE COLLECTED:	11/12/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Riffle		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063				0%	0.063
S A N D	Very Fine	.063 - .125	18		18%	18%	0.125
	Fine	.125 - .25				18%	0.25
	Medium	.25 - .50				18%	0.50
	Coarse	.50 - 1.0				18%	1.0
	Very Coarse	1.0 - 2.0				18%	2.0
G R A V E L	Very Fine	2.0 - 2.8				18%	2.8
	Very Fine	2.8 - 4.0				18%	4.0
	Fine	4.0 - 5.6				18%	5.6
	Fine	5.6 - 8.0				18%	8.0
	Medium	8.0 - 11.0				18%	11.3
	Medium	11.0 - 16.0				18%	16.0
	Coarse	16.0 - 22.6				18%	22.6
	Coarse	22.6 - 32	4		4%	22%	32
	Very Coarse	32 - 45	18		18%	40%	45
	Very Coarse	45 - 64	28		28%	68%	64
C O B B L E	Small	64 - 90	4		4%	72%	90
	Small	90 - 128	18		18%	90%	128
	Large	128 - 180	10		10%	100%	180
	Large	180 - 256				100%	256
B O U L D E R	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(riffle)

UT1
X2-Riffle
Pebble Count Particle Size Distribution

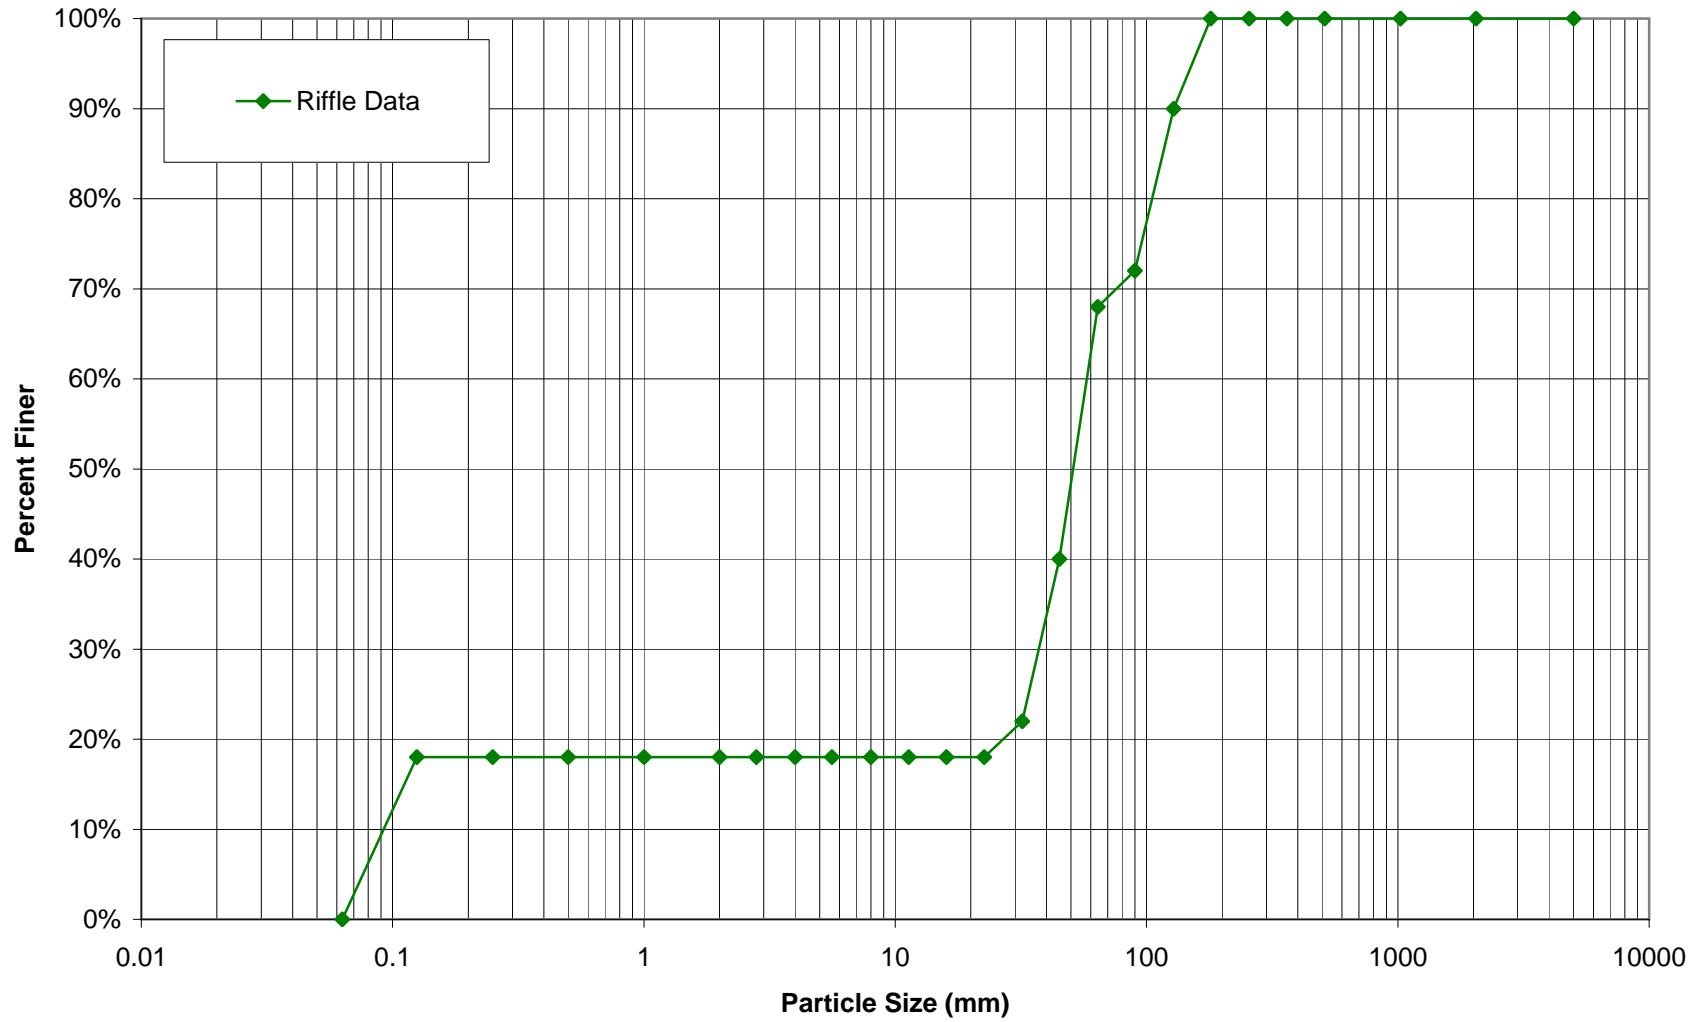

PEBBLE COUNT DATA SHEET: POOL 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1B X3-Pool
DATE COLLECTED:	11/12/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Pool		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	26		26%	26%	0.063
S A N D	Very Fine	.063 - .125	22		22%	48%	0.125
	Fine	.125 - .25	26		26%	74%	0.25
	Medium	.25 - .50	10		10%	84%	0.50
	Coarse	.50 - 1.0	14		14%	98%	1.0
	Very Coarse	1.0 - 2.0	2		2%	100%	2.0
G R A V E L	Very Fine	2.0 - 2.8				100%	2.8
	Very Fine	2.8 - 4.0				100%	4.0
	Fine	4.0 - 5.6				100%	5.6
	Fine	5.6 - 8.0				100%	8.0
	Medium	8.0 - 11.0				100%	11.3
	Medium	11.0 - 16.0				100%	16.0
	Coarse	16.0 - 22.6				100%	22.6
	Coarse	22.6 - 32				100%	32
	Very Coarse	32 - 45				100%	45
	Very Coarse	45 - 64				100%	64
C O B B L E	Small	64 - 90				100%	90
	Small	90 - 128				100%	128
	Large	128 - 180				100%	180
	Large	180 - 256				100%	256
B O U L D E R	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(pool)

UT1B
X3-Pool
Pebble Count Particle Size Distribution

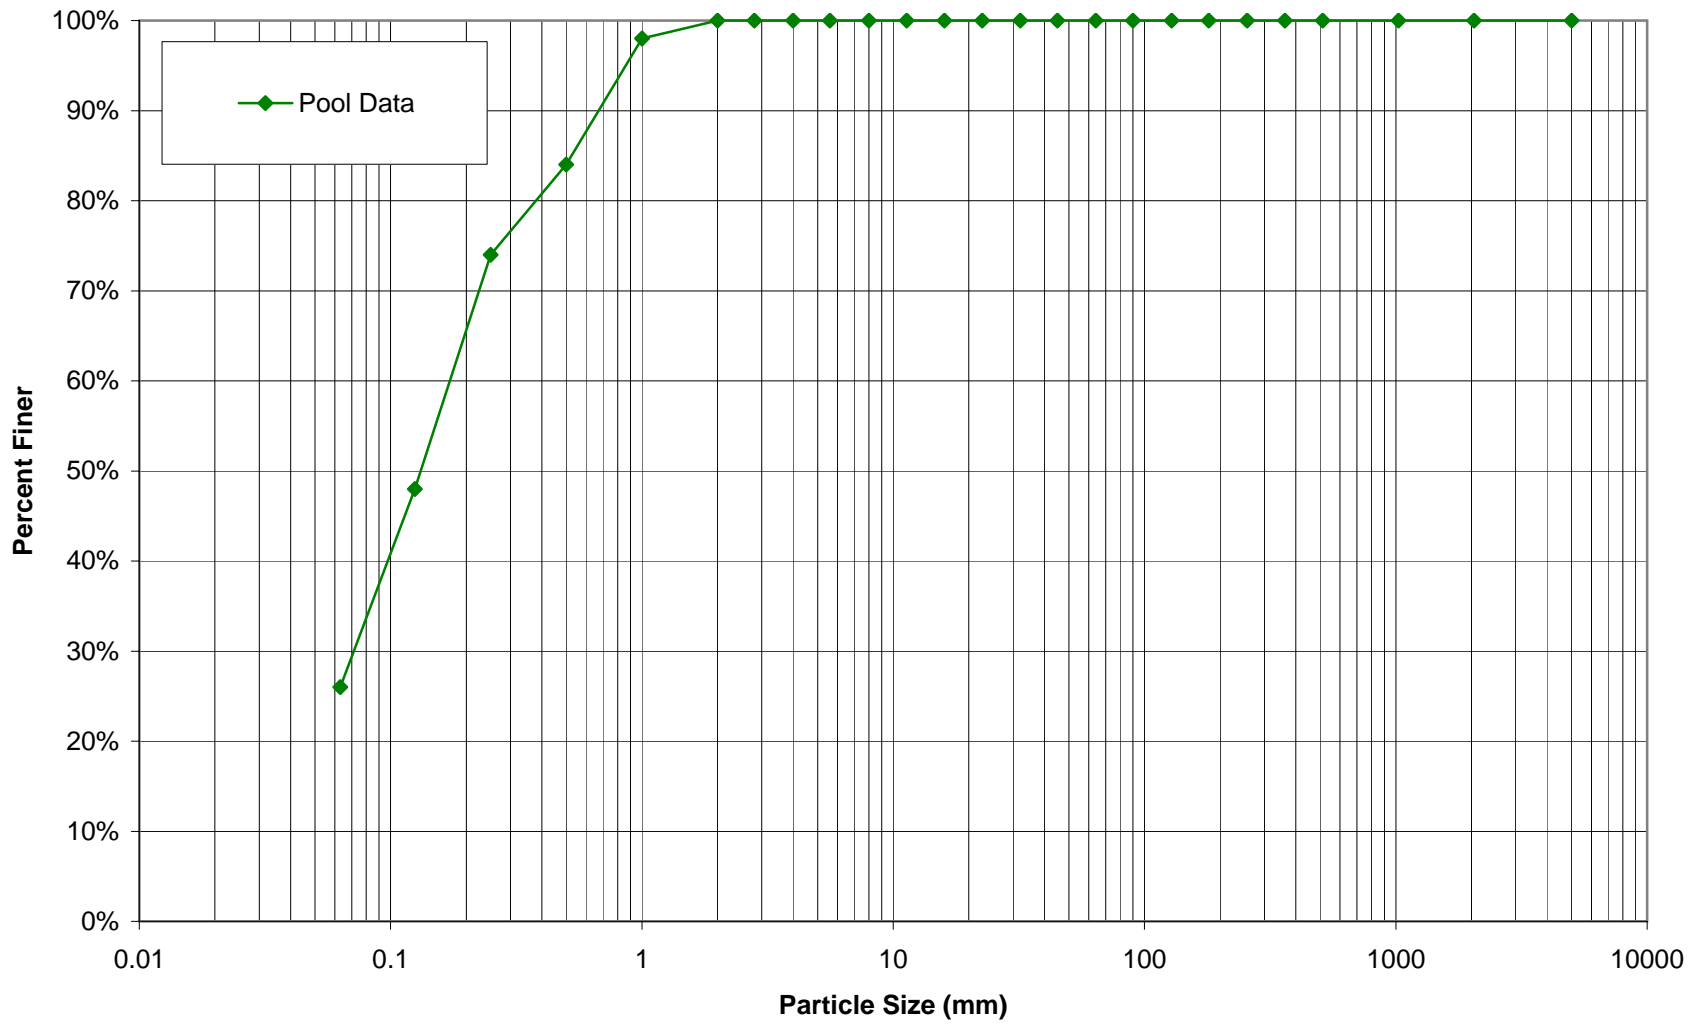

PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1B X4-Riffle
DATE COLLECTED:	11/12/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Riffle		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	14		14%	14%	0.063
	SAND	Very Fine	.063 - .125	45		45%	59%
Fine		.125 - .25	22		22%	81%	0.25
Medium		.25 - .50	19		19%	100%	0.50
Coarse		.50 - 1.0				100%	1.0
Very Coarse		1.0 - 2.0				100%	2.0
GRAVEL	Very Fine	2.0 - 2.8				100%	2.8
	Very Fine	2.8 - 4.0				100%	4.0
	Fine	4.0 - 5.6				100%	5.6
	Fine	5.6 - 8.0				100%	8.0
	Medium	8.0 - 11.0				100%	11.3
	Medium	11.0 - 16.0				100%	16.0
	Coarse	16.0 - 22.6				100%	22.6
	Coarse	22.6 - 32				100%	32
	Very Coarse	32 - 45				100%	45
	Very Coarse	45 - 64				100%	64
COBBLE	Small	64 - 90				100%	90
	Small	90 - 128				100%	128
	Large	128 - 180				100%	180
	Large	180 - 256				100%	256
BOULDER	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(riffle)

UT1B
X4-Riffle
Pebble Count Particle Size Distribution

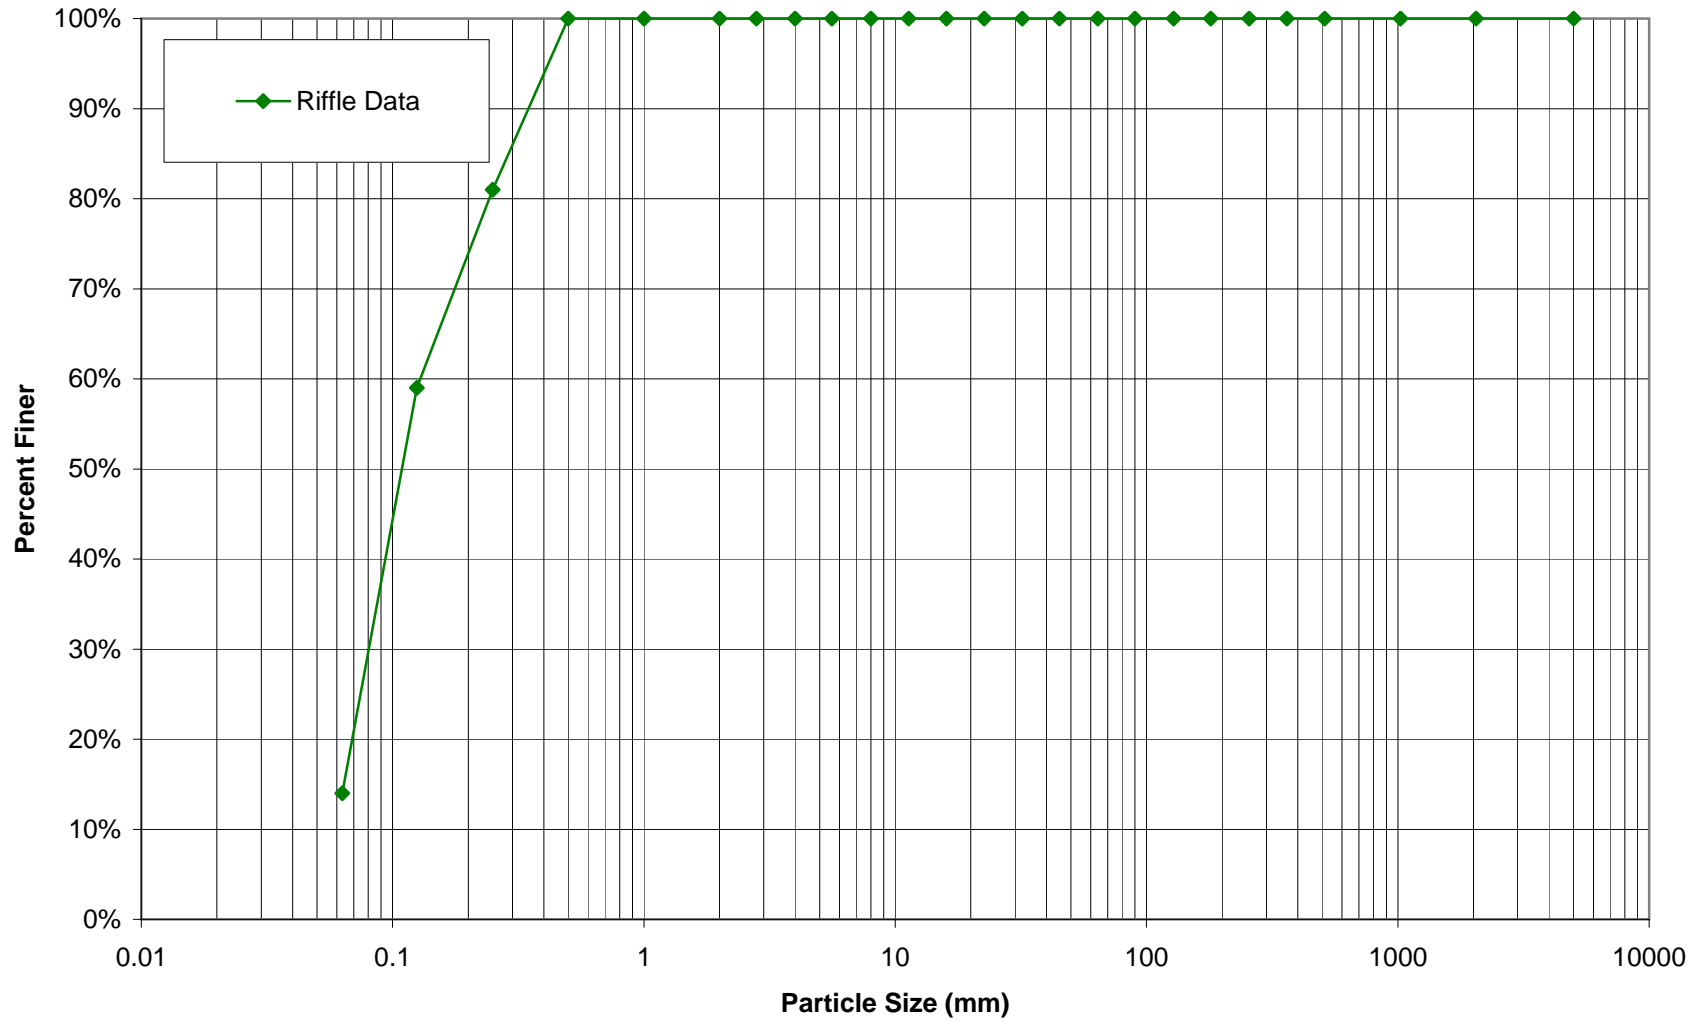

PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1 X5-Riffle
DATE COLLECTED:	11/12/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Riffle		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063				0%	0.063
S A N D	Very Fine	.063 - .125	12		12%	12%	0.125
	Fine	.125 - .25				12%	0.25
	Medium	.25 - .50				12%	0.50
	Coarse	.50 - 1.0	2		2%	14%	1.0
	Very Coarse	1.0 - 2.0				14%	2.0
G R A V E L	Very Fine	2.0 - 2.8				14%	2.8
	Very Fine	2.8 - 4.0				14%	4.0
	Fine	4.0 - 5.6				14%	5.6
	Fine	5.6 - 8.0				14%	8.0
	Medium	8.0 - 11.0				14%	11.3
	Medium	11.0 - 16.0				14%	16.0
	Coarse	16.0 - 22.6				14%	22.6
	Coarse	22.6 - 32	2		2%	16%	32
	Very Coarse	32 - 45	18		18%	34%	45
	Very Coarse	45 - 64	16		16%	50%	64
C O B B L E	Small	64 - 90	4		4%	54%	90
	Small	90 - 128	24		24%	78%	128
	Large	128 - 180	18		18%	96%	180
	Large	180 - 256	4		4%	100%	256
B O U L D E R	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(riffle)

UT1
X5-Riffle
Pebble Count Particle Size Distribution

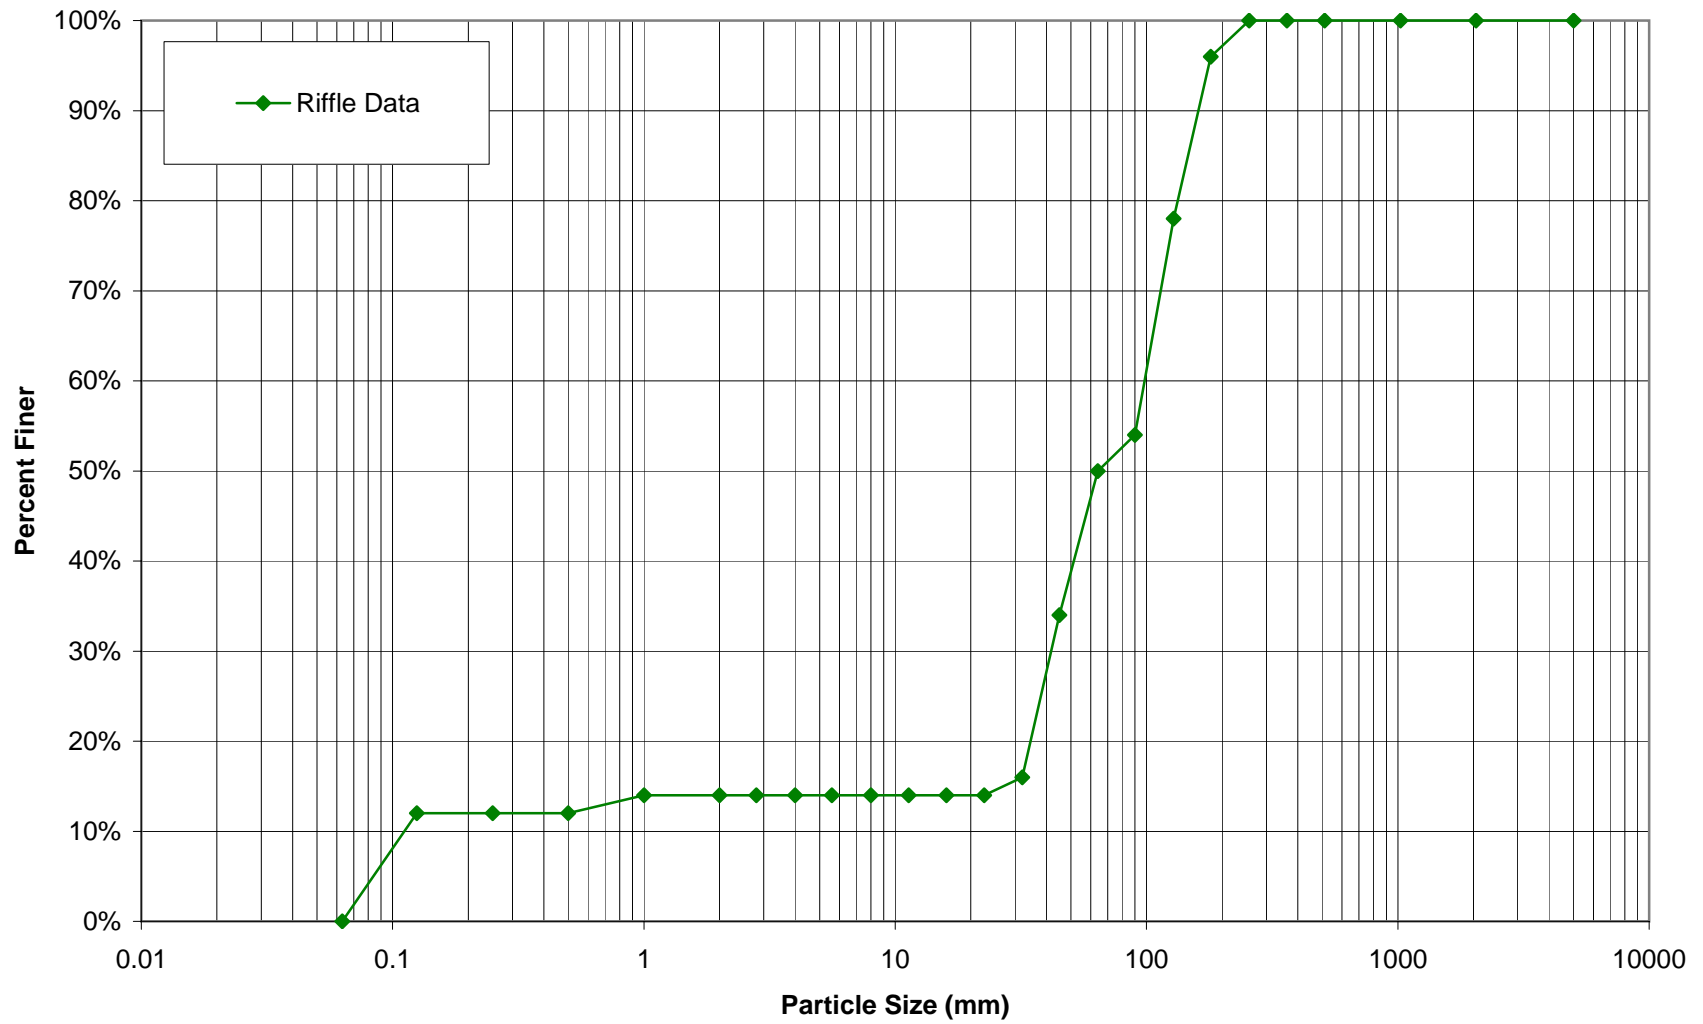

PEBBLE COUNT DATA SHEET: POOL 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1 X6-Pool
DATE COLLECTED:	11/12/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Pool		Class %	% Cum	
SAND	Silt / Clay	< .063	55		55%	55%	0.063
	Very Fine	.063 - .125	15		15%	70%	0.125
	Fine	.125 - .25	15		15%	85%	0.25
	Medium	.25 - .50	10		10%	95%	0.50
	Coarse	.50 - 1.0	5		5%	100%	1.0
	Very Coarse	1.0 - 2.0				100%	2.0
GRAVEL	Very Fine	2.0 - 2.8				100%	2.8
	Very Fine	2.8 - 4.0				100%	4.0
	Fine	4.0 - 5.6				100%	5.6
	Fine	5.6 - 8.0				100%	8.0
	Medium	8.0 - 11.0				100%	11.3
	Medium	11.0 - 16.0				100%	16.0
	Coarse	16.0 - 22.6				100%	22.6
	Coarse	22.6 - 32				100%	32
	Very Coarse	32 - 45				100%	45
	Very Coarse	45 - 64				100%	64
COBBLE	Small	64 - 90				100%	90
	Small	90 - 128				100%	128
	Large	128 - 180				100%	180
	Large	180 - 256				100%	256
BOULDER	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(pool)

UT1
X6-Pool
Pebble Count Particle Size Distribution

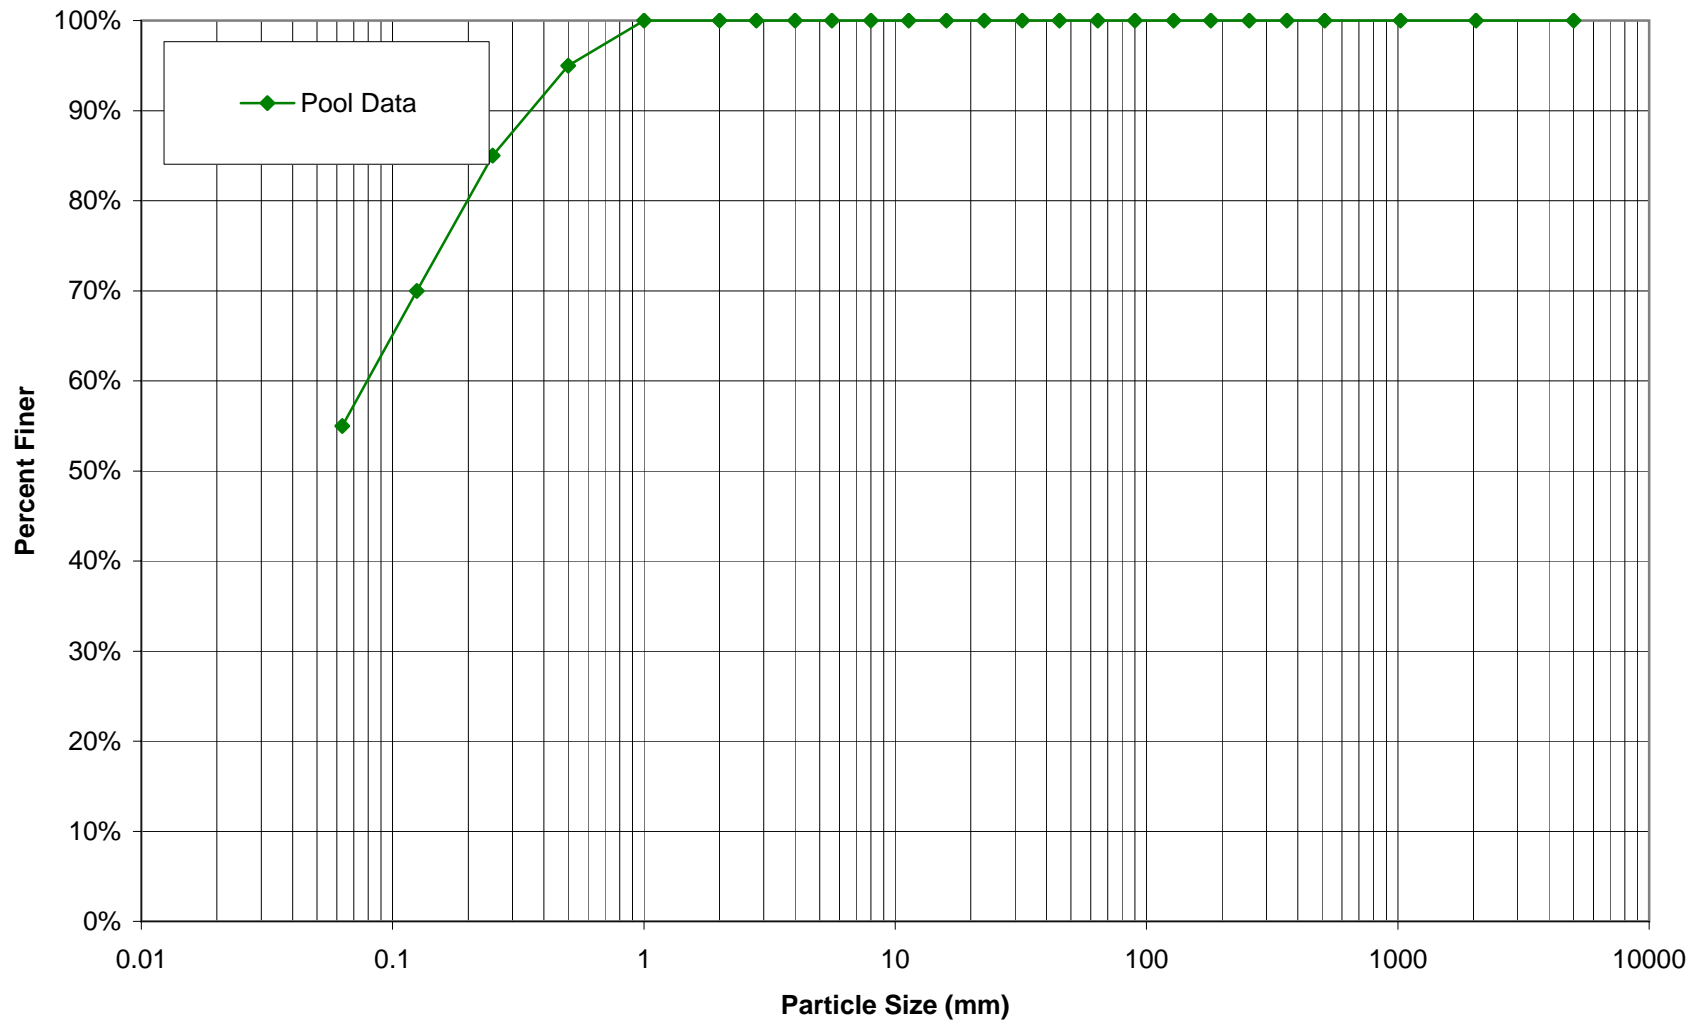

PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1C X7-Riffle
DATE COLLECTED:	11/12/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Riffle		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063				0%	0.063
S A N D	Very Fine	.063 - .125				0%	0.125
	Fine	.125 - .25	6		6%	6%	0.25
	Medium	.25 - .50				6%	0.50
	Coarse	.50 - 1.0	2		2%	8%	1.0
	Very Coarse	1.0 - 2.0				8%	2.0
G R A V E L	Very Fine	2.0 - 2.8				8%	2.8
	Very Fine	2.8 - 4.0				8%	4.0
	Fine	4.0 - 5.6				8%	5.6
	Fine	5.6 - 8.0				8%	8.0
	Medium	8.0 - 11.0				8%	11.3
	Medium	11.0 - 16.0				8%	16.0
	Coarse	16.0 - 22.6				8%	22.6
	Coarse	22.6 - 32	4		4%	12%	32
	Very Coarse	32 - 45	16		16%	28%	45
	Very Coarse	45 - 64	22		22%	50%	64
C O B B L E	Small	64 - 90	14		14%	64%	90
	Small	90 - 128	30		30%	94%	128
	Large	128 - 180	6		6%	100%	180
	Large	180 - 256				100%	256
B O U L D E R	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(riffle)

UT1C
X7-Riffle
Pebble Count Particle Size Distribution

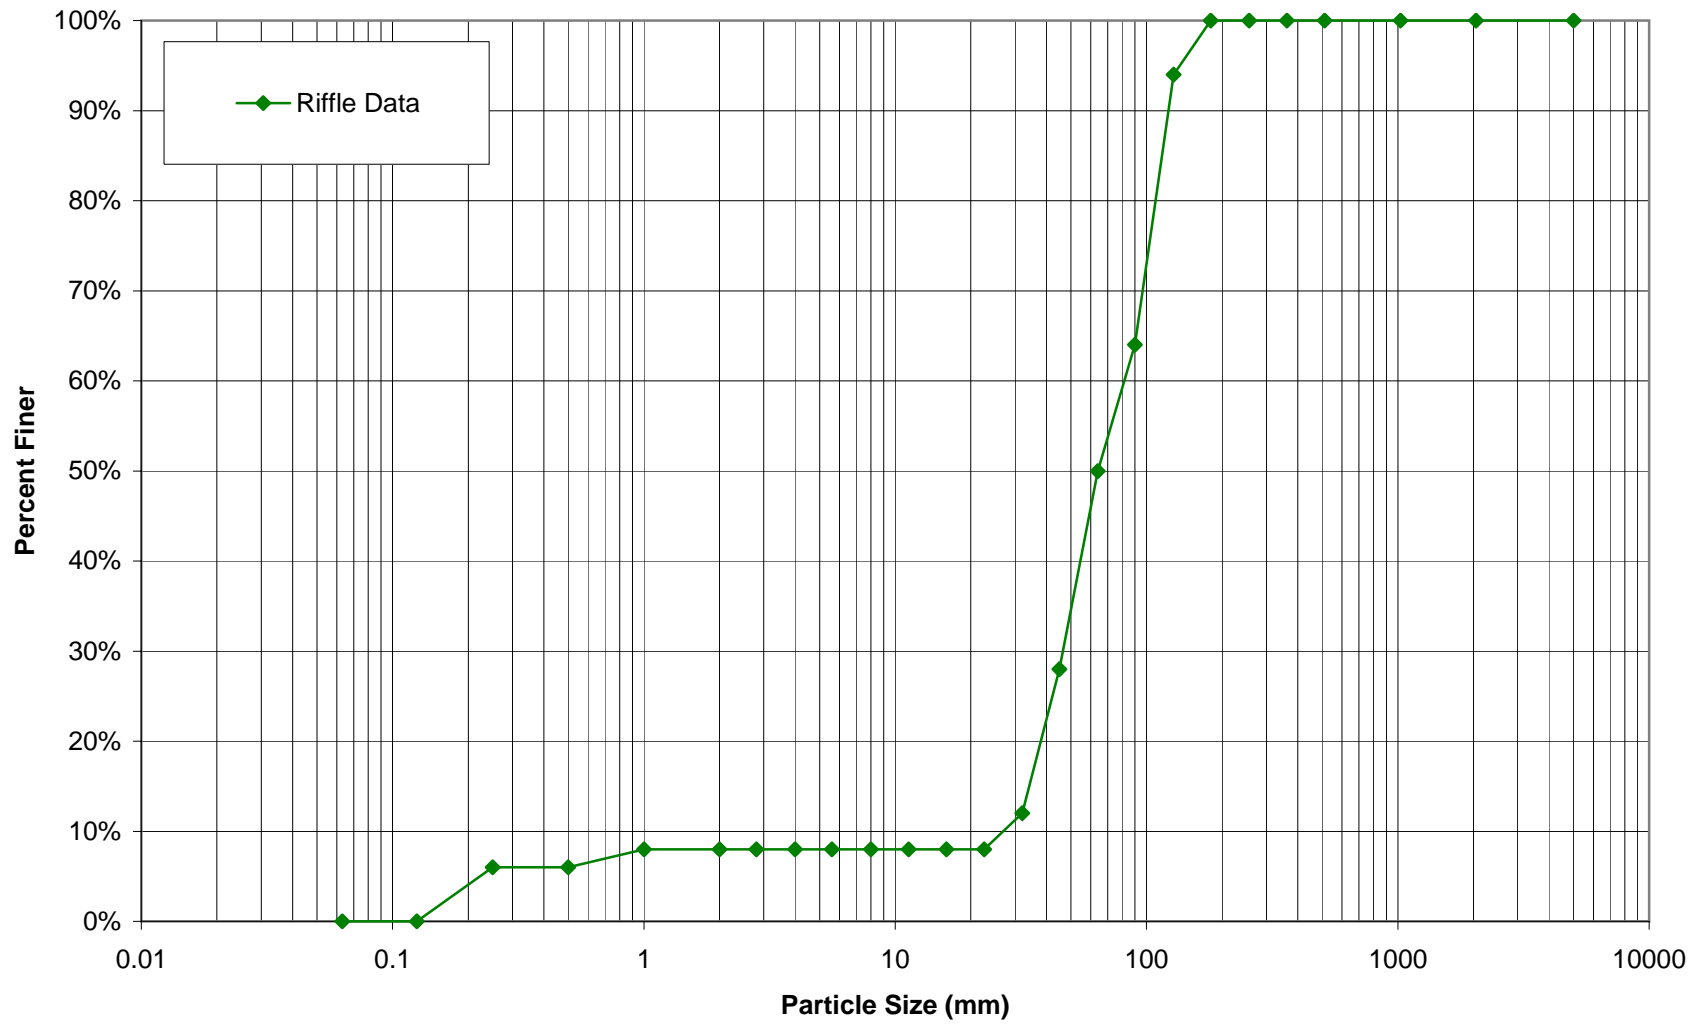

PEBBLE COUNT DATA SHEET: POOL 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1C X8-Pool
DATE COLLECTED:	11/12/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Pool		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	66		66%	66%	0.063
	S A N D	Very Fine	.063 - .125	10		10%	76%
Fine		.125 - .25	20		20%	96%	0.25
Medium		.25 - .50	2		2%	98%	0.50
Coarse		.50 - 1.0	2		2%	100%	1.0
Very Coarse		1.0 - 2.0				100%	2.0
G R A V E L	Very Fine	2.0 - 2.8				100%	2.8
	Very Fine	2.8 - 4.0				100%	4.0
	Fine	4.0 - 5.6				100%	5.6
	Fine	5.6 - 8.0				100%	8.0
	Medium	8.0 - 11.0				100%	11.3
	Medium	11.0 - 16.0				100%	16.0
	Coarse	16.0 - 22.6				100%	22.6
	Coarse	22.6 - 32				100%	32
	Very Coarse	32 - 45				100%	45
	Very Coarse	45 - 64				100%	64
C O B B L E	Small	64 - 90				100%	90
	Small	90 - 128				100%	128
	Large	128 - 180				100%	180
	Large	180 - 256				100%	256
B O U L D E R	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(pool)

UT1C
X8-Pool
Pebble Count Particle Size Distribution

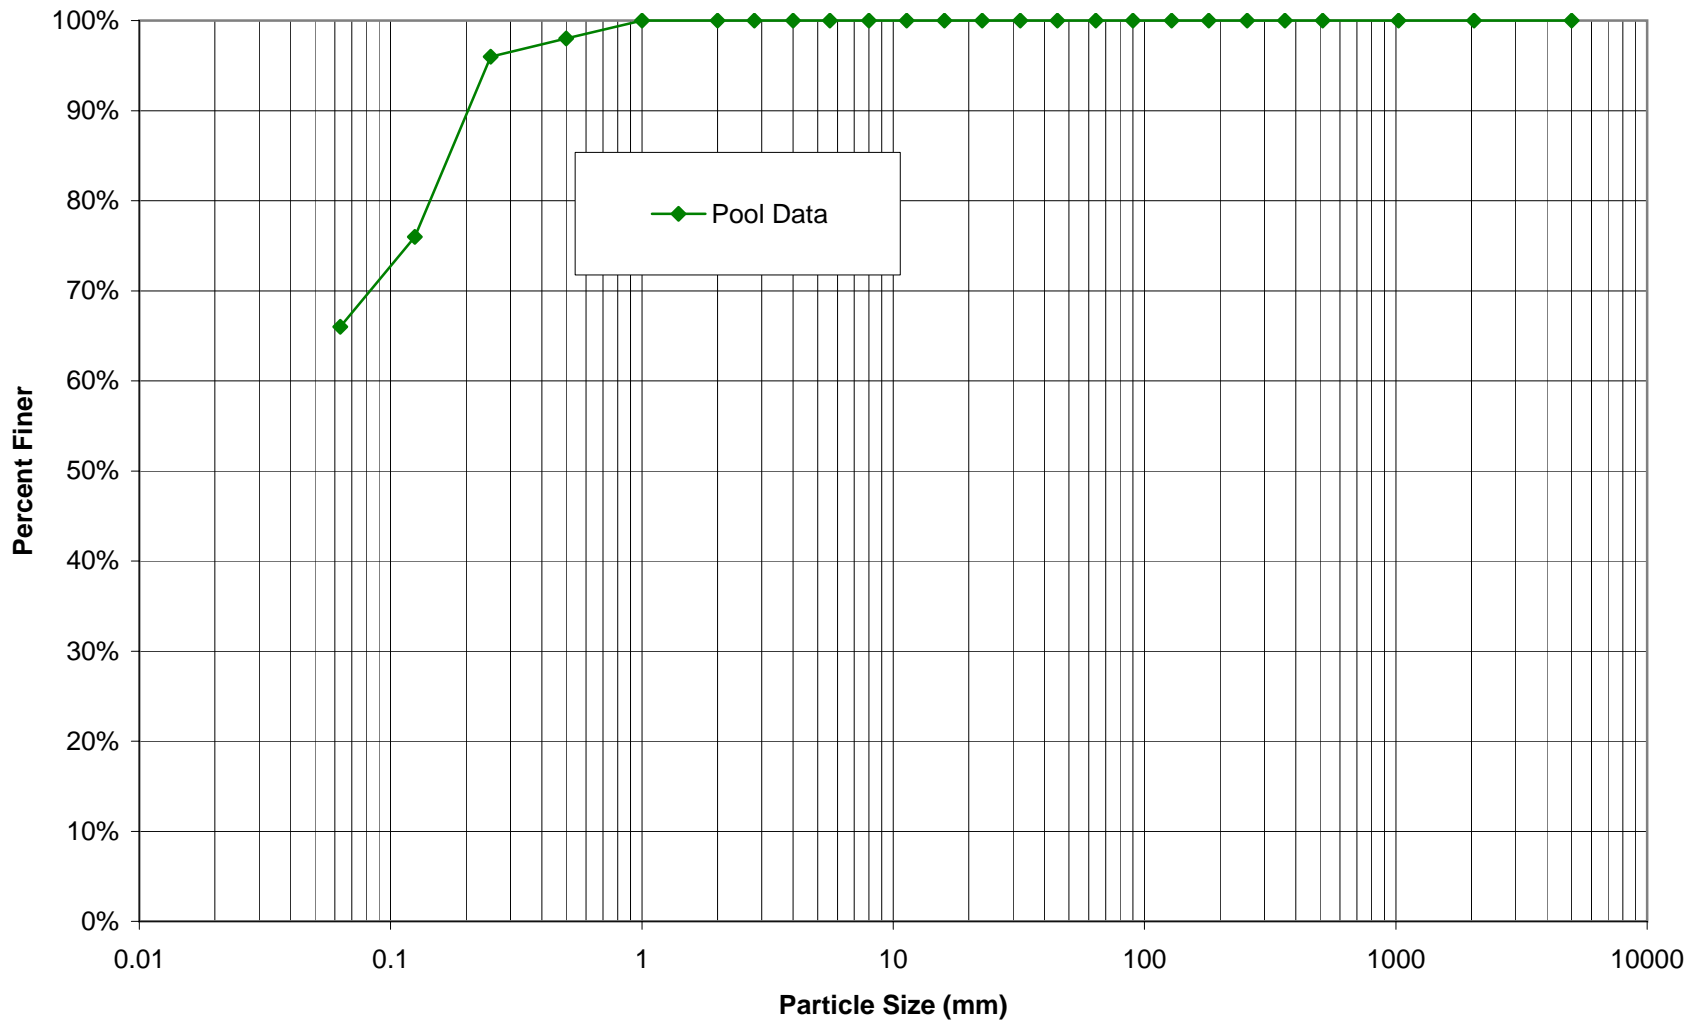

PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1 X9-Riffle
DATE COLLECTED:	11/11/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Riffle		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063				0%	0.063
SAND	Very Fine	.063 - .125				0%	0.125
	Fine	.125 - .25	4		4%	4%	0.25
	Medium	.25 - .50	2		2%	6%	0.50
	Coarse	.50 - 1.0	12		12%	18%	1.0
	Very Coarse	1.0 - 2.0	2		2%	20%	2.0
GRAVEL	Very Fine	2.0 - 2.8				20%	2.8
	Very Fine	2.8 - 4.0				20%	4.0
	Fine	4.0 - 5.6				20%	5.6
	Fine	5.6 - 8.0				20%	8.0
	Medium	8.0 - 11.0				20%	11.3
	Medium	11.0 - 16.0				20%	16.0
	Coarse	16.0 - 22.6	2		2%	22%	22.6
	Coarse	22.6 - 32	12		12%	34%	32
	Very Coarse	32 - 45	24		24%	58%	45
	Very Coarse	45 - 64	2		2%	60%	64
COBBLE	Small	64 - 90	14		14%	74%	90
	Small	90 - 128	18		18%	92%	128
	Large	128 - 180	8		8%	100%	180
	Large	180 - 256				100%	256
BOULDER	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(riffle)

UT1
X9-Riffle
Pebble Count Particle Size Distribution

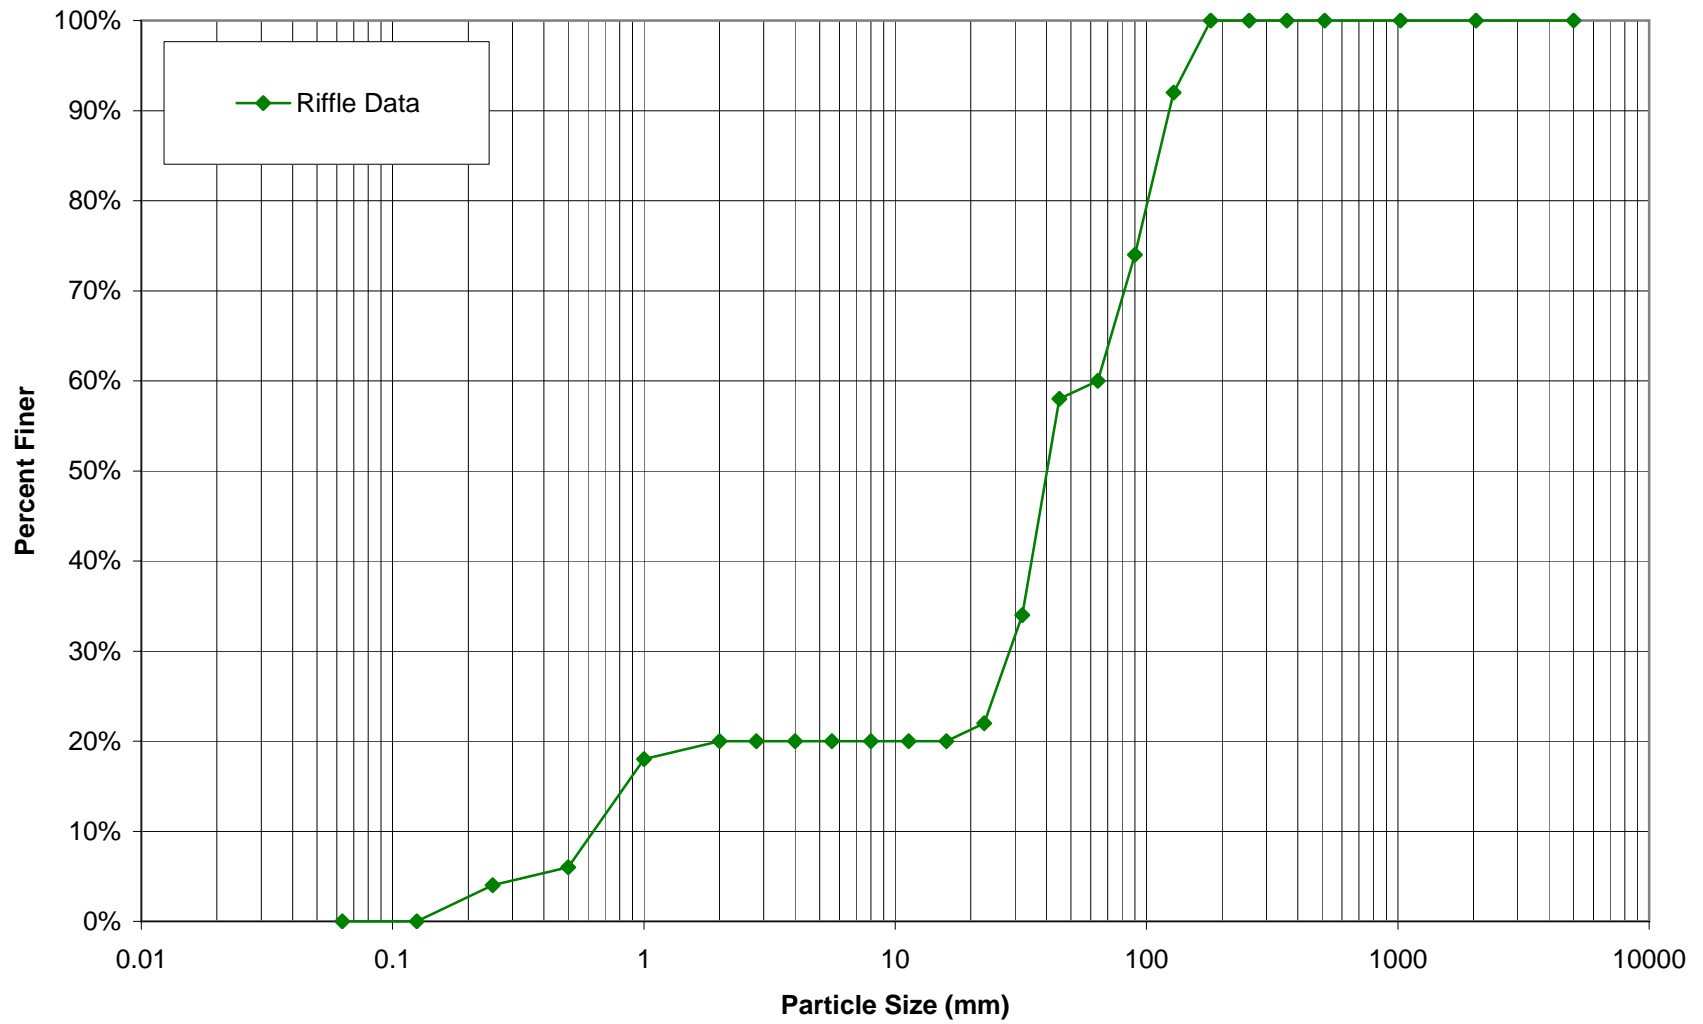

PEBBLE COUNT DATA SHEET: POOL 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1 X10-Pool
DATE COLLECTED:	11/11/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Pool		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	48		48%	48%	0.063
S A N D	Very Fine	.063 - .125	6		6%	54%	0.125
	Fine	.125 - .25	16		16%	70%	0.25
	Medium	.25 - .50	4		4%	74%	0.50
	Coarse	.50 - 1.0	6		6%	80%	1.0
	Very Coarse	1.0 - 2.0				80%	2.0
G R A V E L	Very Fine	2.0 - 2.8				80%	2.8
	Very Fine	2.8 - 4.0				80%	4.0
	Fine	4.0 - 5.6	6		6%	86%	5.6
	Fine	5.6 - 8.0	6		6%	92%	8.0
	Medium	8.0 - 11.0	2		2%	94%	11.3
	Medium	11.0 - 16.0	2		2%	96%	16.0
	Coarse	16.0 - 22.6				96%	22.6
	Coarse	22.6 - 32	4		4%	100%	32
	Very Coarse	32 - 45				100%	45
	Very Coarse	45 - 64				100%	64
C O B B L E	Small	64 - 90				100%	90
	Small	90 - 128				100%	128
	Large	128 - 180				100%	180
	Large	180 - 256				100%	256
B O U L D E R	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(pool)

UT1
X10-Pool
Pebble Count Particle Size Distribution

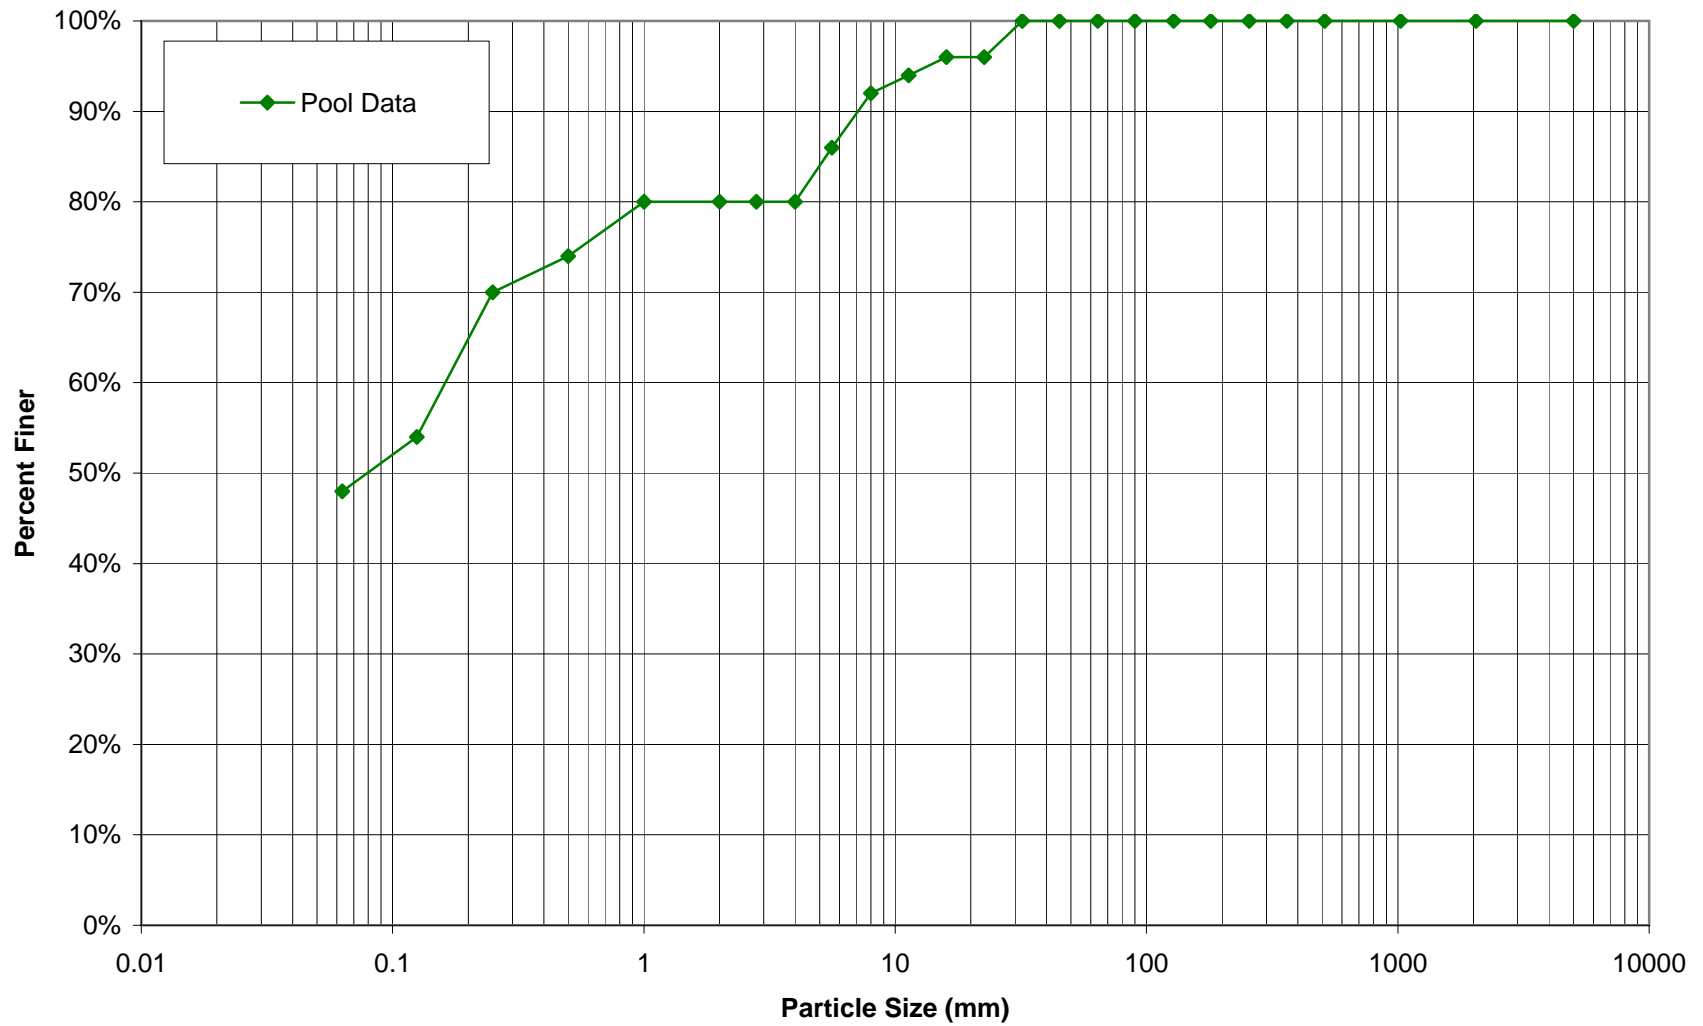

PEBBLE COUNT DATA SHEET: POOL 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1D X11-Pool
DATE COLLECTED:	11/11/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Count	Class %	% Cum		
SILT/CLAY	Silt / Clay	< .063	9	9%	9%	0.063	
	SAND	Very Fine	.063 - .125	6	6%	15%	0.125
Fine		.125 - .25	18	18%	33%	0.25	
Medium		.25 - .50	40	40%	73%	0.50	
Coarse		.50 - 1.0	15	15%	88%	1.0	
Very Coarse		1.0 - 2.0	7	7%	95%	2.0	
GRAVEL	Very Fine	2.0 - 2.8			95%	2.8	
	Very Fine	2.8 - 4.0	1	1%	96%	4.0	
	Fine	4.0 - 5.6	1	1%	97%	5.6	
	Fine	5.6 - 8.0	1	1%	98%	8.0	
	Medium	8.0 - 11.0	1	1%	99%	11.3	
	Medium	11.0 - 16.0			99%	16.0	
	Coarse	16.0 - 22.6			99%	22.6	
	Coarse	22.6 - 32			99%	32	
	Very Coarse	32 - 45			99%	45	
	Very Coarse	45 - 64	1	1%	100%	64	
COBBLE	Small	64 - 90			100%	90	
	Small	90 - 128			100%	128	
	Large	128 - 180			100%	180	
	Large	180 - 256			100%	256	
BOULDER	Small	256 - 362			100%	362	
	Small	362 - 512			100%	512	
	Medium	512 - 1024			100%	1024	
	Large-Very Large	1024 - 2048			100%	2048	
BEDROCK	Bedrock	> 2048			100%	5000	
Total			100	100%			

Largest particles: _____
(pool)

UT1D
X11-Pool
Pebble Count Particle Size Distribution

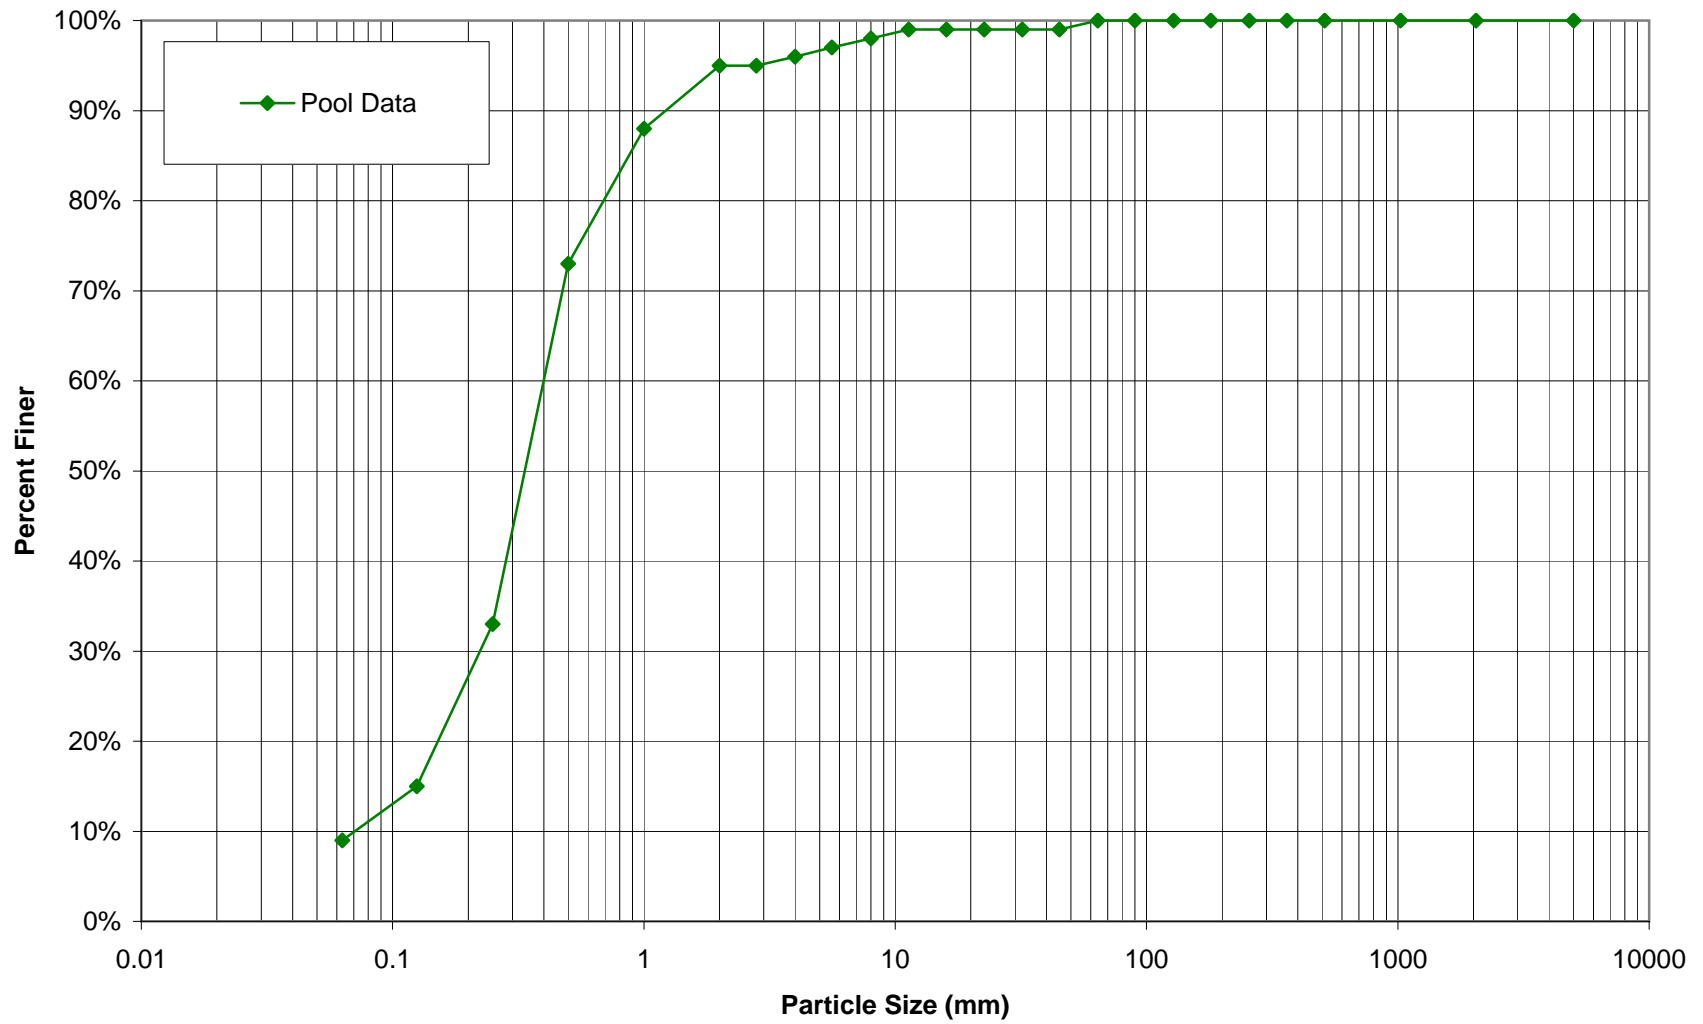

PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1D X12-Riffle
DATE COLLECTED:	11/11/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Riffle		Class %	% Cum	
SAND	Silt / Clay	< .063	1		1%	1%	0.063
	Very Fine	.063 - .125	9		9%	10%	0.125
	Fine	.125 - .25				10%	0.25
	Medium	.25 - .50				10%	0.50
	Coarse	.50 - 1.0				10%	1.0
	Very Coarse	1.0 - 2.0				10%	2.0
GRAVEL	Very Fine	2.0 - 2.8				10%	2.8
	Very Fine	2.8 - 4.0				10%	4.0
	Fine	4.0 - 5.6				10%	5.6
	Fine	5.6 - 8.0				10%	8.0
	Medium	8.0 - 11.0				10%	11.3
	Medium	11.0 - 16.0				10%	16.0
	Coarse	16.0 - 22.6	2		2%	12%	22.6
	Coarse	22.6 - 32	21		21%	33%	32
	Very Coarse	32 - 45	36		36%	69%	45
	Very Coarse	45 - 64	17		17%	86%	64
COBBLE	Small	64 - 90	10		10%	96%	90
	Small	90 - 128	2		2%	98%	128
	Large	128 - 180	2		2%	100%	180
	Large	180 - 256				100%	256
BOULDER	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(riffle)

UT1D
X12-Riffle
Pebble Count Particle Size Distribution

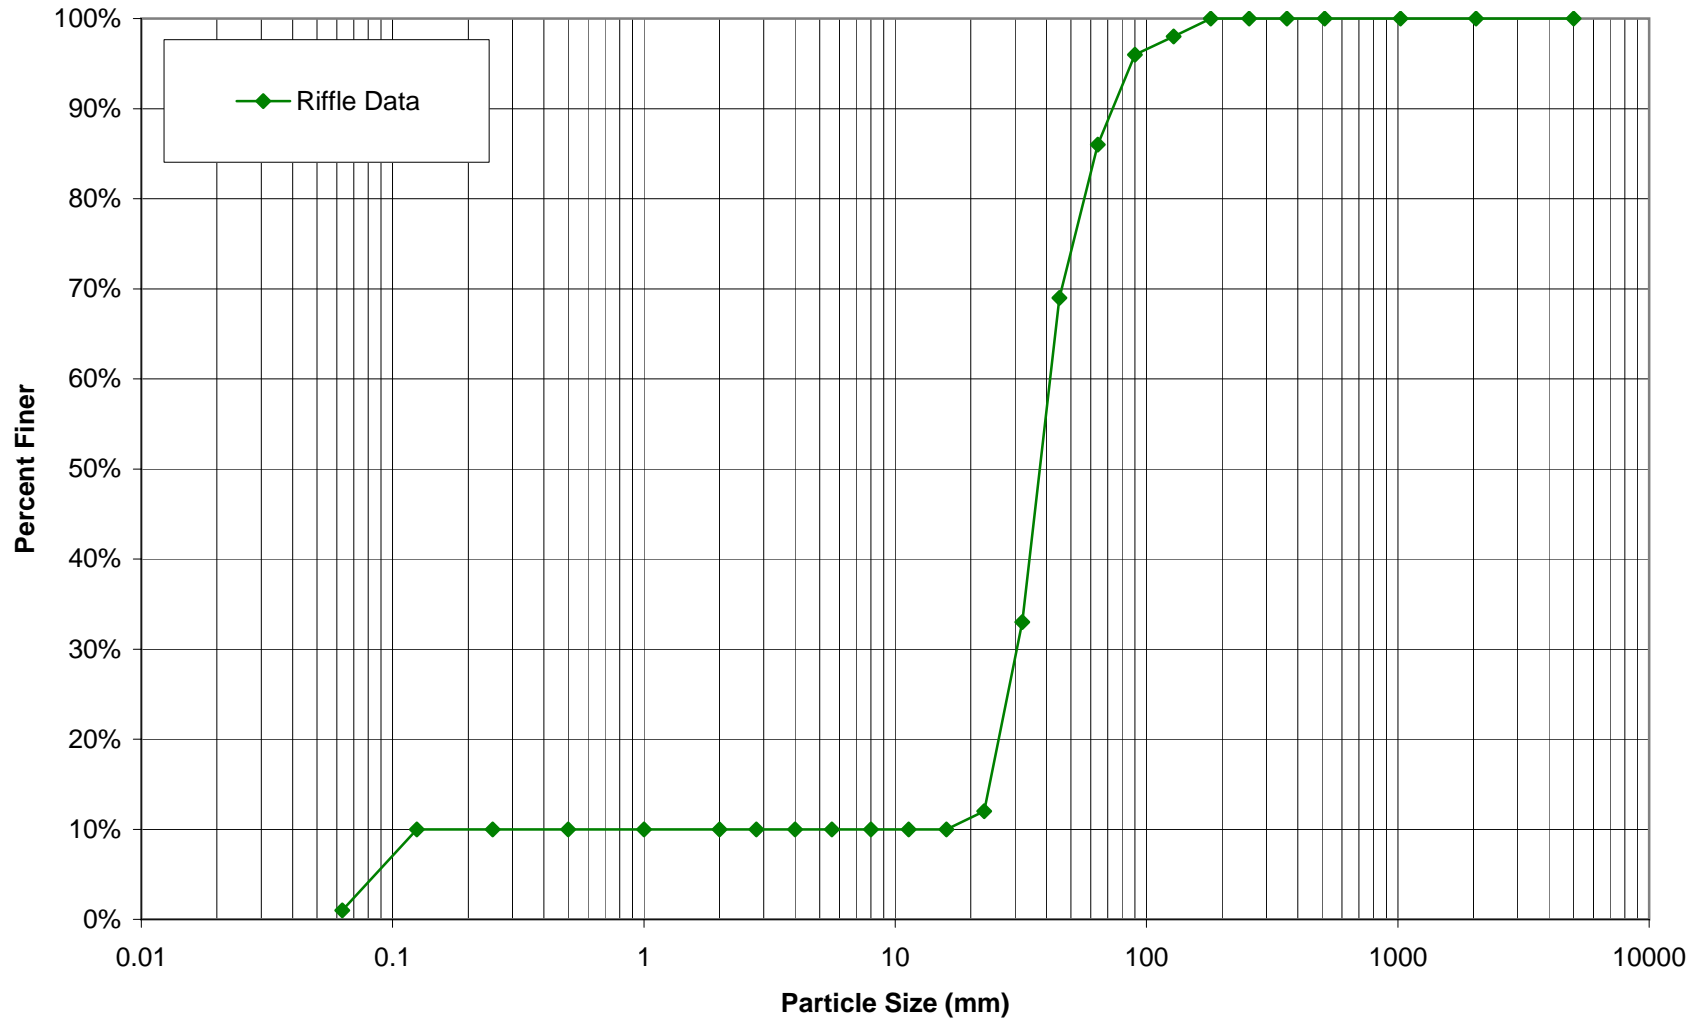

PEBBLE COUNT DATA SHEET: POOL 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1 X13-Pool
DATE COLLECTED:	11/11/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Pool		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	43		43%	43%	0.063
	S A N D	Very Fine	.063 - .125	5		5%	48%
Fine		.125 - .25	27		27%	75%	0.25
Medium		.25 - .50	13		13%	88%	0.50
Coarse		.50 - 1.0	7		7%	95%	1.0
Very Coarse		1.0 - 2.0	3		3%	98%	2.0
G R A V E L	Very Fine	2.0 - 2.8				98%	2.8
	Very Fine	2.8 - 4.0	1		1%	99%	4.0
	Fine	4.0 - 5.6				99%	5.6
	Fine	5.6 - 8.0				99%	8.0
	Medium	8.0 - 11.0	1		1%	100%	11.3
	Medium	11.0 - 16.0				100%	16.0
	Coarse	16.0 - 22.6				100%	22.6
	Coarse	22.6 - 32				100%	32
	Very Coarse	32 - 45				100%	45
	Very Coarse	45 - 64				100%	64
C O B B L E	Small	64 - 90				100%	90
	Small	90 - 128				100%	128
	Large	128 - 180				100%	180
	Large	180 - 256				100%	256
B O U L D E R	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(pool)

UT1
X13-Pool
Pebble Count Particle Size Distribution

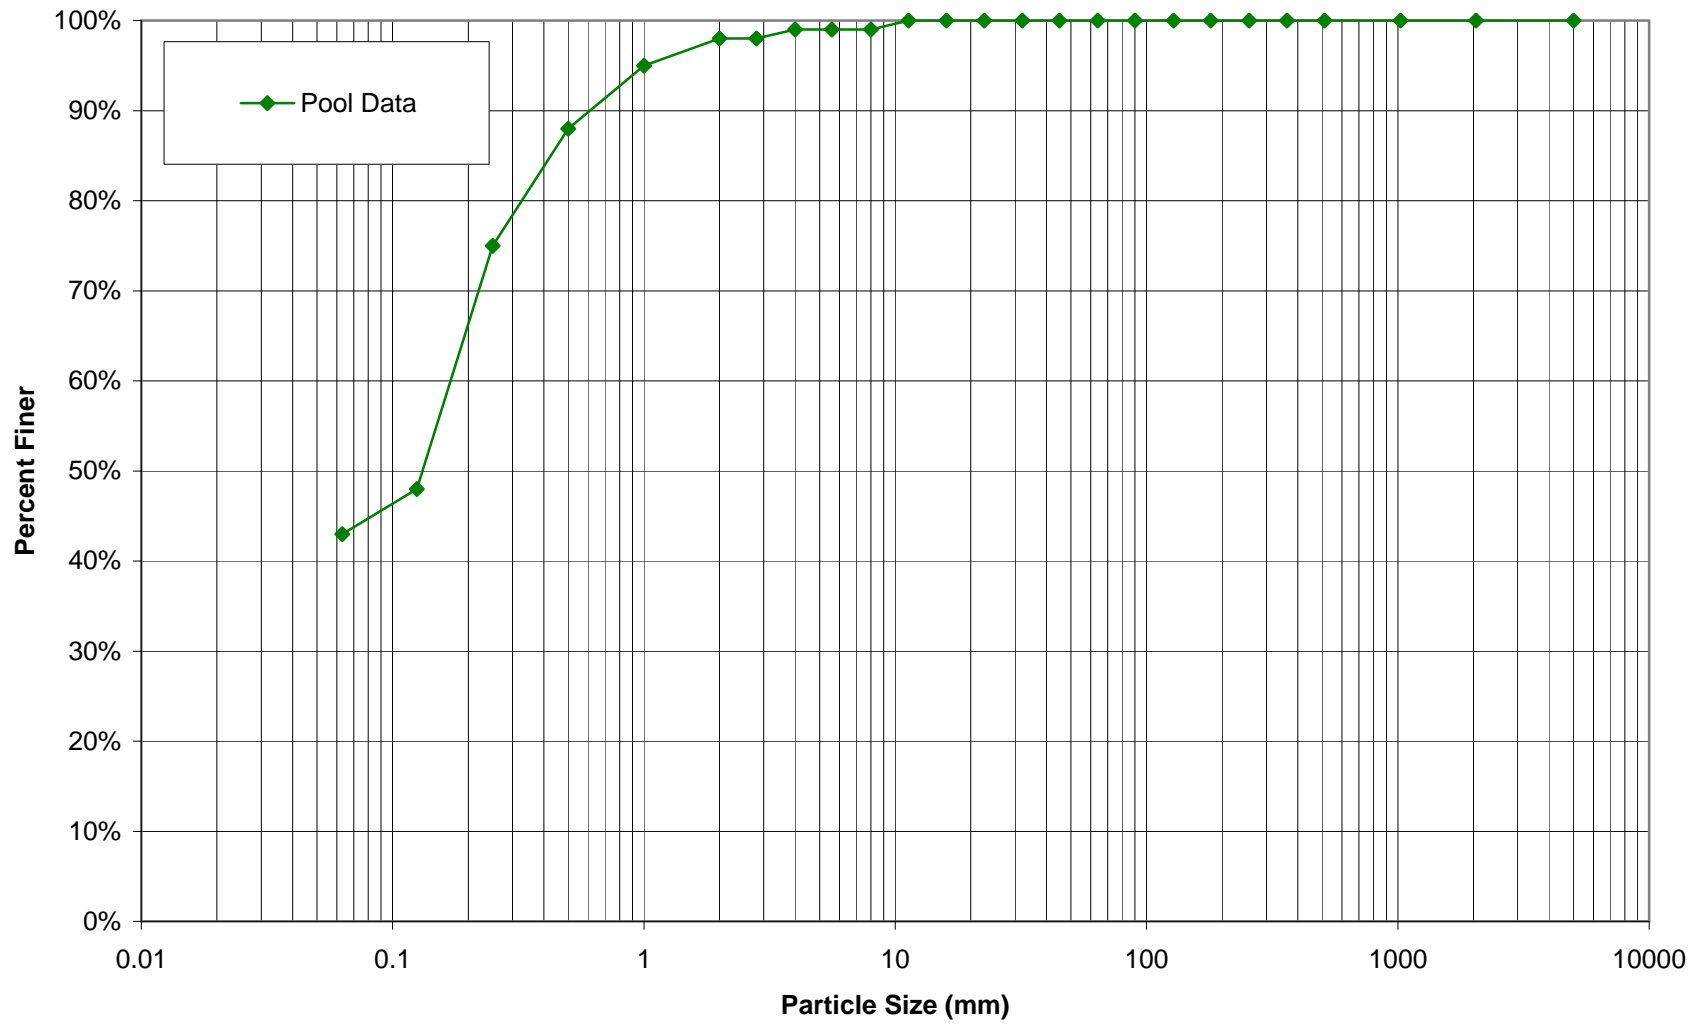

PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1 X14-Riffle
DATE COLLECTED:	11/11/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Riffle		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	9		9%	9%	0.063
S A N D	Very Fine	.063 - .125	11		11%	20%	0.125
	Fine	.125 - .25	14		14%	34%	0.25
	Medium	.25 - .50	27		27%	61%	0.50
	Coarse	.50 - 1.0	5		5%	66%	1.0
	Very Coarse	1.0 - 2.0	4		4%	70%	2.0
G R A V E L	Very Fine	2.0 - 2.8				70%	2.8
	Very Fine	2.8 - 4.0				70%	4.0
	Fine	4.0 - 5.6				70%	5.6
	Fine	5.6 - 8.0				70%	8.0
	Medium	8.0 - 11.0				70%	11.3
	Medium	11.0 - 16.0	1		1%	71%	16.0
	Coarse	16.0 - 22.6	1		1%	72%	22.6
	Coarse	22.6 - 32	4		4%	76%	32
	Very Coarse	32 - 45	7		7%	83%	45
C O B B L E	Very Coarse	45 - 64	3		3%	86%	64
	Small	64 - 90	8		8%	94%	90
	Small	90 - 128	3		3%	97%	128
	Large	128 - 180	2		2%	99%	180
B O U L D E R	Large	180 - 256	1		1%	100%	256
	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
B E D R O C K	Large-Very Large	1024 - 2048				100%	2048
	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(riffle)

UT1
X14-Riffle
Pebble Count Particle Size Distribution

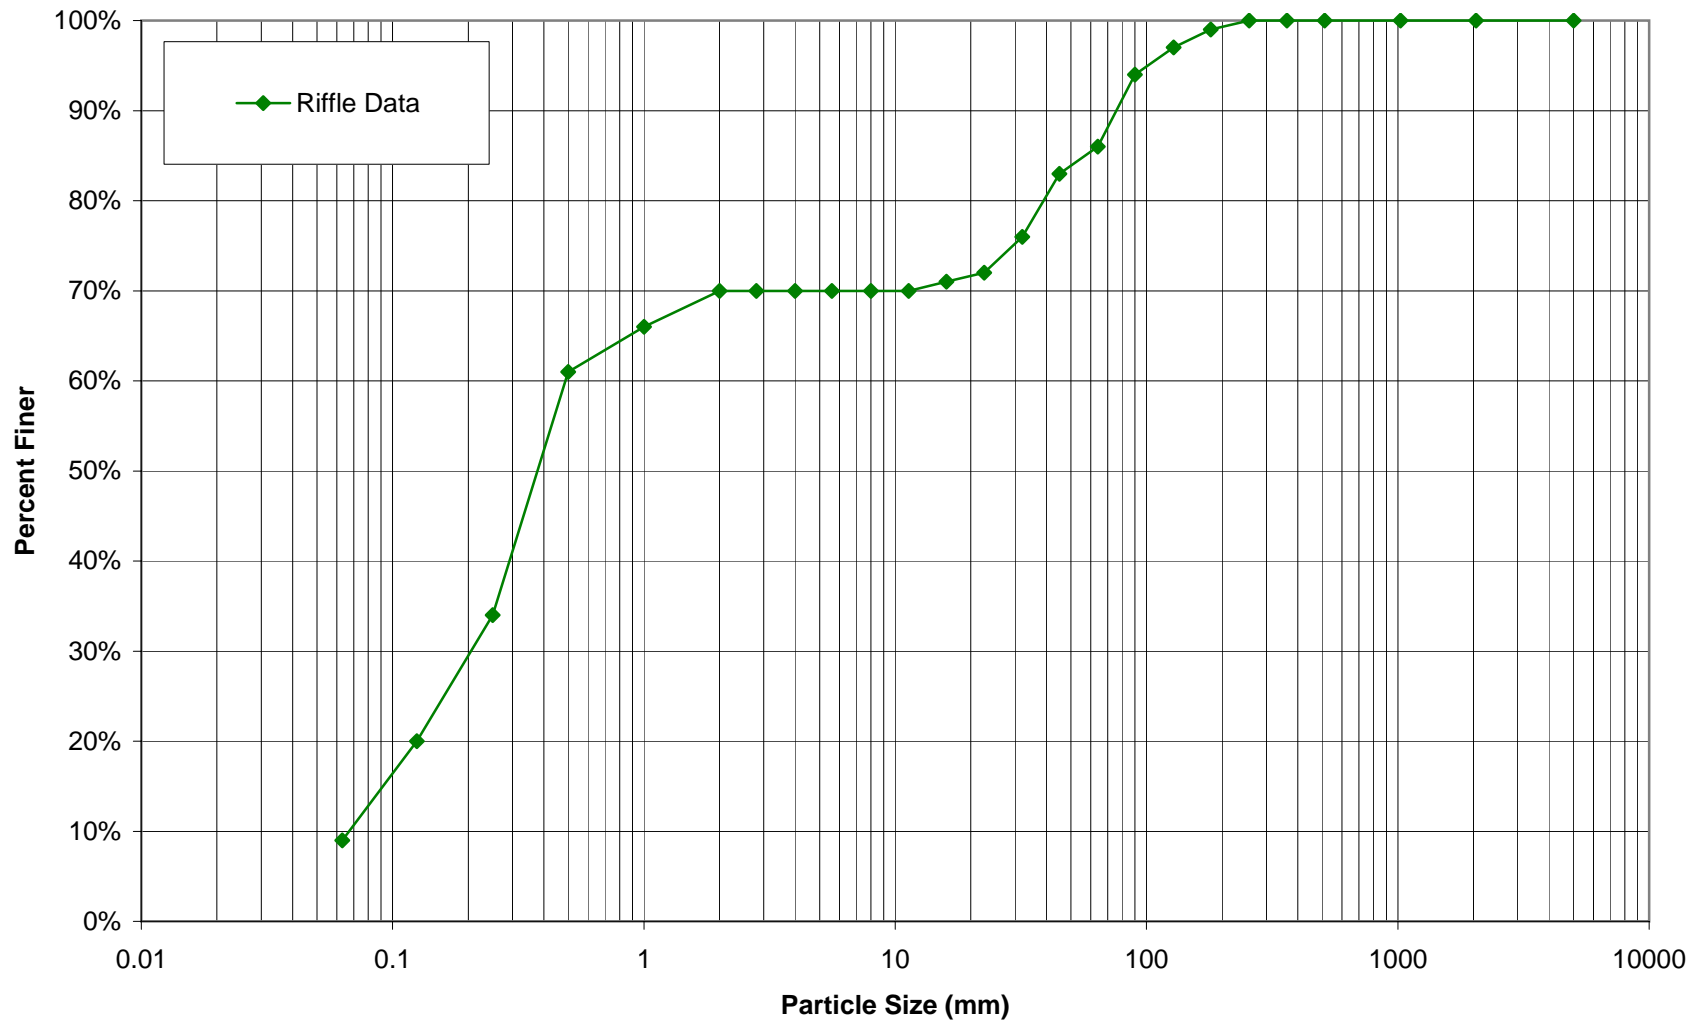

PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT


	BAKER PROJECT NO.	108528
SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring	
REACH/LOCATION:	UT1 X15-Riffle	
DATE COLLECTED:	11/10/2008	
FIELD COLLECTION BY:	IE/CT	
DATA ENTRY BY:	KS	

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		
			Riffle		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	4		4%	4%	
	Very Fine	.063 - .125	3		3%	7%	
SAND	Fine	.125 - .25	21		21%	28%	
	Medium	.25 - .50	27		27%	55%	
	Coarse	.50 - 1.0	29		29%	84%	
	Very Coarse	1.0 - 2.0	8		8%	92%	
	Very Fine	2.0 - 2.8	1		1%	93%	
	Very Fine	2.8 - 4.0	1		1%	94%	
	Fine	4.0 - 5.6	1		1%	95%	
	Fine	5.6 - 8.0				95%	
	Medium	8.0 - 11.0	1		1%	96%	
	Medium	11.0 - 16.0	3		3%	99%	
GRAVEL	Coarse	16.0 - 22.6	1		1%	100%	
	Coarse	22.6 - 32				100%	
	Very Coarse	32 - 45				100%	
	Very Coarse	45 - 64				100%	
	Small	64 - 90				100%	
	Small	90 - 128				100%	
	Large	128 - 180				100%	
	Large	180 - 256				100%	
	BOULDER	Small	256 - 362				100%
		Small	362 - 512				100%
Medium		512 - 1024				100%	
Large-Very Large		1024 - 2048				100%	
BEDROCK	Bedrock	> 2048				100%	
Total			100		100%		

Distribution Plot Size (mm)
0.063
0.125
0.25
0.50
1.0
2.0
2.8
4.0
5.6
8.0
11.3
16.0
22.6
32
45
64
90
128
180
256
362
512
1024
2048
5000

Largest particles: _____
(riffle)

UT1
X15-Riffle
Pebble Count Particle Size Distribution

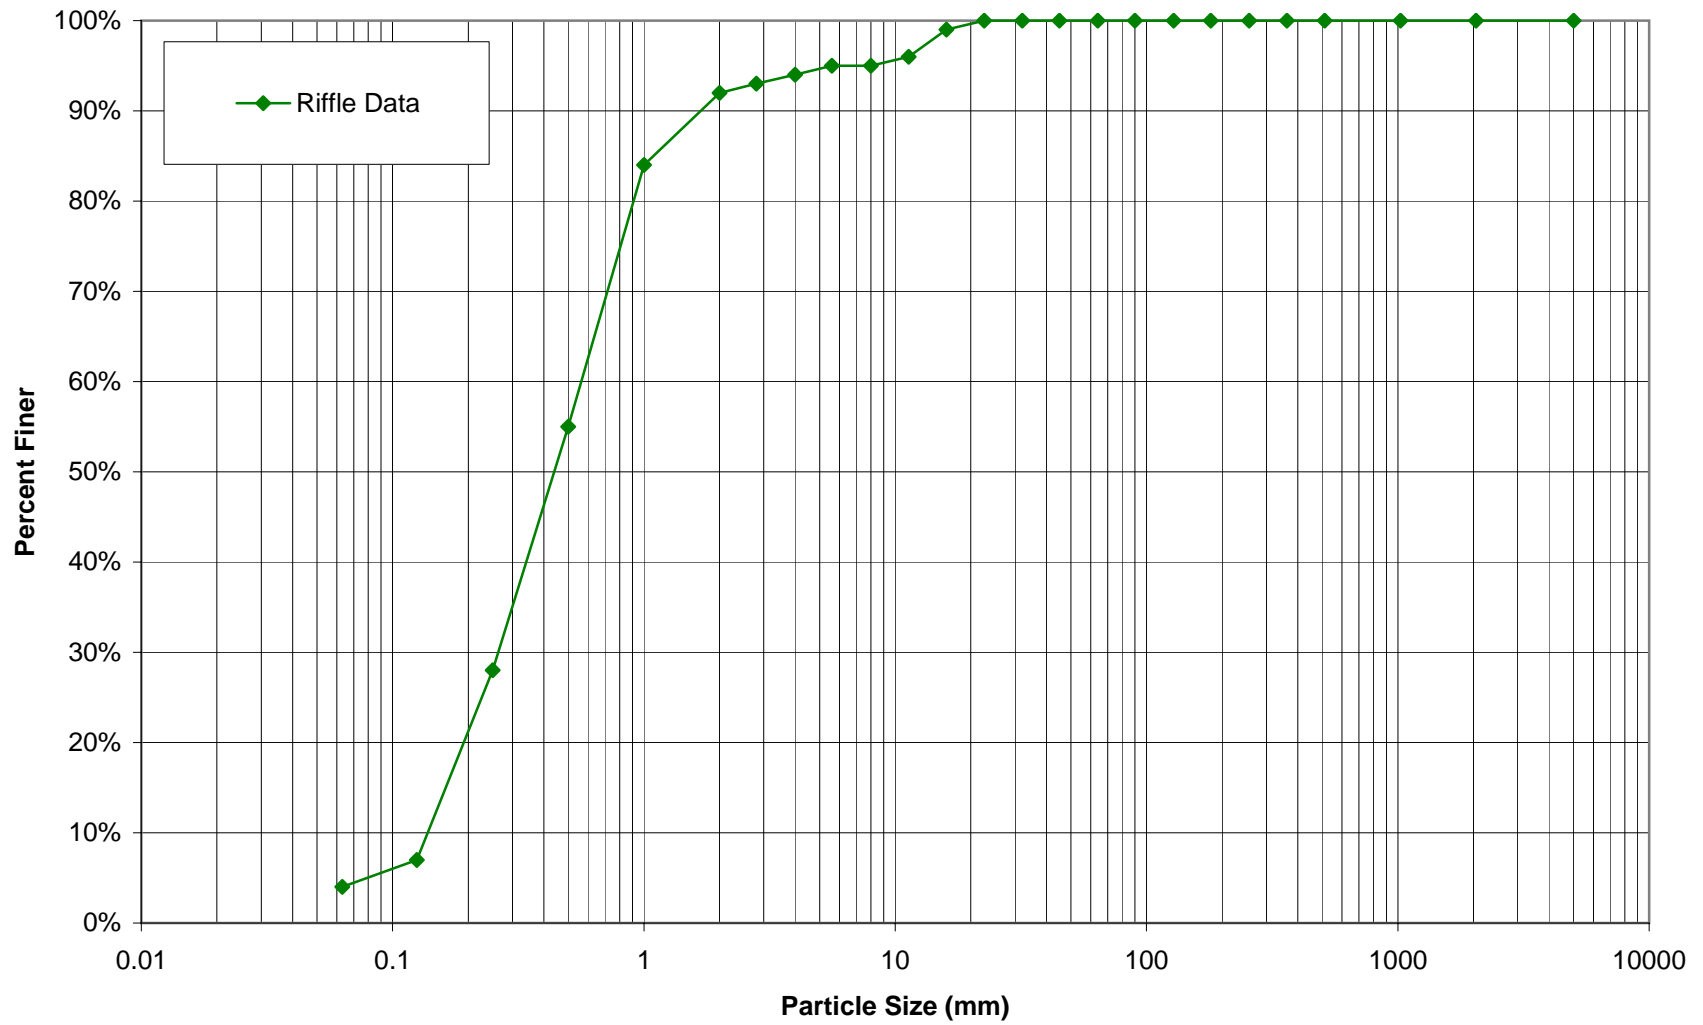

PEBBLE COUNT DATA SHEET: POOL 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1 X16-Pool
DATE COLLECTED:	11/10/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Pool	Class %	% Cum		
SILT/CLAY	Silt / Clay	< .063	61	61%	61%	0.063	
S A N D	Very Fine	.063 - .125	5	5%	66%	0.125	
	Fine	.125 - .25	26	26%	92%	0.25	
	Medium	.25 - .50	7	7%	99%	0.50	
	Coarse	.50 - 1.0	1	1%	100%	1.0	
	Very Coarse	1.0 - 2.0			100%	2.0	
G R A V E L	Very Fine	2.0 - 2.8			100%	2.8	
	Very Fine	2.8 - 4.0			100%	4.0	
	Fine	4.0 - 5.6			100%	5.6	
	Fine	5.6 - 8.0			100%	8.0	
	Medium	8.0 - 11.0			100%	11.3	
	Medium	11.0 - 16.0			100%	16.0	
	Coarse	16.0 - 22.6			100%	22.6	
	Coarse	22.6 - 32			100%	32	
	Very Coarse	32 - 45			100%	45	
	Very Coarse	45 - 64			100%	64	
C O B B L E	Small	64 - 90			100%	90	
	Small	90 - 128			100%	128	
	Large	128 - 180			100%	180	
	Large	180 - 256			100%	256	
B O U L D E R	Small	256 - 362			100%	362	
	Small	362 - 512			100%	512	
	Medium	512 - 1024			100%	1024	
	Large-Very Large	1024 - 2048			100%	2048	
BEDROCK	Bedrock	> 2048			100%	5000	
Total			100	100%			

Largest particles: _____
(pool)

UT1
X16-Pool
Pebble Count Particle Size Distribution

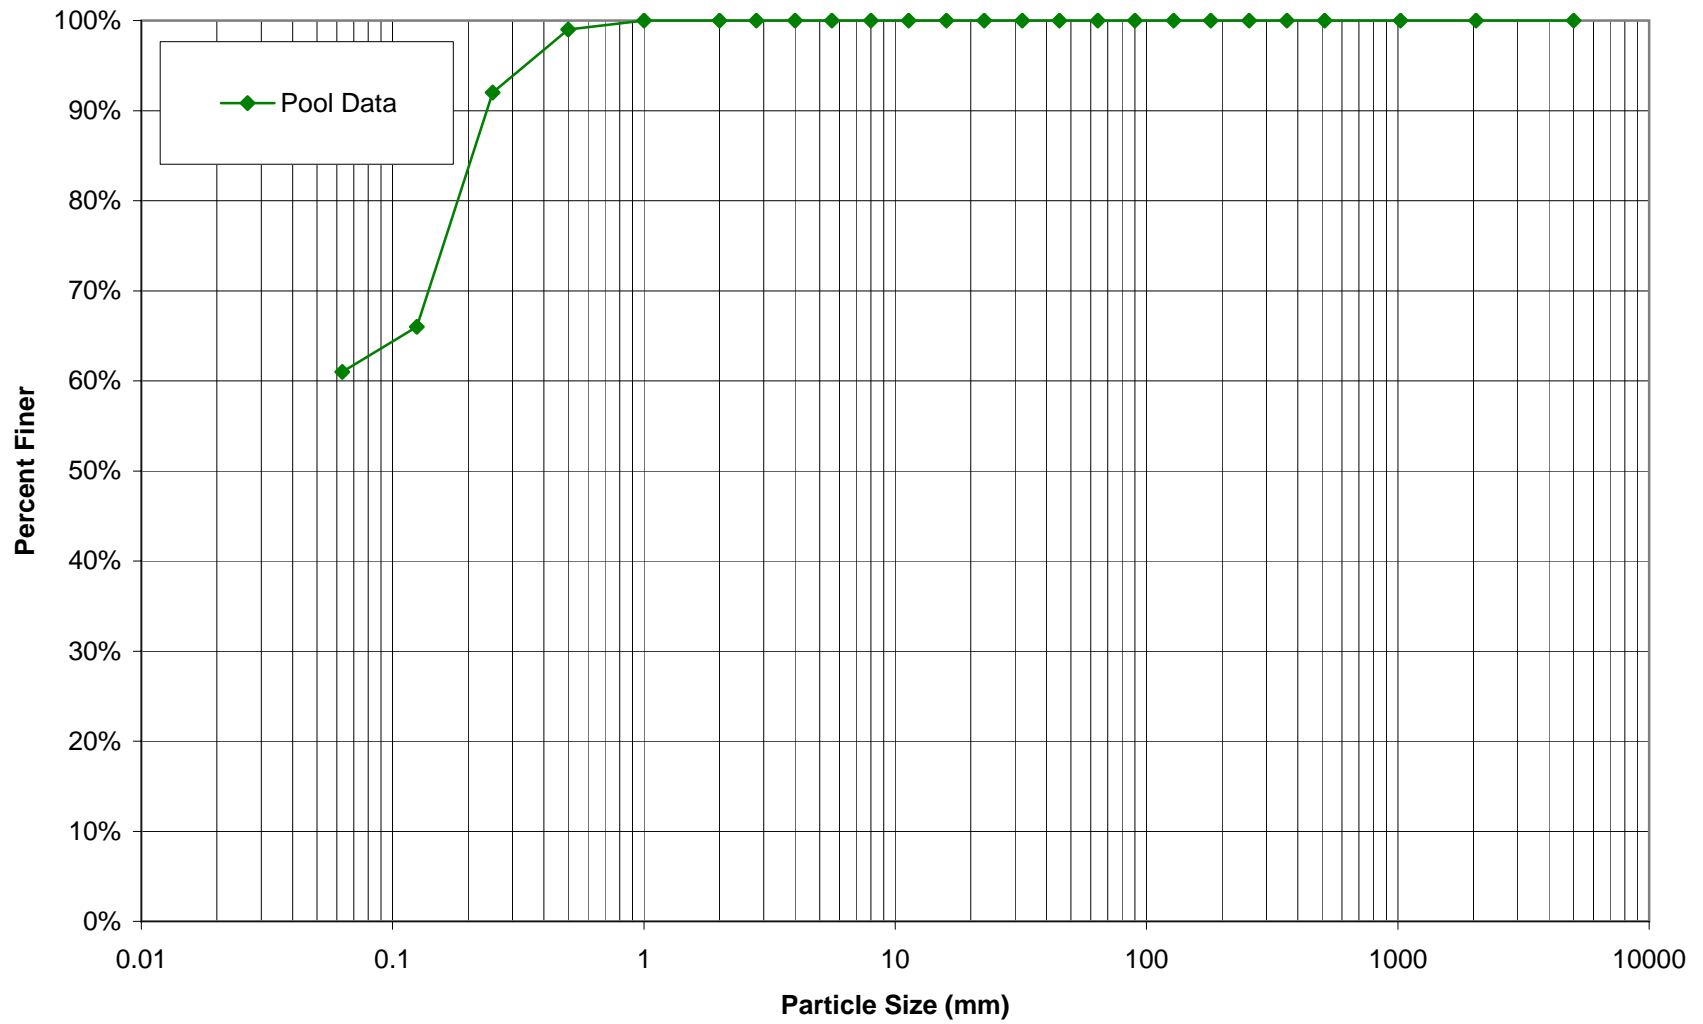

PEBBLE COUNT DATA SHEET: POOL 100-COUNT


BAKER PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT1 X17-Pool
DATE COLLECTED:	11/10/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Pool		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	25		25%	25%	0.063
S A N D	Very Fine	.063 - .125				25%	0.125
	Fine	.125 - .25	23		23%	48%	0.25
	Medium	.25 - .50	25		25%	73%	0.50
	Coarse	.50 - 1.0	19		19%	92%	1.0
	Very Coarse	1.0 - 2.0	4		4%	96%	2.0
G R A V E L	Very Fine	2.0 - 2.8				96%	2.8
	Very Fine	2.8 - 4.0				96%	4.0
	Fine	4.0 - 5.6	1		1%	97%	5.6
	Fine	5.6 - 8.0				97%	8.0
	Medium	8.0 - 11.0				97%	11.3
	Medium	11.0 - 16.0	1		1%	98%	16.0
	Coarse	16.0 - 22.6	2		2%	100%	22.6
	Coarse	22.6 - 32				100%	32
	Very Coarse	32 - 45				100%	45
	Very Coarse	45 - 64				100%	64
COBBLE	Small	64 - 90				100%	90
	Small	90 - 128				100%	128
	Large	128 - 180				100%	180
	Large	180 - 256				100%	256
BOULDER	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(pool)

UT1
X17-Pool
Pebble Count Particle Size Distribution

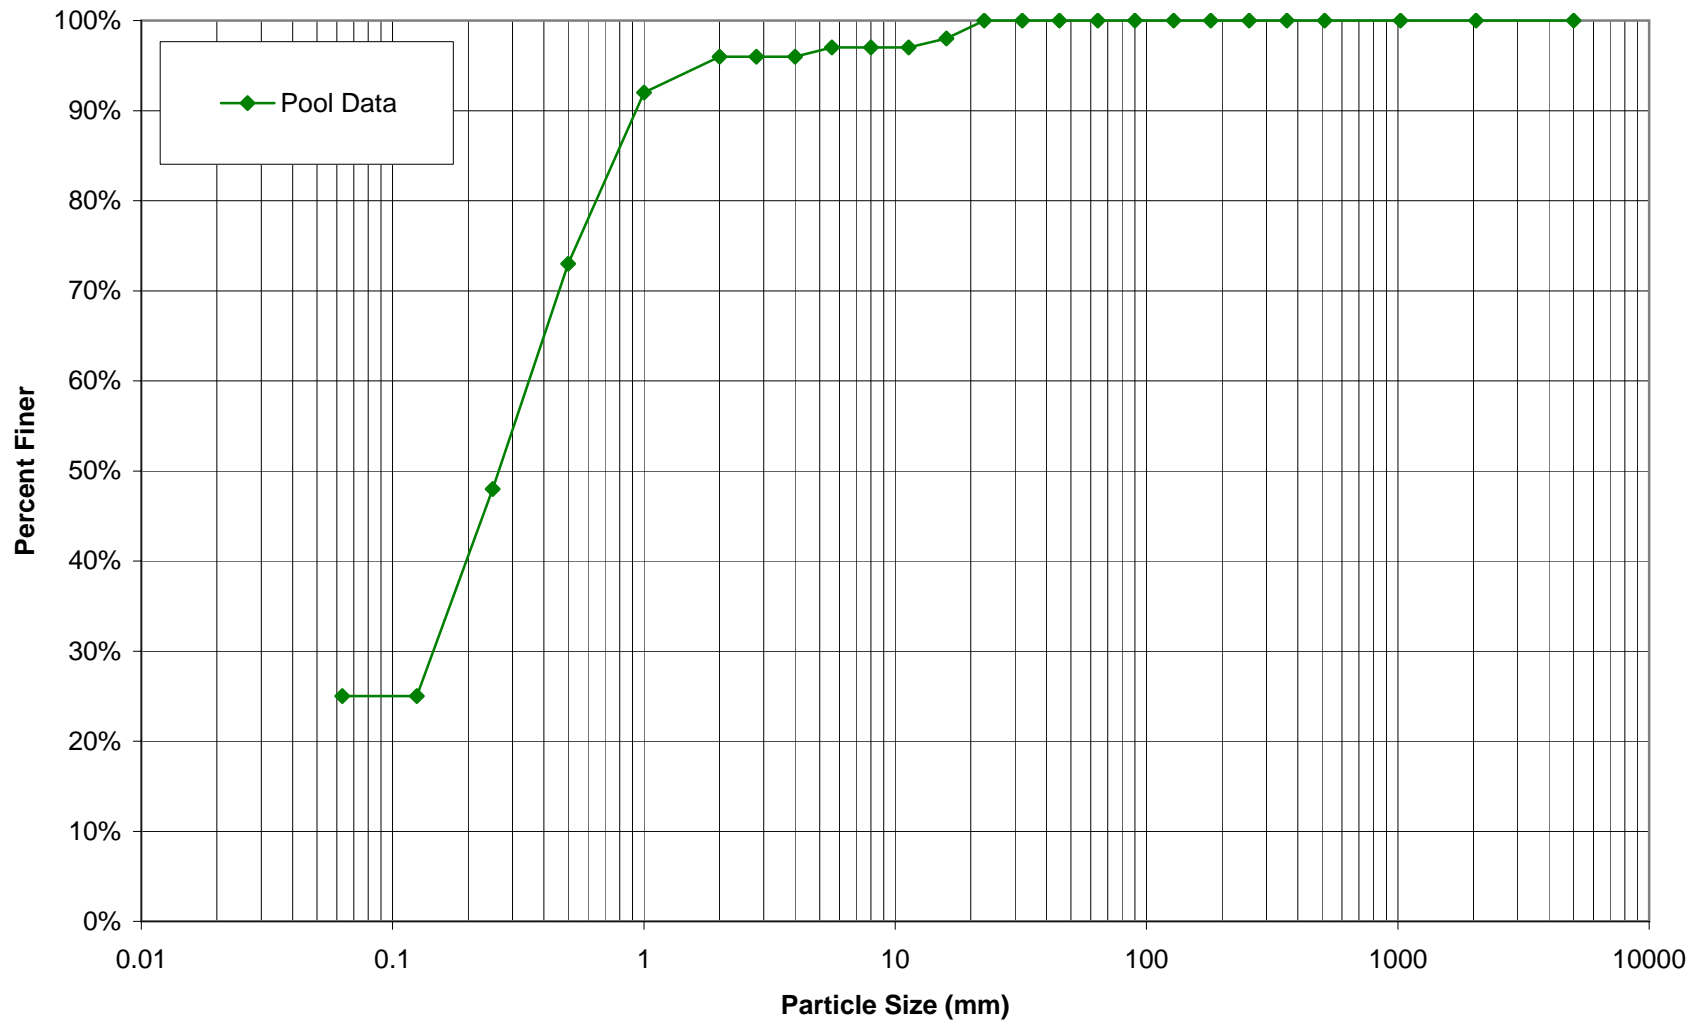

PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT


	BAKER PROJECT NO.	108528
SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring	
REACH/LOCATION:	UT1 X18-Riffle	
DATE COLLECTED:	11/10/2008	
FIELD COLLECTION BY:	IE/CT	
DATA ENTRY BY:	KS	

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Riffle		Class %	% Cum
SILT/CLAY	Silt / Clay	< .063	10		10%	10%
	Very Fine	.063 - .125				10%
SAND	Fine	.125 - .25	5		5%	15%
	Medium	.25 - .50	7		7%	22%
	Coarse	.50 - 1.0	19		19%	41%
	Very Coarse	1.0 - 2.0	3		3%	44%
	Very Fine	2.0 - 2.8	1		1%	45%
	Very Fine	2.8 - 4.0				45%
	Fine	4.0 - 5.6	2		2%	47%
	Fine	5.6 - 8.0				47%
	Medium	8.0 - 11.0				47%
	Medium	11.0 - 16.0	1		1%	48%
GRAVEL	Coarse	16.0 - 22.6	3		3%	51%
	Coarse	22.6 - 32	7		7%	58%
	Very Coarse	32 - 45	26		26%	84%
	Very Coarse	45 - 64	10		10%	94%
	Small	64 - 90	2		2%	96%
	Small	90 - 128	4		4%	100%
COBBLE	Large	128 - 180				100%
	Large	180 - 256				100%
BOULDER	Small	256 - 362				100%
	Small	362 - 512				100%
	Medium	512 - 1024				100%
	Large-Very Large	1024 - 2048				100%
BEDROCK	Bedrock	> 2048				100%
Total			100		100%	

Distribution Plot Size (mm)
0.063
0.125
0.25
0.50
1.0
2.0
2.8
4.0
5.6
8.0
11.3
16.0
22.6
32
45
64
90
128
180
256
362
512
1024
2048
5000

Largest particles: _____
(riffle)

UT1
X18-Riffle
Pebble Count Particle Size Distribution

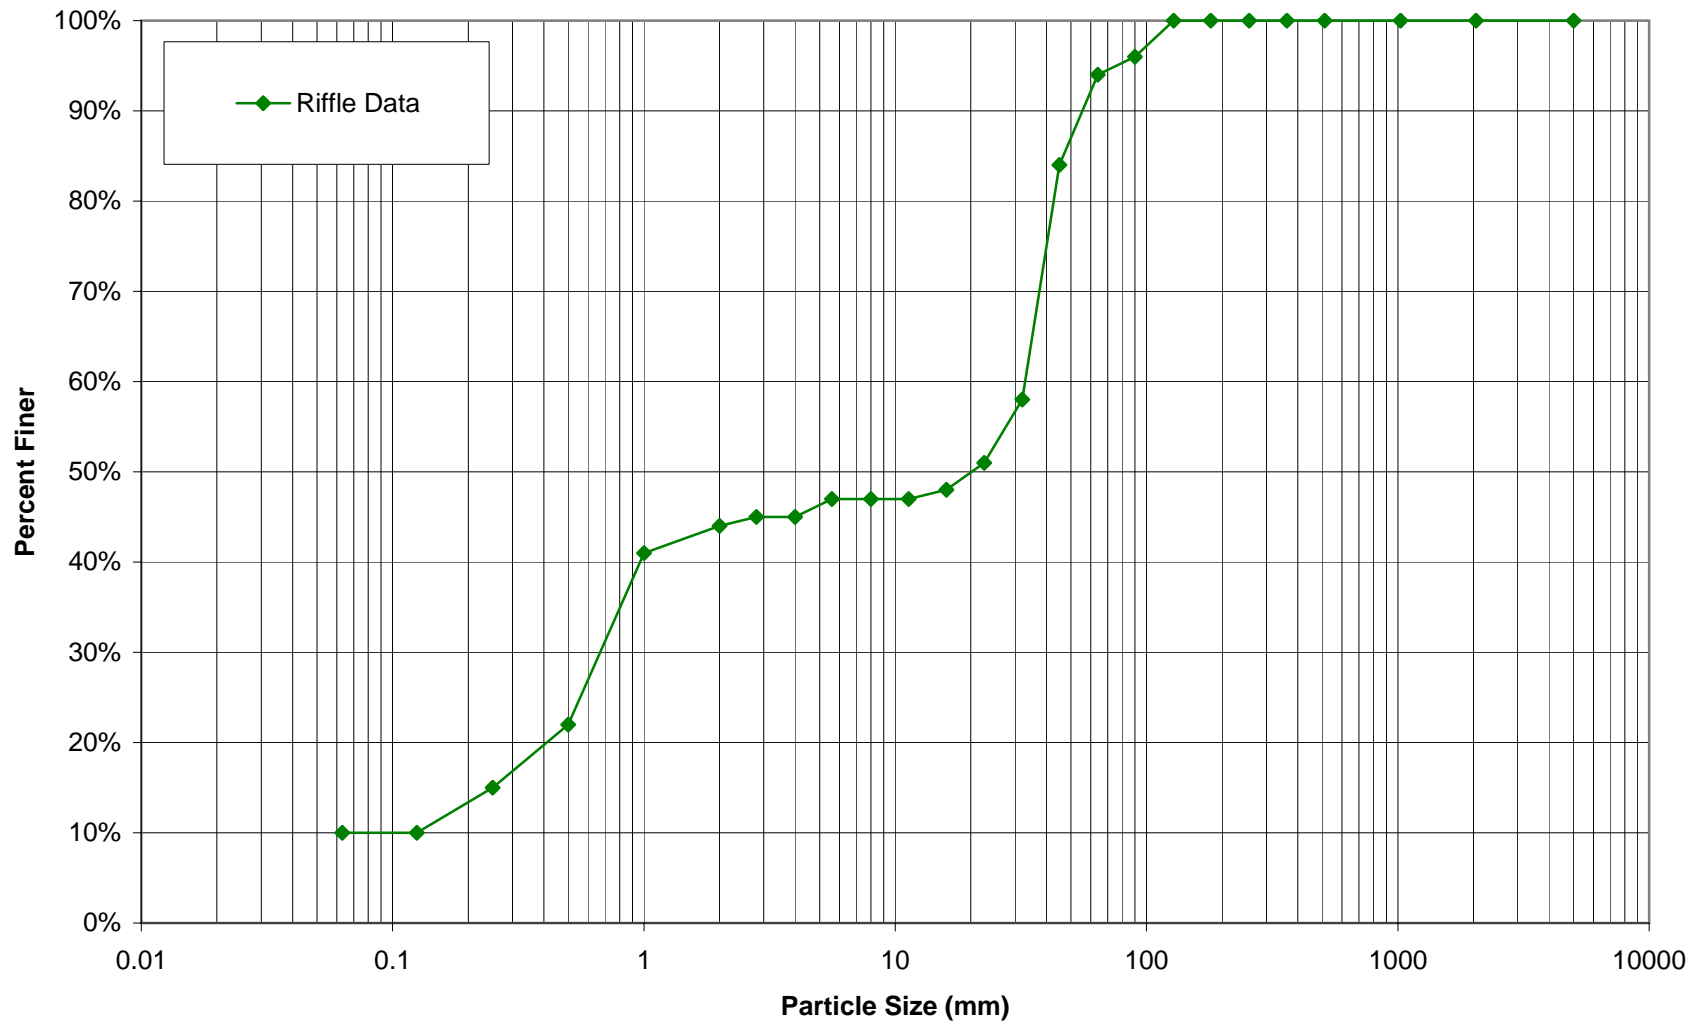


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BUCK PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring	
REACH/LOCATION:	UT2A X1-Riffle	
DATE COLLECTED:	11/7/2008	
FIELD COLLECTION BY:	IE/CT	
DATA ENTRY BY:	KS	

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Riffle		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	17		17%	17%	0.063
S A N D	Very Fine	.063 - .125				17%	0.125
	Fine	.125 - .25	1		1%	18%	0.25
	Medium	.25 - .50				18%	0.50
	Coarse	.50 - 1.0				18%	1.0
	Very Coarse	1.0 - 2.0				18%	2.0
G R A V E L	Very Fine	2.0 - 2.8				18%	2.8
	Very Fine	2.8 - 4.0				18%	4.0
	Fine	4.0 - 5.6				18%	5.6
	Fine	5.6 - 8.0				18%	8.0
	Medium	8.0 - 11.0				18%	11.3
	Medium	11.0 - 16.0				18%	16.0
	Coarse	16.0 - 22.6	1		1%	19%	22.6
	Coarse	22.6 - 32	12		12%	31%	32
	Very Coarse	32 - 45	30		30%	61%	45
	Very Coarse	45 - 64	30		30%	91%	64
C O B B L E	Small	64 - 90	5		5%	96%	90
	Small	90 - 128	3		3%	99%	128
	Large	128 - 180	1		1%	100%	180
	Large	180 - 256				100%	256
B O U L D E R	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(riffle)

UT2A
X1-Riffle
Pebble Count Particle Size Distribution

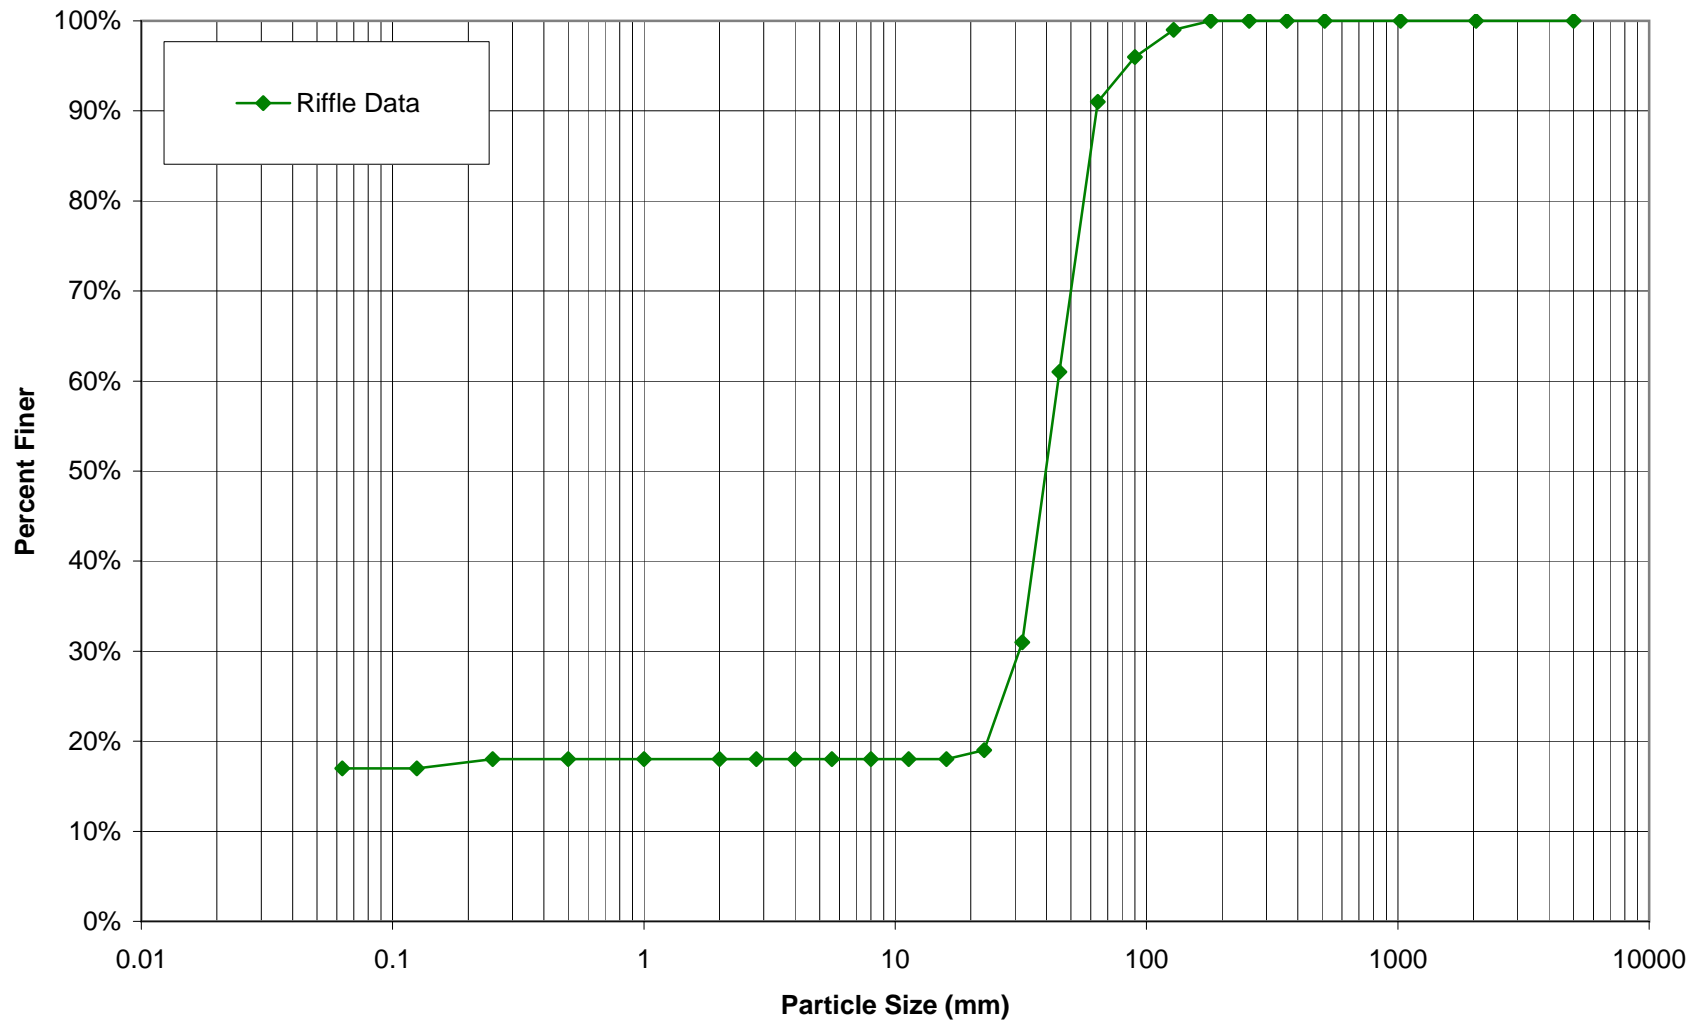

PEBBLE COUNT DATA SHEET: POOL 100-COUNT


BUCK PROJECT NO. 108528

SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT2A X2-Pool
DATE COLLECTED:	11/7/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Pool		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	98		98%	98%	0.063
SAND	Very Fine	.063 - .125				98%	0.125
	Fine	.125 - .25				98%	0.25
	Medium	.25 - .50	2		2%	100%	0.50
	Coarse	.50 - 1.0				100%	1.0
	Very Coarse	1.0 - 2.0				100%	2.0
GRAVEL	Very Fine	2.0 - 2.8				100%	2.8
	Very Fine	2.8 - 4.0				100%	4.0
	Fine	4.0 - 5.6				100%	5.6
	Fine	5.6 - 8.0				100%	8.0
	Medium	8.0 - 11.0				100%	11.3
	Medium	11.0 - 16.0				100%	16.0
	Coarse	16.0 - 22.6				100%	22.6
	Coarse	22.6 - 32				100%	32
	Very Coarse	32 - 45				100%	45
	Very Coarse	45 - 64				100%	64
COBBLE	Small	64 - 90				100%	90
	Small	90 - 128				100%	128
	Large	128 - 180				100%	180
	Large	180 - 256				100%	256
BOULDER	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(pool)

UT2A
X2-Pool
Pebble Count Particle Size Distribution

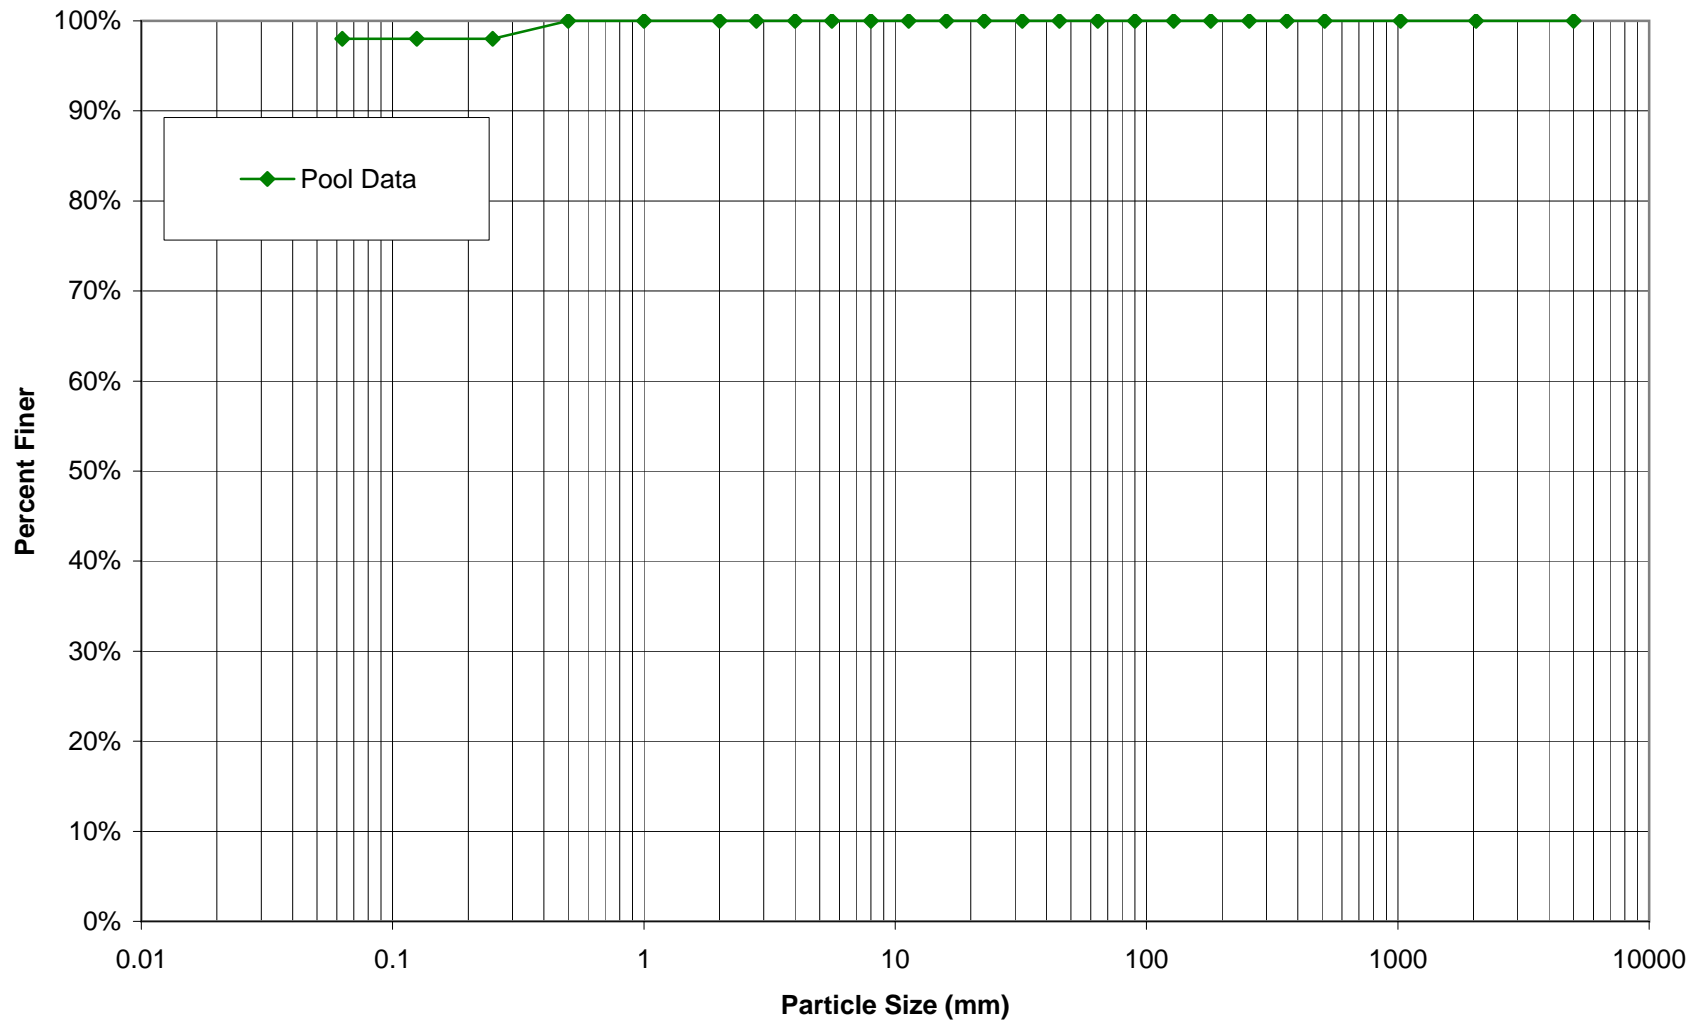


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BUCK PROJECT NO. 108528	
SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT2 X3-Riffle
DATE COLLECTED:	11/4/2008
FIELD COLLECTION BY:	IE/KS
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Riffle		Class %	% Cum	
SAND	Silt / Clay	< .063	11		11%	11%	0.063
	Very Fine	.063 - .125				11%	0.125
	Fine	.125 - .25				11%	0.25
	Medium	.25 - .50				11%	0.50
	Coarse	.50 - 1.0				11%	1.0
GRAVEL	Very Coarse	1.0 - 2.0				11%	2.0
	Very Fine	2.0 - 2.8				11%	2.8
	Very Fine	2.8 - 4.0				11%	4.0
	Fine	4.0 - 5.6				11%	5.6
	Fine	5.6 - 8.0				11%	8.0
	Medium	8.0 - 11.0				11%	11.3
	Medium	11.0 - 16.0	1		1%	12%	16.0
	Coarse	16.0 - 22.6	2		2%	14%	22.6
	Coarse	22.6 - 32	10		10%	24%	32
	Very Coarse	32 - 45	42		42%	66%	45
COBBLE	Very Coarse	45 - 64	18		18%	84%	64
	Small	64 - 90	3		3%	87%	90
	Small	90 - 128	6		6%	93%	128
	Large	128 - 180	4		4%	97%	180
BOULDER	Large	180 - 256	3		3%	100%	256
	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
BEDROCK	Large-Very Large	1024 - 2048				100%	2048
	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(riffle)

UT2
X3-Riffle
Pebble Count Particle Size Distribution

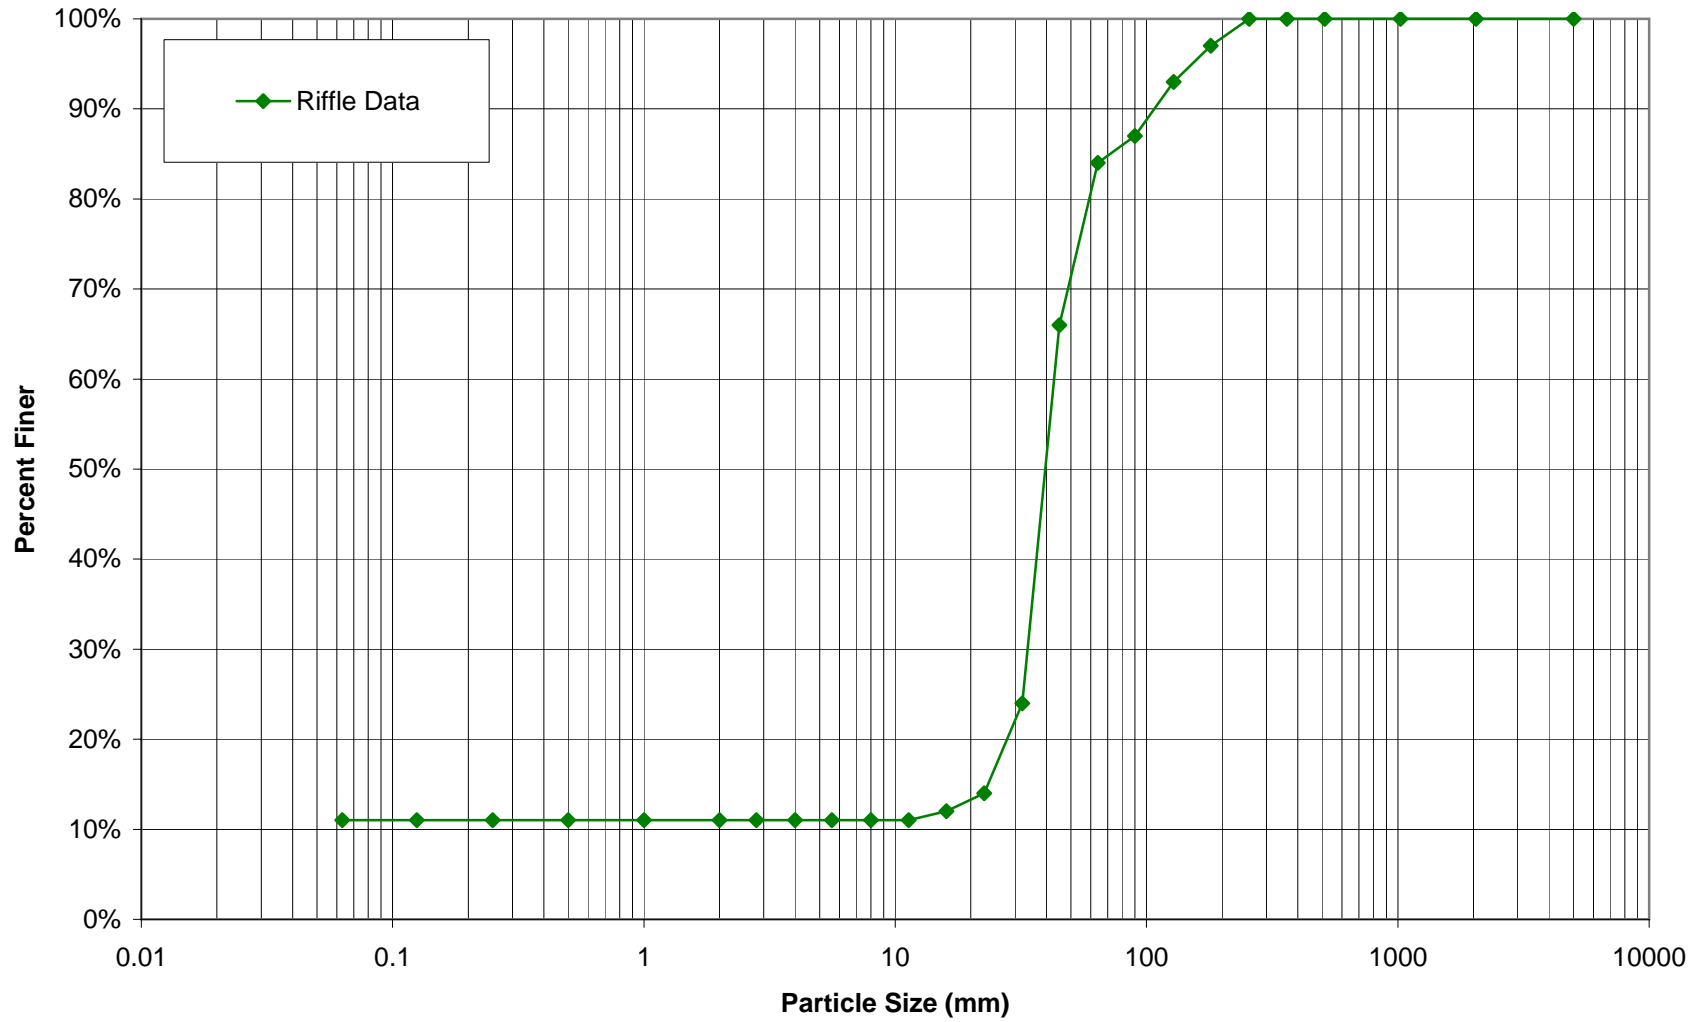


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

	BUCK PROJECT NO. 108528
SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT2 X4-Pool
DATE COLLECTED:	11/4/2008
FIELD COLLECTION BY:	IE/KS
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Pool		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	100		100%	100%	0.063
S A N D	Very Fine	.063 - .125				100%	0.125
	Fine	.125 - .25				100%	0.25
	Medium	.25 - .50				100%	0.50
	Coarse	.50 - 1.0				100%	1.0
	Very Coarse	1.0 - 2.0				100%	2.0
G R A V E L	Very Fine	2.0 - 2.8				100%	2.8
	Very Fine	2.8 - 4.0				100%	4.0
	Fine	4.0 - 5.6				100%	5.6
	Fine	5.6 - 8.0				100%	8.0
	Medium	8.0 - 11.0				100%	11.3
	Medium	11.0 - 16.0				100%	16.0
	Coarse	16.0 - 22.6				100%	22.6
	Coarse	22.6 - 32				100%	32
	Very Coarse	32 - 45				100%	45
	Very Coarse	45 - 64				100%	64
COBBLE	Small	64 - 90				100%	90
	Small	90 - 128				100%	128
	Large	128 - 180				100%	180
	Large	180 - 256				100%	256
BOULDER	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(pool)

UT2
X4-Pool
Pebble Count Particle Size Distribution

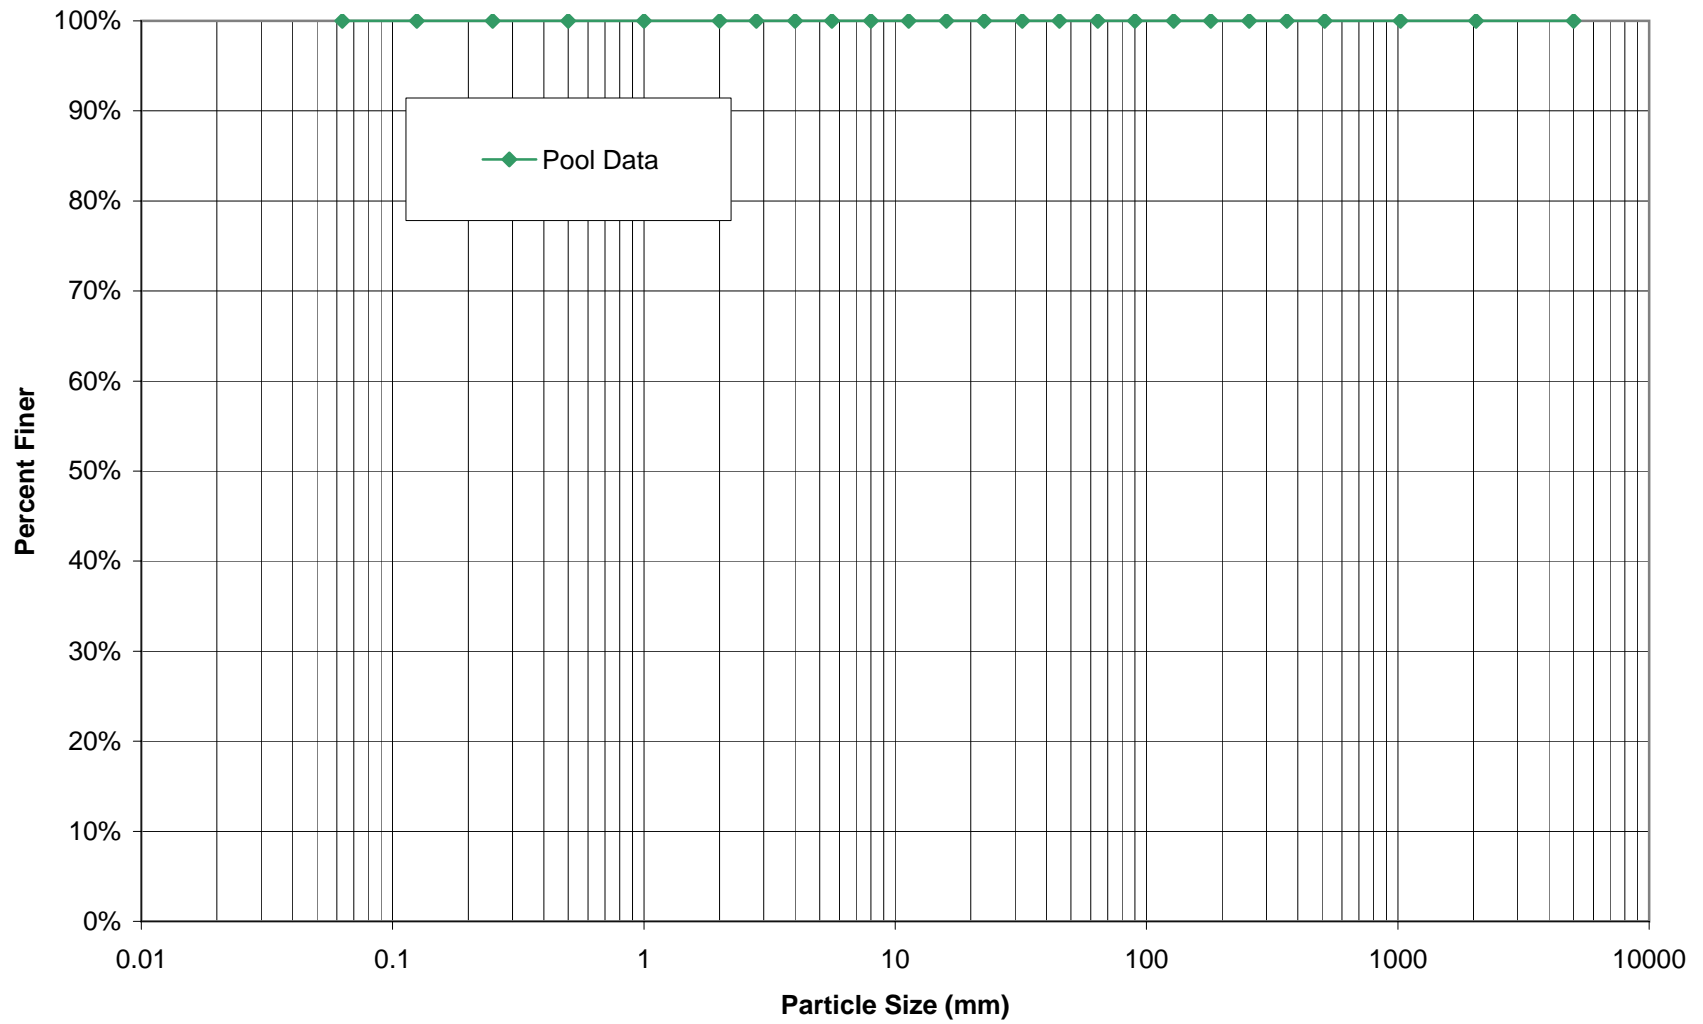


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BUCK PROJECT NO. 108528	
SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring
REACH/LOCATION:	UT2 X5-Riffle
DATE COLLECTED:	11/7/2008
FIELD COLLECTION BY:	IE/CT
DATA ENTRY BY:	KS

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Riffle		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	15		15%	15%	0.063
S A N D	Very Fine	.063 - .125				15%	0.125
	Fine	.125 - .25	8		8%	23%	0.25
	Medium	.25 - .50				23%	0.50
	Coarse	.50 - 1.0	3		3%	26%	1.0
	Very Coarse	1.0 - 2.0				26%	2.0
G R A V E L	Very Fine	2.0 - 2.8				26%	2.8
	Very Fine	2.8 - 4.0	1		1%	27%	4.0
	Fine	4.0 - 5.6	1		1%	28%	5.6
	Fine	5.6 - 8.0				28%	8.0
	Medium	8.0 - 11.0	1		1%	29%	11.3
	Medium	11.0 - 16.0				29%	16.0
	Coarse	16.0 - 22.6				29%	22.6
	Coarse	22.6 - 32	13		13%	42%	32
	Very Coarse	32 - 45	27		27%	69%	45
	Very Coarse	45 - 64	19		19%	88%	64
C O B B L E	Small	64 - 90	3		3%	91%	90
	Small	90 - 128	6		6%	97%	128
	Large	128 - 180	3		3%	100%	180
	Large	180 - 256				100%	256
B O U L D E R	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(riffle)

UT2
X5-Riffle
Pebble Count Particle Size Distribution

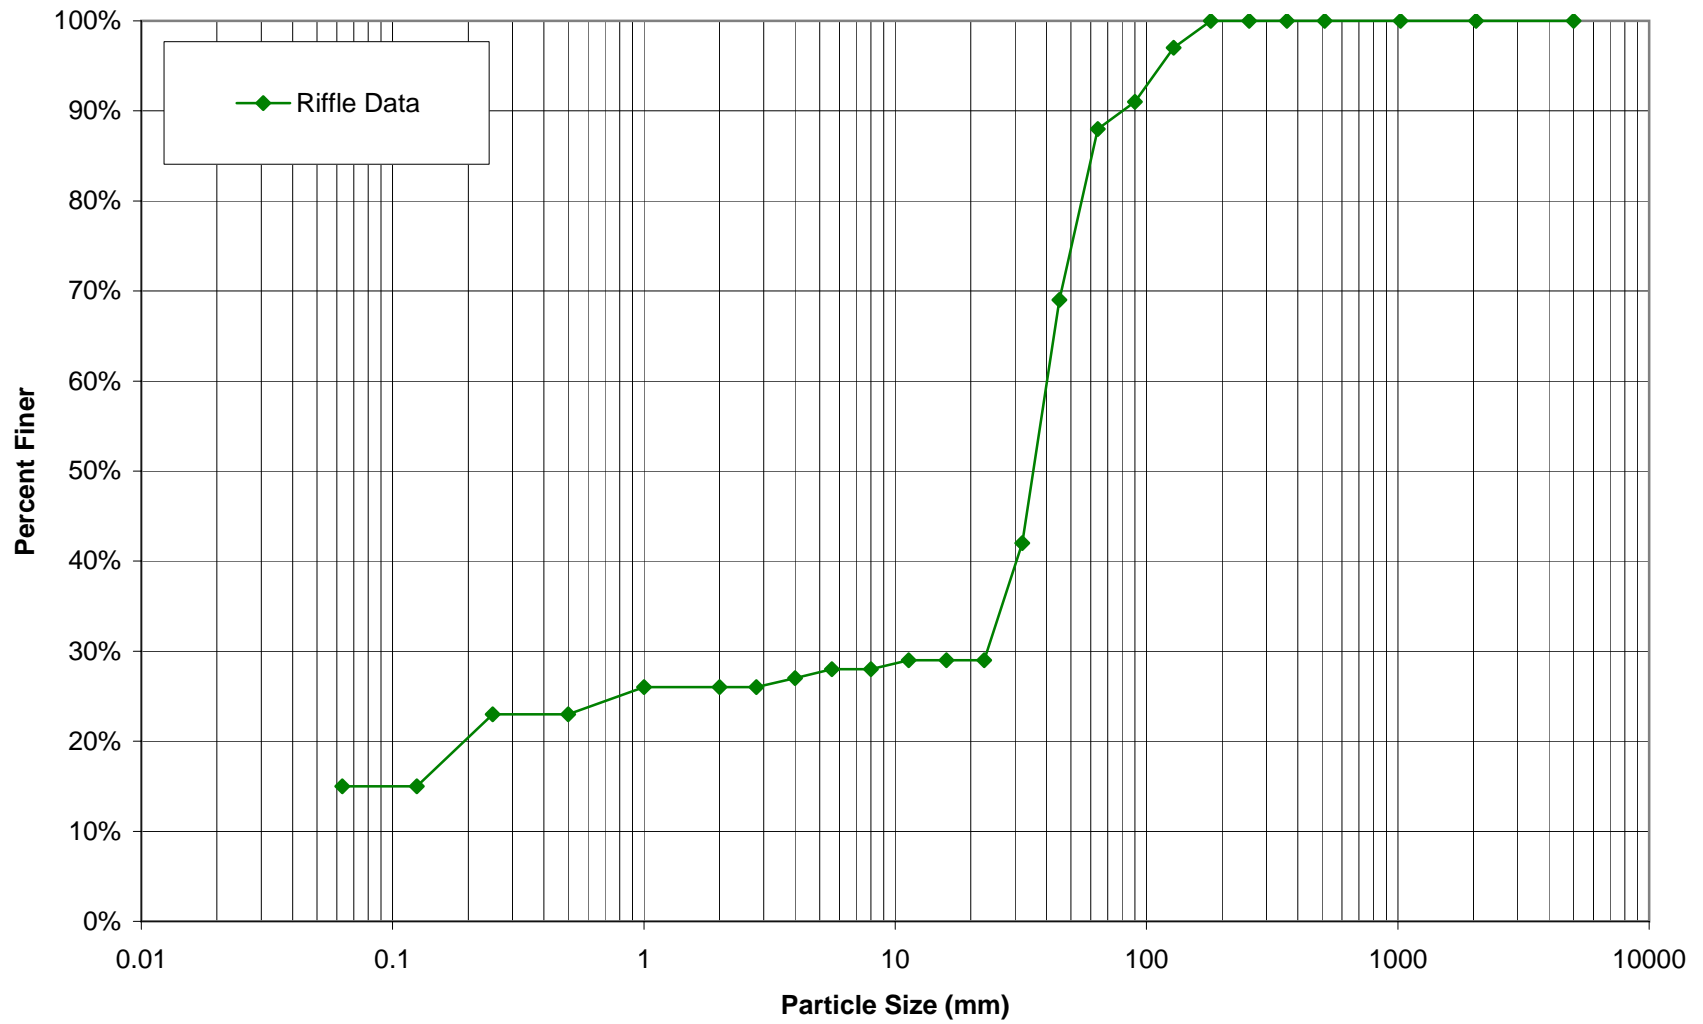


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

	BUCK PROJECT NO.	108528
SITE OR PROJECT:	Beaverdam Creek 2nd Year Monitoring	
REACH/LOCATION:	UT2 X6-Pool	
DATE COLLECTED:	11/7/2008	
FIELD COLLECTION BY:	IE/CT	
DATA ENTRY BY:	KS	

MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Pool		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	96		96%	96%	0.063
S A N D	Very Fine	.063 - .125				96%	0.125
	Fine	.125 - .25				96%	0.25
	Medium	.25 - .50				96%	0.50
	Coarse	.50 - 1.0				96%	1.0
	Very Coarse	1.0 - 2.0				96%	2.0
G R A V E L	Very Fine	2.0 - 2.8				96%	2.8
	Very Fine	2.8 - 4.0				96%	4.0
	Fine	4.0 - 5.6				96%	5.6
	Fine	5.6 - 8.0				96%	8.0
	Medium	8.0 - 11.0				96%	11.3
	Medium	11.0 - 16.0				96%	16.0
	Coarse	16.0 - 22.6				96%	22.6
	Coarse	22.6 - 32				96%	32
	Very Coarse	32 - 45				96%	45
	Very Coarse	45 - 64				96%	64
COBBLE	Small	64 - 90	2		2%	98%	90
	Small	90 - 128	2		2%	100%	128
	Large	128 - 180				100%	180
	Large	180 - 256				100%	256
BOULDER	Small	256 - 362				100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: _____
(pool)

UT2
X6-Pool
Pebble Count Particle Size Distribution

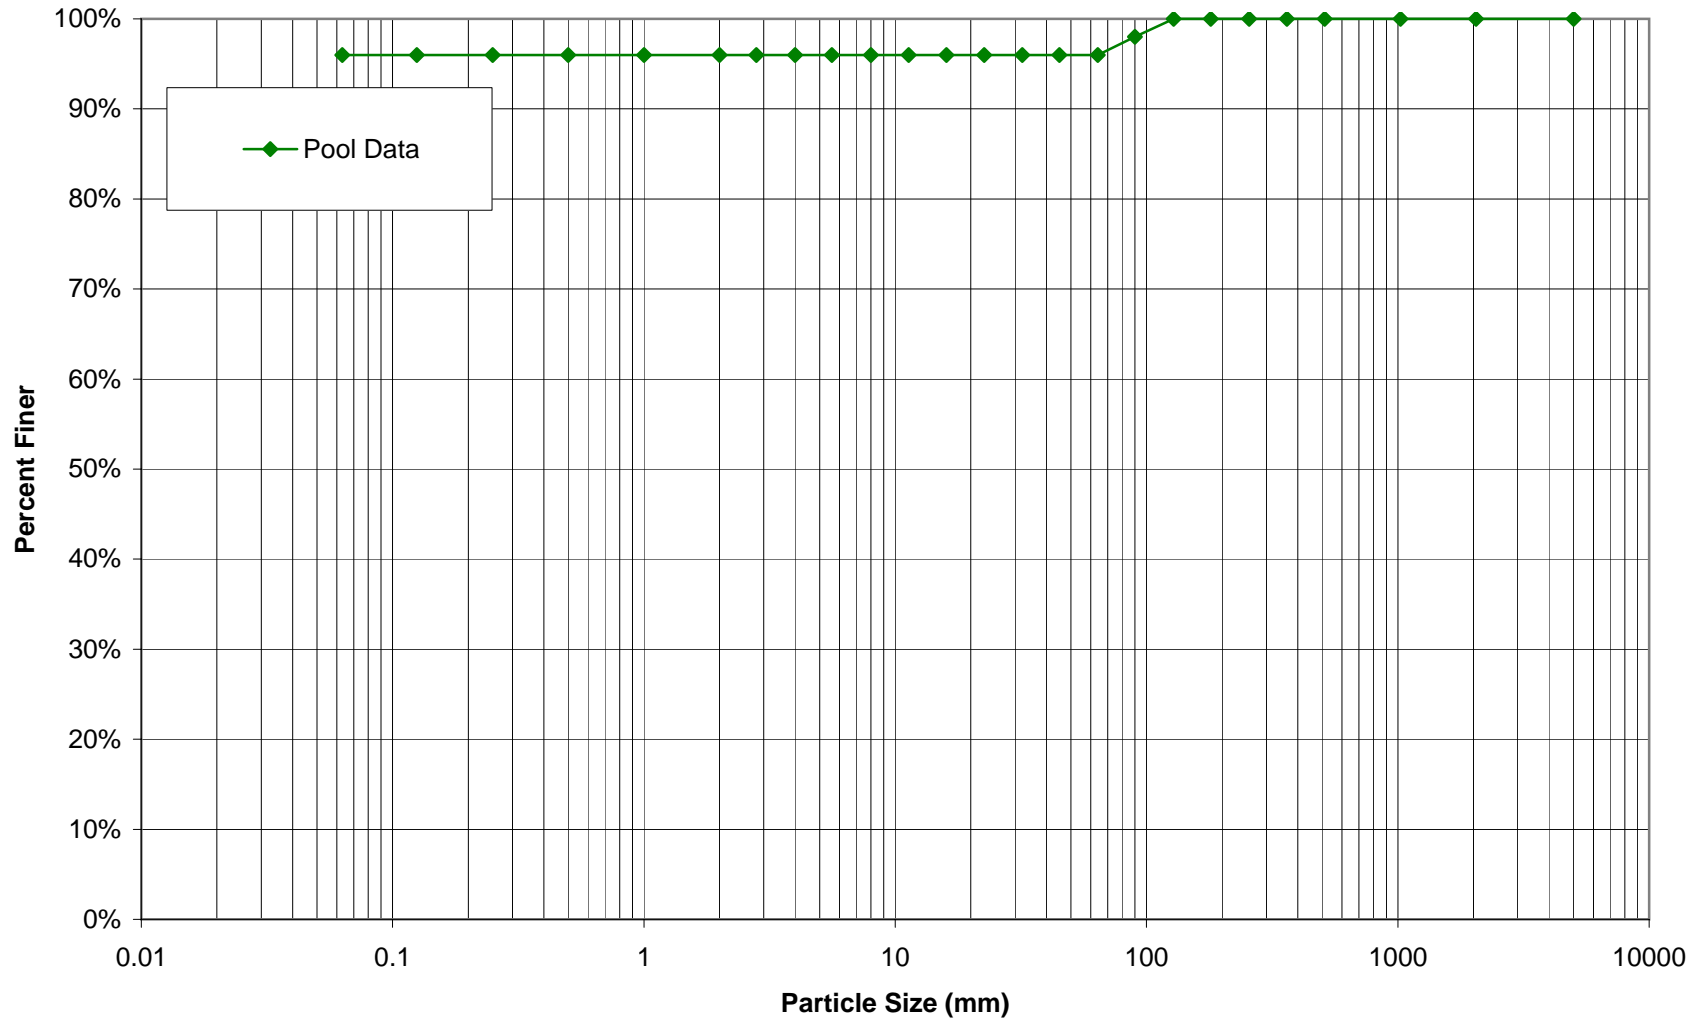


APPENDIX C

AS-BUILT PLAN SHEETS

PROJECT REFERENCE NO. 108528	SHEET NO. T1
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
Baker	

BEAVERDAM CREEK STREAM RESTORATION AS-BUILT PLANS

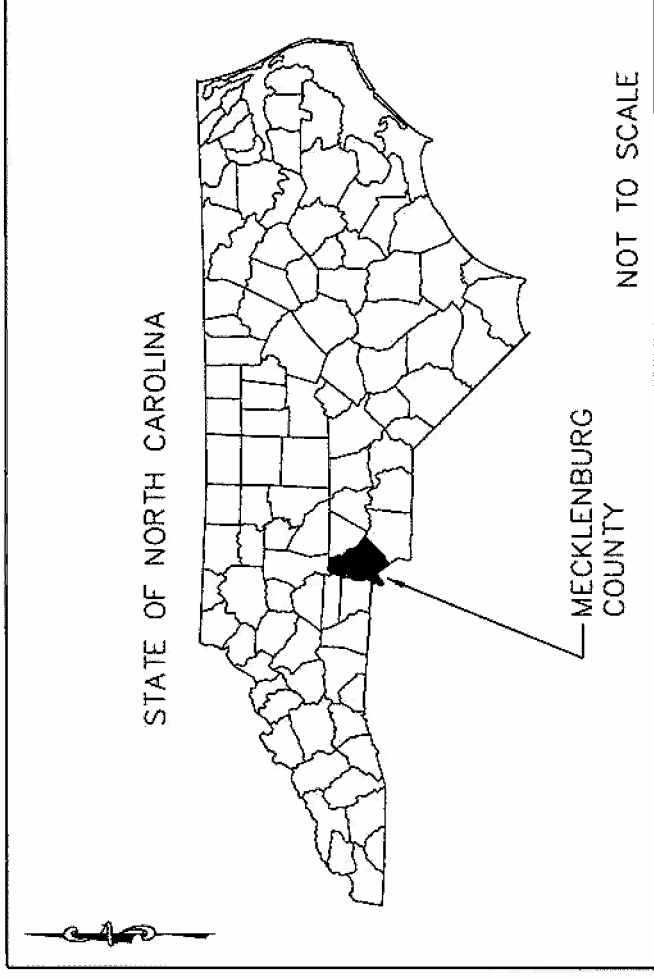


INDEX OF SHEETS

T1
T2
R1-R4
P1-P23


CENTER OF PROJECT:	
LAT: 35-10-21.7	
LONG: 80-59-08.5	
UT1	
PRE-PROJECT STREAM LENGTH	= 8,148 LF
AS-BUILT STREAM RESTORATION LENGTH	= 8,617 LF
UT2	
PRE-PROJECT STREAM LENGTH	= 4,016 LF
AS-BUILT STREAM RESTORATION LENGTH	= 4,377 LF
PRESERVATION LENGTH	= 962 LF
BEAVERDAM CREEK PRESERVATION LENGTH	= 1,641 LF

BEAVERDAM CREEK AS-BUILT WITH BMPS
TITLE SHEET

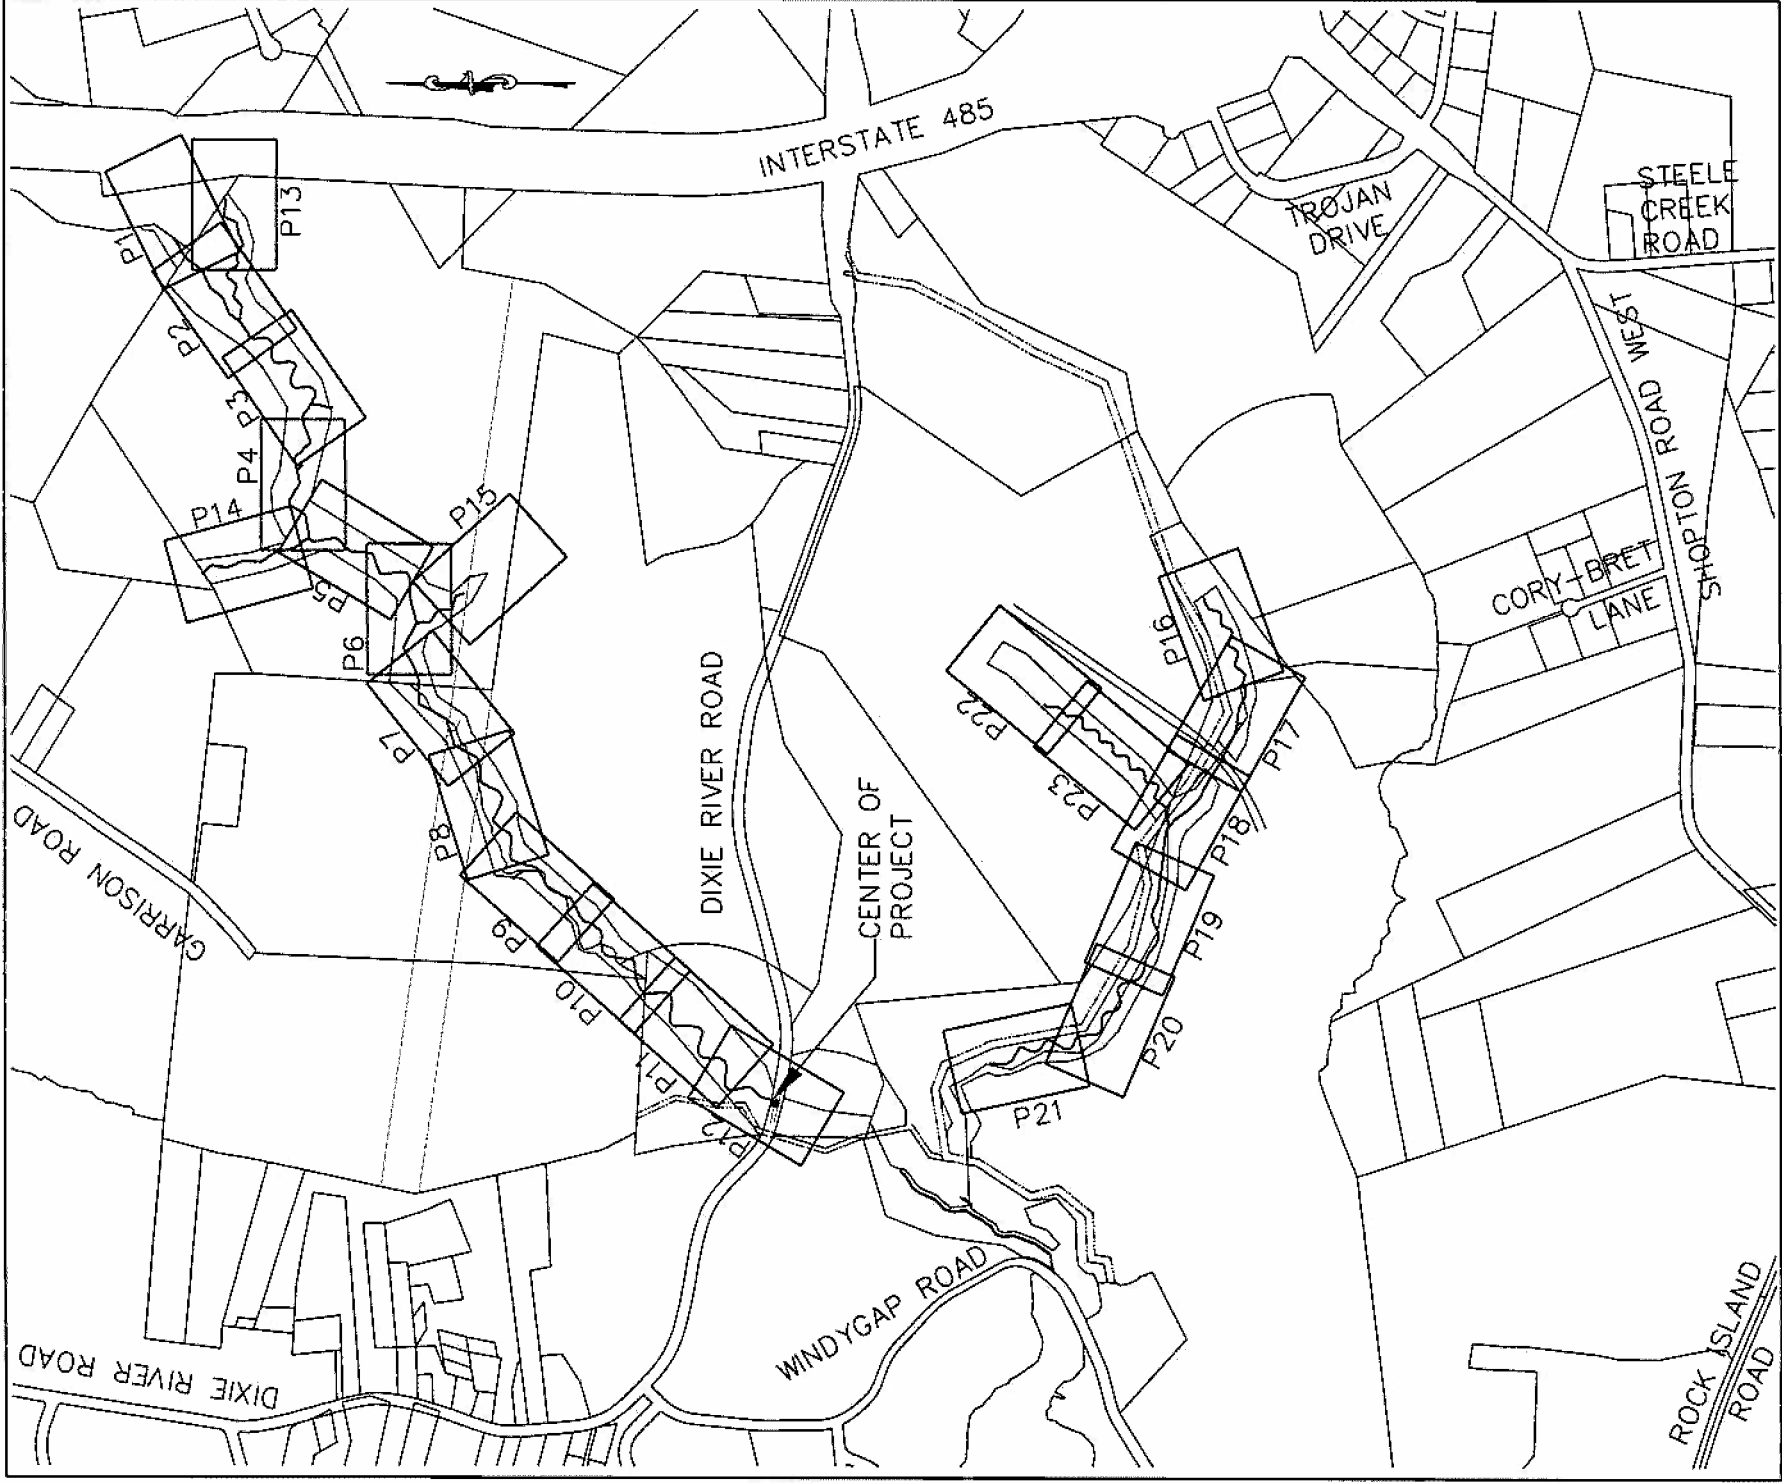

VICINITY MAP

PROJECT REFERENCE NO. 108528	SHEET NO. 12
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	




CONVENTIONAL SYMBOLS

- 10+00 AS-BUILT THALWEG
- 10+00 DESIGN THALWEG
- 600--- EXISTING MAJOR CONTOUR
- EXISTING MINOR CONTOUR
- E CONSERVATION EASEMENT
- PROPERTY LINE
- CONSTRUCTED RIFFLE
- EXISTING TREE
- LOG SILL
- LOG VANE
- FLOW DIRECTION
- ROCK CROSS VANE
- BOULDER CLUSTER
- PHOTO ID POINT
- SURVEY CONTROL POINT
- ROOT WAD
- ROCK VANE

BEAVERDAM CREEK
AS-BUILT WITH BMPS

LEGEND

PROJECT REFERENCE NO. 108528
 SHEET NO. R1
 PROJECT ENGINEER
 KLT
 APPROVED BY
 WAH
 DATE
 10/11/2007

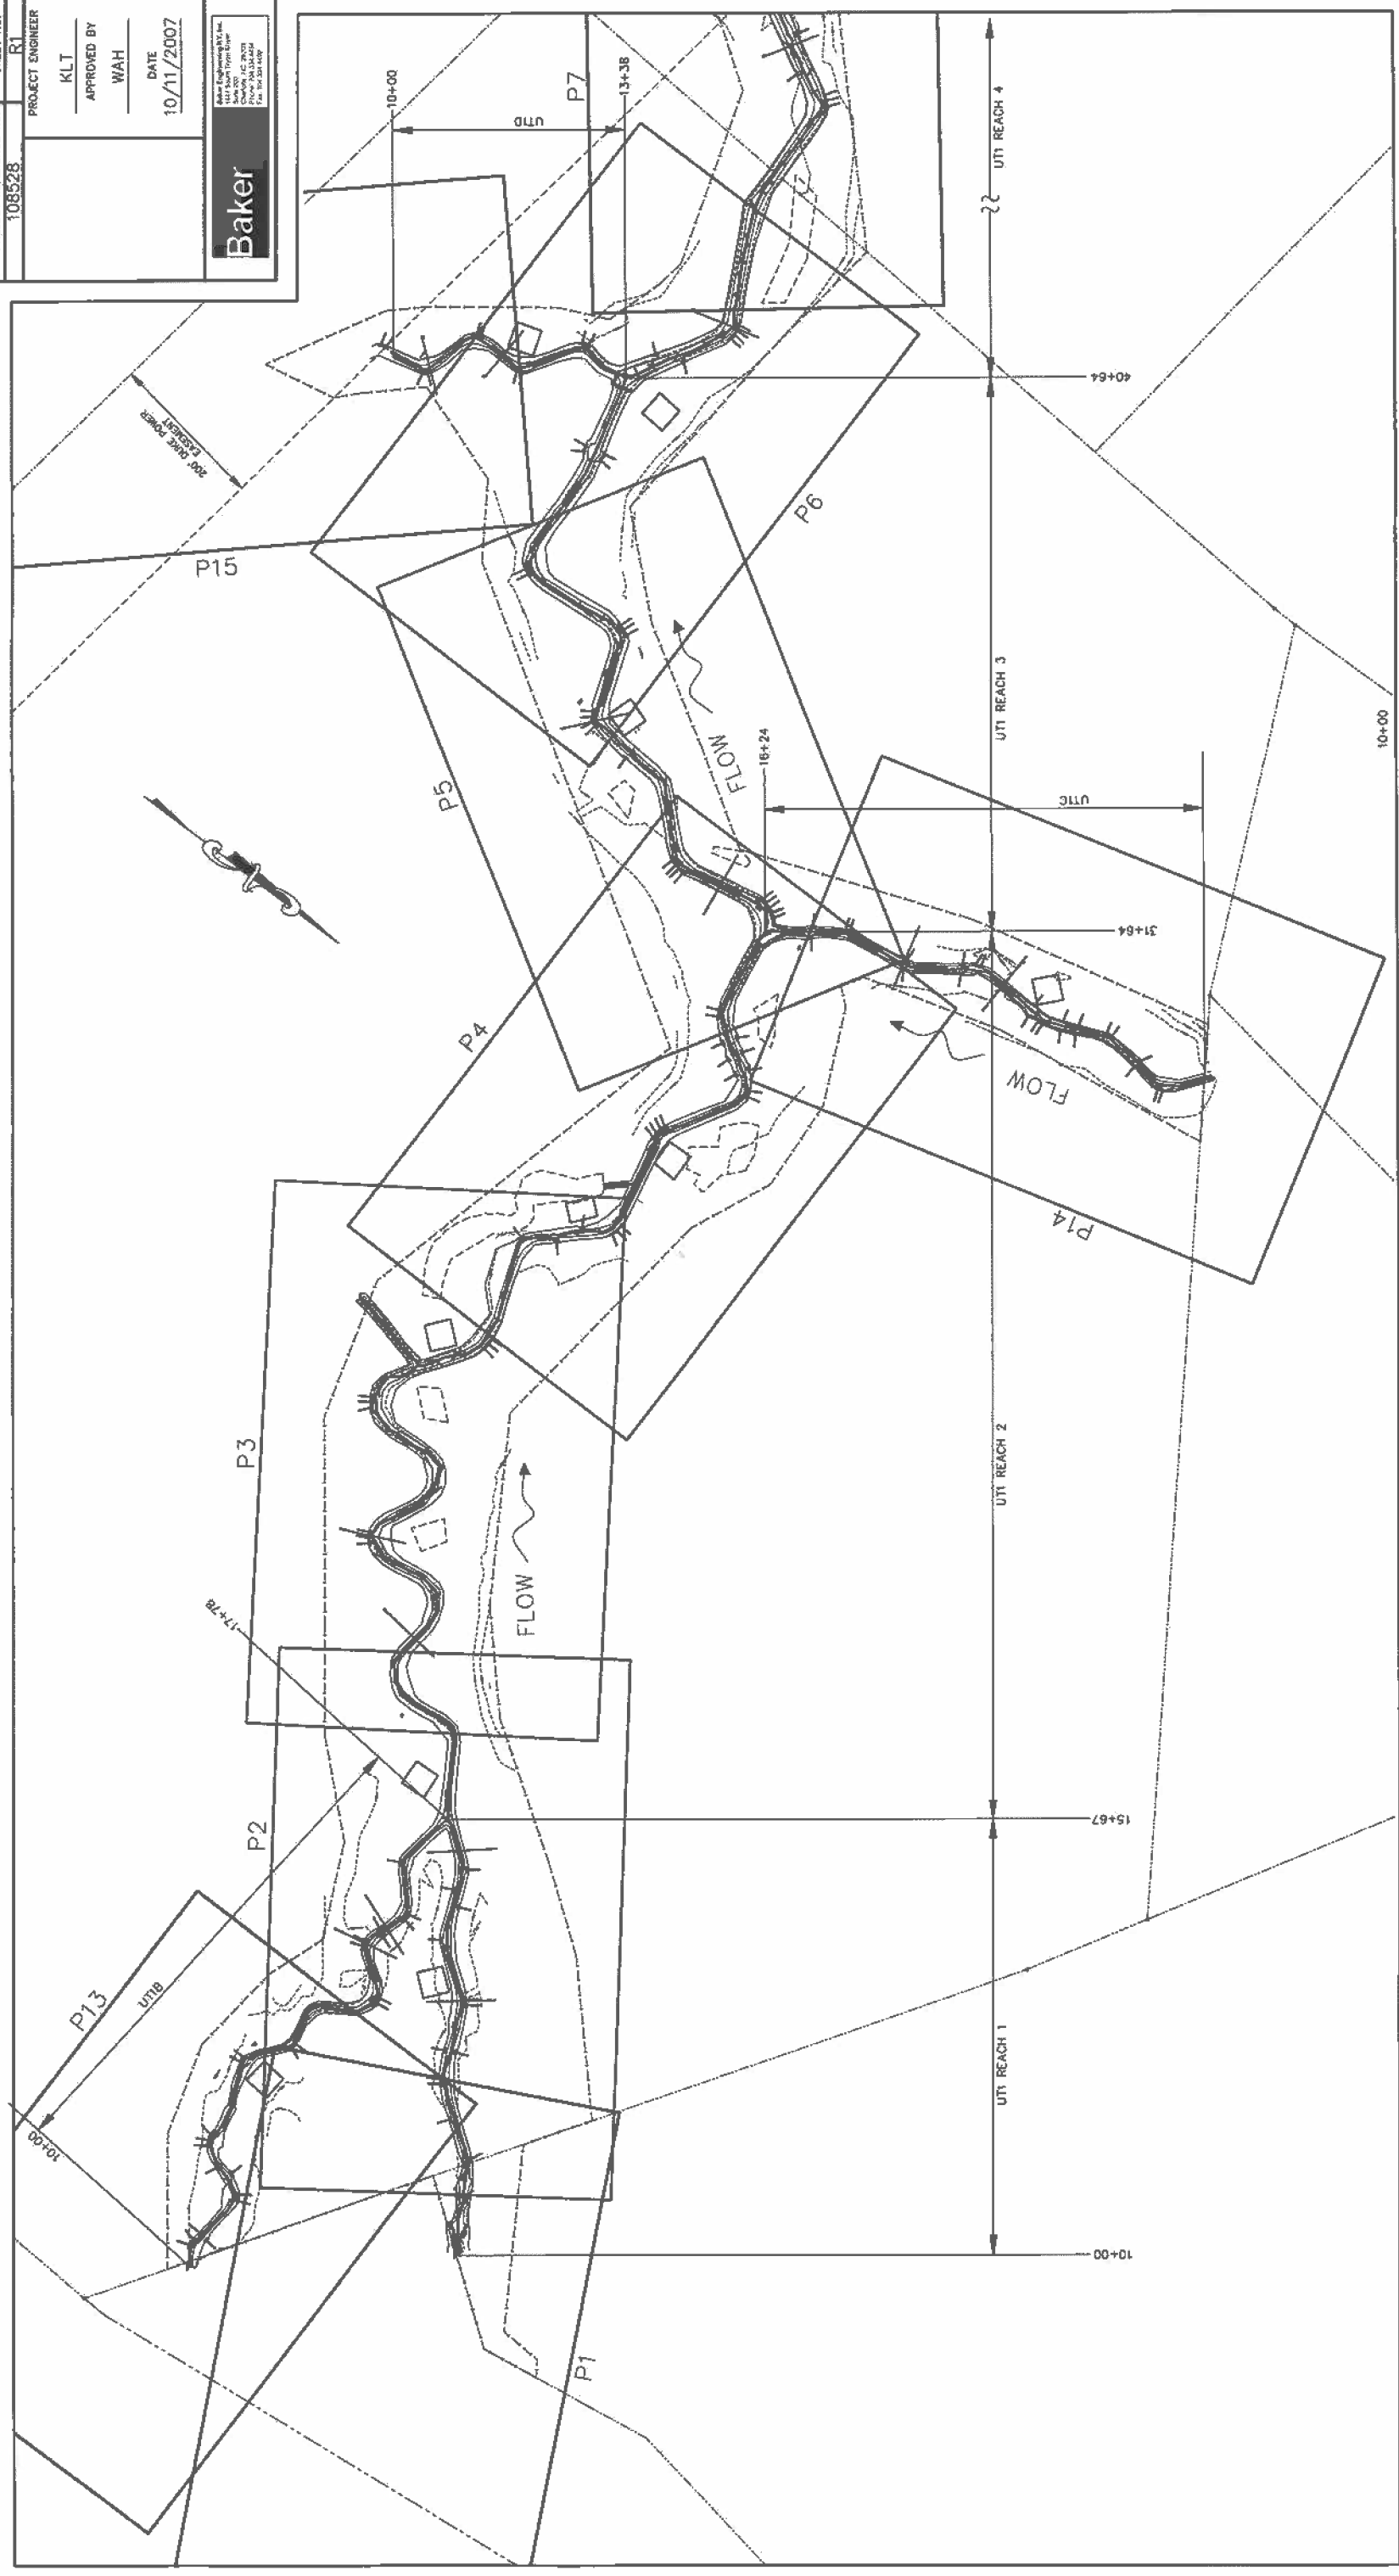


BEAVERDAM CREEK - UT1

BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 REFERENCE SHEET

PROJECT REFERENCE NO. 108528
 SHEET NO. R2
 PROJECT ENGINEER
 KLT
 APPROVED BY
 WAH
 DATE
 10/11/2007



Baker
 Baker Engineering Inc.
 1111 North Third Street
 Suite 100
 Fort Lauderdale, FL 33304
 Phone: 754.333.3333
 Fax: 754.333.3333

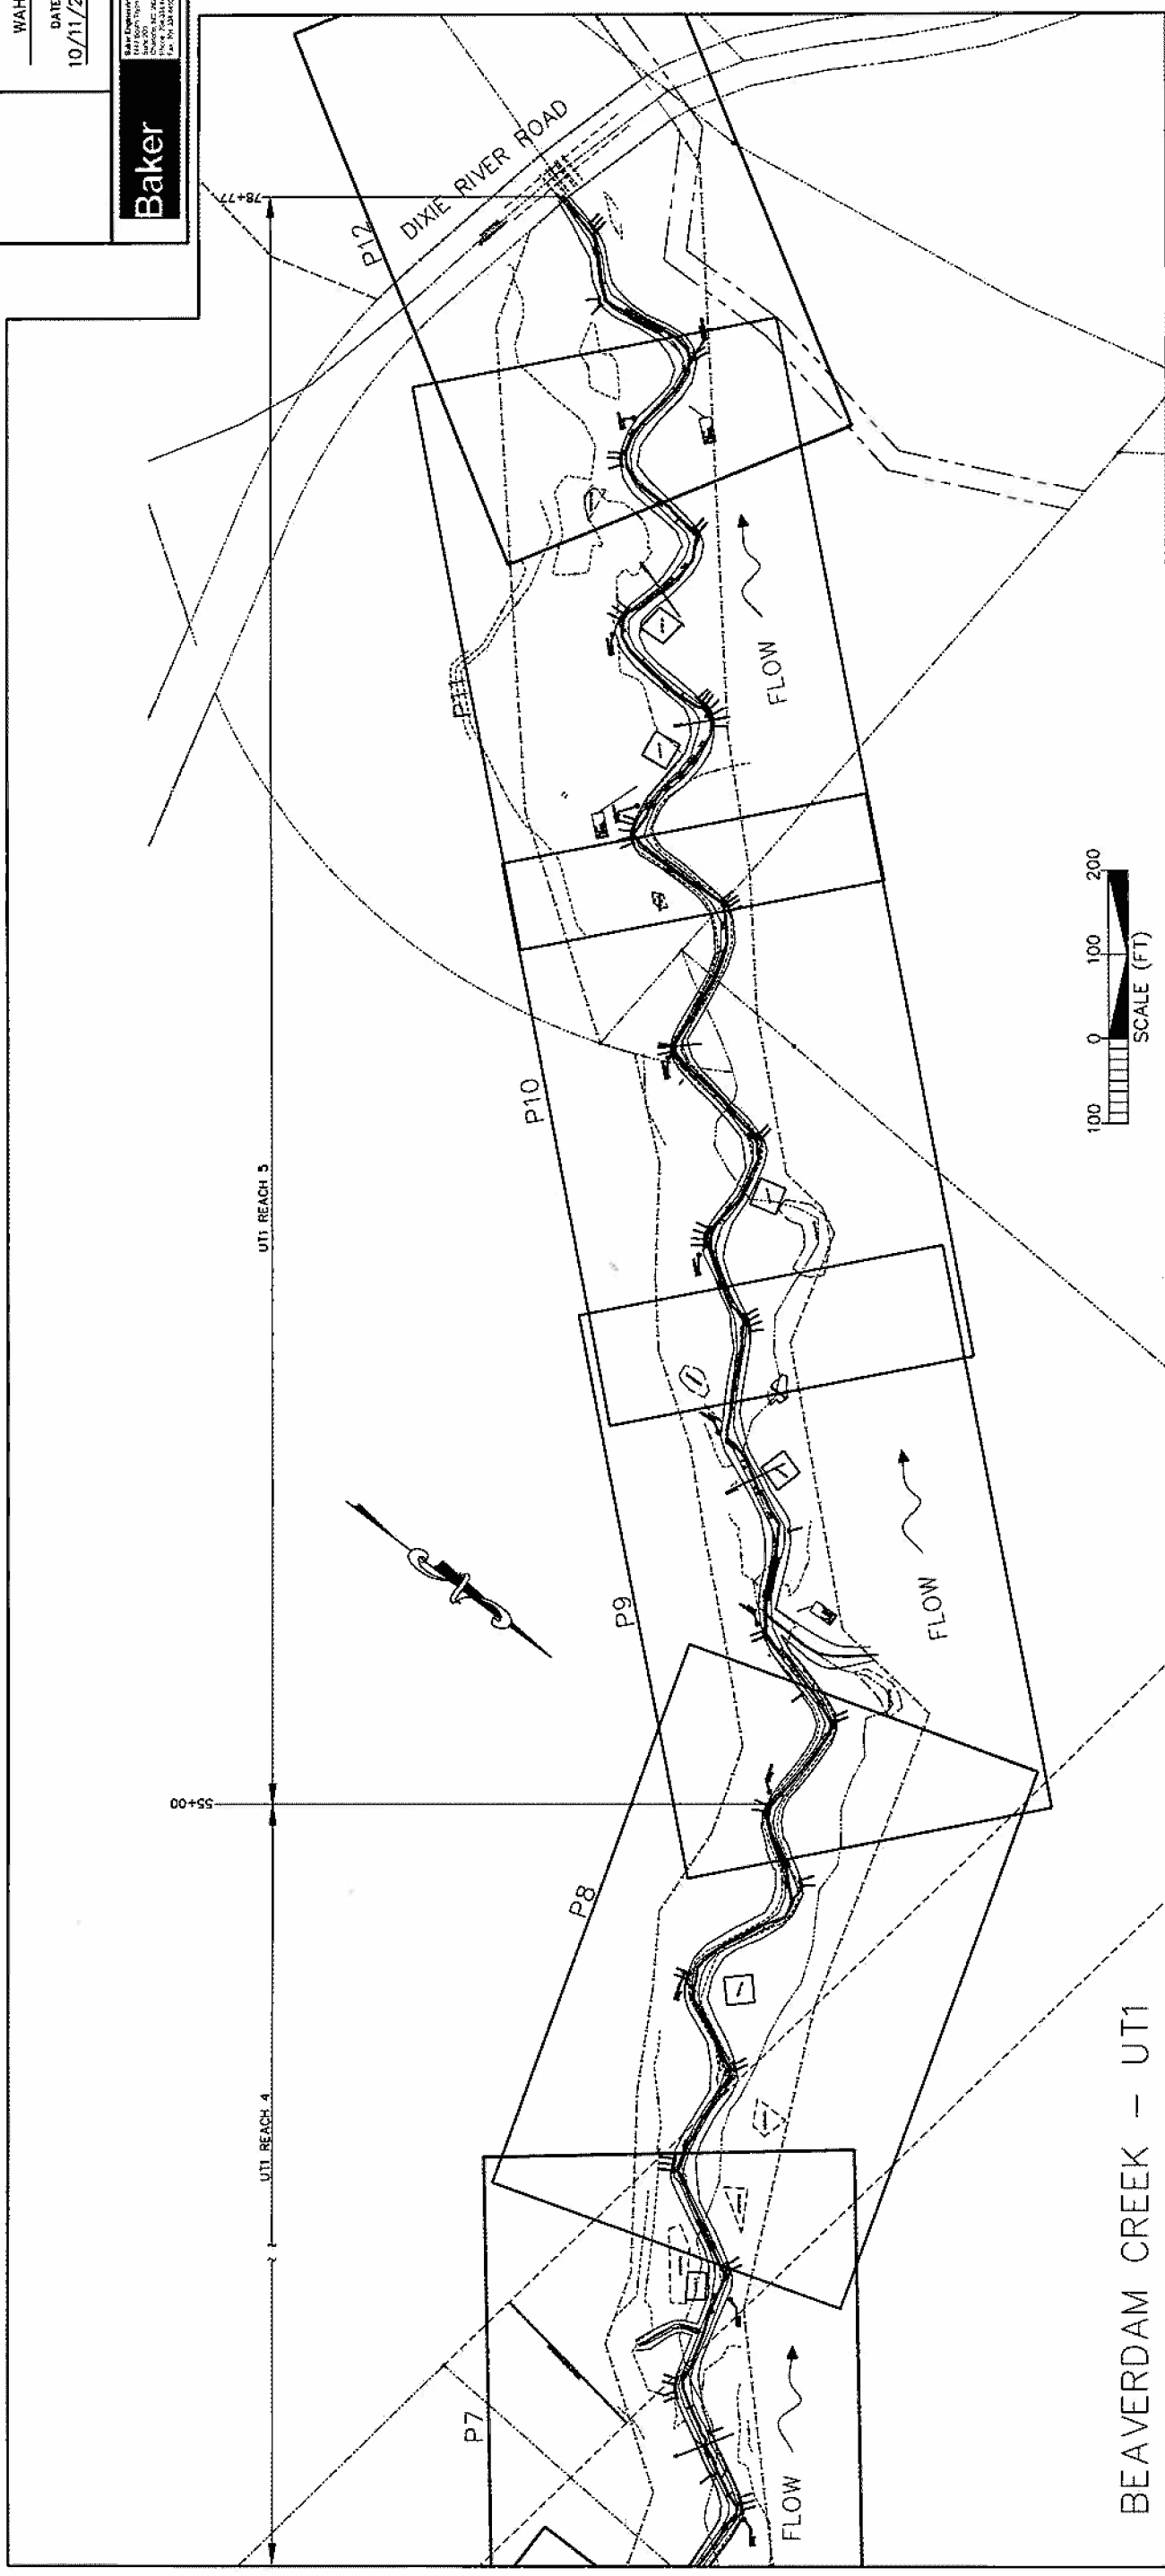

BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 REFERENCE SHEET


PROJECT REFERENCE NO. 108528
 SHEET NO. R3
 PROJECT ENGINEER
 APPROVED BY
 DATE 10/11/2007


Baker
14100 E. South Street
 Suite 200
 Aurora, CO 80014
 Phone: 303.671.1000
 Fax: 303.671.1001
 www.bakerbender.com

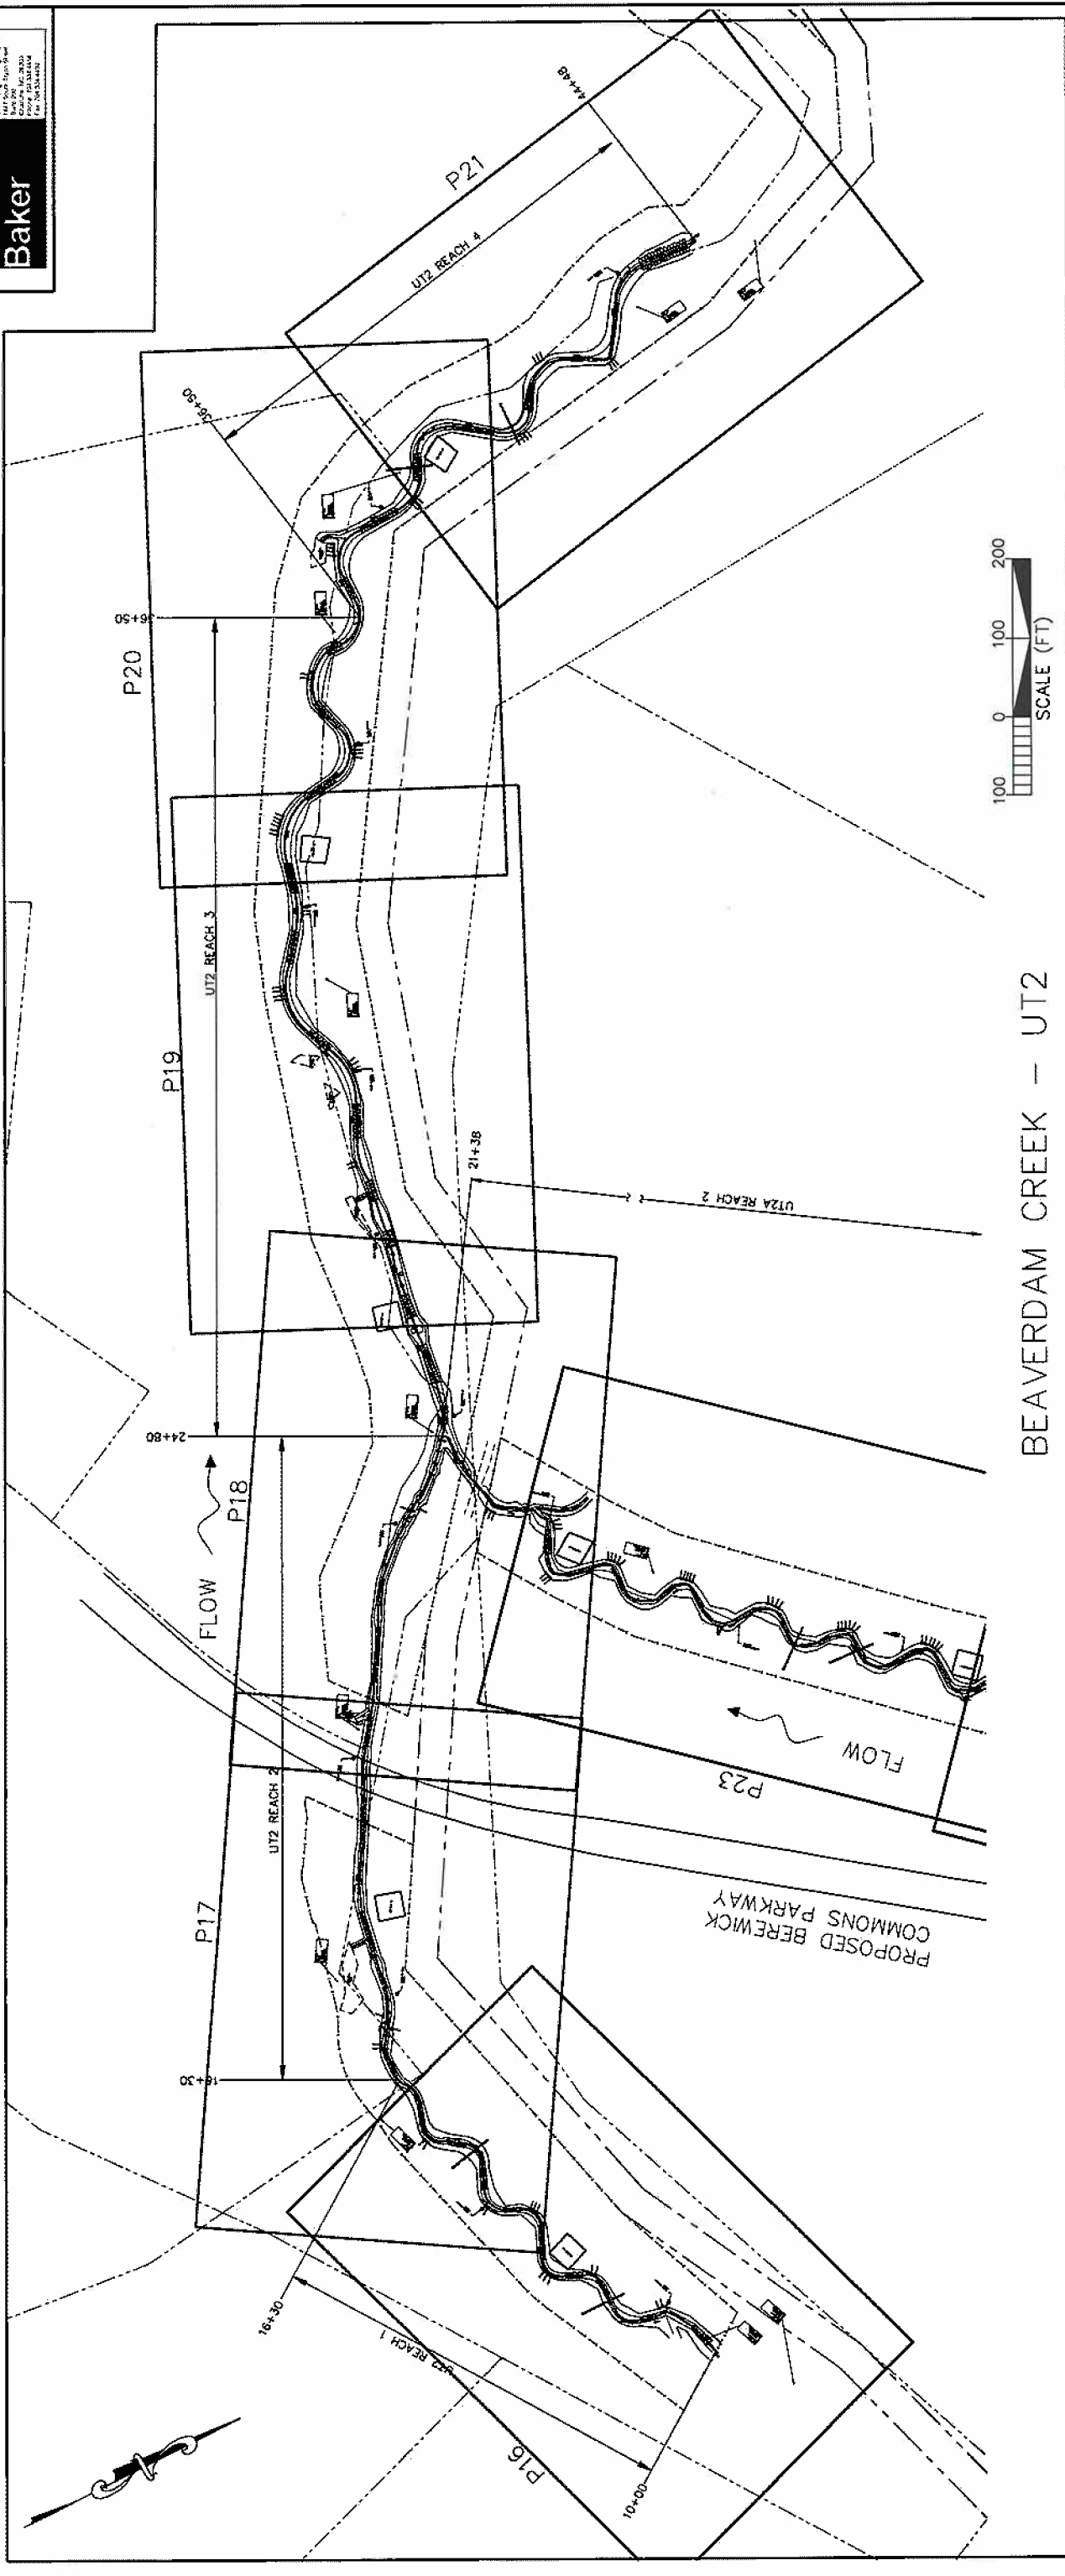

BEAVERDAM CREEK - UT2

BEAVERDAM CREEK
 AS-BUILT WITH BMPs
 REFERENCE SHEET

PROJECT REFERENCE NO. 108528	SHEET NO. R4
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	

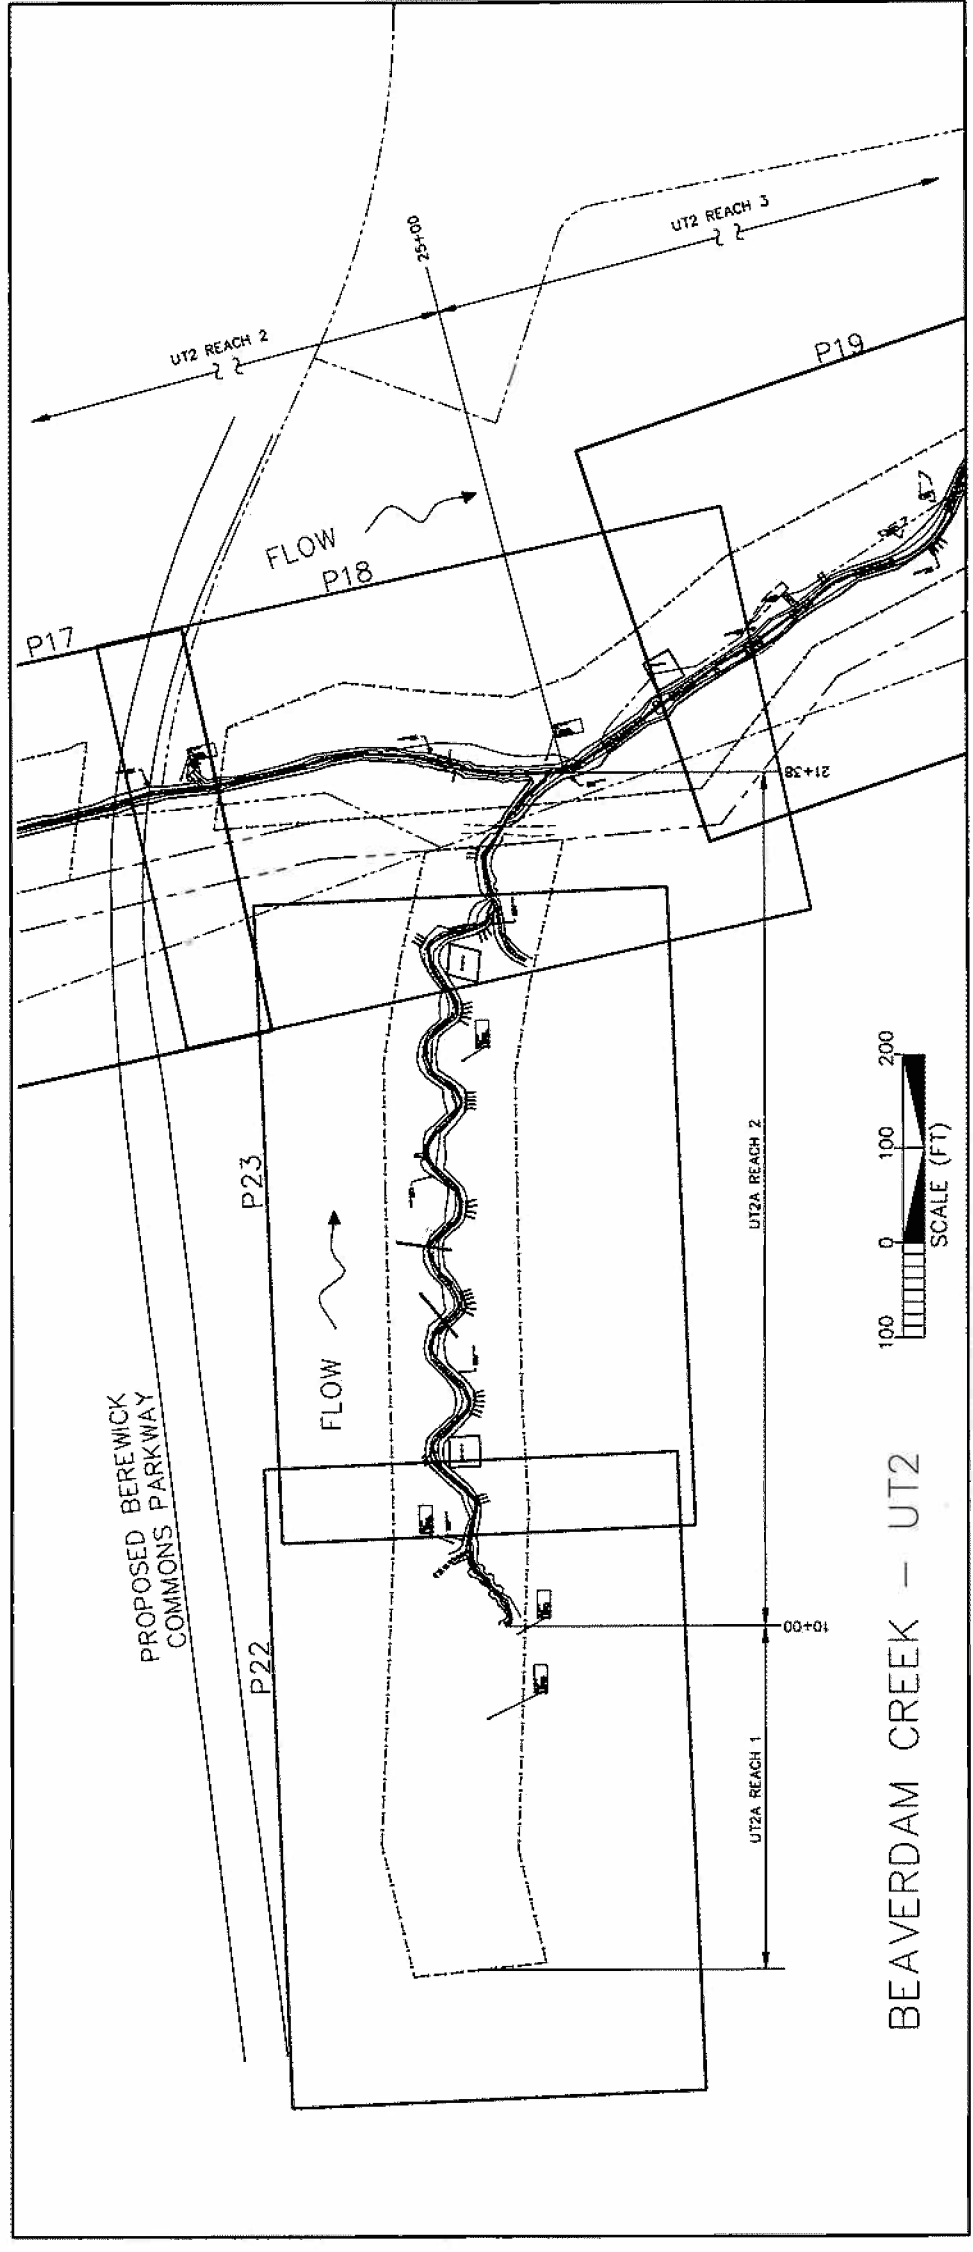


BEAVERDAM CREEK - UT2

BEAVERDAM CREEK AS-BUILT WITH BMPs
REFERENCE SHEET

PROJECT REFERENCE NO. 108528
 SHEET NO. P1
 PROJECT ENGINEER
 K.L.T.
 APPROVED BY
 WAH
 DATE
 10/11/2007



BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 UT1 SITE PLAN

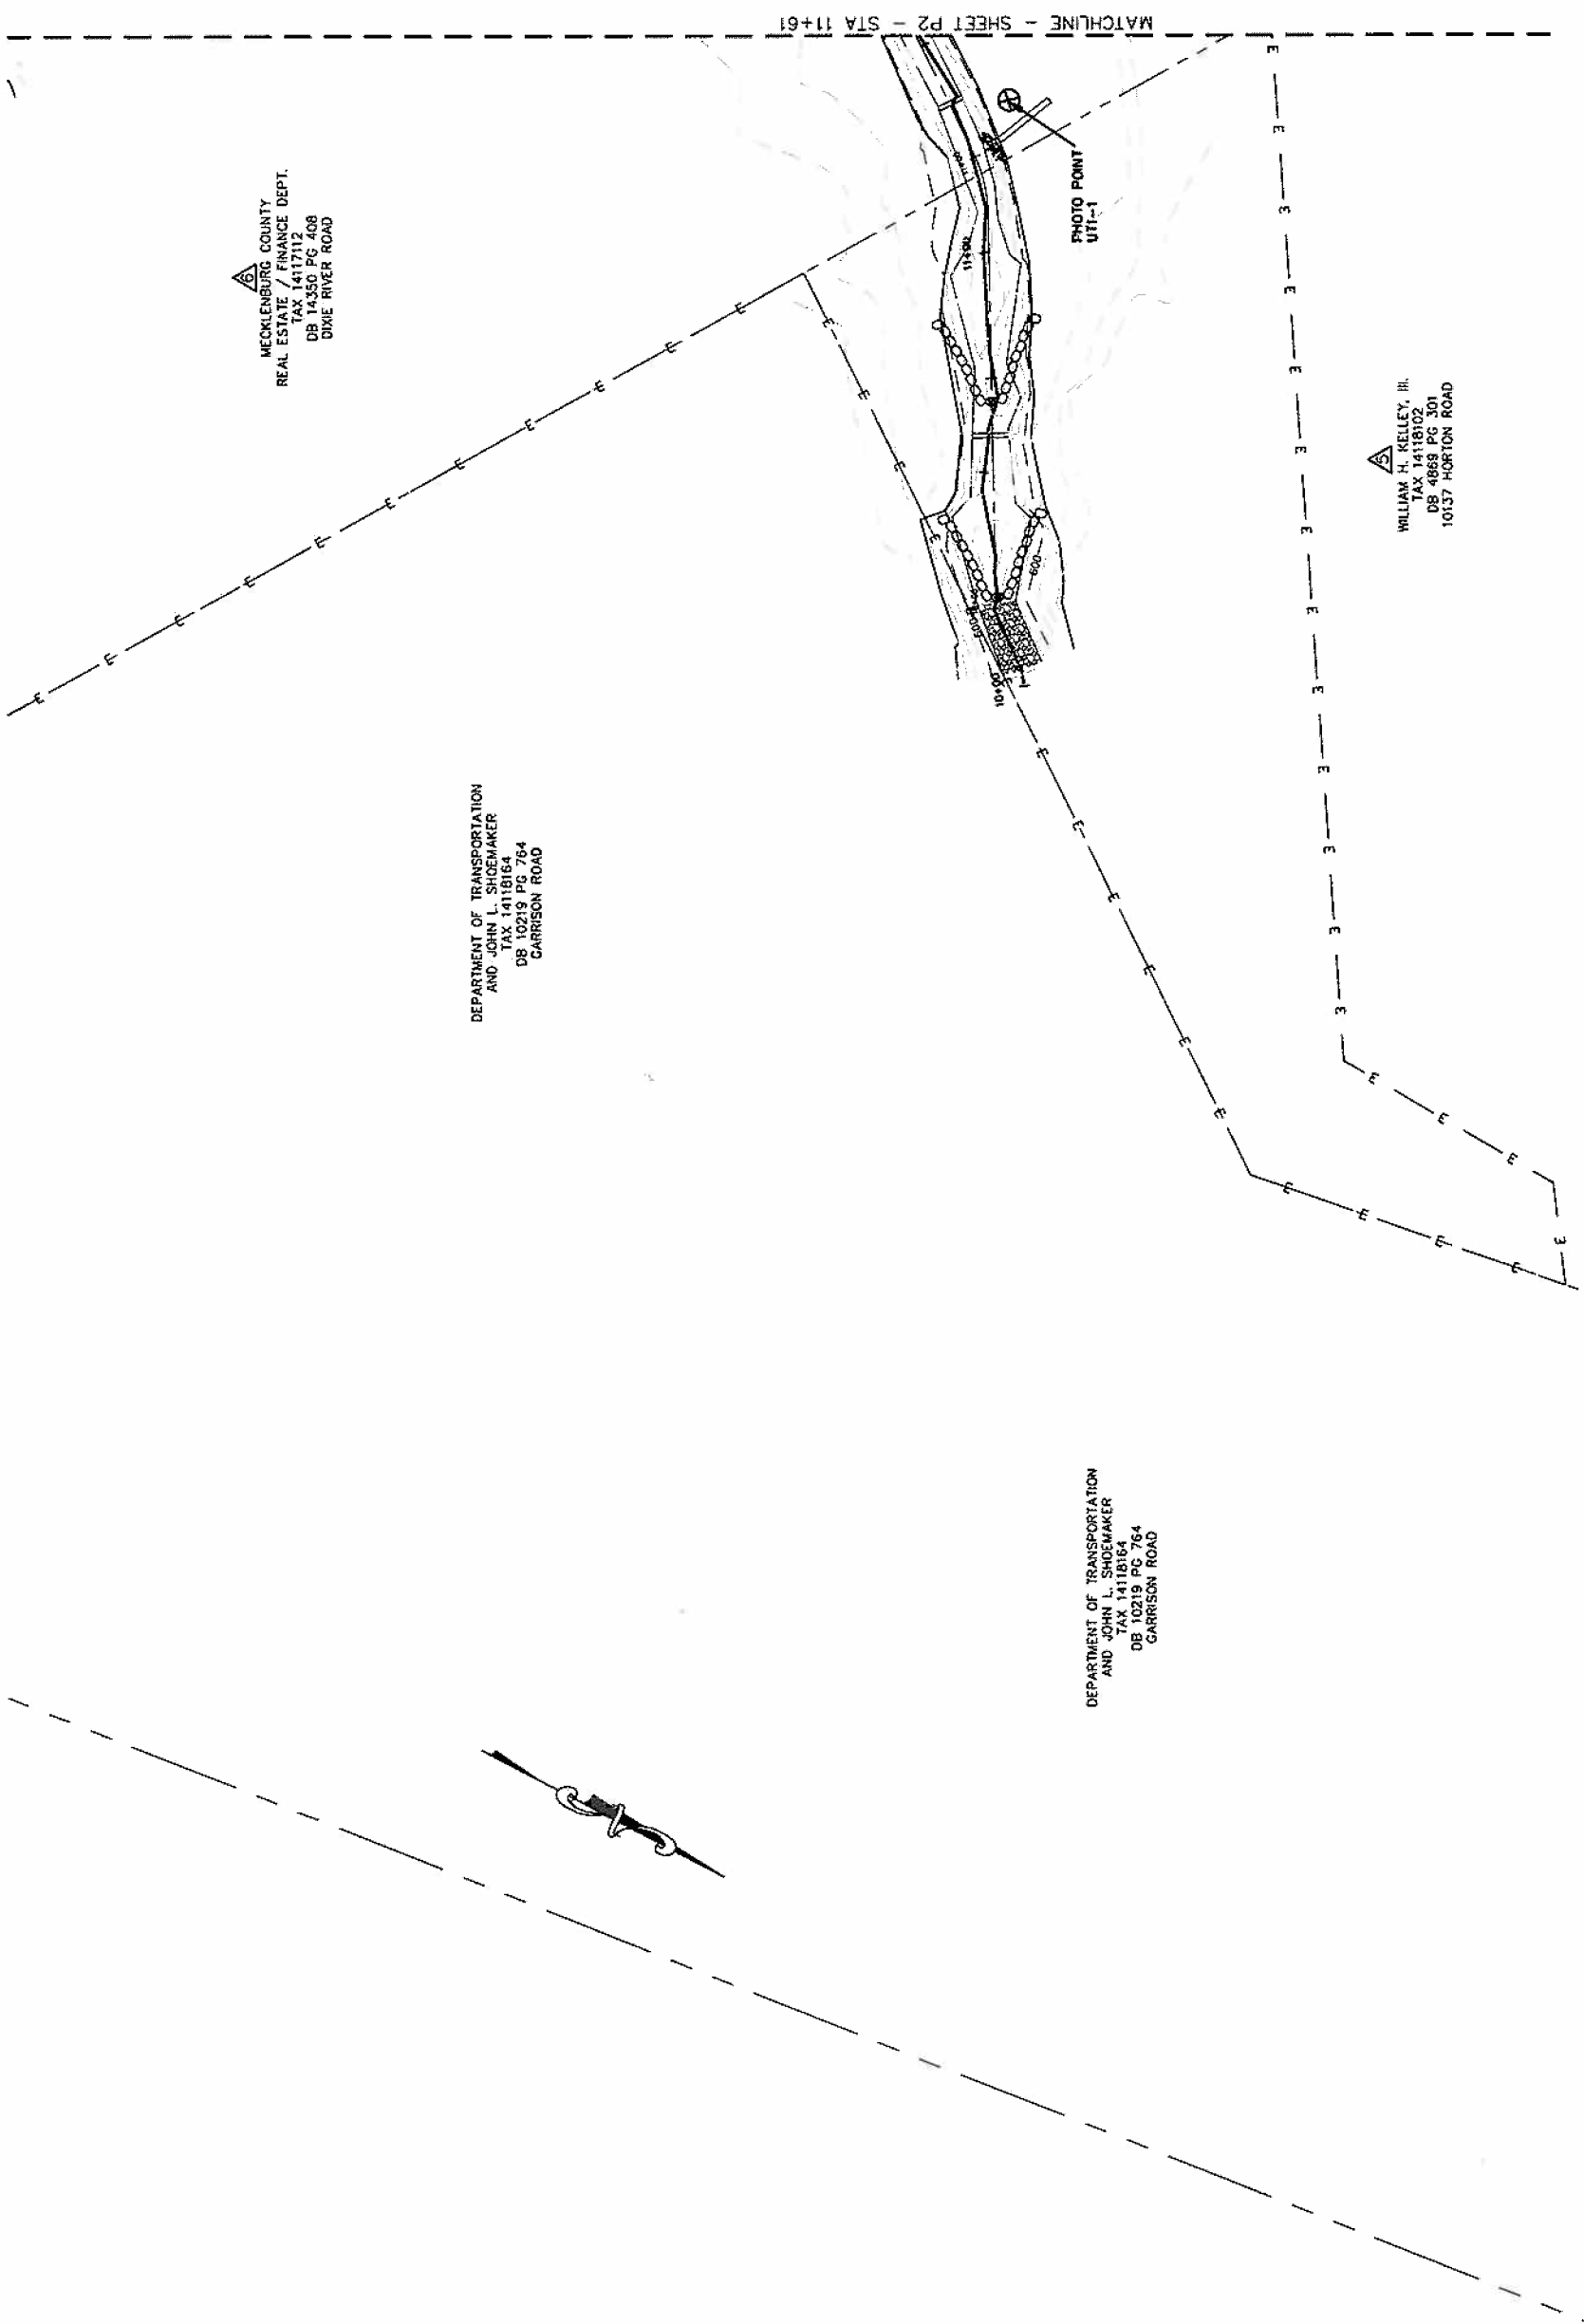


MECKLENBURG COUNTY
 REAL ESTATE / FINANCE DEPT.
 TAX 411712
 DB 4859 PG 301
 DIXIE RIVER ROAD

DEPARTMENT OF TRANSPORTATION
 AND JOHN L. SHOEMAKER
 TAX 14118164
 DB 10219 PG 764
 GARRISON ROAD


WILLIAM H. KELLEY, III.
 TAX 14118102
 DB 4869 PG 301
 10137 HORTON ROAD

DEPARTMENT OF TRANSPORTATION
 AND JOHN L. SHOEMAKER
 TAX 14118164
 DB 10219 PG 764
 GARRISON ROAD




PROJECT REFERENCE NO. 108528
 SHEET NO. P2
 PROJECT ENGINEER
 APPROVED BY KLT
 WAH
 DATE 10/11/2007

Baker
 Baker Engineering PC
 100 South Boulevard
 Cary, NC 27513
 Tel: 919.241.1000
 Fax: 919.241.1001
 www.bakereng.com



BEAVERDAM CREEK
 AS-BUILT WITH BMPs

UT1/UT1-B SITE PLAN

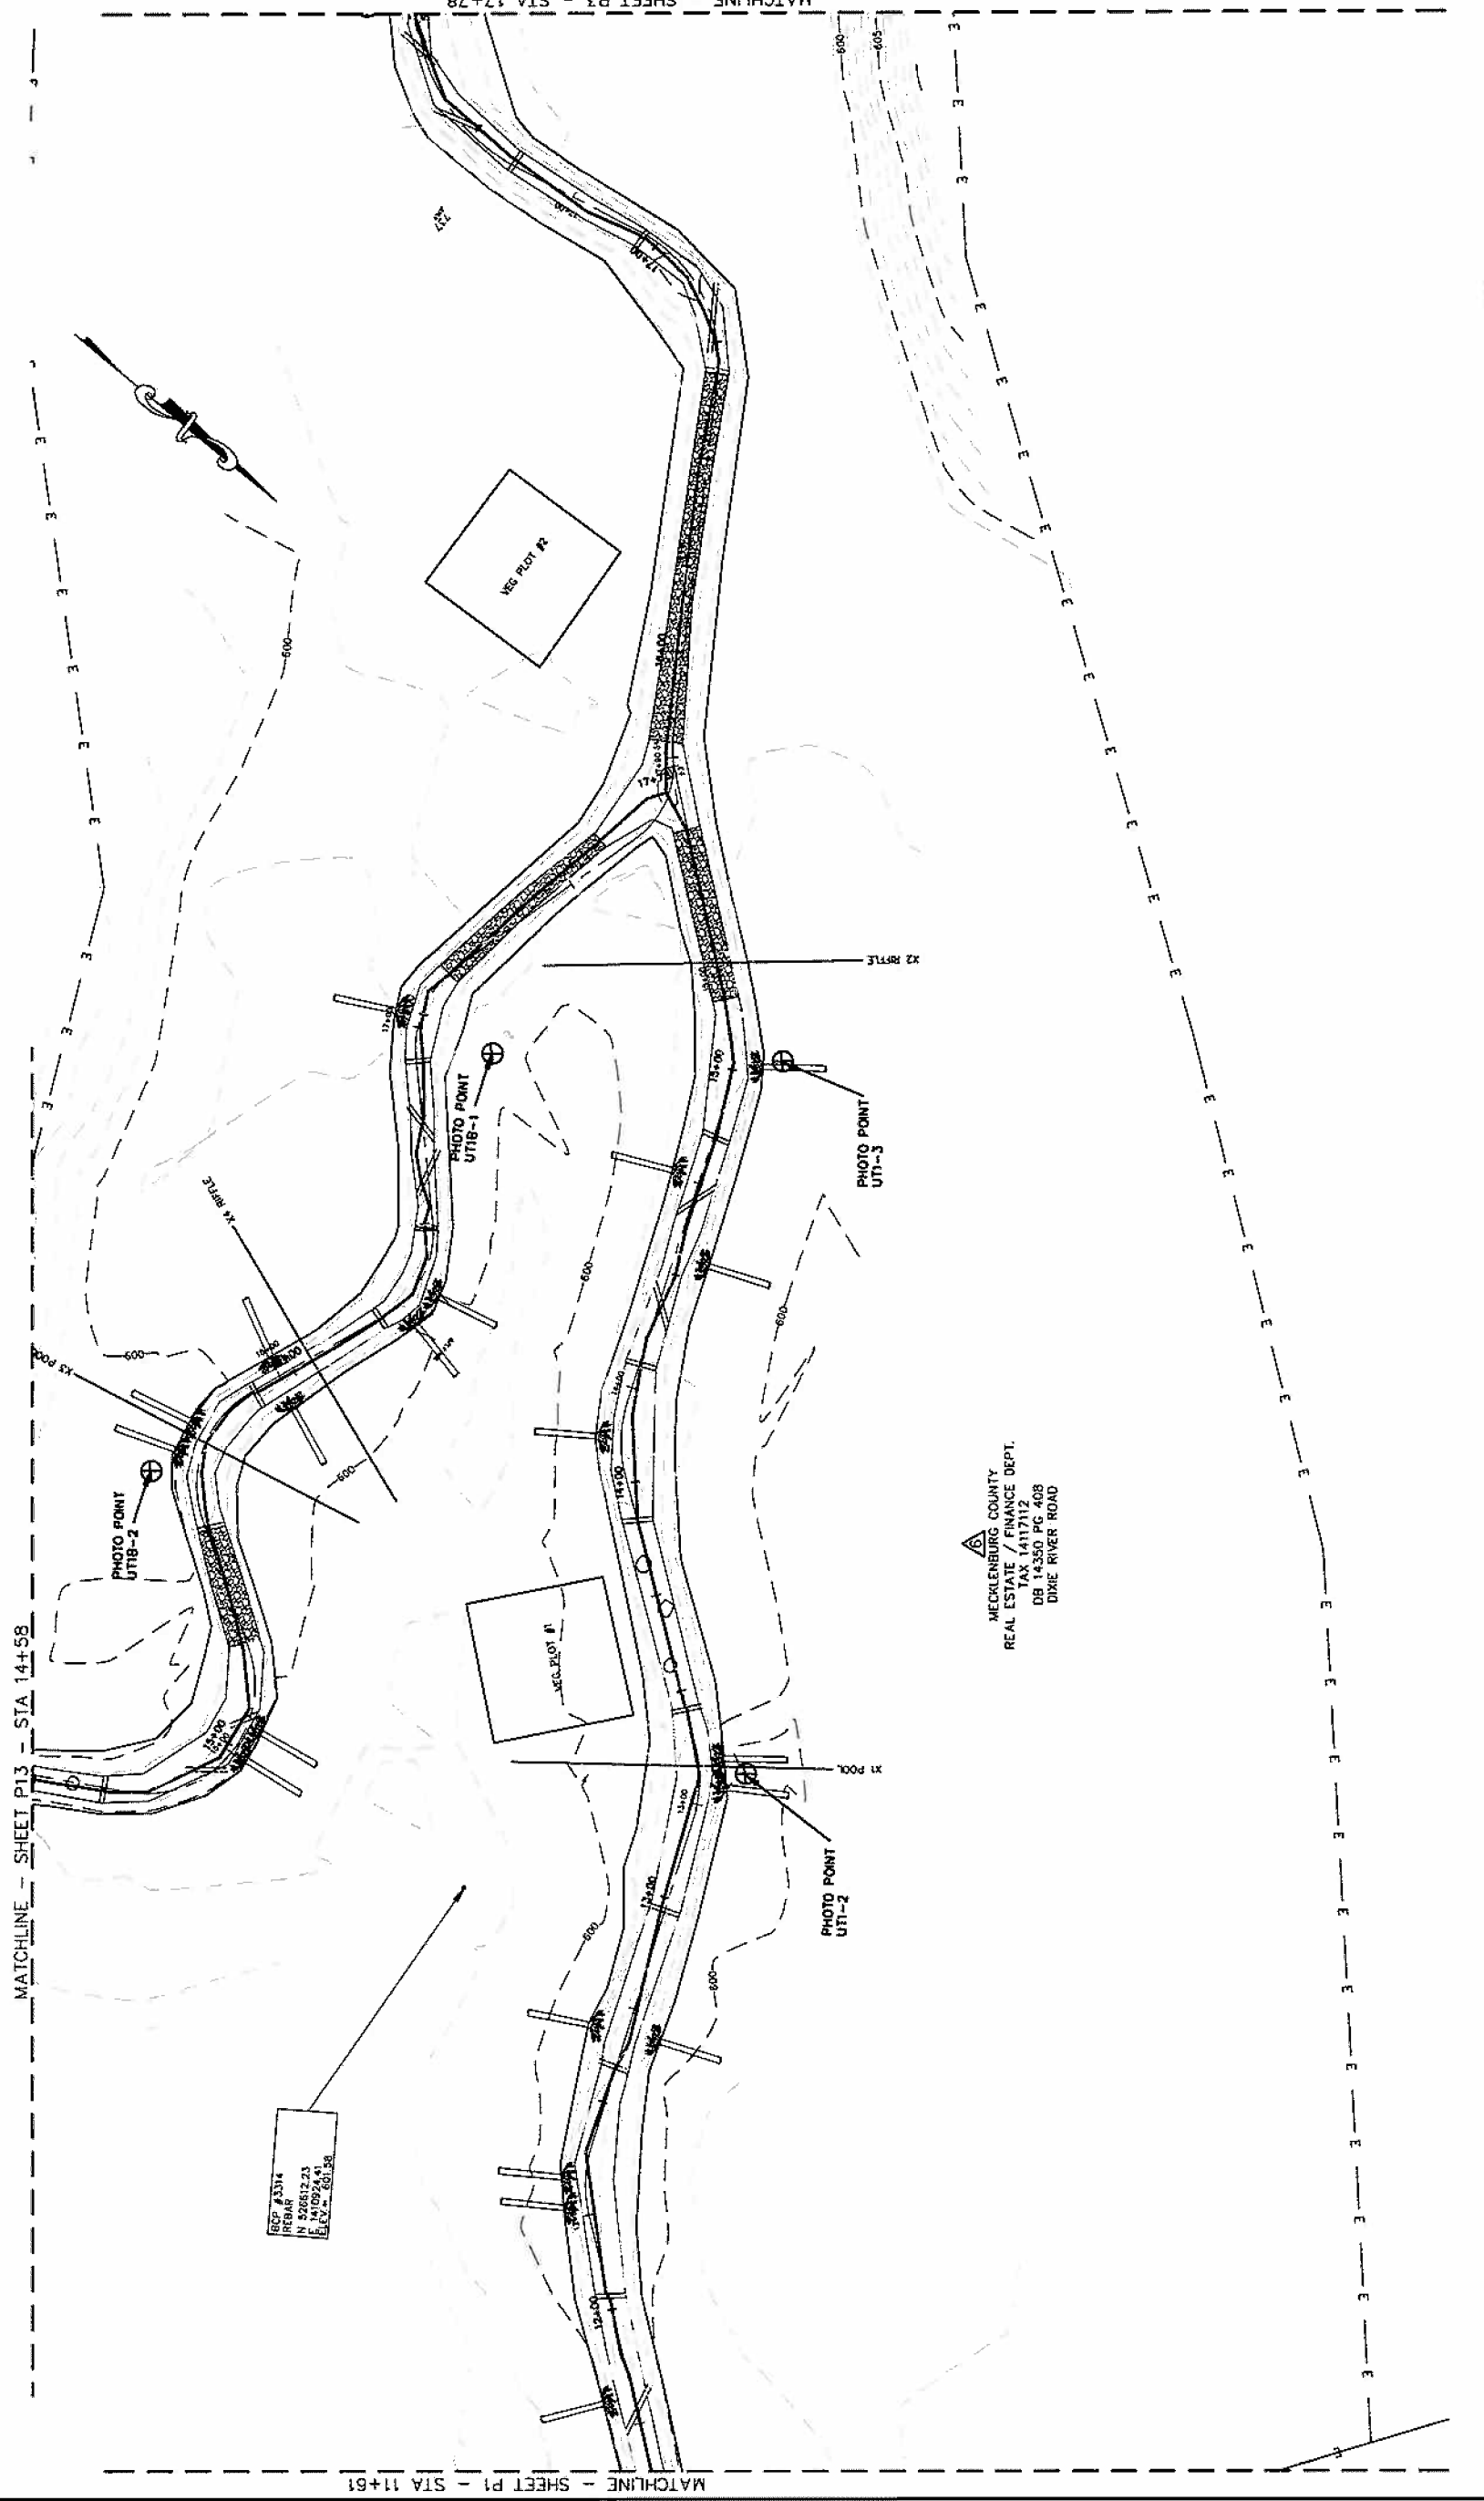


PROJECT REFERENCE NO. 108528
 SHEET NO. P.3
 PROJECT ENGINEER
 APPROVED BY K.L.T.
 WAH
 DATE 10/11/2007

Baker
 Baker Engineering Inc.
 1415 22nd Street
 Okemaw, MI 49829
 (231) 845-3333
 FAX (231) 845-3334




BEAVERDAM CREEK
 AS-BUILT WITH BMPS

UT1 SITE PLAN

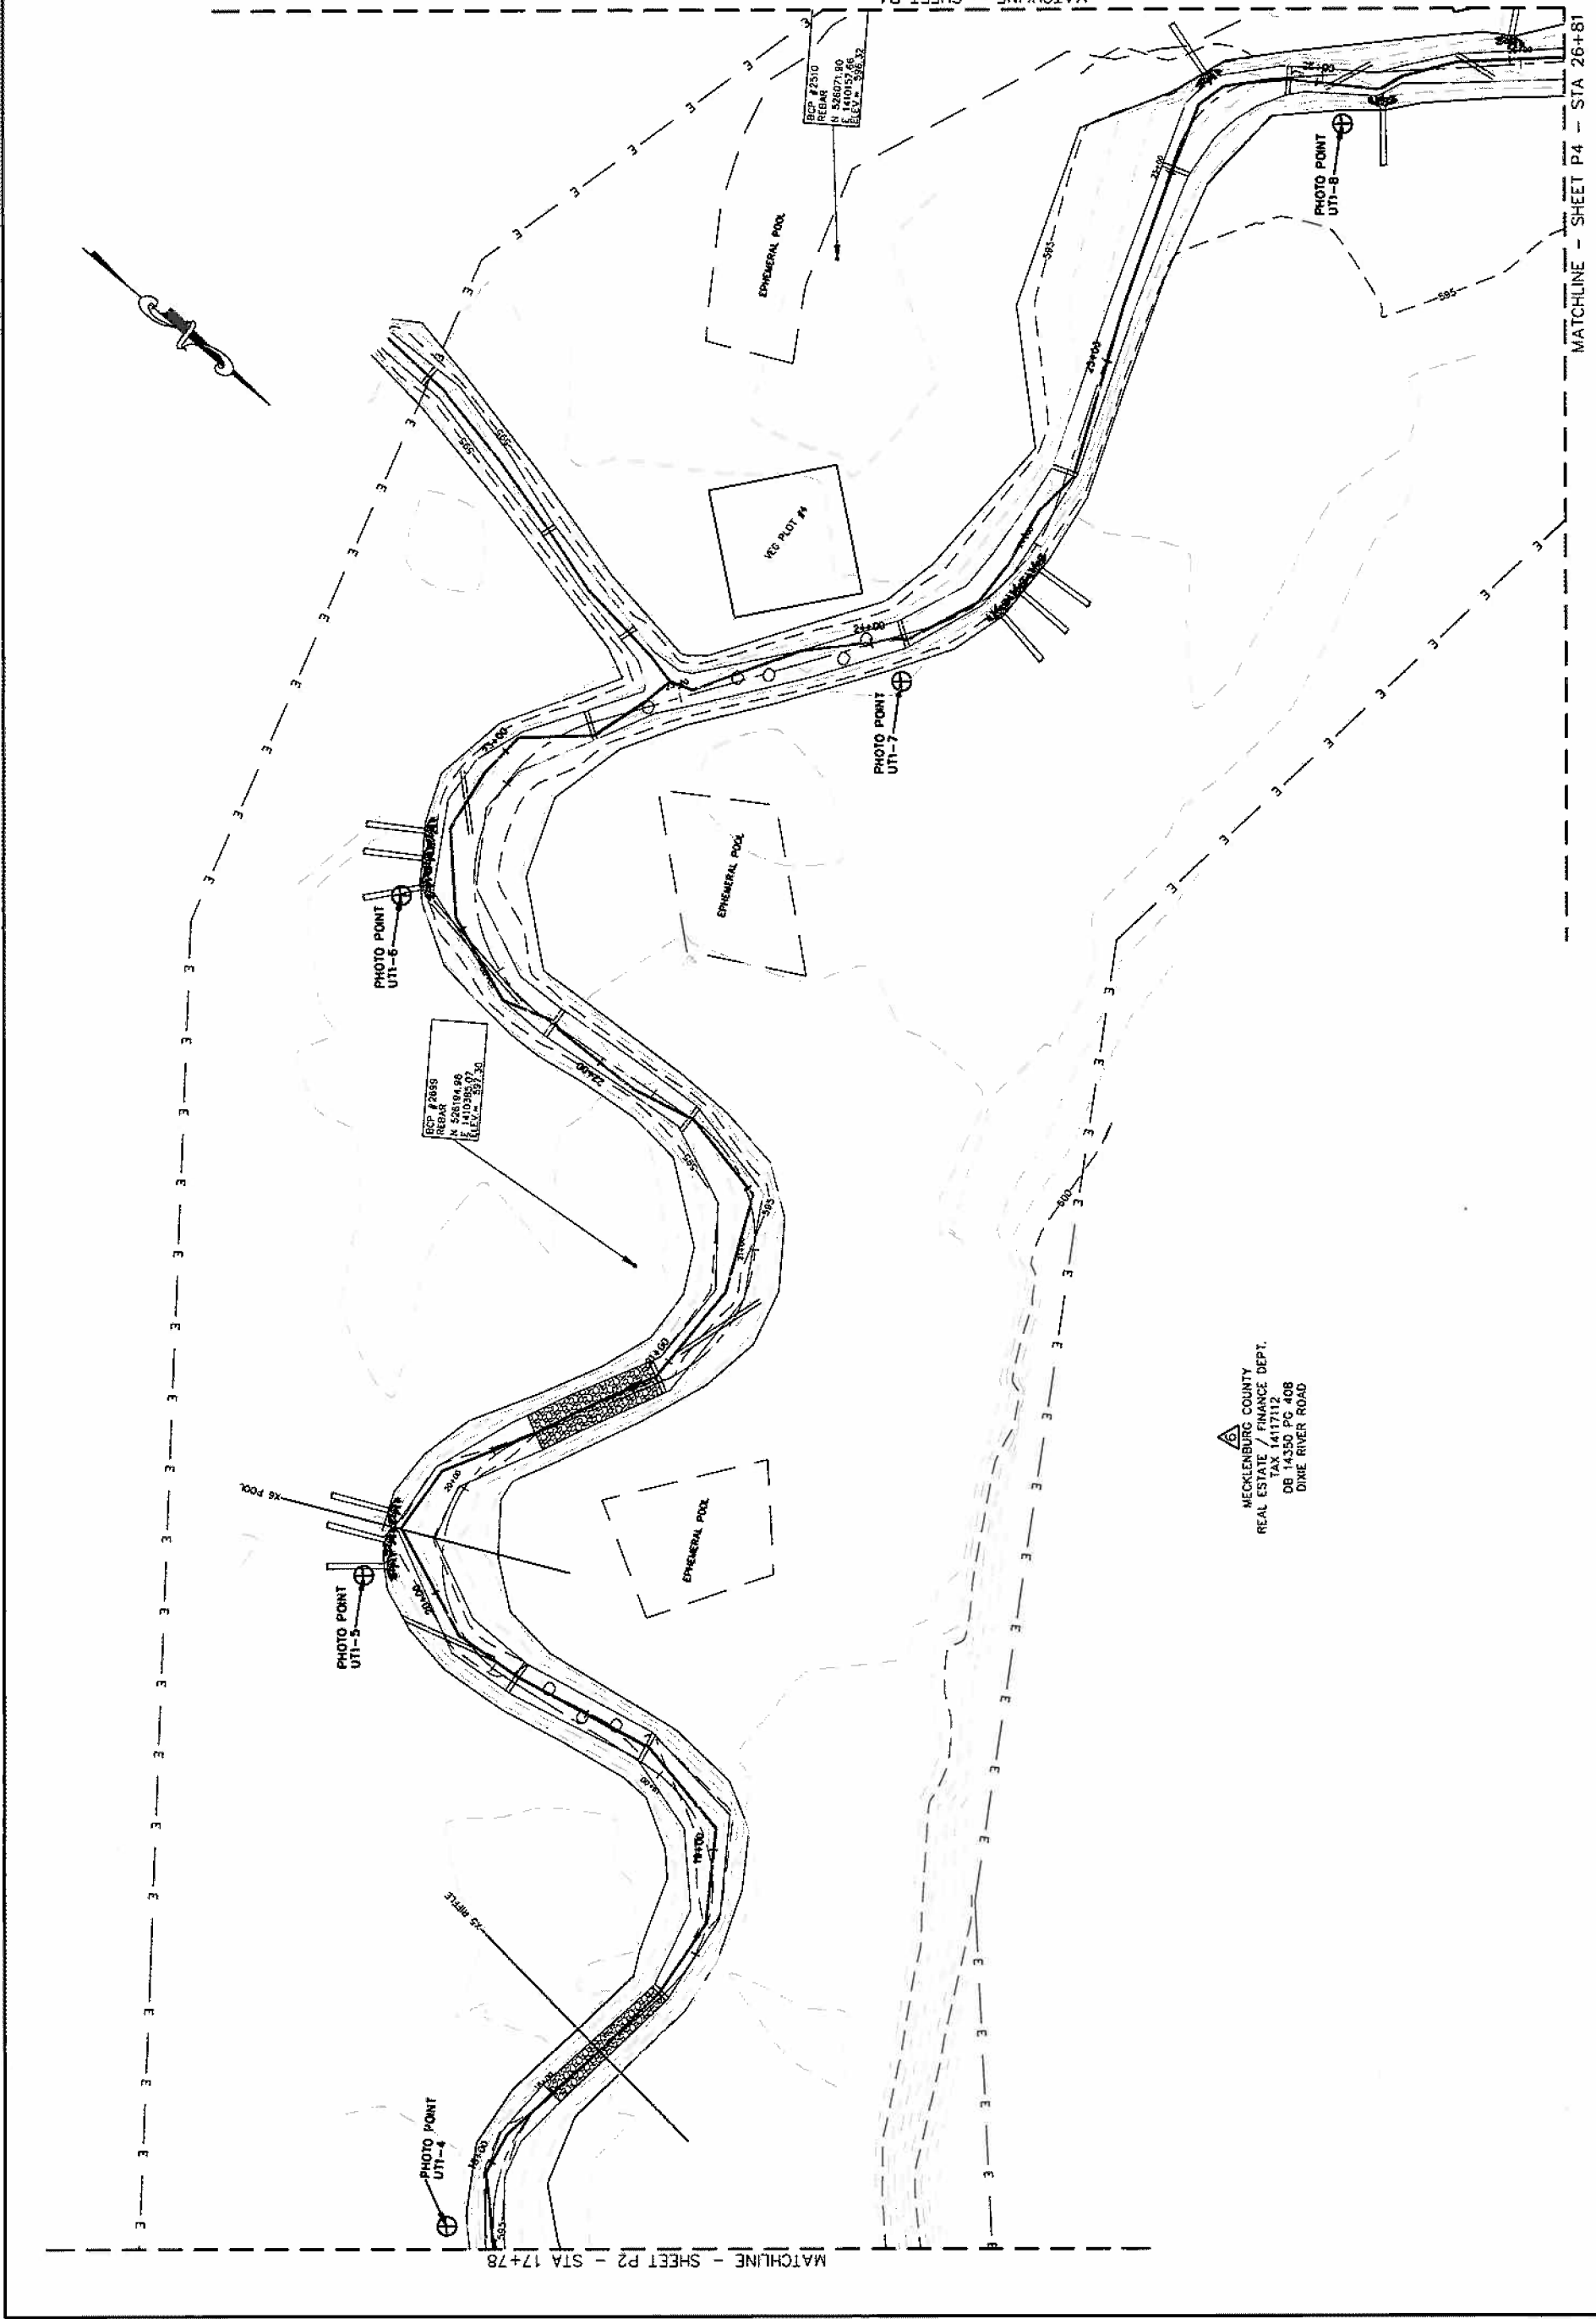

MECKLENBURG COUNTY
 REAL ESTATE / FINANCE DEPT.
 TAX 14117112
 DB 14350 PC 408
 DIME RIVER ROAD

PROJECT REFERENCE NO. 108528	SHEET NO. P.4
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
Baker <small>Soils Engineering Inc. 14117112 14117112 14117112 14117112 14117112</small>	

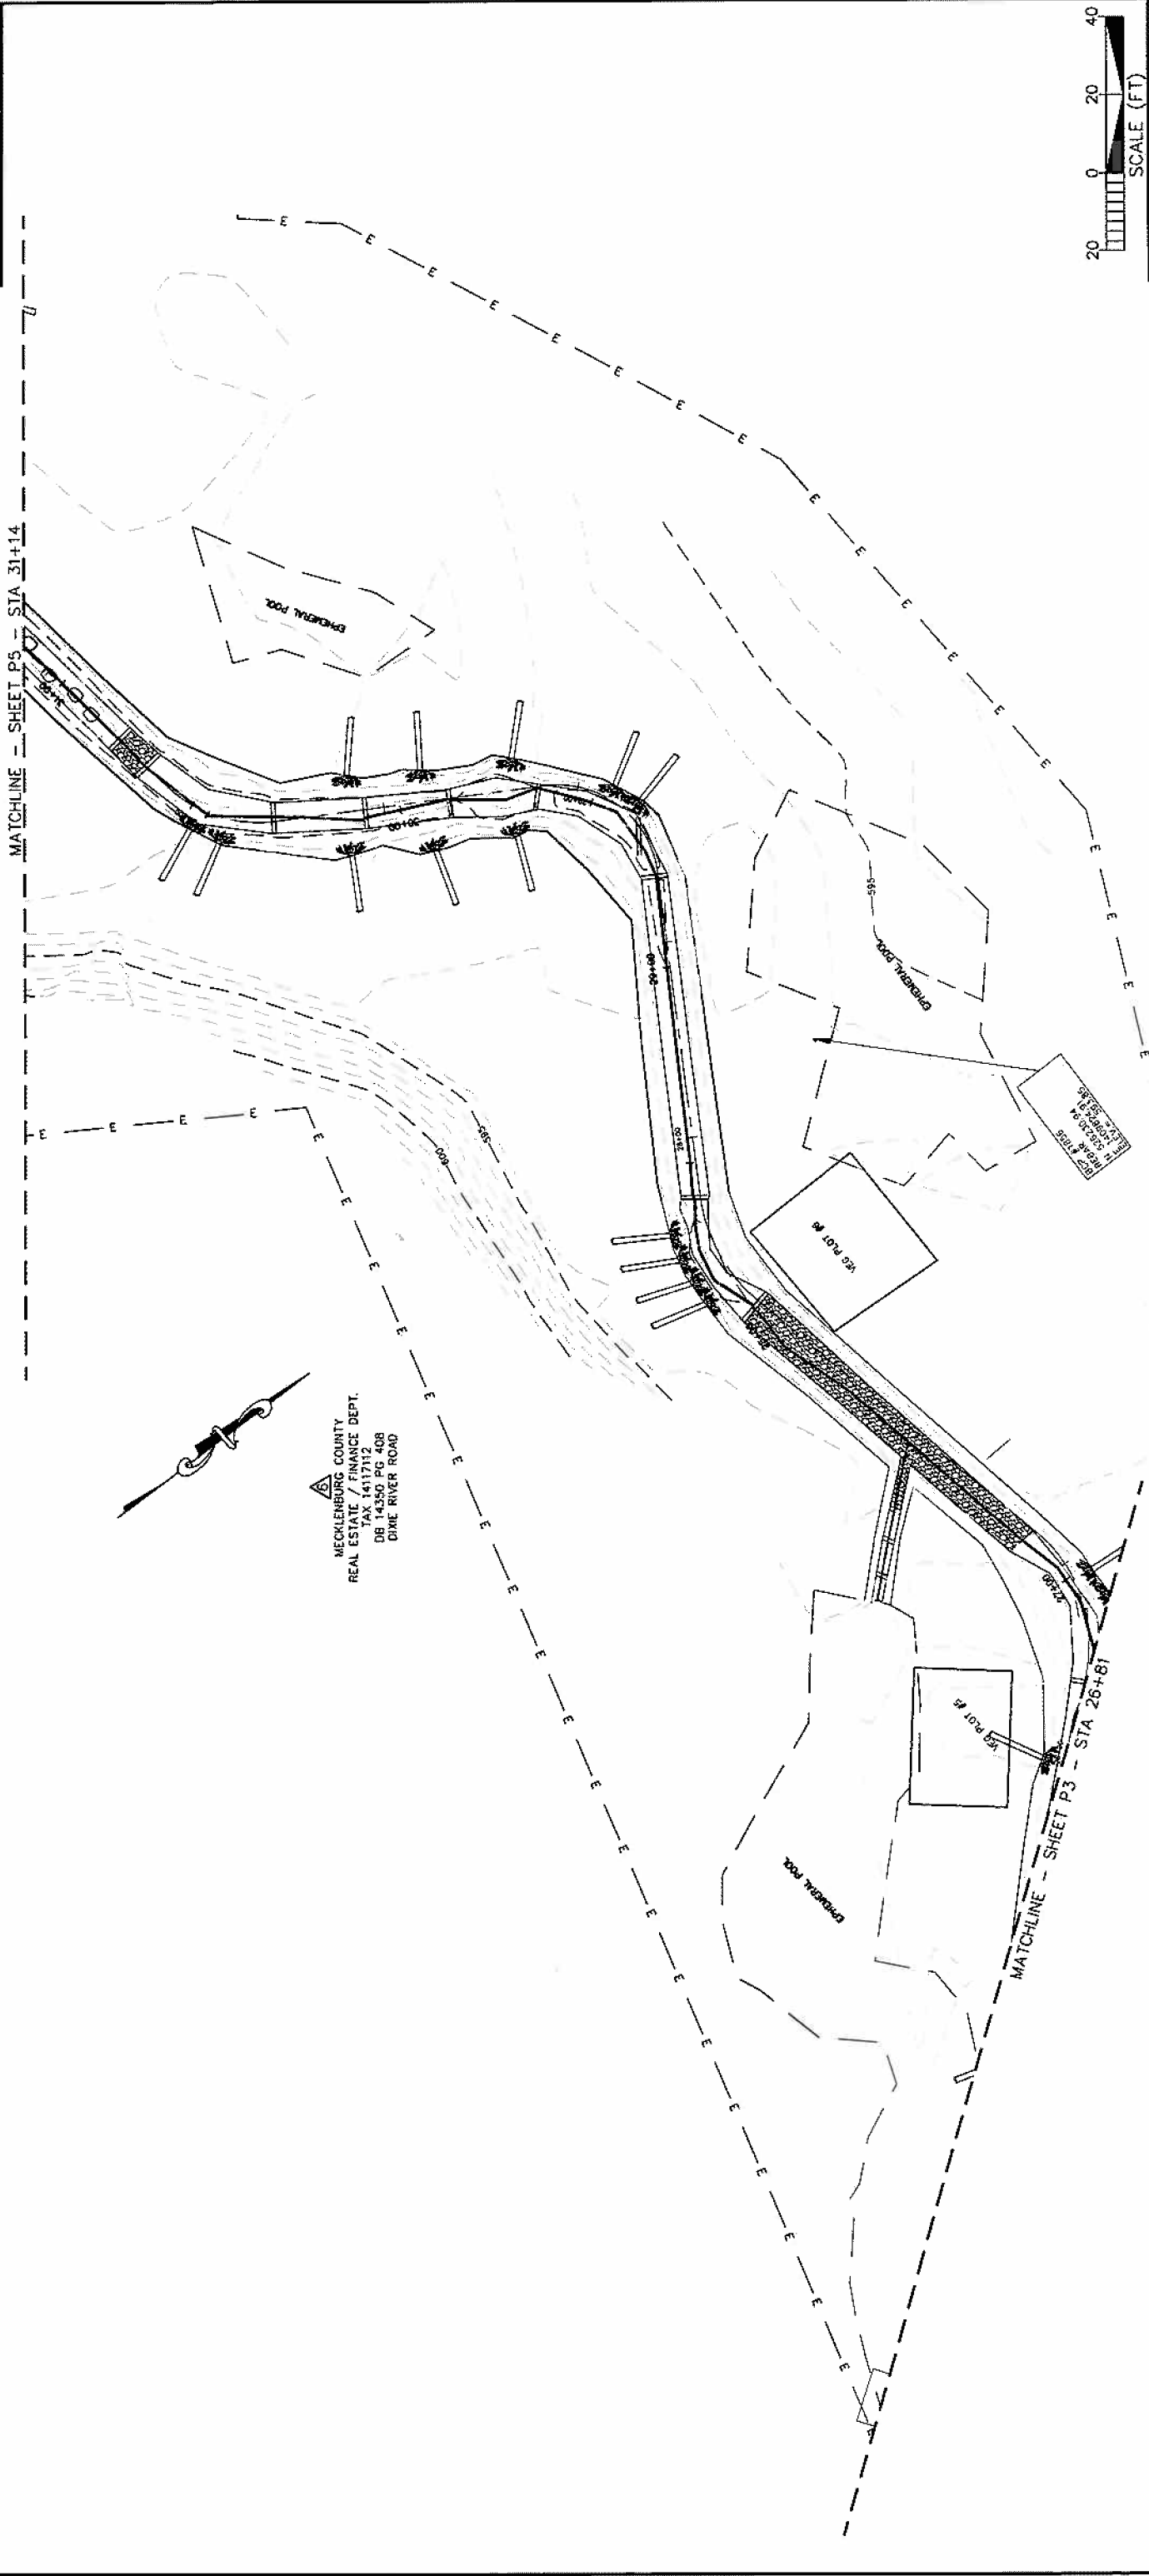

MECKLENBURG COUNTY
REAL ESTATE / FINANCE DEPT.
TAX 4417112
DB 14350 PG 408
DIXIE RIVER ROAD

BEAVERDAM CREEK AS-BUILT WITH BMPs
UT1 SITE PLAN


PROJECT REFERENCE NO. 108528
 SHEET NO. P5
 PROJECT ENGINEER
 APPROVED BY KLT
 WAH
 DATE 10/11/2007

Baker
 Baker Engineering Inc.
 1417 South Appleton Ave.
 Cary, NC 27513
 Phone: 919.242.4400



BEAVERDAM CREEK
 AS-BUILT WITH BMPS

UT1/UT1-C SITE PLAN

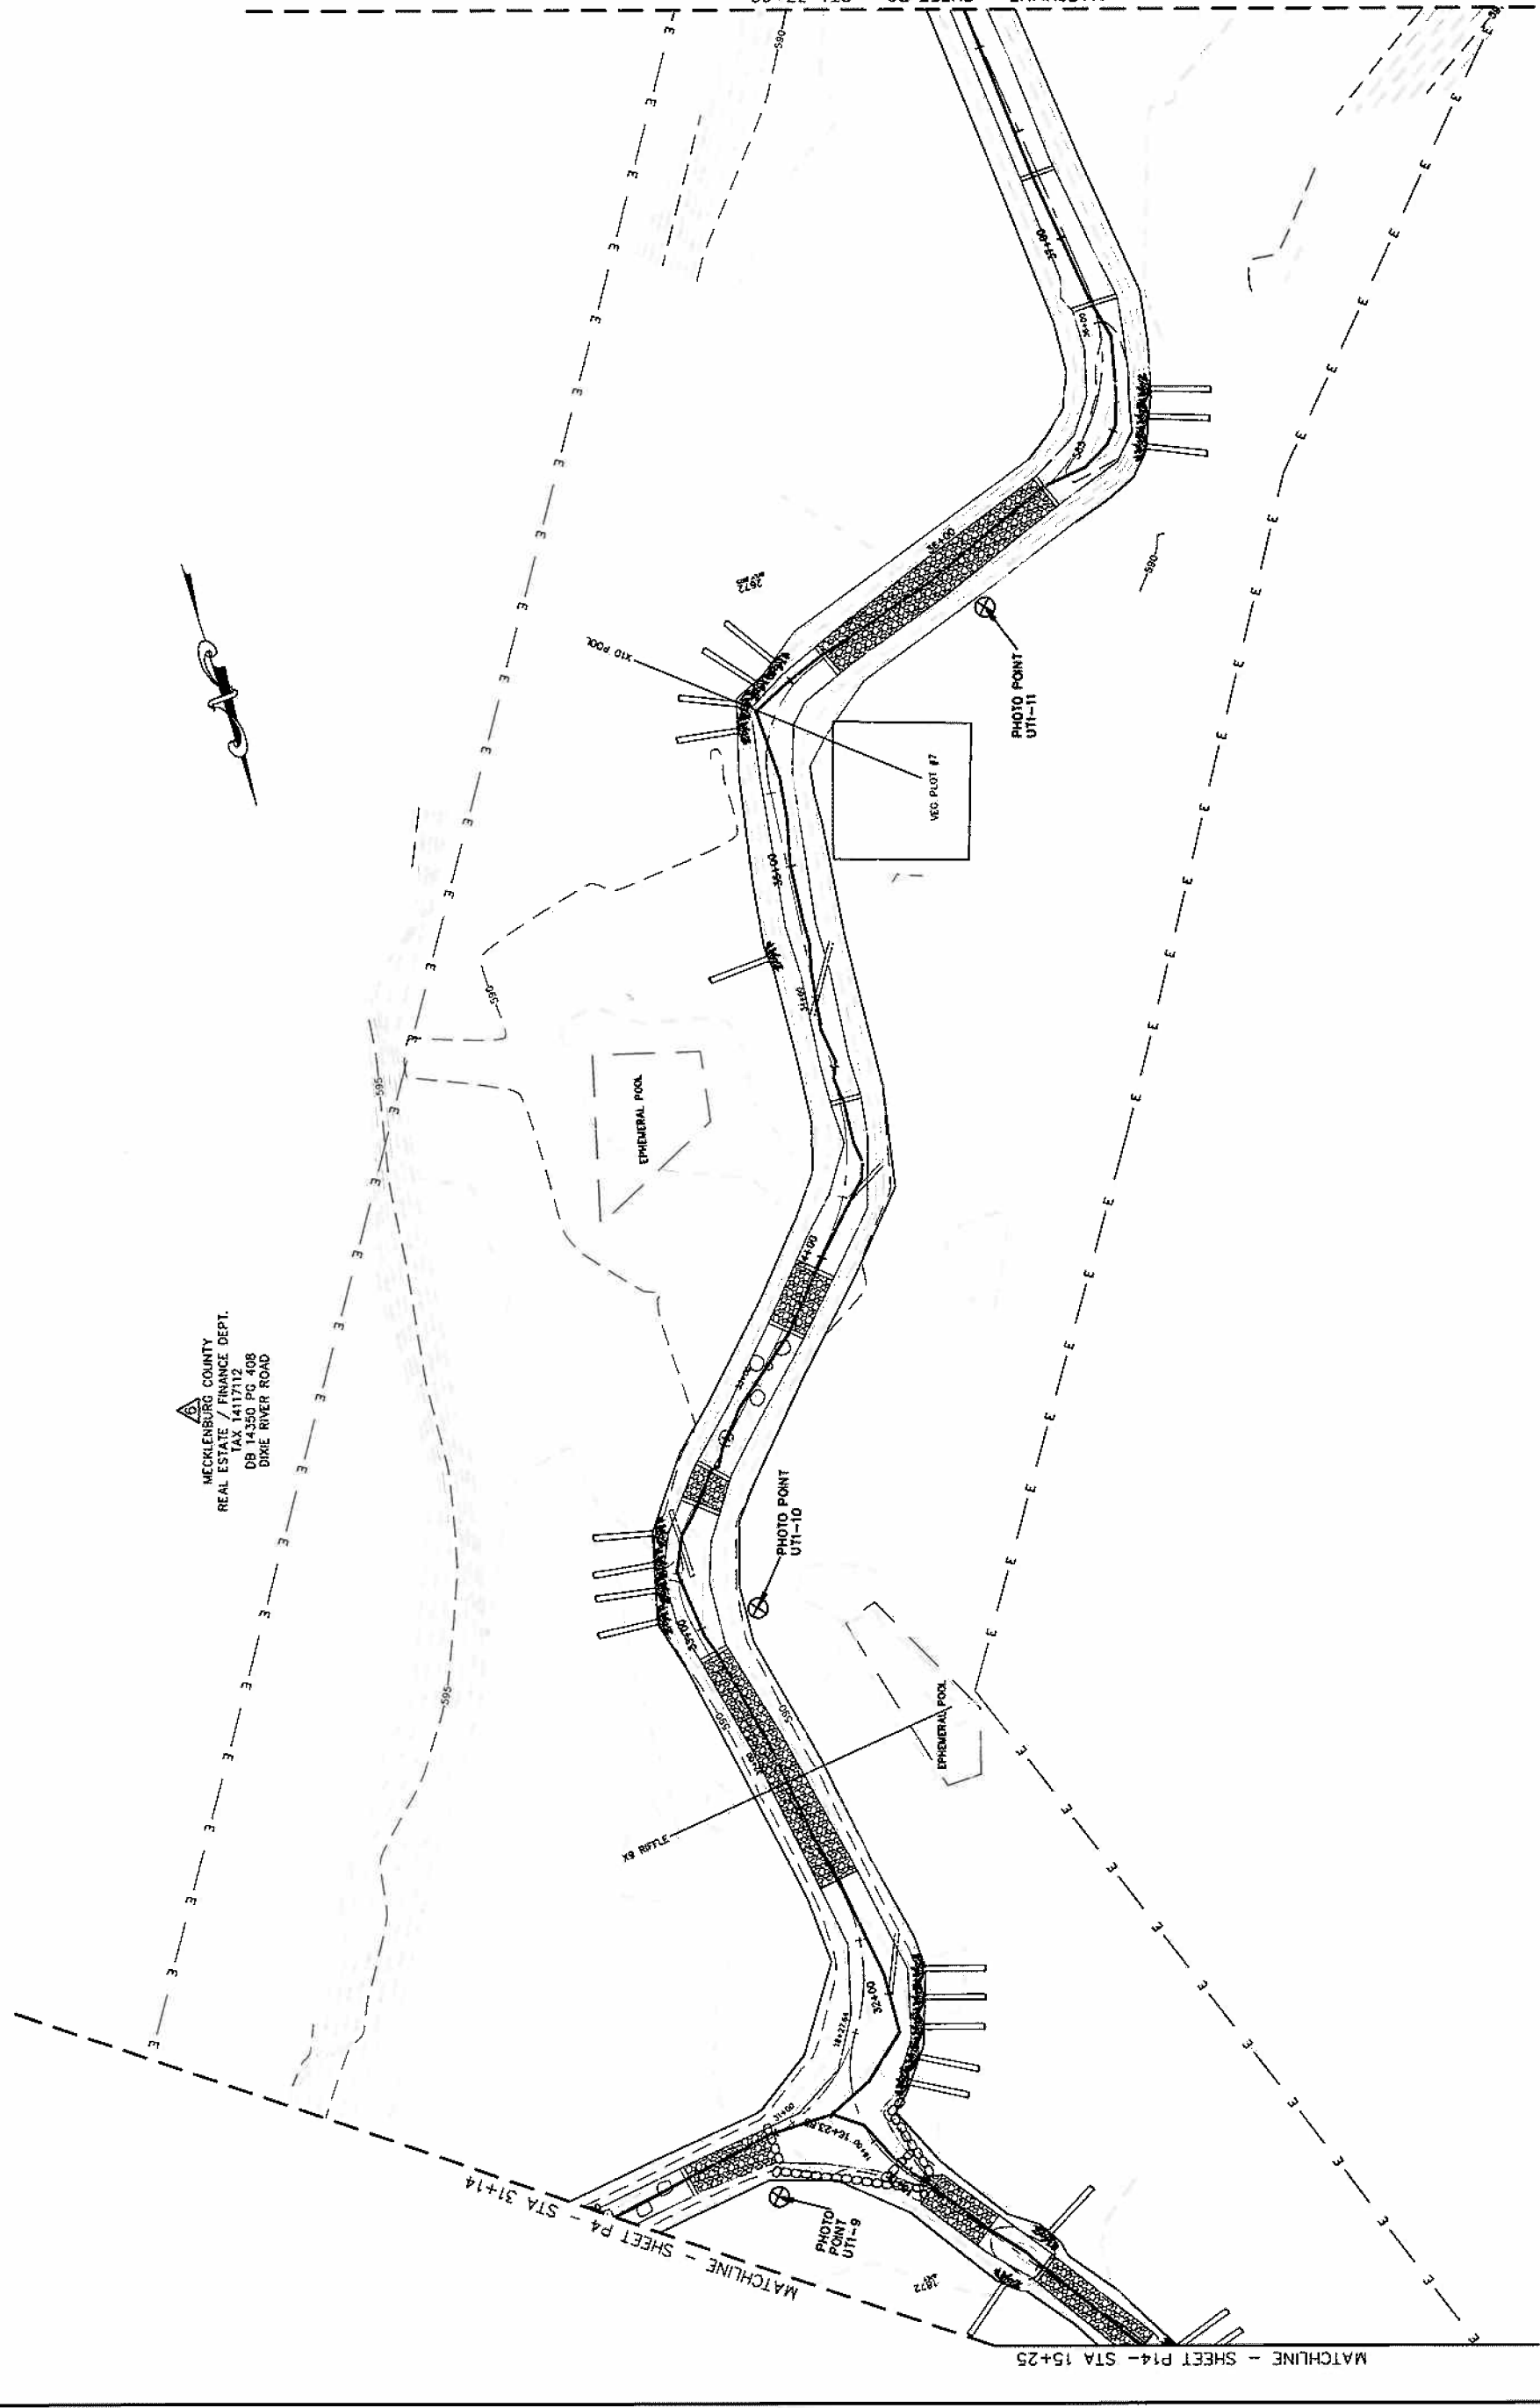

MECKLENBURG COUNTY
 REAL ESTATE / FINANCE DEPT.
 TAX 1417112
 DB 14350 PG 408
 DIXIE RIVER ROAD


PROJECT REFERENCE NO. 108528
 SHEET NO. P6
 PROJECT ENGINEER
 APPROVED BY KLT
 WAH
 DATE 10/11/2007

Baker
10000 Highway 101
 Suite 100
 Dallas, TX 75243
 Phone: 972.342.2222
 Fax: 972.342.2223



BEAVERDAM CREEK
 AS-BUILT WITH BMPS


UT1/UT1-D SITE PLAN

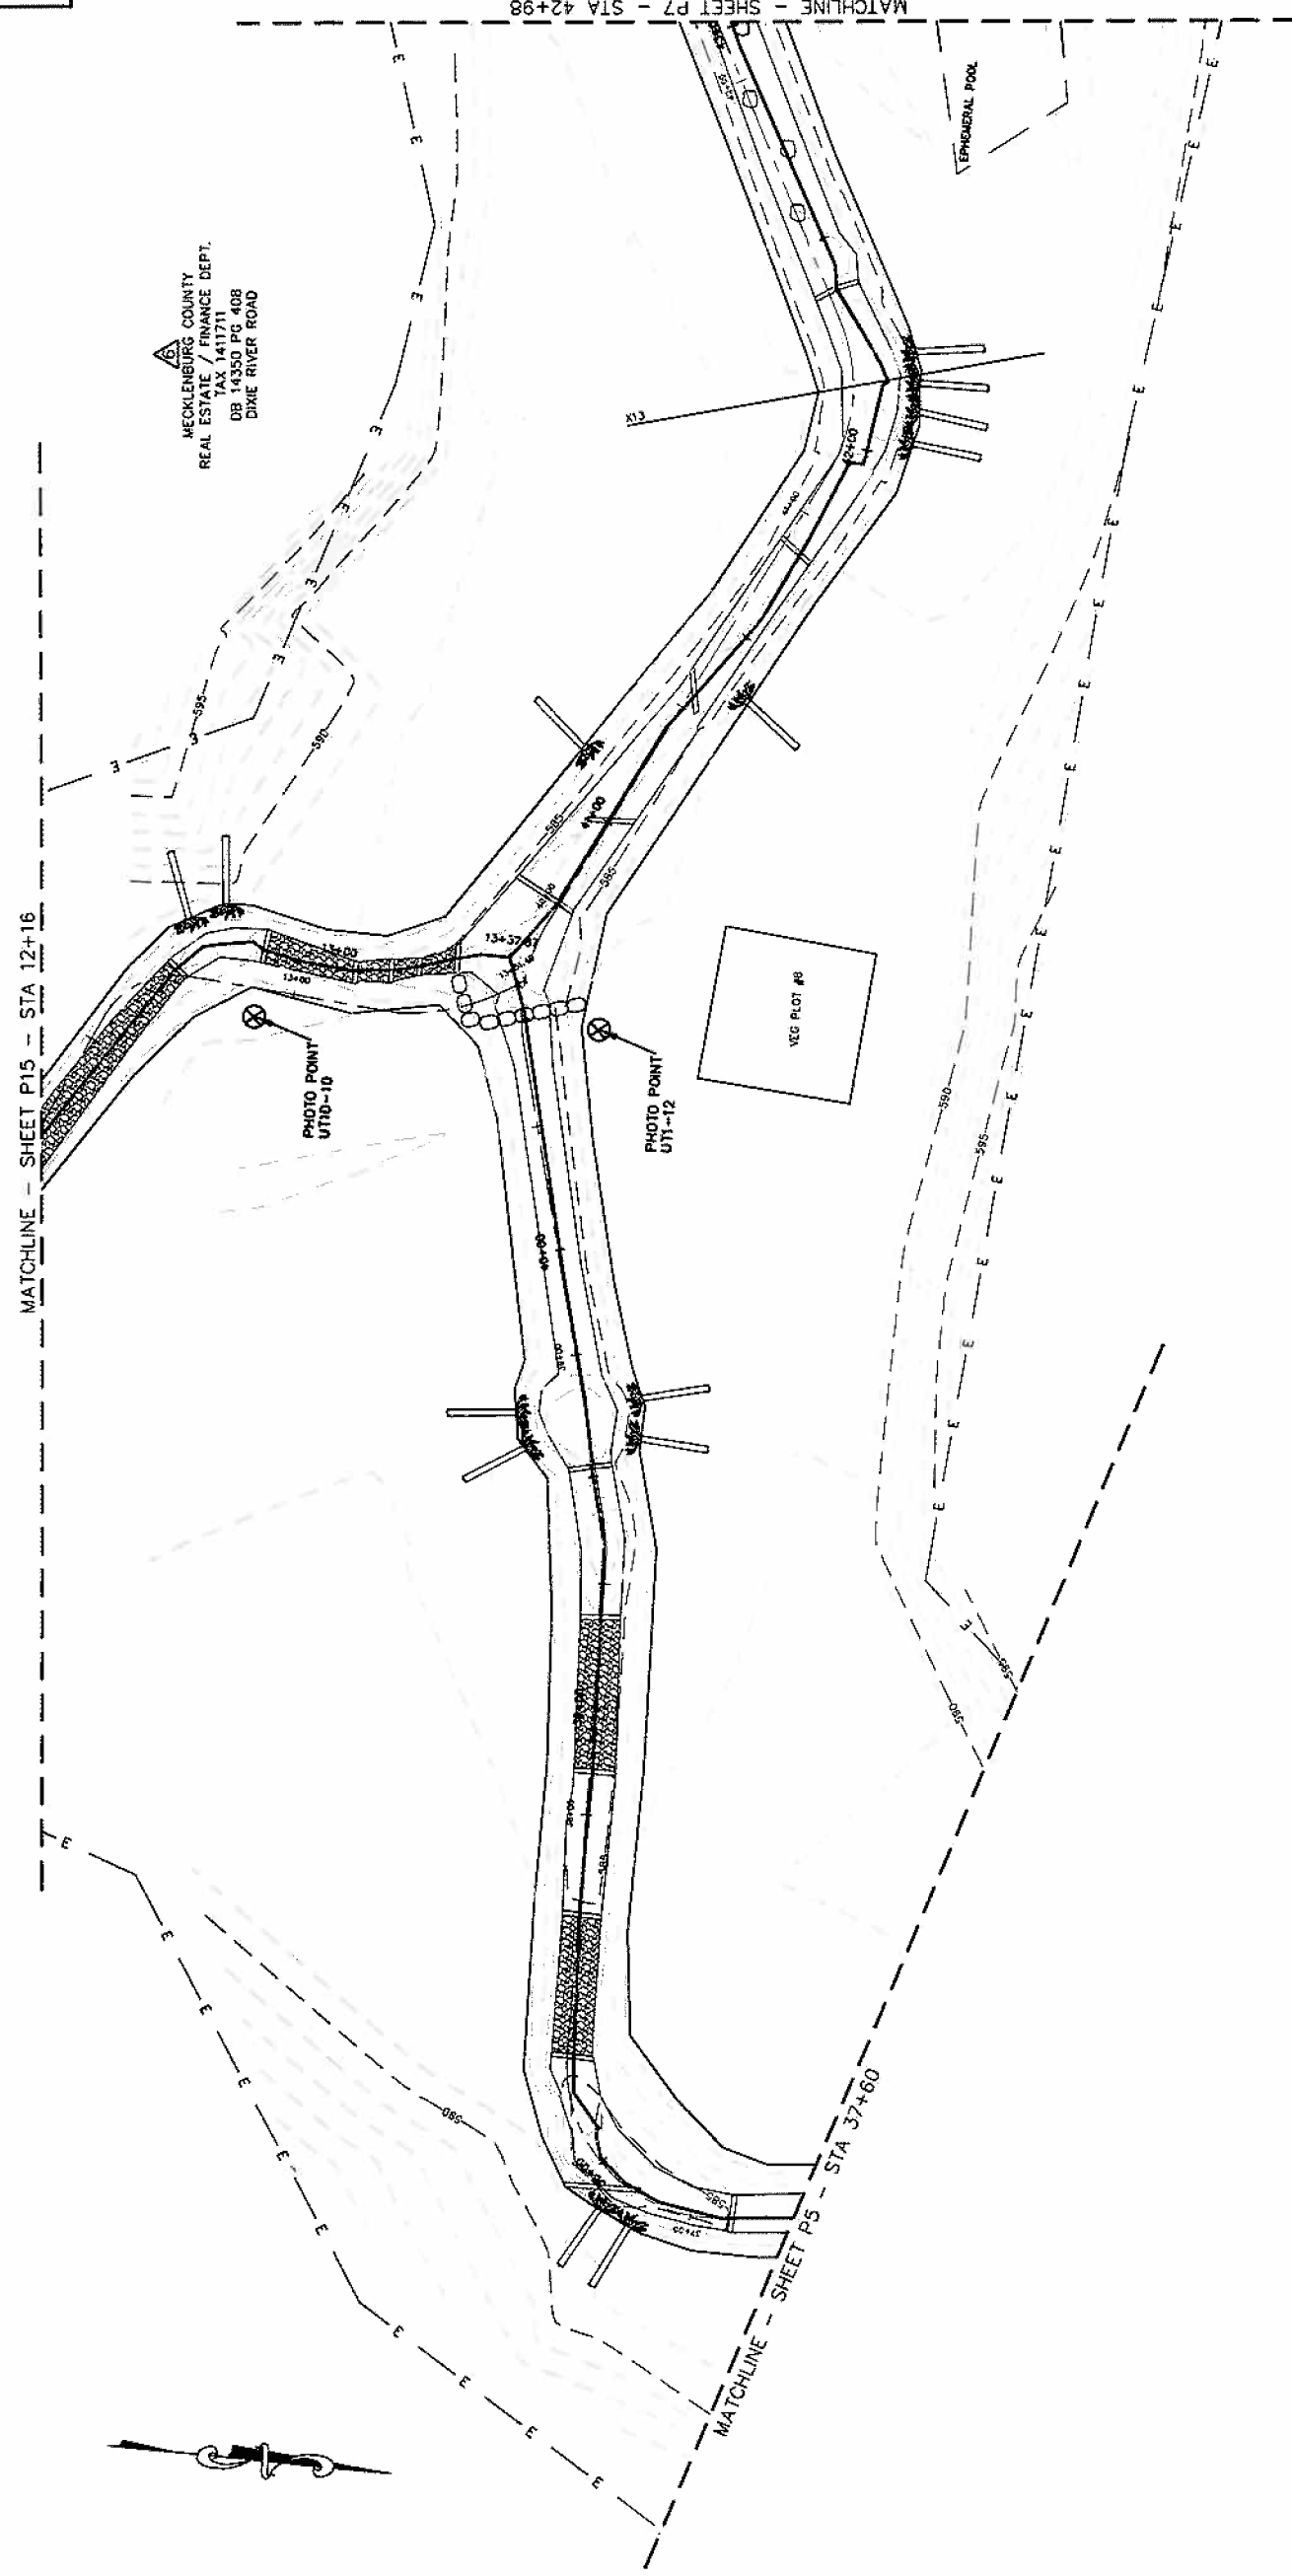

PROJECT REFERENCE NO. 108528 SHEET NO. P7
 PROJECT ENGINEER KLT
 APPROVED BY WAH
 DATE 10/11/2007



BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 UT1 SITE PLAN

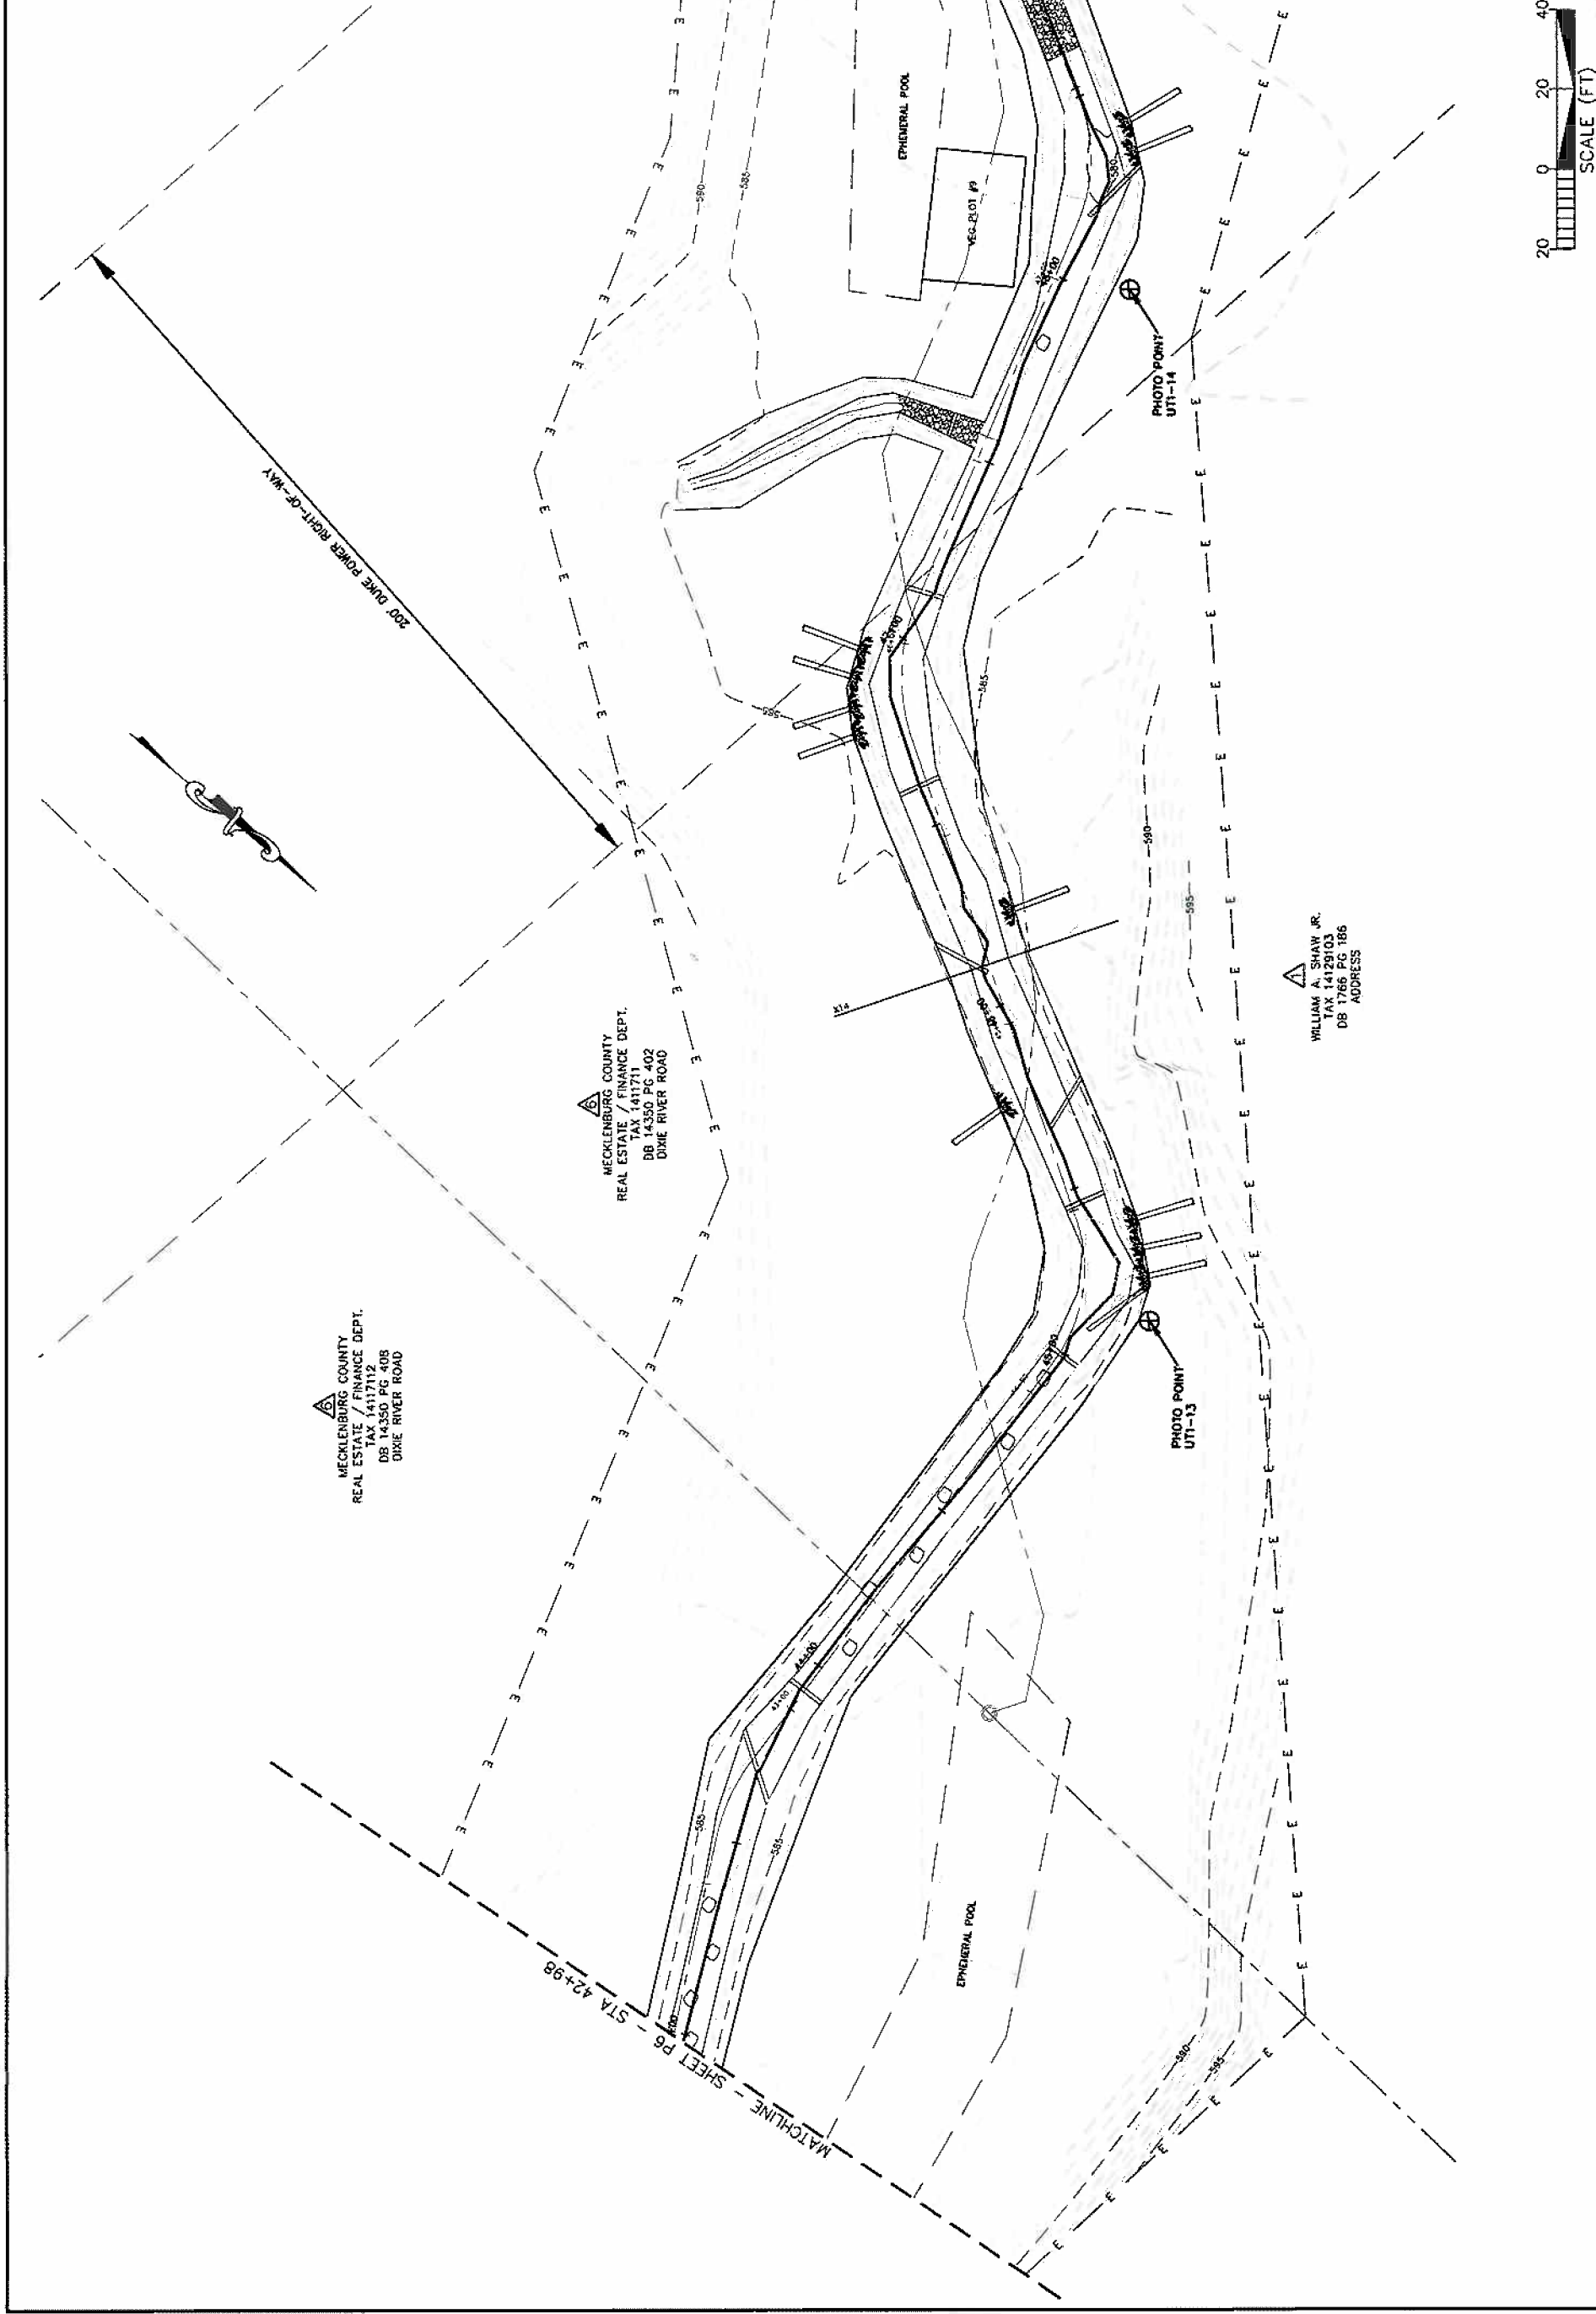


PROJECT REFERENCE NO.
108528

SHEET NO.
P8

PROJECT ENGINEER
KLT

APPROVED BY
WAH

DATE
10/11/2007

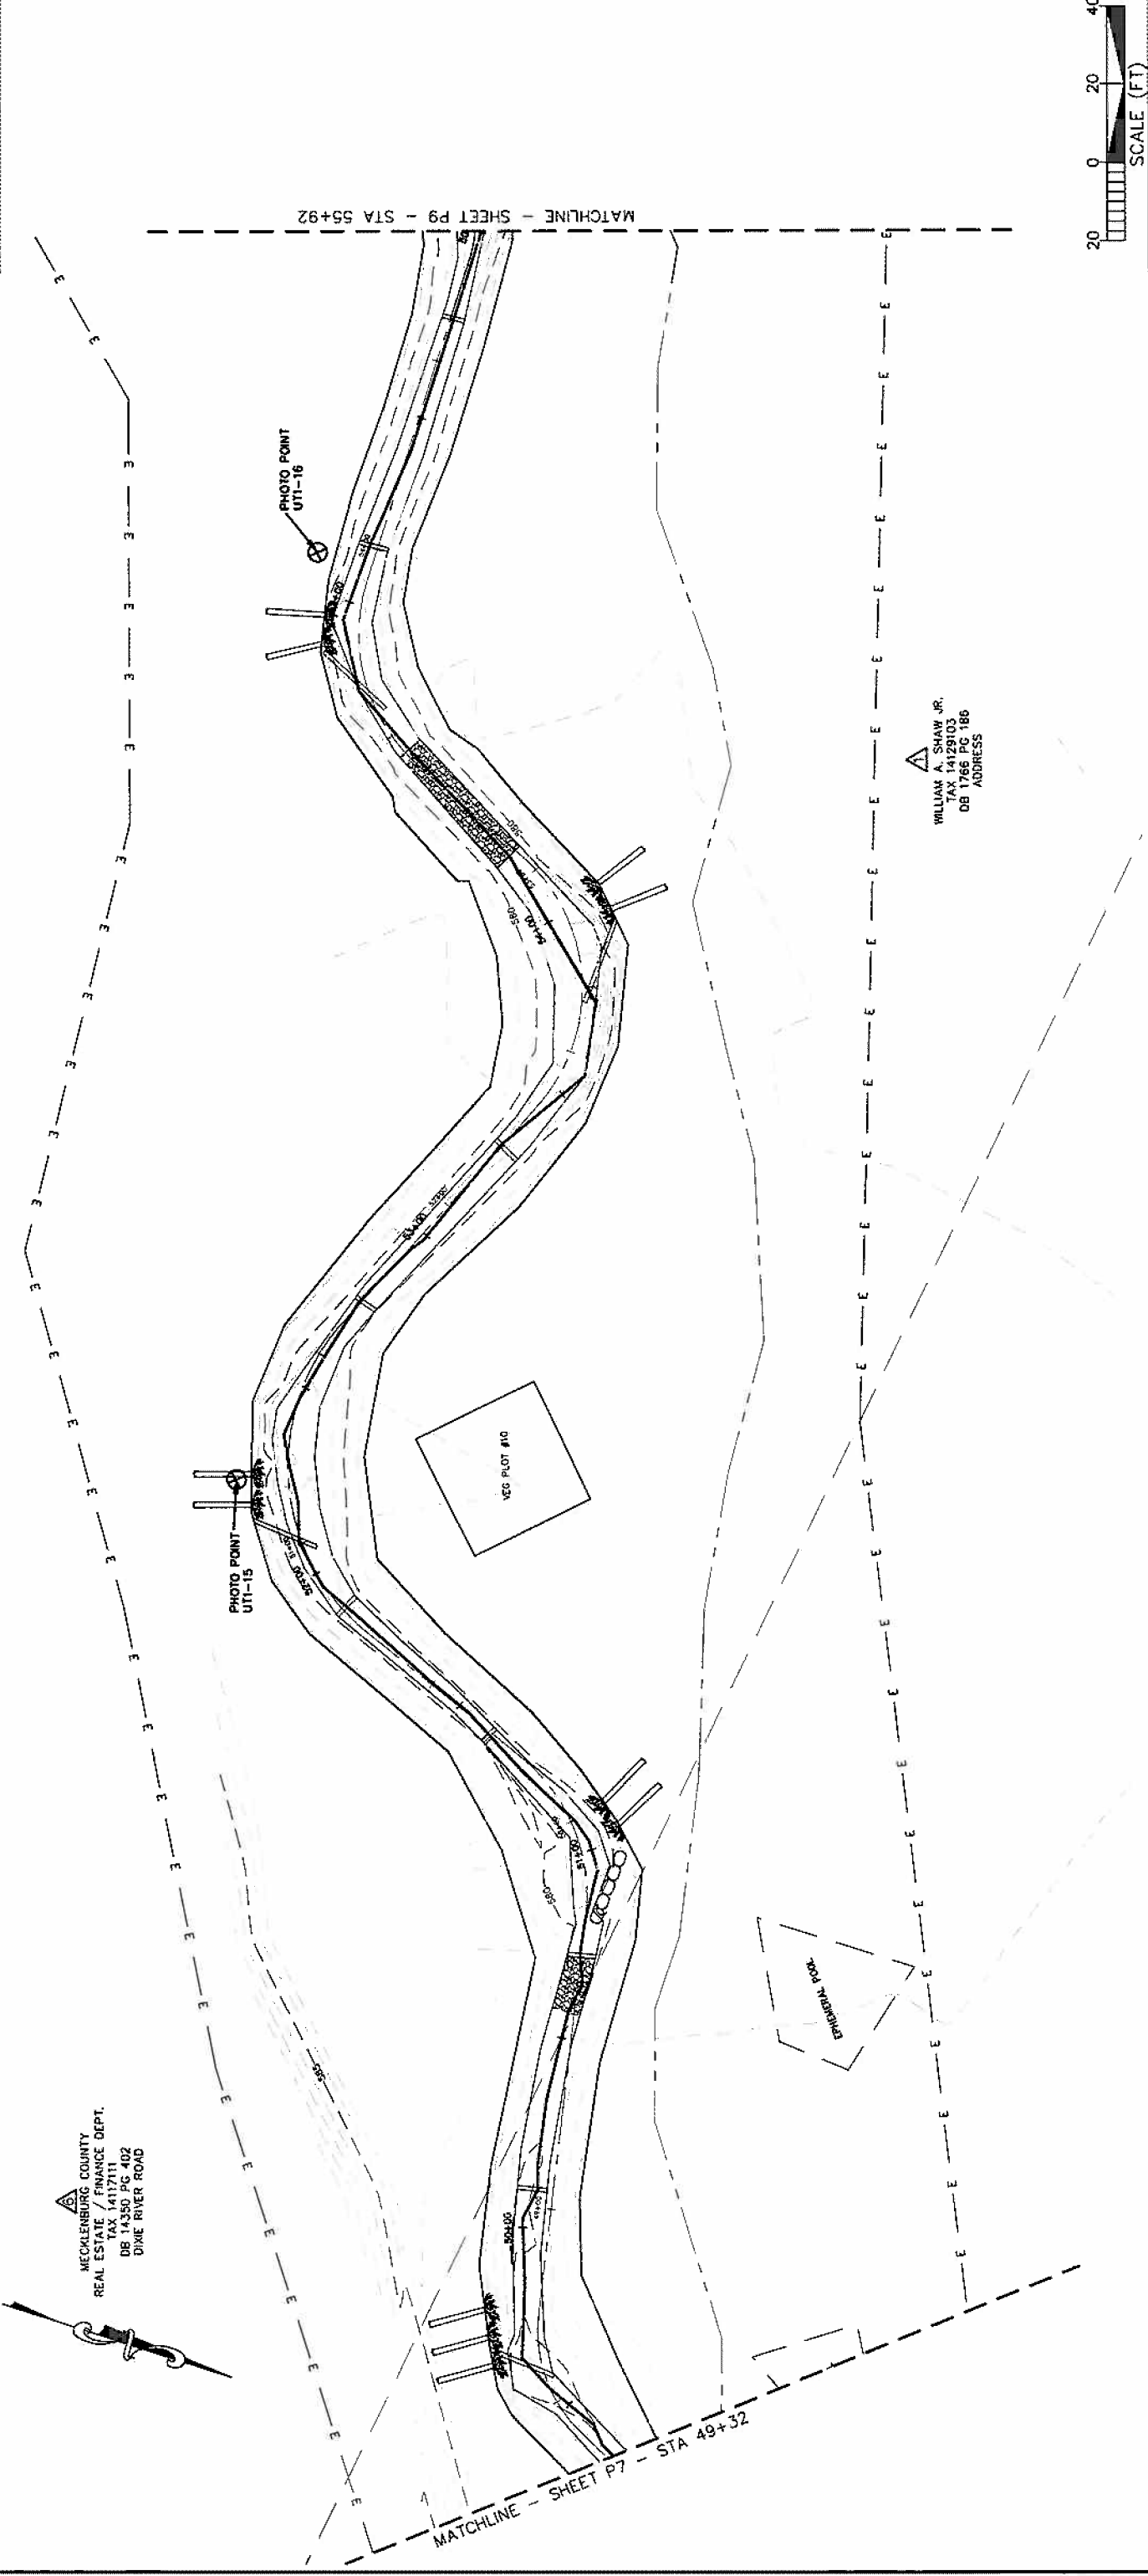

MECKLENBURG COUNTY
REAL ESTATE / FINANCE DEPT.
DB 14350 PC 1402
DIXIE RIVER ROAD

WILLIAM A. SHAW, JR.
TAX 14129103
DB 1766 PC 186
ADDRESS



BEAVERDAM CREEK
AS-BUILT WITH BMPS

UT1 SITE PLAN


PROJECT REFERENCE NO.	108528	SHEET NO.	PG
PROJECT ENGINEER	KLT		
APPROVED BY	WAH		
DATE	10/11/2007		
Baker			
Baker Corporation 1111 North Main Street Greenville, SC 29615 Phone: 864.671.1111 Fax: 864.671.1111			



MECKLENBURG COUNTY
 REAL ESTATE / FINANCE DEPT.
 TAX 1417711
 DB 14350 PG 402
 DIXIE RIVER ROAD

BCP 43469
 N 224657.62
 REBAR
 ELEV 2708.57


WILLIAM A. SHAW JR.
 TAX 14129103
 DB 1766 PG 186
 ADDRESS

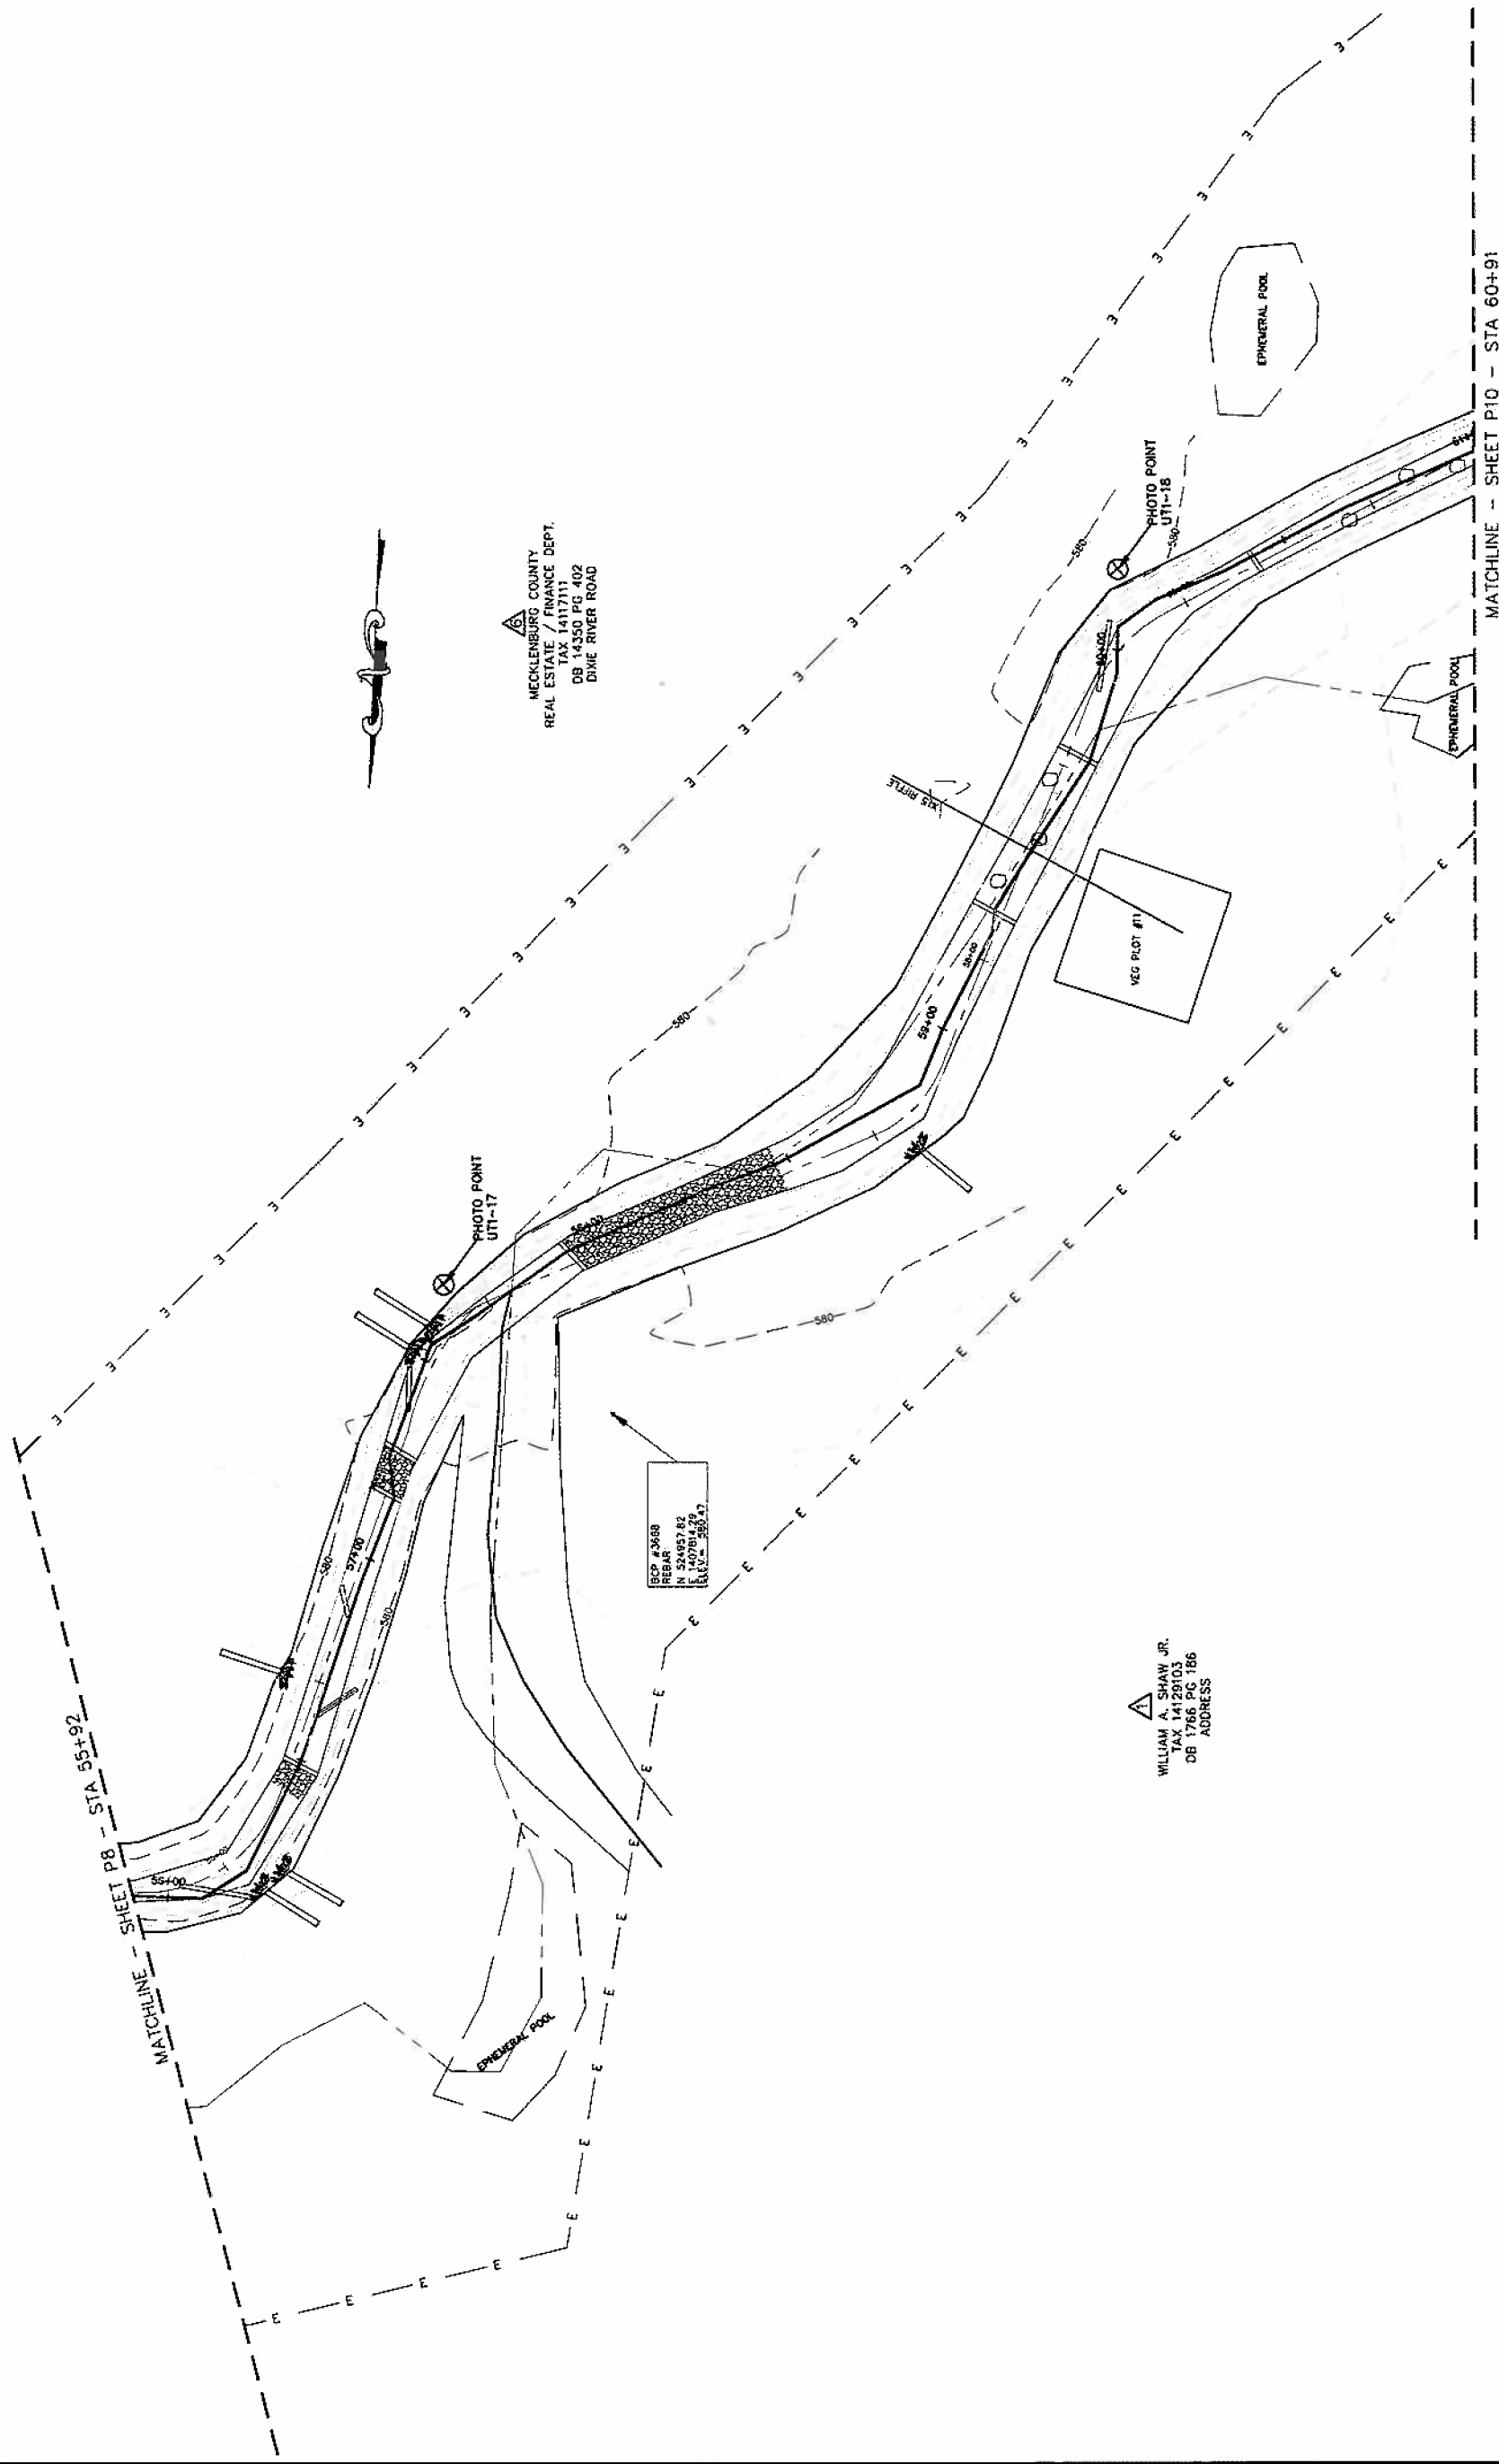

BEAVERDAM CREEK
 AS-BUILT WITH BMPS

UT1 SITE PLAN

PROJECT REFERENCE NO. 108528
 SHEET NO. P10
 PROJECT ENGINEER
 APPROVED BY KLT
 WAH
 DATE 10/11/2007

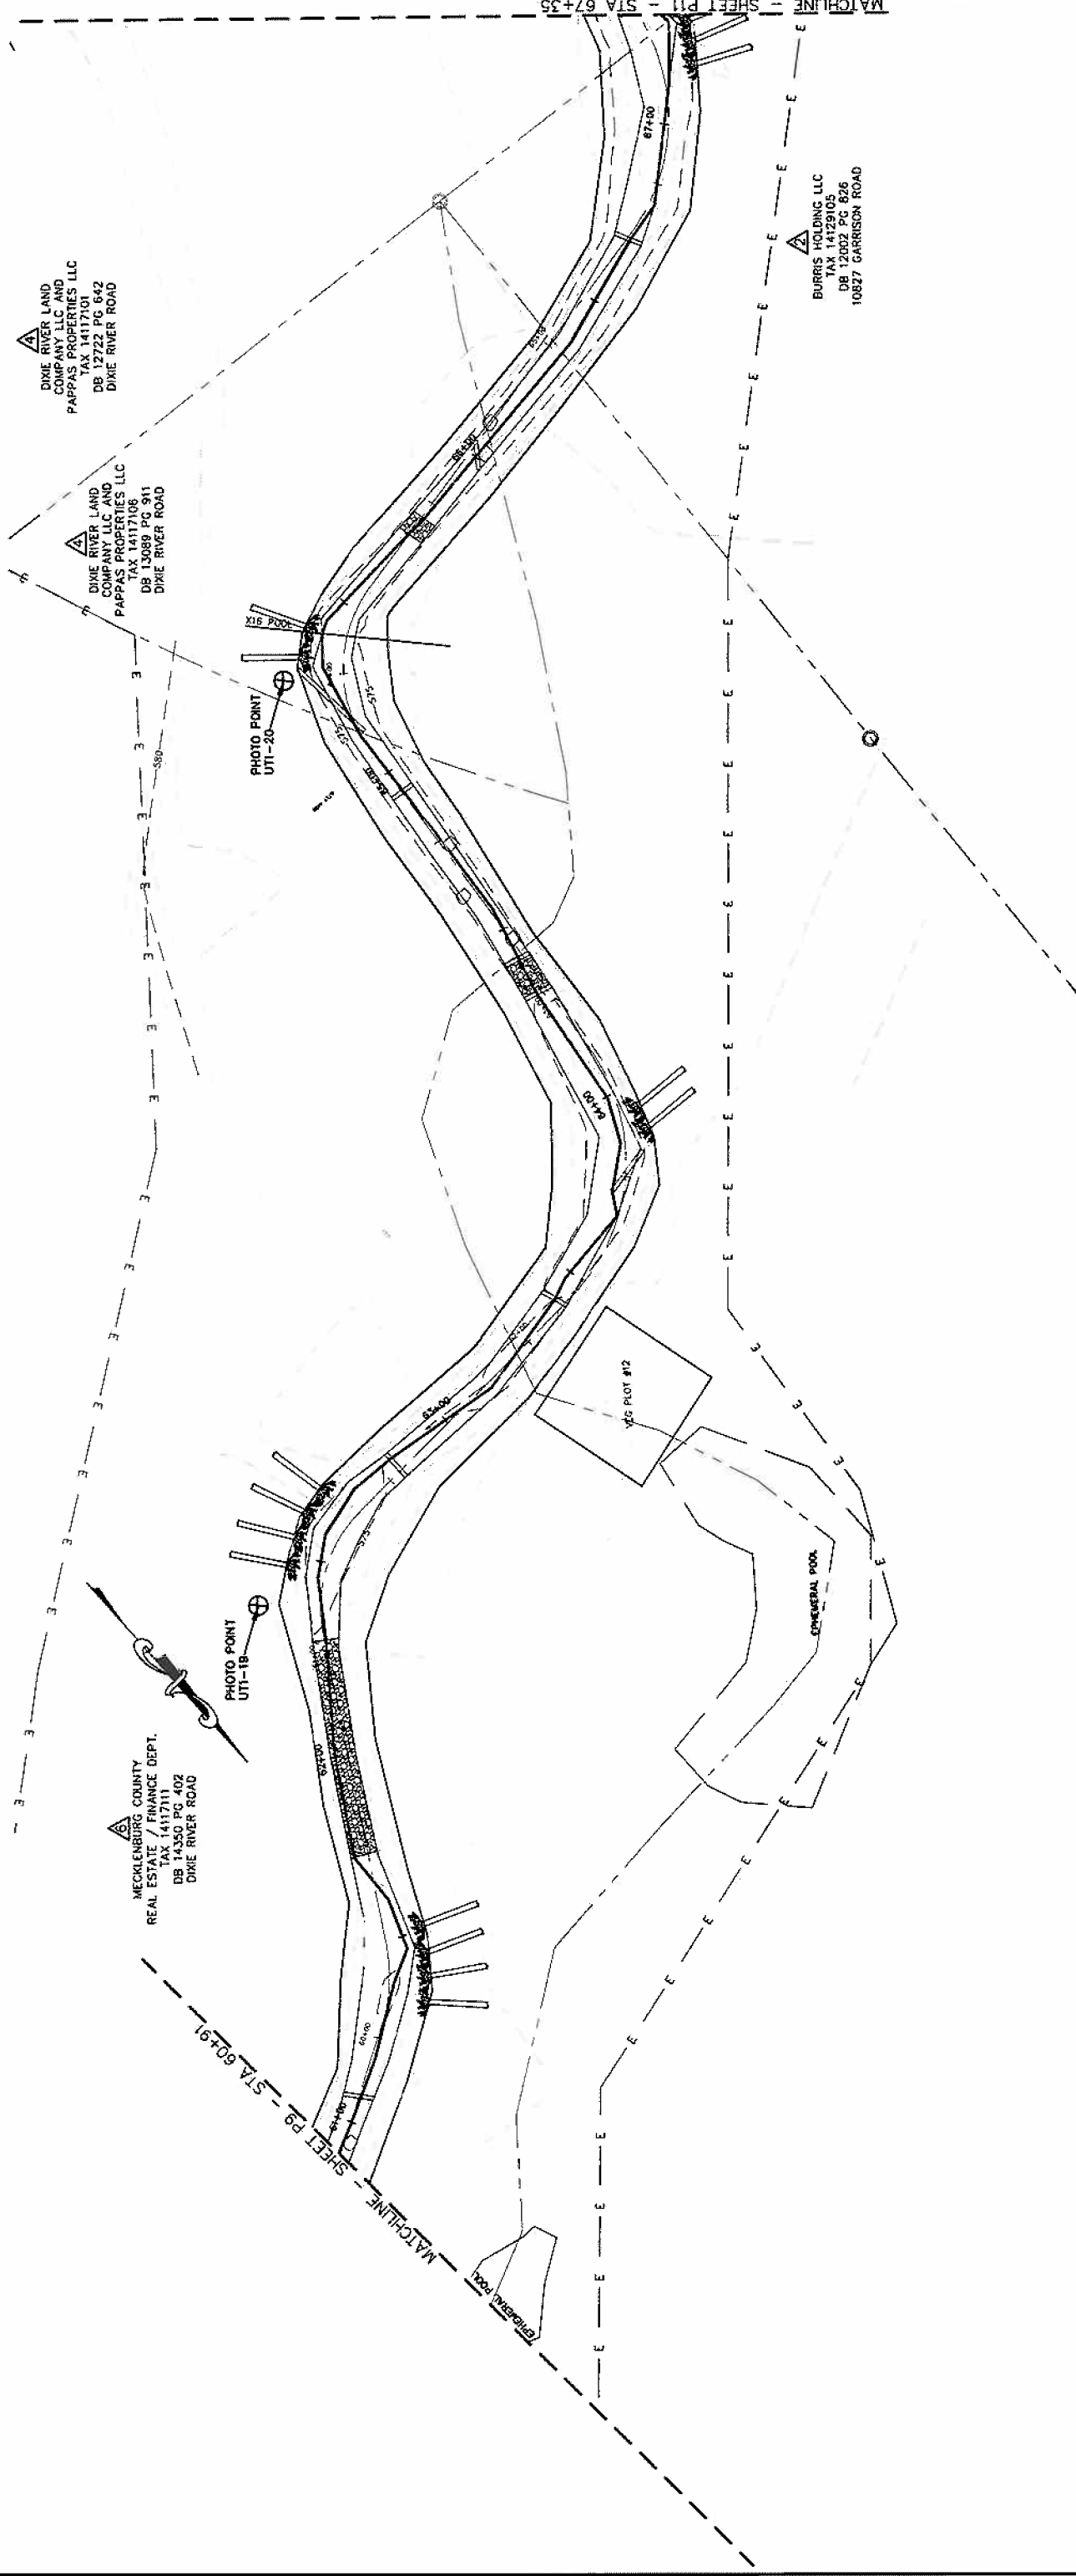

MECKLENBURG COUNTY
 REAL ESTATE / FINANCE DEPT.
 TAX 14117111
 DB 14350 PG 402
 DIXIE RIVER ROAD

DIXIE RIVER LAND
 COMPANY LLC AND
 PAPPAS PROPERTIES LLC
 TAX 14117101
 DB 12722 PG 642
 DIXIE RIVER ROAD

DIXIE RIVER LAND
 COMPANY LLC AND
 PAPPAS PROPERTIES LLC
 TAX 14117108
 DB 13089 PG 911
 DIXIE RIVER ROAD

BURRIS HOLDING LLC
 10827 GARRISON ROAD
 DB 12007 PG 806


BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 UT1 SITE PLAN



PROJECT REFERENCE NO. 108528
 SHEET NO. P11
 PROJECT ENGINEER
 APPROVED BY KLT
 WAH
 DATE 10/11/2007

Baker
 Baker Engineering Co., Inc.
 10000 N. 10th Street
 Omaha, NE 68131
 402.478.4400

BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 UT1 SITE PLAN

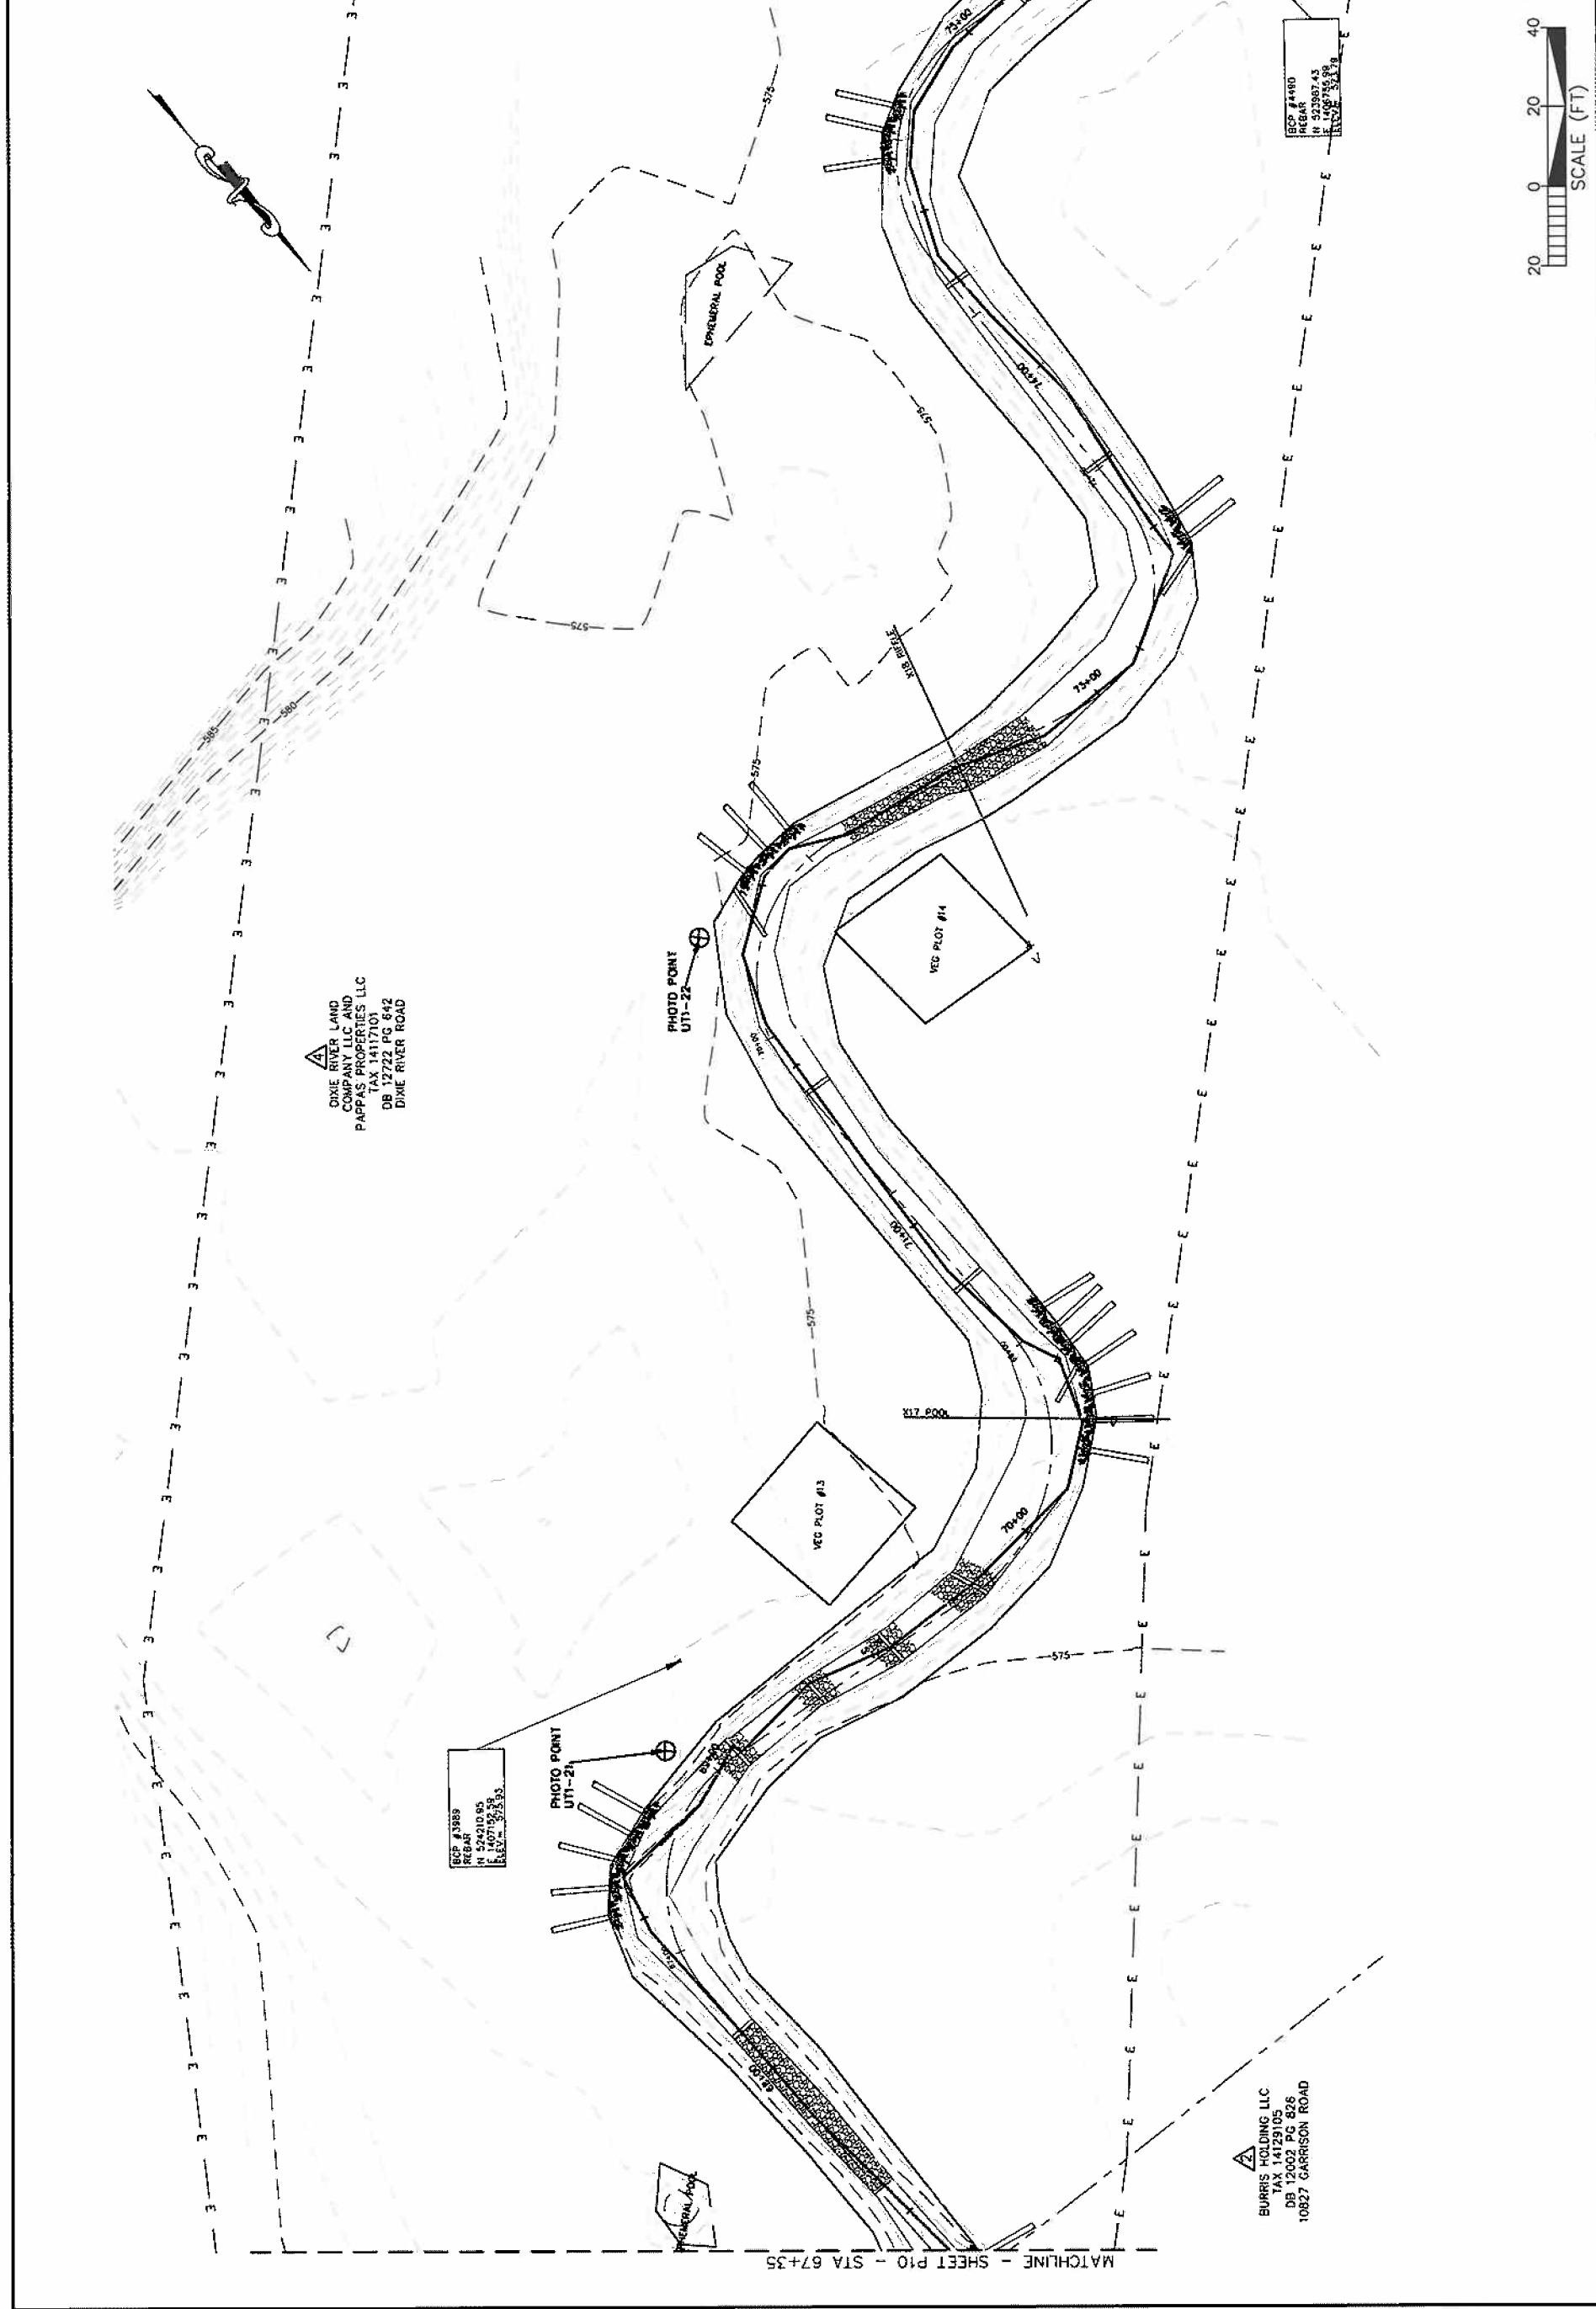


PROJECT REFERENCE NO. 108528	SHEET NO. P12
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	

Baker
 Baker Engineering, Inc.
 1111 South Loop West
 Suite 100, P.O. Box 2826
 Fort Worth, TX 76101
 Phone: 817.342.4422



BEAVERDAM CREEK
 AS-BUILT WITH BMPS


UT1 SITE PLAN

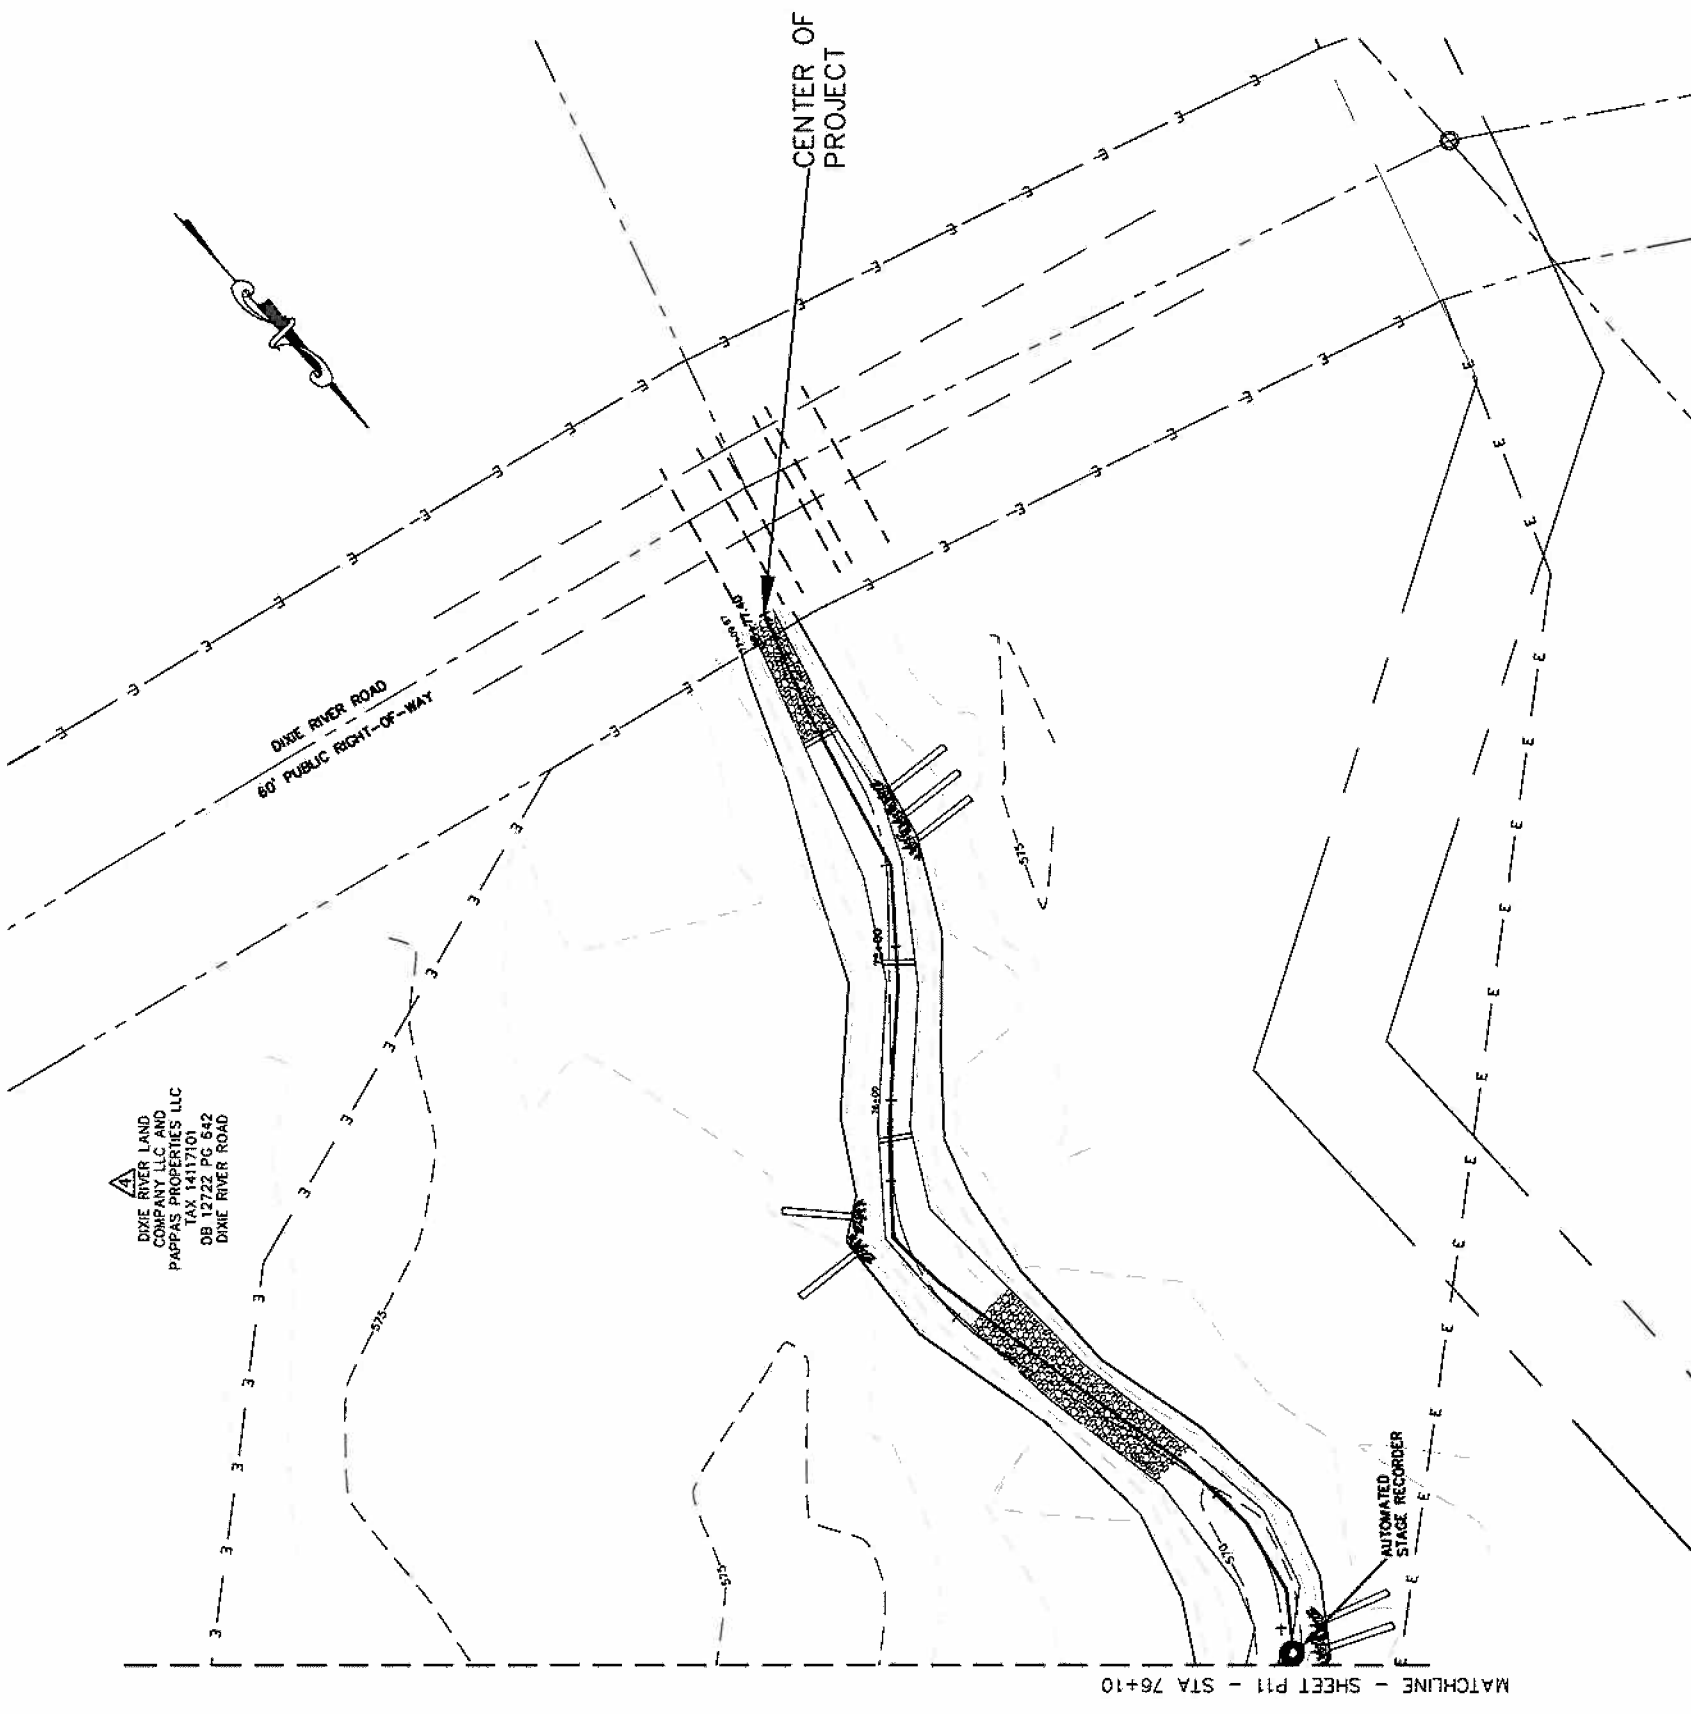

▲
 DIKE RIVER LAND
 COMPANY, INC.
 PAPPAS PROPERTIES LLC
 PAPPAS TAX 14117103
 DB 12722 PG 642
 DIKE RIVER ROAD

PROJECT REFERENCE NO. 108528 SHEET NO. P13
 PROJECT ENGINEER KLT
 APPROVED BY WAH
 DATE 10/11/2007

Baker
 Baker Engineering Inc.
 417 East Tyler Street
 Channahon, IL 61310
 Phone: 815.398.1100
 Fax: 815.398.1101

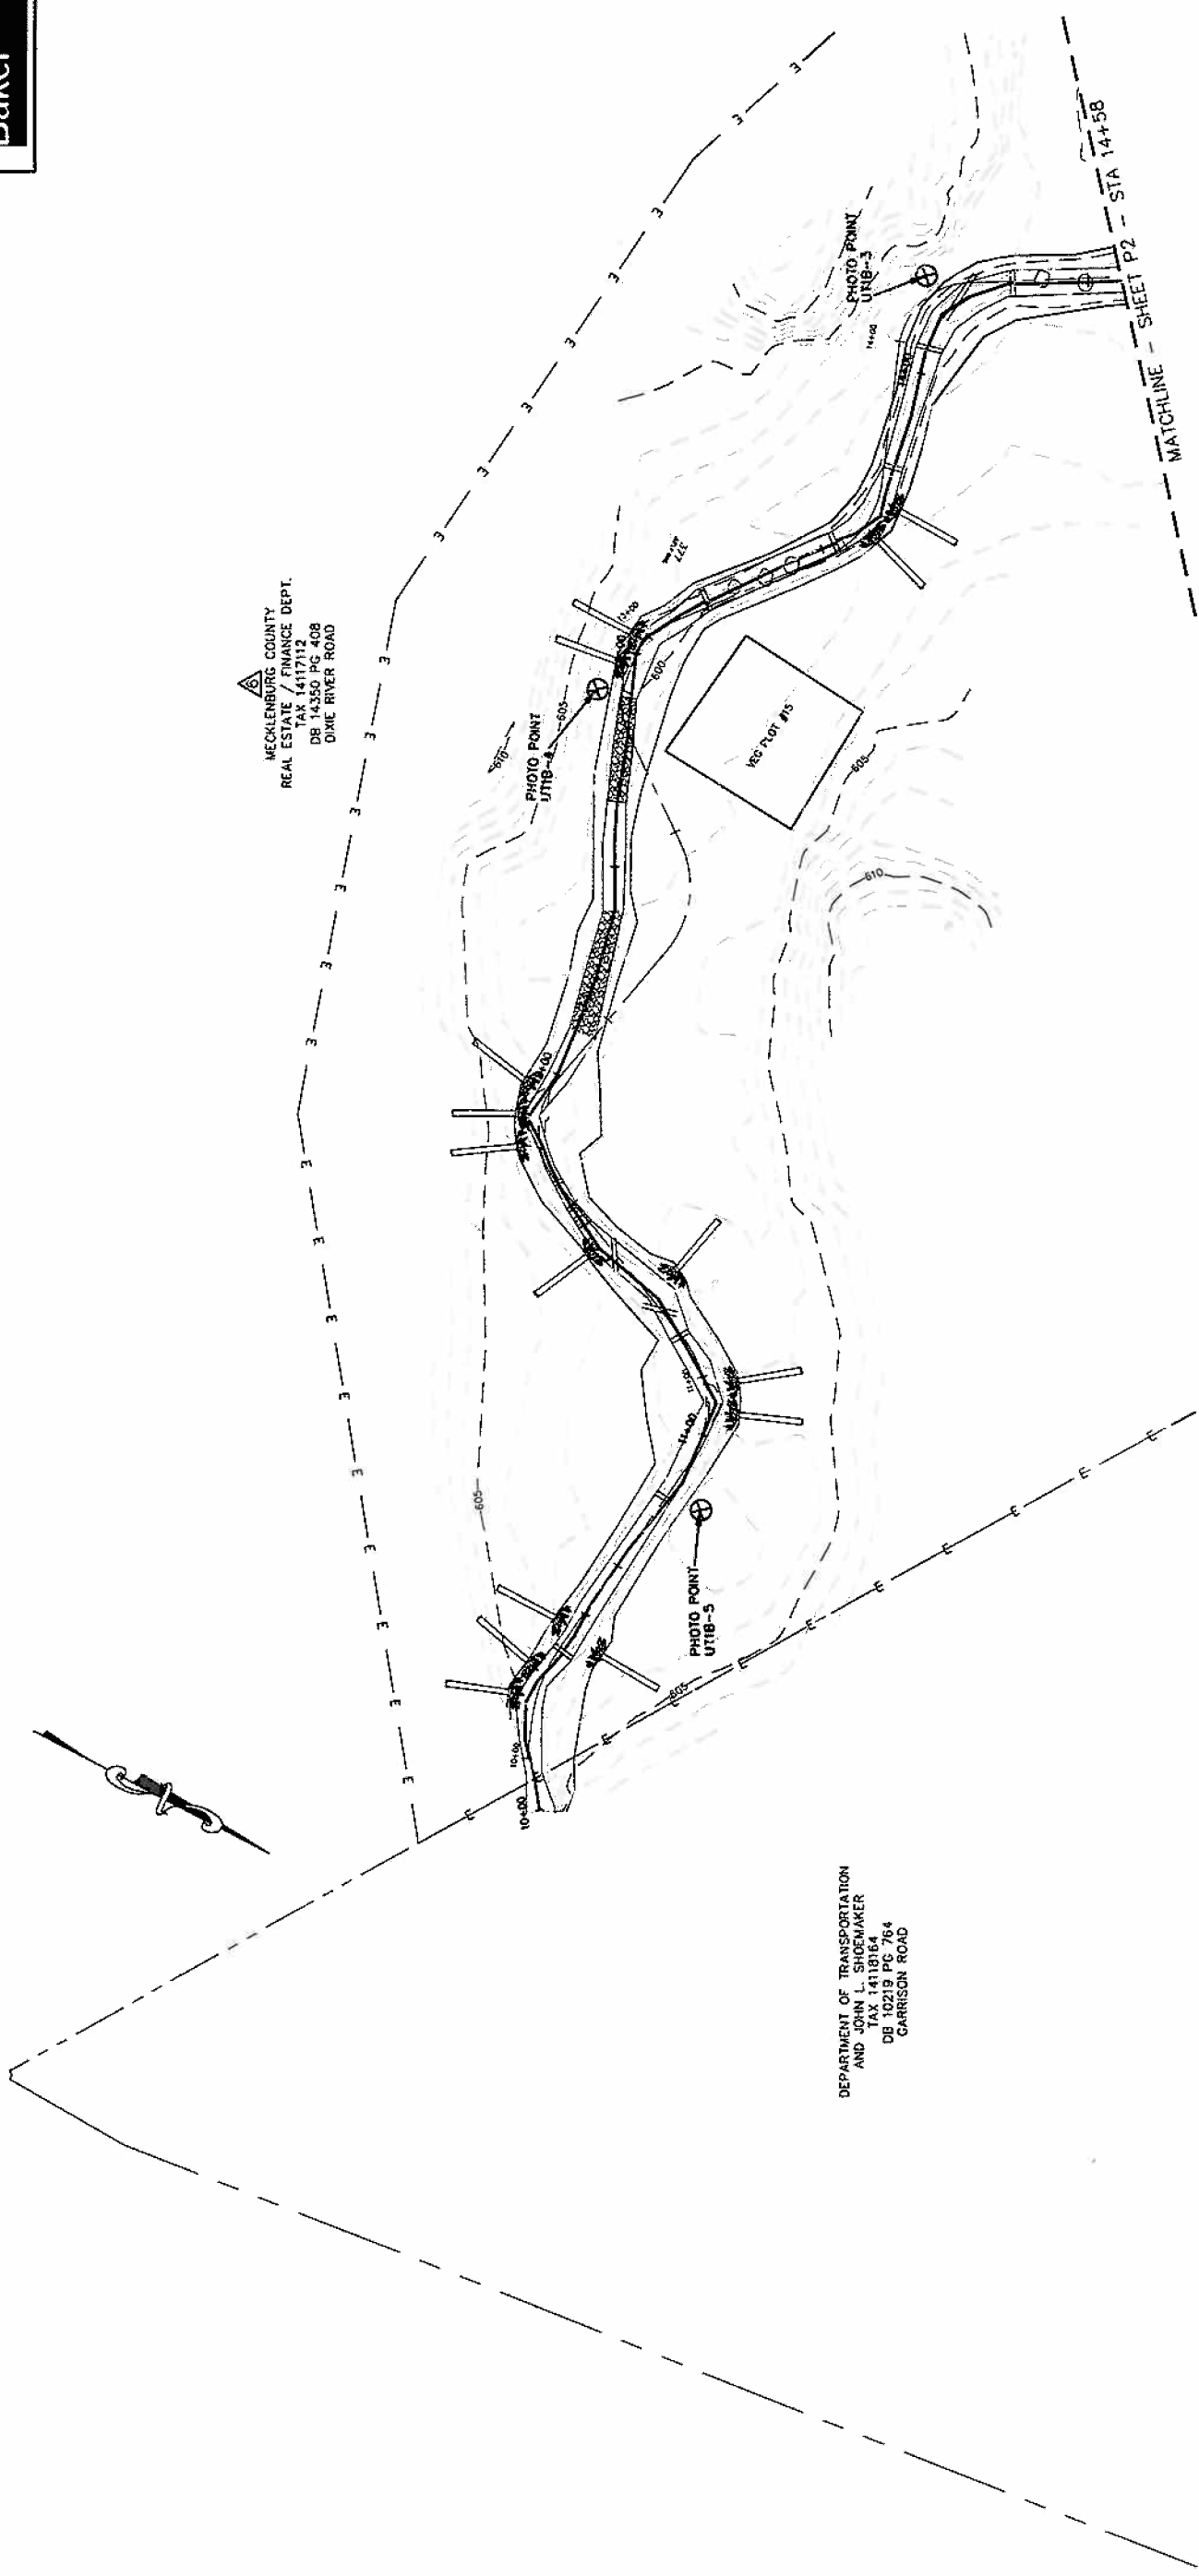

MECKLENBURG COUNTY
 REAL ESTATE FINANCE DEPT.
 TAX 411711
 DB 14350 PC 408
 DIXIE RIVER ROAD

DEPARTMENT OF TRANSPORTATION
 AND JAVAN L. CRUMMAKER
 DB 10219 PC 764
 GARRISON ROAD



BEAVERDAM CREEK
 AS-BUILT WITH BMPs
 UT1-B SITE PLAN


PROJECT REFERENCE NO. 108528
 SHEET NO. P14
 PROJECT ENGINEER
 APPROVED BY KLT
 WAH
 DATE 10/11/2007

Baker
 Baker Engineering, Inc.
 14172 Old Farm Lane
 Oakton, VA 22129
 P: 703.261.4400
 F: 703.261.4401





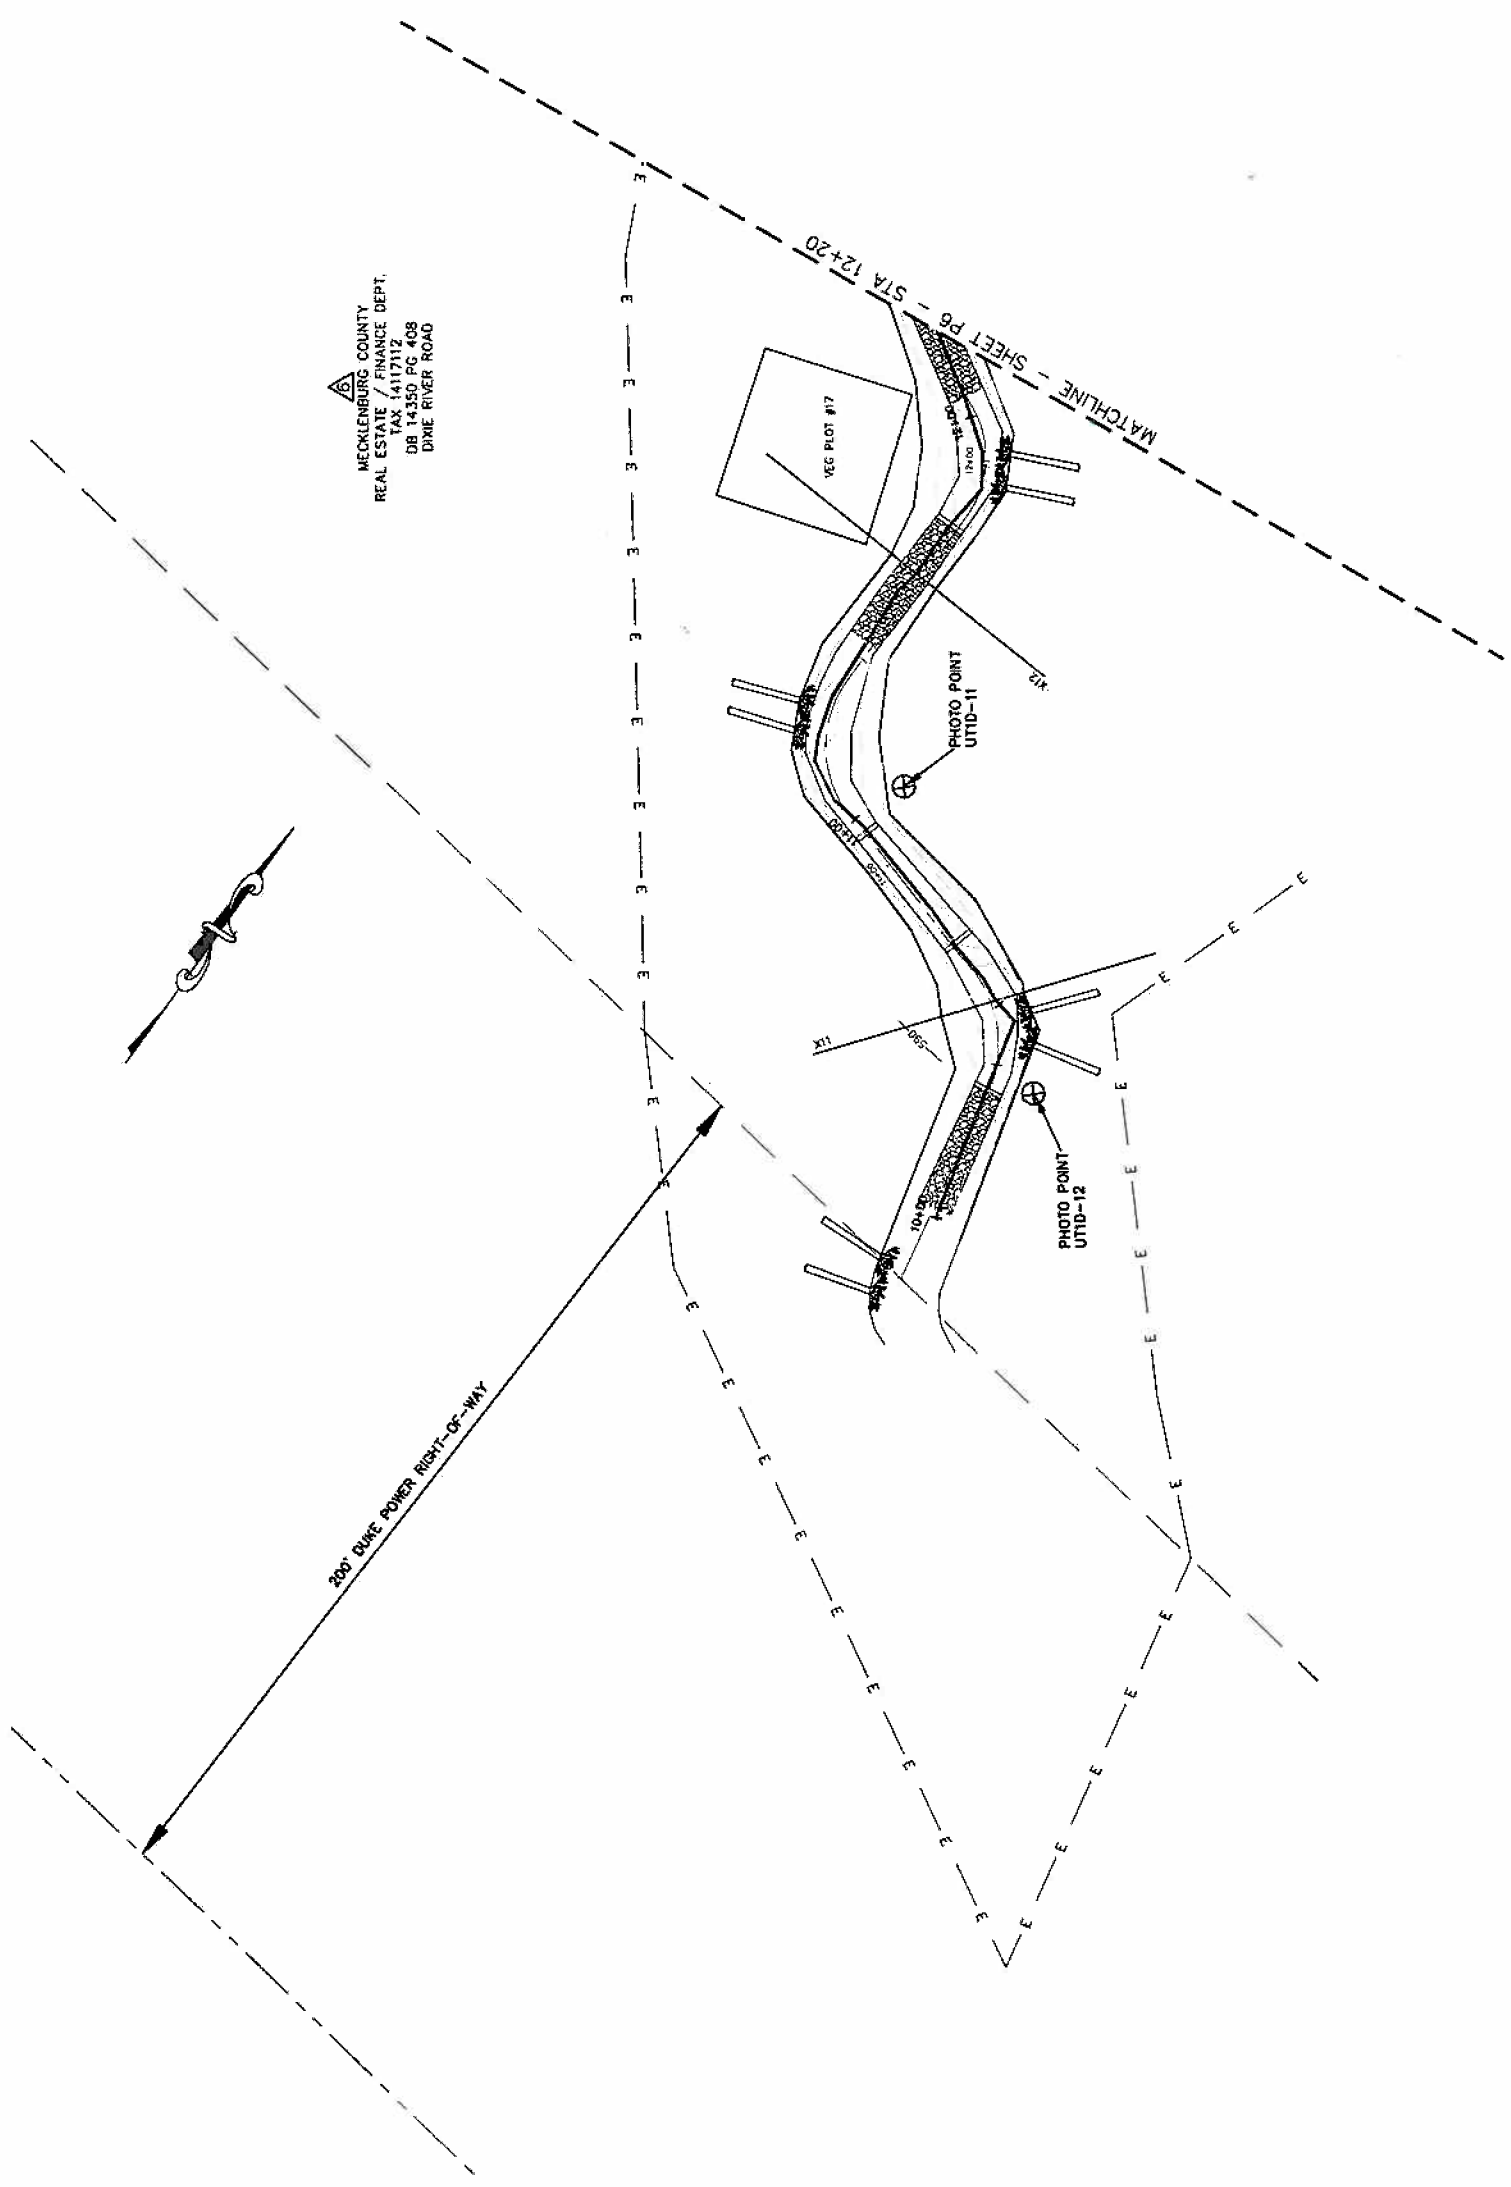
BEAVERDAM CREEK
 AS-BUILT WITH BMPS

UT1-C SITE PLAN

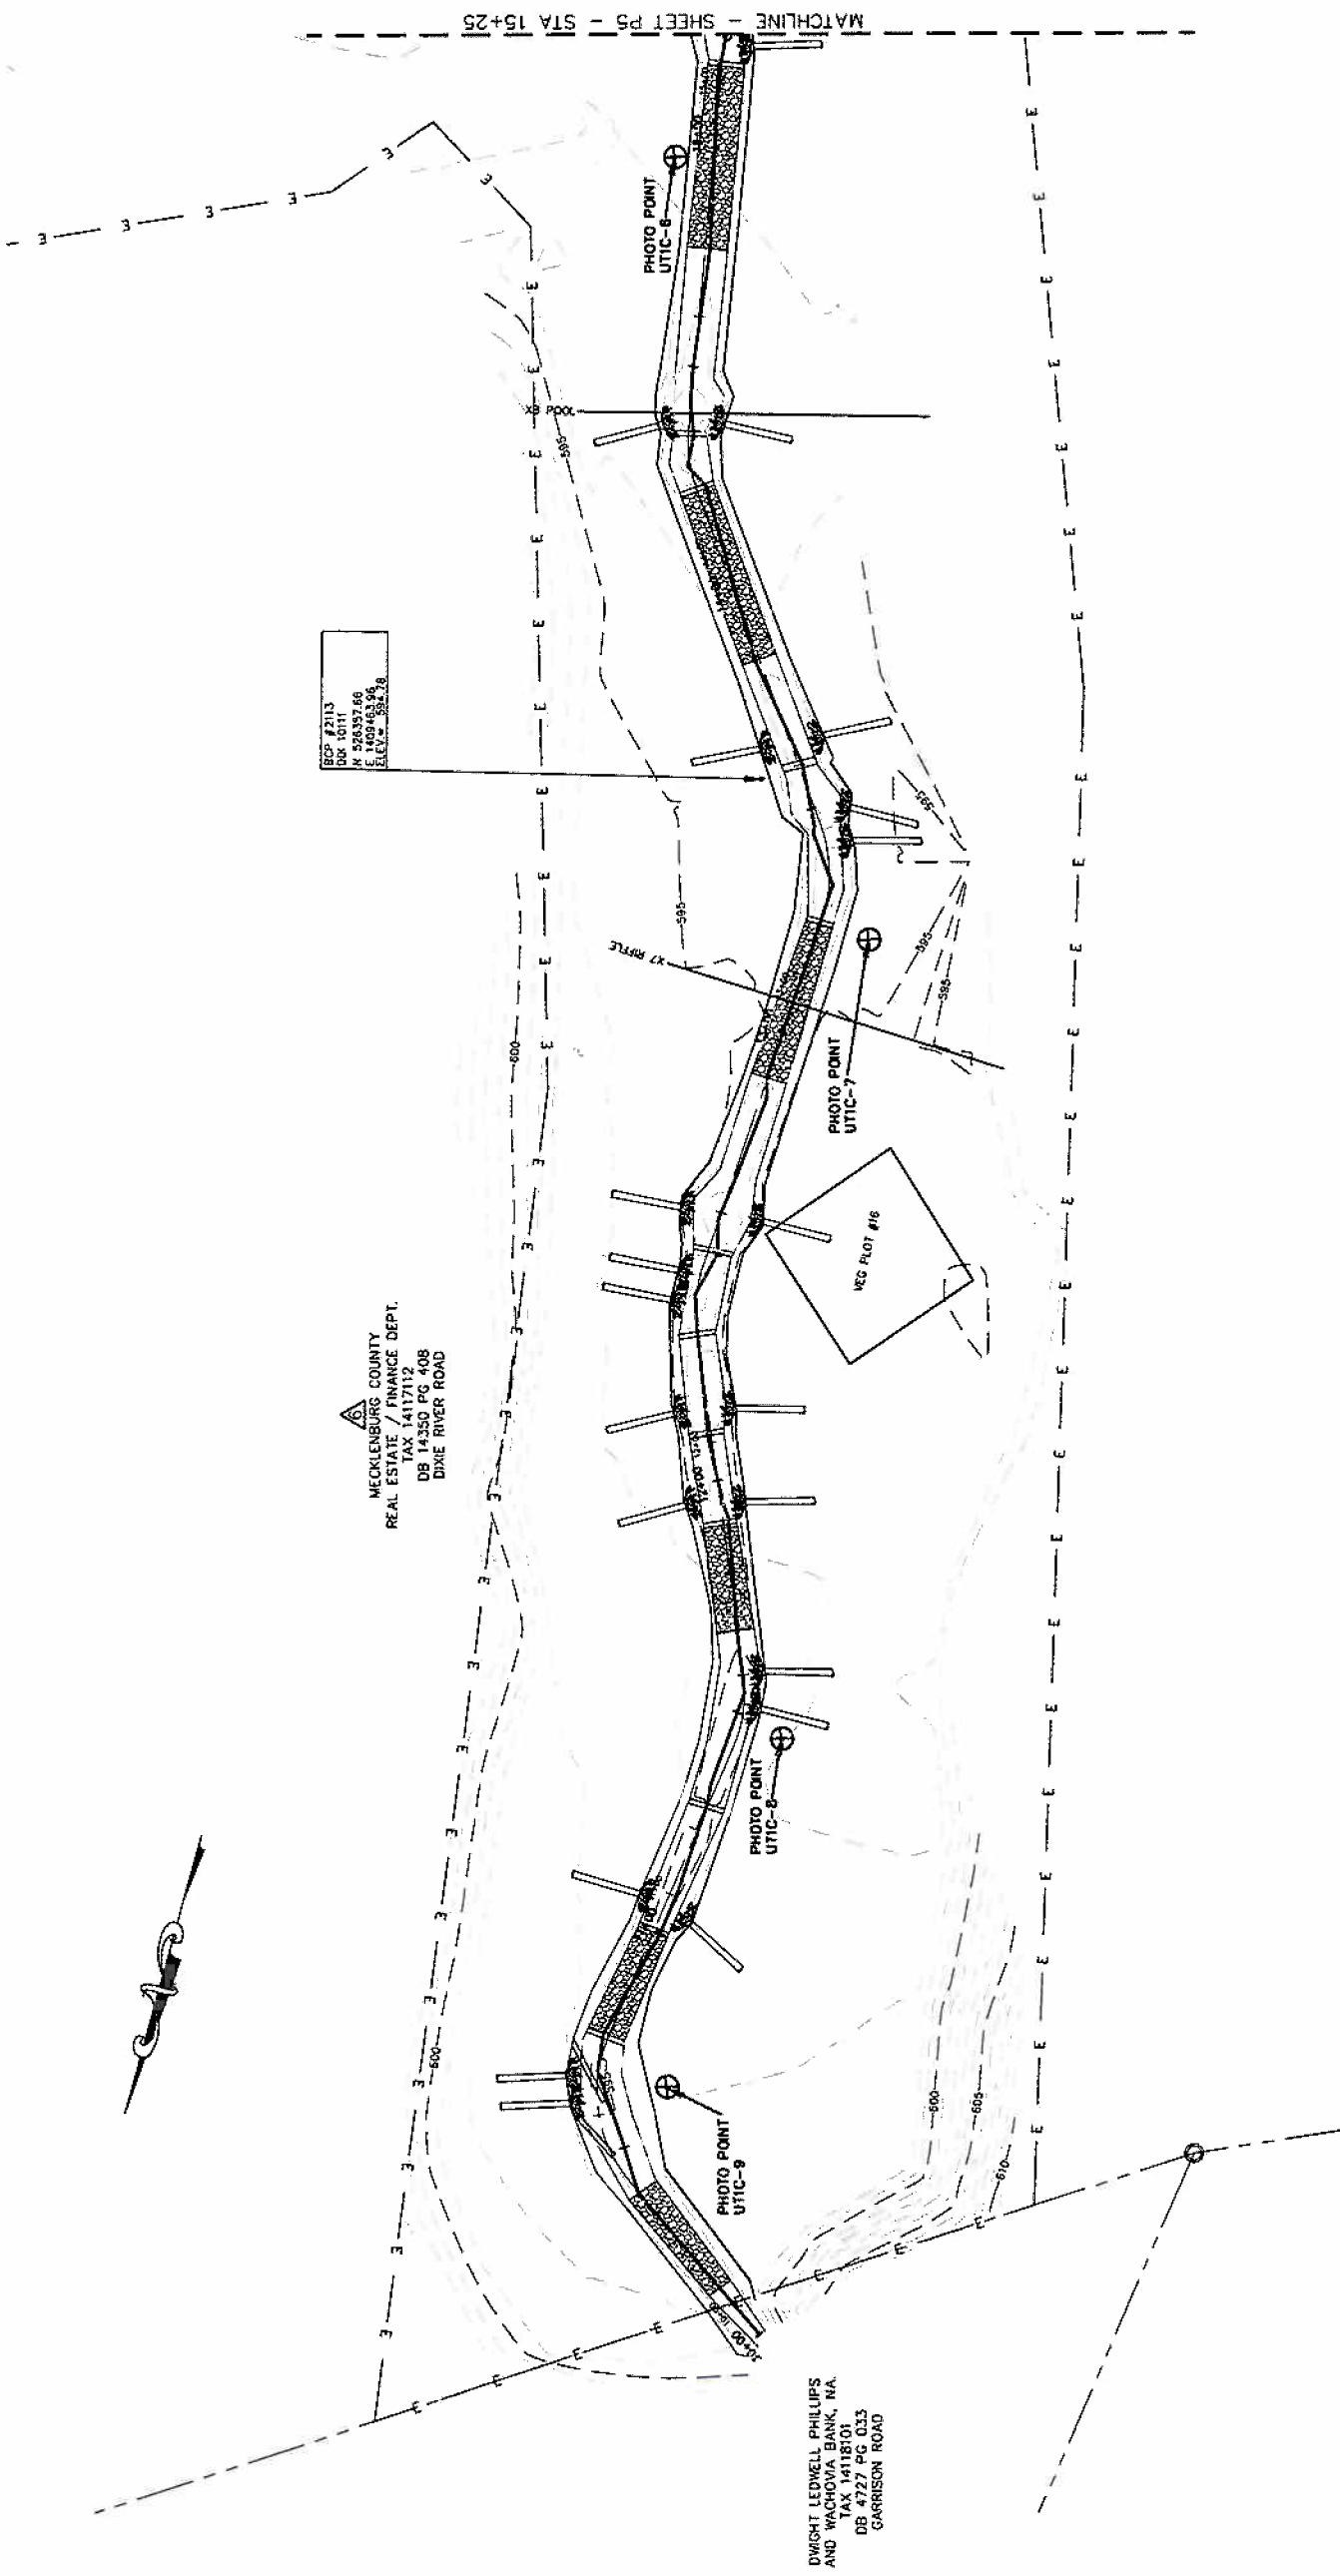

PROJECT REFERENCE NO.	SHEET NO.
108528	PT15
PROJECT ENGINEER	
KLT	
APPROVED BY	
WAH	
DATE	
10/11/2007	
Baker	
<small> Baker Engineering, Inc. 447 South Union Street Danville, VA 24040 Phone: 754.2800 Fax: 754.2424 </small>	


 MECKLENBURG COUNTY
 REAL ESTATE FINANCE DEPT.
 100 N. 7TH ST.
 DR. 1430, FC 08
 DIME RIVER ROAD




BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 UT1-D SITE PLAN

PROJECT REFERENCE NO. 108528
 SHEET NO. P16
 PROJECT ENGINEER
 APPROVED BY KLT
 WAH
 DATE 10/11/2007

Baker
BAKER CONSTRUCTION CO., INC.
 10000 W. 10th Ave.
 Suite 200, Englewood, CO 80150
 Phone: 303.751.1000
 Fax: 303.751.1001

WATERS CONSTRUCTION COMPANY, INC.
 TAX 19925107
 DB 12829 PG 886
 WINDY GAP ROAD

WATERS CONSTRUCTION COMPANY, INC.
 DB 12829 PG 842
 DIKE RIVER ROAD

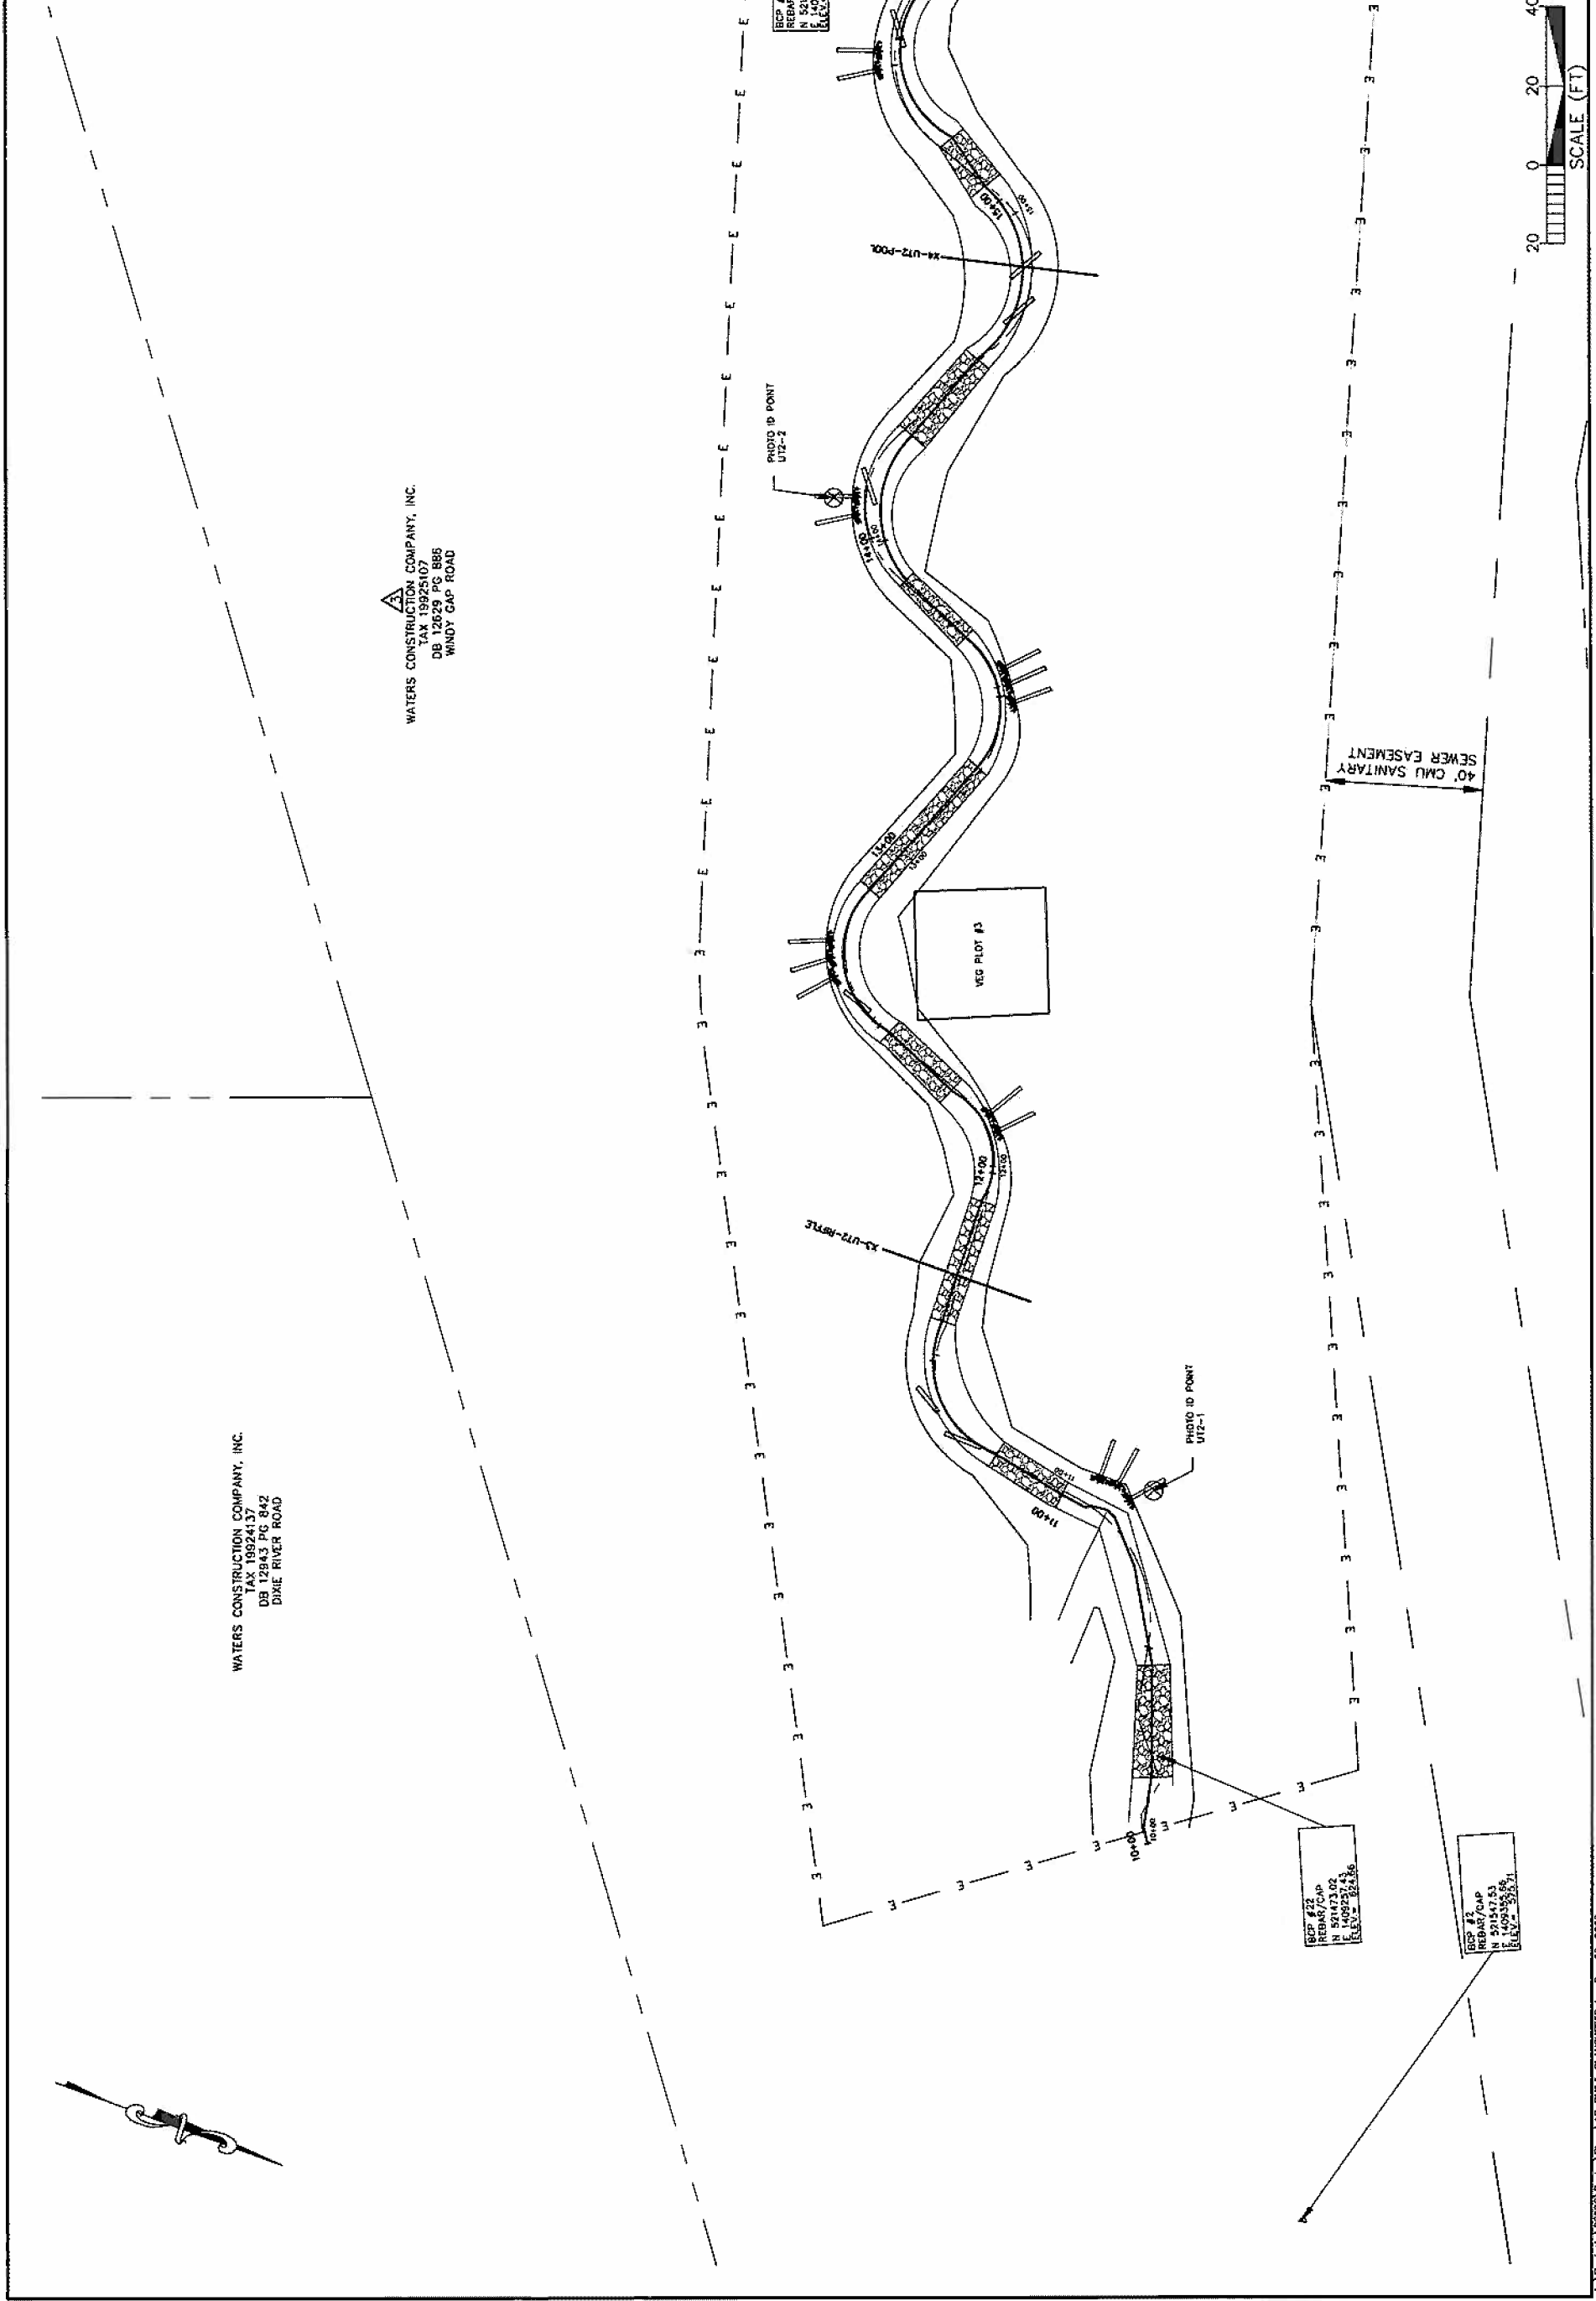

**BEAVERDAM CREEK
 AS-BUILT WITH BMPs**
UT2 SITE PLAN


PROJECT REFERENCE NO. 108528
 SHEET NO. P17
 PROJECT ENGINEER
 APPROVED BY K.L.T.
 W.A.H.
 DATE 10/11/2007





DIME RIVER LAND COMPANY
 AND PAPPAS PROPERTIES, LLC.
 TAX 19925114
 DB 13069 PG 911
 GLENBURN LANE

REC #18
 REGAR.
 N. 212341 B
 E. 2485514
 ELEC. 817.57

WATERS CONSTRUCTION COMPANY, INC.
 TAX 19925107
 DB 12629 PG 886
 WINDY GAP ROAD

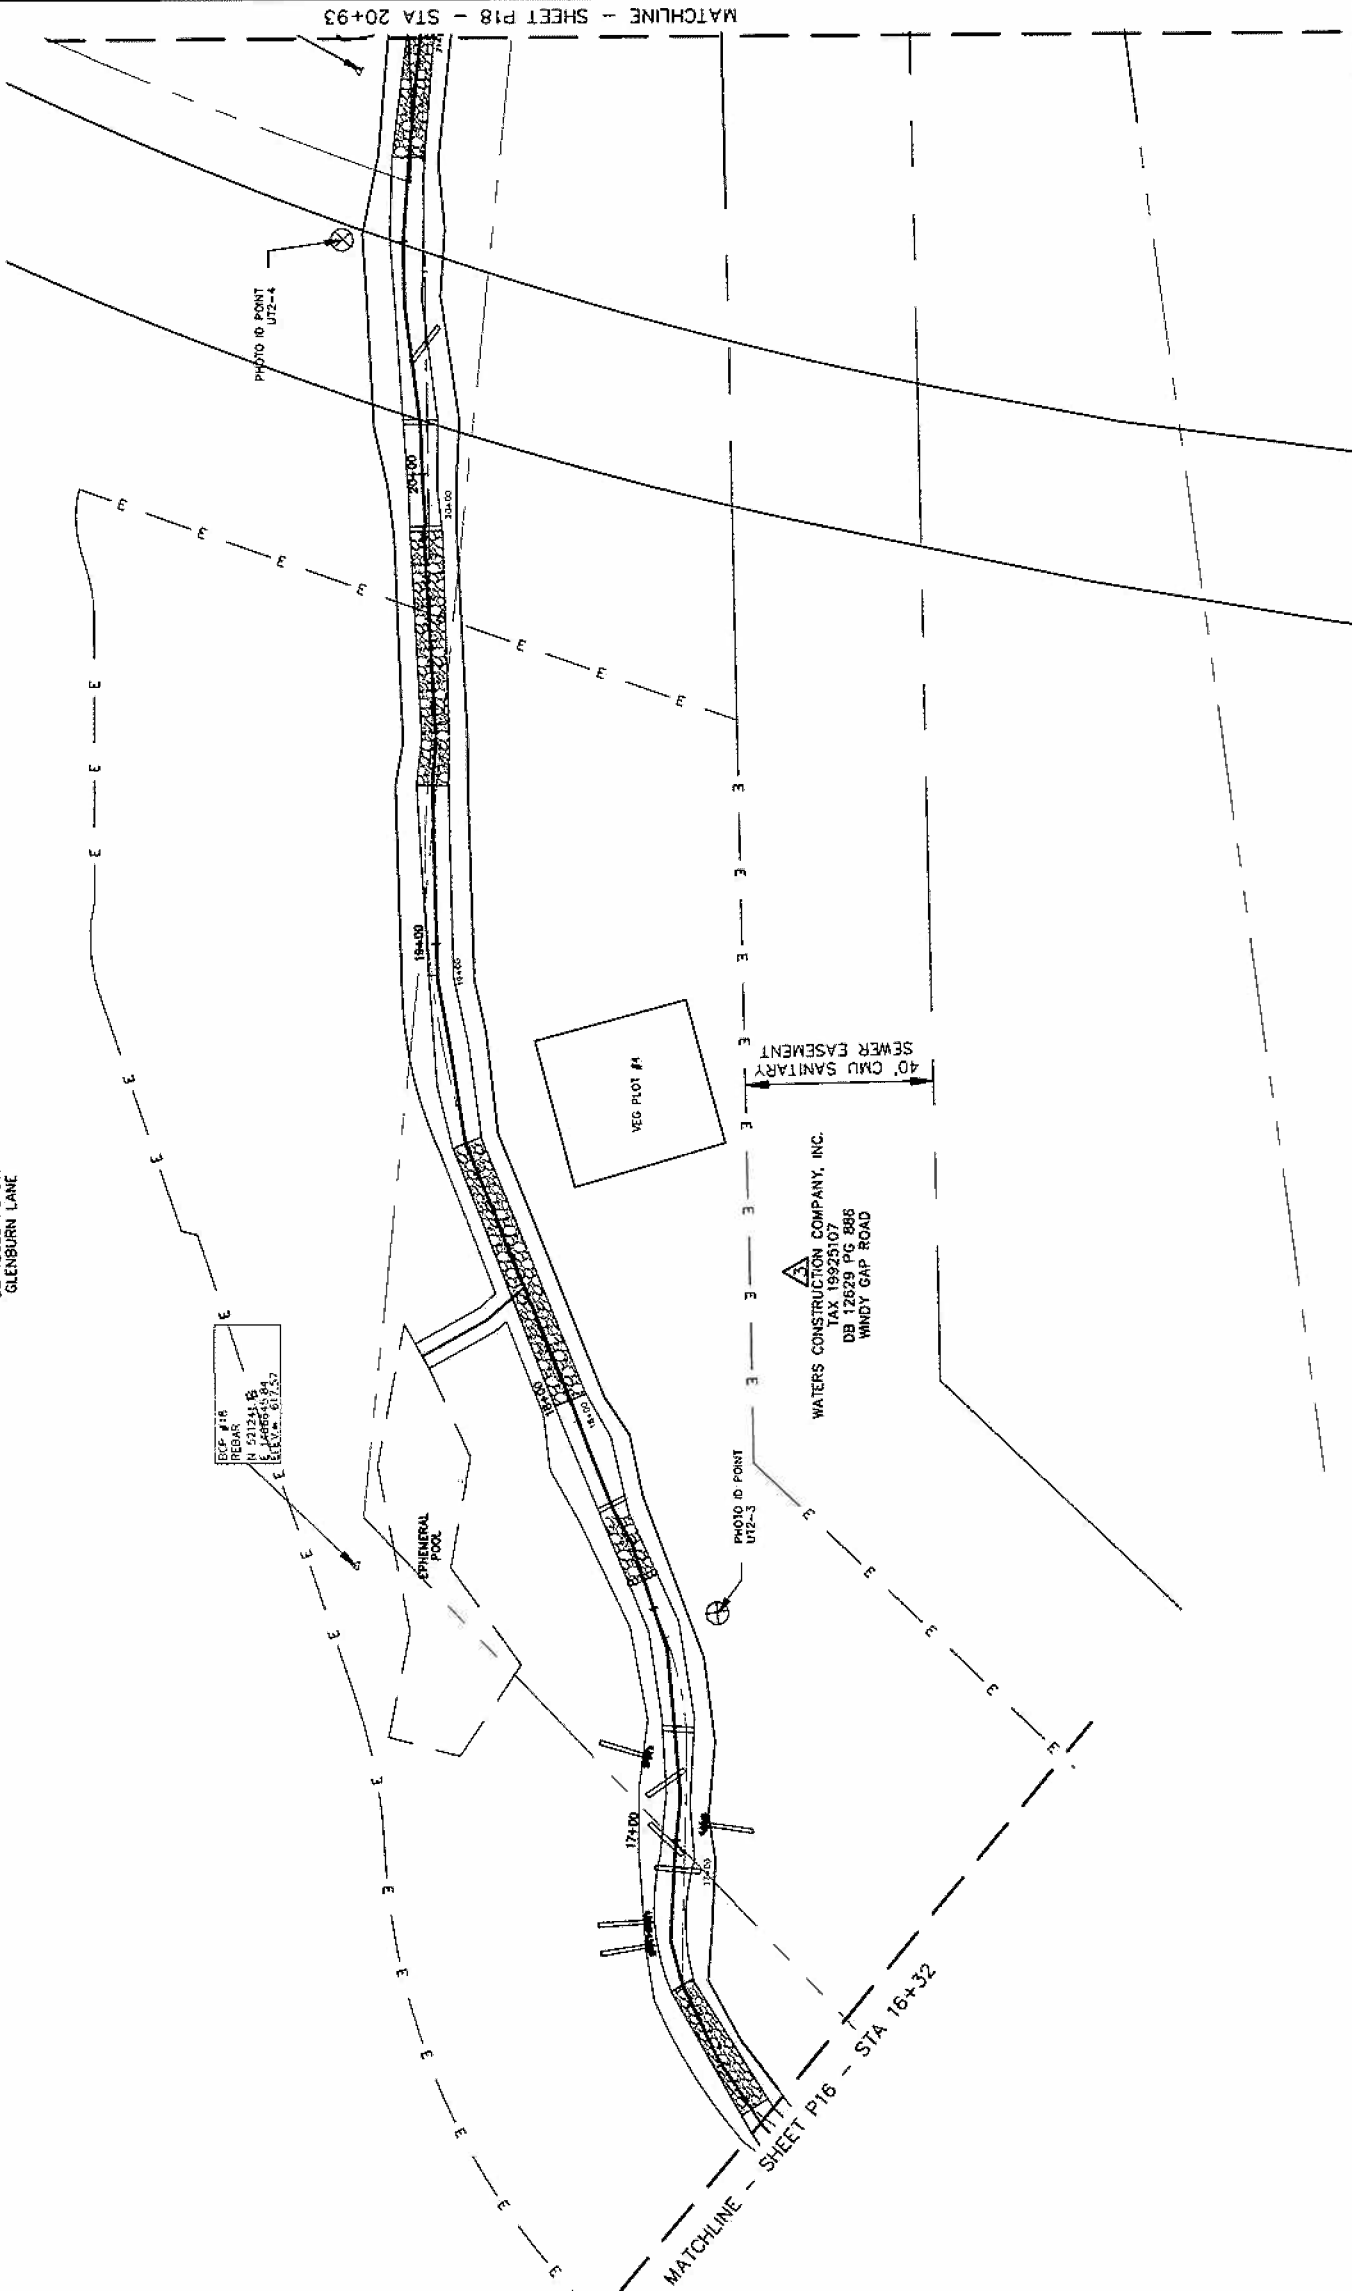

BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 UT2 SITE PLAN



PROJECT REFERENCE NO. 108528
 SHEET NO. P18
 PROJECT ENGINEER
 APPROVED BY KLT
 WAH
 DATE 10/11/2007

Baker
 Baker Engineering Inc.
 14750 W. 10th Ave.
 Suite 100
 Golden, CO 80601
 Phone: 303.440.1400
 Fax: 303.440.1402

BELLASERA BERENCK, LLC.
 C/O THOMAS A. SAHLED JR.
 TAX 1992511
 DB 18271 PC 145
 WINDY GAP ROAD

DIKE RIVER LAND COMPANY
 AND PAPPAS PROPERTIES, LLC.
 TAX 1992514
 DB 18271 PC 91
 WINDY GAP ROAD
 PHOTO ID U12-5


SCP #1322
 NAL
 N 21845.54
 ELEV. 2027.77

SCP #1486
 NAL
 N 21401.00
 ELEV. 2028.83

WATERS-CONSTRUCTION COMPANY, INC.
 TAX 19825107
 DB 12629 PC BB6
 WINDY GAP ROAD

WATERS CONSTRUCTION COMPANY, INC.
 TAX 19925103
 DB 12629 PC 902
 DIKE RIVER ROAD

40' CMU SANITARY
 SEWER EASEMENT

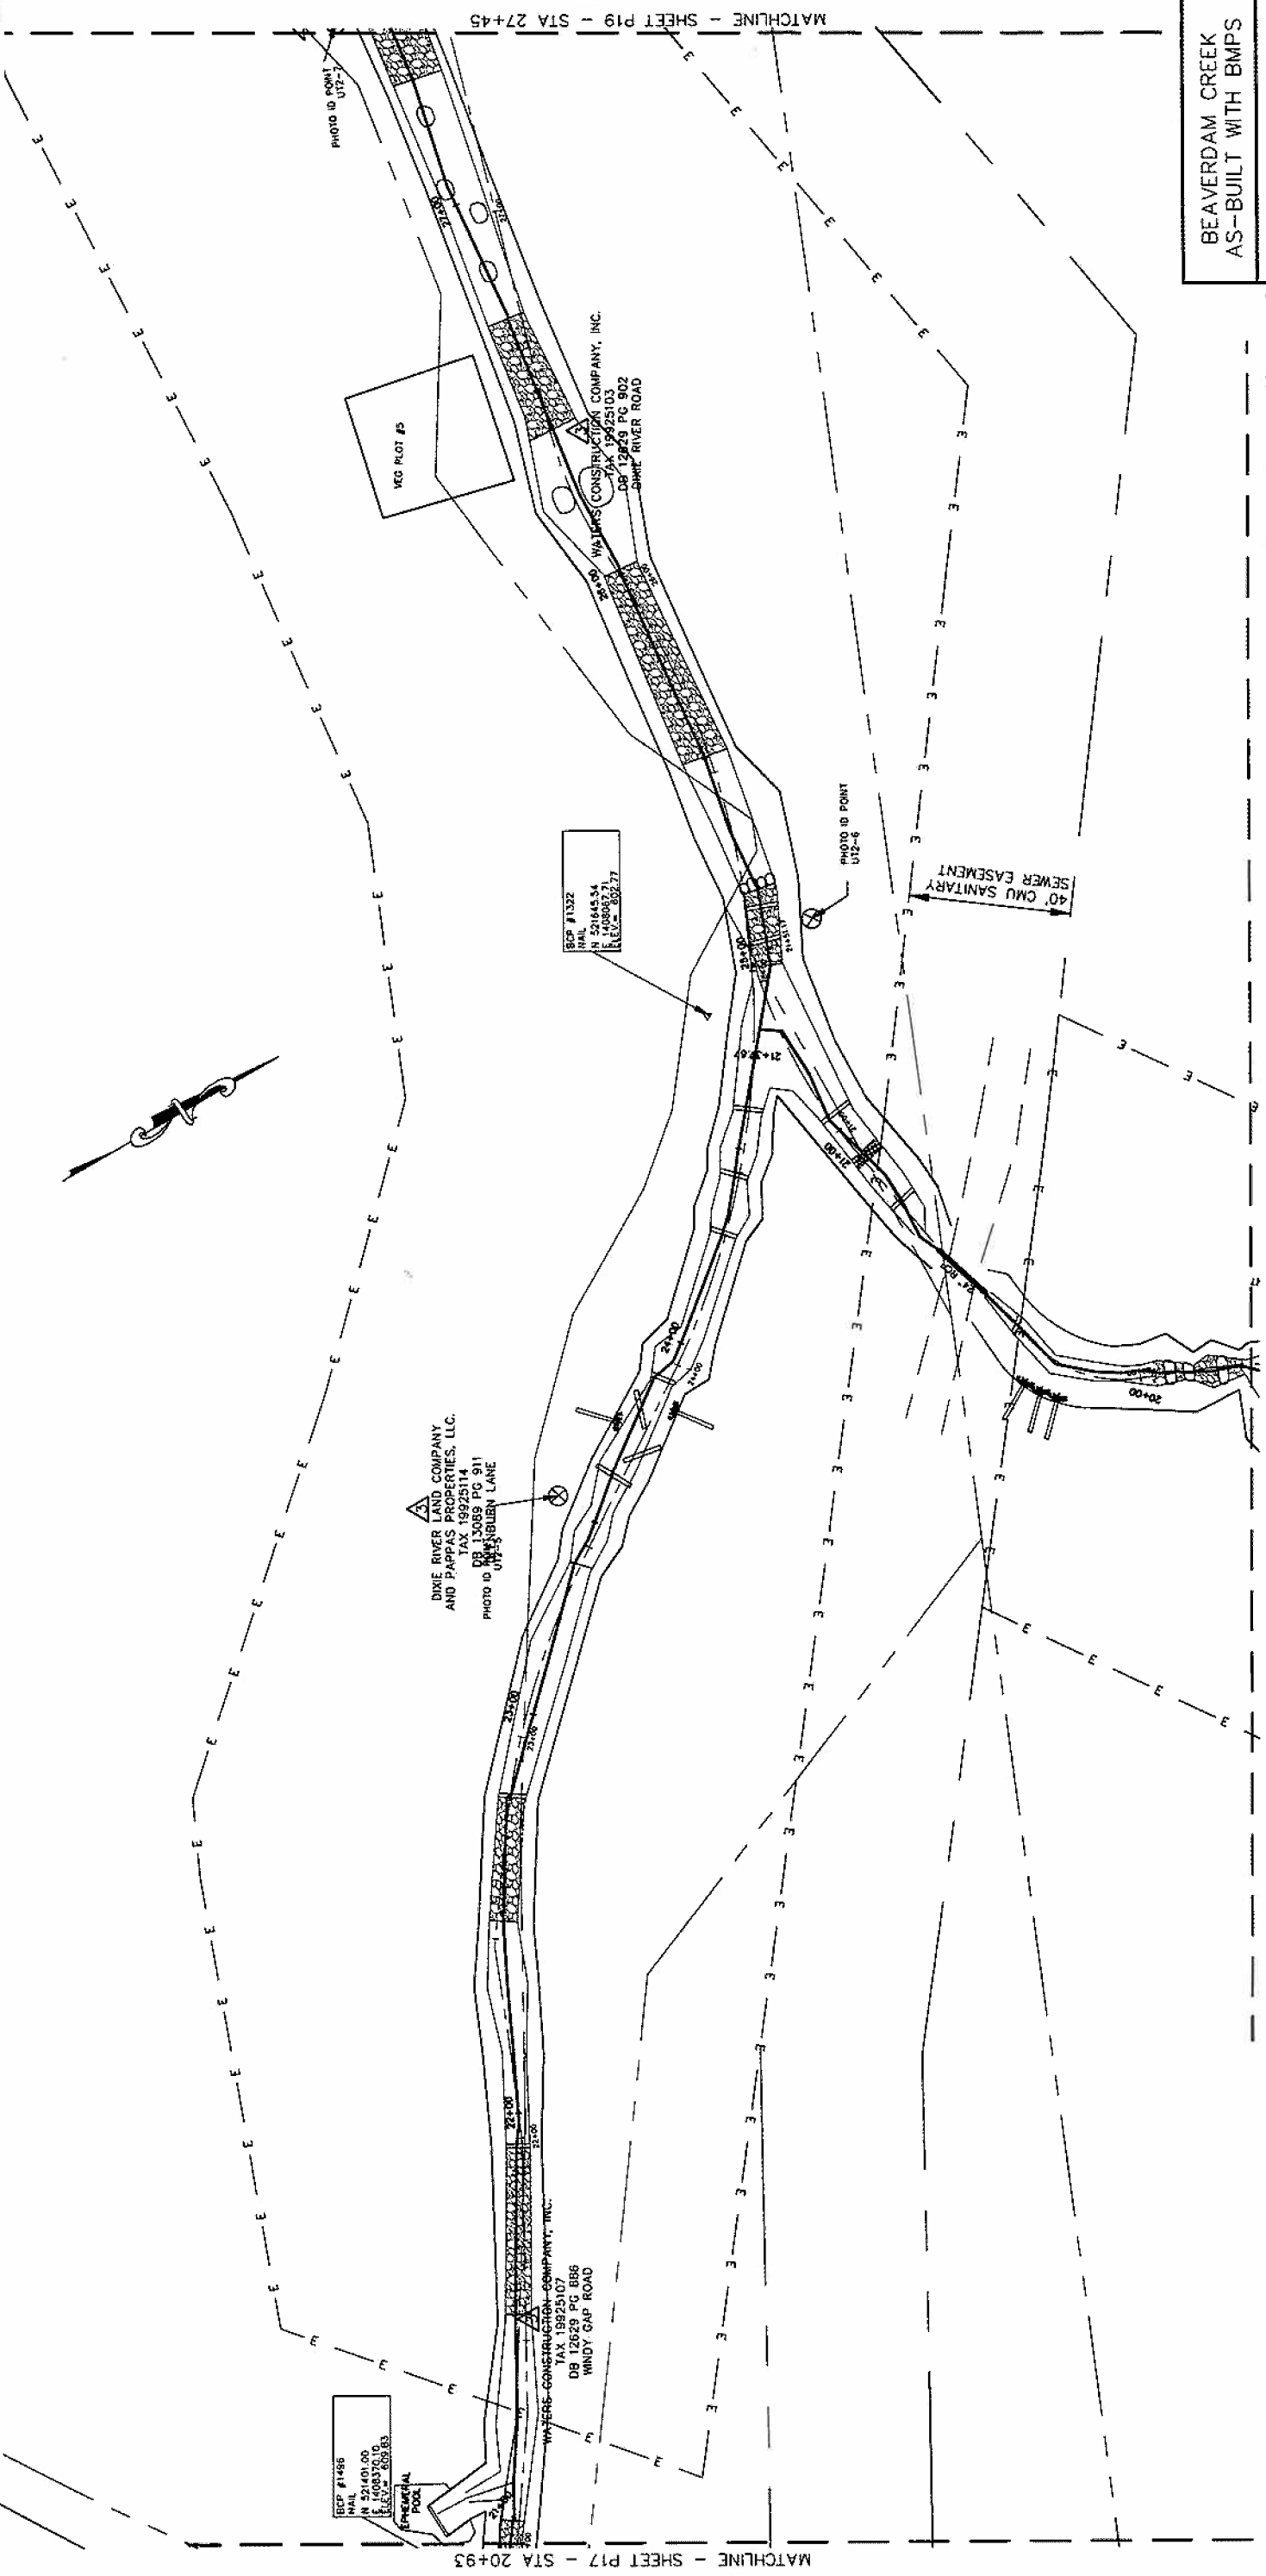

BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 UT2/UT2-A
 SITE PLAN



MATCHLINE - SHEET P23 - STA 19+72


MATCHLINE - SHEET P17 - STA 20+93

MATCHLINE - SHEET P19 - STA 27+45

PROJECT REFERENCE NO. 108528
 SHEET NO. P19
 PROJECT ENGINEER KLT
 APPROVED BY WAH
 DATE 10/11/2007




BELLASERA BEREWICK, LLC.
 c/o THOMAS A. SAIED JR.
 TAX 19925111
 DB 18271 PG 145
 WINDY GAP ROAD

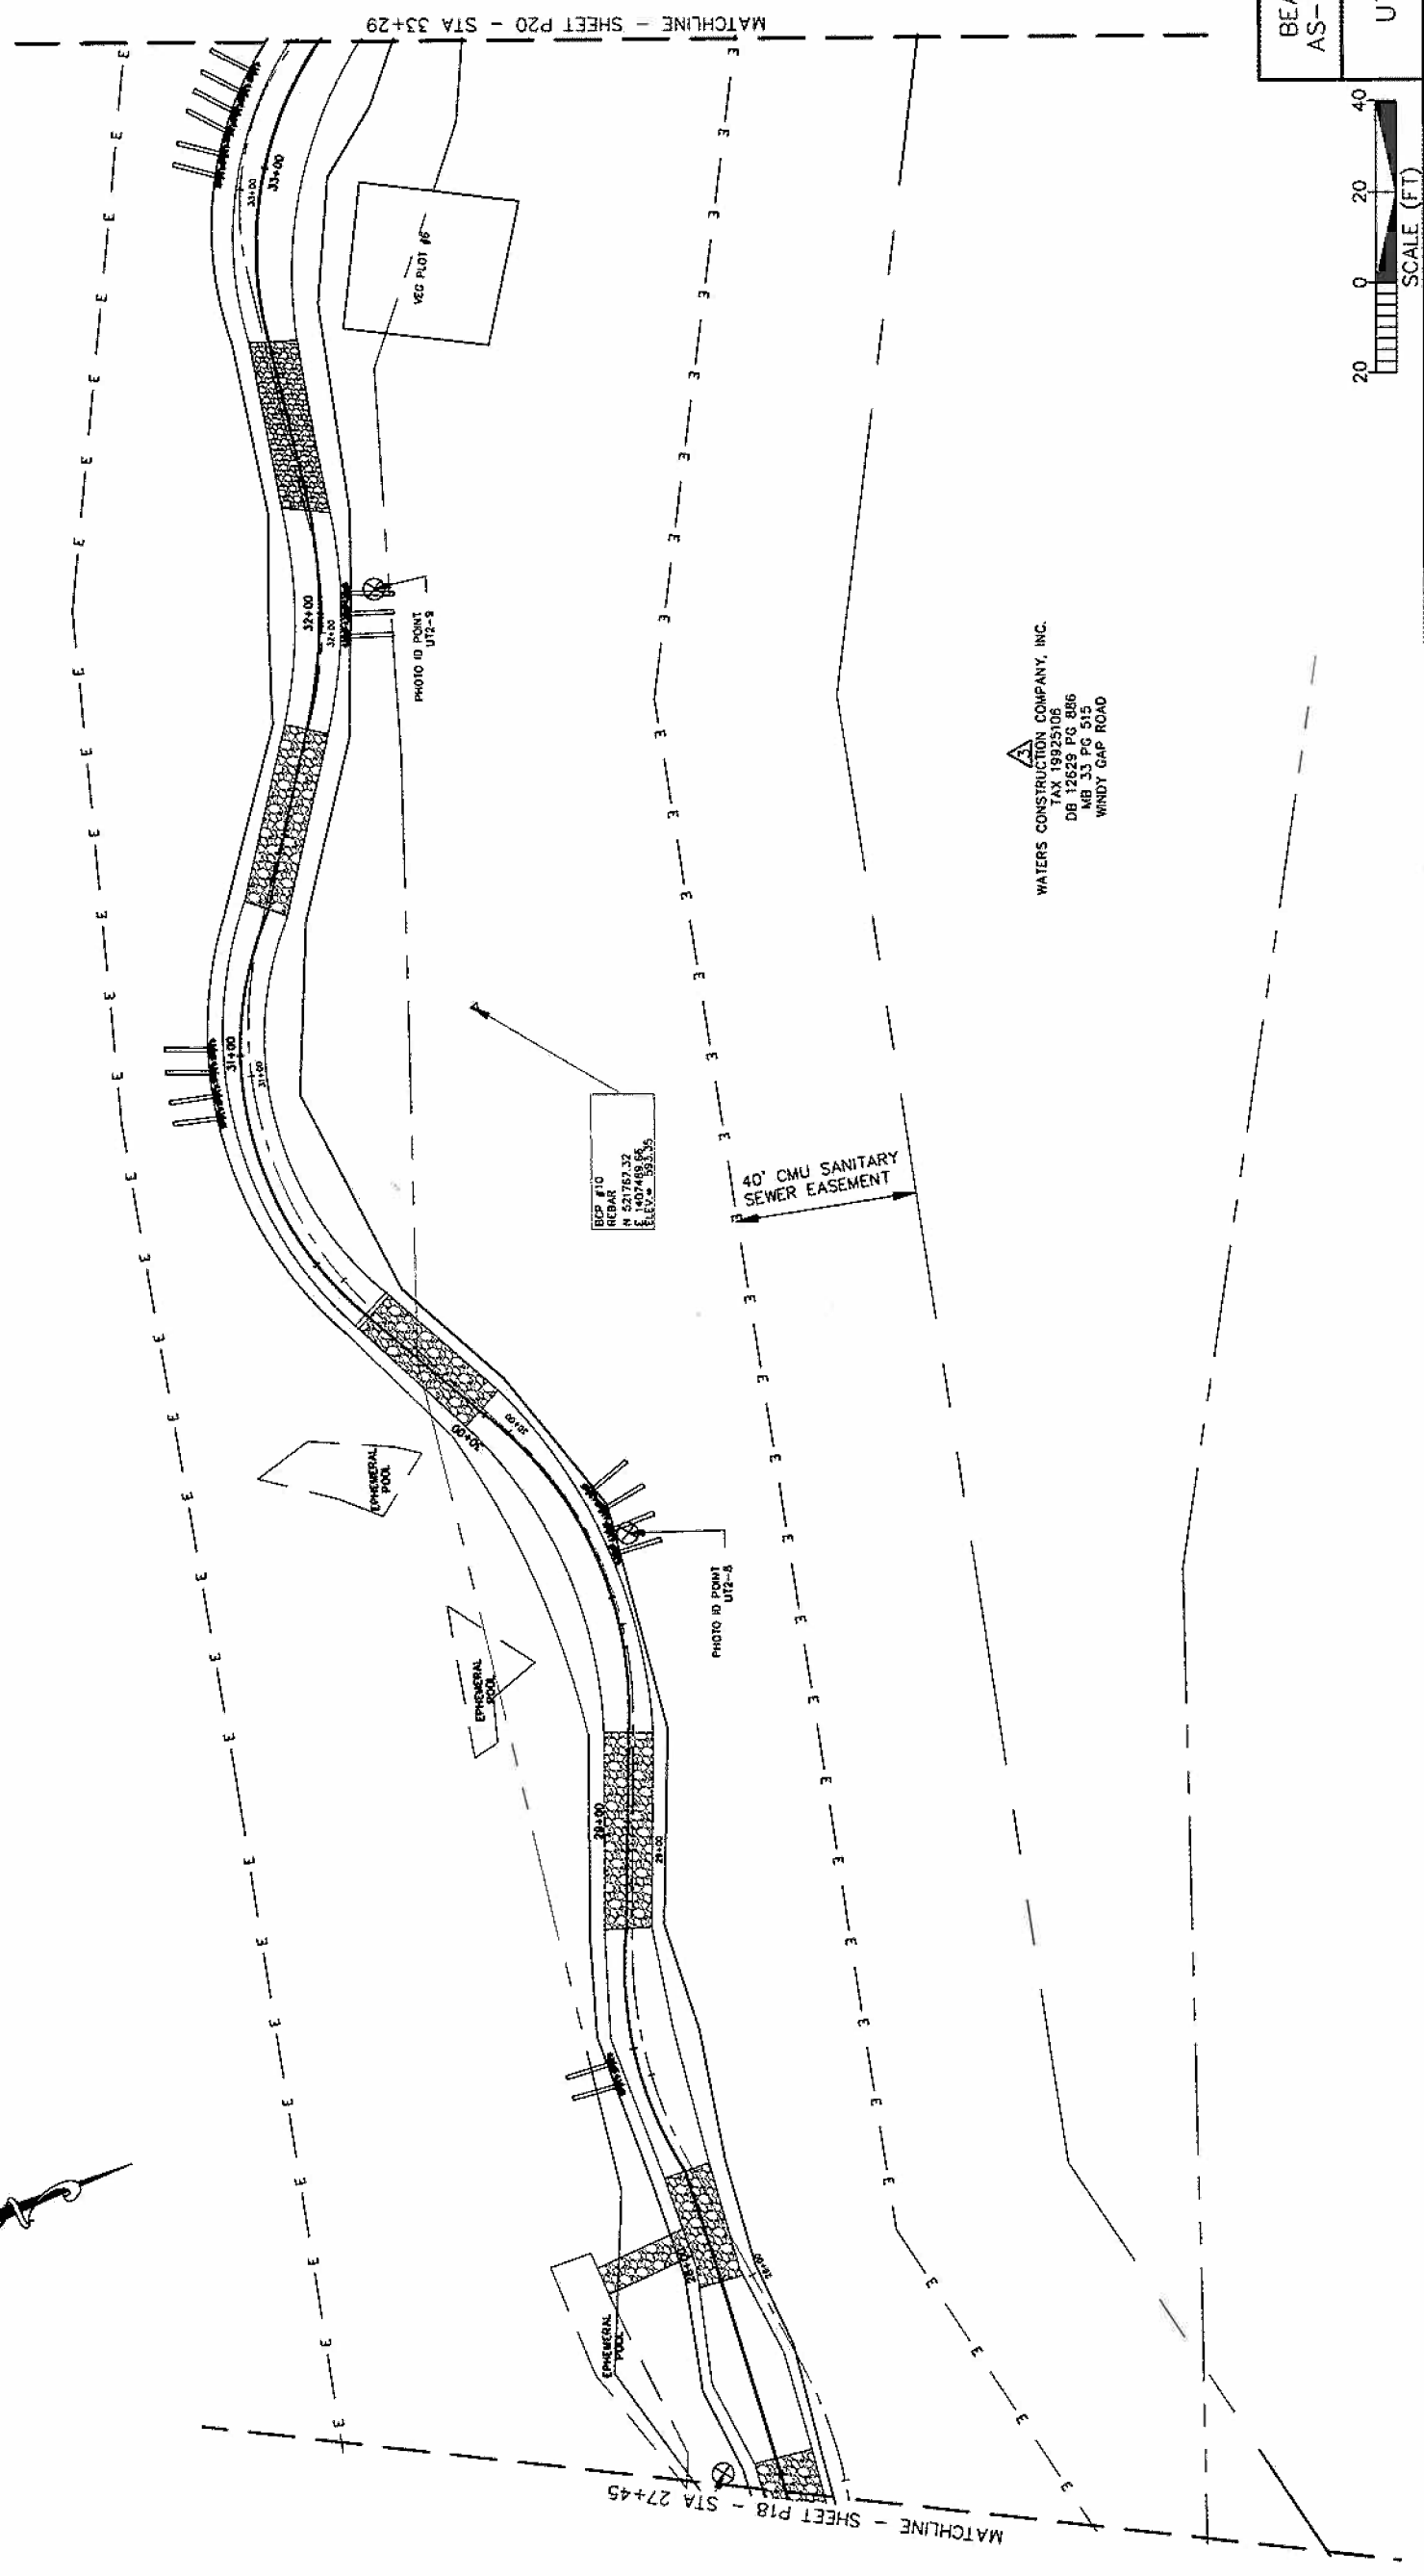

WATERS CONSTRUCTION COMPANY, INC.
 TAX 19925108
 DB 12625 PG 886
 MB 33 PG 515
 WINDY GAP ROAD

REBAR #10
 N 521763.32
 E 407468.84
 ELEV. 20 352.95

BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 UT2 SITE PLAN



PROJECT REFERENCE NO.	106528	SHEET NO.	P20
PROJECT ENGINEER	KLT		
APPROVED BY	WAH		
DATE	10/11/2007		


Baker
 Baker Engineering, Inc.
 10100 North Tryon Street
 Charlotte, NC 28217
 Phone: 704.546.1000
 Fax: 704.546.1001

BELLASERA BEREWICK, LLC.
 c/o THOMAS A SAEED JR.
 TAX 19925111
 DB 18271 PG 145
 WINDY GAP ROAD

MI HOMES OF CHARLOTTE, LLC
 TAX 19925112
 DB 19186 PG 179
 GLENBURN LANE

WATERS CONSTRUCTION COMPANY, INC.
 TAX 19925105
 DB 12625 PG 886
 MB 33 PG 515
 WINDY GAP ROAD


BEAVERDAM CREEK
 AS-BUILT WITH BMPs
 UT2 SITE PLAN

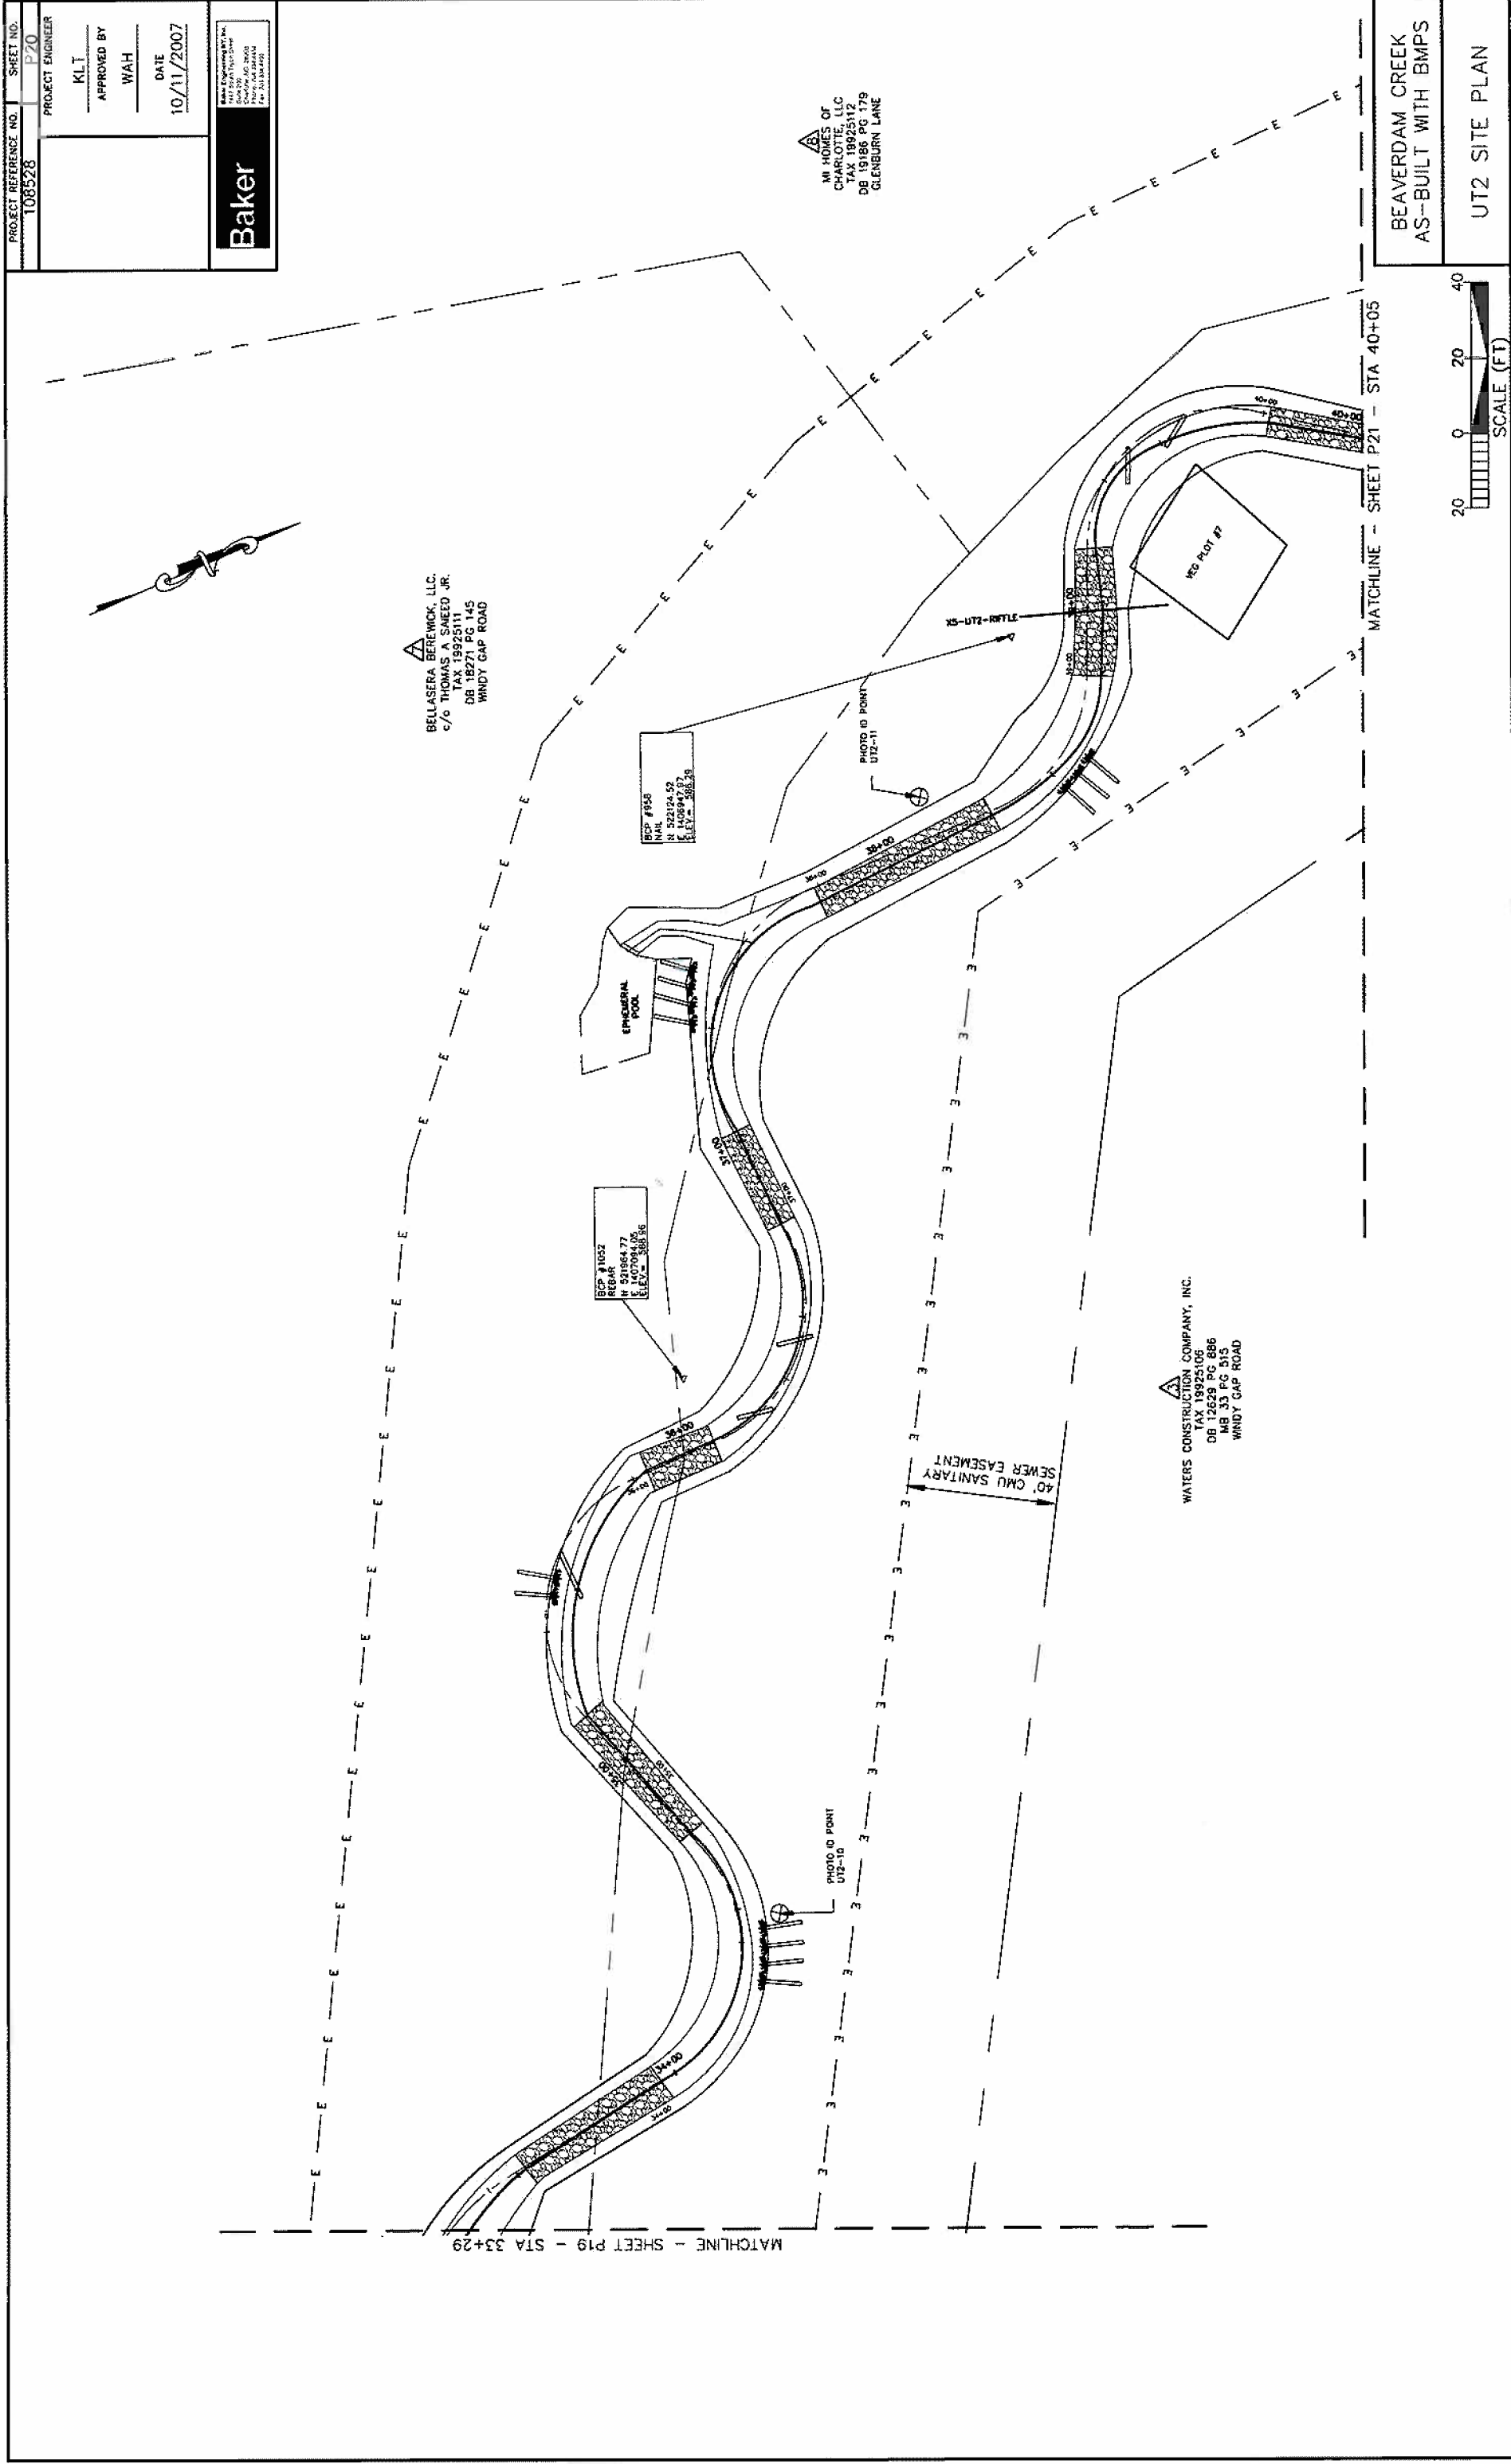

PROJECT REFERENCE NO. 108528
 SHEET NO. P-21
 PROJECT ENGINEER
 APPROVED BY KLT
 WAH
 DATE 10/11/2007



MI HOMES OF CHARLOTTE, LLC
 TAX 19925112
 DB 19186 PG 179
 GLENBURN LANE

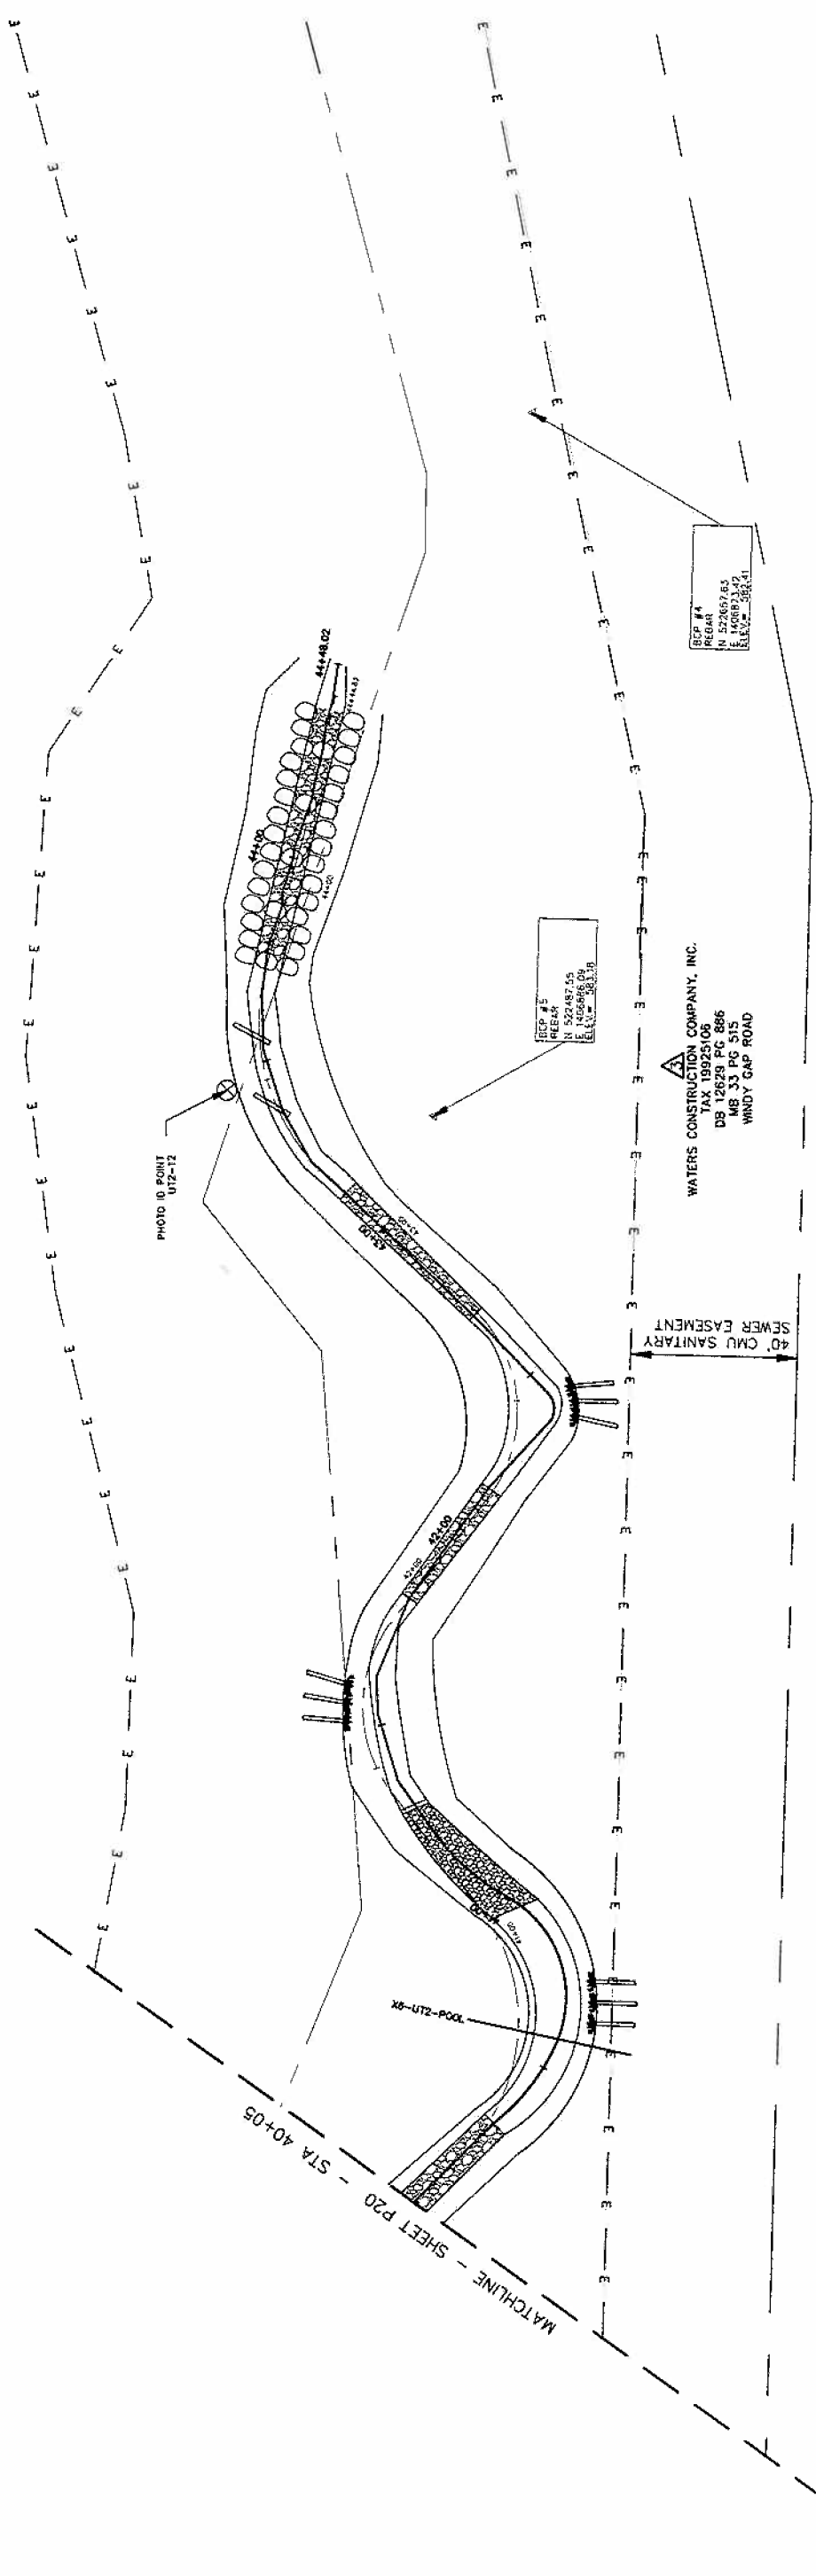

RECP #5
 WEEBKA
 N 522487.55
 E 1408896.09
 EL. 352.30

WATERS CONSTRUCTION COMPANY, INC.
 TAX 19925106
 DB 12629 PG 886
 MB 33 PG 515
 WINDY GAP ROAD

RECP #4
 N 522662.85
 E 1408873.42
 EL. 354.41


BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 UT2 SITE PLAN




PROJECT REFERENCE NO. 108528
 SHEET NO. P22
 PROJECT ENGINEER
 APPROVED BY KLT
 WAH
 DATE 10/11/2007



WATERS CONSTRUCTION COMPANY, INC.
 TAX 18925103
 DB 12628 PG 902
 DIXIE RIVER ROAD

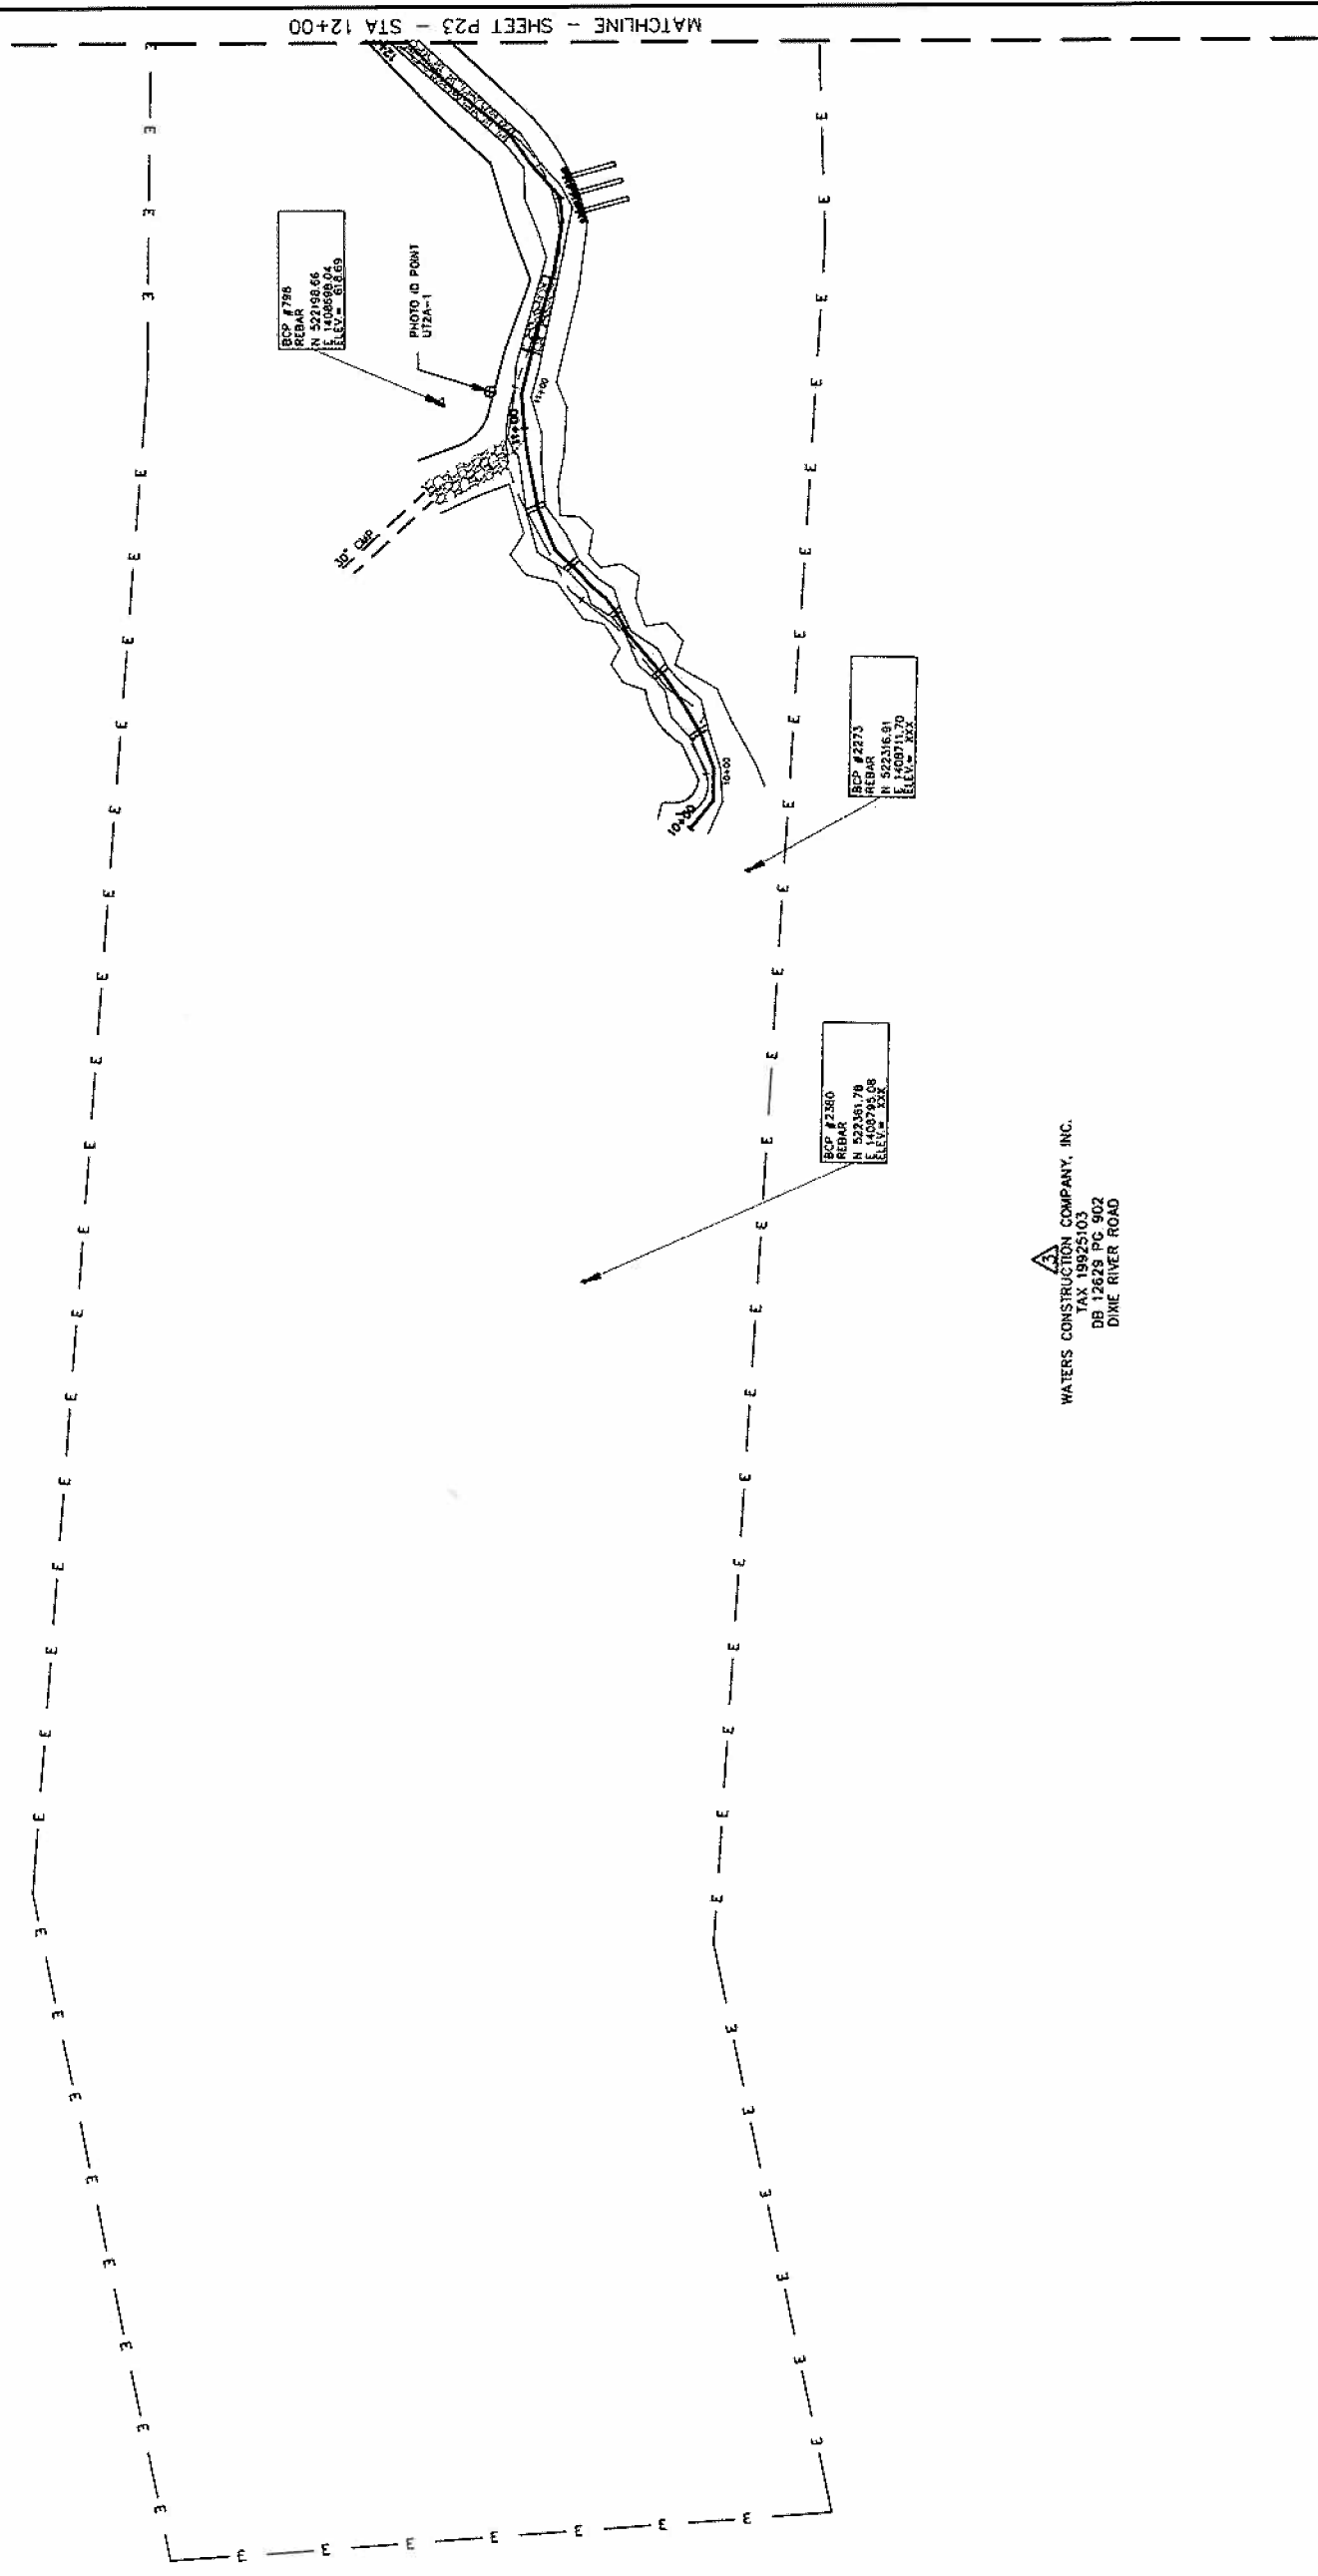



BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 UT2-A SITE PLAN



PROJECT REFERENCE NO.	108528	SHEET NO.	P23
PROJECT ENGINEER	KLT		
APPROVED BY	WAH		
DATE	10/11/2007		


WATERS CONSTRUCTION COMPANY, INC.
 TAX 19925103
 DB 12629 PG 902
 DIXIE RIVER ROAD

Baker
 Baker Engineering & Surveying, Inc.
 2477 207th Street
 Everett, WA 98203
 Phone: 425-244-1100
 Fax: 425-244-1105

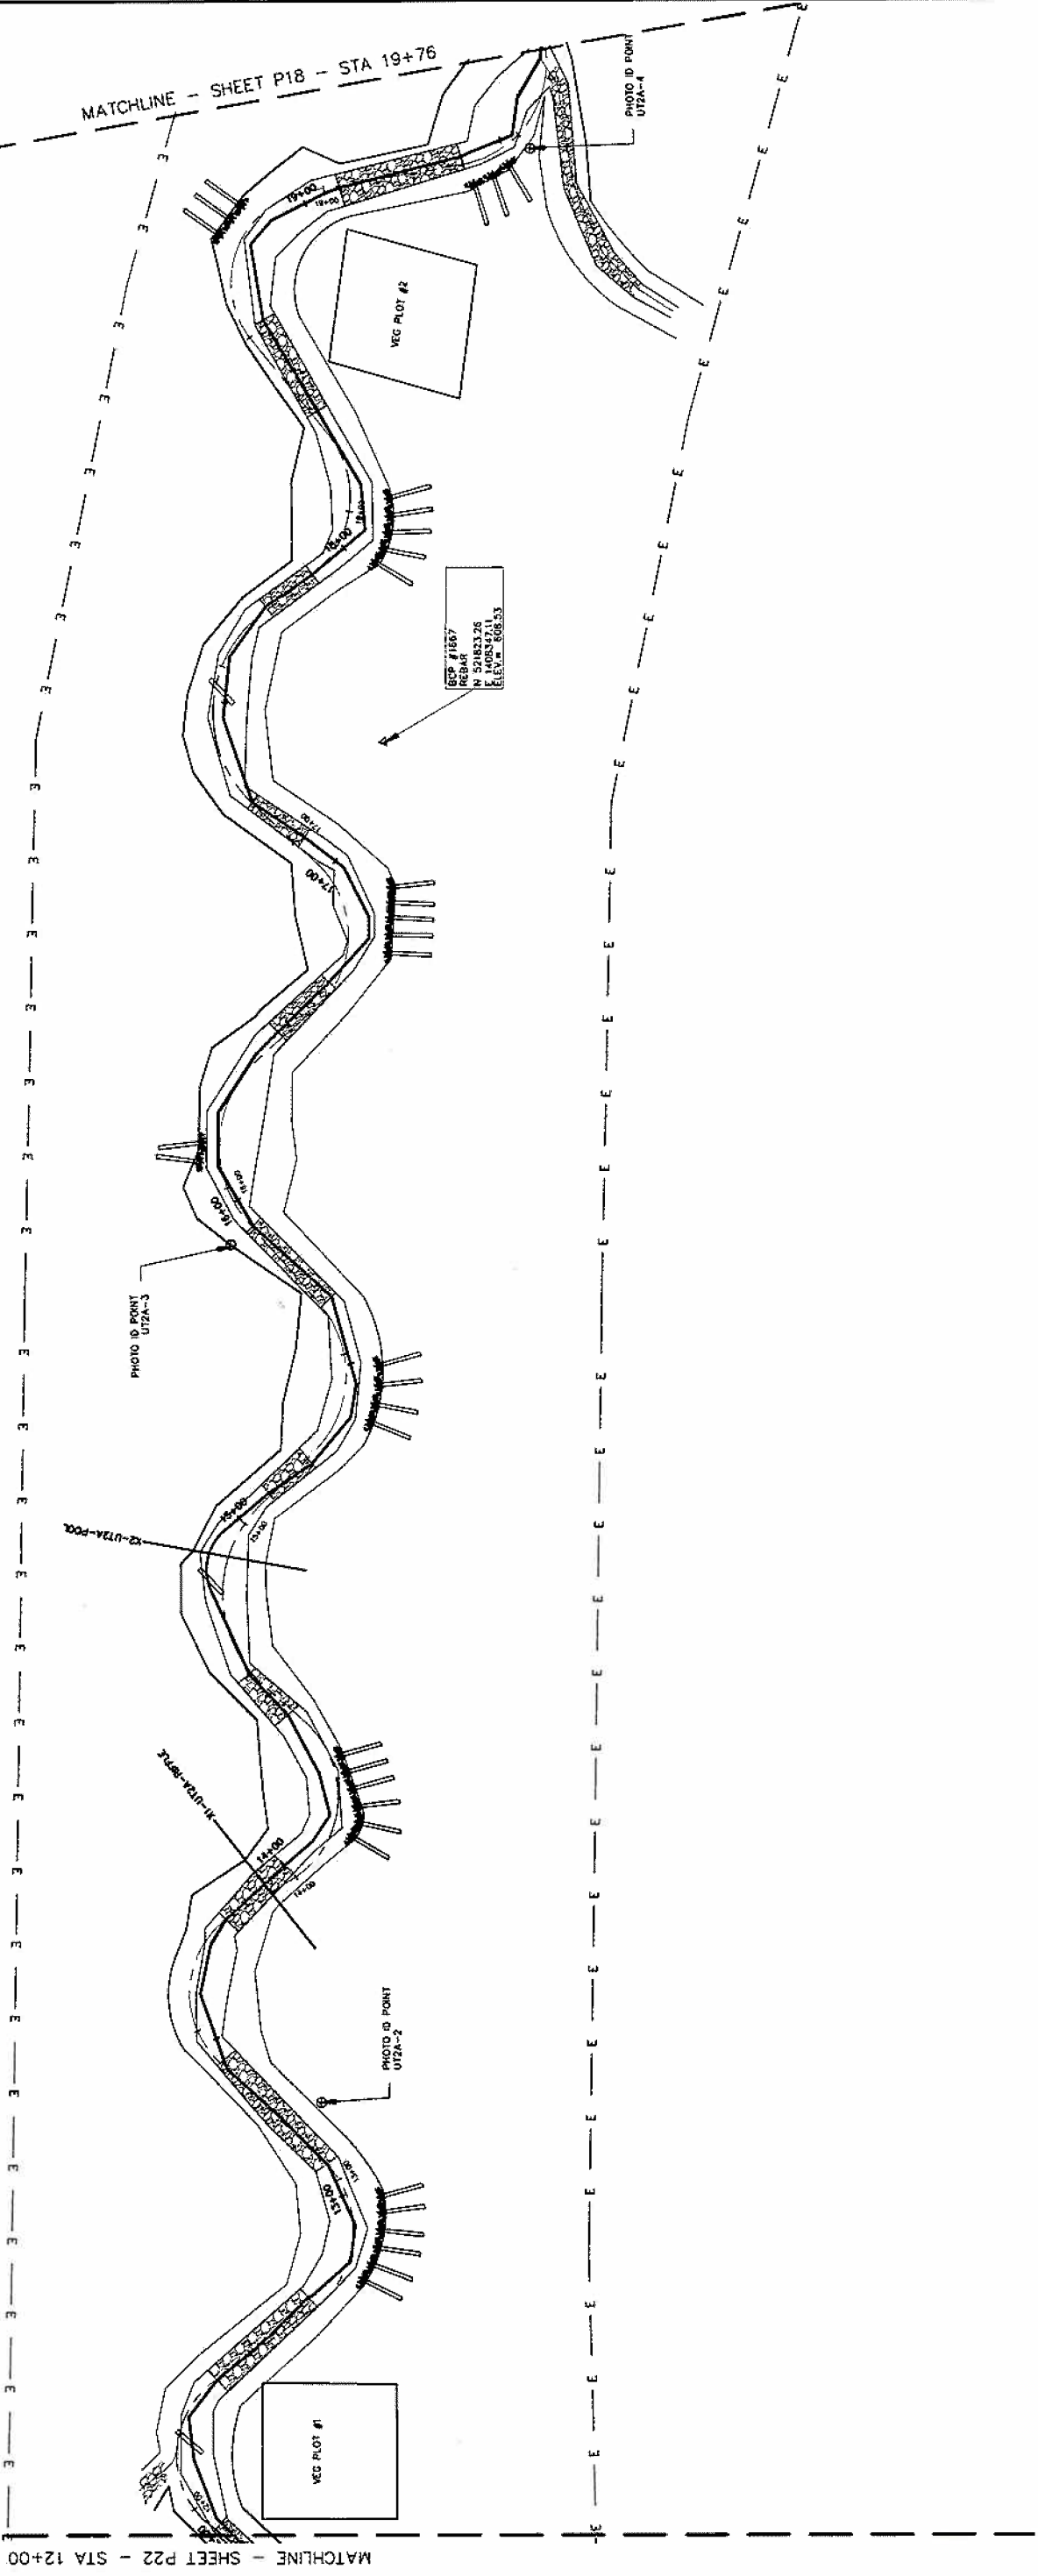

BEAVERDAM CREEK
AS-BUILT WITH BMPS



UT2-A SITE PLAN

APPENDIX D

BASELINE STREAM SUMMARY FOR RESTORATION REACHES

Beaverdam Creek Restoration Site - UT1 (Reach 1)												
Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Dimension - Riffle												
Bankfull Width (ft)		14.6		----	12.5	----	----	13.1	----	----	12.8	----
Floodprone Width (ft)	----	45.0	----	----	74.6	----	----	74.6	----	----	74.7	----
Bankfull Mean Depth (ft)	----	1.5	----	----	1.4	----	----	1.4	----	----	1.4	----
Bankfull Max Depth (ft)	----	2.1	----	----	2.0	----	----	2.1	----	----	2.0	----
Bankfull Cross Sectional Area (ft ²)	----	21.0	----	----	18.0	----	----	18.8	----	----	17.8	----
Width/Depth Ratio	----	10.0	----	----	8.7	----	----	9.2	----	----	9.1	----
Entrenchment Ratio	----	3.1	----	----	6.0	----	----	5.7	----	----	5.9	----
Bank Height Ratio	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----
Bankfull Velocity (fps)	----	3.5	----	----	----	----	----	----	----	----	----	----
Pattern												
Channel Beltwidth (ft)	----	0	----	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	0	----	15	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	0	----	29	----	----	----	----	----	----	----	----	----
Meander Width Ratio	----	0	----	----	----	----	----	----	----	----	----	----
Profile												
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	0.0067	----	0.009	----	----	----	----	----	----	----	----	0.009
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	----	43.8	----	----	----	----	----	----	----	23	54	91
Substrate and Transport Parameters												
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	25 / 36 / 42 / 75 / 105			0.12 / 40 / 50 / 110 / 160		
Reach Shear Stress (competency) lb/ft ²	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m ²	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters												
Channel length (ft)	----	----	555	----	----	567	----	----	568	----	----	563
Drainage Area (SM)	----	----	0.7	----	----	0.7	----	----	0.7	----	----	0.7
Rosgen Classification	----	Bc	----	----	----	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	----	75	----	----	----	----	----	----	----	----	----	----
Sinuosity	----	1.02	----	----	----	----	----	1.05	----	----	1.04	----
BF slope (ft/ft)	----	----	----	----	----	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.
December 2008, Monitoring Year 2 - Draft

Beaverdam Creek Restoration Site - UT1 (Reach 2-5)												
Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Dimension - Riffle												
Bankfull Width (ft)	16.8	----	20.0	15.4	----	23.0	15.2	----	26.9	15.3	----	26.0
Floodprone Width (ft)	----	100.0	----	74.9	----	80.7	74.9	----	80.7	74.8	----	80.6
Bankfull Mean Depth (ft)	1.7	----	2.0	1.7	----	2.1	1.5	----	2.2	1.5	----	2.4
Bankfull Max Depth (ft)	2.4	----	2.9	2.5	----	4.1	2.3	----	4.1	2.4	----	4.7
Bankfull Cross Sectional Area (ft2)	28.0	----	40.0	25.6	----	26.8	23.8	----	59.7	23.6	----	62.4
Width/Depth Ratio	9.8	----	10.1	9.2	----	13.9	9.6	----	14.6	9.9	----	15.7
Entrenchment Ratio	5.0	----	6.0	3.4	----	4.9	2.9	----	4.9	3.0	----	4.9
Bank Height Ratio	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----
Bankfull Velocity (fps)	3.1	----	3.8	----	----	----	----	----	----	----	----	----
Pattern												
Channel Beltwidth (ft)	84	----	100	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	34	----	60	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	134	----	200	----	----	----	----	----	----	----	----	----
Meander Width Ratio	2	----	10	----	----	----	----	----	----	----	----	----
Profile												
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	0.0048	----	0.012	----	----	----	----	----	----	0.008	0.011	0.018
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	101	----	120	----	----	----	----	----	----	72	108	144
Substrate and Transport Parameters												
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	0.17-25 / 0.75-37 / 30-45 / 70-85 / 110-120			0.1-32 / 0.26-46 / 0.37 - 64 / 1.0 - 145 / 5.6-178		
Reach Shear Stress (competency) lb/f2	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m2	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters												
Channel length (ft)	----	----	6155	----	----	5897	----	----	3021	----	----	3023
Drainage Area (SM)	0.7	----	1.75	0.7	----	1.75	0.7	----	1.75	0.7	----	1.75
Rosgen Classification	----	C/E	----	----	----	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	105	----	155	----	----	----	----	----	----	----	----	----
Sinuosity	1.1	----	1.2	----	----	----	----	1.3	----	----	1.3	----
BF slope (ft/ft)	0.002	----	0.006	----	----	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.

December 2008, Monitoring Year 2 - Draft

Beaverdam Creek Restoration Site - UT1B

Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Dimension - Riffle												
Bankfull Width (ft)	----	10.4	----	----	11.1	----	----	11.8	----	----	11.1	----
Floodprone Width (ft)	----	100.0	----	----	75.0	----	----	75.0	----	----	75.0	----
Bankfull Mean Depth (ft)	----	1.1	----	----	1.4	----	----	1.4	----	----	1.4	----
Bankfull Max Depth (ft)	----	1.4	----	----	2.3	----	----	2.3	----	----	2.4	----
Bankfull Cross Sectional Area (ft ²)	----	11.0	----	----	15.3	----	----	16.5	----	----	15.6	----
Width/Depth Ratio	----	9.7	----	----	8.0	----	----	8.5	----	----	7.9	----
Entrenchment Ratio	----	9.6	----	----	6.8	----	----	6.3	----	----	6.8	----
Bank Height Ratio	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----
Bankfull Velocity (fps)	----	4.0	----	----	----	----	----	----	----	----	----	----
Pattern												
Channel Beltwidth (ft)	----	52	----	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	21	----	31	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	83	----	104	----	----	----	----	----	----	----	----	----
Meander Width Ratio	----	5	----	----	----	----	----	----	----	----	----	----
Profile												
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	0.0104	----	0.0138	----	----	----	----	----	----	----	----	----
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	----	52	----	----	----	----	----	----	----	----	----	----
Substrate and Transport Parameters												
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	<0.063 / <0.063 / <0.063 / 0.2 / 0.4	----	----	----	0.065 / 0.09 / 1.1 / 0.3 / 0.4	----
Reach Shear Stress (competency) lb/ft ²	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m ²	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters												
Channel length (ft)	----	----	790	----	----	778	----	----	775	----	----	----
Drainage Area (SM)	----	----	0.34	----	----	0.34	----	----	0.34	----	----	0.34
Rosgen Classification	----	C/E	----	----	C	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	----	45	----	----	----	----	----	----	----	----	----	----
Sinuosity	----	1.15	----	----	1.1	----	----	1.1	----	----	----	----
BF slope (ft/ft)	----	0.003	----	----	0.013	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.
 December 2008, Monitoring Year 2 - Draft

Beaverdam Creek Restoration Site - UT1C

Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Dimension - Riffle												
Bankfull Width (ft)	----	11.2	----	----	11.0	----	----	12.0	----	----	13.2	----
Floodprone Width (ft)	----	100.0	----	----	70.2	----	----	70.6	----	----	71.2	----
Bankfull Mean Depth (ft)	----	0.8	----	----	0.7	----	----	0.7	----	----	0.7	----
Bankfull Max Depth (ft)	----	0.9	----	----	1.0	----	----	1.1	----	----	1.1	----
Bankfull Cross Sectional Area (ft ²)	----	8.0	----	----	7.8	----	----	8.8	----	----	9.5	----
Width/Depth Ratio	----	14.8	----	----	15.6	----	----	16.5	----	----	18.4	----
Entrenchment Ratio	----	8.9	----	----	6.4	----	----	5.9	----	----	5.4	----
Bank Height Ratio	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----
Bankfull Velocity (fps)	----	3.2	----	----	----	----	----	----	----	----	----	----
Pattern												
Channel Beltwidth (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Meander Width Ratio	----	----	----	----	----	----	----	----	----	----	----	----
Profile												
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	0.0191	----	0.0265	----	----	----	----	----	----	----	----	----
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	----	44.8	----	----	----	----	----	----	----	----	----	----
Substrate and Transport Parameters												
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	26 / 37 / 42 / 75 / 100			36 / 50 / 64 / 110 / 130		
Reach Shear Stress (competency) lb/f ²	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m ²	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters												
Channel length (ft)	----	----	628	----	----	616	----	----	615	----	----	----
Drainage Area (SM)	----	----	0.15	----	----	0.15	----	----	0.15	----	----	0.15
Rosgen Classification	----	B	----	----	C	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	----	27	----	----	----	----	----	----	----	----	----	----
Sinuosity	----	1.05	----	----	1.1	----	----	1.1	----	----	----	----
BF slope (ft/ft)	----	0.017	----	----	0.013	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.
 December 2008, Monitoring Year 2 - Draft

Beaverdam Creek Restoration Site - UT1D

Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Dimension - Riffle												
Bankfull Width (ft)	----	10.4	----	----	11.4	----	----	12.7	----	----	11.4	----
Floodprone Width (ft)	---	100.0	----	----	75.5	----	----	75.5	----	----	75.5	----
Bankfull Mean Depth (ft)	----	0.9	----	----	0.8	----	----	0.7	----	----	0.8	----
Bankfull Max Depth (ft)	----	1.2	----	----	1.2	----	----	1.1	----	----	1.1	----
Bankfull Cross Sectional Area (ft ²)	----	10.0	----	----	9.0	----	----	9.2	----	----	9.0	----
Width/Depth Ratio	----	11.2	----	----	14.4	----	----	17.5	----	----	14.4	----
Entrenchment Ratio	----	9.6	----	----	6.6	----	----	6.0	----	----	6.6	----
Bank Height Ratio	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----
Bankfull Velocity (fps)	----	2.9	----	----	----	----	----	----	----	----	----	----
Pattern												
Channel Beltwidth (ft)	----	52	----	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	21	----	31	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	83	----	104	----	----	----	----	----	----	----	----	----
Meander Width Ratio	8	----	10	----	----	----	----	----	----	----	----	----
Profile												
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	----	----	----	----	----	----	----	----	----	----	----	----
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	----	52	----	----	----	----	----	----	----	----	----	----
Substrate and Transport Parameters												
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	32 / 38 / 43 / 85 / 120			25 / 33 / 38 / 60 / 88		
Reach Shear Stress (competency) lb/ft ²	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m ²	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters												
Channel length (ft)	----	----	352	----	----	338	----	----	334	----	----	----
Drainage Area (SM)	----	----	0.16	----	----	0.16	----	----	0.16	----	----	0.16
Rosgen Classification	----	C/E	----	----	C	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	----	28	----	----	----	----	----	----	----	----	----	----
Sinuosity	----	1.15	----	----	1.2	----	----	1.2	----	----	----	----
BF slope (ft/ft)	----	0.007	----	----	0.014	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.
 December 2008, Monitoring Year 2 - Draft

Beaverdam Creek Restoration Site - UT2													
Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)			
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	
Dimension - Riffle													
Bankfull Width (ft)	10.2	----	15.6	16.8	----	16.9	16.1	----	16.6	16.2	----	17.3	
Floodprone Width (ft)	30.0	----	80	39.9	----	39.9	39.9	----	39.9	39.9	----	40.0	
Bankfull Mean Depth (ft)	0.92	----	1.5	0.7	----	1.4	0.7	----	1.4	0.7	----	1.3	
Bankfull Max Depth (ft)	1.3	----	2.3	1.1	----	2.1	1.1	----	1.9	1.1	----	1.9	
Bankfull Cross Sectional Area (ft ²)	9.9	----	23.9	12.2	----	23.4	10.9	----	22.6	11.2	----	21.4	
Width/Depth Ratio	10.2	----	12.6	12.1	----	23.4	12.2	----	23.9	12.3	----	26.6	
Entrenchment Ratio	2.8	----	5.9	2.4	----	2.4	2.4	----	2.5	2.3	----	2.5	
Bank Height Ratio	----	1.0	----	----	1.0	----	1	----	1.0	----	1.0	----	
Bankfull Velocity (fps)	4.7	----	5.4	----	----	----	----	----	----	----	----	----	
Pattern													
Channel Beltwidth (ft)	20	----	75	----	----	----	----	----	----	----	----	----	
Radius of Curvature (ft)	23	----	100	----	----	----	----	----	----	----	----	----	
Meander Wavelength (ft)	100	----	300	----	----	----	----	----	----	----	----	----	
Meander Width Ratio	9.6	----	27.8	----	----	----	----	----	----	----	----	----	
Profile													
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	
Riffle Slope (ft/ft)	0.0122	----	0.0279	----	----	----	----	----	----	----	----	----	
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	
Pool Spacing (ft)	40	----	105	----	----	----	----	----	----	----	----	----	
Substrate and Transport Parameters													
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	26-27 / 35 / 39-39 / 53-59 / 95			0.13-25 / 26-35 / 36-40 / 60-64 / 115-140			
Reach Shear Stress (competency) lb/ft ²	----	----	----	----	----	----	----	----	----	----	----	----	
Stream Power (transport capacity) W/m ²	----	----	----	----	----	----	----	----	----	----	----	----	
Additional Reach Parameters													
Channel length (ft)	----	----	3290	----	----	3293	----	----	3142	----	----	----	
Drainage Area (SM)	0.1	----	0.3	0.1	----	0.3	0.1	----	0.3	0.1	----	0.3	
Rosgen Classification	----	C	----	----	C	----	----	C	----	----	C	----	
Bankfull Discharge (cfs)	48	----	120	----	----	----	----	----	----	----	----	----	
Sinuosity	1.03	----	1.21	----	1.3	----	----	1.3	----	----	----	----	
BF slope (ft/ft)	0.008	----	0.019	----	0.0138	----	----	----	----	----	----	----	

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.
December 2008, Monitoring Year 2 - Draft

Beaverdam Creek Restoration Site - UT2A

Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Dimension - Riffle												
Bankfull Width (ft)	----	15.6	----	----	13.3	----	----	12.2	----	----	13.4	----
Floodprone Width (ft)	----	80.0	----	----	39.8	----	----	39.8	----	----	39.9	----
Bankfull Mean Depth (ft)	----	1.0	----	----	0.8	----	----	0.8	----	----	0.8	----
Bankfull Max Depth (ft)	----	1.4	----	----	1.2	----	----	1.1	----	----	1.2	----
Bankfull Cross Sectional Area (ft2)	----	10.2	----	----	10.6	----	----	9.6	----	----	10.4	----
Width/Depth Ratio	----	10.2	----	----	16.6	----	----	15.5	----	----	17.2	----
Entrenchment Ratio	----	5.9	----	----	3.0	----	----	3.3	----	----	3.0	----
Bank Height Ratio	----	1.0	----	----	1.0	----	----	1	----	----	1.0	----
Bankfull Velocity (fps)	----	5.1	----	----	----	----	----	----	----	----	----	----
Pattern												
Channel Beltwidth (ft)	40	----	55	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	24	----	30	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	100	----	120	----	----	----	----	----	----	----	----	----
Meander Width Ratio	9.8	----	11.8	----	----	----	----	----	----	----	----	----
Profile												
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	0.02	----	0.0273	----	----	----	----	----	----	----	----	----
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	----	57	----	----	----	----	----	----	----	----	----	----
Substrate and Transport Parameters												
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	26 / 30 / 35 / 53 / 78			<0.063 / 33 / 40 / 60 / 83		
Reach Shear Stress (competency) lb/f2	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m2	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters												
Channel length (ft)	----	----	1099	----	----	1131	----	----	1121	----	----	----
Drainage Area (SM)	----	----	0.1	----	----	0.1	----	----	0.1	----	----	0.1
Rosen Classification	----	C/E	----	----	C	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	----	51	----	----	----	----	----	----	----	----	----	----
Sinuosity	----	1.21	----	----	1.25	----	----	1.22	----	----	----	----
BF slope (ft/ft)	----	0.012	----	----	0.015	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.
 December 2008, Monitoring Year 2 - Draft

APPENDIX E

MORHOLOGY AND HYDRAULIC MONITORING SUMMARY

Beaverdam Creek Restoration Site : Project No. D05016-1															
Reach: Beaverdam Creek UT1 (Reach 1)															
I. Cross-Section Parameters	Cross Section 1					Cross Section 2									
	Pool					Riffle									
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5					
Dimension															
BF Width (ft)	22.1	19.9				13.1	12.8								
Floodprone Width (ft)	75.1	75.2				74.6	74.7								
BF Cross Sectional Area (ft ²)	33.1	31.8				18.8	17.8								
BF Mean Depth (ft)	1.5	1.6				1.4	1.4								
BF Max Depth (ft)	3.1	2.9				2.1	2.0								
Width/Depth Ratio	14.8	12.4				9.2	9.1								
Entrenchment Ratio	3.4	3.8				5.7	5.9								
Wetted Perimeter (ft)	25.1	23.1				16.0	15.6								
Hydraulic Radius (ft)	1.3	1.4				1.2	1.1								
Substrate															
d50 (mm)	<0.063	0.1				42	50								
d84 (mm)	<0.063	0.3				75	110								
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)		
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med
Pattern															
Channel Beltwidth (ft)	-	-	-	-	-	-									
Radius of Curvature (ft)	-	-	-	-	-	-									
Meander Wavelength (ft)	-	-	-	-	-	-									
Meander Width Ratio	-	-	-	-	-	-									
Profile															
Riffle length (ft)	-	-	-	-	-	-									
Riffle Slope (ft/ft)	-	-	-	-	-	0.009	0.009								
Pool Length (ft)	-	-	-	-	-	-									
Pool Spacing (ft)	-	-	-	23	91	51									
Additional Reach Parameters															
Valley Length (ft)	540	-	-	540	-	-									
Channel Length (ft)	568	-	-	563	-	-									
Sinuosity	1.1	-	-	1.04	-	-									
Water Surface Slope (ft/ft)	-	-	-	-	-	-									
BF Slope (ft/ft)	-	-	-	-	-	-									
Rosgen Classification	C	-	-	C	-	-									

Beaverdam Creek Restoration Site : Project No. D05016-1																				
Reach: Beaverdam Creek UT1 (Reaches 2-5)																				
I. Cross-Section Parameters	Cross Section 5 Riffle					Cross Section 6 Pool					Cross Section 9 Riffle					Cross Section 10 Pool				
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5
Dimension																				
	BF Width (ft)	15.2	15.3			23.5	23.6				17.8	17.6				22.2	22.4			
	Floodprone Width (ft)	74.9	74.8			75.0	75.0				75.09	75.1				74.9	74.9			
	BF Cross Sectional Area (ft ²)	23.8	23.6			41.1	41.2				29.26	29.4				44.8	42.7			
	BF Mean Depth (ft)	1.6	1.5			1.8	1.7				1.64	1.7				2.0	1.9			
	BF Max Depth (ft)	2.3	2.4			3.5	3.4				2.65	2.8				3.3	3.4			
	Width/Depth Ratio	9.7	9.9			13.4	13.6				10.83	10.6				11.0	11.8			
	Entrenchment Ratio	4.9	4.9			3.2	3.2				4.22	4.3				3.4	3.3			
	Wetted Perimeter (ft)	18.3	18.4			27.0	27.1				21.1	21.0				26.3	26.2			
	Hydraulic Radius (ft)	1.3	1.3			1.5	1.5				1.4	1.4				1.7	1.6			
Substrate																				
	d50 (mm)	45	64			0.2	<0.063				36	40				<0.063	0.08			
	d84 (mm)	85	145			0.45	0.24				72	110				0.7	5			
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)							
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med					
Pattern																				
	Channel Beltwidth (ft)	-	-	-	-	-	-													
	Radius of Curvature (ft)	-	-	-	-	-	-													
	Meander Wavelength (ft)	-	-	-	-	-	-													
	Meander Width Ratio	-	-	-	-	-	-													
Profile																				
	Riffle length (ft)	-	-	-	-	-	-													
	Riffle Slope (ft/ft)	-	-	-	0.009	0.02	0.01													
	Pool Length (ft)	-	-	-	-	-	-													
	Pool Spacing (ft)	-	-	-	72	144	115													
Additional Reach Parameters																				
	Valley Length (ft)	2370	-	-	2370	-	-													
	Channel Length (ft)	3021	-	-	3023	-	-													
	Sinuosity	1.3	-	-	1.3	-	-													
	Water Surface Slope (ft/ft)	-	-	-	-	-	-													
	BF Slope (ft/ft)	-	-	-	-	-	-													
	Rosgen Classification	C	-	-	C	-	-													

Beaverdam Creek Restoration Site : Project No. D05016-1																						
Reach: Beaverdam Creek UT1 (Reaches 2-5) cont'd																						
I. Cross-Section Parameters	Cross Section 13					Cross Section 14					Cross Section 15					Cross Section 16						
	Pool					Riffle					Riffle					Pool						
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5		
Dimension																						
BF Width (ft)	30.0	28.6				19.1	20.2				26.9	26.0				20.9	21.6					
Floodprone Width (ft)	90.9	90.9				75.2	75.2				77.9	78.0				52.1	52.1					
BF Cross Sectional Area (ft ²)	71.7	77.6				37.9	39.4				59.7	62.4				36.8	45.2					
BF Mean Depth (ft)	2.4	2.7				2.0	2.0				2.2	2.4				1.8	2.1					
BF Max Depth (ft)	5.3	6.6				3.1	3.3				4.1	4.7				3.4	3.7					
Width/Depth Ratio	12.6	10.6				9.6	10.3				12.1	10.8				11.8	10.3					
Entrenchment Ratio	3.0	3.2				3.9	3.7				2.9	3.0				2.5	2.4					
Wetted Perimeter (ft)	34.8	34.1				23.1	24.1				31.3	30.8				24.4	25.8					
Hydraulic Radius (ft)	2.1	2.3				1.6	1.6				1.9	2.0				1.5	1.8					
Substrate																						
d50 (mm)	0.3	0.1				30	0.4				-	0.4				-	<0.063					
d84 (mm)	0.8	0.4				70	50				-	1.0				-	0.2					
Reach: Beaverdam Creek UT1 (Reaches 2-5) cont'd																						
I. Cross-Section Parameters	Cross Section 17					Cross Section 18																
	Pool					Riffle																
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5												
Dimension																						
BF Width (ft)	27.0	23.3				22.5	23.4															
Floodprone Width (ft)	67.2	67.2				80.7	80.6															
BF Cross Sectional Area (ft ²)	33.2	36.1				34.7	34.8															
BF Mean Depth (ft)	1.2	1.6				1.5	1.5															
BF Max Depth (ft)	2.5	4.4				2.7	2.7															
Width/Depth Ratio	21.9	15.1				14.6	15.7															
Entrenchment Ratio	2.5	2.9				3.6	3.5															
Wetted Perimeter (ft)	29.5	26.4				25.6	26.4															
Hydraulic Radius (ft)	1.1	1.4				1.4	1.3															
Substrate																						
d50 (mm)	-	0.3				-	22															
d84 (mm)	-	0.8				-	45															

Beaverdam Creek Restoration Site : Project No. D05016-1															
Reach: Beaverdam Creek UT1B															
I. Cross-Section Parameters	Cross Section 3 Pool					Cross Section 4 Riffle									
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5					
Dimension															
BF Width (ft)	15.3	14.8				11.8	11.1								
Floodprone Width (ft)	75.1	75.1				75.0	75.0								
BF Cross Sectional Area (ft ²)	16.4	19.4				16.5	15.6								
BF Mean Depth (ft)	1.1	1.3				1.4	1.4								
BF Max Depth (ft)	2.3	3.0				2.3	2.4								
Width/Depth Ratio	14.3	11.4				8.5	7.9								
Entrenchment Ratio	4.9	5.1				6.3	6.8								
Wetted Perimeter (ft)	17.5	17.4				14.6	13.9								
Hydraulic Radius (ft)	0.9	1.1				1.1	1.1								
Substrate															
d50 (mm)	0.16	0.14				<0.063	0.11								
d84 (mm)	0.42	0.5				0.2	0.3								
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)		
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med
Pattern															
Channel Beltwidth (ft)	-	-	-	-	-	-									
Radius of Curvature (ft)	-	-	-	-	-	-									
Meander Wavelength (ft)	-	-	-	-	-	-									
Meander Width Ratio	-	-	-	-	-	-									
Profile															
Riffle length (ft)	-	-	-	-	-	-									
Riffle Slope (ft/ft)	-	-	-	-	-	-									
Pool Length (ft)	-	-	-	-	-	-									
Pool Spacing (ft)	-	-	-	-	-	-									
Additional Reach Parameters															
Valley Length (ft)	680	-	-	-	-	-									
Channel Length (ft)	775	-	-	-	-	-									
Sinuosity	1.1	-	-	-	-	-									
Water Surface Slope (ft/ft)	-	-	-	-	-	-									
BF Slope (ft/ft)	-	-	-	-	-	-									
Rosgen Classification	C	-	-	-	-	C									

Beaverdam Creek Restoration Site : Project No. D05016-1															
Reach: Beaverdam Creek UT1C															
I. Cross-Section Parameters	Cross Section 7					Cross Section 8									
	Riffle					Pool									
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5					
Dimension															
BF Width (ft)	12.0	13.2				13.6	12.4								
Floodprone Width (ft)	70.6	71.2				75.0	75.0								
BF Cross Sectional Area (ft ²)	8.8	9.5				31.6	30.3								
BF Mean Depth (ft)	0.7	0.7				2.3	2.4								
BF Max Depth (ft)	1.1	1.1				3.2	3.2								
Width/Depth Ratio	16.5	18.4				5.9	5.1								
Entrenchment Ratio	5.9	5.4				5.5	6.0								
Wetted Perimeter (ft)	13.5	14.6				18.2	17.3								
Hydraulic Radius (ft)	0.7	0.6				1.7	1.7								
Substrate															
d50 (mm)	42	64				<0.063	<0.063								
d84 (mm)	75	110				0.23	0.17								
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)		
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med
Pattern															
Channel Beltwidth (ft)	-	-	-	-	-	-									
Radius of Curvature (ft)	-	-	-	-	-	-									
Meander Wavelength (ft)	-	-	-	-	-	-									
Meander Width Ratio	-	-	-	-	-	-									
Profile															
Riffle length (ft)	-	-	-	-	-	-									
Riffle Slope (ft/ft)	-	-	-	-	-	-									
Pool Length (ft)	-	-	-	-	-	-									
Pool Spacing (ft)	-	-	-	-	-	-									
Additional Reach Parameters															
Valley Length (ft)	544	-	-	-	-	-									
Channel Length (ft)	615	-	-	-	-	-									
Sinuosity	1.1	-	-	-	-	-									
Water Surface Slope (ft/ft)	-	-	-	-	-	-									
BF Slope (ft/ft)	-	-	-	-	-	-									
Rosgen Classification	C	-	-	-	-	C									

Beaverdam Creek Restoration Site : Project No. D05016-1																
Reach: Beaverdam Creek UT1D																
I. Cross-Section Parameters	Cross Section 11					Cross Section 12										
	Pool					Riffle										
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5						
Dimension																
BF Width (ft)	15.3	15.1				12.7	11.4									
Floodprone Width (ft)	75.7	75.6				75.5	75.5									
BF Cross Sectional Area (ft ²)	20.9	18.9				9.2	9.0									
BF Mean Depth (ft)	1.4	1.3				0.7	0.8									
BF Max Depth (ft)	2.5	2.2				1.1	1.1									
Width/Depth Ratio	11.3	12.0				17.5	14.4									
Entrenchment Ratio	3.4	5.0				6.0	6.6									
Wetted Perimeter (ft)	18.0	17.6				14.1	13.0									
Hydraulic Radius (ft)	1.2	1.1				0.7	0.7									
Substrate																
d50 (mm)	<0.063	0.33				43	38									
d84 (mm)	0.22	0.85				85	60									
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)			
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	
Pattern																
Channel Beltwidth (ft)	-	-	-	-	-	-										
Radius of Curvature (ft)	-	-	-	-	-	-										
Meander Wavelength (ft)	-	-	-	-	-	-										
Meander Width Ratio	-	-	-	-	-	-										
Profile																
Riffle length (ft)	-	-	-	-	-	-										
Riffle Slope (ft/ft)	-	-	-	-	-	-										
Pool Length (ft)	-	-	-	-	-	-										
Pool Spacing (ft)	-	-	-	-	-	-										
Additional Reach Parameters																
Valley Length (ft)	300	-	-	-	-	-										
Channel Length (ft)	334	-	-	-	-	-										
Sinuosity	1.1	-	-	-	-	-										
Water Surface Slope (ft/ft)	-	-	-	-	-	-										
BF Slope (ft/ft)	-	-	-	-	-	-										
Rosgen Classification	C	-	-	-	C	-										

Beaverdam Creek Restoration Site : Project No. D05016-1															
Reach: Beaverdam Creek UT2A															
I. Cross-Section Parameters	Cross Section 1					Cross Section 2									
	Riffle					Pool									
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5					
Dimension															
BF Width (ft)	12.2	13.4				20.1	20.6								
Floodprone Width (ft)	39.8	39.9				40.0	40.0								
BF Cross Sectional Area (ft ²)	9.6	10.4				20.4	21.3								
BF Mean Depth (ft)	0.8	0.8				1.0	1.0								
BF Max Depth (ft)	1.1	1.2				1.9	2.2								
Width/Depth Ratio	15.5	17.2				19.8	19.9								
Entrenchment Ratio	3.3	3.0				2.0	1.9								
Wetted Perimeter (ft)	13.7	15.0				22.1	22.7								
Hydraulic Radius (ft)	0.7	0.7				0.9	0.9								
Substrate															
d50 (mm)	35	40				<0.063	<0.063								
d84 (mm)	53	60				<0.063	<0.063								
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)		
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med
Pattern															
Channel Beltwidth (ft)	-	-	-	-	-	-									
Radius of Curvature (ft)	-	-	-	-	-	-									
Meander Wavelength (ft)	-	-	-	-	-	-									
Meander Width Ratio	-	-	-	-	-	-									
Profile															
Riffle length (ft)	-	-	-	-	-	-									
Riffle Slope (ft/ft)	-	-	-	-	-	-									
Pool Length (ft)	-	-	-	-	-	-									
Pool Spacing (ft)	-	-	-	-	-	-									
Additional Reach Parameters															
Valley Length (ft)	920	-	-	-	-	-									
Channel Length (ft)	1121	-	-	-	-	-									
Sinuosity	1.2	-	-	-	-	-									
Water Surface Slope (ft/ft)	-	-	-	-	-	-									
BF Slope (ft/ft)	-	-	-	-	-	-									
Rosgen Classification	C	-	-	-	C	-									

Beaverdam Creek Restoration Site : Project No. D05016-1

Reach: Beaverdam Creek UT2

I. Cross-Section Parameters	Cross Section 3 Riffle					Cross Section 4 Pool					Cross Section 5 Riffle					Cross Section 6 Pool				
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5
	Dimension																			
	BF Width (ft)	16.1	17.3			20.9	20.8				16.6	16.2				14.0	14.4			
	Floodprone Width (ft)	40.0	40.0			40.1	40.1				39.9	39.9				28.0	28.8			
	BF Cross Sectional Area (ft ²)	10.9	11.2			25.8	25.1				22.6	21.4				23.2	24.9			
	BF Mean Depth (ft)	0.7	0.7			1.2	1.2				1.4	1.3				1.7	1.7			
	BF Max Depth (ft)	1.1	1.1			2.5	2.5				1.9	1.9				2.6	2.6			
	Width/Depth Ratio	23.9	26.6			16.9	17.3				12.2	12.3				8.5	8.4			
	Entrenchment Ratio	2.5	2.3			1.9	1.9				2.4	2.5				2.0	2.0			
	Wetted Perimeter (ft)	17.5	18.6			23.4	23.3				19.4	18.8				17.3	17.9			
	Hydraulic Radius (ft)	0.6	0.6			1.1	1.1				1.2	1.1				1.3	1.4			
Substrate																				
	d50 (mm)	39	40			<0.063	<0.063				38	36				<0.063	<0.063			
	d84 (mm)	59	64			<0.063	<0.063				59	60				<0.063	<0.063			
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)							
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med					
Pattern																				
	Channel Beltwidth (ft)	-	-	-	-	-	-													
	Radius of Curvature (ft)	-	-	-	-	-	-													
	Meander Wavelength (ft)	-	-	-	-	-	-													
	Meander Width Ratio	-	-	-	-	-	-													
Profile																				
	Riffle length (ft)	-	-	-	-	-	-													
	Riffle Slope (ft/ft)	-	-	-	-	-	-													
	Pool Length (ft)	-	-	-	-	-	-													
	Pool Spacing (ft)	-	-	-	-	-	-													
Additional Reach Parameters																				
	Valley Length (ft)	2470	-	-	-	-	-													
	Channel Length (ft)	3142	-	-	-	-	-													
	Sinuosity	1.3	-	-	-	-	-													
	Water Surface Slope (ft/ft)	-	-	-	-	-	-													
	BF Slope (ft/ft)	-	-	-	-	-	-													
	Rosgen Classification	C	-	-	C	-	-													