

**BEAVERDAM CREEK
STREAM RESTORATION PROJECT**
ANNUAL MONITORING REPORT FOR 2008-2009 (YEAR 3)

Project Number: D05016-1



Submitted to:

NC Ecosystem Enhancement Program
2728 Capital Blvd, Suite 1H 103
Raleigh, NC 27604



December, 2009

Prepared for: River Works, Incorporated



8000 Regency Parkway
Suite 200
Cary, NC 27518

Prepared by: Michael Baker Engineering, Inc.



1447 South Tryon St., Ste. 200
Charlotte, NC 28203

TABLE OF CONTENTS

TITLE PAGE

TABLE OF CONTENTS	i
EXECUTIVE SUMMARY	1
1.0 PROJECT BACKGROUND	2
1.1 Project Location	2
1.2 Mitigation Goals and Objectives.....	2
1.3 Project Description and Restoration Approach.....	2
1.4 Project History and Background	4
1.5 Project Plan	8
2.0 VEGETATION MONITORING	8
2.1 Soil Data.....	8
2.2 Description of Species and Monitoring Protocol	9
2.3 Vegetation Success Criteria	9
2.4 Results of Vegetative Monitoring	10
2.5 Vegetation Observations	12
2.6 Vegetation Problem Areas	12
2.7 Vegetation Photos	12
3.0 STREAM MONITORING	12
3.1 Description of Stream Monitoring	12
3.2 Stream Restoration Success Criteria	13
3.3 Bankfull Discharge Monitoring Results.....	13
3.4 Stream Monitoring Data and Photos	14
3.5 Stream Stability Assessment	14
3.6 Cross-section, Longitudinal Profile, and Bed Material Analysis Monitoring Results...	16
3.7 Areas of Concern.....	16
4.0 HYDROLOGY	17
5.0 CONCLUSIONS AND RECOMMENDATIONS	18
6.0 WILDLIFE OBSERVATIONS	18
7.0 REFERENCES	19

APPENDICES

APPENDIX A – Project Photo Log

APPENDIX B – Stream Monitoring Data

APPENDIX C – As-built Plan Sheets

APPENDIX D – Baseline Stream Summary for Restoration Reaches

APPENDIX E – Morphology and Hydraulic Monitoring Summary – Year 3 Monitoring

LIST OF TABLES

Table 1.	Project Mitigation Approach
Table 2.	Project Activity and Reporting History
Table 3.	Project Contact Table
Table 4.	Project Background
Table 5.	Soil Data for Project
Table 6.	Tree Species Planted
Table 7.	Year 3 Stem Counts for Each Species Arranged by Plot
Table 8.	Verification of Bankfull Events
Table 9.	Categorical Stream Feature Visual Stability Assessment
Table 10.	Comparison of Historic Rainfall to Observed Rainfall
Table 11.	Hydrologic Monitoring Results for Year 3

LIST OF FIGURES

Figure 1.	Site Vicinity Map
Figure 2.	Site Topographic Map
Figure 3.	Restoration Summary Map
Figure 4.	Stage Recorder Locations
Figure 5.	Historic Average vs. Observed Rainfall

EXECUTIVE SUMMARY

This Annual Report details the monitoring activities during the 2009 growing season on the Beaverdam Creek Stream Restoration Site (“Site”). Construction of the Site, including planting of trees, was completed in March 2007. In order to document project success, twenty-four vegetation monitoring plots, eighteen permanent cross-sections, 3,562 linear feet (LF) of longitudinal profile survey, and two automated stage recorders were installed and assessed across the restoration Site. The 2009 data represents results from the third year of vegetation and hydrologic monitoring for streams.

Prior to restoration, stream and buffer functions on the Site were historically impaired as a result of heavy land timbering and subsequent aggressive farming. More recently some areas were reforested within the project site, but it continued to be actively farmed, grazed or converted to medium density residential developments. The restoration project restored/enhanced 13,203 linear feet (LF) of channelized stream on two unnamed tributaries of Beaverdam Creek: UT1 and UT2, and preserved an additional 1,641 LF of Beaverdam Creek and 962 LF of UT2 to total 15,806 LF of restored, enhanced, or preserved stream.

Weather station data from the for NRCS National Climate and Water Center (Charlotte WSO AP WETS Station in Mecklenburg County – NC 1690) and the USGS Water Data for North Carolina (USGS 35090308100454 Withers Cove in Mecklenburg County, NC) were used to document precipitation amounts. For the 2008 - 2009 growing season, the total recorded rainfall in inches was less than the historical average totals. May and October were the only two months that recorded rainfall data above the historical average.

Twenty-four monitoring plots that are 10 meters by 10 meters (0.025 acre) in size were used to assess survivability of the woody vegetation planted on Site. They are randomly located to represent the different zones within the project. The vegetation monitoring indicated an overall average of 475 stems per acre. The Site has met the interim vegetative success criteria goal of at least 320 stems per acre for year three and is on track for meeting final success criteria of 260 trees per acre by the end of year five.

In general, dimension, pattern, profile and in-stream structures remained stable during the third growing season.

1.0 PROJECT BACKGROUND

The Beaverdam Creek site is located within the extraterritorial jurisdiction (ETJ) of the City of Charlotte, Mecklenburg County, and lies within the Catawba River Basin (Figure 1). The site lies within North Carolina Department of Water Quality (NCDWQ) sub-basin 03-08-34 and U.S. Geologic Survey (USGS) hydrologic unit 03050101170040. The recent land use of the site consists of agriculture and medium density residential development.

The project involved the restoration, enhancement and preservation of 15,806 LF of stream along Beaverdam Creek (the mainstem) and two unnamed tributaries (UT1 and UT2).

1.1 Project Location

The Beaverdam Creek sited is located approximately 3 miles southwest of the Charlotte-Douglas International Airport. The site extends from the newly constructed Interstate 485 corridor to Brown's Cove of Lake Wylie, an impounded reservoir on the Catawba River. The site can be accessed from Dixie River Road (UT1 to the north and UT2 to the south) 1.5 miles northeast of the intersection with Steele Creek Road. See Figures 1 and 2 for an overview of the project site.

1.2 Mitigation Goals and Objectives

The specific goals for the Beaverdam Creek Restoration Project were as follows:


- Preserve/Restore/Enhance 15,806 LF of stream channel.
- Create geomorphically stable stream channel and floodplain conditions along UT1, UT2 and their associated tributaries within the Beaverdam Creek watershed.
- Improve the local hydrology through increased groundwater recharge, groundwater storage, and hydrologic connectivity between the channel and the adjacent floodplain.
- Improve water quality in the Beaverdam Creek watershed by increasing dissolved oxygen concentrations and reducing nutrient and sediment loads.
- Improve aquatic and riparian terrestrial habitat through improved hydraulic and biologic diversity.

1.3 Project Description and Restoration Approach

For analysis and design purposes, Beaverdam Creek and the two unnamed tributaries (UT1 and UT2) were subdivided into 15 individual reaches based on their hydrologic and geomorphic characteristics. The mainstem of Beaverdam Creek consists of only 1 of the 15 design reaches, where only preservation and no restoration activities were proposed. The remaining 14 reaches exist within UT1 (8 reaches) and UT2 (6 reaches). Among these 14 reaches, 12 were scheduled for restoration, the upstream reach of UT1 was scheduled for enhancement and the downstream reach of UT2 was scheduled for preservation. All reach locations are shown in Figure 3. The following describes the site's preconstruction conditions.

The project extents on UT1 began at I-485 flowing from the northeast direction. UT1 was divided into 5 reaches starting in the upstream with Reach 1 and continuing downstream to Reach 5 and changing designation at tributary confluences or at significant grade breaks. The three tributary confluences were included within the design parameters on UT1 and were identified as UT1B, UT1C, and UT1D from the upstream confluence and continuing downstream.

The UT2 watershed abuts the southern boundary of UT1's watershed, is bordered by Dixie River Road, and generally flows in the southwest direction. The mainstem of UT2 was divided into four reaches starting upstream at Reach 1 and continuing downstream to Reach 4. One tributary confluence, UT2A, was included within the design parameters of UT2. Reach UT2A, upstream of station 10+00, consisted

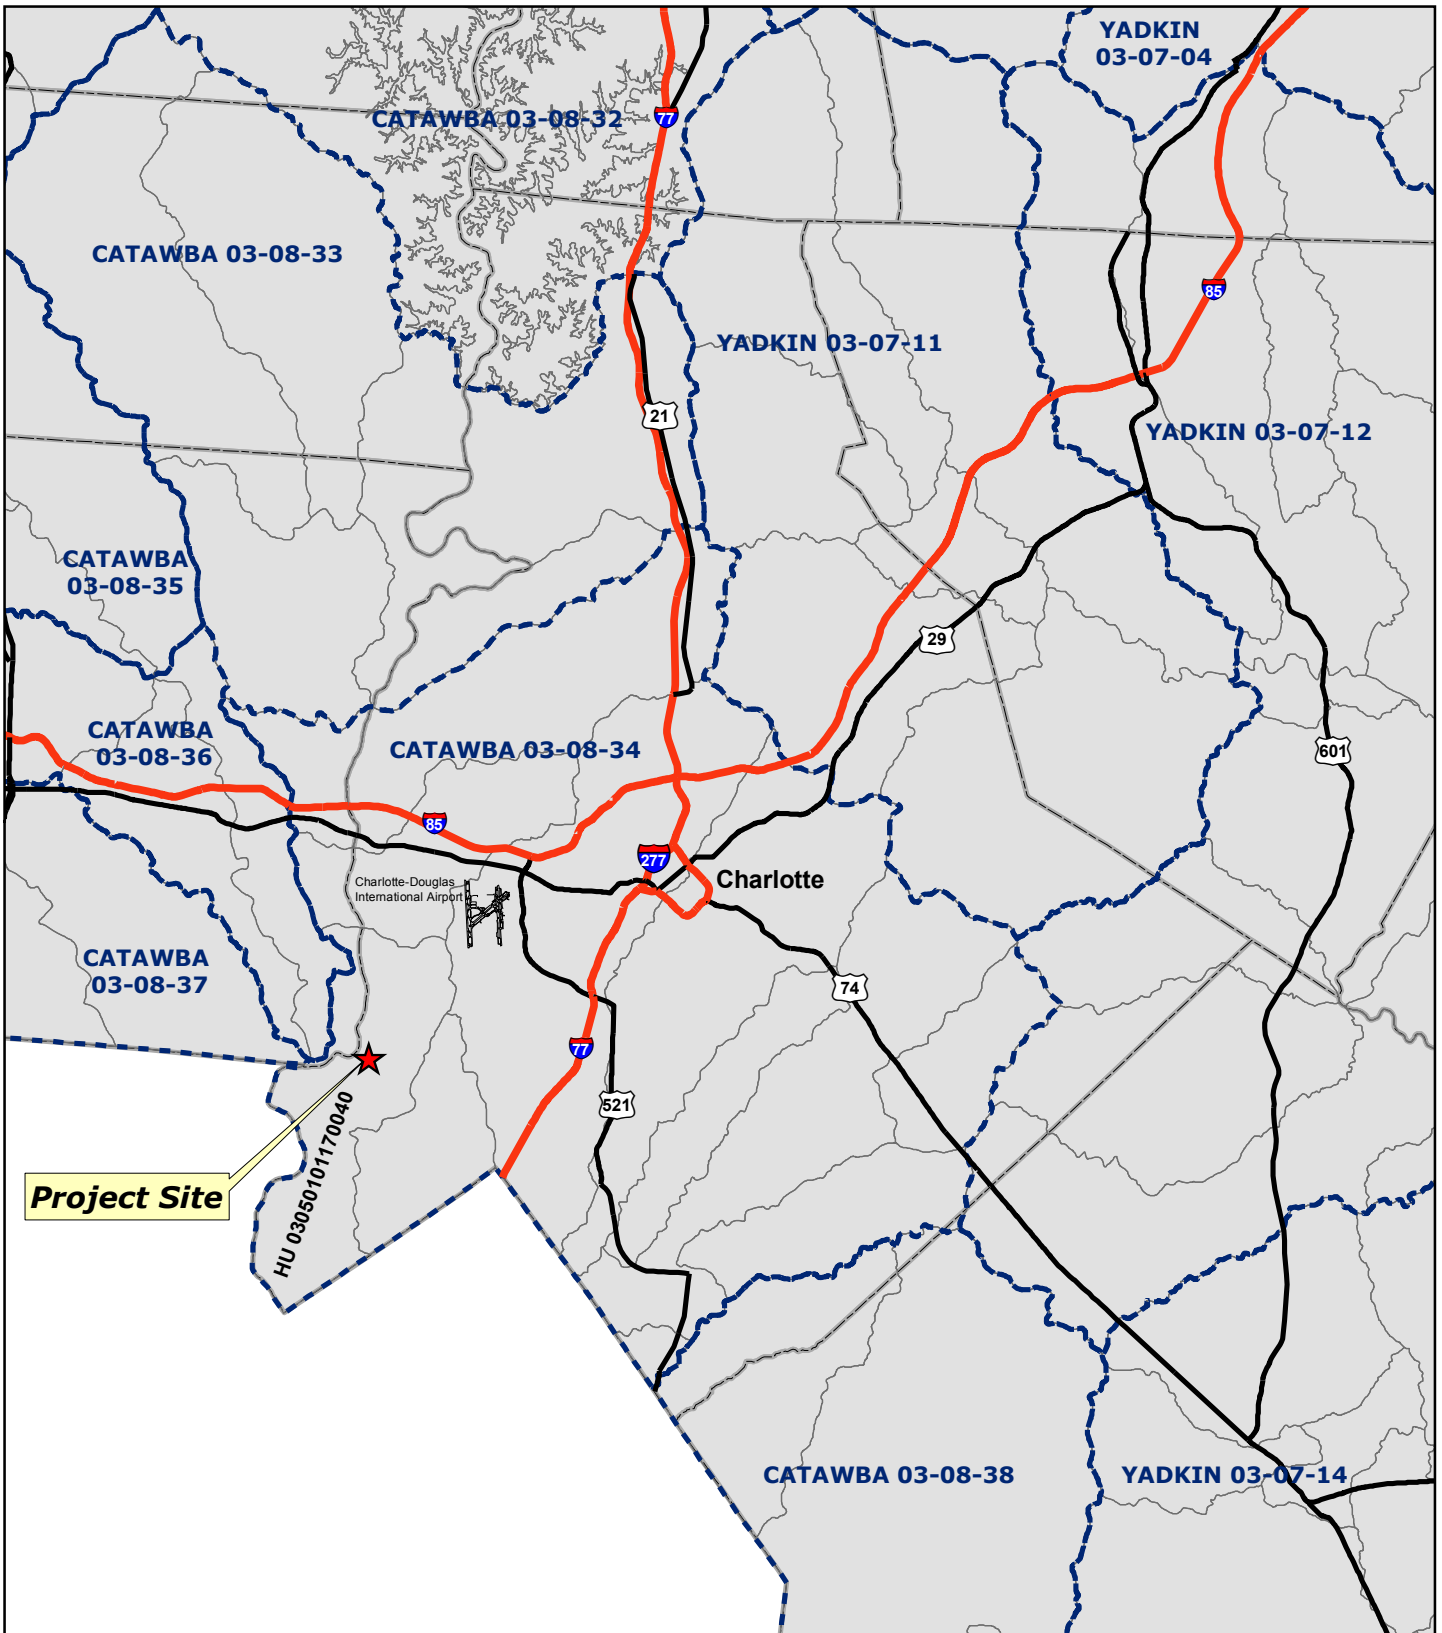


Project Site

HU 03050101170040

Charlotte-Douglas International Airport

Charlotte

Map Inset



Mecklenburg County, NC

LEGEND

- HUC
- DWQ Sub-basin
- Counties



EEP Contract No.: D05016-1

December 2009

Figure 1: Project Vicinity Map


Beaverdam Creek
Year 3 Monitoring
Mecklenburg County, NC



Baker



The site can be accessed from Dixie River Road (UT1 to the north and UT2 to the south) 1.5 miles northeast of the intersection with Steele Creek Road.

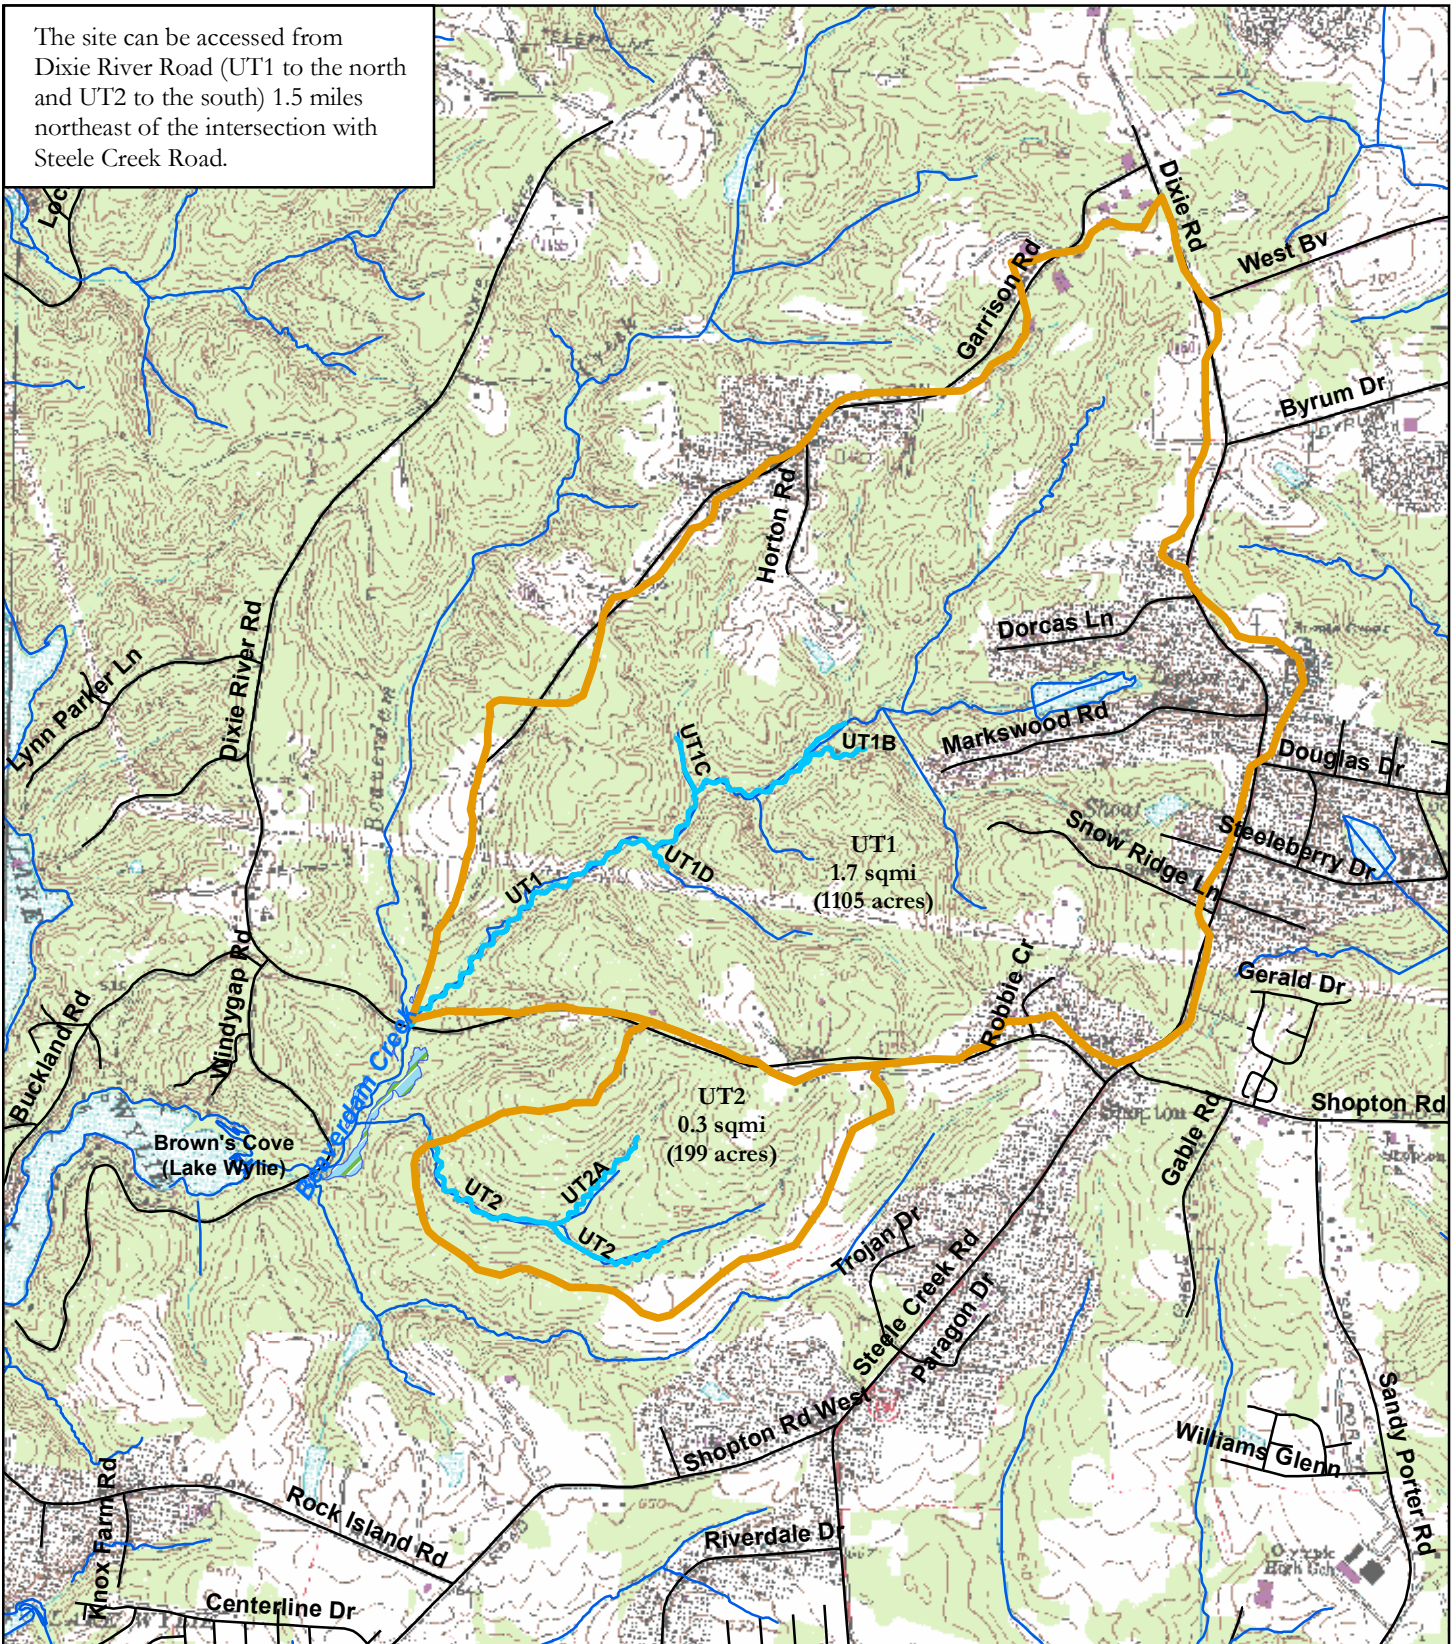


EEP Contract No.: D05016-1

Figure 2: Site Topographic Map





LEGEND

- Project Watershed Boundary
- Project Reaches
- Creeks
- Roads



December 2009



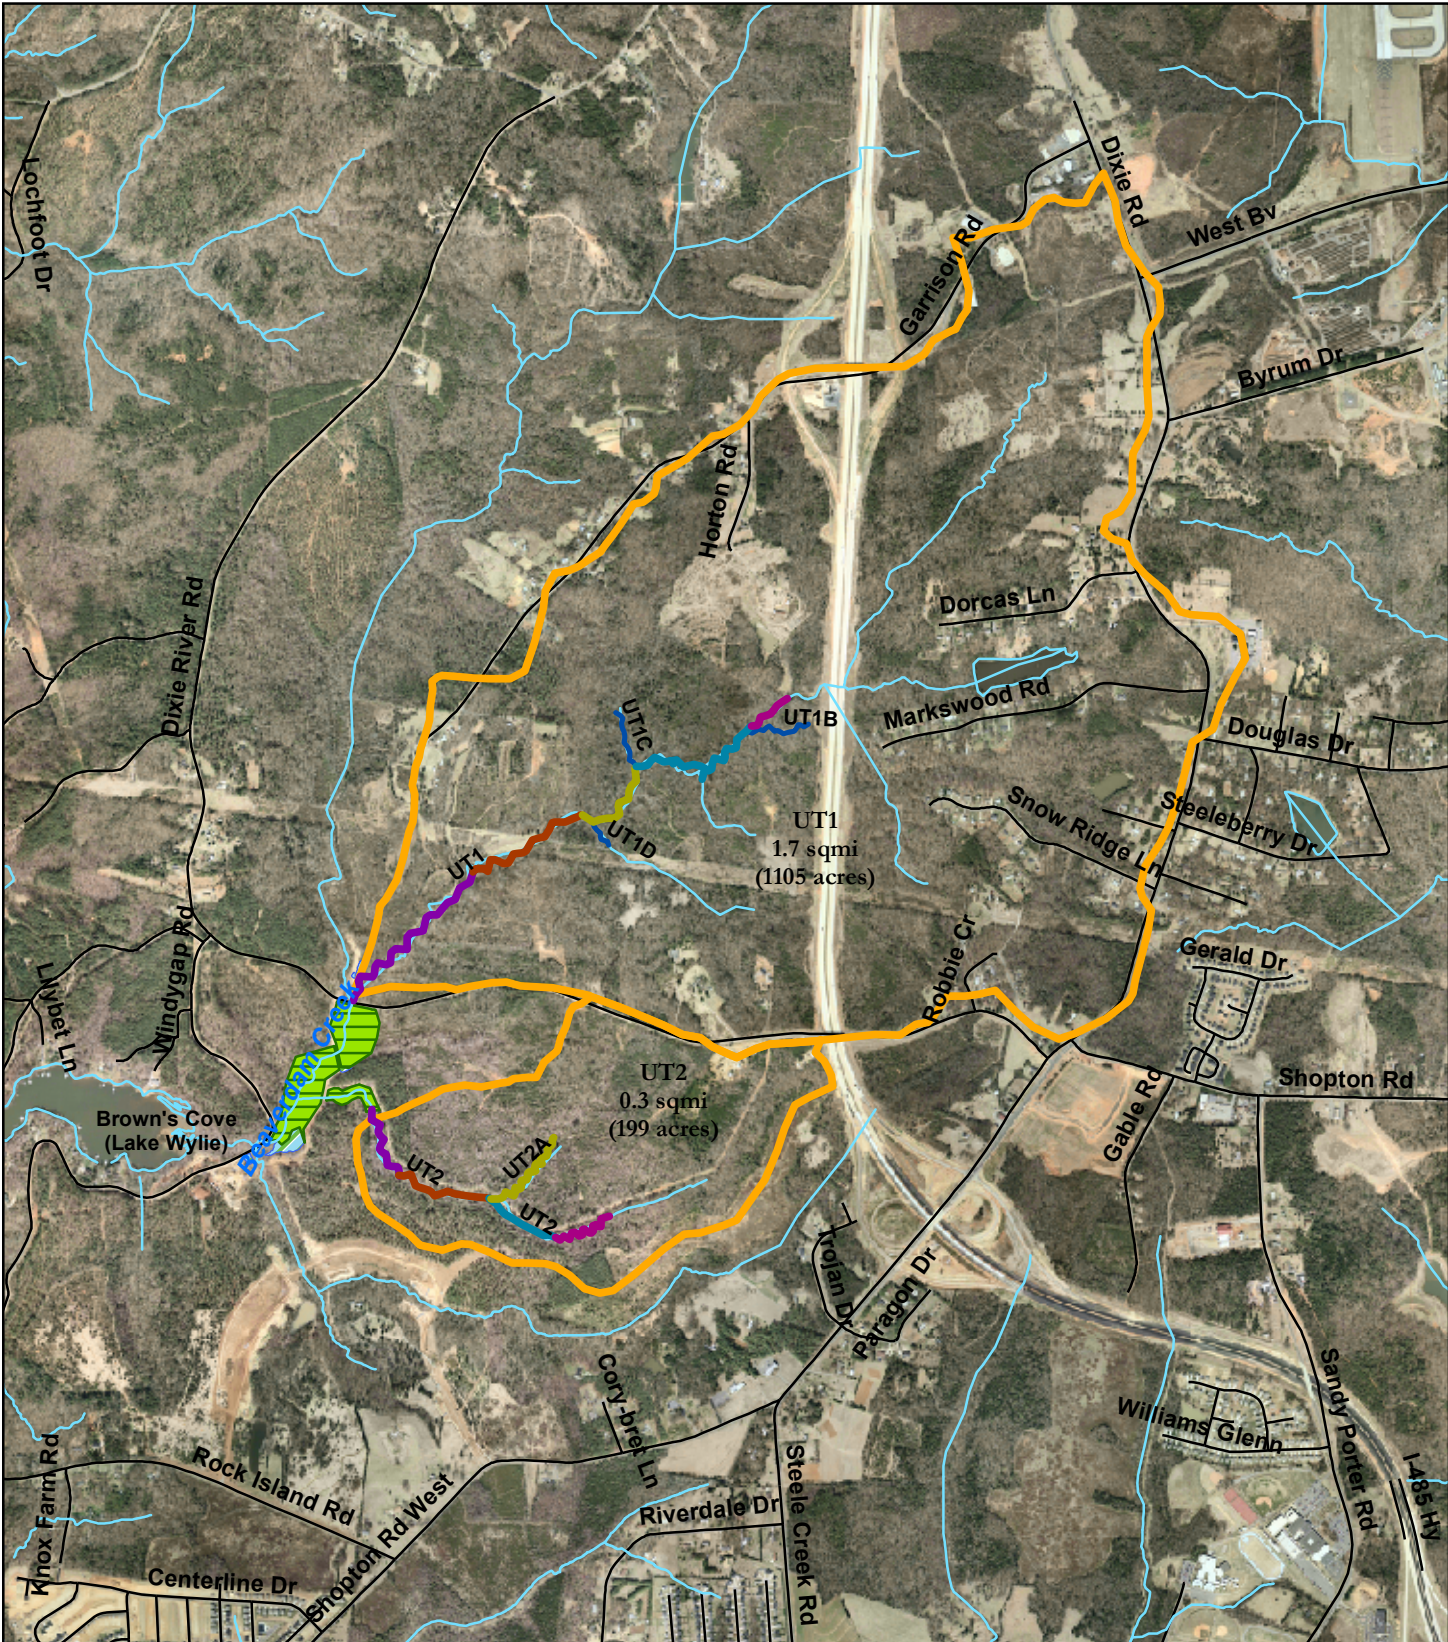

EEP Contract No.: D05016-1

LEGEND

- Project Watershed Boundary
- Preservation Easement
- Creeks
- Roads

0 900 1,800 3,600 Feet

December 2009

Figure 3: Restoration Summary Map

Beaverdam Creek
Year 3 Monitoring
Mecklenburg County, NC

only of a non-disturbance area (not for credit). The downstream section of UT2A, from a headcut at station 10+00 to its confluence at the terminus of UT2 Reach 2, was 1,138 LF with a channel slope of 1.4 percent.

Preservation was proposed for reaches within the project area that were currently in stable, functioning condition and did not warrant restoration. The two reaches proposed for preservation were along the mainstem of Beaverdam and the downstream section of UT2. The reach along the mainstem of Beaverdam Creek proposed for preservation had a reach length of 1,641 LF. It began at the confluence with UT1 and extended downstream to the confluence of UT2. The reach along the mainstem of UT2 proposed for preservation had a length of 962 LF. It began immediately downstream of UT2 Reach 4 and ended at its confluence with Beaverdam Creek.

Throughout most of UT1, the restoration approach accelerated the existing evolutionary process and established a natural, successional stable, C/E-type stream channel. Additionally, soil bioengineering, structural reinforcement, and revetments were applied to promote stability immediately following construction when the stream was most vulnerable. Given the wide floodplain, relatively flat slopes, generally stable nature of the soil, and favorable growing conditions at the site, this restoration approach was an achievable goal. Removal of the majority of invasive species and planting of native vegetative species throughout the riparian buffer complemented the channel restoration and promoted climax successional habitat.

Similar to UT1, the restoration approach throughout UT2 entailed establishing a successional C/E-type stream channel while maintaining the ability to accommodate subsequent natural channel evolution towards an E-type channel, as warranted by future influences to the discharge and sediment regime. This was accomplished through application of a Priority 1 design throughout with short segments of Priority 2 design to tie into the incised channels.

Table 1. Project Mitigation Approach

Beaverdam Creek Restoration Site: Project No. D05016-1								
Project Segment or Reach ID	Existing Footage/Acreage	Mitigation Type *	Approach**	Linear Footage or Acreage	Mitigation Ratio	Mitigation Units	Stationing	Comment
UT1 (Reach 1)	542	E	EI	567	1.5:1	378	10+00 - 15+67	Low slope, minimal meander and floodplain benching.
UT1 (Reach 2-5)	5796	R	P1	6,310	1:1	6,310	15+67 - 78+77	The beginning of channel utilizes the existing wide, flat floodplain then narrows through the valley and straightens through the Duke Power easement and connects into the mainstem of Beaverdam through a wide, flat floodplain.
UT1B	743	R	P2	778	1:1	778	10+00 - 17+78	The valley is pinched so floodplain grading will create adequate benching.
UT1C	744	R	P1	624	1:1	624	10+00 - 16+24	Step-pool design dominated by log drops. The valley is narrow resulting minimal meander.
UT1D	323	R	P1	338	1:1	338	10+00 - 13+38	The channel will have the appropriate belt width throughout the ample floodplain. A series of drop structures at the end of the reach will tie into UT1.
UT2	3130	R	P1	3,448	1:1	3,448	10+00 - 44+48	Increase sinuosity, pool development, and reestablish connection with the floodplain and construct in channel step-pools in areas where the valley is confined and steep.
UT2A	886	R	P1	1,138	1:1	1,138	10+00 - 21+38	A step-pool channel will be constructed in the areas where the valley is confined and steep. Transition connections constructed between the constructed channel and the existing channels.
Beaverdam Creek	1641	P	---	1,641	1:5	328	-	
UT2	962	P	---	962	1:5	192	-	
Total linear ft of channel restored or				15,806				
Mitigation Unit Summation for Streams:				13,534				

* R = Restoration
 E = Enhancement
 P = Preservation

** P1 = Priority I
 P2 = Priority II
 P3 = Priority III
 EI = Enhancement I

1.4 Project History and Background

The chronology of the Beaverdam Creek Restoration Project is presented in Table 2. The contact information for all designers, contractors, and relevant suppliers is presented in Table 3. Relevant project background information is presented in Table 4.

Table 2. Project Activity and Reporting History

Beaverdam Creek Restoration Site: Project No. D05016-1			
Activity or Report	Scheduled Completion	Data Collection Complete	Actual Completion or Delivery
Restoration Plan Prepared	Nov-05	N/A	
Restoration Plan Amended	Dec-05	N/A	
Restoration Plan Approved	Dec-05	N/A	
Final Design – (at least 90% complete)	Dec-05	N/A	
Construction Begins	May-06	N/A	Jun-06
Temporary S&E mix applied to entire project area	N/A	N/A	Jan-07
Permanent seed mix applied to entire project area	Mar-06	N/A	Jan-07
Planting of live stakes	Nov-06	N/A	Jan-07
Planting of bare root trees	Nov-06	N/A	Jan-07
Survey of As-built conditions (Year 0 Monitoring-baseline)	Jan-07	Mar-07	Apr-07
Repair work			
Year 1 Monitoring	Dec-07	Nov-07	Dec-07
Year 2 Monitoring	Dec-08	Nov-08	Dec-08
Year 3 Monitoring	Dec-09	Nov-09	Dec-09
Year 4 Monitoring	Dec-10	Unknown	Unknown
Year 5 Monitoring	Dec-11	Unknown	Unknown

Table 3. Project Contact

Beaverdam Creek Restoration Site: Project No. D05016-1	
Full Service Delivery Contractor	
River Works, Incorporated	8000 Regency Parkway, Suite 200 Cary, NC 27518 <u>Contact:</u> Will Pedersen, Tel. 919-459-9001
Designer	
Michael Baker Engineering, Inc.	8000 Regency Parkway, Suite 200 Cary, NC 27518 <u>Contact:</u> Kevin Tweedy, Tel 919-463-5488

Table 3. Project Contact

Beaverdam Creek Restoration Site: Project No. D05016-1	
Construction Contractor	
River Works, Inc.	8000 Regency Parkway, Suite 200 Cary, NC 27518 <u>Contact:</u> Will Pedersen, Tel. 919-459-9001
Planting Contractor	
River Works, Inc.	8000 Regency Parkway, Suite 200 Cary, NC 27518 <u>Contact:</u> Will Pedersen, Tel. 919-459-9001
Seeding Contractor	
River Works, Inc.	8000 Regency Parkway, Suite 200 Cary, NC 27518 <u>Contact:</u> Will Pedersen, Tel. 919-459-9001
Seed Mix Sources	Mellow Marsh Farm, 919-742-1200
Nursery Stock Suppliers	Mellow Marsh Farm, 919-742-1200 International Paper, 1-888-888-7159
Monitoring Performers	
Michael Baker Engineering, Inc.	1447 S. Tryon Street, Suite 200 Charlotte, NC 28203
Stream Monitoring Point of Contact:	Ian Eckardt, Tel.704-334-4454
Vegetation Monitoring Point of Contact:	Ian Eckardt, Tel. 704-334-4454

Table 4. Project Background

Beaverdam Creek Restoration Site: Project No. D05016-1	
Project County:	Mecklenburg County, NC
Drainage Area:	
UT1 (Reach 1)	0.70 mi ²
UT1 (Reach 2-5)	1.73 mi ²
UT1B	0.34 mi ²
UT1C	0.15mi ²
UT1D	0.16 mi ²
UT2	0.3 mi ²
UT2A	0.1 mi ²
Estimated Drainage % Impervious Cover:	
UT1 (Reach 1)	15%
UT1 (Reach 2-5)	12%
UT1B	10%
UT1C	5%
UT1D	21%
UT2	4%
UT2A	2%

Table 4. Project Background Table

Beaverdam Creek Restoration Site: Project No. D05016-1	
Stream Order:	
UT1 (Reach 1)	1
UT1 (Reach 2-5)	2
UT1B	1
UT1C	1
UT1D	1
UT2	1
UT2A	1
Physiographic Region	Piedmont
Ecoregion	Southern Outer Piedmont
Rosgen Classification of As-Built	
UT1 (Reach 1)	C/E
UT1 (Reach 2-5)	C/E
UT1B	C/E
UT1C	C/E
UT1D	C/E
UT2	C/E
UT2A	C/E
Cowardin Classification	Riverine, Upper Perennial, Unconsolidated Bottom, Cobble-Gravel
Dominant Soil Types	
UT1 (Reach 1)	MO
UT1 (Reach 2-5)	MO, DaD, CeD2, PaE
UT1B	MO
UT1C	MO, PaE, CeD2
UT1D	MO, PaE, CeD2
UT2	MO, CeD2
UT2A	MO
Reference site ID	Spencer Creek, UT to Spencer Creek, McDowell Park, Latta Plantation, McClintock Creek (McNair & Stockwood), UT to Cleghorn, UT to Lake Jeanette, UT to Big Lost Cove
USGS HUC for Project and Reference sites	3050101170040
NCDWQ Sub-basin for Project and Reference	03-08-34
NCDWQ classification for Project and Reference	C
Any portion of any project segment 303d listed?	No
Any portion of any project segment upstream of a 303d listed segment?	No
Reasons for 303d listing or stressor?	N/A
% of project easement fenced	10%

1.5 Project Plan

Plans depicting the as-built conditions of the major project elements, location of permanent monitoring cross-sections, and locations of permanent vegetation monitoring plots are presented in Appendix C of this report.

2.0 VEGETATION MONITORING

2.1 Soil Data

The soil data for the Site are presented in Table 5.

Table 5. Soil Data for Project

Beaverdam Creek Restoration Site: Project No. D05016-1					
Series	Max Depth (in)	% Clay on Surface	K	T	OM %
Cecil Sandy Clay Loam (CeD2)	80	20-35	0.28	5	0.5-1
Monacan Loam (MO)	80	7-27	0.43	5	2-3
Davidson sandy clay loam (DaD)	75	20-35	0.28	5	0.5-2
Pacolet sandy loam (PaE)	62	8-20	0.2	5	0.5-2
Pacolet sandy loam (PaF)	62	8-20	0.2	5	0.5-2

(USDA, 2006. Official Soil Series Descriptions: <http://soils.usda.gov/technical/classification/osd/index.html>)

General taxonomy of soils:

Cecil: The Cecil series consists of well-drained soils with moderate permeability on and near floodplains. They formed in residuum weathered felsic igneous and metamorphic rock, such as granite. Slopes range from 8 to 15 percent (USDA, 2006. "Soil Taxonomy").

Monacan: Soils of the Monacan series are deep, moderately well and somewhat poorly drained with moderate permeability. They formed in recent alluvial sediments of the Piedmont and Coastal Plain. Slopes are commonly less than 2 percent (USDA, 2006. "Soil Taxonomy").

Pacolet: The Pacolet series consists of very deep, well drained, moderately permeable soils that formed in material weathered mostly from acid crystalline rocks of the Piedmont uplands. Slopes commonly are 15 to 25 percent but range up to 2 to 60 percent (USDA, 2006. "Soil Taxonomy").

Davidson: The Davidson series consists of very deep, well drained moderately permeable soils that formed in materials weathered from dark colored rocks high in ferromagnesian minerals. These soils are on gently sloping to moderately steep uplands in the Piedmont. Slopes are commonly 2 to 15 percent but range up to 25 percent (USDA, 2006. "Soil Taxonomy").

2.2 Description of Species and Monitoring Protocol

The Site was planted in bottomland hardwood forest species in early – mid March of 2007. There were twenty-four vegetation-monitoring plots established throughout the planting areas. The following tree species were planted in the restoration area:

**Table 6. Tree Species Planted
Beaverdam Creek Restoration Site: Project No. D05016-1**

ID	Scientific Name	Common Name	FAC Status
1	<i>Alnus serrulata</i>	Tag Alder	FACW+
2	<i>Asimina triloba</i>	Paw paw	FAC
3	<i>Cercis canadensis</i>	Redbud	FACU
4	<i>Celtis laevigata</i>	Sugarberry	FACW
5	<i>Cephalanthus occidentalis</i>	Buttonbush	OBL
6	<i>Cornus amomum</i>	Silky Dogwood	FACW+
7	<i>Cornus florida</i>	Flowering Dogwood	FACU
8	<i>Diospyros virginiana</i>	Persimmon	FAC
9	<i>Fraxinus pennsylvanica</i>	Green Ash	FACW
10	<i>Juglan nigra</i>	Black Walnut	FACU
11	<i>Liriodendron tulipiferra</i>	Tulip poplar	FACW
12	<i>Platanus occidentalis</i>	Sycamore	FACW-
13	<i>Nyssa sylvatica</i>	Blackgum	FAC
14	<i>Quercus michauxii</i>	Swamp chestnut oak	FACW-
15	<i>Quercus phellos</i>	Willow oak	FACW-
16	<i>Quercus rubra</i>	Red oak	FACU
17	<i>Sambucus candensis</i>	Elderberry	FACW-
18	<i>Viburnum dentatum</i>	Arrow-wood viburnum	FAC

(USDA, 2007: <http://plants.usda.gov>)

The following monitoring protocol was designed to predict vegetative survivability. Twenty-four plots were established throughout the Site. The number of plots was based on the species/area curve method and their location was based on EEP monitoring guidance. The size of individual plots was 100 square meters. The locations of the vegetation plots are shown on the as-built plan sheets in Appendix C.

Individual quadrant data provided includes density and coverage quantities. Relative values were calculated, and importance values were determined. Individual seedlings were marked to ensure that they can be found in succeeding monitoring years. Mortality was determined from the difference between the previous year's living, planted seedlings and the current year's living, planted seedlings.

2.3 Vegetation Success Criteria

The interim measure of vegetative success for the Site will be the survival of at least 320 3-year old planted trees per acre at the end of year three of the monitoring period. The final vegetative success criteria will be the survival of 260 5-year old planted trees per acre at the end of year five of the monitoring period.

2.4 Results of Vegetative Monitoring

The following table presents stem counts for each of the monitoring plots. Each planted tree species is identified down the left column, and each plot is identified across the top row. The numbers on the top row correlate to the vegetation plot IDs. Trees are flagged in the field on an as-needed basis before the flags degrade. Flags are utilized because they will not interfere with the growth of the tree. Volunteer species are also flagged during this process.

During the initial counts of species totals during the as-built monitoring report, some tree species were unidentifiable (no buds or leaves) and documented as *Unknown Quercus* in the stem plot counts or were labeled incorrectly. During Year 1 vegetative monitoring, three of the four *Unknown Quercus* were identified as *Quercus michauxii* and updated. Tree species that were labeled incorrectly have been updated and coded within Table 7 to represent the correction.

The average stem count per acre for Year 3 monitoring was 475. The range of stem counts throughout the 24 vegetative monitoring plots was from 160 – 760. The current survivability rate for Year 3 is 76.0%. The data reflects that the overall site has met the minimum success interim criteria of 320 trees per acre by the end of year three and is on trajectory for meeting the final success criteria of 260 trees per acre by the end of year five.

No volunteer species were noted in any of the Site's vegetation plots, or were too small to verify. If any woody volunteer species are observed in subsequent monitoring years they will be flagged and added to the overall stems per acre assessment of the Site.

Table 7. Year 3 Stem Counts for Each Species Arranged by Plot

Beaverdam Creek Restoration Site : Project No. D05016-1																														
Tree Species	Plots																					As-built Totals	Year 1 Totals	Year 2 Totals	Year 3 Totals	% Survival				
	UT1														UT2															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	1	2	3	4						5	6	7	
<i>Alnus serrulata</i>																										2	2	0	0	0.0
<i>Asimina tuloba</i>							4	3		3	2	1														21	18	13	13	61.9
<i>Cercis canadensis</i>															1											3	3	1	1	33.3
<i>Celtis laevigata</i>	1				1									2												6	3	3	4	66.7
<i>Cephalanthus occidentalis</i>																										1	1	1	0	0.0
<i>Cornus amomum</i>																										1	0	1	0	0.0
<i>Cornus florida</i>																										2	3	0	0	0.0
<i>Diospyros virginiana</i>		1																								3	3	2	2	66.7
<i>Fraxinus pennsylvanica</i>	4			4	7	1	6	1			1	3	4	3	6	5		3	13		2	8	5	1	77	76	75	77	100.0	
<i>Juglan nigra</i>	1	1	1	1		4		2		7		1	2													31	28	21	20	64.5
<i>Liriodendron tulipifera</i>	1		1		1		2			2		3		2		1	2	2		1	2			2	36	29	21	22	61.1	
<i>Platanus occidentalis</i>		2		2	4	4	1	5		2			1		1	1				7	4		1	1	54	46	36	36	66.7	
<i>Nyssa sylvatica</i>	2	1	2	3		1		1			1	5		3	2	5	2			3	2		5	2	55	50	46	40	72.7	
<i>Quercus michauxii</i>	1	4	7	2			2	4			1	1	3	3	2	1		6			3	6	2	1	55	57	47	49	89.1	
<i>Quercus phellos</i>	1	1	2	1	1		1	1		1	4		1			4									20	20	18	18	90.0	
<i>Quercus rubra</i>								1						1												1	1	3	2	200.0
<i>Sambucus candensis</i>																										1	0	0	0	0.0
<i>Viburnum dentatum</i>									1																	2	2	1	1	50.0
<i>Unknown Quercus</i>																										4	1	1	0	0.0
Stems/plot	11	10	13	13	14	10	12	19	4	12	9	11	16	12	12	14	8	13	13	11	13	14	14	7	375	343	290	285	76.0	
Stems/acre	440	400	520	520	560	400	480	760	160	480	360	440	640	480	480	560	320	520	520	440	520	560	560	280				475	Average	

- Tree # 3-7 was mislabelled as *Platanus occidentalis* in As-built Initial Counts
- Tree # 3-16 was mislabelled as *Liriodendron tulipifera* in As-built Initial Counts
- Tree # 7-10 was mislabelled as *Asimina tuloba* in As-built Initial Counts
- Tree # 7-2, -3, -4 were mislabelled as *Fraxinus pennsylvanica* in As-built Initial Counts
- Tree # 14-5, -8, -10 were labelled as unknown in As-built Initial Counts
- Tree # 7-21 was labelled as *Liriodendron tulipifera* in the field but was not added in the As-built Initial Counts
- Tree # 7-4 was mislabelled as *Quercus michauxii* in the Year 1 Monitoring Counts
- Tree # 16-6 was mislabelled as *Nyssa sylvatica* in the Year 1 Monitoring Counts
- Tree # 9-1 was incorrectly counted as *Cercis canadensis* instead of *Cornus amomum* in the Year 1 Monitoring Counts
- Tree # 8-10 was mislabelled as *Quercus phellos* in the As-built Initial Counts
- Tree # 1-6 was mislabelled as *Quercus phellos* in the As-built Initial Counts

2.5 Vegetation Observations

During 2009 minor repairs were made to the stream-side vegetation. Maintenance work at Station 56+55 on UT1 involved the removal of a rock and roll log structure that lost functionality. The right bank was re-graded and a brush mattress with a live fascine toe was installed. Other repairs included the re-grading and resetting of rootwads at Station 68+50 on UT1. Geolifts with vegetation were added upstream and immediately on top of these rootwads. Live stakes were installed and bare roots planted in the small disturbed work area in the vicinity of Station 68+50. A sewer line was installed by Mecklenburg County during the spring of 2009 that crosses UT1 at Station 76+60. The disturbed area will be replanted early in 2010.

In January of 2009 seeding and mulching was completed at the top UT2A where a BMP was removed in late 2008. Bare roots were planted in the footprint of the old BMP in March. Beyond these minor repairs, the stream-side and floodplain vegetation has continued to successfully establish throughout the project site.

2.6 Vegetation Problem Areas

Invasive species are present but minimal throughout the project site. At this time, there seem to be no invasive species problem areas. Although none seem to be posing any problems, invasive species can very quickly affect the survivability of the planted stems the weedy species should be monitored to prevent any major mortality issue.

2.7 Vegetation Photos

Photos of the project showing the on-site vegetation are included in Appendix A of this report.

3.0 STREAM MONITORING



3.1 Description of Stream Monitoring

To document the stated success criteria, the following monitoring program was instituted following construction completion on the Site:

Bankfull Events: The occurrence of bankfull events within the monitoring period was documented by the use of two automated stage recorders. The University of North Carolina (UNCC) installed and monitored the readings from both stage recorders. Gauging station BD2 was installed on UT1 and gauging station BD3 was installed on UT2. Each data logger recorded the watermark at 15 minute intervals at each station and was checked at each Site visit to determine if a bankfull event had occurred. Photos of the bankfull events were not available from UNCC. Figure 4 shows the locations of the stage recorders.

Cross-Sections: Two permanent cross-sections were installed per 1,000 linear feet of stream restoration work, with one located at a riffle cross-section and one located at a pool cross-section. Twenty four total cross sections were established. Each cross-section was marked on both banks with permanent pins to establish the exact transect used. A common benchmark was used for cross-sections and consistently referenced to facilitate comparison of year-to-year data. The annual cross-sectional survey included points measured at all breaks in slope, including top of bank, bankfull, inner berm, edge of water, and thalweg, if the features are present. Riffle cross-sections were classified using the Rosgen stream classification system (Rosgen, 1994). Permanent cross-sections for 2009 (Year 3) were surveyed in October 2009.

Longitudinal Profiles: A representative longitudinal profile was surveyed for 2009 (Year 3). The initial 3,562 linear feet of profile was collected for the mainstem reach of UT1. Measurements included

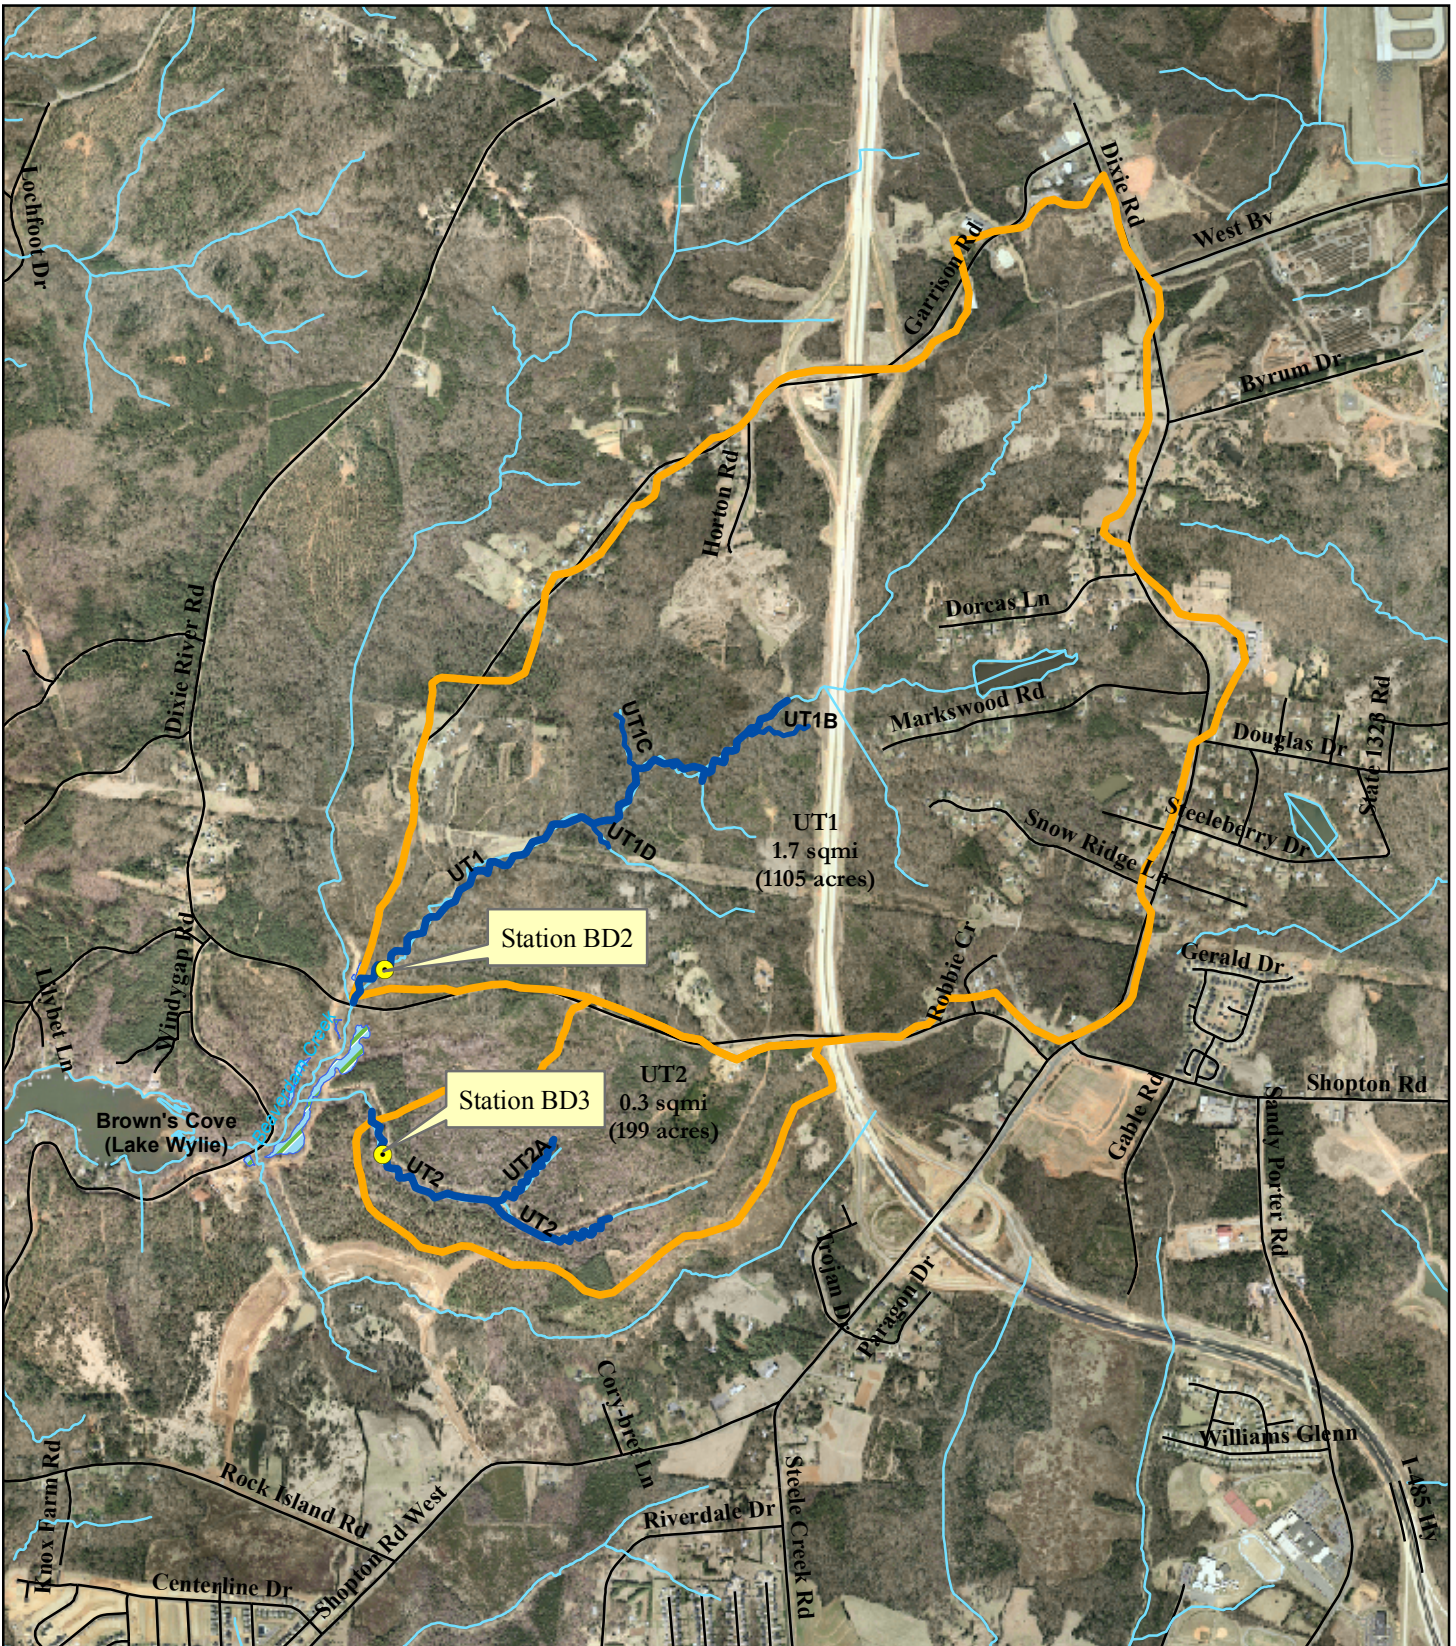

LEGEND

- Crest Gauges
- As-built Alignments
- Project Watershed Boundary
- Creeks
- Roads

EEP Contract No.: D05016-1

0 950 1,900 3,800 Feet

December 2009

Figure 4: Stage Recorder Locations

Beaverdam Creek
Year 3 Monitoring
Mecklenburg County, NC

thalweg, water surface, bankfull, and top of low bank. Each of these measurements was taken at the head of each feature (e.g., riffle, pool, glide). In addition, maximum pool depth was recorded. All survey was tied to a single permanent benchmark.

Bed Material Analysis: Pebble counts were conducted for the permanent cross-sections (100 counts per cross-section) on the project reaches. Pebble count data was plotted on a semi-log graph and are included in Appendix B.

Photo Reference Stations: Photographs were used to visually document restoration success. Fifty-one (51) reference stations were established to document conditions at the constructed grade control structures across the Site. These photos are provided in Appendix A. The GPS coordinates of each photo station were noted as additional reference to ensure the same photo location was used throughout the monitoring period. These stations are included in the As-built Plan Sheets in Appendix C. Reference photos were taken once per year.

Each streambank was photographed at each permanent cross-section photo station. For each streambank photo, the photo view line followed a survey tape placed across the channel, perpendicular to flow (representing the cross-section line). The photograph was framed so that the survey tape is centered in the photo (appears as a vertical line at the center of the photograph), keeping the channel water surface line horizontal and near the lower edge of the frame. These photos are presented along with the cross-section monitoring data in Appendix B.

3.2 Stream Restoration Success Criteria

The approved Mitigation Plan requires the following criteria be met to achieve stream restoration success:

- *Bankfull Events:* Two bankfull flow events must be documented within the five-year monitoring period. The two bankfull events must occur in separate years.
- *Cross-Sections:* There should be little change in as-built cross-sections. If changes to channel cross-section take place, they should be minor changes representing an increase in stability (e.g., settling, vegetative changes, deposition along the banks, or decrease in width/depth ratio).
- *Longitudinal Profiles:* The longitudinal profiles should show that the bedform features are remaining stable (not aggrading or degrading). The pools should remain deep with flat water surface slopes and the riffles should remain steeper and shallower than the pools.
- *Bed Material Analysis:* Pebble counts should indicate maintenance of bed material.
- *Photo Reference Stations:* Photographs will be used to subjectively evaluate channel aggradation or degradation, bank erosion, success of riparian vegetation and effectiveness of erosion control measures. Photos should indicate the absence of developing bars within the channel, no excessive bank erosion or increase in channel depth over time, and maturation of riparian vegetation.

3.3 Bankfull Discharge Monitoring Results

On-site data loggers documented the occurrence of multiple bankfull flow events during the third year (2009) of the post-construction monitoring period (Table 8). Maximum stage heights of 6.67 ft and 1.828 ft were recorded on 6/5/09 by the data loggers BD2 and BD3, respectively. See Table 8, below, for all bankfull events during monitoring Year 3.

Table 8. Verification of Bankful Events

Beaverdam Creek Restoration Site: Project No. D05016-1				
Station Number	Date of Data Collection	Date of Occurrence of Bankfull Event	Method of Data Collection	Gage Height (feet)
BD2	N/A	1/6/2009	Datalogger	5.53
	N/A	3/1/2009	Datalogger	6.5
	N/A	3/28/2009	Datalogger	5.69
	N/A	5/5/2009	Datalogger	6.3
	N/A	5/26/2009	Datalogger	6.66
	N/A	6/5/2009	Datalogger	6.67
BD3	N/A	1/4/2009	Datalogger	0.972
	N/A	1/6/2009	Datalogger	1.496
	N/A	2/28/2009	Datalogger	1.075
	N/A	3/1/2009	Datalogger	1.759
	N/A	3/9/2009	Datalogger	0.87
	N/A	3/15/2009	Datalogger	1.128
	N/A	3/28/2009	Datalogger	1.506
	N/A	4/10/2009	Datalogger	1.021
	N/A	4/20/2009	Datalogger	0.9
	N/A	5/5/2009	Datalogger	1.409
	N/A	5/24/2009	Datalogger	1.453
	N/A	5/26/2009	Datalogger	1.762
	N/A	6/5/2009	Datalogger	1.828
	N/A	9/20/2009	Datalogger	0.96

3.4 Stream Monitoring Data and Photos

A photo log of the project showing each of the fifty-one (51) permanent photo locations is included in Appendix A of this report. Survey data and photos from each permanent cross-section are included in Appendix B of this report.

3.5 Stream Stability Assessment

Table 9 presents a summary of the results obtained from the visual inspection of in-stream structures performed during Year 3 of post-construction monitoring. The percentages noted are a general overall field evaluation of how the features were performing at the time of the on-site visual stability assessment on November 20, 2009. These percentages are solely based on the field evaluator's visual assessment at the time of the site visit.

Visual observations of the various structures throughout Year 3 growing season indicated that structures were functioning as designed and holding their elevation grade. Root wads placed on the outside of meander bends provided bank stability and in-stream cover for fish and other aquatic organisms. Cover logs placed in meander pool areas allowed scour to keep pools deep and provide cover for fish. During the Year 3 site visit, remnant scour was observed immediately underneath a few of the cover logs and

other log vane structures. This was observed at stations 41+50, 53+80, and 56+00, of UT1. This minor amount of scour was the result of the large storm event that dropped 3.5 inches of rain on the project site shortly after construction was completed. The channel at these stations and throughout the project has remained largely unchanged through Year 3.

A slight increase in the channel’s performance scores reflects repair work at stations 56+55 and 68+50 that addressed structures that had lost functionality during Year 2. Year 3 observations noted that only log sill structures at stations 12+05 and 25+90 on UT1 had been bypassed either by scour under the structure or failure of the fabric seal.

Table 9. Categorical Stream Feature Visual Stability Assessment

Beaverdam Creek Restoration Site : Project No. D05016-1						
	Performance Percentage					
Feature	Initial	MY-01	MY-02	MY-03	MY-04	MY-05
Riffles	100%	100%	100%	100%		
Pools	100%	100%	100%	100%		
Thalweg	100%	100%	100%	100%		
Meanders	100%	100%	100%	100%		
Bed General	100%	99%	99%	99%		
Vanes / J Hooks etc.	100%	97%	95%	97%		
Wads and Boulders	100%	100%	100%	100%		

3.6 Cross-section, Longitudinal Profile, and Bed Material Analysis Monitoring Results

Cross Sections

Year 3 cross-section monitoring data for stream stability were collected during October 2009 and compared to as-built conditions, Year 1 conditions, and Year 2 conditions.

The twenty four permanent cross-sections along the restored channels (twelve located across riffles and twelve across pools) were re-surveyed to document stream dimension at the end of the Year 3 monitoring period. Cross-sections are provided in Appendix B, and data from the cross-sections are summarized in Appendix E. Most cross-sections show that there has been minor adjustment to stream dimension within the last year; with the exception of of cross-sections 11, 15, and 17.

Cross-sections 11 and 17, are located across pools that have have experienced aggradation during Year 3. The aggradation documented at X11 is due to an unknown offsite sediment source. The recent deposition is only present at the very top of UT1D. X17 experienced bed scour during Year 2 as a result of 7.54 inch precipitation event between August 25 and 27, 2008. During Year 3 X17 has aggraded back towards its as-built depth. Scour followed by aggradation is a natural cycle in pool features and has not resulted in any observed channel instability. Photographs of X17 indicate that the banks of the stream are stable with vegetation.

Cross-section 15, a riffle, also experienced aggradation. X15 is located immediately upstream of a large in-stream boulder. The aggradation in Year 3 followed scour observed during Year 2. This change in channel geometry is most likely influenced by the boulder structure and will be monitored, however no other action is required at this time.

Longitudinal Profiles

The Year 3 longitudinal profile was conducted during November 2009. The initial 3,000 LF of channel was surveyed along the mainstem of UT1. The longitudinal profile is included in Appendix B. A summary of parameters measured are provided in Appendix D. Please note that this summary represents only the portion of project that was surveyed.

The representative longitudinal profile along the restored channel was resurveyed to document stream profile at the end of monitoring Year 3. Riffle slopes and pool-to-pool spacing were calculated for Reach 1 and Reaches 2-5 of UT1. The Year 3 riffle slope for Reach 1 is 0.014 ft/ft and pool-to-pool spacing has a mean value of 57 ft. These values are on par with the design values, which are respectively 0.009 ft/ft and 44 ft. Reaches 2-5 riffle slopes range from 0.008 ft/ft to 0.013 ft/ft are also similar to their design values that range from 0.005 to 0.018 ft/ft. The Year 2 pool-to-pool spacing of Reaches 2-5 ranges from 67 to 146 ft with a mean value of 114. These values are similar to the design value range of 101 to 120 ft. Sinuosity for Reach 1 was 1.04, which is the same as that calculated in Year 2. The sinuosity of Reaches 2-5 remained the same Year 2 with a value of 1.3.

Profile remained largely unchanged with a few exceptions where pools had deepened due to scour or slightly aggraded. Overall pattern shows little to no change.

Bed Material Analysis

Year 3 bed material samples were collected at each permanent cross-section during October 2009. The pebble count data were plotted on a semi-log graph and will be compared with future monitoring data. Data indicates maintenance of a coarse bed in constructed riffles and a relative fining in the pools. All pebble count data are provided in Appendix B.

3.7 Areas of Concern

Currently there are no areas of concern.

4.0 HYDROLOGY

Rainfall data were collected to document the hydrologic conditions throughout the project area in the 2009 growing season. Since no rain gauges were installed within the project boundaries, monthly rainfall totals were calculated from data downloaded from the Withers Cove USGS gauge 35090308100454 in Mecklenburg County, NC. Historical rainfall data were collected from the Charlotte WSO AP WETS Station in Mecklenburg County (NC 1690) using NRCS National Water and Climate Data Center website.

The total rainfall in inches for 2008 – 2009 is less than the historical average totals. May and October were the only two months that recorded rainfall data above the historical average. Precipitation for the month of June was well below the 30 percentile mark. Hydrologic monitoring results are shown in Table 10 and Figure 5.


Table 10. Comparison of Historic Rainfall to Observed Rainfall

Beaverdam Creek Restoration Site: EEP Contract No. D05016-1				
Month	Average	30%	70%	Observed 2008-09 Precipitation
January	4.00	3.21	5.15	2.09
February	3.55	2.34	4.42	2.05
March	4.39	3.01	5.54	3.10
April	2.95	1.98	3.73	2.02
May	3.66	2.33	4.29	5.94
June	3.42	2.43	4.68	0.68
July	3.79	2.49	4.76	2.46
August	3.72	2.34	4.57	2.54
September	3.83	2.00	4.68	2.77
October	3.66	1.80	4.49	3.91
November	3.36	2.51	4.24	2.94
December	3.18	2.11	3.81	2.99
Total Rainfall	43.51	28.55	54.36	33.489

(NRCS National Climate and Water Center, 2003 and USGS, 2009)

* Monthly rainfall data was calculated based on rainfall data from 11/1/08 – 10/31/09 using the nearest USGS rain gauge data (USGS 35090308100454 Withers Cove in Mecklenburg County) to the project site. (USGS, 2009)

Figure 5. Historic Average vs. Observed Rainfall

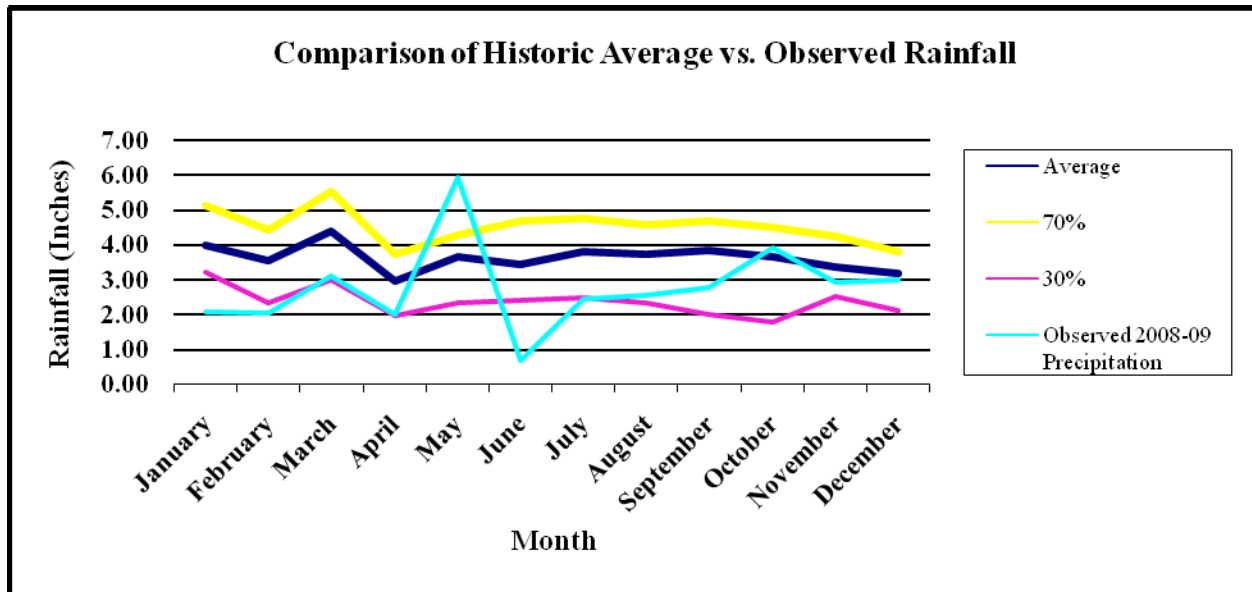

5.0 CONCLUSIONS AND RECOMMENDATIONS

Vegetation Monitoring. Vegetation monitoring efforts have calculated the range of stems per acre for each plot to be from 160 to 760 stems per acre on the 24 vegetation plots. The average number of stems per acre is 475, which is a survival rate of 76% based on the initial planting count of 625 stems per acre. The overall site has met the minimum success interim criteria of 320 trees per acre by the end of Year 3. Assuming that preventative methods will be used to maintain any invasive exotics, vegetation survivability should remain excellent on the Site and final vegetative success criteria will be met.

Stream Monitoring. The total length of stream channel restored and/or preserved on the Site was 15,806 linear feet. This entire length was inspected during Year 3 of the monitoring period (2009) to assess stream performance. Based on the data collected, riffles, pools, and other constructed features along the restored channel are stable and functioning as designed. Minor bed scour, the result of a large storm event shortly after construction was complete, was noted at isolated pockets along UT1 but has changed little. Two log sill structures should be resealed along UT1 to restore functionality. The lack of major problem areas along the length of the restored channels after the occurrence of two stream flow events larger than bankfull discharge further supports functionality of the design. It is expected that stability and in-stream habitat of the system will continue to improve in the coming years as permanent vegetation becomes more established.

6.0 WILDLIFE OBSERVATIONS

During the monitoring assessment in October 2009, a Great Blue Heron was observed within the project area. Observations of deer and raccoon tracks are also common on the Site. In addition, frogs, turtles, turkey, and fish have also been observed periodically.

7.0 REFERENCES

Rosgen, D.L. 1994. A Classification of Natural Rivers. *Catena* 22:169-199.

Rosgen, D.L. 1996. Applied River Morphology. Pagosa Springs, CO: Wildland Hydrology Books.

United States Department of Agriculture (USDA), Natural Resources Conservation Service (NRCS). 2006. Soil Series Descriptions. <http://soils.usda.gov/technical/classification/osd/index.html>

USDA. NRCS. 2006. Soil Taxonomy, A Basic System of Soil Classification for Making and Interpreting Soil Surveys. ftp://ftp-fc.sc.egov.usda.gov/NSSC/Soil_Taxonomy/tax.pdf

USDA. NRCS. 2003. Climate Information for Mecklenburg County in the State of North Carolina (1971-2000). TAPS Station : CHARLOTTE WSO AP, NC1690
<ftp://ftp.wcc.nrcs.usda.gov/support/climate/taps/nc/37119.txt>

USDA, NRCS. 2007. The PLANTS Database (28 November 2007). National Plant Data Center, Baton Rouge, LA 70874-4490 USA. <http://plants.usda.gov>

U.S. Geological Service (USGS). 2009. Real-Time Data for North Carolina - Precipitation USGS Water-Data Site Information for North Carolina. USGS 35090308100454 Withers Cove in Mecklenburg County, NC. Retrieved on 2009-11-20 10:25:09 EDT
http://waterdata.usgs.gov/nc/nwis/current/?type=precip&group_key=county_cd

APPENDIX A

Photo Log

PHOTO LOG – UT1



UT1 – PID 1



UT1 – PID 2



UT1 – PID 3



UT1 – PID 4



UT1 – PID 5



UT1 – PID 6

PHOTO LOG – UT1



UT1 – PID 7



UT1 – PID 8



UT1 – PID 9



UT1 – PID 10



UT1 – PID 11



UT1 – PID 12

PHOTO LOG – UT1



UT1 – PID 13



UT1 – PID 14



UT1 – PID 15



UT1 – PID 16



UT1 – PID 17



UT1 – PID 18

PHOTO LOG – UT1



UT1 – PID 19



UT1 – PID 20



UT1 – PID 21



UT1 – PID 22



UT1 – PID 23

PHOTO LOG – UT1B, UT1C, & UT1D



UT1B – PID 1



UT1B – PID 2



UT1B – PID 3



UT1B – PID 4



UT1B – PID 5



UT1C – PID 6

PHOTO LOG – UT1B, UT1C, & UT1D



UT1C – PID 7



UT1C – PID 8



UT1C – PID 9



UTD – PID 10



UT1D – PID 11



UT1D – PID 12

PHOTO LOG – UT2 & UT2A



UT2 – PID 1



UT2 – PID 2



UT2 – PID 3



UT2 – PID 4



UT2 – PID 5



UT2 – PID 6

PHOTO LOG – UT2 & UT2A



UT2 – PID 7



UT2 – PID 8



UT2 – PID 9



UT2 – PID 10



UT2 – PID 11



UT2 – PID 12

PHOTO LOG – UT2 & UT2A



UT2A – PID 1



UT2A – PID 2



UT2A – PID 3



UT2A – PID 4

VEG PLOT PHOTOS – UT1 & UT1B – UT1D



UT1 – Veg Plot 1



UT1 – Veg Plot 2



UT1 – Veg Plot 3



UT1 – Veg Plot 4



UT1 – Veg Plot 5



UT1 – Veg Plot 6

VEG PLOT PHOTOS – UT1 & UT1B – UT1D



UT1 – Veg Plot 7



UT1 – Veg Plot 8



UT1 – Veg Plot 9



UT1 – Veg Plot 10



UT1 – Veg Plot 11



UT1 – Veg Plot 12

VEG PLOT PHOTOS – UT1 & UT1B – UT1D



UT1 – Veg Plot 13



UT1 – Veg Plot 14



UT1B – Veg Plot 15



UT1C – Veg Plot 16



UT1D – Veg Plot 17

VEG PLOT PHOTOS – UT2 & UT2A



UT2A – Veg Plot 1



UT2A – Veg Plot 2



UT2 – Veg Plot 3



UT2 – Veg Plot 4



UT2 – Veg Plot 5



UT2 – Veg Plot 6

VEG PLOT PHOTOS – UT2 & UT2A




UT2 – Veg Plot 7


APPENDIX B

STREAM MONITORING DATA

Beaverdam Creek UT1 Mainstem Profile (2009 Monitoring)

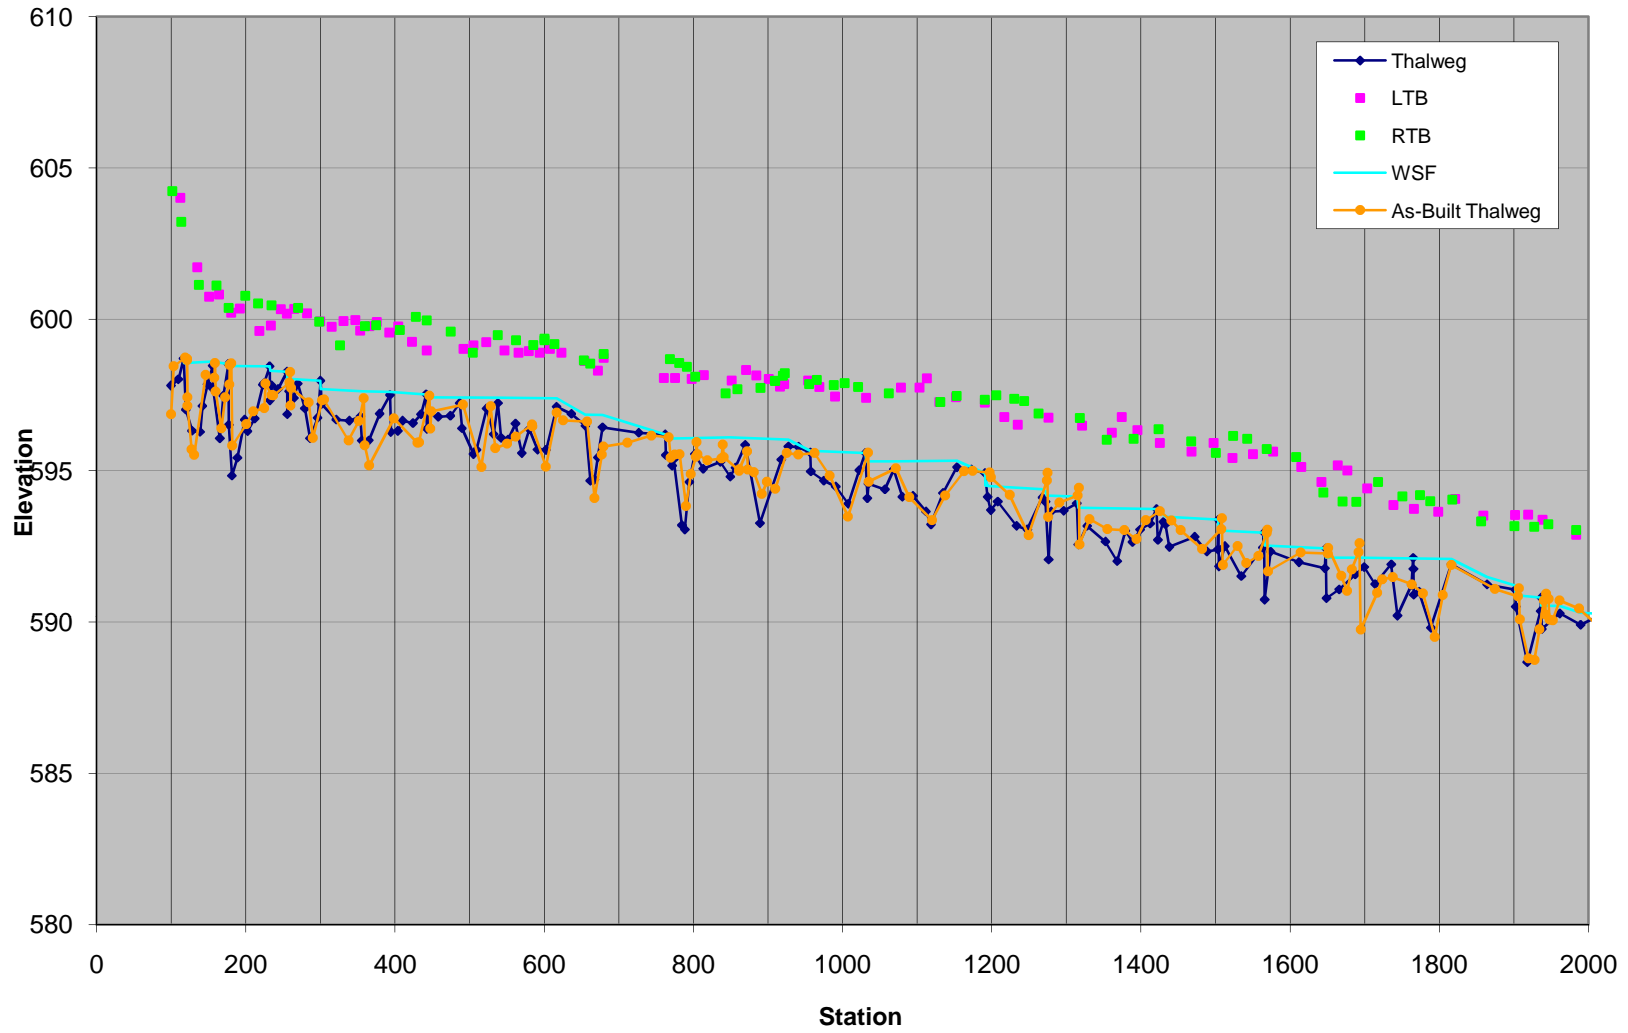

Beaverdam Creek UT1 Mainstem Profile (2009 Monitoring)

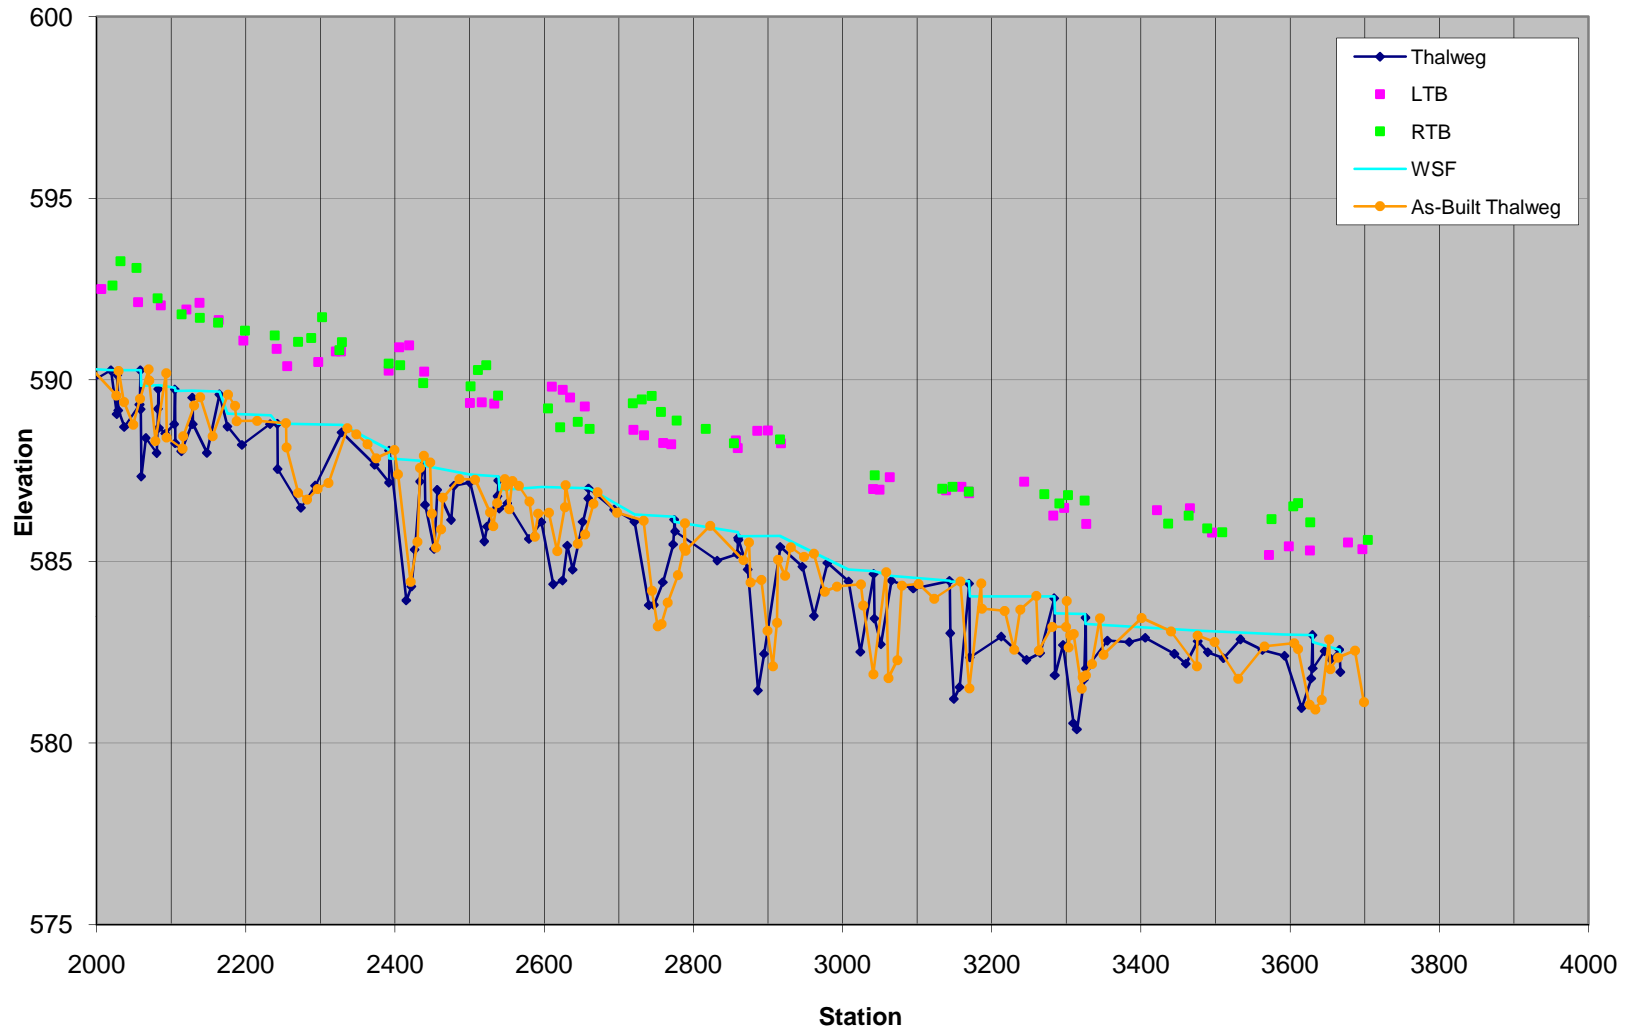

UT1 Permanent Cross Section X1
 (Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		28.1	18.44	1.52	2.93	12.1	1		599.47	599.47

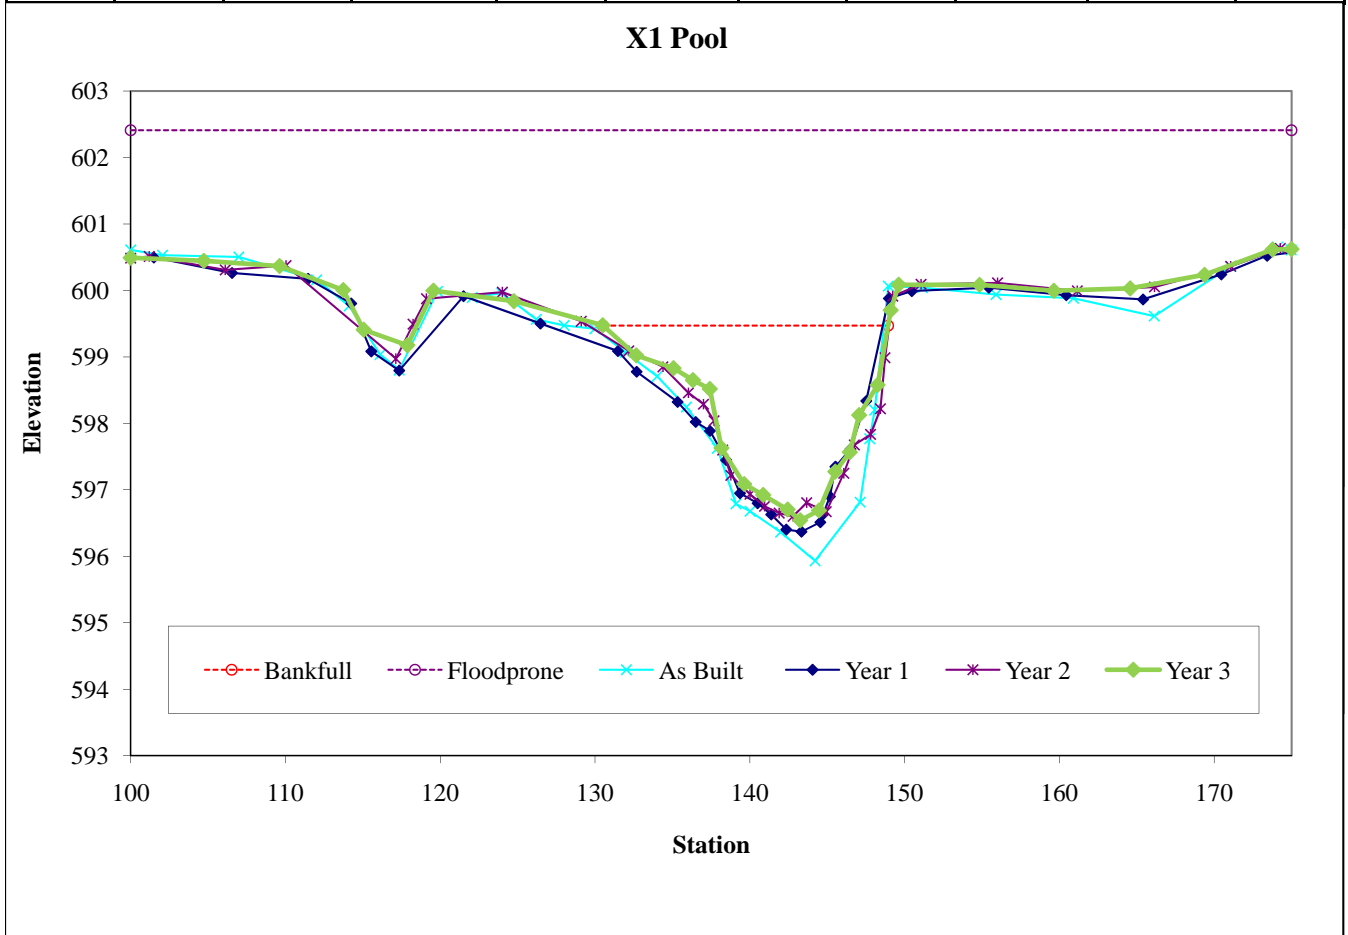

UT1 Permanent Cross Section X2
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	E	16.9	12.74	1.32	1.92	9.62	1	5.9	598.9	598.9

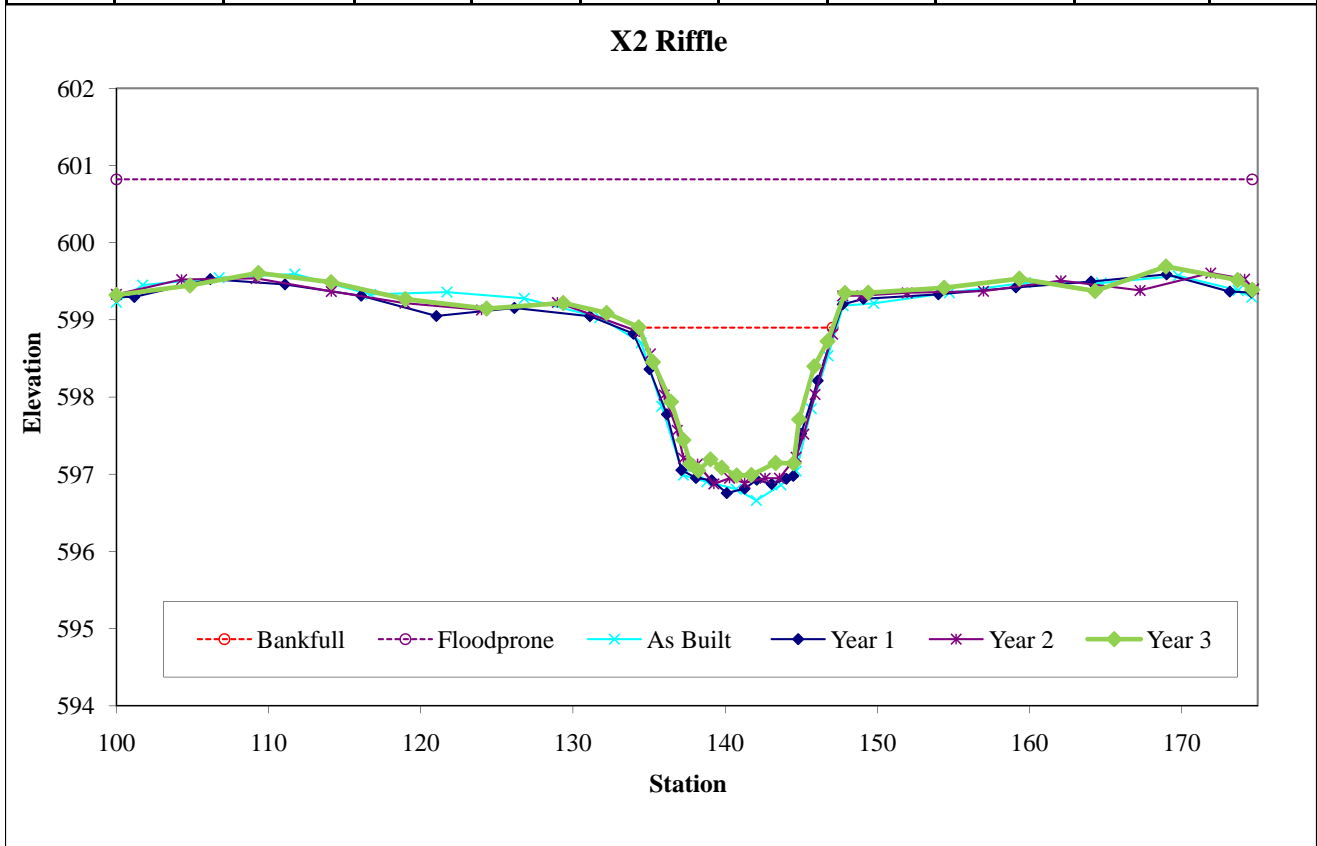

UT1B Permanent Cross Section X3
 (Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		16.3	13.89	1.17	2.68	11.87	1		599.66	599.66

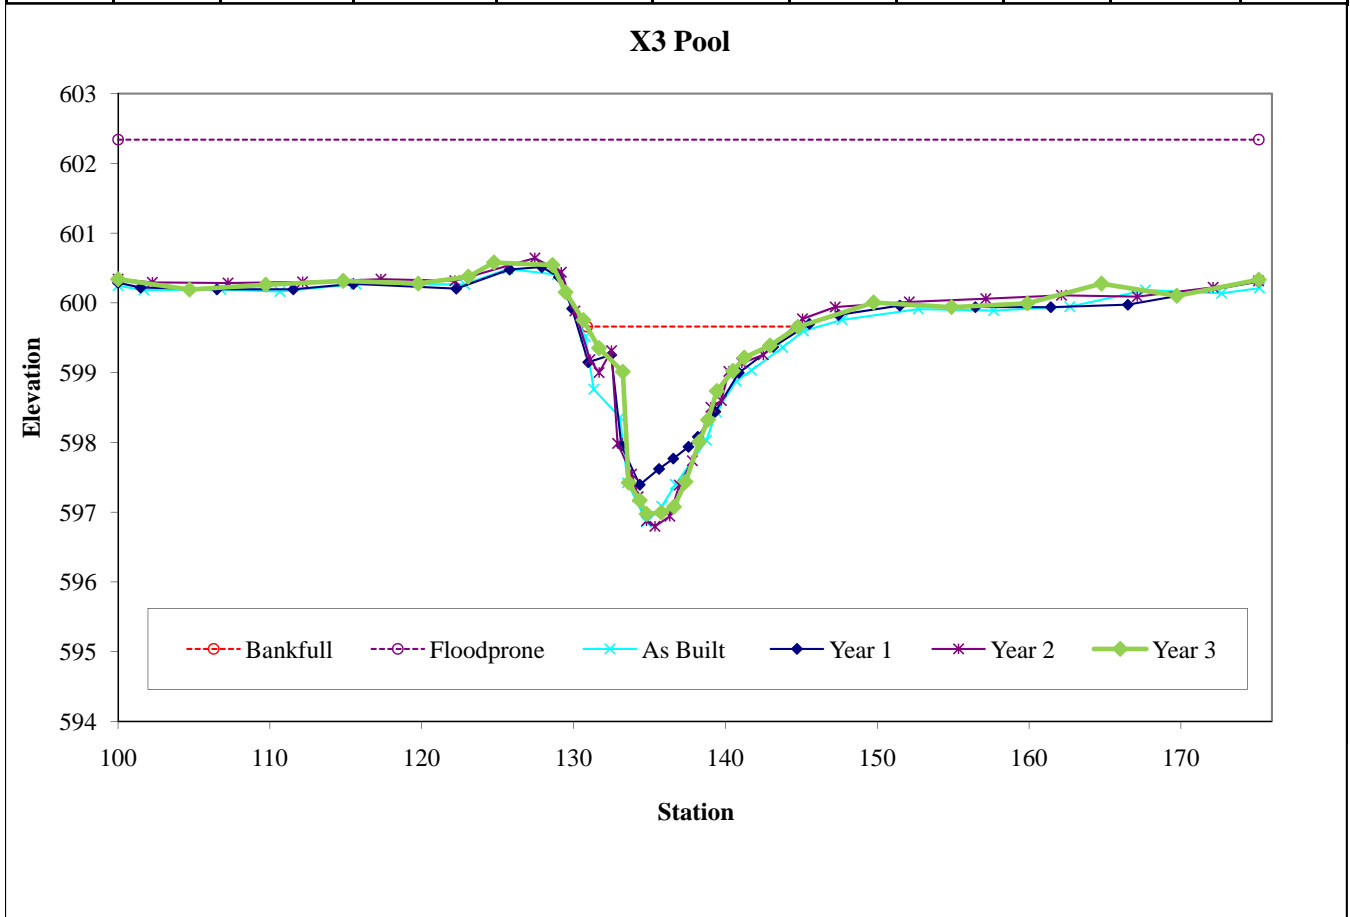

UT1B Permanent Cross Section X4
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	E	14.1	10.81	1.3	2.36	8.31	1	6.9	599.66	599.66

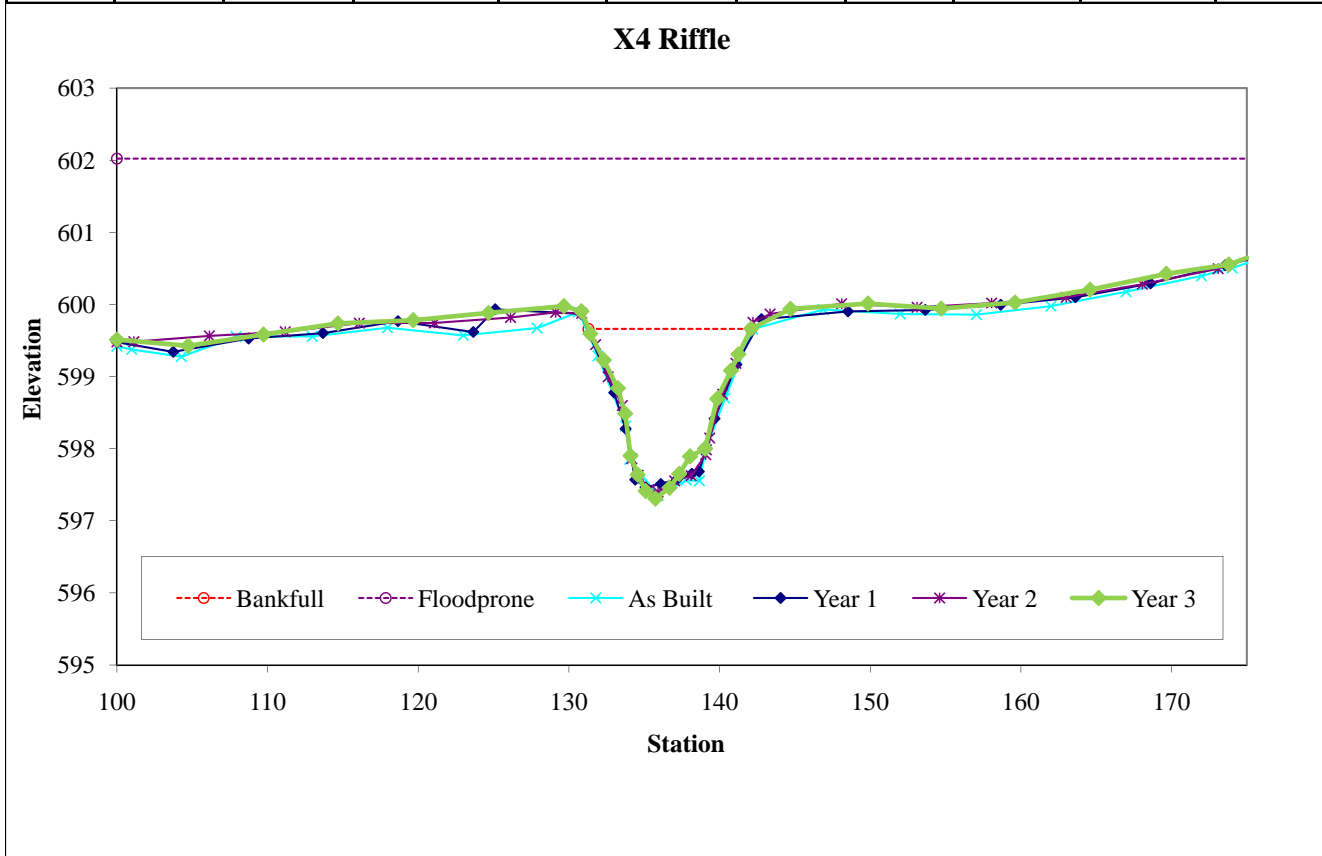

UT1 Permanent Cross Section X5
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	E	22.8	15.11	1.51	2.27	10	1	5	597.83	597.83

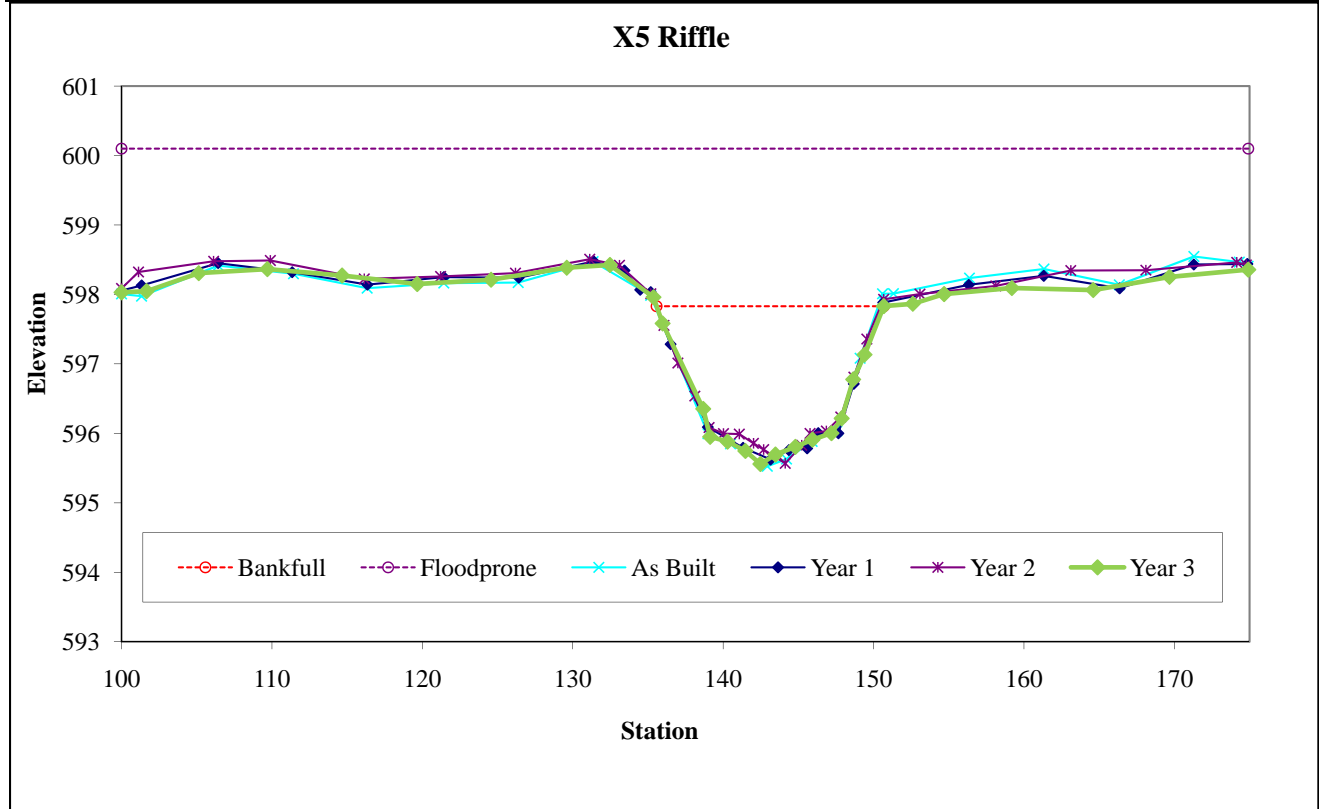

UT1 Permanent Cross Section X6
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		41.3	23.32	1.77	3.57	13.16	1		596.92	596.92

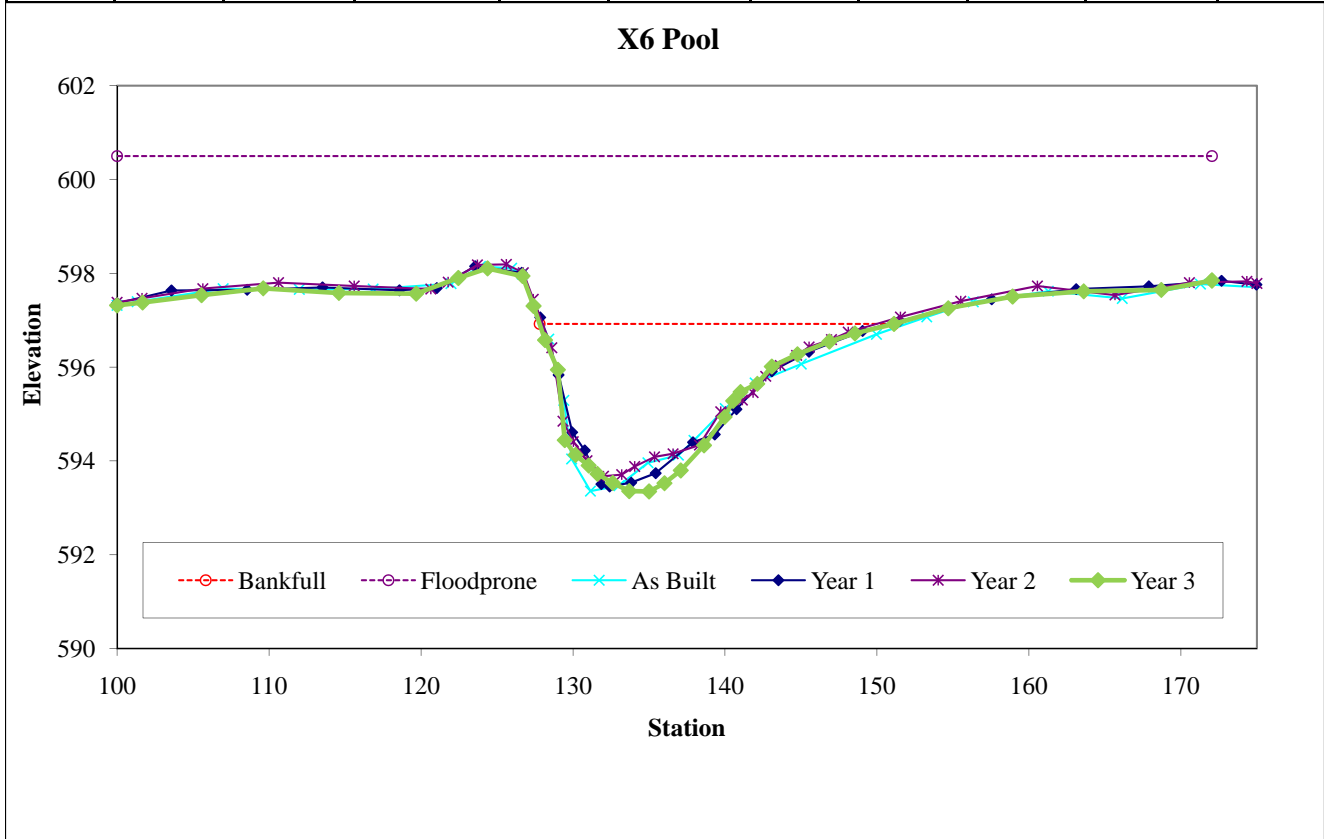

UT1C Permanent Cross Section X7
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C	8.6	12.04	0.71	1.12	16.86	1	5.9	594.84	594.84

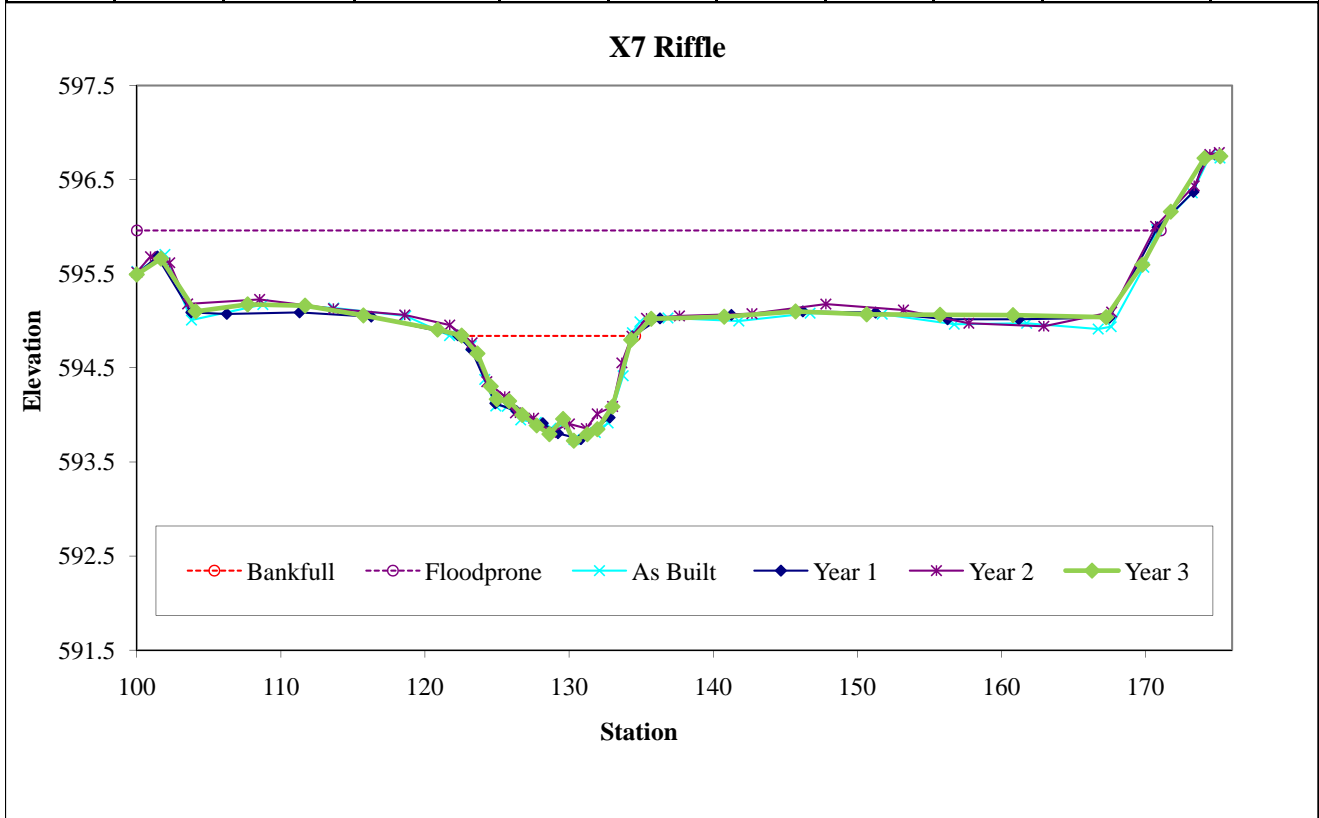

UT1C Permanent Cross Section X8
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		31.6	13.77	2.29	3.07	6.01	1		593.43	593.43

X8 Pool

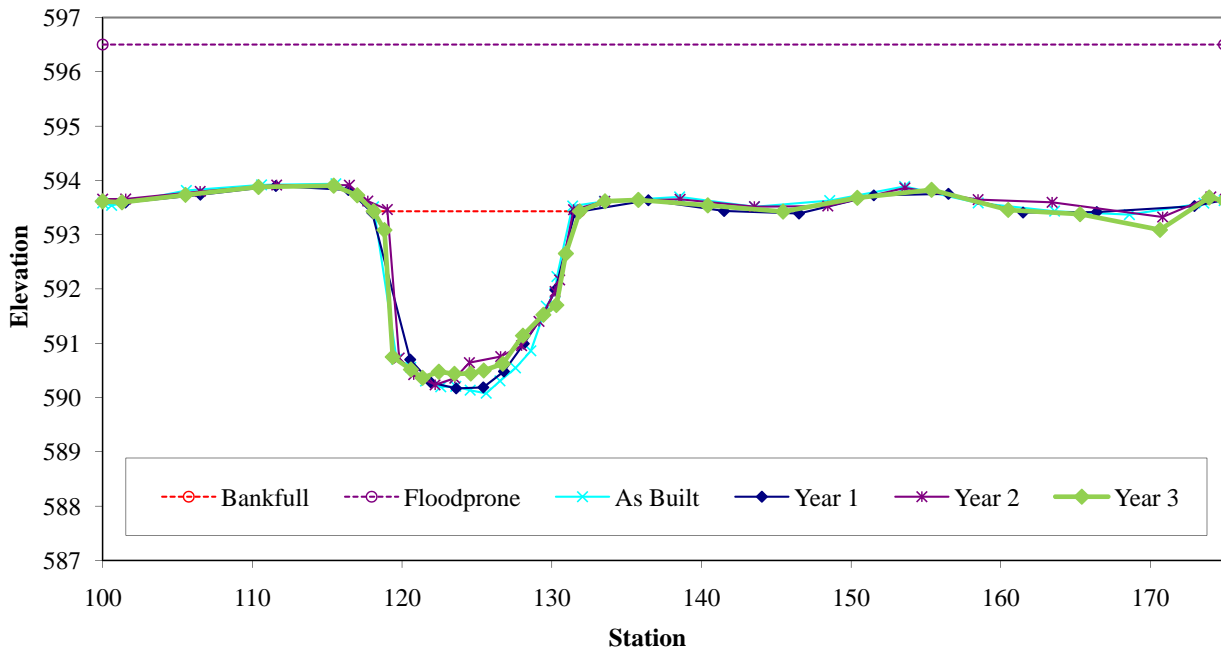

UT1 Permanent Cross Section X9
 (Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	E	28.1	17.43	1.61	2.82	10.8	1	4.3	590.6	590.6

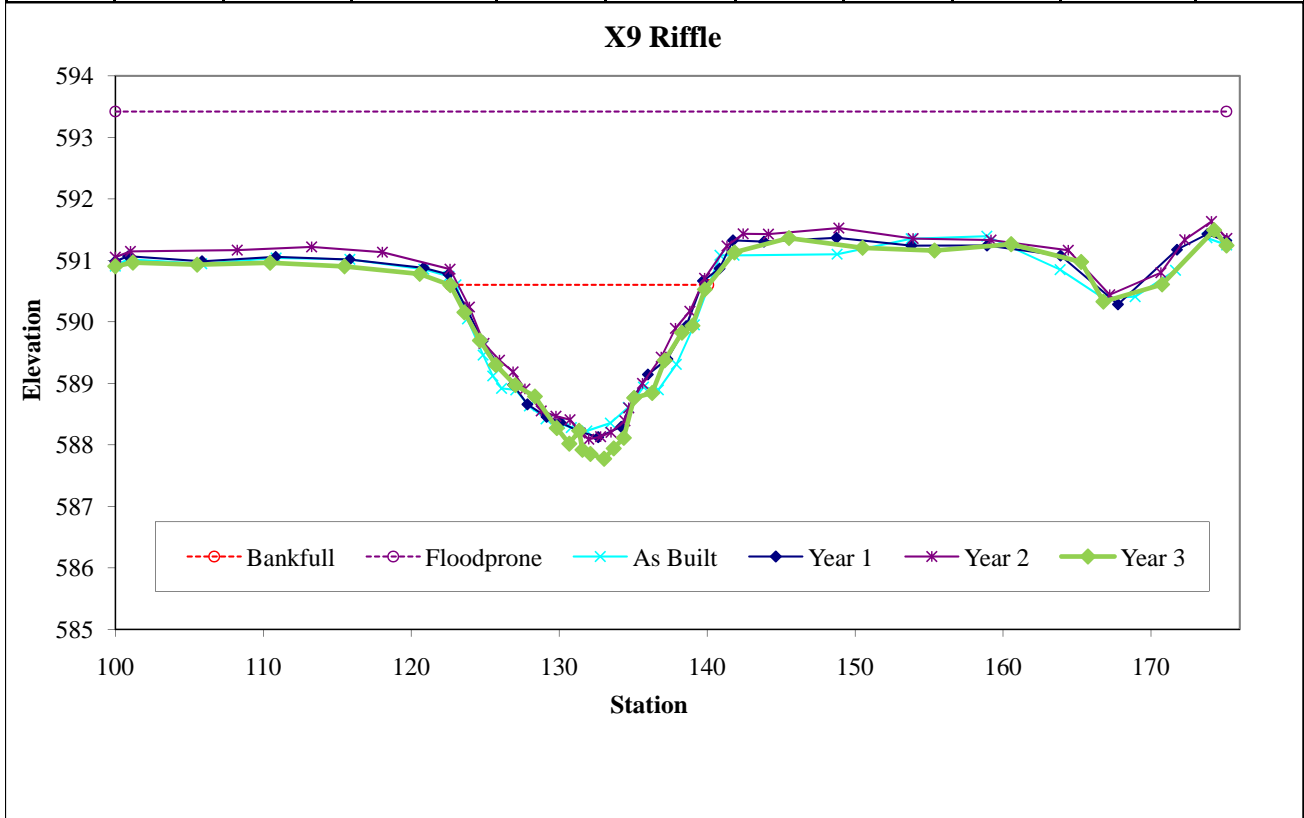

UT1 Permanent Cross Section X10
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		45	23.51	1.91	3.58	12.28	1		588.76	588.76

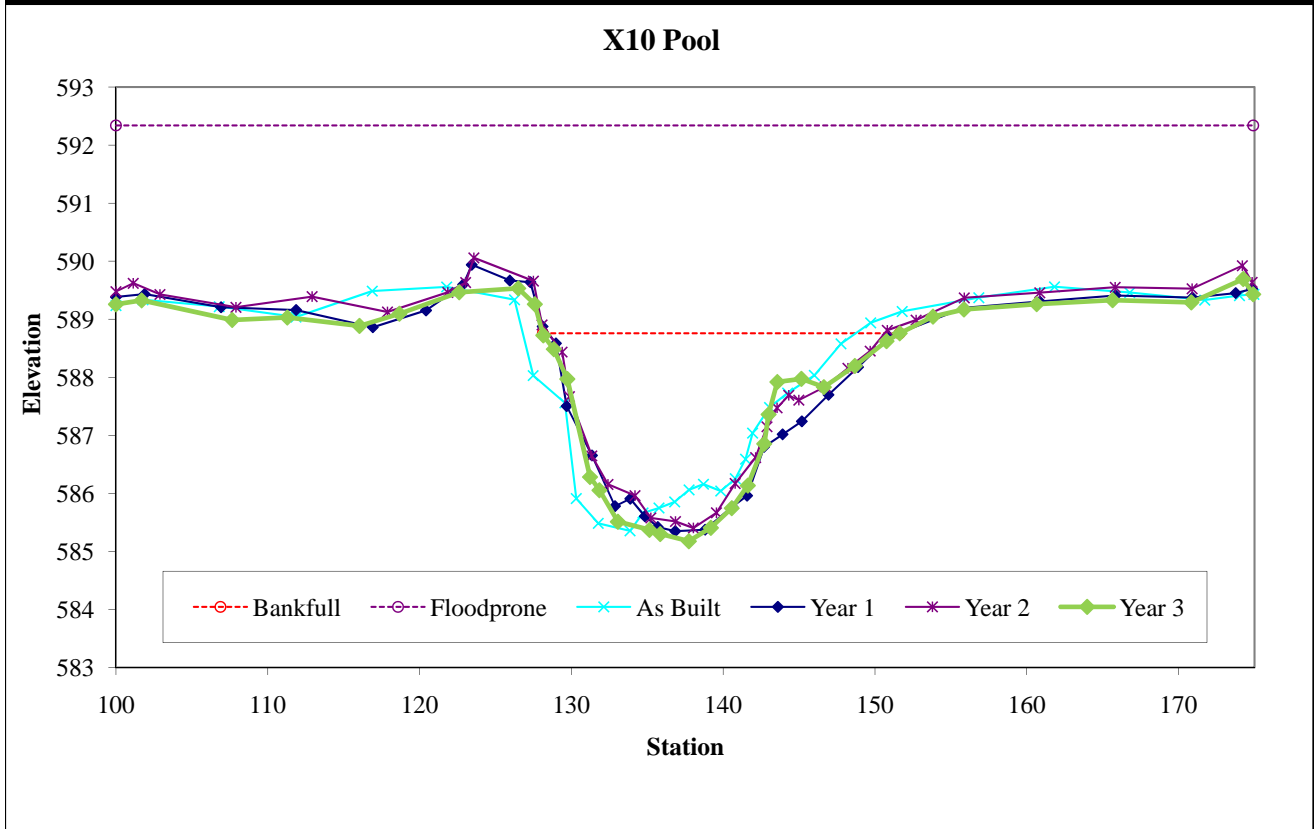

UT1D Permanent Cross Section X11
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		16.1	20.06	0.8	1.84	24.98	1		590.17	590.17

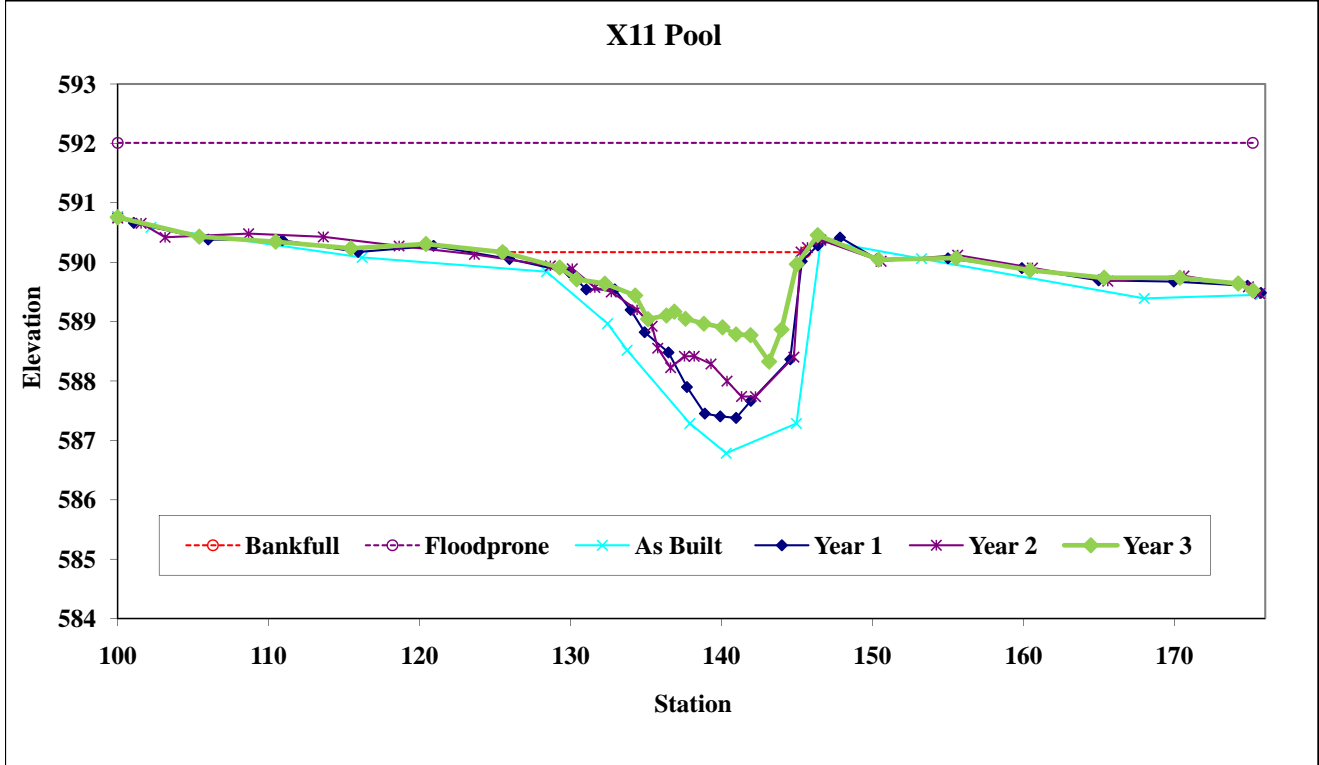

UT1D Permanent Cross Section X12
 (Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C	8.6	13.09	0.66	1.08	19.88	1	5.8	589	589

X12 Riffle

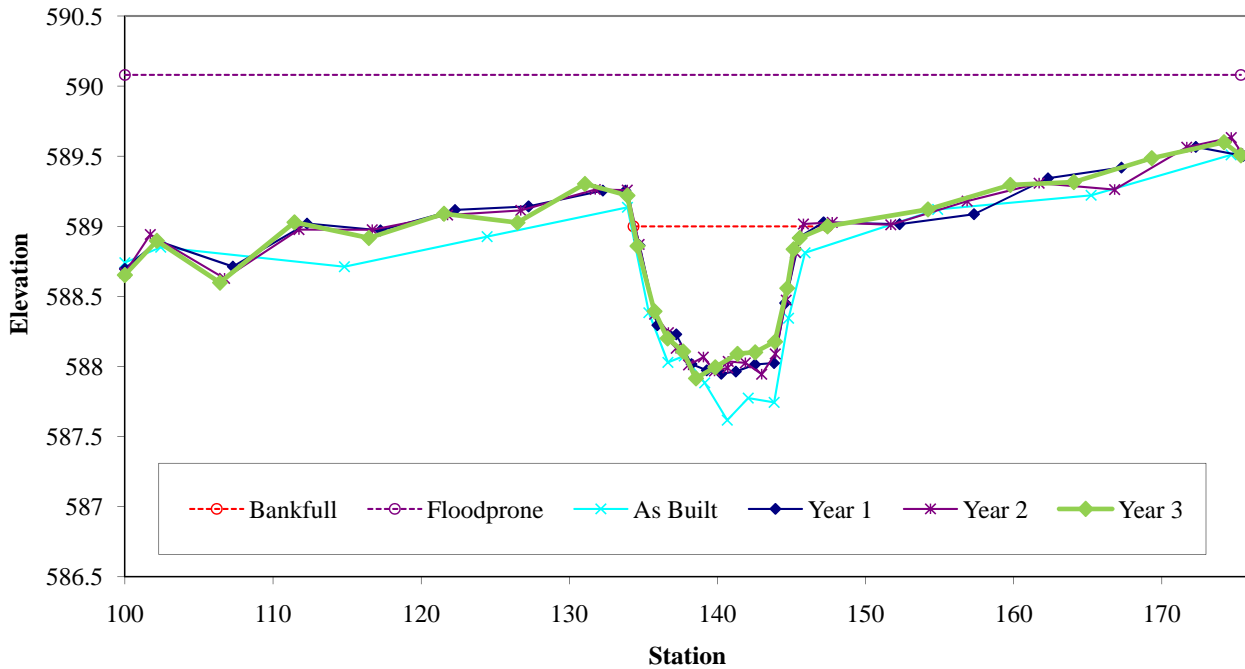

UT1 Permanent Cross Section X13
 (Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		69.2	26.98	2.56	6.14	10.52	1		586.55	586.55

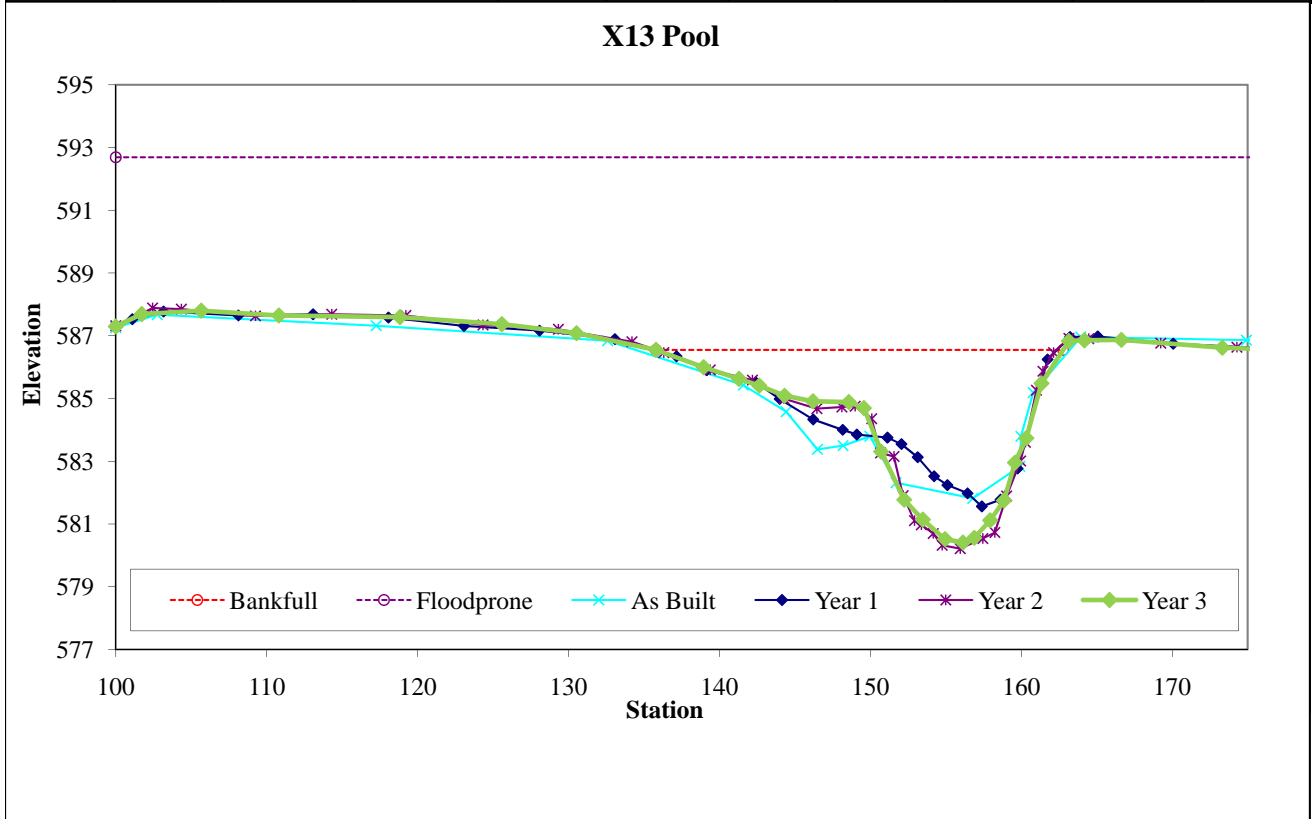

UT1 Permanent Cross Section X14
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	E	42.7	21.42	2	3.52	10.74	1	3.4	585.23	585.23

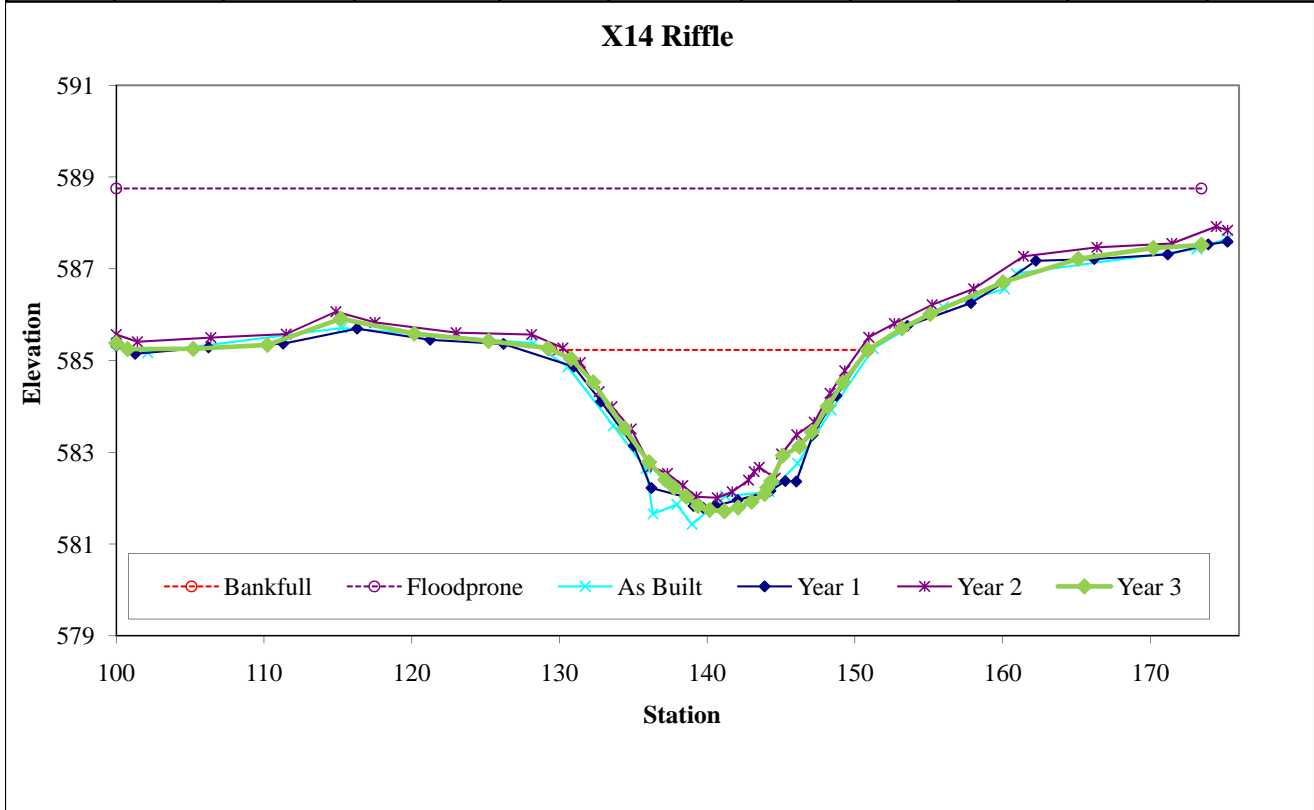

UT1 Permanent Cross Section X15
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C	54	25.96	2.08	3.74	12.48	1	3	579.51	579.51

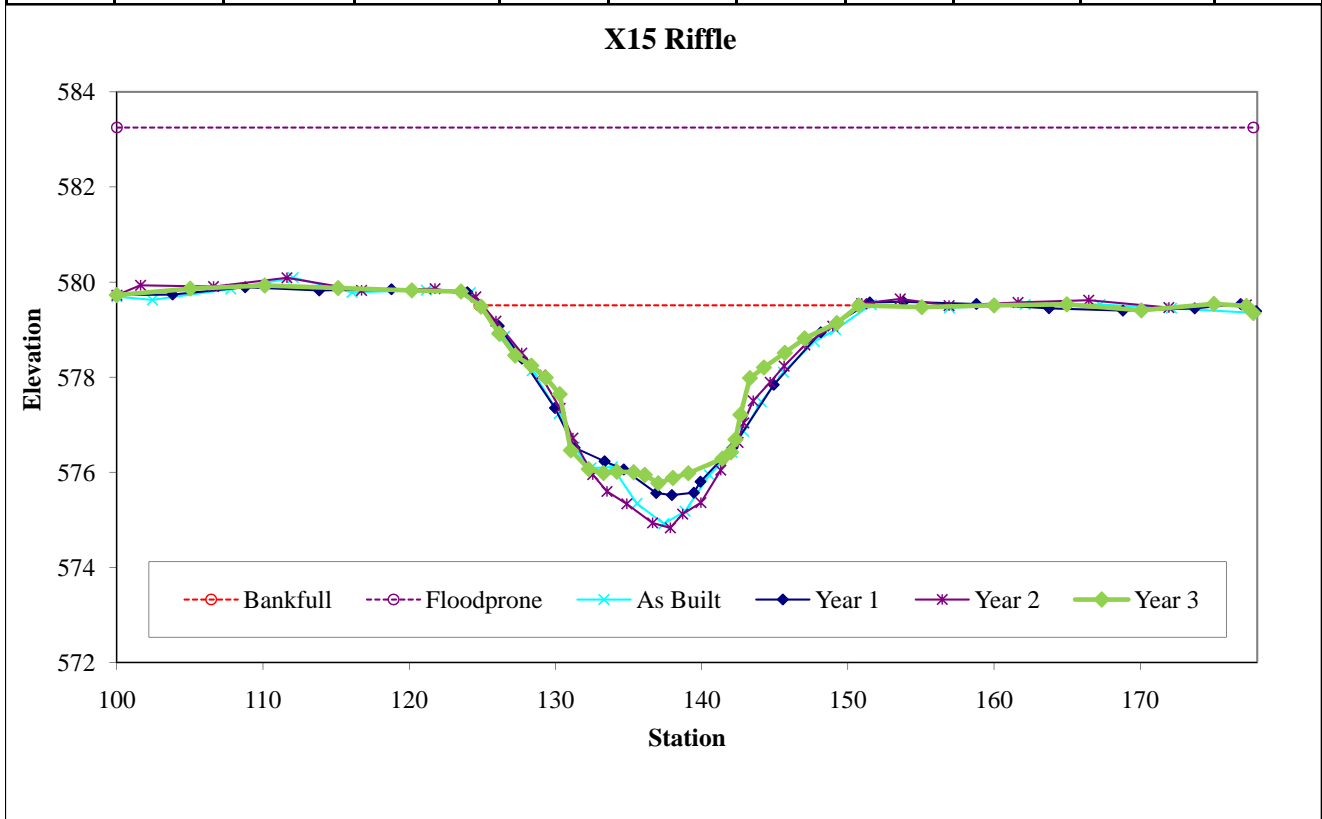

UT1 Permanent Cross Section X16
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		47.1	22.57	2.09	3.82	10.82	1		576.77	576.77

X16 Pool

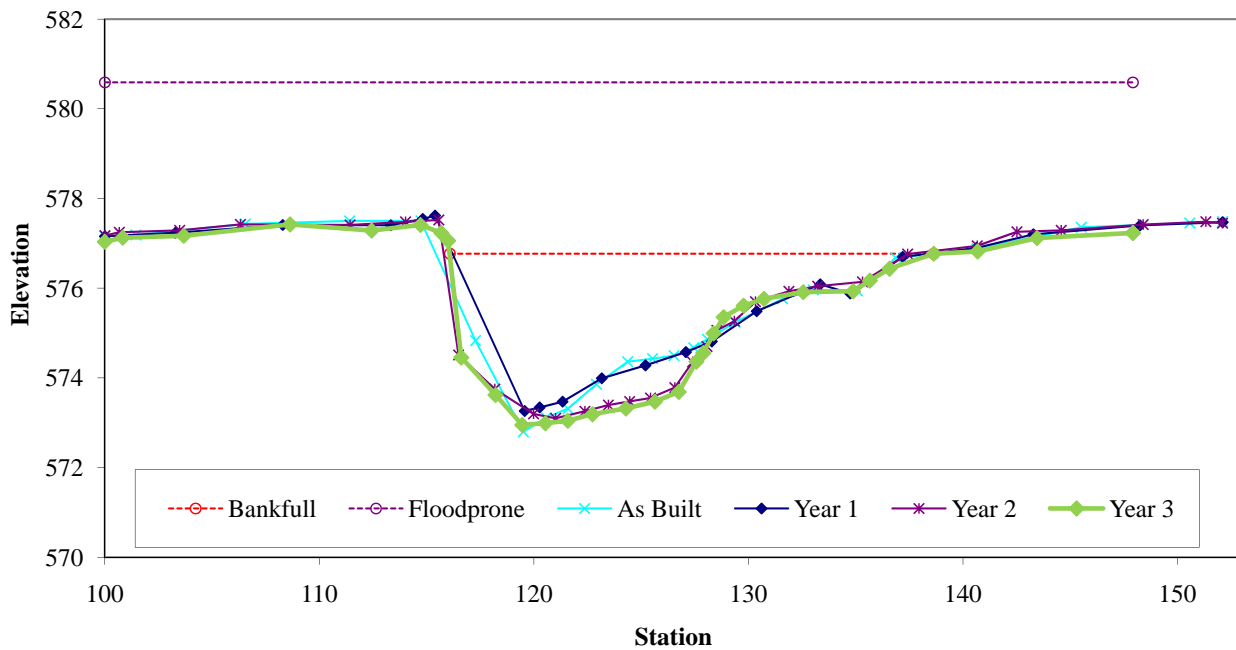

UT1 Permanent Cross Section X17
 (Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		28.1	24.5	1.15	3.06	21.34	1	-	573.76	573.76

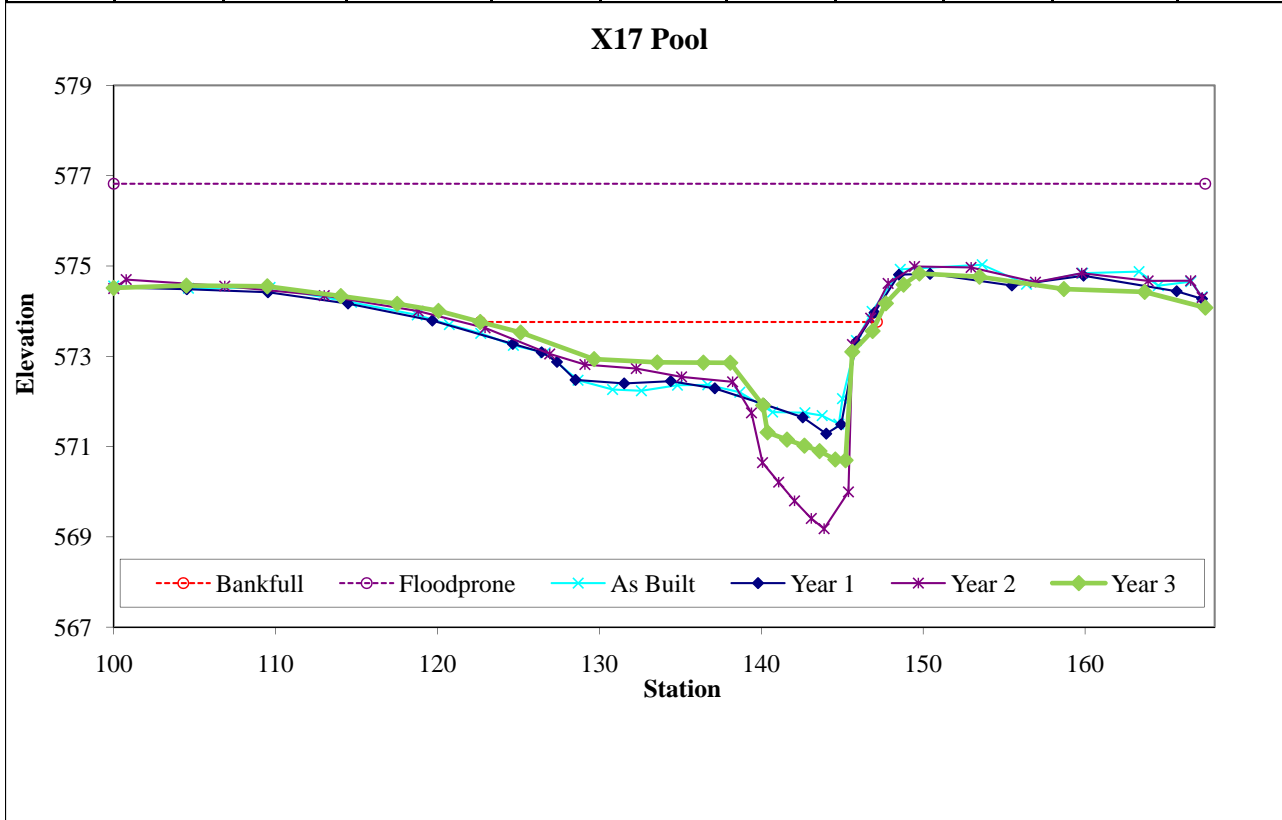

UT1 Permanent Cross Section X18
 (Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C	33.8	22.68	1.49	2.75	15.2	1	3.56	574.21	574.21

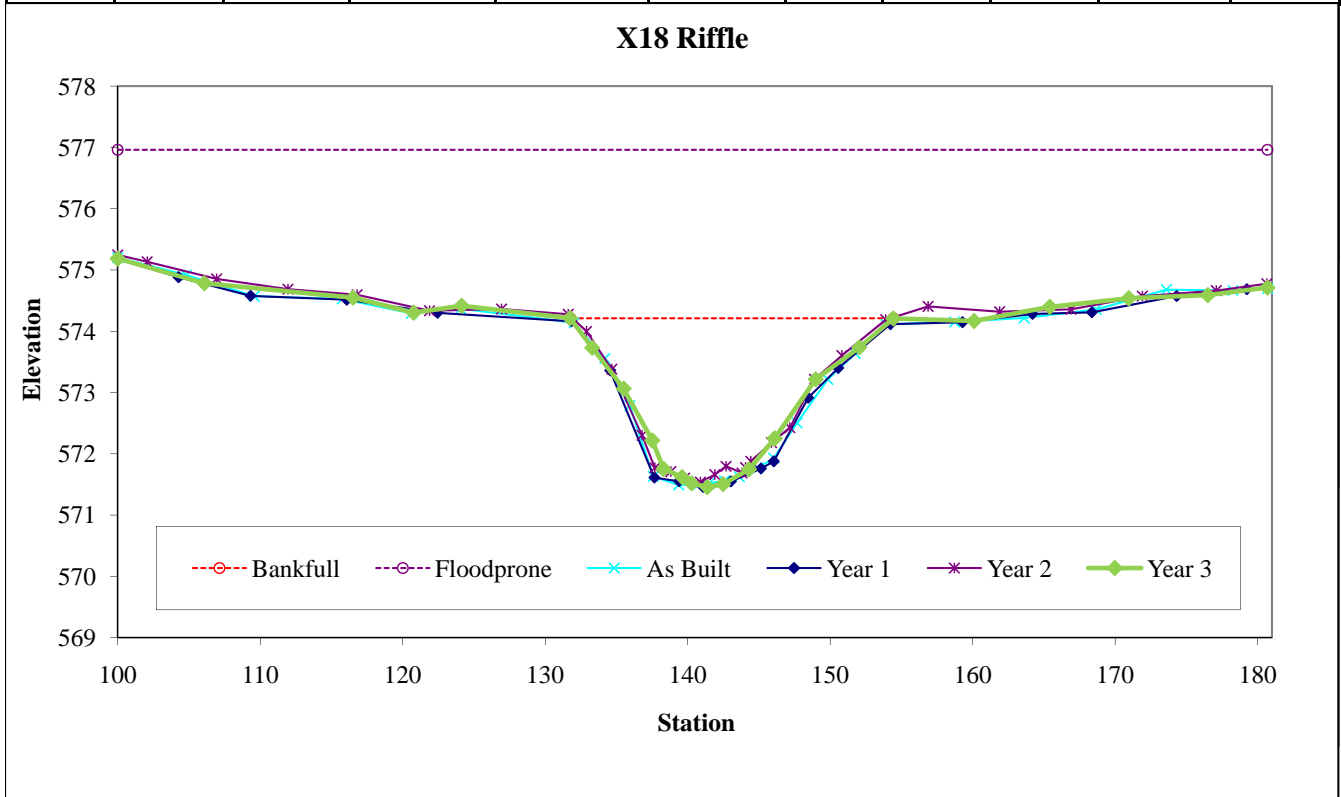

UT2A Permanent Cross Section X1
 (Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C	9.1	12.58	0.72	1.04	17.44	1	3.2	612.68	612.68

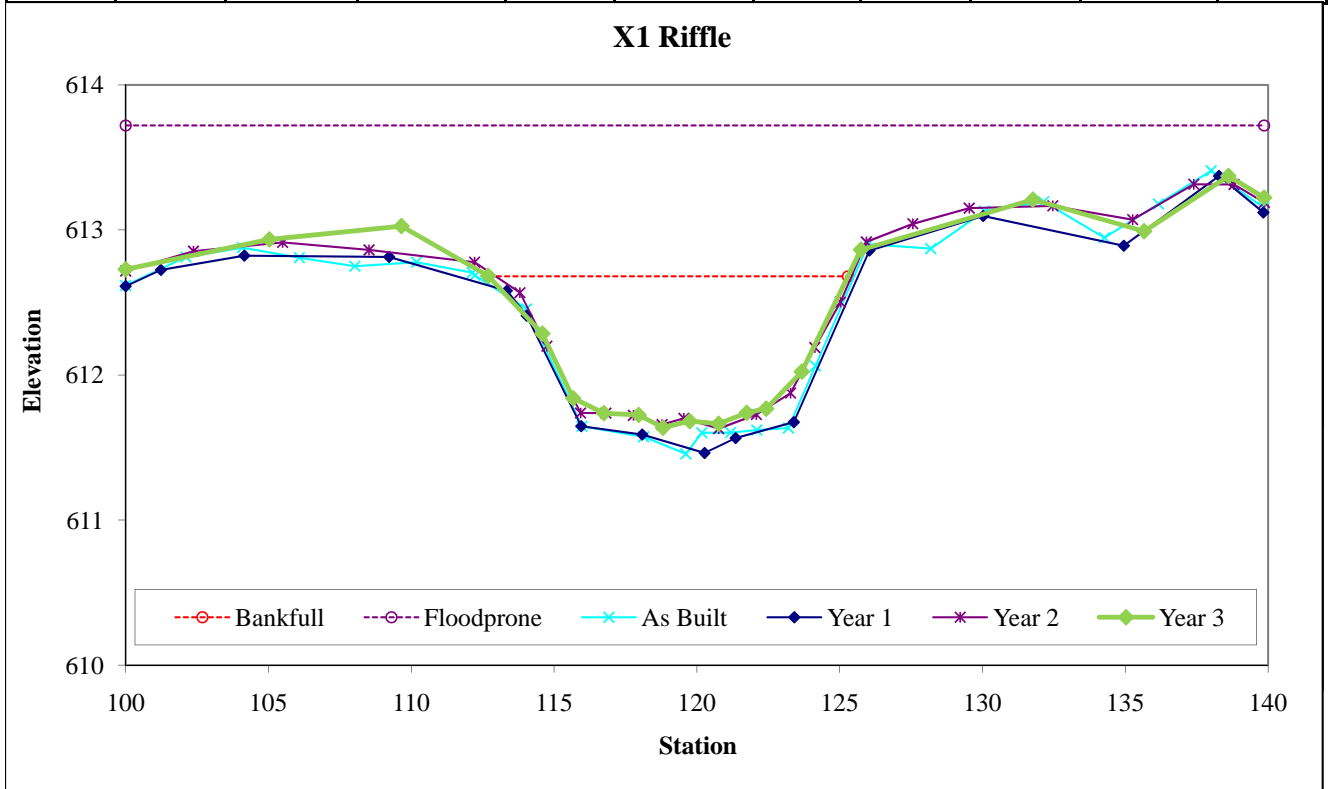

UT2A Permanent Cross Section X2
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		17.8	19.21	0.93	1.78	20.7	1	-	611.5	611.49

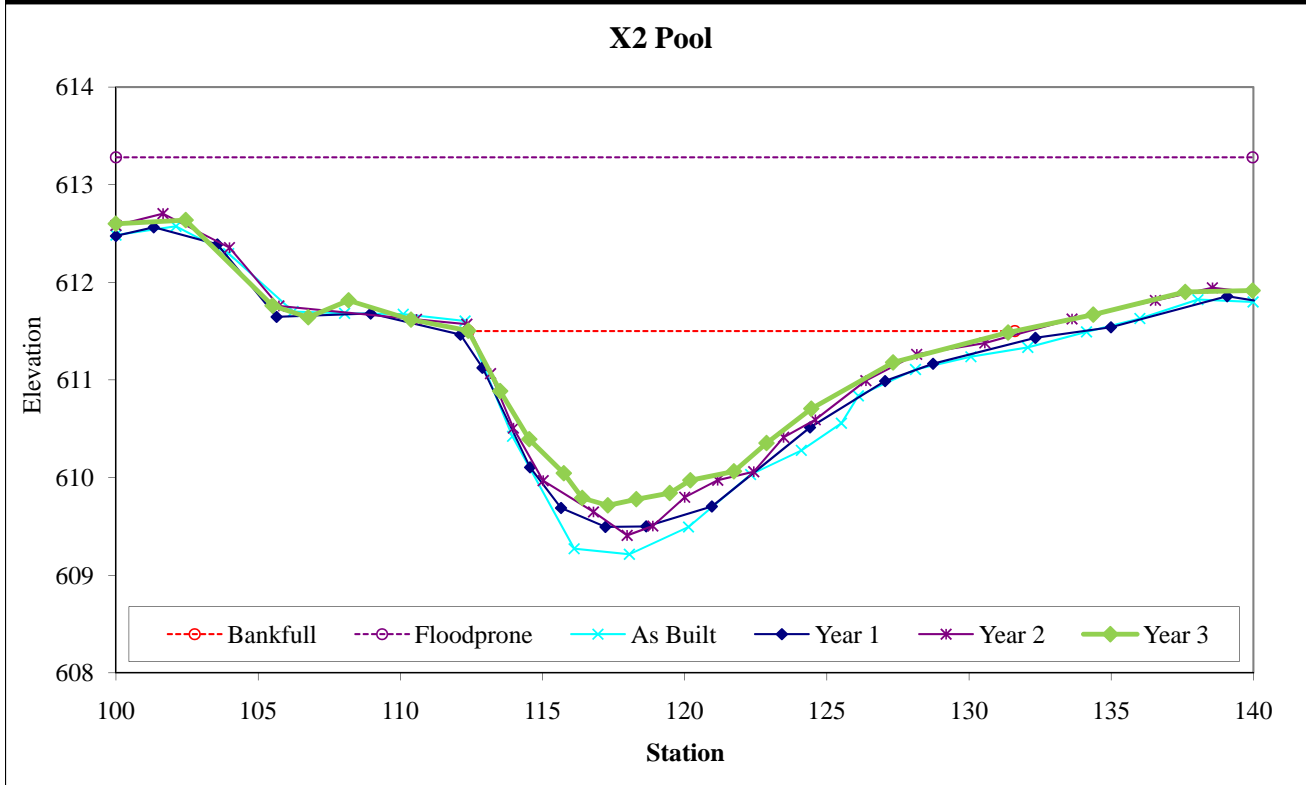

UT2 Permanent Cross Section X3
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C	11.2	17.05	0.66	1.04	25.93	1	2.3	622.95	622.96

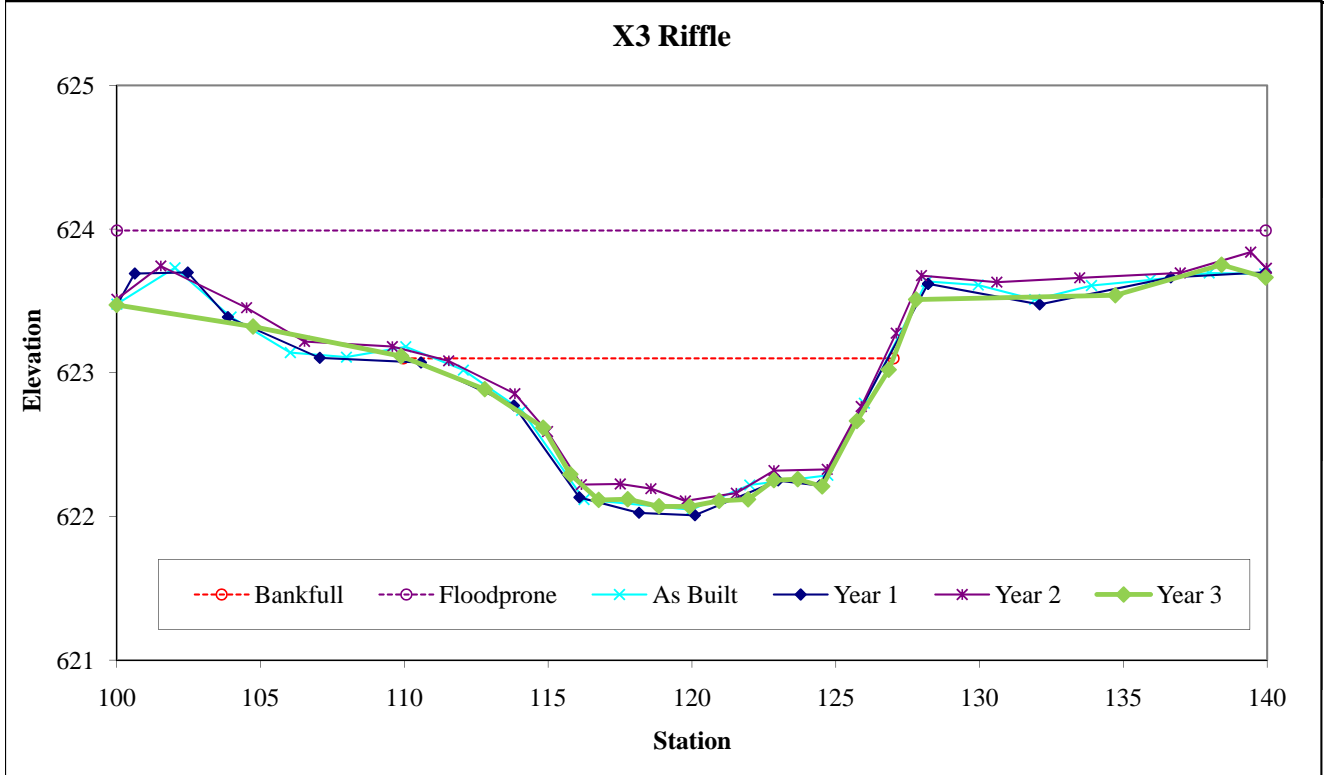

UT2 Permanent Cross Section X4
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		22.9	19.8	1.16	2.34	17.11	1	-	619.22	619.22

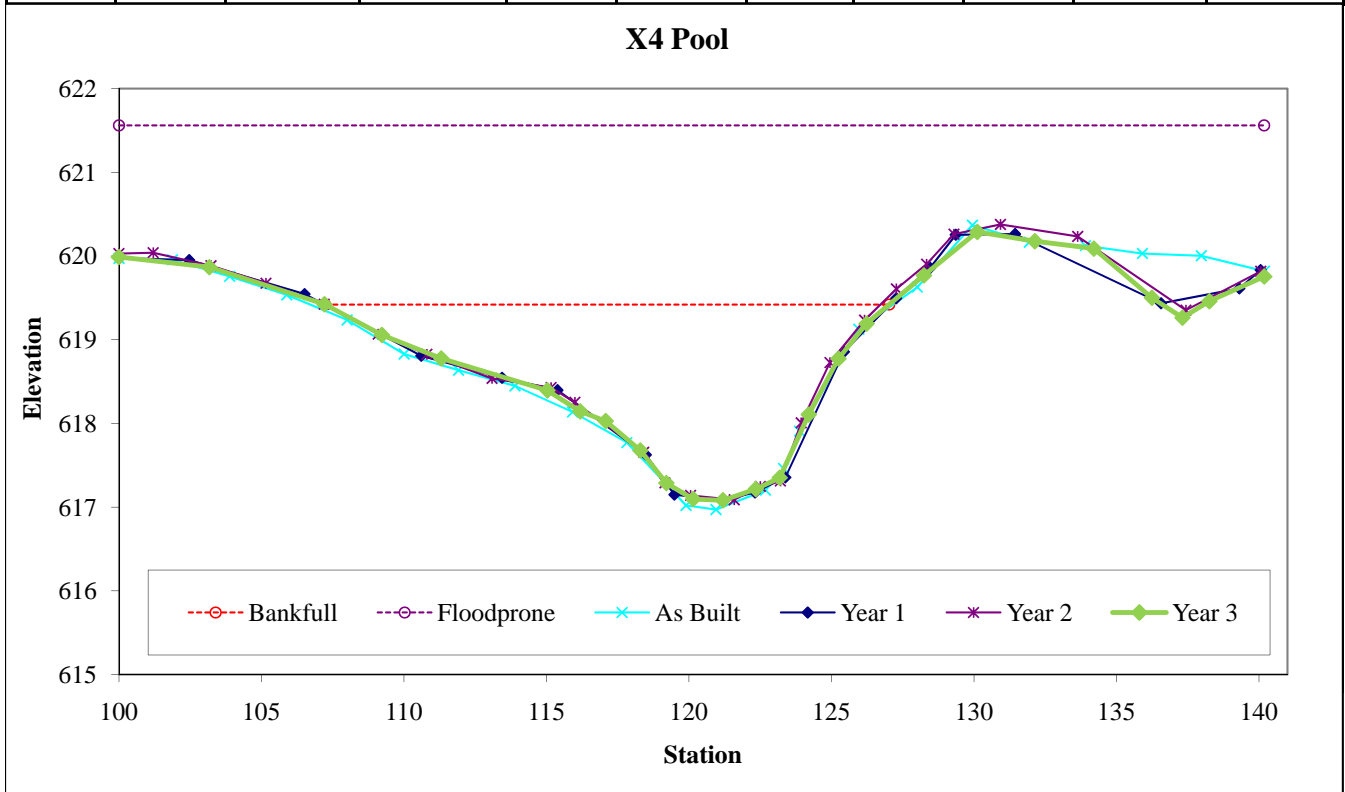

UT2 Permanent Cross Section X5
(Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Riffle	C	23.4	16.99	1.37	2.05	12.36	1	2.3	585.95	585.95

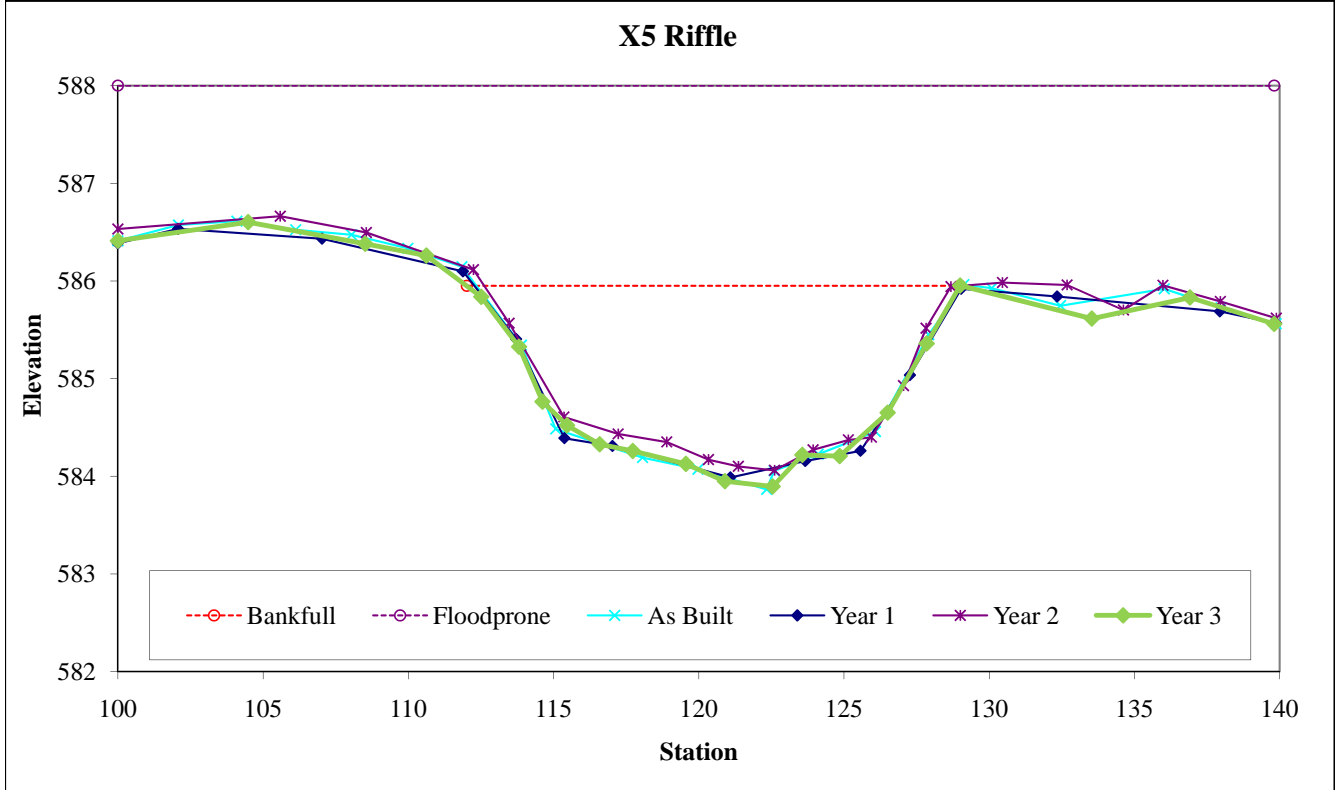

UT2 Permanent Cross Section X6
 (Year 3 Monitoring Data - collected October 2009)




Looking at the Left Bank



Looking at the Right Bank

Feature	Stream Type	BKF Area	BKF Width	BKF Depth	Max BKF Depth	W/D	BH Ratio	ER	BKF Elev	TOB Elev
Pool		25.8	14.68	1.76	2.67	8.35	1	-	583.65	583.66

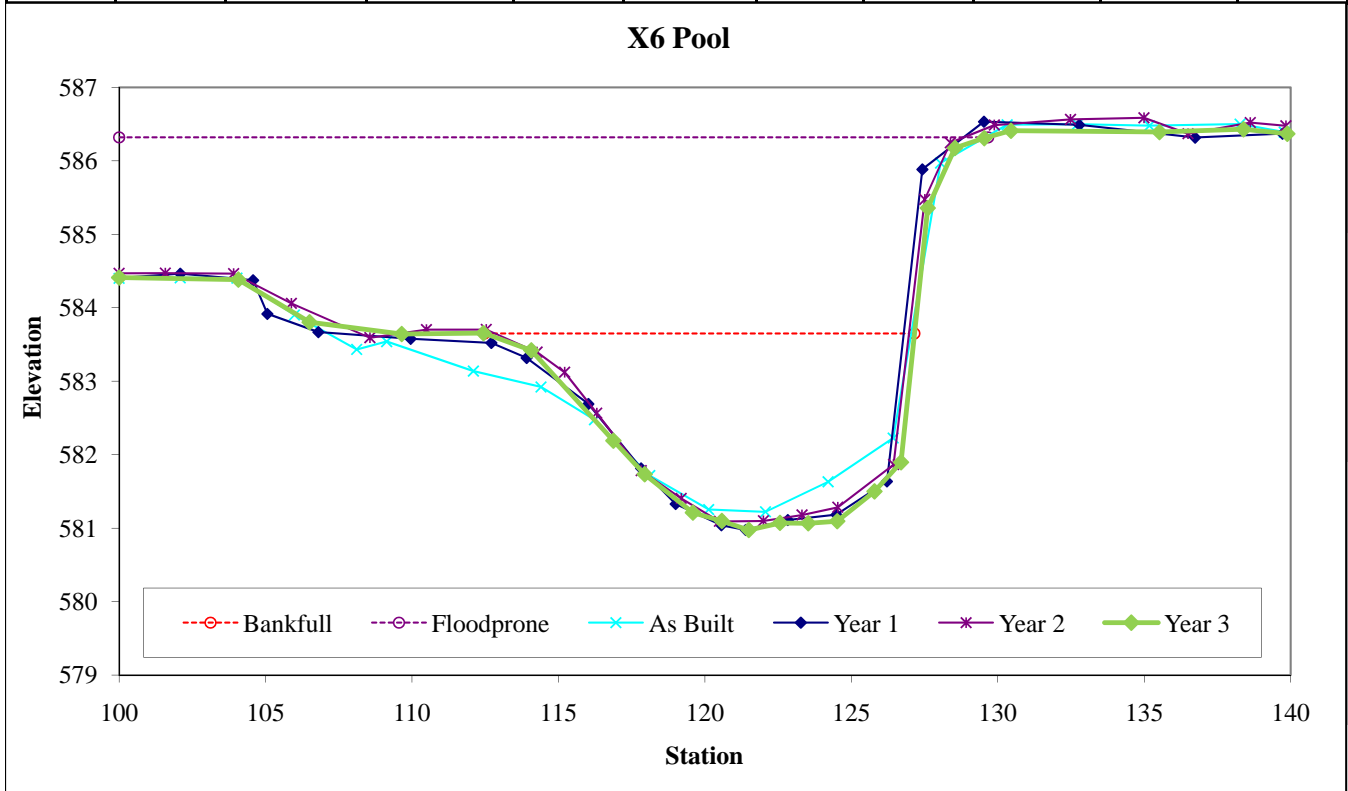


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1 X1-Pool	
DATE COLLECTED:	9/23/2009	
FIELD COLLECTION BY:	KS/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Pool	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	9	9%	9%	
	Very Fine	.063 - .125	67	67%	76%	
	Fine	.125 - .25			76%	
	Medium	.25 - .50	23	23%	99%	
	Coarse	.50 - 1.0			99%	
	Very Coarse	1.0 - 2.0	1	1%	100%	
SAND	Very Fine	2.0 - 2.8			100%	
	Very Fine	2.8 - 4.0			100%	
	Fine	4.0 - 5.6			100%	
	Fine	5.6 - 8.0			100%	
	Medium	8.0 - 11.0			100%	
	Medium	11.0 - 16.0			100%	
	Coarse	16.0 - 22.6			100%	
	Coarse	22.6 - 32			100%	
	Very Coarse	32 - 45			100%	
	Very Coarse	45 - 64			100%	
GRAVEL	Small	64 - 90			100%	
	Small	90 - 128			100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
COBBLE	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: _____
(pool)

**UT1
X1-Pool
Pebble Count Size Class Distribution**

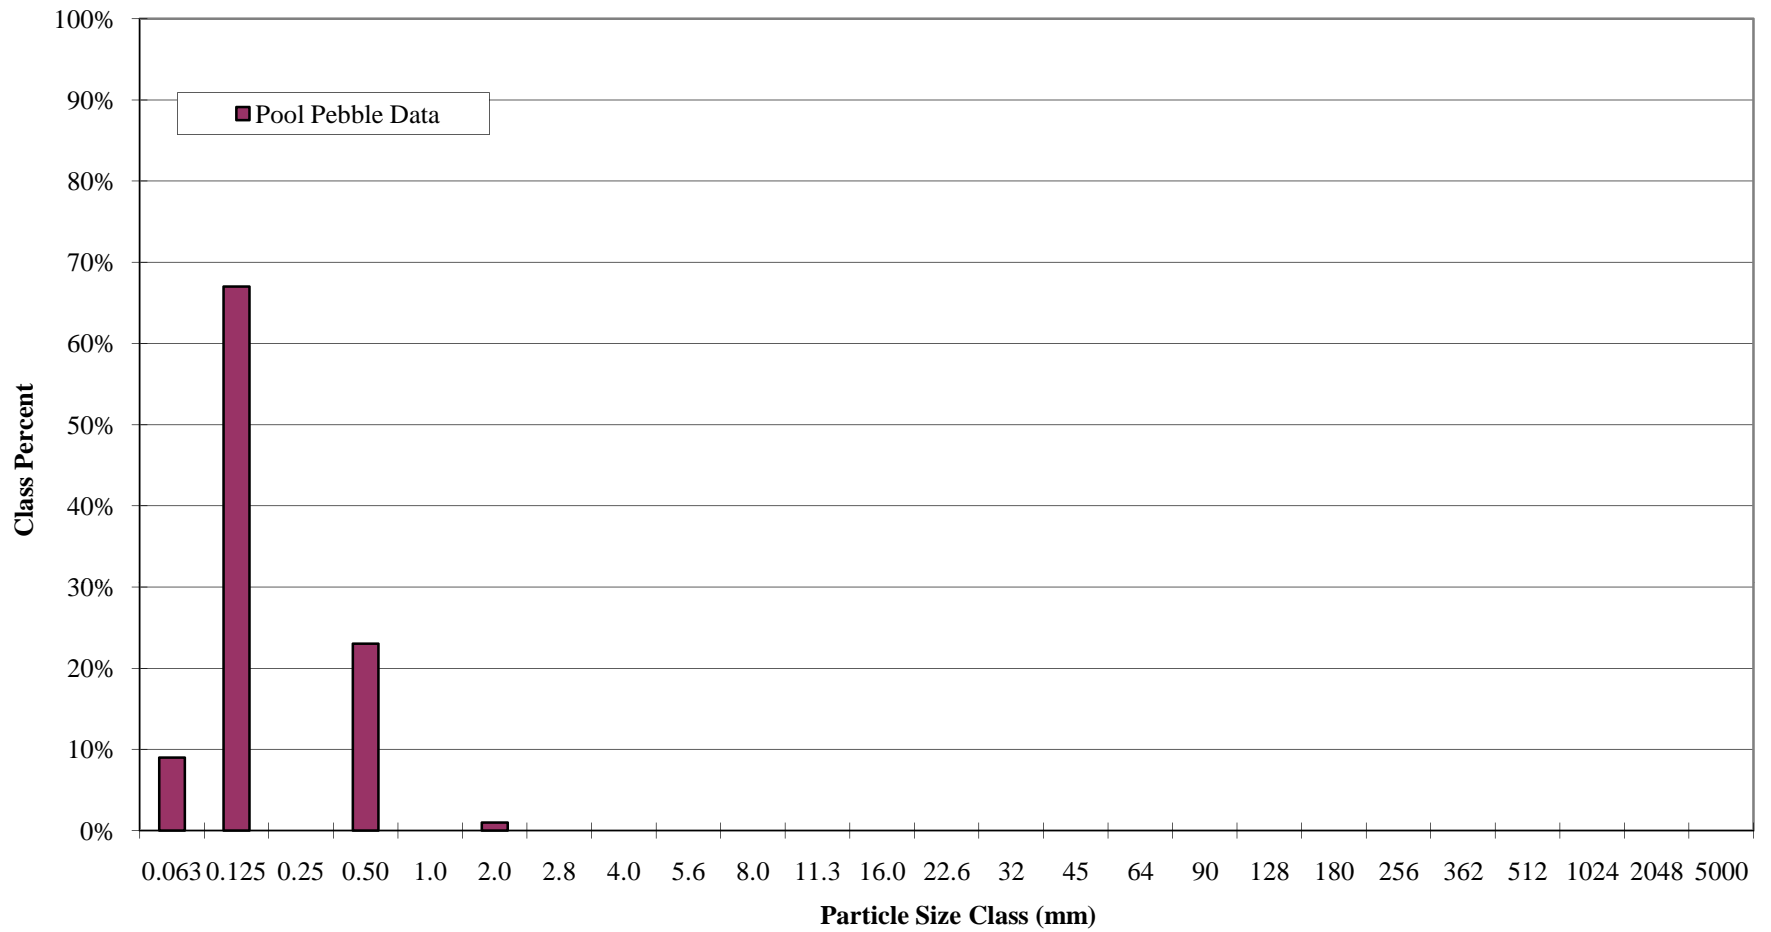

**UT1
X1-Pool
Pebble Count Particle Size Distribution**

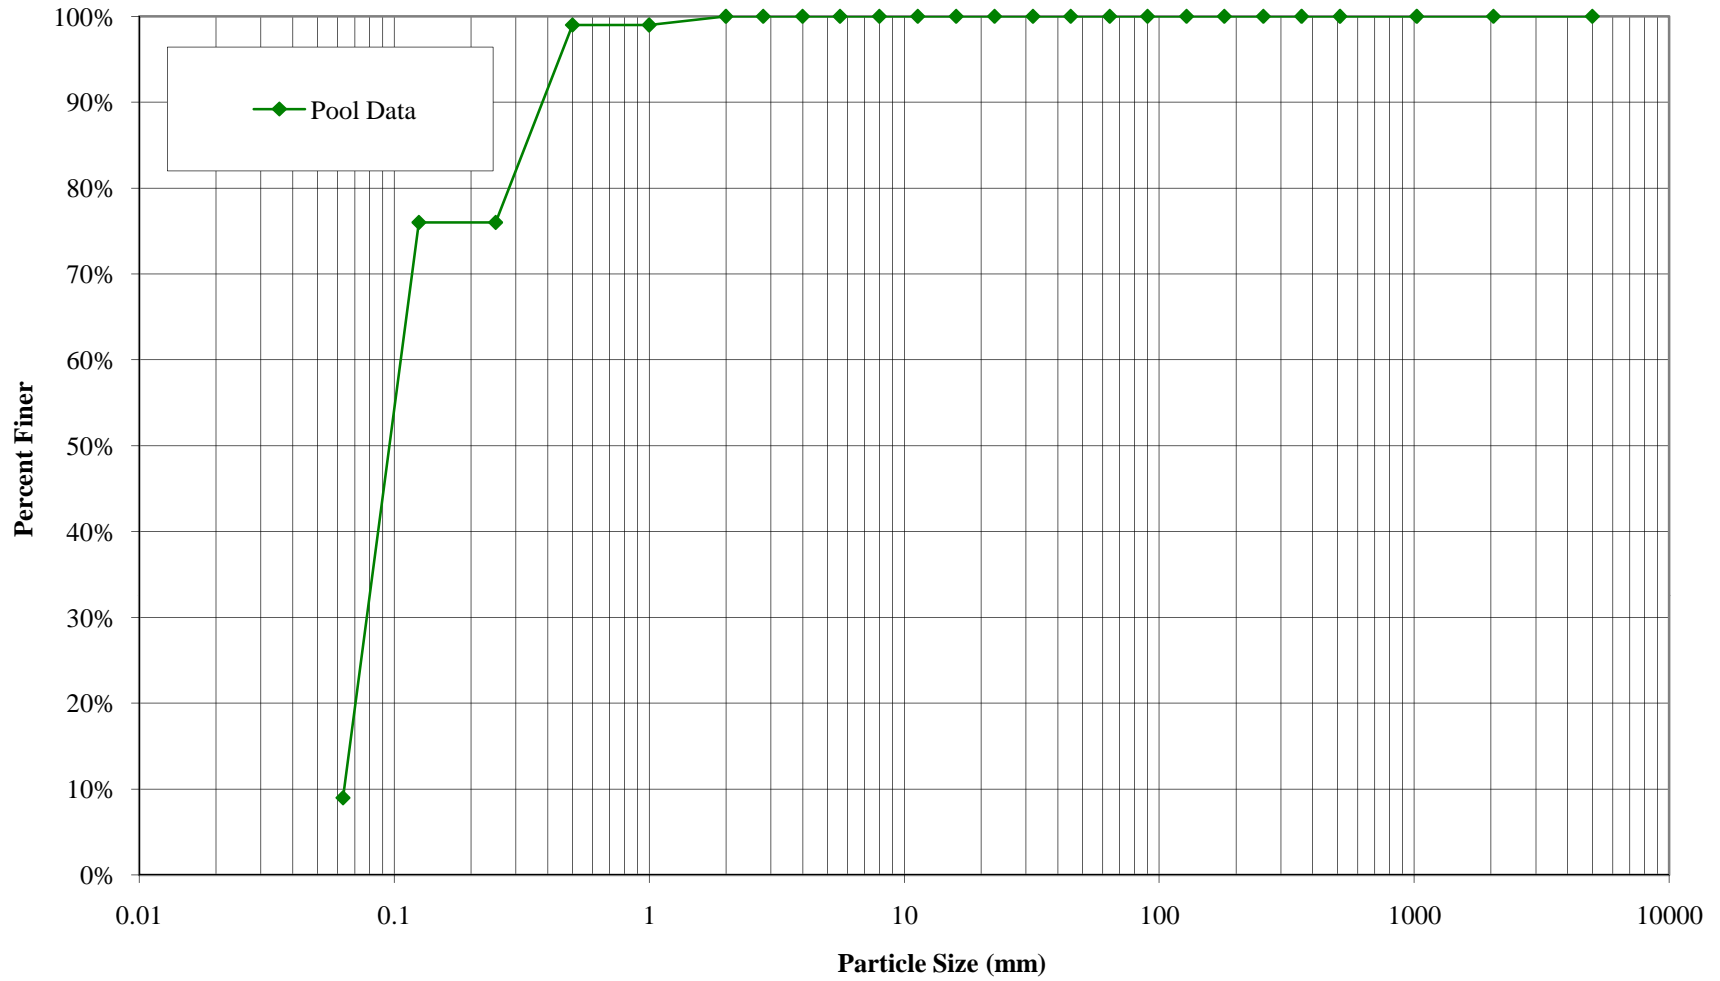


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BAKER PROJECT NO. 108528	
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring
REACH/LOCATION:	UT1 X2-Riffle
DATE COLLECTED:	9/23/2009
FIELD COLLECTION BY:	KS/CT
DATA ENTRY BY:	KS


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Riffle	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	33	33%	33%	
SAND	Very Fine	.063 - .125			33%	
	Fine	.125 - .25			33%	
	Medium	.25 - .50	2	2%	35%	
	Coarse	.50 - 1.0	2	2%	37%	
	Very Coarse	1.0 - 2.0			37%	
GRAVEL	Very Fine	2.0 - 2.8			37%	
	Very Fine	2.8 - 4.0			37%	
	Fine	4.0 - 5.6			37%	
	Fine	5.6 - 8.0			37%	
	Medium	8.0 - 11.0			37%	
	Medium	11.0 - 16.0			37%	
	Coarse	16.0 - 22.6			37%	
	Coarse	22.6 - 32			37%	
	Very Coarse	32 - 45			37%	
	Very Coarse	45 - 64	20	20%	57%	
COBBLE	Small	64 - 90	12	12%	69%	
	Small	90 - 128	23	23%	92%	
	Large	128 - 180	8	8%	100%	
	Large	180 - 256			100%	
BOULDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: 175 mm
(riffle)

**UT1
X2-Riffle
Pebble Count Size Class Distribution**

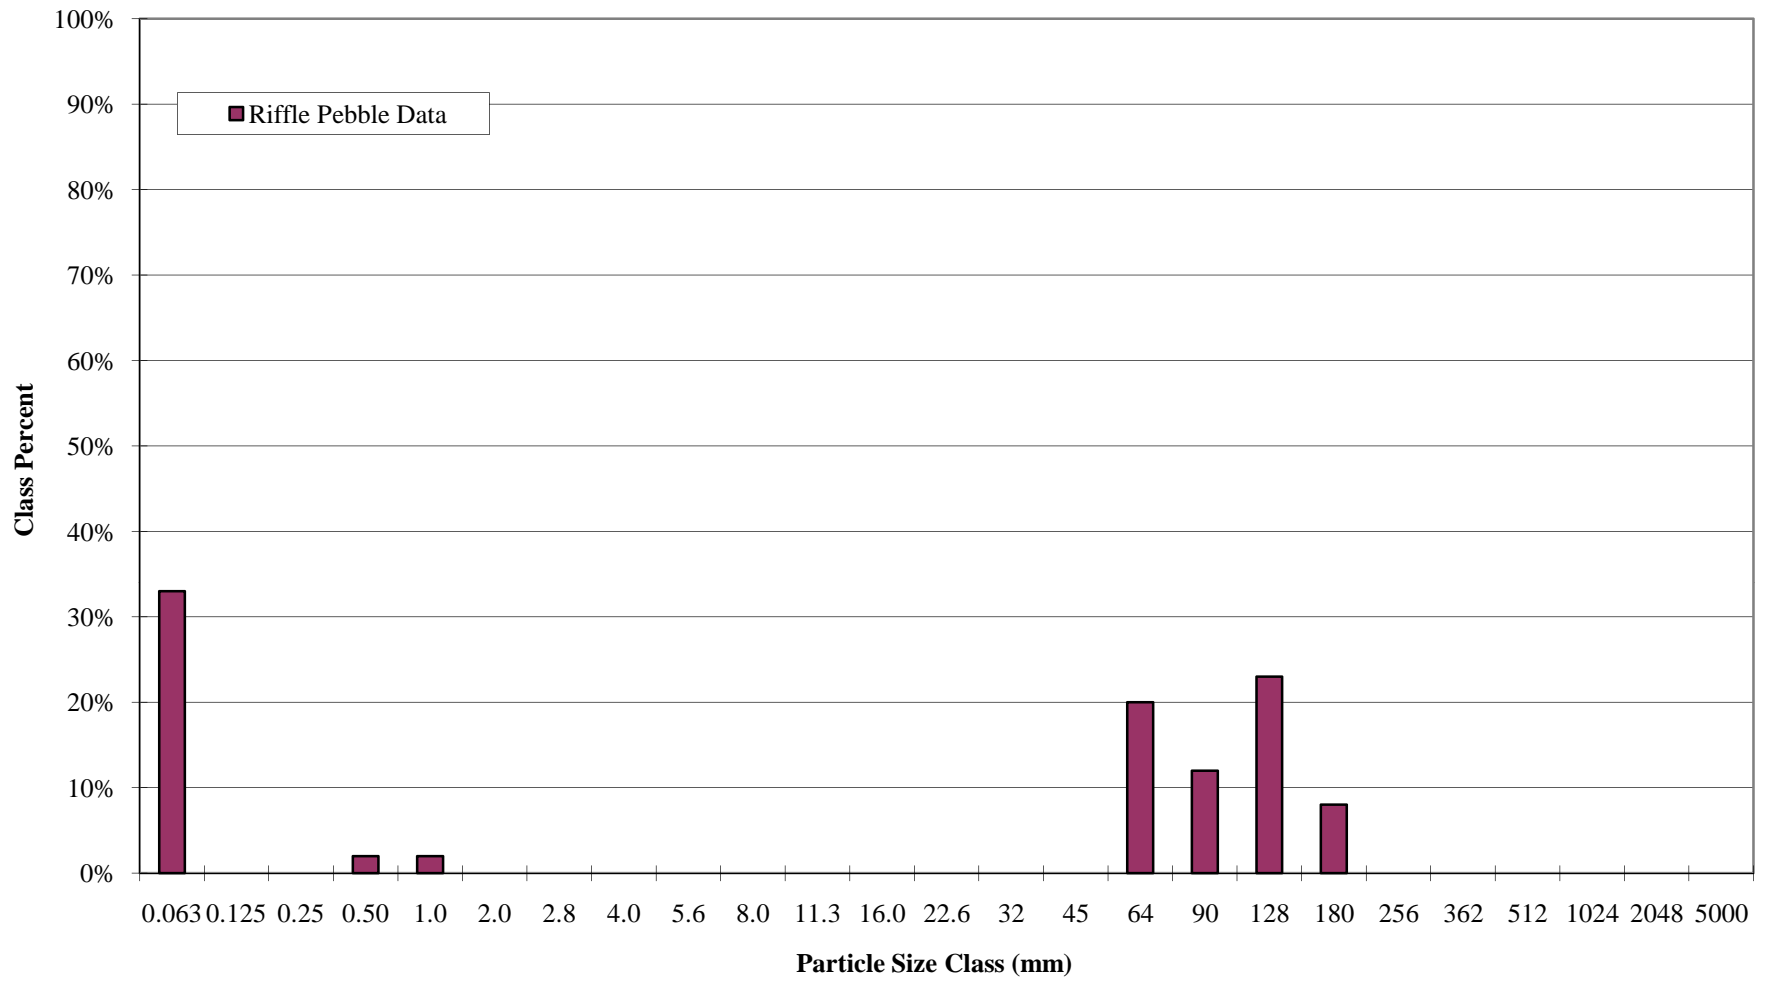

**UT1
X2-Riffle
Pebble Count Particle Size Distribution**

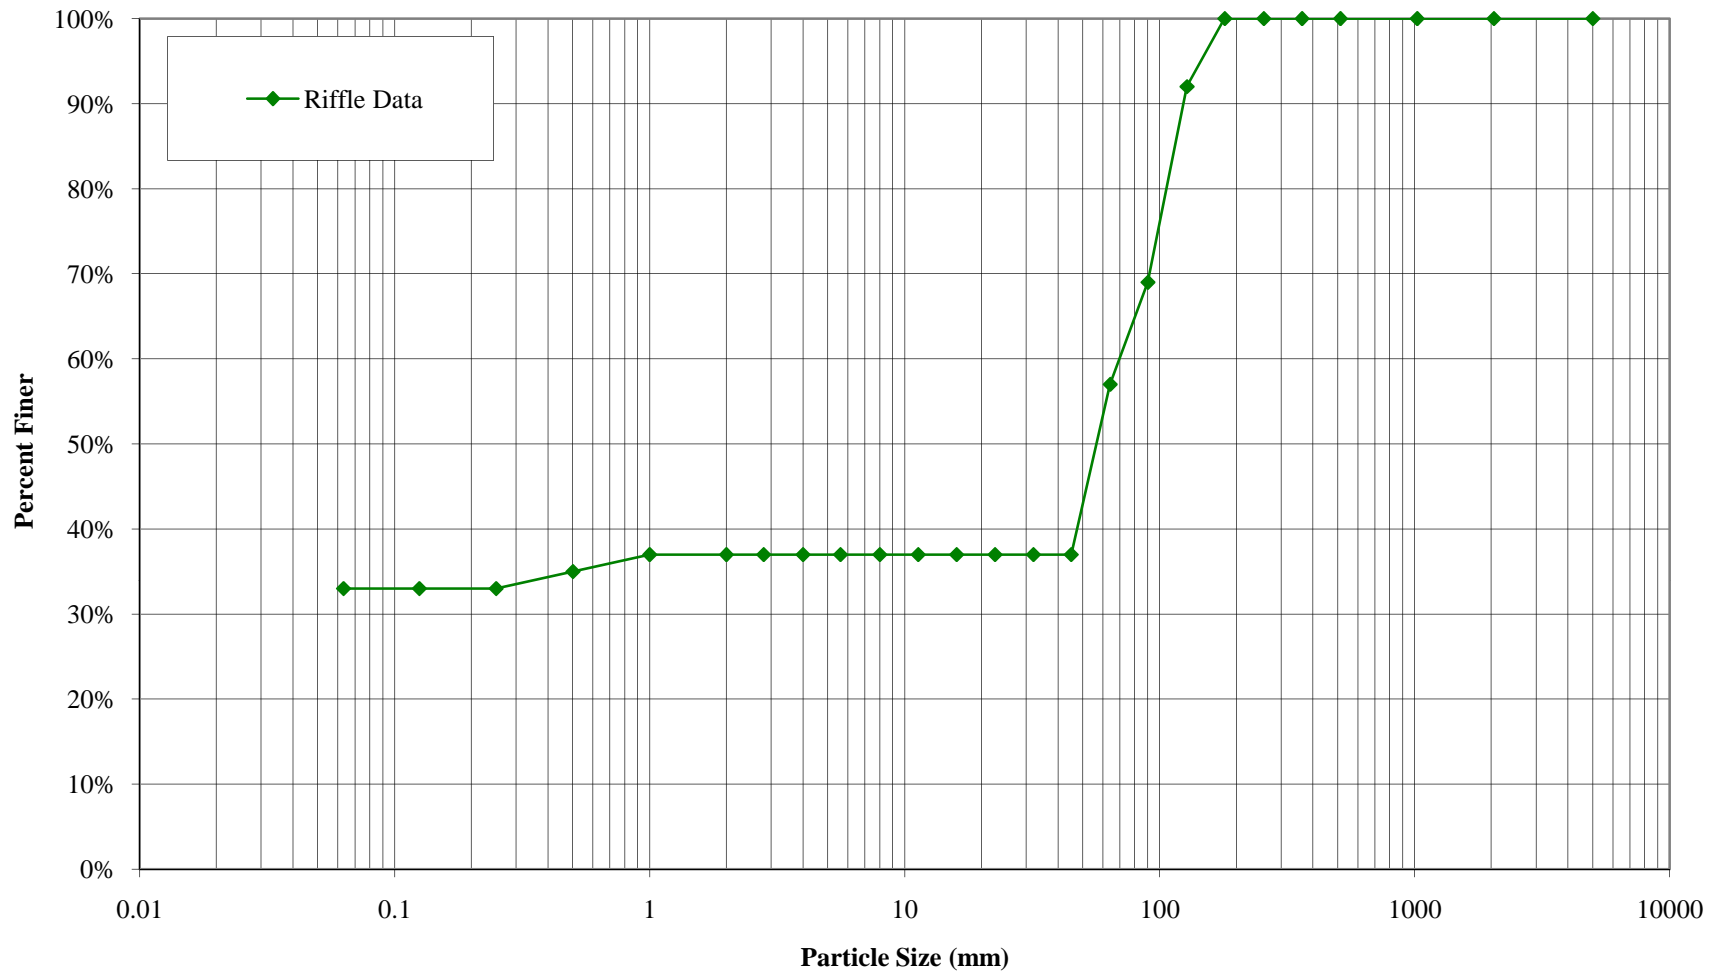


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1B X3-Pool	
DATE COLLECTED:	9/23/2009	
FIELD COLLECTION BY:	KS/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Pool	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	10	10%	10%	
SAND	Very Fine	.063 - .125	61	61%	71%	
	Fine	.125 - .25	3	3%	74%	
	Medium	.25 - .50	16	16%	90%	
	Coarse	.50 - 1.0	6	6%	96%	
	Very Coarse	1.0 - 2.0	4	4%	100%	
GRAVEL	Very Fine	2.0 - 2.8			100%	
	Very Fine	2.8 - 4.0			100%	
	Fine	4.0 - 5.6			100%	
	Fine	5.6 - 8.0			100%	
	Medium	8.0 - 11.0			100%	
	Medium	11.0 - 16.0			100%	
	Coarse	16.0 - 22.6			100%	
	Coarse	22.6 - 32			100%	
	Very Coarse	32 - 45			100%	
	Very Coarse	45 - 64			100%	
COBBLE	Small	64 - 90			100%	
	Small	90 - 128			100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
BQUILDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: _____
(pool)

**UT1B
X3-Pool
Pebble Count Size Class Distribution**




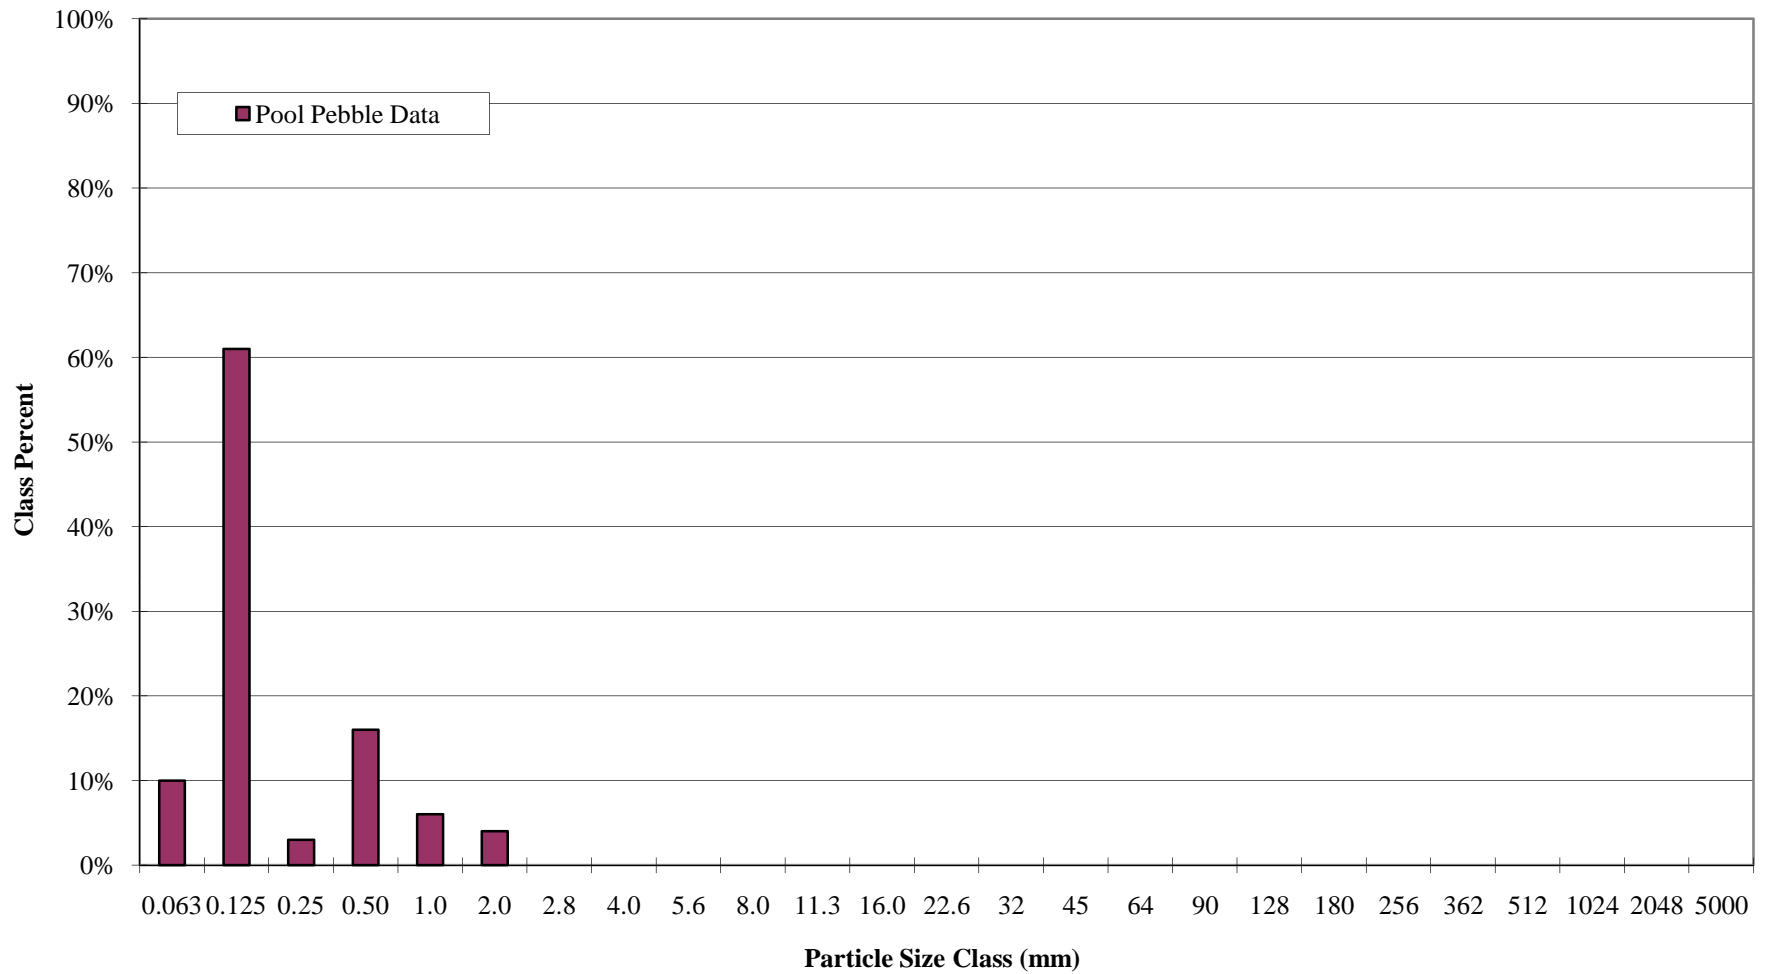


**UT1B
X3-Pool
Pebble Count Particle Size Distribution**

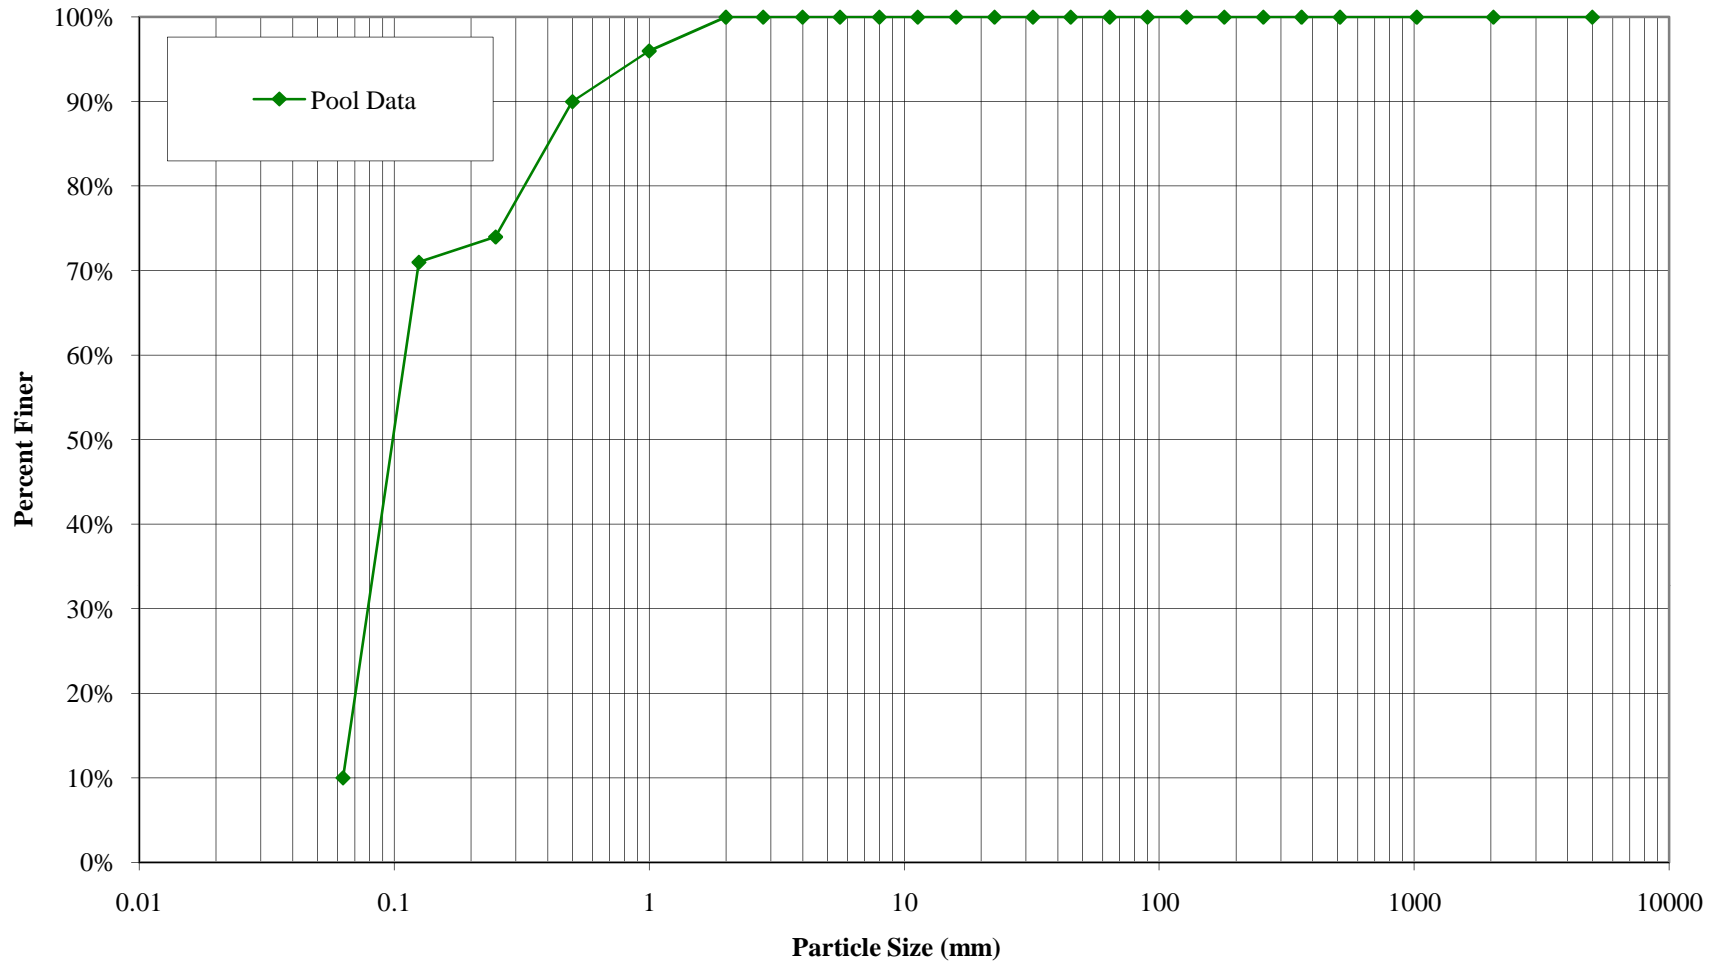


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1B X4-Riffle	
DATE COLLECTED:	9/23/2009	
FIELD COLLECTION BY:	KS/CT	
DATA ENTRY BY:	KS	

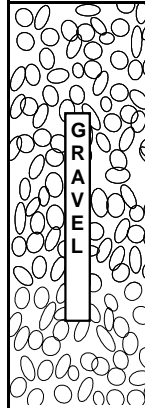
MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Riffle		Class %	% Cum
SILT/CLAY	Silt / Clay	< .063	51		51%	51%
 SAND	Very Fine	.063 - .125	35		35%	86%
	Fine	.125 - .25	2		2%	88%
	Medium	.25 - .50	11		11%	99%
	Coarse	.50 - 1.0	1		1%	100%
	Very Coarse	1.0 - 2.0				100%
 GRAVEL	Very Fine	2.0 - 2.8				100%
	Very Fine	2.8 - 4.0				100%
	Fine	4.0 - 5.6				100%
	Fine	5.6 - 8.0				100%
	Medium	8.0 - 11.0				100%
	Medium	11.0 - 16.0				100%
	Coarse	16.0 - 22.6				100%
	Coarse	22.6 - 32				100%
	Very Coarse	32 - 45				100%
	Very Coarse	45 - 64				100%
 COBBLE	Small	64 - 90				100%
	Small	90 - 128				100%
	Large	128 - 180				100%
	Large	180 - 256				100%
 BOULDER	Small	256 - 362				100%
	Small	362 - 512				100%
	Medium	512 - 1024				100%
	Large-Very Large	1024 - 2048				100%
BEDROCK	Bedrock	> 2048				100%
Total			100		100%	

Largest particles: 1 mm
(riffle)

**UT1B
X4-Riffle
Pebble Count Size Class Distribution**

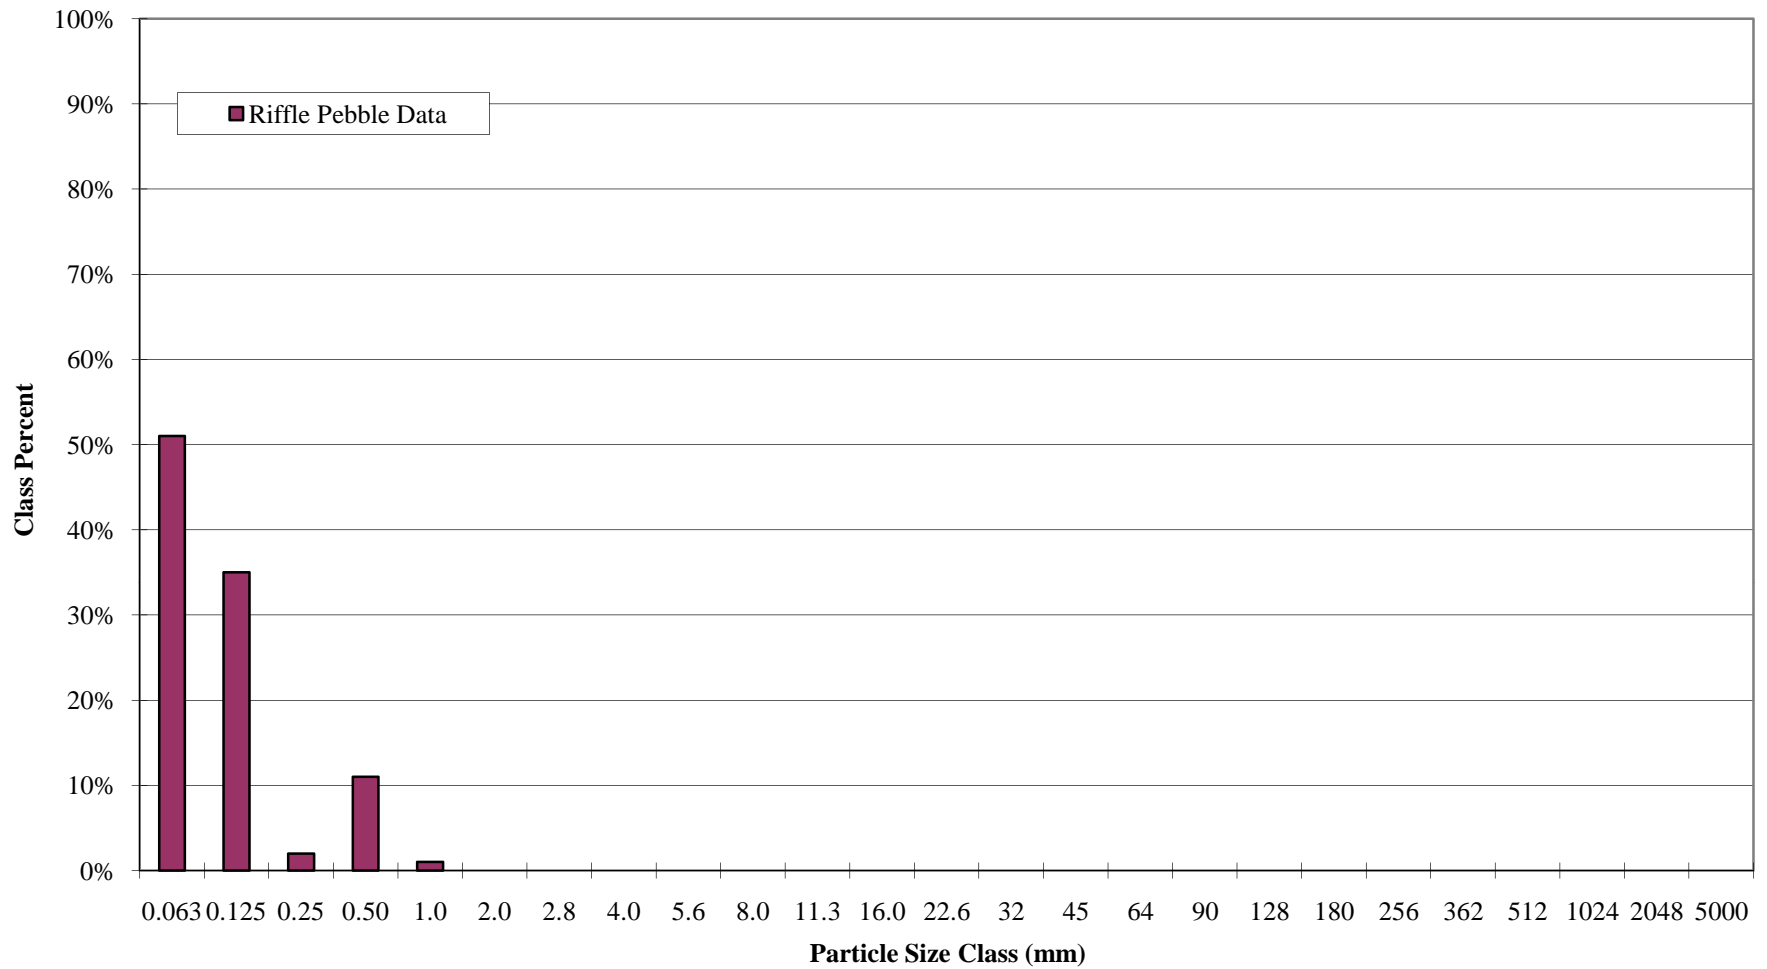

**UT1B
X4-Riffle
Pebble Count Particle Size Distribution**

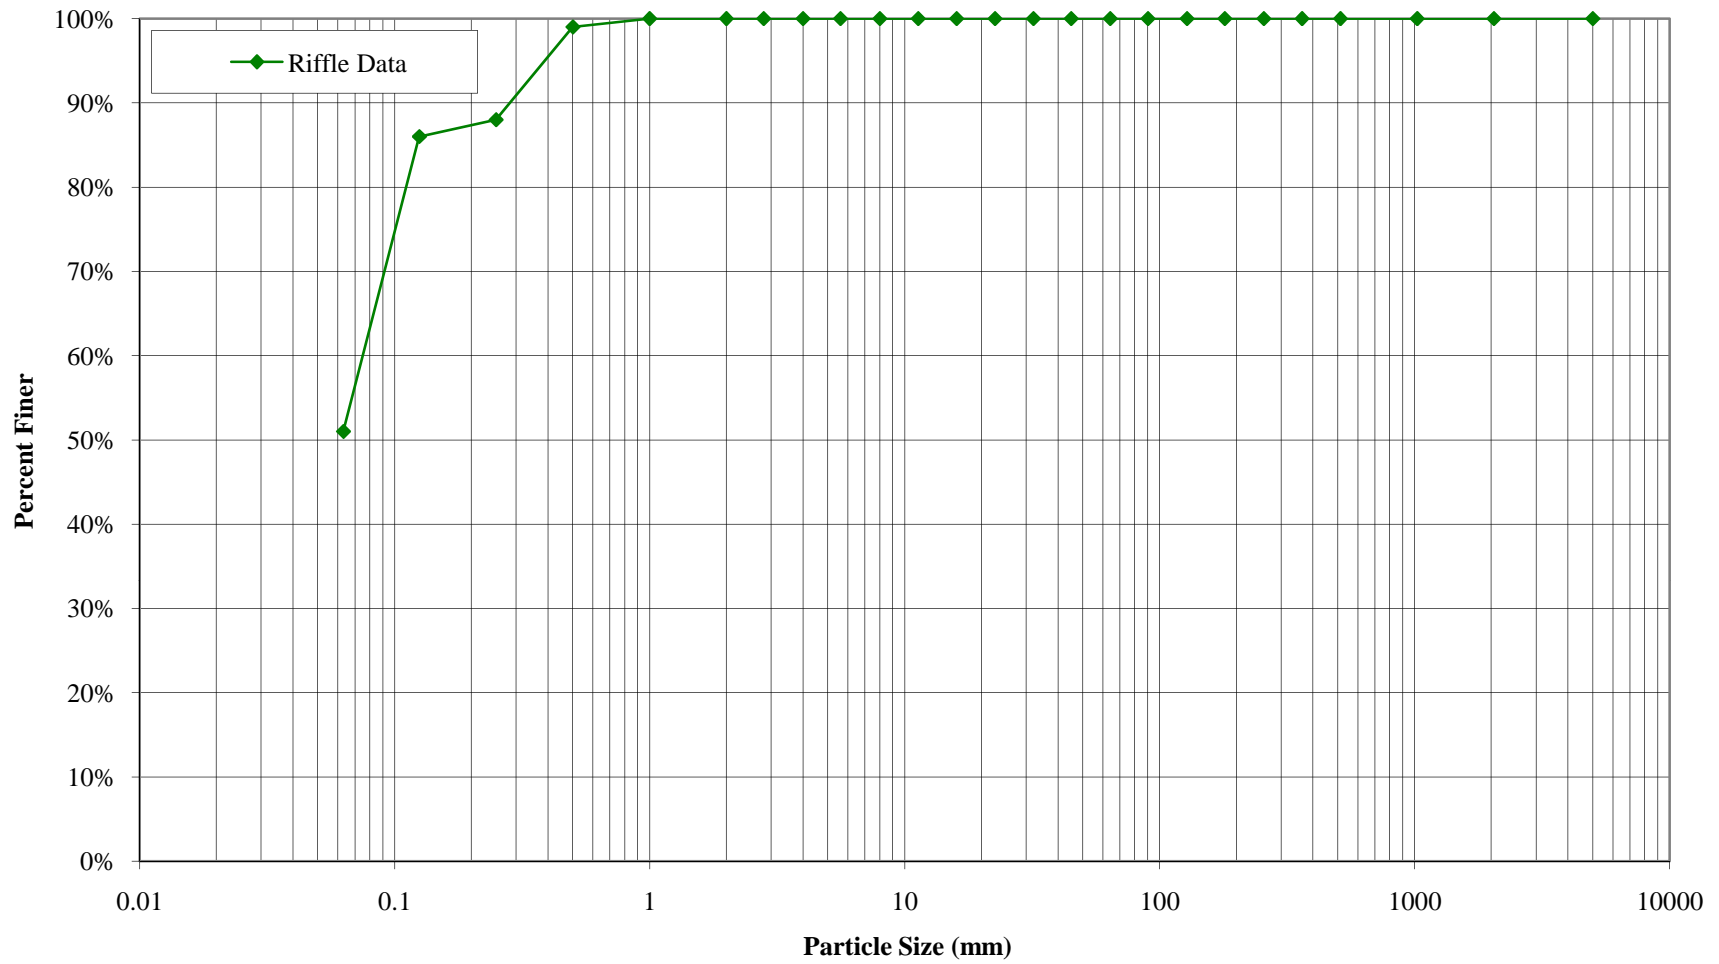


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

	BAKER PROJECT NO.	108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1 X5-Riffle	
DATE COLLECTED:	9/23/2009	
FIELD COLLECTION BY:	KS/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Riffle	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063			0%	
SAND	Very Fine	.063 - .125	5	5%	5%	
	Fine	.125 - .25	7	7%	12%	
	Medium	.25 - .50	5	5%	17%	
	Coarse	.50 - 1.0	1	1%	18%	
	Very Coarse	1.0 - 2.0			18%	
GRAVEL	Very Fine	2.0 - 2.8			18%	
	Very Fine	2.8 - 4.0			18%	
	Fine	4.0 - 5.6			18%	
	Fine	5.6 - 8.0			18%	
	Medium	8.0 - 11.0			18%	
	Medium	11.0 - 16.0			18%	
	Coarse	16.0 - 22.6	1	1%	19%	
	Coarse	22.6 - 32	4	4%	23%	
	Very Coarse	32 - 45	10	10%	33%	
	Very Coarse	45 - 64	14	14%	47%	
COBBLE	Small	64 - 90	12	12%	59%	
	Small	90 - 128	23	23%	82%	
	Large	128 - 180	16	16%	98%	
	Large	180 - 256	2	2%	100%	
BOULDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
	Total		100	100%		

Largest particles: 210 mm
(riffle)

**UT1
X5-Riffle
Pebble Count Size Class Distribution**

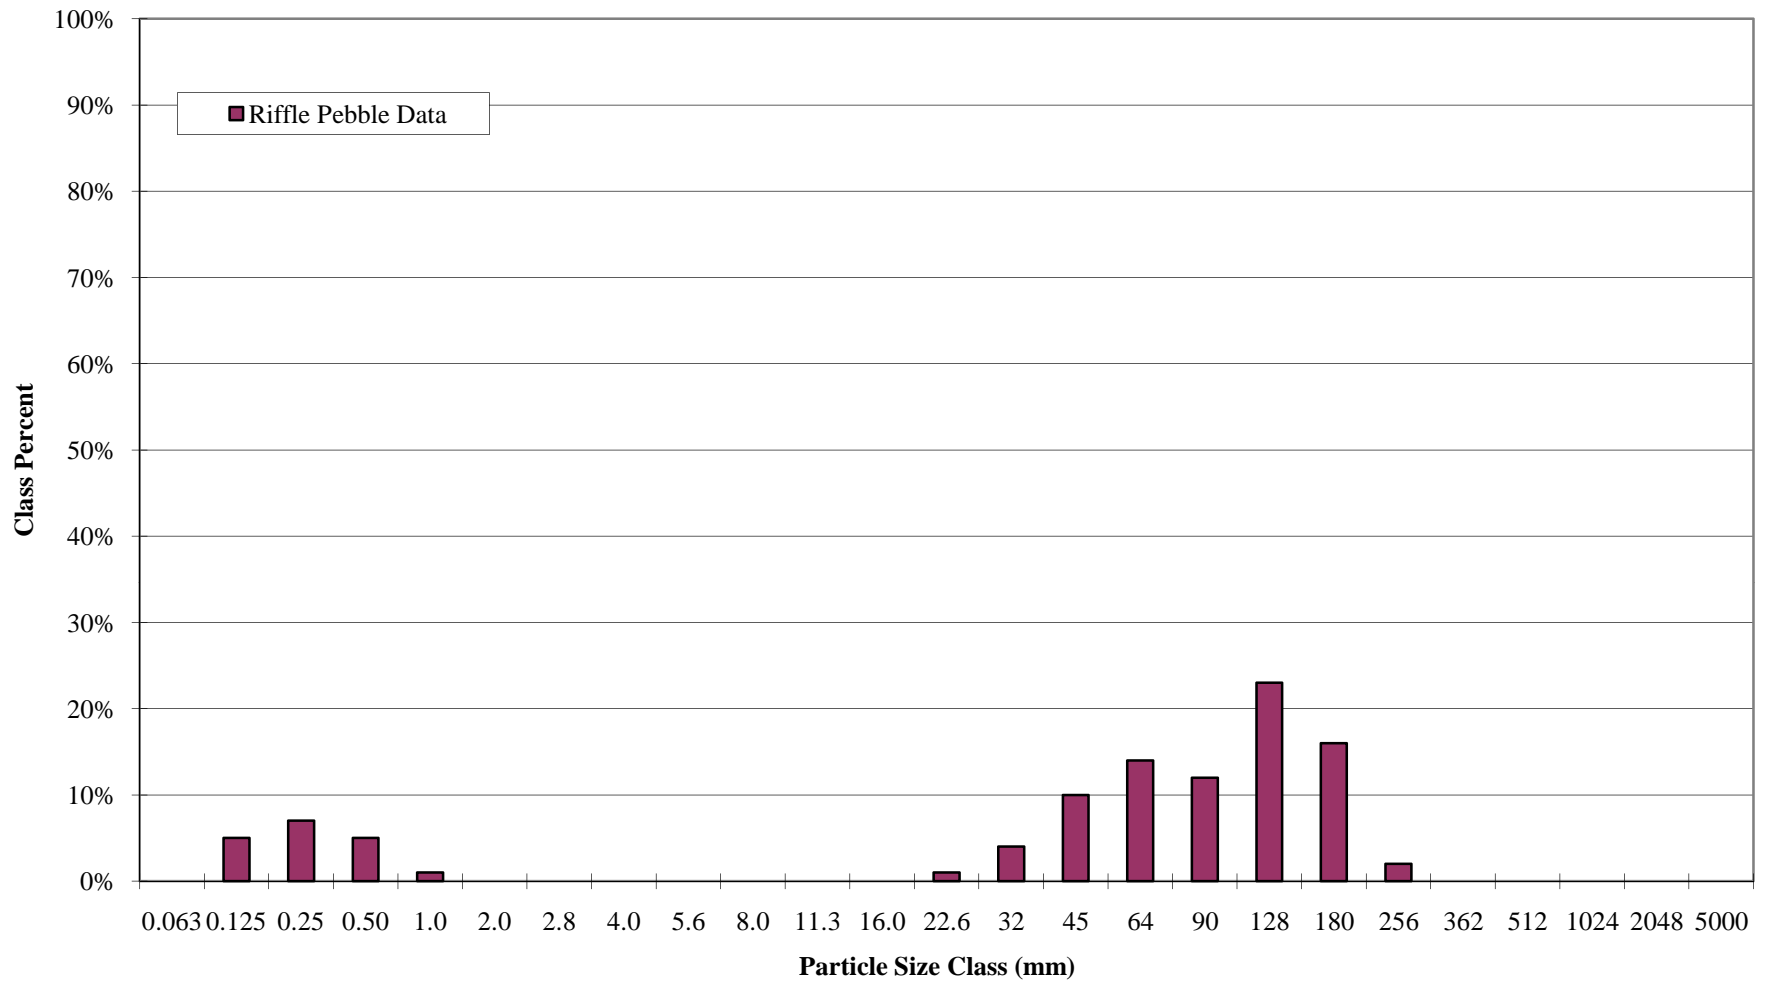

**UT1
X5-Riffle
Pebble Count Particle Size Distribution**

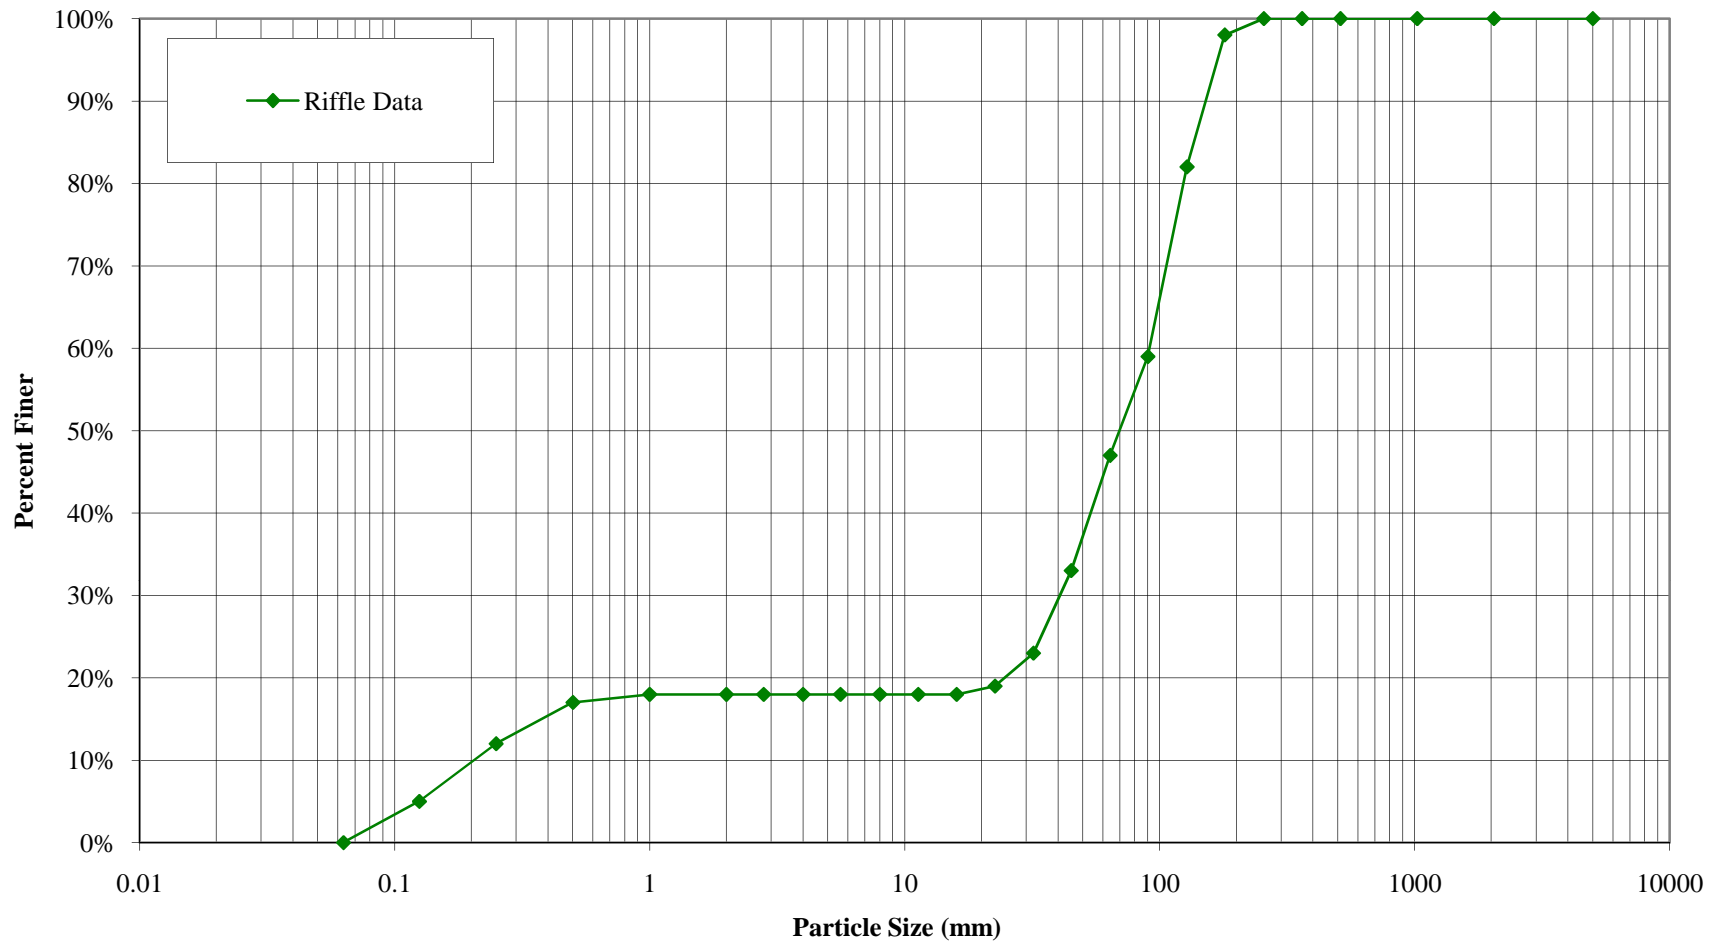


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1 X6-Pool	
DATE COLLECTED:	9/23/2009	
FIELD COLLECTION BY:	KS/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Pool	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	57	57%	57%	
SAND	Very Fine	.063 - .125	29	29%	86%	
	Fine	.125 - .25	4	4%	90%	
	Medium	.25 - .50	10	10%	100%	
	Coarse	.50 - 1.0			100%	
	Very Coarse	1.0 - 2.0			100%	
GRAVEL	Very Fine	2.0 - 2.8			100%	
	Very Fine	2.8 - 4.0			100%	
	Fine	4.0 - 5.6			100%	
	Fine	5.6 - 8.0			100%	
	Medium	8.0 - 11.0			100%	
	Medium	11.0 - 16.0			100%	
	Coarse	16.0 - 22.6			100%	
	Coarse	22.6 - 32			100%	
	Very Coarse	32 - 45			100%	
	Very Coarse	45 - 64			100%	
COBBLE	Small	64 - 90			100%	
	Small	90 - 128			100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
BQUILDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: _____
(pool)

**UT1
X6-Pool
Pebble Count Size Class Distribution**

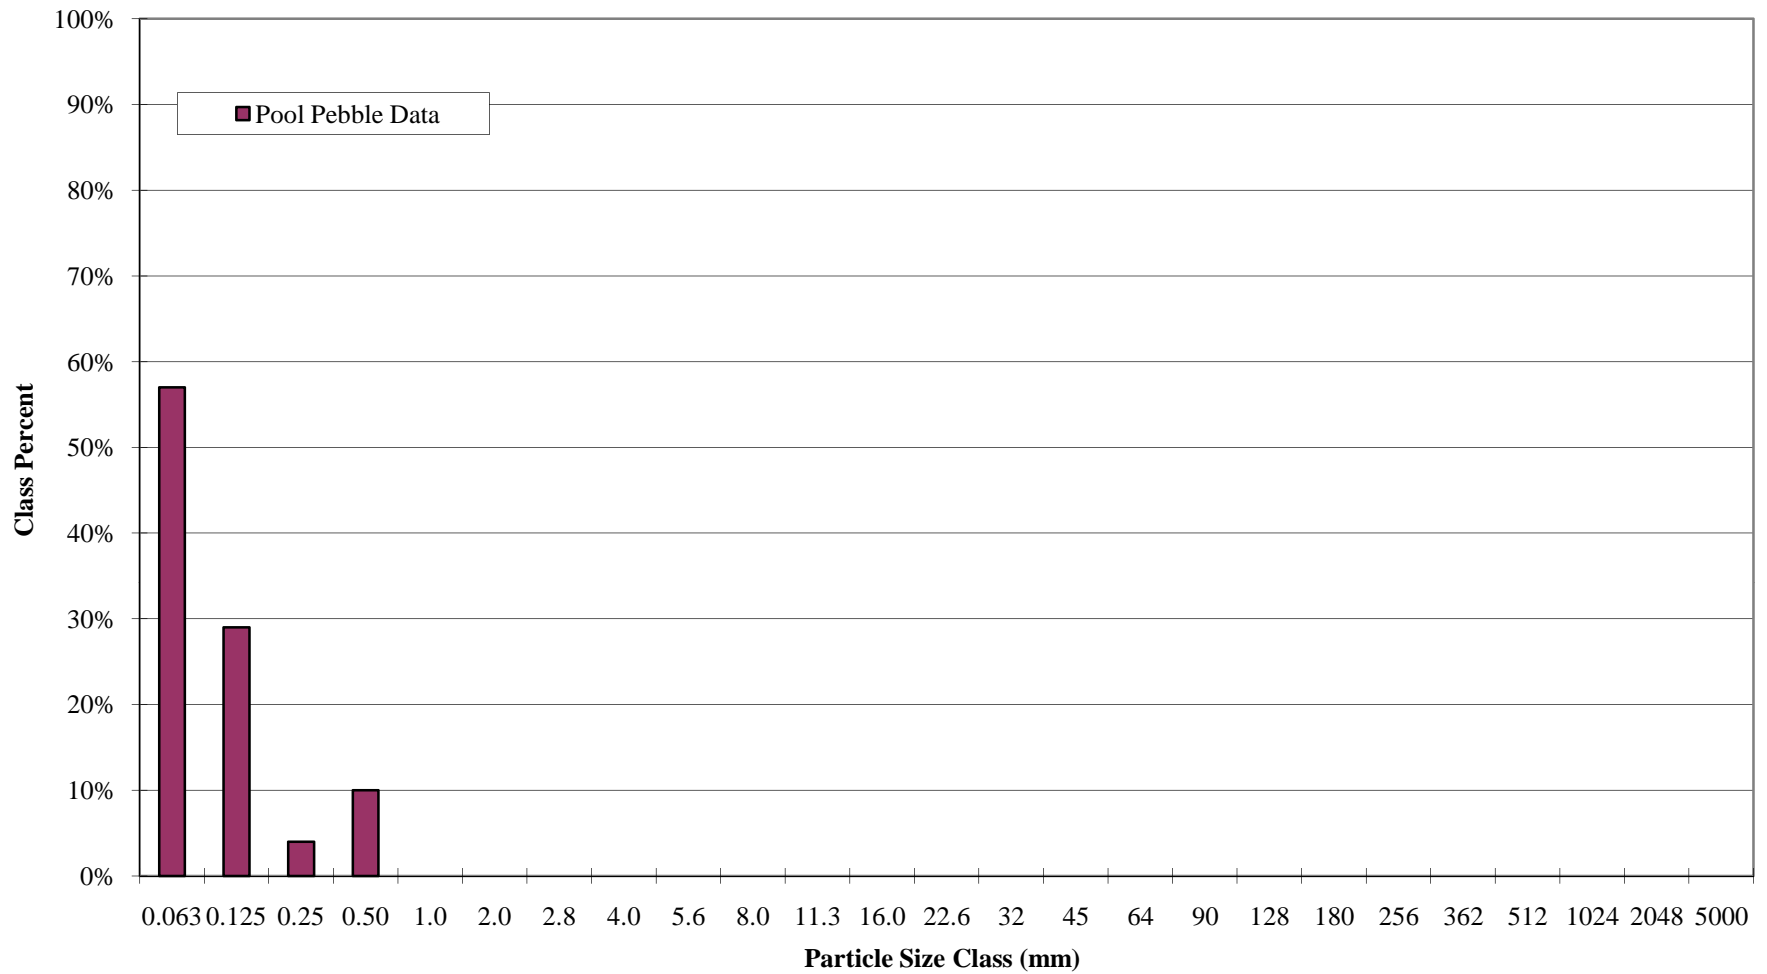

**UT1
X6-Pool
Pebble Count Particle Size Distribution**

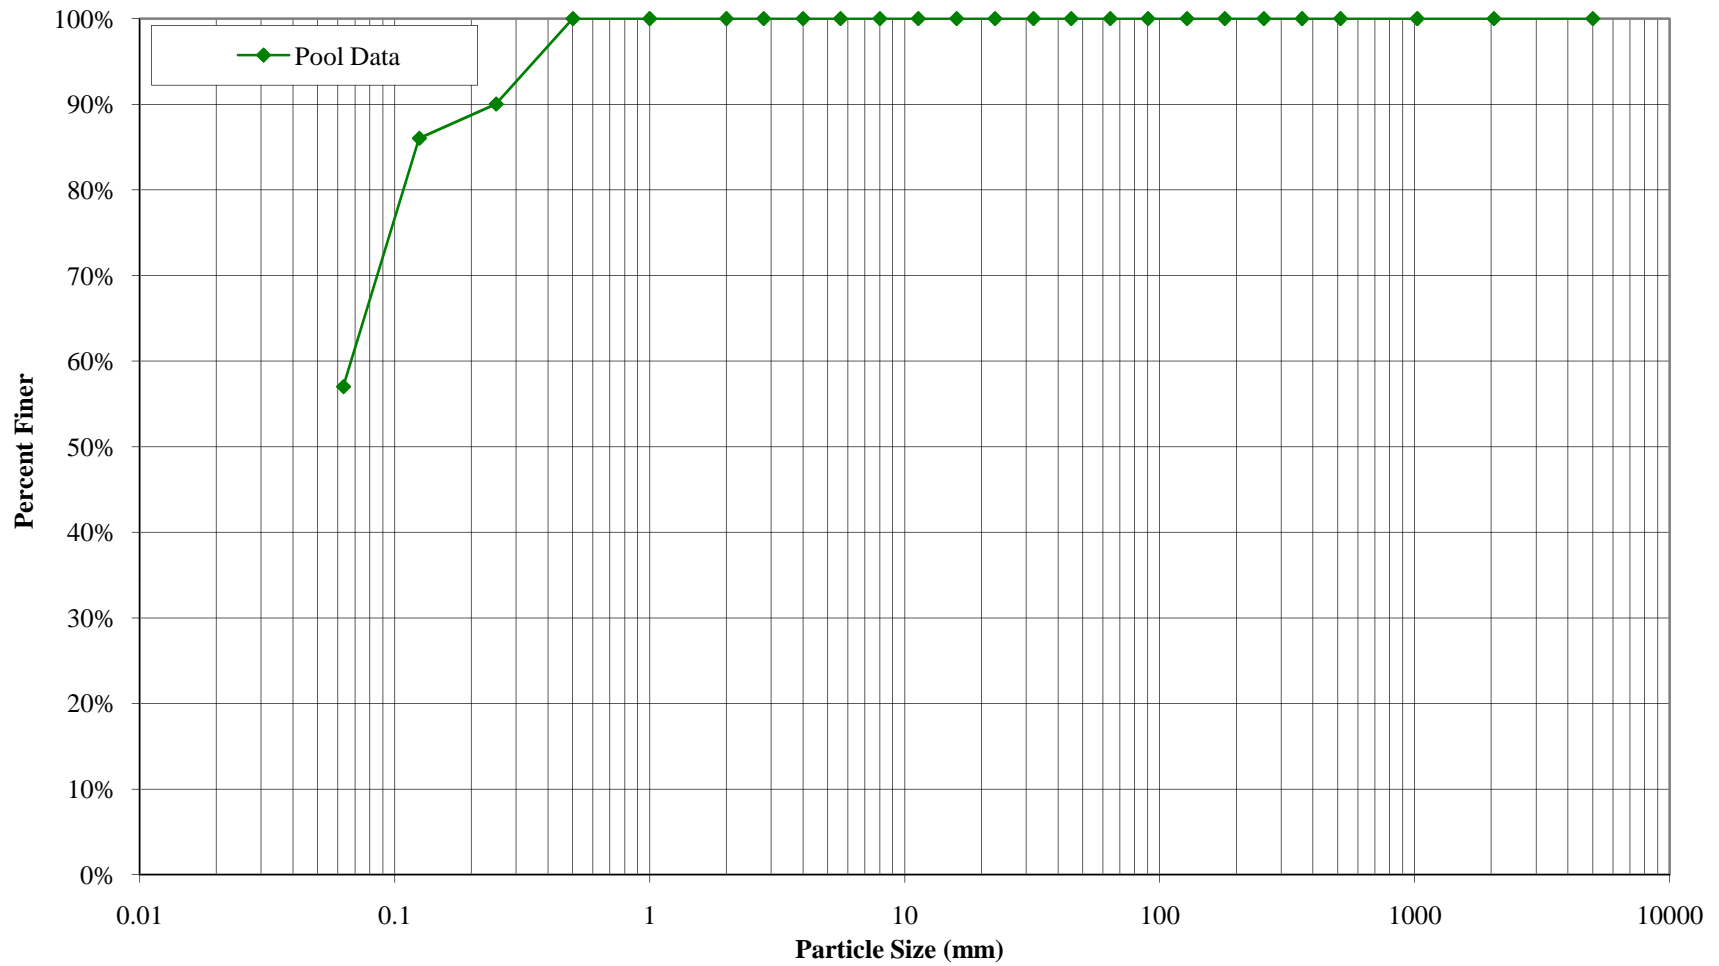


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UTIC X7-Riffle	
DATE COLLECTED:	9/23/2009	
FIELD COLLECTION BY:	KS/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Riffle	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	7	7%	7%	
	Very Fine	.063 - .125			7%	
	Fine	.125 - .25	6	6%	13%	
	Medium	.25 - .50	6	6%	19%	
	Coarse	.50 - 1.0	1	1%	20%	
	Very Coarse	1.0 - 2.0			20%	
SAND	Very Fine	2.0 - 2.8			20%	
	Very Fine	2.8 - 4.0			20%	
	Fine	4.0 - 5.6			20%	
	Fine	5.6 - 8.0			20%	
	Medium	8.0 - 11.0	1	1%	21%	
	Medium	11.0 - 16.0			21%	
	Coarse	16.0 - 22.6			21%	
	Coarse	22.6 - 32	4	4%	25%	
	Very Coarse	32 - 45	14	14%	39%	
	Very Coarse	45 - 64	14	14%	53%	
GRAVEL	Small	64 - 90	13	13%	66%	
	Small	90 - 128	21	21%	87%	
	Large	128 - 180	13	13%	100%	
	Large	180 - 256			100%	
COBBLE	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
Boulder	Bedrock	> 2048			100%	
	Total		100	100%		

Largest particles: 175 mm
(riffle)

**UT1C
X7-Riffle
Pebble Count Particle Size Distribution**

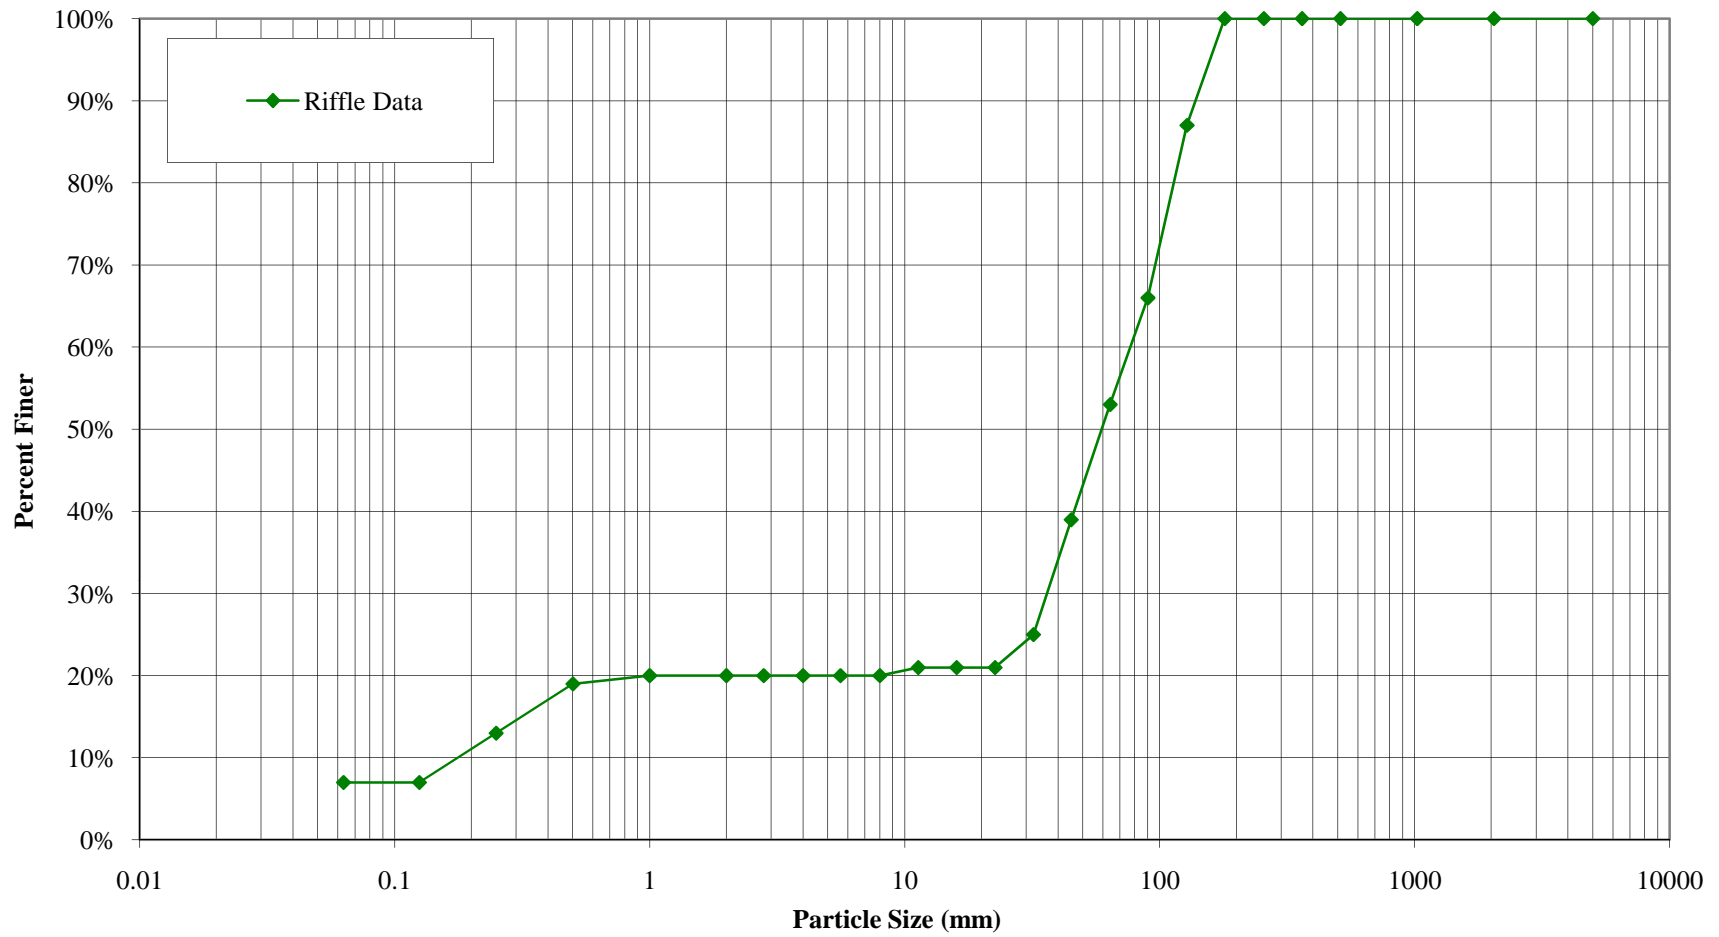

**UT1C
X7-Riffle
Pebble Count Size Class Distribution**

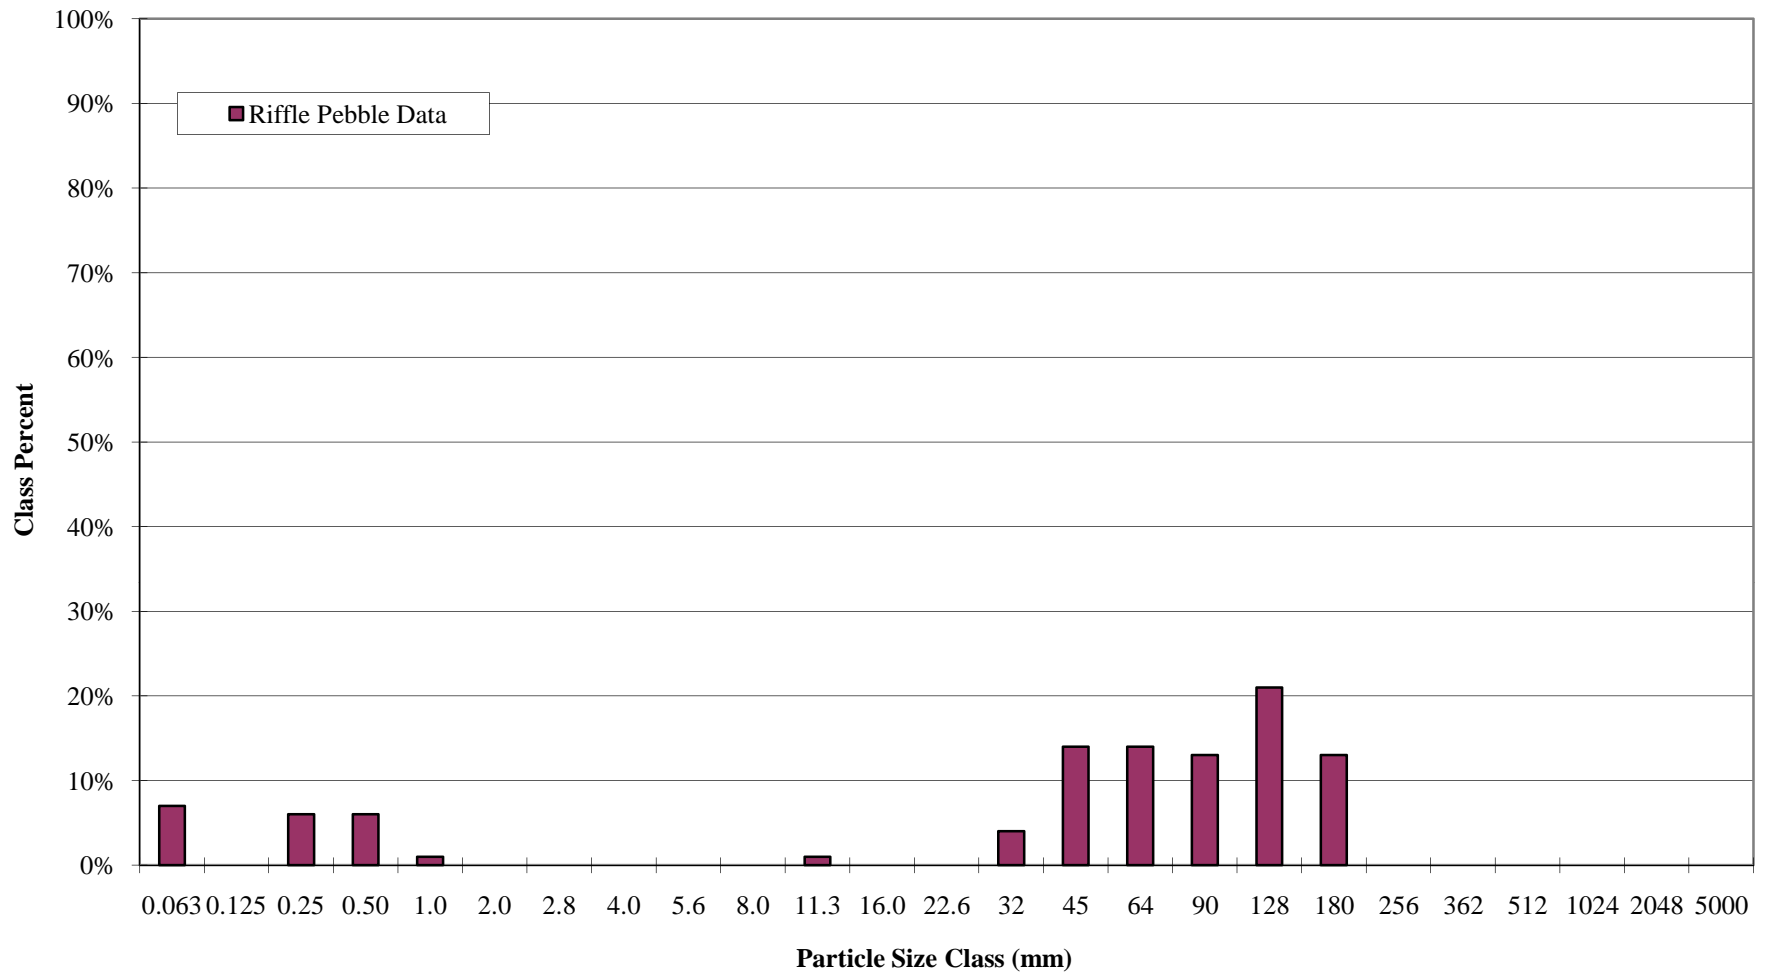


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UTIC X8-Pool	
DATE COLLECTED:	9/23/2009	
FIELD COLLECTION BY:	KS/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Pool	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	36	36%	36%	
	SAND	Very Fine	.063 - .125	40	40%	76%
		Fine	.125 - .25	10	10%	86%
		Medium	.25 - .50	14	14%	100%
		Coarse	.50 - 1.0			100%
		Very Coarse	1.0 - 2.0			100%
GRAVEL	Very Fine	2.0 - 2.8			100%	
	Very Fine	2.8 - 4.0			100%	
	Fine	4.0 - 5.6			100%	
	Fine	5.6 - 8.0			100%	
	Medium	8.0 - 11.0			100%	
	Medium	11.0 - 16.0			100%	
	Coarse	16.0 - 22.6			100%	
	Coarse	22.6 - 32			100%	
	Very Coarse	32 - 45			100%	
	Very Coarse	45 - 64			100%	
COBBLE	Small	64 - 90			100%	
	Small	90 - 128			100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
BOULDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: _____
(pool)

**UT1C
X8-Pool
Pebble Count Size Class Distribution**

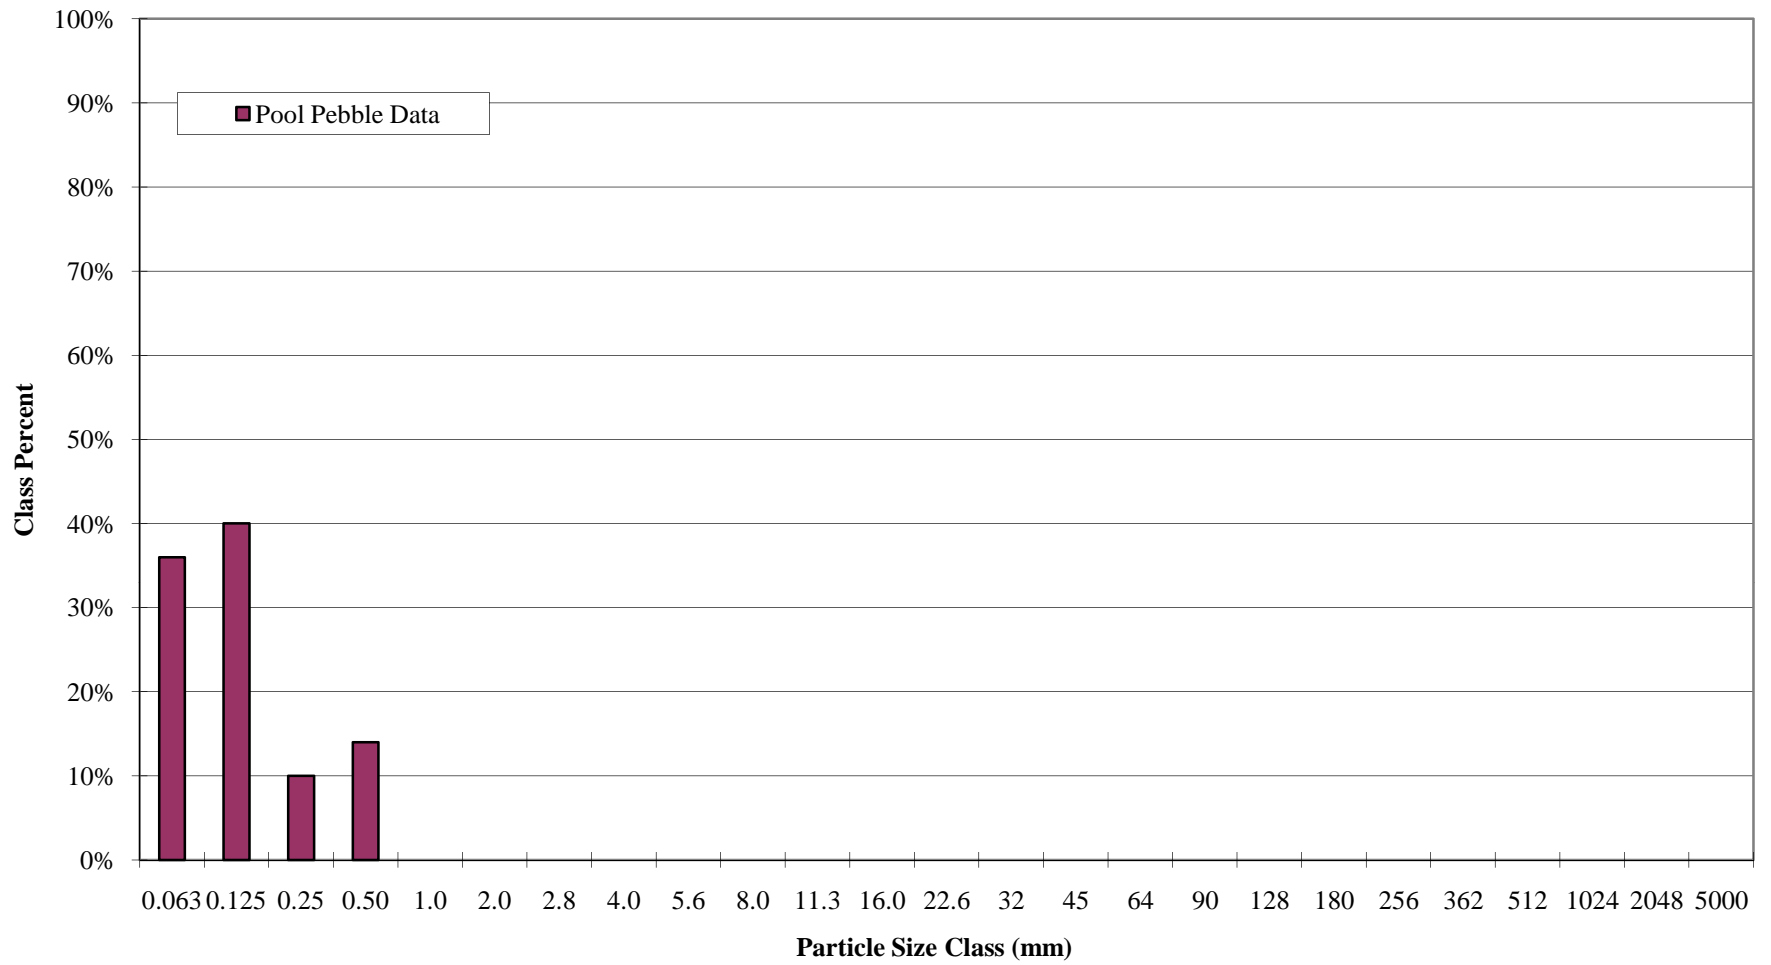

**UT1C
X8-Pool
Pebble Count Particle Size Distribution**

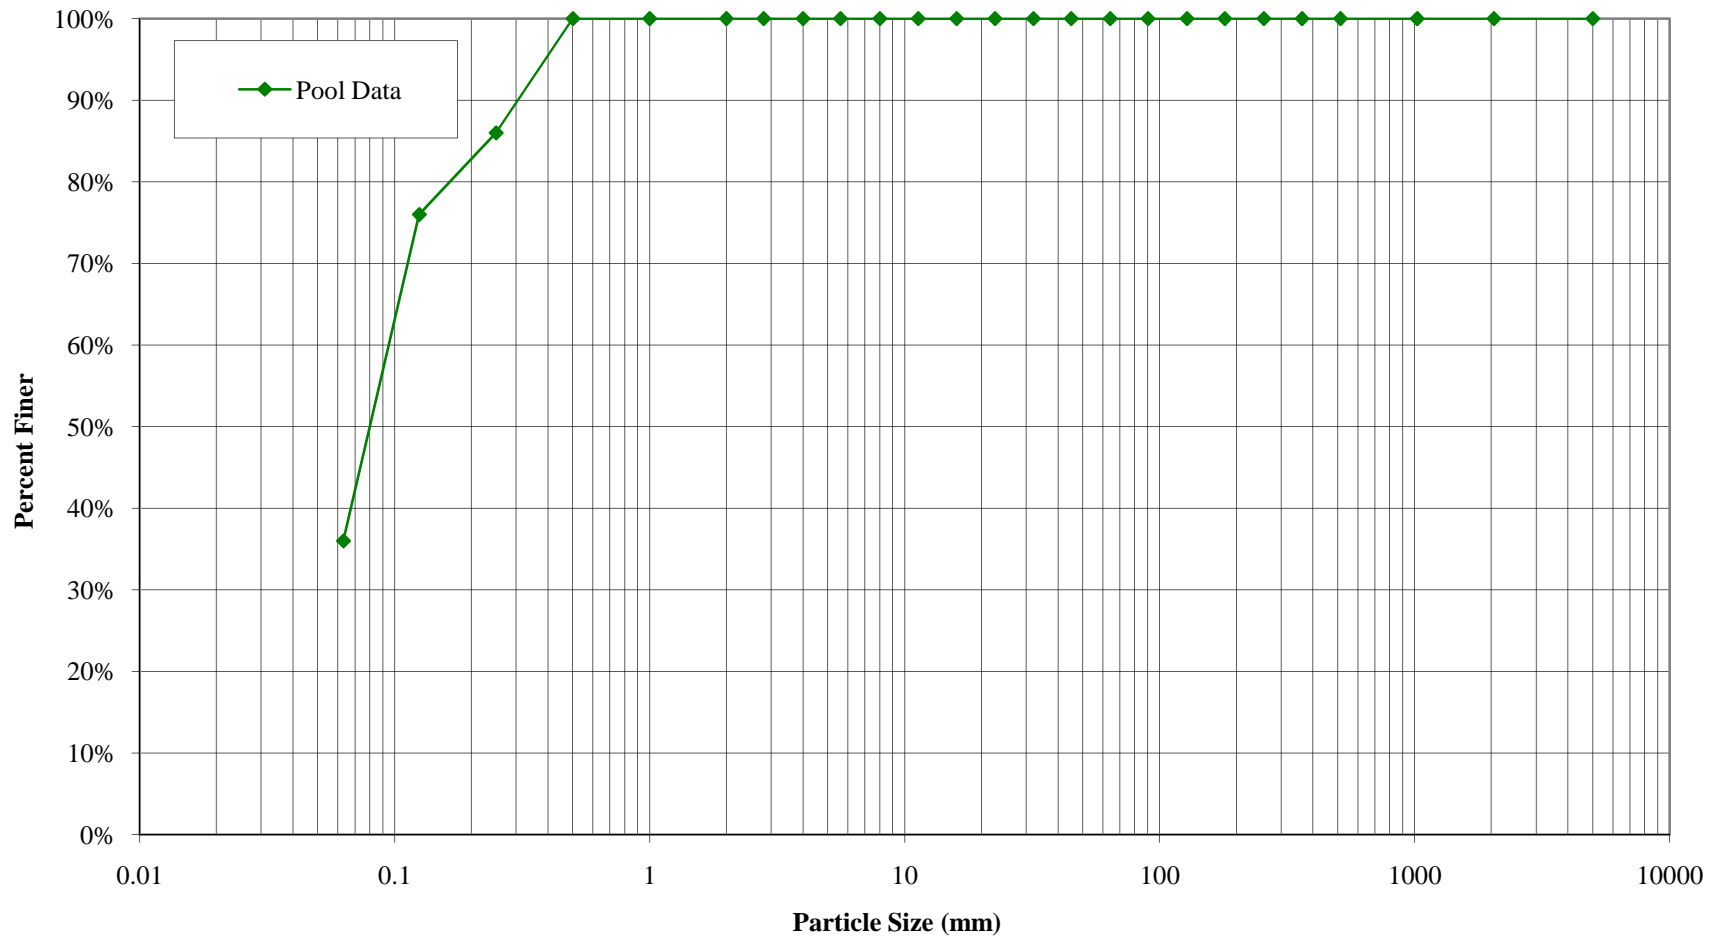


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1 X9-Riffle	
DATE COLLECTED:	9/23/2009	
FIELD COLLECTION BY:	KS/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Riffle	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	4	4%	4%	
	Very Fine	.063 - .125	2	2%	6%	
	Fine	.125 - .25	3	3%	9%	
	Medium	.25 - .50	1	1%	10%	
	Coarse	.50 - 1.0			10%	
	Very Coarse	1.0 - 2.0	9	9%	19%	
SAND	Very Fine	2.0 - 2.8			19%	
	Very Fine	2.8 - 4.0			19%	
	Fine	4.0 - 5.6			19%	
	Fine	5.6 - 8.0			19%	
	Medium	8.0 - 11.0	1	1%	20%	
	Medium	11.0 - 16.0			20%	
	Coarse	16.0 - 22.6	1	1%	21%	
	Coarse	22.6 - 32	5	5%	26%	
	Very Coarse	32 - 45	13	13%	39%	
	Very Coarse	45 - 64	12	12%	51%	
GRAVEL	Small	64 - 90	17	17%	68%	
	Small	90 - 128	23	23%	91%	
	Large	128 - 180	9	9%	100%	
	Large	180 - 256			100%	
COBBLE	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: _____ 150 mm _____
(riffle)

**UT1
X9-Riffle
Pebble Count Size Class Distribution**

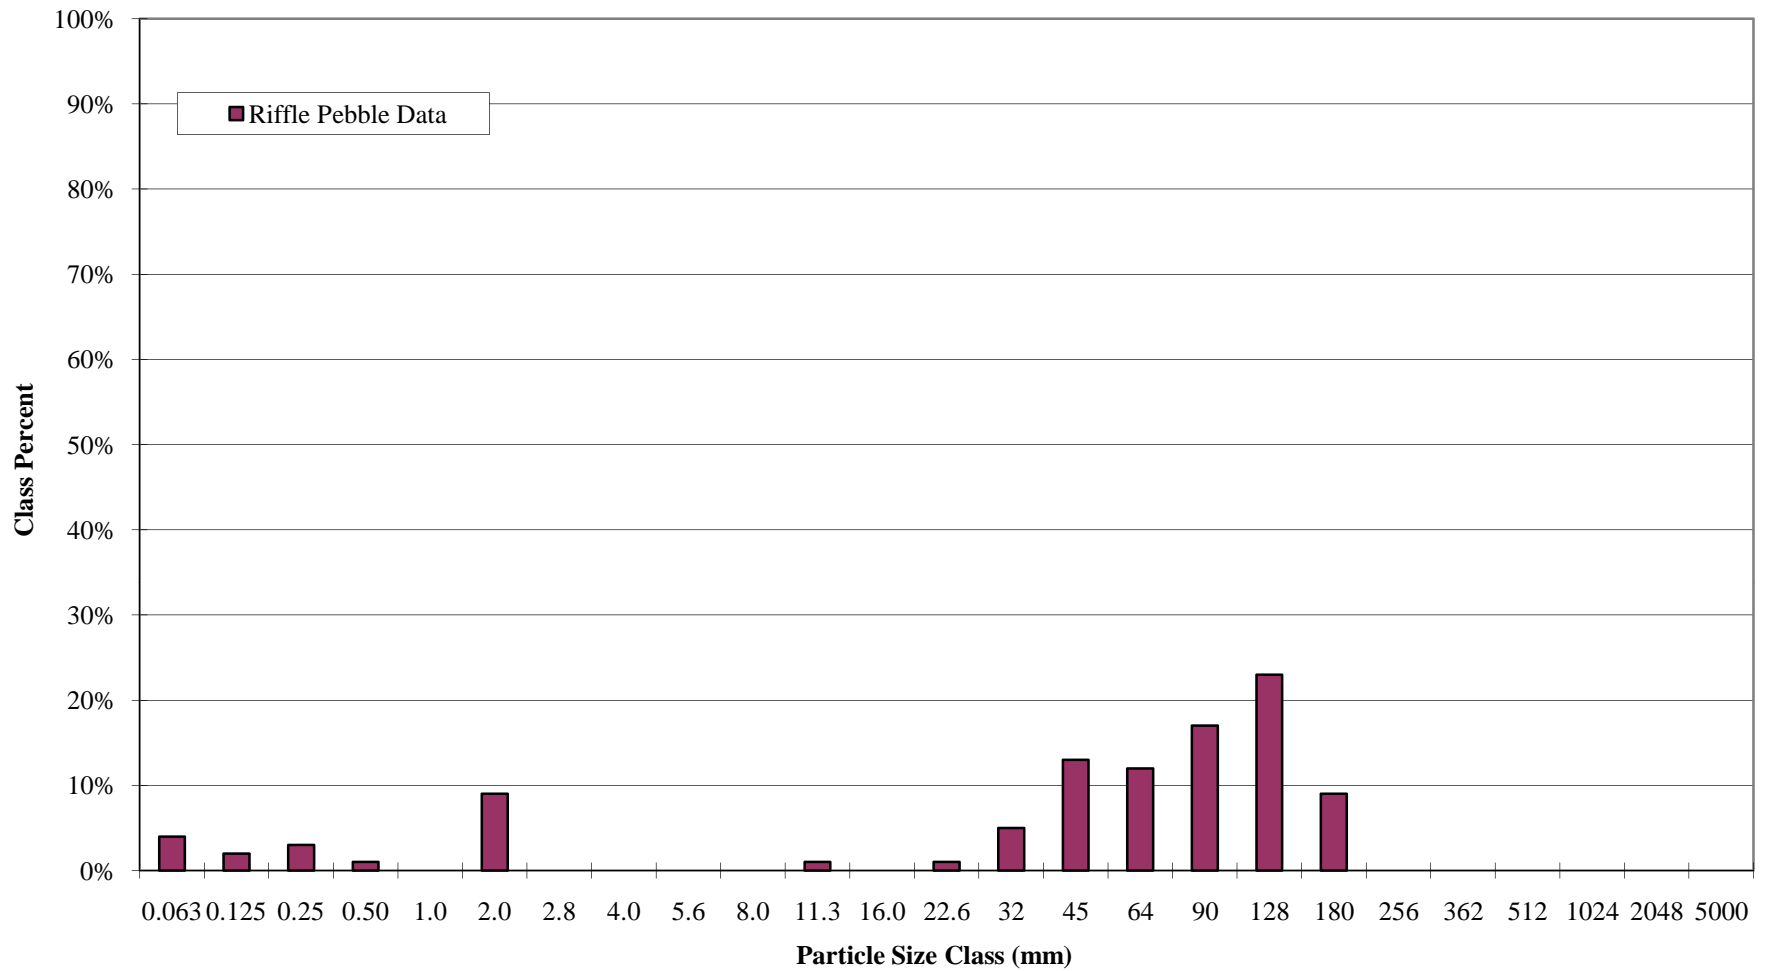

**UT1
X9-Riffle
Pebble Count Particle Size Distribution**

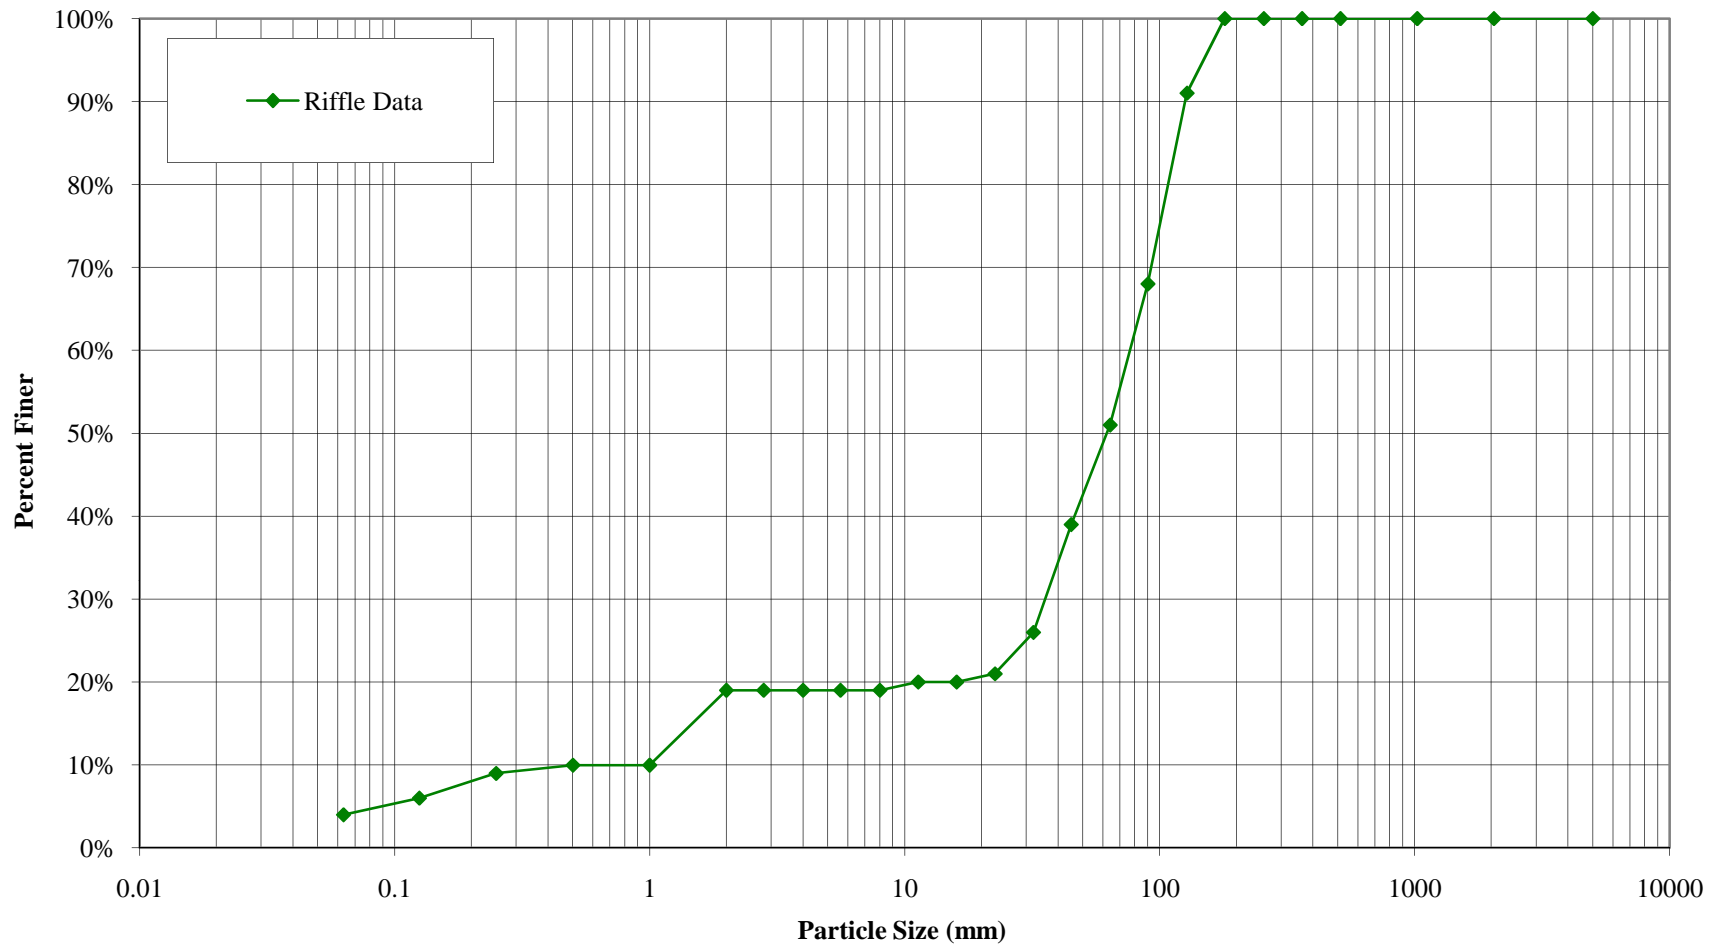


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1 X10-Pool	
DATE COLLECTED:	9/23/2009	
FIELD COLLECTION BY:	KS/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Pool	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	60	60%	60%	
SAND	Very Fine	.063 - .125	6	6%	66%	
	Fine	.125 - .25	1	1%	67%	
	Medium	.25 - .50	20	20%	87%	
	Coarse	.50 - 1.0	2	2%	89%	
	Very Coarse	1.0 - 2.0			89%	
GRAVEL	Very Fine	2.0 - 2.8			89%	
	Very Fine	2.8 - 4.0			89%	
	Fine	4.0 - 5.6			89%	
	Fine	5.6 - 8.0			89%	
	Medium	8.0 - 11.0	1	1%	90%	
	Medium	11.0 - 16.0			90%	
	Coarse	16.0 - 22.6			90%	
	Coarse	22.6 - 32	4	4%	94%	
	Very Coarse	32 - 45	1	1%	95%	
	Very Coarse	45 - 64	2	2%	97%	
COBBLE	Small	64 - 90	1	1%	98%	
	Small	90 - 128	2	2%	100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
BOULDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: _____
(pool)

**UT1
X10-Pool
Pebble Count Size Class Distribution**

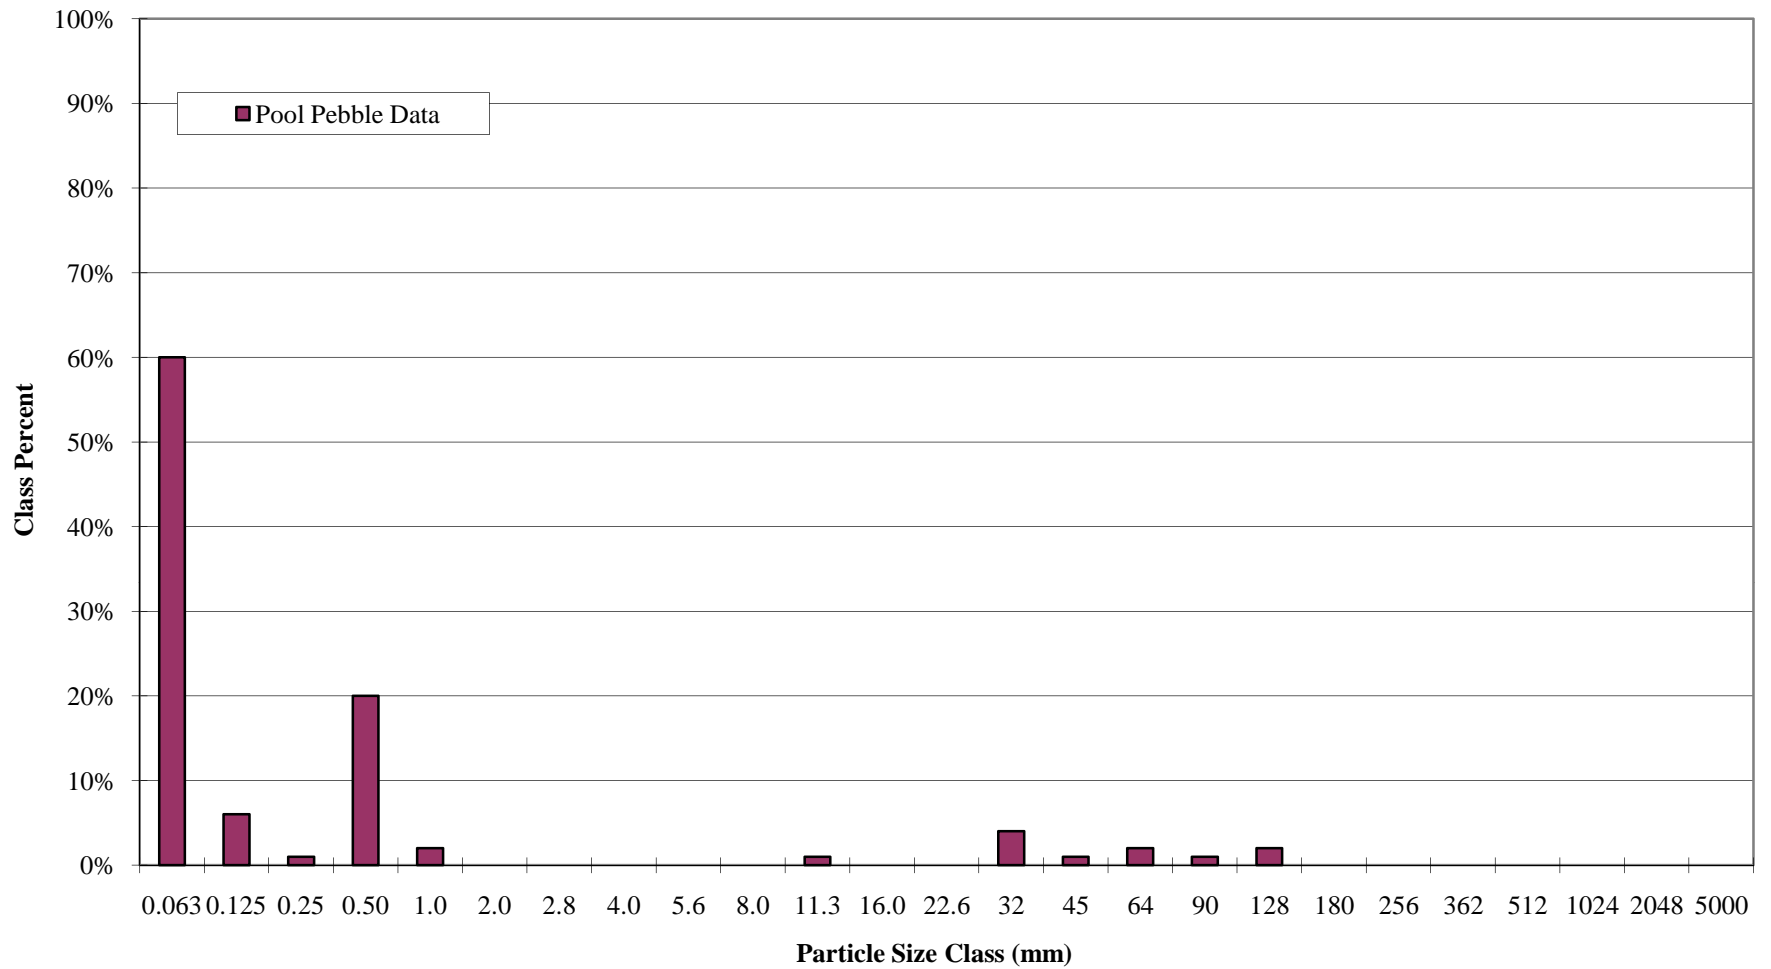

**UT1
X10-Pool
Pebble Count Particle Size Distribution**

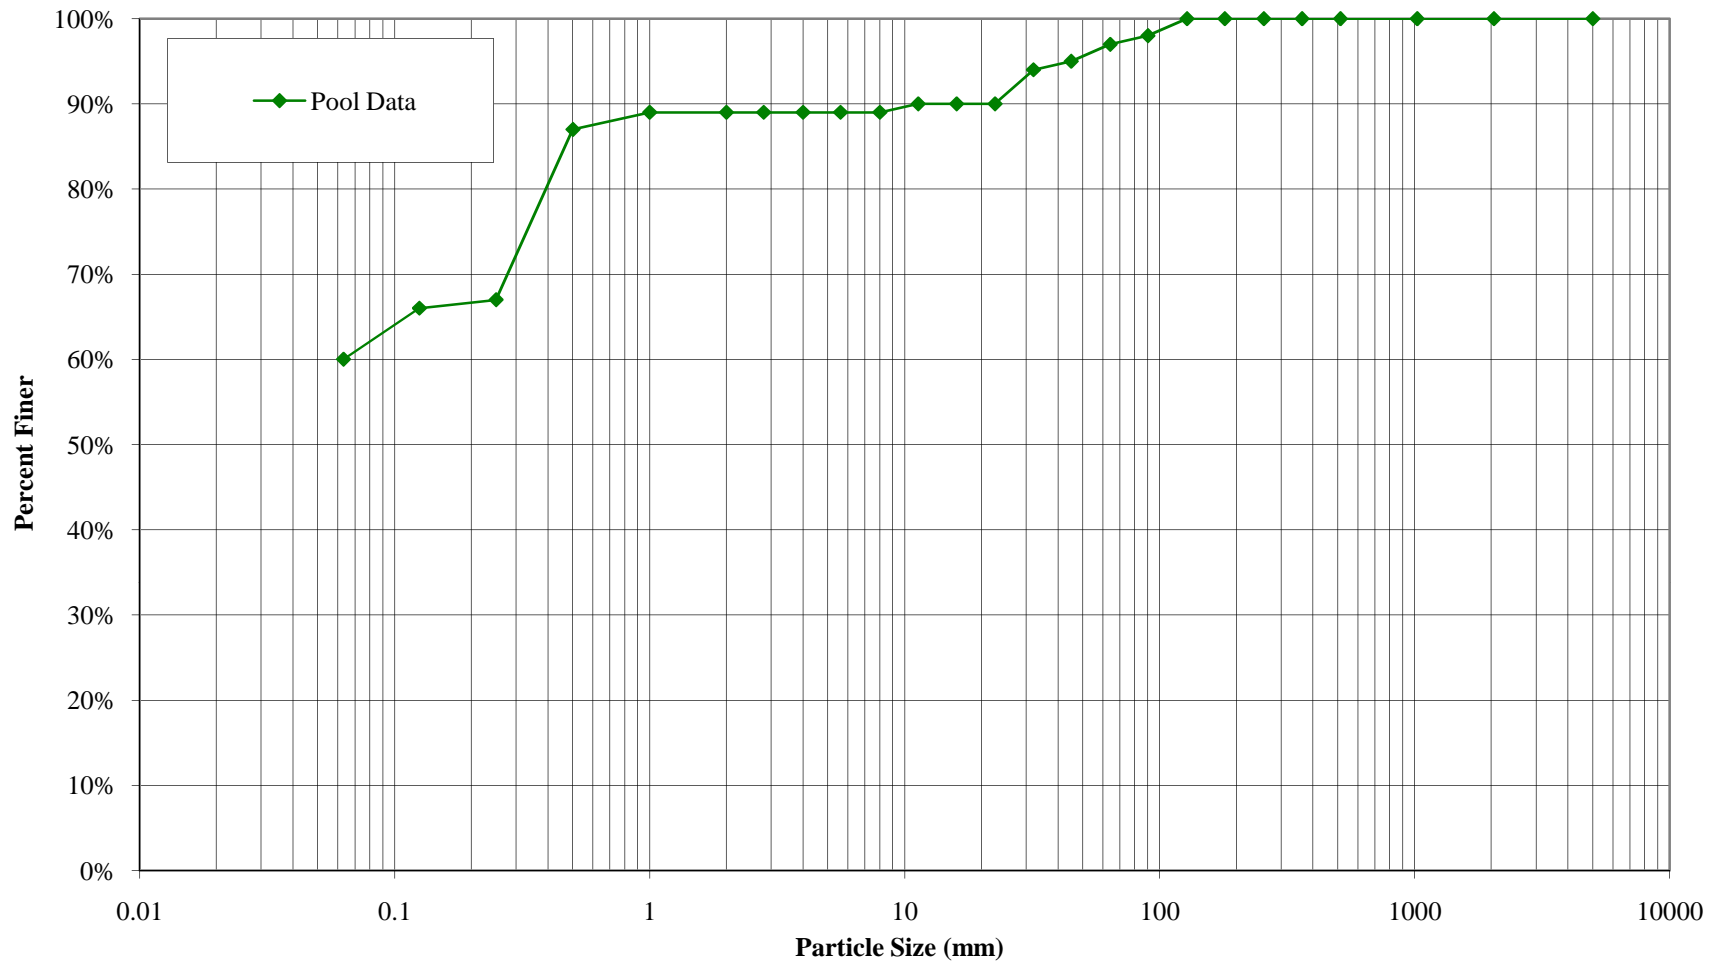


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UTID X11-Pool	
DATE COLLECTED:	9/10/2009	
FIELD COLLECTION BY:	PL/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Pool	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	2	2%	2%	
SAND	Very Fine	.063 - .125	13	13%	15%	
	Fine	.125 - .25	15	15%	30%	
	Medium	.25 - .50	70	70%	100%	
	Coarse	.50 - 1.0			100%	
	Very Coarse	1.0 - 2.0			100%	
GRAVEL	Very Fine	2.0 - 2.8			100%	
	Very Fine	2.8 - 4.0			100%	
	Fine	4.0 - 5.6			100%	
	Fine	5.6 - 8.0			100%	
	Medium	8.0 - 11.0			100%	
	Medium	11.0 - 16.0			100%	
	Coarse	16.0 - 22.6			100%	
	Coarse	22.6 - 32			100%	
	Very Coarse	32 - 45			100%	
	Very Coarse	45 - 64			100%	
COBBLE	Small	64 - 90			100%	
	Small	90 - 128			100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
BQUILDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: _____
(pool)

**UT1D
X11-Pool
Pebble Count Size Class Distribution**

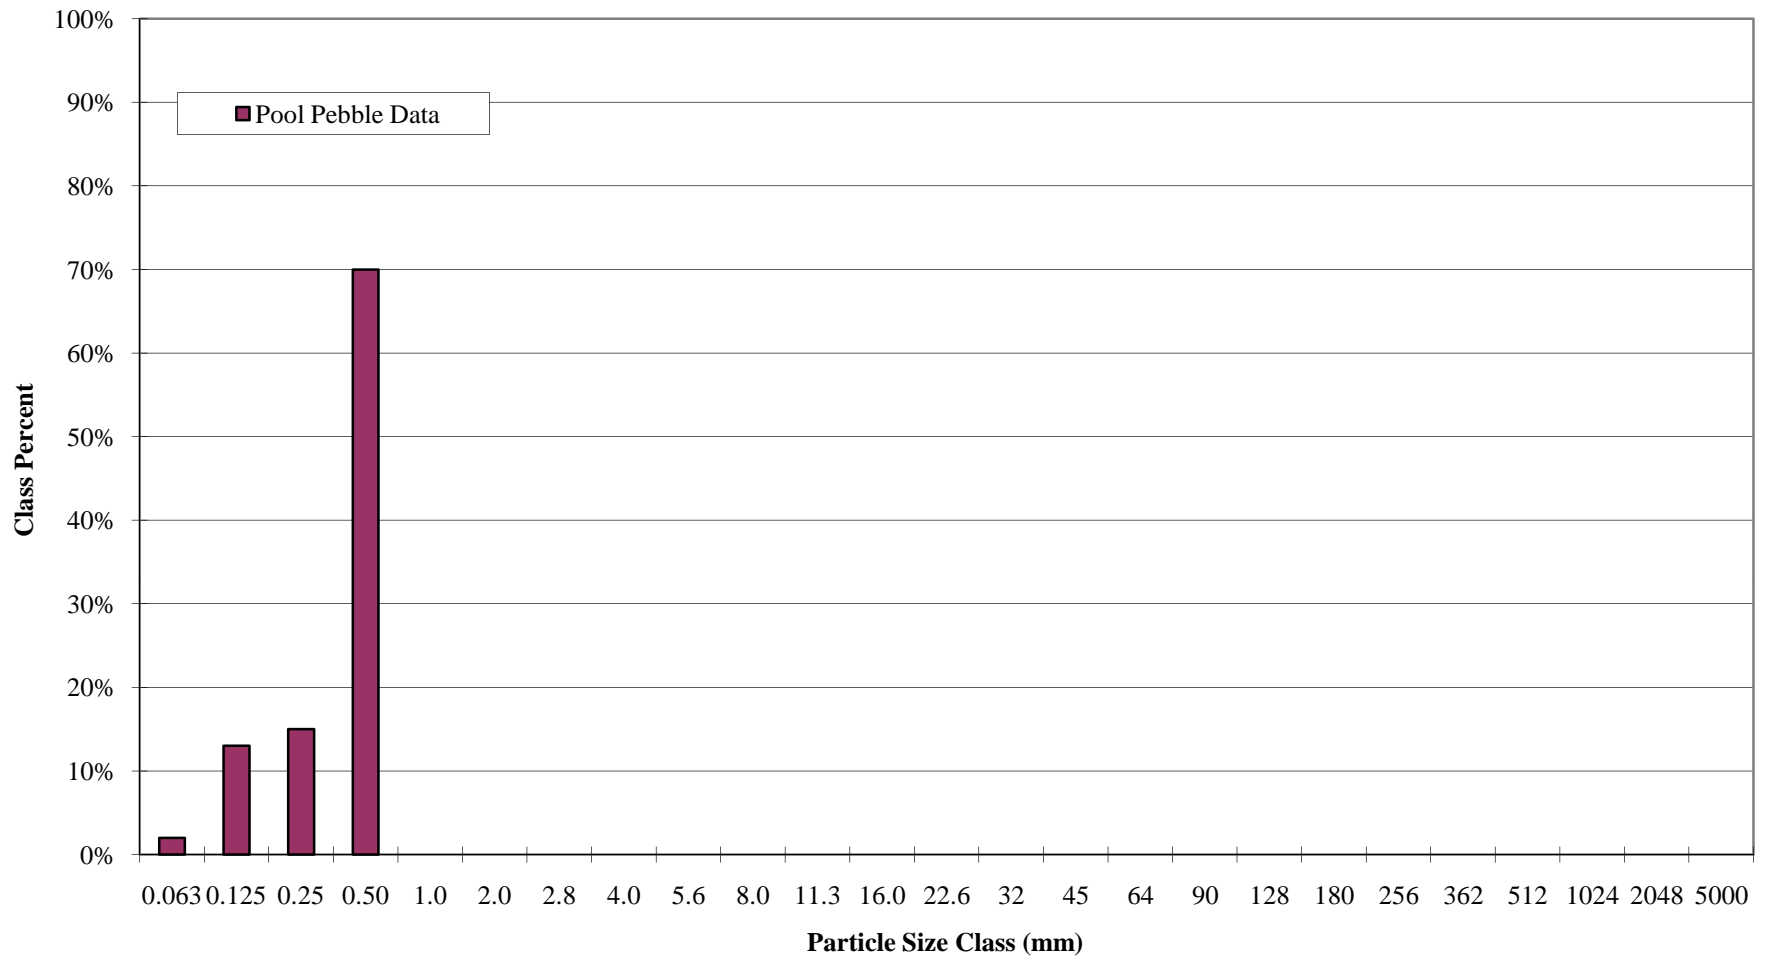

**UT1D
X11-Pool
Pebble Count Particle Size Distribution**

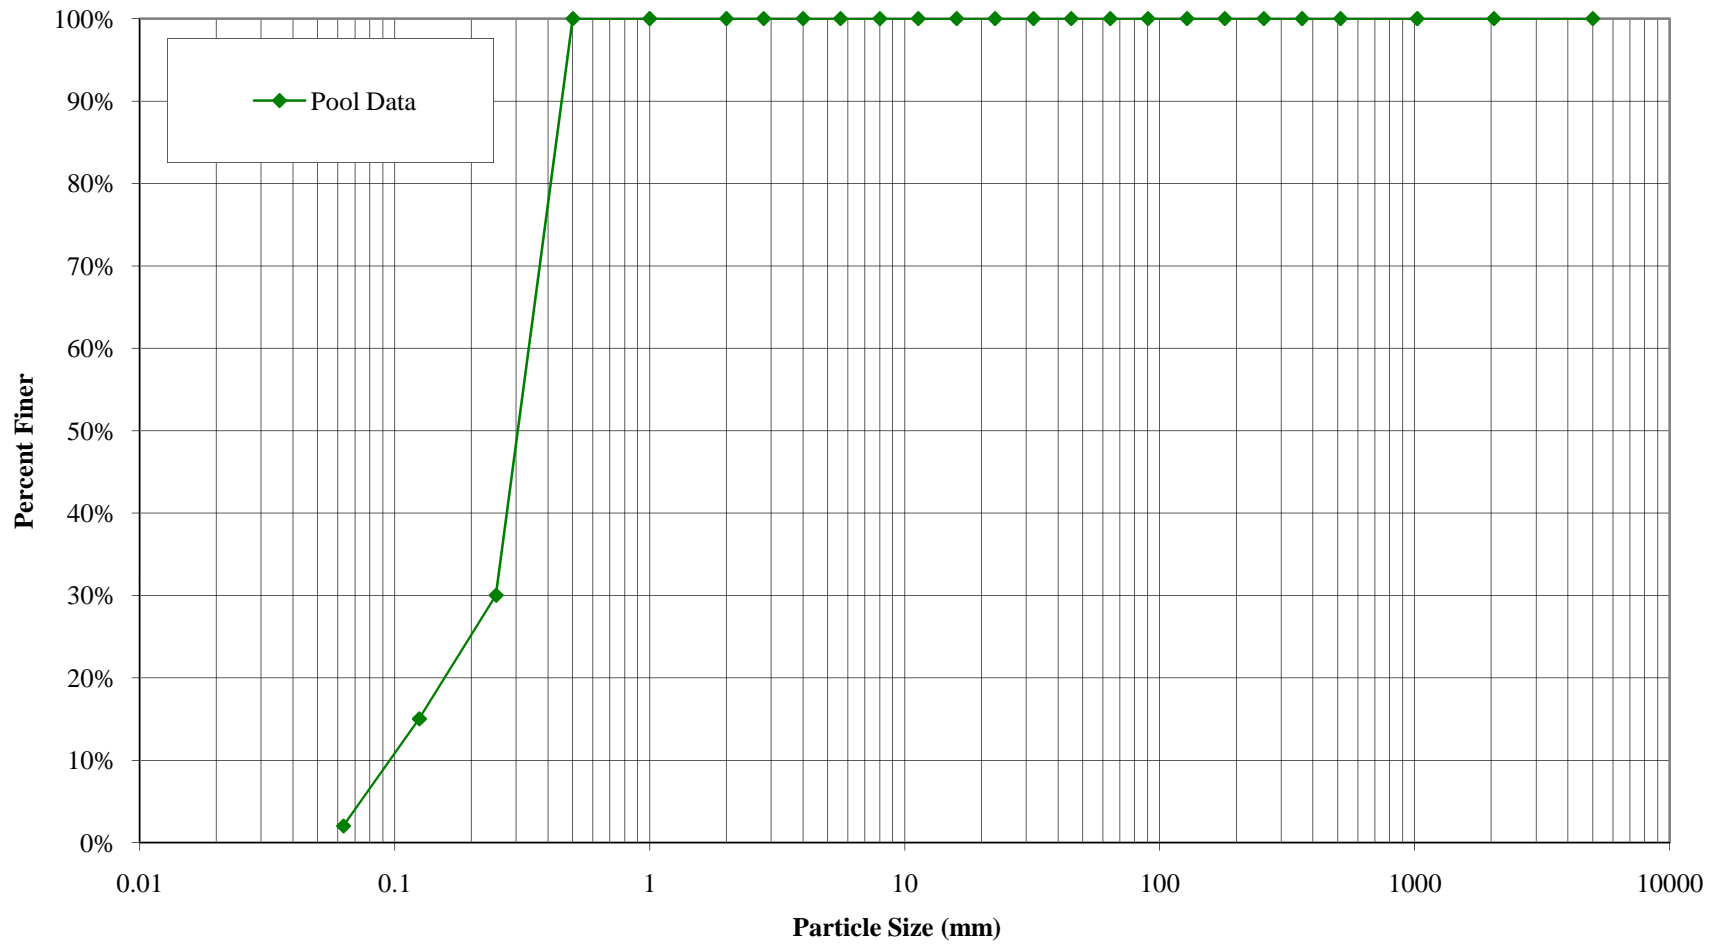


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UTID X12-Riffle	
DATE COLLECTED:	9/10/2009	
FIELD COLLECTION BY:	PL/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Riffle	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063			0%	
SAND	Very Fine	.063 - .125	20	20%	20%	
	Fine	.125 - .25	24	24%	44%	
	Medium	.25 - .50			44%	
	Coarse	.50 - 1.0			44%	
	Very Coarse	1.0 - 2.0			44%	
GRAVEL	Very Fine	2.0 - 2.8			44%	
	Very Fine	2.8 - 4.0			44%	
	Fine	4.0 - 5.6	1	1%	45%	
	Fine	5.6 - 8.0			45%	
	Medium	8.0 - 11.0			45%	
	Medium	11.0 - 16.0			45%	
	Coarse	16.0 - 22.6	2	2%	47%	
	Coarse	22.6 - 32	7	7%	54%	
	Very Coarse	32 - 45	25	25%	79%	
	Very Coarse	45 - 64	15	15%	94%	
COBBLE	Small	64 - 90	2	2%	96%	
	Small	90 - 128	2	2%	98%	
	Large	128 - 180	2	2%	100%	
	Large	180 - 256			100%	
BOULDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: _____ 160 mm _____
(riffle)

**UT1D
X12-Riffle
Pebble Count Size Class Distribution**

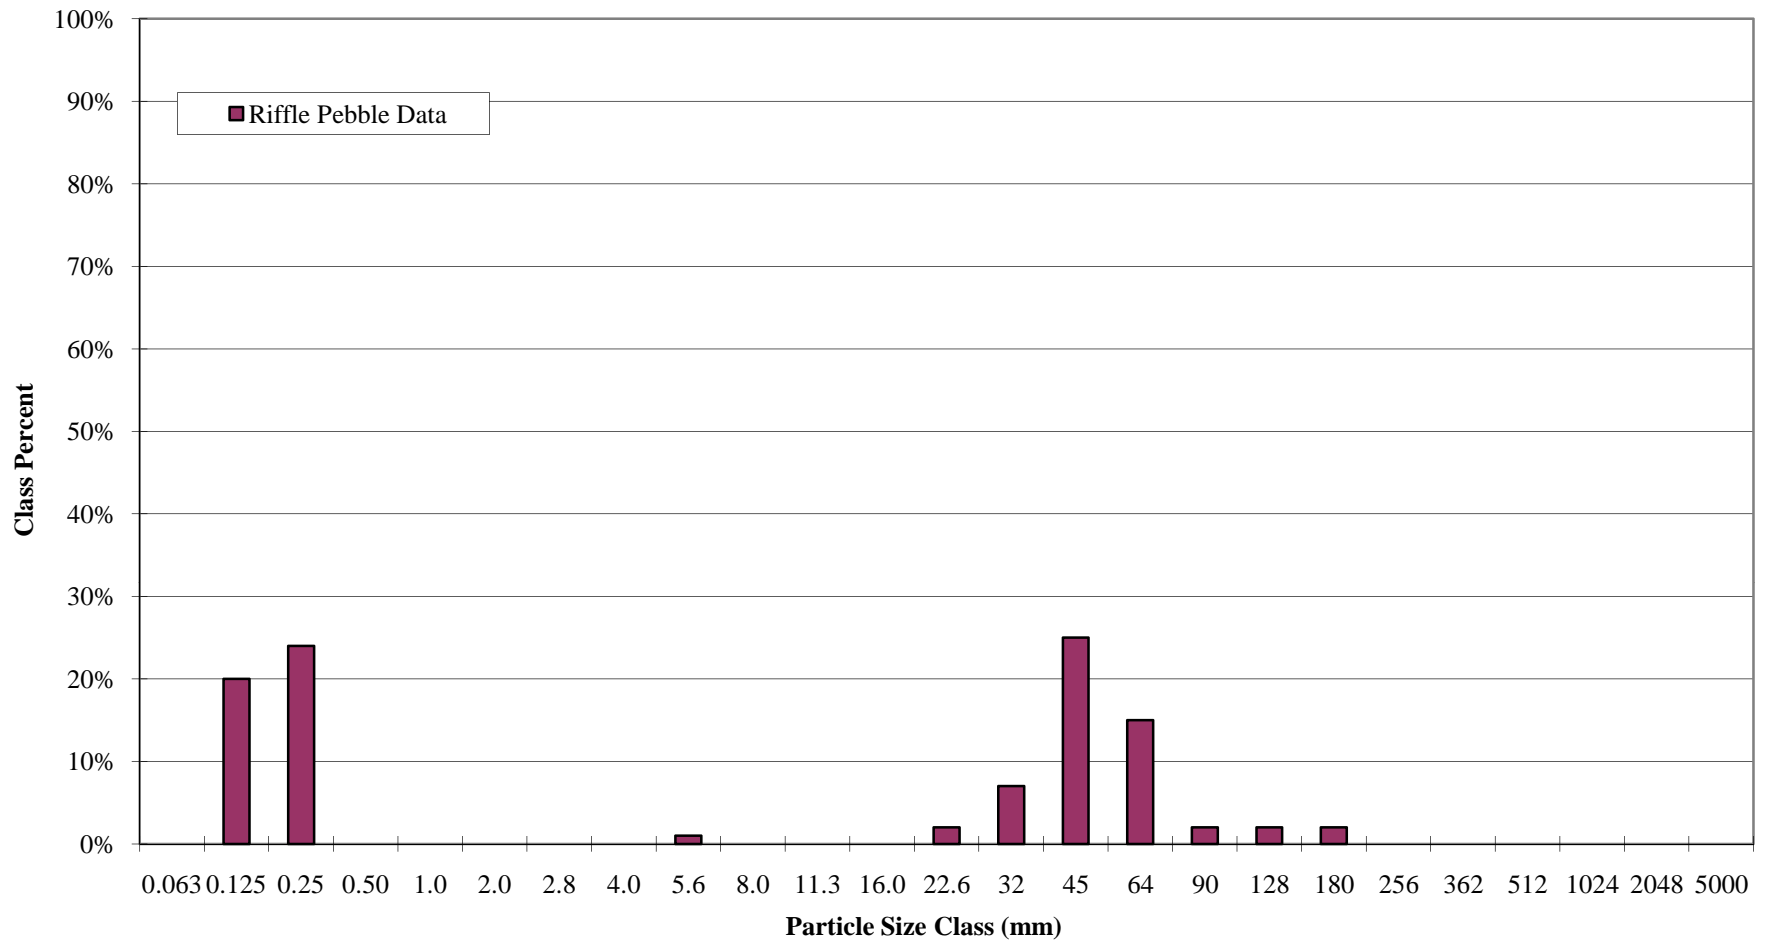
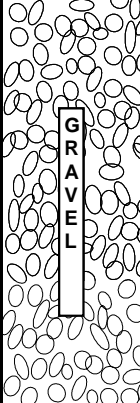




**UT1D
X12-Riffle
Pebble Count Particle Size Distribution**

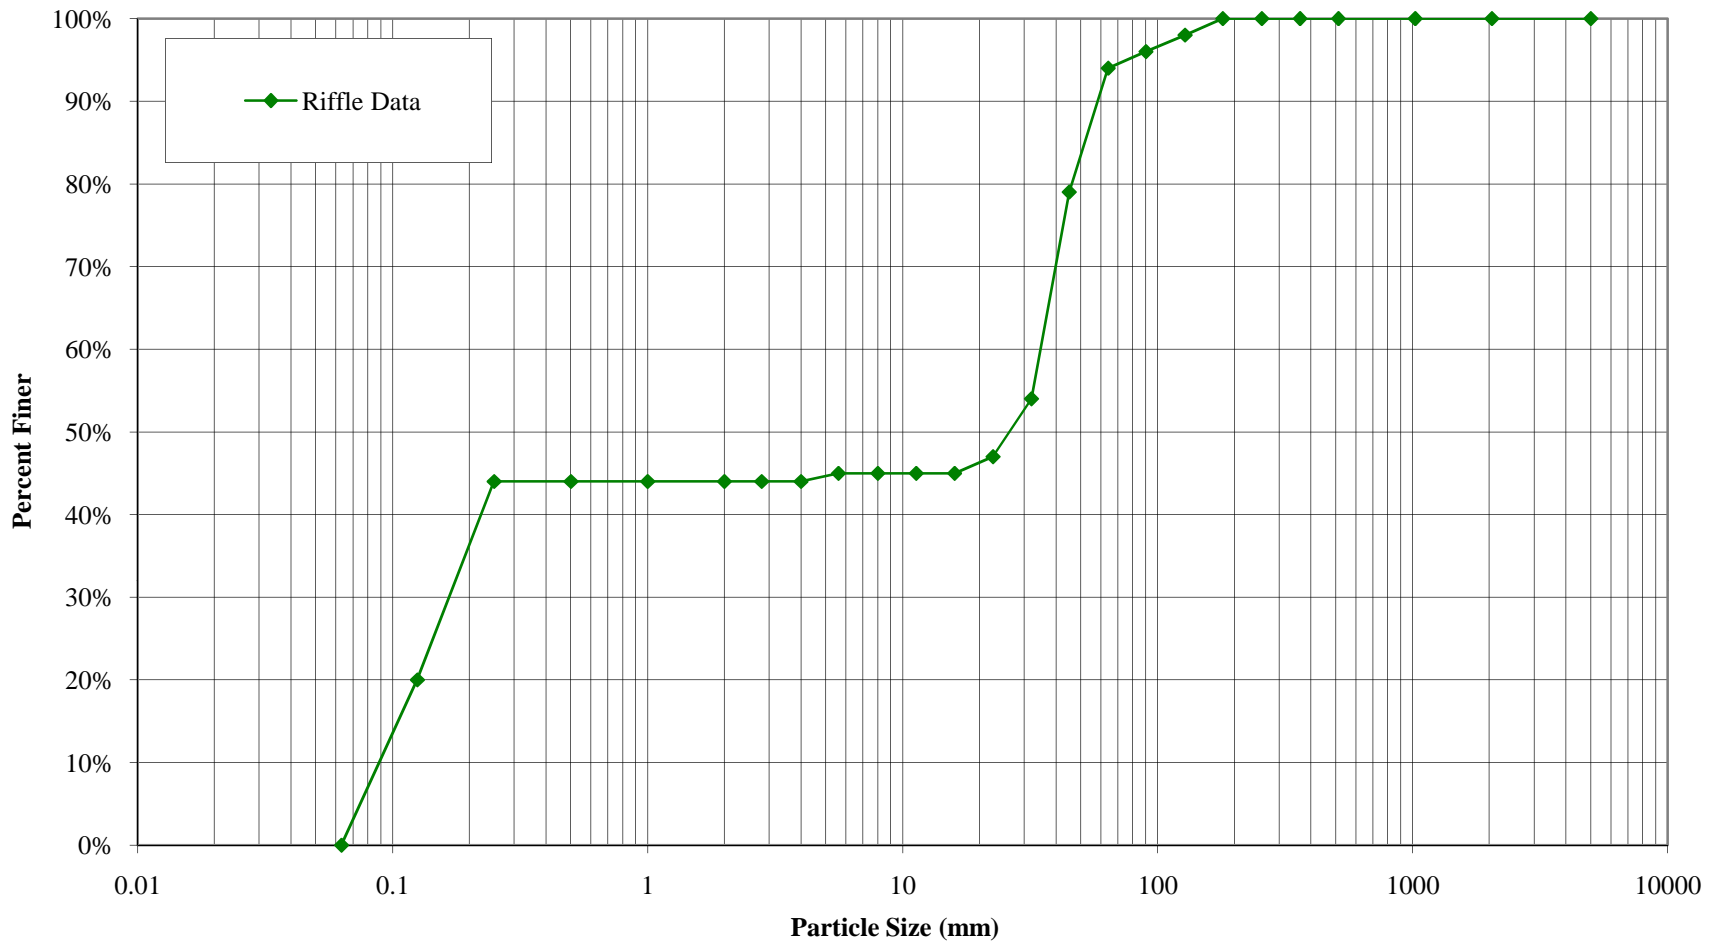


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1 X13-Pool	
DATE COLLECTED:	9/10/2009	
FIELD COLLECTION BY:	PL/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Pool	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	50	50%	50%	
 SAND	Very Fine	.063 - .125	15	15%	65%	
	Fine	.125 - .25	10	10%	75%	
	Medium	.25 - .50	15	15%	90%	
	Coarse	.50 - 1.0	1	1%	91%	
	Very Coarse	1.0 - 2.0	9	9%	100%	
 GRAVEL	Very Fine	2.0 - 2.8			100%	
	Very Fine	2.8 - 4.0			100%	
	Fine	4.0 - 5.6			100%	
	Fine	5.6 - 8.0			100%	
	Medium	8.0 - 11.0			100%	
	Medium	11.0 - 16.0			100%	
	Coarse	16.0 - 22.6			100%	
	Coarse	22.6 - 32			100%	
	Very Coarse	32 - 45			100%	
	Very Coarse	45 - 64			100%	
 COBBLE	Small	64 - 90			100%	
	Small	90 - 128			100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
 BOLDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: _____
(pool)

**UT1
X13-Pool
Pebble Count Size Class Distribution**

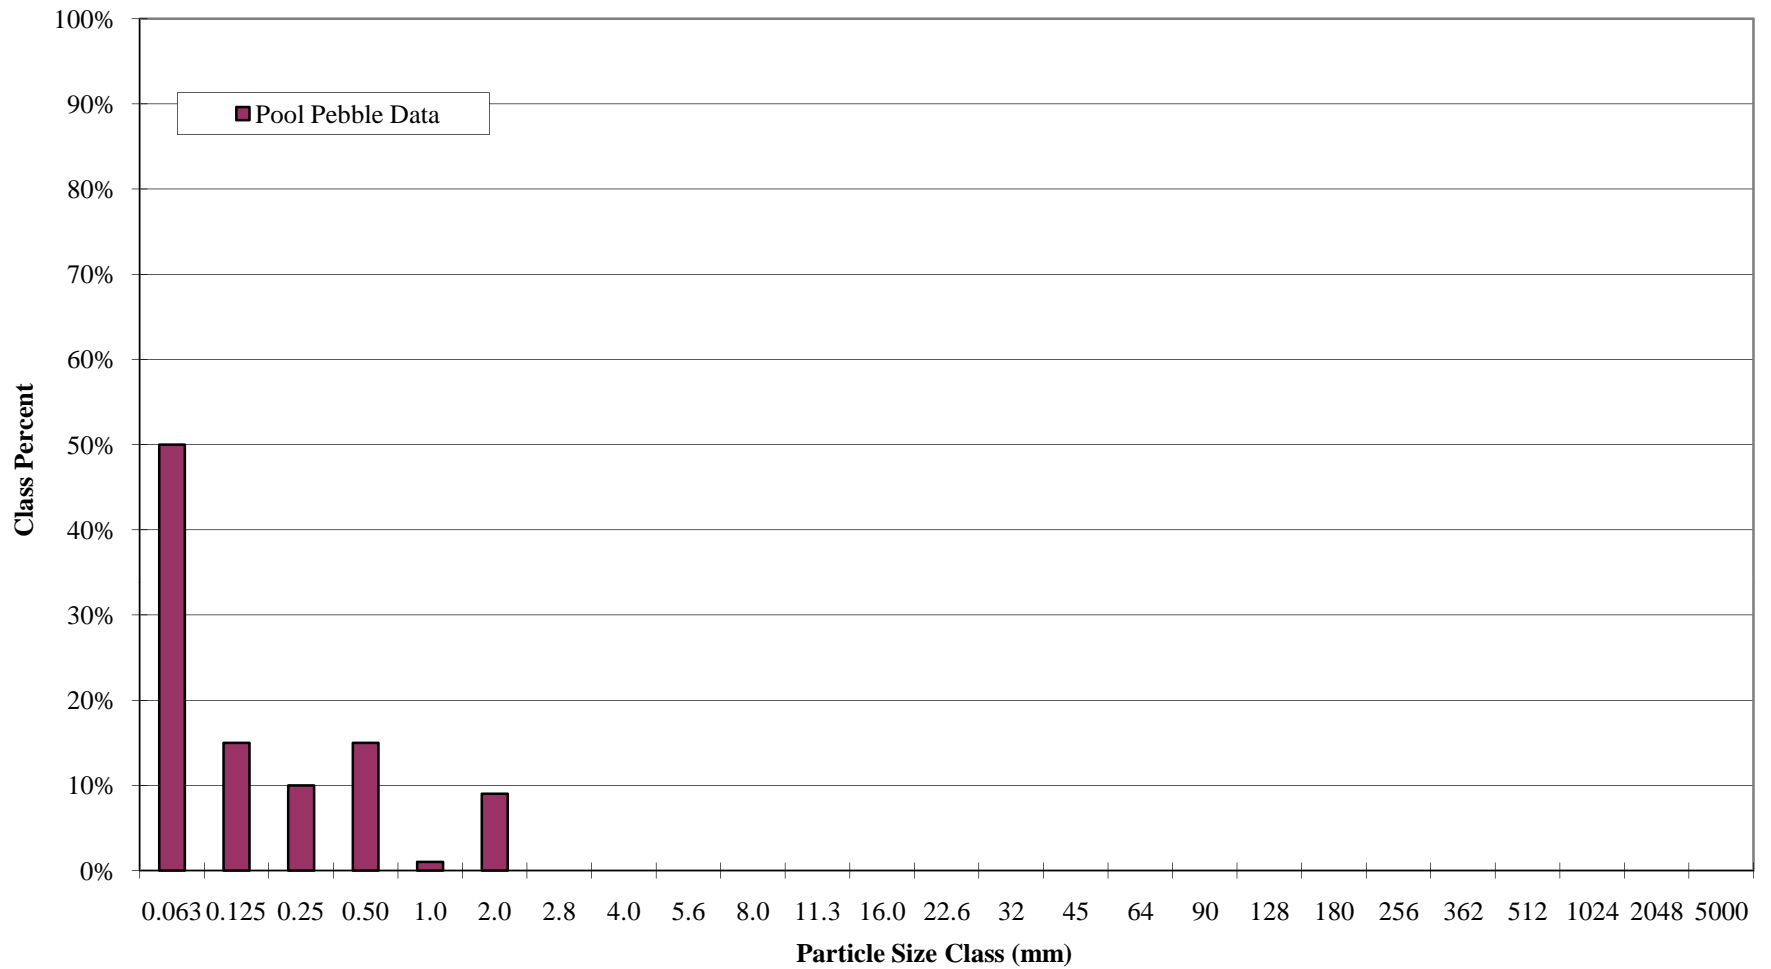

**UT1
X13-Pool
Pebble Count Particle Size Distribution**

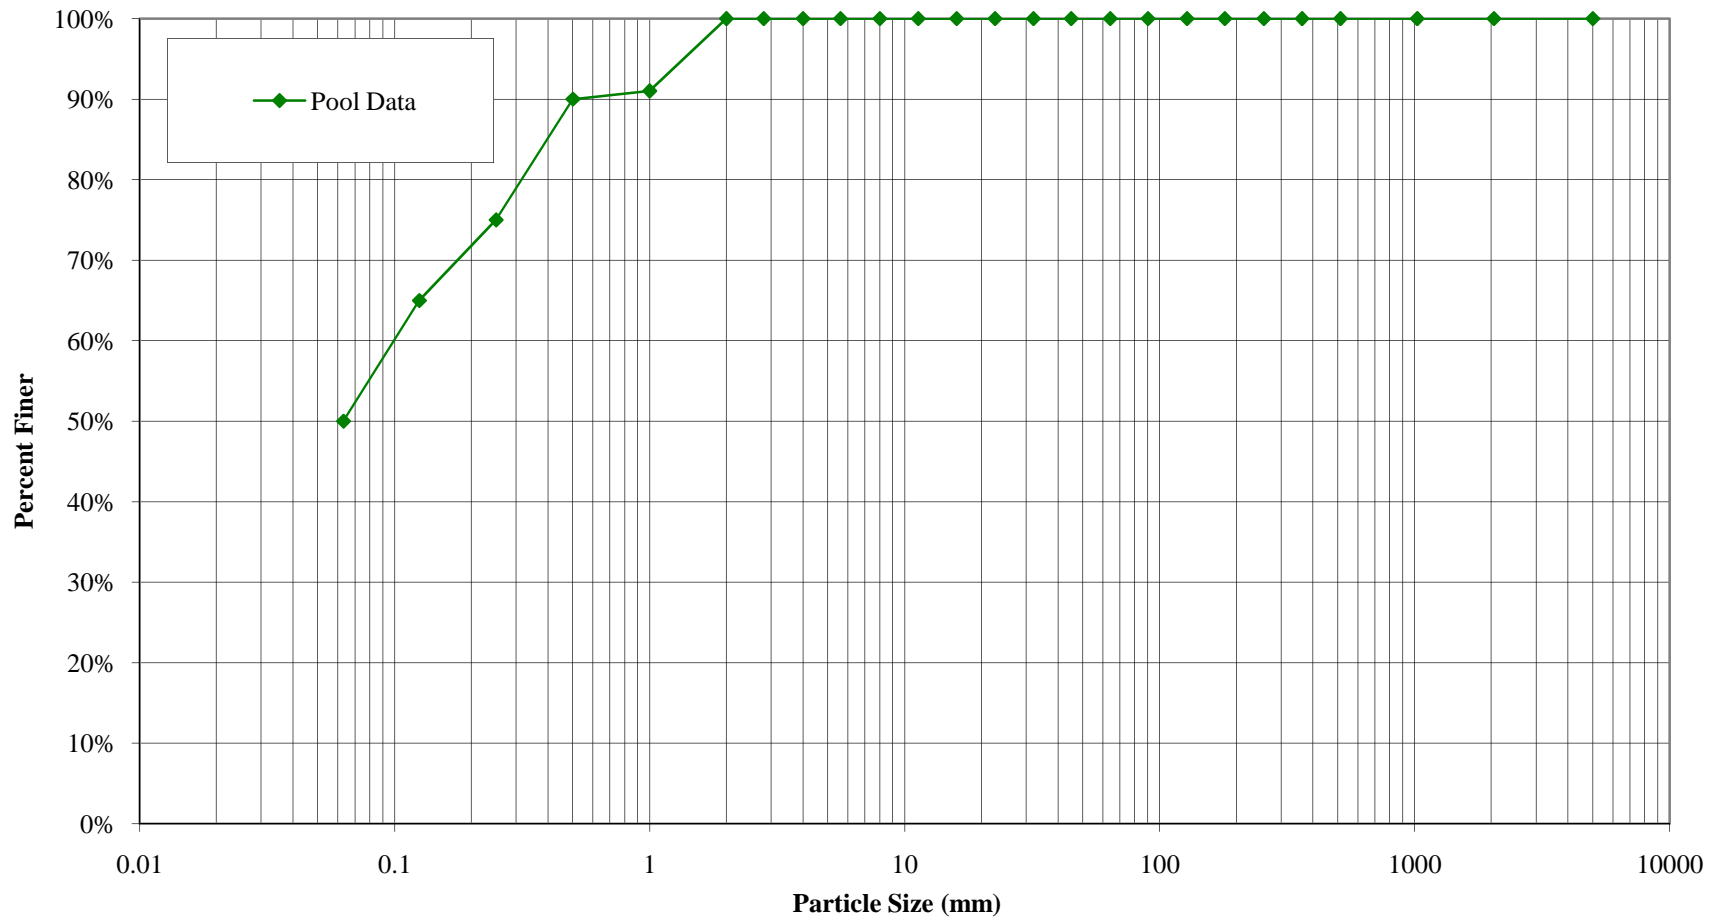


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1 X14-Riffle	
DATE COLLECTED:	9/10/2009	
FIELD COLLECTION BY:	PL/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Riffle	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	35	35%	35%	
	Very Fine	.063 - .125	10	10%	45%	
	Fine	.125 - .25	5	5%	50%	
	Medium	.25 - .50	15	15%	65%	
	Coarse	.50 - 1.0	1	1%	66%	
	Very Coarse	1.0 - 2.0	12	12%	78%	
SAND	Very Fine	2.0 - 2.8			78%	
	Very Fine	2.8 - 4.0			78%	
	Fine	4.0 - 5.6	1	1%	79%	
	Fine	5.6 - 8.0	1	1%	80%	
	Medium	8.0 - 11.0			80%	
	Medium	11.0 - 16.0	3	3%	83%	
	Coarse	16.0 - 22.6	1	1%	84%	
	Coarse	22.6 - 32	4	4%	88%	
	Very Coarse	32 - 45	3	3%	91%	
	Very Coarse	45 - 64	4	4%	95%	
GRAVEL	Small	64 - 90	5	5%	100%	
	Small	90 - 128			100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
COBBLE	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: 90 mm
(riffle)

**UT1
X14-Riffle
Pebble Count Size Class Distribution**

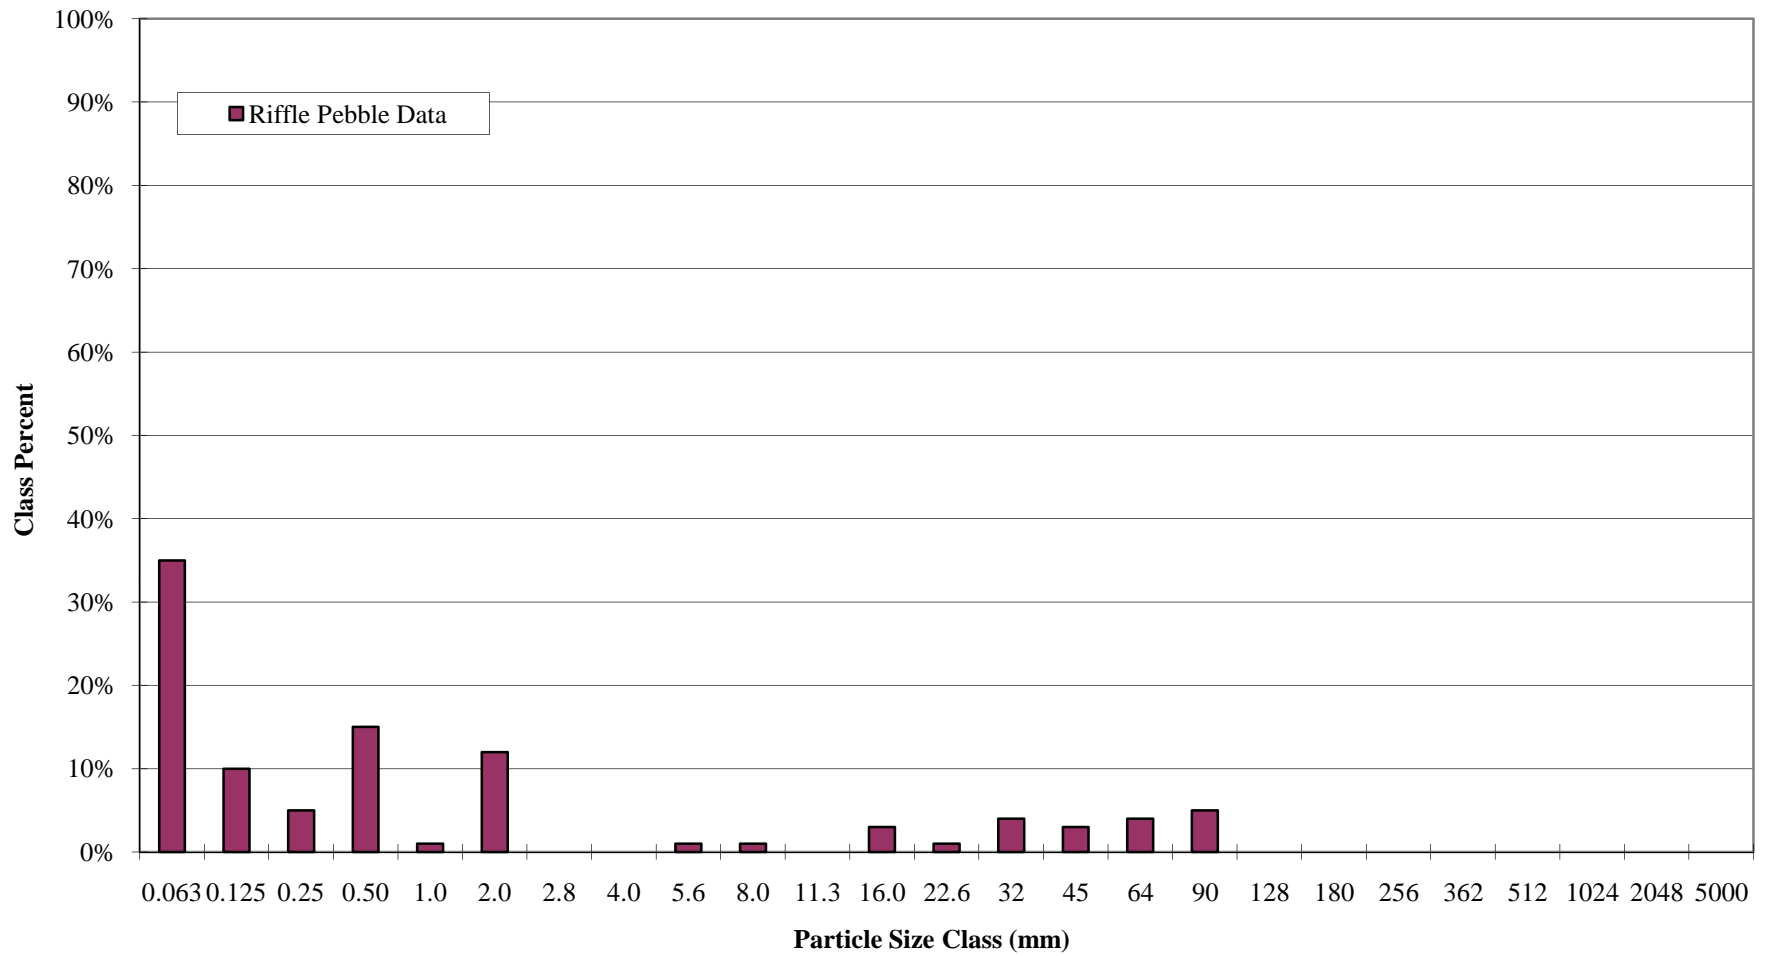

**UT1
X14-Riffle
Pebble Count Particle Size Distribution**

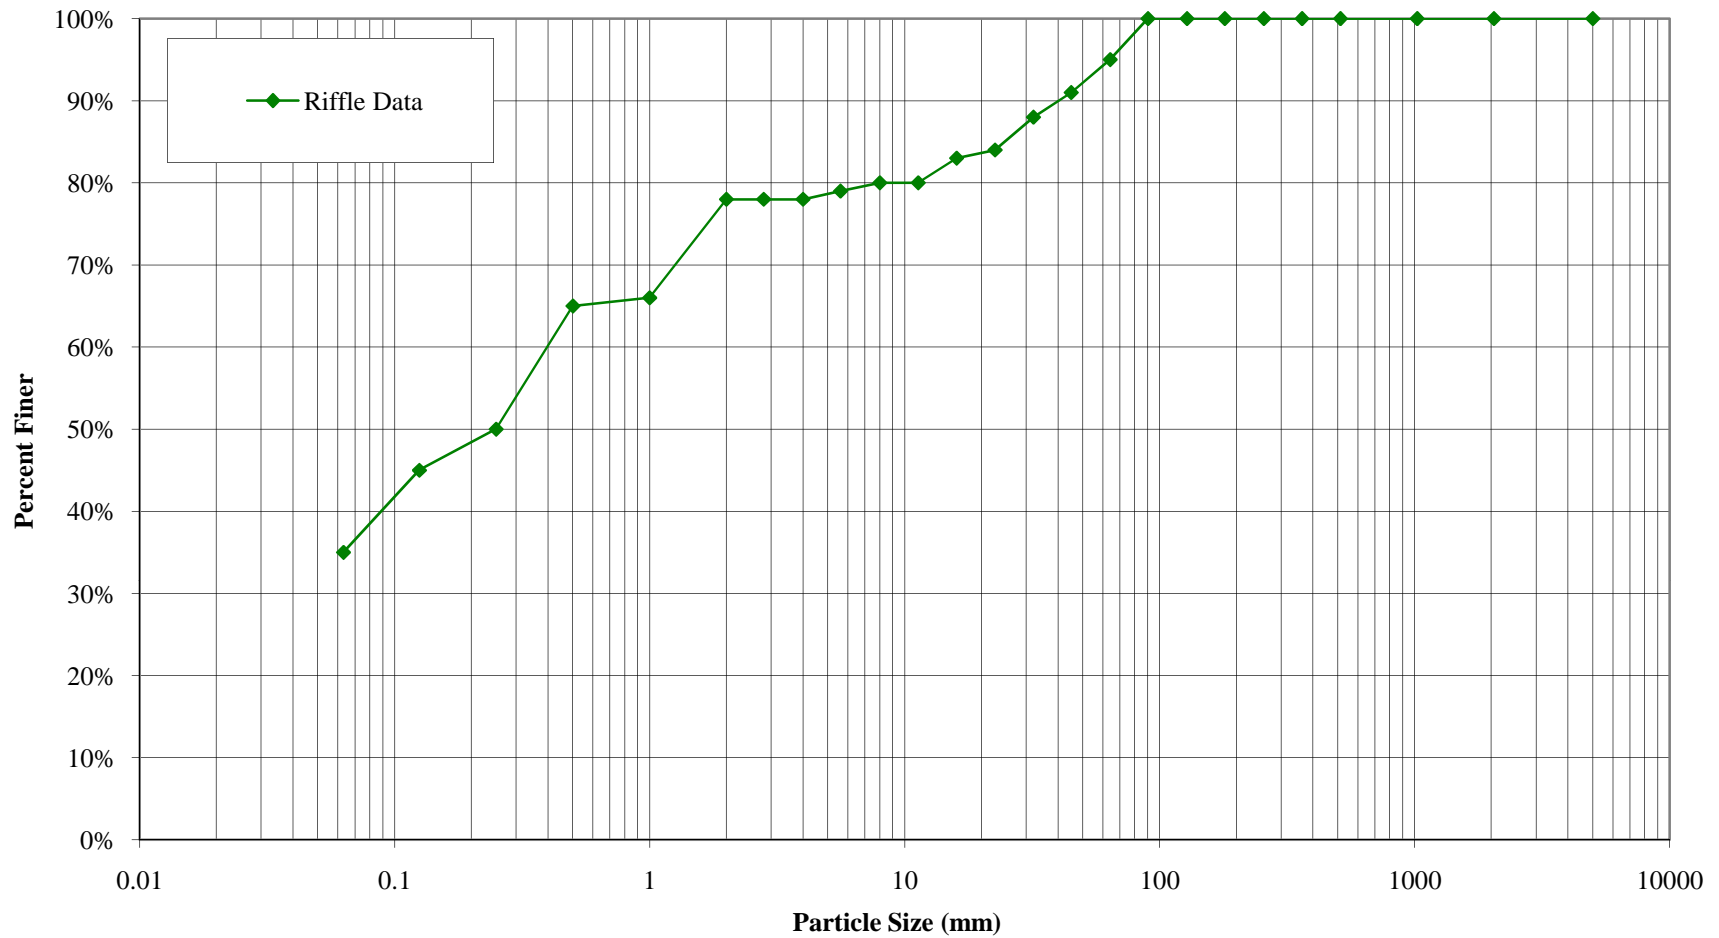


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1 X15-Riffle	
DATE COLLECTED:	9/10/2009	
FIELD COLLECTION BY PL/CT		
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Riffle	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	9	9%	9%	
	Very Fine	.063 - .125	8	8%	17%	
SAND	Fine	.125 - .25	11	11%	28%	
	Medium	.25 - .50	55	55%	83%	
	Coarse	.50 - 1.0	9	9%	92%	
	Very Coarse	1.0 - 2.0	5	5%	97%	
	Very Fine	2.0 - 2.8			97%	
	Very Fine	2.8 - 4.0			97%	
	Fine	4.0 - 5.6			97%	
	Fine	5.6 - 8.0			97%	
	Medium	8.0 - 11.0	1	1%	98%	
	Medium	11.0 - 16.0	1	1%	99%	
GRAVEL	Coarse	16.0 - 22.6			99%	
	Coarse	22.6 - 32			99%	
	Very Coarse	32 - 45			99%	
	Very Coarse	45 - 64			99%	
	Small	64 - 90			99%	
	Small	90 - 128			99%	
	Large	128 - 180	1	1%	100%	
	Large	180 - 256			100%	
BOULDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Lar	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: 135 mm
(riffle)

**UT1
X15-Riffle
Pebble Count Size Class Distribution**

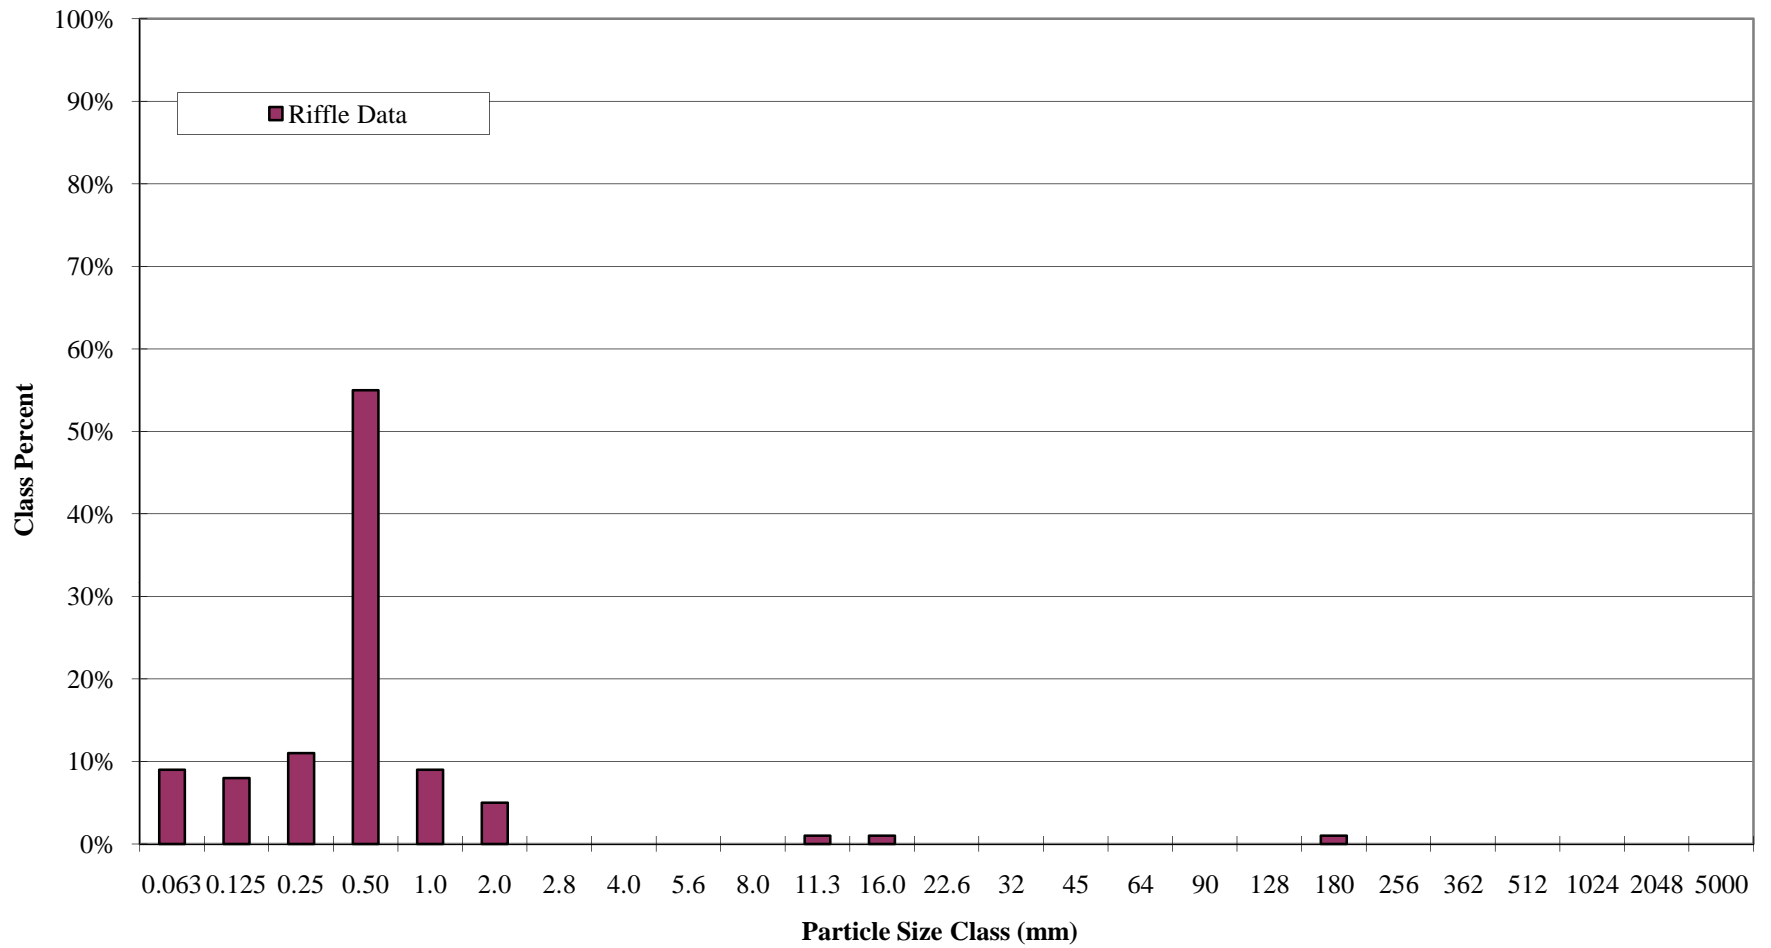

**UT1
X15-Riffle
Pebble Count Particle Size Distribution**

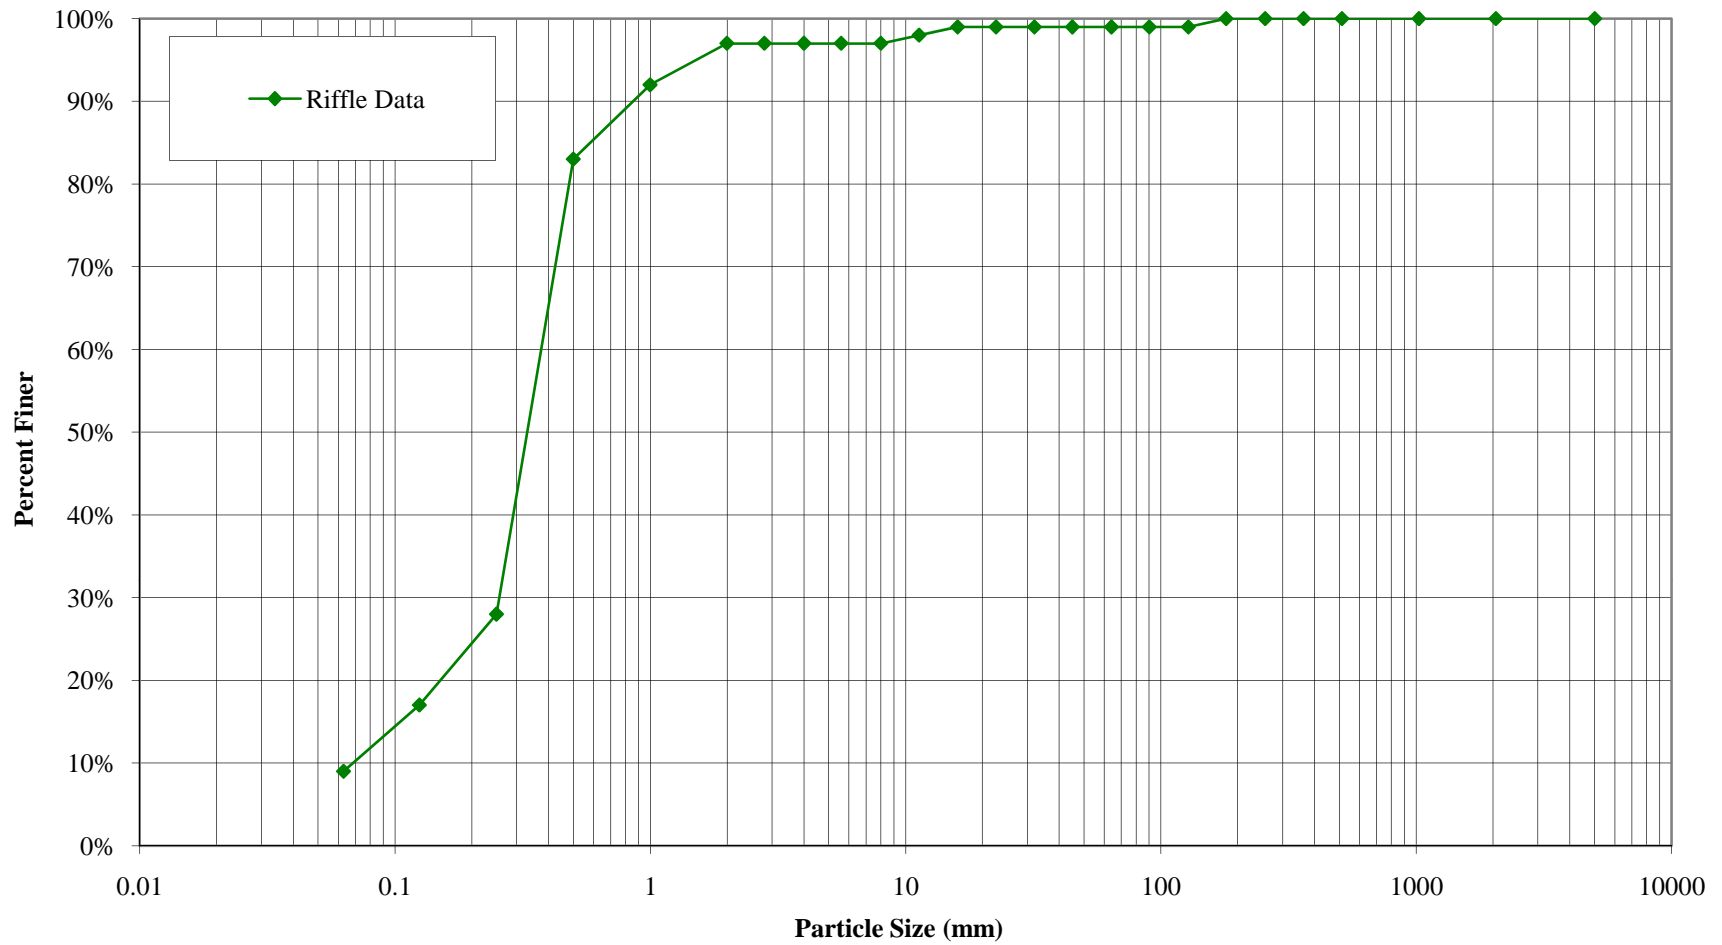


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1 X16-Pool	
DATE COLLECTED:	9/10/2009	
FIELD COLLECTION BY:	PL/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Pool	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	77	77%	77%	
SAND	Very Fine	.063 - .125	16	16%	93%	
	Fine	.125 - .25	7	7%	100%	
	Medium	.25 - .50			100%	
	Coarse	.50 - 1.0			100%	
	Very Coarse	1.0 - 2.0			100%	
GRAVEL	Very Fine	2.0 - 2.8			100%	
	Very Fine	2.8 - 4.0			100%	
	Fine	4.0 - 5.6			100%	
	Fine	5.6 - 8.0			100%	
	Medium	8.0 - 11.0			100%	
	Medium	11.0 - 16.0			100%	
	Coarse	16.0 - 22.6			100%	
	Coarse	22.6 - 32			100%	
	Very Coarse	32 - 45			100%	
	Very Coarse	45 - 64			100%	
COBBLE	Small	64 - 90			100%	
	Small	90 - 128			100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
BQUILDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: _____
(pool)

**UT1
X16-Pool
Pebble Count Size Class Distribution**

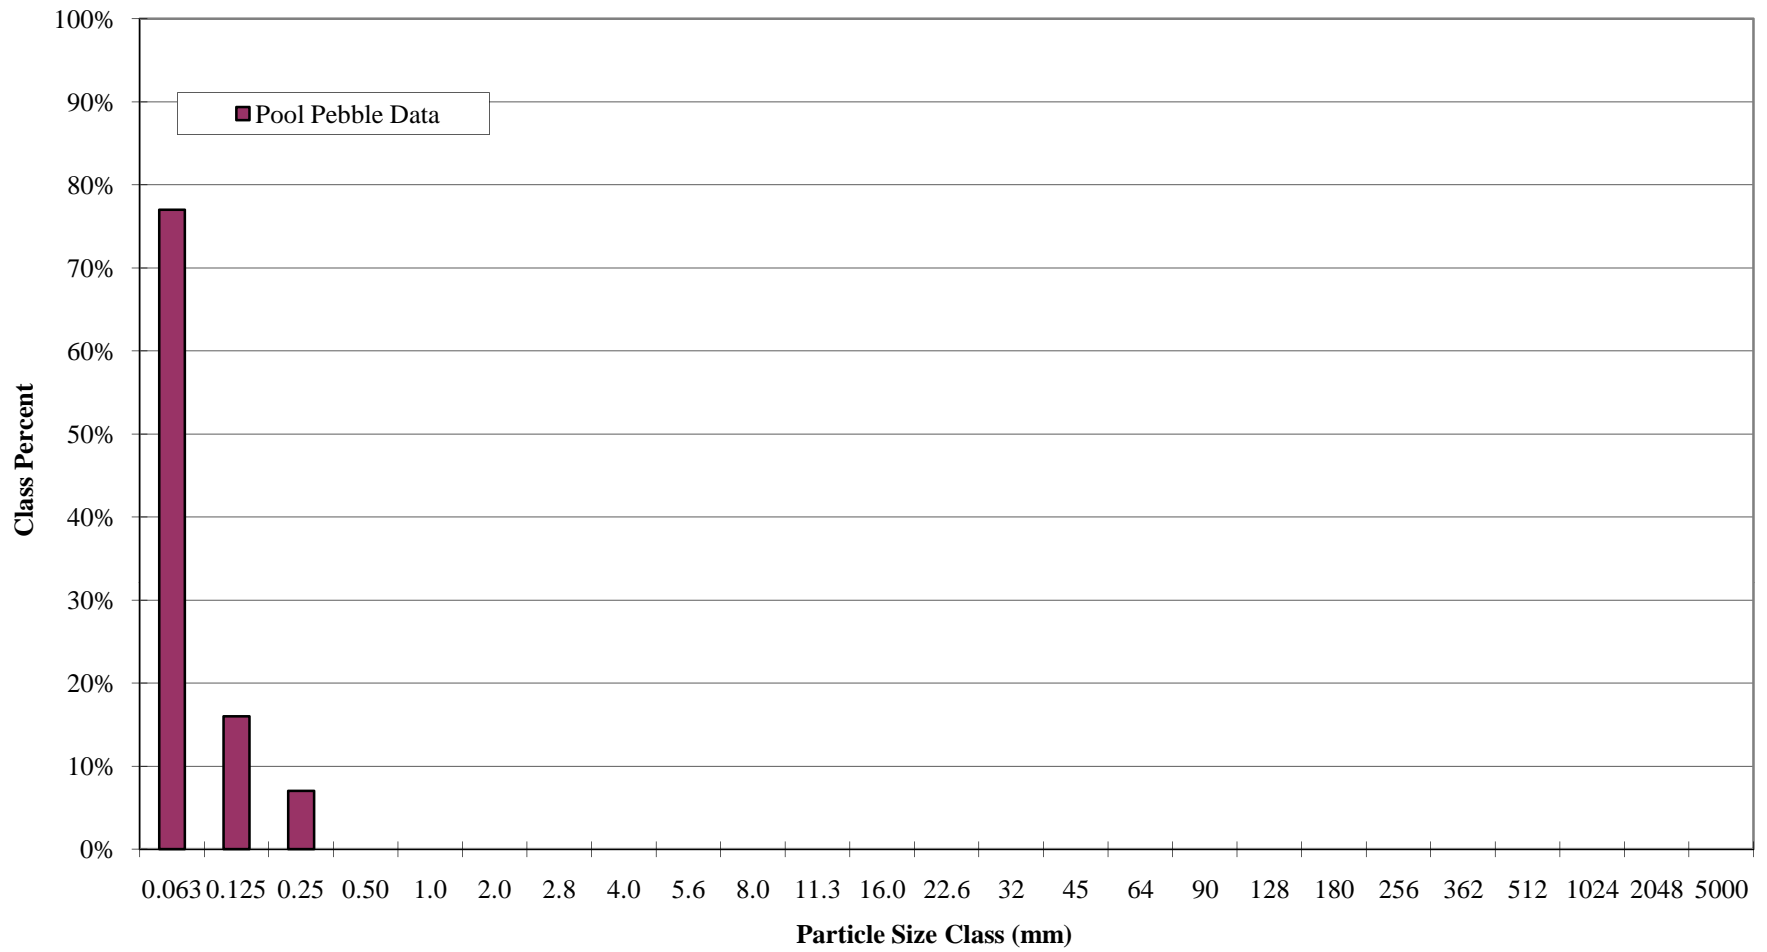

**UT1
X16-Pool
Pebble Count Particle Size Distribution**

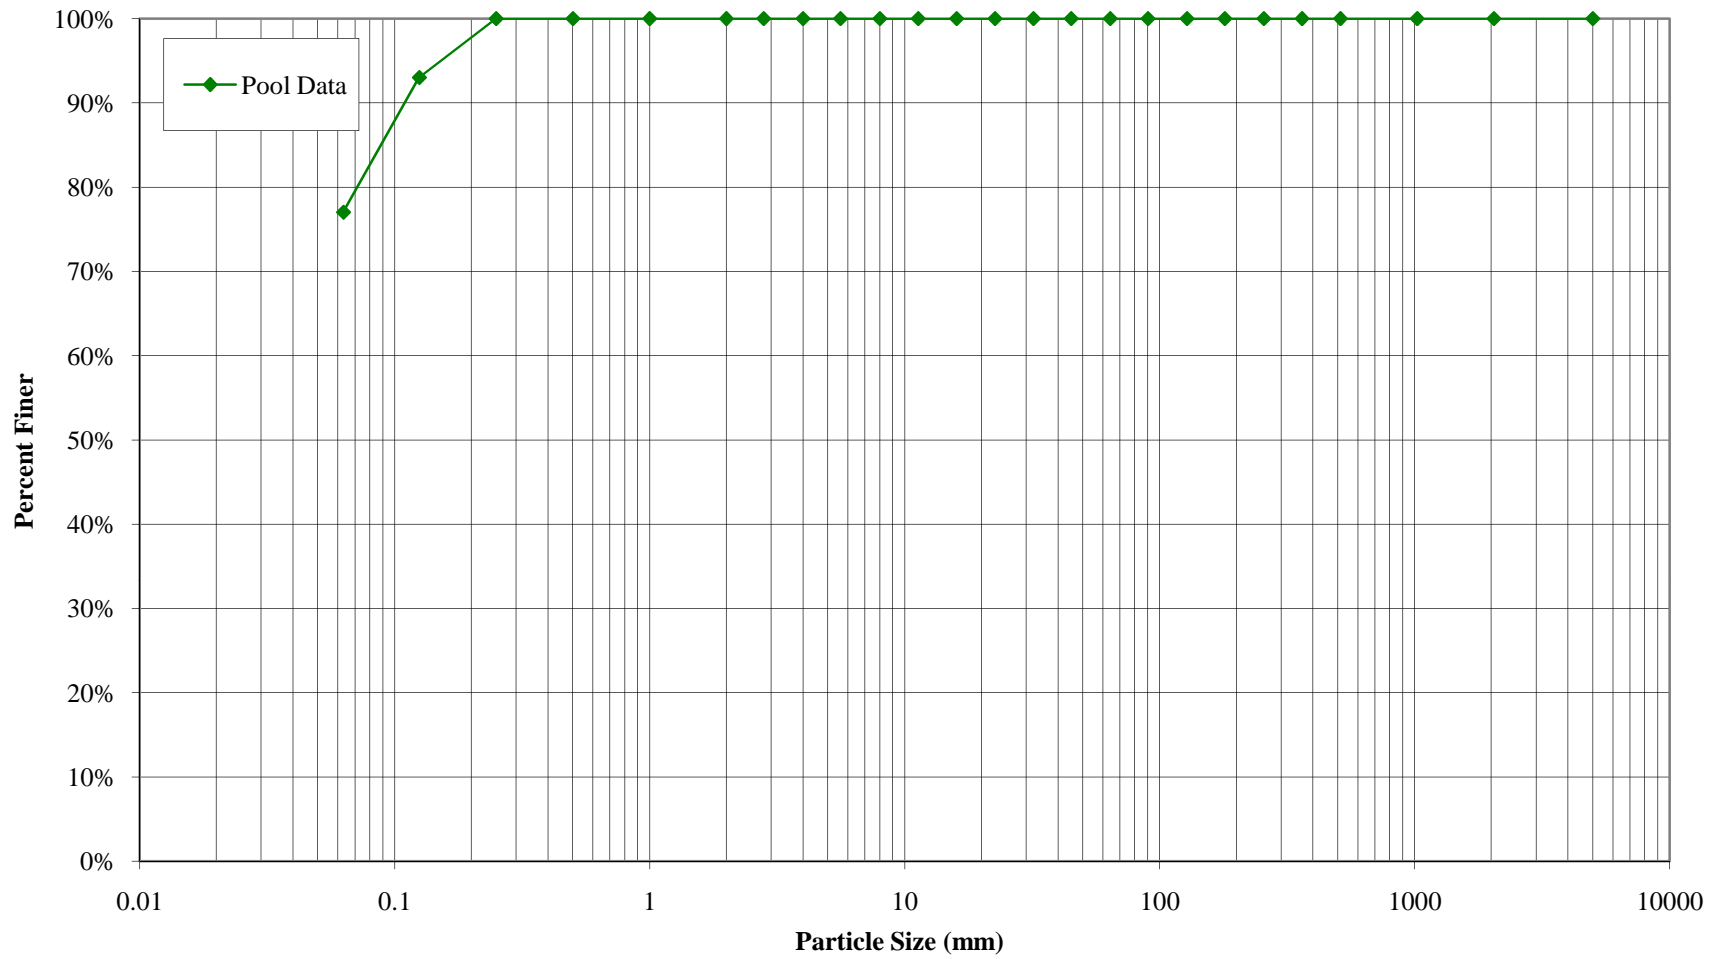


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1 X17-Pool	
DATE COLLECTED:	9/10/2009	
FIELD COLLECTION BY:	PL/CT	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Pool	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	7	7%	7%	
	Very Fine	.063 - .125	8	8%	15%	
	Fine	.125 - .25	34	34%	49%	
	Medium	.25 - .50	32	32%	81%	
	Coarse	.50 - 1.0	11	11%	92%	
	Very Coarse	1.0 - 2.0	7	7%	99%	
SAND	Very Fine	2.0 - 2.8			99%	
	Very Fine	2.8 - 4.0			99%	
	Fine	4.0 - 5.6			99%	
	Fine	5.6 - 8.0			99%	
	Medium	8.0 - 11.0	1	1%	100%	
	Medium	11.0 - 16.0			100%	
	Coarse	16.0 - 22.6			100%	
	Coarse	22.6 - 32			100%	
	Very Coarse	32 - 45			100%	
	Very Coarse	45 - 64			100%	
GRAVEL	Small	64 - 90			100%	
	Small	90 - 128			100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
COBBLE	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
Boulder	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: _____
(pool)

**UT1
X17-Pool
Pebble Count Size Class Distribution**

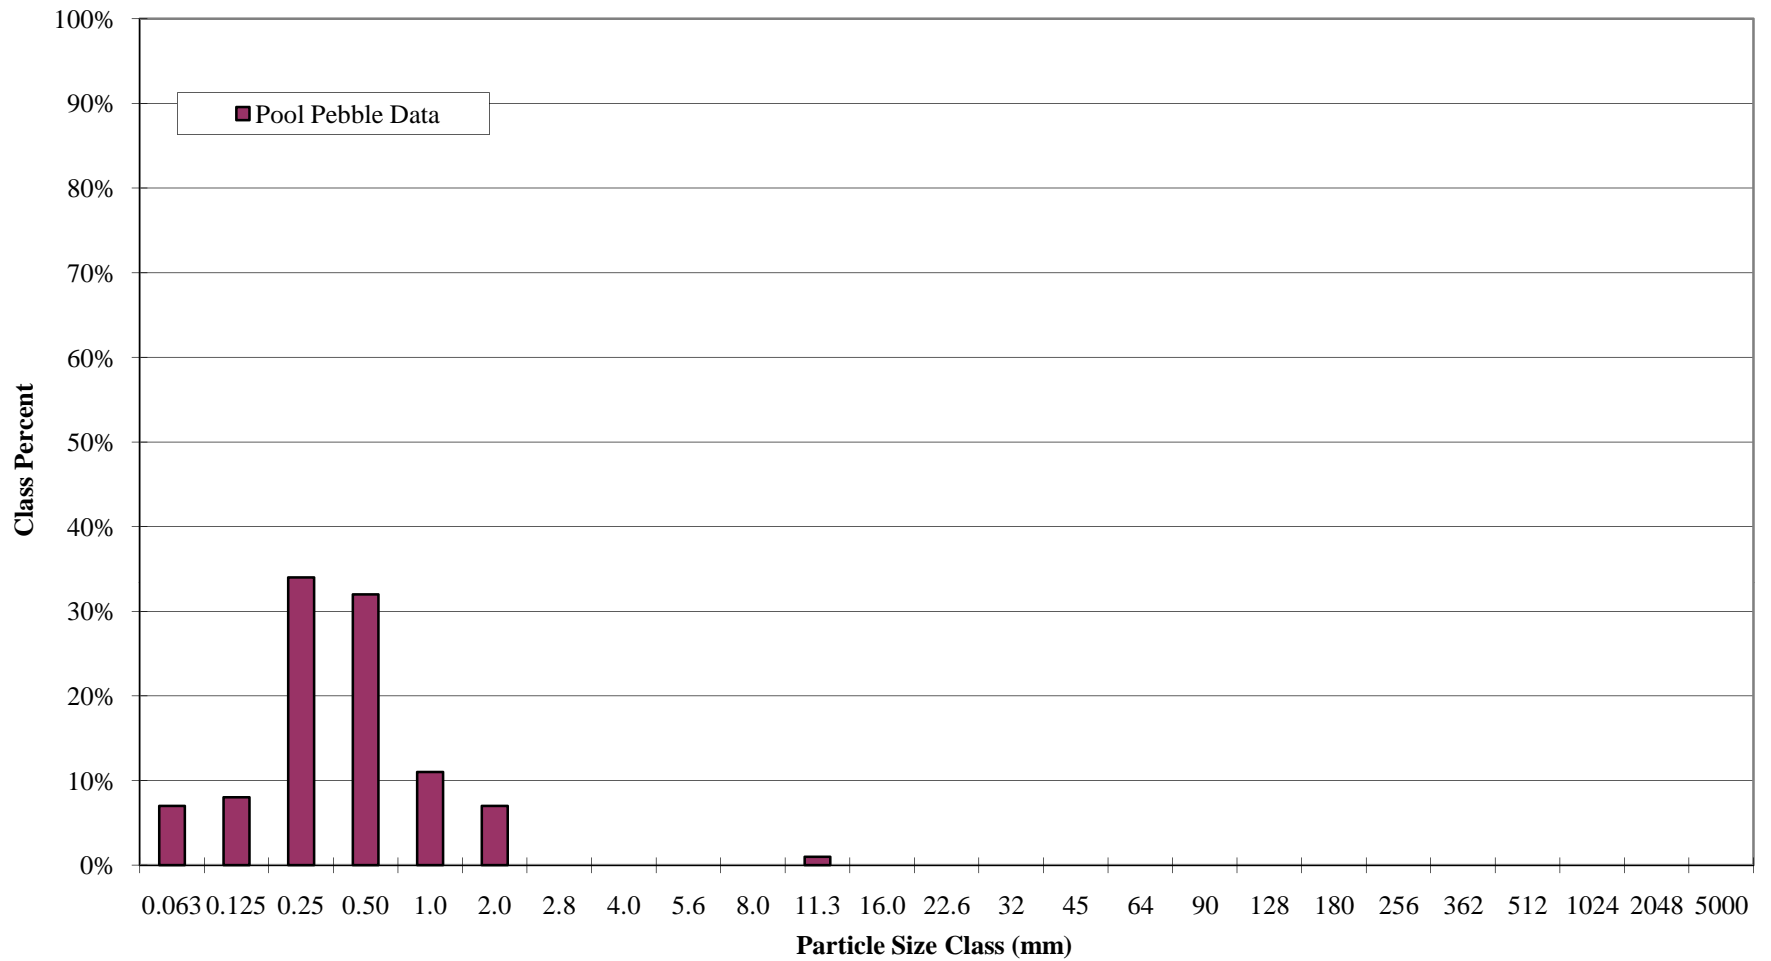

**UT1
X17-Pool
Pebble Count Particle Size Distribution**

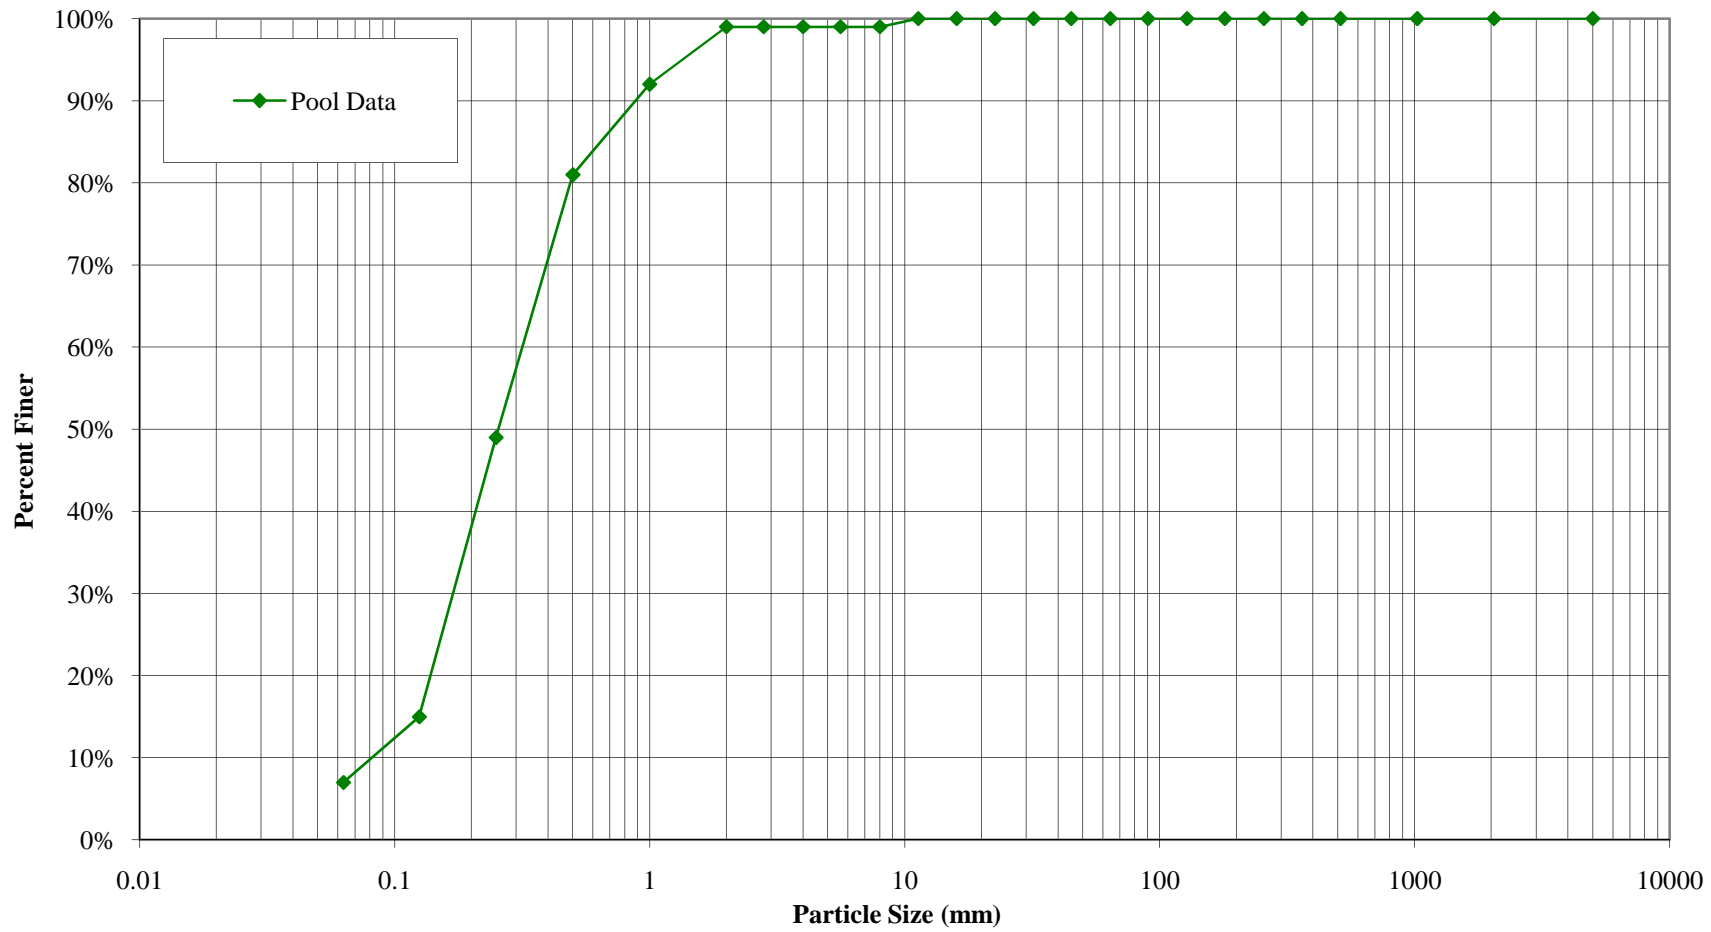


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT1 X18-Riffle	
DATE COLLECTED:	9/10/2009	
FIELD COLLECTION BY PL/CT		
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		
			Riffle	Class %	% Cum		
SILT/CLAY	Silt / Clay	< .063			0%		
	Very Fine	.063 - .125	1	1%	1%		
SAND	Fine	.125 - .25	5	5%	6%		
	Medium	.25 - .50	15	15%	21%		
	Coarse	.50 - 1.0	10	10%	31%		
	Very Coarse	1.0 - 2.0	5	5%	36%		
	Very Fine	2.0 - 2.8			36%		
	Very Fine	2.8 - 4.0			36%		
	Fine	4.0 - 5.6			36%		
	Fine	5.6 - 8.0			36%		
	Medium	8.0 - 11.0	1	1%	37%		
	Medium	11.0 - 16.0	1	1%	38%		
GRAVEL	Coarse	16.0 - 22.6	1	1%	39%		
	Coarse	22.6 - 32	10	10%	49%		
	Very Coarse	32 - 45	35	35%	84%		
	Very Coarse	45 - 64	15	15%	99%		
	Small	64 - 90			99%		
	Small	90 - 128	1	1%	100%		
	Large	128 - 180			100%		
	Large	180 - 256			100%		
	BOULDER	Small	256 - 362			100%	
		Small	362 - 512			100%	
Medium		512 - 1024			100%		
Large-Very Lar		1024 - 2048			100%		
BEDROCK	Bedrock	> 2048			100%		
Total			100	100%			

Largest particles: 90 mm
(riffle)

UT1
X18-Riffle
Pebble Count Size Class Distribution

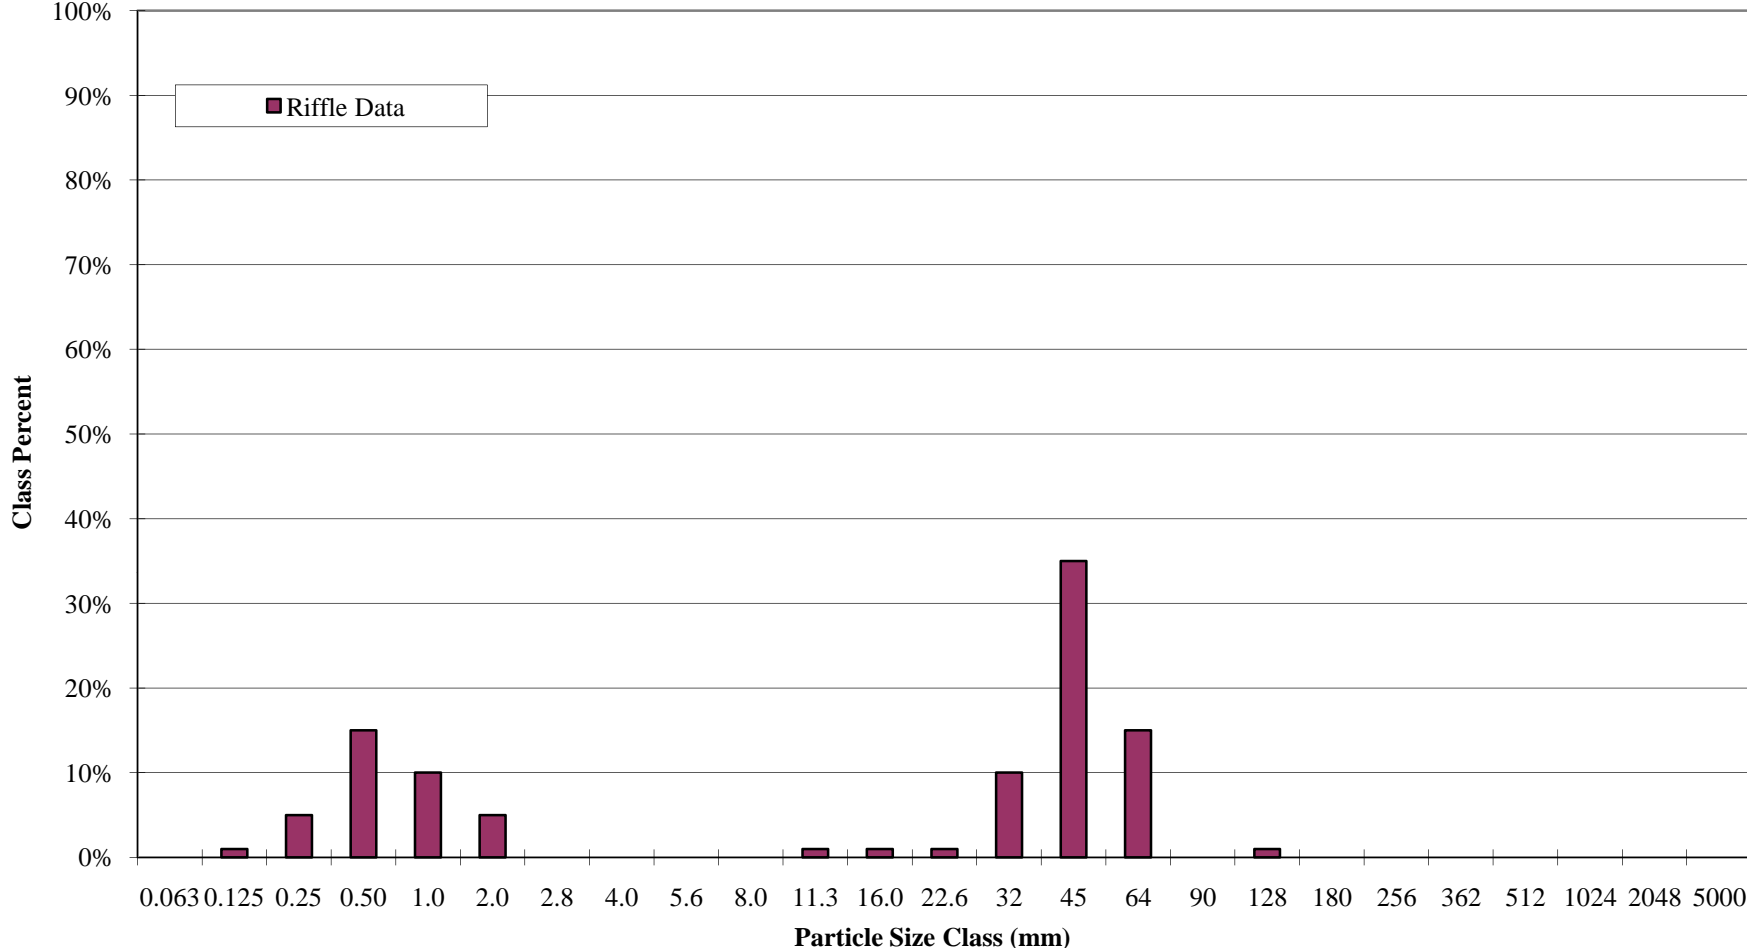

**UT1
X18-Riffle
Pebble Count Particle Size Distribution**

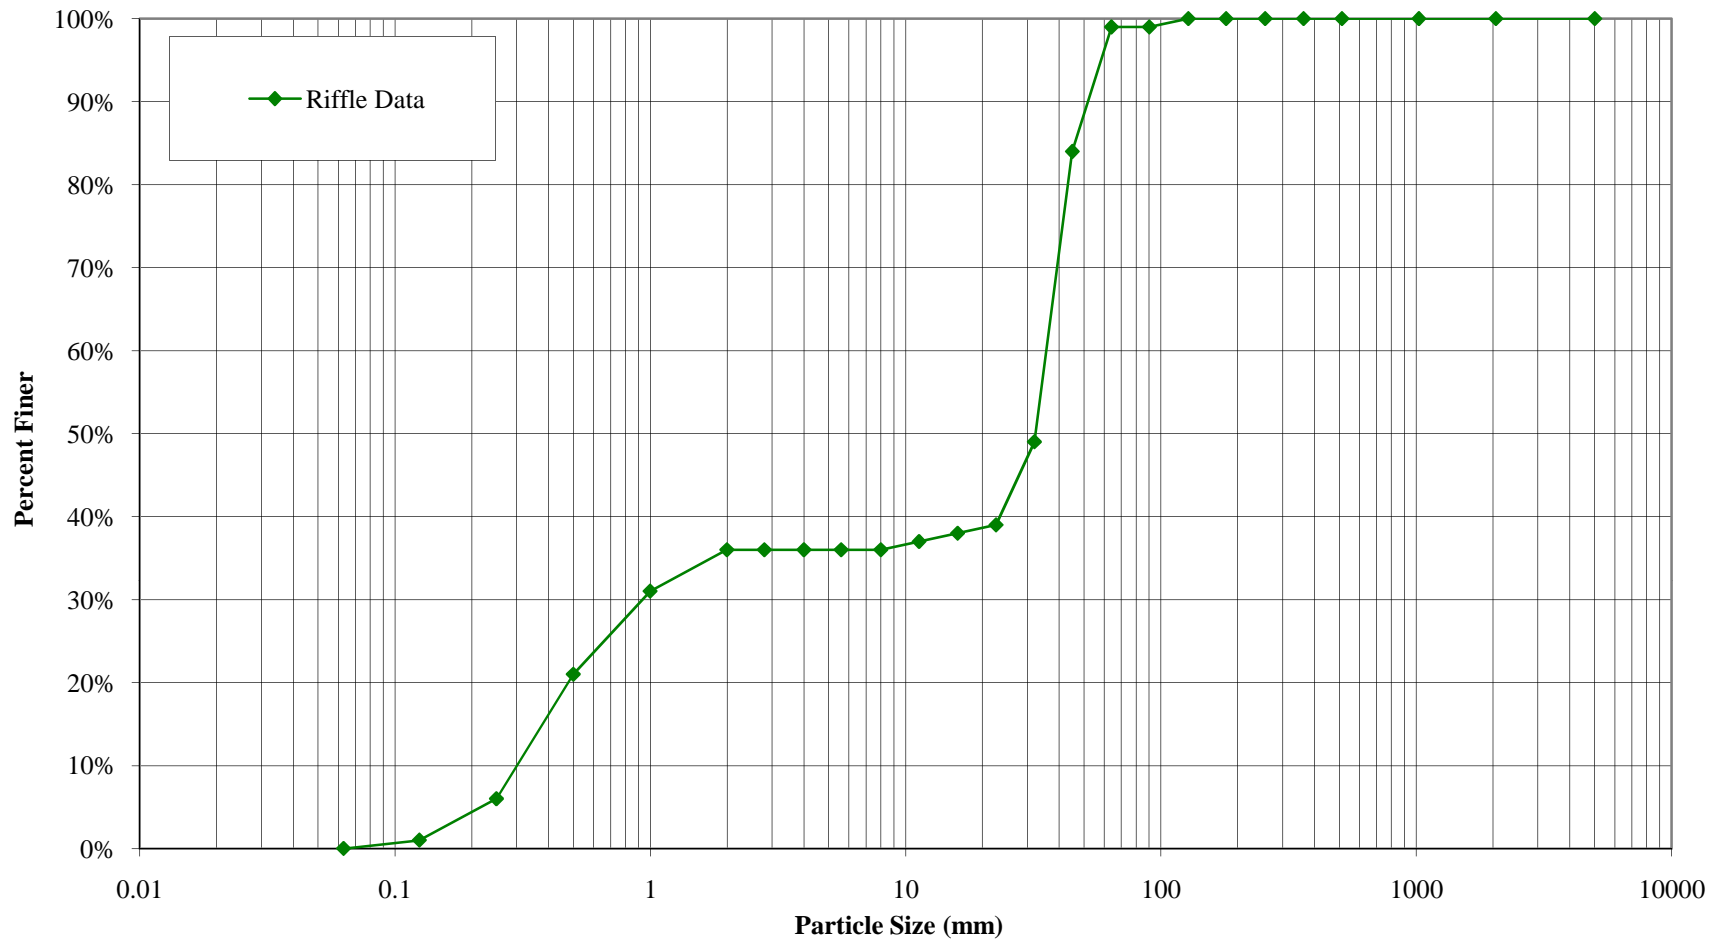

PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT


BAKER PROJECT NO.	108528
--------------------------	--------

SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring
REACH/LOCATION:	UT2A X1-Riffle
DATE COLLECTED:	10/27/2009
FIELD COLLECTION BY:	CT/PL
DATA ENTRY BY:	KS


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Riffle	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	10	10%	10%	
SAND	Very Fine	.063 - .125			10%	
	Fine	.125 - .25			10%	
	Medium	.25 - .50			10%	
	Coarse	.50 - 1.0			10%	
	Very Coarse	1.0 - 2.0			10%	
GRAVEL	Very Fine	2.0 - 2.8			10%	
	Very Fine	2.8 - 4.0			10%	
	Fine	4.0 - 5.6			10%	
	Fine	5.6 - 8.0			10%	
	Medium	8.0 - 11.0			10%	
	Medium	11.0 - 16.0			10%	
	Coarse	16.0 - 22.6			10%	
	Coarse	22.6 - 32	5	5%	15%	
	Very Coarse	32 - 45	44	44%	59%	
	Very Coarse	45 - 64	40	40%	99%	
COBBLE	Small	64 - 90			99%	
	Small	90 - 128	1	1%	100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
Boulder	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: 100 mm
(riffle)

**UT2A
X1-Riffle
Pebble Count Size Class Distribution**

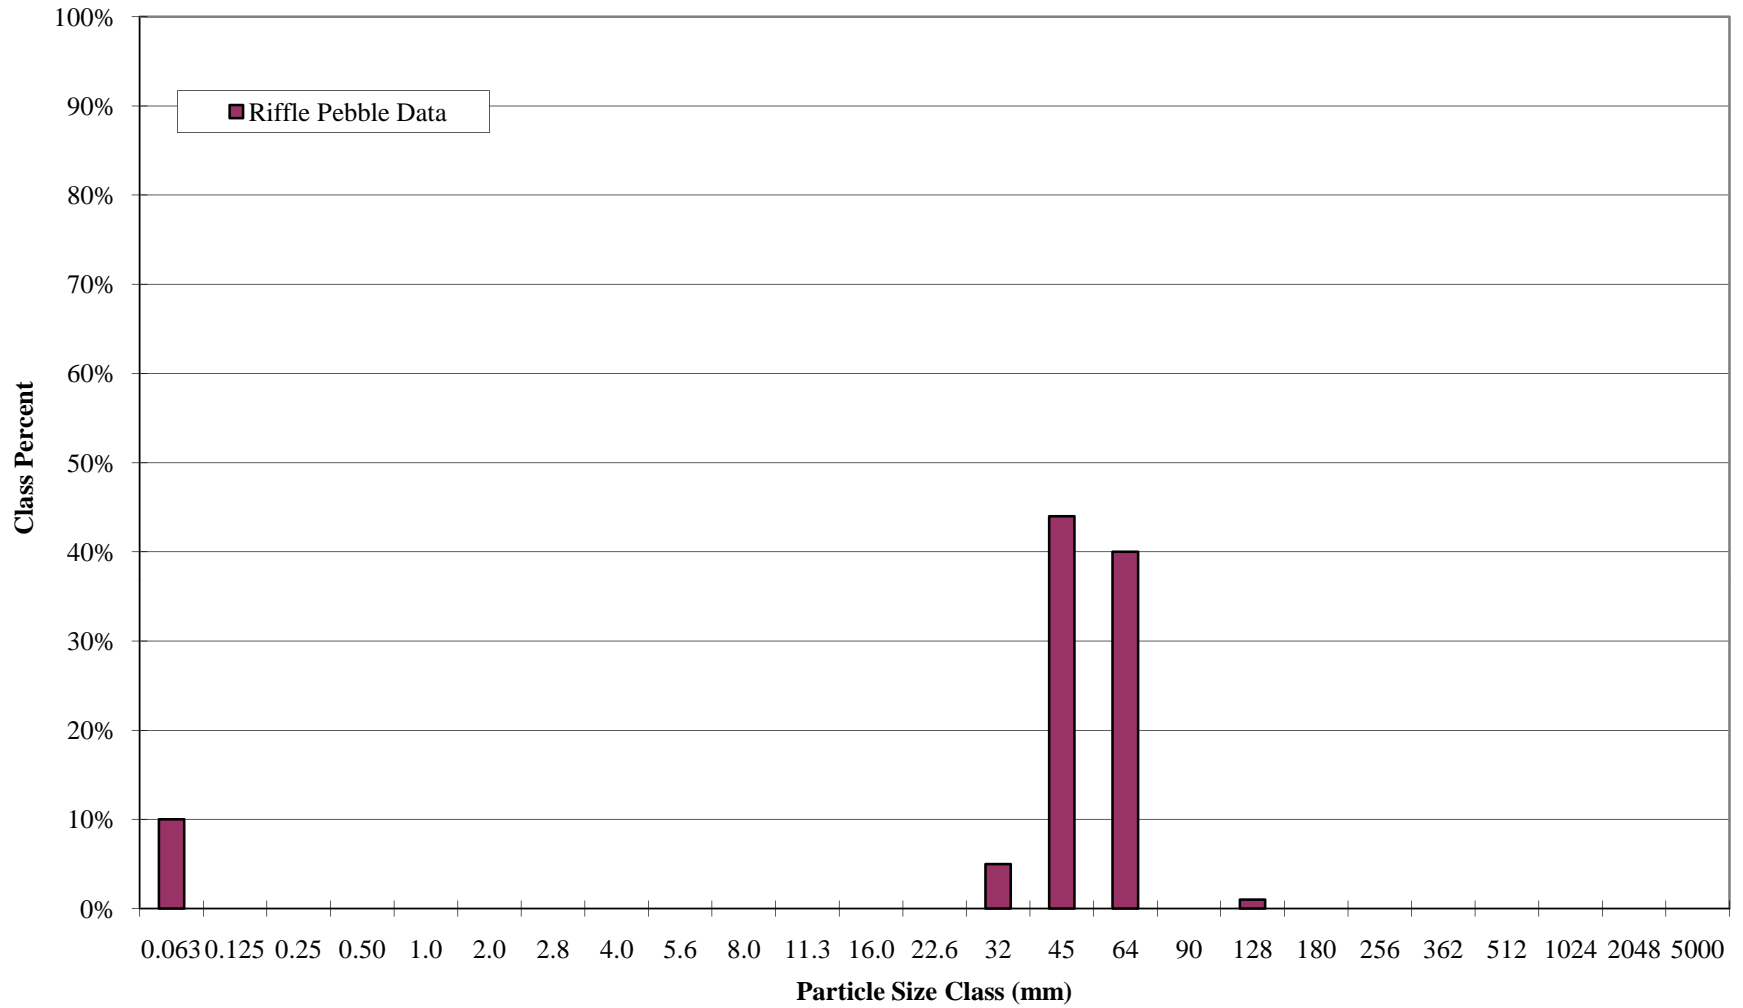

**UT2A
X1-Riffle
Pebble Count Particle Size Distribution**

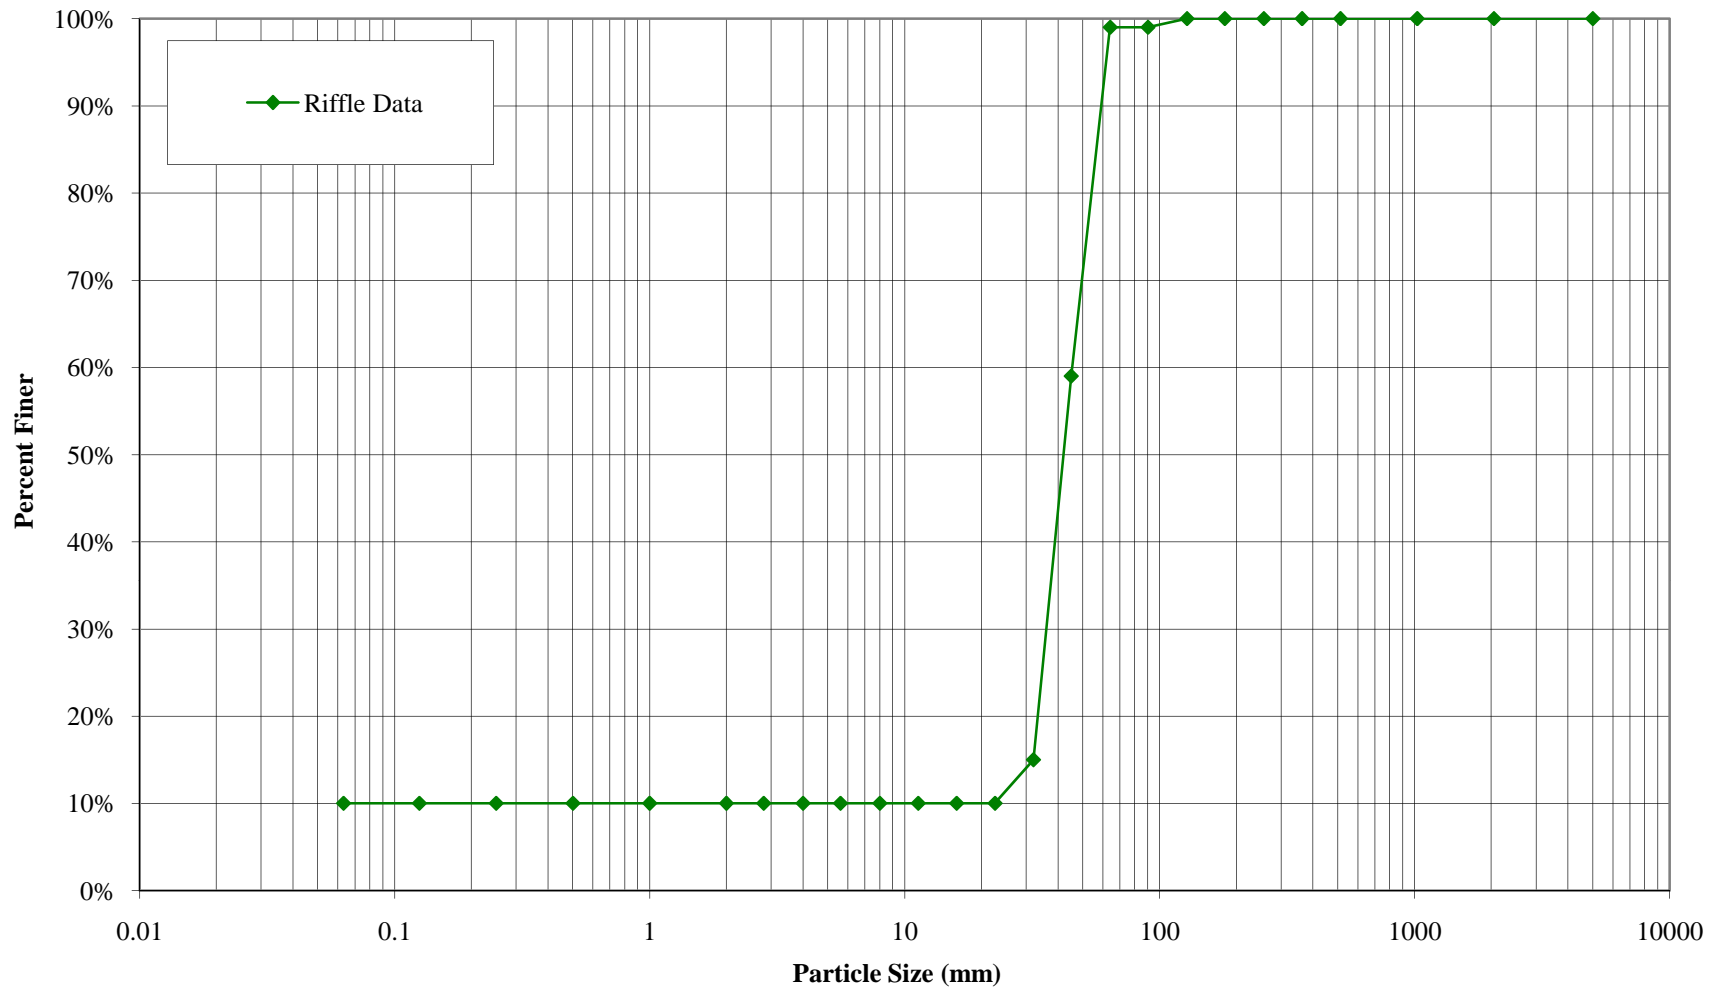


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT2A X2-Pool	
DATE COLLECTED:	10/27/2009	
FIELD COLLECTION BY:	CT/PL	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Pool		Class %	% Cum
SILT/CLAY	Silt / Clay	< .063	100		100%	100%
SAND	Very Fine	.063 - .125				100%
	Fine	.125 - .25				100%
	Medium	.25 - .50				100%
	Coarse	.50 - 1.0				100%
	Very Coarse	1.0 - 2.0				100%
GRAVEL	Very Fine	2.0 - 2.8				100%
	Very Fine	2.8 - 4.0				100%
	Fine	4.0 - 5.6				100%
	Fine	5.6 - 8.0				100%
	Medium	8.0 - 11.0				100%
	Medium	11.0 - 16.0				100%
	Coarse	16.0 - 22.6				100%
	Coarse	22.6 - 32				100%
	Very Coarse	32 - 45				100%
	Very Coarse	45 - 64				100%
COBBLE	Small	64 - 90				100%
	Small	90 - 128				100%
	Large	128 - 180				100%
	Large	180 - 256				100%
BOULDER	Small	256 - 362				100%
	Small	362 - 512				100%
	Medium	512 - 1024				100%
	Large-Very Large	1024 - 2048				100%
BEDROCK	Bedrock	> 2048				100%
Total			100		100%	

Largest particles: _____
(pool)

**UT2A
X2-Pool
Pebble Count Size Class Distribution**

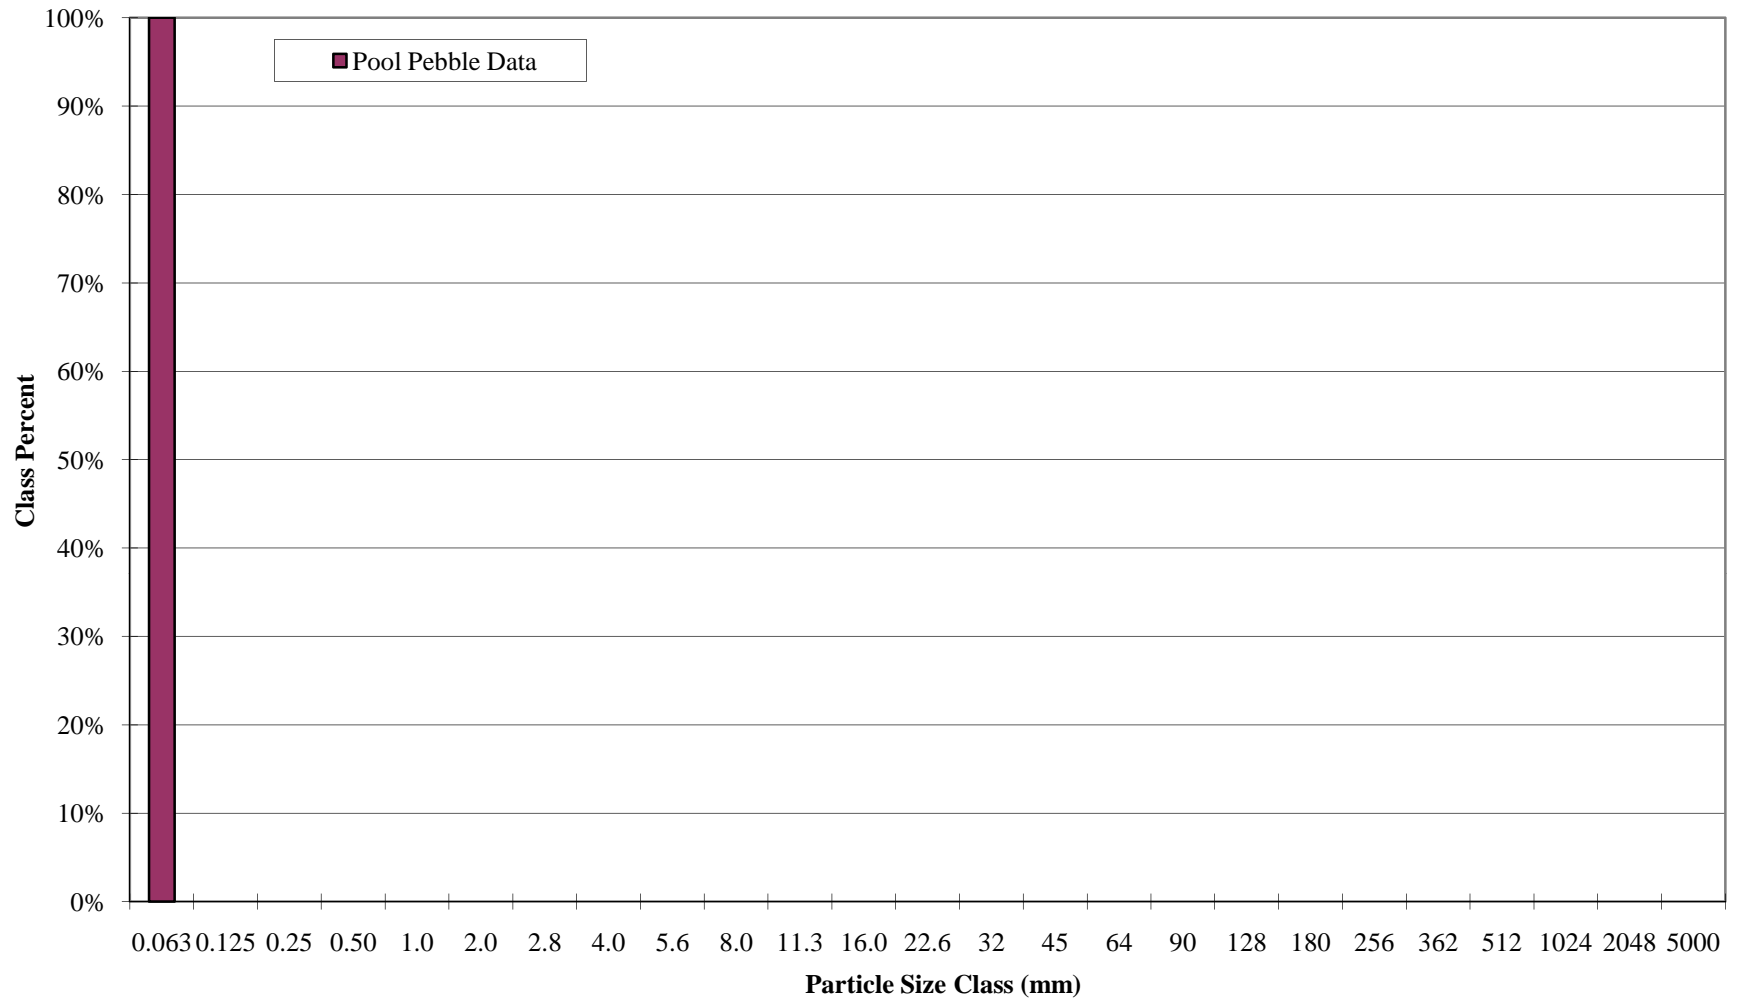

**UT2A
X2-Pool
Pebble Count Particle Size Distribution**

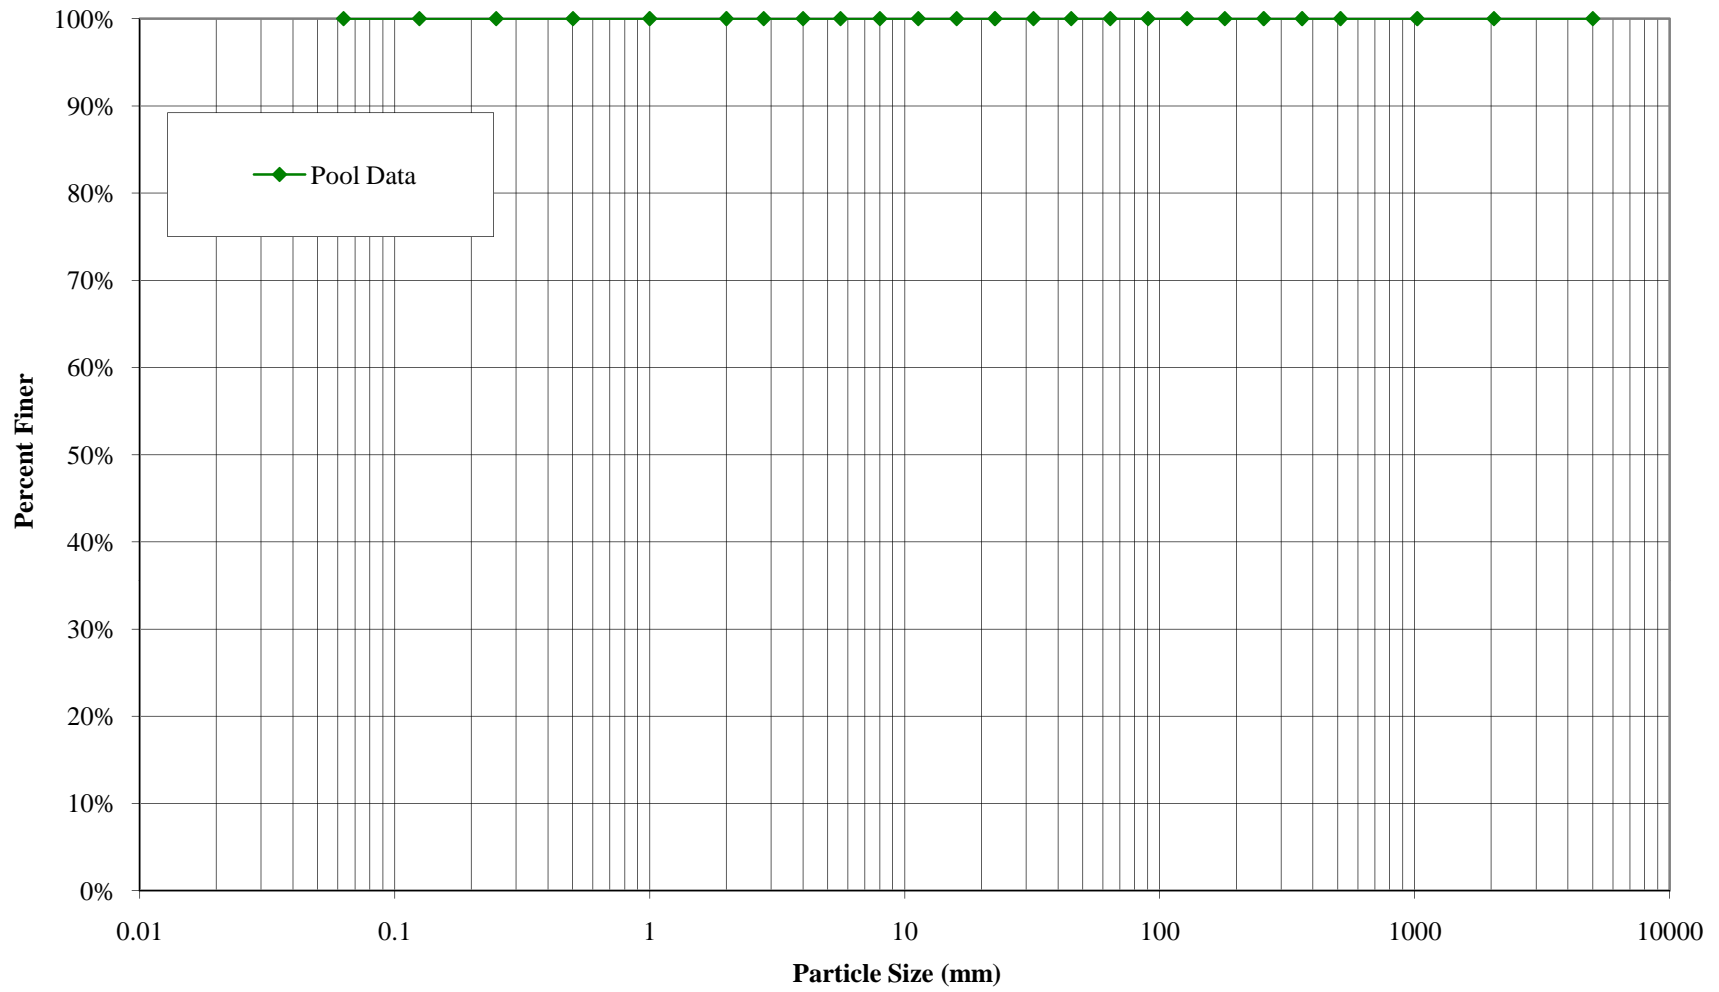


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT2 X3-Riffle	
DATE COLLECTED:	10/27/2009	
FIELD COLLECTION BY:	CT/PL	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary		Distribution Plot Size (mm)
			Riffle		Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	5		5%	5%	0.063
SAND	Very Fine	.063 - .125				5%	0.125
	Fine	.125 - .25				5%	0.25
	Medium	.25 - .50				5%	0.50
	Coarse	.50 - 1.0				5%	1.0
	Very Coarse	1.0 - 2.0				5%	2.0
GRAVEL	Very Fine	2.0 - 2.8				5%	2.8
	Very Fine	2.8 - 4.0				5%	4.0
	Fine	4.0 - 5.6				5%	5.6
	Fine	5.6 - 8.0				5%	8.0
	Medium	8.0 - 11.0				5%	11.3
	Medium	11.0 - 16.0				5%	16.0
	Coarse	16.0 - 22.6	1		1%	6%	22.6
	Coarse	22.6 - 32	25		25%	31%	32
	Very Coarse	32 - 45	38		38%	69%	45
	Very Coarse	45 - 64	21		21%	90%	64
COBBLE	Small	64 - 90	5		5%	95%	90
	Small	90 - 128	2		2%	97%	128
	Large	128 - 180	2		2%	99%	180
	Large	180 - 256				99%	256
BOULDER	Small	256 - 362	1		1%	100%	362
	Small	362 - 512				100%	512
	Medium	512 - 1024				100%	1024
	Large-Very Large	1024 - 2048				100%	2048
BEDROCK	Bedrock	> 2048				100%	5000
Total			100		100%		

Largest particles: 270 mm
(riffle)

**UT2
X3-Riffle
Pebble Count Size Class Distribution**

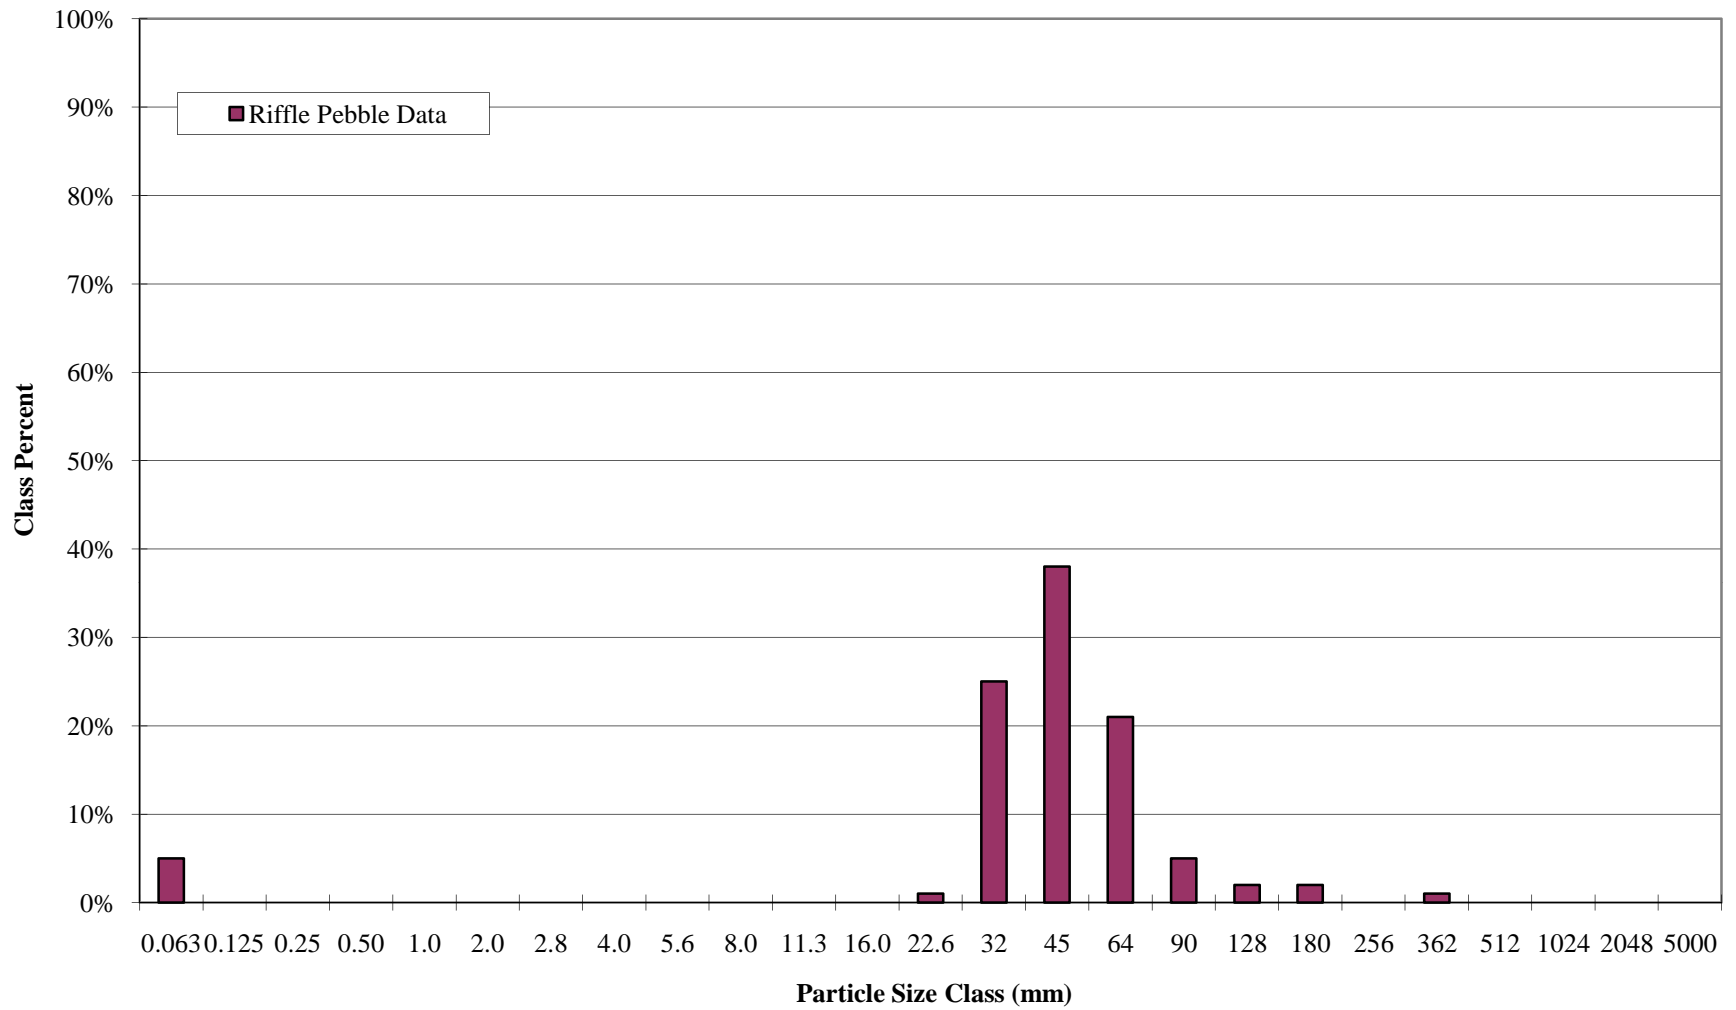

**UT2
X3-Riffle
Pebble Count Particle Size Distribution**

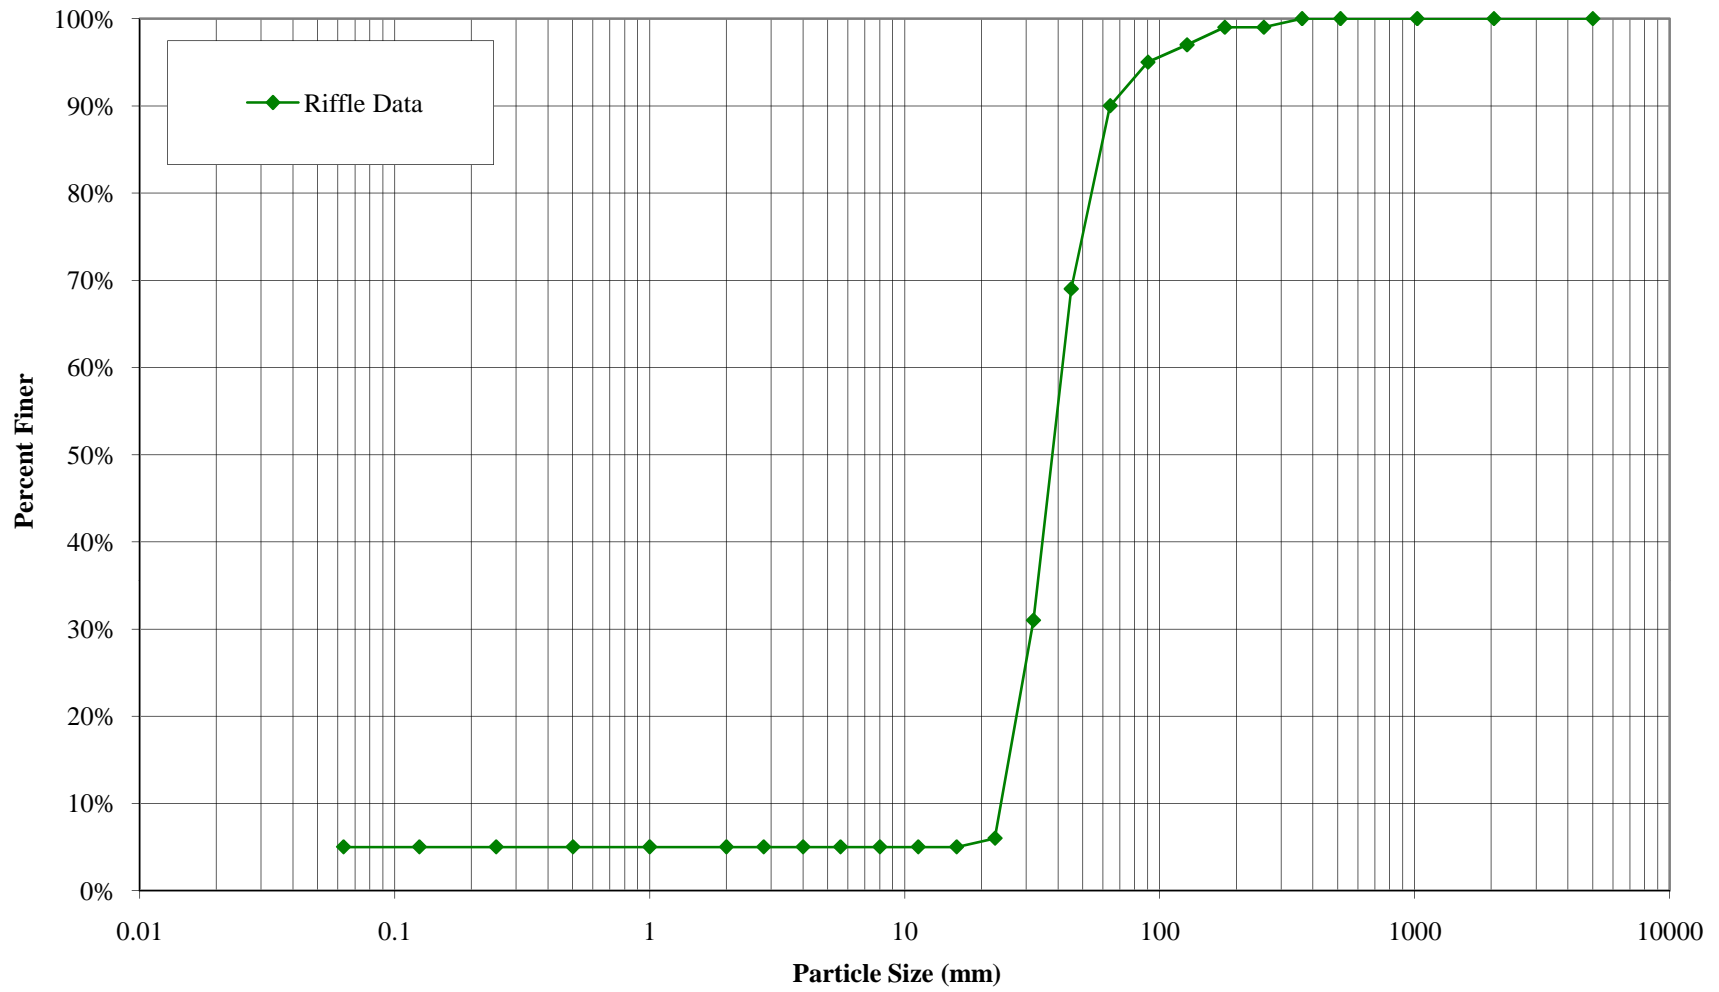


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT2 X4-Pool	
DATE COLLECTED:	10/27/2009	
FIELD COLLECTION BY:	CT/PL	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Pool	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	95	95%	95%	
SAND	Very Fine	.063 - .125	5	5%	100%	
	Fine	.125 - .25			100%	
	Medium	.25 - .50			100%	
	Coarse	.50 - 1.0			100%	
	Very Coarse	1.0 - 2.0			100%	
GRAVEL	Very Fine	2.0 - 2.8			100%	
	Very Fine	2.8 - 4.0			100%	
	Fine	4.0 - 5.6			100%	
	Fine	5.6 - 8.0			100%	
	Medium	8.0 - 11.0			100%	
	Medium	11.0 - 16.0			100%	
	Coarse	16.0 - 22.6			100%	
	Coarse	22.6 - 32			100%	
	Very Coarse	32 - 45			100%	
	Very Coarse	45 - 64			100%	
COBBLE	Small	64 - 90			100%	
	Small	90 - 128			100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
BOULDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
Total			100	100%		

Largest particles: _____
(pool)

**UT2
X4-Pool
Pebble Count Size Class Distribution**

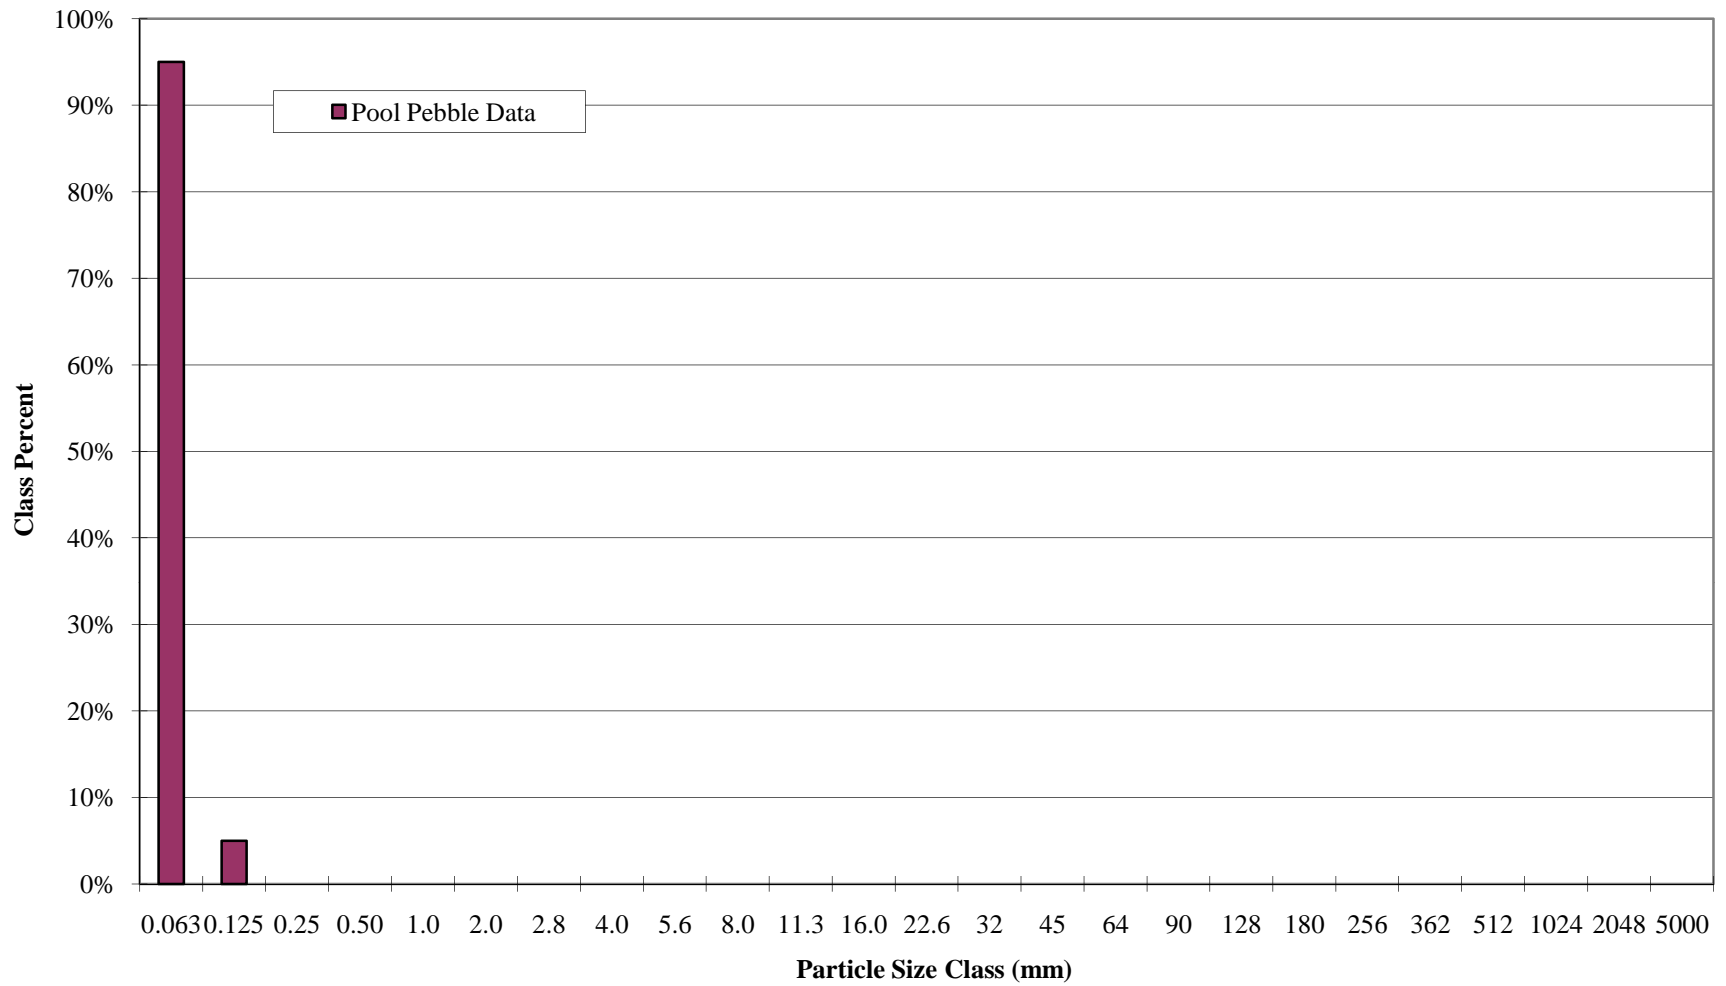

**UT2
X4-Pool
Pebble Count Particle Size Distribution**

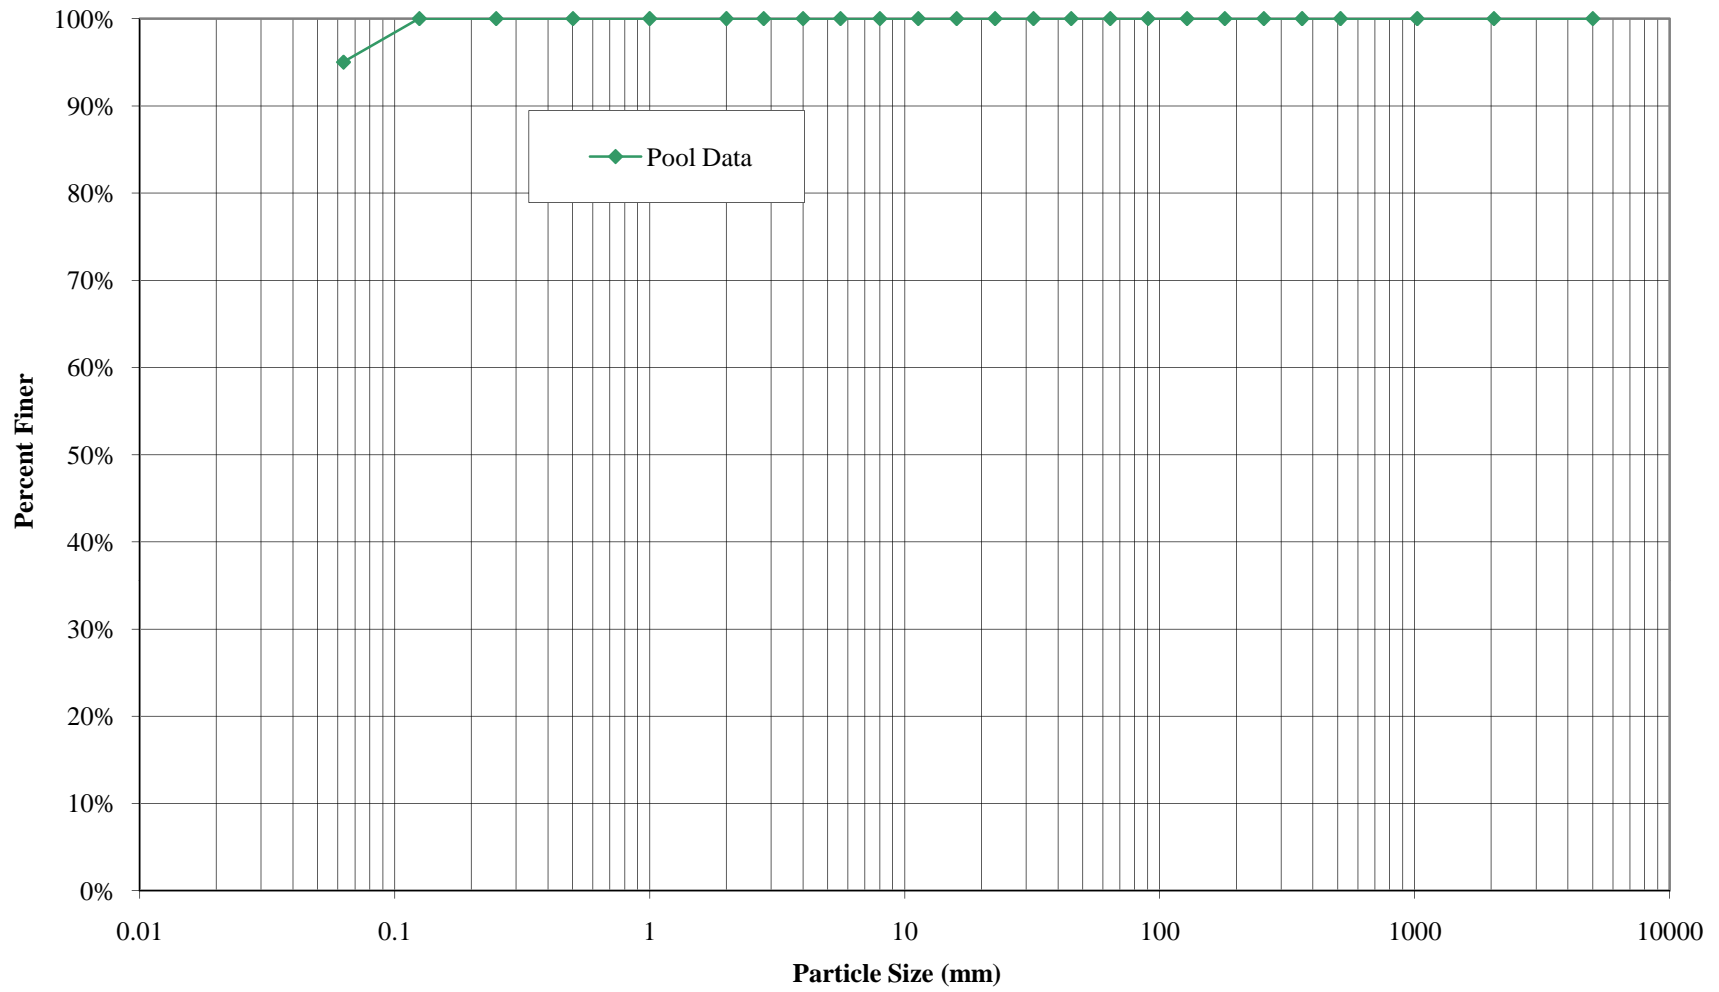


PEBBLE COUNT DATA SHEET: RIFFLE 100-COUNT

BAKER PROJECT NO.		108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT2 X5-Riffle	
DATE COLLECTED:	10/27/2009	
FIELD COLLECTION BY:	CT/PL	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Riffle		Class %	% Cum
SILT/CLAY	Silt / Clay	< .063	2		2%	2%
SAND	Very Fine	.063 - .125				2%
	Fine	.125 - .25				2%
	Medium	.25 - .50				2%
	Coarse	.50 - 1.0				2%
	Very Coarse	1.0 - 2.0	2		2%	4%
GRAVEL	Very Fine	2.0 - 2.8				4%
	Very Fine	2.8 - 4.0				4%
	Fine	4.0 - 5.6				4%
	Fine	5.6 - 8.0				4%
	Medium	8.0 - 11.0				4%
	Medium	11.0 - 16.0				4%
	Coarse	16.0 - 22.6	3		3%	7%
	Coarse	22.6 - 32	19		19%	26%
	Very Coarse	32 - 45	58		58%	84%
	Very Coarse	45 - 64	10		10%	94%
COBBLE	Small	64 - 90	2		2%	96%
	Small	90 - 128	3		3%	99%
	Large	128 - 180	1		1%	100%
	Large	180 - 256				100%
BQUILDER	Small	256 - 362				100%
	Small	362 - 512				100%
	Medium	512 - 1024				100%
	Large-Very Large	1024 - 2048				100%
BEDROCK	Bedrock	> 2048				100%
Total			100		100%	

Largest particles: 120 mm
(riffle)

**UT2
X-5 Riffle
Pebble Count Size Class Distribution**

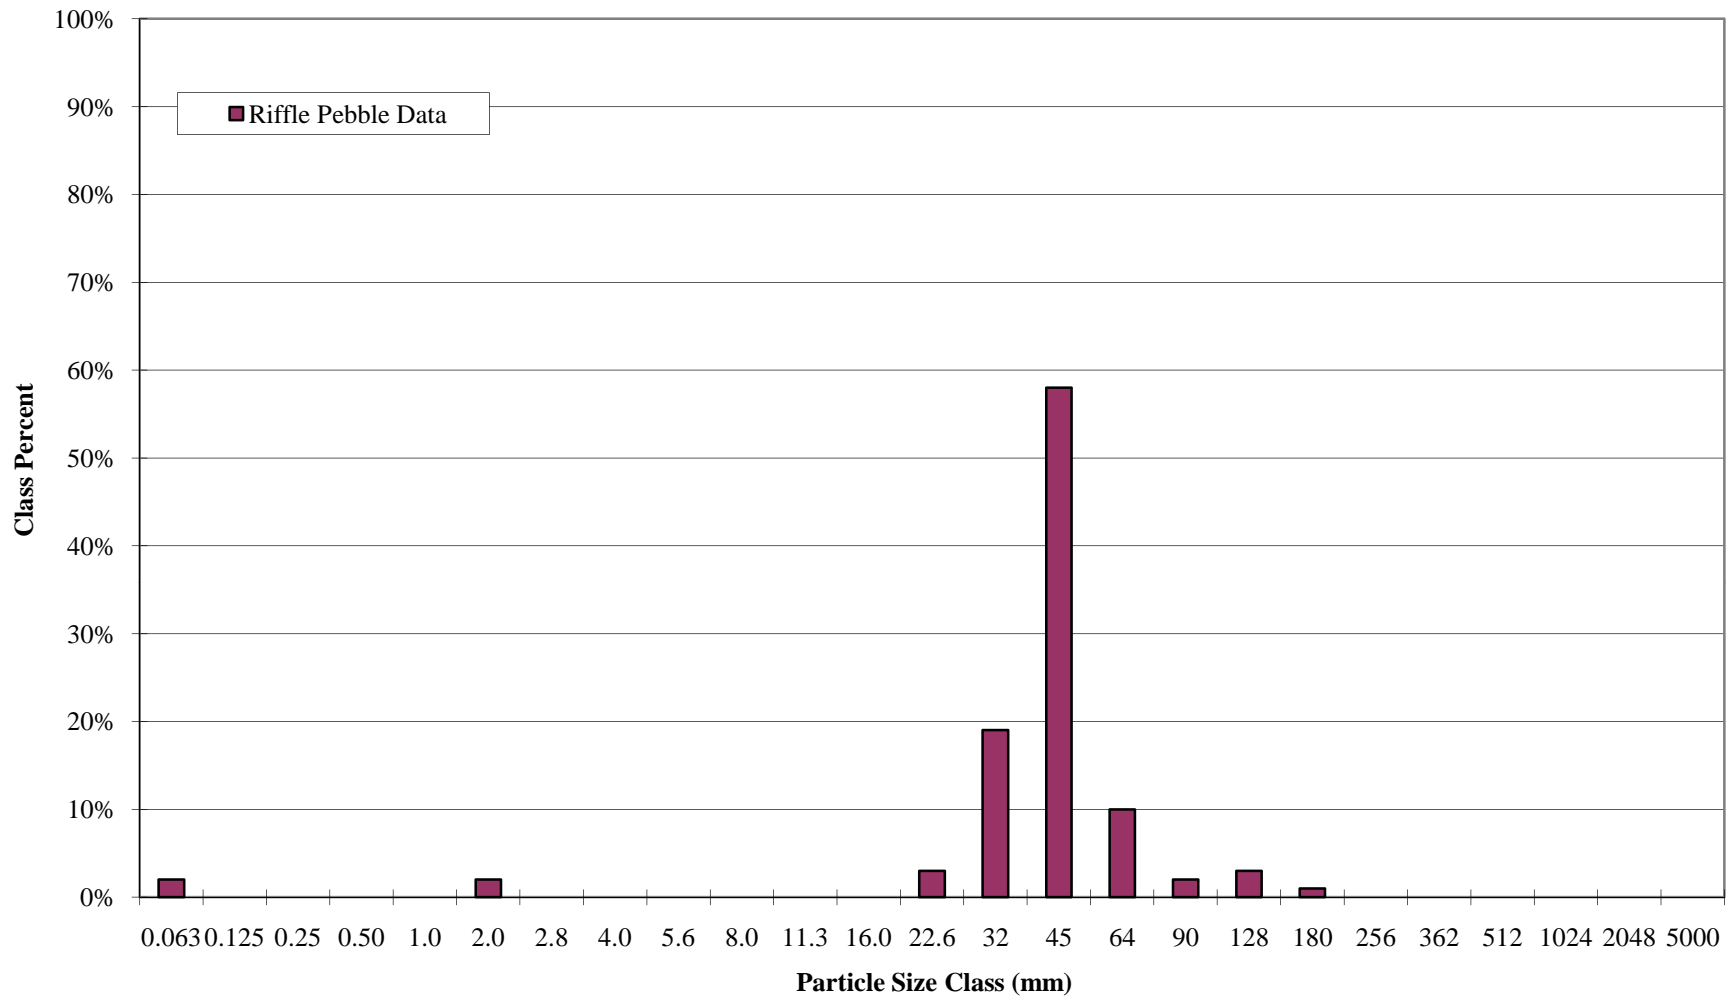

**UT2
X5-Riffle
Pebble Count Particle Size Distribution**

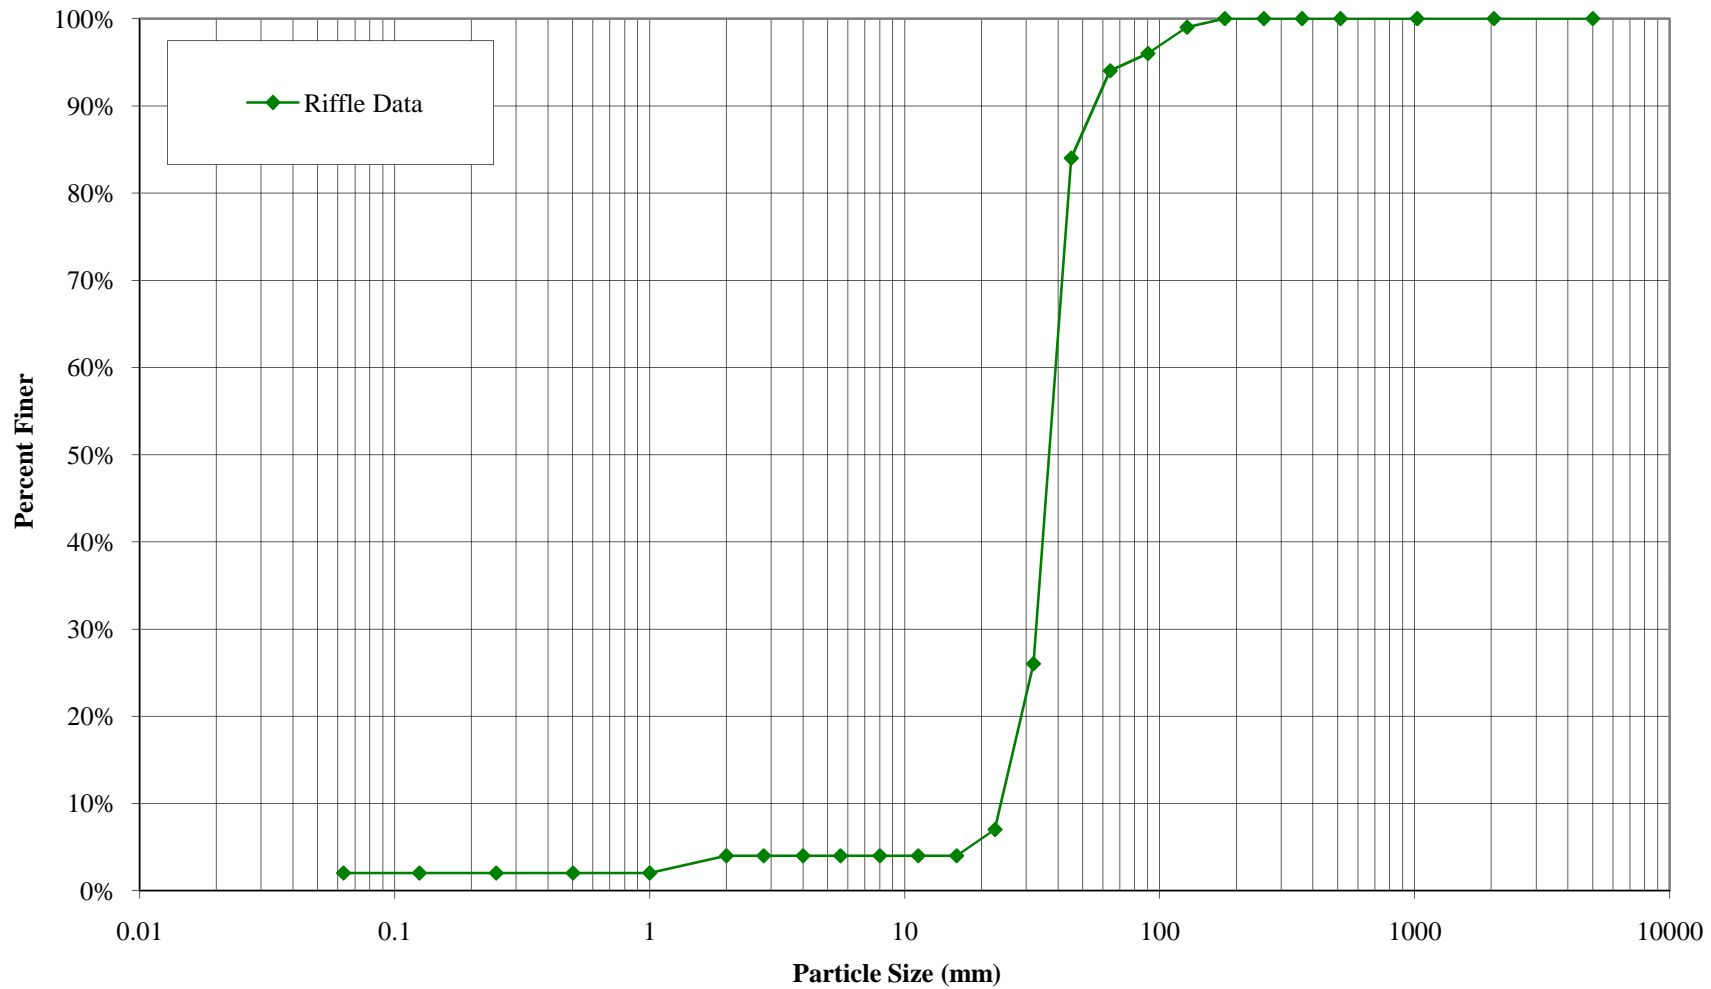


PEBBLE COUNT DATA SHEET: POOL 100-COUNT

	BAKER PROJECT NO.	108528
SITE OR PROJECT:	Beaverdam Creek 3rd Year Monitoring	
REACH/LOCATION:	UT2 X6-Pool	
DATE COLLECTED:	10/27/2009	
FIELD COLLECTION BY:	CT/PL	
DATA ENTRY BY:	KS	


MATERIAL	PARTICLE	SIZE (mm)	PARTICLE CLASS COUNT		Summary	
			Pool	Class %	% Cum	
SILT/CLAY	Silt / Clay	< .063	50	50%	50%	
SAND	Very Fine	.063 - .125	30	30%	80%	
	Fine	.125 - .25	15	15%	95%	
	Medium	.25 - .50			95%	
	Coarse	.50 - 1.0			95%	
	Very Coarse	1.0 - 2.0			95%	
GRAVEL	Very Fine	2.0 - 2.8	5	5%	100%	
	Very Fine	2.8 - 4.0			100%	
	Fine	4.0 - 5.6			100%	
	Fine	5.6 - 8.0			100%	
	Medium	8.0 - 11.0			100%	
	Medium	11.0 - 16.0			100%	
	Coarse	16.0 - 22.6			100%	
	Coarse	22.6 - 32			100%	
	Very Coarse	32 - 45			100%	
	Very Coarse	45 - 64			100%	
COBBLE	Small	64 - 90			100%	
	Small	90 - 128			100%	
	Large	128 - 180			100%	
	Large	180 - 256			100%	
BOULDER	Small	256 - 362			100%	
	Small	362 - 512			100%	
	Medium	512 - 1024			100%	
	Large-Very Large	1024 - 2048			100%	
BEDROCK	Bedrock	> 2048			100%	
	Total		100	100%		

Largest particles: _____
(pool)

**UT2
X6-Pool
Pebble Count Size Class Distribution**

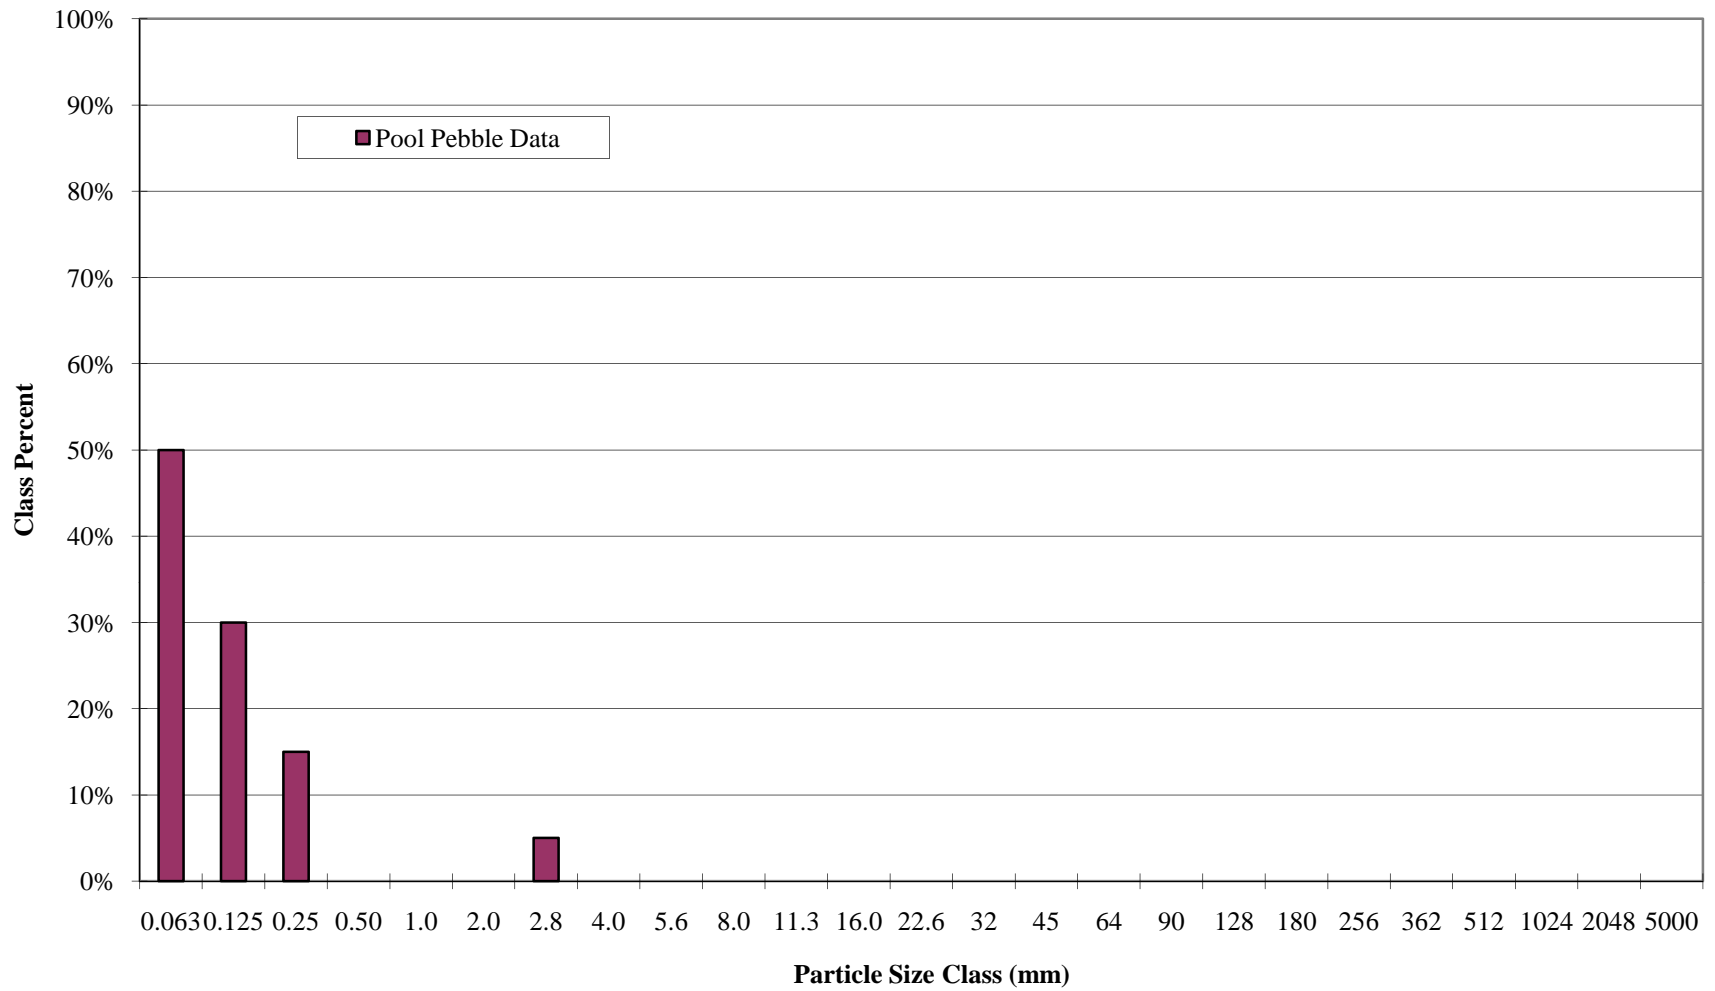



**UT2
X6-Pool
Pebble Count Particle Size Distribution**

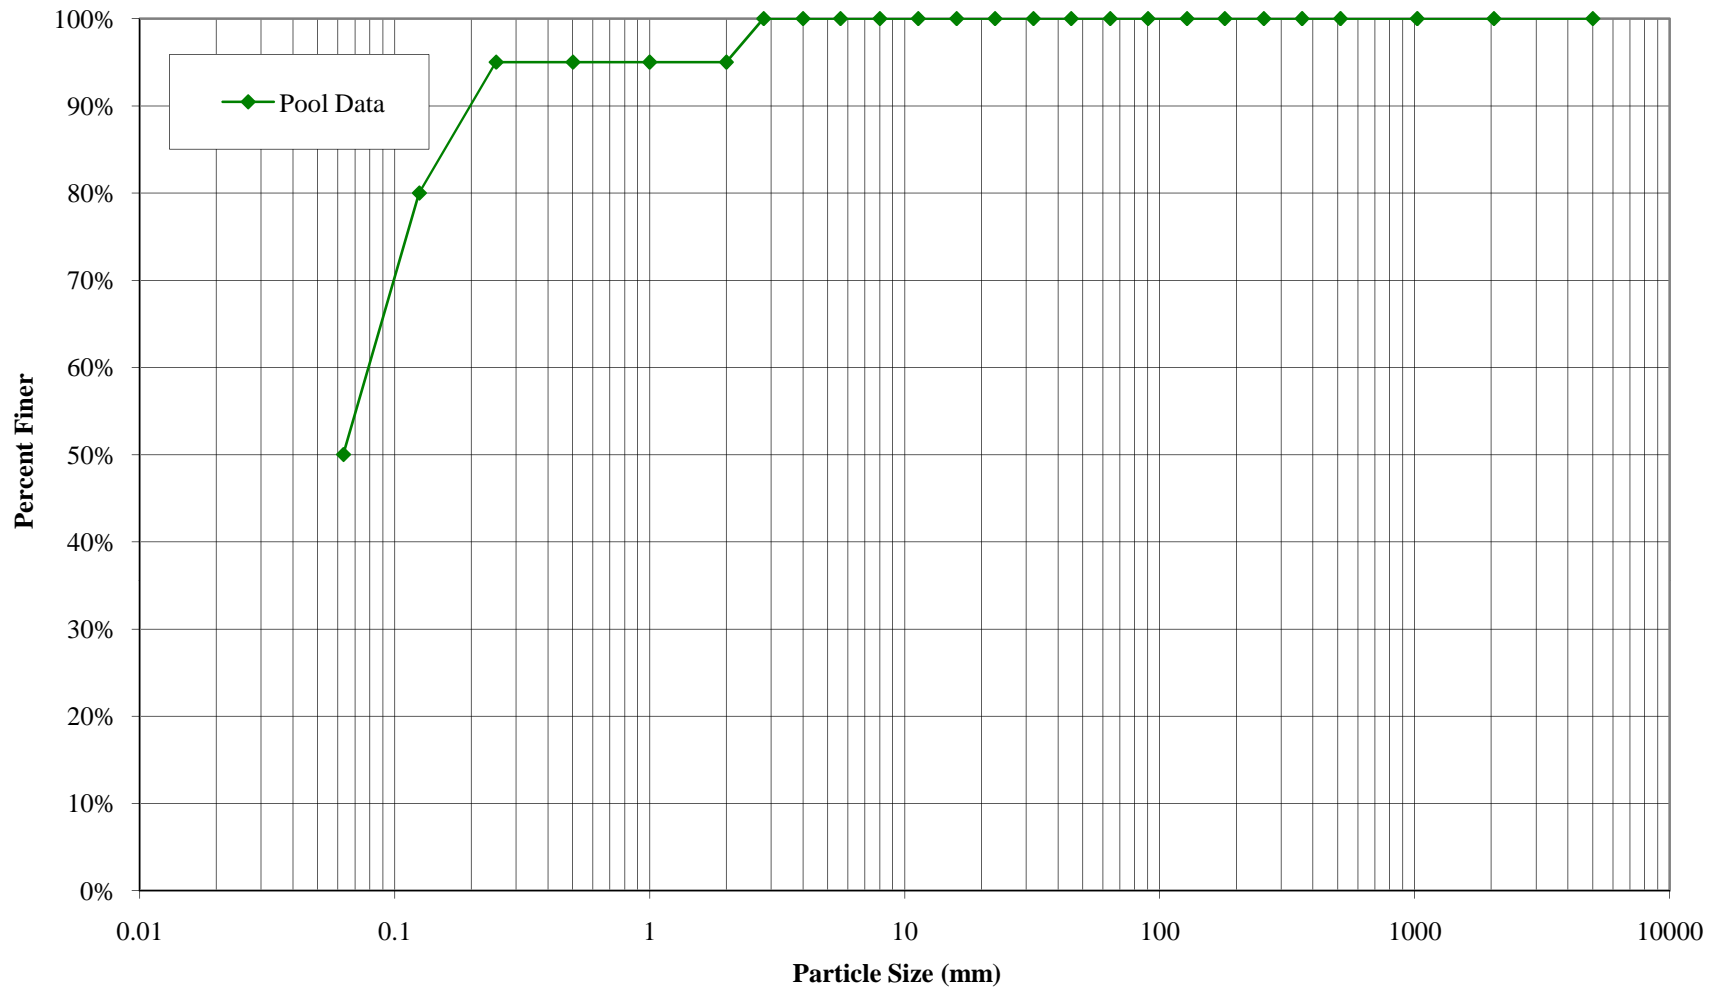

APPENDIX C

AS-BUILT PLAN SHEETS

BEAVERDAM CREEK STREAM RESTORATION AS-BUILT PLANS

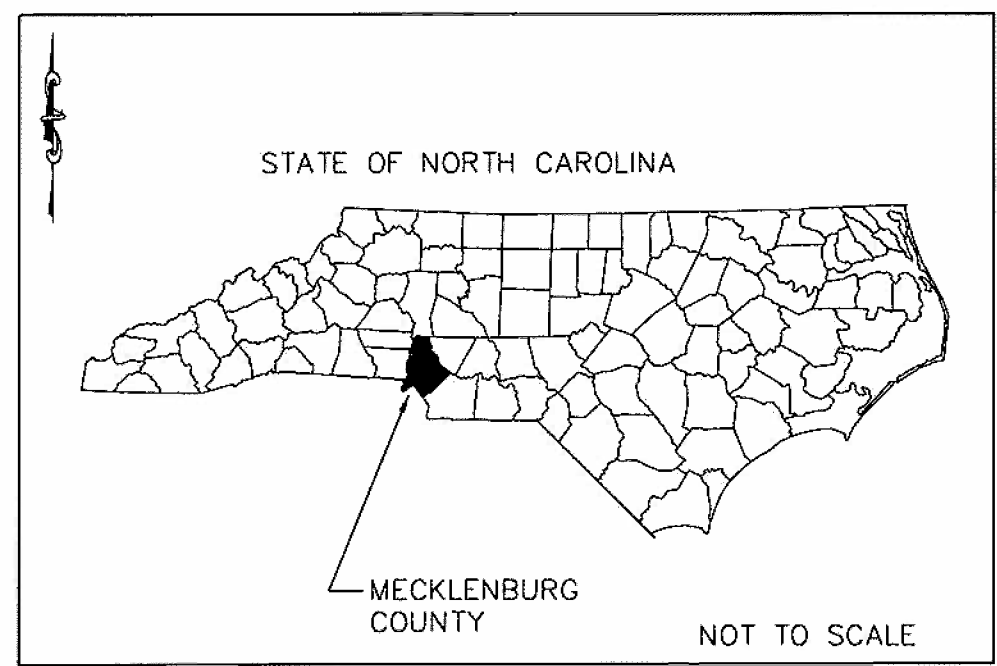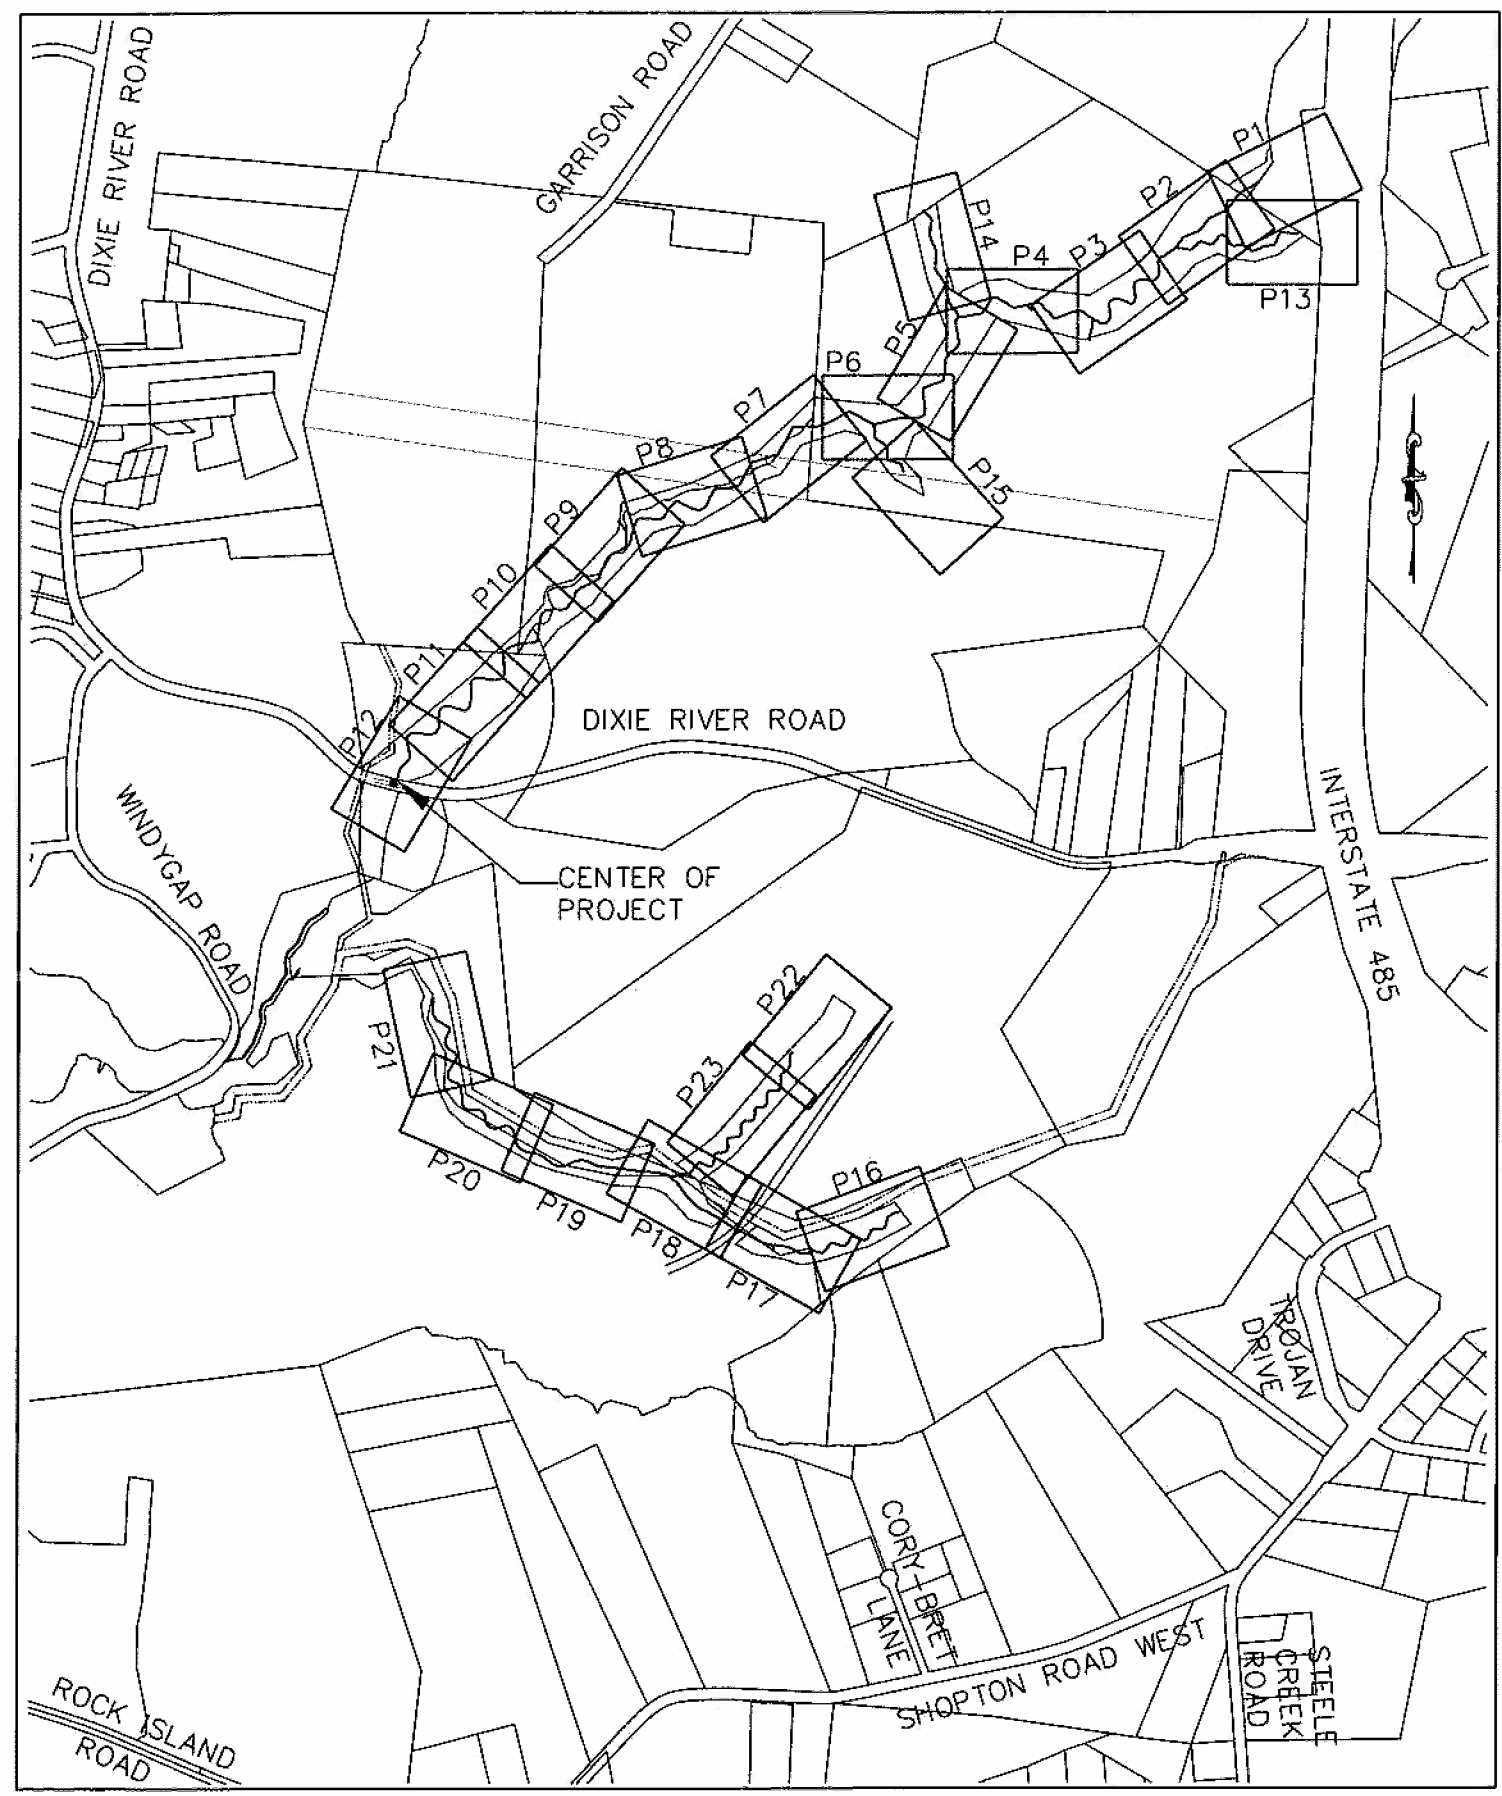

INDEX OF SHEETS

TITLE SHEET	T1
LEGEND	T2
REFERENCE SHEET	R1-R4
AS-BUILT PLANS	P1-P23


CENTER OF PROJECT:
 LAT: 35-10-21.7
 LONG: 80-59-08.5

UT1
 PRE-PROJECT STREAM LENGTH = 8,148 LF
 AS-BUILT STREAM RESTORATION LENGTH = 8,617 LF

UT2
 PRE-PROJECT STREAM LENGTH = 4,016 LF
 AS-BUILT STREAM RESTORATION LENGTH = 4,377 LF
 PRESERVATION LENGTH = 962 LF

BEAVERDAM CREEK
 PRESERVATION LENGTH = 1,641 LF

VICINITY MAP




















BEAVERDAM CREEK
AS-BUILT WITH BMPS

TITLE SHEET

PROJECT REFERENCE NO.	SHEET NO.
108528	T2
PROJECT ENGINEER	
KLT	
APPROVED BY	
WAH	
DATE	
10/11/2007	
Baker	
<small>Baker Engineering, Inc. 1417 South Tyler Street Suite 200 Canton, MO 64603 Phone: 314-384-4444 Fax: 314-384-4443</small>	


CONVENTIONAL SYMBOLS

-  AS-BUILT THALWEG
-  DESIGN THALWEG
-  EXISTING MAJOR CONTOUR
-  EXISTING MINOR CONTOUR
-  CONSERVATION EASEMENT
-  PROPERTY LINE
-  CONSTRUCTED RIFFLE
-  EXISTING TREE
-  LOG SILL
-  LOG VANE
-  FLOW DIRECTION
-  ROCK CROSS VANE
-  BOULDER CLUSTER
-  PHOTO ID POINT
-  SURVEY CONTROL POINT
-  ROOT WAD
-  ROCK VANE


BEAVERDAM CREEK
AS-BUILT WITH BMPS

LEGEND

PROJECT REFERENCE NO. 108528	SHEET NO. R1
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small>Baker Engineering, Inc. 1417 South Tryon Street Suite 200 Charlotte, NC 28203 Phone: 704.334.4474 Fax: 704.334.4474</small>	

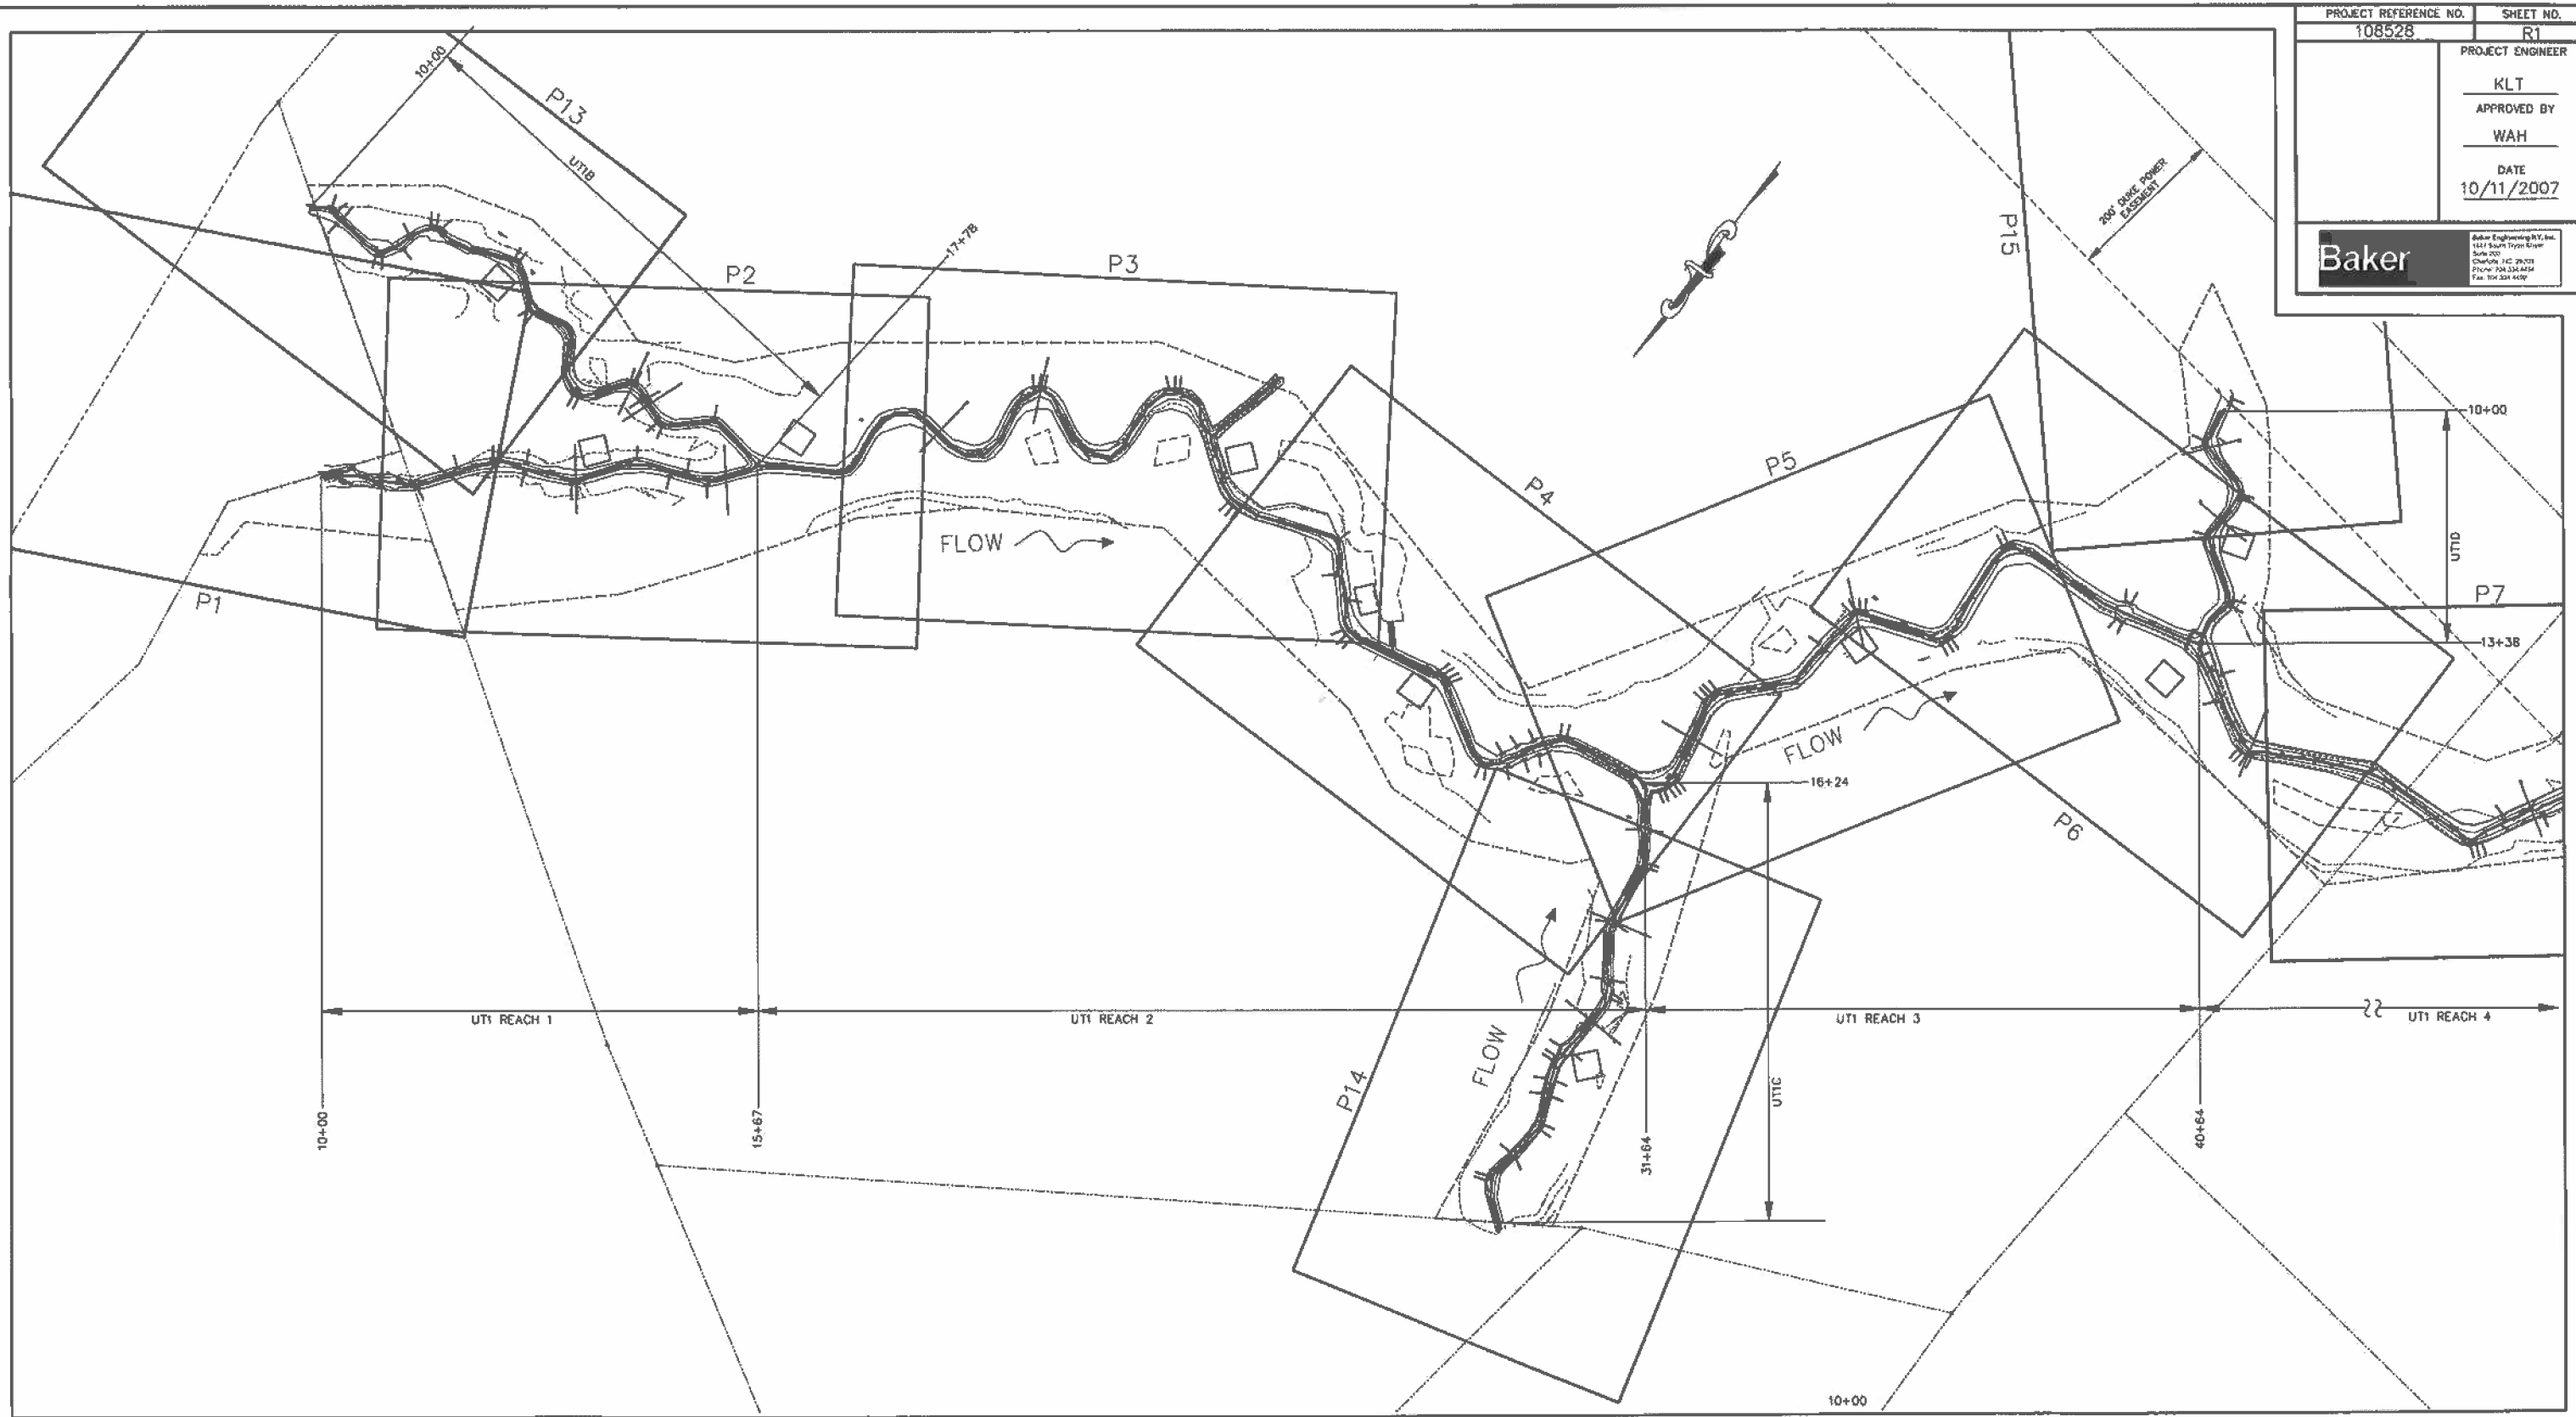


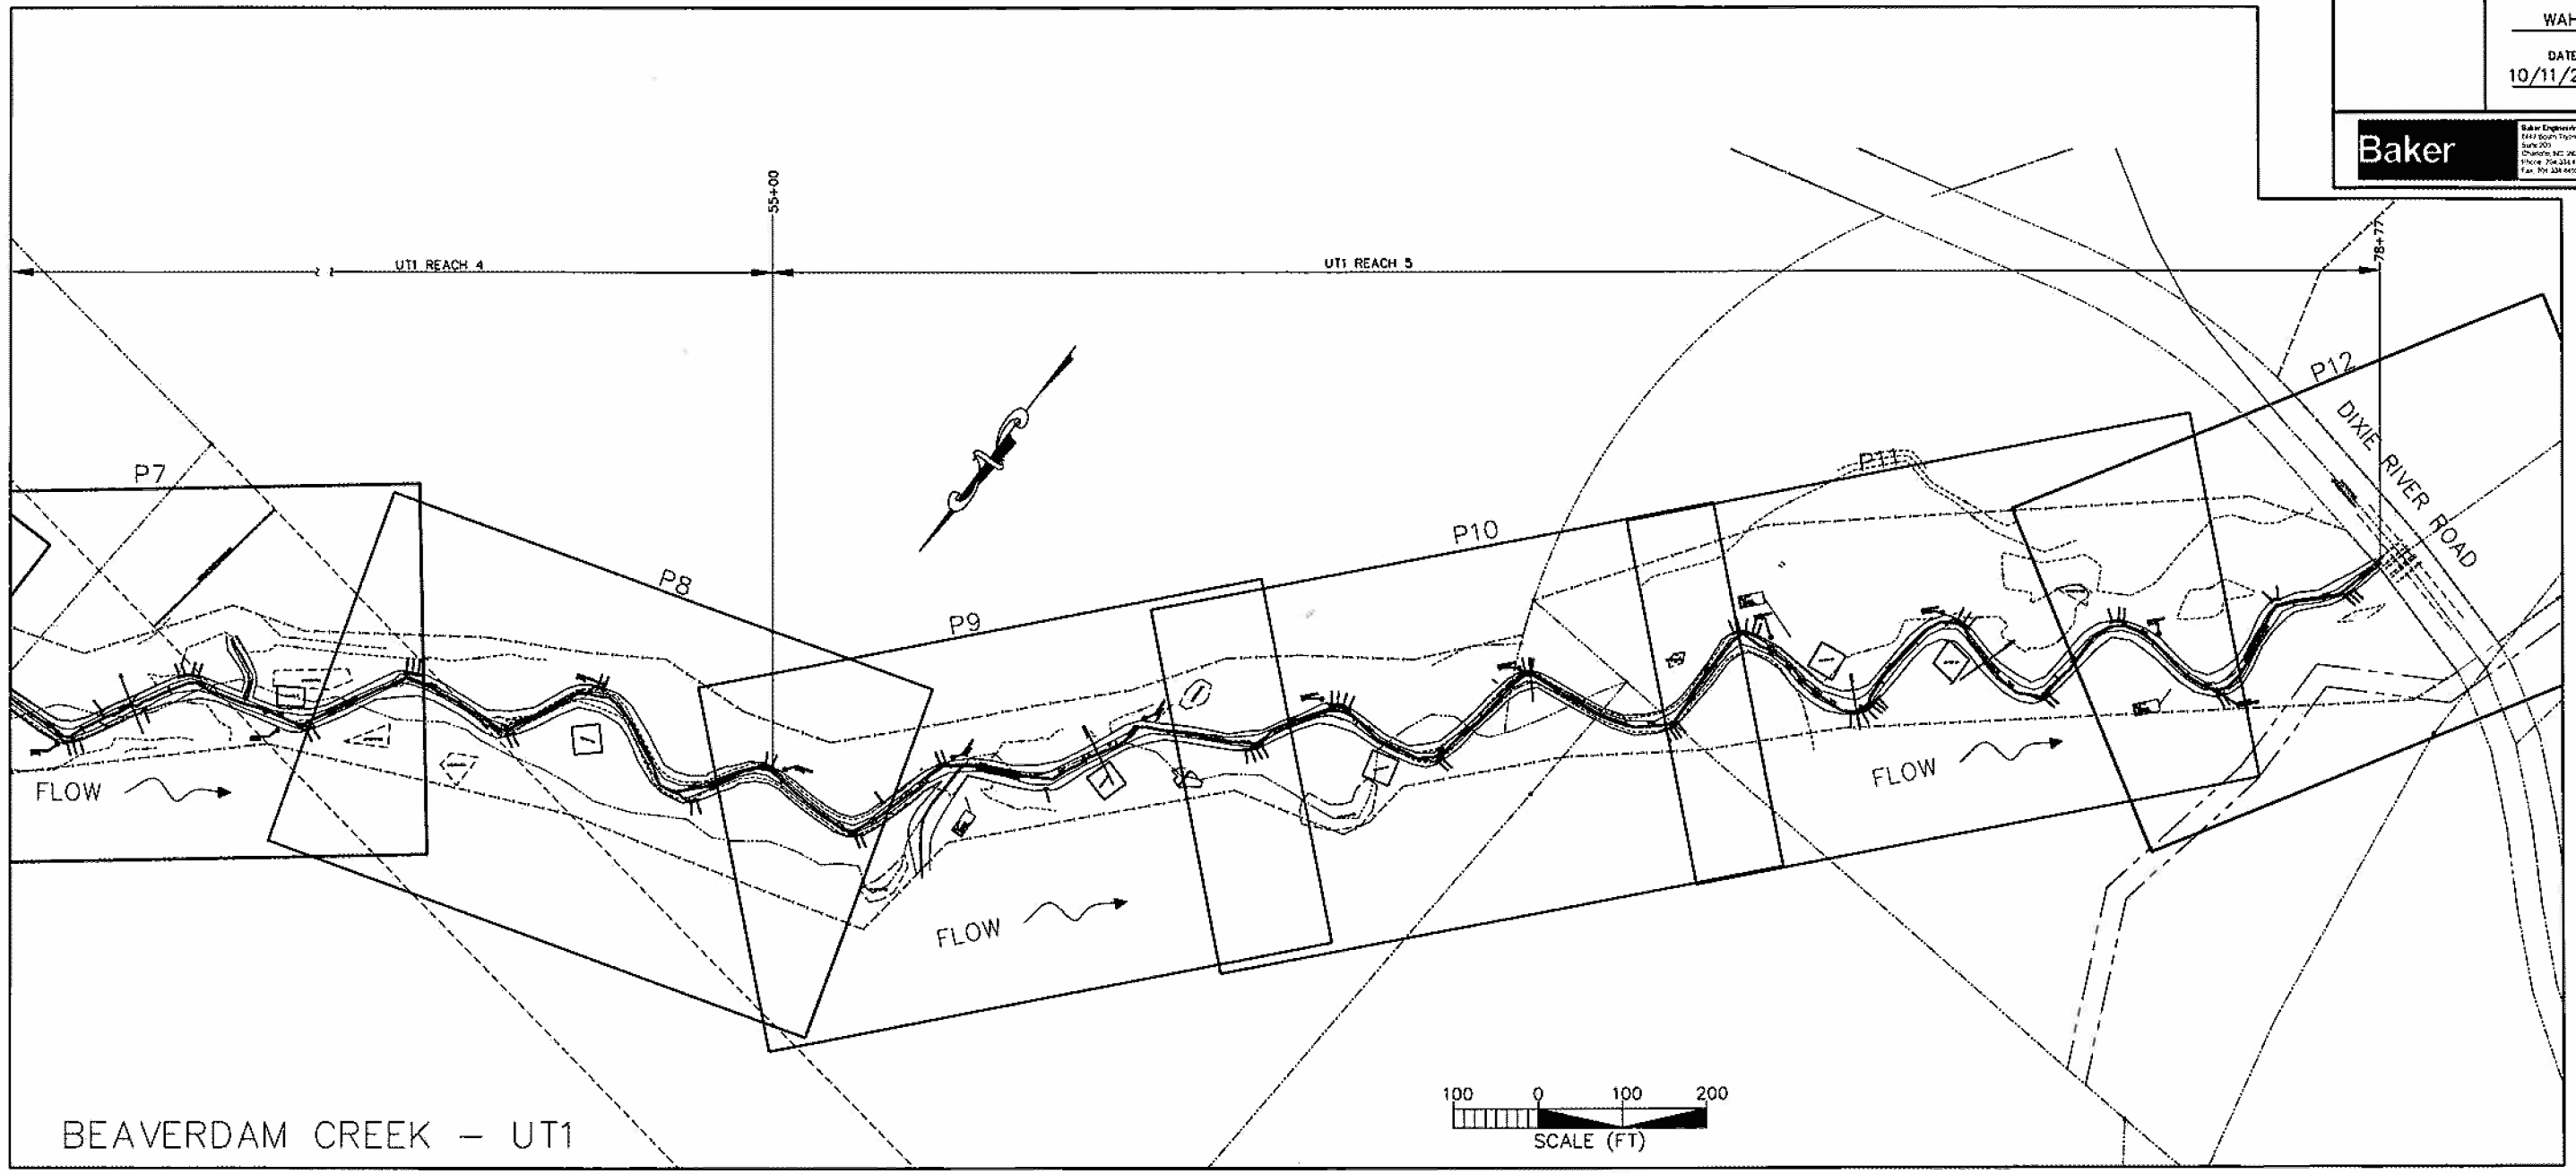
BEAVERDAM CREEK - UT1



BEAVERDAM CREEK
AS-BUILT WITH BMPs

REFERENCE SHEET


PROJECT REFERENCE NO. 108528	SHEET NO. R2
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small>Baker Engineering LLC 1441 South Tyson Street Suite 200 Chandler, AZ 85224 Phone: 480.333.4444 Fax: 480.333.4444</small>	



BEAVERDAM CREEK
AS-BUILT WITH BMPS

REFERENCE SHEET

PROJECT REFERENCE NO.	SHEET NO.
108528	R3
PROJECT ENGINEER	
KLT	
APPROVED BY	
WAH	
DATE	
10/11/2007	
Baker	
<small>Baker Engineering, Inc. 1447 South Fifth Street Suite 200 Coeur d'Alene, ID 83814 Phone: 208.664.4444 Fax: 208.664.4422</small>	


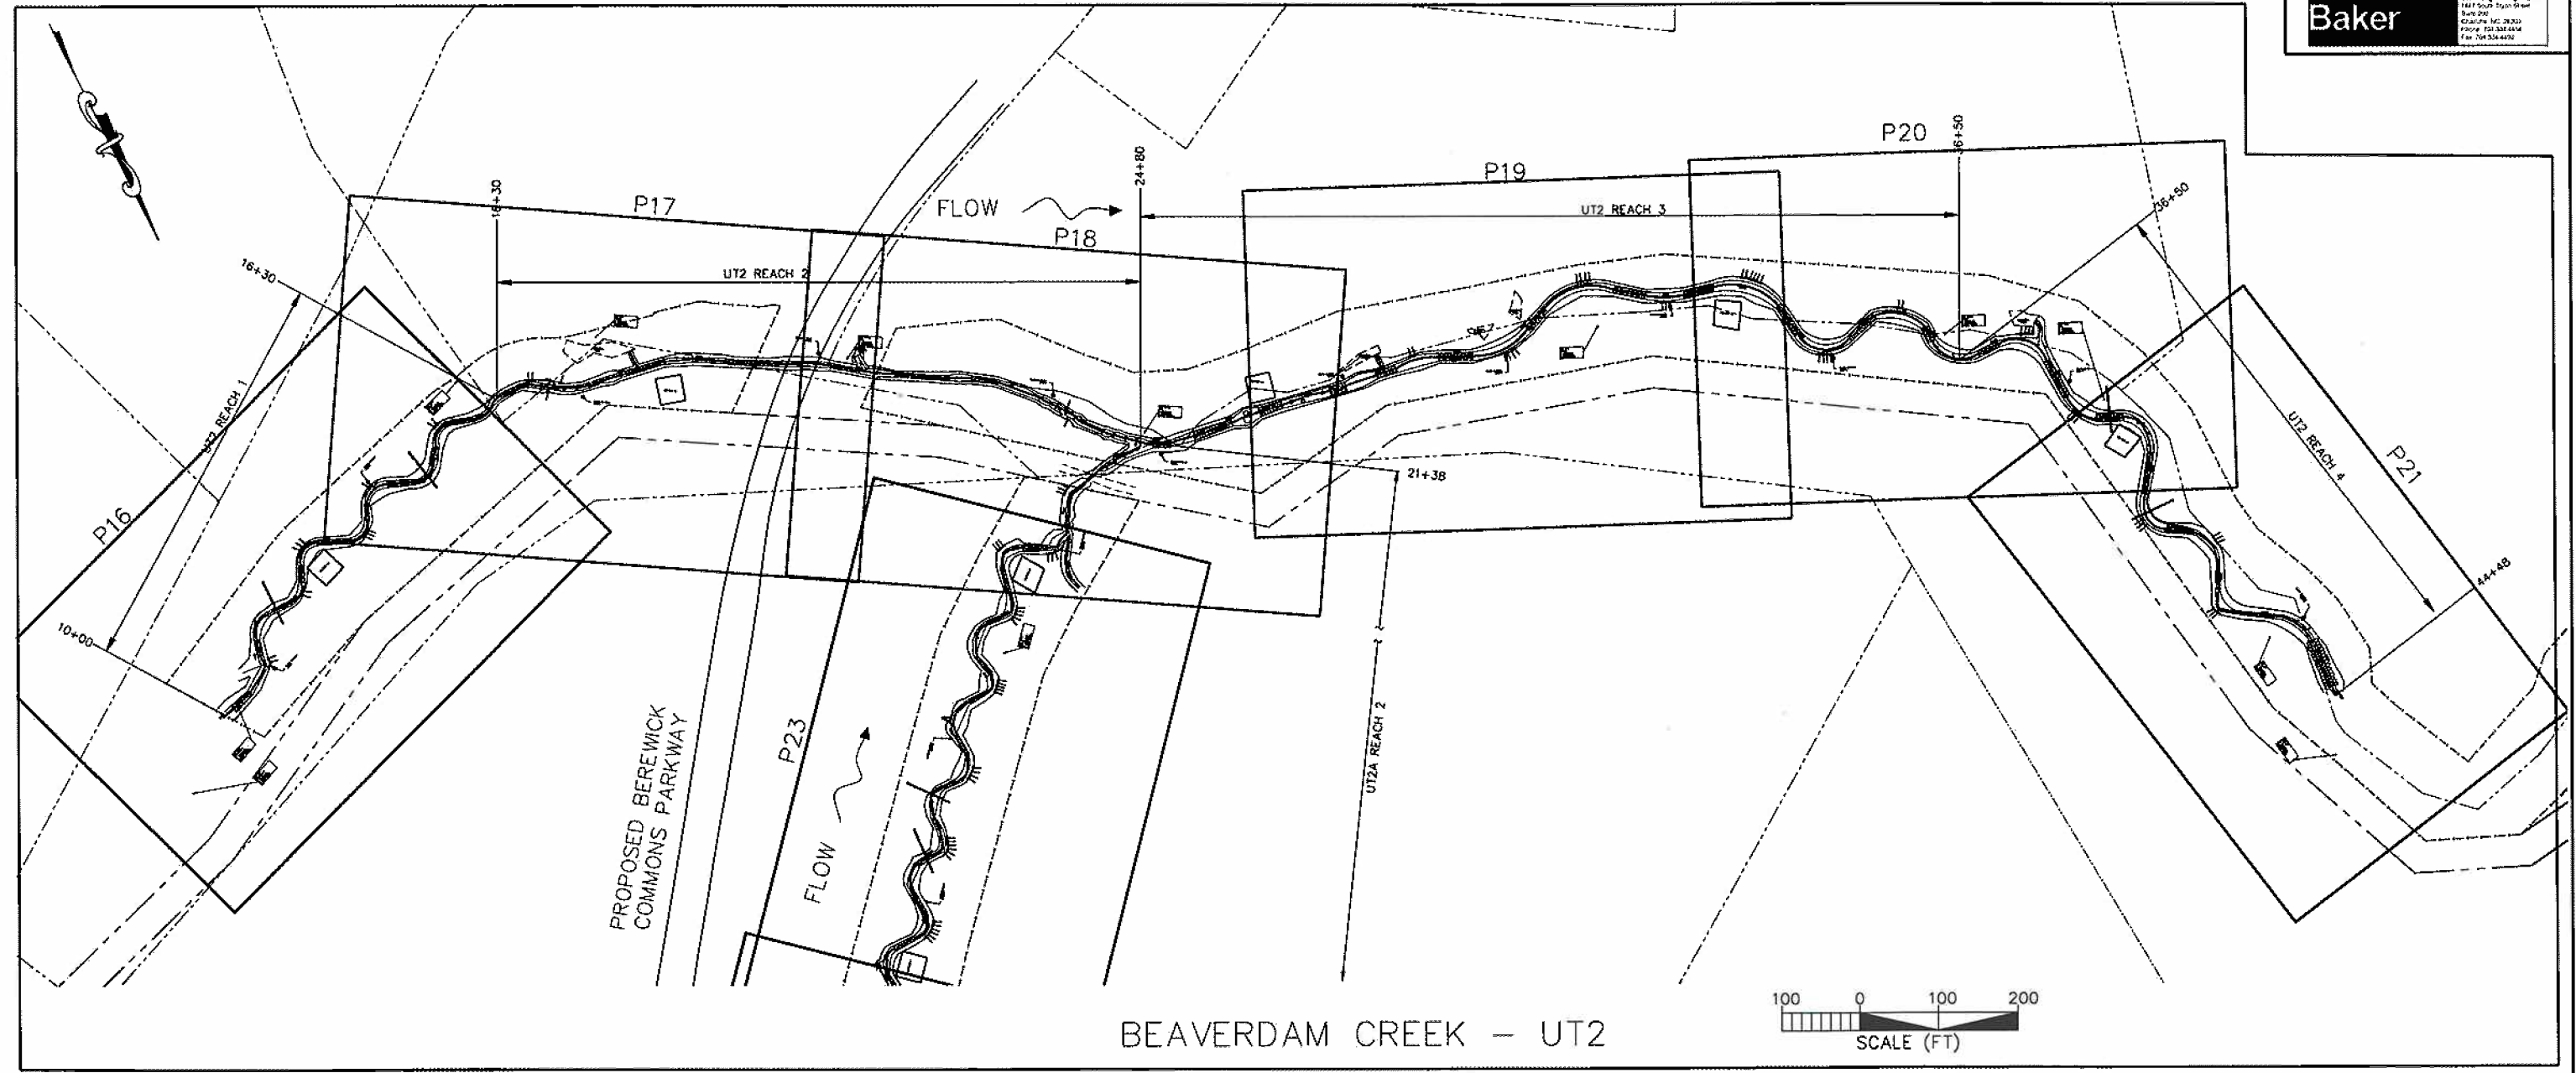


BEAVERDAM CREEK - UT2


BEAVERDAM CREEK
AS-BUILT WITH BMPS
REFERENCE SHEET

PROJECT REFERENCE NO. 108528	SHEET NO. R4
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	

Baker Engineering, Inc.
 2447 E. 1st Street
 Suite 200
 Chicago, IL 60632
 Phone: 773.324.6234
 Fax: 773.324.4322

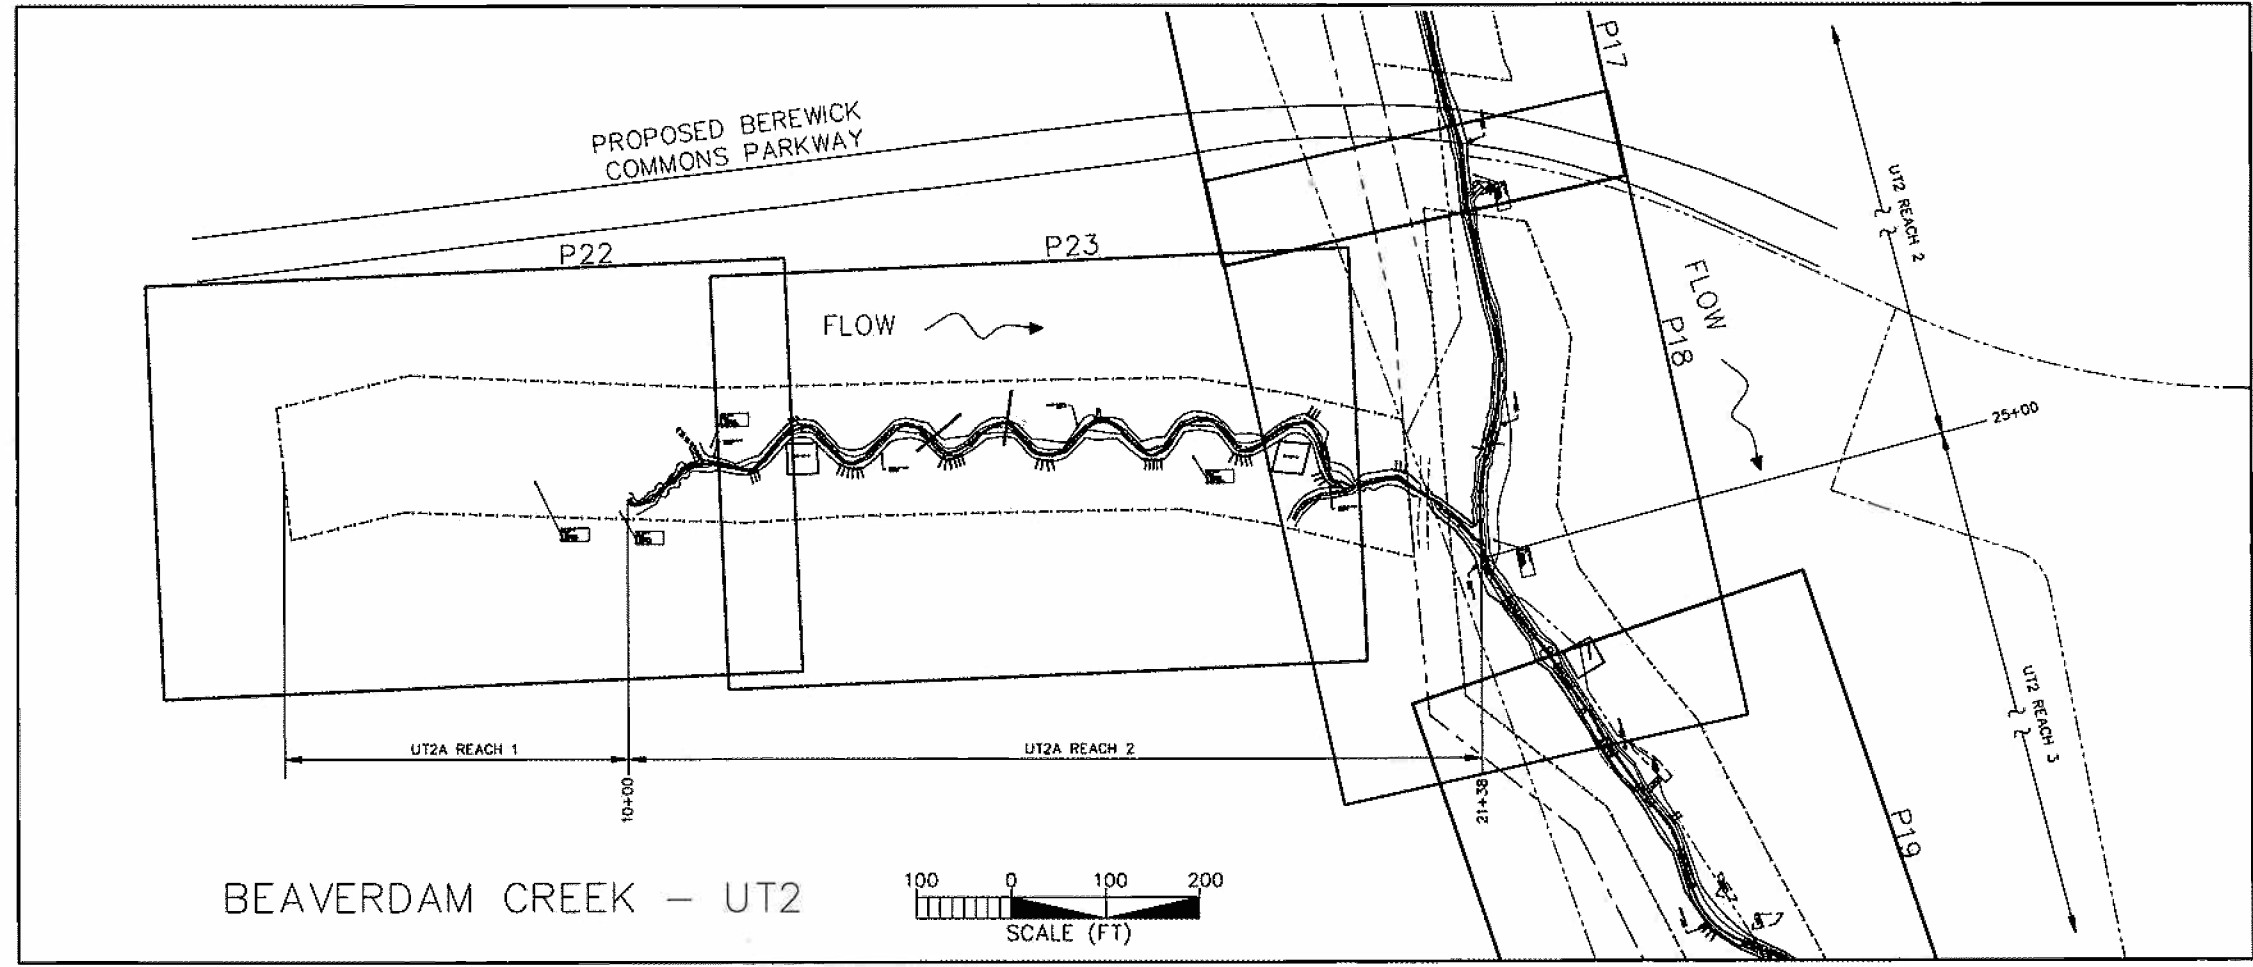


BEAVERDAM CREEK - UT2



BEAVERDAM CREEK
AS-BUILT WITH BMPS


REFERENCE SHEET


PROJECT REFERENCE NO.	SHEET NO.
108528	P1
PROJECT ENGINEER	
KLT	
APPROVED BY	
WAH	
DATE	
10/11/2007	
Baker	
<small>Baker Engineering, Inc. 1847 South Tryon Street Suite 200 Charlotte, NC 28213 Phone: 704.332.4455 Fax: 704.332.4450</small>	

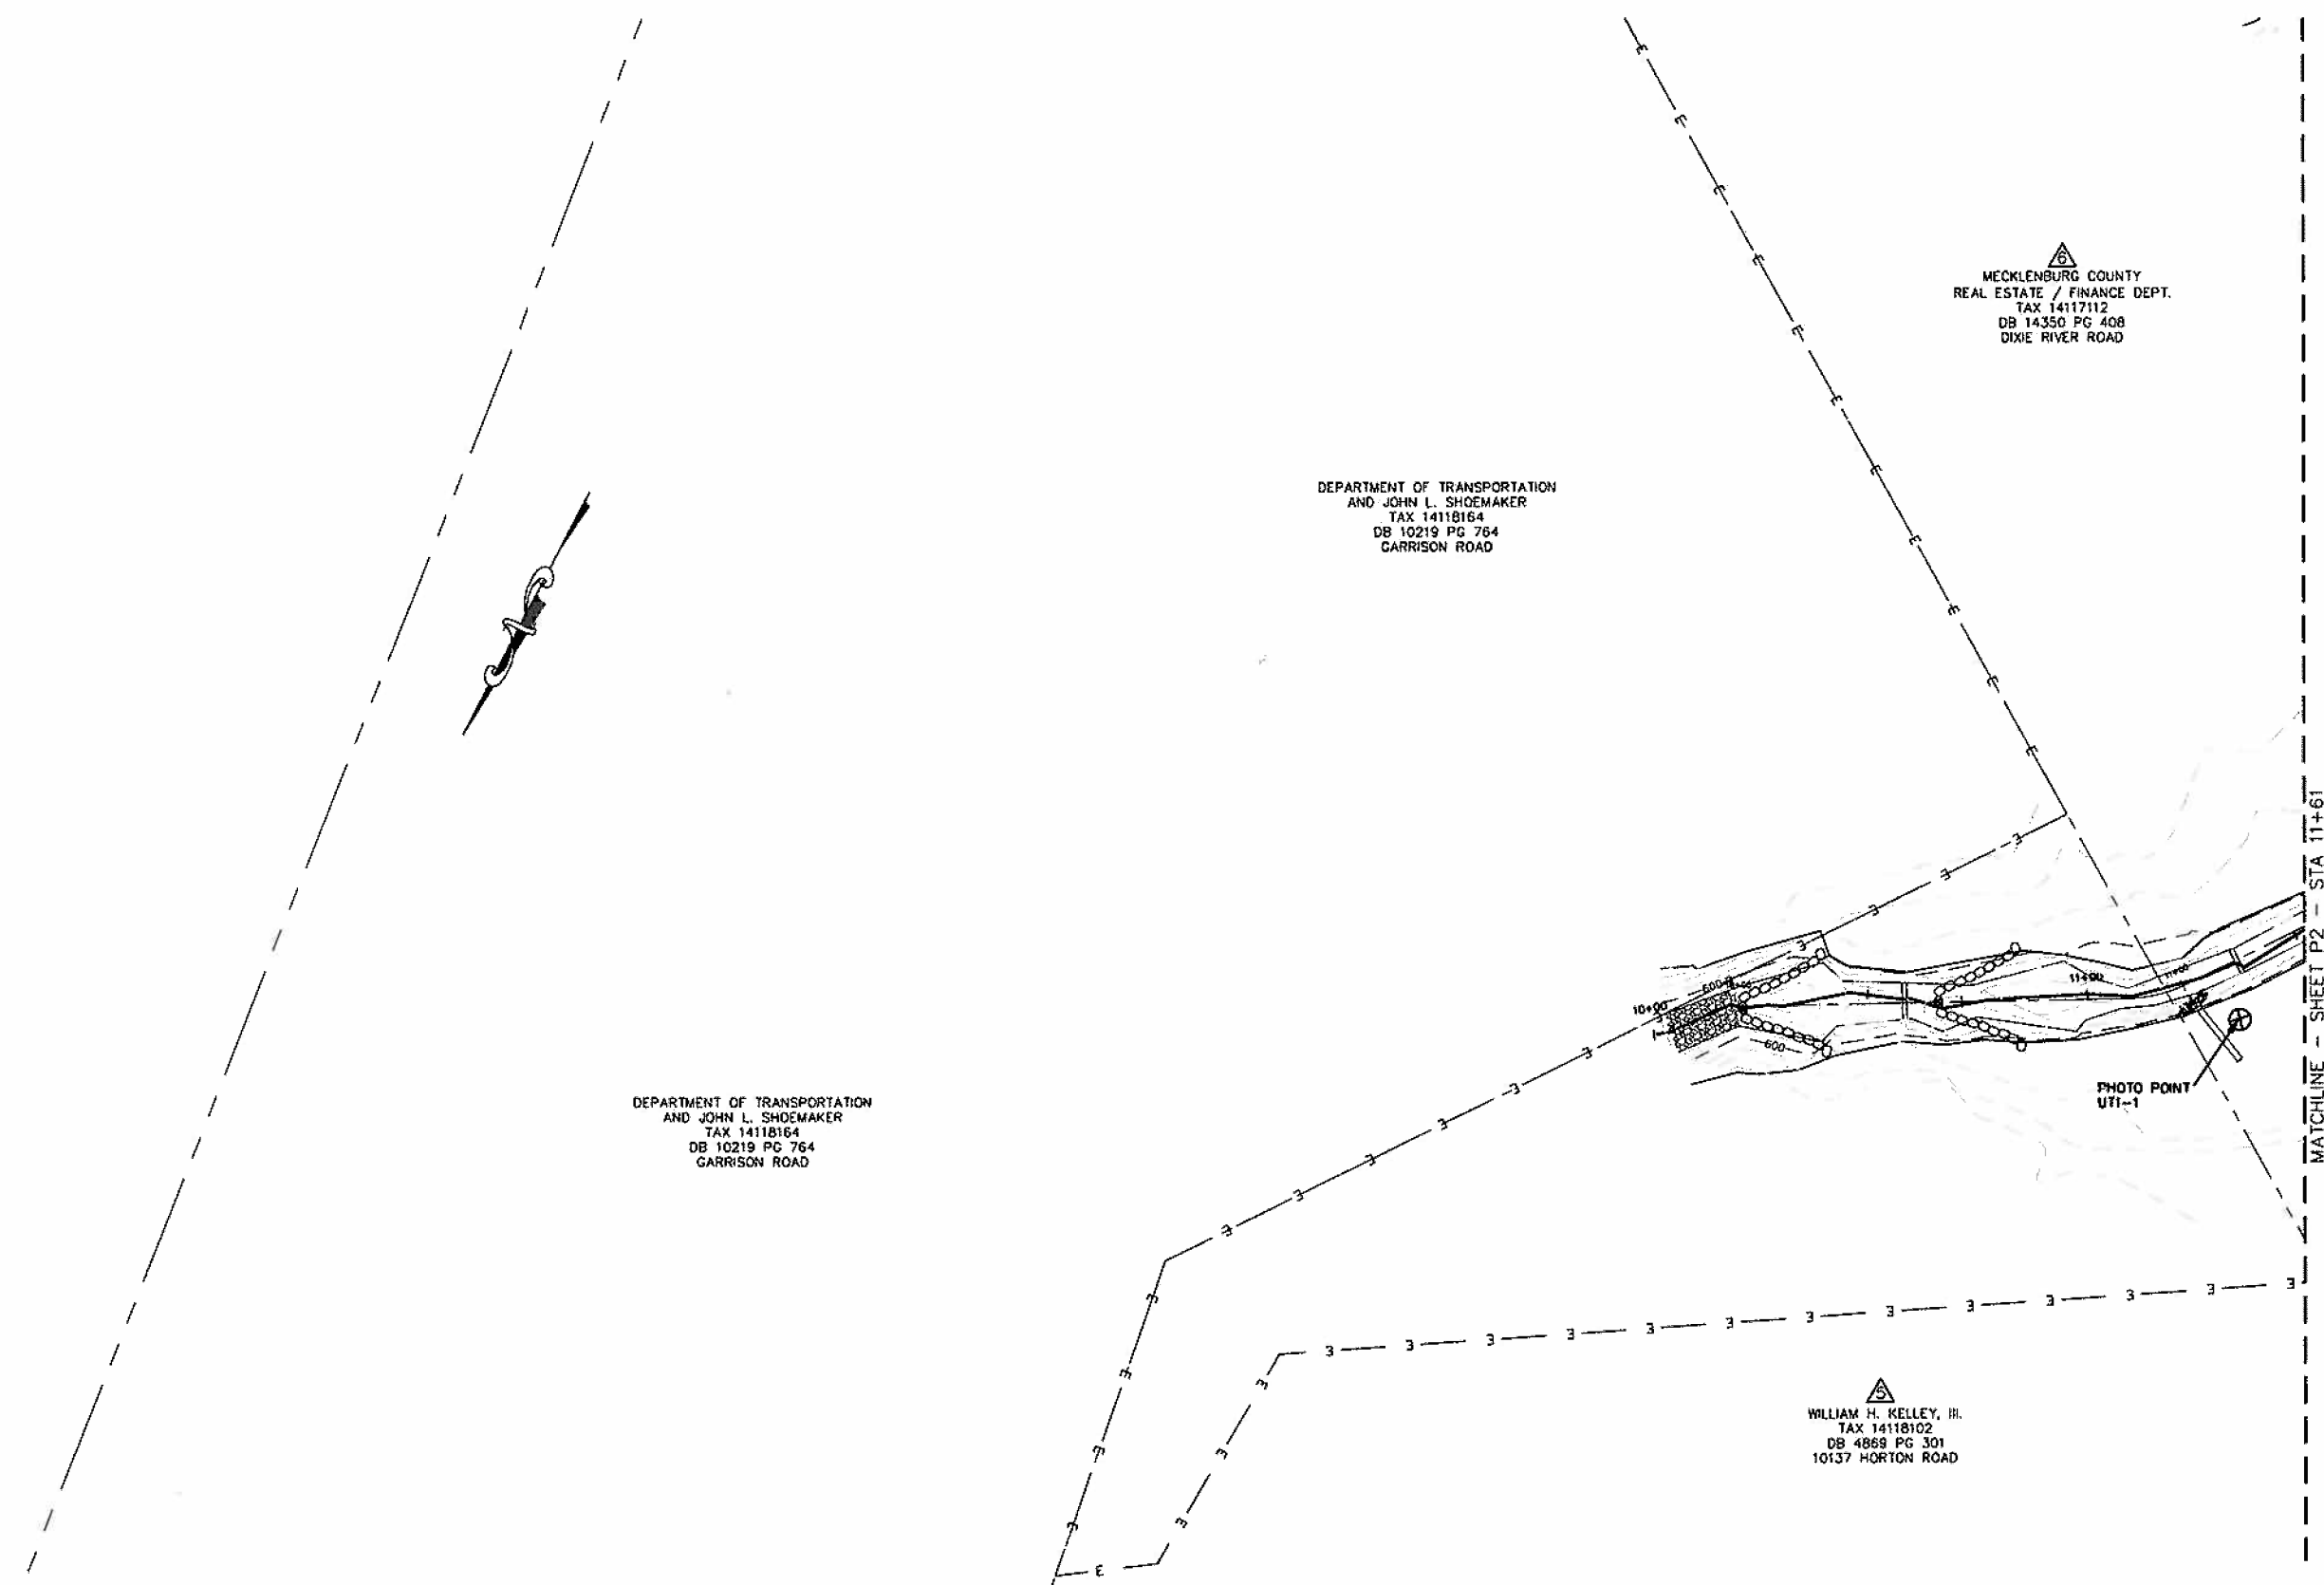

BEAVERDAM CREEK
AS-BUILT WITH BMPS

UT1 SITE PLAN


PROJECT REFERENCE NO. 108528	SHEET NO. P2
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small>Baker Engineering, Inc. 1443 South Tower Drive Suite 200 Clemens, NC 28033 Phone: 704.344.4400 Fax: 704.344.4409</small>	

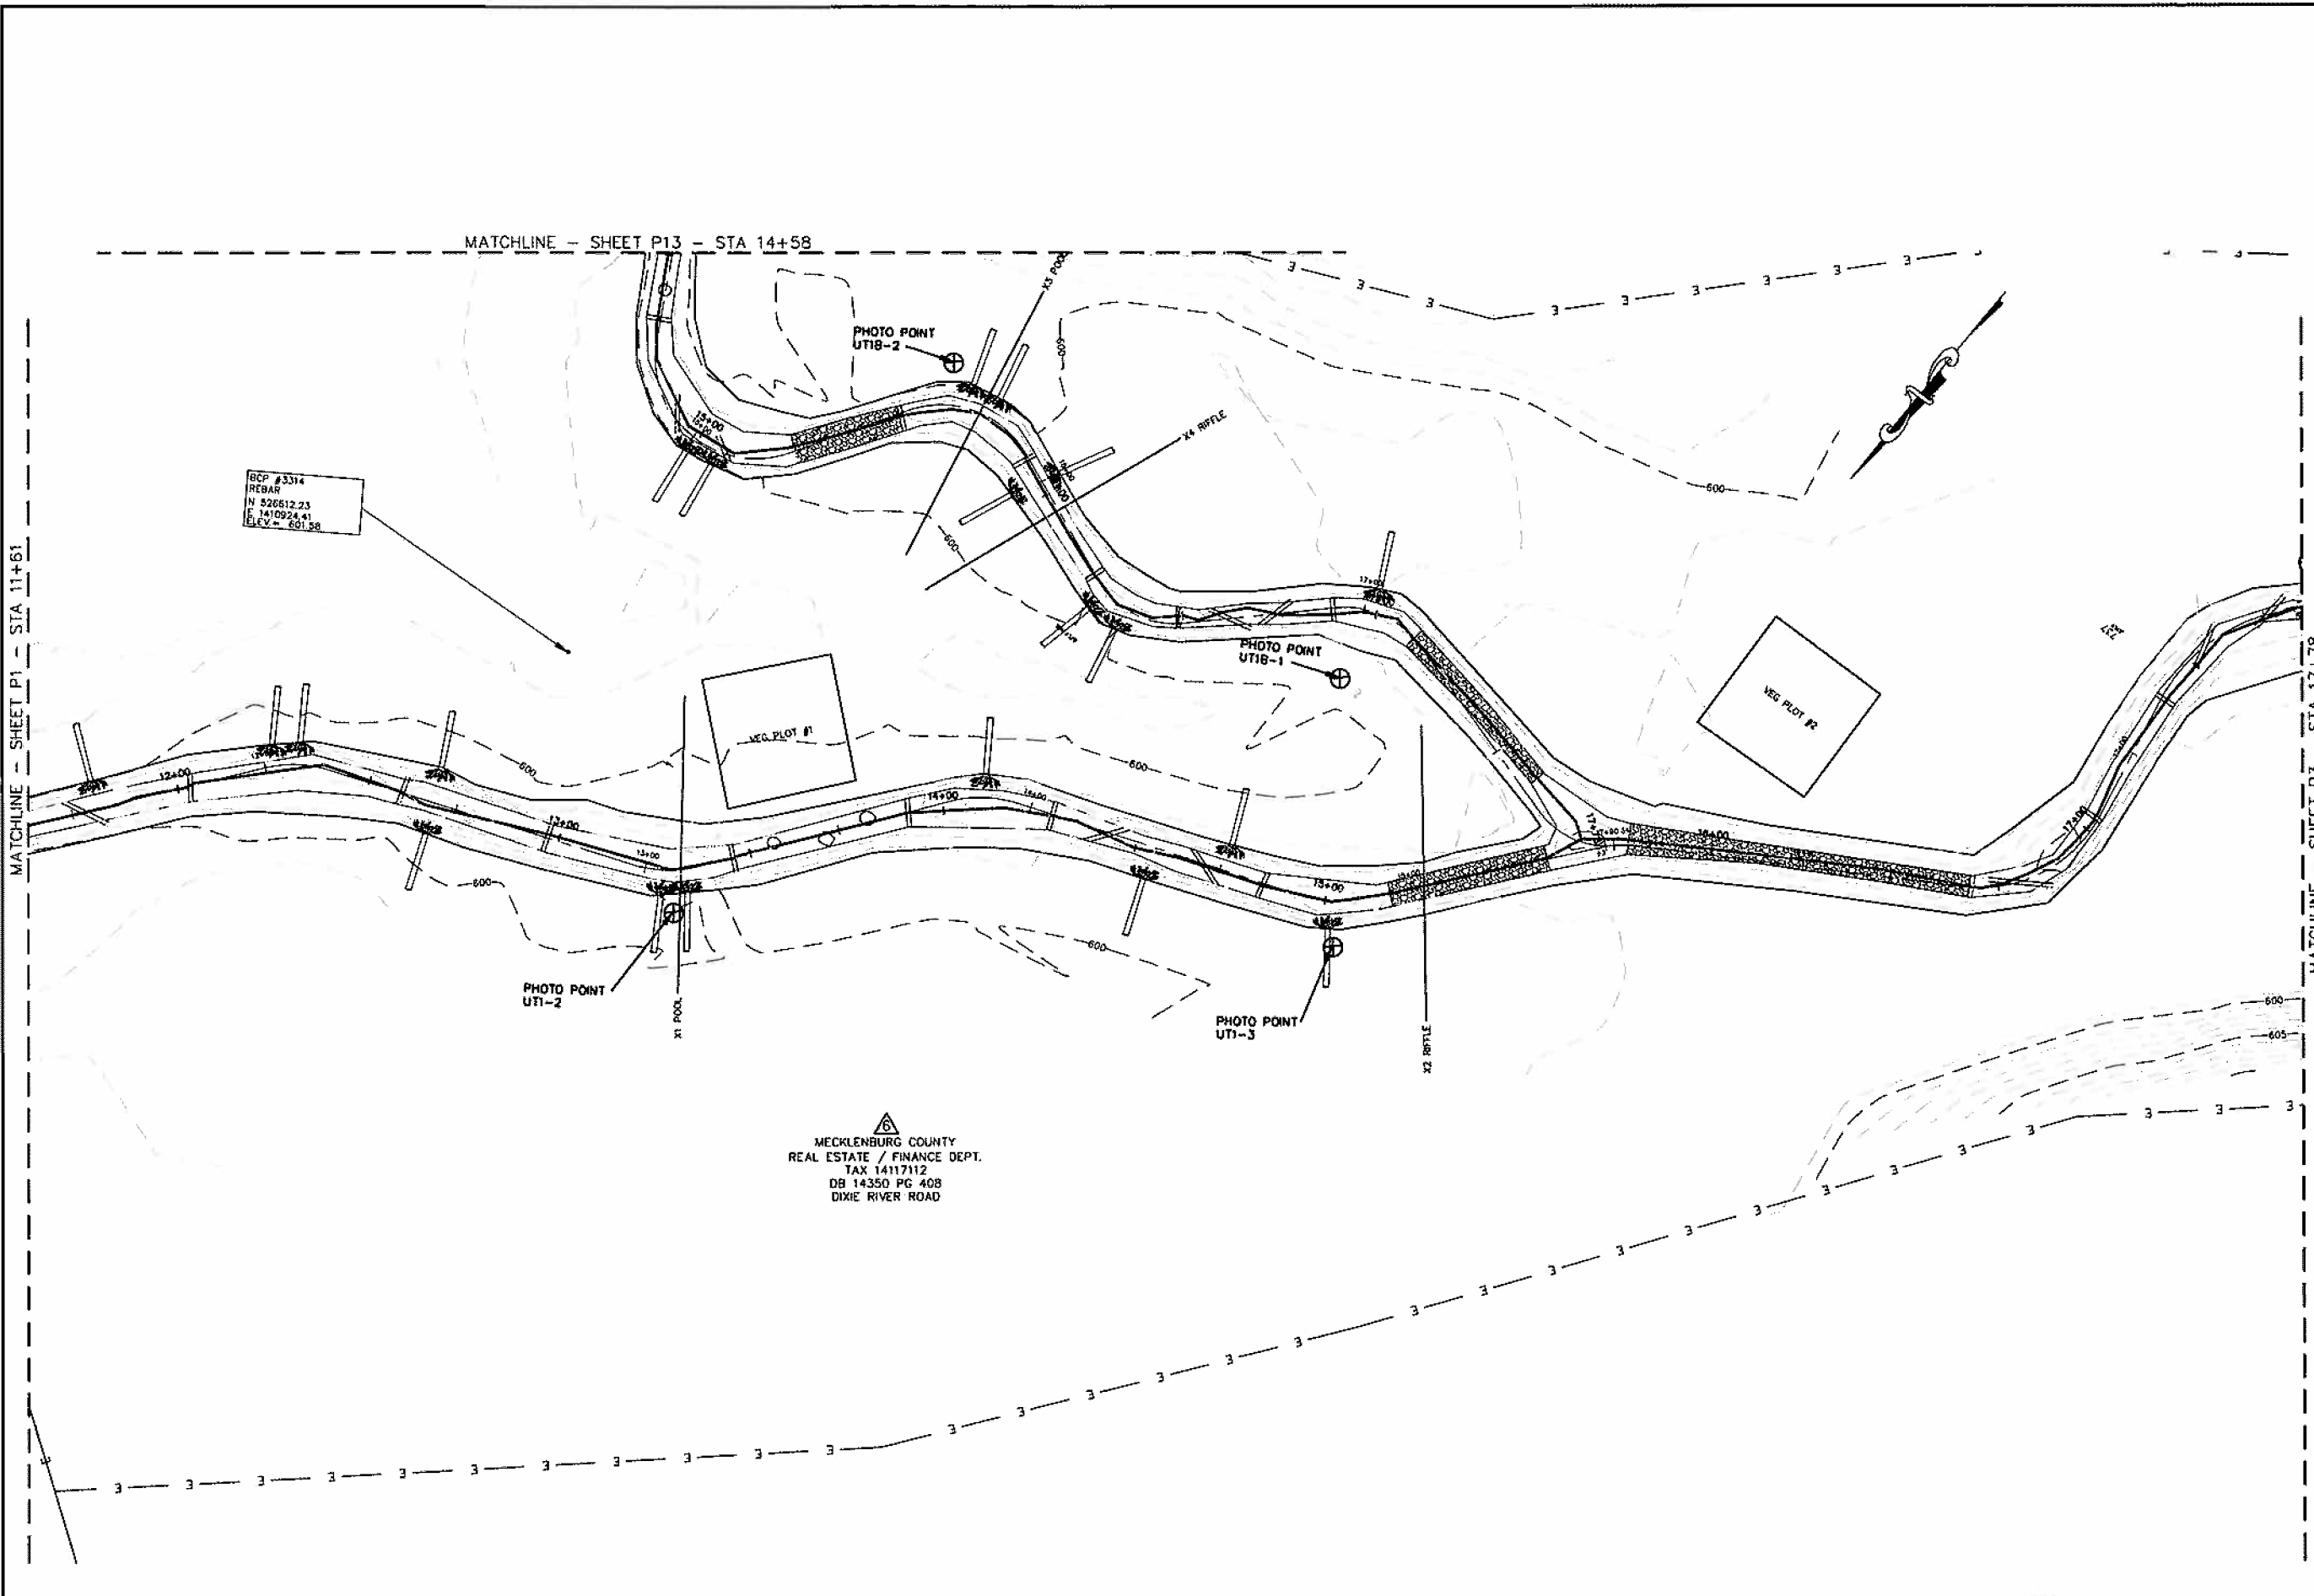



BCP #3314
REBAR
N 526512.23
E 1410924.41
ELEV = 601.58

MECKLENBURG COUNTY
REAL ESTATE / FINANCE DEPT.
TAX 14117112
DB 14350 PG 408
DIXIE RIVER ROAD

BEAVERDAM CREEK
AS-BUILT WITH BMPs
UT1/UT1-B SITE PLAN

PROJECT REFERENCE NO. 108528	SHEET NO. P3
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	

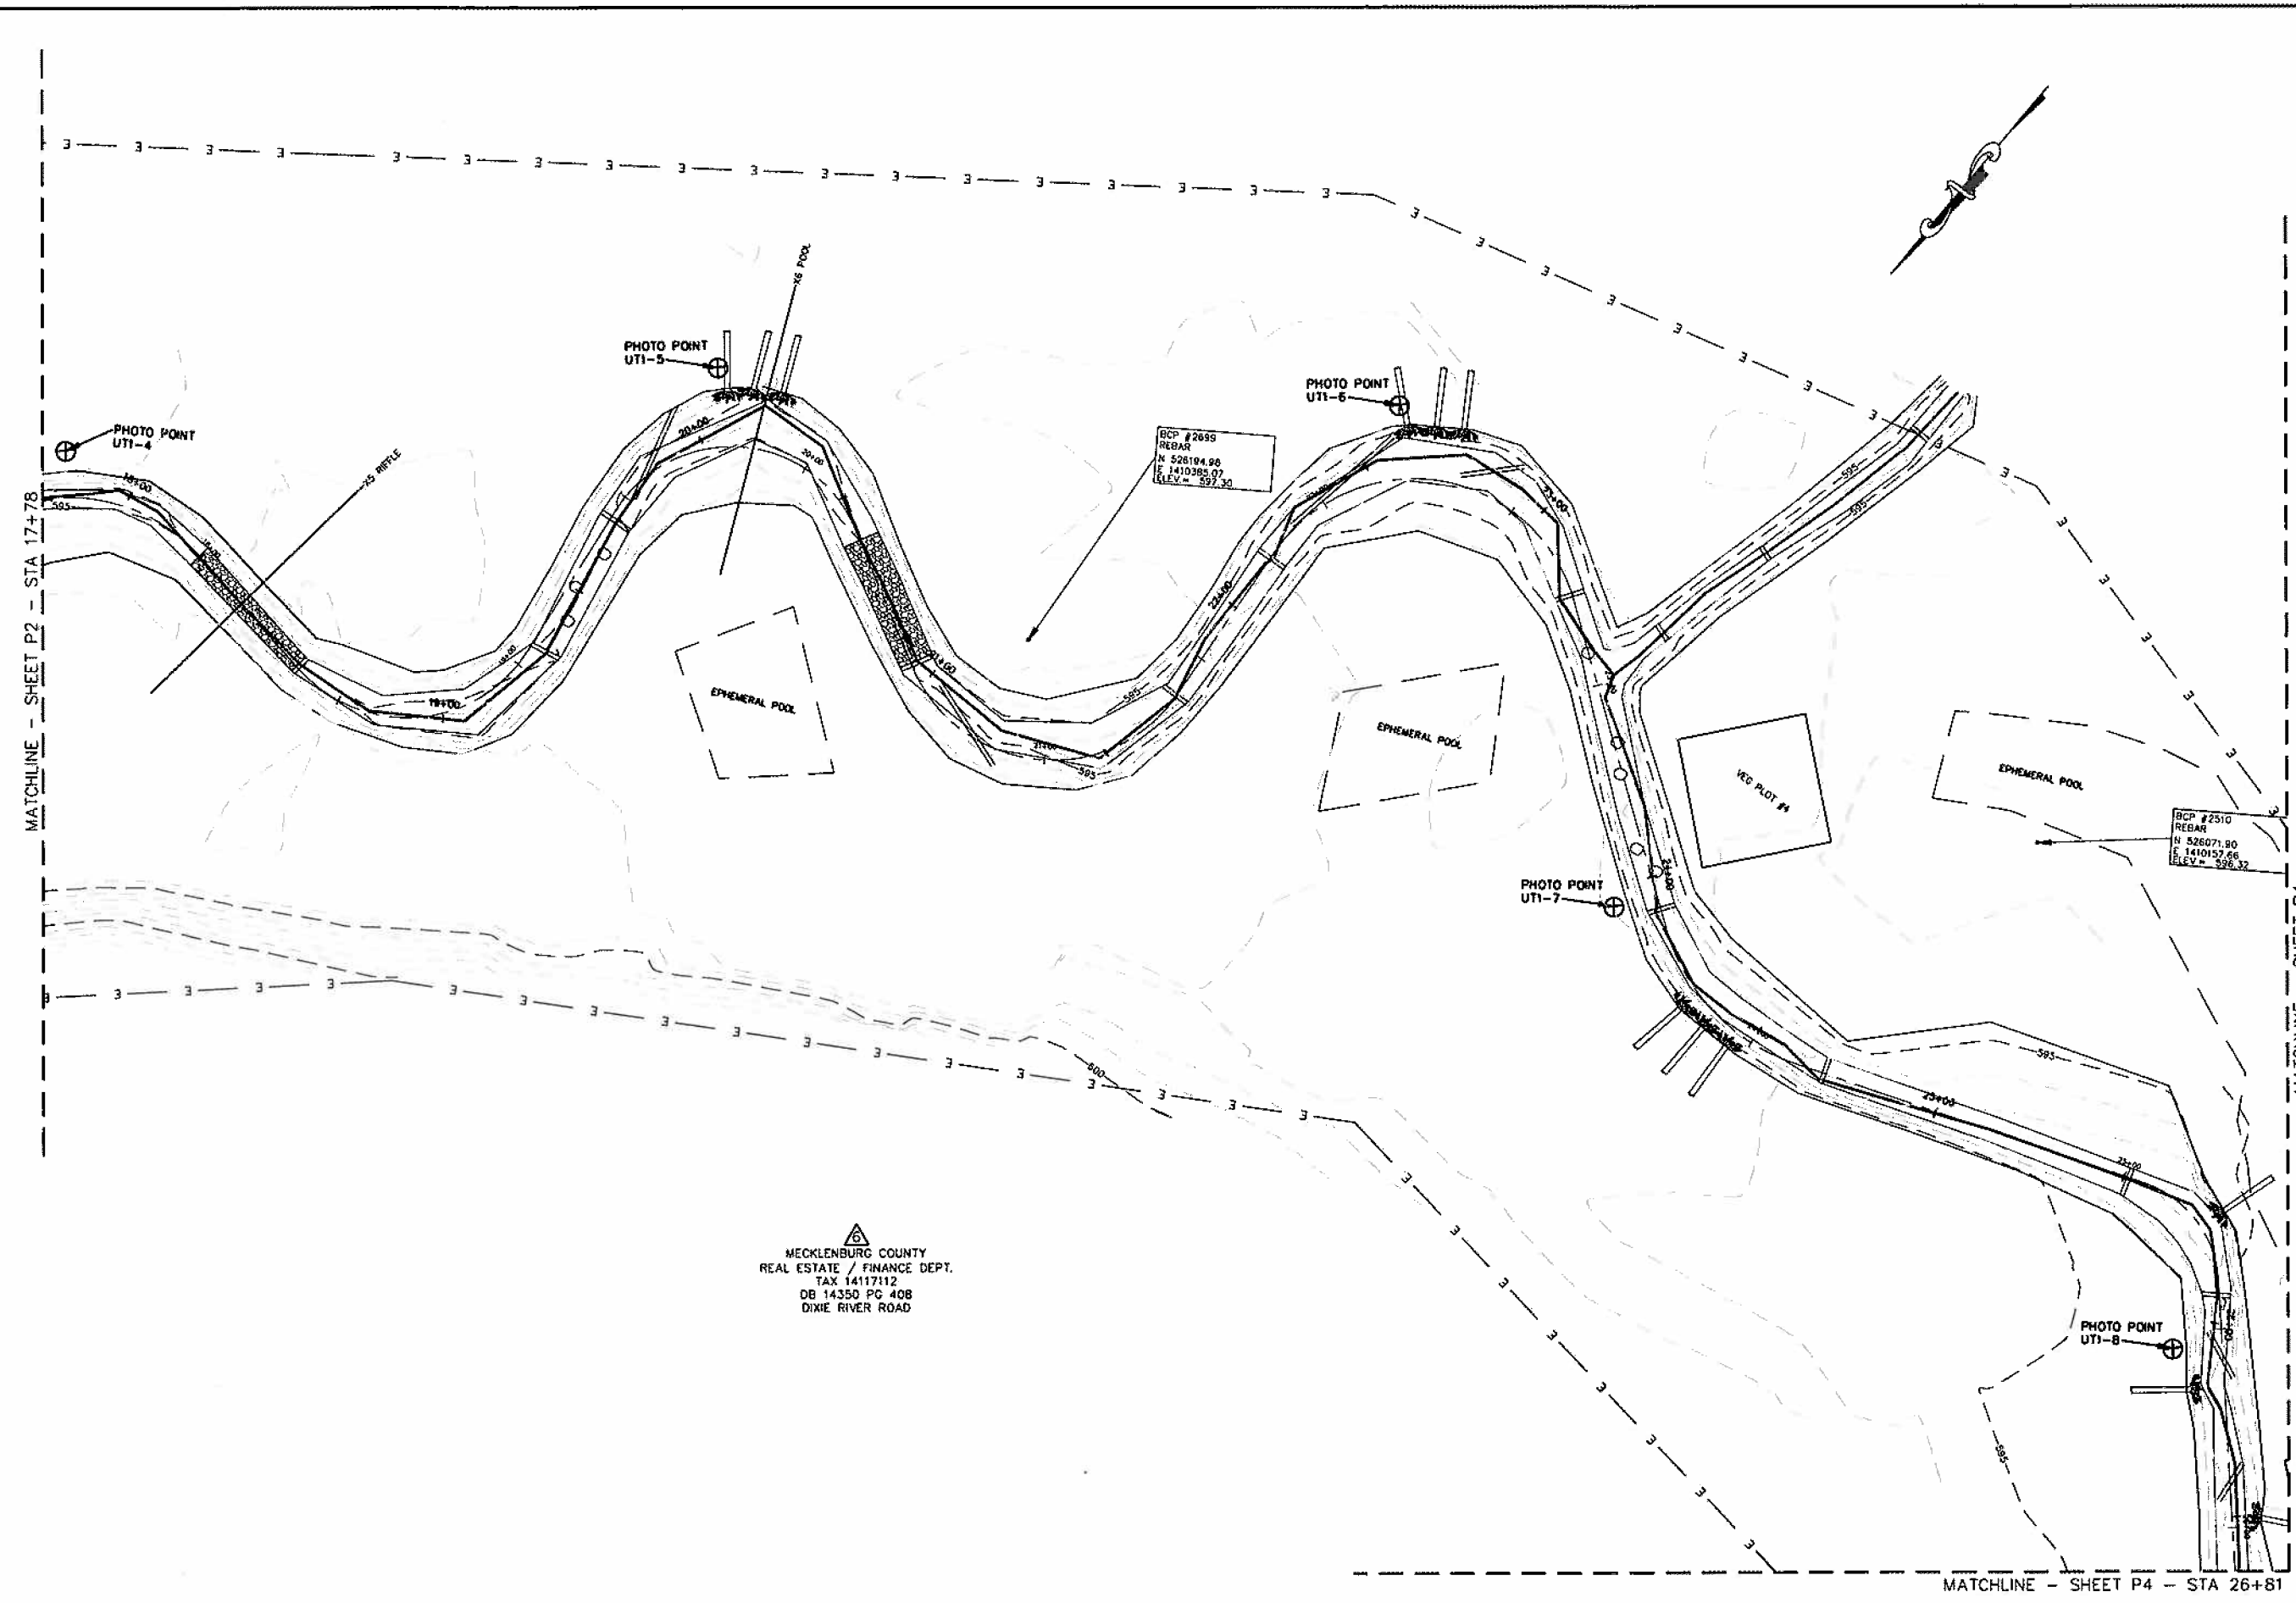


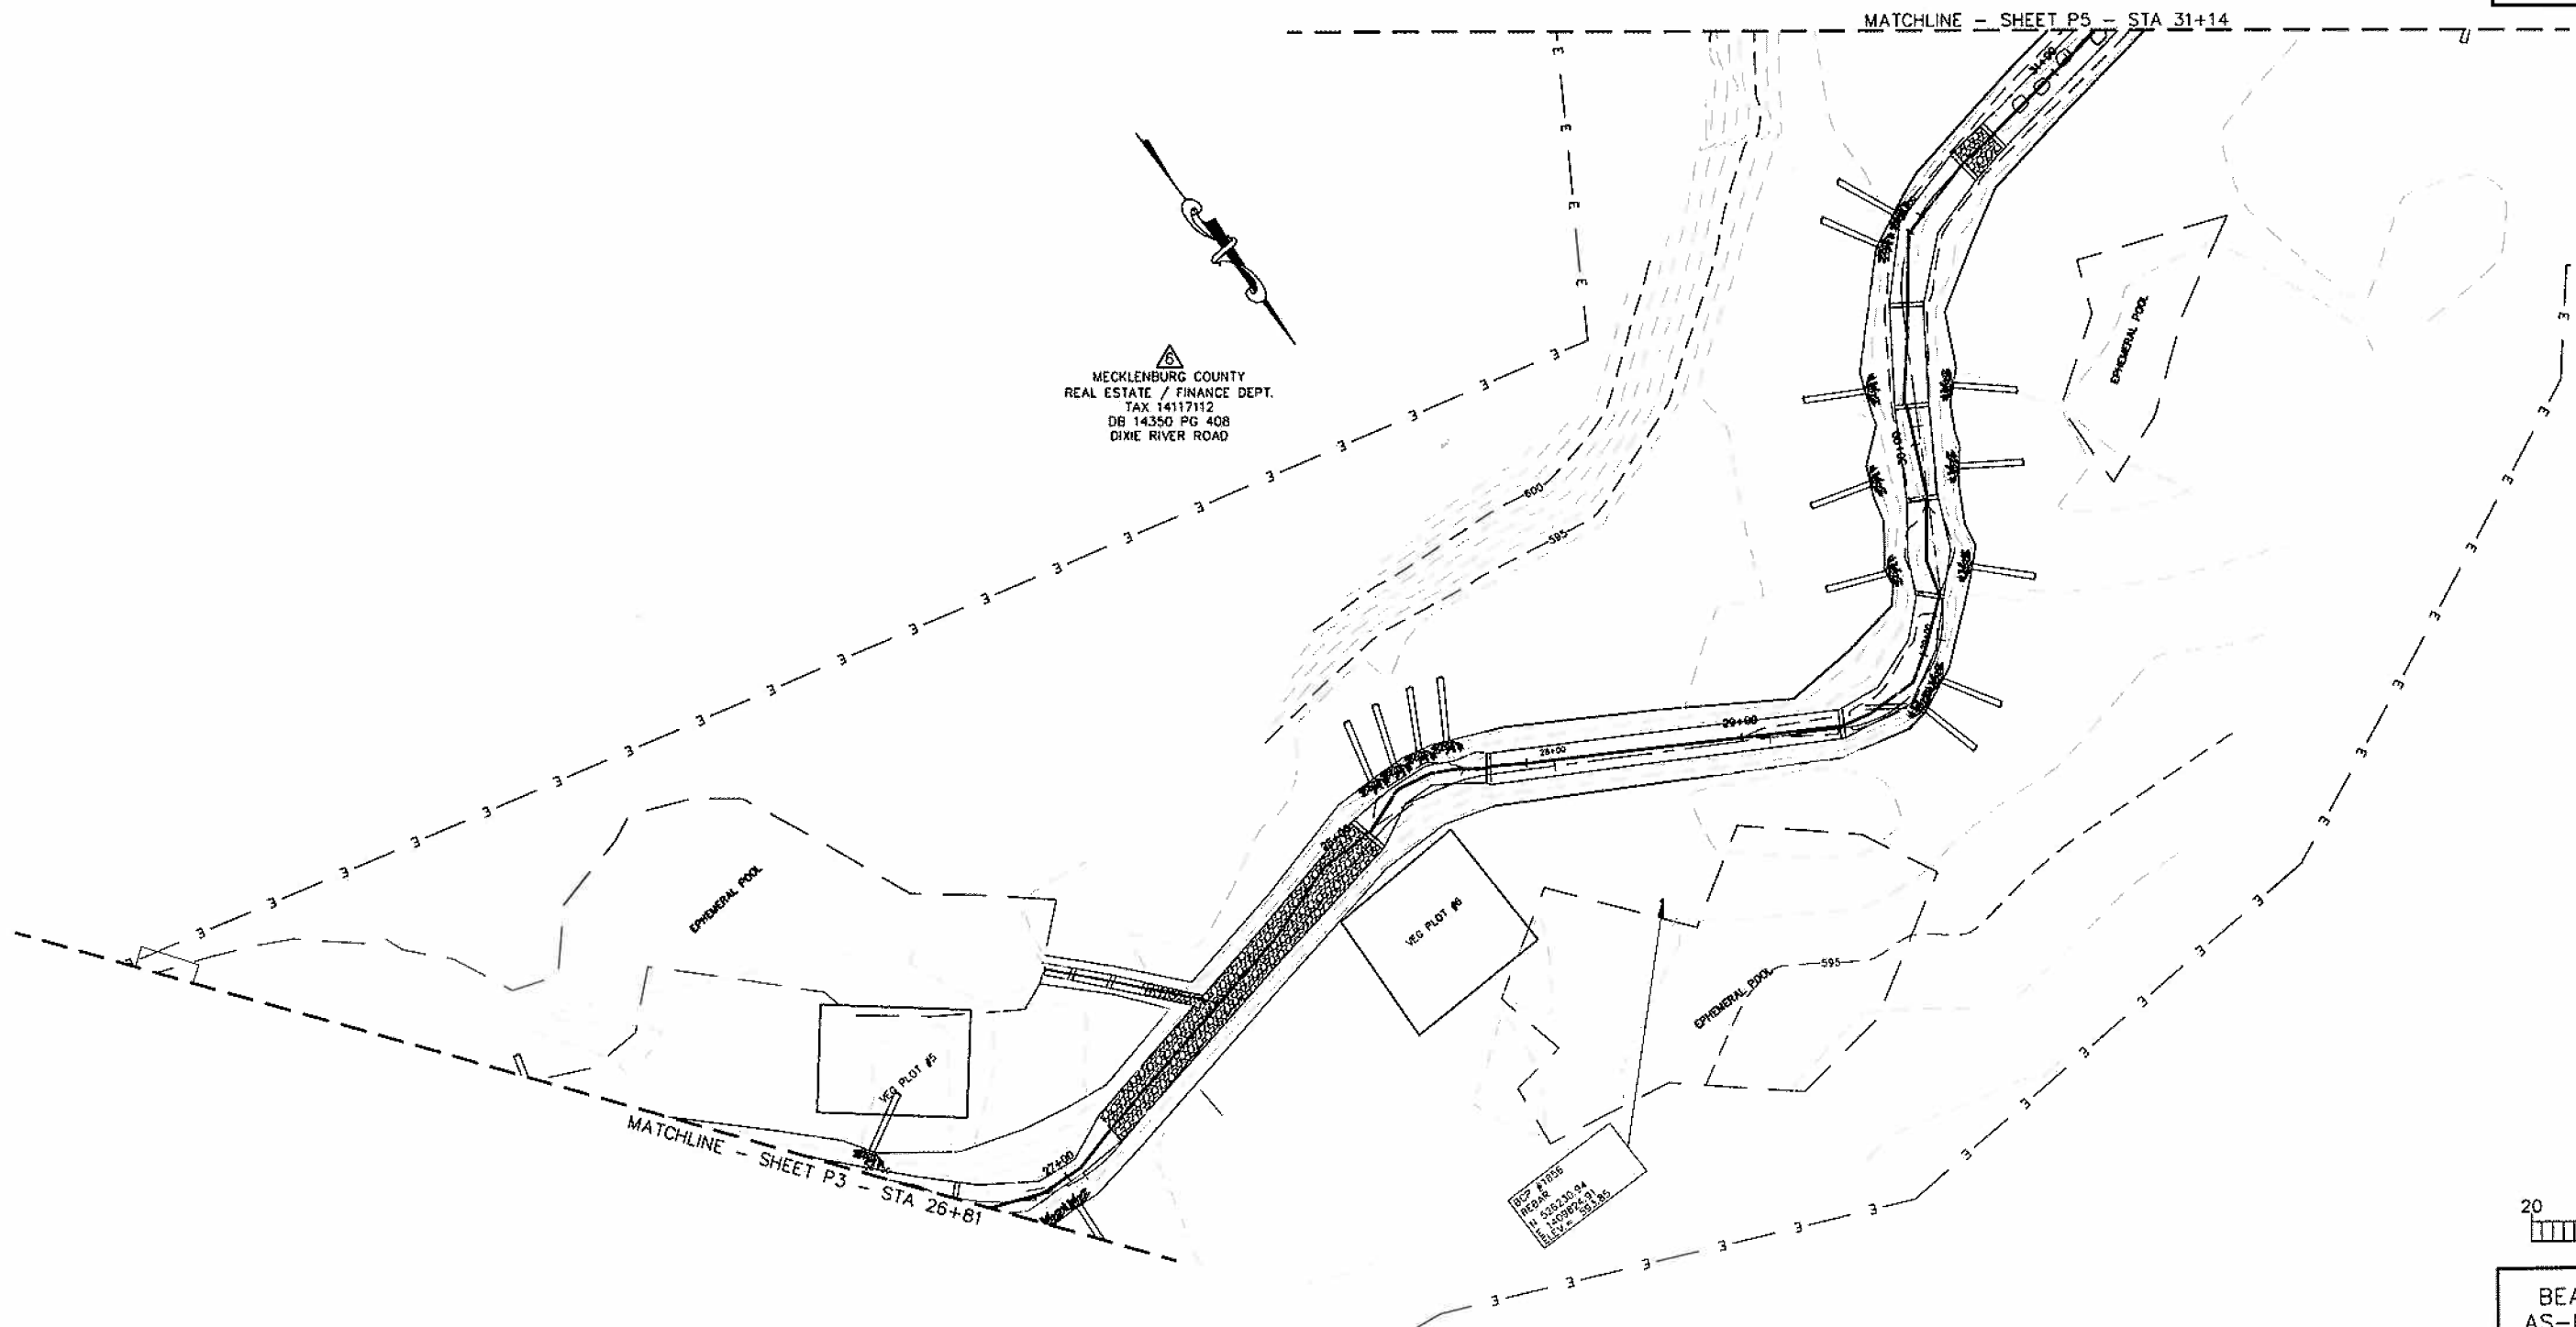

 MECKLENBURG COUNTY
 REAL ESTATE / FINANCE DEPT.
 TAX 14117112
 DB 14350 PG 408
 DIXIE RIVER ROAD



BEAVERDAM CREEK
AS-BUILT WITH BMPs


UT1 SITE PLAN

PROJECT REFERENCE NO. 108528	SHEET NO. P4
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small>Baker Engineering Inc. 1847 South Tyson Street Suite 207 Columbus, GA 31906 Phone: (706) 324-4444 Fax: (706) 324-4457</small>	




BEAVERDAM CREEK
AS-BUILT WITH BMPS


UT1 SITE PLAN


PROJECT REFERENCE NO. 108528	SHEET NO. P5
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small>Baker Engineering, Inc. 1447 South 17th Street Suite 202 Columbus, MS 39206 Phone: 662.324.4550 Fax: 662.324.4552</small>	

MECKLENBURG COUNTY
REAL ESTATE / FINANCE DEPT.
TAX 14117112
DB 14350 PG 408
DIXIE RIVER ROAD

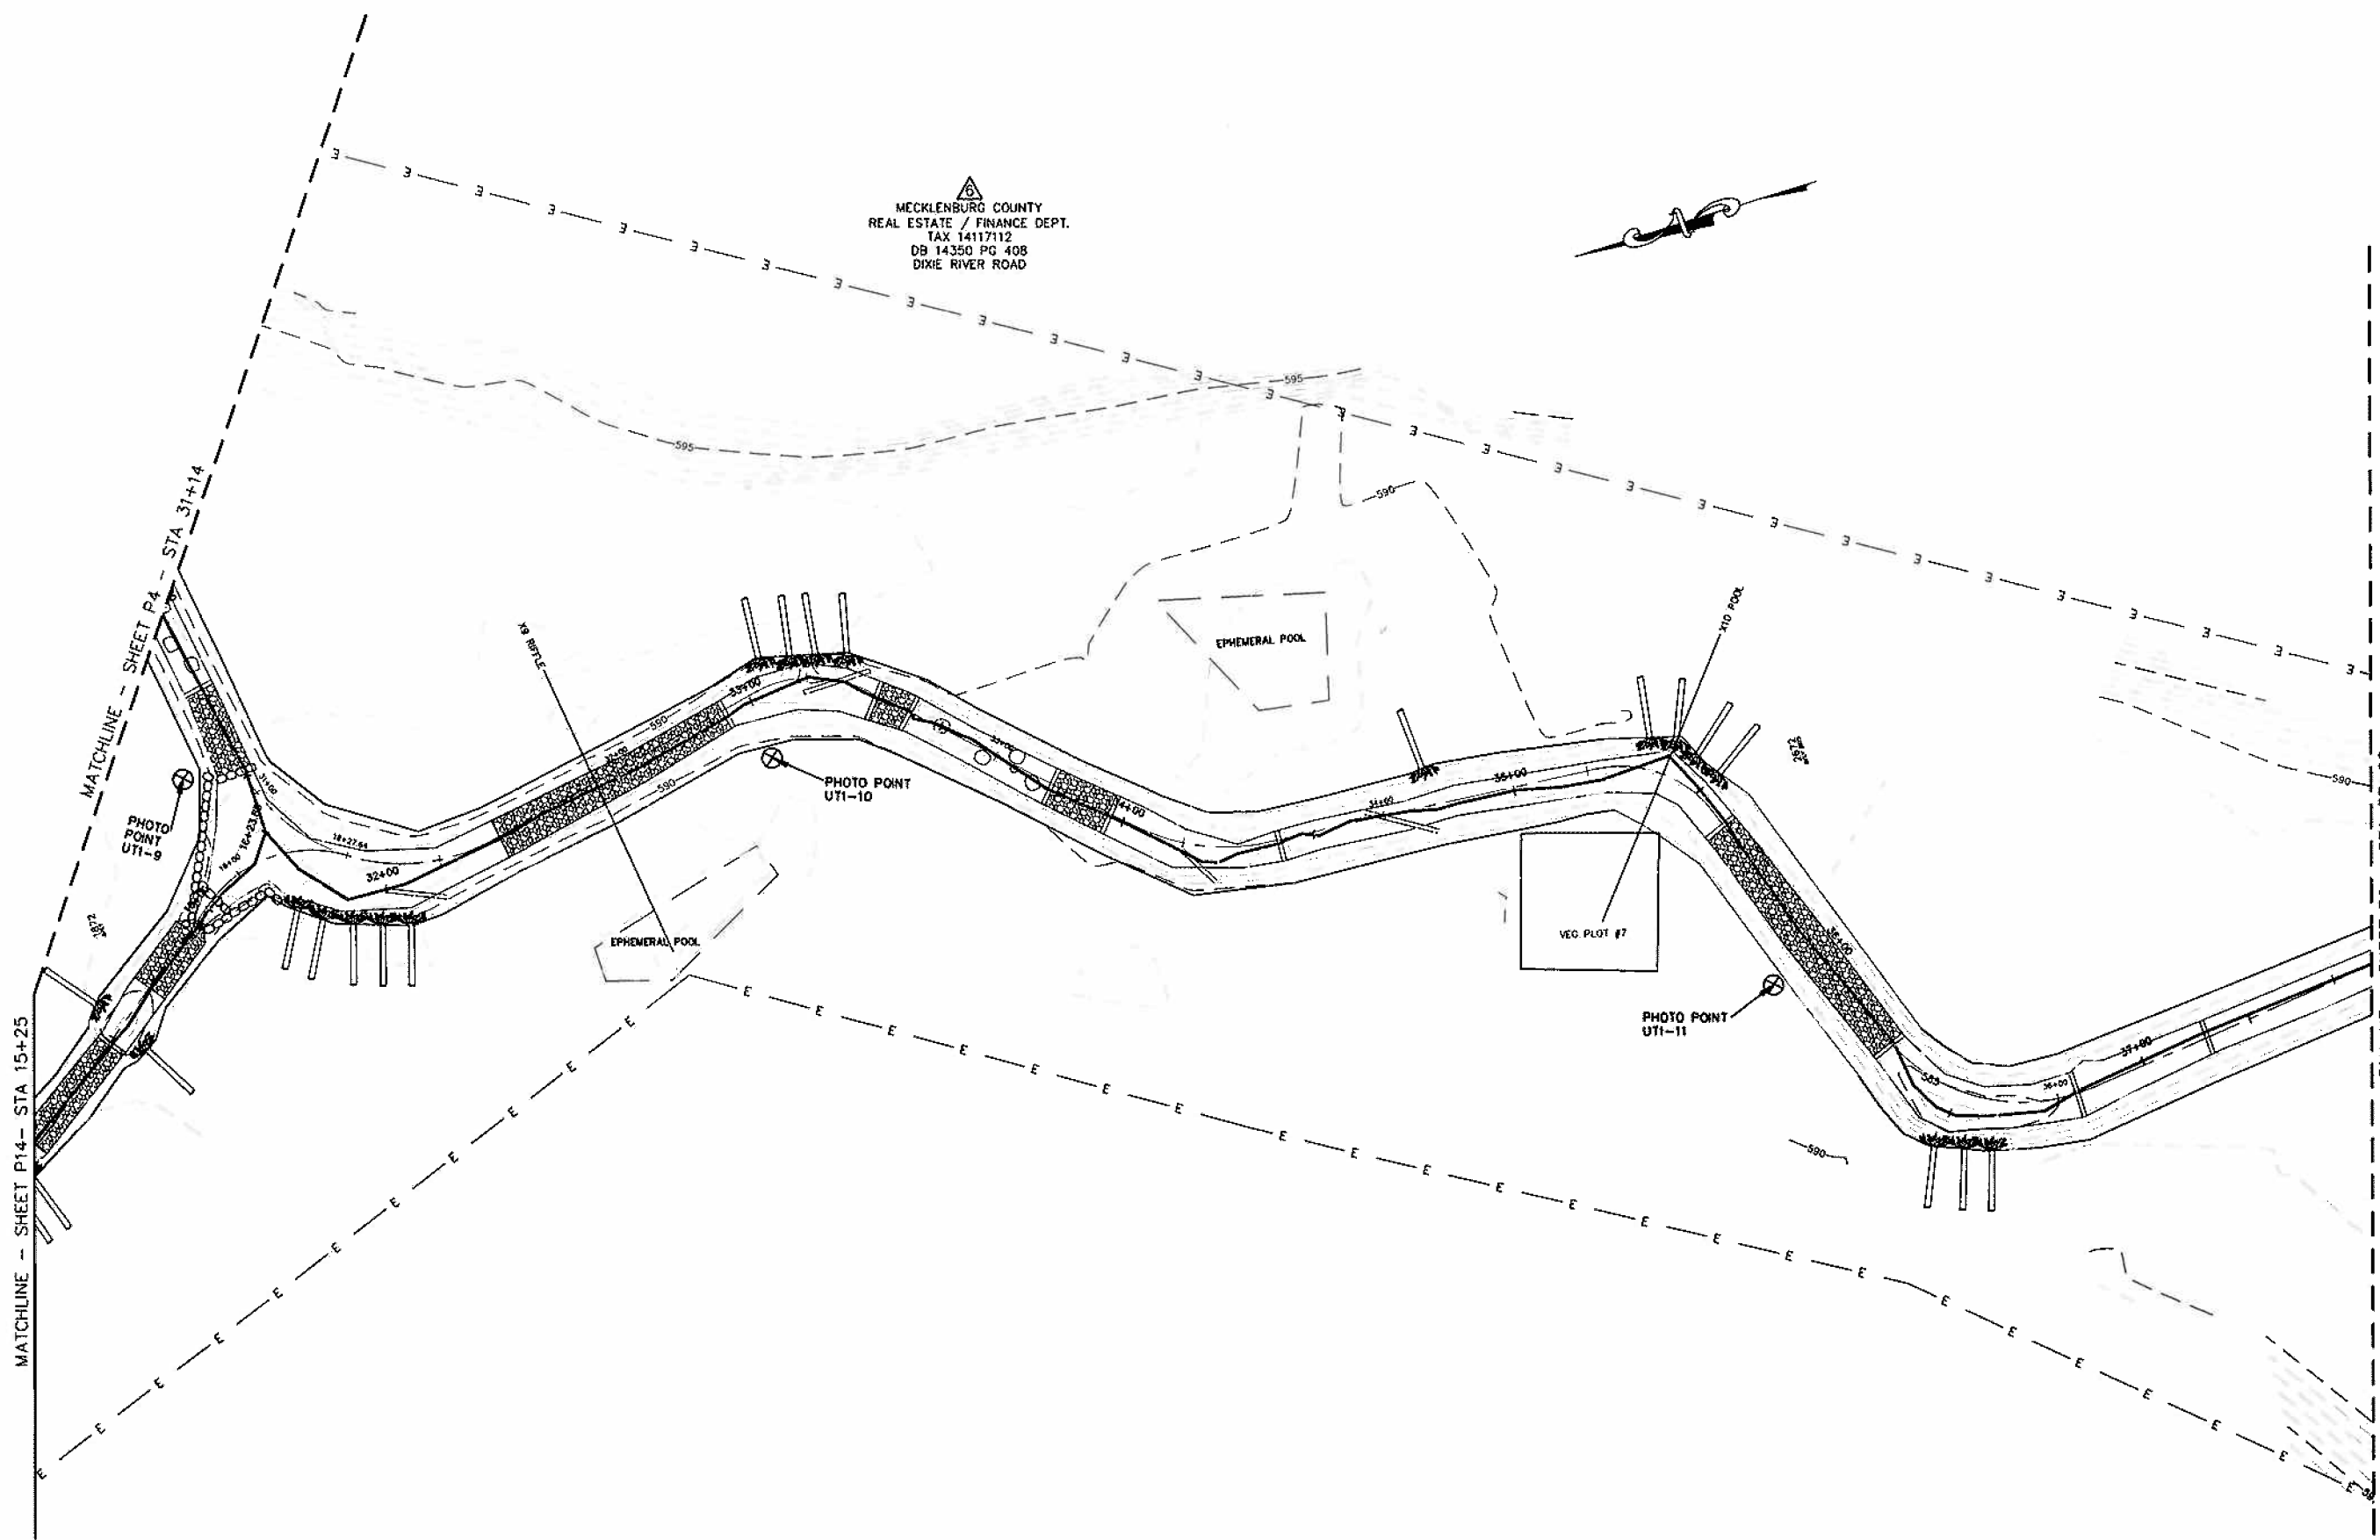


BEAVERDAM CREEK
AS-BUILT WITH BMPS
UT1/UT1-C SITE PLAN


PROJECT REFERENCE NO. 108528	SHEET NO. P6
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	

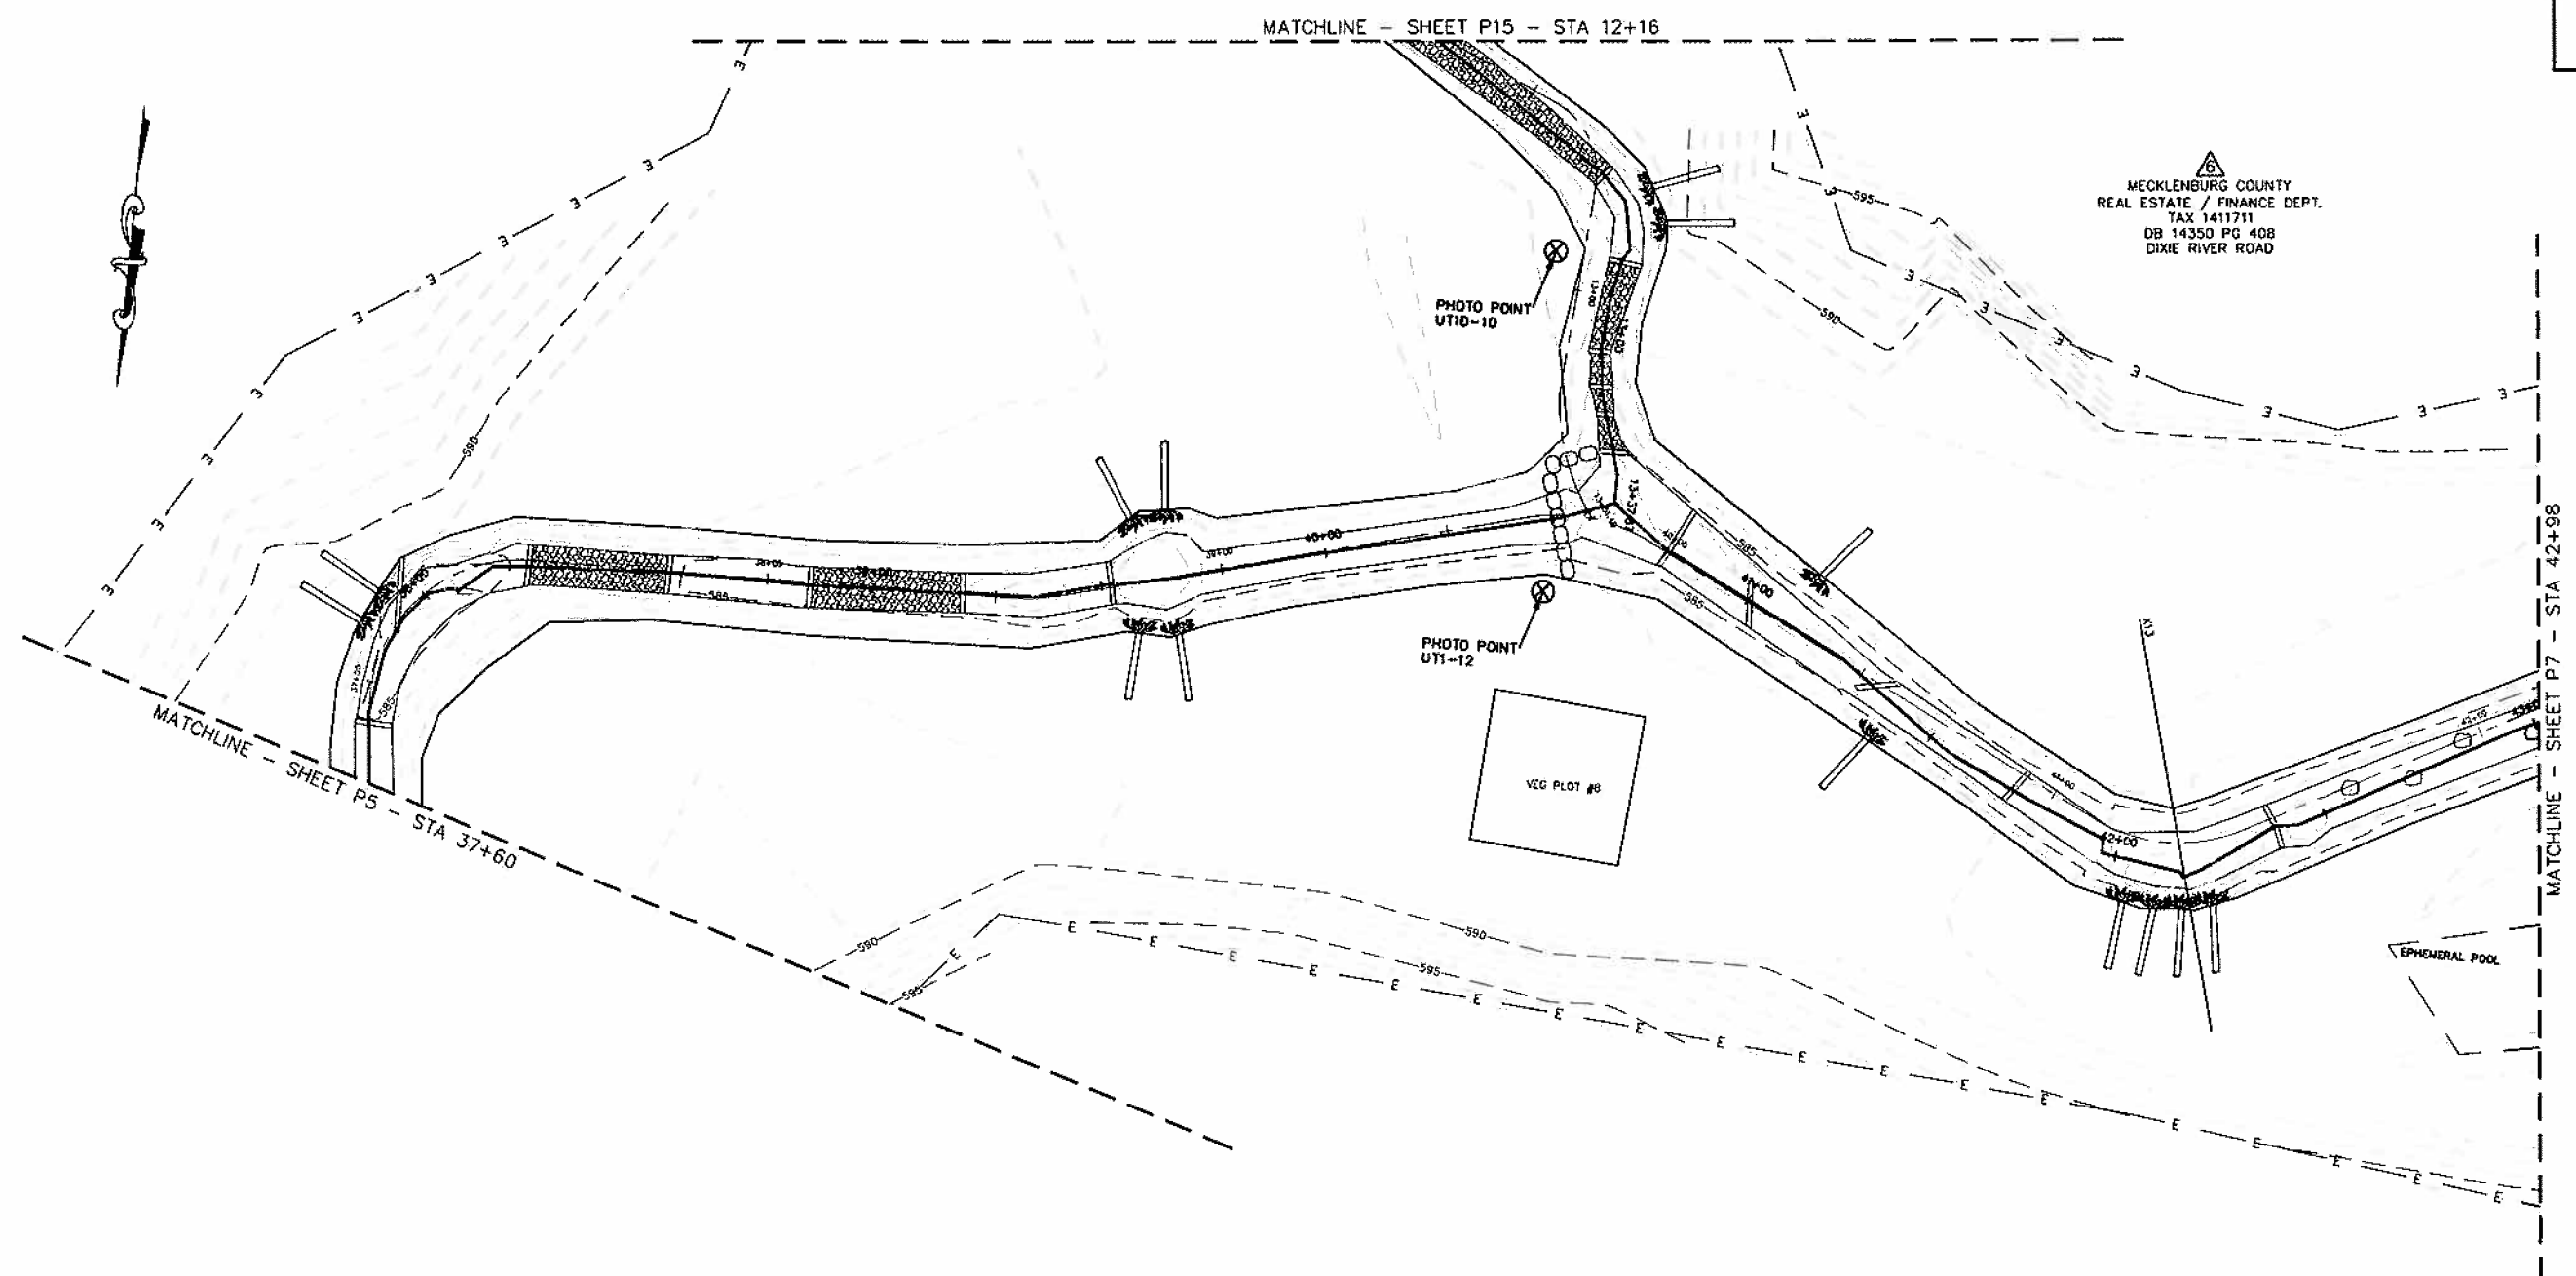


MECKLENBURG COUNTY
REAL ESTATE / FINANCE DEPT.
TAX 1411711
DB 14350 PG 408
DIXIE RIVER ROAD





BEAVERDAM CREEK
AS-BUILT WITH BMPs
UT1/UT1-D SITE PLAN

PROJECT REFERENCE NO. 108528	SHEET NO. P7
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small> Baker Engineering Inc. 1444 South Taylor Street Suite 200 Cary, NC 27513 Phone: 919.234.4457 Fax: 919.234.4452 </small>	


 MECKLENBURG COUNTY
 REAL ESTATE / FINANCE DEPT.
 TAX 14117112
 DB 14350 PG 408
 DIXIE RIVER ROAD



 MECKLENBURG COUNTY
 REAL ESTATE / FINANCE DEPT.
 TAX 14117111
 DB 14350 PG 402
 DIXIE RIVER ROAD

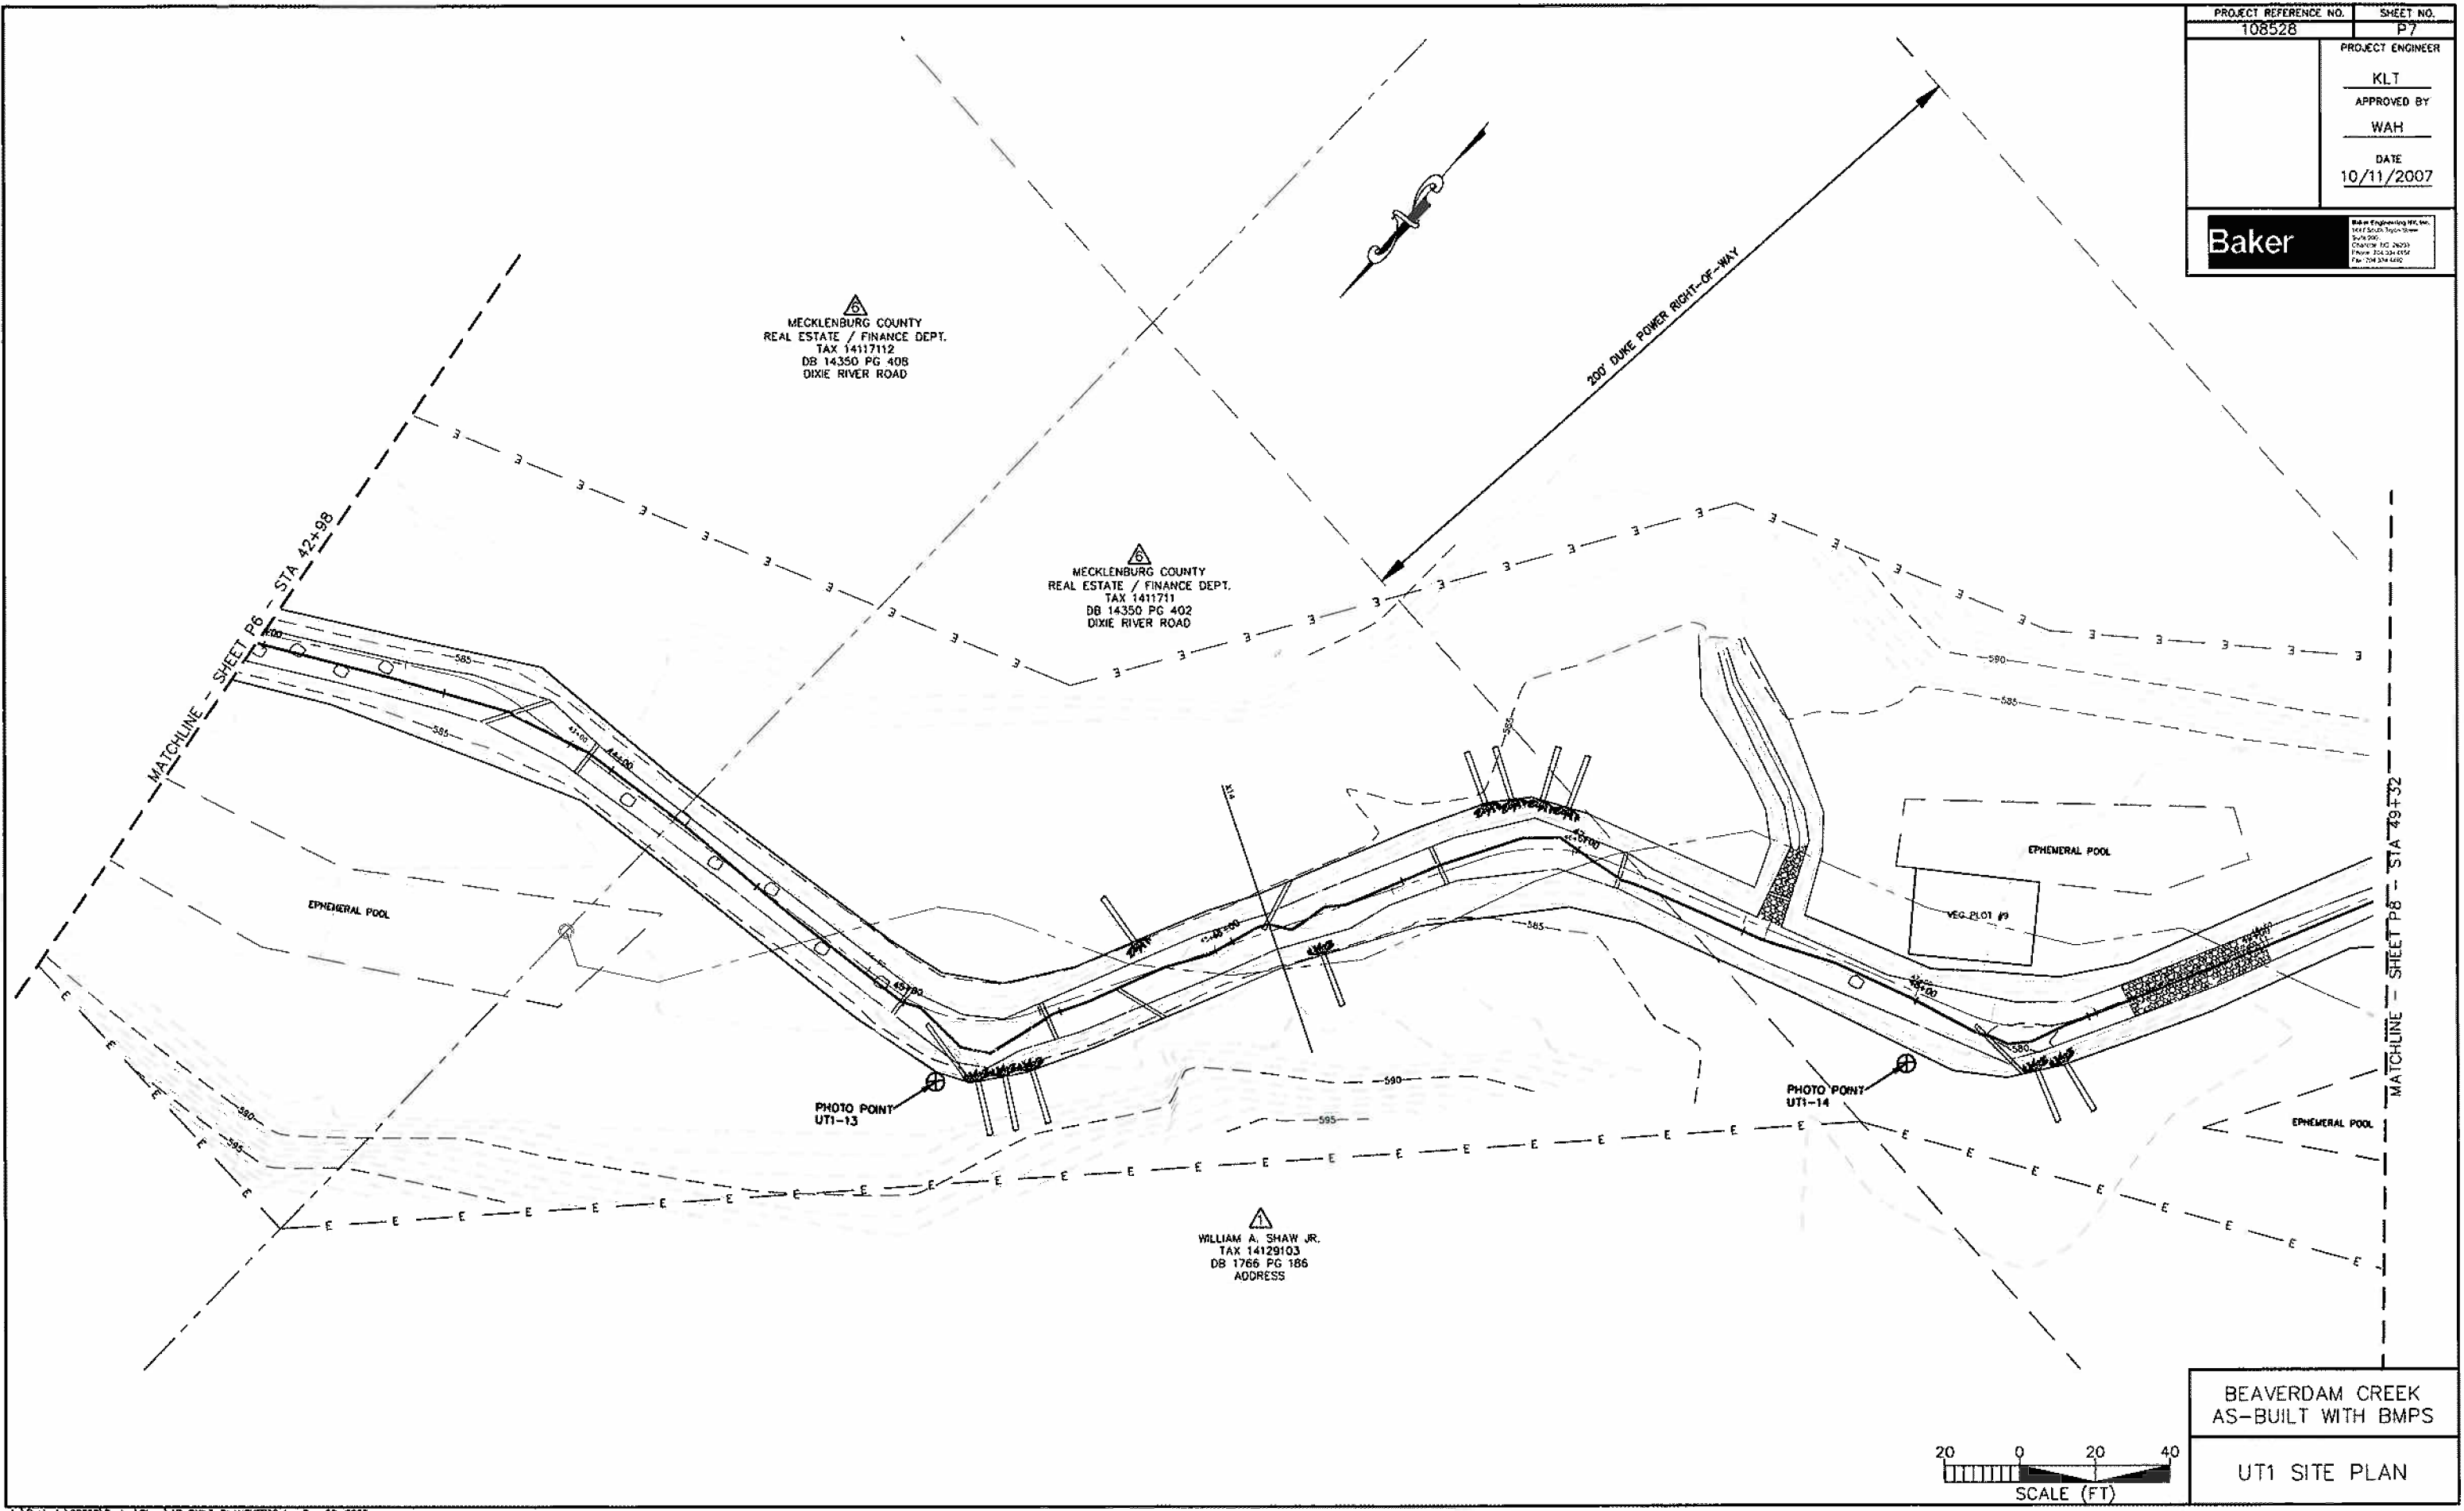
 WILLIAM A. SHAW JR.
 TAX 14129103
 DB 1766 PG 186
 ADDRESS




BEAVERDAM CREEK
AS-BUILT WITH BMPs


UT1 SITE PLAN

PROJECT REFERENCE NO. 108528	SHEET NO. P8
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small>Baker Engineering, Inc. Inc. 15415 South 100th Street Suite 200 Claremont, NC 28002 Phone: 704.334.4545 Fax: 704.334.4572</small>	

MECKLENBURG COUNTY
REAL ESTATE / FINANCE DEPT.
TAX 14117111
DB 14350 PG 402
DIXIE RIVER ROAD

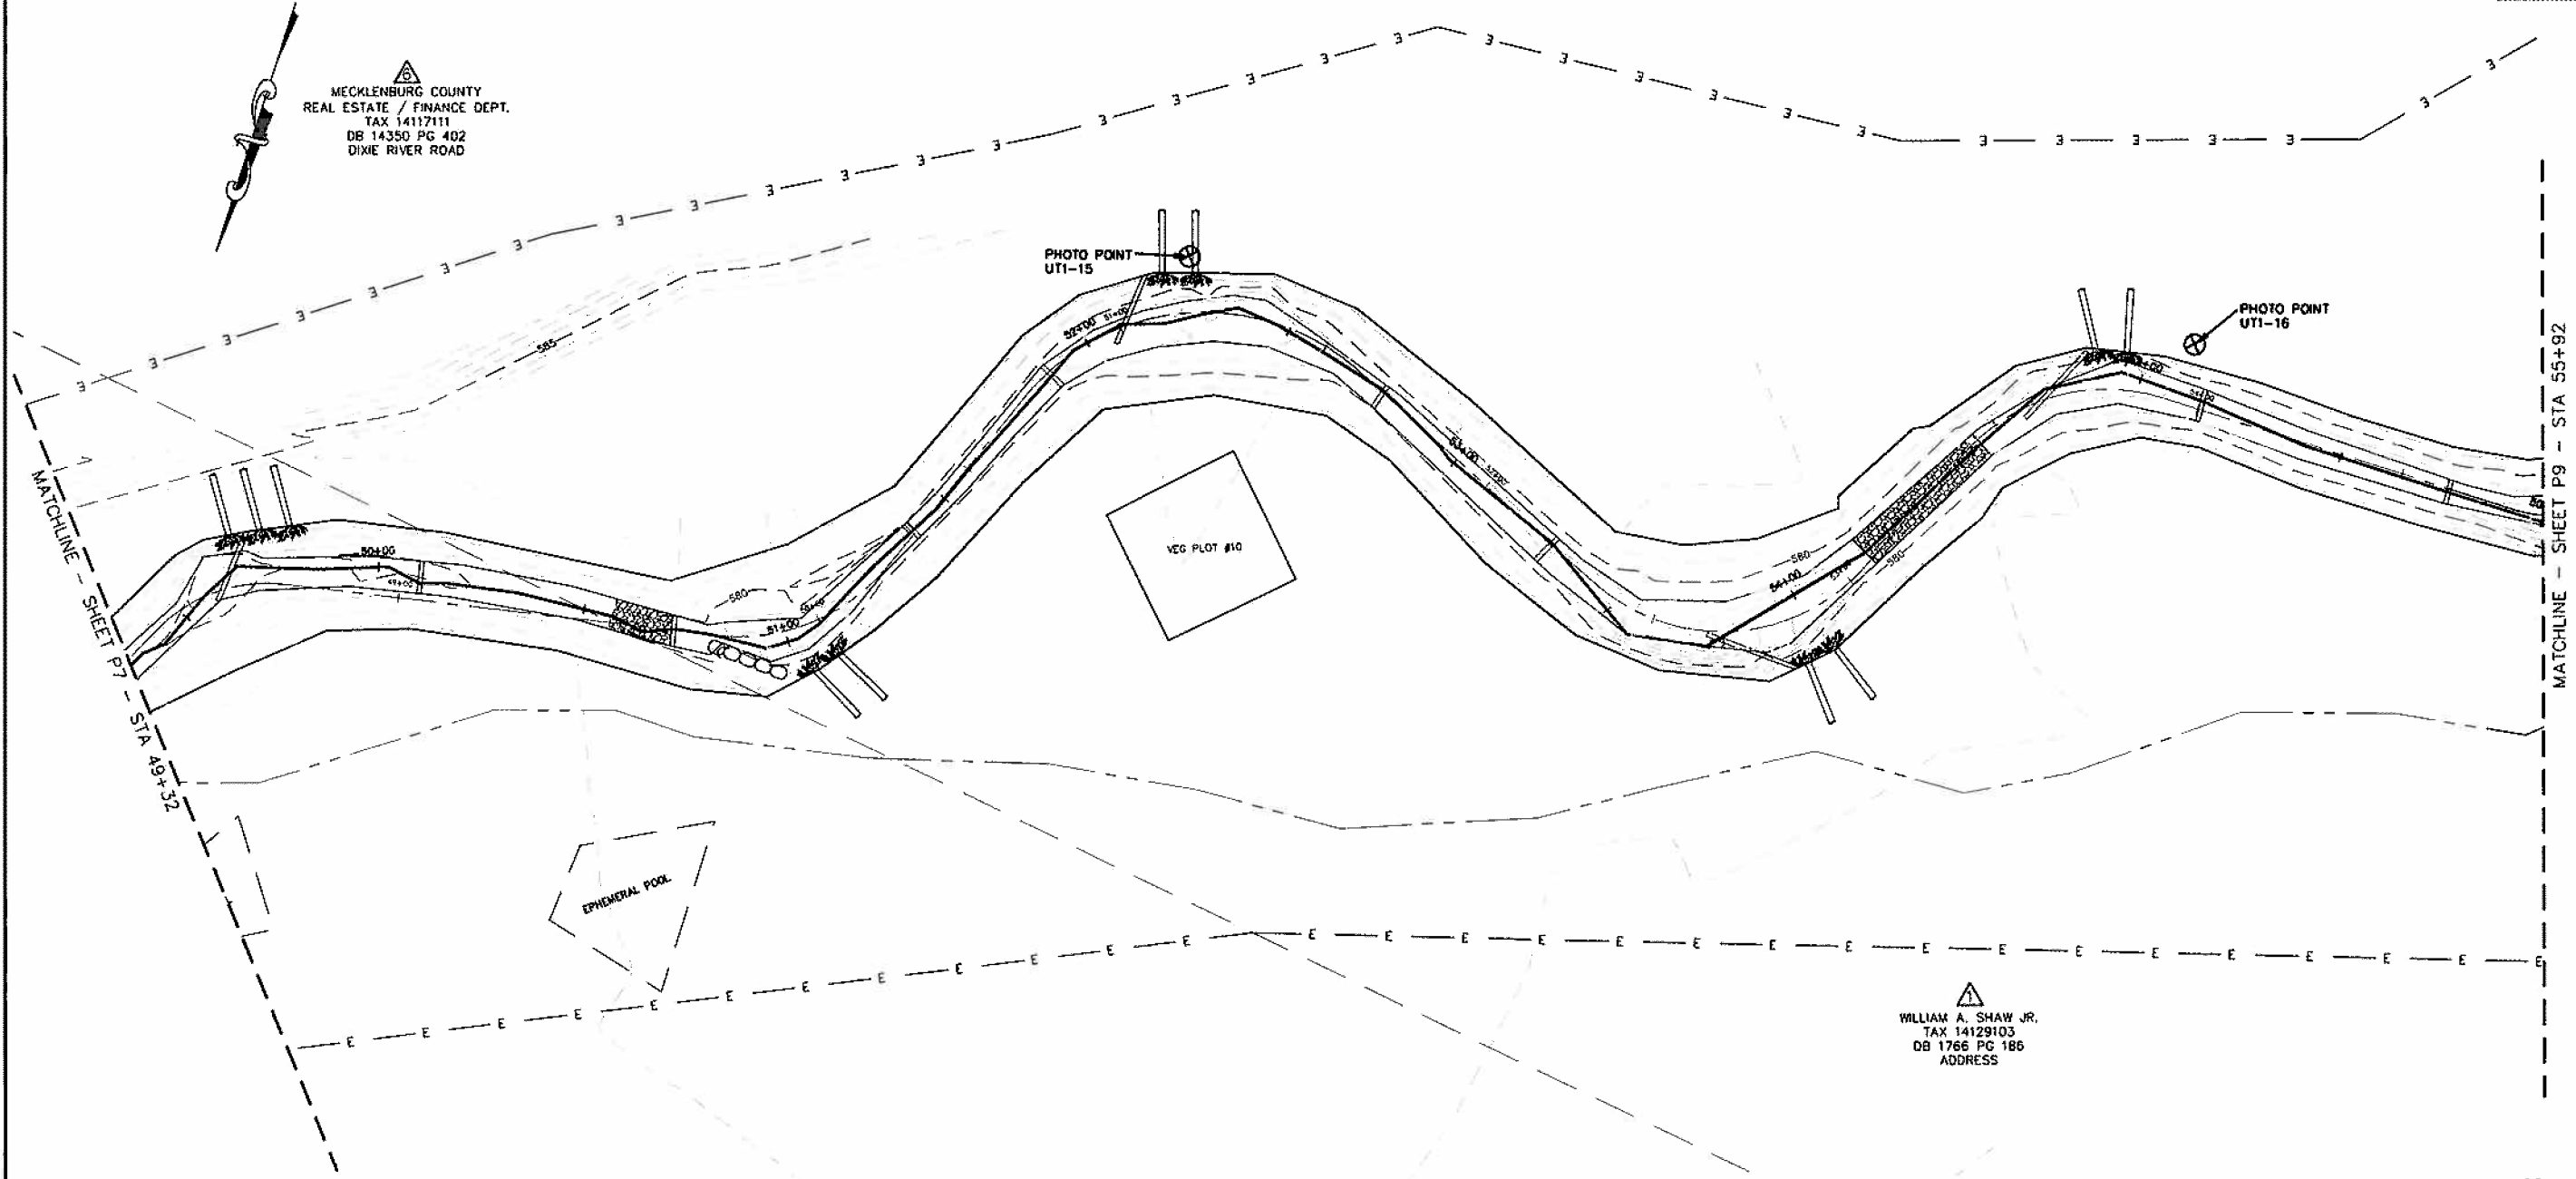


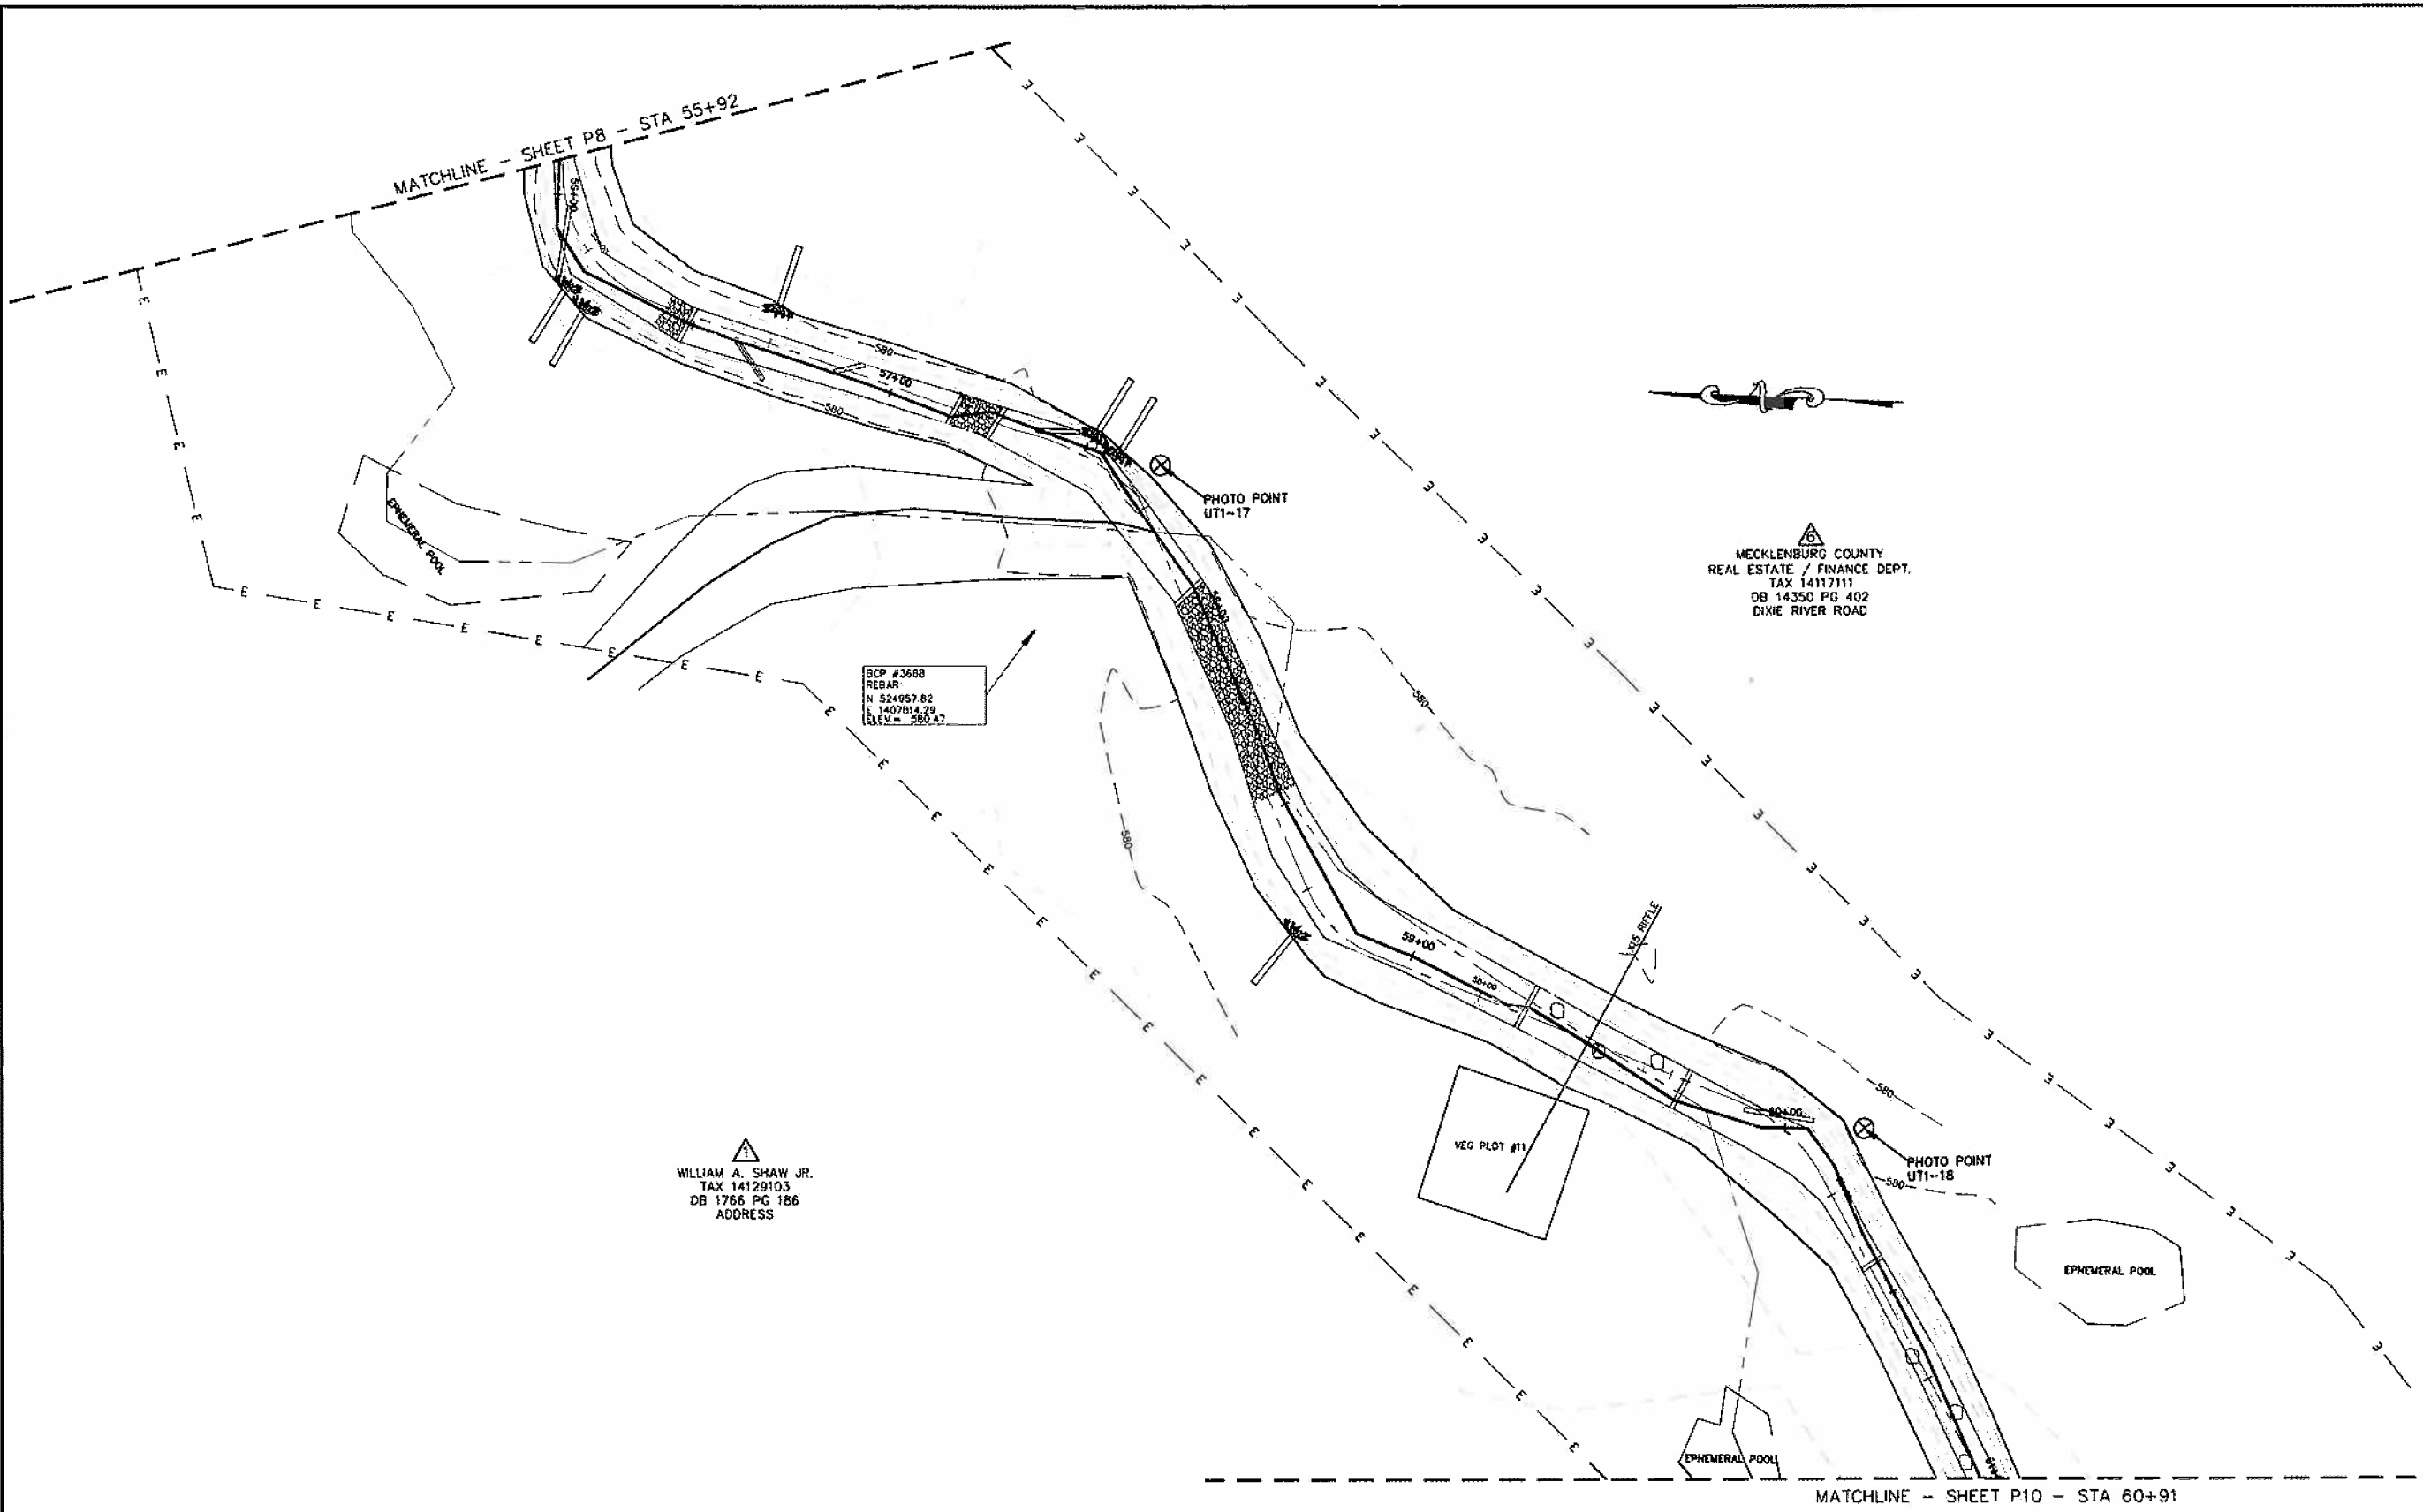
WILLIAM A. SHAW JR.
TAX 14129103
DB 1766 PG 186
ADDRESS



BEAVERDAM CREEK
AS-BUILT WITH BMPs

UT1 SITE PLAN

PROJECT REFERENCE NO. 108528	SHEET NO. P9
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	



BCP #3688
REBAR
N 524957.82
E 1407614.29
ELEV = 290.47


MECKLENBURG COUNTY
REAL ESTATE / FINANCE DEPT.
TAX 14117111
DB 14350 PG 402
DIXIE RIVER ROAD


WILLIAM A. SHAW JR.
TAX 14129103
DB 1766 PG 186
ADDRESS



BEAVERDAM CREEK
AS-BUILT WITH BMPS

UT1 SITE PLAN

PROJECT REFERENCE NO. 108528	SHEET NO. P10
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small>Baker Engineering, Inc. 1417 South Taylor Street Suite 200 Columbus, MS 39203 Phone: 662-334-4444 Fax: 662-334-4400</small>	

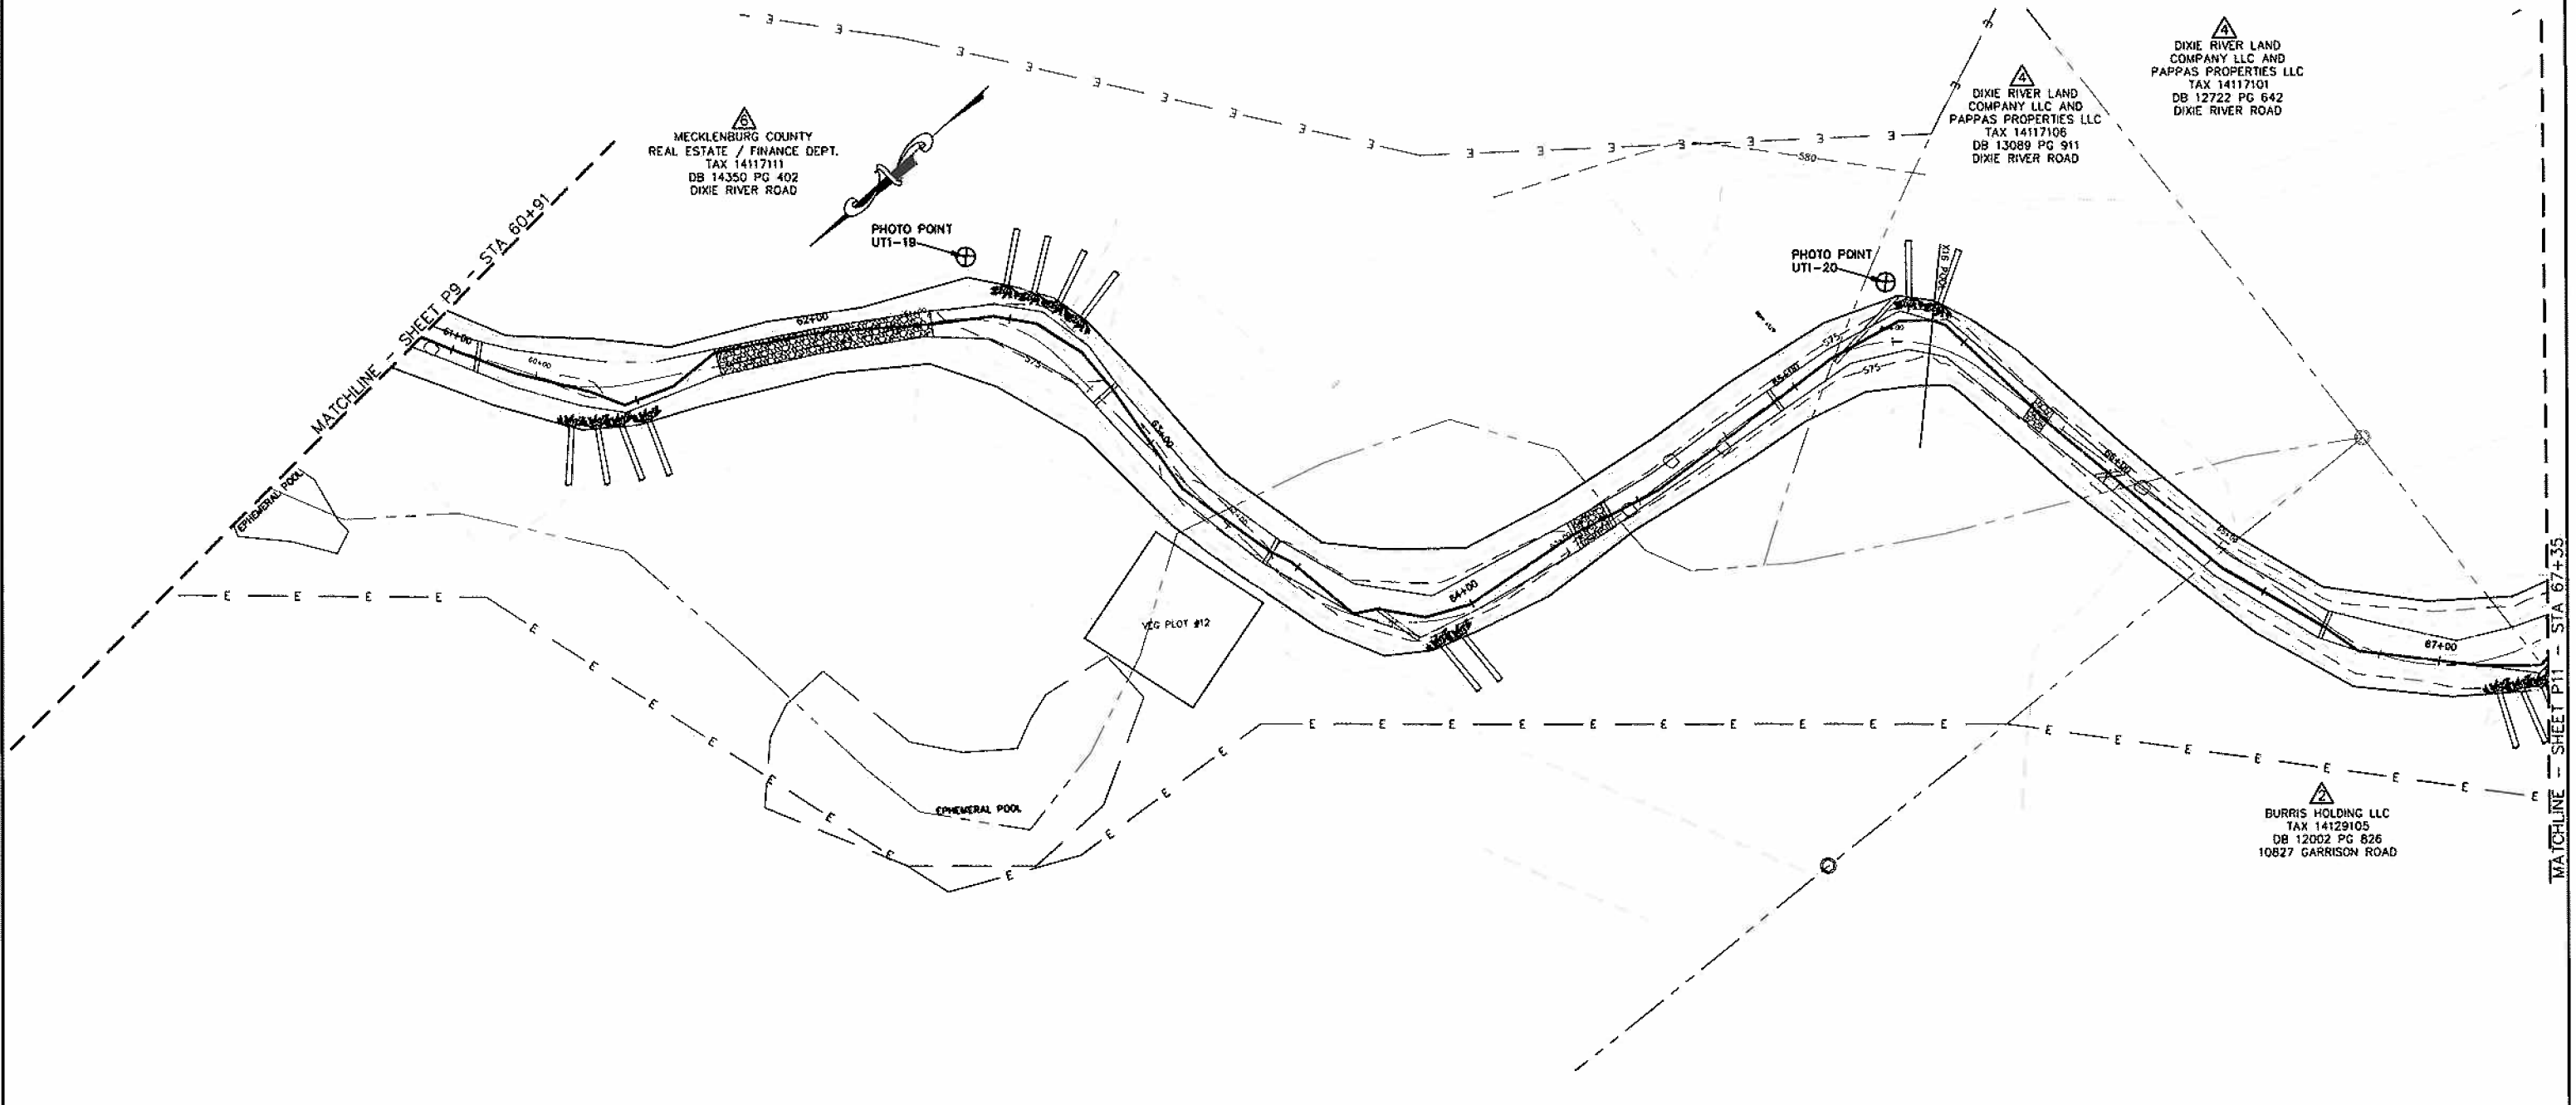

BEAVERDAM CREEK
AS-BUILT WITH BMPs


UT1 SITE PLAN



PROJECT REFERENCE NO. 108528	SHEET NO. P11
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
 Baker Engineering LLC, Inc. <small>1417 South 1st Street Suite 200 Chandler, AZ 85224 Phone: 480.948.4444 Fax: 480.948.4427</small>	

 DIXIE RIVER LAND COMPANY LLC AND PAPPAS PROPERTIES LLC
 TAX 14117101
 DB 12722 PG 642
 DIXIE RIVER ROAD


BCP #3989
 REBAR
 N 524210.95
 E 1407152.98
 ELEV = 575.95


BCP #4490
 REBAR
 N 523967.43
 E 1406745.99
 ELEV = 571.78

 BURRIS HOLDING LLC
 TAX 14129105
 DB 12002 PG 826
 10827 GARRISON ROAD

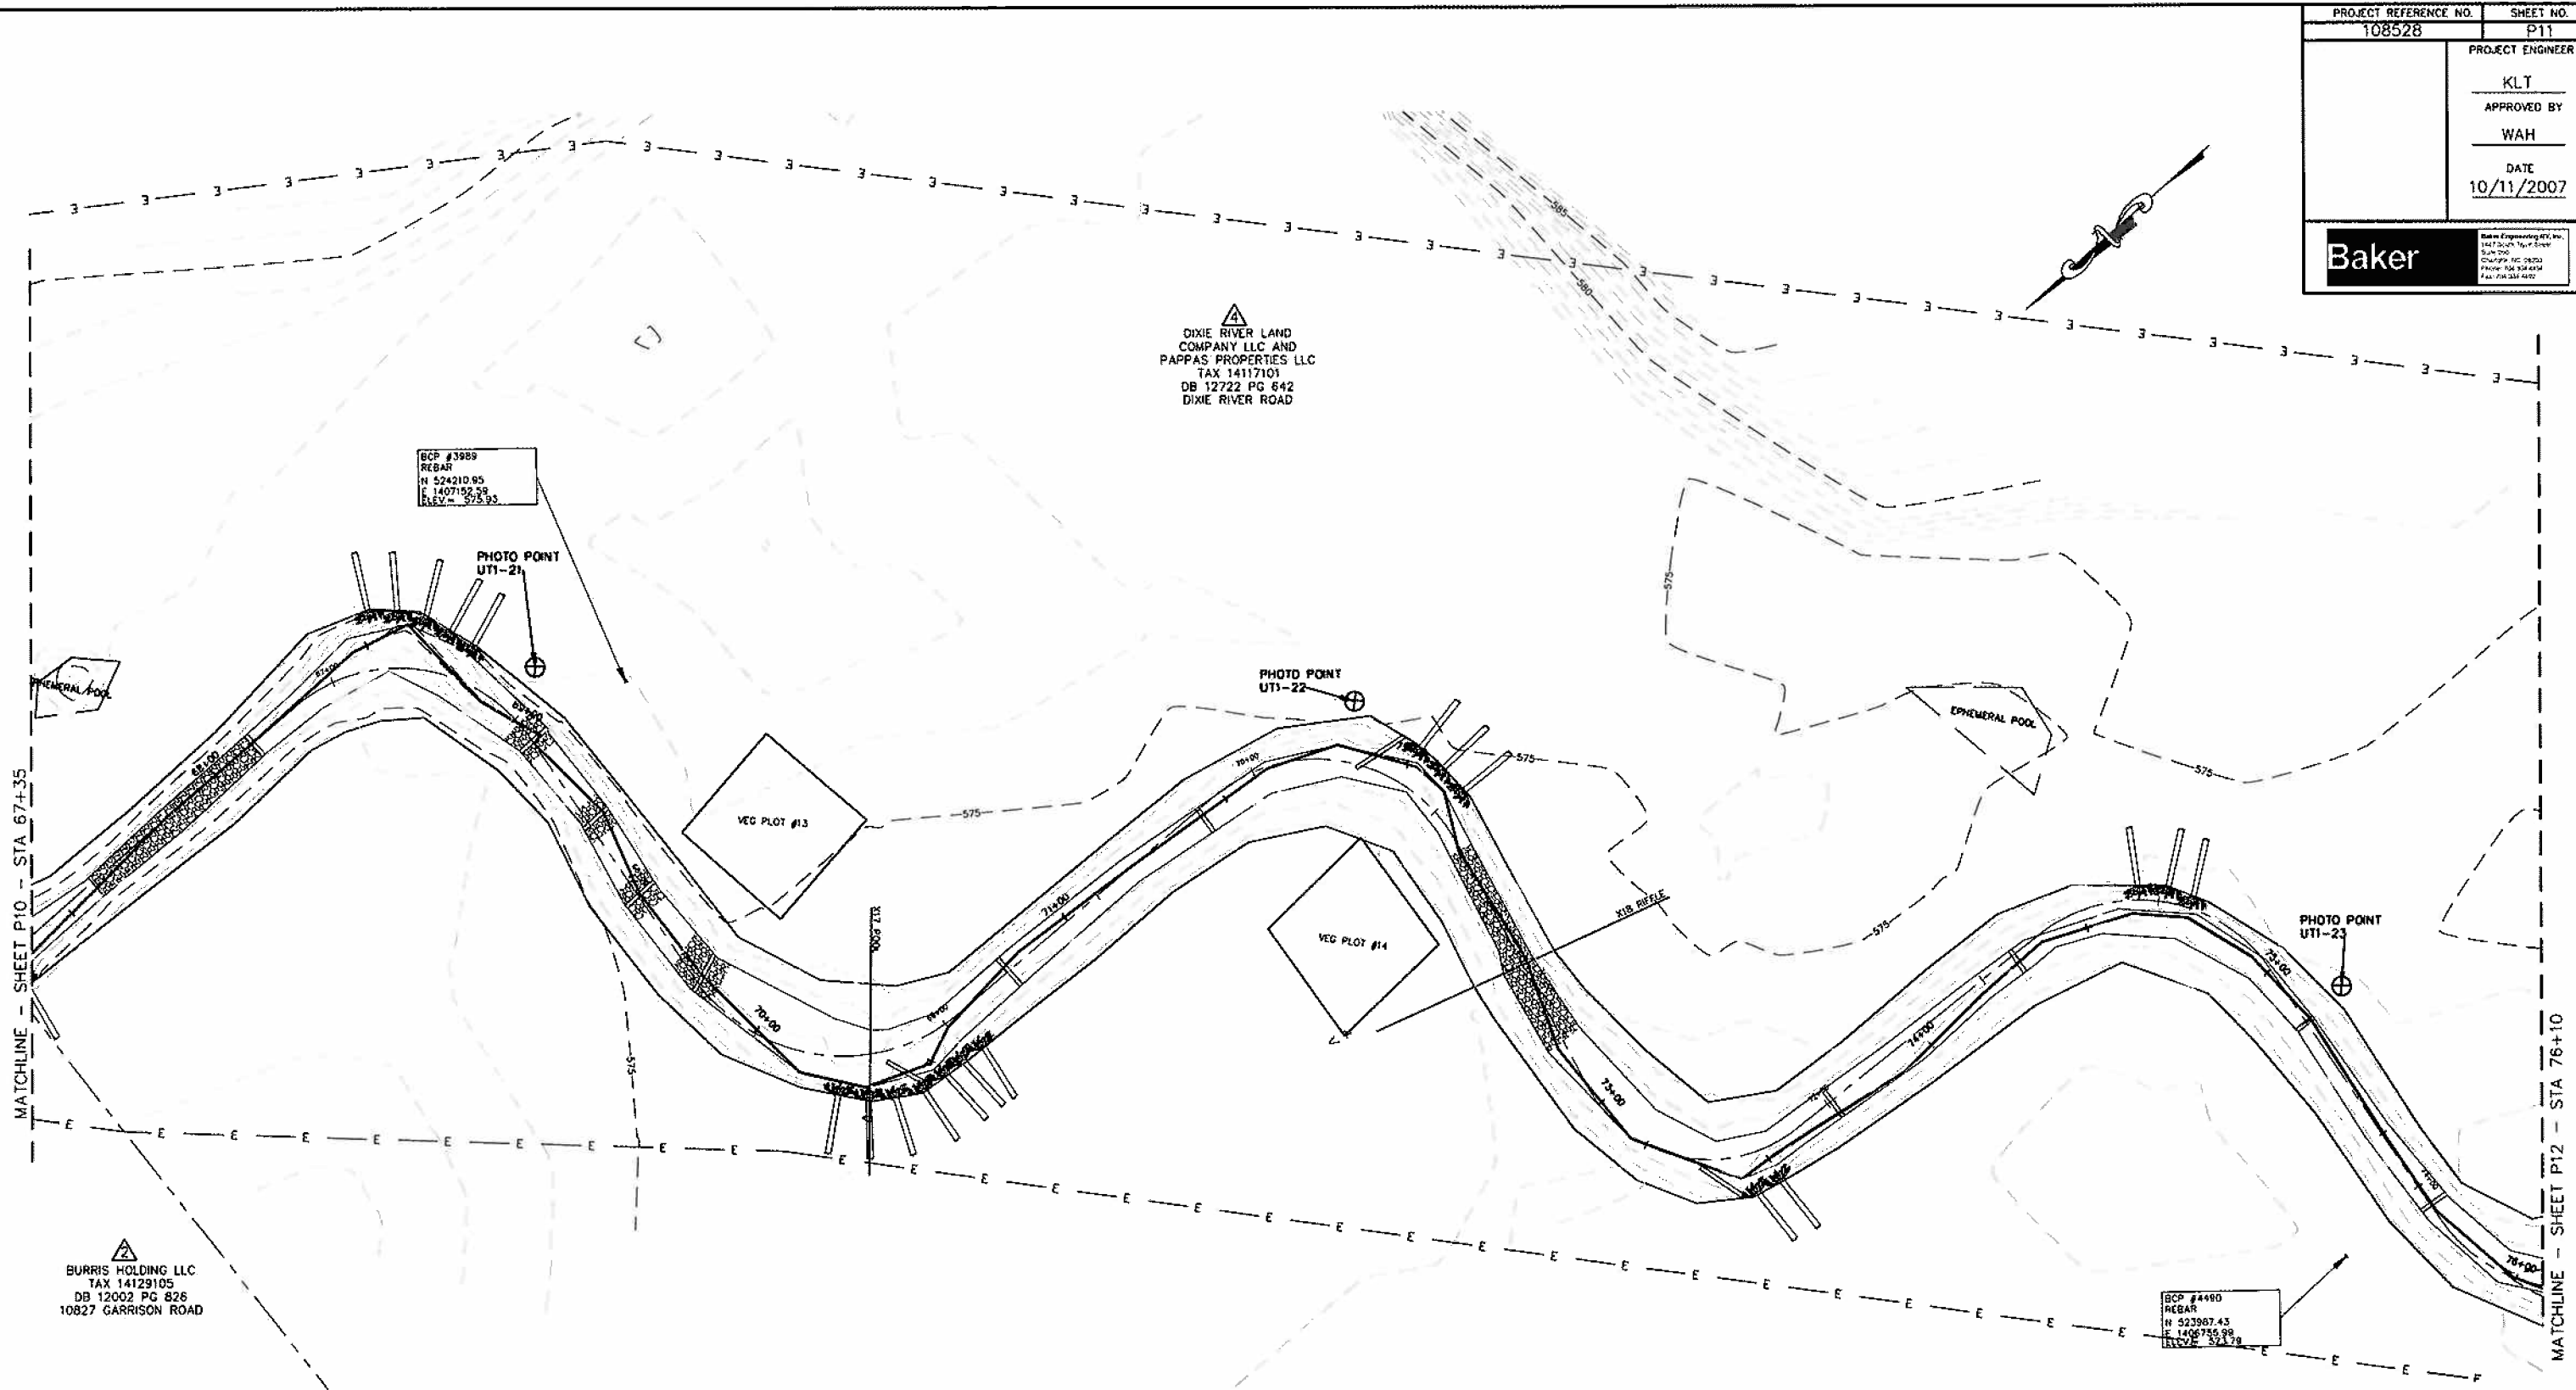

BEAVERDAM CREEK
 AS-BUILT WITH BMPS
 UT1 SITE PLAN

PROJECT REFERENCE NO. 108528	SHEET NO. P12
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small> Baker Engineering, Inc. 1147 South Tyson Drive Suite 202 Chaska, MN 55309 Phone: 763.344.4444 Fax: 763.344.4422 </small>	

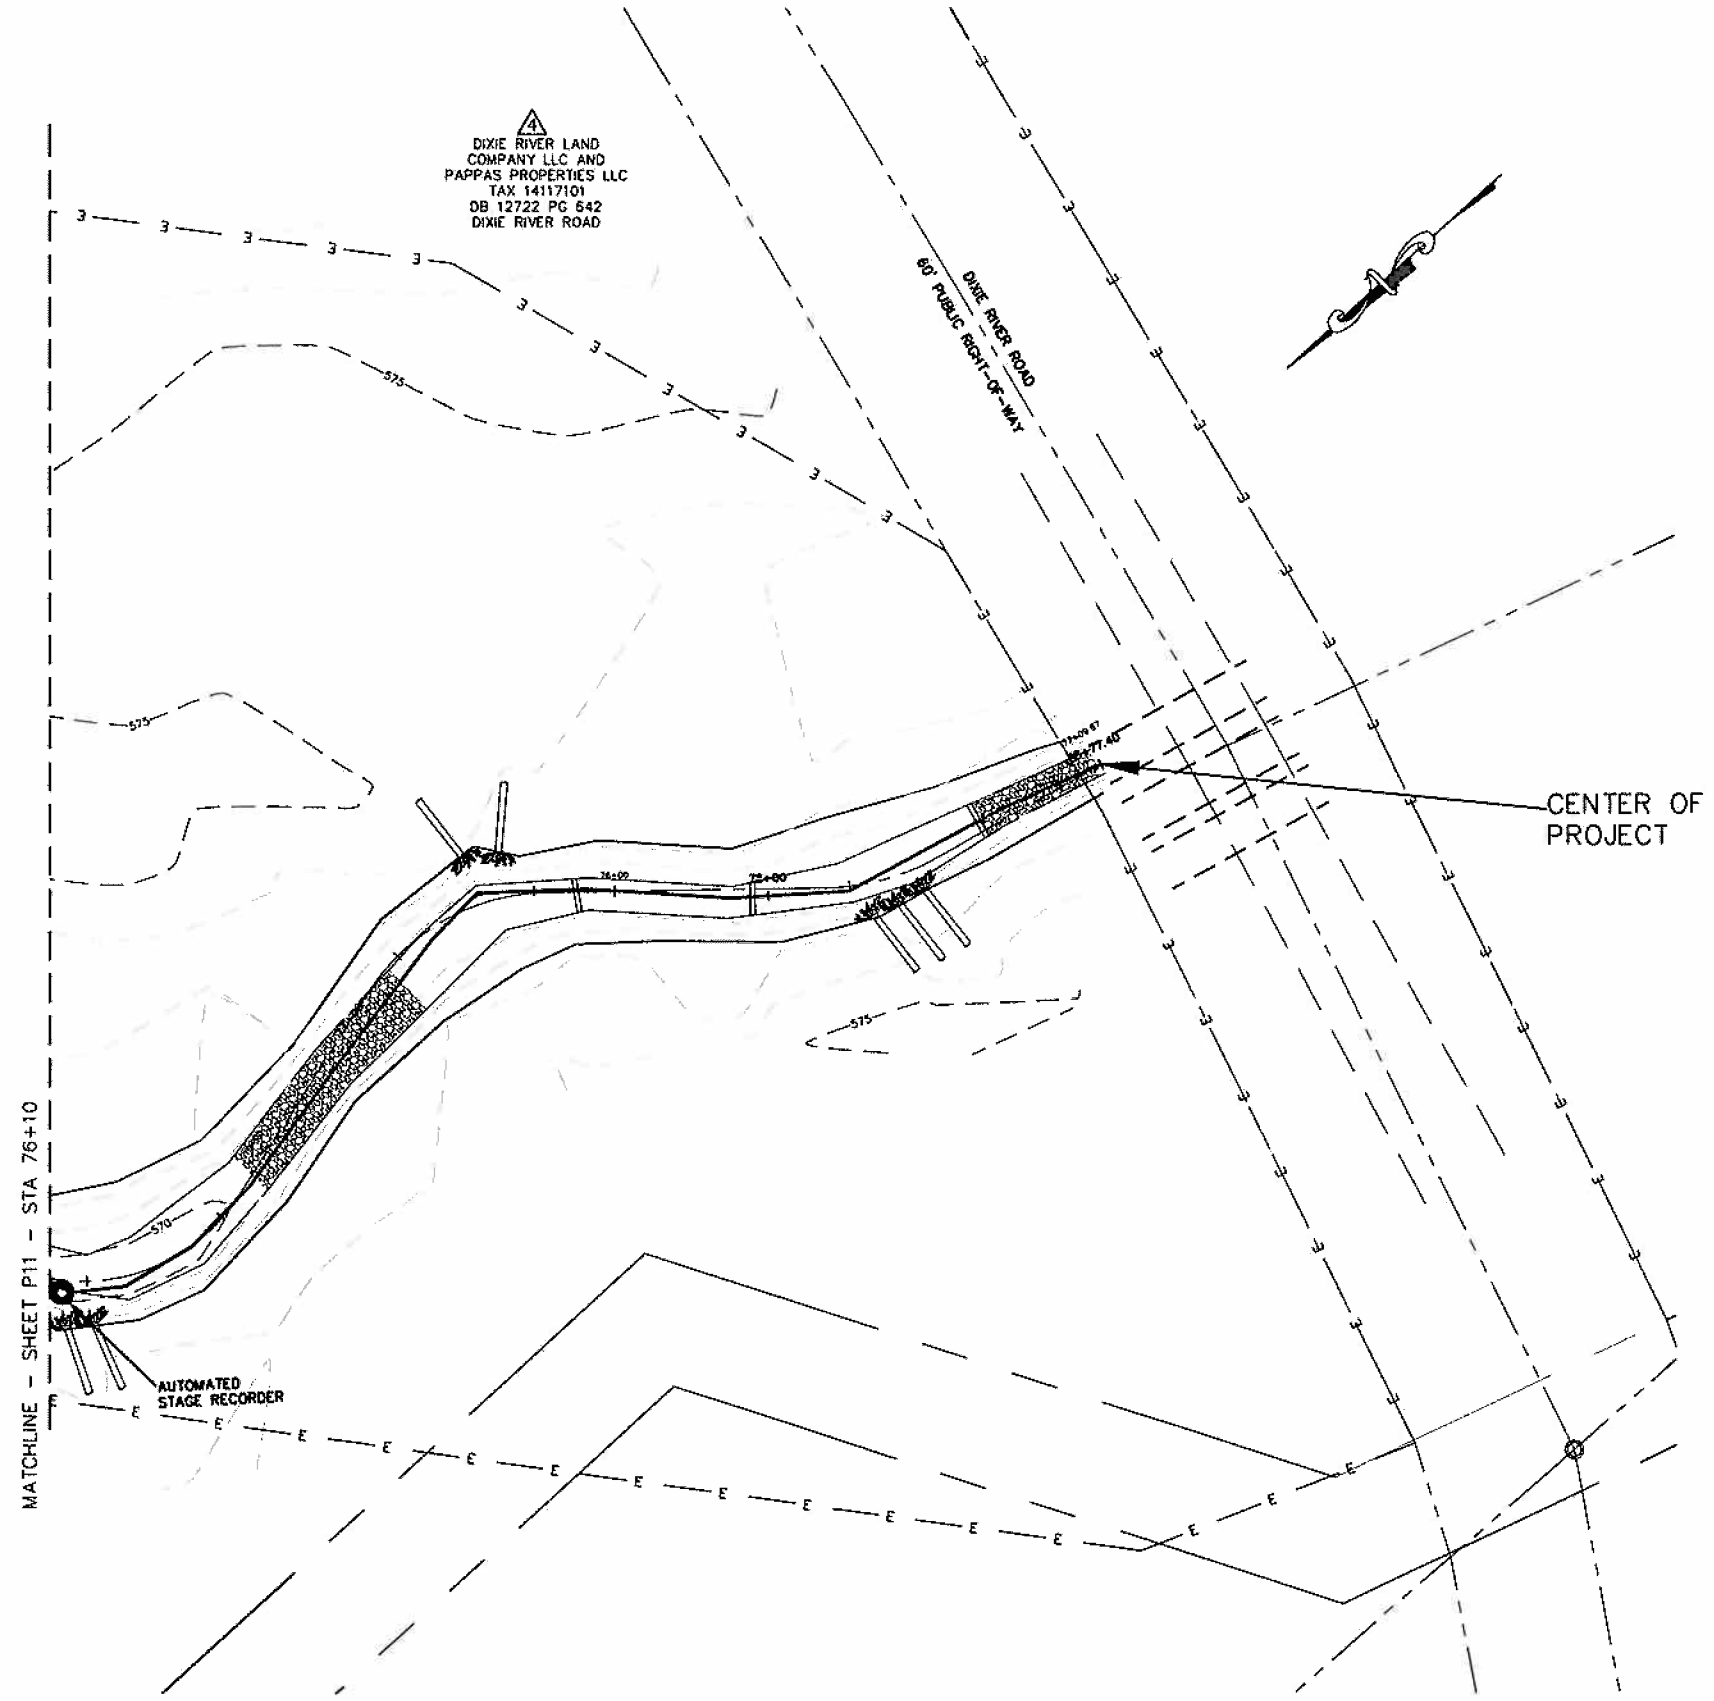




 DIXIE RIVER LAND
 COMPANY LLC AND
 PAPPAS PROPERTIES LLC
 TAX 14117101
 DB 12722 PG 642
 DIXIE RIVER ROAD



BEAVERDAM CREEK
AS-BUILT WITH BMPS

UT1 SITE PLAN

PROJECT REFERENCE NO. 108528	SHEET NO. P13
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
Baker	
<small>Baker Engineering Inc., Inc. 1417 South Lynn Street Bloomington, MD 21152 Phone: 703.333.4433 Fax: 703.333.4492</small>	

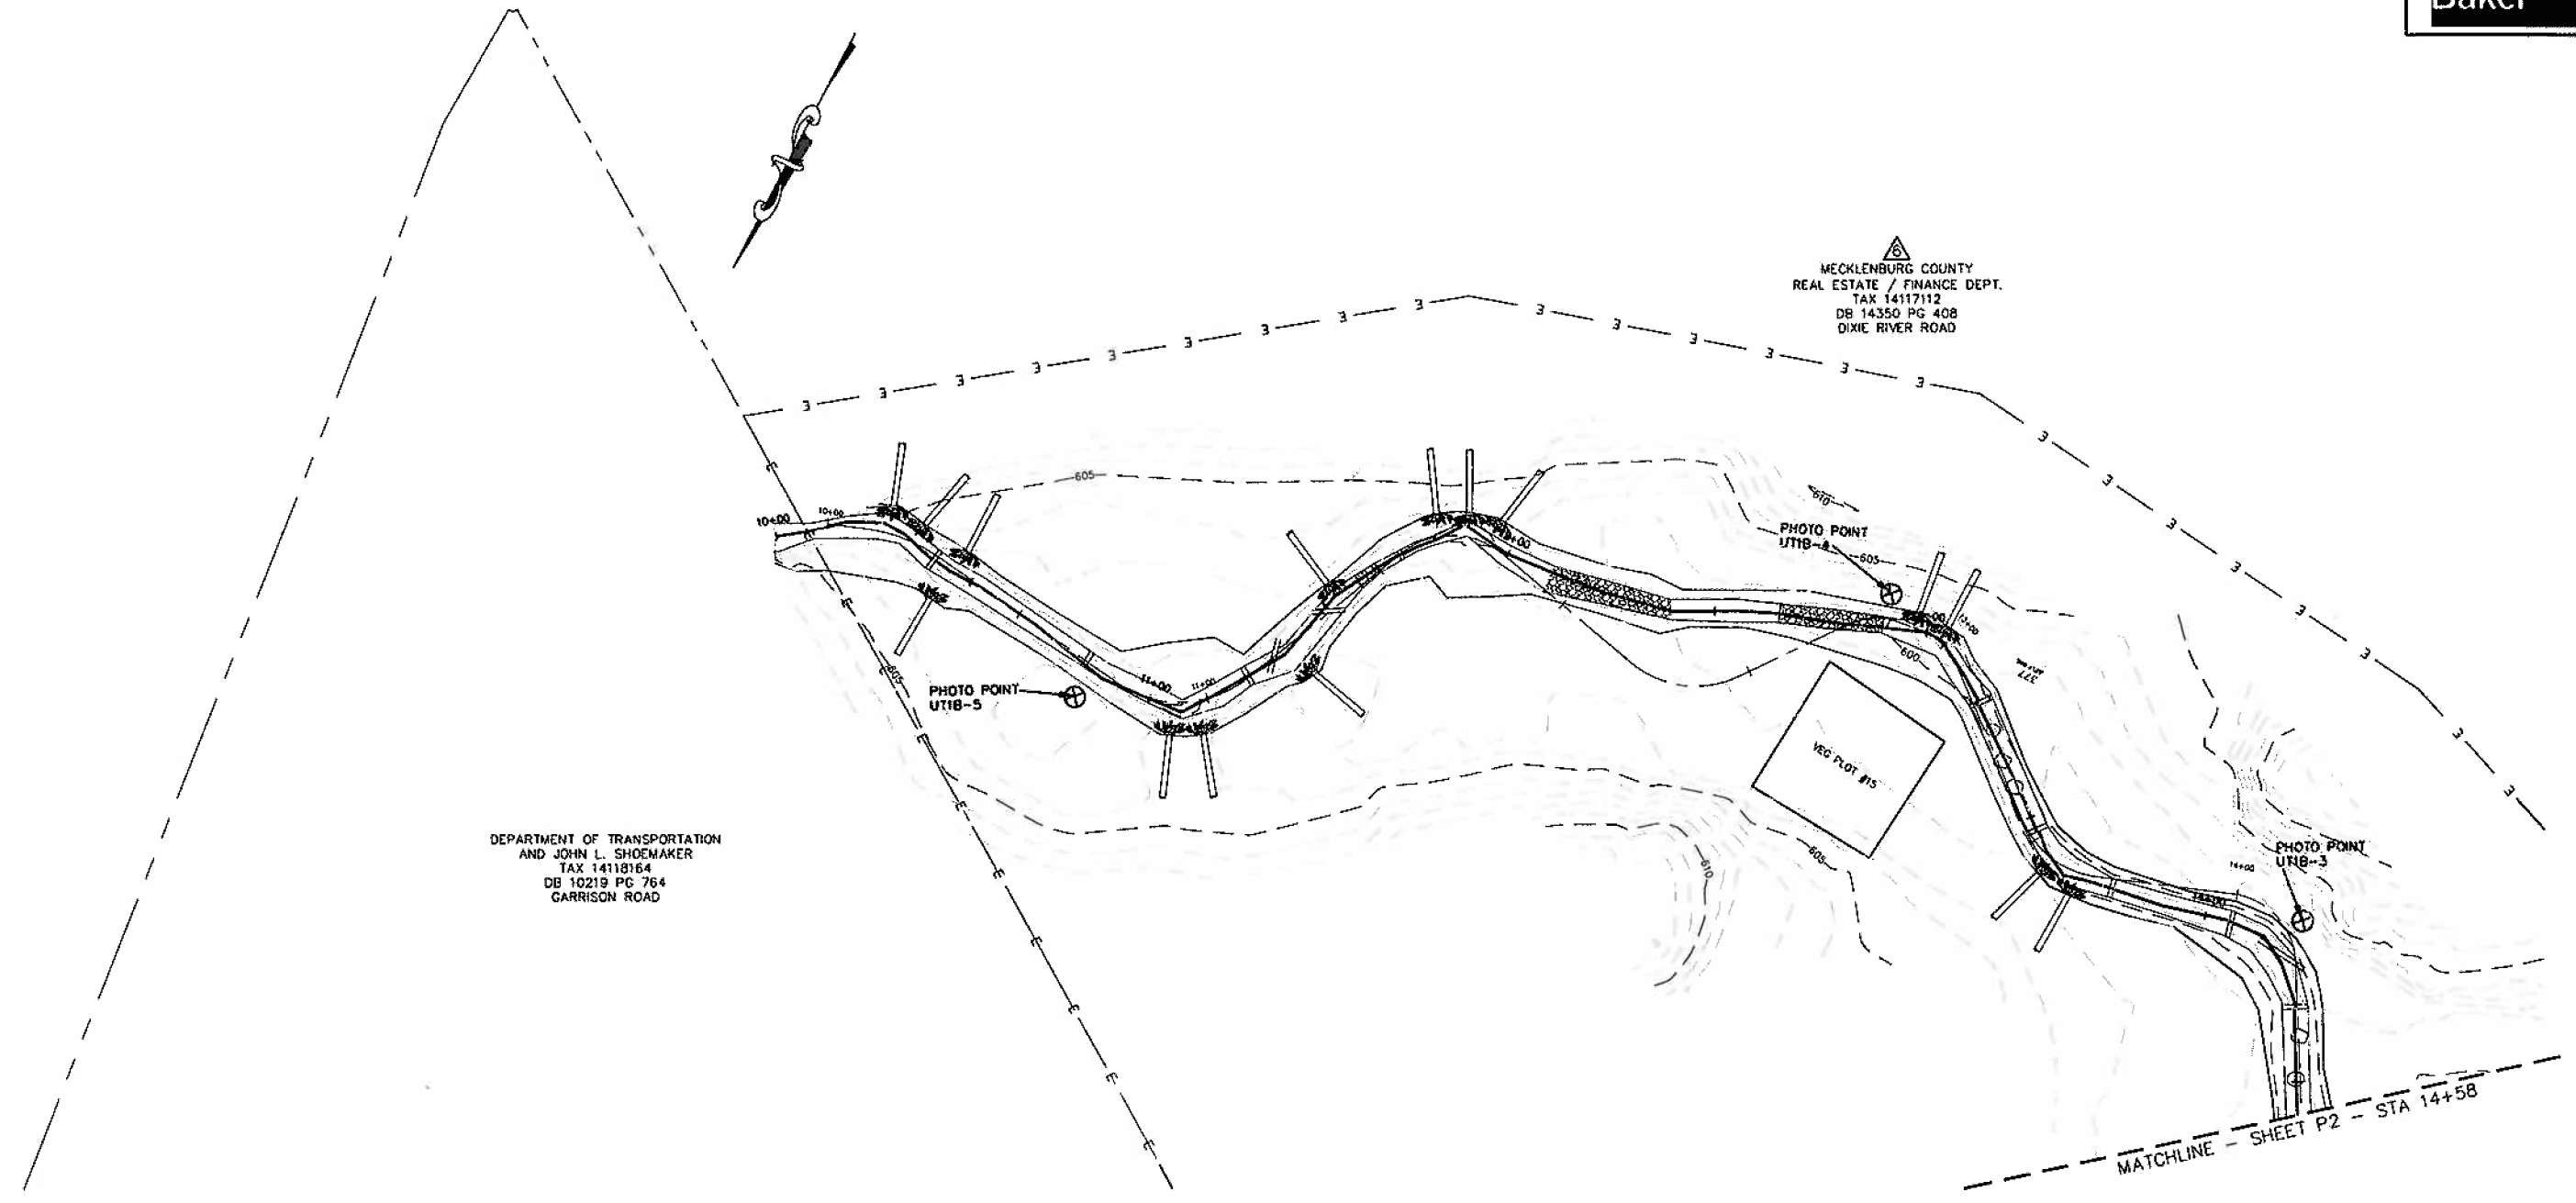


DEPARTMENT OF TRANSPORTATION
AND JOHN L. SHOEMAKER
TAX 14118164
DB 10219 PG 764
GARRISON ROAD


MECKLENBURG COUNTY
REAL ESTATE / FINANCE DEPT.
TAX 14117112
DB 14350 PG 408
DIXIE RIVER ROAD



BEAVERDAM CREEK
AS-BUILT WITH BMPS


UT1-B SITE PLAN

PROJECT REFERENCE NO. 108528	SHEET NO. P14
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small>Baker Engineering & Construction, Inc. 1417 South 17th Street Tomball, TX 77476 Phone: 281-291-4444 Fax: 281-291-4444</small>	

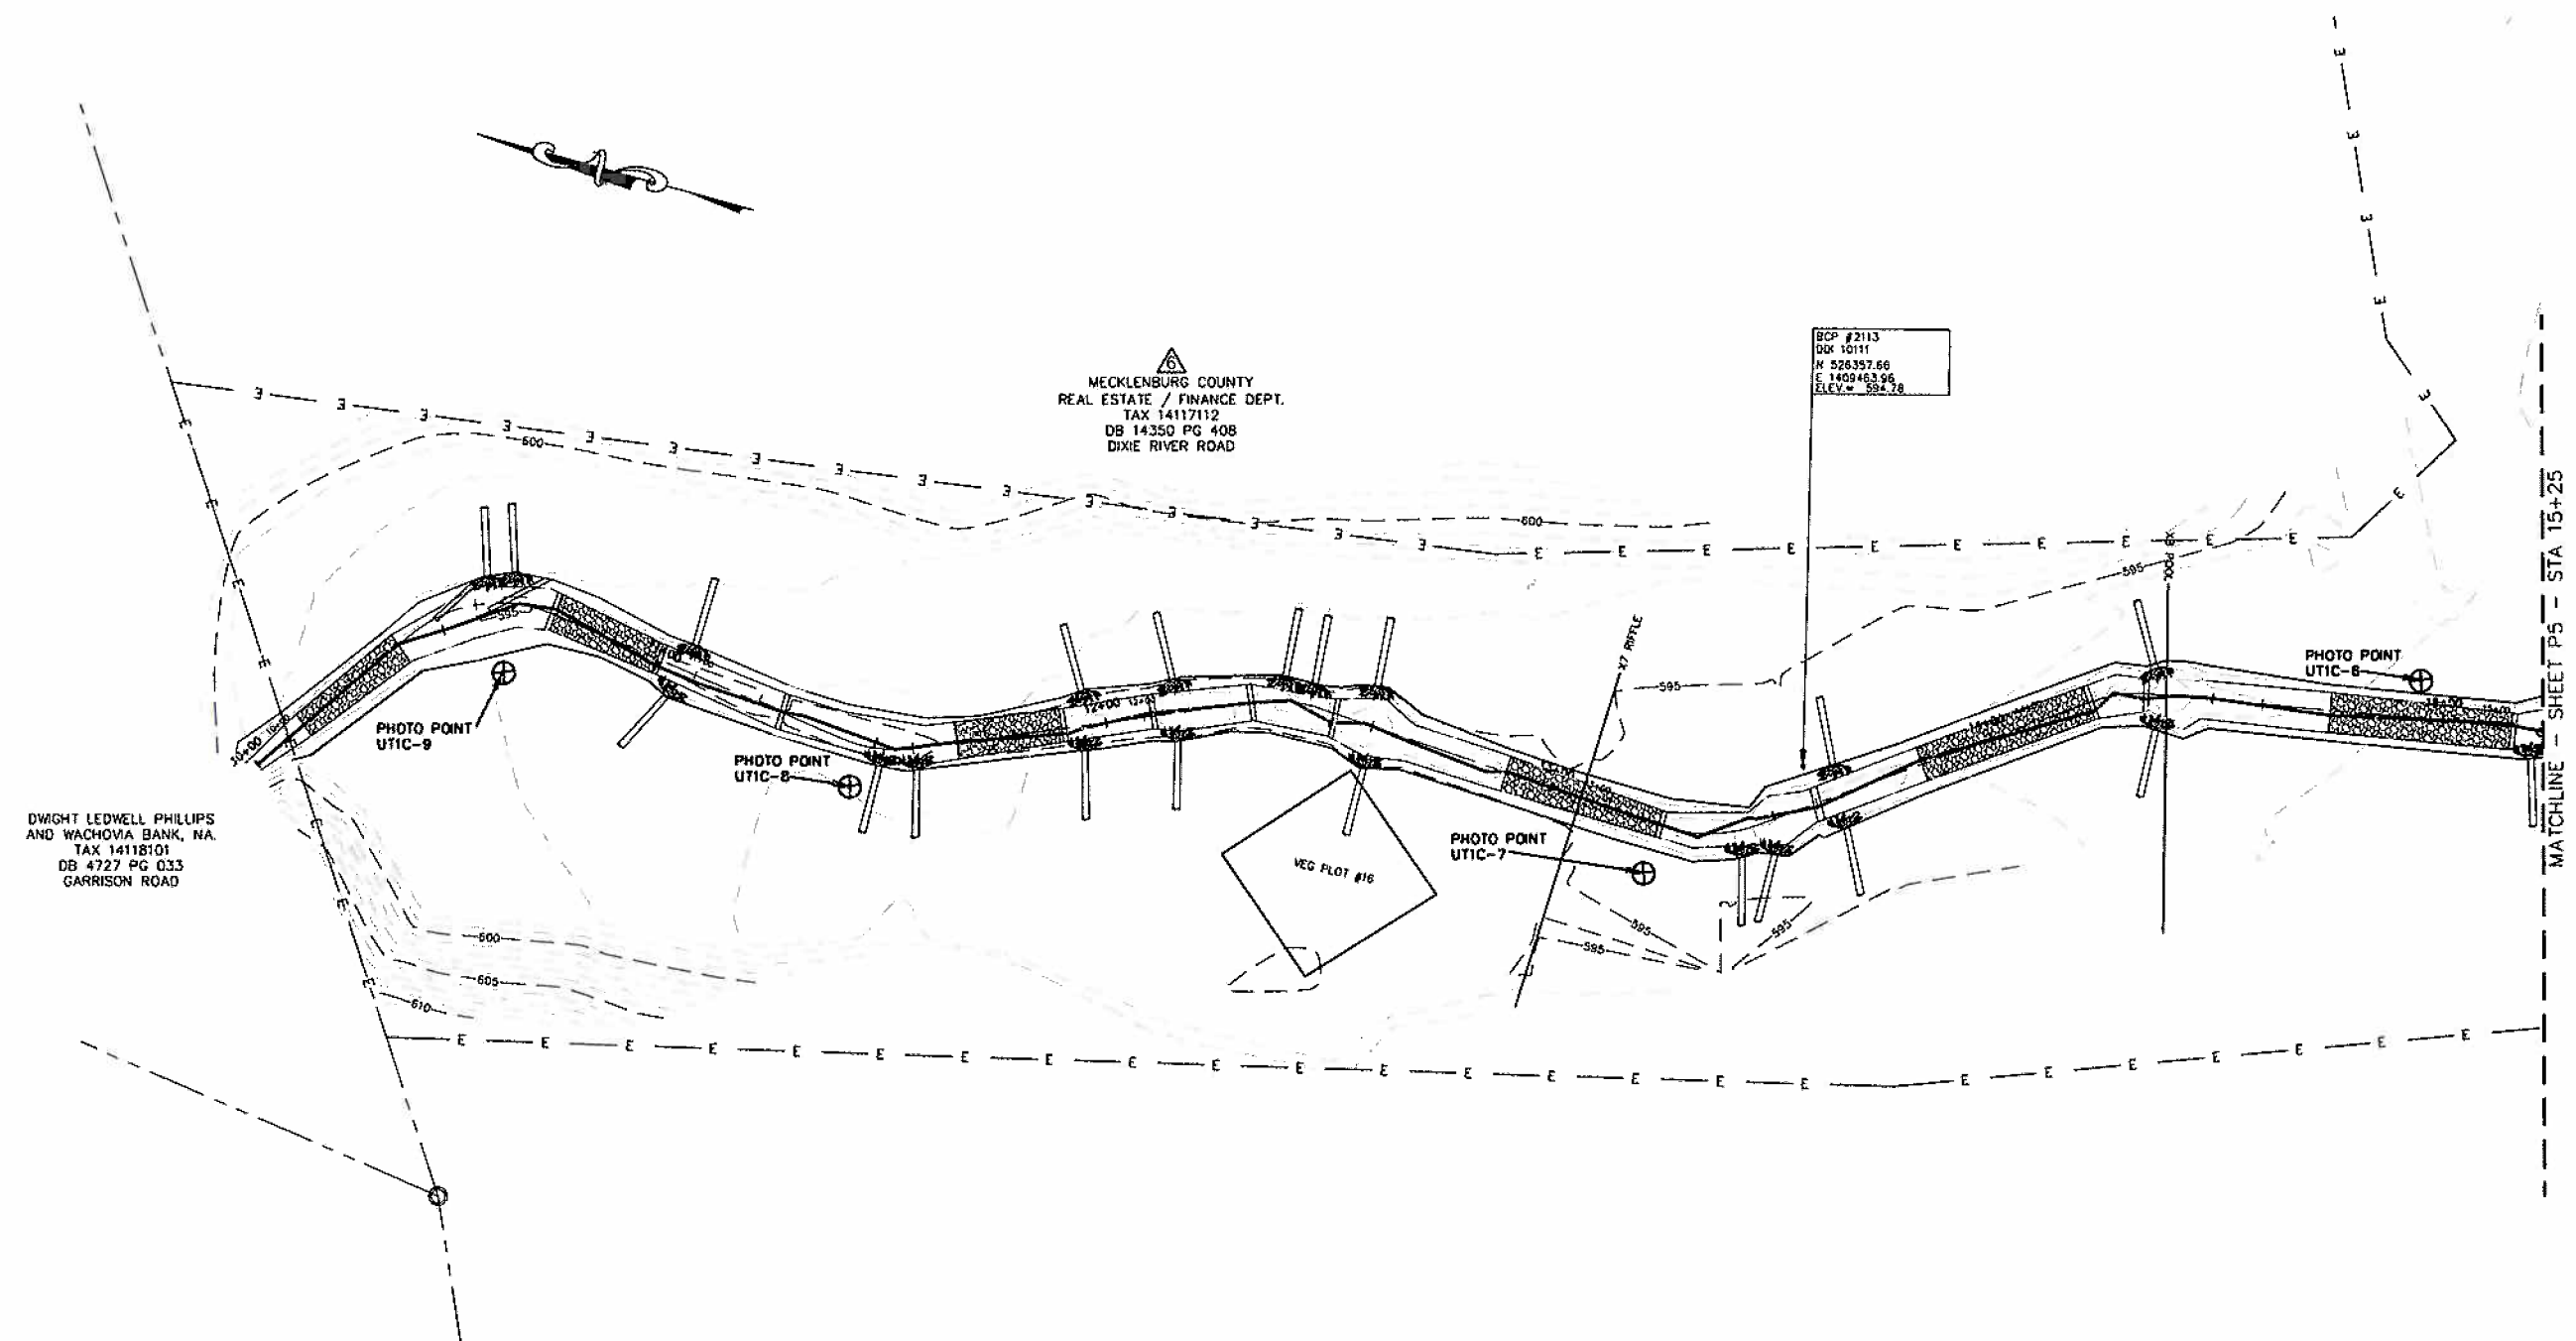


BEAVERDAM CREEK
AS-BUILT WITH BMPS

UT1-C SITE PLAN


PROJECT REFERENCE NO. 108528	SHEET NO. P15
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small>Baker Engineering, Inc. 1417 South Vista Street Suite 200 Chapin, NC 28329 Phone: 704.334.4424 Fax: 704.334.4497</small>	

MECKLENBURG COUNTY
REAL ESTATE / FINANCE DEPT.
TAX: 14117112
DB 14350 PG 408
DIXIE RIVER ROAD

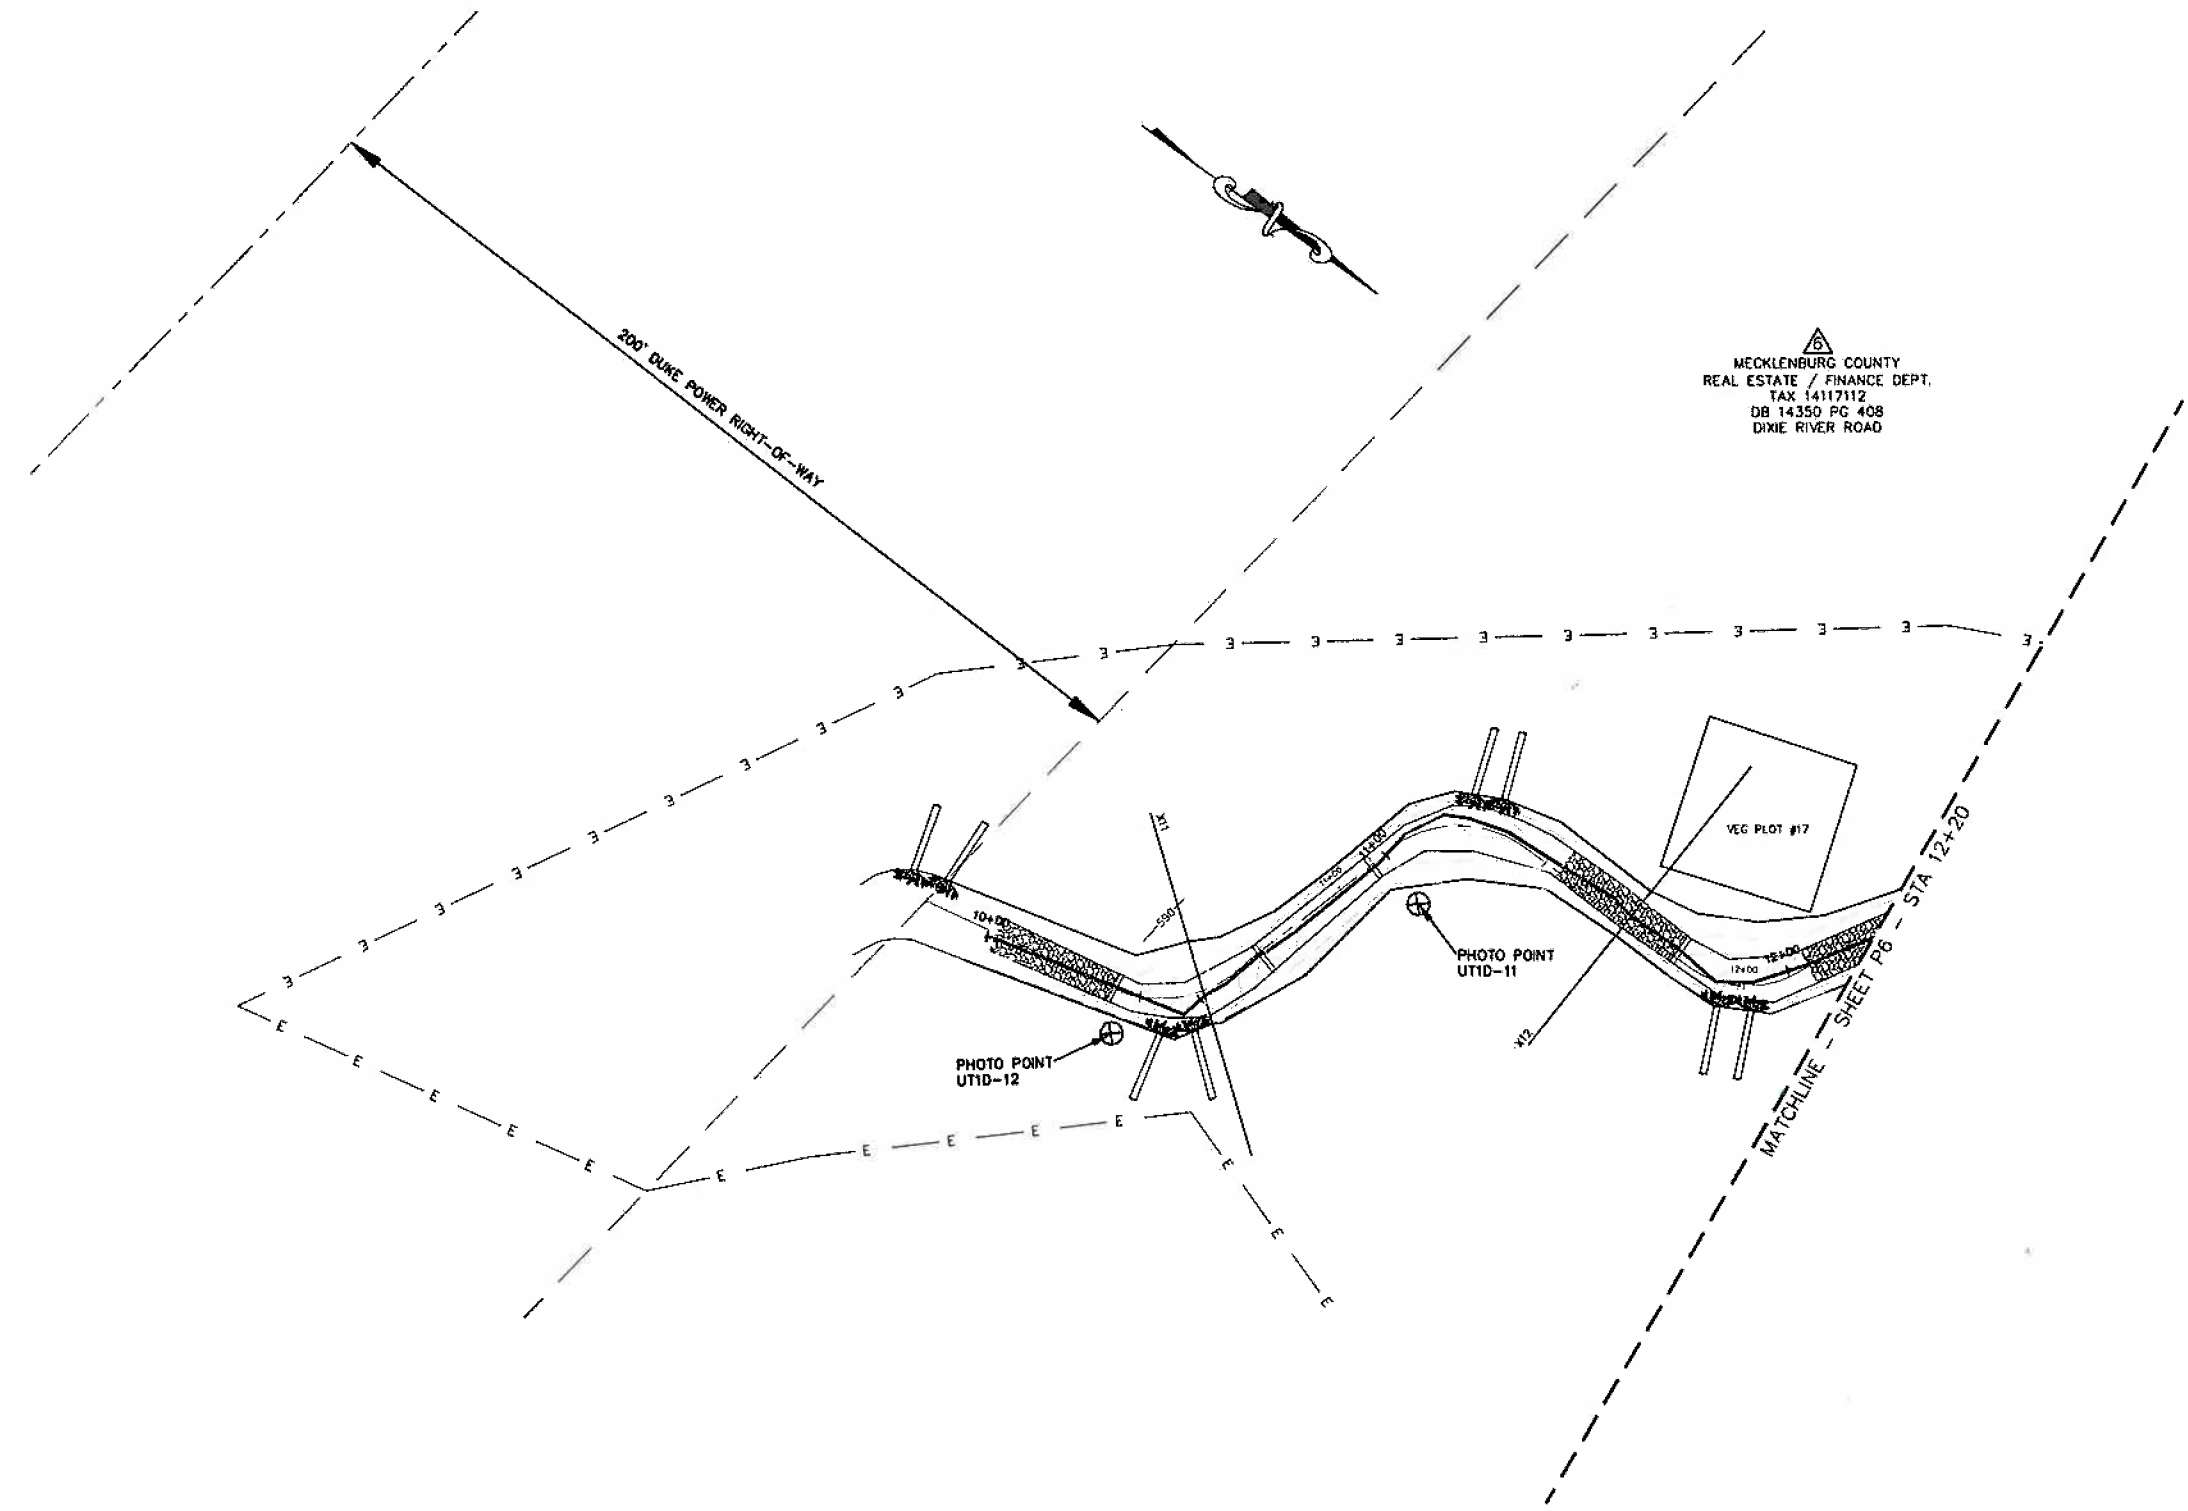


BEAVERDAM CREEK
AS-BUILT WITH BMPS

UT1-D SITE PLAN

PROJECT REFERENCE NO. 108528	SHEET NO. P16
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	


WATERS CONSTRUCTION COMPANY, INC.
TAX 19924137
DB 12943 PG 842
DIXIE RIVER ROAD

WATERS CONSTRUCTION COMPANY, INC.
TAX 19925107
DB 12629 PG 886
WINDY GAP ROAD

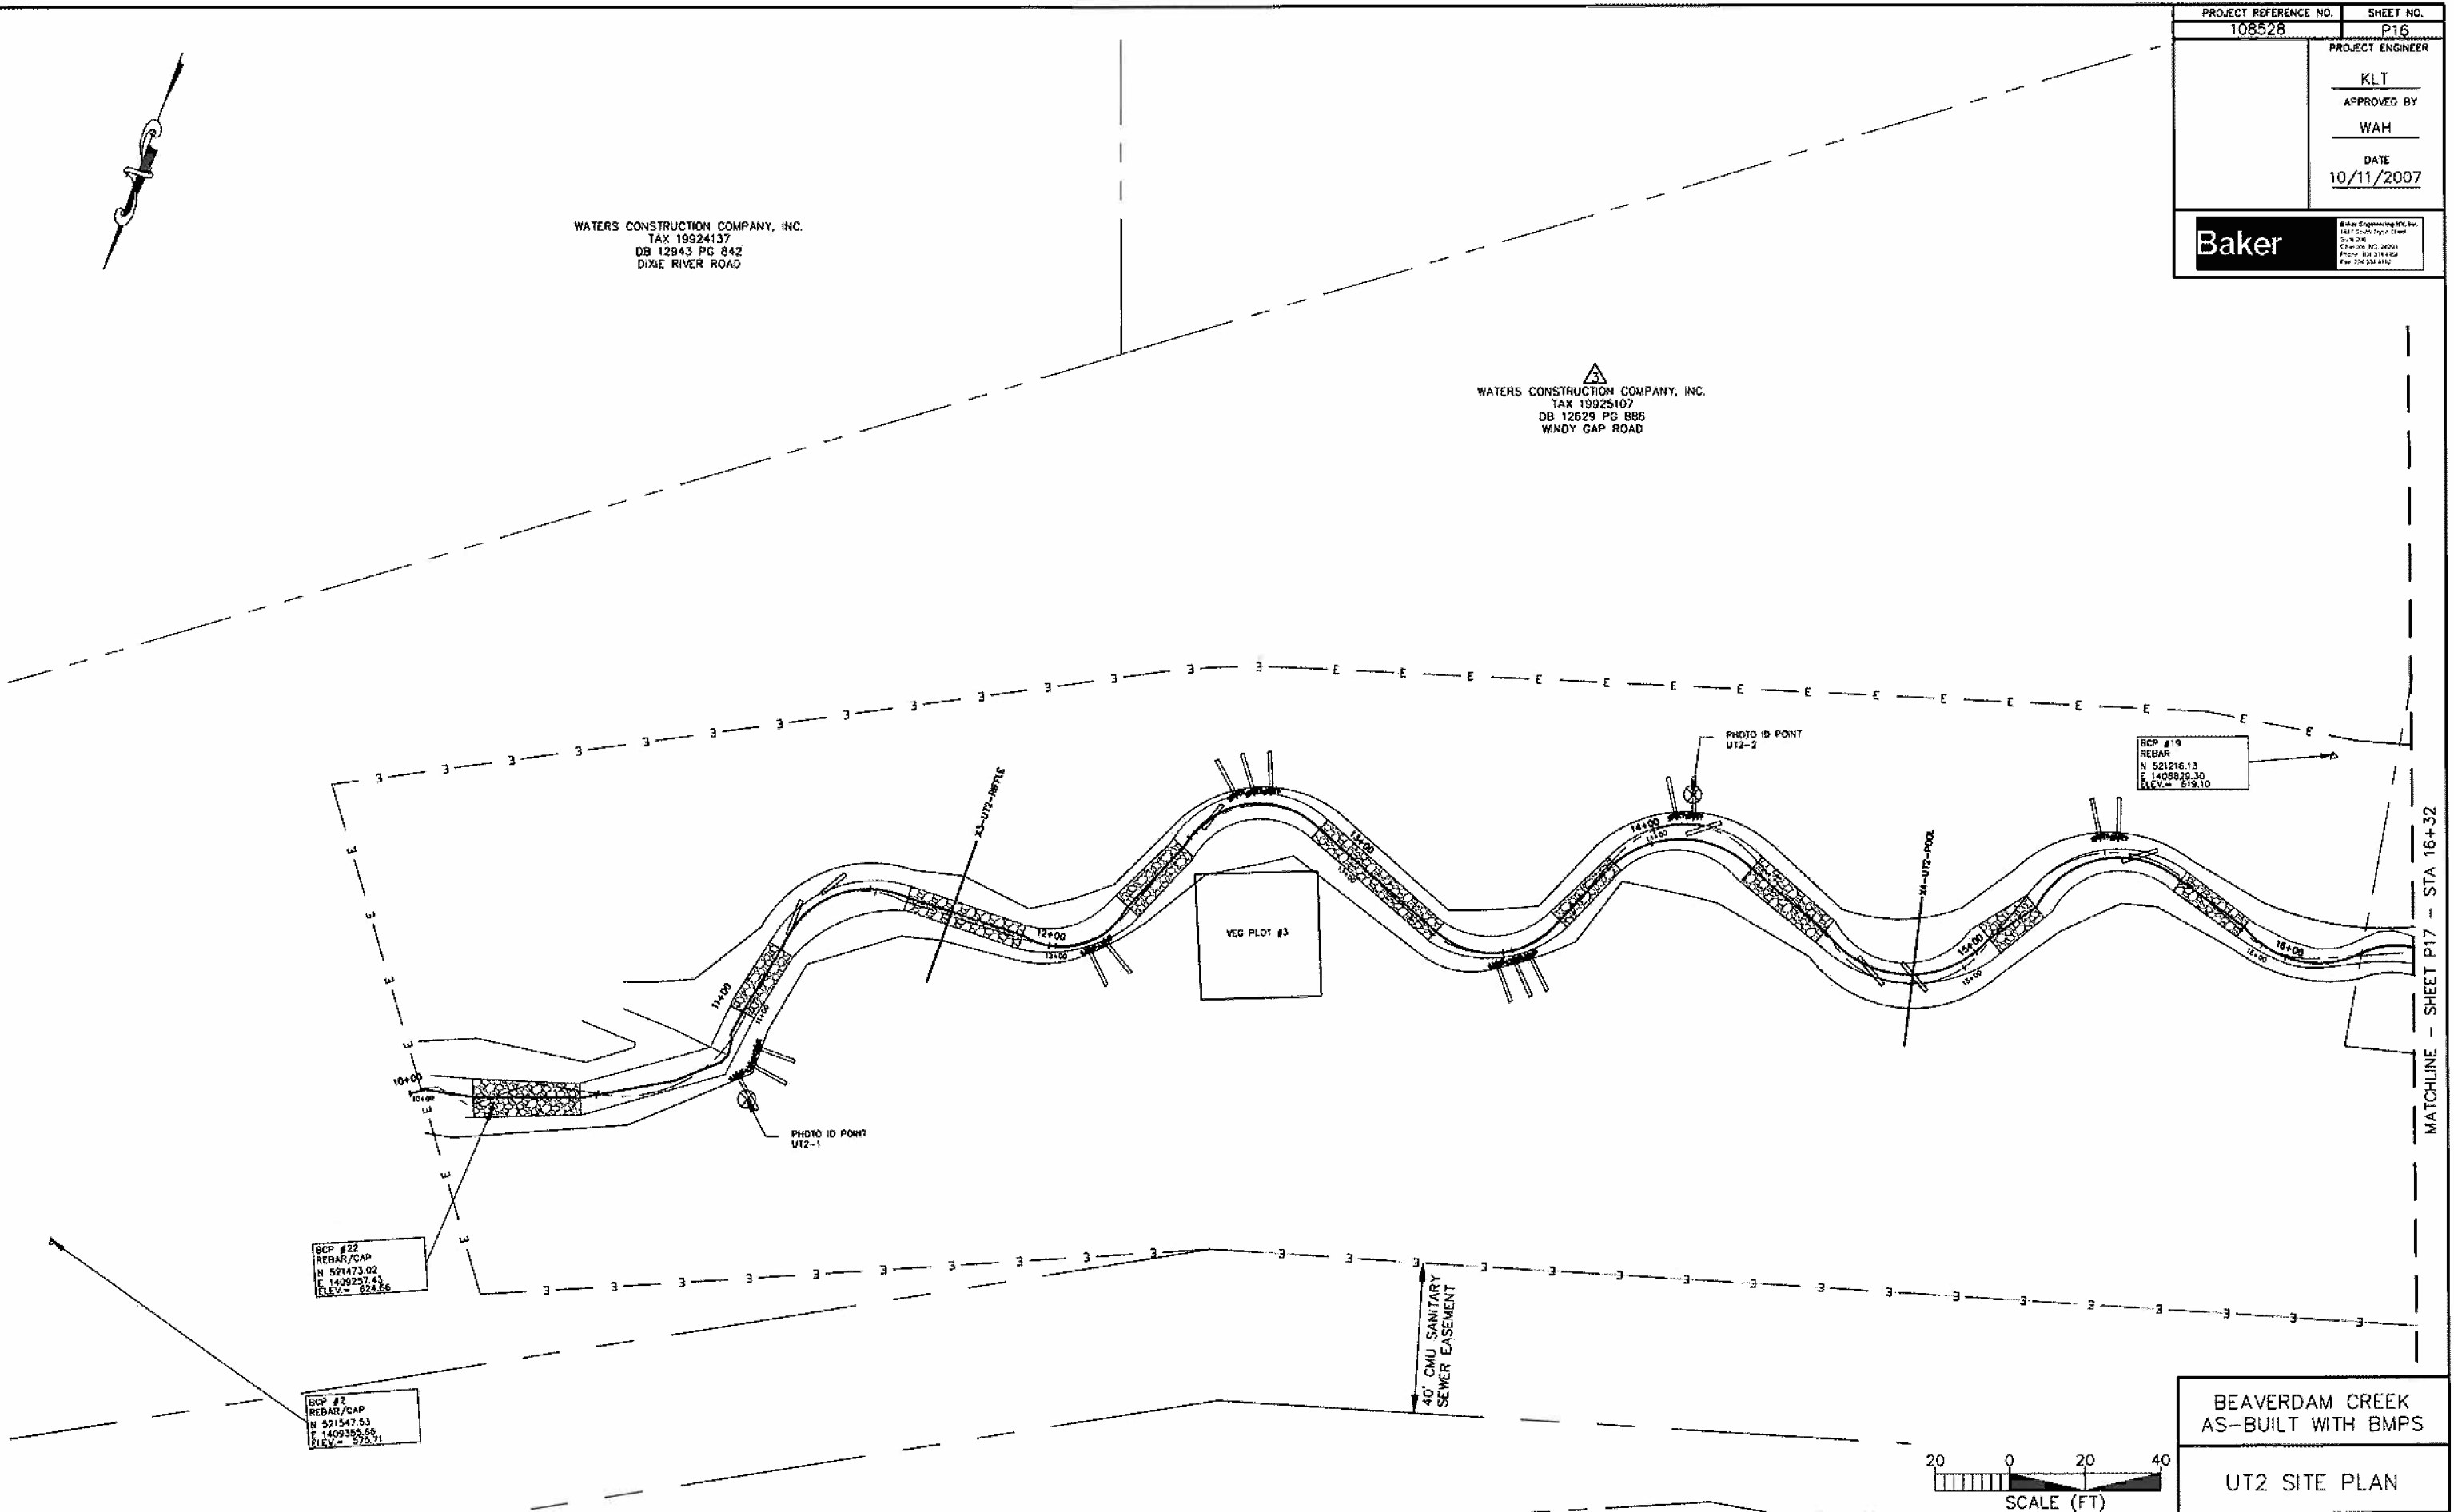

BEAVERDAM CREEK
AS-BUILT WITH BMPs

UT2 SITE PLAN


PROJECT REFERENCE NO. 108528	SHEET NO. P17
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small>Baker Engineering, Inc. 1445 South State Street Suite 202 Chattanooga, TN 37403 Phone: 423.249.4444 Fax: 423.249.4442</small>	


 DIXIE RIVER LAND COMPANY
 AND PAPPAS PROPERTIES, LLC.
 TAX 19925114
 DB 13089 PG 911
 GLENBURN LANE

BCP #18
 REBAR
 N 521241.15
 E 1488945.84
 ELEV. = 617.52

EPHEMERAL POOL

VEG PLOT #4


 WATERS CONSTRUCTION COMPANY, INC.
 TAX 19925107
 DB 12629 PG 886
 WINDY GAP ROAD


40' CMU SANITARY SEWER EASEMENT

PHOTO ID POINT UT2-4

PHOTO ID POINT UT2-3

MATCHLINE - SHEET P16 - STA 16+32

MATCHLINE - SHEET P18 - STA 20+93



BEAVERDAM CREEK AS-BUILT WITH BMPS

UT2 SITE PLAN

PROJECT REFERENCE NO.	SHEET NO.
108528	P18
PROJECT ENGINEER	
KLT	
APPROVED BY	
WAH	
DATE	
10/11/2007	
Baker	
<small>Baker Engineering LLC, Inc. 1407 South Fifth Street Raleigh, NC 27603 Phone: 704.334.4444 Fax: 704.334.4472</small>	

BELLASERA BEREWICK, LLC.
c/o THOMAS A SAIED JR.
TAX 19925111
DB 18271 PG 145
WINDY GAP ROAD

DIXIE RIVER LAND COMPANY
AND PAPPAS PROPERTIES, LLC.
TAX 19925114
DB 13089 PG 911
PHOTO ID POINT
UT2-5
WINDY GAP LANE

BCP #1496
NAIL
N 521401.00
E 1408370.10
ELEV. = 609.83

BCP #1322
NAIL
N 521645.54
E 1408082.71
ELEV. = 502.77

WATERS CONSTRUCTION COMPANY, INC.
TAX 19925103
DB 12829 PG 902
DIXIE RIVER ROAD

WATERS CONSTRUCTION COMPANY, INC.
TAX 19925107
DB 12629 PG 886
WINDY GAP ROAD

MATCHLINE - SHEET P17 - STA 20+93


MATCHLINE - SHEET P19 - STA 27+45

MATCHLINE - SHEET P23 - STA 19+72




BEAVERDAM CREEK
AS-BUILT WITH BMPS
UT2/UT2-A
SITE PLAN


PROJECT REFERENCE NO. 108528	SHEET NO. P19
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	



 BELLASERA BEREWICK, LLC.
 c/o THOMAS A SAIEED JR.
 TAX 19925111
 DB 18271 PG 145
 WINDY GAP ROAD


 WATERS CONSTRUCTION COMPANY, INC.
 TAX 19925106
 DB 12629 PG 886
 MB 33 PG 515
 WINDY GAP ROAD

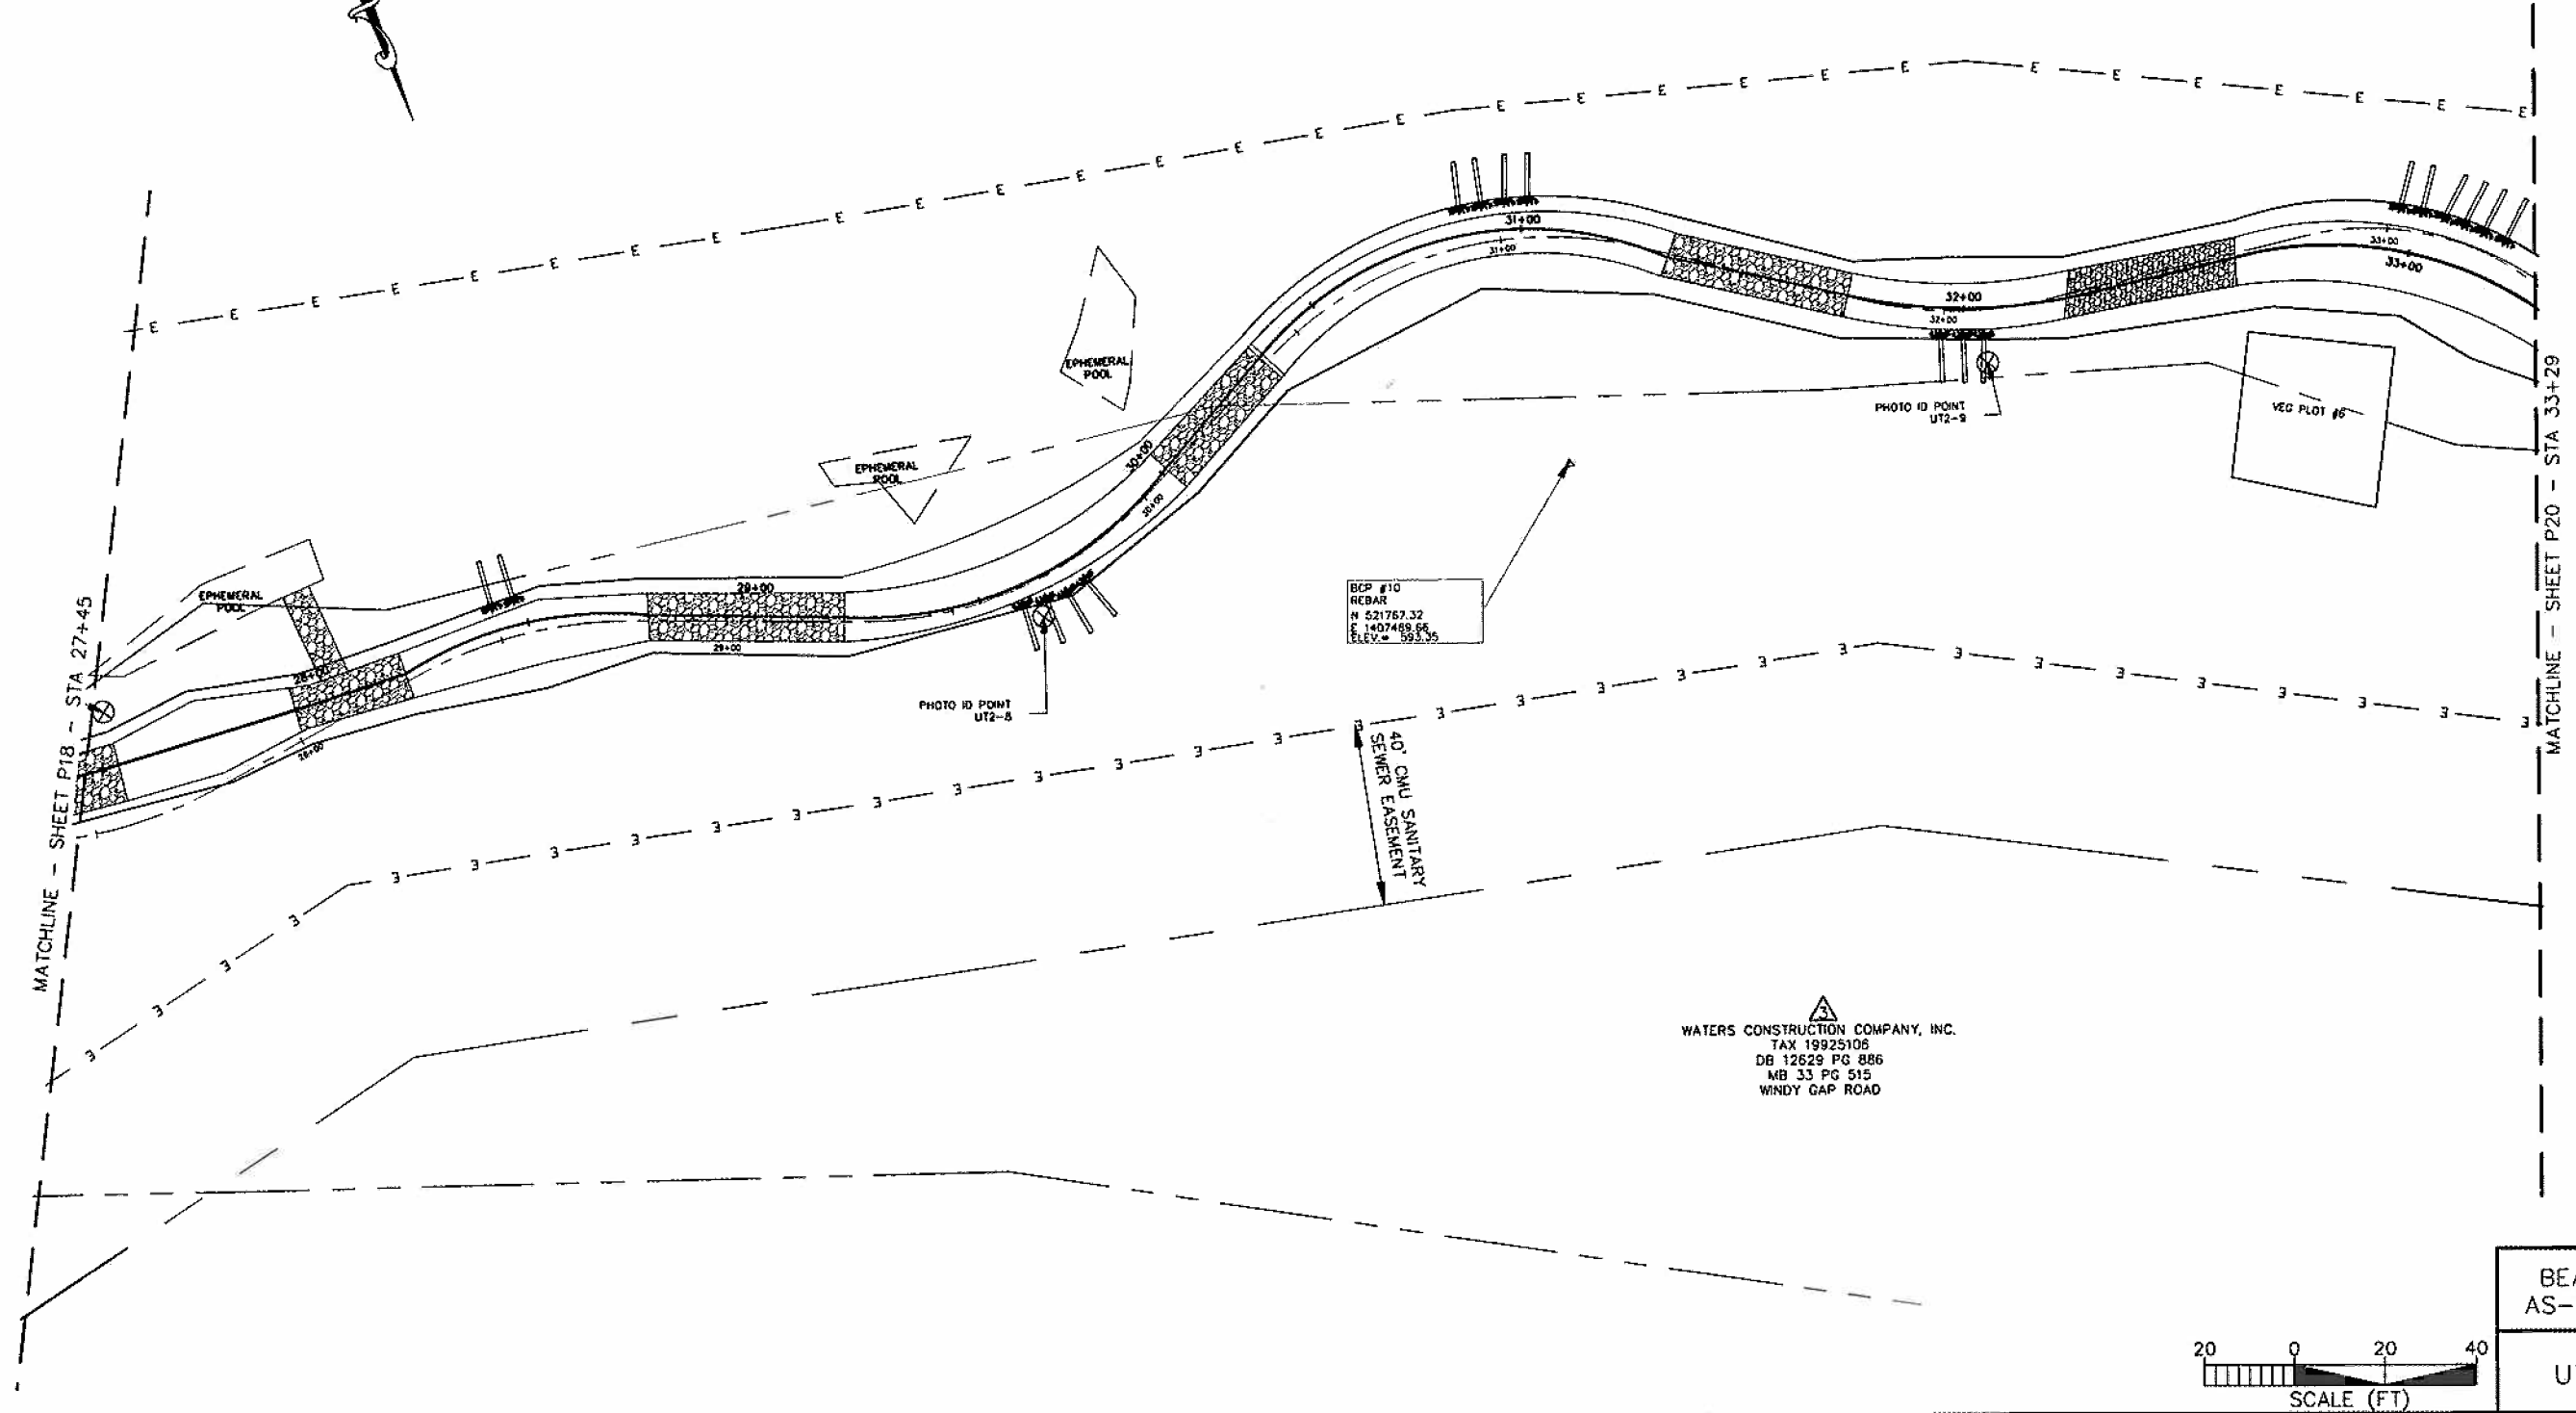


BEAVERDAM CREEK
 AS-BUILT WITH BMPs
 UT2 SITE PLAN


PROJECT REFERENCE NO. 108528	SHEET NO. P20
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small>Baker Engineering, Inc. 1417 Degan Taylor Drive Suite 202 Charlotte, NC 28203 Phone: 704.334.4444 Fax: 704.334.4422</small>	

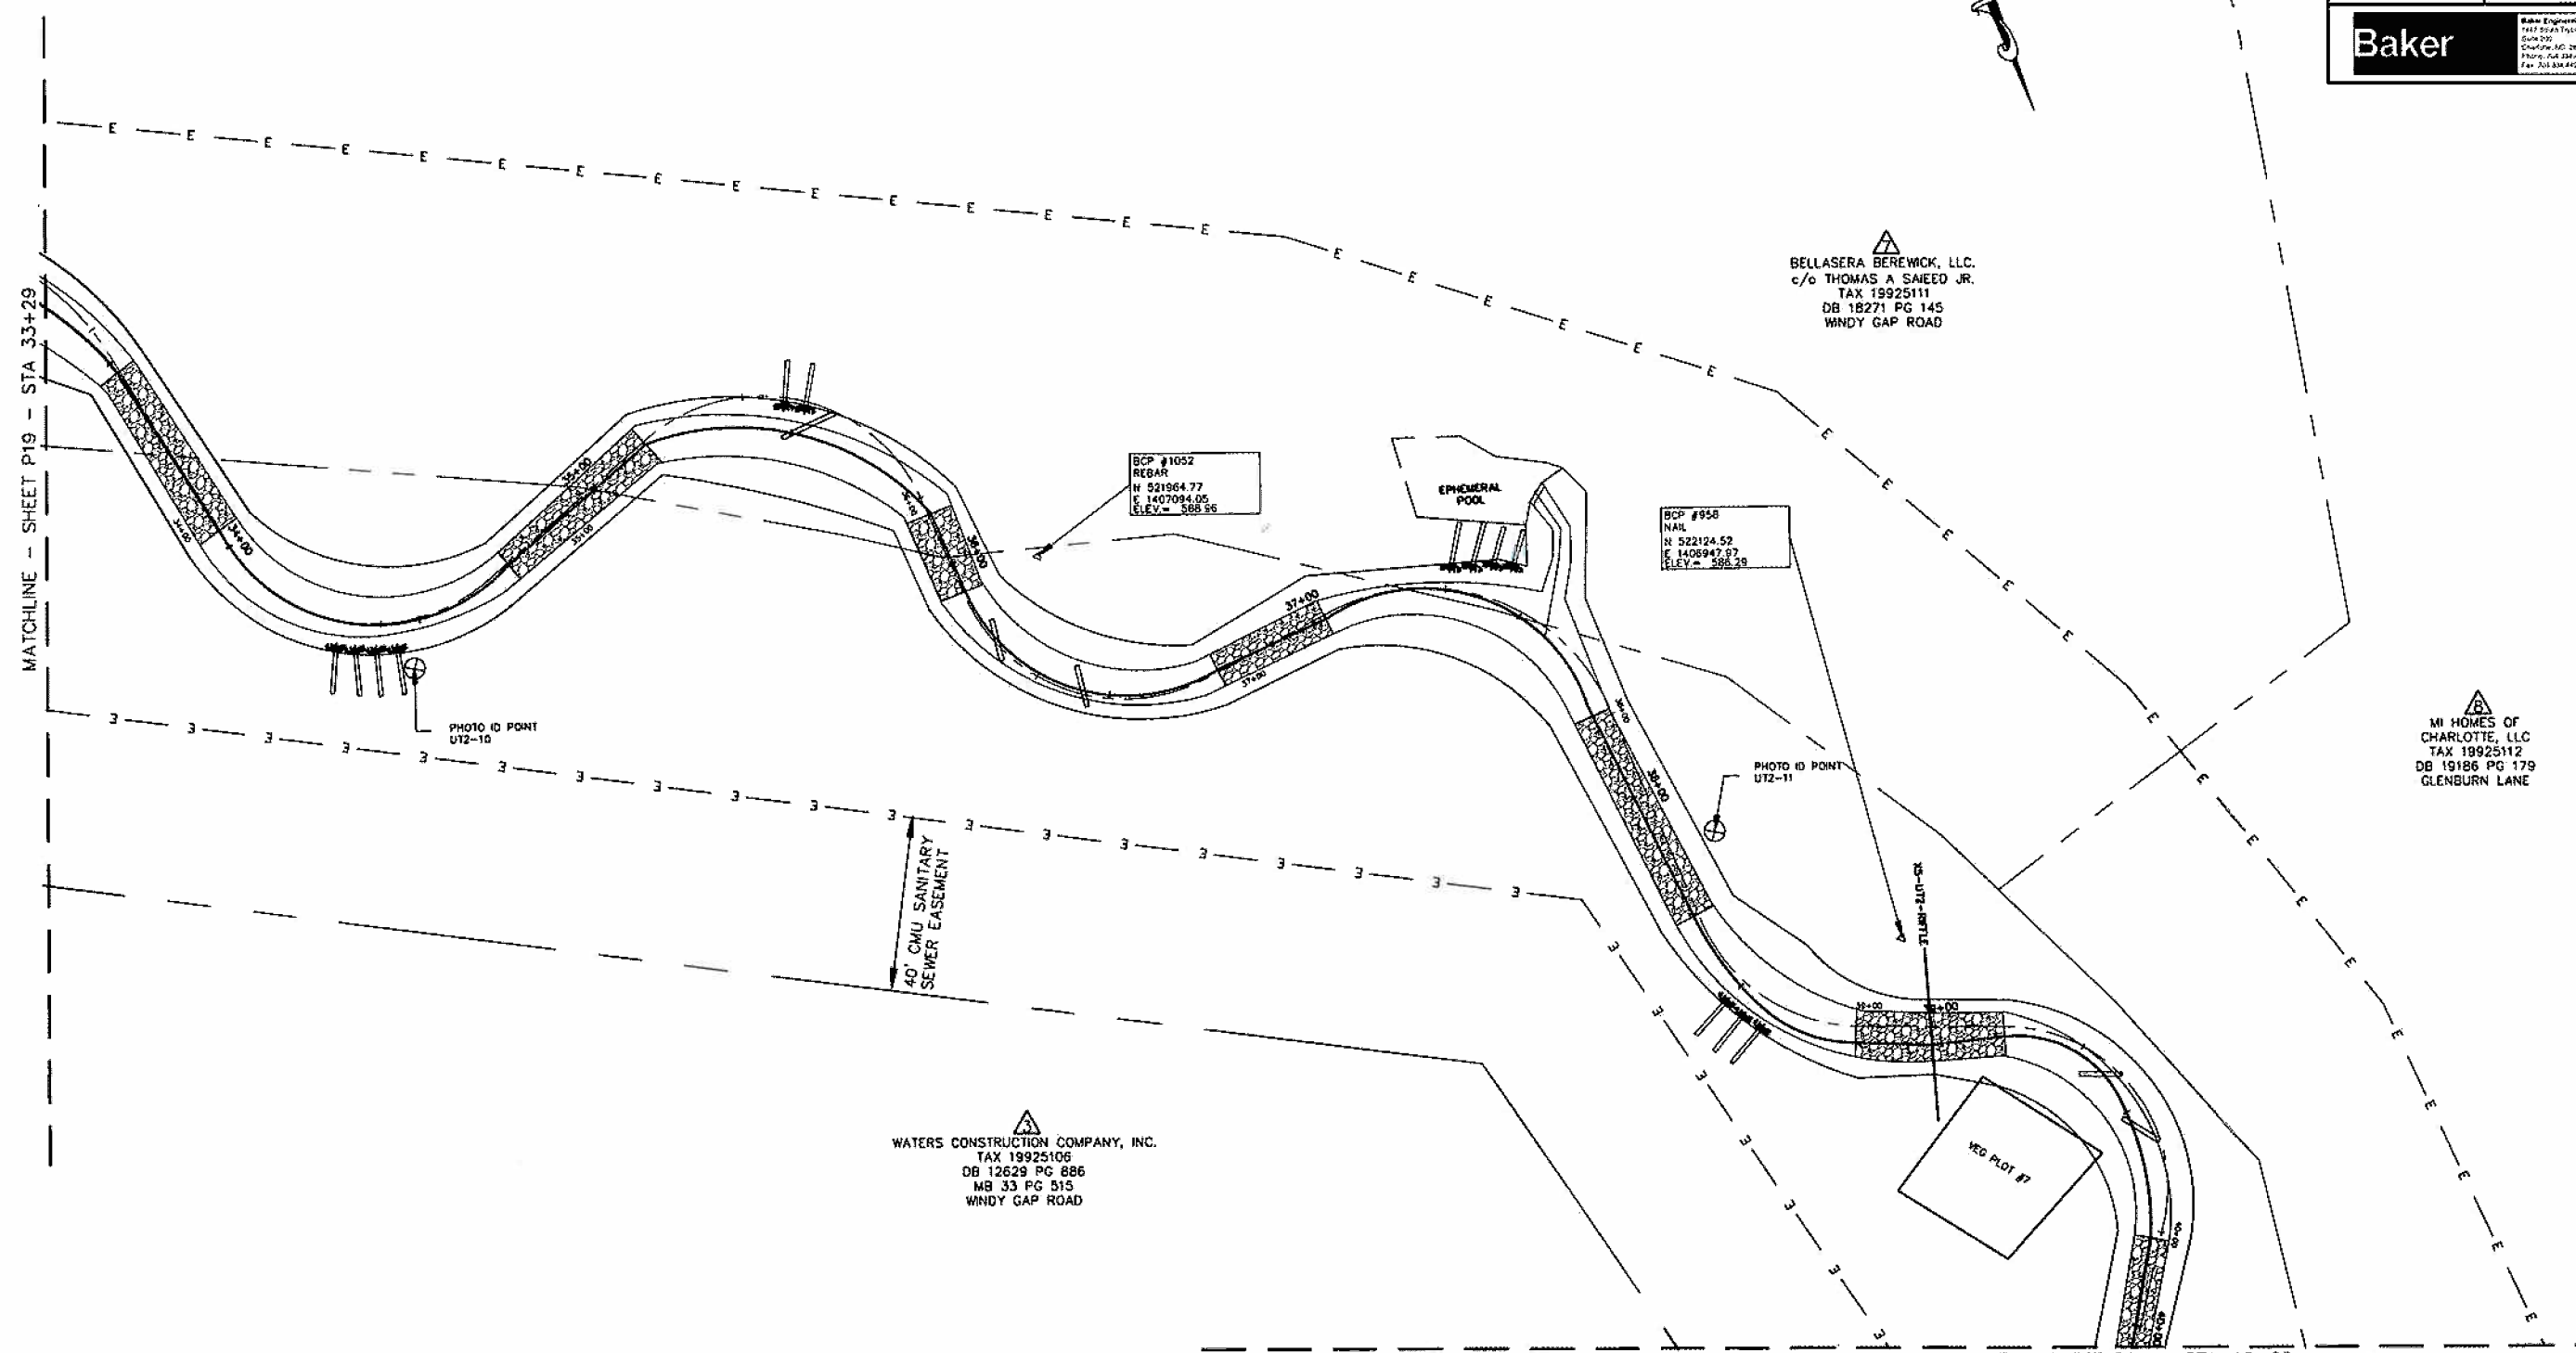

BEAVERDAM CREEK
AS-BUILT WITH BMPS
UT2 SITE PLAN

PROJECT REFERENCE NO. 108528	SHEET NO. P-21
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	
<small>Baker Engineering, Inc. 1417 South Tyler Street Charlotte, NC 28203 Phone: 704.334.6100 Fax: 704.334.6100</small>	

MI HOMES OF CHARLOTTE, LLC
TAX 19925112
DB 19186 PG 179
GLENBURN LANE

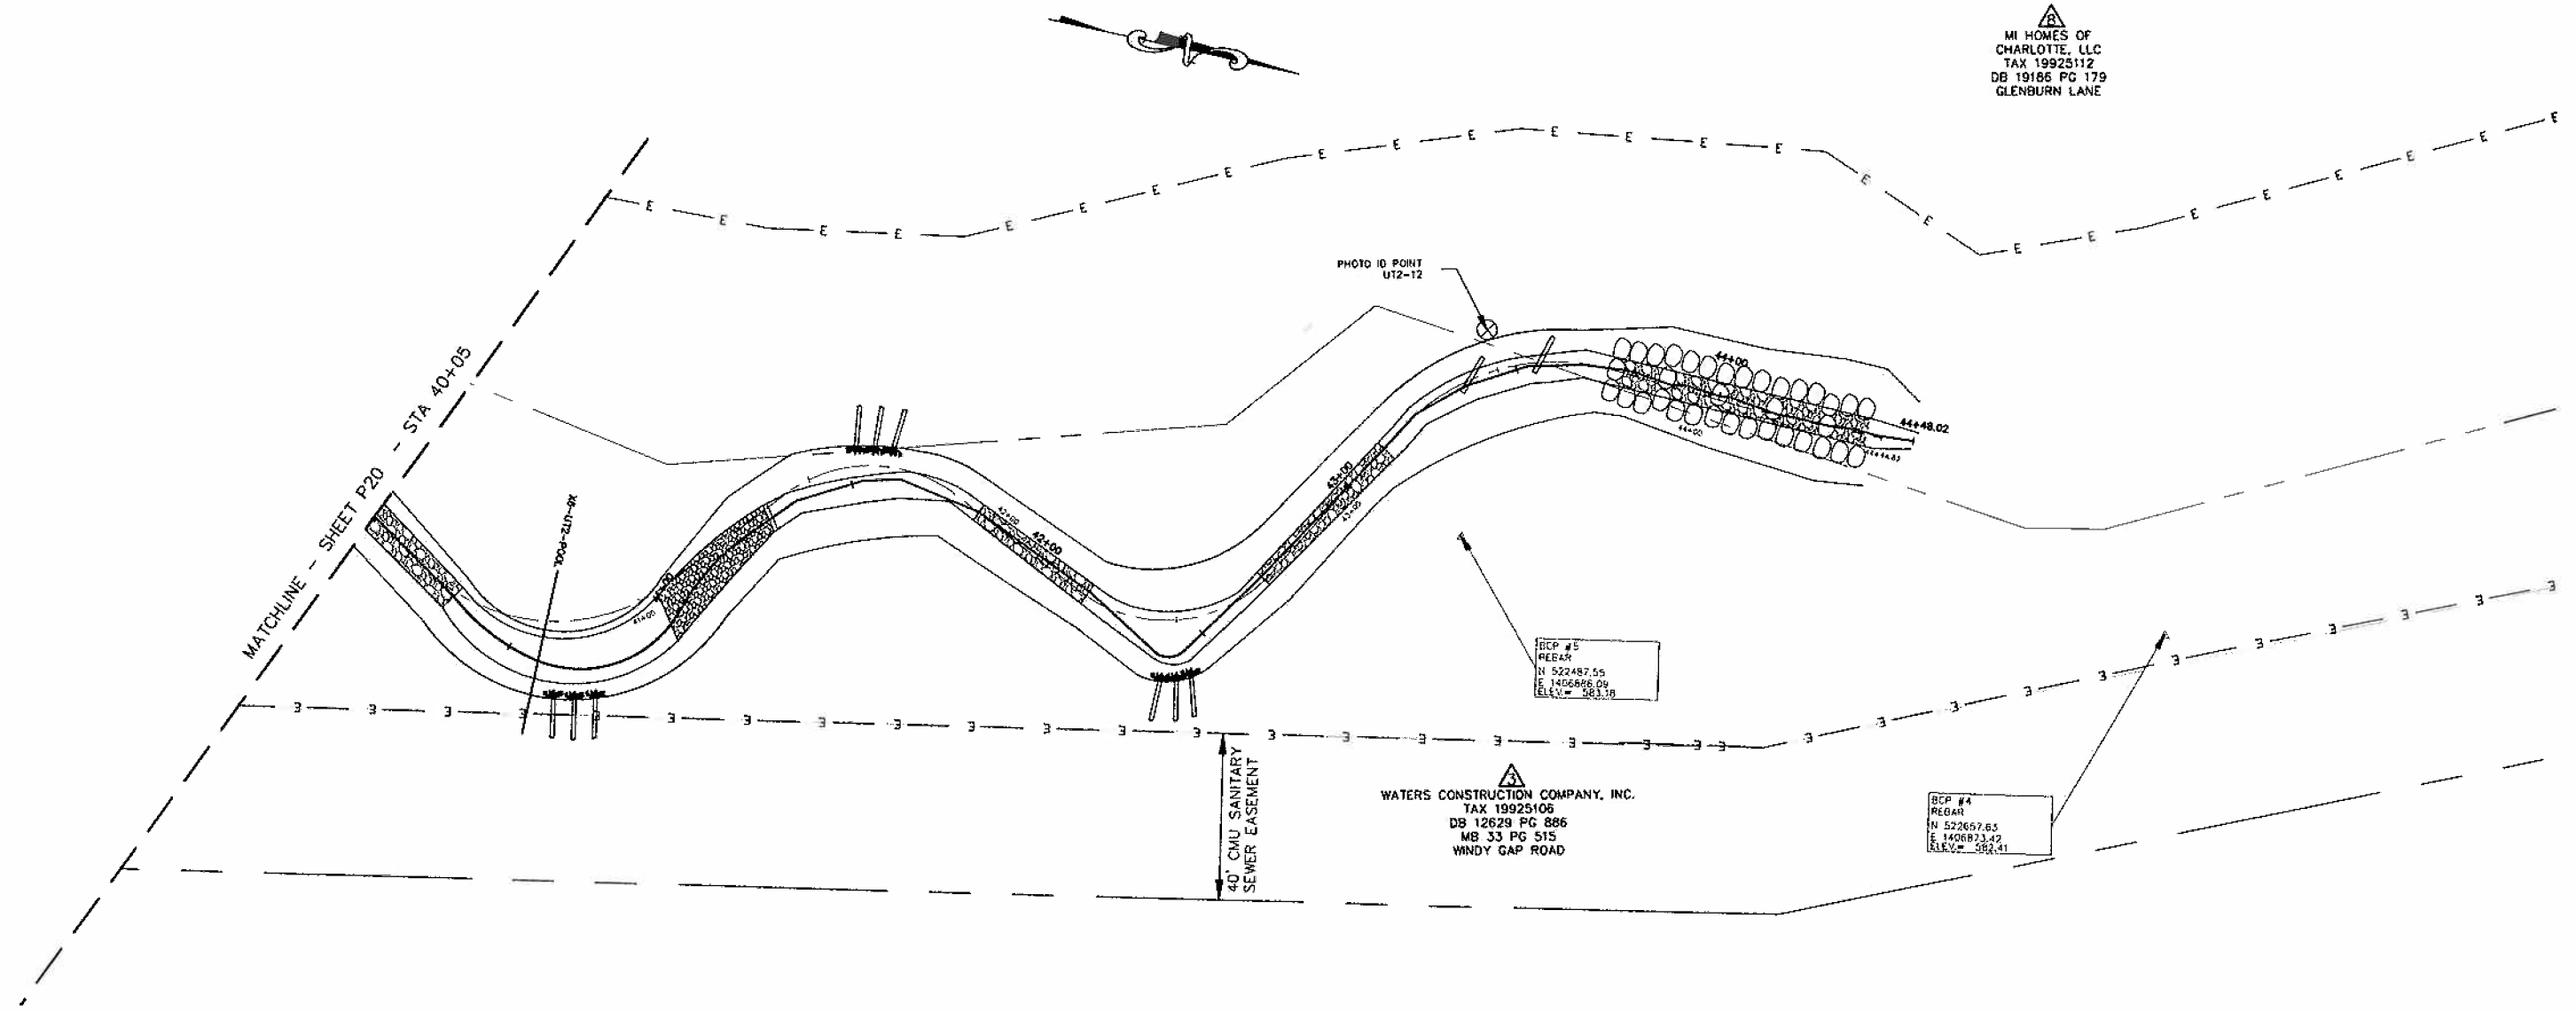

WATERS CONSTRUCTION COMPANY, INC.
TAX 19925106
DB 12629 PG 886
MB 33 PG 515
WINDY GAP ROAD


BEAVERDAM CREEK
AS-BUILT WITH BMPS

UT2 SITE PLAN



PROJECT REFERENCE NO. 108528	SHEET NO. P22
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	


 WATERS CONSTRUCTION COMPANY, INC.
 TAX 19925103
 DB 12629 PG 902
 DIXIE RIVER ROAD

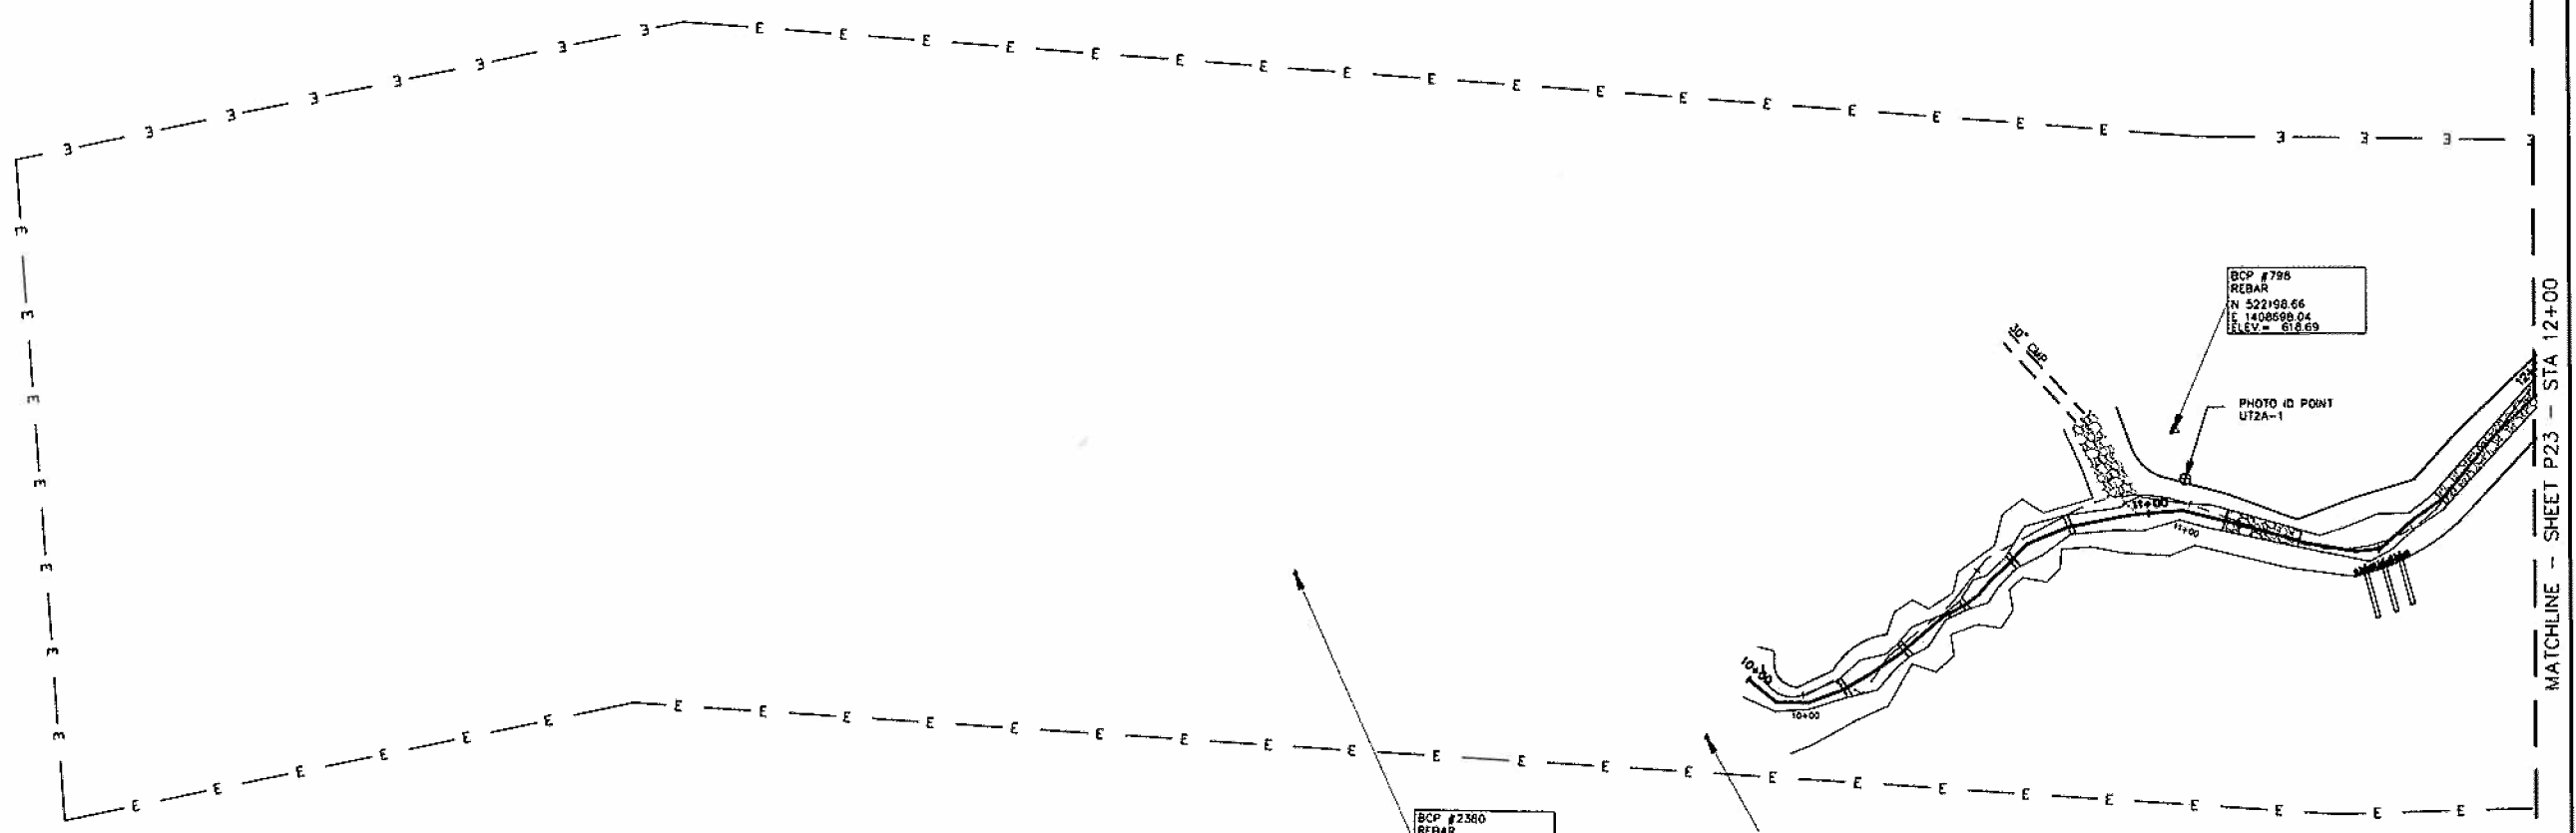


BCP #798
 REBAR
 N 522198.66
 E 1408598.04
 ELEV = 618.69


BCP #2360
 REBAR
 N 522361.78
 E 1408795.08
 ELEV = XXX


BCP #2273
 REBAR
 N 522316.91
 E 1408711.70
 ELEV = XXX




 WATERS CONSTRUCTION COMPANY, INC.
 TAX 19925103
 DB 12629 PG 902
 DIXIE RIVER ROAD



BEAVERDAM CREEK
 AS-BUILT WITH BMPs
 UT2-A SITE PLAN

PROJECT REFERENCE NO. 108528	SHEET NO. P23
PROJECT ENGINEER KLT	
APPROVED BY WAH	
DATE 10/11/2007	
	


 WATERS CONSTRUCTION COMPANY, INC.
 TAX 19925103
 DB 12629 PG 902
 DIXIE RIVER ROAD

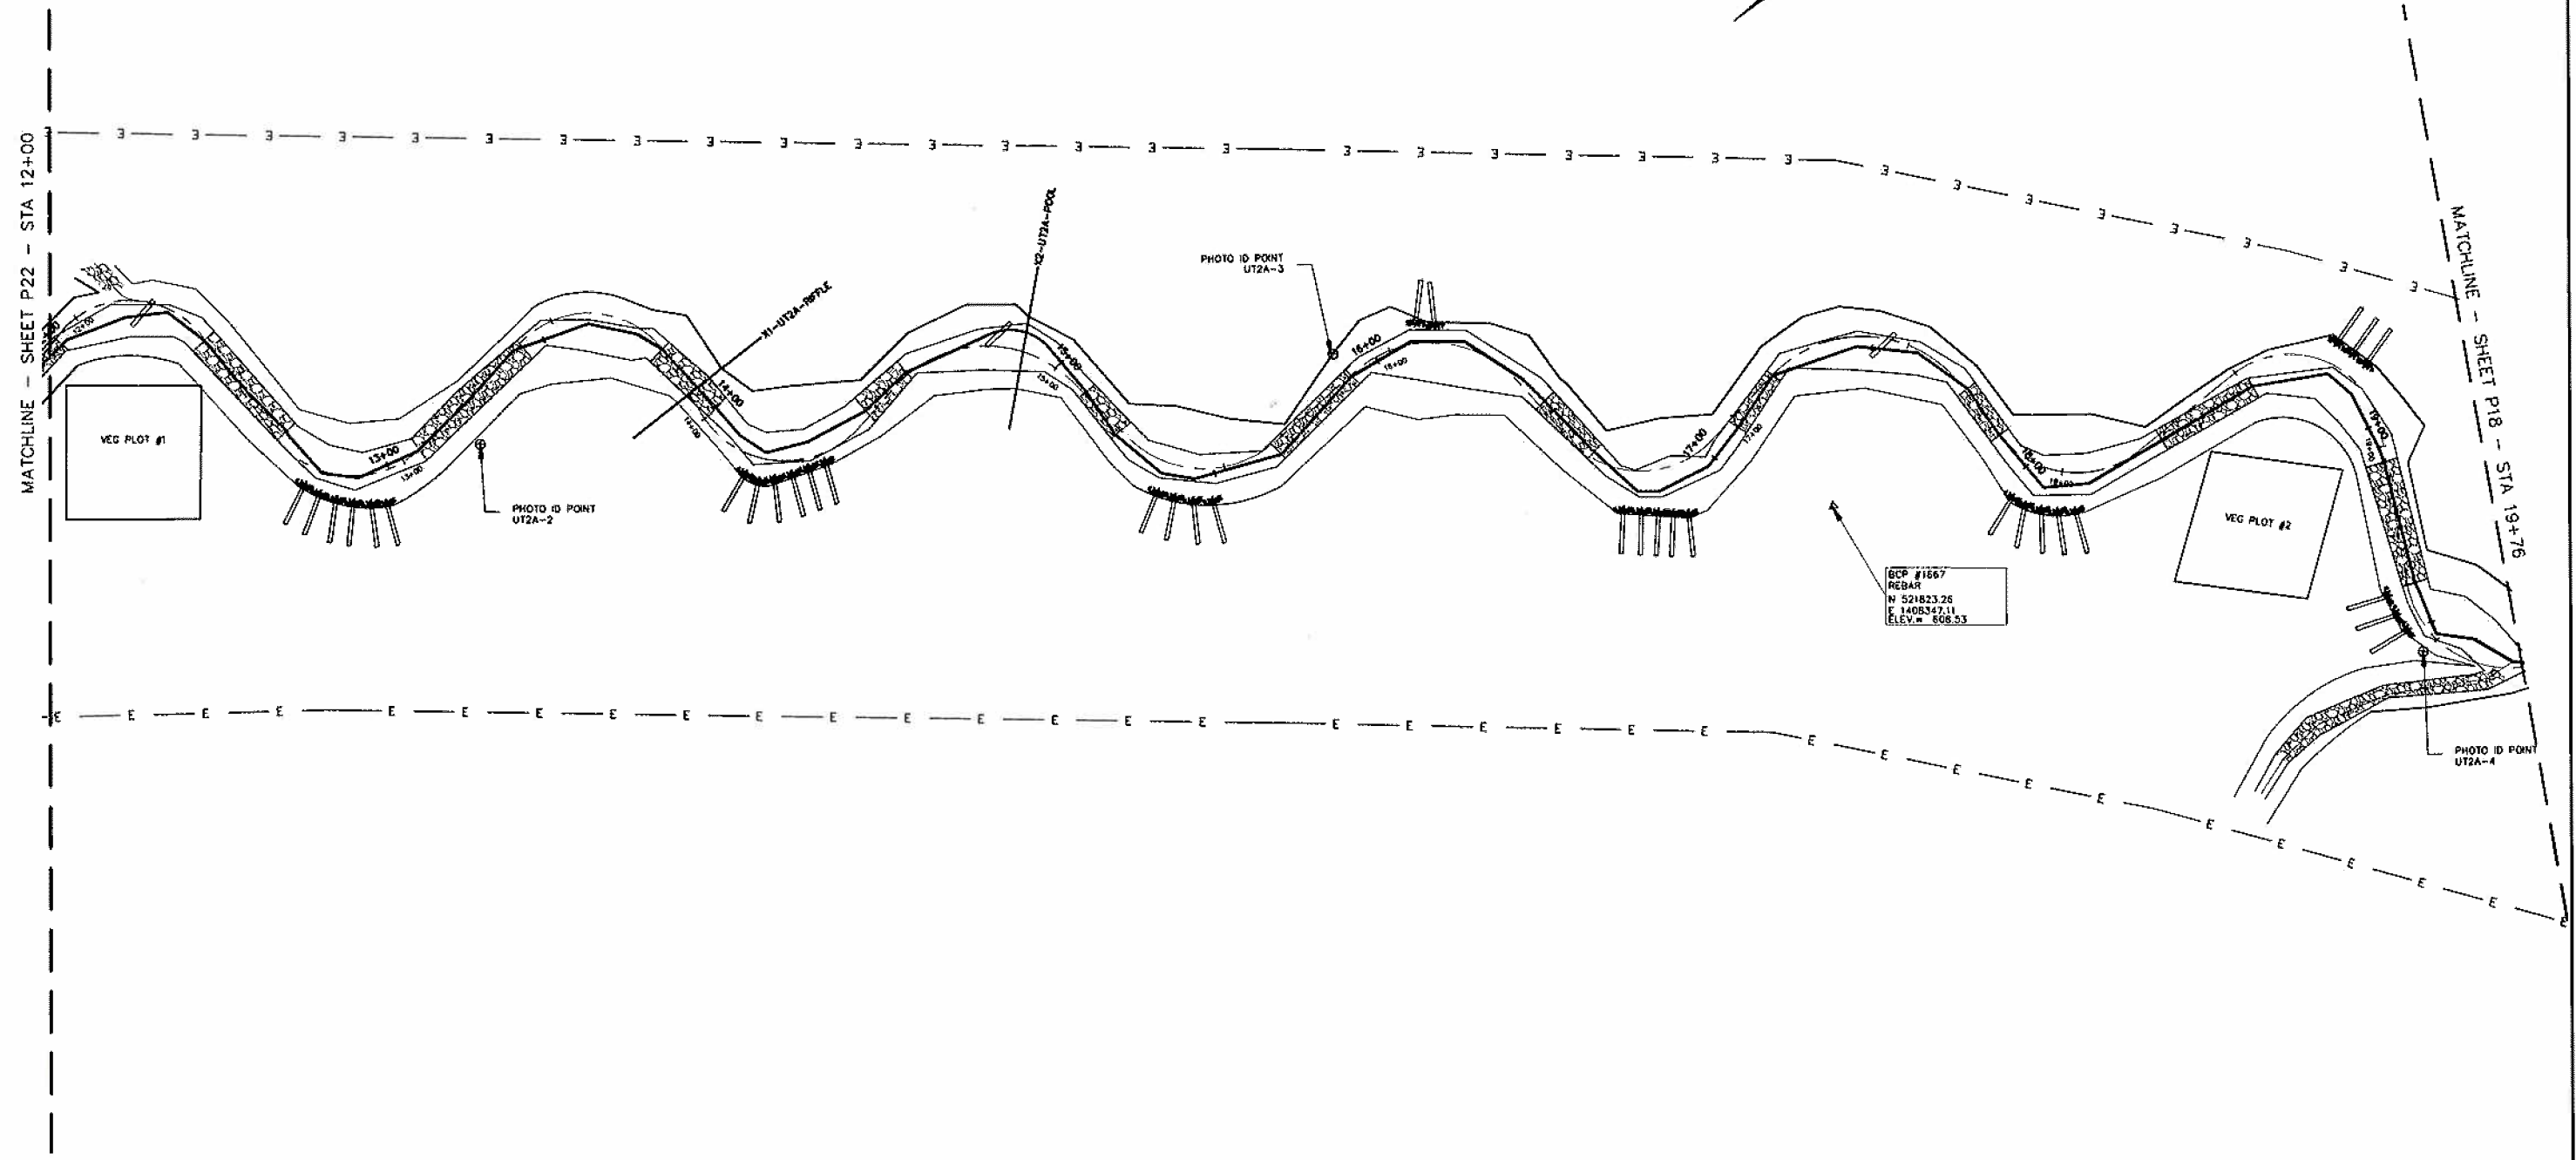

BEAVERDAM CREEK
 AS-BUILT WITH BMPs
 UT2-A SITE PLAN

APPENDIX D

BASELINE STREAM SUMMARY FOR RESTORATION REACHES

Beaverdam Creek Restoration Site - UT1 (Reach 1)

Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)			MY-3 (2009)		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Dimension - Riffle															
Bankfull Width (ft)		14.6		----	12.5	----	----	13.1	----	----	12.8	----	----	12.7	----
Floodprone Width (ft)	----	45.0	----	----	74.6	----	----	74.6	----	----	74.7	----	----	74.6	----
Bankfull Mean Depth (ft)	----	1.5	----	----	1.4	----	----	1.4	----	----	1.4	----	----	1.3	----
Bankfull Max Depth (ft)	----	2.1	----	----	2.0	----	----	2.1	----	----	2.0	----	----	1.9	----
Bankfull Cross Sectional Area (ft ²)	----	21.0	----	----	18.0	----	----	18.8	----	----	17.8	----	----	16.9	----
Width/Depth Ratio	----	10.0	----	----	8.7	----	----	9.2	----	----	9.1	----	----	9.6	----
Entrenchment Ratio	----	3.1	----	----	6.0	----	----	5.7	----	----	5.9	----	----	5.9	----
Bank Height Ratio	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----
Bankfull Velocity (fps)	----	3.5	----	----	----	----	----	----	----	----	----	----	----	----	----
Pattern															
Channel Beltwidth (ft)	----	0	----	----	----	----	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	0	----	15	----	----	----	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	0	----	29	----	----	----	----	----	----	----	----	----	----	----	----
Meander Width Ratio	----	0	----	----	----	----	----	----	----	----	----	----	----	----	----
Profile															
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	0.0067	----	0.009	----	----	----	----	----	----	----	0.009	----	----	----	0.014
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	----	43.8	----	----	----	----	----	----	----	23	54	91	16	57	97
Substrate and Transport Parameters															
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	25 / 36 / 42 / 75 / 105	----	----	0.12 / 40 / 50 / 110 / 160	----	----	----	<.063 / 0.5 / 59 / 110 / 140	----
Reach Shear Stress (competency) lb/ft ²	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m ²	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters															
Channel length (ft)	----	----	555	----	----	567	----	----	568	----	----	563	----	----	562
Drainage Area (SM)	----	----	0.7	----	----	0.7	----	----	0.7	----	----	0.7	----	----	0.7
Rosgen Classification	----	Bc	----	----	----	----	----	C	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	----	75	----	----	----	----	----	----	----	----	----	----	----	----	----
Sinuosity	----	1.02	----	----	----	----	----	1.05	----	----	1.04	----	----	1.04	----
BF slope (ft/ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.
December 2009, Monitoring Year 3

Beaverdam Creek Restoration Site - UT1 (Reach 2-5)

Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)			MY-3 (2009)		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Dimension - Riffle															
Bankfull Width (ft)	16.8	----	20.0	15.4	----	23.0	15.2	----	26.9	15.3	----	26.0	15.1	----	26.0
Floodprone Width (ft)	----	100.0	----	74.9	----	80.7	74.9	----	80.7	74.8	----	80.6	73.5	----	80.7
Bankfull Mean Depth (ft)	1.7	----	2.0	1.7	----	2.1	1.5	----	2.2	1.5	----	2.4	1.5	----	2.1
Bankfull Max Depth (ft)	2.4	----	2.9	2.5	----	4.1	2.3	----	4.1	2.4	----	4.7	2.3	----	3.7
Bankfull Cross Sectional Area (ft2)	28.0	----	40.0	25.6	----	26.8	23.8	----	59.7	23.6	----	62.4	22.8	----	54.0
Width/Depth Ratio	9.8	----	10.1	9.2	----	13.9	9.6	----	14.6	9.9	----	15.7	10.0	----	15.2
Entrenchment Ratio	5.0	----	6.0	3.4	----	4.9	2.9	----	4.9	3.0	----	4.9	3.0	----	5.0
Bank Height Ratio	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----
Bankfull Velocity (fps)	3.1	----	3.8	----	----	----	----	----	----	----	----	----	----	----	----
Pattern															
Channel Beltwidth (ft)	84	----	100	----	----	----	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	34	----	60	----	----	----	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	134	----	200	----	----	----	----	----	----	----	----	----	----	----	----
Meander Width Ratio	2	----	10	----	----	----	----	----	----	----	----	----	----	----	----
Profile															
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	0.0048	----	0.012	----	----	----	----	----	----	0.008	0.011	0.018	0.008	0.011	0.013
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	101	----	120	----	----	----	----	----	----	72	108	144	67	114	146
Substrate and Transport Parameters															
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	0.17-25 / 0.75-37 / 30-45 / 70-85 / 110-120			0.1-32 / 0.26-46 / 0.37 - 64 / 1.0 - 145 / 5.6-178			53-1.6 / 0.063-47 / 0.26-70 / 0.55-140 / 1.4		
Reach Shear Stress (competency) lb/ft2	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m2	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters															
Channel length (ft)	----	----	6155	----	----	5897	----	----	3021	----	----	3023	----	----	3000
Drainage Area (SM)	0.7	----	1.75	0.7	----	1.75	0.7	----	1.75	0.7	----	1.75	0.7	----	1.75
Rosgen Classification	----	C/E	----	----	----	----	----	C	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	105	----	155	----	----	----	----	----	----	----	----	----	----	----	----
Sinuosity	1.1	----	1.2	----	----	----	----	1.3	----	----	1.3	----	----	1.3	----
BF slope (ft/ft)	0.002	----	0.006	----	----	----	----	----	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.
December 2009, Monitoring Year 3

Beaverdam Creek Restoration Site - UT1B															
Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)			MY-3 (2009)		
Dimension - Riffle	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Bankfull Width (ft)	----	10.4	----	----	11.1	----	----	11.8	----	----	11.1	----	----	10.8	----
Floodprone Width (ft)	----	100.0	----	----	75.0	----	----	75.0	----	----	75.0	----	----	75.0	----
Bankfull Mean Depth (ft)	----	1.1	----	----	1.4	----	----	1.4	----	----	1.4	----	----	1.3	----
Bankfull Max Depth (ft)	----	1.4	----	----	2.3	----	----	2.3	----	----	2.4	----	----	2.4	----
Bankfull Cross Sectional Area (ft ²)	----	11.0	----	----	15.3	----	----	16.5	----	----	15.6	----	----	14.1	----
Width/Depth Ratio	----	9.7	----	----	8.0	----	----	8.5	----	----	7.9	----	----	8.3	----
Entrenchment Ratio	----	9.6	----	----	6.8	----	----	6.3	----	----	6.8	----	----	6.9	----
Bank Height Ratio	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----
Bankfull Velocity (fps)	----	4.0	----	----	----	----	----	----	----	----	----	----	----	----	----
Pattern															
Channel Beltwidth (ft)	----	52	----	----	----	----	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	21	----	31	----	----	----	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	83	----	104	----	----	----	----	----	----	----	----	----	----	----	----
Meander Width Ratio	----	5	----	----	----	----	----	----	----	----	----	----	----	----	----
Profile															
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	0.0104	----	0.0138	----	----	----	----	----	----	----	----	----	----	----	----
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	----	52	----	----	----	----	----	----	----	----	----	----	----	----	----
Substrate and Transport Parameters															
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	<0.063 / <0.063 / <0.063 / 0.2 / 0.4			0.065 / 0.09 / 1.1 / 0.3 / 0.4			<0.063 / <0.063 / <0.063 / 0.13 / 0.39		
Reach Shear Stress (competency) lb/ft ²	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m ²	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters															
Channel length (ft)	----	----	790	----	----	778	----	----	775	----	----	----	----	----	----
Drainage Area (SM)	----	----	0.34	----	----	0.34	----	----	0.34	----	----	0.34	----	----	0.34
Rosgen Classification	----	C/E	----	----	C	----	----	C	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	----	45	----	----	----	----	----	----	----	----	----	----	----	----	----
Sinuosity	----	1.15	----	----	1.1	----	----	1.1	----	----	----	----	----	----	----
BF slope (ft/ft)	----	0.003	----	----	0.013	----	----	----	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.

December 2009, Monitoring Year 3

Beaverdam Creek Restoration Site - UT1C

Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)			MY-3 (2009)		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Dimension - Riffle															
Bankfull Width (ft)	----	11.2	----	----	11.0	----	----	12.0	----	----	13.2	----	----	12.0	----
Floodprone Width (ft)	----	100.0	----	----	70.2	----	----	70.6	----	----	71.2	----	----	71.1	----
Bankfull Mean Depth (ft)	----	0.8	----	----	0.7	----	----	0.7	----	----	0.7	----	----	0.7	----
Bankfull Max Depth (ft)	----	0.9	----	----	1.0	----	----	1.1	----	----	1.1	----	----	1.1	----
Bankfull Cross Sectional Area (ft2)	----	8.0	----	----	7.8	----	----	8.8	----	----	9.5	----	----	8.6	----
Width/Depth Ratio	----	14.8	----	----	15.6	----	----	16.5	----	----	18.4	----	----	16.9	----
Entrenchment Ratio	----	8.9	----	----	6.4	----	----	5.9	----	----	5.4	----	----	5.9	----
Bank Height Ratio	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----
Bankfull Velocity (fps)	----	3.2	----	----	----	----	----	----	----	----	----	----	----	----	----
Pattern															
Channel Beltwidth (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Meander Width Ratio	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Profile															
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	0.0191	----	0.0265	----	----	----	----	----	----	----	----	----	----	----	----
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	----	44.8	----	----	----	----	----	----	----	----	----	----	----	----	----
Substrate and Transport Parameters															
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	26 / 37 / 42 / 75 / 100	----	36 / 50 / 64 / 110 / 130	----	0.33 / 40 / 60 / 130 / 160	----	----	----	----
Reach Shear Stress (competency) lb/ft2	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m2	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters															
Channel length (ft)	----	----	628	----	----	616	----	----	615	----	----	----	----	----	----
Drainage Area (SM)	----	----	0.15	----	----	0.15	----	----	0.15	----	0.15	----	----	----	0.15
Rosgen Classification	----	B	----	----	C	----	----	C	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	----	27	----	----	----	----	----	----	----	----	----	----	----	----	----
Sinuosity	----	1.05	----	----	1.1	----	----	1.1	----	----	----	----	----	----	----
BF slope (ft/ft)	----	0.017	----	----	0.013	----	----	----	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.

December 2009, Monitoring Year 3

Beaverdam Creek Restoration Site - UT1D															
Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)			MY-3 (2009)		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Dimension - Riffle															
Bankfull Width (ft)	----	10.4	----	----	11.4	----	----	12.7	----	----	11.4	----	----	13.1	----
Floodprone Width (ft)	----	100.0	----	----	75.5	----	----	75.5	----	----	75.5	----	----	75.3	----
Bankfull Mean Depth (ft)	----	0.9	----	----	0.8	----	----	0.7	----	----	0.8	----	----	0.7	----
Bankfull Max Depth (ft)	----	1.2	----	----	1.2	----	----	1.1	----	----	1.1	----	----	1.1	----
Bankfull Cross Sectional Area (ft2)	----	10.0	----	----	9.0	----	----	9.2	----	----	9.0	----	----	8.6	----
Width/Depth Ratio	----	11.2	----	----	14.4	----	----	17.5	----	----	14.4	----	----	19.9	----
Entrenchment Ratio	----	9.6	----	----	6.6	----	----	6.0	----	----	6.6	----	----	5.8	----
Bank Height Ratio	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----	----	1.0	----
Bankfull Velocity (fps)	----	2.9	----	----	----	----	----	----	----	----	----	----	----	----	----
Pattern															
Channel Beltwidth (ft)	----	52	----	----	----	----	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	21	----	31	----	----	----	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	83	----	104	----	----	----	----	----	----	----	----	----	----	----	----
Meander Width Ratio	8	----	10	----	----	----	----	----	----	----	----	----	----	----	----
Profile															
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	----	52	----	----	----	----	----	----	----	----	----	----	----	----	----
Substrate and Transport Parameters															
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	32 / 38 / 43 / 85 / 120	----	----	25 / 33 / 38 / 60 / 88	----	----	0.12 / 0.19 / 26 / 50 / 68	----	----
Reach Shear Stress (competency) lb/ft2	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m2	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters															
Channel length (ft)	----	----	352	----	----	338	----	----	334	----	----	----	----	----	----
Drainage Area (SM)	----	----	0.16	----	----	0.16	----	----	0.16	----	----	0.16	----	----	0.16
Rosgen Classification	----	C/E	----	----	C	----	----	C	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	----	28	----	----	----	----	----	----	----	----	----	----	----	----	----
Sinuosity	----	1.15	----	----	1.2	----	----	1.2	----	----	----	----	----	----	----
BF slope (ft/ft)	----	0.007	----	----	0.014	----	----	----	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.
December 2009, Monitoring Year 3

Beaverdam Creek Restoration Site - UT2

Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)			MY-3 (2009)		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Dimension - Riffle															
Bankfull Width (ft)	10.2	----	15.6	16.8	----	16.9	16.1	----	16.6	16.2	----	17.3	17.0	----	17.1
Floodprone Width (ft)	30.0	----	80	39.9	----	39.9	39.9	----	39.9	39.9	----	40.0	39.8	----	40.0
Bankfull Mean Depth (ft)	0.92	----	1.5	0.7	----	1.4	0.7	----	1.4	0.7	----	1.3	0.7	----	1.4
Bankfull Max Depth (ft)	1.3	----	2.3	1.1	----	2.1	1.1	----	1.9	1.1	----	1.9	1.0	----	2.1
Bankfull Cross Sectional Area (ft ²)	9.9	----	23.9	12.2	----	23.4	10.9	----	22.6	11.2	----	21.4	11.2	----	23.4
Width/Depth Ratio	10.2	----	12.6	12.1	----	23.4	12.2	----	23.9	12.3	----	26.6	12.4	----	25.9
Entrenchment Ratio	2.8	----	5.9	2.4	----	2.4	2.4	----	2.5	2.3	----	2.5	2.3	----	2.3
Bank Height Ratio	----	1.0	----	----	1.0	----	1	----	1.0	----	1.0	----	----	1.0	----
Bankfull Velocity (fps)	4.7	----	5.4	----	----	----	----	----	----	----	----	----	----	----	----
Pattern															
Channel Beltwidth (ft)	20	----	75	----	----	----	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	23	----	100	----	----	----	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	100	----	300	----	----	----	----	----	----	----	----	----	----	----	----
Meander Width Ratio	9.6	----	27.8	----	----	----	----	----	----	----	----	----	----	----	----
Profile															
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	0.0122	----	0.0279	----	----	----	----	----	----	----	----	----	----	----	----
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	40	----	105	----	----	----	----	----	----	----	----	----	----	----	----
Substrate and Transport Parameters															
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	26-27 / 35 / 39-39 / 53-59 / 95			0.13-25 / 26-35 / 36-40 / 60-64 / 115-140			26-27 / 33-34 / 38 / 45-58 / 65-90		
Reach Shear Stress (competency) lb/ft ²	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m ²	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters															
Channel length (ft)	----	----	3290	----	----	3293	----	----	3142	----	----	----	----	----	----
Drainage Area (SM)	0.1	----	0.3	0.1	----	0.3	0.1	----	0.3	0.1	----	0.3	0.1	----	0.3
Rosgen Classification	----	C	----	----	C	----	----	C	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	48	----	120	----	----	----	----	----	----	----	----	----	----	----	----
Sinuosity	1.03	----	1.21	----	1.3	----	----	1.3	----	----	----	----	----	----	----
BF slope (ft/ft)	0.008	----	0.019	----	0.0138	----	----	----	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.
 December 2009, Monitoring Year 3

Beaverdam Creek Restoration Site - UT2A															
Parameter	Design			As-built			MY-1 (2007)			MY-2 (2008)			MY-3 (2009)		
	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max	Min	Mean	Max
Dimension - Riffle															
Bankfull Width (ft)	----	15.6	----	----	13.3	----	----	12.2	----	----	13.4	----	----	12.6	----
Floodprone Width (ft)	----	80.0	----	----	39.8	----	----	39.8	----	----	39.9	----	----	39.9	----
Bankfull Mean Depth (ft)	----	1.0	----	----	0.8	----	----	0.8	----	----	0.8	----	----	0.7	----
Bankfull Max Depth (ft)	----	1.4	----	----	1.2	----	----	1.1	----	----	1.2	----	----	1.0	----
Bankfull Cross Sectional Area (ft2)	----	10.2	----	----	10.6	----	----	9.6	----	----	10.4	----	----	9.1	----
Width/Depth Ratio	----	10.2	----	----	16.6	----	----	15.5	----	----	17.2	----	----	17.4	----
Entrenchment Ratio	----	5.9	----	----	3.0	----	----	3.3	----	----	3.0	----	----	3.2	----
Bank Height Ratio	----	1.0	----	----	1.0	----	----	1	----	----	1.0	----	----	1.0	----
Bankfull Velocity (fps)	----	5.1	----	----	----	----	----	----	----	----	----	----	----	----	----
Pattern															
Channel Beltwidth (ft)	40	----	55	----	----	----	----	----	----	----	----	----	----	----	----
Radius of Curvature (ft)	24	----	30	----	----	----	----	----	----	----	----	----	----	----	----
Meander Wavelength (ft)	100	----	120	----	----	----	----	----	----	----	----	----	----	----	----
Meander Width Ratio	9.8	----	11.8	----	----	----	----	----	----	----	----	----	----	----	----
Profile															
Riffle Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Riffle Slope (ft/ft)	0.02	----	0.0273	----	----	----	----	----	----	----	----	----	----	----	----
Pool Length (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Pool Spacing (ft)	----	57	----	----	----	----	----	----	----	----	----	----	----	----	----
Substrate and Transport Parameters															
d16 / d35 / d50 / d84 / d95	----	----	----	----	----	----	26 / 30 / 35 / 53 / 78	----	----	<0.063 / 33 / 40 / 60 / 83	----	----	32 / 37 / 42 / 57 / 61	----	----
Reach Shear Stress (competency) lb/ft2	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Stream Power (transport capacity) W/m2	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----
Additional Reach Parameters															
Channel length (ft)	----	----	1099	----	----	1131	----	----	1121	----	----	----	----	----	----
Drainage Area (SM)	----	----	0.1	----	----	0.1	----	----	0.1	----	----	0.1	----	----	0.1
Rosgen Classification	----	C/E	----	----	C	----	----	C	----	----	C	----	----	C	----
Bankfull Discharge (cfs)	----	51	----	----	----	----	----	----	----	----	----	----	----	----	----
Sinuosity	----	1.21	----	----	1.25	----	----	1.22	----	----	----	----	----	----	----
BF slope (ft/ft)	----	0.012	----	----	0.015	----	----	----	----	----	----	----	----	----	----

Beaverdam Creek, EEP Contract No. D05016-1, River Works, Inc.
December 2009, Monitoring Year 3

APPENDIX E

MORHOLOGY AND HYDRAULIC MONITORING SUMMARY

Beaverdam Creek Restoration Site : Project No. D05016-1															
Reach: Beaverdam Creek UT1 (Reach 1)															
I. Cross-Section Parameters	Cross Section 1					Cross Section 2									
	Pool					Riffle									
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5					
Dimension															
BF Width (ft)	22.1	19.9	18.4			13.1	12.8	12.7							
Floodprone Width (ft)	75.1	75.2	75.0			74.6	74.7	74.6							
BF Cross Sectional Area (ft ²)	33.1	31.8	28.1			18.8	17.8	16.9							
BF Mean Depth (ft)	1.5	1.6	1.5			1.4	1.4	1.3							
BF Max Depth (ft)	3.1	2.9	2.9			2.1	2.0	1.9							
Width/Depth Ratio	14.8	12.4	12.1			9.2	9.1	9.6							
Entrenchment Ratio	3.4	3.8	-			5.7	5.9	5.9							
Wetted Perimeter (ft)	25.1	23.1	21.5			16.0	15.6	15.4							
Hydraulic Radius (ft)	1.3	1.4	1.3			1.2	1.1	1.1							
Substrate															
d50 (mm)	<0.063	0.1	0.1			42	50	59							
d84 (mm)	<0.063	0.3	0.33			75	110	110							
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)		
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med
Pattern															
Channel Beltwidth (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Radius of Curvature (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Meander Wavelength (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Meander Width Ratio	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Profile															
Riffle length (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Riffle Slope (ft/ft)	-	-	-	-	0.009	0.009	-	0.01	0.01	-	-	-	-	-	-
Pool Length (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Pool Spacing (ft)	-	-	-	23	91	51	16	97	57	-	-	-	-	-	-
Additional Reach Parameters															
Valley Length (ft)	540	-	-	540	-	-	540	-	-	540	-	-	-	-	-
Channel Length (ft)	568	-	-	563	-	-	562	-	-	562	-	-	-	-	-
Sinuosity	1.1	-	-	1.04	-	-	1.04	-	-	1.04	-	-	-	-	-
Water Surface Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BF Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Rosgen Classification	C	-	-	C	-	-	C/E	-	-	C/E	-	-	-	-	-

Beaverdam Creek Restoration Site : Project No. D05016-1																				
Reach: Beaverdam Creek UT1 (Reaches 2-5)																				
I. Cross-Section Parameters	Cross Section 5					Cross Section 6					Cross Section 9					Cross Section 10				
	Riffle					Pool					Riffle					Pool				
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5
Dimension																				
BF Width (ft)	15.2	15.3	15.1			23.5	23.6	23.3			17.8	17.6	17.4			22.2	22.4	23.5		
Floodprone Width (ft)	74.9	74.8	74.9			75.0	75.0	72.0			75.09	75.1	75.1			74.9	74.9	74.9		
BF Cross Sectional Area (ft ²)	23.8	23.6	22.8			41.1	41.2	41.3			29.26	29.4	28.1			44.8	42.7	45.0		
BF Mean Depth (ft)	1.6	1.5	1.5			1.8	1.7	1.8			1.64	1.7	1.6			2.0	1.9	1.9		
BF Max Depth (ft)	2.3	2.4	2.3			3.5	3.4	3.6			2.65	2.8	2.8			3.3	3.4	3.6		
Width/Depth Ratio	9.7	9.9	10.0			13.4	13.6	13.2			10.83	10.6	10.8			11.0	11.8	12.3		
Entrenchment Ratio	4.9	4.9	5.0			3.2	3.2	-			4.22	4.3	4.3			3.4	3.3	-		
Wetted Perimeter (ft)	18.3	18.4	18.1			27.0	27.1	26.9			21.1	21.0	20.7			26.3	26.2	27.3		
Hydraulic Radius (ft)	1.3	1.3	1.3			1.5	1.5	1.5			1.4	1.4	1.4			1.7	1.6	1.6		
Substrate																				
d50 (mm)	45	64	70			0.2	<0.063	<0.063			36	40	63			<0.063	0.08	<0.063		
d84 (mm)	85	145	140			0.45	0.24	0.3			72	110	120			0.7	5	0.45		
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)							
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med					
Pattern																				
Channel Beltwidth (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
Radius of Curvature (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
Meander Wavelength (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
Meander Width Ratio	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
Profile																				
Riffle length (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
Riffle Slope (ft/ft)	-	-	-	0.009	0.02	0.01	0.01	0.01	0.01	0.01	-	-	-	-	-					
Pool Length (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
Pool Spacing (ft)	-	-	-	72	144	115	67	146	114	-	-	-	-	-	-					
Additional Reach Parameters																				
Valley Length (ft)	2370	-	-	2370	-	-	2370	-	-	2370	-	-	-	-	-					
Channel Length (ft)	3021	-	-	3023	-	-	3000	-	-	-	-	-	-	-	-					
Sinuosity	1.3	-	-	1.3	-	-	1.3	-	-	-	-	-	-	-	-					
Water Surface Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
BF Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
Rosgen Classification	C	-	-	C	-	-	C/E	-	-	-	-	-	-	-	-					

Beaverdam Creek Restoration Site : Project No. D05016-1																										
Reach: Beaverdam Creek UT1 (Reaches 2-5) cont'd																										
I. Cross-Section Parameters		Cross Section 13 Pool					Cross Section 14 Riffle					Cross Section 15 Riffle					Cross Section 16 Pool									
		MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5					
Dimension																										
	BF Width (ft)	30.0	28.6	27.0			19.1	20.2	21.4			26.9	26.0	26.0			20.9	21.6	22.6							
	Floodprone Width (ft)	90.9	90.9	90.9			75.2	75.2	73.5			77.9	78.0	77.7			52.1	52.1	47.9							
	BF Cross Sectional Area (ft ²)	71.7	77.6	69.2			37.9	39.4	42.7			59.7	62.4	54.0			36.8	45.2	47.1							
	BF Mean Depth (ft)	2.4	2.7	2.6			2.0	2.0	2.0			2.2	2.4	2.1			1.8	2.1	2.1							
	BF Max Depth (ft)	5.3	6.6	6.1			3.1	3.3	3.5			4.1	4.7	2.7			3.4	3.7	3.8							
	Width/Depth Ratio	12.6	10.6	10.5			9.6	10.3	10.7			12.1	10.8	12.5			11.8	10.3	10.8							
	Entrenchment Ratio	3.0	3.2	-			3.9	3.7	3.4			2.9	3.0	3.0			2.5	2.4	-							
	Wetted Perimeter (ft)	34.8	34.1	32.1			23.1	24.1	25.4			31.3	30.8	30.1			24.4	25.8	26.8							
	Hydraulic Radius (ft)	2.1	2.3	2.2			1.6	1.6	1.7			1.9	2.0	1.8			1.5	1.8	1.8							
Substrate																										
	d50 (mm)	0.3	0.1	0.06			30	0.4	0.26			-	0.4	0.33			-	<0.063	<0.063							
	d84 (mm)	0.8	0.4	0.36			70	50	20			-	1.0	0.55			-	0.2	0.09							
Reach: Beaverdam Creek UT1 (Reaches 2-5) cont'd																										
I. Cross-Section Parameters		Cross Section 17 Pool					Cross Section 18 Riffle																			
		MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5															
Dimension																										
	BF Width (ft)	27.0	23.3	24.5			22.5	23.4	22.7																	
	Floodprone Width (ft)	67.2	67.2	67.4			80.7	80.6	80.7																	
	BF Cross Sectional Area (ft ²)	33.2	36.1	28.1			34.7	34.8	33.8																	
	BF Mean Depth (ft)	1.2	1.6	1.2			1.5	1.5	1.5																	
	BF Max Depth (ft)	2.5	4.4	3.1			2.7	2.7	2.8																	
	Width/Depth Ratio	21.9	15.1	21.3			14.6	15.7	15.2																	
	Entrenchment Ratio	2.5	2.9	-			3.6	3.5	3.6																	
	Wetted Perimeter (ft)	29.5	26.4	26.8			25.6	26.4	25.7																	
	Hydraulic Radius (ft)	1.1	1.4	1.0			1.4	1.3	1.3																	
Substrate																										
	d50 (mm)	-	0.3	0.26			-	22	32																	
	d84 (mm)	-	0.8	0.57			-	45	45																	

Beaverdam Creek Restoration Site : Project No. D05016-1															
Reach: Beaverdam Creek UT1B															
I. Cross-Section Parameters	Cross Section 3 Pool					Cross Section 4 Riffle									
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5					
Dimension															
BF Width (ft)	15.3	14.8	13.9			11.8	11.1	10.8							
Floodprone Width (ft)	75.1	75.1	75.1			75.0	75.0	75.0							
BF Cross Sectional Area (ft ²)	16.4	19.4	16.3			16.5	15.6	14.1							
BF Mean Depth (ft)	1.1	1.3	1.2			1.4	1.4	1.3							
BF Max Depth (ft)	2.3	3.0	2.7			2.3	2.4	2.4							
Width/Depth Ratio	14.3	11.4	11.9			8.5	7.9	8.3							
Entrenchment Ratio	4.9	5.1	-			6.3	6.8	6.9							
Wetted Perimeter (ft)	17.5	17.4	16.2			14.6	13.9	13.4							
Hydraulic Radius (ft)	0.9	1.1	1.0			1.1	1.1	1.1							
Substrate															
d50 (mm)	0.16	0.14	0.1			<0.063	0.11	<0.063							
d84 (mm)	0.42	0.5	0.38			0.2	0.3	0.13							
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)		
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med
Pattern															
Channel Beltwidth (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Radius of Curvature (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Meander Wavelength (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Meander Width Ratio	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Profile															
Riffle length (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Riffle Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Pool Length (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Pool Spacing (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Additional Reach Parameters															
Valley Length (ft)	680	-	-	-	-	-	-	-	-	-	-	-	-	-	
Channel Length (ft)	775	-	-	-	-	-	-	-	-	-	-	-	-	-	
Sinuosity	1.1	-	-	-	-	-	-	-	-	-	-	-	-	-	
Water Surface Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
BF Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Rosgen Classification	C	-	-	C	-	-	C/E	-	-	-	-	-	-	-	

Beaverdam Creek Restoration Site : Project No. D05016-1																
Reach: Beaverdam Creek UT1C																
I. Cross-Section Parameters	Cross Section 7					Cross Section 8										
	Riffle					Pool										
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5						
Dimension																
	BF Width (ft)	12.0	13.2	12.0		13.6	12.4	13.8								
	Floodprone Width (ft)	70.6	71.2	71.1		75.0	75.0	74.9								
	BF Cross Sectional Area (ft ²)	8.8	9.5	8.6		31.6	30.3	31.6								
	BF Mean Depth (ft)	0.7	0.7	0.7		2.3	2.4	2.3								
	BF Max Depth (ft)	1.1	1.1	1.1		3.2	3.2	3.1								
	Width/Depth Ratio	16.5	18.4	16.9		5.9	5.1	6.0								
	Entrenchment Ratio	5.9	5.4	5.9		5.5	6.0	-								
	Wetted Perimeter (ft)	13.5	14.6	13.5		18.2	17.3	18.4								
	Hydraulic Radius (ft)	0.7	0.6	0.6		1.7	1.7	1.7								
Substrate																
	d50 (mm)	42	64	60		<0.063	<0.063	0.08								
	d84 (mm)	75	110	130		0.23	0.17	0.22								
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)			
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	
Pattern																
	Channel Beltwidth (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Radius of Curvature (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Meander Wavelength (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Meander Width Ratio	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Profile																
	Riffle length (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Riffle Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Pool Length (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Pool Spacing (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Additional Reach Parameters																
	Valley Length (ft)	544	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Channel Length (ft)	615	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Sinuosity	1.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Water Surface Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	BF Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Rosgen Classification	C	-	-	C	-	-	-	C	-	-	-	-	-	-	-

Beaverdam Creek Restoration Site : Project No. D05016-1															
Reach: Beaverdam Creek UT1D															
I. Cross-Section Parameters	Cross Section 11					Cross Section 12									
	Pool					Riffle									
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5					
Dimension															
BF Width (ft)	15.3	15.1	20.1			12.7	11.4	13.1							
Floodprone Width (ft)	75.7	75.6	75.2			75.5	75.5	75.3							
BF Cross Sectional Area (ft ²)	20.9	18.9	16.1			9.2	9.0	8.6							
BF Mean Depth (ft)	1.4	1.3	0.8			0.7	0.8	0.7							
BF Max Depth (ft)	2.5	2.2	1.8			1.1	1.1	1.1							
Width/Depth Ratio	11.3	12.0	25.0			17.5	14.4	19.9							
Entrenchment Ratio	3.4	5.0	-			6.0	6.6	5.8							
Wetted Perimeter (ft)	18.0	17.6	21.7			14.1	13.0	14.4							
Hydraulic Radius (ft)	1.2	1.1	0.7			0.7	0.7	0.6							
Substrate															
d50 (mm)	<0.063	0.33	0.3			43	38	26							
d84 (mm)	0.22	0.85	0.43			85	60	50							
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)		
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med
Pattern															
Channel Beltwidth (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Radius of Curvature (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Meander Wavelength (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Meander Width Ratio	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Profile															
Riffle length (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Riffle Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Pool Length (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Pool Spacing (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Additional Reach Parameters															
Valley Length (ft)	300	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Channel Length (ft)	334	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Sinuosity	1.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Water Surface Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BF Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Rosgen Classification	C	-	-	-	-	C	-	-	-	-	C	-	-	-	-

Beaverdam Creek Restoration Site : Project No. D05016-1															
Reach: Beaverdam Creek UT2A															
I. Cross-Section Parameters	Cross Section 1					Cross Section 2									
	Riffle					Pool									
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5					
Dimension															
BF Width (ft)	12.2	13.4	12.6			20.1	20.6	19.2							
Floodprone Width (ft)	39.8	39.9	39.9			40.0	40.0	40.0							
BF Cross Sectional Area (ft ²)	9.6	10.4	9.1			20.4	21.3	17.8							
BF Mean Depth (ft)	0.8	0.8	0.7			1.0	1.0	0.9							
BF Max Depth (ft)	1.1	1.2	1.0			1.9	2.2	1.8							
Width/Depth Ratio	15.5	17.2	17.4			19.8	19.9	20.7							
Entrenchment Ratio	3.3	3.0	3.2			2.0	1.9	-							
Wetted Perimeter (ft)	13.7	15.0	14.0			22.1	22.7	21.1							
Hydraulic Radius (ft)	0.7	0.7	0.6			0.9	0.9	0.8							
Substrate															
d50 (mm)	35	40	42			<0.063	<0.063	<0.063							
d84 (mm)	53	60	57			<0.063	<0.063	<0.063							
II. Reachwide Parameters	MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)		
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med
Pattern															
Channel Beltwidth (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Radius of Curvature (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Meander Wavelength (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Meander Width Ratio	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Profile															
Riffle length (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Riffle Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Pool Length (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Pool Spacing (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Additional Reach Parameters															
Valley Length (ft)	920	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Channel Length (ft)	1121	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Sinuosity	1.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Water Surface Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BF Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Rosgen Classification	C	-	-	C	-	-	C	-	-	C	-	-	-	-	-

Beaverdam Creek Restoration Site : Project No. D05016-1																																																																																																																						
Reach: Beaverdam Creek UT2																																																																																																																						
I. Cross-Section Parameters	Cross Section 3 Riffle					Cross Section 4 Pool					Cross Section 5 Riffle					Cross Section 6 Pool																																																																																																						
	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5	MY1	MY2	MY3	MY4	MY5																																																																																																		
Dimension		BF Width (ft)	16.1	17.3	17.1	20.9	20.8	19.8	16.6	16.2	17.0	14.0	14.4	14.7	Floodprone Width (ft)	40.0	40.0	40	40.1	40.1	40.2	39.9	39.9	39.8	28.0	28.8	29.7	BF Cross Sectional Area (ft ²)	10.9	11.2	11.2	25.8	25.1	22.9	22.6	21.4	23.4	23.2	24.9	25.8	BF Mean Depth (ft)	0.7	0.7	0.7	1.2	1.2	1.2	1.4	1.3	1.4	1.7	1.7	1.8	BF Max Depth (ft)	1.1	1.1	1.0	2.5	2.5	2.3	1.9	1.9	2.1	2.6	2.6	2.7	Width/Depth Ratio	23.9	26.6	25.9	16.9	17.3	17.1	12.2	12.3	12.4	8.5	8.4	8.4	Entrenchment Ratio	2.5	2.3	2.3	1.9	1.9	-	2.4	2.5	2.3	2.0	2.0	-	Wetted Perimeter (ft)	17.5	18.6	18.4	23.4	23.3	22.1	19.4	18.8	19.7	17.3	17.9	18.2	Hydraulic Radius (ft)	0.6	0.6	0.6	1.1	1.1	1.0	1.2	1.1	1.2	1.3	1.4	1.4
Substrate		d50 (mm)	39	40	38	<0.063	<0.063	<0.063	38	36	38	<0.063	<0.063	0.06	d84 (mm)	59	64	58	<0.063	<0.063	<0.063	59	60	45	<0.063	<0.063	0.16																																																																																											
II. Reachwide Parameters		MY-1 (2007)			MY-2 (2008)			MY-3 (2009)			MY-4 (2010)			MY-5 (2011)																																																																																																								
		Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med																																																																																																						
Pattern		Channel Beltwidth (ft)	-	-	-	-	-	-	-	-	-							Radius of Curvature (ft)	-	-	-	-	-	-	-	-	-	Meander Wavelength (ft)	-	-	-	-	-	-	-	-	-	Meander Width Ratio	-	-	-	-	-	-	-	-	-																																																																							
Profile		Riffle length (ft)	-	-	-	-	-	-	-	-	-				Riffle Slope (ft/ft)	-	-	-	-	-	-	-	-	-	-	-	-	Pool Length (ft)	-	-	-	-	-	-	-	-	-	Pool Spacing (ft)	-	-	-	-	-	-	-	-	-																																																																							
Additional Reach Parameters		Valley Length (ft)	2470	-	-	-	-	-	-	-	-				Channel Length (ft)	3142	-	-	-	-	-	-	-	-	-	-	-	Sinuosity	1.3	-	-	-	-	-	-	-	-	Water Surface Slope (ft/ft)	-	-	-	-	-	-	-	-	-	BF Slope (ft/ft)	-	-	-	-	-	-	-	-	-	Rosgen Classification	C	-	-	C	-	-	C	-	-																																																			