

**FINAL**  
**ANNUAL MONITORING REPORT**  
**YEAR 4 (2012)**  
**BRILES STREAM RESTORTION SITE**  
**RANDOLPH COUNTY, NORTH CAROLINA**  
**(EEP Project No. 047, Contract No. 004809)**  
**Construction Completed November 2007**



Submitted to:  
North Carolina Department of Environment and Natural Resources  
Ecosystem Enhancement Program  
Raleigh, North Carolina



January 2013

**FINAL**  
**ANNUAL MONITORING REPORT**  
**YEAR 4 (2012)**  
**BRILES STREAM RESTORTION SITE**  
**RANDOLPH COUNTY, NORTH CAROLINA**  
**(EEP Project No. 047, Contract No. 004809)**  
**Construction Completed November 2007**



Submitted to:  
North Carolina Department of Environment and Natural Resources  
Ecosystem Enhancement Program  
Raleigh, North Carolina

Prepared by:  
Axiom Environmental, Inc.  
218 Snow Avenue  
Raleigh, North Carolina 27603



January 2013

## Table of Contents

1.0 EXECUTIVE SUMMARY .....	1
2.0 METHODOLOGY .....	2
2.1 Vegetation Assessment .....	2
2.2 Stream Assessment .....	2
3.0 REFERENCES .....	3

## Appendices

### APPENDIX A. PROJECT VICINITY MAP AND BACKGROUND TABLES

- Figure 1. Site Location Map
- Table 1. Project Components and Mitigation Credits
- Table 2. Project Activity and Reporting History
- Table 3. Project Contacts Table
- Table 4. Project Attributes Table

### APPENDIX B. VISUAL ASSESSMENT DATA

- Figure 2. Monitoring Plan View
- Tables 5A-5D. Visual Stream Morphology Stability Assessment
- Table 6. Vegetation Condition Assessment
- Stream Fixed-Station Photographs
- Vegetation Monitoring Photographs

### APPENDIX C. VEGETATION PLOT DATA

- Table 7. Vegetation Plot Criteria Attainment
- Table 8. CVS Vegetation Plot Metadata
- Table 9. Total and Planted Stems by Plot and Species

### APPENDIX D. STREAM SURVEY DATA

- Cross-section Plots
- Longitudinal Profile Plots
- Substrate Plots
- Table 10a-b. Baseline Stream Data Summary
- Table 11a-b. Monitoring Data

### APPENDIX E. HYDROLOGY DATA

- Table 12. Verification of Bankfull Events

## 1.0 EXECUTIVE SUMMARY

The Briles Stream Restoration Site (hereafter referred to as the “Site”) is situated within the US Geological Survey (USGS) hydrologic unit 03040103 and NC Division of Water Quality (NCDWQ) Priority Sub-basin 03-07-09. The Site is located on an 87-acre parcel owned by Mr. and Mrs. Kenneth Briles. It is located southeast of the intersection of Ross Wood Road and Pleasant Grove Road in Trinity, Randolph County, North Carolina. The primary land uses on the property include rangeland (pasture), a chicken egg farm, and forest. The Site stream, Unnamed Tributary to Jackson Creek (UTJC), became impaired due to poor grazing management and human impacts. This report (compiled based on NC Ecosystem Enhancement Program (NCEEP) *Procedural Guidance and Content Requirements for EEP Monitoring Reports* Version 1.4 dated 11/7/11) summarizes data for Year 4 (2012) monitoring.

The project goals are to:

- Restore stable channel morphology capable of moving flows and sediment provided by its watershed.
- Restore riparian habitat and functions.
- Improve water quality and reduce land and riparian vegetation loss resulting from lateral erosion and bed degradation.
- Improve aquatic and terrestrial habitat.

The above project goals were achieved through the following project objectives:

- Build appropriate C4 and B4c channels with stable channel dimensions.
- Plant a functional Bottomland Hardwood Forest community to create an effective riparian buffer.
- Exclude livestock from riparian areas.
- Preserve portions of the Site that currently function as a stable riverine system.

During Year 4 (2012) monitoring eight vegetation plots were sampled. Overall, the Site met or exceeded vegetation success criteria, with an average of 385 stems-per-acre. Six of the eight plots met or exceeded the success criteria of 290 stems-per-acre (minimum stem count after 4 years). Vegetation Plots 2 and 7 were each one stem shy of meeting success criteria. When counting natural recruits of silky dogwood (*Cornus amomum*), vegetation plot 2 exceeds success criteria. Decreasing planted stem counts may be attributed to competition from an increasing density of blackberry (*Rubus* sp.), particularly along reaches UTJC1 and UTJC3, in and adjacent to Vegetation Plots 3, 4, 7, and 8. Additionally, several stems of Chinese privet (*Ligustrum sinense*) were observed throughout the Site and will continue to be monitored into monitoring year 5.

A visual assessment and geomorphic survey were completed for the Site, and indicated that the project reaches were performing within established success criteria ranges as shown below. No significant bank erosion was recorded, and the geomorphic measurements are within the range of design parameters. The forded crossing on reach UTJC Reach 1 was observed to be stable and performing as constructed. No indicators of bankfull events were observed during the 2012 monitoring period; however, two bankfull events have previously been documented during the 2010 and 2011 monitoring seasons.

Stream Success Criteria (from approved Mitigation Plan 2008):

- Little or no change from the as-built cross-sections.
- Pools shall maintain design depths with lower water surface slopes, while the riffles should

- remain shallower with steeper water surface slopes.
- Sediment transport shall remain relatively unchanged with respect to aggradation and deposition of sediments.
- There should be no visual indicators of instability.
- A minimum of two bankfull events must occur in separate years within the five-year monitoring.

Summary information/data related to the occurrence of items such as beaver or encroachment and statistics related to performance of various project and monitoring elements can be found in tables and figures within this report's appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly the Restoration Plan) documents available on the NCEEP website. All raw data supporting the tables and figures in the appendices is available from NCEEP upon request.

## **2.0 METHODOLOGY**

### **2.1 Vegetation Assessment**

Eight vegetation plots were established and marked after construction with one half-inch metal conduit and pin flags. The plots are 10 meters square and are located randomly within the Site. These plots were surveyed in October for the Year 4 (2012) monitoring season using the *CVS-EEP Protocol for Recording Vegetation, Version 4.2* (Lee et al. 2008) (<http://cvs.bio.unc.edu/methods.htm>); results are included in Appendix C. The taxonomic standard for vegetation used for this document was *Flora of the Southern and Mid-Atlantic States* (Weakley 2012).

### **2.2 Stream Assessment**

Annual stream monitoring was conducted in October 2012. Five permanent cross-sections, three riffle and two pool, were established and will be used to evaluate stream dimension; locations are depicted on Figure 2 (Appendix B). Cross-sections are permanently monumented with one half-inch by 4-foot PVC posts at each end point. Cross-sections were surveyed to provide a detailed measurement of the stream and banks including points on the adjacent floodplain, top of bank, bankfull, breaks in slope, edge of water, and thalweg. Data will be used to calculate width-depth ratios, entrenchment ratios, and bank height ratios for each cross-section. In addition, photographs and pebble counts will be conducted at each permanent cross-section location annually.

Two monitoring reaches totaling approximately 1700-linear feet were established and will be used to evaluate stream pattern and longitudinal profile; locations are depicted on Figure 2 (Appendix B). Longitudinal profile measurements include average water surface slopes, facet slopes, and pool-to-pool spacing. Twenty-three permanent photo points were established throughout the restoration reach; locations are depicted on Figure 2 (Appendix B). In addition, visual stream morphology stability assessments were completed in each of the monitoring reaches to assess the channel bed, banks, and in-stream structures.

### 3.0 REFERENCES

- Lee, Michael T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2008. CVS-EEP Protocol for Recording Vegetation, Version 4.2. (online). Available: <http://cvs.bio.unc.edu/methods.htm>.
- Weakley, Alan S. 2012. Flora of the Southern and Mid-Atlantic States. Available online at: <http://www.herbarium.unc.edu/WeakleysFlora.pdf> [September 28, 2012]. University of North Carolina Herbarium, North Carolina Botanical Garden, University of North Carolina, Chapel Hill, North Carolina.

APPENDIX A

PROJECT VICINITY MAP AND BACKGROUND TABLES


Figure 1. Site Location Map

Table 1. Project Components and Mitigation Credits


Table 2. Project Activity and Reporting History

Table 3. Project Contacts Table

Table 4. Project Attributes Table

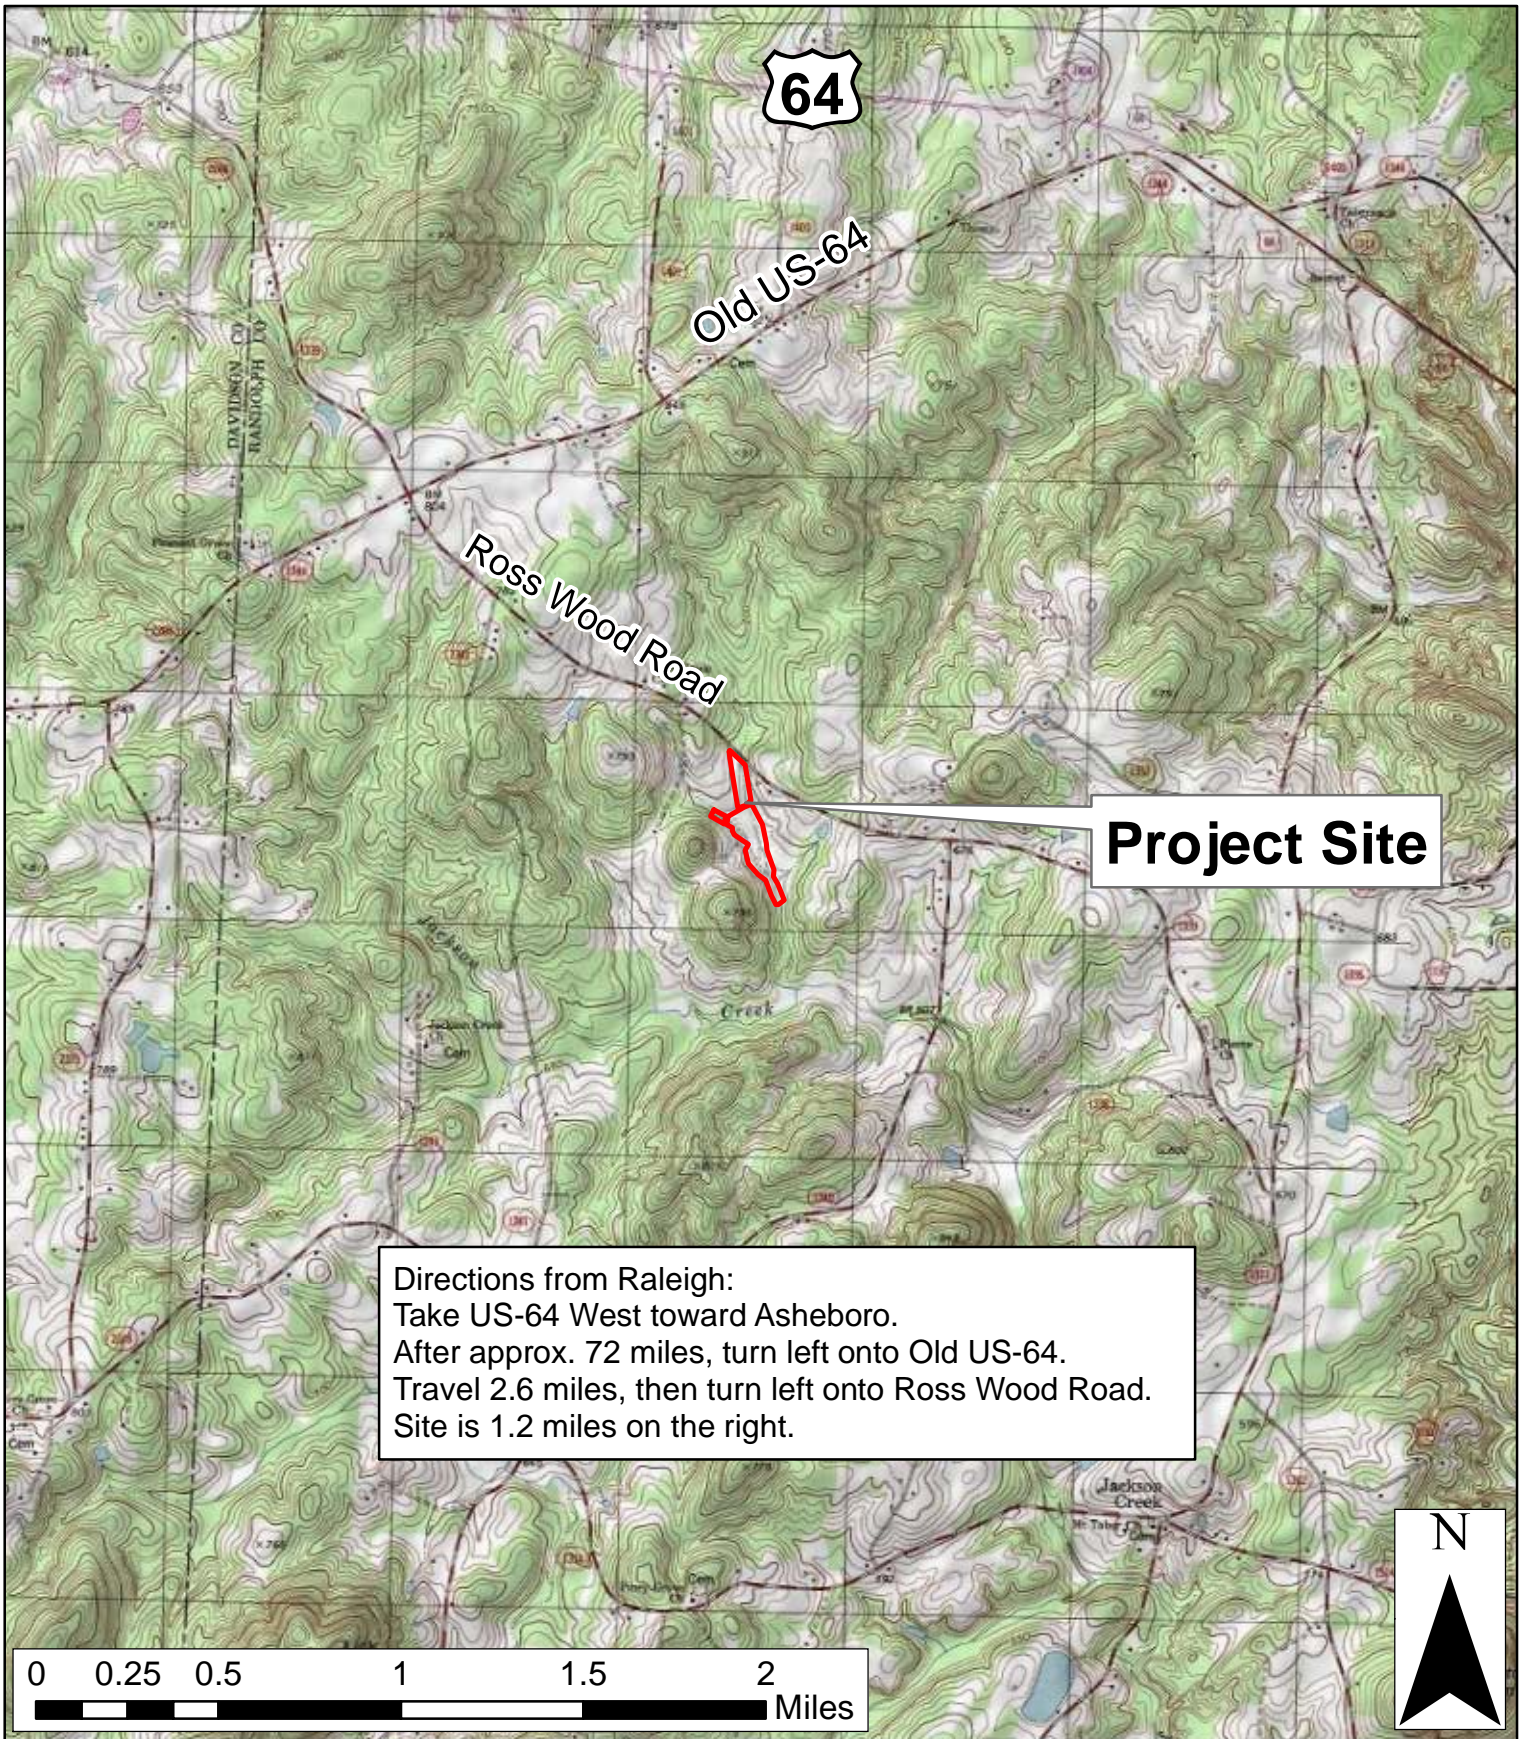

Directions from Raleigh:  
 Take US-64 West toward Asheboro.  
 After approx. 72 miles, turn left onto Old US-64.  
 Travel 2.6 miles, then turn left onto Ross Wood Road.  
 Site is 1.2 miles on the right.

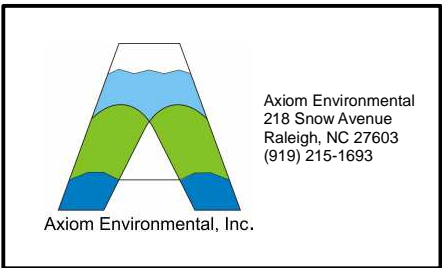

**SITE LOCATION MAP**  
**BRILES CREEK SITE**  
**EPP PROJECT NUMBER 047**  
**Randolph County, North Carolina**

Dwn. by. KRJ
Date: October 2012
Project: 12-004.12

FIGURE  
1



**Table 1. Project Components and Mitigation Credits  
Briles Stream Restoration Site (EEP Project Number 047)**

Mitigation Credits							
Type	Stream			Riparian Wetland		Buffer	
	Restoration	Restoration Equivalent		Restoration	Restoration Equivalent		
<b>Totals</b>	<b>1787</b>	<b>594</b>		<b>--</b>	<b>--</b>	<b>--</b>	
Projects Components							
Project Component/ Reach ID	Station Range	Existing Linear Footage/ Acreage	Priority Approach	Restoration/ Restoration Equivalent	Restoration Linear Footage/ Acreage	Mitigation Ratio	Comment
UTJC1	10+00- 24+25	1358	P2	Restoration	1425	1:1	.
UTJC2	24+47- 28+09	355	P3	Restoration	362	1:1	
UTJC3	50+00- 58+17	784	P3	Enhancement I	817	1.5:1	
UTJC4	28+88- 33+96	508	--	Preservation	508	5:1	
Component Summation							
Restoration Level			Stream (linear footage)		Riparian Wetland (acres)		Buffer (square footage)
Restoration			1787		--		--
Enhancement I			817				--
Preservation			508				
<b>Totals</b>			<b>3112</b>		<b>--</b>		<b>--</b>
<b>Mitigation Units</b>			<b>2381 SMUs</b>		<b>--</b>		<b>--</b>

**Table 2. Project Activity and Reporting History**  
**Briles Stream Restoration Site (EEP Project Number 047)**

Elapsed Time Since Grading Complete: 5 years 1 month

Elapsed Time Since Planting Complete: 5 years 1 month

Number of Reporting Years: 4

Activity or Deliverable	Data Collection Complete	Completion or Delivery
Restoration Plan	2003/2004	December 2005
Final Design – Construction Plans		September 2006
Construction		November 2007
Containerized, bare root and B&B plantings		November 2007
Mitigation Plan / As-built (Year 0 Monitoring – baseline)	December 2007	January 2008
Year 1 Monitoring (2009)	March 2009	November 2009
Year 2 Monitoring (2010)	October 2010	January 2011
Year 3 Monitoring (2011)	August 2011	November 2011
Year 4 Monitoring (2012)	November 2012	December 2012

**Table 3. Project Contacts Table**  
**Briles Stream Restoration Site (EEP Project Number 047)**

<b>Designer</b>	KCI Associates of NC Landmark Center II, Suite 220 4601 Six Forks Rd. Raleigh, NC 27609 Adam Spiller (919) 783-9214
<b>Construction Contractor</b>	L-J, Inc. 220 Stoneridge Drive, Suite 405, Columbia, SC 29210 Richard Goodwin (803) 929-1181
<b>Survey Contractor</b>	KCI Associates of NC Landmark Center II, Suite 220 4601 Six Forks Rd., Raleigh, NC 27609 Adam Spiller (919) 783-9214
<b>Planting Contractor</b>	Habitat Assessment and Restoration Program, Inc. 9305-D Monroe Road, Charlotte, NC 28270 Alan Peoples (704) 945-0881
<b>Seed Mix Source</b>	Evergreen Seed Company (919) 567-1333
<b>Nursery Stock Suppliers</b>	Foggy Mountain Nursery (919) 524-5304
<b>Baseline Data Collection and Years 1-3 Monitoring Performers</b>	Kimley-Horn and Associates, Inc. 3001 Weston Parkway, Cary, NC 27513 Daren Pait (919) 677-2000
<b>Year 4 - 5 Monitoring Performer</b>	Axiom Environmental, Inc. 218 Snow Avenue, Raleigh, NC 27603 Grant Lewis 919-215-1693

**Table 4. Project Attribute Table  
Briles Stream Restoration Site (EEP Project Number 047)**

<b>Project Information</b>		
Project Name	Briles Stream Restoration Site	
Project County	Randolph	
Project Area	13.4 acres	
<b>Project Watershed Summary Information</b>		
Physiographic Region	Piedmont	
Ecoregion	Carolina Slate Belt	
Project River Basin	Yadkin	
USGS 8-digit HUC	03040103	
USGS 14-digit HUC	03040103050030	
NCDWQ Subbasin	03-07-09	
Project Drainage Area	0.6 square miles	
Project Drainage Area Impervious Surface	<1%	
Watershed Type	Rural	
<b>Reach Summary Information</b>		
<b>Parameters</b>	<b>Reach UTJC1</b>	<b>Reach UTJC22</b>
Restored/Enhanced Length (linear feet)	1425	362
Drainage Area (square miles)	0.4	0.6
NCDWQ Index Number	13-2-2	13-2-2
NCDWQ Classification	C	C
Valley Type/Morphological Description	VIII/C4	VIII/B4c
Dominant Soil Series	Georgeville Silt Loam	
Drainage Class	Well Drained	
Soil Hydric Status	Nonhydric	
Slope	0.0090	
FEMA Classification	Zone C	
Percent Composition of Exotic Invasives	<5	
<b>Regulatory Considerations</b>		
<b>Regulation</b>	<b>Applicable</b>	
Waters of the U.S. –Sections 404 and 401	Yes-Received Appropriate Permits	
Endangered Species Act	No	
Historic Preservation Act	No	
CZMA/CAMA	No	
FEMA Floodplain Compliance	No	
Essential Fisheries Habitat	No	

APPENDIX B  
VISUAL ASSESSMENT DATA


Figure 2. Monitoring Plan View

Tables 5A-5D. Visual Stream Morphology Stability Assessment

Table 6. Vegetation Condition Assessment Table

Stream Fixed-Station Photographs

Vegetation Monitoring Photographs

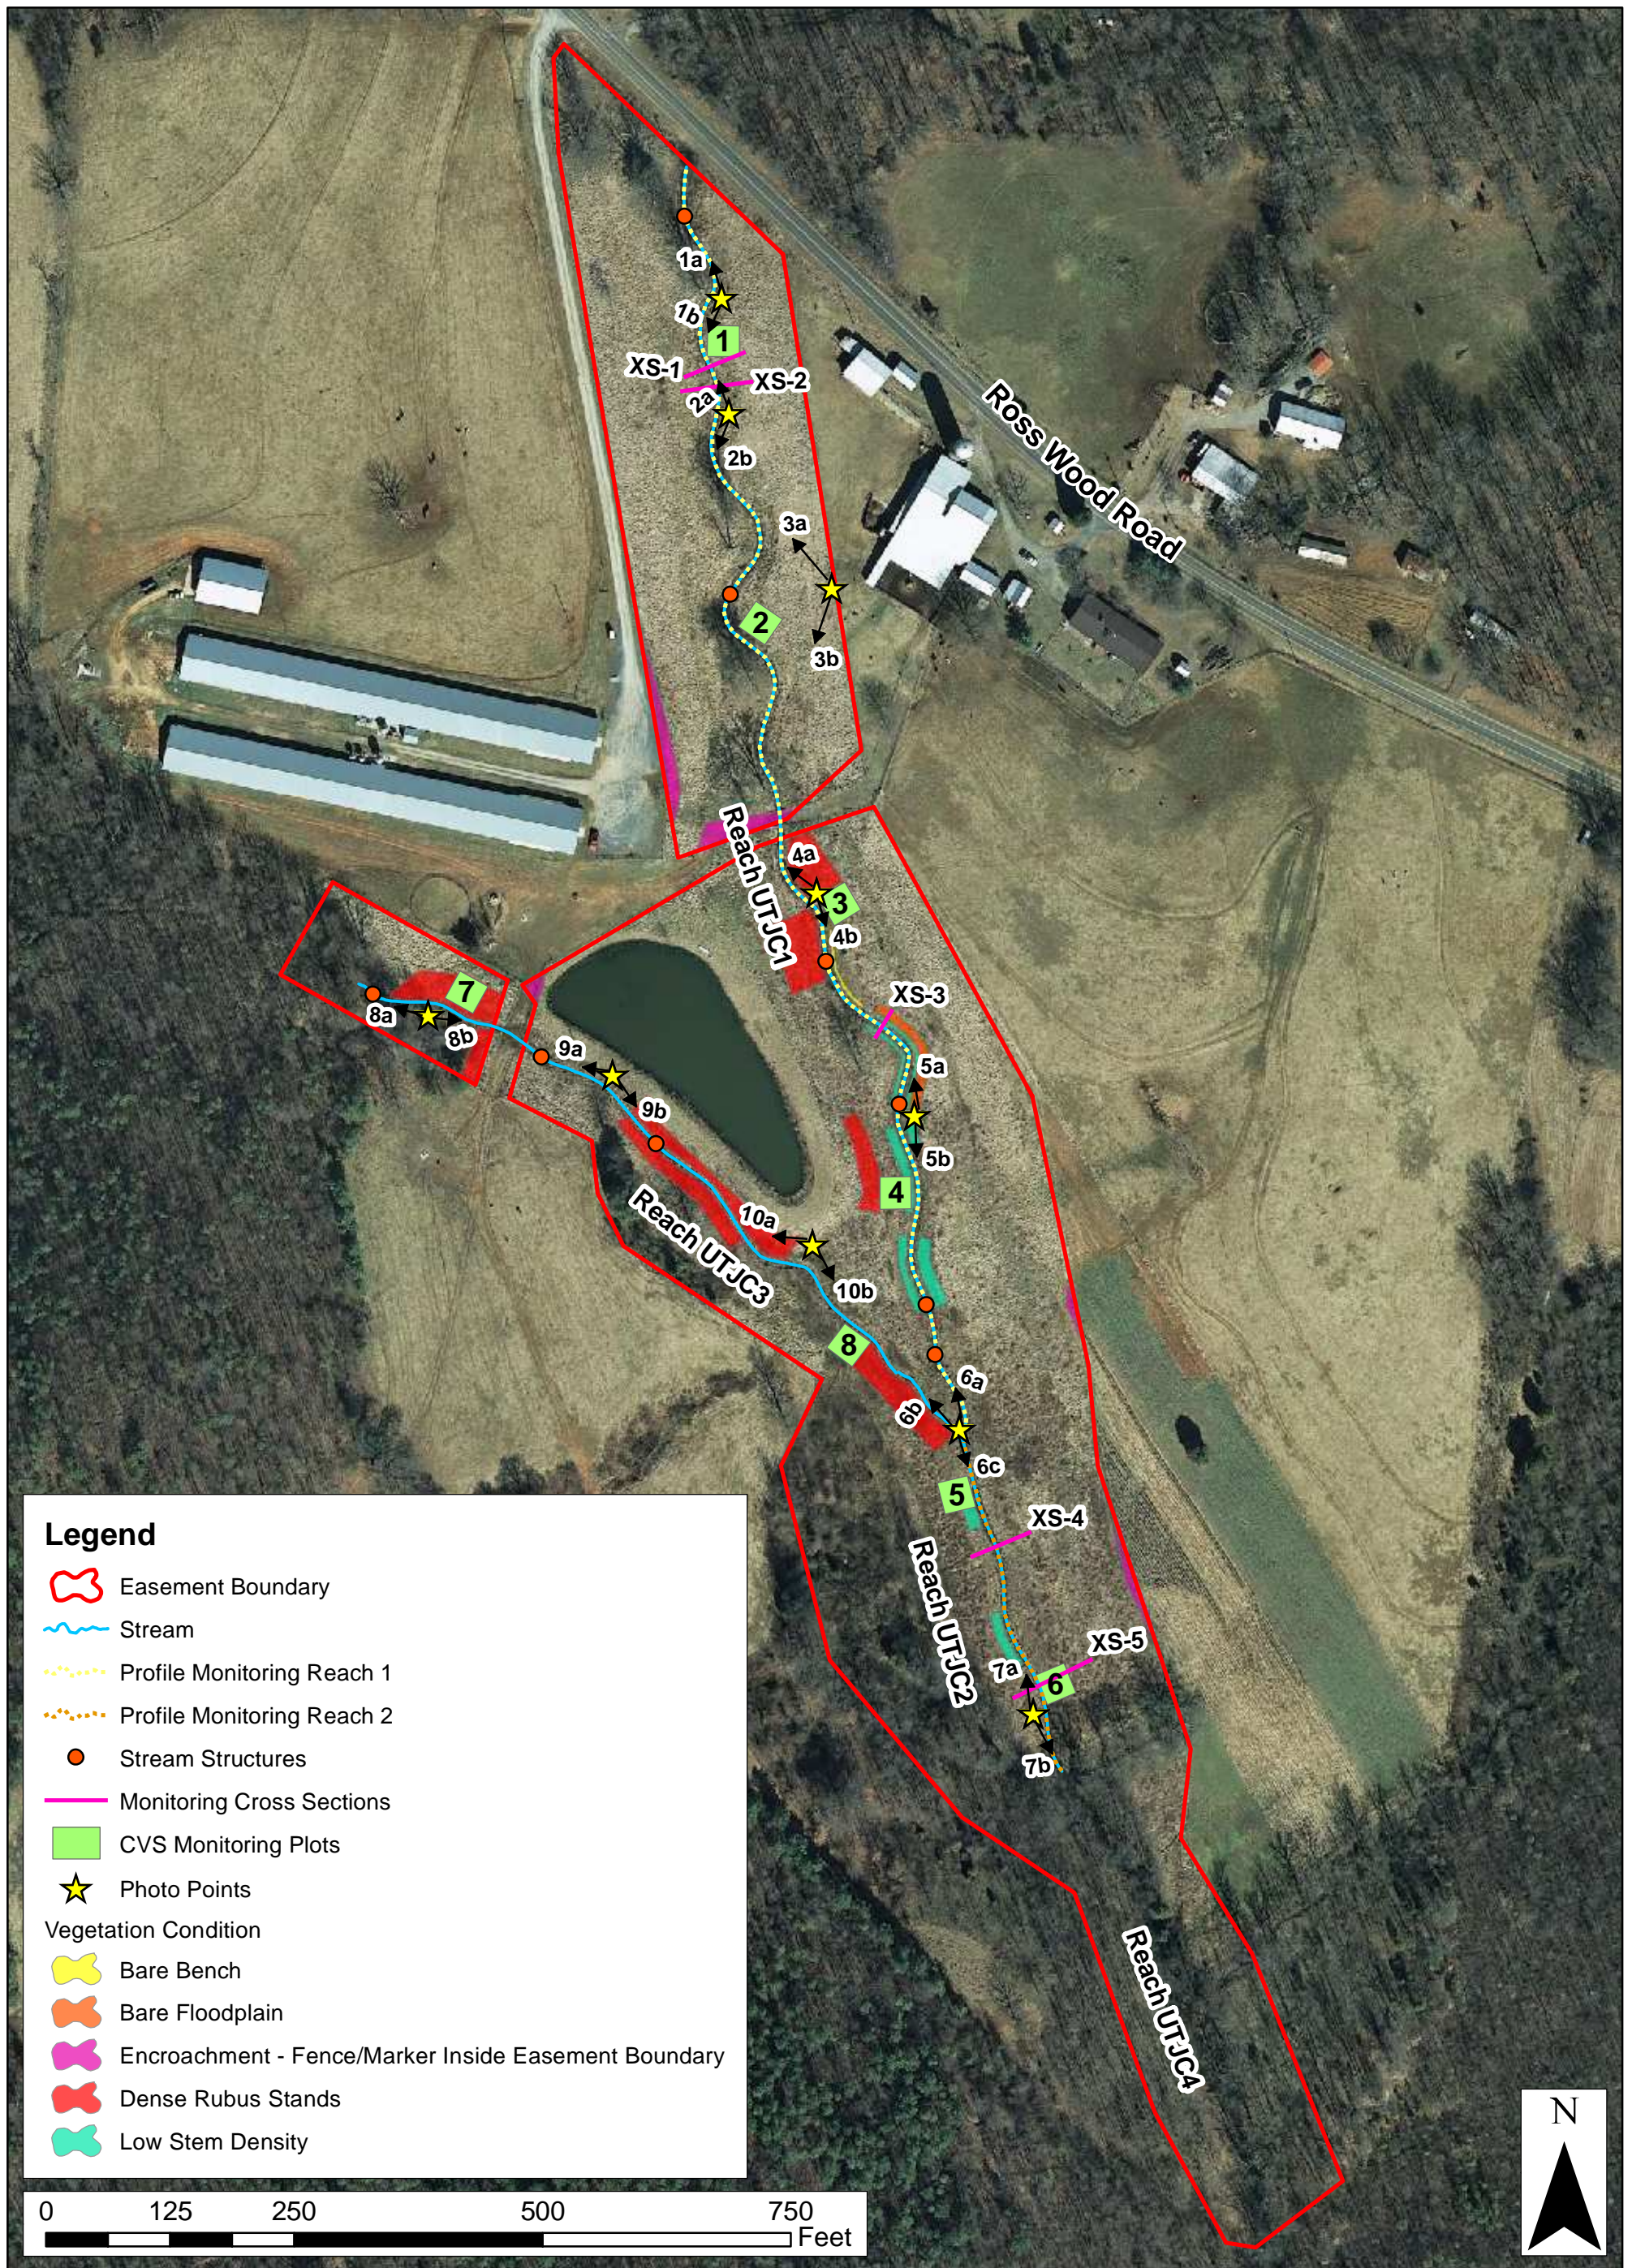


**Legend**

- Easement Boundary
- Stream
- Profile Monitoring Reach 1
- Profile Monitoring Reach 2
- Stream Structures
- Monitoring Cross Sections
- CVS Monitoring Plots
- Photo Points

**Vegetation Condition**

- Bare Bench
- Bare Floodplain
- Encroachment - Fence/Marker Inside Easement Boundary
- Dense Rubus Stands
- Low Stem Density



Axiom Environmental  
218 Snow Avenue  
Raleigh, NC 27603  
(919) 215-1693

Axiom Environmental, Inc.

**CURRENT CONDITION PLAN VIEW**  
**BRILES CREEK SITE**  
**EPP PROJECT NUMBER 047**  
**Randolph County, North Carolina**

Dwn. by:	KRJ
Date:	October 2012
Project:	12-004.12

FIGURE  
2

Table 5A Visual Stream Morphology Stability Assessment

Reach UT JC1

Assessed Length 1425

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation	
1. Bed	1. Vertical Stability (Rifle and Run units)	1. <u>Accretion</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include pointbars)			0	0	100%				
		2. <u>Degradation</u> - Evidence of downcutting			2	3	100%				
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	12	12			100%				
		3. <u>Meander Pool Condition</u>	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6)	12	12			100%			
	4. <u>Thalweg Position</u>	1. Thalweg centering at upstream of meander bend (Run)	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	12	12			100%			
			1. Thalweg centering at upstream of meander bend (Run)	12	12			100%			
		2. Thalweg centering at downstream of meander (Glide)	1. Thalweg centering at upstream of meander bend (Run)	12	12			100%			
			2. Thalweg centering at downstream of meander (Glide)	12	12			100%			
	2. Bank	1. <u>Scoured/Eroding</u>	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			2	60	98%	0	0	98%
			Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%
3. <u>Mass Wasting</u>		Bank slumping, calving, or collapse			0	0	100%	0	0	100%	
		<b>Totals</b>			2	60	98%	0	0	98%	
3. Engineered Structures	1. <u>Overall Integrity</u>	Structures physically intact with no dislodged boulders or logs.	6	6			100%				
		2. <u>Grade Control</u>	Grade control structures exhibiting maintenance of grade across the sill.	6	6			100%			
	2a. <u>Piping</u>	Structures lacking any substantial flow underneath sills or arms.	6	6			100%				
	3. <u>Bank Protection</u>	Bank erosion within the structures extent of influence does not exceed 15%. (See guidance for this table in EEP monitoring guidance document)	6	6			100%				
		4. <u>Habitat</u>	Pool forming structures maintaining - Max Pool Depth : Mean Bankfull Depth ratio $\geq$ 1.6 Rootwads/logs providing some cover at base-flow.	6	6			100%			

Table 5B Visual Stream Morphology Stability Assessment

Reach UT JC2

Assessed Length 362

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Rifle and Run units)	1. <u>Accretion</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include pointbars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	2	2			100%			
		3. <u>Meander Pool Condition</u>	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6)	2	2			100%		
2. Bank	4. <u>Thalweg Position</u>	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	2	2			100%			
		1. <u>Thalweg</u> centering at upstream of meander bend (Run)	2	2			100%			
		2. <u>Thalweg</u> centering at downstream of meander (Glide)	2	2			100%			
		<b>Totals</b>			0	0	100%	0	0	100%
3. Engineered Structures	1. <u>Scoured/Eroding</u>	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion	--	--	0	0	100%	0	0	100%
	2. <u>Undercut</u>	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.	--	--	0	0	100%	0	0	100%
	3. <u>Mass Wasting</u>	Bank slumping, calving, or collapse	--	--	0	0	100%	0	0	100%
	1. <u>Overall Integrity</u>	Structures physically intact with no dislodged boulders or logs.	--	--	0	0	100%	0	0	100%
	2. <u>Grade Control</u>	Grade control structures exhibiting maintenance of grade across the sill.	--	--			N/A			
2a. <u>Piping</u>	Structures lacking any substantial flow underneath sills or arms.	--	--			N/A				
3. <u>Bank Protection</u>	Bank erosion within the structures extent of influence does not exceed 15%. (See guidance for this table in EEP monitoring guidance document)	--	--			N/A				
4. <u>Habitat</u>	Pool forming structures maintaining - Max Pool Depth : Mean Bankfull Depth ratio $\geq$ 1.6 Rootwads/logs providing some cover at base-flow.	--	--			N/A				

**Table 5C Visual Stream Morphology Stability Assessment**

Reach ID Reach UT JC3

Assessed Length 817

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Rifle and Run units)	1. <u>Accretion</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include pointbars)	0		0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting	0		0	0	100%			
	2. Rifle Condition	1. <u>Texture/Substrate</u> - Rifle maintains coarser substrate	7	7			100%			
		3. <u>Meander Pool Condition</u>	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6)	7	7			100%		
2. Bank	4. <u>Thalweg Position</u>	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head or downstream riffle)	7	7			100%			
		1. Thalweg centering at upstream of meander bend (Run)	7	7			100%			
		2. Thalweg centering at downstream of meander (Slide)	7	7			100%			
		<b>Totals</b>		0	0	0	100%	0	0	100%
3. Engineered Structures	1. <u>Scoured/Eroding</u>	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion	4	4			100%	0	0	100%
	2. <u>Undercut</u>	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.	4	4			100%	0	0	100%
	3. <u>Mass Wasting</u>	Bank slumping, calving, or collapse	4	4			100%	0	0	100%
	1. <u>Overall Integrity</u>	Structures physically intact with no dislodged boulders or logs.	4	4			100%	0	0	100%
	2. <u>Grade Control</u>	Grade control structures exhibiting maintenance of grade across the sill.	4	4			100%	0	0	100%
	2a. <u>Piping</u>	Structures lacking any substantial flow underneath sills or arms.	4	4			100%	0	0	100%
	3. <u>Bank Protection</u>	Bank erosion within the structures extent of influence does not exceed 15%. (See guidance for this table in EEP monitoring guidance document)	4	4			100%	0	0	100%
	4. <u>Habitat</u>	Pool forming structures maintaining - Max Pool Depth : Mean Bankfull Depth ratio $\geq$ 1.6 Rootwads/logs providing some cover at base-flow.	4	4			100%	0	0	100%



Table 5D Visual Stream Morphology Stability Assessment

Reach UT JC4

Assessed Length 508

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Rifle and Run units)	1. <u>Accretion</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include pointbars)	--	--	0	0	100%	0	0	100%
		2. <u>Degradation</u> - Evidence of downcutting	--	--	0	0	100%	0	0	100%
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	--	--			N/A			N/A
		3. <u>Meander Pool Condition</u>	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6) 2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	--	--			N/A		
4. Thalgweg Position		1. Thalgweg centering at upstream of meander bend (Run)	--	--			N/A			N/A
		2. Thalgweg centering at downstream of meander (Glide)	--	--			N/A			N/A
2. Bank	1. <u>Scoured/Eroding</u>	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion	--	--	0	0	100%	0	0	100%
		Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.	--	--	0	0	100%	0	0	100%
		Bank slumping, calving, or collapse	--	--	0	0	100%	0	0	100%
<b>Totals</b>										
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	--	--	0	0	100%	0	0	100%
		2. Grade Control	--	--			N/A			N/A
		2a. Piping	--	--			N/A			N/A
		3. Bank Protection	--	--			N/A			N/A
4. Habitat		Bank erosion within the structures extent of influence does not exceed 15%. (See guidance for this table in EEP monitoring guidance document)	--	--			N/A			N/A
		Pool forming structures maintaining - Max Pool Depth : Mean Bankfull Depth ratio $\geq$ 1.6 Rootwads/logs providing some cover at base-flow.	--	--			N/A			N/A

## Vegetation Condition Assessment

8.8

Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	0.1 acres	See Figure 2	3	0.04	0.5%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1 acres	See Figure 2	8	0.12	1.4%
<b>Total</b>				11	0.16	1.9%
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 acres	See Figure 2	0	0.00	0.0%
<b>Cumulative Total</b>				11	0.16	1.9%

14

Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage
4. Invasive Areas of Concern <sup>4</sup>	Areas or points (if too small to render as polygons at map scale).	1000 SF	See Figure 2	0	0.00	0.0%
5. Easement Encroachment Areas <sup>3</sup>	Areas or points (if too small to render as polygons at map scale).	none	See Figure 2	5	0.11	1.3%

<sup>1</sup> = Enter the planted acreage within the easement. This number is calculated as the easement acreage minus any existing mature tree stands that were not subject to supplemental planting of the understory, the channel acreage, crossings or any other elements not directly planted as part of the project effort.

<sup>2</sup> = The acreage within the easement boundaries.

<sup>3</sup> = Encroachment may occur within or outside of planted areas and will therefore be calculated against the overall easement acreage. In the event a polygon is cataloged into items 1, 2 or 3 in the table and is the result of encroachment, the associated acreage should be tallied in the relevant item (i.e., item 1, 2 or 3) as well as a parallel tally in item 5.

<sup>4</sup> = Invasives may occur in or out of planted areas, but still within the easement and will therefore be calculated against the overall easement acreage. Invasives of concern/interest are listed below. The list of high concern species are those with the potential to directly outcompete native, young, woody stems in the short-term (e.g. monitoring period or shortly thereafter) or affect the community structure for existing, more established tree/shrub stands over timeframes that are slightly longer (e.g. 1-2 decades). The low/moderate concern group are those species that generally do not have this capacity over the timeframes discussed and therefore are not expected to be mapped with regularity, but can be mapped, if in the judgement of the observer their coverage, density or distribution is suppressing the viability, density, or growth of planted woody stems. Decisions as to whether remediation will be needed are based on the integration of risk factors by EEP such as species present, their coverage, distribution relative to native biomass, and the practicality of treatment. For example, even modest amounts of Kudzu or Japanese Knotweed early in the projects history will warrant control, but potentially large coverages of Microstegium in the herb layer will not likely trigger control because of the limited capacities to impact tree/shrub layers within the timeframes discussed and the potential impacts of treating extensive amounts of ground cover. Those species with the "watch list" designator in gray shade are of interest as well, but have yet to be observed across the state with any frequency. Those in *red italics* are of particular interest given their extreme risk/threat level for mapping as points where isolated specimens are found, particularly early in a projects monitoring history. However, areas of discreet, dense patches will of course be mapped as polygons. The symbology scheme below was one that was found to be helpful for symbolizing invasives polygons, particularly for situations where the condition for an area is somewhere between isolated specimens and dense, discreet patches. In any case, the point or polygon/area feature can be symbolized to describe things like high or low concern and species can be listed as a map inset, in legend items if the number of species are limited or in the narrative section of the executive summary.

**Briles Creek  
Stream Fixed-Station Photographs  
Taken October 2012**



Photo  
Point 1a



Photo  
Point 1b



Photo  
Point 2a



Photo  
Point 2b



Photo  
Point 3a



Photo  
Point 3b

**Briles Creek  
Stream Fixed-Station Photographs  
Taken October 2012  
(continued)**



Photo  
Point 4a



Photo  
Point 4b



Photo  
Point 5a



Photo  
Point 5b



Photo  
Point 6a



Photo  
Point 6b



Photo  
Point 6c

**Briles Creek  
Stream Fixed-Station Photographs  
Taken October 2012  
(continued)**



Photo  
Point 7a



Photo  
Point 7b



Photo  
Point 8a



Photo  
Point 8b



Photo  
Point 9a



Photo  
Point 9b

**Briles Creek  
Stream Fixed-Station Photographs  
Taken October 2012  
(continued)**

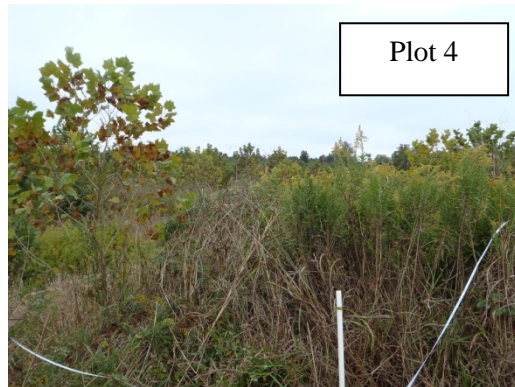


Photo  
Point 10a



Photo  
Point 10b

**Briles Creek  
Vegetation Monitoring Photographs  
Taken October 2012**



**Briles Creek  
Vegetation Monitoring Photographs  
Taken October 2012  
(continued)**





APPENDIX C  
VEGETATION PLOT DATA

Table 7. Vegetation Plot Criteria Attainment

Table 8. CVS Vegetation Plot Metadata

Table 9. Total and Planted Stems by Plot and Species

**Table 7. Vegetation Plot Criteria Attainment  
Briles Stream Restoration Site (EEP Project Number 047)**

Vegetation Plot ID	Vegetation Survival Threshold Met?	Tract Mean
1	Yes	75%
2	No*	
3	Yes	
4	Yes	
5	Yes	
6	Yes	
7	No	
8	Yes	

\*Based on planted stems alone, this plot doesn't meet success criteria; however, when including naturally recruited stems of silky dogwood (*Cornus amomum*) this plot was well-above 290 stems per acre.

**Table 8. CVS Vegetation Plot Metadata  
Briles Stream Restoration Site (EEP Project Number 047)**

<b>Report Prepared By</b>	Corri Faquin
<b>Date Prepared</b>	11/20/2012 12:42
<b>database name</b>	Axiom-EEP-2012-A.mdb
<b>database location</b>	C:\Documents and Settings\pperkinson\Desktop
<b>computer name</b>	PHILLIP-LT
<b>DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----</b>	
<b>Metadata</b>	Description of database file, the report worksheets, and a summary of project(s) and project data.
<b>Proj, planted</b>	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
<b>Proj, total stems</b>	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
<b>Plots</b>	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
<b>Vigor</b>	Frequency distribution of vigor classes for stems for all plots.
<b>Vigor by Spp</b>	Frequency distribution of vigor classes listed by species.
<b>Damage</b>	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
<b>Damage by Spp</b>	Damage values tallied by type for each species.
<b>Damage by Plot</b>	Damage values tallied by type for each plot.
<b>Planted Stems by Plot and Spp</b>	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
<b>PROJECT SUMMARY-----</b>	
<b>Project Code</b>	47
<b>project Name</b>	Briles
<b>Description</b>	Stream Restoration in Randolph county, North Carolina
<b>River Basin</b>	Yadkin-Pee Dee
<b>length(ft)</b>	2628
<b>stream-to-edge width (ft)</b>	50
<b>area (sq m)</b>	24412.45
<b>Required Plots (calculated)</b>	8
<b>Sampled Plots</b>	8

**Table 9. Total and Planted Stems by Plot and Species**

Briles Stream Restoration Site EEP Project Code 47

Scientific Name	Common Name	Species Type	Current Plot Data (MY4 2012)																								Annual Means																							
			047-01-0001			047-01-0002			047-01-0003			047-01-0004			047-01-0005			047-01-0006			047-01-0007			047-01-0008			MY4 (2012)			MY3 (2010)			MY2 (2009)			MY1 (2008)			MY0 (2007)											
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T			
<i>Alnus serrulata</i>	hazel alder	Shrub										1	1	1																1	1	1																		
<i>Betula nigra</i>	river birch	Tree	2	2	2	2	2	2	3	3	3				1	1	1													8	8	8	7	7	7	7	7	7	15	15	15	15	15	15						
<i>Callicarpa americana</i>	American beautyberry	Shrub										1	1	1																2	2	2																		
<i>Celtis laevigata</i>	sugarberry	Tree	6	6	6																									6	6	6																		
<i>Celtis occidentalis</i>	common hackberry	Tree																			1	1	1							1	1	1																		
<i>Cercis canadensis</i>	eastern redbud	Tree				1	1	1																						2	2	2																		
<i>Cornus amomum</i>	silky dogwood	Shrub	2	3	3	2	4	4								5	5	1	1	1	1	1	1	1	1	1	4	4	4	10	18	18	5	16	16	17	35	35	19	45	45	19	44	44						
<i>Diospyros virginiana</i>	common persimmon	Tree										1	1	1				2	2	2										3	3	3																		
<i>Fraxinus nigra</i>	black ash	Tree	1	1	1																									1	1	1	1	1	1	1	1	1	1	1	1				1	1	1			
<i>Fraxinus pennsylvanica</i>	green ash	Tree	1	1	1	1	1	1	1	1	1	2	2	2	3	3	3	5	5	5							2	2	2	15	15	15	13	13	13	16	16	16	27	27	27	26	26	26						
<i>Juglans</i>	walnut	Tree																				2	2	2						2	2	2																		
<i>Liriodendron tulipifera</i>	tuliptree	Tree	2	2	2				2	2	2	1	1	1	2	2	2													7	7	7	3	3	3	3	3	3	8	8	8	8	8	8	8	8	8			
<i>Platanus occidentalis</i>	American sycamore	Tree										1	1	1																1	1	1	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3			
<i>Prunus serotina</i>	black cherry	Tree										1	1	1																1	1	1																		
<i>Quercus pagoda</i>	cherrybark oak	Tree							1	1	1	1	1	1	1	1	1	2	2	2							1	1	1	6	6	6	3	3	3	8	8	8	11	11	11	11	11	11	11	11	11			
<i>Quercus phellos</i>	willow oak	Tree																																		2	2	2	2	2	2	2	2	2						
<i>Salix nigra</i>	black willow	Tree				1	1						1	1													5	5	5	5	7	7	5	7	7		3	3		4	4		3	3						
<i>Salix sericea</i>	silky willow	Shrub				2	2					2	2								2	2	2							2	6	6		9	9		12	12		10	10		11	11						
<i>Sambucus canadensis</i>	Common Elderberry	Shrub				3	3								1	1	1										1	1	1	2	5	5		1	1		9	9		10	10		11	11						
<i>Sambucus nigra</i>	European black elderb	Shrub																									1	1	1	1	1	1																		
<i>Ulmus americana</i>	American elm	Tree							1	1	1																			1	1	1																		
		<b>Stem count</b>	14	15	15	6	14	14	8	8	8	9	12	12	8	13	13	12	12	12	6	6	6	14	14	14	77	94	94	40	63	63	55	96	96	85	135	135	85	135	135	85	135	135						
		<b>size (ares)</b>	1			1			1			1			1			1			1			1			8			8			8			8			8											
		<b>size (ACRES)</b>	0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.20			0.20			0.20			0.20														
		<b>Species count</b>	6	6	6	4	7	7	5	5	5	8	10	10	5	6	6	6	6	6	4	4	4	6	6	6	20	20	20	9	11	11	8	10	10	7	10	10	8	11	11	8	11	11	8	11	11			
		<b>Stems per ACRE</b>	566.6	607	607	242.8	566.6	566.6	323.7	323.7	323.7	364.2	485.6	485.6	323.7	526.1	526.1	485.6	485.6	485.6	242.8	242.8	242.8	566.6	566.6	566.6	385	470	470	202.3	318.7	318.7	278.2	485.6	485.6	430	682.9	682.9	430	682.9	682.9	430	682.9	682.9						

**Color for Density**  
 Exceeds requirements by 10%  
 Exceeds requirements, but by less than 10%  
 Fails to meet requirements, by less than 10%  
 Fails to meet requirements by more than 10%

APPENDIX D  
STREAM SURVEY DATA



Cross-section Plots

Longitudinal Profile Plots

Substrate Plots



Tables 10a-b. Baseline Stream Data Summary

Tables 11a-b. Monitoring Data

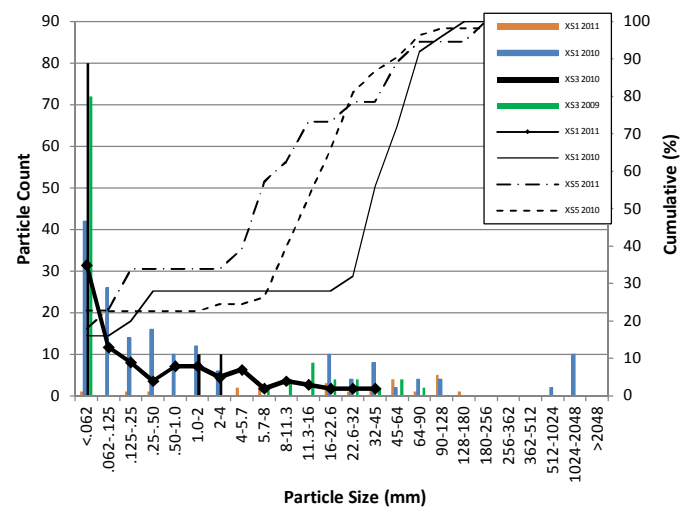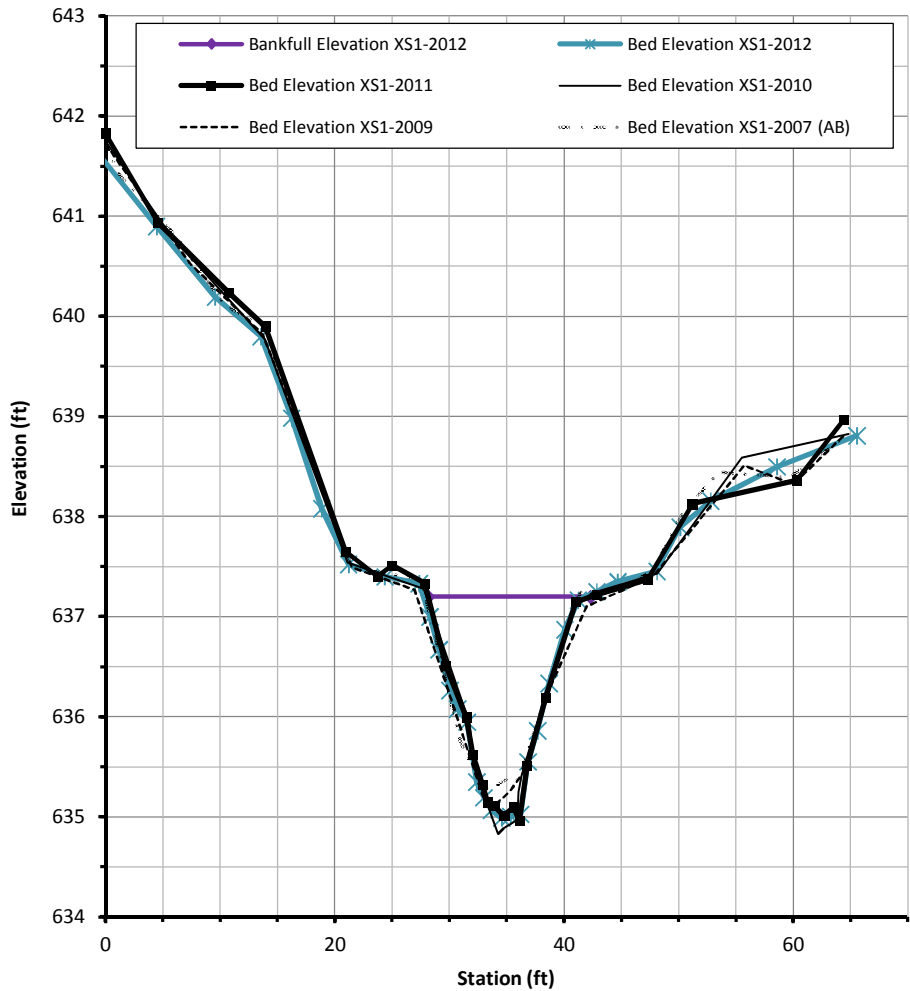



ID	Year	Phase	Facet Type	Wbkf	Abkf	Dbkf
XS1	2007	AB	Riffle	13.4	15.9	1.2
XS1	2009	MY1	Riffle	14.6	16	1.1
XS1	2010	MY2	Riffle	14.5	16.5	1.1
XS1	2011	MY3	Riffle	14.3	16.2	1.1
XS1	2012	MY4	Riffle	13.5	16.4	1.2

ID	Year	Phase	d50(mm)	d84(mm)
XS1	2007	AB	0.07	5.02
XS1	2009	MY1	11.73	31
XS1	2010	MY2	8	22.3
XS1	2011	MY3	7.84	29.15
XS1	2012	MY4	34.8	104

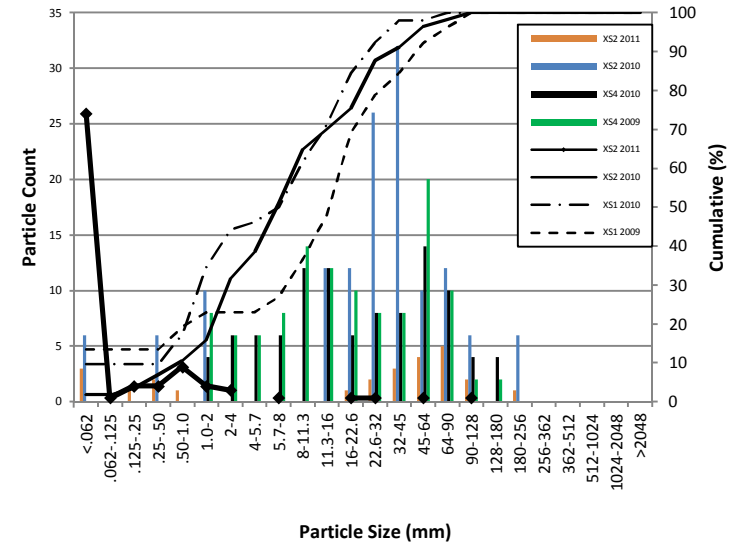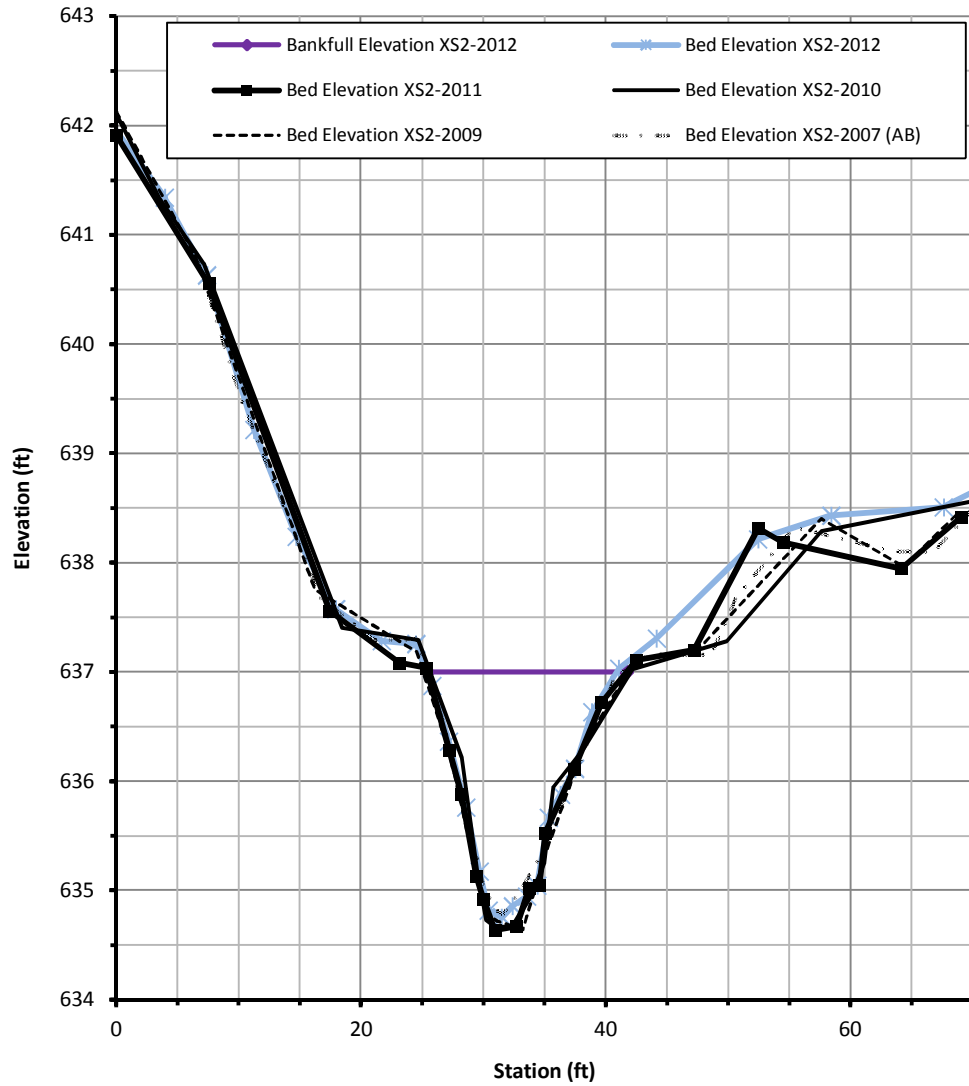

ID	Year	Phase	Facet Type	Wbkf	Abkf	Dbkf
XS2	2007	AB	Pool	15.9	18.9	1.2
XS2	2009	MY1	Pool	17.6	22.5	1.3
XS2	2010	MY2	Pool	16.6	19.4	1.2
XS2	2011	MY3	Pool	16.3	19.8	1.2
XS2	2012	MY4	Pool	19.4	23.2	1.2



ID	Year	Phase	d50(mm)	d84(mm)
XS2	2007	AB	0.14	3.6
XS2	2009	MY1	28.2	62.7
XS2	2010	MY2	38.5	89.6
XS2	2011	MY3	3.2	57.7
XS2	2012	MY4	--	--

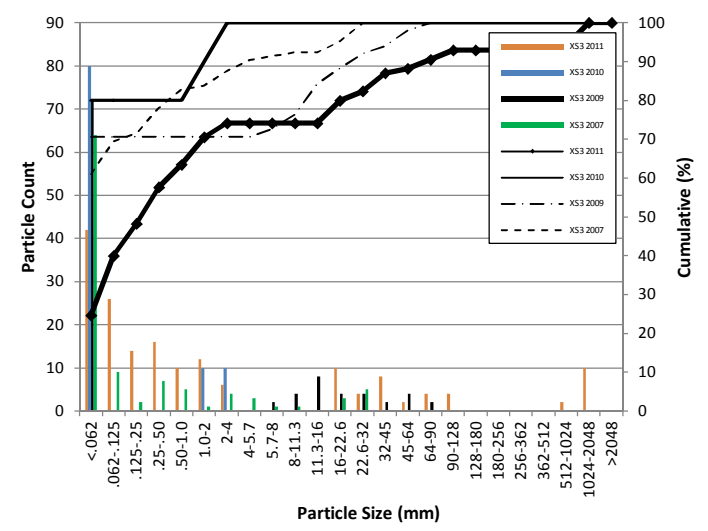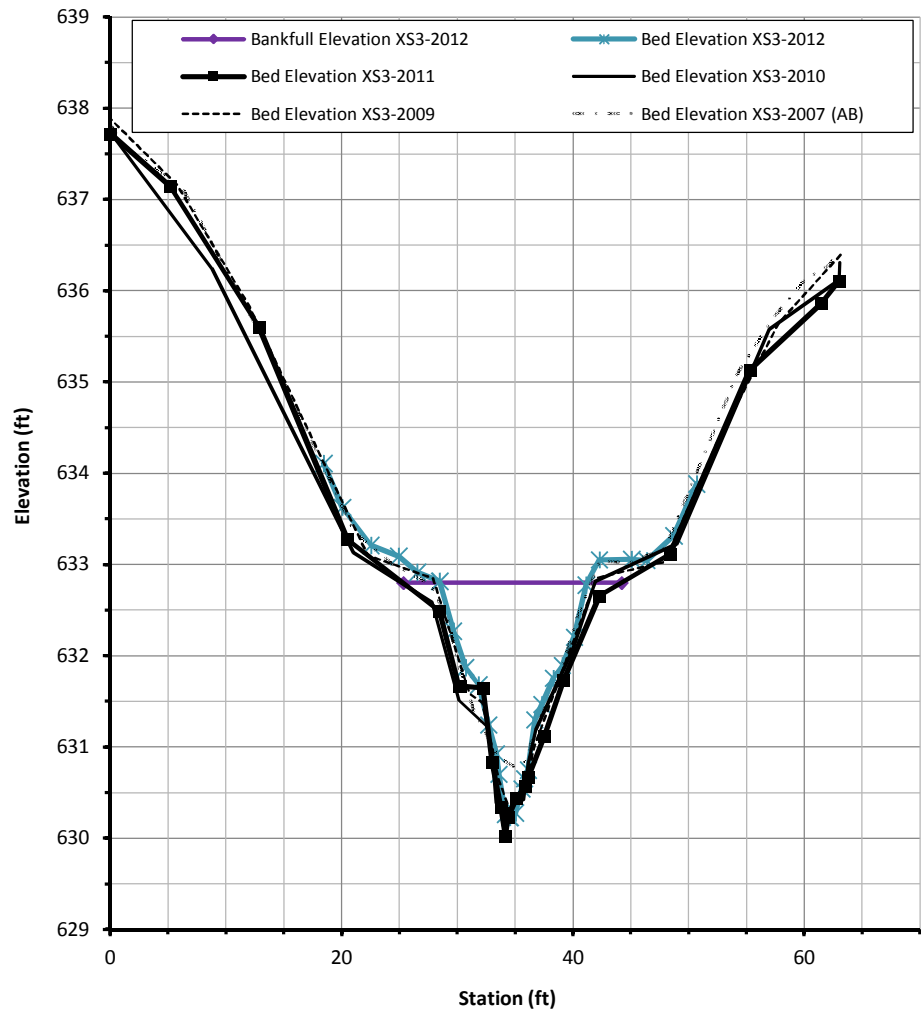

ID	Year	Phase	Facet Type	Wbkf	Abkf	Dbkf
XS3	2007	AB	Pool	14.2	16.2	1.1
XS3	2009	MY1	Pool	14.1	17.9	1.3
XS3	2010	MY2	Pool	13.6	16	1.2
XS3	2011	MY3	Pool	18.9	19.7	1
XS3	2012	MY4	Pool	12.9	16.1	1.3



ID	Year	Phase	d50(mm)	d84(mm)
XS3	2007	AB	--	1.05
XS3	2009	MY1	--	11.2
XS3	2010	MY2	0.04	1.4
XS3	2011	MY3	0.3	36.6
XS3	2012	MY4	--	--



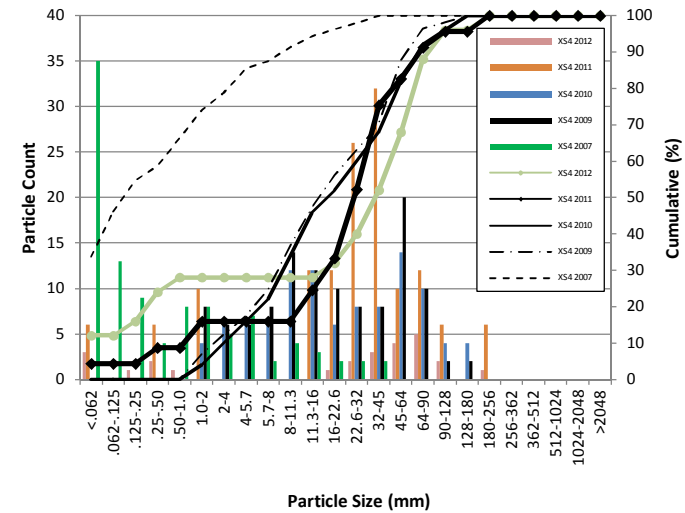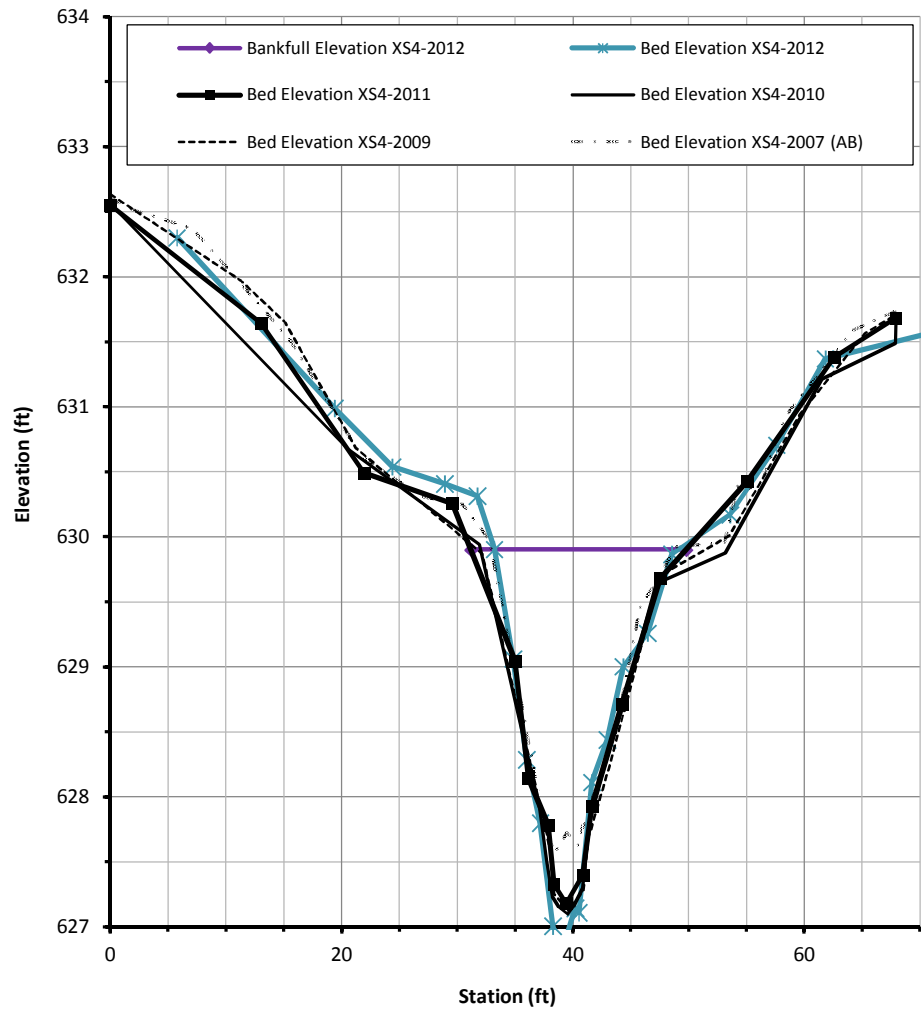

ID	Year	Phase	Facet Type	Wbkf	Abkf	Dbkf
XS4	2007	AB	Riffle	15.8	19.8	1.3
XS4	2009	MY1	Riffle	15	20.2	1.4
XS4	2010	MY2	Riffle	14.5	19.1	1.3
XS4	2011	MY3	Riffle	18.6	22.6	1.2
XS4	2012	MY4	Riffle	15.4	21.8	1.4

ID	Year	Phase	d50(mm)	d84(mm)
XS4	2007	AB	0.09	3.5
XS4	2009	MY1	12.7	42.2
XS4	2010	MY2	20.4	69.2
XS4	2011	MY3	30.9	68.2
XS4	2012	MY4	42.5	84

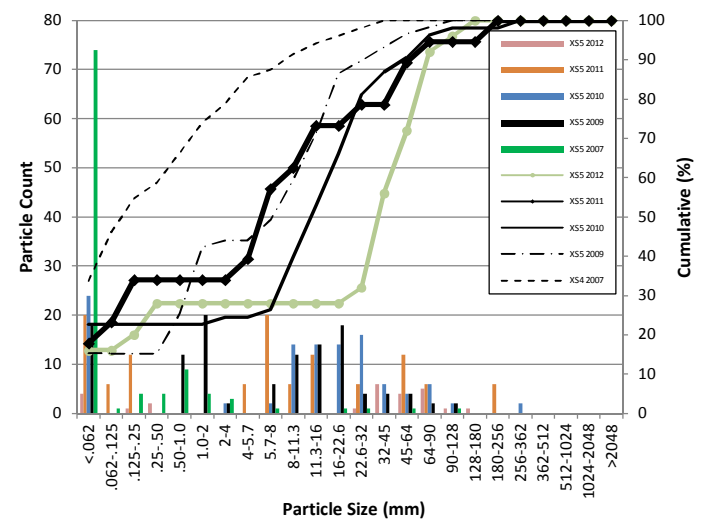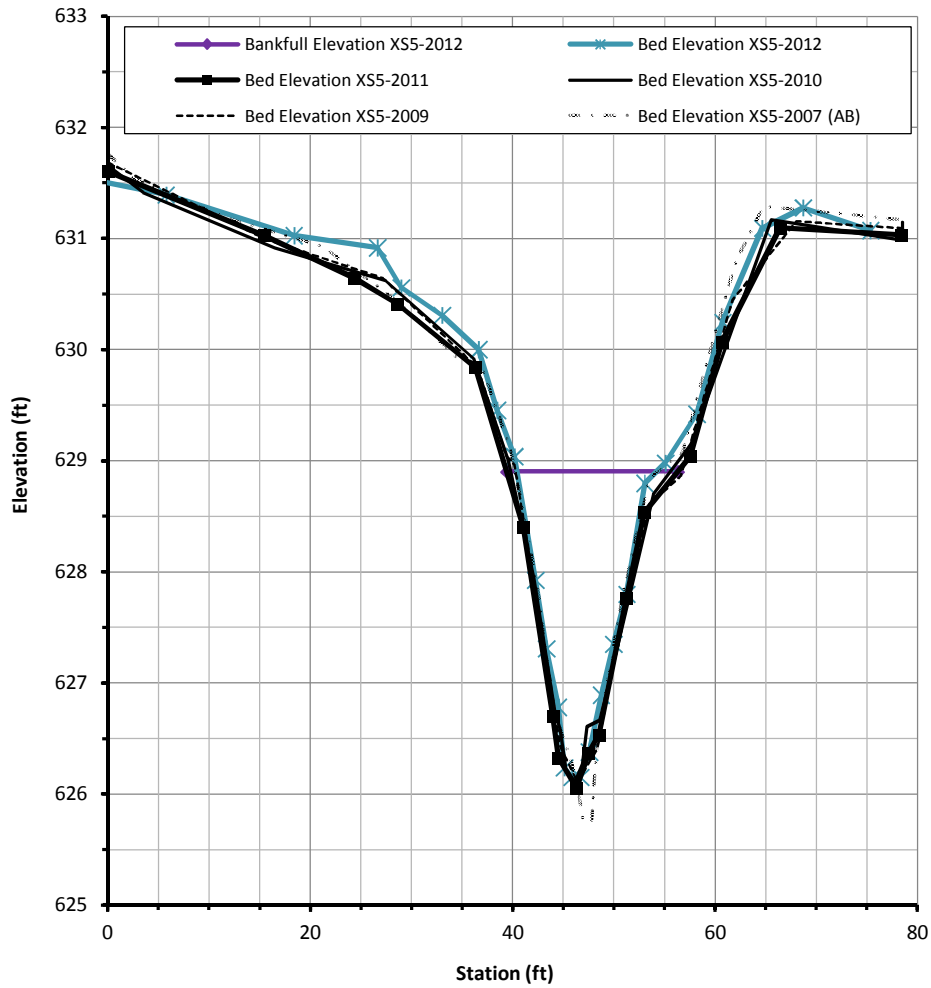


ID	Year	Phase	Facet Type	Wbkf	Abkf	Dbkf
XS5	2007	AB	Riffle	14	21.4	1.5
XS5	2009	MY1	Riffle	12.7	18.2	1.4
XS5	2010	MY2	Riffle	13.6	19.1	1.4
XS5	2011	MY3	Riffle	16.9	23	1.4
XS5	2012	MY4	Riffle	15.3	22.2	1.5

ID	Year	Phase	d50(mm)	d84(mm)
XS5	2007	AB	--	0.37
XS5	2009	MY1	5.9	15.3
XS5	2010	MY2	15	38.6
XS5	2011	MY3	7.1	54.6
XS5	2012	MY4	41.3	79


# BRILES REACH 1 STREAM THALWEG PROFILE 2012

Water Surface Slope  
0.0062


Bankfull Slope  
0.0062

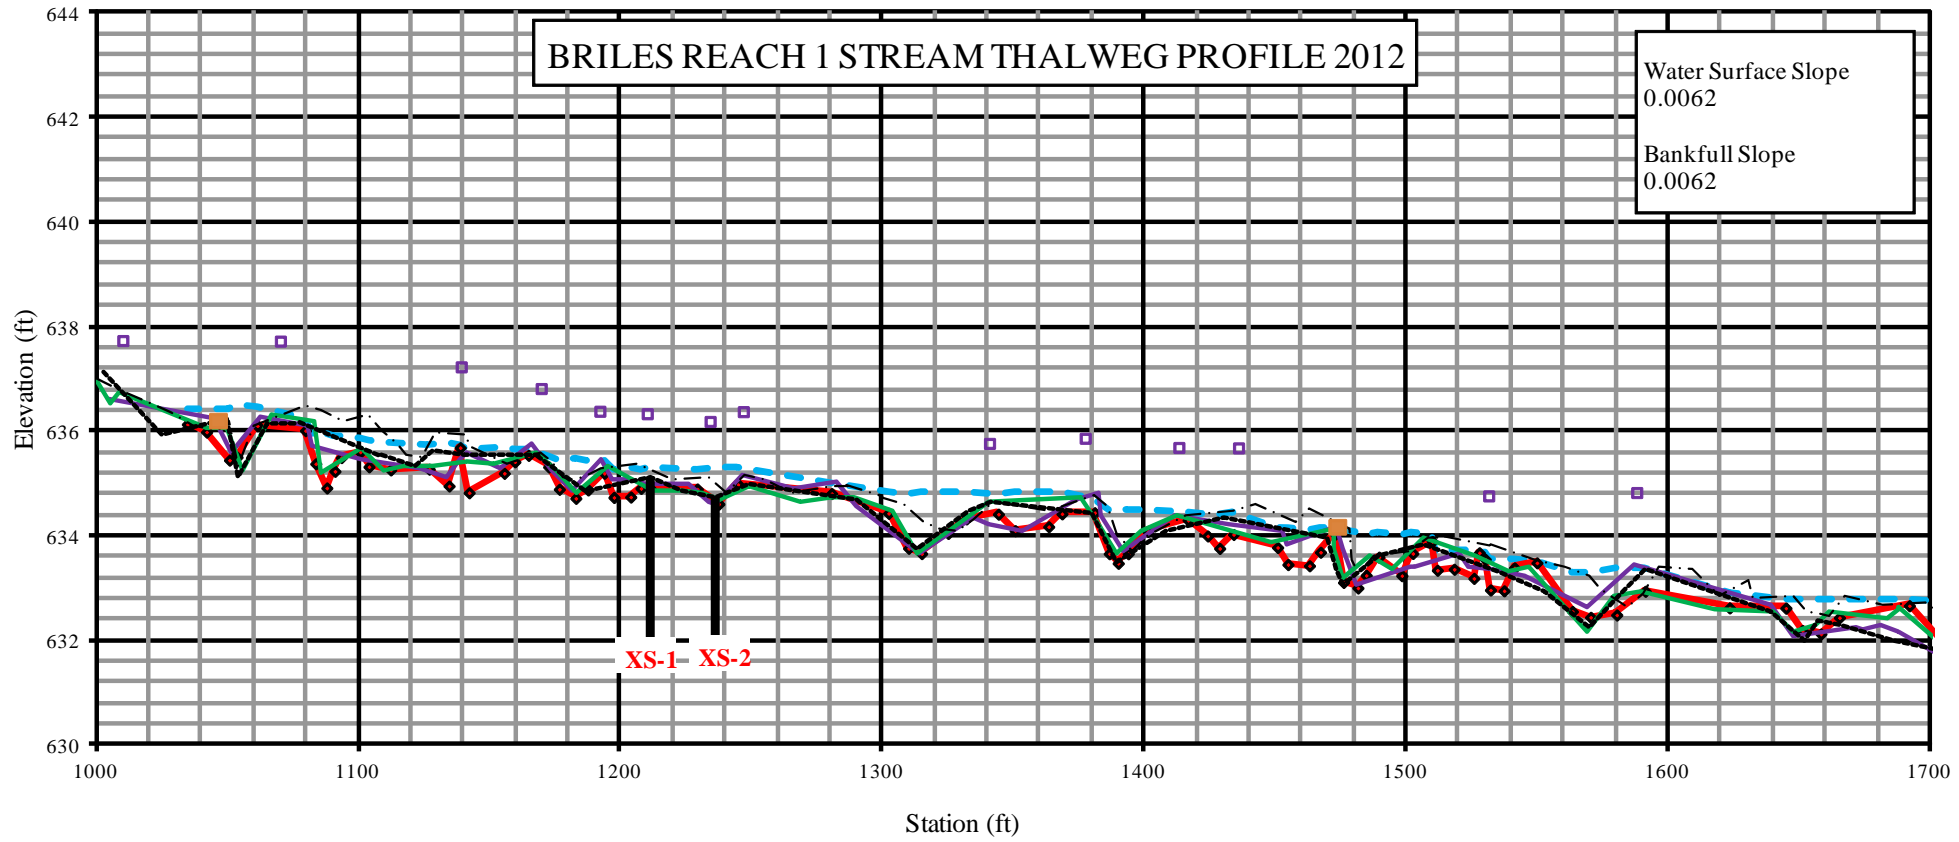

- |  |   |   |   |
|--|---|---|---|
| <span style="color: brown;">■</span> In-Stream Structures        | <span style="color: cyan;">- - -</span> Water Surface Elevation | <span style="color: purple;">■</span> Bankfull Elevation        | <span style="color: red;">—◆—</span> Bed Elevation-2012 (MY4) |
| <span style="color: purple;">—■—</span> Bed Elevation-2011 (MY3) | <span style="color: green;">—●—</span> Bed Elevation-2010 (MY2) | <span style="color: black;">—◆—</span> Bed Elevation-2009 (MY1) | <span style="color: grey;">—●—</span> Bed Elevation-2007 (AB) |

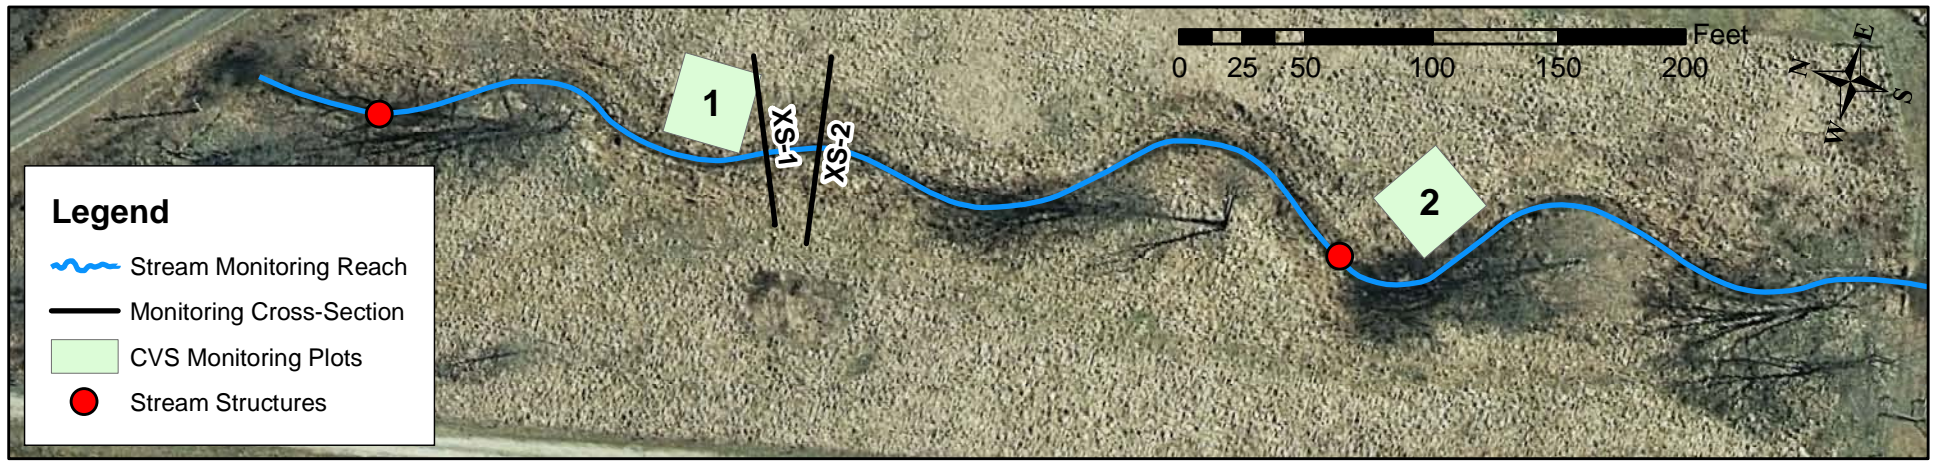





- Legend**
- ~ Stream Monitoring Reach
  - Monitoring Cross-Section
  - ◇ CVS Monitoring Plots
  - Stream Structures

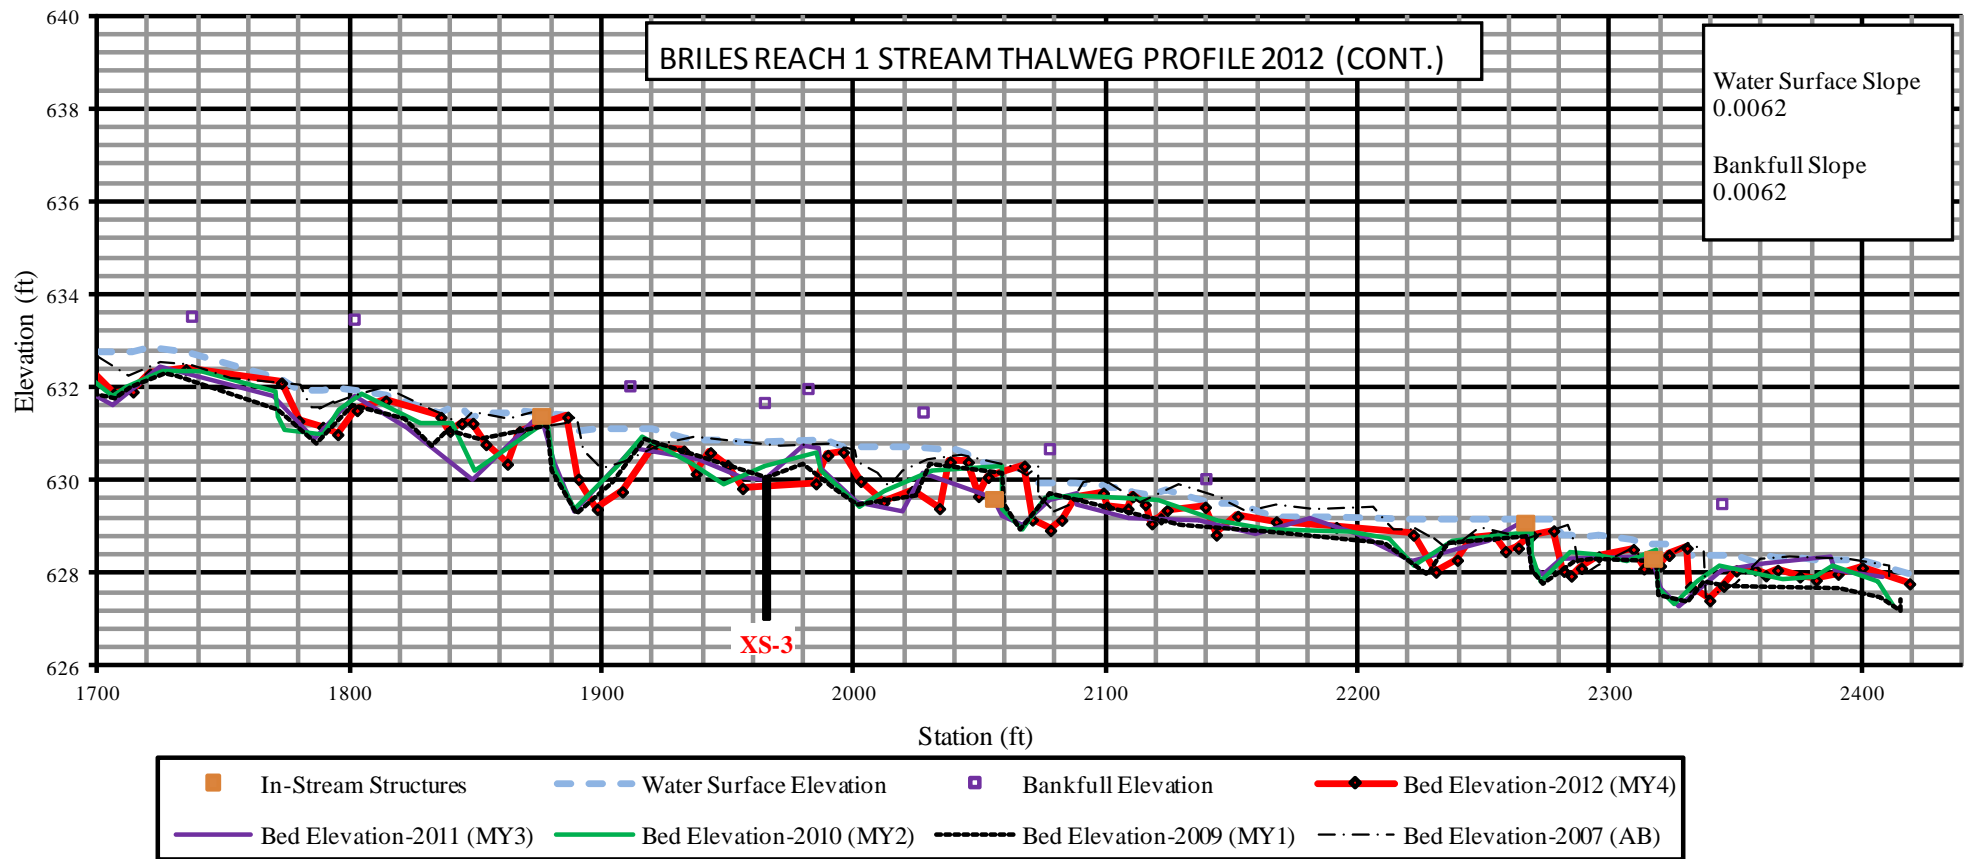


### BRILES REACH 2 STREAM THALWEG PROFILE 2012

Water Surface Slope  
0.0057

Bankfull Slope  
0.0057

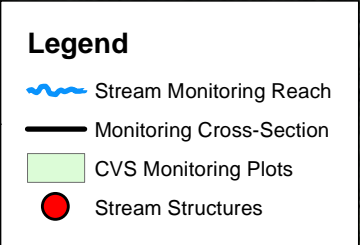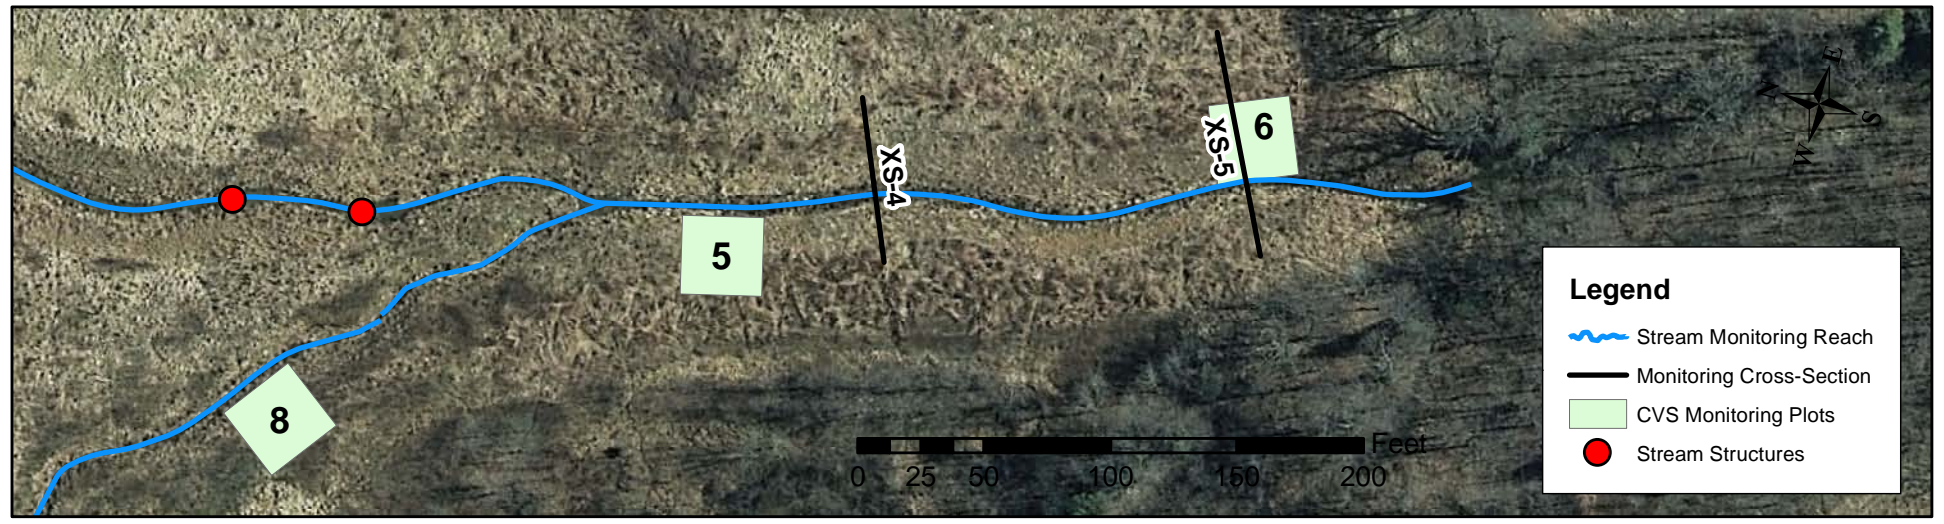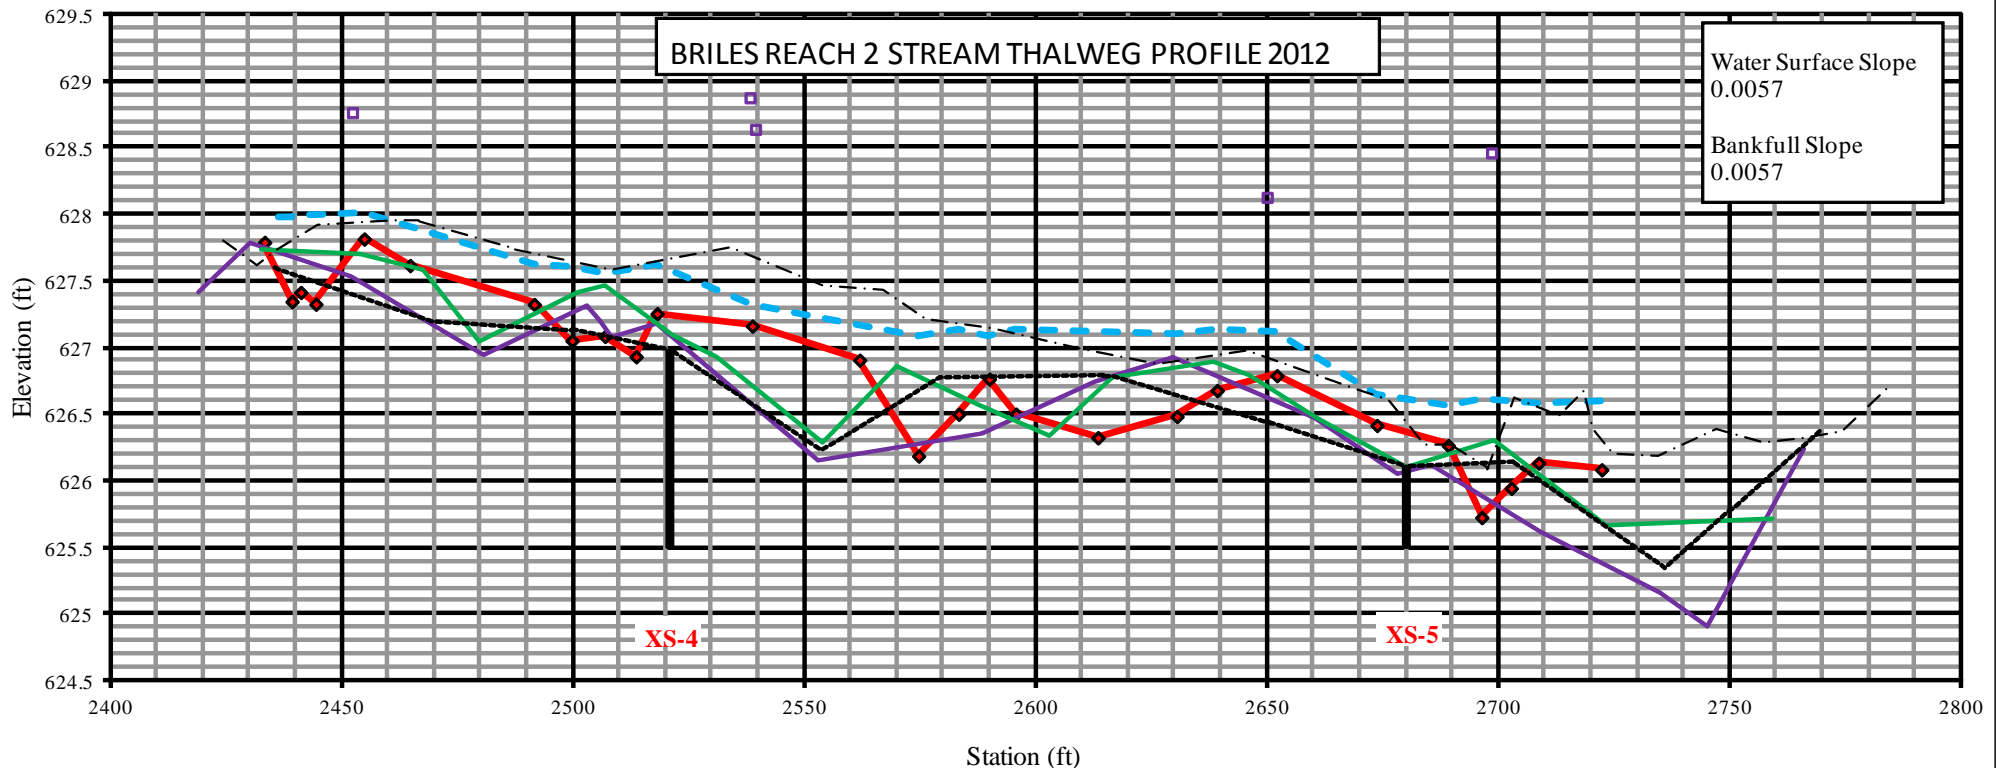

Pebble Count,	
Briles Creek	
---	
---	
Note:	<b>Cross Section 1</b>

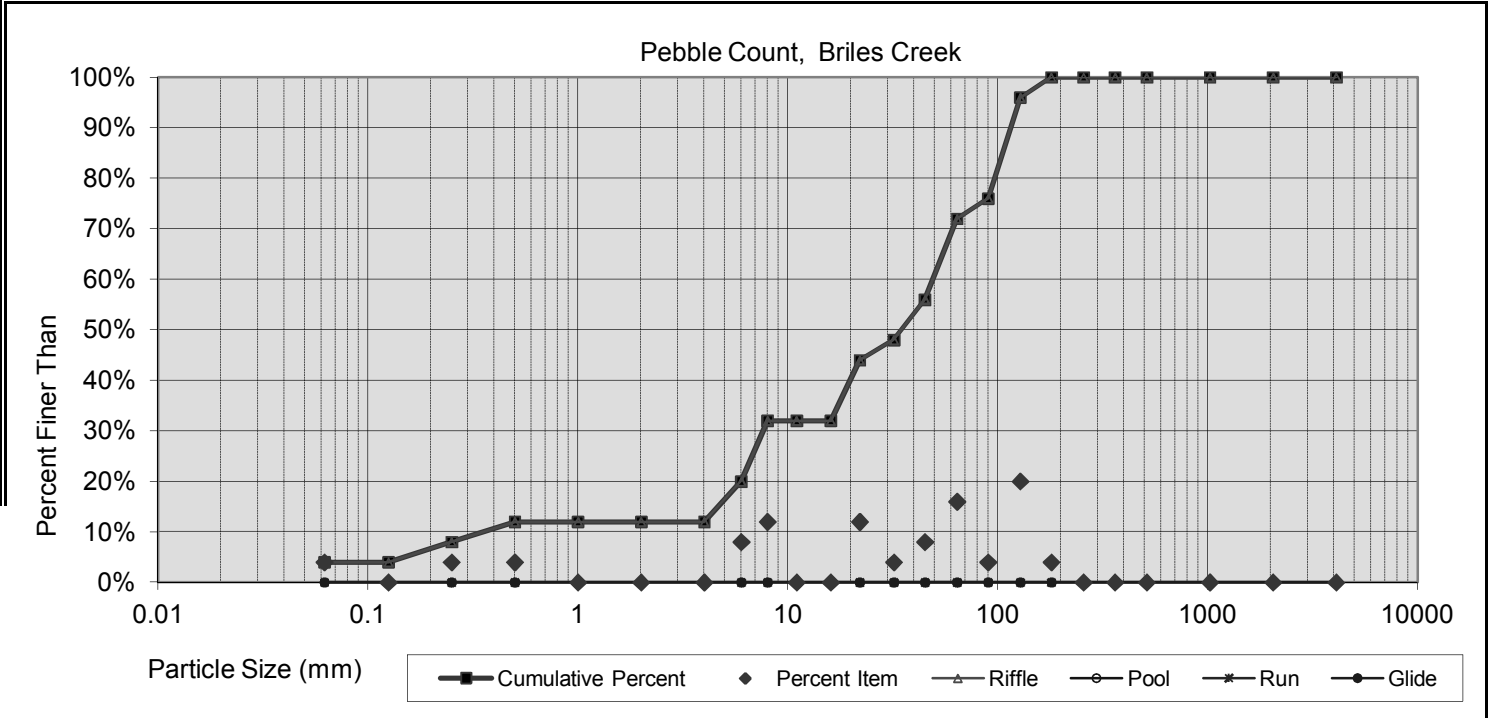


Size percent less than (mm)					Percent by substrate type					
D16	D35	D50	D84	D95	silt/clay	sand	gravel	cobble	boulder	bedrock
4.899	17.33	34.8	104	126	4%	8%	60%	28%	0%	0%

Pebble Count,


Briles Creek

Note: **Cross Section 4**

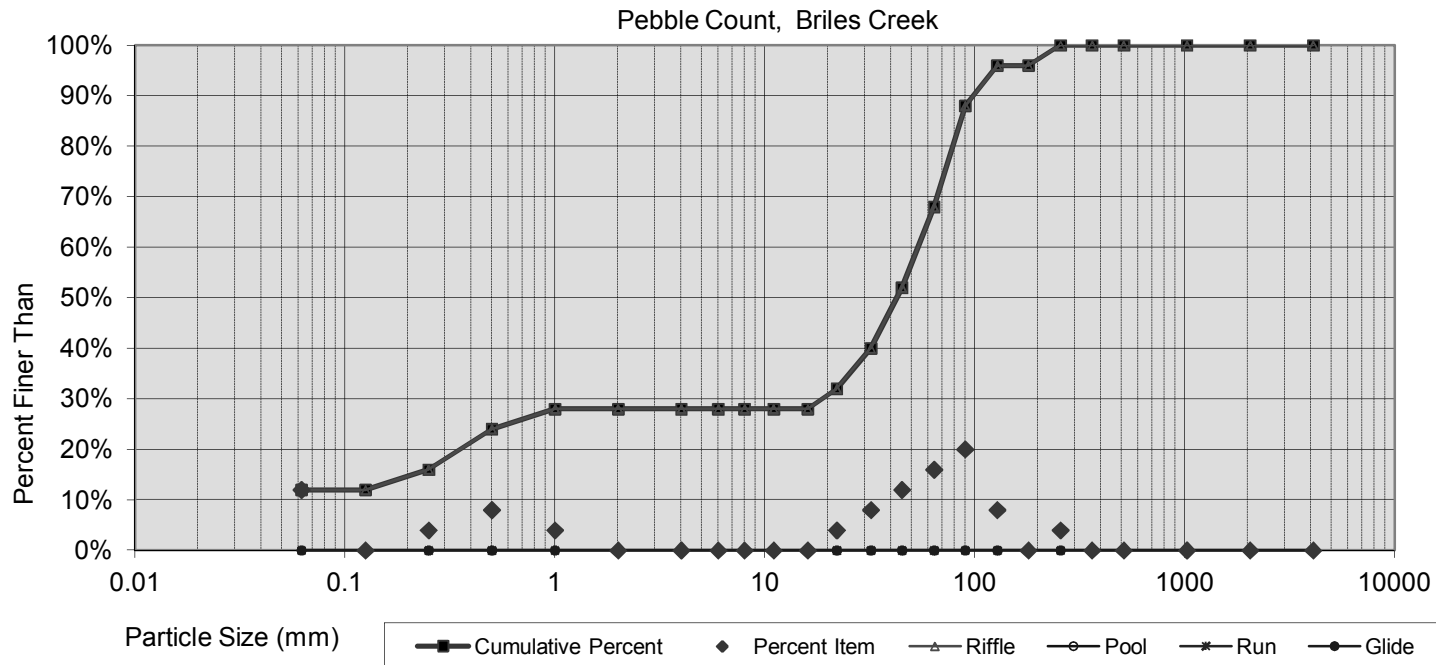

Size percent less than (mm)					Percent by substrate type					
D16	D35	D50	D84	D95	silt/clay	sand	gravel	cobble	boulder	bedrock
0.250	25.32	42.5	84	122	12%	16%	40%	32%	0%	0%

Pebble Count,	
Briles Creek	
---	
---	
Note:	<b>Cross Section 5</b>

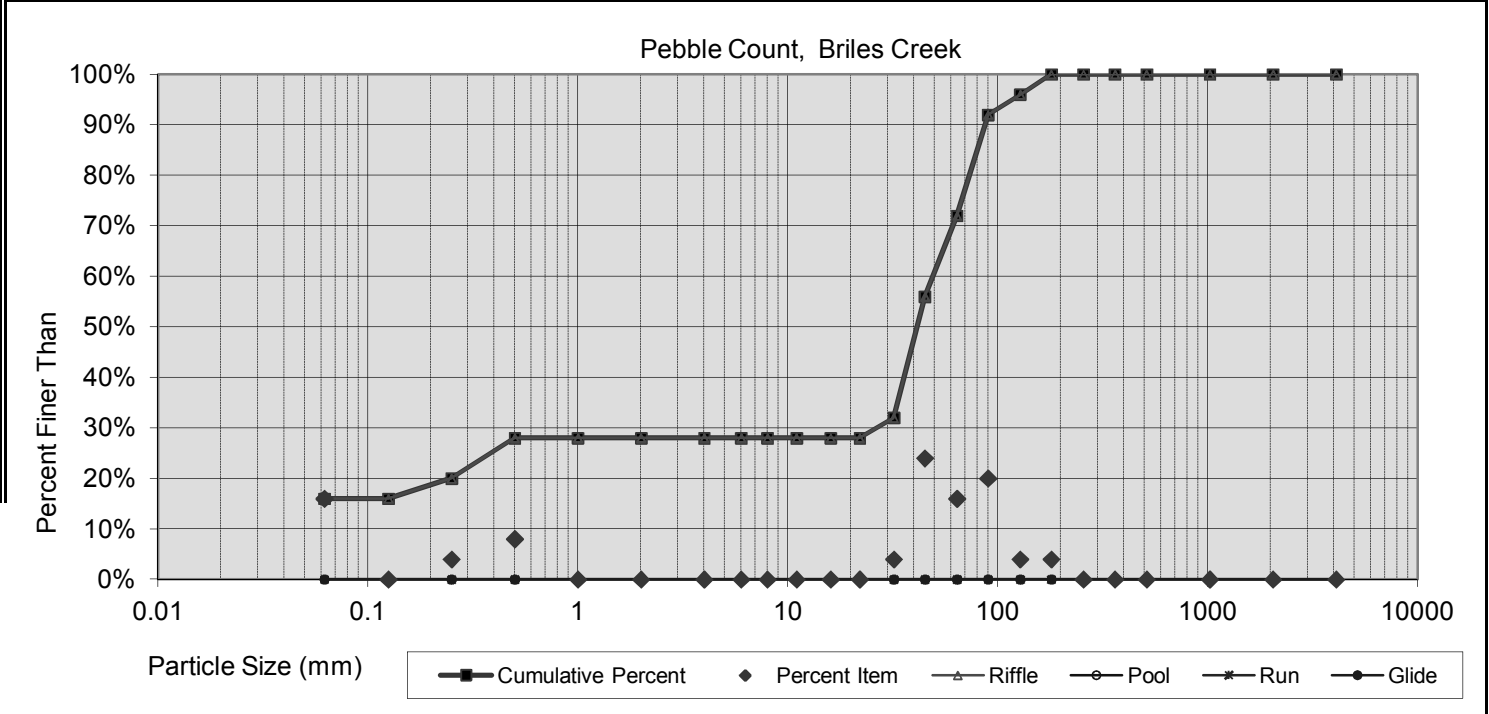

Size percent less than (mm)					Percent by substrate type					
D16	D35	D50	D84	D95	silt/clay	sand	gravel	cobble	boulder	bedrock
0.125	33.39	41.3	79	117	16%	12%	44%	28%	0%	0%



Table 10a.1 Baseline Stream Data Summary  
Briles Stream Restoration Site/047 - UTJC1 (1,425 feet)

Parameter	Gauge <sup>2</sup>	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline					
Dimension and Substrate - Riffle Only		LL	UL	Eq.	Min	Mean	Med	Max	SD <sup>5</sup>	n	Min	Mean	Med	Max	SD <sup>5</sup>	n	Min	Med	Max	Min	Mean	Med	Max	SD <sup>5</sup>	n
Bankfull Width (ft)		7.617	8.419	8.018	8.5	15.2	11.7	28.8	8.93	4	9.0	13.1	12.6	18.0	3.7	6	15.4			13.4	13.8		14.2		2
Floodprone Width (ft)					20	42	44	60	16	4	13	114	150	200	79	6	>35			38	43		>48		2
Bankfull Mean Depth (ft)		1.063	1.175	1.119	0.6	1.4	1.4	2.2	0.653	4	0.9	1.2	1.2	1.5	0.2449	6	1.1			1.1	1.2		1.2		2
<sup>1</sup> Bankfull Max Depth (ft)					1.5	2.0	1.8	2.8	0.556	4	1.3	1.6	1.6	2	0.2872	6	1.5			1.9	2.0		2.0		2
Bankfull Cross Sectional Area (ft <sup>2</sup> )		10.92	12.07	11.49	15.1	17.6	18.2	18.8	1.626	4	10.4	15.3	13.5	22.3	5.0408	6	17.0			15.9	16.1		16.2		2
Width/Depth Ratio					3.8	16.3	8.2	44.9	18.47	4	7.6	11.5	9.7	18	4.4922	6	14.0			11.3	11.9		12.4		2
Entrenchment Ratio					1.8	3.5	3.7	4.7	1.204	4	1.3	7.5	8.4	14.4	5.361	6	>2.2			2.7	3.1		>3.5		2
<sup>1</sup> Bank Height Ratio					1.0	1.7	1.9	1.8	0.408	4	1.0	1.0	1.0	1.0	0.0	6	1.0			1.0	1.0		1.0		2
<b>Profile</b>																									
Riffle Length (ft)																				20	46	44	115	40.91	19
Riffle Slope (ft/ft)					0.004	0.008		0.012			0.003	0.04		0.076			0.005	0.009	0.012	0.001	0.01	0.01	0.016	0.006	19
Pool Length (ft)											28			108			15		30	7	12	10	27	8.9069	17
Pool Max depth (ft)																				1	1.23		4.12	1.7387	17
Pool Spacing (ft)											38			181			46		154	50	82	78	157	45.77	17
<b>Pattern</b>																									
Channel Beltwidth (ft)					50						75			135			77			31	51	56	60	12.87	5
Radius of Curvature (ft)					25			57			14.5			26.8			20		50	28	41	42	55	11.03	14
Rc:Bankfull width (ft/ft)					<b>0.9</b>			<b>6.7</b>			<b>1</b>			<b>1.6</b>			<b>1.5</b>		<b>3.2</b>	<b>2</b>	<b>3</b>	<b>3</b>	<b>4</b>		
Meander Wavelength (ft)					50			100			70			148			105		170	78	92	91	110	13.15	6
Meander Width Ratio					1.7			5.9			3.6			13			5			2.2	3.7	4.1	4.3		
<b>Transport parameters</b>																									
Reach Shear Stress (competency) lb/ft <sup>2</sup>								0.69888									0.58344							0.71136	
Max part size (mm) mobilized at bankfull								53.6750893									44.47063129							54.67420176	
Stream Power (transport capacity) W/m <sup>2</sup>								120.5568									128.0916							143.1612	
<b>Additional Reach Parameters</b>																									
Rosgen Classification					G4c/E4/C4/5						C4						C4			C4					
Bankfull Velocity (fps)		3.805	4.206	4.005	1.8-3.6												3-3.8								
Bankfull Discharge (cfs)		43.73	48.33	46.03	50-65																				
Valley length (ft)																									
Channel Thalweg length (ft)					1375												1446			1432					
Sinuosity (ft)					1						1.5						1.2			1.1					
Water Surface Slope (Channel) (ft/ft)					0.004-0.012						0.007-0.012						0.005			0.0063					
BF slope (ft/ft)																	<b>0.005</b>			<b>0.0057</b>					
<sup>3</sup> Bankfull Floodplain Area (acres)																									
<sup>4</sup> % of Reach with Eroding Banks																									
Channel Stability or Habitat Metric																									
Biological or Other																									

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile. 2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).

3. Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.

4 = Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data; 5. Of value/needed only if the n exceeds 3

Table 10a.2 Baseline Stream Data Summary  
Briles Stream Restoration Site/047 - UTJC2 (362 feet)

Parameter	Gauge <sup>2</sup>	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline					
Dimension and Substrate - Riffle Only		LL	UL	Eq.	Min	Mean	Med	Max	SD <sup>5</sup>	n	Min	Mean	Med	Max	SD <sup>5</sup>	n	Min	Med	Max	Min	Mean	Med	Max	SD <sup>5</sup>	n
Bankfull Width (ft)		9.068	10.02	9.545		22.9				1	9.0	9.5		10.0		2	14.3				15.8				1
Floodprone Width (ft)						37				1	13	17		21		2	19		32		>60				1
Bankfull Mean Depth (ft)		1.21	1.337	1.274		0.8				1	1.1	1.2		1.2		2	1.2				1.3				1
<sup>1</sup> Bankfull Max Depth (ft)						2.2				1	1.3	1.4		1.5		2	2.5				2.3				1
Bankfull Cross Sectional Area (ft <sup>2</sup> )		14.38	15.9	15.14		18.8				1	10.4	10.6		10.7		2	17.0				19.8				1
Width/Depth Ratio						27.9				1	8.0	10.0		12.0		2	12.0				12.6				1
Entrenchment Ratio						1.6				1	1.3	1.8		2.3		2	2.3				>3				1
<sup>1</sup> Bank Height Ratio						2				1	1.0	1.0		1.0		2	1.0				1.0				1
<b>Profile</b>																									
Riffle Length (ft)																				17	150		232		2
Riffle Slope (ft/ft)					0.004	0.008		0.012			0.01	0.015		0.02			0.005	0.009	0.012	0.005	0.006		0.006		2
Pool Length (ft)											3			25			15		30	8	11		14		2
Pool Max depth (ft)																				0.5	0.94		1.38		2
Pool Spacing (ft)											30			59			28		86		256				1
<b>Pattern</b>																									
Channel Beltwidth (ft)					50						45						70			28	29		30		2
Radius of Curvature (ft)					25			57			13			42			28		100	44	53	48	66		3
Rc:Bankfull width (ft/ft)					<b>0.8</b>			<b>6.7</b>			<b>1.3</b>			<b>4.4</b>			<b>2</b>		<b>7</b>	<b>2.8</b>	<b>3.4</b>	<b>3</b>	<b>4.2</b>		
Meander Wavelength (ft)					50			100			96			136			72		215	45	63		81		2
Meander Width Ratio					1.7			5.9			4.5			5			5			1.7	1.8		1.9		
<b>Transport parameters</b>																									
Reach Shear Stress (competency) lb/ft <sup>2</sup>								0.39936									0.63648								0.454272
Max part size (mm) mobilized at bankfull								29.9589873									48.6910315								34.26324512
Stream Power (transport capacity) W/m <sup>2</sup>								120.5568									128.0916								84.38976
<b>Additional Reach Parameters</b>																									
Rosgen Classification								G4c/E4/C4/5						B4c					B4c						C4
Bankfull Velocity (fps)		3.867	4.274	4.071				2.1											3-3.8						
Bankfull Discharge (cfs)		58.56	64.72	61.64				50-65																	
Valley length (ft)																									
Channel Thalweg length (ft)								365											362						353
Sinuosity (ft)								1						1.2					1.1						1.05
Water Surface Slope (Channel) (ft/ft)								0.004-0.012						0.013					0.06						0.0047
BF slope (ft/ft)																			<b>0.06</b>						<b>0.0043</b>
<sup>3</sup> Bankfull Floodplain Area (acres)																									
<sup>4</sup> % of Reach with Eroding Banks																									
Channel Stability or Habitat Metric																									
Biological or Other																									

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile. 2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).

3. Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.

4 = Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data; 5. Of value/needed only if the n exceeds 3

**Table 10b.1 Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)  
Briles Stream Restoration Site/047 - UTJC1 (1,425 feet)**

Parameter	Pre-Existing Condition						Reference Reach(es) Data						Design						As-built/Baseline					
<sup>1</sup> Ri% / Ru% / P% / G% / S%																								
<sup>1</sup> SC% / Sa% / G% / C% / B% / Be%	14	27	47	7		5																		
<sup>1</sup> d16 / d35 / d50 / d84 / d95 / di <sup>P</sup> / di <sup>SP</sup> (mm)	0.3	1.2	6.1	10.6	61.9																			
<sup>2</sup> Entrenchment Class <1.5 / 1.5-1.99 / 2.0-4.9 / 5.0-9.9 / >10																								
<sup>3</sup> Incision Class <1.2 / 1.2-1.49 / 1.5-1.99 / >2.0																								

Shaded cells indicate that these will typically not be filled in.

1 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave

2 = Entrenchment Class - Assign/bin the reach footage into the classes indicated and provide the percentage of the total reach footage in each class in the table. This will result from the measured cross-sections as well as visual estimates

3 = Assign/bin the reach footage into the classes indicated and provide the percentage of the total reach footage in each class in the table. This will result from the measured cross-sections as well as the longitudinal profile

**Footnotes 2,3** - These classes are loosely built around the Rosgen classification and hazard ranking breaks, but were adjusted slightly to make for easier assignment to somewhat coarser bins based on visual estimates in the field such that measurement of every segment for ER would not be necessary.

The intent here is to provide the reader/consumer of design and monitoring information with a good general sense of the extent of hydrologic containment in the pre-existing and the rehabilitated states as well as comparisons to the reference distributions.

ER and BHR have been addressed in prior submissions as a subsample (cross-sections as part of the design survey), however, these subsamples have often focused entirely on facilitating design without providing a thorough pre-construction distribution of these parameters, leaving the reader/consumer with a sample that is weighted heavily on the stable sections of the reach. This means that the distributions for these parameters should include data from both the cross-section surveys and the longitudinal profile and in the case of ER, visual estimates. For example, the typical longitudinal profile permits sampling of the BHR at riffles beyond those subject to cross-sections and therefore can be readily integrated and provide a more complete sample distribution for these parameters, thereby providing the distribution/coverage necessary to provide meaningful comparisons.

**Table 10b.2 Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)  
Briles Stream Restoration Site/047 - UTJC2 (362 feet)**

Parameter	Pre-Existing Condition						Reference Reach(es) Data						Design						As-built/Baseline					
<sup>1</sup> Ri% / Ru% / P% / G% / S%																								
<sup>1</sup> SC% / Sa% / G% / C% / B% / Be%	14	27	47	7		5																		
<sup>1</sup> d16 / d35 / d50 / d84 / d95 / di <sup>P</sup> / di <sup>SP</sup> (mm)	0.3	1.2	6.1	10.6	61.9																			
<sup>2</sup> Entrenchment Class <1.5 / 1.5-1.99 / 2.0-4.9 / 5.0-9.9 / >10																								
<sup>3</sup> Incision Class <1.2 / 1.2-1.49 / 1.5-1.99 / >2.0																								

Shaded cells indicate that these will typically not be filled in.

1 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave

2 = Entrenchment Class - Assign/bin the reach footage into the classes indicated and provide the percentage of the total reach footage in each class in the table. This will result from the measured cross-sections as well as visual estimates

3 = Assign/bin the reach footage into the classes indicated and provide the percentage of the total reach footage in each class in the table. This will result from the measured cross-sections as well as the longitudinal profile

**Footnotes 2,3** - These classes are loosely built around the Rosgen classification and hazard ranking breaks, but were adjusted slightly to make for easier assignment to somewhat coarser bins based on visual estimates in the field such that measurement of every segment for ER would not be necessary.

The intent here is to provide the reader/consumer of design and monitoring information with a good general sense of the extent of hydrologic containment in the pre-existing and the rehabilitated states as well as comparisons to the reference distributions.

ER and BHR have been addressed in prior submissions as a subsample (cross-sections as part of the design survey), however, these subsamples have often focused entirely on facilitating design without providing a thorough pre-construction distribution of these parameters, leaving the reader/consumer with a sample that is weighted heavily on the stable sections of the reach. This means that the distributions for these parameters should include data from both the cross-section surveys and the longitudinal profile and in the case of ER, visual estimates. For example, the typical longitudinal profile permits sampling of the BHR at riffles beyond those subject to cross-sections and therefore can be readily integrated and provide a more complete sample distribution for these parameters, thereby providing the distribution/coverage necessary to provide meaningful comparisons.

**Table 11a. Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters – Cross Sections)**

**Briles Stream Restoration Site/047**

	Cross Section 1 (Riffle)							Cross Section 2 (Pool)							Cross Section 3 (Riffle)							Cross Section 4 (Riffle)							Cross Section 5 (Pool)						
Based on fixed baseline bankfull elevation <sup>1</sup>	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+
<b>Record elevation (datum) used</b>	637.2	637.2	637.2	637.2	637.2			637	637	637	637	637.3			632.8	632.8	632.8	632.8	632.8			629.9	629.9	629.9	629.9	629.9			628.9	628.9	628.9	628.9	629		
Bankfull Width (ft)	13.4	16.47	14.2	14.28	13.5			15.36	17.04	16.12	16.25	19.4			14.2	13.85	16.69	18.91	12.9			15.8	19.62	21.34	18.6	15.4			14.0	16.12	15.54	16.89	15.3		
Floodprone Width (ft)	>48	49.05	50.28	49.04	55			60.27	57.95	59.51	57.49	NA			38	42.42	43.54	46.14	42			>60	68.03	67.95	67.89	70			78.65	78.7	78.45	78.37	NA		
Bankfull Mean Depth (ft)	1.2	1.06	1.14	1.13	1.2			1.2	1.22	1.18	1.22	1.2			1.1	1.25	1.16	1.04	1.3			2.3	1.21	1.12	1.22	1.4			1.5	1.4	1.42	1.36	1.5		
Bankfull Max Depth (ft)	1.9	2.08	2.37	2.23	2.2			2.2	2.36	2.33	2.36	2.5			2.0	2.51	2.5	2.77	2.6			1.3	2.78	2.8	2.72	3			3.5	2.8	2.79	2.85	2.9		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	15.9	17.46	16.16	16.21	16.4			18.9	20.86	19.01	19.84	23.2			16.2	17.3	19.33	19.72	16.1			19.8	23.65	23.9	22.61	21.8			21.4	22.61	22.02	22.97	22.2		
Bankfull Width/Depth Ratio	11.3	15.54	12.46	12.64	11.1			12.49	13.97	13.66	13.32	NA			12.4	11.08	14.39	18.18	10.3			12.6	16.21	19.05	15.25	10.8			8.83	11.51	10.94	12.42	NA		
Bankfull Entrenchment Ratio	>3.5	2.98	3.54	3.43	4.1			3.92	3.4	3.69	3.54	NA			2.7	3.06	2.61	2.44	3.3			>3.0	3.47	3.18	3.65	4.6			5.71	4.88	5.05	4.64	NA		
Bankfull Bank Height Ratio	1.0	1.0	1.0	1.0	1			1.1	1.1	1.0	1	1			1.0	1.0	1.1	1	1			1.0	1.0	1.0	1	1			1.0	1.0	1.0	1	1		
Cross Sectional Area between end pins (ft <sup>2</sup> )	67	67	67	67	--			84	84	84	84	--			146	146	146	146	--			86	86	86	86	--			82	82	82	82	--		
d50 (mm)	0.14	31	8	7.84	34.8			0.27	62.7	38.5	3.17	--			0.062	11.17	0.04	0.3	--			0.17	42.24	20.4	30.92	42.5			0.062	15.25	14.99	7.08	41.3		

1 = Widths and depths for monitoring resurvey will be based on the baseline bankfull datum regardless of dimensional/depositional development. Input the elevation used as the datum, which should be consistent and based on the baseline datum established. If the performer has inherited the project and cannot acquire the datum used for prior years this must be discussed with EEP. If this cannot be resolved in time for a given years report submission a footnote in this should be included that states: "It is uncertain if the monitoring datum has been consistent over the monitoring history, which may influence calculated values. Additional data from a prior performer is being acquired to provide confirmation. Values will be recalculated in a future submission based on a consistent datum if determined to be necessary."

**Exhibit Table 11b.1 Monitoring Data - Stream Reach Data Summary  
Briles Stream Restoration Site/047 - UTJC1 (1,425 feet)**

Parameter	Baseline						MY-1						MY-2						MY-3						MY-4						MY-5					
	Min	Mean	Med	Max	SD <sup>4</sup>	n	Min	Mean	Med	Max	SD <sup>4</sup>	n	Min	Mean	Med	Max	SD <sup>4</sup>	n	Min	Mean	Med	Max	SD <sup>4</sup>	n	Min	Mean	Med	Max	SD <sup>4</sup>	n	Min	Mean	Med	Max	SD <sup>4</sup>	n
<b>Dimension and Substrate - Riffle only</b>																																				
Bankfull Width (ft)	13.4	13.8		14.2		2	13.9	15.2		16.5		2	14.2	15.4		16.7		2	14.3	16.6		18.9		2	12.9	13.2		13.5		2						
Floodprone Width (ft)	38	43		>48		2	42.4	45.7		49.1		2	43.5	46.9		50.3		2	46.1	47.6		49.0		2	42	48.5		55		2						
Bankfull Mean Depth (ft)	1.1	1.2		1.2		2	1.06	1.16		1.25		2	1.14	1.15		1.16		2	1.0	1.1		1.1		2	1.2	1.3		1.3		2						
<sup>1</sup> Bankfull Max Depth (ft)	1.9	2.0		2.0		2	2.08	2.3		2.51		2	2.37	2.44		2.5		2	2.2	2.5		2.8		2	2.2	2.4		2.6		2						
Bankfull Cross Sectional Area (ft <sup>2</sup> )	15.9	16.1		16.2		2	17.3	17.4		17.5		2	16.2	17.7		19.3		2	16.2	18.0		19.7		2	16.1	16.3		16.4		2						
Width/Depth Ratio	11.3	11.9		12.4		2	11.1	13.3		15.5		2	12.5	13.4		14.4		2	12.6	15.4		18.2		2	9.9	10.6		11.3		2						
Entrenchment Ratio	2.7	3.1		>3.5		2	2.98	3.02		3.06		2	2.61	3.08		3.54		2	2.4	2.9		3.4		2	3.3	3.7		4.1		2						
<sup>1</sup> Bank Height Ratio	1.0	1.0		1.0		2	1.0	1.0		1.0		2	1.0	1.1		1.1		2	1.0	1.0		1.0		2	1.0	1.0		1.0		2						
<b>Profile</b>																																				
Riffle Length (ft)	20	46	44	115	40.9095	19													19.1	38.4		78.9			4.4	18.6	12.8	69.7	16.5	34						
Riffle Slope (ft/ft)	0.0014	0.0095	0.0102	0.0163	0.0061	19													0.00535	0.01012		0.03324			0.0000	0.0106	0.0090	0.0532	0.0103	34						
Pool Length (ft)	7	12	10	27	8.906926	17													14.0	42.8		86.1			7.9	20.5	18.5	42.4	9.5	37						
Pool Max depth (ft)																			0.1	0.8		1.6			2.2	2.4	2.4	2.6		2						
Pool Spacing (ft)	50	82	78	157	45.7703	17													14.0	76.5		178.7			8.9	37	31.9	95.1	20.5	39						
<b>Pattern</b>																																				
Channel Beltwidth (ft)	31	51	56	60	12.8712	5																														
Radius of Curvature (ft)	28	41	42	55	11.0303	14																														
Rc:Bankfull width (ft/ft)	2	3	3	4																																
Meander Wavelength (ft)	78	92	91	110	13.1498	6																														
Meander Width Ratio	2.2	3.7	4.1	4.3																																
<b>Additional Reach Parameters</b>																																				
Rosgen Classification	C4						C4						C4						C4						E/C4											
Channel Thalweg length (ft)	1432						1432						1432						1432						1432											
Sinuosity (ft)	1.1						1.1						1.1						1.1						1.1											
Water Surface Slope (Channel) (ft/ft)	0.0063																								0.0062											
BF slope (ft/ft)	0.0057																								----											
<sup>3</sup> Ri% / Ru% / P% / G% / S%																																				
<sup>3</sup> SC% / Sa% / G% / C% / B% / Be%																																				
<sup>3</sup> d16 / d35 / d50 / d84 / d95 /																																				
<sup>2</sup> % of Reach with Eroding Banks																																				
Channel Stability or Habitat Metric																																				
Biological or Other																																				

Pattern data will not typically be collected unless visual data, dimensional data or profile data indicate significant shifts from baseline

Shaded cells indicate that these will typically not be filled in.  
 1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.  
 2 = Proportion of reach exhibiting banks that are eroding based on the visual survey from visual assessment table  
 3 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave  
 4. = Of value/needed only if the n exceeds 3

**Exhibit Table 11b.2 Monitoring Data - Stream Reach Data Summary  
Briles Stream Restoration Site/047 - UTJC2 (362 feet)**

Parameter	Baseline						MY-1						MY-2						MY-3						MY-4						MY-5					
	Min	Mean	Med	Max	SD <sup>4</sup>	n	Min	Mean	Med	Max	SD <sup>4</sup>	n	Min	Mean	Med	Max	SD <sup>4</sup>	n	Min	Mean	Med	Max	SD <sup>4</sup>	n	Min	Mean	Med	Max	SD <sup>4</sup>	n	Min	Mean	Med	Max	SD <sup>4</sup>	n
<b>Dimension and Substrate - Riffle only</b>																																				
Bankfull Width (ft)		15.8				1		19.6				1		21.3				1		18.6				1		15.4				1						
Floodprone Width (ft)		>60				1		68				1		68				1		67.9				1		70				1						
Bankfull Mean Depth (ft)		1.3				1		1.21				1		1.12				1		1.2				1		1.4				1						
<sup>1</sup> Bankfull Max Depth (ft)		2.3				1		2.78				1		2.8				1		2.7				1		3				1						
Bankfull Cross Sectional Area (ft <sup>2</sup> )		19.8				1		23.7				1		23.9				1		22.6				1		21.8				1						
Width/Depth Ratio		12.6				1		16.2				1		19.1				1		15.3				1		10.8				1						
Entrenchment Ratio		>3				1		3.47				1		3.18				1		3.7				1		4.6				1						
<sup>1</sup> Bank Height Ratio		1.0				1		1.0				1		1.0				1		1.0				1		1				1						
<b>Profile</b>																																				
Riffle Length (ft)	17	150		232		2													16.0	31.9		56.4			36.8	42.6	41.8	49.9	5.7	4						
Riffle Slope (ft/ft)	0.01	0.01		0.01		2													0.0109	0.0123		0.0147			0.0104	0.0110	0.0108	0.0118	0.0007	3						
Pool Length (ft)	8	11		14		2													50.5	81.3		112.1			19.6	30.1	27.3	49.3	12.8	4						
Pool Max depth (ft)																																				1
Pool Spacing (ft)		256				1																			.9	99.2	29.4			4						
<b>Pattern</b>																																				
Channel Beltwidth (ft)	28	29		30		2																														
Radius of Curvature (ft)	44	53	48	66		3																														
Rc:Bankfull width (ft/ft)	2.8	3.4	3	4.2																																
Meander Wavelength (ft)	45	63		81		2																														
Meander Width Ratio	1.7	1.8		1.9																																
<b>Additional Reach Parameters</b>																																				
Rosgen Classification	C4						C4						C4						C4						E/C4											
Channel Thalweg length (ft)	353						353						353						353						353											
Sinuosity (ft)	1.05						1.05						1.05						1.05						1.05											
Water Surface Slope (Channel) (ft/ft)	0.0047																								0.0057											
BF slope (ft/ft)	0.0043																								----											
<sup>3</sup> Ri% / Ru% / P% / G% / S%																																				
<sup>3</sup> SC% / Sa% / G% / C% / B% / Be%																																				
<sup>3</sup> d16 / d35 / d50 / d84 / d95 /																																				
<sup>2</sup> % of Reach with Eroding Banks																																				
Channel Stability or Habitat Metric																																				
Biological or Other																																				

Pattern data will not typically be collected unless visual data, dimensional data or profile data indicate significant shifts from baseline

Shaded cells indicate that these will typically not be filled in.  
 1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.  
 2 = Proportion of reach exhibiting banks that are eroding based on the visual survey from visual assessment table  
 3 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave  
 4. = Of value/needed only if the n exceeds 3

APPENDIX E  
HYDROLOGY DATA

Table 12. Verification of Bankfull Events



**Table 12. Verification of Bankfull Events**

**Briles Stream Restoration Site (EEP Project Number 047)**

Date of Data Collection	Date of Occurrence	Method	Photo (if available)
July 6, 2010	NA	Rack lines observed along channel bank	NA
April 19, 2011	NA	Rack lines observed along channel bank	SP3/SP4
2012 Monitoring	NA	No bankfull events were documented for 2012 monitoring.	NA

Photos SP3/SP4: Evidence of overbank including flow within adjacent floodplain, laid back vegetation, and large debris/wrack piles.

