

**Dye Branch II  
Stream Restoration  
NCEEP Project Number: 92255  
Monitoring Year 3  
Monitoring Contract Number: 004523  
2013 Final Report**




**Submitted to  
North Carolina Ecosystem Enhancement Program  
North Carolina Department of Environment and Natural Resources  
November 2013**



**1652 Mail Service Center  
Raleigh, NC 27699**



# Monitoring Firm

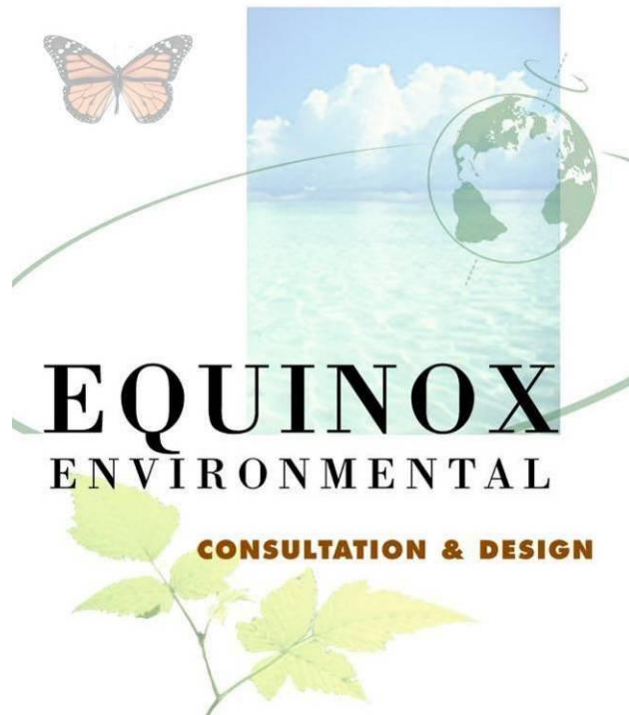

**37 Haywood Street, Suite 100  
Asheville, North Carolina 28801  
Phone: 828-253-6856**

**Project Contact: Kevin Mitchell  
Email: [kevin@equinoxenvironmental.com](mailto:kevin@equinoxenvironmental.com)**

# **Dye Branch II Stream Restoration 2013 Monitoring Report (MY 3)**

## **Table of Contents**

1.0	Executive Summary / Project Abstract	Page 1
2.0	Methodology	Page 2
3.0	References	Page 3



## Appendices

### Appendix A. Project Vicinity Map and Background Tables

- Figure 1. Vicinity Map and Directions
- Table 1a. Project Components
- Table 1b. Component Summations
- Table 2. Project Activity and Reporting History
- Table 3. Project Contacts
- Table 4. Project Attributes

### Appendix B. Visual Assessment Data

- Figure 2. Integrated Current Condition Plan View
- Table 5. Visual Stream Morphology Stability Assessment
- Table 6. Vegetation Condition Assessment
- Photo Station Photos

### Appendix C. Vegetation Plot Data

- Table 7. Vegetation Plot Criteria Attainment
- Vegetation Monitoring Plot Photos
- Table 8. CVS Vegetation Plot Metadata
- Table 9. Planted and Total Stem Counts (Species by Plot with Annual Means)

### Appendix D. Stream Survey Data

- Cross-Sections with Annual Overlays and Photos
- Longitudinal Profiles with Annual Overlays
- Pebble Count Plots with Annual Overlays
- Table 10a. Baseline Stream Data Summary
- Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)
- Table 11a. Monitoring Data – Dimensional Morphology Summary (Dimensional Parameters – Cross-Sections)
- Table 11b. Monitoring Data – Stream Reach Data Summary

### Appendix E. Hydrologic Data

- Table 12. Verification of Bankfull Events
- Figure 3. Dye Branch Water Level Logger Chart
- Figure 4. Precipitation for Mooresville, North Carolina

## 1.0 EXECUTIVE SUMMARY / PROJECT ABSTRACT

The goals and objectives stated in the Dye Branch Stream Restoration Plan (NCEEP 2005) are as follows:

- Provide a stable system of stream channels that neither aggrade nor degrade while maintaining dimension, pattern, and profile with the capacity to transport the watershed's water and sediment load;
- Improve the overall water quality and aquatic habitat by reducing sediment and waste inputs into the stream caused by bank erosion, mass-wasting, and stormwater runoff through stabilization of the stream channel and creation of a stormwater wetland; and
- Improve the overall viability of the riparian vegetative communities through establishment of native species and elimination of invasive exotic species.

The site includes a diverse assemblage of 21 planted species of native trees and shrubs. Planted species range from 3 to 6 per plot with 4 to 10 species observed when volunteers are included. Between the baseline and year 1 (MY1) monitoring vegetation data collection efforts, two monitoring plots were impacted by repairs made to the stream channel in summer 2011. A significant number of planted stems were damaged in VP7 and all plants in VP8 were destroyed. Based on the MY3 vegetation data from plots 1 through 7 the project is not meeting the 320 planted stems per acre criterion that must be achieved by the end of the year three monitoring period. Average stem density for planted stems in MY3 is approximately 271 stems per acre. Of the seven monitoring plots, five plots (~71%) are not meeting the year three interim success criteria numbers per acre. These include VP 1, 4, 5, 6, and 7; which had 162, 243, 202, 202, 243, and 272 stems per acre, respectively. However, when planted and natural stems are combined, the average stem density is 1353 stems per acre, and all seven plots meet the year three interim success criteria. Regarding invasive-exotics, 32 isolated patches of high threat invasive plants have been identified, totaling 2.61 acres. Generally, these areas are distributed throughout the project area.

Stream longitudinal profiles within the Cemetery Branch reach have remained stable among monitoring years with the exception of a few isolated areas of bed degradation and aggradation. The upstream reach of Dye Branch has multiple areas of aggradation and degradation, as well as structures with compromised structural integrity. The downstream reach of Dye Branch showed a significant downcutting between MY1 and MY2. The reach maintained relatively similar bed elevation between MY2 and MY3; however, it still shows signs of significant shifts between aggradation and degradation throughout the length of the reach. A water level logger was installed in December of 2010 and has since recorded a total of 11 bankfull events including three during MY2 and five in MY3.

Summary information/data related to the occurrence of items such as beaver or easement encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the mitigation and restoration plan documents available on EEP's website. All raw data supporting tables and figures in the appendices are available from EEP upon request.

## **2.0 Methodology**

The stream monitoring methodologies utilized in MY3 replicate those employed during the previous monitoring years and are based on standard guidance and procedures documents (Rosgen 1996; USACE 2003). Vegetation monitoring data were collected following the standard CVS-EEP Protocol for Recording Vegetation, Level II, Version 4.2 (Lee et al. 2008).

### **3.0 References**

- Lee, M.T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2008. CVS-EEP Protocol for Recording Vegetation. Version 4.2. The University of North Carolina at Chapel Hill, Department of Biology.
- NCEEP (North Carolina Ecosystem Enhancement Program). 2005. Dye Branch Stream Restoration Plan. Raleigh.
- Rosgen, D.L. 1996. Applied River Morphology. Wildland Hydrology Books. Pagosa Springs, Colorado.
- USACE (U.S. Army Corps of Engineers). 2003. Stream Mitigation Guidelines. U.S. Army Corps of Engineers, U.S. Environmental Protection Agency, North Carolina Wildlife Resources Commission, North Carolina Department of Environment and Natural Resources-Division of Water Quality. Wilmington District.




**Appendix A**  
**Project Vicinity Map and Background Tables**








The subject project site is an environmental restoration site of the NCDENR Ecosystem Enhancement Program (EEP) and is encompassed by a recorded conservation easement, but is bordered by land under private ownership. Accessing the site may require traversing areas near or along the easement boundary and therefore access by the general public is not permitted. Access by authorized personnel of state and federal agencies or their designees/contractors involved in the development, oversight and stewardship of the restoration site is permitted within the terms and timeframes of their defined roles. Any intended site visitation or activity by any person outside of these previously sanctioned roles and activities requires prior coordination with EEP.

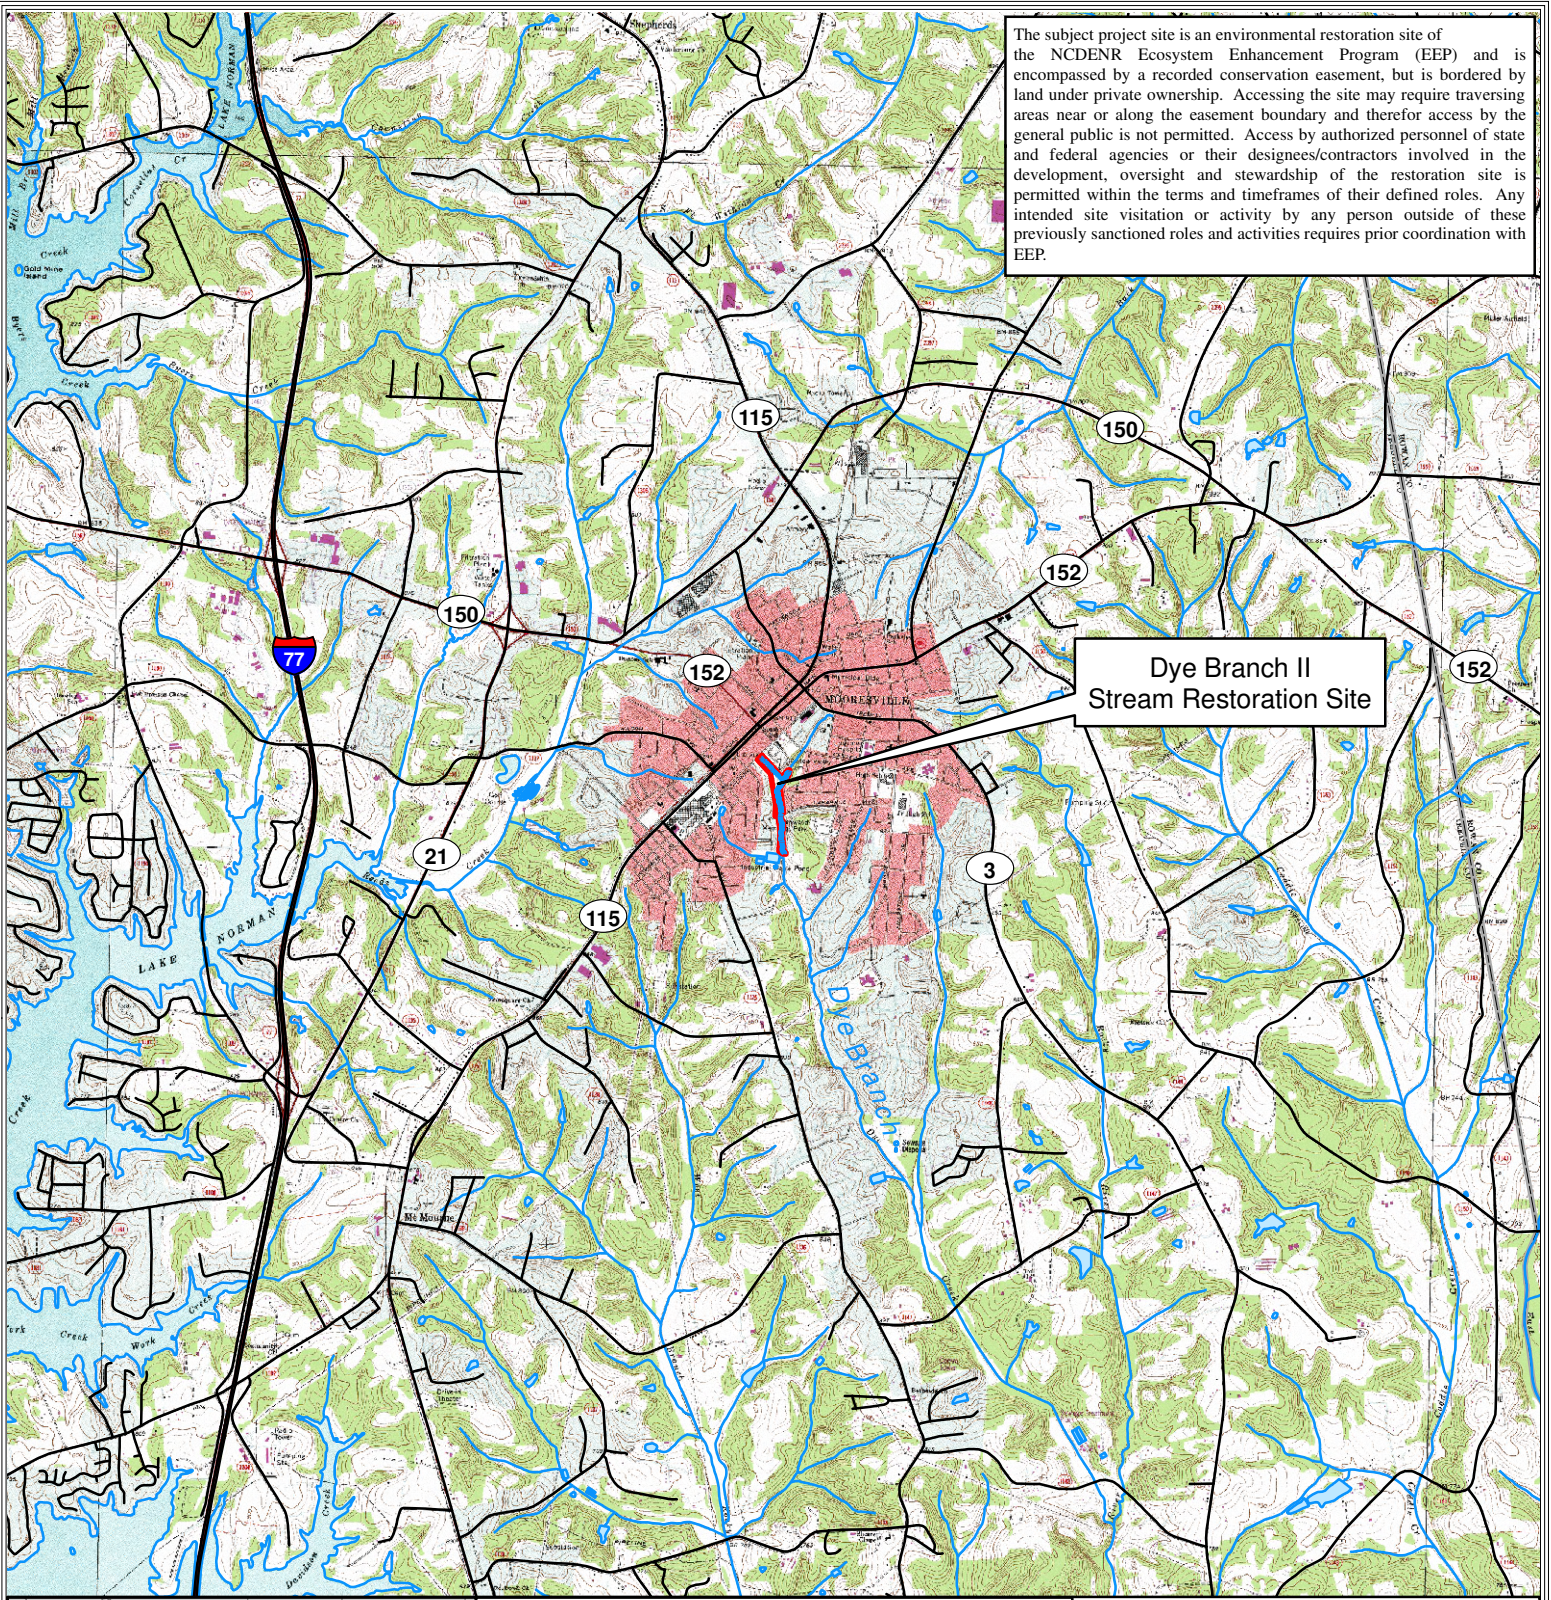

Dye Branch II Stream Restoration Site

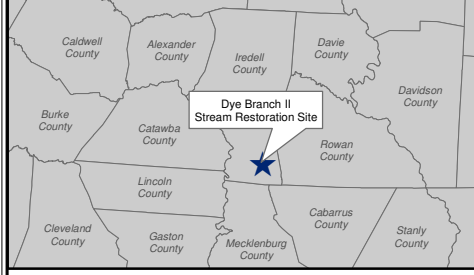

**Figure 1 - Vicinity Map**  
 Dye Branch II Stream Restoration Site  
 Project No. 92255

Directions: From Raleigh, proceed west on I-40 towards Statesville. Take Exit 152 A (I-77S) towards Charlotte. Proceed on I-77S to Exit 36 (NC-150) towards Mooresville. From NC-150 turn slight right onto McLelland Avenue/NC-152 for approximately 1.2 miles. The site is located on the west side of McLelland Avenue/NC-152.

Iredell County, North Carolina

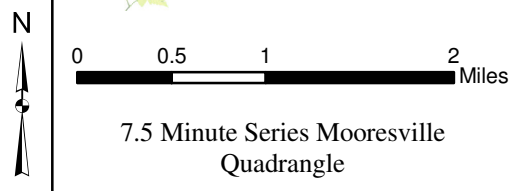




Table 1a. Project Components Dye Branch II / Project No. 92255								
Project Component or Reach ID	Existing Feet/Acres	Restoration Level	Approach	Footage or Acreage	Stationing	Buffer Acres	BMP Elements	Comment
Cemetery Branch	968 lf	R	P3	1,014 lf	0+00 - 10+14		Stormwater wetlands	
Dye Branch Upstream	1,772 lf	R	P2	1,500 lf	0+00 - 15+00		Stormwater wetlands	
Dye Branch Downstream	1,232 lf	R	P2	1,171 lf	16+00 - 27+71			

- Information unavailable

=Non-Applicable

Table 1b. Component Summations Dye Branch II / Project No. 92255							
Restoration Level	Stream (lf)	Riparian Wetland (ac)		Non-Riparian (ac)	Upland (ac)	Buffer (ac)	BMP
		Riverine	Non-Riverine				
Restoration	3,685	0.0	0.0				
Enhancement		0.0	0.0				
Enhancement I	0						
Enhancement II	0						
Creation		0.0	0.0				
Preservation	0	0.0	0.0				
HQ Preservation	0	0.0	0.0				
		0.0	0.0				
<b>Totals</b>	<b>3,685</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>3</b>

=Non-applicable

Table 2. Project Activity & Reporting History Dye Branch II / Project No. 92255		
Activity or Report	Data Collection Complete	Actual Completion or Delivery
Restoration Plan	-	Oct 2005
Final Design - Construction Plans	-	April 2006
Final Design - Repair Plans	N/A	July 2010
Construction Repairs	N/A	Dec 2010
Temporary S&E mix applied	N/A	Summer 2010
Permanent seed mix applied	N/A	Summer 2010
Planting	N/A	Feb 2011
Mitigation Plan / As-built (Year 0 Monitoring - Baseline)	March 2011	Aug 2011
Year 1 Monitoring	Nov 2011	Jan 2012
Year 2 Monitoring	Dec 2012	Jan 2013
Year 3 Monitoring	Nov 2013	Dec 2013
Year 4 Monitoring		
Year 5 Monitoring		

- Information unavailable.

N/A - Item does not apply.

<b>Table 3. Project Contacts</b> <b>Dye Branch II / Project No. 92255</b>	
<b>Designer</b>	Mulkey Engineers & Consultants 6750 Tryon Road Cary NC, 27518
Primary Project Design POC	Emmett Perdue (919) 858-1874
<b>Construction Contractor</b>	Fluvial Solutions P.O. Box 28749 Raleigh, NC 27611
Construction Contractor POC	Peter Jelenevsky (919) 605-6134
<b>Planting Contractor</b>	Fluvial Solutions P.O. Box 28749 Raleigh, NC 27611
Planting Contractor POC	Peter Jelenevsky (919) 605-6134
<b>Seeding Contractor</b>	Fluvial Solutions P.O. Box 28749 Raleigh, NC 27611
Seeding Contractor POC	Peter Jelenevsky (919) 605-6134
Seed Mix Sources	Hanes Geo Components Winston-Salem, NC 27101
Nursery Stock Suppliers	North Carolina Forest Service Goldsboro, NC 27530
<b>Monitoring Performers (Y0) - 2010</b>	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Win Taylor (828) 253-6856
Vegetation Monitoring POC	Win Taylor (828) 253-6856
<b>Monitoring Performers (Y1) - 2011</b>	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Win Taylor (828) 253-6856
Vegetation Monitoring POC	Win Taylor (828) 253-6856
<b>Monitoring Performers (Y2) - 2012</b>	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Kevin Mitchell (828) 253-6856
Vegetation Monitoring POC	Kevin Mitchell (828) 253-6856
<b>Monitoring Performers (Y3) - 2013</b>	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Hunter Terrell (828) 253-6856
Vegetation Monitoring POC	Hunter Terrell (828) 253-6856
<b>Monitoring Performers (Y4) - 2014</b>	
Stream Monitoring POC	
Vegetation Monitoring POC	
<b>Monitoring Performers (Y5) - 2015</b>	
Stream Monitoring POC	
Vegetation Monitoring POC	

<b>Table 4. Project Attributes</b>		
<b>Dye Branch II / Project No. 92255</b>		
Project County	Iredell	
Physiographic Region	Piedmont	
Ecoregion	Southern Outer Piedmont	
River Basin	Yadkin - Pee Dee	
USGS HUC	03040105010010	
NCDWQ Sub-Basin	03-07-11	
Within Extent of EEP Watershed Plan	Upper Rocky River Local Watershed Plan	
WRC Class	Warm	
% of Project Easement Fenced or Demarcated	100%	
Beaver Activity Observed During Design Phase	No	
<b>Restoration Component Attributes</b>		
	<b>Dye Branch</b>	<b>Cemetery Branch</b>
Drainage Area (sq.mi.)	0.60	0.06
Stream Order	First / Second	First
Restored Length (feet)	2,671	1,014
Perennial or Intermittent	Perennial	Perennial
Watershed Type	Urban	
Watershed LULC Distribution		
	Urban	85%
	Other	15%
Watershed Impervious Cover	-	
NCDWQ AU/Index Number	13-17-2	
NCDWQ Classification	C	
303d Listed	Yes	
Upstream of 303d Listed Segment	Yes	
Reasons for 303d Listing or Stressor	Poor Bioclassification	
Total Acreage of Easement	12.0	
Total Vegetated Acreage within Easement	12.0	
Total Planted Acreage as Part of Restoration	8.9	
Rosgen Classification of Pre-Existing	E4 / G4c	E4
Rosgen Classification of As-Built	C	C
Valley Type	-	-
Valley Slope	0.0097 / 0.0125	0.0217
Valley Side Slope Range	-	-
Valley Toe Slope Range	-	-
Cowardin Classification	N/A	N/A
Trout Waters Designation	No	No
Species of Concern, Endangered, Etc.	None	
Dominant Soil Series and Characteristics	Chewacla / Cecil / Colfax	
	Series	
	Depth	-
	Clay%	-
	K	-
	T	-

- Information unavailable.

N/A - Item does not apply.







# **Appendix B**

## **Visual Assessment Data**



Figure 2. Integrated Current Condition Plan View



Prepared for	<b>Project:</b> Dye Branch Stream Restoration	Notes: 1) Base Map Data Provided by Mulkey Engineers & Consultants	Prepared by
	Monitoring Year 3 - Integrated Current Condition Plan View Draft Iredell County, North Carolina	2) NC OneMap 2010 Aerial Photo 3) Dominant Invasive Species Include Ligustrum sp., Lonicera japonica, Pueraria montana var. lobata, and Lespedeza cuneata.	
	Sheet 1 of 1		
	Date	Project Number	
	November 2013	NCEP # 92255	



<b>Table 5. Visual Stream Morphology Stability Assessment</b> <b>Dye Branch II / Project No. 92255 - Cemetery Branch</b> <b>Assessed Length 1,014 feet</b>												
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation		
<b>1. Bed</b>	<b>1. Vertical Stability</b> (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			1	9	99%					
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%					
	<b>2. Riffle Condition</b>	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	14	14			100%					
		<b>3. Meander Pool Condition</b>	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6).	14			15				93%	
	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).		15	15			100%					
	<b>4. Thalweg Position</b>	1. Thalweg centering at upstream of meander bend (Run).	15	15			100%					
		2. Thalweg centering at downstream of meander bend (Glide).	14	14			100%					
<b>2. Bank</b>	<b>1. Scoured / Eroding</b>	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.					0	0	100%	N/A	N/A	N/A
	<b>2. Undercut</b>	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.					0	0	100%	N/A	N/A	N/A
	<b>3. Mass Wasting</b>	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A		
<b>Totals</b>					0	0	100%	N/A	N/A	N/A		
<b>3. Engineered Structures</b>	<b>1. Overall Integrity</b>	Structures physically intact with no dislodged boulders or logs.	32	32			100%					
	<b>2. Grade Control</b>	Grade control structures exhibiting maintenance of grade across the sill.	28	28			100%					
	<b>2a. Piping</b>	Structures lacking any substantial flow underneath sills or arms.	27	28			96%					
	<b>3. Bank Protection</b>	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	4	4			100%					
	<b>4. Habitat</b>	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio $\geq$ 1.6. Rootwads/logs providing some cover at base-flow.	13	13			100%					

N/A - Item does not apply.

Table 5 cont'd. Visual Stream Morphology Stability Assessment Dye Branch II / Project No. 92255 - Dye Branch - Upstream Assessed Length 1,500 feet										
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			4	189	87%			
		2. <u>Degradation</u> - Evidence of downcutting.			2	112	93%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	15	17			88%			
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6).	18	20					
	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).		18	20			90%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	14	17			82%			
		2. Thalweg centering at downstream of meander bend (Glide).	14	16			88%			
	2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			9	240			
2. Undercut		Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
3. Mass Wasting		Bank slumping, calving, or collapse.			3	72	98%	2	0	98%
<b>Totals</b>					12	312	90%	7	50	91%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	26	30			87%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	8	8			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	6	8			75%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	18	23			78%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio $\geq$ 1.6. Rootwads/logs providing some cover at base-flow.	4	5			80%			

N/A - Item does not apply.

Table 5 cont'd. Visual Stream Morphology Stability Assessment Dye Branch II / Project No. 92255 - Dye Branch - Downstream Assessed Length 1,171 feet										
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			4	113	90%			
		2. <u>Degradation</u> - Evidence of downcutting.			2	98	92%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	11	11			100%			
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6).	10	10					
	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).		10	10			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	8	10			80%			
		2. Thalweg centering at downstream of meander bend (Glide).	9	10			90%			
	2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			4	128			
2. Undercut		Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
3. Mass Wasting		Bank slumping, calving, or collapse.			2	117	95%	1	22	96%
<b>Totals</b>					6	245	90%	1	22	90%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	15	22			68%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	6	8			75%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	4	8			50%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	12	14			86%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio $\geq$ 1.6. Rootwads/logs providing some cover at base-flow.	5	5			100%			

N/A - Item does not apply.

<b>Table 6. Vegetation Condition Assessment</b> <b>Dye Branch II / Project No. 92255</b> <b>Planted Acreage 9.0</b>					
Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	Stipple Black Dots White Background	1	0.01	<1%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	N/A	0	0.00	0%
<b>Totals</b>			1	0.01	<1%
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	N/A	0	0.00	0%
<b>Cumulative Totals</b>			1	0.01	<1%
<b>Easement Acreage 12.01</b>					
Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage
4. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale).	Cross Hatch (Red - Dense/Yellow - Present)	33	2.61	22%
5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	Stipple Orange Dots White Background	1	0.06	0.5%

N/A - Item does not apply.





Cemetery Branch – Permanent Photo Station 1  
Downstream



Cemetery Branch – Permanent Photo Station 2  
Upstream





Cemetery Branch – Permanent Photo Station 2  
Downstream



Dye Branch – Permanent Photo Station 3  
Downstream





Dye Branch – Permanent Photo Station 4  
Upstream



Dye Branch – Permanent Photo Station 5  
Upstream





Dye Branch – Permanent Photo Station 6  
Upstream



Dye Branch – Permanent Photo Station 7  
Downstream





Dye Branch – Permanent Photo Station 8  
Upstream



Dye Branch – Permanent Photo Station 9  
Upstream





# **Appendix C**

## **Vegetation Plot Data**

<b>Table 7. Vegetation Plot Criteria Attainment Dye Branch II / Project No. 92255</b>		
<b>Vegetation Plot ID</b>	<b>Vegetation Survival Threshold Met?</b>	<b>Tract Mean</b>
1	No	14%
2	Yes	
3	Yes	
4	No	
5	No	
6	No	
7	No	



Vegetation Monitoring Plot 1  
Monitoring Year 3 – July 9, 2013



Vegetation Monitoring Plot 2  
Monitoring Year 3 – July 9, 2013





Vegetation Monitoring Plot 3  
Monitoring Year 3 – July 9, 2013



Vegetation Monitoring Plot 4  
Monitoring Year 3 – July 9, 2013





Vegetation Monitoring Plot 5  
Monitoring Year 3 – July 9, 2013



Vegetation Monitoring Plot 7  
Monitoring Year 3 – July 9, 2013

<b>Table 8. CVS Vegetation Plot Metadata Dye Branch II / Project No. 92255</b>	
<b>Report Prepared By</b>	William Carson
<b>Date Prepared</b>	7/15/2013 10:39
<b>Database Name</b>	Equinox-2013-A-DyeBranch_MY3.mdb
<b>Database Location</b>	Z:\ES\NRI&M\EEP Monitoring\Dye Branch\DB-MY3-2013\Data\Veg
<b>Computer Name</b>	SENIORSCIENTIST
<b>File Size</b>	51560448
<b>DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT</b>	
<b>Metadata</b>	Description of database file, the report worksheets, and a summary of project(s) and project data.
<b>Project Planted</b>	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
<b>Project Total Stems</b>	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
<b>Plots</b>	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
<b>Vigor</b>	Frequency distribution of vigor classes for stems for all plots.
<b>Vigor by Species</b>	Frequency distribution of vigor classes listed by species.
<b>Damage</b>	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
<b>Damage by Species</b>	Damage values tallied by type for each species.
<b>Damage by Plot</b>	Damage values tallied by type for each plot.
<b>Planted Stems by Plot and Species</b>	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
<b>ALL Stems by Plot and Species</b>	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
<b>PROJECT SUMMARY</b>	
<b>Project Code</b>	92255
<b>Project Name</b>	Dye Branch
<b>Description</b>	
<b>River Basin</b>	Yadkin-Pee Dee
<b>Length(ft)</b>	
<b>Stream-to-Edge Width (ft)</b>	
<b>Area (sq m)</b>	
<b>Required Plots (calculated)</b>	
<b>Sampled Plots</b>	7








# **Appendix D**

## **Stream Survey Data**

**Cemetery Branch  
Cross-Section 1 - Pool  
Station 1 + 04.27**

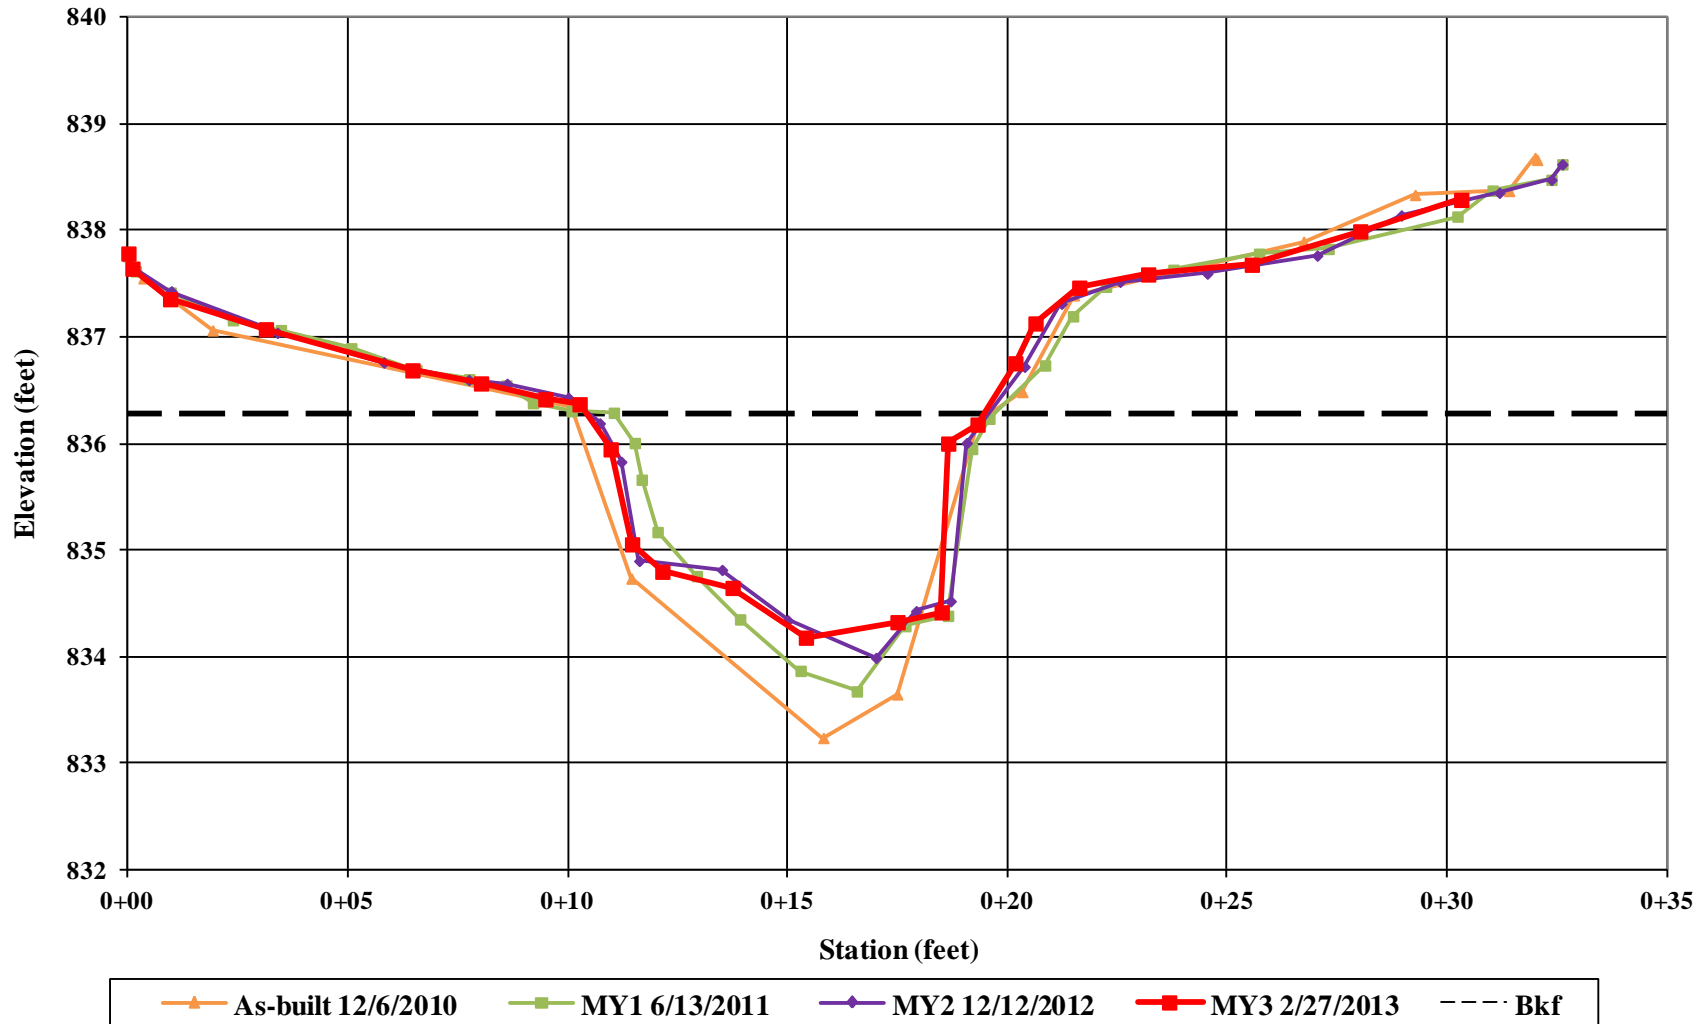



Cemetery Branch – Cross-Section 1 – Pool  
Left Bank Descending  
Monitoring Year 3 – February 27, 2013



Cemetery Branch – Cross-Section 1 – Pool  
Right Bank Descending  
Monitoring Year 3 – February 27, 2013






Cemetery Branch – Cross-Section 1 – Pool  
Downstream  
Monitoring Year 3 – February 27, 2013



Cemetery Branch – Cross-Section 1 – Pool  
Upstream  
Monitoring Year 3 – February 27, 2013



**Cemetery Branch  
Cross-Section 2 - Riffle  
Station 6 + 40.40**

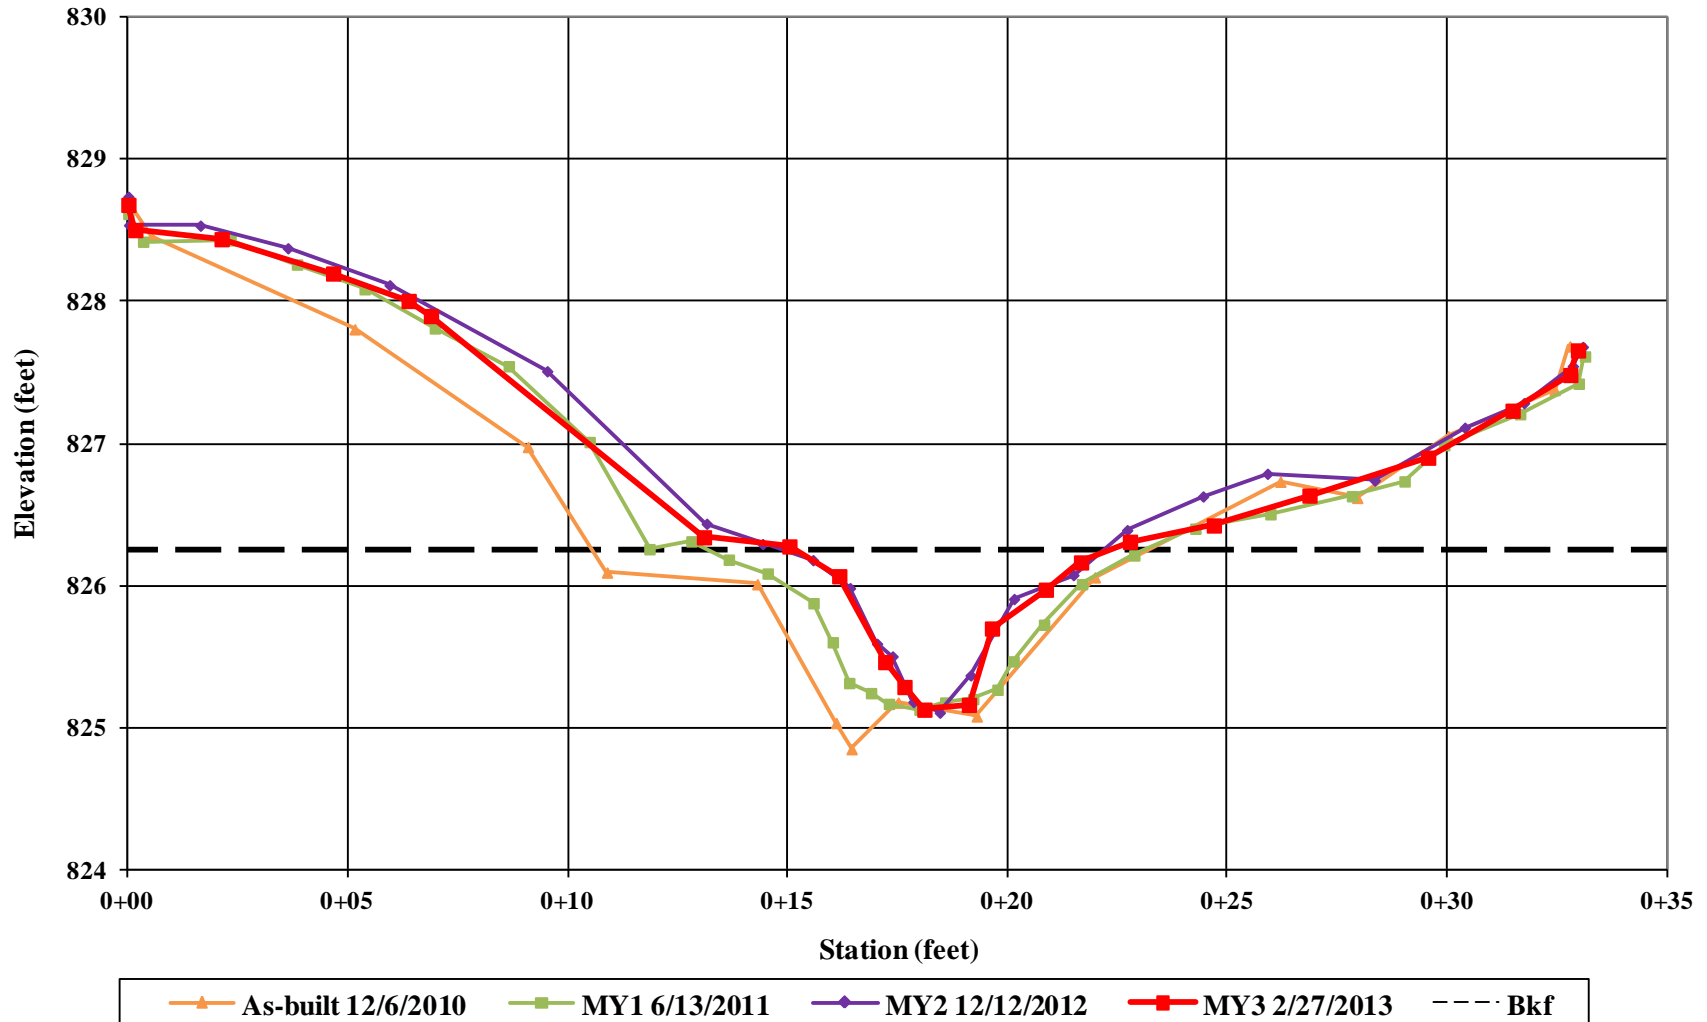



Cemetery Branch – Cross-Section 2 – Riffle  
Left Bank Descending  
Monitoring Year 3 – February 27, 2013



Cemetery Branch – Cross-Section 2 – Riffle  
Right Bank Descending  
Monitoring Year 3 – February 27, 2013






Cemetery Branch – Cross-Section 2 – Riffle  
Downstream  
Monitoring Year 3 – February 27, 2013



Cemetery Branch – Cross-Section 2 – Riffle  
Upstream  
Monitoring Year 3 – February 27, 2013



**Cemetery Branch  
Cross-Section 3 - Riffle  
Station 8 + 77.10**

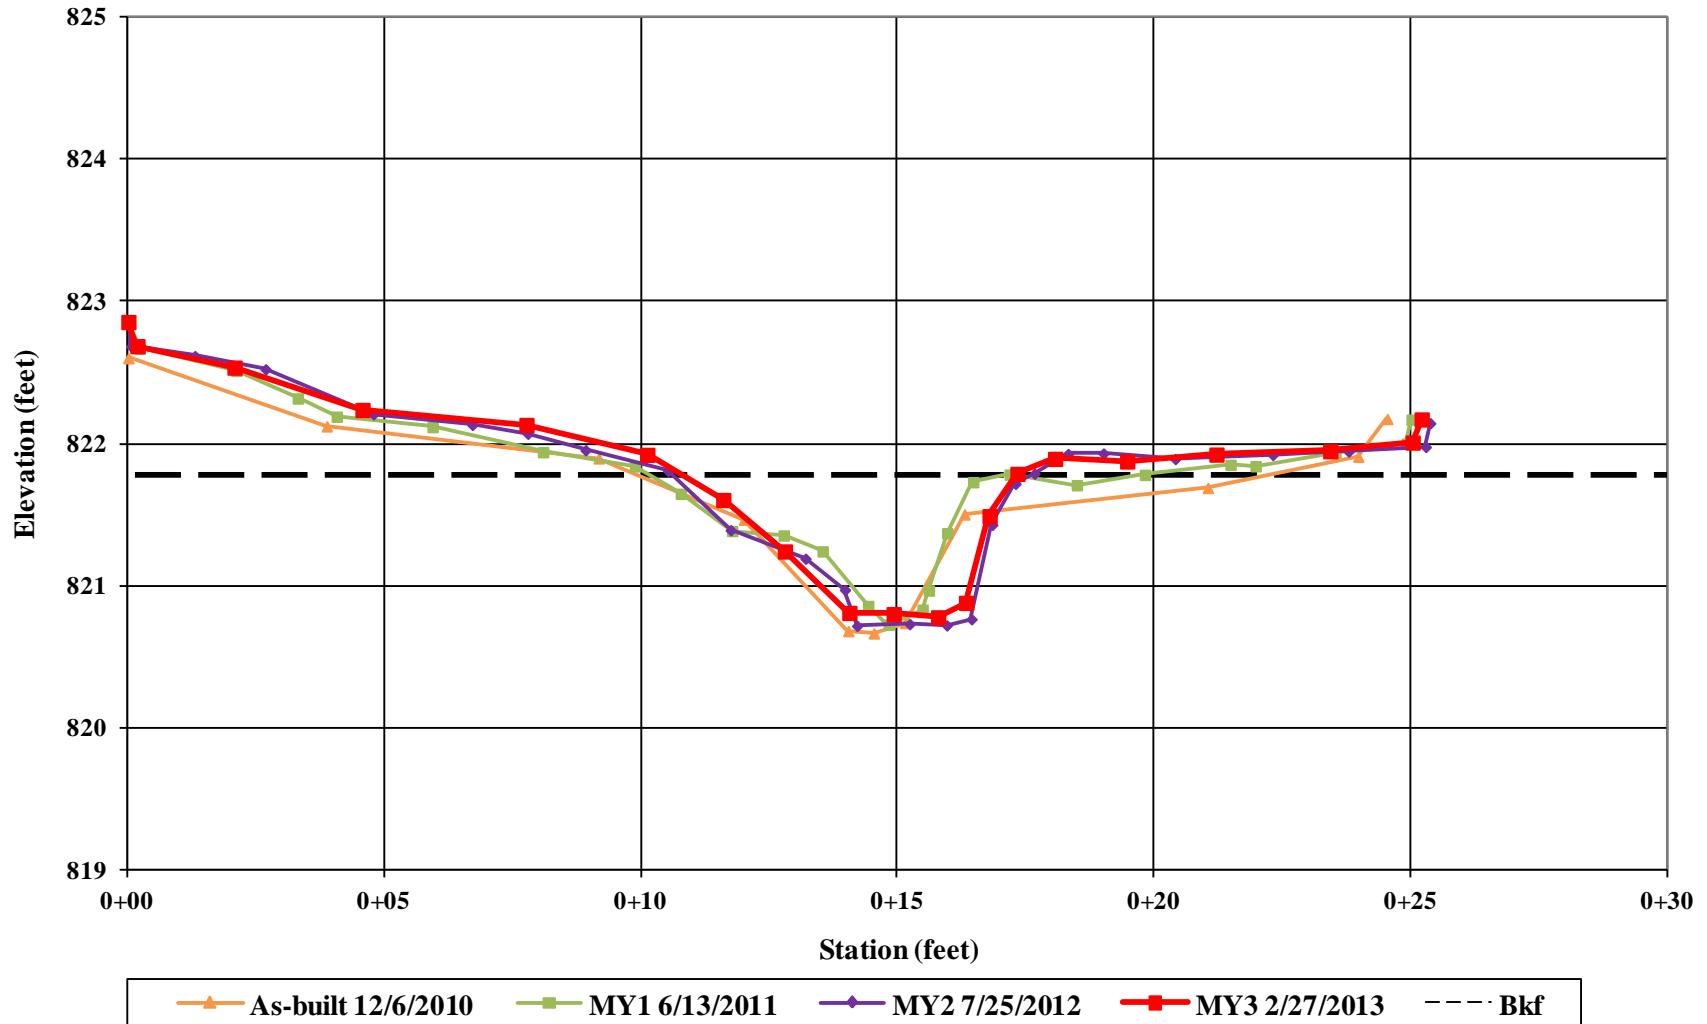



Cemetery Branch – Cross-Section 3 – Riffle  
Left Bank Descending  
Monitoring Year 3 – February 27, 2013



Cemetery Branch – Cross-Section 3 – Riffle  
Right Bank Descending  
Monitoring Year 3 – February 27, 2013






Cemetery Branch – Cross-Section 3 – Riffle  
Downstream  
Monitoring Year 3 – February 28, 2013



Cemetery Branch – Cross-Section 3 – Riffle  
Upstream  
Monitoring Year 3 – February 28, 2013



**Dye Branch - Upstream  
Cross-Section 4 - Riffle  
Station 1 + 15.75**

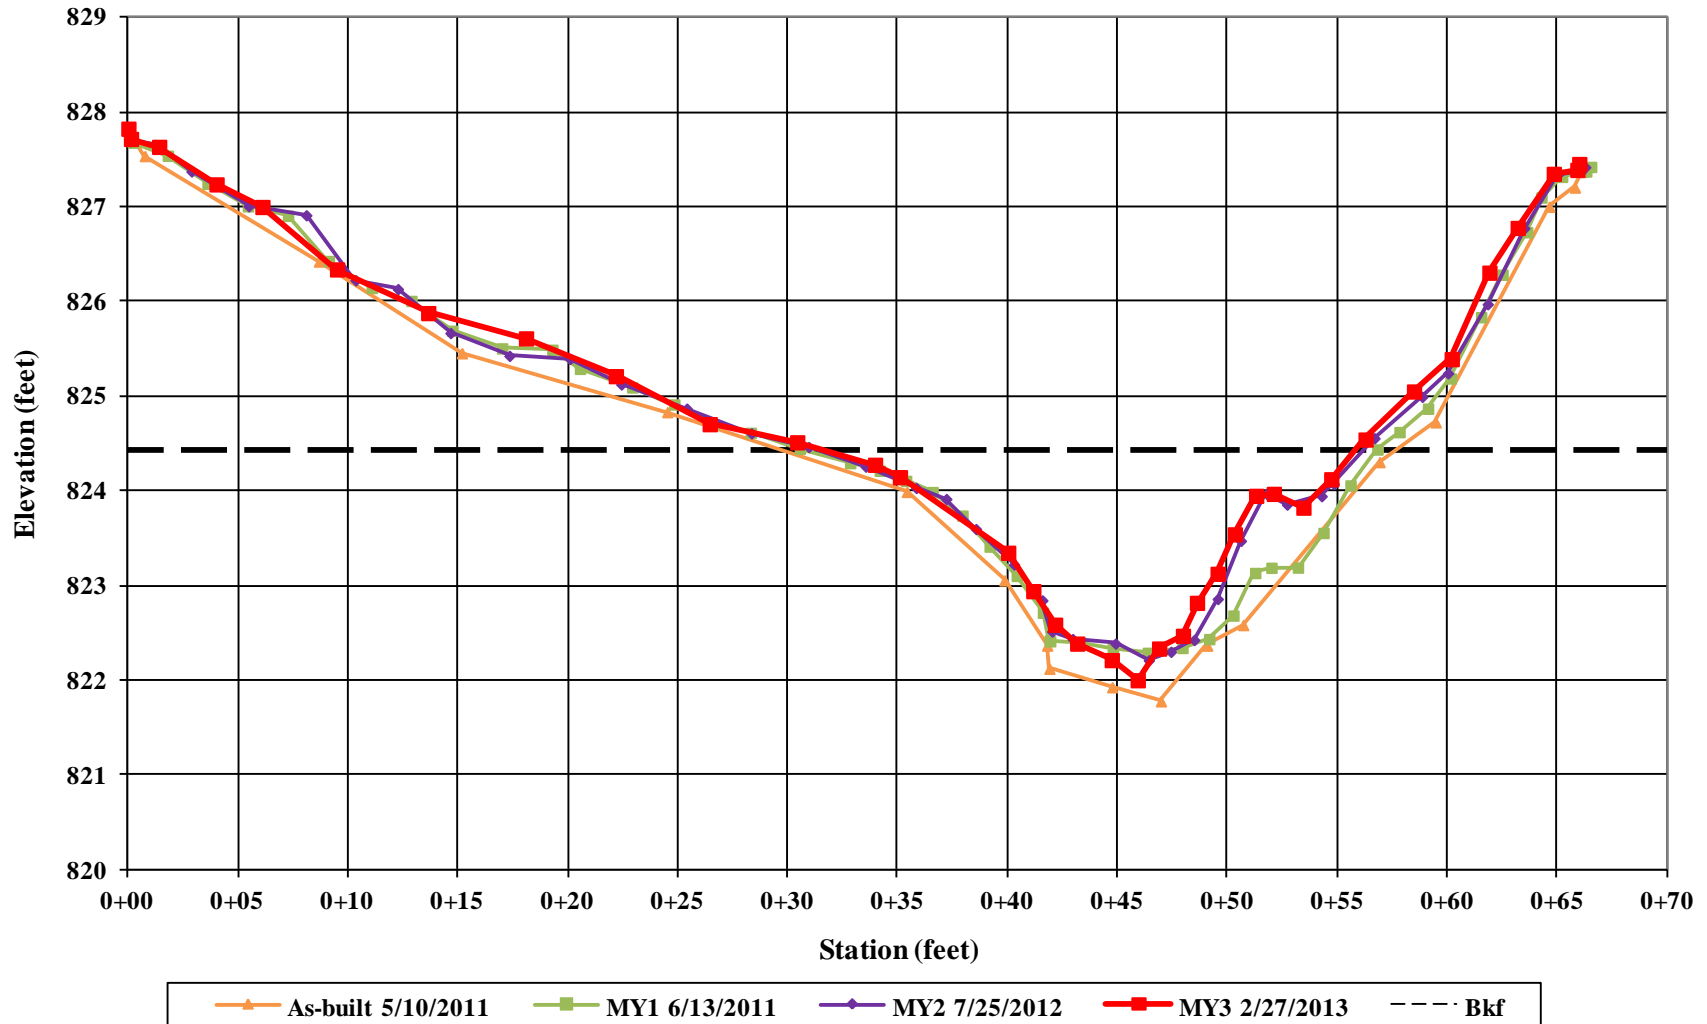



Dye Branch Upstream Reach – Cross-Section 4 – Riffle  
Left Bank Descending  
Monitoring Year 3 – February 28, 2013



Dye Branch Upstream Reach – Cross-Section 4 – Riffle  
Right Bank Descending  
Monitoring Year 3 – February 28, 2013






Dye Branch Upstream Reach – Cross-Section 4 – Riffle  
Downstream  
Monitoring Year 3 – February 28, 2013



Dye Branch Upstream Reach – Cross-Section 4 – Riffle  
Upstream  
Monitoring Year 3 – February 28, 2013



**Dye Branch - Upstream  
Cross-Section 5 - Pool  
Station 7 + 74.58**

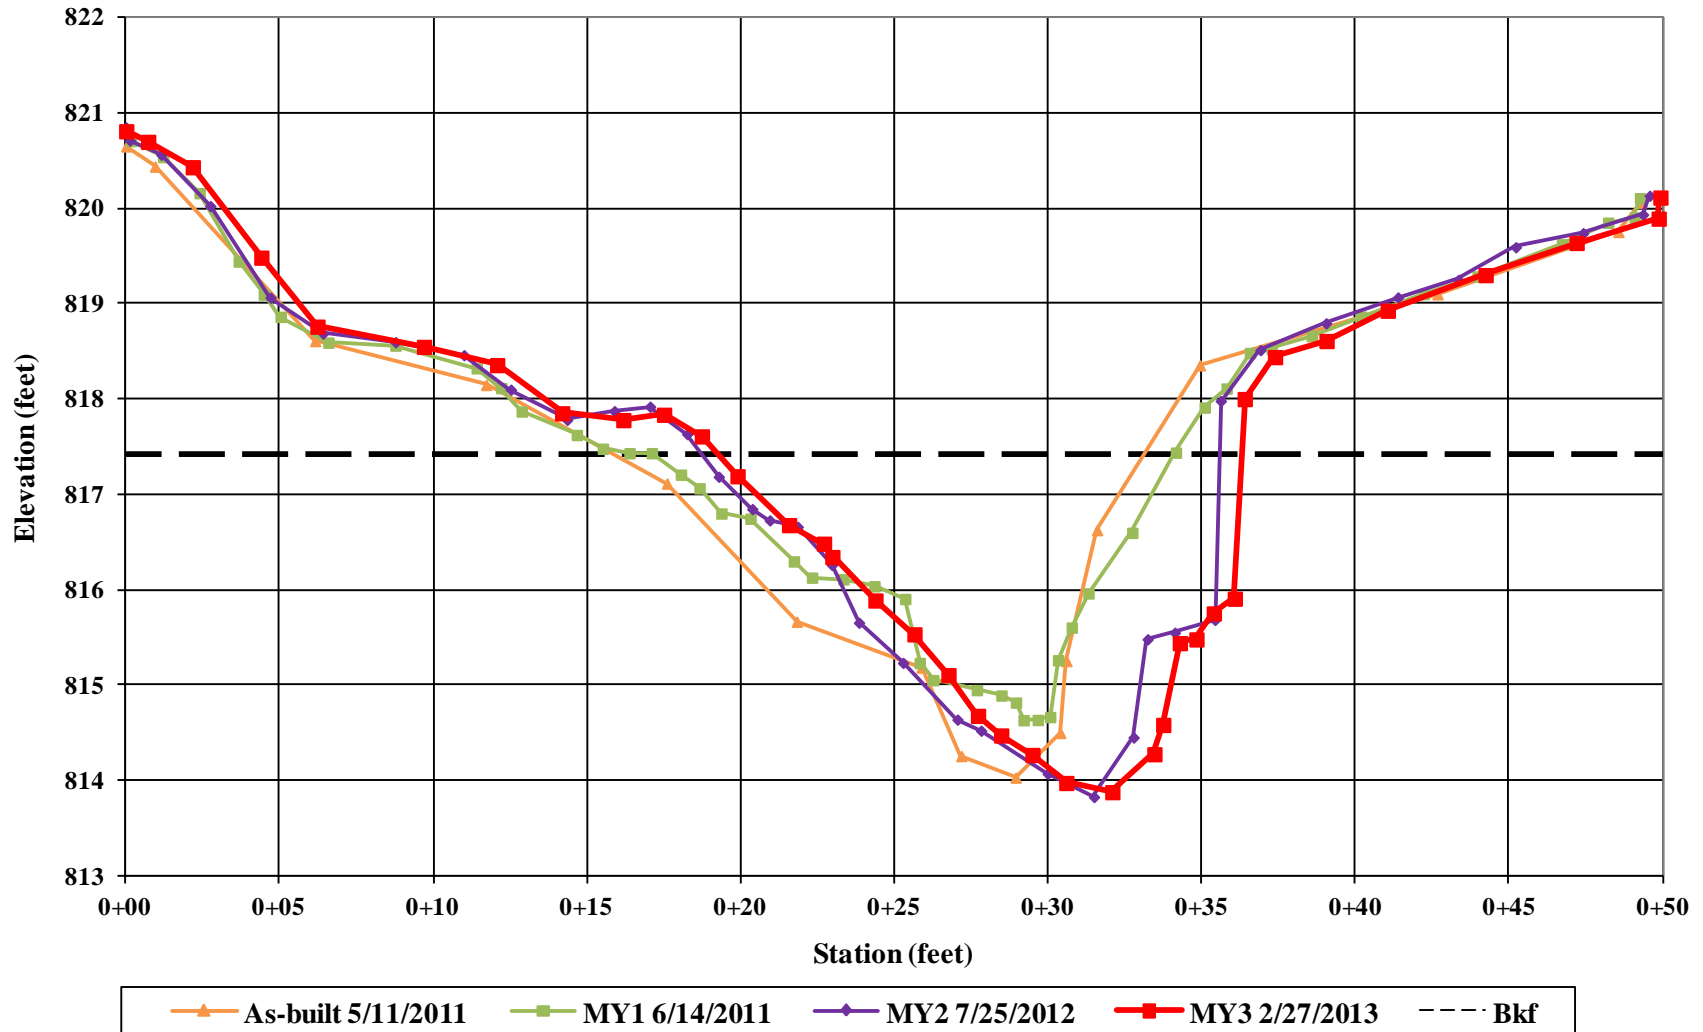



Dye Branch Upstream Reach – Cross-Section 5 – Pool  
Left Bank Descending  
Monitoring Year 3 – February 28, 2013



Dye Branch Upstream Reach – Cross-Section 5 – Pool  
Right Bank Descending  
Monitoring Year 3 – February 28, 2013






Dye Branch Upstream Reach – Cross-Section 5 – Pool  
Downstream  
Monitoring Year 3 – February 28, 2013



Dye Branch Upstream Reach – Cross-Section 5 – Pool  
Upstream  
Monitoring Year 3 – February 28, 2013



**Dye Branch - Upstream  
Cross-Section 6 - Riffle  
Station 10 + 75.57**

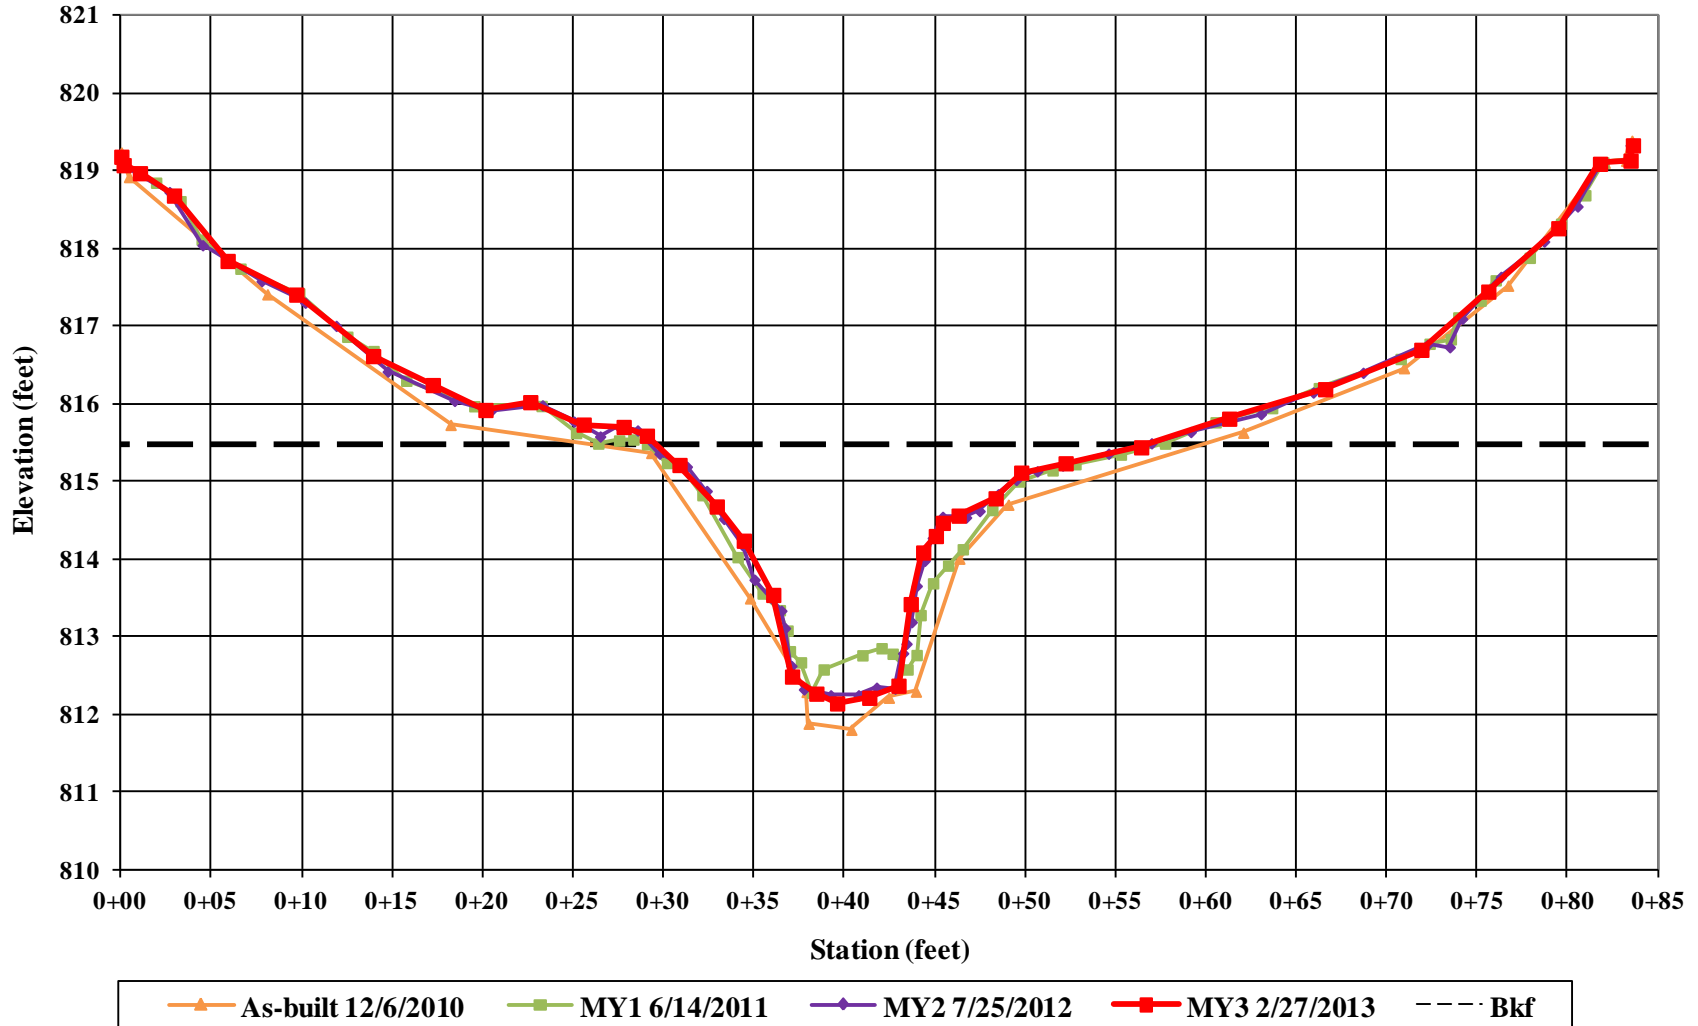



Dye Branch Upstream Reach – Cross-Section 6 – Riffle  
Left Bank Descending  
Monitoring Year 3 – February 28, 2013



Dye Branch Upstream Reach – Cross-Section 6 – Riffle  
Right Bank Descending  
Monitoring Year 3 – February 28, 2013






Dye Branch Upstream Reach – Cross-Section 6 – Riffle  
Downstream  
Monitoring Year 3 – February 28, 2013



Dye Branch Upstream Reach – Cross-Section 6 – Riffle  
Upstream  
Monitoring Year 3 – February 28, 2013

**Dye Branch - Upstream  
Cross-Section 7 - Riffle  
Station 13+ 85.87**

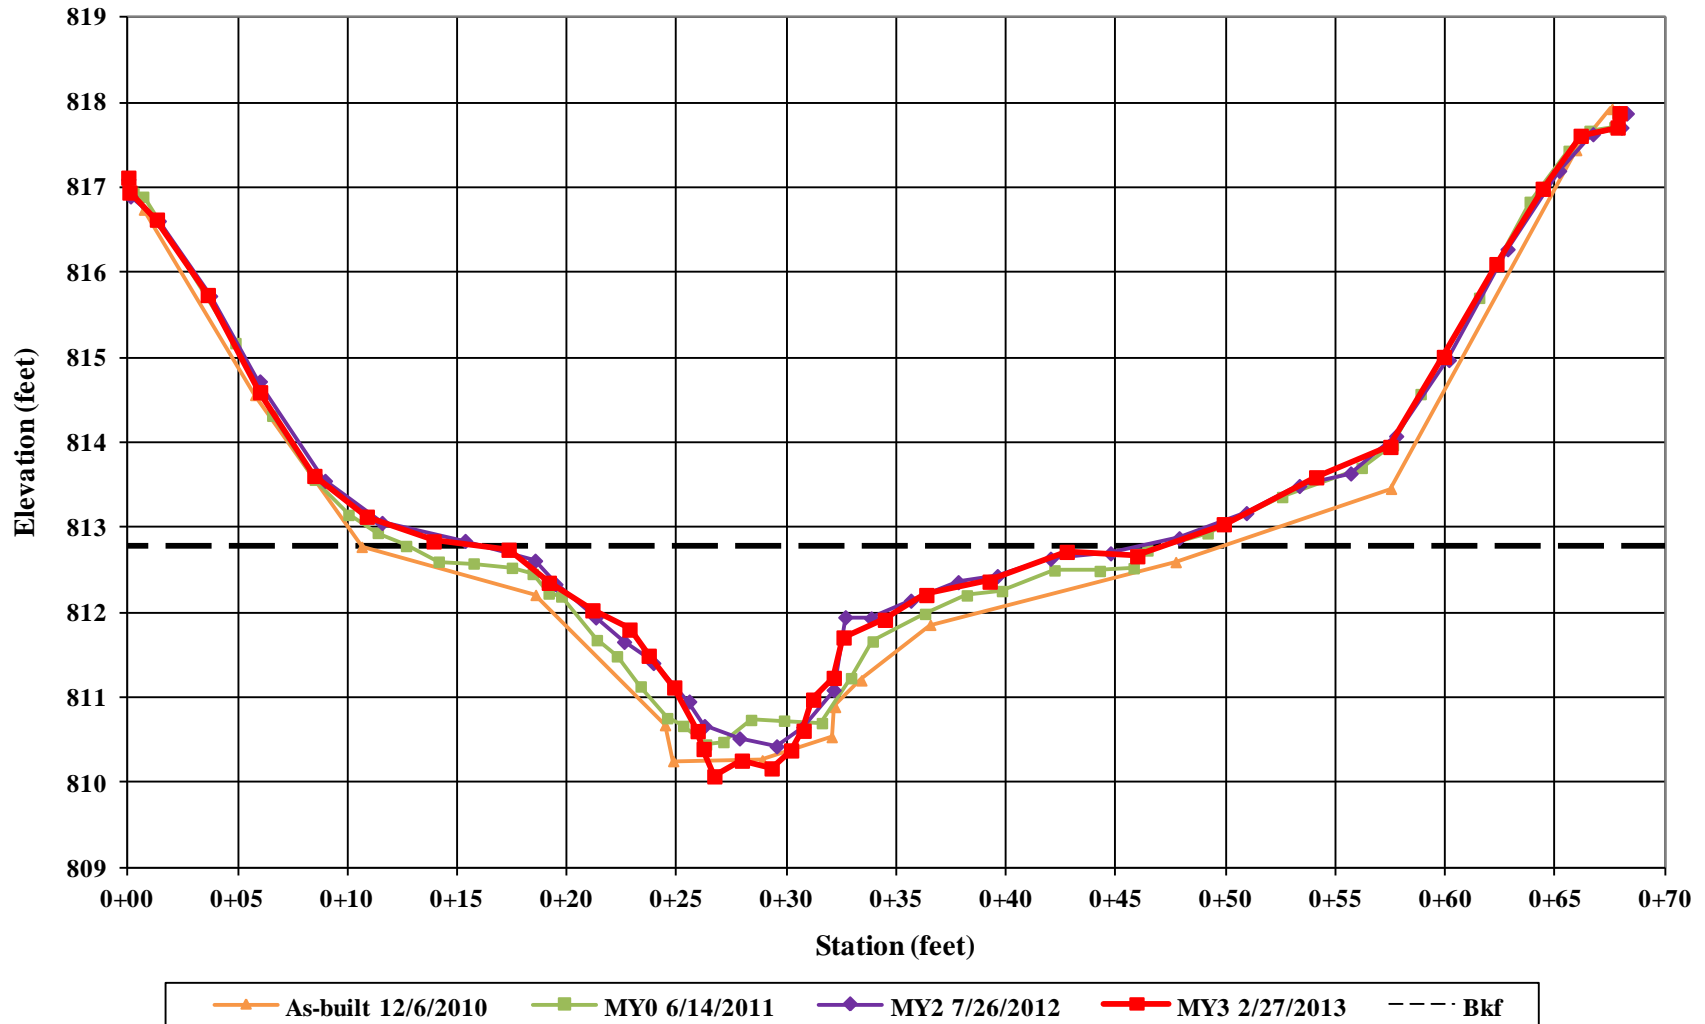





Dye Branch Upstream Reach – Cross-Section 7 – Riffle  
Left Bank Descending  
Monitoring Year 3 – February 28, 2013



Dye Branch Upstream Reach – Cross-Section 7 – Riffle  
Right Bank Descending  
Monitoring Year 3 – February 28, 2013






Dye Branch Upstream Reach – Cross-Section 7 – Riffle  
Downstream  
Monitoring Year 3 – February 28, 2013



Dye Branch Upstream Reach – Cross-Section 7 – Riffle  
Upstream  
Monitoring Year 3 – February 28, 2013



**Dye Branch - Downstream  
Cross-Section 8 - Riffle  
Station 17 + 27.43**

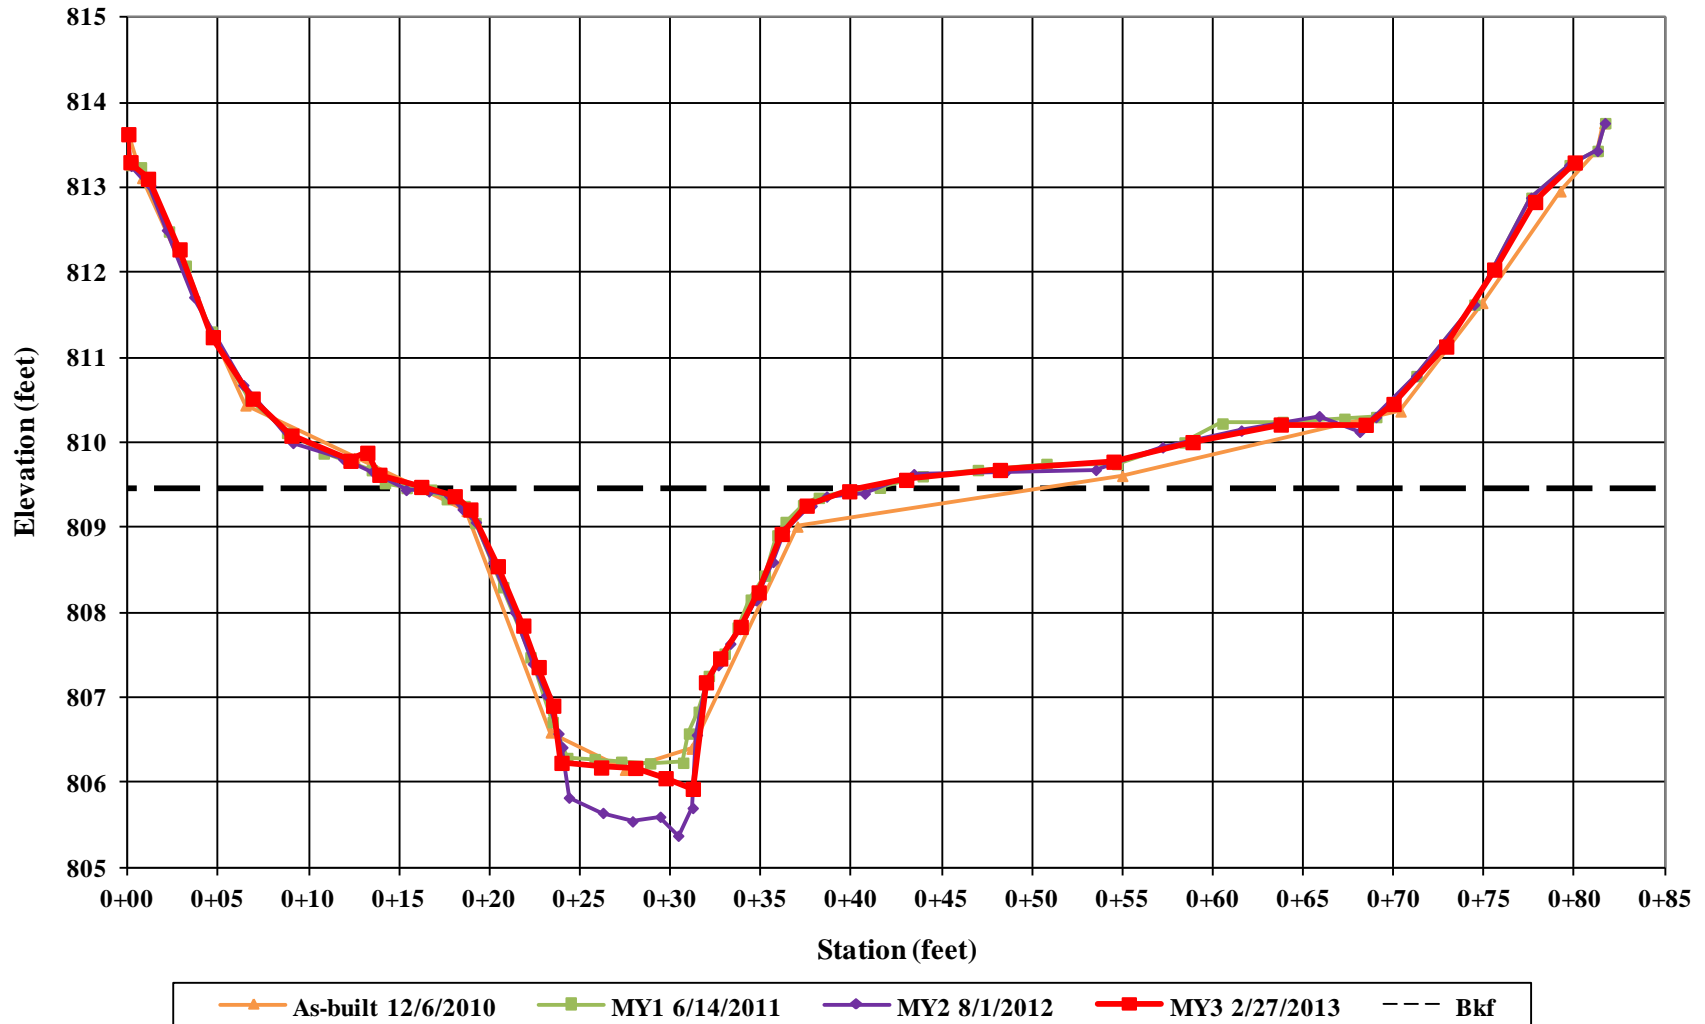



Dye Branch Downstream Reach – Cross-Section 8 – Riffle  
Left Bank Descending  
Monitoring Year 3 – March 1, 2013



Dye Branch Downstream Reach – Cross-Section 8 – Riffle  
Right Bank Descending  
Monitoring Year 3 – March 1, 2013






Dye Branch Downstream Reach – Cross-Section 8 – Riffle  
Downstream  
Monitoring Year 3 – March 1, 2013



Dye Branch Downstream Reach – Cross-Section 8 – Riffle  
Upstream  
Monitoring Year 3 – March 1, 2013

**Dye Branch - Downstream  
Cross-Section 9 - Pool  
Station 19 + 80.80**

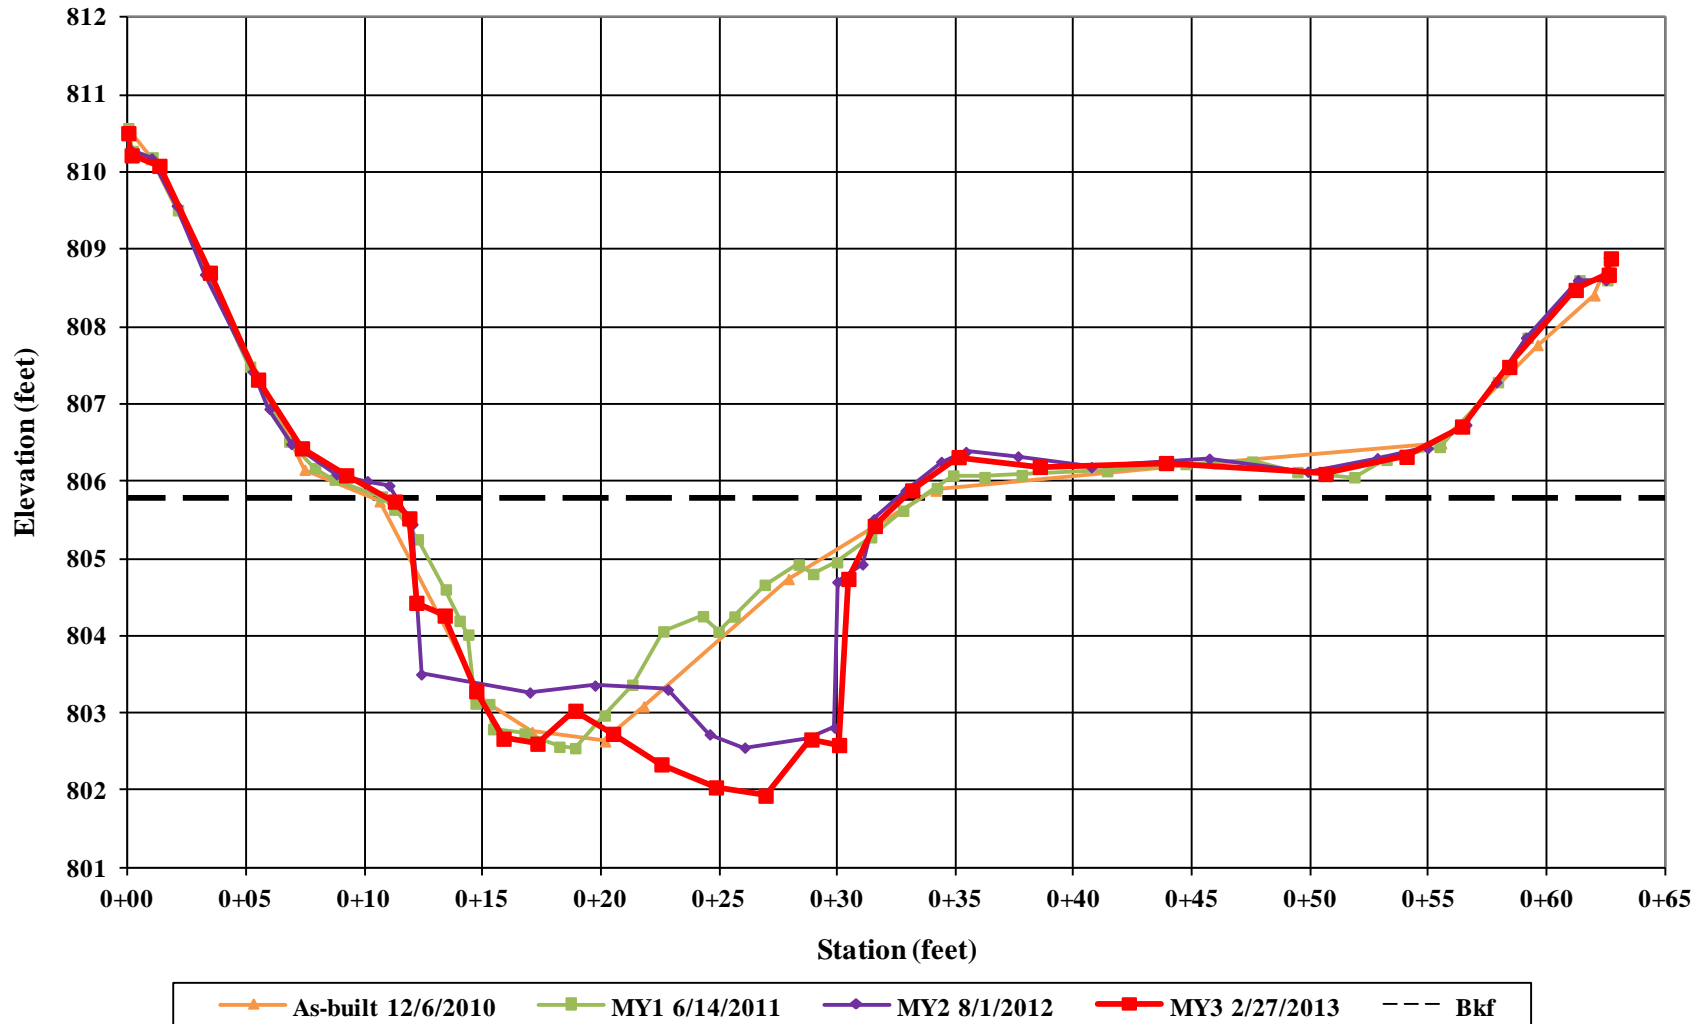





Dye Branch Downstream Reach – Cross-Section 9 – Pool  
Left Bank Descending  
Monitoring Year 3 – March 1, 2013



Dye Branch Downstream Reach – Cross-Section 9 – Pool  
Right Bank Descending  
Monitoring Year 3 – March 1, 2013






Dye Branch Downstream Reach – Cross-Section 9 – Pool  
Downstream  
Monitoring Year 3 – March 1, 2013



Dye Branch Downstream Reach – Cross-Section 9 – Pool  
Upstream  
Monitoring Year 3 – March 1, 2013



**Dye Branch - Downstream  
Cross-Section 10 - Riffle  
Station 24 + 85.22**

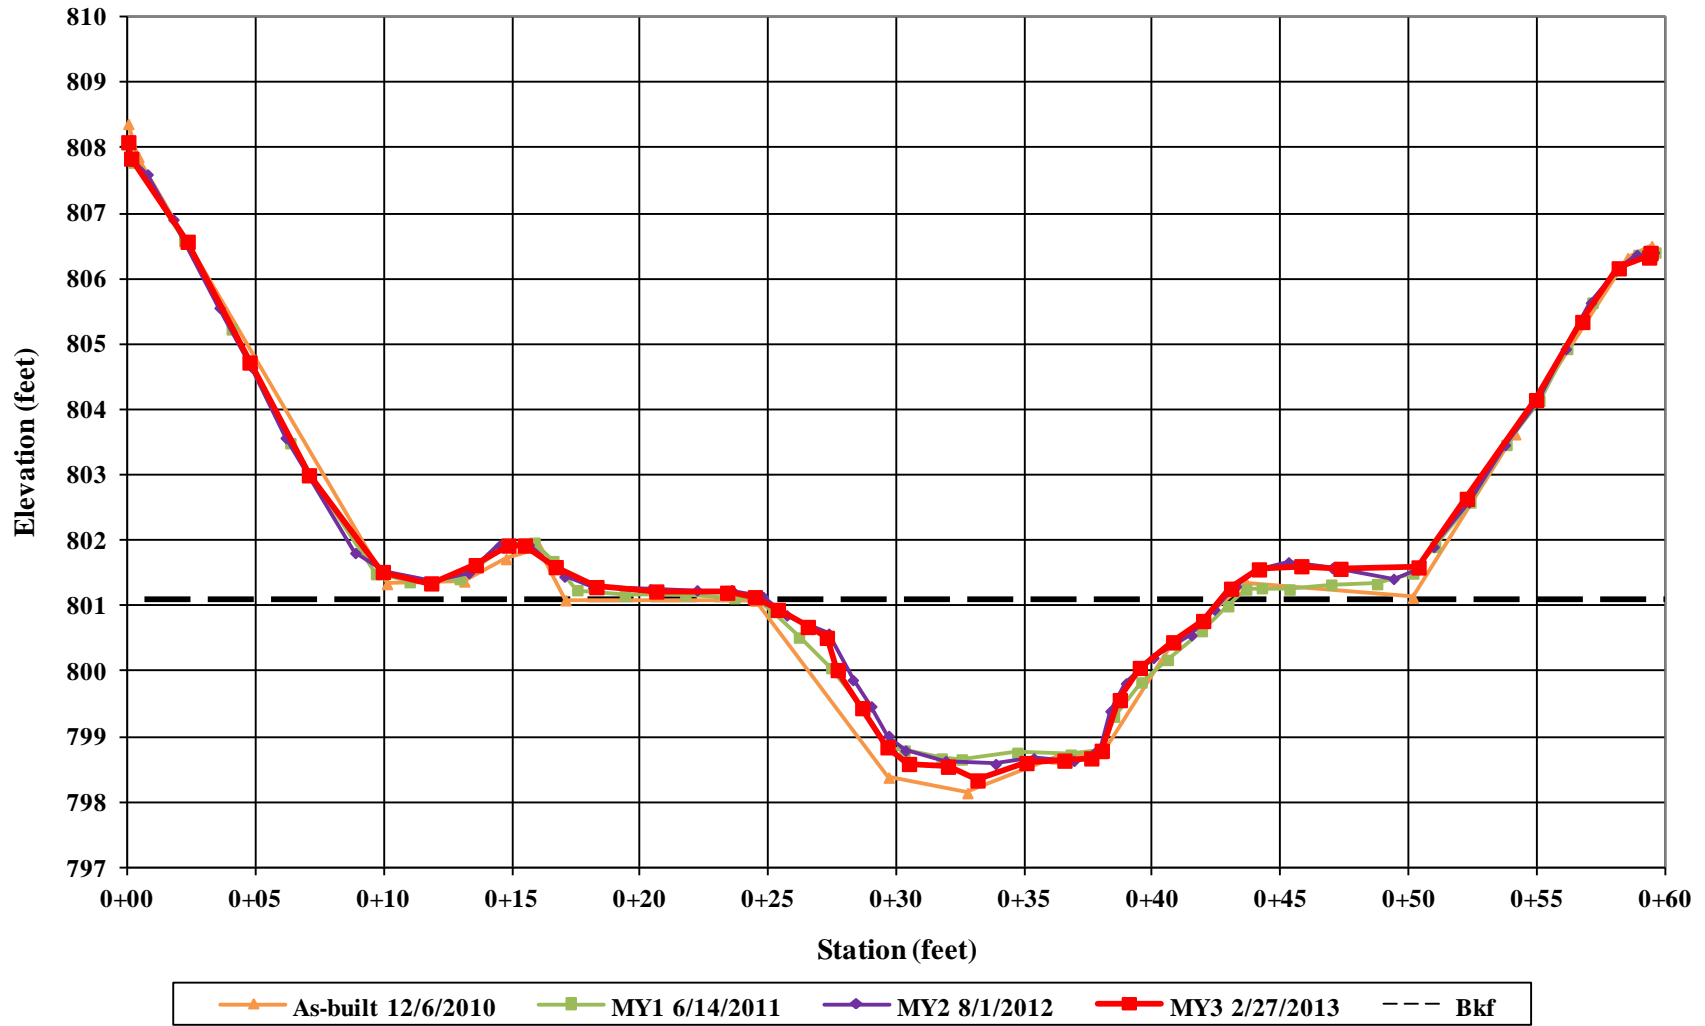



Dye Branch Downstream Reach – Cross-Section 10 – Riffle  
Left Bank Descending  
Monitoring Year 3 – March 1, 2013



Dye Branch Downstream Reach – Cross-Section 10 – Riffle  
Right Bank Descending  
Monitoring Year 3 – March 1, 2013






Dye Branch Downstream Reach – Cross-Section 10 – Riffle  
Downstream  
Monitoring Year 3 – March 1, 2013



Dye Branch Downstream Reach – Cross-Section 10 – Riffle  
Upstream  
Monitoring Year 3 – March 1, 2013



**Cemetery Branch  
Longitudinal Profile  
0+00 to 9+89.93**









**Dye Branch - Upstream  
Longitudinal Profile  
0+30.36 to 15+03.3**

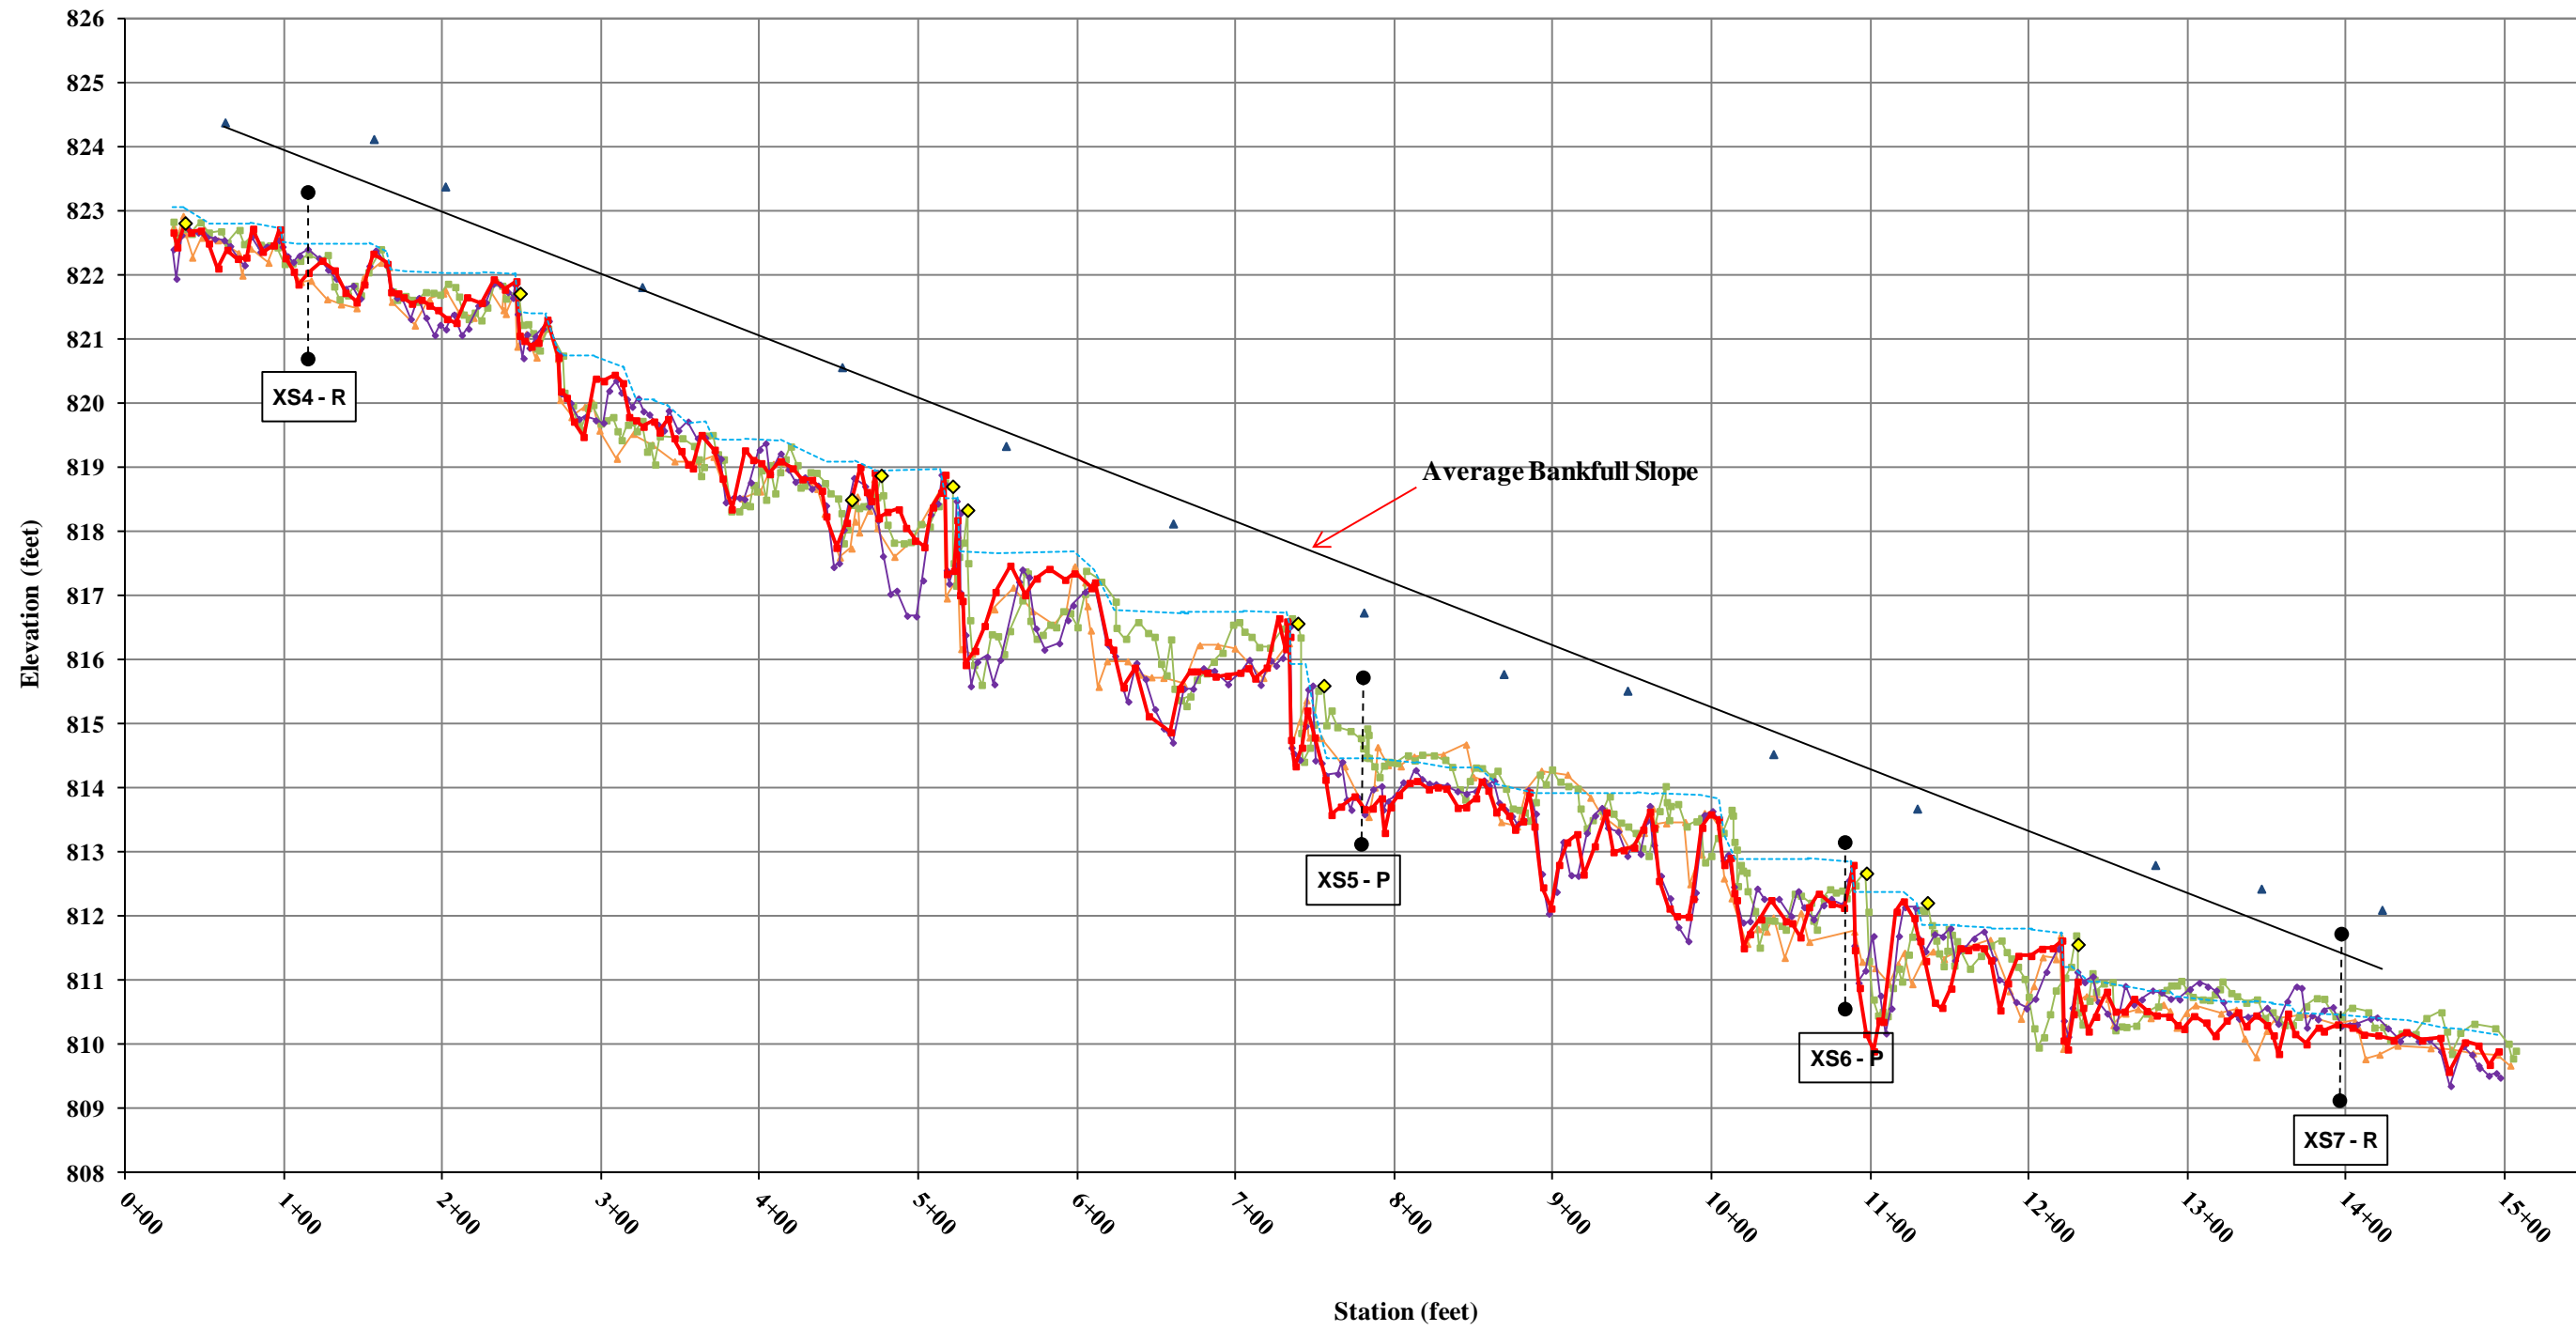







**Dye Branch - Downstream  
Longitudinal Profile  
16+52.72 to 25+34.71**

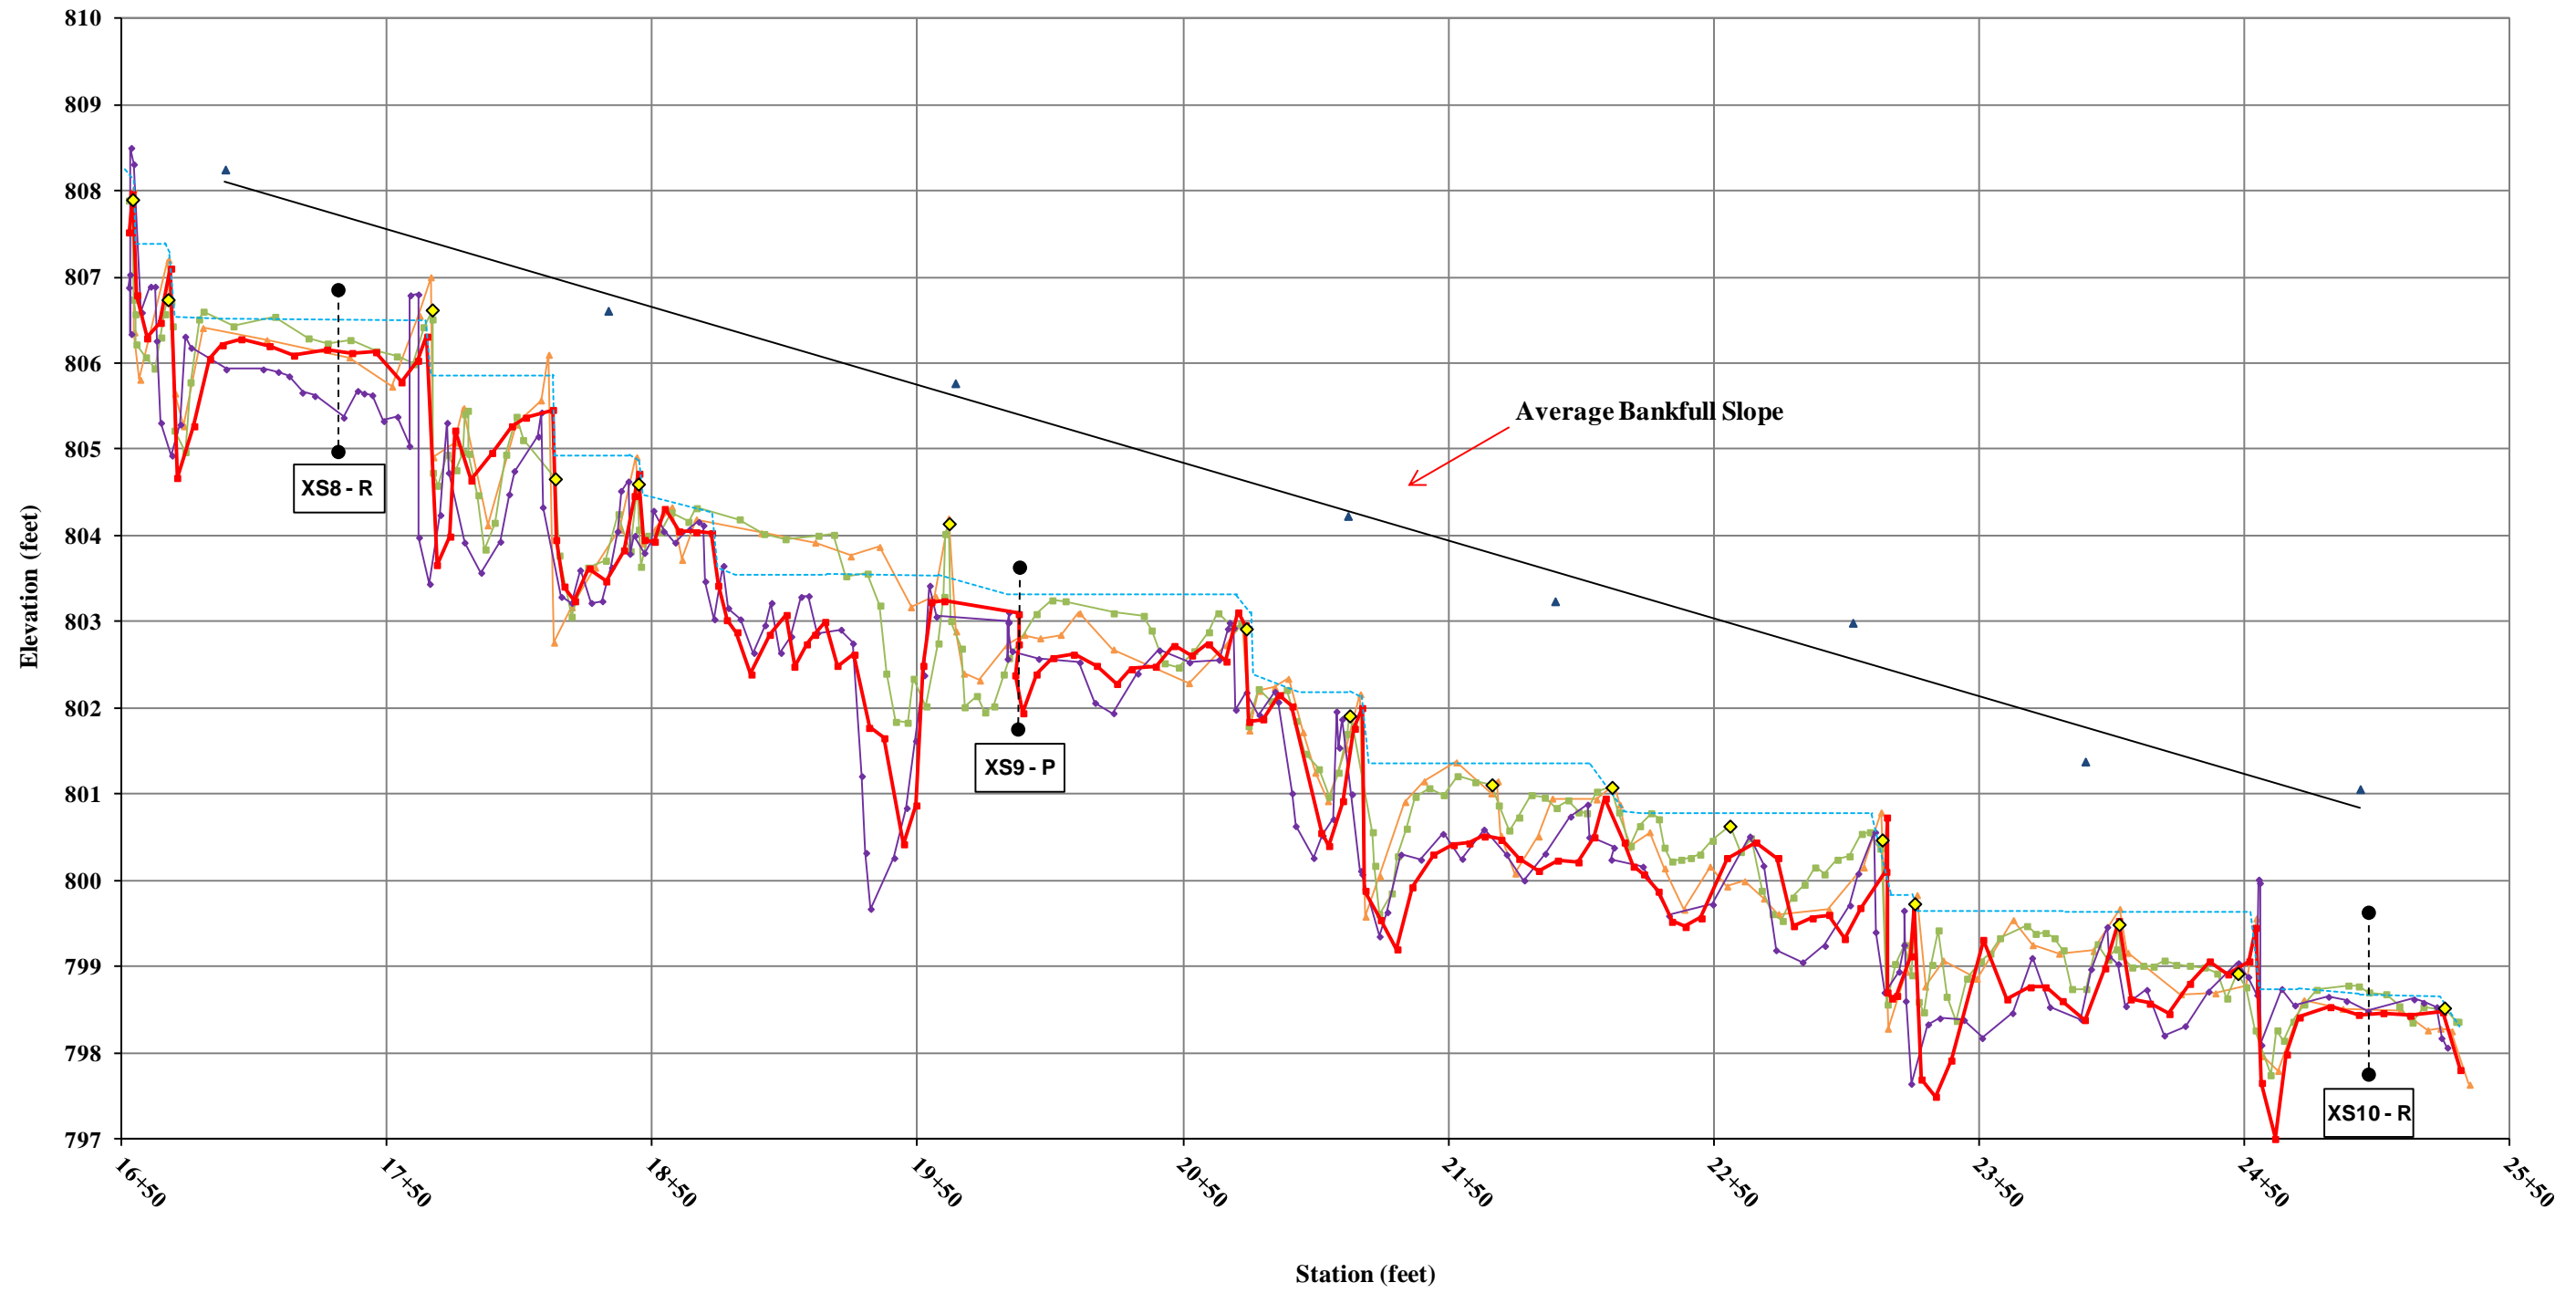



<b>Dye Branch II / Project No. 92255</b>					
<b>Cemetery Branch - Cross-Section 1 - Pool</b>					
<b>Pebble Count Summary</b>					
			Monitoring Year 3		
<b>Description</b>	<b>Material</b>	<b>Size (mm)</b>	<b>Total #</b>	<b>Item %</b>	<b>Cum %</b>
<b>Silt/Clay</b>	silt/clay	0.062	2	2%	2%
<b>Sand</b>	very fine sand	0.125		0%	2%
	fine sand	0.25		0%	2%
	medium sand	0.50	4	4%	6%
	coarse sand	1.00		0%	6%
	very coarse sand	2.00	34	32%	38%
<b>Gravel</b>	very fine gravel	4.0	12	11%	49%
	fine gravel	5.7	13	12%	61%
	fine gravel	8.0	5	5%	66%
	medium gravel	11.3	1	1%	67%
	medium gravel	16.0	14	13%	80%
	coarse gravel	22.3	7	7%	87%
	coarse gravel	32	6	6%	92%
	very coarse gravel	45	3	3%	95%
<b>Cobble</b>	very coarse gravel	64	3	3%	98%
	small cobble	90	1	1%	99%
	medium cobble	128	1	1%	100%
	large cobble	180		0%	100%
<b>Boulder</b>	very large cobble	256		0%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
<b>Bedrock</b>	very large boulder	4096		0%	100%
	bedrock	>4096		0%	100%
<b>TOTALS</b>			106	100%	100%



<b>Summary Data</b>	
D50	4.1
D84	19
D95	43

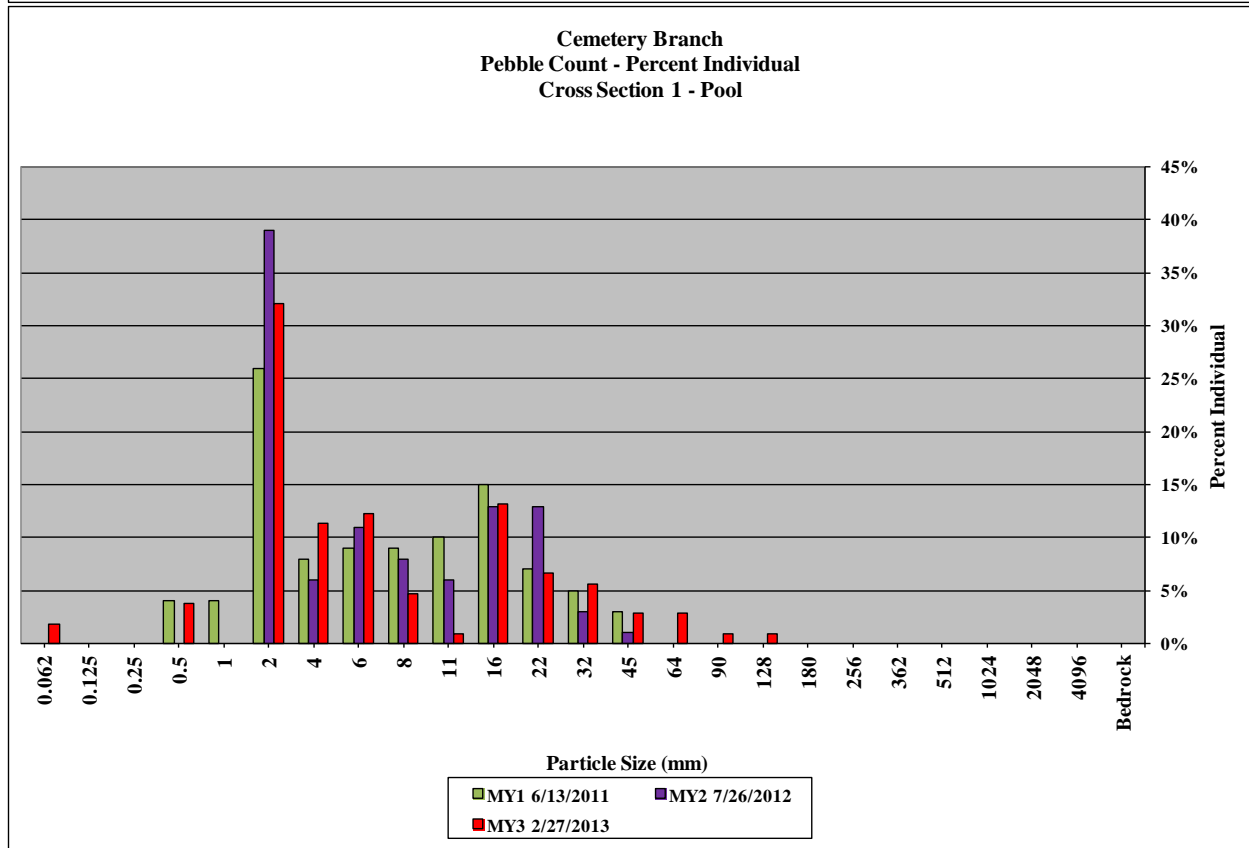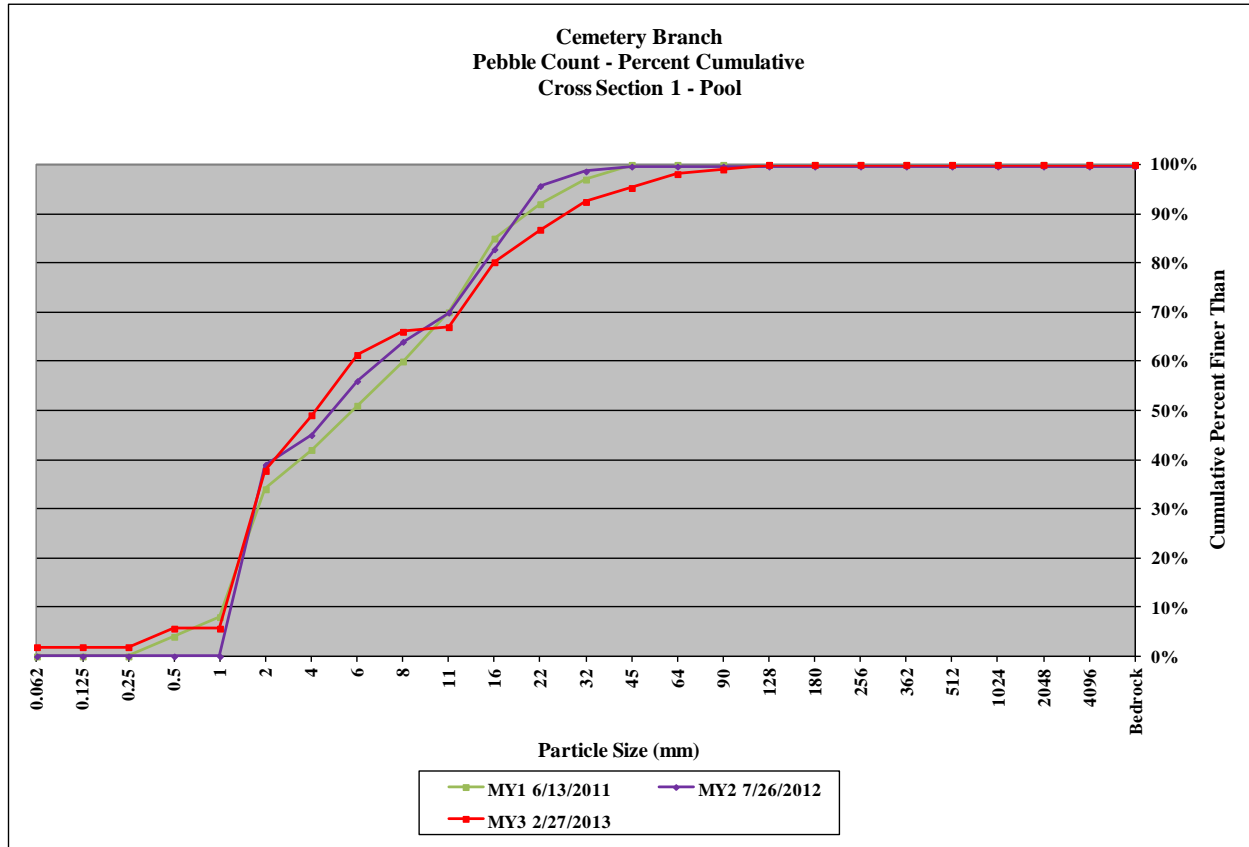



<b>Dye Branch II / Project No. 92255</b>					
<b>Cemetery Branch - Cross-Section 2 - Riffle</b>					
<b>Pebble Count Summary</b>					
			Monitoring Year 3		
<b>Description</b>	<b>Material</b>	<b>Size (mm)</b>	<b>Total #</b>	<b>Item %</b>	<b>Cum %</b>
<b>Silt/Clay</b>	silt/clay	0.062		0%	0%
<b>Sand</b>	very fine sand	0.125		0%	0%
	fine sand	0.25		0%	0%
	medium sand	0.50	5	5%	5%
	coarse sand	1.00	13	13%	18%
	very coarse sand	2.00	32	32%	50%
<b>Gravel</b>	very fine gravel	4.0	5	5%	54%
	fine gravel	5.7	11	11%	65%
	fine gravel	8.0	5	5%	70%
	medium gravel	11.3	7	7%	77%
	medium gravel	16.0	4	4%	81%
	coarse gravel	22.3	5	5%	86%
	coarse gravel	32	1	1%	87%
	very coarse gravel	45	1	1%	88%
	very coarse gravel	64	5	5%	93%
<b>Cobble</b>	small cobble	90		0%	93%
	medium cobble	128	3	3%	96%
	large cobble	180	3	3%	99%
	very large cobble	256		0%	99%
<b>Boulder</b>	small boulder	362	1	1%	100%
	small boulder	512		0%	100%
	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
	very large boulder	4096		0%	100%
<b>Bedrock</b>	bedrock	>4096		0%	100%
<b>TOTALS</b>			101	100%	100%



<b>Summary Data</b>	
D50	2.1
D84	19
D95	110

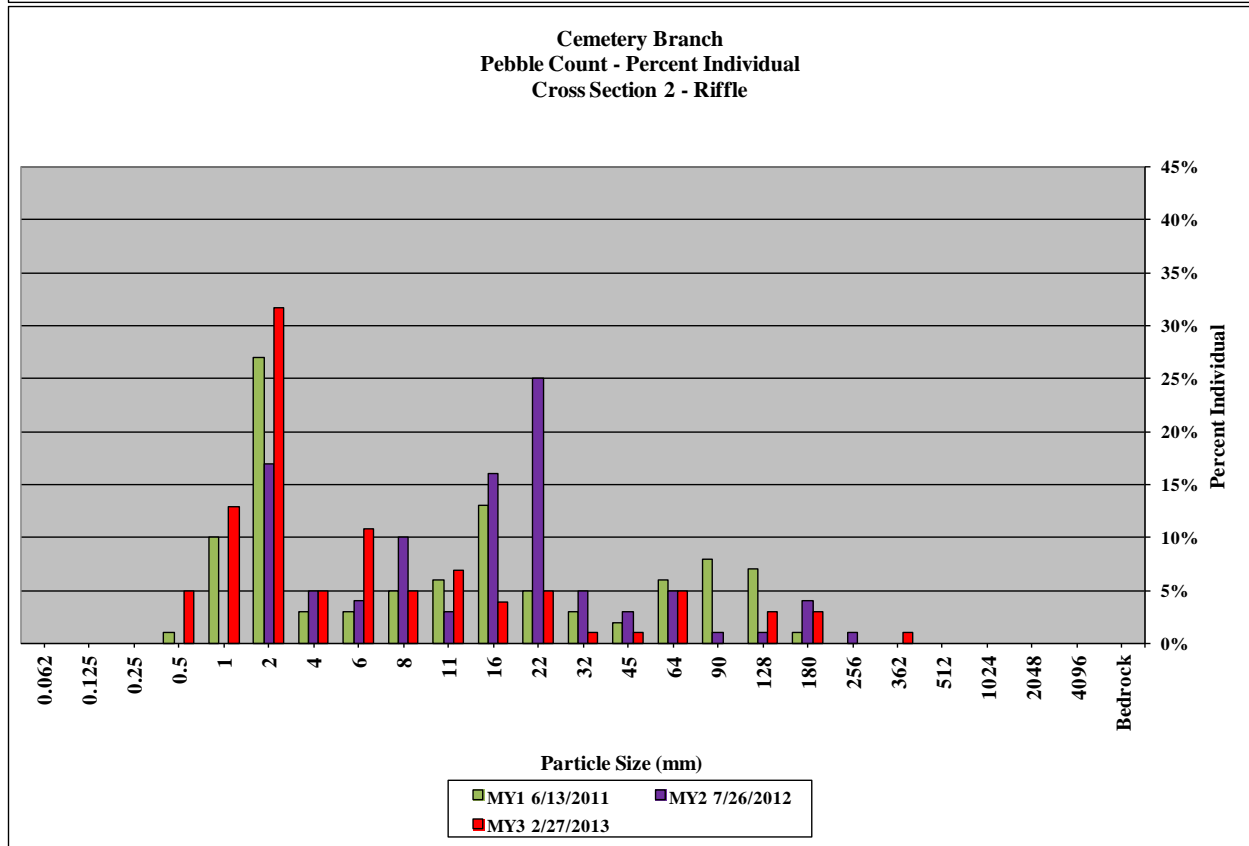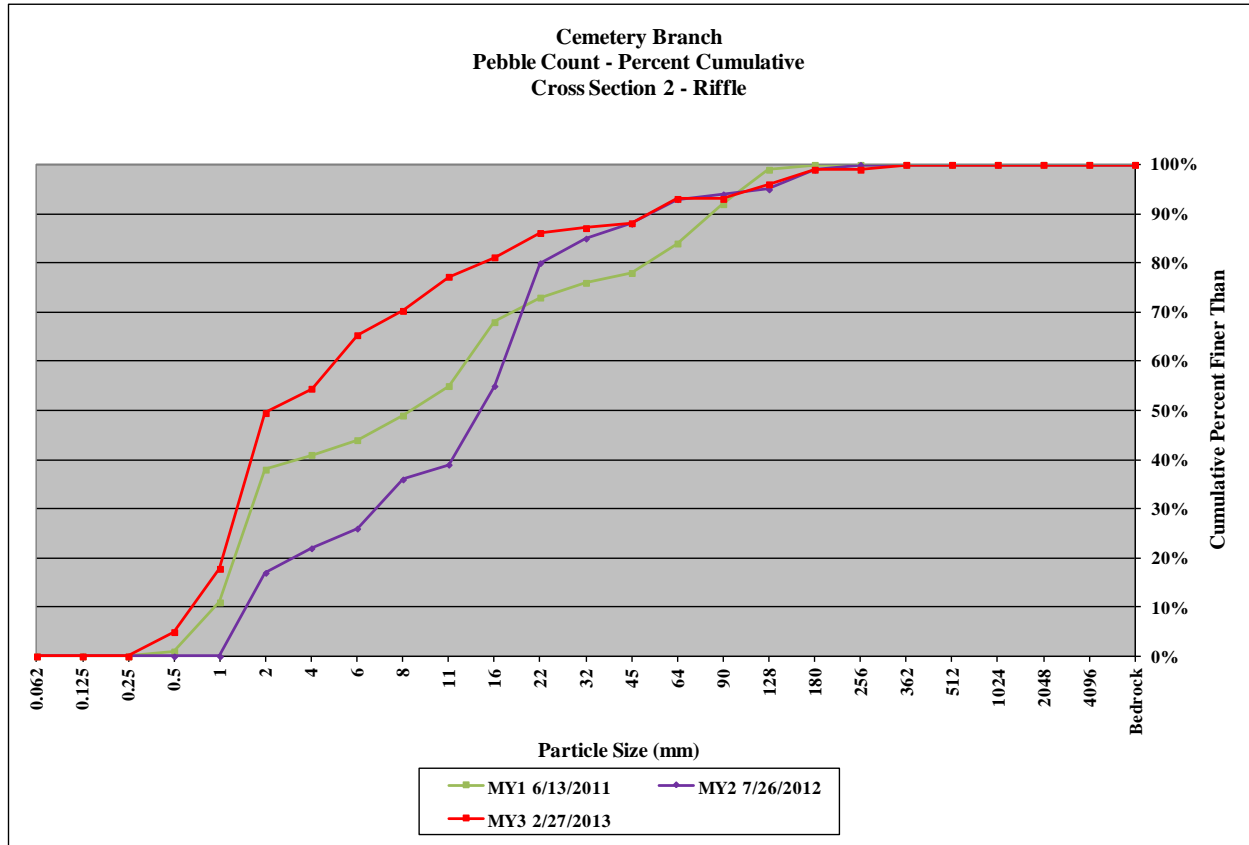



<b>Dye Branch II / Project No. 92255</b>					
<b>Cemetery Branch - Cross-Section 3 - Riffle</b>					
<b>Pebble Count Summary</b>					
			Monitoring Year 3		
<b>Description</b>	<b>Material</b>	<b>Size (mm)</b>	<b>Total #</b>	<b>Item %</b>	<b>Cum %</b>
<b>Silt/Clay</b>	silt/clay	0.062	1	1%	1%
<b>Sand</b>	very fine sand	0.125		0%	1%
	fine sand	0.25	3	3%	4%
	medium sand	0.50	12	12%	16%
	coarse sand	1.00	9	9%	25%
	very coarse sand	2.00	15	15%	40%
<b>Gravel</b>	very fine gravel	4.0	5	5%	45%
	fine gravel	5.7	5	5%	50%
	fine gravel	8.0	8	8%	58%
	medium gravel	11.3	12	12%	70%
	medium gravel	16.0	7	7%	77%
	coarse gravel	22.3	8	8%	85%
	coarse gravel	32	5	5%	90%
	very coarse gravel	45	3	3%	93%
	very coarse gravel	64	2	2%	95%
<b>Cobble</b>	small cobble	90	4	4%	99%
	medium cobble	128		0%	99%
	large cobble	180	1	1%	100%
	very large cobble	256		0%	100%
<b>Boulder</b>	small boulder	362		0%	100%
	small boulder	512		0%	100%
	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
	very large boulder	4096		0%	100%
<b>Bedrock</b>	bedrock	>4096		0%	100%
<b>TOTALS</b>			100	100%	100%



<b>Summary Data</b>	
D50	6
D84	21
D95	64

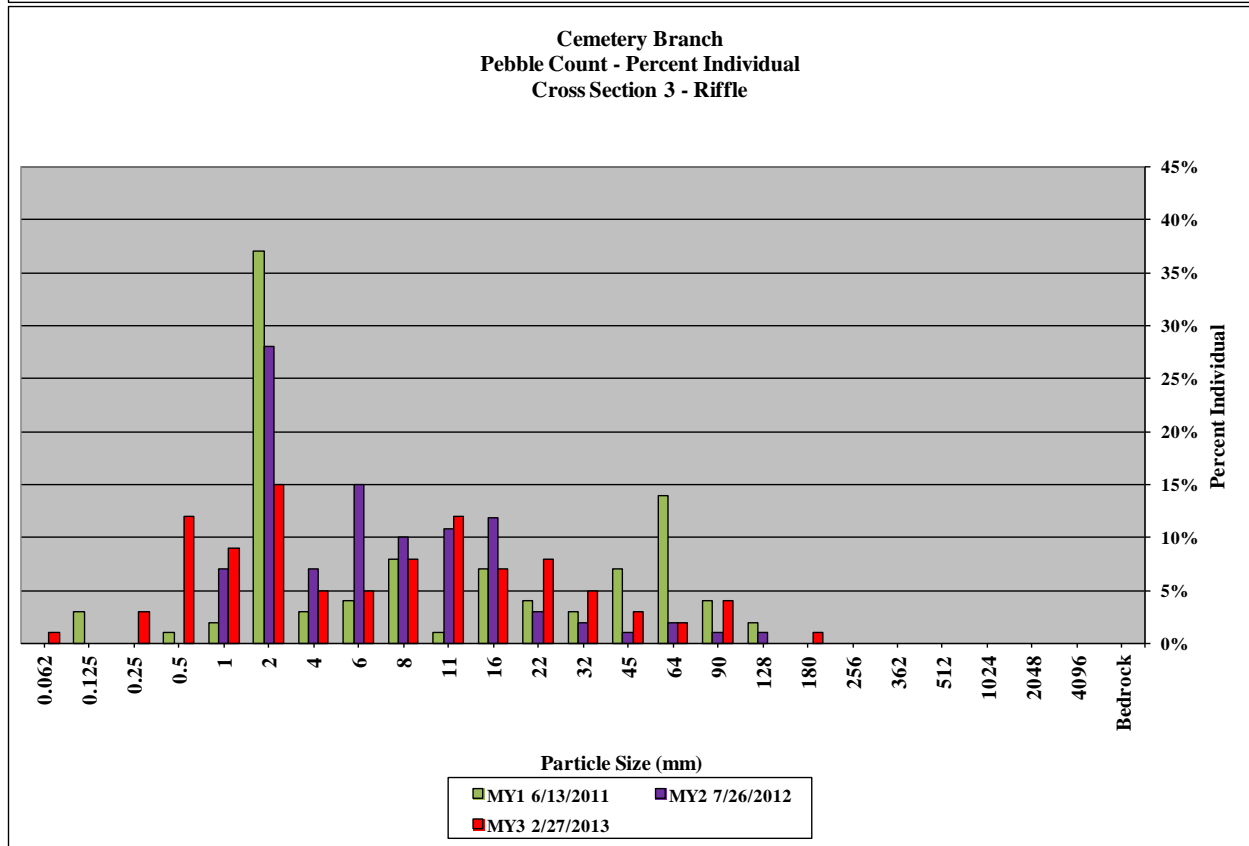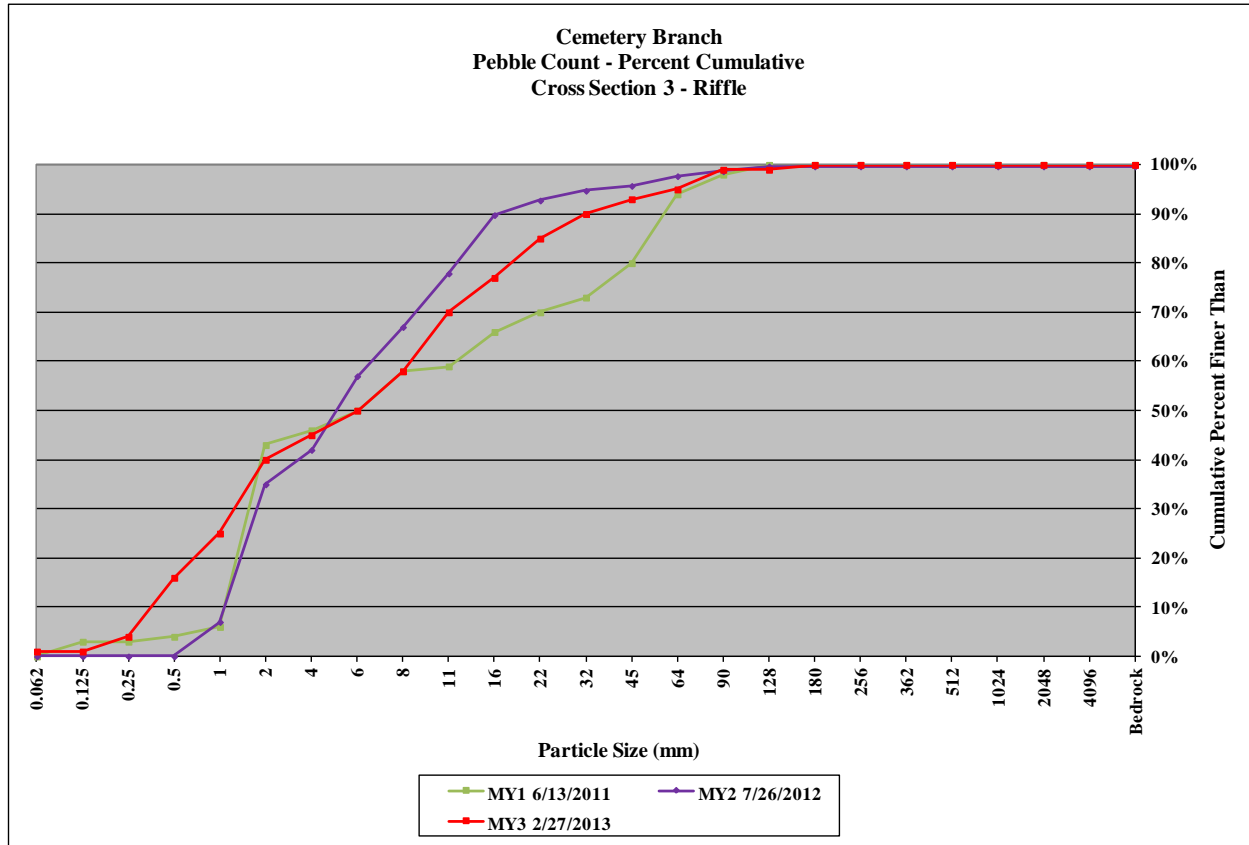



<b>Dye Branch II / Project No. 92255</b>					
<b>Dye Branch - Upstream - Cross-Section 4 - Riffle</b>					
<b>Pebble Count Summary</b>					
			Monitoring Year 3		
<b>Description</b>	<b>Material</b>	<b>Size (mm)</b>	<b>Total #</b>	<b>Item %</b>	<b>Cum %</b>
<b>Silt/Clay</b>	silt/clay	0.062	1	1%	1%
<b>Sand</b>	very fine sand	0.125		0%	1%
	fine sand	0.25	3	3%	4%
	medium sand	0.50	18	18%	22%
	coarse sand	1.00	27	27%	49%
	very coarse sand	2.00	19	19%	68%
<b>Gravel</b>	very fine gravel	4.0	2	2%	70%
	fine gravel	5.7	5	5%	75%
	fine gravel	8.0	3	3%	78%
	medium gravel	11.3	1	1%	79%
	medium gravel	16.0	6	6%	85%
	coarse gravel	22.3	1	1%	86%
	coarse gravel	32	1	1%	87%
	very coarse gravel	45	3	3%	90%
<b>Cobble</b>	very coarse gravel	64	1	1%	91%
	small cobble	90	6	6%	97%
	medium cobble	128	2	2%	99%
	large cobble	180		0%	99%
<b>Boulder</b>	very large cobble	256		0%	99%
	small boulder	362		0%	99%
	small boulder	512	1	1%	100%
	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
<b>Bedrock</b>	very large boulder	4096		0%	100%
	bedrock	>4096		0%	100%
<b>TOTALS</b>			100	100%	100%



<b>Summary Data</b>	
D50	1
D84	15
D95	80

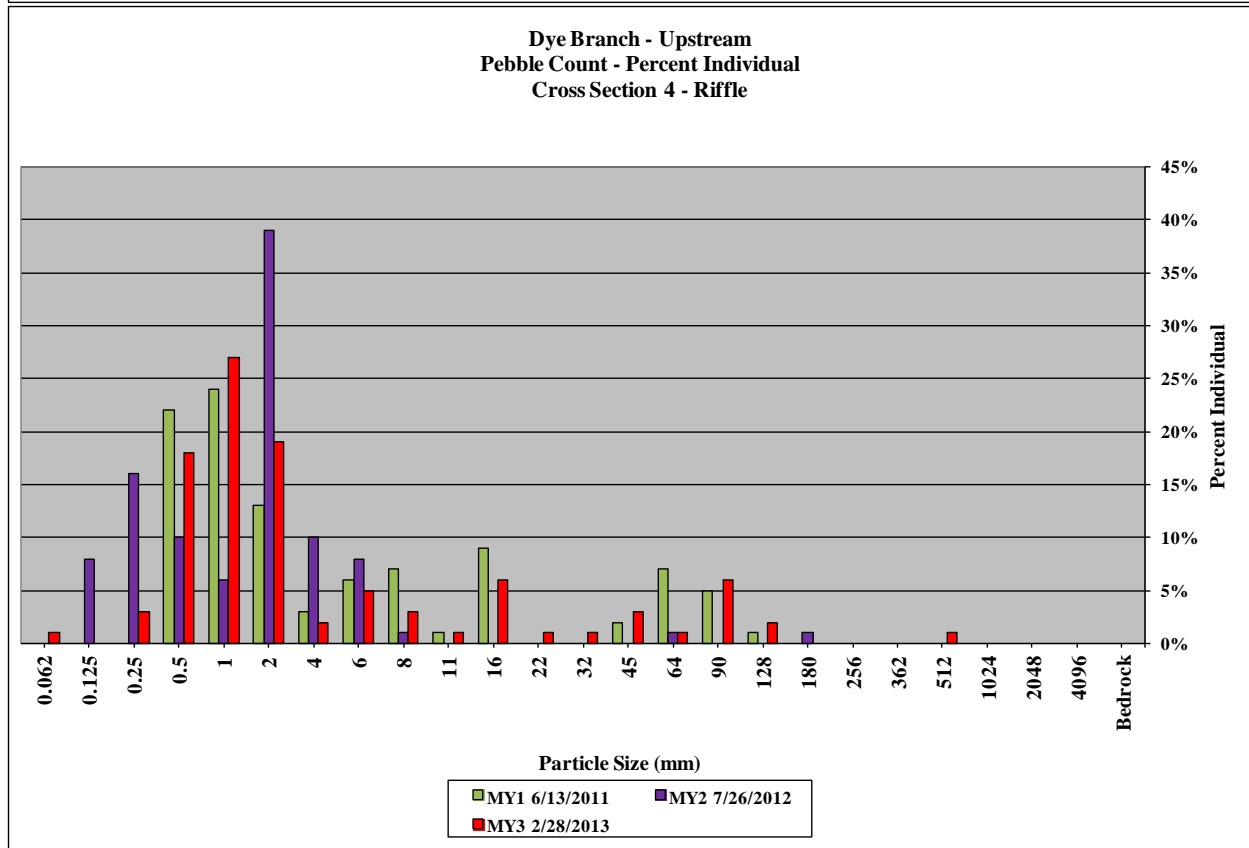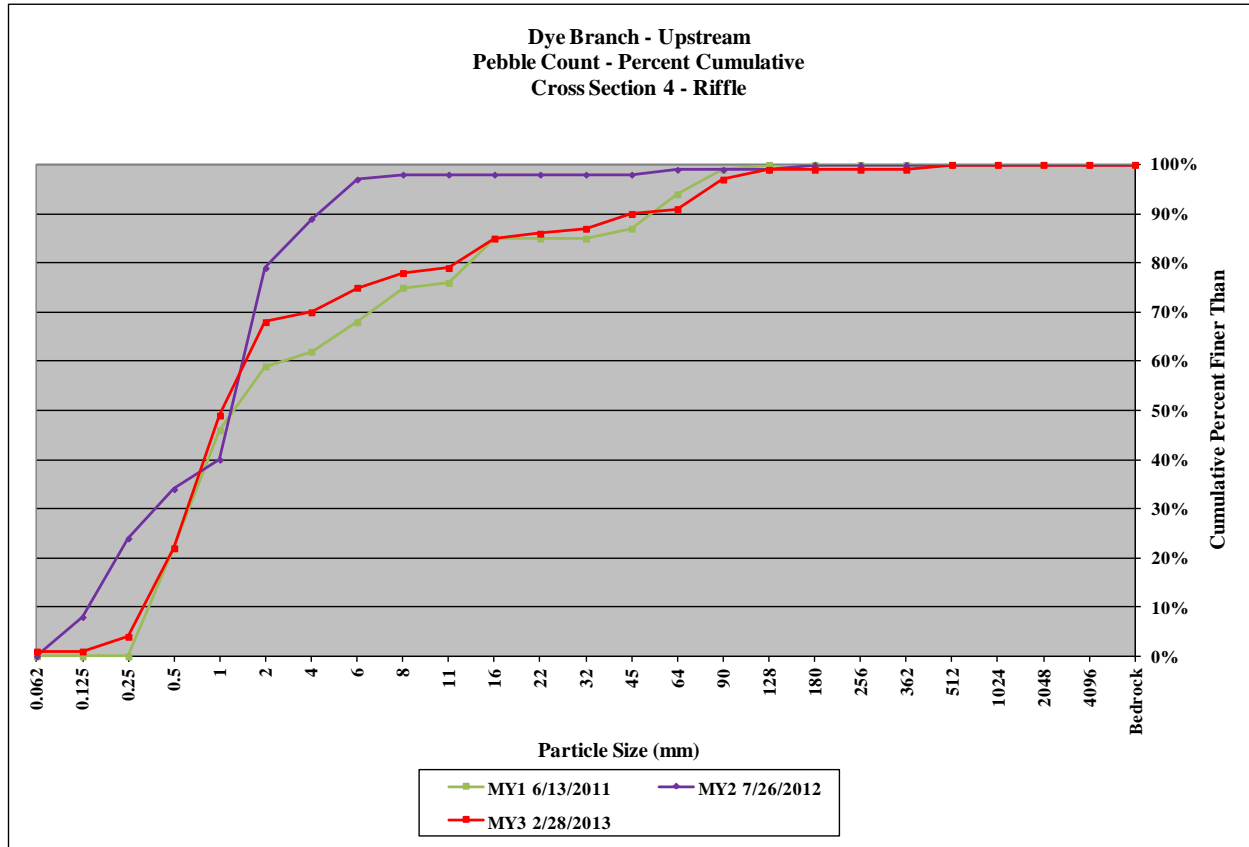

<b>Dye Branch II / Project No. 92255</b>					
<b>Dye Branch - Upstream - Cross-Section 5 - Pool</b>					
<b>Pebble Count Summary</b>					
			Monitoring Year 3		
<b>Description</b>	<b>Material</b>	<b>Size (mm)</b>	<b>Total #</b>	<b>Item %</b>	<b>Cum %</b>
<b>Silt/Clay</b>	silt/clay	0.062	7	7%	7%
<b>Sand</b>	very fine sand	0.125		0%	7%
	fine sand	0.25	7	7%	13%
	medium sand	0.50	11	10%	24%
	coarse sand	1.00	6	6%	29%
	very coarse sand	2.00	2	2%	31%
<b>Gravel</b>	very fine gravel	4.0	2	2%	33%
	fine gravel	5.7		0%	33%
	fine gravel	8.0	4	4%	37%
	medium gravel	11.3	6	6%	42%
	medium gravel	16.0	15	14%	57%
	coarse gravel	22.3	15	14%	71%
	coarse gravel	32	12	11%	82%
	very coarse gravel	45	5	5%	87%
<b>Cobble</b>	very coarse gravel	64	4	4%	91%
	small cobble	90	6	6%	96%
	medium cobble	128	2	2%	98%
	large cobble	180	2	2%	100%
<b>Boulder</b>	very large cobble	256		0%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
<b>Bedrock</b>	very large boulder	4096		0%	100%
	bedrock	>4096		0%	100%
<b>TOTALS</b>			106	100%	100%



<b>Summary Data</b>	
D50	13
D84	37
D95	84



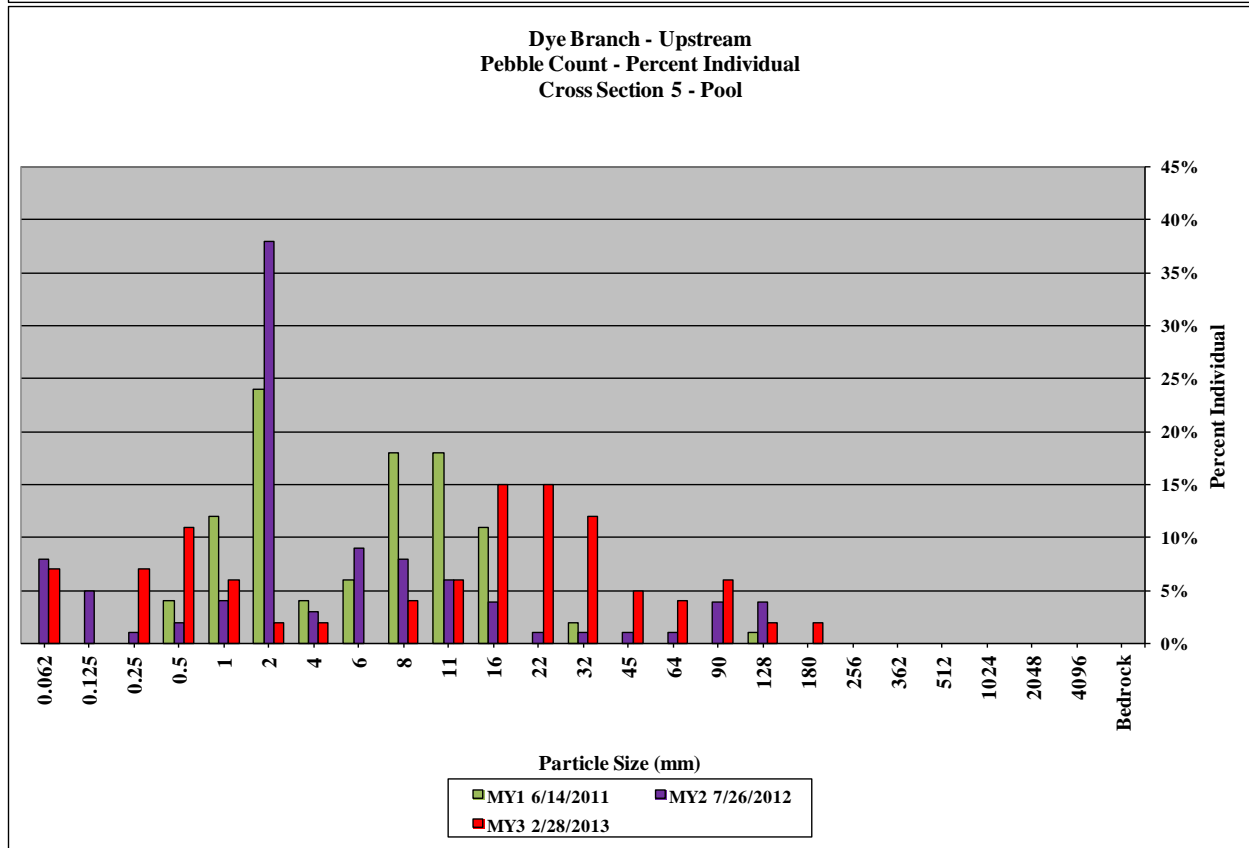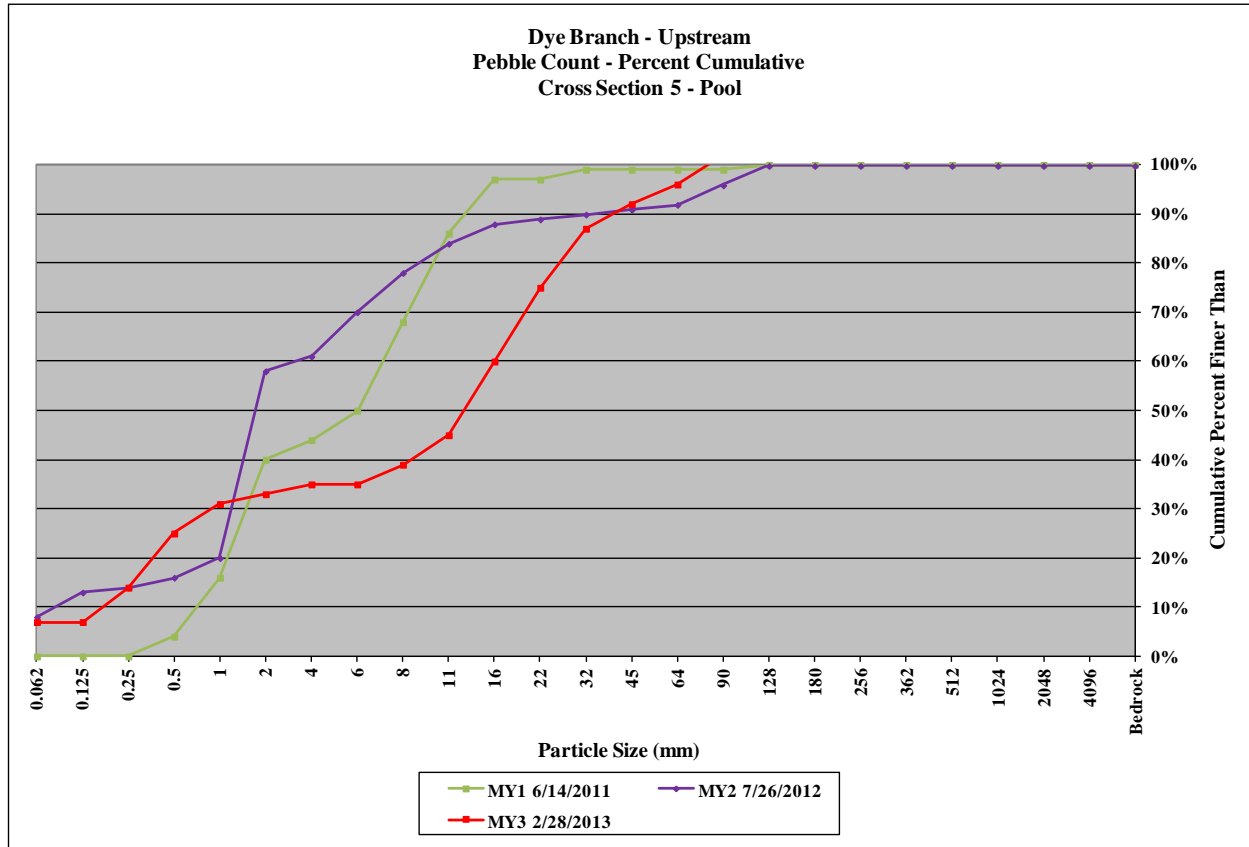

<b>Dye Branch II / Project No. 92255</b>					
<b>Dye Branch - Upstream - Cross-Section 6 - Riffle</b>					
<b>Pebble Count Summary</b>					
			Monitoring Year 3		
<b>Description</b>	<b>Material</b>	<b>Size (mm)</b>	<b>Total #</b>	<b>Item %</b>	<b>Cum %</b>
<b>Silt/Clay</b>	silt/clay	0.062	4	4%	4%
<b>Sand</b>	very fine sand	0.125	2	2%	6%
	fine sand	0.25	4	4%	10%
	medium sand	0.50	11	11%	21%
	coarse sand	1.00	12	12%	33%
	very coarse sand	2.00	25	25%	58%
<b>Gravel</b>	very fine gravel	4.0	6	6%	64%
	fine gravel	5.7	3	3%	67%
	fine gravel	8.0	2	2%	69%
	medium gravel	11.3	3	3%	72%
	medium gravel	16.0	4	4%	76%
	coarse gravel	22.3	6	6%	82%
	coarse gravel	32	5	5%	87%
	very coarse gravel	45	3	3%	90%
<b>Cobble</b>	very coarse gravel	64	4	4%	94%
	small cobble	90	3	3%	97%
	medium cobble	128	2	2%	99%
	large cobble	180	1	1%	100%
<b>Boulder</b>	very large cobble	256		0%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
<b>Bedrock</b>	very large boulder	4096		0%	100%
	bedrock	>4096		0%	100%
<b>TOTALS</b>			100	100%	100%



<b>Summary Data</b>	
D50	1.6
D84	26
D95	72

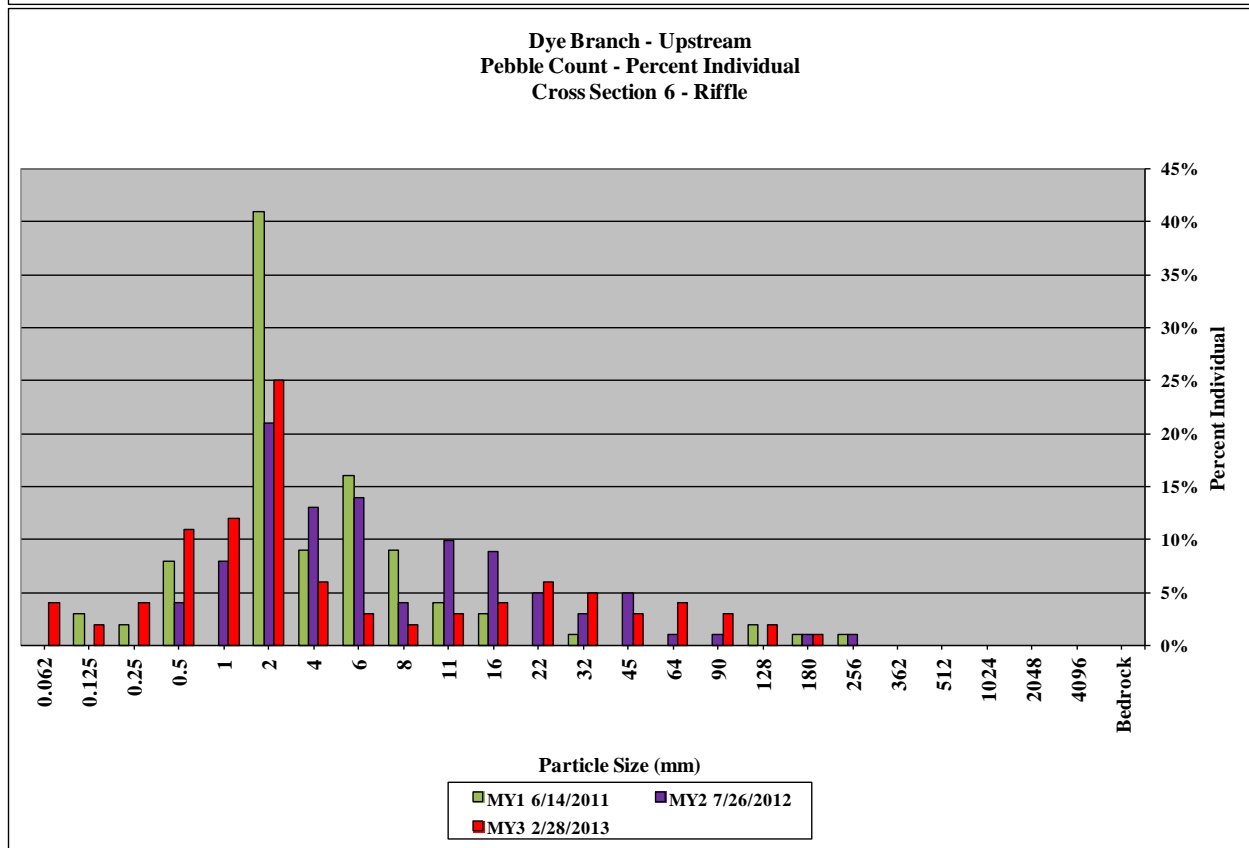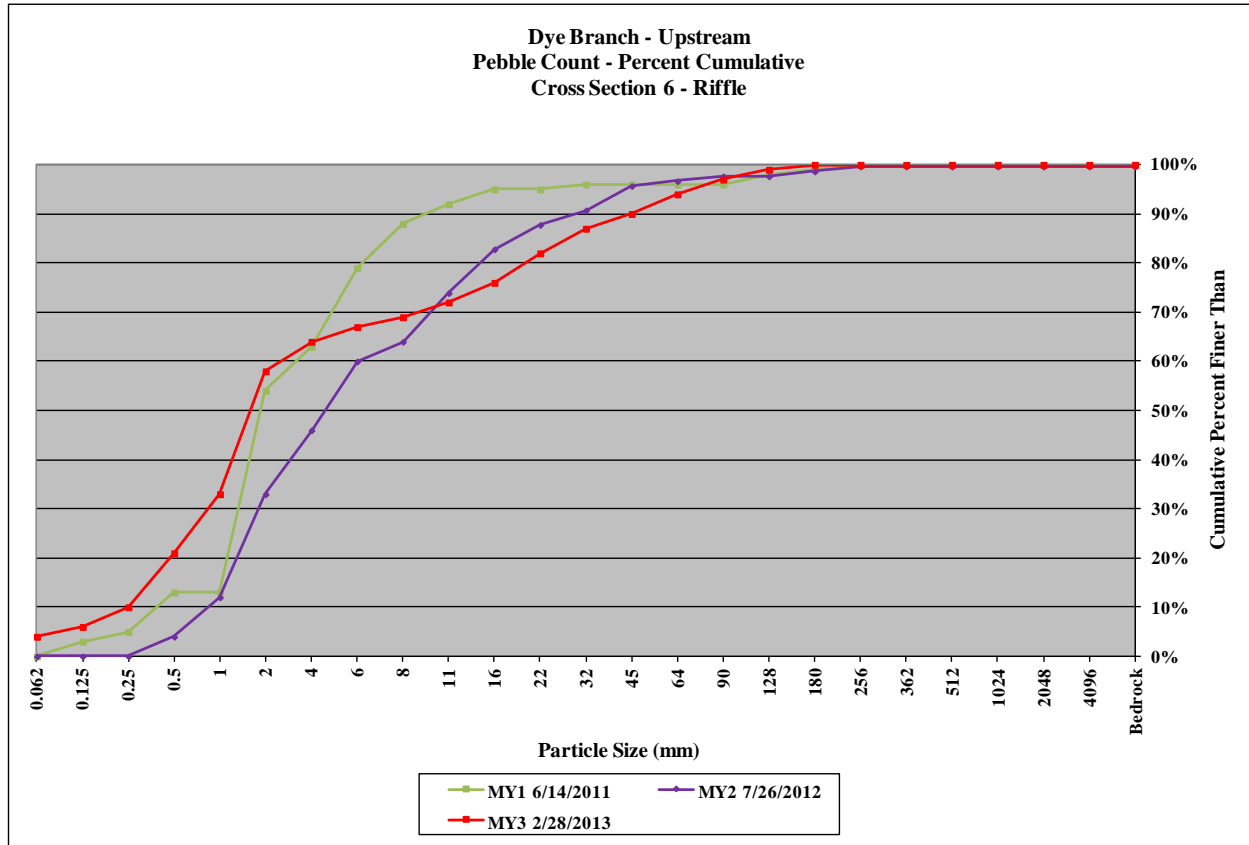



<b>Dye Branch II / Project No. 92255</b>					
<b>Dye Branch - Upstream - Cross-Section 7 - Riffle</b>					
<b>Pebble Count Summary</b>					
			Monitoring Year 3		
<b>Description</b>	<b>Material</b>	<b>Size (mm)</b>	<b>Total #</b>	<b>Item %</b>	<b>Cum %</b>
<b>Silt/Clay</b>	silt/clay	0.062		0%	0%
<b>Sand</b>	very fine sand	0.125		0%	0%
	fine sand	0.25	8	8%	8%
	medium sand	0.50	8	8%	15%
	coarse sand	1.00	4	4%	19%
	very coarse sand	2.00	11	10%	30%
<b>Gravel</b>	very fine gravel	4.0	7	7%	36%
	fine gravel	5.7	8	8%	44%
	fine gravel	8.0	9	9%	52%
	medium gravel	11.3	17	16%	69%
	medium gravel	16.0	22	21%	90%
	coarse gravel	22.3	9	9%	98%
	coarse gravel	32	1	1%	99%
	very coarse gravel	45	1	1%	100%
<b>Cobble</b>	very coarse gravel	64		0%	100%
	small cobble	90		0%	100%
	medium cobble	128		0%	100%
	large cobble	180		0%	100%
<b>Boulder</b>	very large cobble	256		0%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
<b>Bedrock</b>	very large boulder	4096		0%	100%
	bedrock	>4096		0%	100%
<b>TOTALS</b>			105	100%	100%



<b>Summary Data</b>	
D50	7.4
D84	14
D95	20

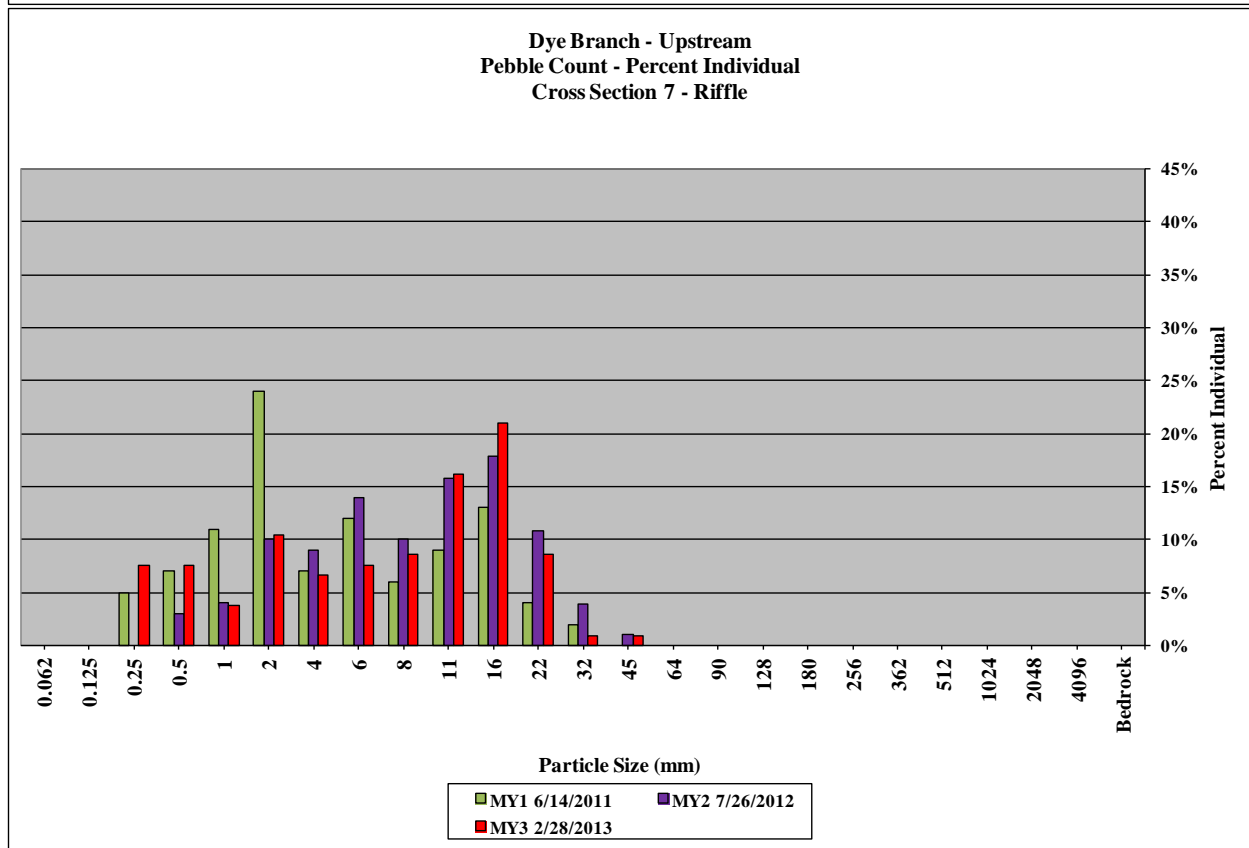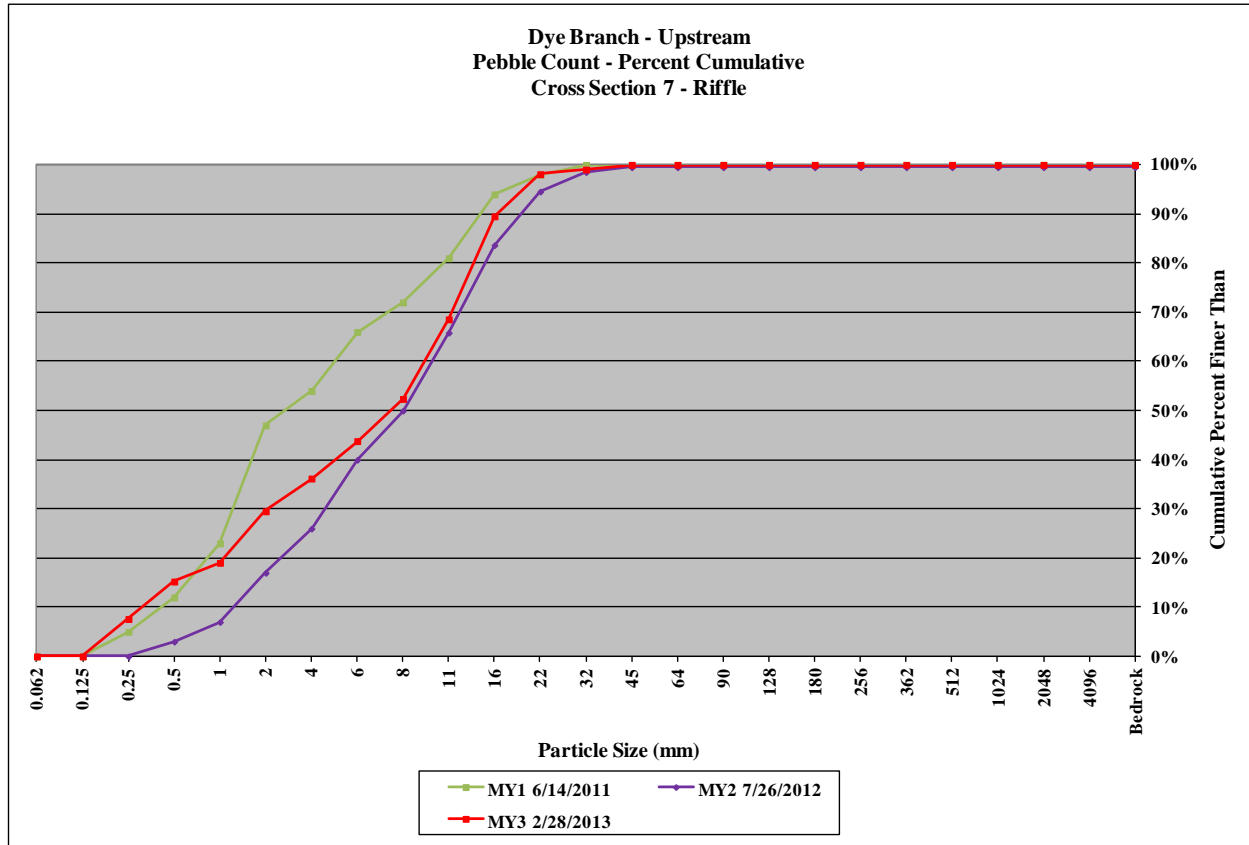

<b>Dye Branch II / Project No. 92255</b>					
<b>Dye Branch - Downstream - Cross-Section 8 - Riffle</b>					
<b>Pebble Count Summary</b>					
			Monitoring Year 3		
<b>Description</b>	<b>Material</b>	<b>Size (mm)</b>	<b>Total #</b>	<b>Item %</b>	<b>Cum %</b>
<b>Silt/Clay</b>	silt/clay	0.062	3	3%	3%
<b>Sand</b>	very fine sand	0.125	4	4%	7%
	fine sand	0.25	22	22%	29%
	medium sand	0.50	15	15%	44%
	coarse sand	1.00	7	7%	51%
	very coarse sand	2.00	25	25%	76%
<b>Gravel</b>	very fine gravel	4.0	7	7%	83%
	fine gravel	5.7	11	11%	94%
	fine gravel	8.0	2	2%	96%
	medium gravel	11.3	3	3%	99%
	medium gravel	16.0	1	1%	100%
	coarse gravel	22.3		0%	100%
	coarse gravel	32		0%	100%
	very coarse gravel	45		0%	100%
<b>Cobble</b>	very coarse gravel	64		0%	100%
	small cobble	90		0%	100%
	medium cobble	128		0%	100%
	large cobble	180		0%	100%
<b>Boulder</b>	very large cobble	256		0%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
<b>Bedrock</b>	very large boulder	4096		0%	100%
	bedrock	>4096		0%	100%
<b>TOTALS</b>			100	100%	100%



<b>Summary Data</b>	
D50	0.91
D84	4.2
D95	6.9



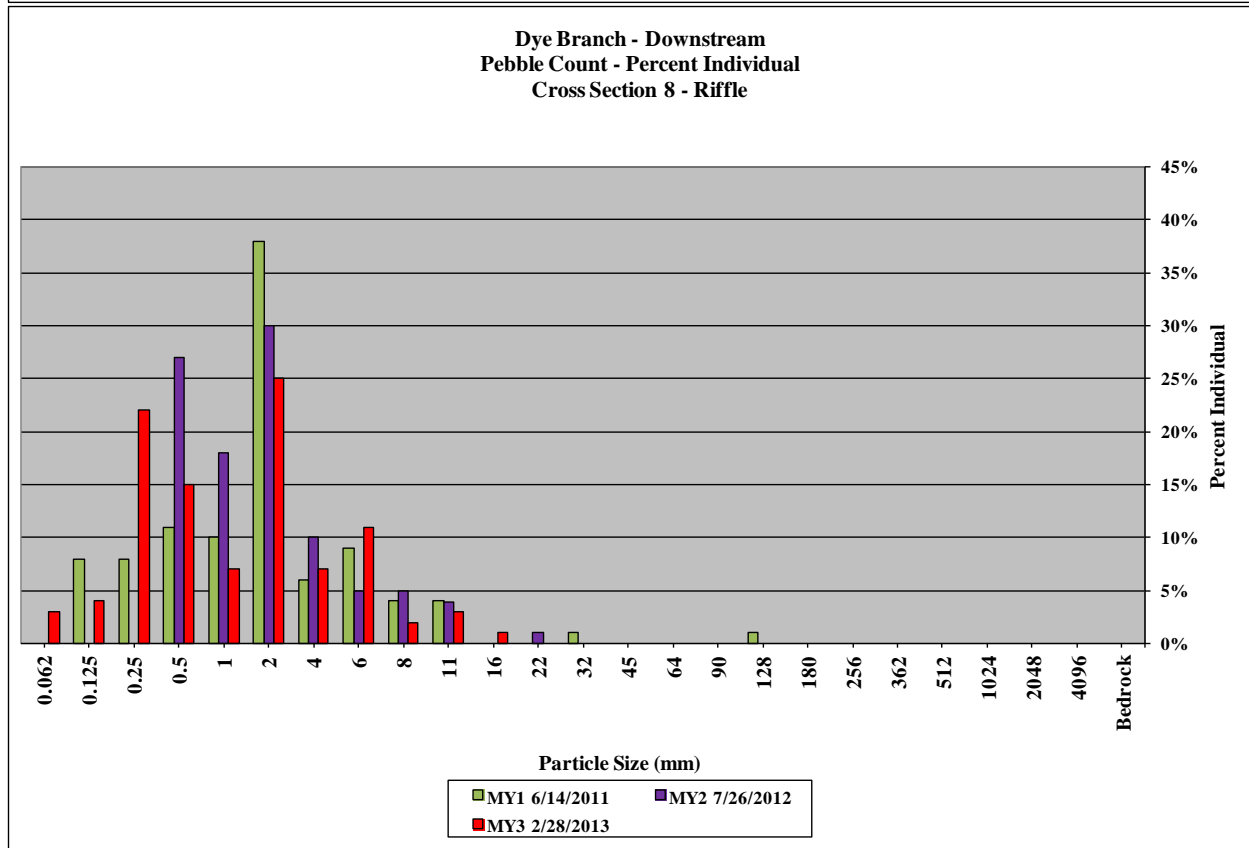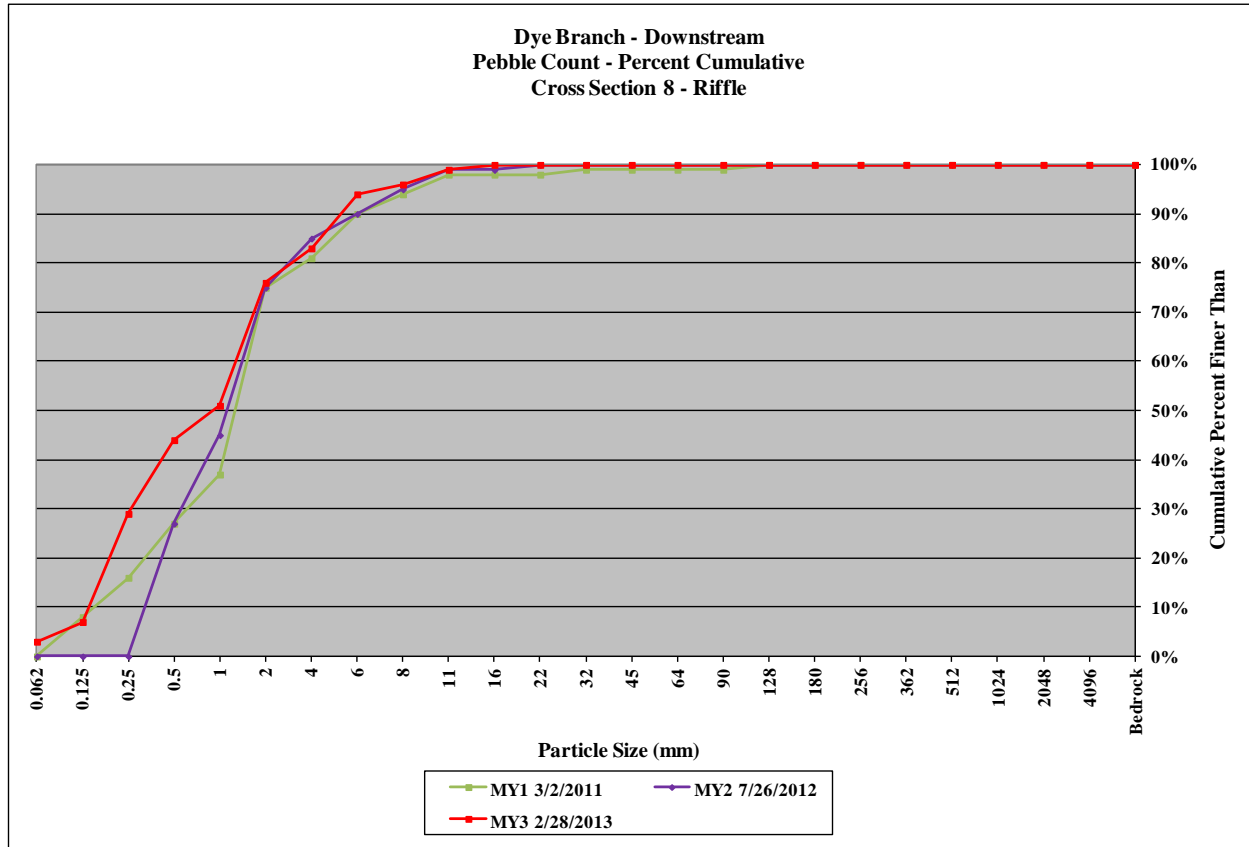

<b>Dye Branch II / Project No. 92255</b>					
<b>Dye Branch - Downstream - Cross-Section 9 - Pool</b>					
<b>Pebble Count Summary</b>					
			Monitoring Year 3		
<b>Description</b>	<b>Material</b>	<b>Size (mm)</b>	<b>Total #</b>	<b>Item %</b>	<b>Cum %</b>
<b>Silt/Clay</b>	silt/clay	0.062	1	1%	1%
<b>Sand</b>	very fine sand	0.125		0%	1%
	fine sand	0.25	3	3%	4%
	medium sand	0.50	1	1%	5%
	coarse sand	1.00	12	12%	17%
	very coarse sand	2.00	43	43%	60%
<b>Gravel</b>	very fine gravel	4.0	13	13%	73%
	fine gravel	5.7	4	4%	77%
	fine gravel	8.0	4	4%	81%
	medium gravel	11.3	5	5%	86%
	medium gravel	16.0	6	6%	92%
	coarse gravel	22.3	3	3%	95%
	coarse gravel	32	3	3%	98%
	very coarse gravel	45	1	1%	99%
	very coarse gravel	64	1	1%	100%
<b>Cobble</b>	small cobble	90		0%	100%
	medium cobble	128		0%	100%
	large cobble	180		0%	100%
	very large cobble	256		0%	100%
<b>Boulder</b>	small boulder	362		0%	100%
	small boulder	512		0%	100%
	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
	very large boulder	4096		0%	100%
<b>Bedrock</b>	bedrock	>4096		0%	100%
<b>TOTALS</b>			100	100%	100%

<b>Summary Data</b>	
D50	1.7
D84	9.7
D95	22

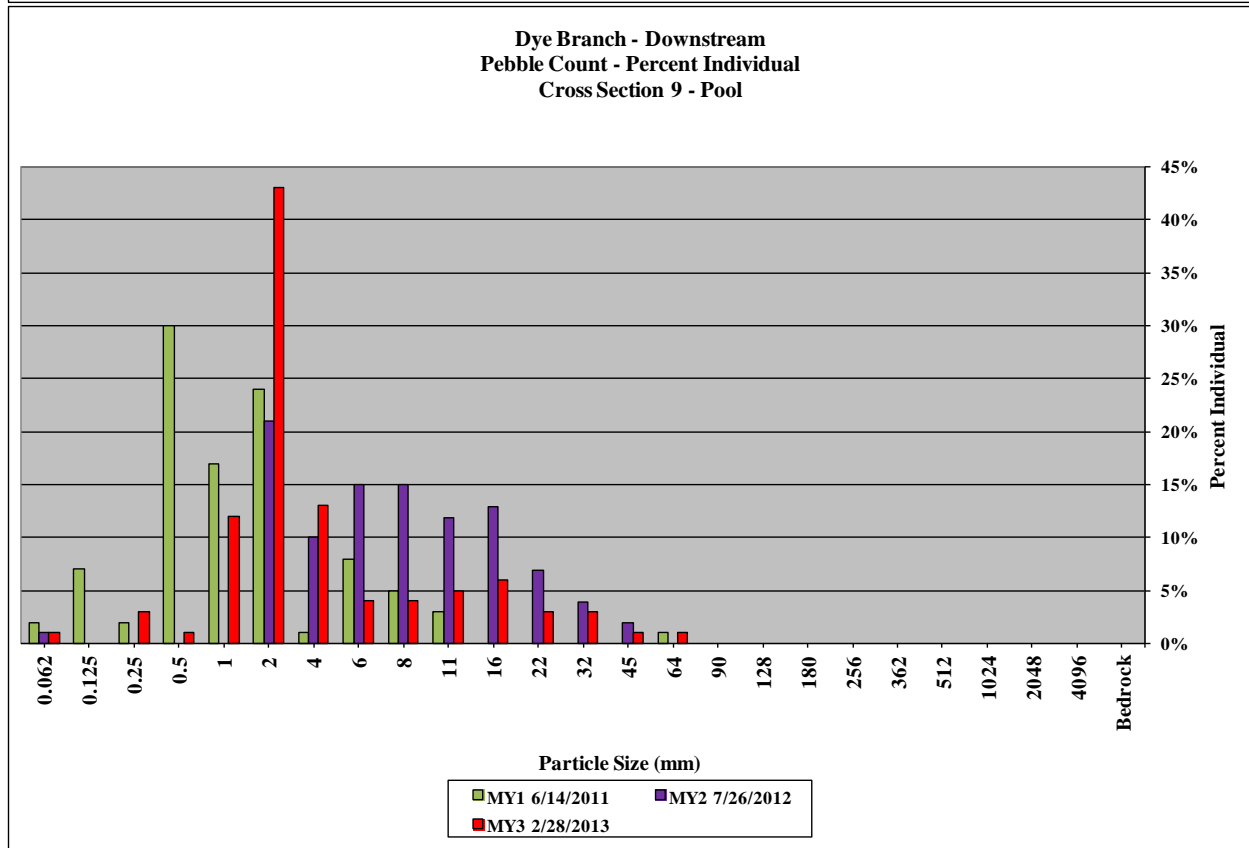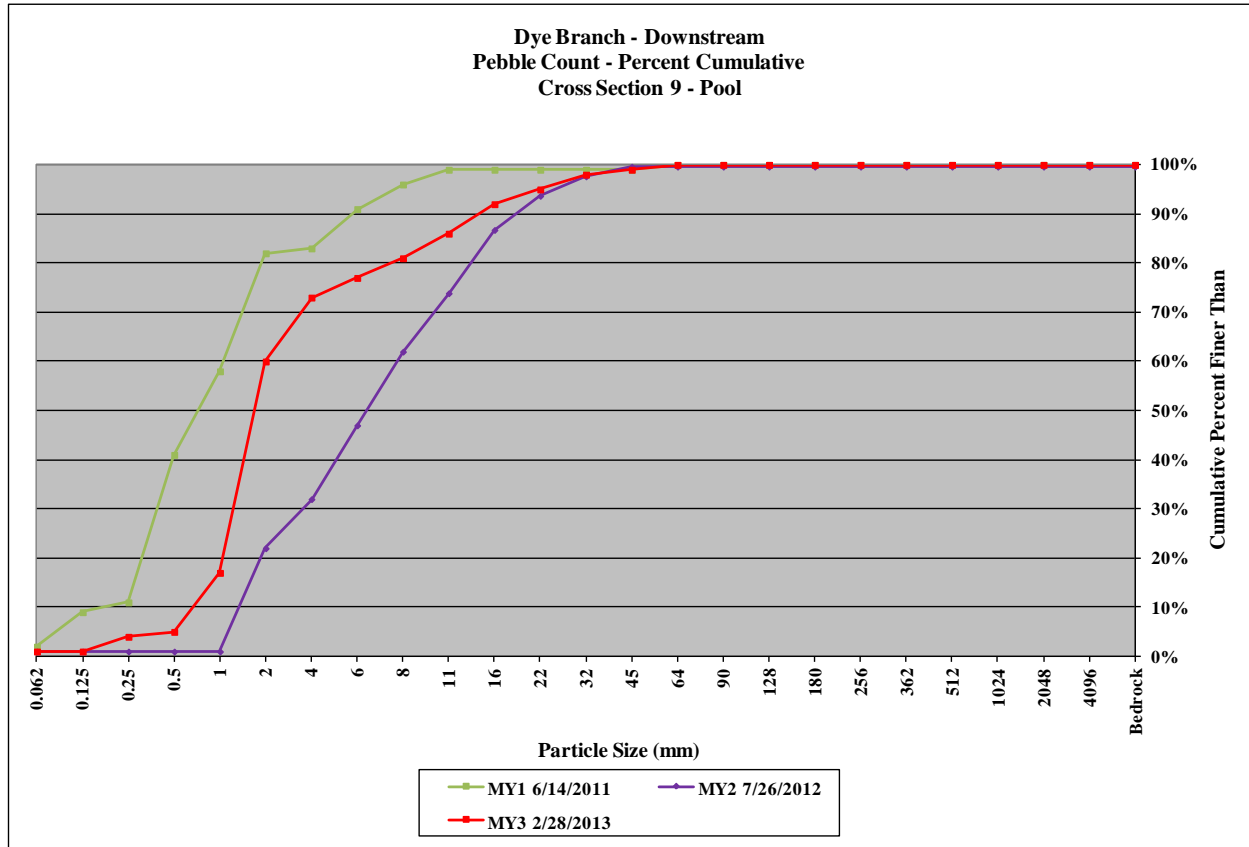



<b>Dye Branch II / Project No. 92255</b>					
<b>Dye Branch - Downstream - Cross-Section 10 - Riffle</b>					
<b>Pebble Count Summary</b>					
			Monitoring Year 3		
<b>Description</b>	<b>Material</b>	<b>Size (mm)</b>	<b>Total #</b>	<b>Item %</b>	<b>Cum %</b>
<b>Silt/Clay</b>	silt/clay	0.062	32	32%	32%
<b>Sand</b>	very fine sand	0.125	1	1%	33%
	fine sand	0.25	13	13%	46%
	medium sand	0.50	2	2%	48%
	coarse sand	1.00	4	4%	52%
	very coarse sand	2.00	5	5%	57%
<b>Gravel</b>	very fine gravel	4.0	5	5%	62%
	fine gravel	5.7	4	4%	66%
	fine gravel	8.0	6	6%	72%
	medium gravel	11.3	9	9%	81%
	medium gravel	16.0	11	11%	92%
	coarse gravel	22.3	6	6%	98%
	coarse gravel	32	1	1%	99%
	very coarse gravel	45	1	1%	100%
<b>Cobble</b>	very coarse gravel	64		0%	100%
	small cobble	90		0%	100%
	medium cobble	128		0%	100%
	large cobble	180		0%	100%
<b>Boulder</b>	very large cobble	256		0%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
<b>Bedrock</b>	very large boulder	4096		0%	100%
	bedrock	>4096		0%	100%
<b>TOTALS</b>			100	100%	100%

<b>Summary Data</b>	
D50	0.062
D84	12
D95	19

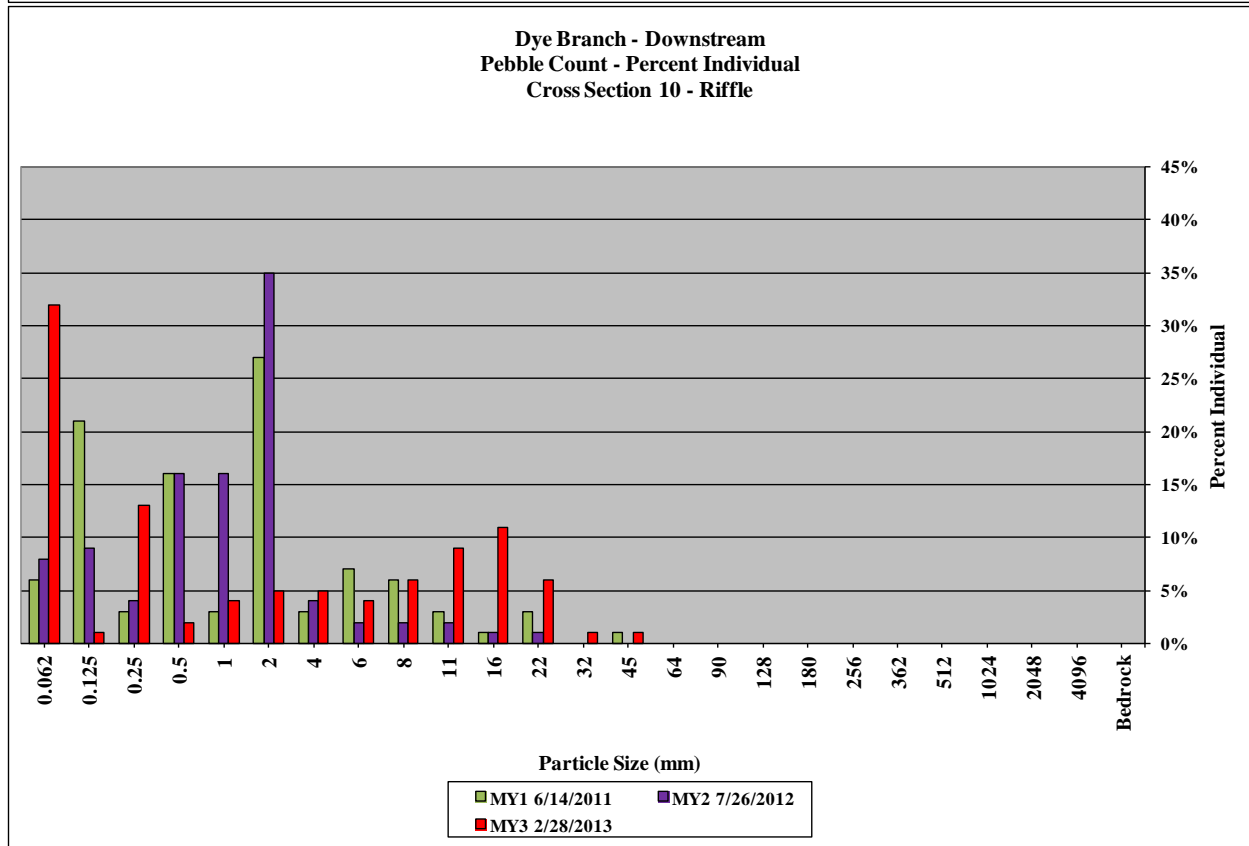
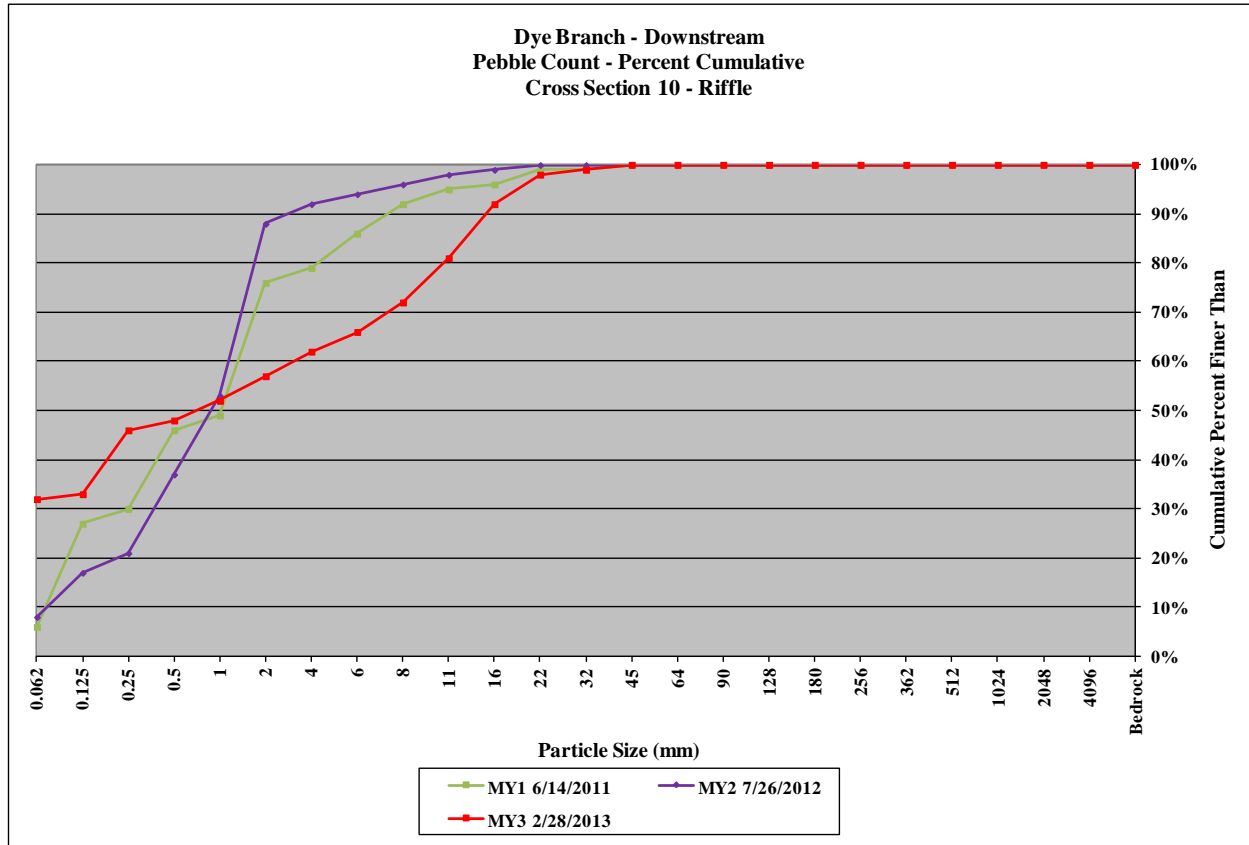


Table 10a. Baseline Stream Data Summary Dye Branch II / Project No. 92255 - Cemetery Branch (977 feet)																								
Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data						Design			Monitoring Baseline					
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
<b>Dimension &amp; Substrate - Riffle</b>																								
Bankfull Width (ft)	-	-	-	7.0	7.0	7.0	7.0	N/A	1	8.9	11.1	11.3	14.1	1.8	7	-	10.0	-	5.5	7.2	7.2	8.9	N/A	2
Floodprone Width (ft)				14.2	14.2	14.2	14.2	N/A	1	19.0	54.0	36.0	100.0	38.1	5	-	28.0	-	>30	>30	>30	>30	N/A	2
Bankfull Mean Depth (ft)	-	-	-	1.0	1.0	1.0	1.0	N/A	1	0.7	0.9	0.8	1.6	0.3	7	-	0.7	-	0.5	0.7	0.7	0.8	N/A	2
Bankfull Max Depth (ft)				1.5	1.5	1.5	1.5	N/A	1	1.0	1.5	1.3	2.4	0.5	7	0.8	1.1	1.6	1.0	1.2	1.2	1.4	N/A	2
Bankfull Cross Sectional Area (ft <sup>2</sup> )				6.8	6.8	6.8	6.8	N/A	1	6.8	9.6	8.4	18.4	3.9	7	-	7.0	-	3.0	5.0	5.0	7.0	N/A	2
Width/Depth Ratio				7.2	7.2	7.2	7.2	N/A	1	6.9	11.2	11.7	15.0	NA	3	-	14.3	-	10.3	10.8	10.8	11.2	N/A	2
Entrenchment Ratio				2.0	2.0	2.0	2.0	N/A	1	3.8	6.8	7.7	8.9	NA	3	-	2.8	-	>3.4	>4.4	>4.4	>5.4	N/A	2
Bank Height Ratio				1.5	1.5	1.5	1.5	N/A	1	1.0	1.1	1.0	1.2	NA	3	1.0	1.0	1.0	1.0	1.0	1.0	1.0	N/A	2
<b>Profile</b>																								
Riffle Length (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.8	23.4	19.5	53.9	14.84	14
Riffle Slope (ft/ft)				0.012	0.034	-	0.088	-	-	0.006	0.027	0.026	0.052	0.016	6	-	0.048	-	0.004	0.023	0.022	0.049	0.01	14
Pool Length (ft)				4.7	8.2	-	11.9	-	-	3.5	19.3	19.6	32.8	11.5	6	13.8	20.7	27.6	5.8	16.2	16.9	39.1	7.17	24
Pool Max Depth (ft)				-	2.6	-	-	-	-	1.8	2.6	2.9	3.2	0.5	7	-	2.0	-	1.8	3.0	2.9	3.7	0.48	18
Pool Spacing (ft)				22.8	86.0	-	228.2	-	-	18.0	52.7	40.2	140.8	41.7	7	18.4	27.6	32.2	4.5	38.7	36.4	111.0	24.40	24
<b>Pattern</b>																								
Channel Belt Width (ft)				5.3	10.8	-	22.6	-	-	26.0	49.1	40.0	119.0	29.8	9	23.0	32.2	41.4	11.3	30.6	37.0	46.7	12.3	16
Radius of Curvature (ft)				3.9	19.6	-	37.0	-	-	5.0	23.8	22.0	48.0	14.6	9	18.4	27.6	36.8	8.3	13.7	12.0	29.9	5.7	16
Rc: Bankfull Width (ft/ft)				0.6	2.8	-	5.3	-	-	0.6	2.1	1.8	4.3	1.3	9	1.8	2.8	3.7	2.4	2.4	2.4	2.4	N/A	1
Meander Wavelength (ft)				13.6	42.0	-	71.0	-	-	26.0	72.9	69.0	155.0	47.6	9	46.0	55.2	64.4	38.8	77.4	79.1	167.0	36.1	11
Meander Width Ratio				0.8	1.5	-	3.2	-	-	2.5	4.7	3.6	10.1	2.7	7	2.3	3.2	4.1	4.9	6.6	6.6	8.2	N/A	2
<b>Transport Parameters</b>																								
Reach Shear Stress (Competency) lb/ft <sup>2</sup>																								
Max Part Size (mm) Mobilized at Bankfull							45 - 180																	
Stream Power (Transport Capacity) W/m <sup>2</sup>																								
<b>Additional Reach Parameters</b>																								
Rosgen Classification							E4					E4 / C4 / C5					C4							C
Bankfull Velocity (fps)							6.6 - 7.8						4.1 - 7.0				5.5 - 6.7							
Bankfull Discharge (cfs)							44.3 - 52.8						35.0 - 128.1				38.4 - 46.6							
Valley Length (ft)							-					-					-							
Channel Thalweg Length (ft)							-					-					-							977
Sinuosity							1.14					1.15 - 2.22					1.14							1.08
Water Surface Slope (ft/ft)							0.0190					0.0057 - 0.0130					0.0190							-
Bankfull Slope (ft/ft)							-					-					-							0.0191
Bankfull Floodplain Area (acres)							-					-					-							
% of Reach with Eroding Banks							-					-					-							
Channel Stability or Habitat Metric							-					-					-							
Biological or Other							-					-					-							

- Information unavailable.  
N/A - Item does not apply.  
Non-Applicable.



Table 10a. Baseline Stream Data Summary																									
Dye Branch II / Project No. 92255 - Dye Branch-Upstream (1,465 feet)																									
Parameter	Regional Curve			Pre-Existing Condition					Reference Reach Data UT to Ostin Creek					Design			Monitoring Baseline								
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N	
<b>Dimension &amp; Substrate - Riffle</b>																									
Bankfull Width (ft)	-	-	-	-	11.2	-	-	-	-	16.0	18.5	-	20.6	-	-	-	20.1	-	25.7	28.4	26.9	32.7	N/A	3	
Floodprone Width (ft)	-	-	-	-	89.5	-	-	-	-	67.2	70.2	-	72.8	-	-	70.9	76.9	88.8	54.4	64.9	58.6	81.8	N/A	3	
Bankfull Mean Depth (ft)	-	-	-	-	1.6	-	-	-	-	1.6	1.6	-	1.7	-	-	-	1.5	-	1.1	1.3	1.3	1.4	N/A	3	
Bankfull Max Depth (ft)	-	-	-	-	2.8	-	-	-	-	1.5	1.9	-	2.4	-	-	1.5	1.8	2.2	2.2	2.8	2.5	3.6	N/A	3	
Bankfull Cross Sectional Area (ft <sup>2</sup> )	-	-	-	-	18.1	20.2	19.7	22.9	NA	3	27.4	30.3	-	33.4	-	-	31.0	-	29.5	36.3	32.5	46.9	N/A	3	
Width/Depth Ratio	-	-	-	-	6.2	7.0	7.0	7.9	NA	3	9.3	11.4	-	12.7	-	-	13.0	-	20.3	22.6	22.8	24.6	N/A	3	
Entrenchment Ratio	-	-	-	-	>3.2	>4.4	>5.0	>5.0	NA	3	3.5	3.8	-	4.4	-	-	3.5	3.8	4.4	2.0	2.3	2.3	2.5	N/A	3
Bank Height Ratio	-	-	-	-	1.0	-	-	-	-	1.0	1.2	-	1.4	-	-	1.0	1.0	1.0	1.0	1.0	1.0	1.0	N/A	3	
<b>Profile</b>																									
Riffle Length (ft)	-	-	-	-	-	-	-	-	-	6.1	17.6	-	30.2	-	-	6.6	19.1	32.7	20.1	51.6	47.1	97	29.5	8	
Riffle Slope (ft/ft)	-	-	-	-	0.002	0.014	-	0.042	-	0.006	0.028	-	0.066	-	-	0.007	0.030	0.070	0.002	0.006	0.005	0.016	0.005	8	
Pool Length (ft)	-	-	-	-	-	-	-	-	-	18.3	35.1	-	62.9	-	-	19.9	38.1	68.1	8.76	24.6	22.4	66.4	13	20	
Pool Max Depth (ft)	-	-	-	-	-	-	-	-	-	2.2	2.9	-	3.3	-	-	2.1	2.7	3.1	2.1	3.44	3.61	4.48	0.67	20	
Pool Spacing (ft)	-	-	-	-	-	-	-	-	-	50.3	78.9	-	105.8	-	-	54.5	85.5	114.7	24.1	66.8	65.3	125	28.6	19	
<b>Pattern</b>																									
Channel Belt Width (ft)	-	-	-	-	6.6	24.3	-	56.9	-	36.0	67.0	-	150.0	-	-	39.0	72.6	162.6	28.5	45.0	48.4	54.1	8.34	17	
Radius of Curvature (ft)	-	-	-	-	14.5	52.4	-	148.8	-	19.0	49.0	-	115.0	-	-	20.6	53.1	124.6	23.6	31.3	31.2	39.6	4.75	14	
Rc: Bankfull Width (ft/ft)	-	-	-	-	1.3	4.7	-	13.3	-	1.0	2.7	-	6.2	-	-	1.0	2.7	6.2	2.3	2.3	2.3	2.3	N/A	1	
Meander Wavelength (ft)	-	-	-	-	40.1	79.7	-	172.7	-	33.0	94.0	-	155.0	-	-	35.8	102	168.0	100.5	130.0	138.2	153.3	18.2	12	
Meander Width Ratio	-	-	-	-	0.6	2.2	-	5.1	-	1.9	3.6	-	8.1	-	-	1.9	3.6	8.1	1.7	1.9	1.9	2.1	0.21	3	
<b>Transport Parameters</b>																									
Reach Shear Stress (Competency) lb/ft <sup>2</sup>																									
Max Part Size (mm) Mobilized at Bankfull				30 - 100																					
Stream Power (Transport Capacity) W/m <sup>2</sup>																									
<b>Additional Reach Parameters</b>																									
Rosgen Classification				E4					C4					C5			C								
Bankfull Velocity (fps)	-			6.2 - 6.9					4.2					3.5											
Bankfull Discharge (cfs)	-			112.2 - 124.8					128					110											
Valley Length (ft)																									
Channel Thalweg Length (ft)				2,086					1,034					2,405			2,455								
Sinuosity				1.04					1.20					1.20			1.21								
Water Surface Slope (Channel) (ft/ft)				0.0090					0.0088					0.0080			0.0080								
Bankfull Slope (ft/ft)																	0.0083								
Bankfull Floodplain Area (acres)																									
% of Reach with Eroding Banks																									
Channel Stability or Habitat Metric																									
Channel Stability or Habitat Metric																									
Biological or Other																									

- Information unavailable.  
 N/A - Item does not apply.  
 Non-Applicable.

Table 10a. Baseline Stream Data Summary																									
Dye Branch II / Project No. 92255 - Dye Branch-Downstream (870 feet)																									
Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data UT to Ostin Creek						Design			Monitoring Baseline						
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N	
<b>Dimension &amp; Substrate - Riffle</b>																									
Bankfull Width (ft)	-	-	-	14.8	14.8	14.8	14.8	NA	1	16.0	18.5	-	20.6	-	-	-	20.1	-	18.4	18.6	18.6	18.8	N/A	3	
Floodprone Width (ft)				22.0	22.0	22.0	22.0	NA	1	67.2	70.2	-	72.8	-	-	70.9	76.9	88.8	48.7	61.8	61.8	74.8	N/A	3	
Bankfull Mean Depth (ft)	-	-	-	1.2	1.2	1.2	1.2	NA	1	1.6	1.6	-	1.7	-	-	1.5			1.9	2.0	2.0	2.0	N/A	3	
Bankfull Max Depth (ft)				2.4	2.4	2.4	2.4	NA	1	1.5	1.9	-	2.4	-	-	1.5	1.8	2.2	2.9	3.0	3.0	3.1	N/A	3	
Bankfull Cross Sectional Area (ft <sup>2</sup> )				17.4	17.4	17.4	2.4	NA	1	27.4	30.3	-	33.4	-	-	31.0			34.0	36.1	36.1	38.1	N/A	3	
Width/Depth Ratio				12.5	12.5	12.5	2.4	NA	1	9.3	11.4	-	12.7	-	-	13.0			9.3	9.6	9.6	9.9	N/A	3	
Entrenchment Ratio				1.5	1.5	1.5	2.4	NA	1	3.5	3.8	-	4.4	-	-	3.5	3.8	4.4	2.7	3.4	3.4	4.0	N/A	3	
Bank Height Ratio				4.9	4.9	4.9	2.4	NA	1	1.0	1.2	-	1.4	-	-	1.0	1.0	1.0	1.0	1.0	1.0	1.0	N/A	3	
<b>Profile</b>																									
Riffle Length (ft)				-	-	-	-	-	-	6.1	17.6	-	30.2	-	-	6.6	19.1	32.7	15.7	50.3	55.7	79.3	20.2	7	
Riffle Slope (ft/ft)				0.003	0.021	-	0.121	-	-	0.006	0.028	-	0.066	-	-	0.007	0.030	0.070	0.001	0.006	0.006	0.014	0.004	7	
Pool Length (ft)				2.9	24.8	-	120	-	-	18.3	35.1	-	62.9	-	-	19.9	38.1	68.1	10.1	19.9	15.9	39.6	8.91	14	
Pool Max Depth (ft)				-	3.1	-	-	-	-	2.2	2.9	-	3.3	-	-	2.1	2.7	3.1	3.3	3.91	3.77	5.05	0.59	12	
Pool Spacing (ft)				79.0	162.0	-	261.0	-	-	50.3	78.9	-	105.8	-	-	54.5	85.5	114.7	15.3	57.5	38.8	130	41.5	14	
<b>Pattern</b>																									
Channel Belt Width (ft)				15.6	30.6	-	67.7	-	-	36.0	67.0	-	150.0	-	-	39.0	72.6	162.6	28.3	49.2	57.5	65.4	15.4	9	
Radius of Curvature (ft)				11.0	42.1	-	81.9	-	-	19.0	49.0	-	115.0	-	-	20.6	53.1	124.6	32.7	40.7	42.2	50.1	5.6	7	
Re: Bankfull Width (ft/ft)				0.7	2.9	-	5.6	-	-	1.0	2.7	-	6.2	-	-	1.0	2.7	6.2	1.7	1.7	1.7	1.7	N/A	1	
Meander Wavelength (ft)				62.0	103.0	-	157	-	-	33.0	94.0	-	155.0	-	-	35.8	102	168.0	138.9	162.2	157.3	210.5	27.2	6	
Meander Width Ratio				1.1	2.1	-	4.6	-	-	1.9	3.6	-	8.1	-	-	1.9	3.6	8.1	2.4	2.8	2.8	3.1	0.51	2	
<b>Transport Parameters</b>																									
Reach Shear Stress (Competency) lb/ft <sup>2</sup>																									
Max Part Size (mm) Mobilized at Bankfull							30 - 100																		
Stream Power (Transport Capacity) W/m <sup>2</sup>																									
<b>Additional Reach Parameters</b>																									
Rosgen Classification							G4c						C4					C5					C		
Bankfull Velocity (fps)							6.1 - 7.2						4.2					3.5							
Bankfull Discharge (cfs)							105.4 - 126.0						128					110							
Valley Length (ft)																									
Channel Thalweg Length (ft)																									
Sinuosity							1.14						1.46					1.09					1.10		
Water Surface Slope (ft/ft)							0.0110						0.0090					0.0095							
Bankfull Slope (ft/ft)																							0.0106		
Bankfull Floodplain Area (acres)																									
% of Reach with Eroding Banks																									
Channel Stability or Habitat Metric																									
Biological or Other																									

- Information unavailable.  
 N/A - Item does not apply.  
 Non-Applicable.

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions) Dye Branch II / Project No. 92255 - Cemetery Branch (977 feet)																															
Parameter	Pre-Existing Condition						Reference Reach Data						Design						Monitoring Baseline												
Ri% / Ru% / P% / G% / S%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	35%	4%	42%	13%	7%				
SC% / Sa% / G% / C% / B% / Be%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-								
d16 / D35 / d50 / d84 / d95 / di <sup>p</sup> / di <sup>sp</sup> (mm)	0.9	1.2	2.0	8.0	10.1	88.9	-	0.21	0.5	3.5	13.9	26.6	45.0	-																	
Entrenchment Class																															
<1.5 / 1.5 - 1.99 / 2 - 4.9 / 5.0 - 9.9 / >10	-	-	-	-	-		-	-	-	-	-	-	-	-																	
Incision Class																															
<1.2 / 1.2 - 1.49 / 1.5 - 1.99 / >2.0	-	-	-	-			-	-	-	-	-	-	-	-																	

- Information unavailable.  
N/A - Item does not apply.  
Non-Applicable.

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions) Dye Branch II / Project No. 92255 - Dye Branch-Upstream (1,465 feet)																															
Parameter	Pre-Existing Condition						Reference Reach Data						Design						Monitoring Baseline												
Ri% / Ru% / P% / G% / S%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	28%	15%	34%	20%	3%				
SC% / Sa% / G% / C% / B% / Be%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-								
d16 / D35 / d50 / d84 / d95 / di <sup>p</sup> / di <sup>sp</sup> (mm)	0.15	0.4	3.3	10.3	13.7	45.7	-	-	-	-	-	-	-	-																	
Entrenchment Class																															
<1.5 / 1.5 - 1.99 / 2 - 4.9 / 5.0 - 9.9 / >10	-	-	-	-	-		-	-	-	-	-	-	-	-																	
Incision Class																															
<1.2 / 1.2 - 1.49 / 1.5 - 1.99 / >2.0	-	-	-	-			-	-	-	-	-	-	-	-																	

- Information unavailable.  
Non-Applicable.

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions) Dye Branch II / Project No. 92255 - Dye Branch-Downstream (870 feet)																															
Parameter	Pre-Existing Condition						Reference Reach Data						Design						Monitoring Baseline												
Ri% / Ru% / P% / G% / S%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	43%	6%	34%	13%	3%				
SC% / Sa% / G% / C% / B% / Be%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-								
d16 / D35 / d50 / d84 / d95 / di <sup>p</sup> / di <sup>sp</sup> (mm)	0.15	0.28	0.56	10.7	13.0	45.7	-	-	-	-	-	-	-	-																	
Entrenchment Class																															
<1.5 / 1.5 - 1.99 / 2 - 4.9 / 5.0 - 9.9 / >10	-	-	-	-	-		-	-	-	-	-	-	-	-																	
Incision Class																															
<1.2 / 1.2 - 1.49 / 1.5 - 1.99 / >2.0	-	-	-	-			-	-	-	-	-	-	-	-																	

- Information unavailable.  
N/A - Item does not apply.  
Non-Applicable.



<b>Table 11a. Baseline Morphology &amp; Hydraulic Monitoring Summary Dye Branch II / Project No. 92255 - Cemetery Branch (971 Feet)</b>																		
<b>Parameter</b>	<b>Cross Section 1 Pool</b>						<b>Cross Section 2 Riffle</b>						<b>Cross Section 3 Riffle</b>					
<b>Dimension</b>	<b>Base</b>	<b>MY1</b>	<b>MY2</b>	<b>MY3</b>	<b>MY4</b>	<b>MY5</b>	<b>Base</b>	<b>MY1</b>	<b>MY2</b>	<b>MY3</b>	<b>MY4</b>	<b>MY5</b>	<b>Base</b>	<b>MY1</b>	<b>MY2</b>	<b>MY3</b>	<b>MY4</b>	<b>MY5</b>
Record Elevation (datum) Used	836.3	836.3	836.3	836.3			826.3	826.3	826.3	826.3			821.7	821.7	821.7	821.7		
Bankfull Width (ft)	9.7	10.2	9.4	9.2			8.9	10.6	8.0	8.4			5.5	6.0	6.5	6.1		
Floodprone Width (ft)	>50	>50	>50	>50			>30	>30	>30	>30			>30	>30	>30	>30		
Bankfull Mean Depth (ft)	1.9	1.5	1.5	1.5			0.8	0.6	0.5	0.5			0.5	0.5	0.6	0.6		
Bankfull Max Depth (ft)	3.1	2.7	2.4	2.2			1.4	1.2	1.2	1.2			1.0	1.0	1.0	0.9		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	18.9	15.2	14.3	14.0			7.0	6.3	3.9	4.1			3.0	2.8	4.0	3.6		
Bankfull Width/Depth Ratio	5.0	6.8	6.2	6.1			11.2	18.1	16.4	17.3			10.3	12.7	10.6	10.4		
Bankfull Entrenchment Ratio	>5.1	>4.9	>5.3	>5.4			>3.4	>2.8	>3.8	>3.6			>5.4	>5.0	>4.6	>4.9		
Bankfull Bank Height Ratio	1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0		
Cross Sectional Area between End Pins (ft <sup>2</sup> )	18.9	15.2	14.3	14.0			7.0	6.3	3.9	4.1			3.0	2.8	4.0	3.6		
d50 (mm)	N/A	5.7	4.8	4.1			N/A	8.4	14.0	2.1			N/A	6.0	5.0	6.0		

N/A - Item does not apply.

<b>Table 11a. Baseline Morphology &amp; Hydraulic Monitoring Summary Dye Branch II / Project No. 92255 - Dye Branch-Upstream (1,471 Feet)</b>																								
<b>Parameter</b>	<b>Cross Section 4 Riffle</b>						<b>Cross Section 5 Pool</b>						<b>Cross Section 6 Riffle</b>						<b>Cross Section 7 Riffle</b>					
<b>Dimension</b>	<b>Base</b>	<b>MY1</b>	<b>MY2</b>	<b>MY3</b>	<b>MY4</b>	<b>MY5</b>	<b>Base</b>	<b>MY1</b>	<b>MY2</b>	<b>MY3</b>	<b>MY4</b>	<b>MY5</b>	<b>Base</b>	<b>MY1</b>	<b>MY2</b>	<b>MY3</b>	<b>MY4</b>	<b>MY5</b>	<b>Base</b>	<b>MY1</b>	<b>MY2</b>	<b>MY3</b>	<b>MY4</b>	<b>MY5</b>
Record Elevation (datum) Used	824.3	824.3	824.3	824.3			817.4	817.4	817.4	817.4			815.5	815.5	815.5	815.5			812.5	812.5	812.5	812.5		
Bankfull Width (ft)	25.7	23.8	22.9	20.8			17.1	17.0	16.8	16.4			32.7	28.7	27.7	26.9			26.9	24.1	21.3	20.1		
Floodprone Width (ft)	58.6	52.8	52.8	52.8			50	47.1	47.1	47.1			81.8	78.2	78.2	78.2			54.4	52.6	52.6	52.6		
Bankfull Mean Depth (ft)	1.3	1.1	1.0	1.1			1.7	1.4	2.1	2.1			1.4	1.3	1.3	1.3			1.1	1.0	0.9	1.1		
Bankfull Max Depth (ft)	2.5	2.0	2.1	2.3			3.4	2.8	3.6	3.6			3.6	3.2	3.2	3.3			2.2	2.0	2.1	2.4		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	32.5	27.1	23.1	22.4			28.8	23.7	35.0	35.1			46.9	37.5	36.2	36.0			29.5	24.2	19.9	21.3		
Bankfull Width/Depth Ratio	20.3	20.9	22.6	19.3			10.2	12.2	8.1	7.7			22.8	22.0	21.2	20.0			24.6	24.0	22.9	18.9		
Bankfull Entrenchment Ratio	2.3	2.2	2.3	2.5			2.9	2.8	2.8	2.9			2.5	2.7	2.8	2.9			2.0	2.2	2.5	2.6		
Bankfull Bank Height Ratio	1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0		
Cross Sectional Area between End Pins (ft <sup>2</sup> )	32.5	27.1	23.1	22.4			28.8	23.7	35.0	35.2			46.9	37.5	36.2	36.0			29.5	24.2	19.9	21.4		
d50 (mm)	N/A	1.2	1.2	1.0			N/A	6.0	1.7	13.0			N/A	1.9	4.5	1.6			N/A	2.7	8.0	7.4		

N/A - Item does not apply.

<b>Table 11a. Baseline Morphology &amp; Hydraulic Monitoring Summary Dye Branch II / Project No. 92255 - Dye Branch-Downstream (869 Feet)</b>																		
<b>Parameter</b>	<b>Cross Section 8 Rifle</b>						<b>Cross Section 9 Pool</b>						<b>Cross Section 10 Rifle</b>					
	<b>Base</b>	<b>MY1</b>	<b>MY2</b>	<b>MY3</b>	<b>MY4</b>	<b>MY5</b>	<b>Base</b>	<b>MY1</b>	<b>MY2</b>	<b>MY3</b>	<b>MY4</b>	<b>MY5</b>	<b>Base</b>	<b>MY1</b>	<b>MY2</b>	<b>MY3</b>	<b>MY4</b>	<b>MY5</b>
Record Elevation (datum) Used	809.3	809.3	809.3	809.3			806.1	806.1	806.1	806.1			801.1	801.1	801.1	801.1		
Bankfull Width (ft)	18.8	18.8	19.6	18.6			26.3	26.3	24.3	24.6			18.4	18.5	17.7	17.9		
Floodprone Width (ft)	74.8	73.5	73.5	73.5			>70	>70	>70	>70			48.7	47.6	47.6	47.6		
Bankfull Mean Depth (ft)	2.0	1.9	2.1	2.0			1.8	1.7	2.3	2.6			1.9	1.6	1.6	1.6		
Bankfull Max Depth (ft)	3.1	3.0	3.9	3.3			3.5	3.5	3.5	4.1			2.9	2.4	2.5	2.7		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	38.1	35.9	41.0	36.8			48.4	43.6	55.3	63.5			34.0	29.5	27.8	29.4		
Bankfull Width/Depth Ratio	9.3	9.9	9.3	9.4			14.3	15.9	10.7	9.6			9.9	11.7	11.3	11.0		
Bankfull Entrenchment Ratio	4.0	3.9	3.8	4.0			>2.7	>2.7	2.9	>2.8			2.7	2.6	2.7	2.7		
Bankfull Bank Height Ratio	1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0		
Cross Sectional Area between End Pins (ft <sup>2</sup> )	38.1	35.9	41.0	36.9			48.4	43.6	55.3	63.5			34.0	29.5	27.8	29.4		
d50 (mm)	N/A	1.3	1.1	0.9			N/A	0.72	6.4	1.7			N/A	1.0	0.9	0.1		

N/A - Item does not apply.





Table 11b. Monitoring Data - Stream Reach Data Summary																																				
Dye Branch II / Project No. 92255 - Dye Branch-Upstream (1,471 feet)																																				
Parameter	Baseline						MY - 1						MY - 2						MY - 3						MY - 4						MY - 5					
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
<b>Dimension &amp; Substrate - Riffle</b>																																				
Bankfull Width (ft)	25.7	28.4	26.9	32.7	N/A	3	23.8	25.5	24.1	28.7	N/A	3	21.3	24.0	22.9	27.7	N/A	3	20.1	22.6	20.8	26.9	N/A	3												
Floodprone Width (ft)	54.4	64.9	58.6	81.8	N/A	3	52.6	61.2	52.8	78.2	N/A	3	52.6	61.2	52.8	78.2	N/A	3	52.6	61.2	52.8	78.2	N/A	3												
Bankfull Mean Depth (ft)	1.1	1.3	1.3	1.4	N/A	3	1.0	1.1	1.1	1.3	N/A	3	0.9	1.1	1.0	1.3	N/A	3	1.1	1.2	1.1	1.3	N/A	3												
Bankfull Max Depth (ft)	2.2	2.8	2.5	3.6	N/A	3	2.0	2.4	2.0	3.2	N/A	3	2.1	2.5	2.1	3.2	N/A	3	2.3	2.7	2.4	3.3	N/A	3												
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	29.5	36.3	32.5	46.9	N/A	3	24.2	29.6	27.1	37.5	N/A	3	19.9	26.4	23.1	36.2	N/A	3	21.3	26.6	22.4	36.0	N/A	3												
Width/Depth Ratio	20.3	22.6	22.8	24.6	N/A	3	20.9	22.3	22.0	24.0	N/A	3	21.2	22.2	22.6	22.9	N/A	3	18.9	19.4	19.3	20.0	N/A	3												
Entrenchment Ratio	2.0	2.3	2.3	2.5	N/A	3	2.2	2.4	2.2	2.7	N/A	3	2.3	2.5	2.5	2.8	N/A	3	2.5	2.7	2.6	2.9	N/A	3												
Bank Height Ratio	1.0	1.0	1.0	1.0	N/A	3	1.0	1.0	1.0	1.0	N/A	3	1.0	1.0	1.0	1.0	N/A	3	1.0	1.0	1.0	1.0	N/A	3												
<b>Profile</b>																																				
Riffle Length (ft)	20.1	51.6	47.1	97.0	29.5	8	17.5	40.6	33.3	75.1	19.0	11	15.5	37.5	34.6	58.6	14.4	9	16.8	41.4	47.0	54.0	16.2	6												
Riffle Slope (ft/ft)	0.002	0.006	0.005	0.016	0.005	8	0.002	0.007	0.005	0.019	0.005	11	0.001	0.007	0.004	0.016	0.005	9	0.002	0.008	0.006	0.016	0.006	6												
Pool Length (ft)	8.8	24.6	22.4	66.4	13.0	20	10.7	29.8	27.3	75.6	15.9	20	8.8	29.5	23.2	76.3	18.7	20	7.7	26.2	21.8	81.6	17.7	21												
Pool Max Depth (ft)	2.1	3.4	3.6	4.5	0.7	20	1.8	3.3	3.4	4.7	0.8	20	2.2	3.7	3.8	5.0	0.8	20	1.6	3.1	3.1	4.3	0.8	20												
Pool Spacing (ft)	24.1	66.8	65.3	124.9	28.6	19	31.7	67.7	69.0	128.2	27.5	19	20.7	62.1	55.7	127.6	29.6	19	13.2	65.1	64.0	127.5	30.7	18												
<b>Pattern</b>																																				
Channel Belt Width (ft)	28.5	45.0	48.4	54.1	8.3	17																														
Radius of Curvature (ft)	23.6	31.3	31.2	39.6	4.7	14																														
Rc: Bankfull Width (ft/ft)	2.0	2.0	2.0	2.0	N/A	1																														
Meander Wavelength (ft)	100.5	130.0	138.2	153.3	18.2	12																														
Meander Width Ratio	1.5	1.7	1.8	1.9	N/A	3																														
<b>Additional Reach Parameters</b>																																				
Rosgen Classification	C						C5						C4						C4																	
Channel Thalweg Length (ft)	1,465						1,471						1,465						1,447																	
Sinuosity (ft)	1.15						1.16						1.15						1.14																	
Water Surface Slope (Channel) (ft/ft)	-						0.0092						0.0091						0.0092																	
Bankfull Slope (ft/ft)	0.0091						0.0094						0.0095						0.0091																	
Ri% / Ru% / P% / G% / S%	28%	15%	34%	20%	3%		31%	10%	41%	15%	4%		23%	14%	40%	19%	3%		17%	15%	38%	26%	3%													
SC% / SA% / G% / C% / B% / Be%*							0%	50%	47%	3%	0%	0%	2%	45%	50%	3%	0%	0%	3%	43%	48%	6%	0%	0%												
d16 / d35 / d50 / d84 / d95 (mm)																																				
% of Reach with Eroding Banks	0%						0%						7%						10%																	
Channel Stability or Habitat Metric	N/A						N/A						N/A						N/A																	
Biological or Other	N/A						N/A						N/A						N/A																	

N/A - Information does not apply.  
 Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step  
 SC = Silt-Clay / SA = Sand / G = Gravel / C = Cobble / B = Boulder / Be = Bedrock  
 \*Percentages based on riffle and pool pebble counts.

Table 11b. Monitoring Data - Stream Reach Data Summary																														
Dye Branch II / Project No. 92255 - Dye Branch-Downstream (869 feet)																														
Parameter	Baseline					MY - 1					MY - 2					MY - 3					MY - 4					MY - 5				
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
<b>Dimension &amp; Substrate - Riffle</b>																														
Bankfull Width (ft)	18.4	18.6	18.6	18.8	N/A	2	18.5	18.7	18.7	18.8	N/A	2	17.7	18.7	18.7	19.6	N/A	2	17.9	20.4	18.6	24.6	N/A	2						
Floodprone Width (ft)	48.7	61.8	61.8	74.8	N/A	2	47.6	60.6	60.6	73.5	N/A	2	47.6	60.6	60.6	73.5	N/A	2	47.6	63.7	70.0	73.5	N/A	2						
Bankfull Mean Depth (ft)	1.9	2.0	2.0	2.0	N/A	2	1.6	1.8	1.8	1.9	N/A	2	1.6	1.9	1.9	2.1	N/A	2	1.6	2.1	2.0	2.6	N/A	2						
Bankfull Max Depth (ft)	2.9	3.0	3.0	3.1	N/A	2	2.4	2.7	2.7	3.0	N/A	2	2.5	3.2	3.2	3.9	N/A	2	2.7	3.4	3.3	4.1	N/A	2						
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	34.0	36.1	36.1	38.1	N/A	2	29.5	32.7	32.7	35.9	N/A	2	27.8	34.4	34.4	41.0	N/A	2	29.4	43.2	36.8	63.5	N/A	2						
Width/Depth Ratio	9.3	9.6	9.6	9.9	N/A	2	9.9	10.8	10.8	11.7	N/A	2	9.3	10.3	10.3	11.3	N/A	2	9.4	10.0	9.6	11.0	N/A	2						
Entrenchment Ratio	2.7	3.4	3.4	4.0	N/A	2	2.6	3.3	3.3	3.9	N/A	2	2.7	3.3	3.3	3.8	N/A	2	2.7	3.2	2.8	4.0	N/A	2						
Bank Height Ratio	1.0	1.0	1.0	1.0	N/A	2	1.0	1.0	1.0	1.0	N/A	2	1.0	1.0	1.0	1.0	N/A	2	1.0	1.0	1.0	1.0	N/A	2						
<b>Profile</b>																														
Riffle Length (ft)	15.7	50.3	55.7	79.3	20.2	7	14.4	48.7	43.0	87.0	24.1	7	14.7	37.3	39.9	54.7	18.2	4	18.9	42.8	41.0	70.4	23.4	4						
Riffle Slope (ft/ft)	0.001	0.006	0.006	0.014	0.004	7	0.001	0.003	0.003	0.006	0.002	7	0.003	0.007	0.007	0.010	0.004	4	0.001	0.005	0.005	0.008	0.004	4						
Pool Length (ft)	10.1	19.9	15.9	39.6	8.9	14	9.7	17.6	17.5	26.1	5.8	15	7.6	26.2	31.4	44.2	13.0	14	8.7	26.6	30.2	56.6	15.7	15						
Pool Max Depth (ft)	3.3	3.9	3.8	5.1	0.6	12	3.2	3.9	4.0	4.9	0.5	13	3.0	4.2	3.8	6.7	1.0	13	3.0	3.9	3.8	5.3	0.7	12						
Pool Spacing (ft)	15.3	57.5	38.8	130.2	41.5	14	10.8	56.8	40.6	129.1	40.4	14	10.0	60.6	61.6	109.9	34.9	13	12.0	57.3	48.3	114.8	36.8	14						
<b>Pattern</b>																														
Channel Belt Width (ft)	28.3	49.2	57.5	65.4	15.4	9																								
Radius of Curvature (ft)	32.7	40.7	42.2	50.1	5.6	7																								
Rc: Bankfull Width (ft/ft)	1.6	1.6	1.6	1.6	N/A	1																								
Meander Wavelength (ft)	138.9	162.2	157.3	210.5	27.2	6																								
Meander Width Ratio	3.1	3.1	3.1	3.1	N/A	2																								
<b>Additional Reach Parameters</b>																														
Rosgen Classification	C					C5					C5					C5														
Channel Thalweg Length (ft)	870					869					875					867														
Sinuosity (ft)	1.10					1.09					1.10					1.09														
Water Surface Slope (Channel) (ft/ft)	-					0.0099					0.0094					0.0099														
Bankfull Slope (ft/ft)	0.0106					0.0104					0.0101					0.0089														
Ri% / Ru% / P% / G% / S%	43%	6%	34%	13%	3%	39%	10%	31%	18%	2%	17%	19%	42%	19%	3%	20%	11%	46%	20%	4%										
SC% / SA% / G% / C% / B% / Be%*						3%	75%	22%	0%	0%	0	3%	59%	38%	0%	0%	0%	12%	52%	36%	0%	0%	0%							
d16 / d35 / d50 / d84 / d95 (mm)																														
% of Reach with Eroding Banks	0%					0%					8%					10%														
Channel Stability or Habitat Metric	N/A					N/A					N/A					N/A														
Biological or Other	N/A					N/A					N/A					N/A														

N/A - Information does not apply.  
 Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step  
 SC = Silt-Clay / SA = Sand / G = Gravel / C = Cobble / B = Boulder / Be = Bedrock  
 \*Percentages based on riffle and pool pebble counts.






# **Appendix E**

## **Hydrologic Data**


<b>Table 12. Verification of Bankfull Events Dye Branch II / Project No. 92255</b>		
<b>Date of Occurrence</b>	<b>Method</b>	<b>Feet Above Average Bankfull Elevation</b>
7/8/2011	Water level logger	1.07
9/21/2011	Water level logger	1.14
9/24/2011	Water level logger	0.52
5/16/2012	Water level logger	1.63
7/11/2012	Water level logger	0.21
9/29/2012	Water level logger	0.22
4/12/2013	Water level logger	0.08
6/28/2013	Water level logger	0.81
6/30/2013	Water level logger	0.72
7/9/2013	Water level logger	1.62
7/31/2013	Water level logger	0.53

Figure 3. Dye Branch Water Level Logger Chart

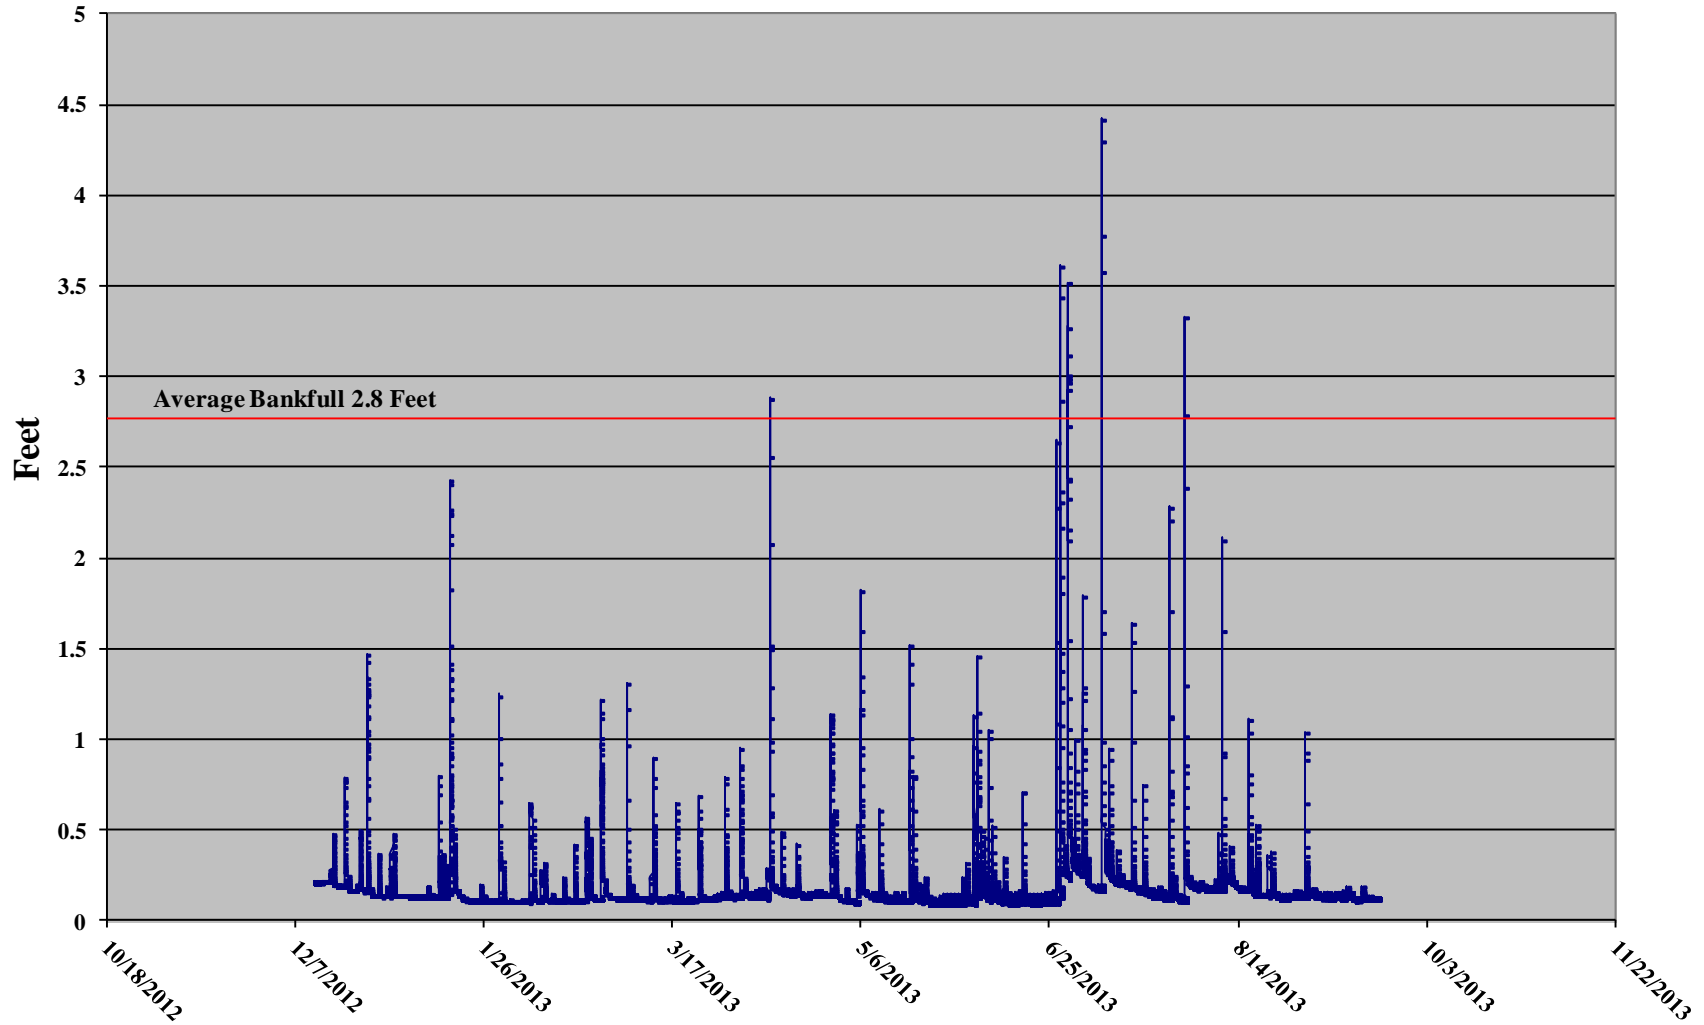



**Figure 3. Precipitation for Mooresville, North Carolina**

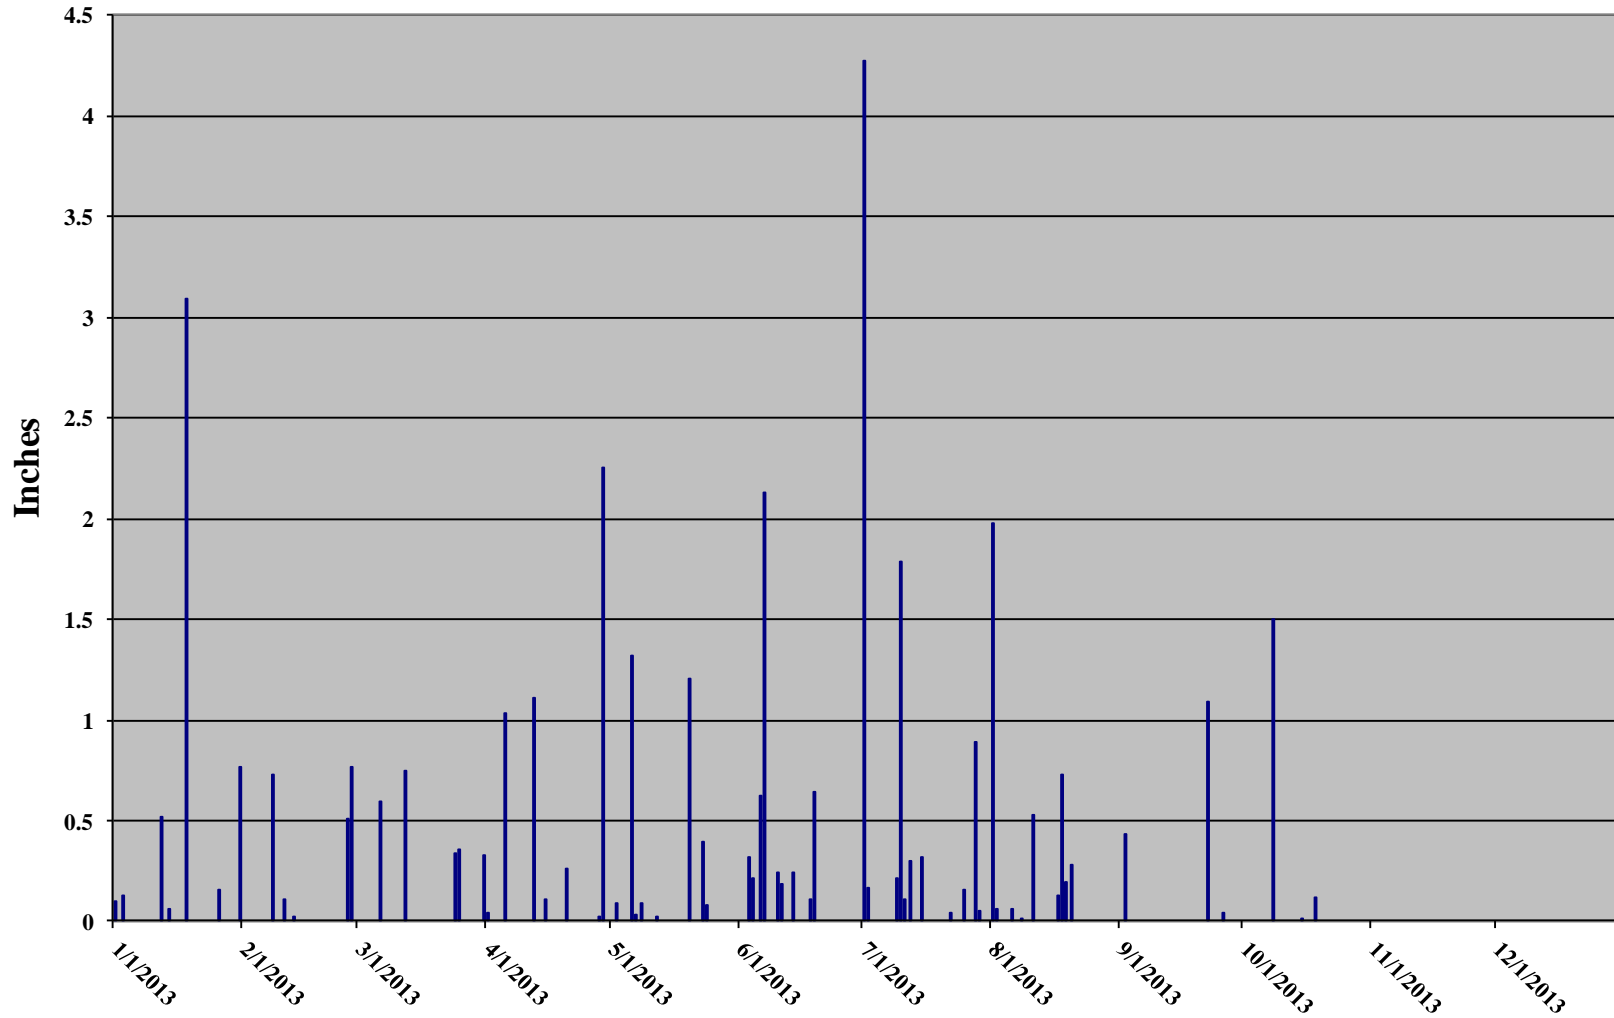

NC CRONOS (North Carolina Climate Retrieval and Observations Network of the Southeast Database). State Climate Office of North Carolina. Version 2.7.2. Mooresville 1.9 SSE (NC-IR-1). <http://www.nc-climate.ncsu.edu/cronos/> Accessed November 2013.