

**Glade Creek
Stream Restoration
NCEEP Project Number: 854
Monitoring Contract Number: D08033S
Monitoring Year 2
2012 Final Report**




**Submitted to
North Carolina Ecosystem Enhancement Program
North Carolina Department of Environment and Natural Resources
November 2012**



**1652 Mail Service Center
Raleigh, NC 27699**

Monitoring Firm

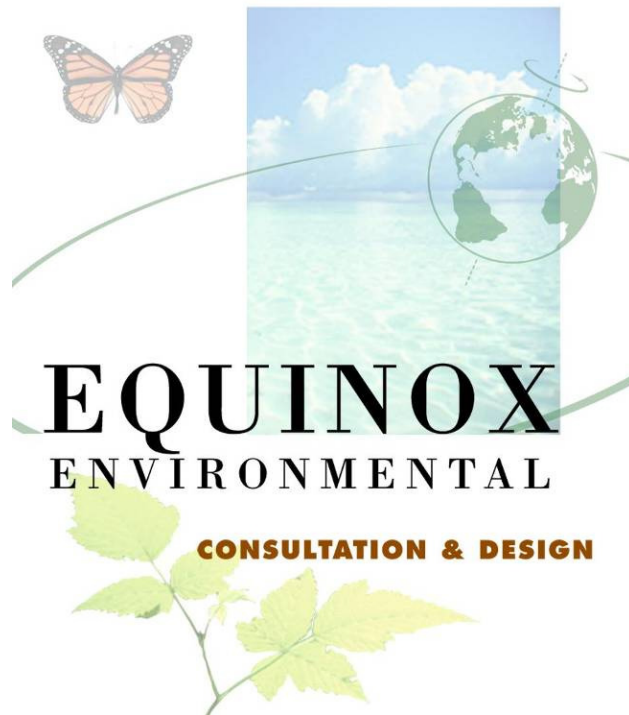

**37 Haywood Street, Suite 100
Asheville, North Carolina 28801
Phone: 828-253-6856**

**Project Contact: Kevin Mitchell
Email: kevin@equinoxenvironmental.com**

Glade Creek Stream Restoration 2012 Monitoring Report (MY 2)

Table of Contents

1.0	Executive Summary/Project Abstract	Page 1
2.0	Methodology	Page 3
3.0	References	Page 4

Appendices

Appendix A. Project Vicinity Map and Background Tables

- Figure 1. Vicinity Map and Directions
- Table 1a. Project Components
- Table 1b. Component Summations
- Table 2. Project Activity and Reporting History
- Table 3. Project Contacts
- Table 4. Project Attributes

Appendix B. Visual Assessment Data

- Figure 2. Integrated Current Condition Plan View
- Table 5. Visual Stream Morphology Stability Assessment
- Table 6. Vegetation Condition Assessment
- Photo Station Photos

Appendix C. Vegetation Plot Data

- Table 7. Vegetation Plot Criteria Attainment
- Vegetation Monitoring Plot Photos
- Table 8. CVS Vegetation Plot Metadata
- Table 9. Planted and Total Stem Counts (Species by Plot with Annual Means)

Appendix D. Stream Survey Data

- Cross-Sections with Annual Overlays and Photos
- Longitudinal Profiles with Annual Overlays
- Pebble Count Plots with Annual Overlays
- Table 10a. Baseline Stream Data Summary
- Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)
- Table 11a. Monitoring Data – Dimensional Morphology Summary (Dimensional Parameters – Cross-Sections)
- Table 11b. Monitoring Data – Stream Reach Data Summary

1.0 EXECUTIVE SUMMARY/PROJECT ABSTRACT

The goals and objectives stated in the Glade Creek Restoration Plan (NCEEP 2007) are as follows:

Project Goals

- Rapidly stabilize the channel of Glade Creek relative to natural processes;
- Rapidly stabilize and preserve the channel of the Unnamed Tributary relative to natural processes;
- Restore and rehabilitate channel features and aquatic habitat in Glade Creek and the Unnamed Tributary;
- Rehabilitate the riparian buffer along both streams; and
- Preserve the existing wetlands onsite.

Project Objectives

- Restore approximately 2,430 linear feet of stream channel on Glade Creek;
- Restore approximately 275 linear feet of the Unnamed Tributary;
- Preserve 570 linear feet of the Unnamed Tributary; and
- Preserve the existing 0.33 acre wetlands within the project site.

The monitoring year two (MY2) vegetation plot data revealed average planted stem density to be 546 stems/acre, which puts the project on track to meet the 320 planted stems/acre minimum density criterion that must be achieved by the end of the year three monitoring period. Stem densities were found to have declined by approximately 5% from the previous year due to dead or missing stems. There are also 16 isolated patches of high threat invasive plants that are distributed throughout the project area. Multiflora rose *Rosa multiflora* and oriental bittersweet *Celastrus orbiculatus* are the most dominant species present, while secondary species found included Japanese honeysuckle *Lonicera japonica*, Japanese barberry *Berberis thunbergii*, and Japanese spiraea *Spiraea japonica*.

Stream longitudinal profiles remained stable between monitoring years. While three areas of bed aggradation were present, no other significant instability in the stream channel were identified. No bankfull events have been documented since construction was completed.

Summary information/data related to the occurrence of items such as beaver or easement encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the restoration plan on EEP's website (NCEEP 2007). All raw data supporting tables and figures in the appendices are available from EEP upon request.

2.0 Methodology

The stream monitoring methodologies utilized in MY2 replicate those employed during the previous monitoring year and are based on standard guidance and procedures documents (Rosgen 1996; USACE 2003). Vegetation monitoring data were collected following the standard CVS-EEP Protocol for Recording Vegetation, Level II, Version 4.2 (Lee et al. 2008).

3.0 References

Lee, M.T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2008. CVS-EEP Protocol for Recording Vegetation. Version 4.2. The University of North Carolina at Chapel Hill, Department of Biology.


NCEEP (North Carolina Ecosystem Enhancement Program). 2007. Restoration Plan. Glade Creek Stream Restoration. Alleghany County, North Carolina. Raleigh.

Rosgen, D.L. 1996. Applied River Morphology. Wildland Hydrology Books, Pagosa Springs, Colorado.

USACE (U.S. Army Corps of Engineers). 2003. Stream Mitigation Guidelines. U.S. Army Corps of Engineers, U.S. Environmental Protection Agency, North Carolina Wildlife Resources Commission, North Carolina Department of Environment and Natural Resources-Division of Water Quality. Wilmington District.

Appendix A
Project Vicinity Map and Background Tables

The subject project site is an environmental restoration site of the NCDENR Ecosystem Enhancement Program (NCEEP) and is encompassed by a recorded conservation easement, but is bordered by land under private ownership. Accessing the site may require traversing areas near or along the easement boundary and therefore access by the general public is not permitted. Access by authorized personnel of state and federal agencies or their designees/contractors involved in the development, oversight and stewardship of the restoration site is permitted within the terms and timeframes of their defined roles. Any intended site visitation or activity by any person outside of these previously sanctioned roles and activities requires prior coordination with NCEEP.

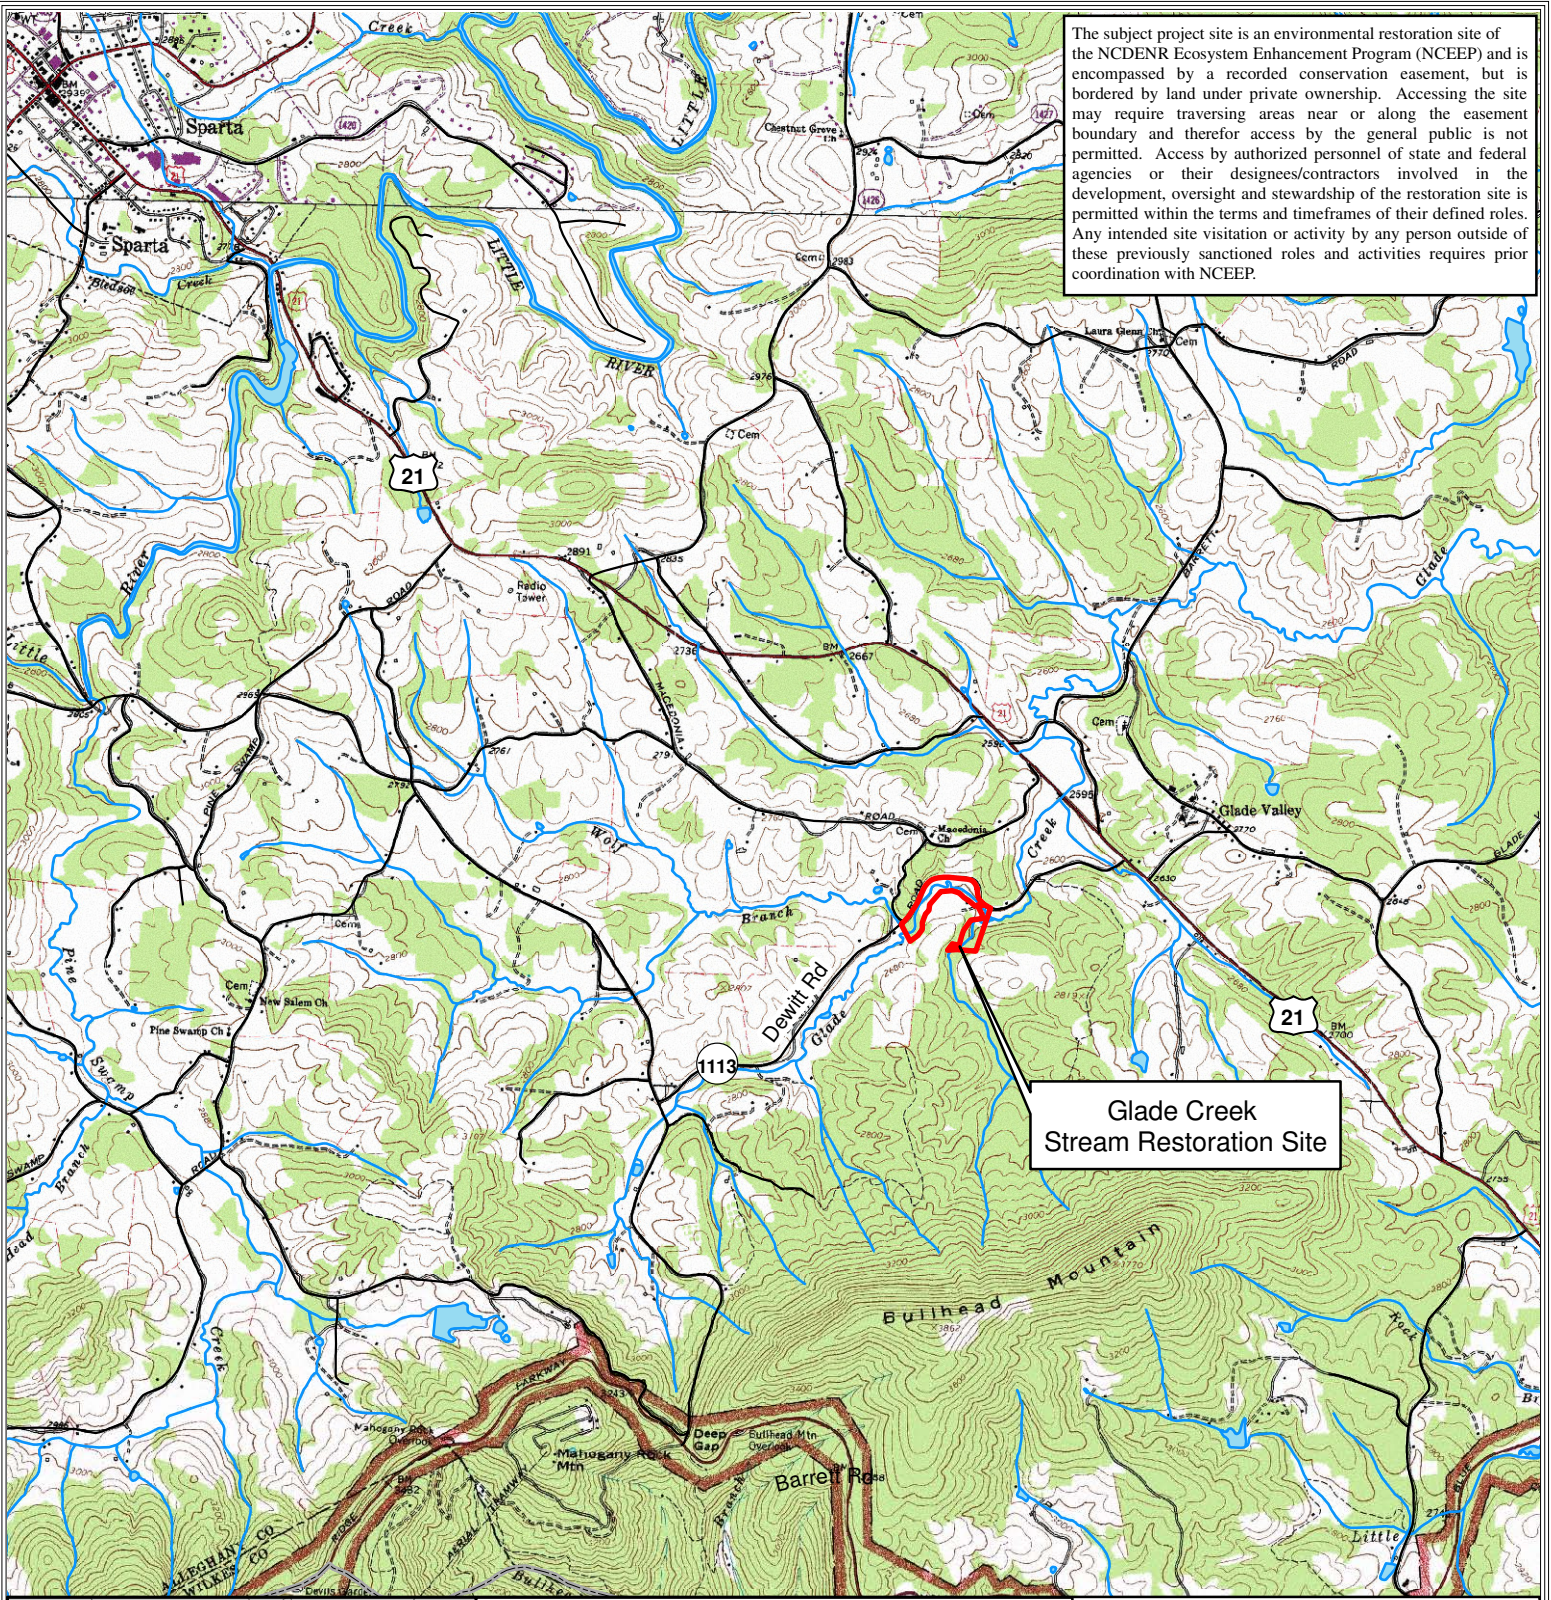

Glade Creek Stream Restoration Site




Figure 1 - Vicinity Map

Glade Creek Stream Restoration Site
Project No. 854

Alleghany County, North Carolina

Directions: The project site is located in Alleghany County, North Carolina, approximately 4 miles southeast of the town of Sparta. From the south and east, the site can be accessed by exiting Interstate 77 North at the US 21 Bypass exit in Elkin. Proceed on US 21 towards Sparta for 23.1 miles to Dewitt Road. Turn left on Dewitt Road and travel 0.7 miles to the site entrance on the left at 541 Dewitt Road.



7.5 Minute Series
Glade Valley Quadrangle

Table 1a. Project Components Glade Creek / Project No. 854								
Project Component or Reach ID	Existing Feet/Acres	Restoration Level	Approach	Footage or Acreage	Stationing	Buffer Acres	BMP Elements	Comment
Glade Creek	2,569 lf	R	P2	2,513 lf*	0+00 - 25+58			
Unnamed Tributary Downstream	300 lf	R	P2	265 lf	0+00 - 2+65			
Unnamed Tributary Upstream	784 lf	P		784 lf	Not Established			
Wetlands	0.26 ac	P		0.26 ac	N/A			

*Excludes the 45 linear feet of stream associated with the private drive access location.

=Non-Applicable

Table 1b. Component Summations Glade Creek / Project No. 854							
Restoration Level	Stream (lf)	Riparian Wetland (Ac)		Non-Riparian (ac)	Upland (ac)	Buffer (ac)	BMP
		Riverine	Non-Riverine				
Restoration	2,778*	0.00	0.00				
Enhancement		0.00	0.00				
Enhancement I	0						
Enhancement II	0						
Creation		0.00	0.00				
Preservation	784	0.00	0.26				
HQ Preservation	0	0.00	0.00				
		0.00	0.00				
Totals	784	0.26		0	0	0	0

*Excludes the 45 linear feet of stream associated with the private drive access location.

=Non-Applicable

Table 2. Project Activity and Reporting History Glade Creek / Project No. 854		
Activity or Report	Data Collection Complete	Completion or Delivery
Mitigation Plan	June 2007	Dec 2007
Final Design - Construction Plans	Aug 2007	Dec 2008
Construction	N/A	April 2011
Temporary S&E mix applied to entire project area	N/A	Sept - Nov 2010 March - April 2011
Permanent seed mix applied	N/A	Sept - Nov 2010 March - April 2011
Planting	May 2011	May 2011
Baseline Monitoring Document (Year 0 Monitoring - Baseline)	May 2011	Dec 2011
Year 1 Monitoring	Dec 2011	Feb 2012
Year 2 Monitoring	Nov 2012	Jan 2013
Year 3 Monitoring		
Year 4 Monitoring		
Year 5 Monitoring		

N/A - Item does not apply.

Table 3. Project Contacts Glade Creek / Project No. 854	
Designer	Biohabitats Southeast Bioregion Inc. 8218 Creedmoor Road, Suite 200 Raleigh, North Carolina 27613
Primary Project Design POC	Kevin Nunnery (919) 518-0313
Construction Contractor	Yadkin Valley Construction 2961 Old 60 Highway Ronda, North Carolina 28670
Construction Contractor POC	Terry Benton (336) 984-2219
Planting Contractor	Foggy Mountain Nursery 2251 Ed Little Road Creston, North Carolina 28615
Planting Contractor POC	Glen Sullivan (336) 384-5323
Seeding Contractor	Yadkin Valley Construction 2961 Old 60 Highway Ronda, North Carolina 28670
Seeding Contractor POC	Terry Benton (336) 984-2219
Seed Mix Sources	Hanes Geo (336) 747-1600
Nursery Stock Suppliers	Foggy Mountain Nursery Glen Sullivan (336) 384-5323
Monitoring Performers (Y0) - 2011	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Win Taylor (828) 253-6856
Vegetation Monitoring POC	Win Taylor (828) 253-6856
Monitoring Performers (Y1) - 2011	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Win Taylor (828) 253-6856
Vegetation Monitoring POC	Win Taylor (828) 253-6856
Monitoring Performers (Y2) - 2012	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Kevin Mitchell (828) 253-6856
Vegetation Monitoring POC	Kevin Mitchell (828) 253-6856
Monitoring Performers (Y3)- 2013	
Stream Monitoring POC	
Vegetation Monitoring POC	
Monitoring Performers (Y4)- 2014	
Stream Monitoring POC	
Vegetation Monitoring POC	
Monitoring Performers (Y5)- 2015	
Stream Monitoring POC	
Vegetation Monitoring POC	

Table 4. Project Baseline Information and Attributes Glade Creek / Project No. 854			
Project Information			
Project Name	Glade Creek		
County	Alleghany		
Project Area (acres)	15.86		
Project Coordinates (latitude and longitude)	Latitude 36.468090 / Longitude -81.066384		
Project Watershed Summary Information			
Physiographic Province	Blue Ridge		
River Basin	New River		
USGS Hydrologic Unit 8-dgit	05050001		
USGS Hydrologic Unit 14-dgit	05050001000801		
NCDWQ Sub-Basin	05-07-03		
Project Drainage Area (acres)	3,443		
Project Drainage Area Percentage of Impervious Cover	<1%		
CGIA Land Use Classification	Deciduous Forest Land		
Reach Summary Information			
Parameters	Glade Creek	UT-Lower	UT-Upper
Length of Reach (linear feet)	2,558	265	784
Valley Classification	-	-	-
Drainage Area (acres)	2,922	521	520
NCDWQ Stream Identification Score	59	50.5	50.5
NCDWQ Water Quality Classification	C-Tr	C-Tr	C-Tr
Morphological Description (stream type)	C	C	-
Evolutionary Trend	-	-	-
Underlying Mapped Soils	Alluvial	Alluvial	Alluvial
Drainage Class	-	-	-
Soil Hydric Status	-	-	-
Slope	0.0075	0.0075	0.0075
FEMA Classification	-	-	-
Native Vegetation Community	Northern Hardwood Forest & Rich Cove Forest		
Percent Composition of Exotic Invasive Vegetation	14.5%		
Wetland Summary Information			
Parameters	Wetland 1 (Glade Ck)	Wetland 2 (UT)	
Size of Wetland (acres)	0.178	0.085	
Wetland Type	Riparian	Riparian	
Soil Series	Toxaway		
Soil Hydric Status	Hydric		
Source of Hydrology	-	-	
Hydrologic Impairment	-	-	
Native Vegetation Community	High Elevation Seep		
Percent Composition of Exotic Invasive Vegetation	100%	0%	
Regulatory Considerations			
Regulation	Applicable?	Resolved?	Supporting Documentation
Waters of the United States - Section 404	Yes	N/A	-
Waters of the United States - Section 401	Yes	N/A	-
Endangered Species	No	N/A	N/A
Historic Preservation Act	No	N/A	N/A
Coastal Zone Management Act (CZMA)	No	N/A	N/A
Coastal Area Management Act (CAMA)	No	N/A	N/A
FEMA Floodplain Compliance	No	N/A	N/A
Essential Fisheries Habitat	No	N/A	N/A

- Information unavailable.
N/A - Item does not apply.

Appendix B

Visual Assessment Data

Figure 2. Integrated Current Condition Plan View - Final



Prepared for	Project: Glade Creek Stream Restoration Year 2 Monitoring Alleghany County, North Carolina	Notes: 1) Base Map Data Provided by NCEEP & Biohabitats 2) 2010 Aerial Photo	Prepared by
		Sheet 1 of 1	
	Date	Project Number	
	November 2012	NCEEP # 854	

Table 5. Visual Stream Morphology Stability Assessment Glade Creek / Project No. 854 - Glade Creek Assessed Length 2,558 feet										
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			2	45	98%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	17	17			100%			
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6).	17	17					
	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).		17	17			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	17	17			100%			
		2. Thalweg centering at downstream of meander bend (Glide).	16	16			100%			
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	N/A	N/A	N/A
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
Totals					0	0	100%	N/A	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	40	40			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	13	13			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	13	13			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does NOT exceed 15%.	18	18			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio \geq 1.6. Rootwads/logs providing some cover at base-flow.	22	22			100%			

N/A - Item does not apply.

Table 5. Visual Stream Morphology Stability Assessment Glade Creek / Project No. 854 - Unnamed Tributary - Downstream Assessed Length 265 feet										
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			1	29	89%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	4	4			100%			
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6).	4	5					
	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).		4	5			80%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	5	5			100%			
		2. Thalweg centering at downstream of meander bend (Glide).	5	5			100%			
	2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0			
2. Undercut		Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
3. Mass Wasting		Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
Totals					0	0	100%	N/A	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	13	13			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	6	6			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	5	6			83%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	9	9			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio \geq 1.6. Rootwads/logs providing some cover at base-flow.	6	6			100%			

N/A - Item does not apply.

Table 6. Vegetation Condition Assessment Glade Creek / Project No. 854 Planted Acreage 4.31					
Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	N/A	0	0.00	0%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	N/A	0	0.00	0%
Totals			0	0.00	0%
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	N/A	0	0.00	0%
Cumulative Totals			0	0.00	0%
Easement Acreage 15.86					
Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage
4. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale).	Cross Hatch (Red - Dense/Yellow - Present)	16	2.34	15%
5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	N/A	0	0.00	0%

N/A - Item does not apply.



Glade Creek – Permanent Photo Station 1
Upstream



Glade Creek – Permanent Photo Station 2
Upstream



Glade Creek – Permanent Photo Station 3
Upstream



Glade Creek – Permanent Photo Station 4
Upstream



Glade Creek – Permanent Photo Station 5
Upstream



Glade Creek – Permanent Photo Station 5
Downstream



Unnamed Tributary Lower – Permanent Photo Station 6
Upstream



Unnamed Tributary Lower – Permanent Photo Station 7
Upstream

Appendix C

Vegetation Plot Data

Table 7. Vegetation Plot Criteria Attainment Glade Creek / Project No. 854		
Vegetation Plot ID	Vegetation Survival Threshold Met?	Tract Mean
1	Yes	100%
2	Yes	
3	Yes	
4	Yes	
5	Yes	
6	Yes	



Vegetation Monitoring Plot 1
Monitoring Year 2 – June 7, 2012



Vegetation Monitoring Plot 2
Monitoring Year 2 – June 7, 2012



Vegetation Monitoring Plot 3
Monitoring Year 2 – June 7, 2012



Vegetation Monitoring Plot 4
Monitoring Year 2 – June 7, 2012



Vegetation Monitoring Plot 5
Monitoring Year 2 – June 7, 2012



Vegetation Monitoring Plot 6
Monitoring Year 2 – June 7, 2012

Table 8. CVS Vegetation Plot Metadata Glade Creek / Project No. 854	
Report Prepared By	Kevin Mitchell
Date Prepared	8/10/2012 9:43
Database Name	Equinox-2012-A-GladeCreek-MY2.mdb
Database Location	Z:\ES\NRI&M\VEEP Monitoring\Glade Creek\Glade-MY2-2012\Data\Veg
Computer Name	D16TNK71
File Size	51527680
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Project Planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Project Total Stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Species	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Species	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Species	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
ALL Stems by Plot and Species	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
PROJECT SUMMARY	
Project Code	854
Project Name	Glade Creek
Description	
River Basin	New
Length(ft)	
Stream-to-Edge Width (ft)	
Area (sq m)	
Required Plots (calculated)	
Sampled Plots	6


Table 9. Planted and Total Stem Counts (Species by Plot with Annual Means)																																
Glade Creek / Project No. 854																																
Scientific Name	Common Name	Species Type	Current Plot Data (MY2 2012)																		Annual Means											
			E854-01-0001			E854-01-0002			E854-01-0003			E854-01-0004			E854-01-0005			E854-01-0006			MY2 (2012)			MY1 (2011)			MY0 (2011)					
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T			
<i>Alnus serrulata</i>	Hazel alder	Shrub																														
<i>Aronia arbutifolia</i>	Red chokeberry	Shrub	2	2	2	4	4	4	2	2	2	2	2	2	1	1	1															
<i>Betula nigra</i>	River birch	Tree							2	2	2																					
<i>Callicarpa americana</i>	American beautyberry	Shrub																														
<i>Calycanthus floridus</i>	Eastern sweetshrub	Shrub																														
<i>Carpinus caroliniana</i>	American hombeam	Tree				2	2	2	1	1	1	2	2	2							2	2	2	7	7	7	8	8	8	13	13	13
<i>Cephalanthus occidentalis</i>	Common buttonbush	Shrub				5	5	5																								
<i>Cercis canadensis</i>	Eastern redbud	Tree	3	3	3				1	1	1																					
<i>Cornus amomum</i>	Silky dogwood	Shrub																														
<i>Diospyros virginiana</i>	Common persimmon	Tree				1	1	1	1	1	1																					
<i>Hamamelis virginiana</i>	American witchhazel	Tree	1	1	1	1	1	1																								
<i>Hydrangea arborescens</i>	Wild hydrangea	Shrub	1	1	1																											
<i>Kalmia latifolia</i>	Mountain laurel	Shrub Tree	1	1	1																											
<i>Lindera benzoin</i>	Northern spicebush	Shrub																														
<i>Liriodendron tulipifera</i>	Tuliptree	Tree	2	2	2				1	1	1	1	1	1																		
<i>Malus angustifolia</i>	Southern crabapple	Tree	1	1	1	1	1	1	1	1	1																					
<i>Platanus occidentalis</i>	American sycamore	Tree	2	2	2	3	3	3	2	2	2	3	3	3	1	1	1	3	3	3	14	14	14	14	14	14	14	14	14	14	14	14
<i>Quercus alba</i>	White oak	Tree																														
<i>Quercus rubra</i>	Northern red oak	Tree	3	3	3	1	1	1	1	1	1	1	1	1	3	3	3	2	2	2	11	11	11	12	12	12	12	12	12	12	12	
<i>Rhododendron</i>	Rhododendron	Shrub							1	1	1	1	1	1																		
<i>Salix</i>	Willow	Shrub Tree																														
<i>Salix nigra</i>	Black willow	Tree				6																										
Unknown	Unknown	Unknown																														
Stem count			16	16	22	18	18	19	13	13	14	10	10	20	11	14	16	13	13	13	81	84	104	86	89	96	106	109	109			
Size (ares)			1			1			1			1			1			1			6			6			6					
Size (ACRES)			0.02			0.02			0.02			0.02			0.02			0.02			0.15			0.15			0.15					
Species count			9	9	10	8	8	9	10	10	11	6	6	7	7	9	9	6	6	6	16	18	19	16	17	18	17	18	18			
Stems per ACRE			647	647	890	728	728	769	526	526	567	405	405	809	445	567	647	526	526	526	546	567	701	580	600	647	715	735	735			

Exceeds requirements by 10%

Appendix D

Stream Survey Data

Glade Creek Cross-Section 1 - Riffle Station 3 + 13.39

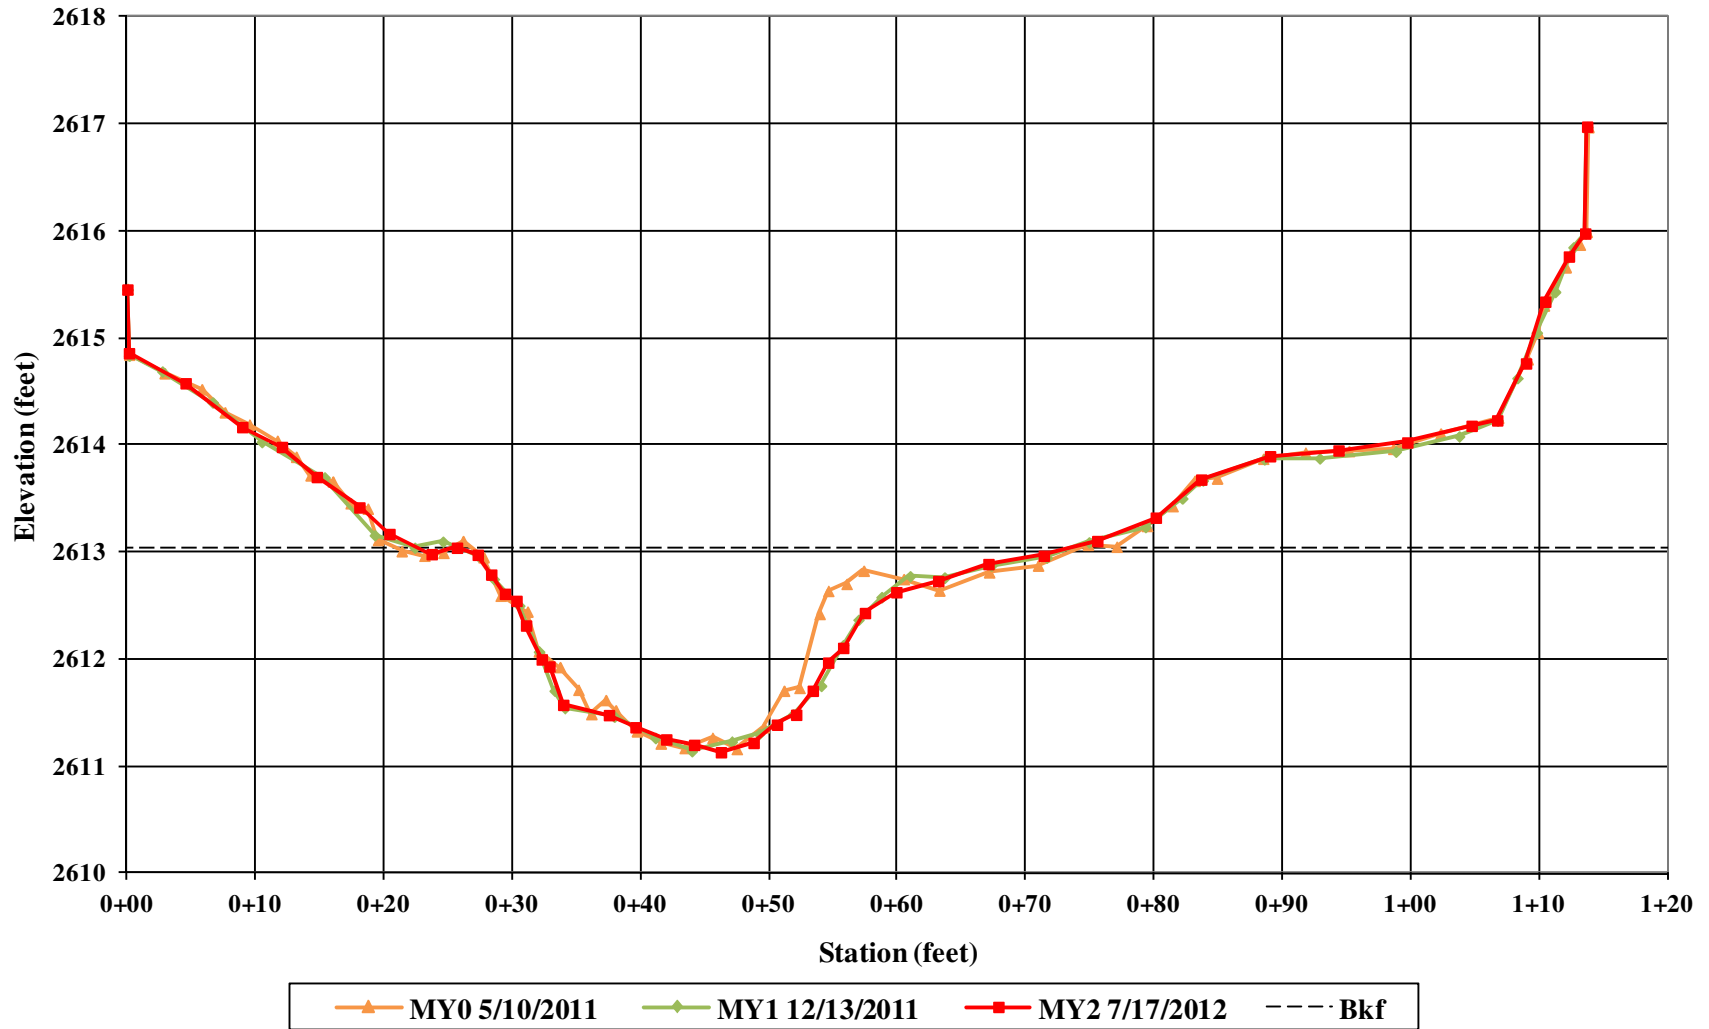



Glade Creek – Cross-Section 1 – Riffle
Left Bank Descending
Monitoring Year 2 – July 17, 2012



Glade Creek – Cross-Section 1 – Riffle
Right Bank Descending
Monitoring Year 2 – July 17, 2012




Glade Creek – Cross-Section 1 – Riffle
Downstream
Monitoring Year 2 – July 17, 2012



Glade Creek – Cross-Section 1 – Riffle
Upstream
Monitoring Year 2 – July 17, 2012

**Glade Creek
Cross-Section 2 - Pool
Station 5 + 99.40**

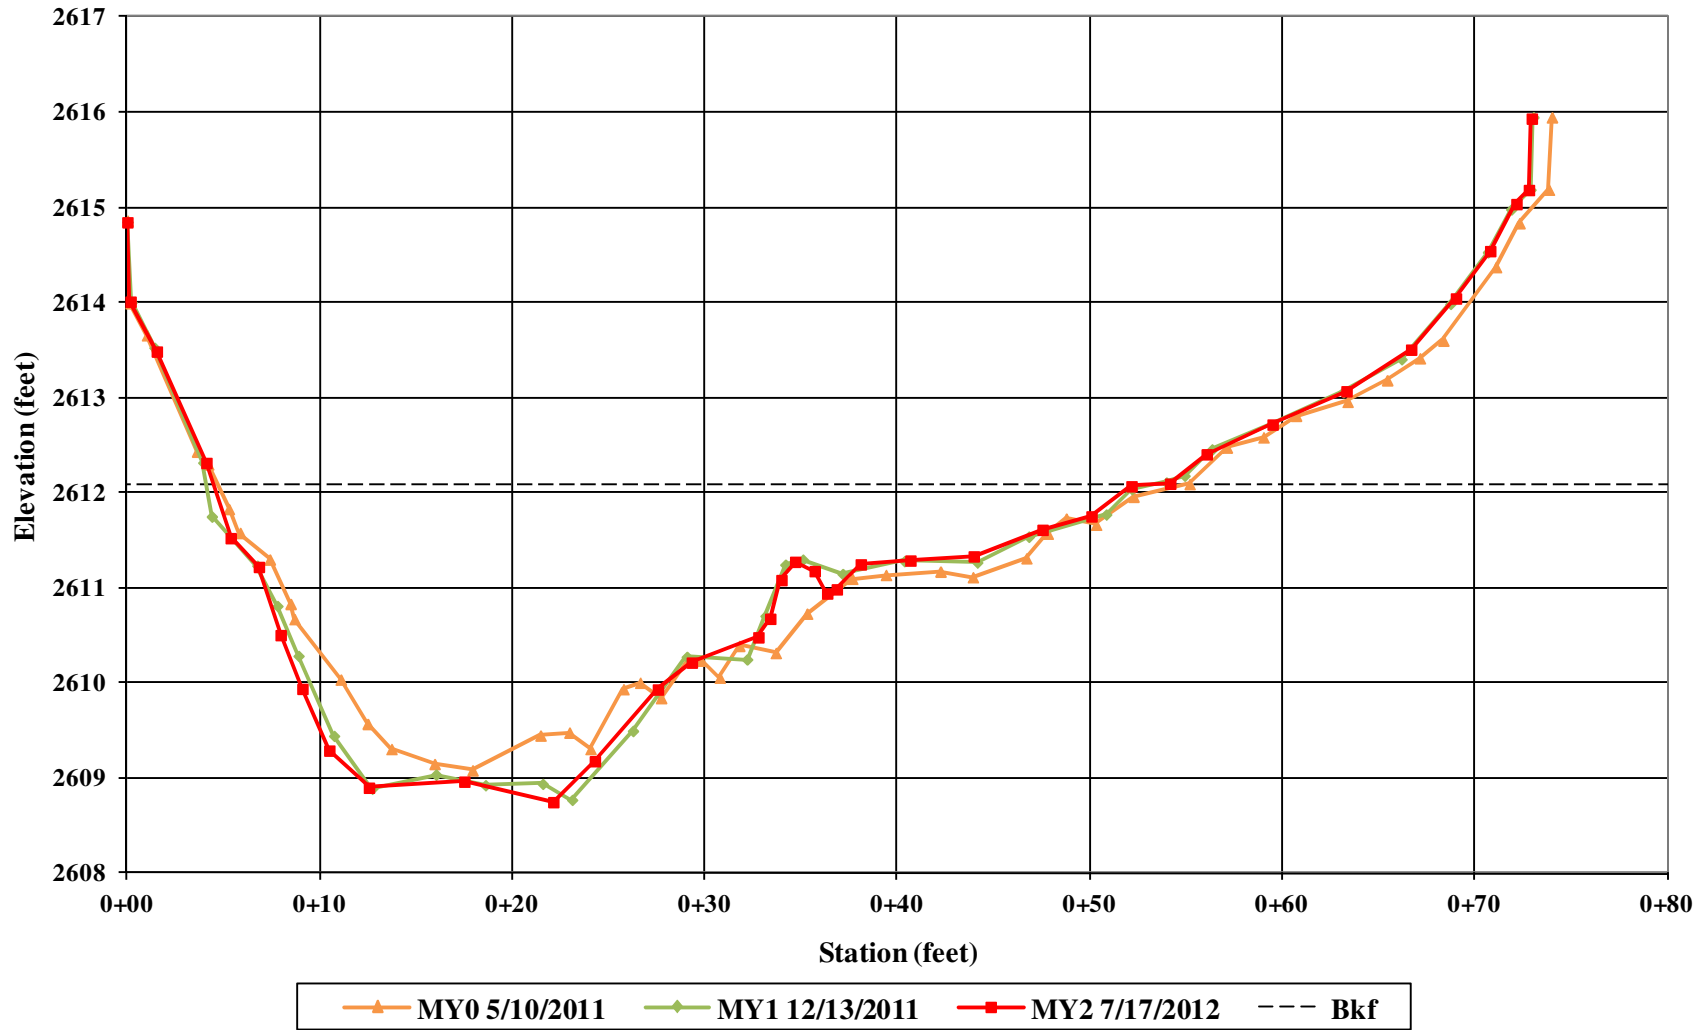



Glade Creek – Cross-Section 2 – Pool
Left Bank Descending
Monitoring Year 2 – July 17, 2012



Glade Creek – Cross-Section 2 – Pool
Right Bank Descending
Monitoring Year 2 – July 17, 2012




Glade Creek – Cross-Section 2 – Pool
Downstream
Monitoring Year 2 – July 17, 2012



Glade Creek – Cross-Section 2 – Pool
Upstream
Monitoring Year 2 – July 17, 2012

**Glade Creek
Cross-Section 3 - Riffle
Station 8 + 39.86**

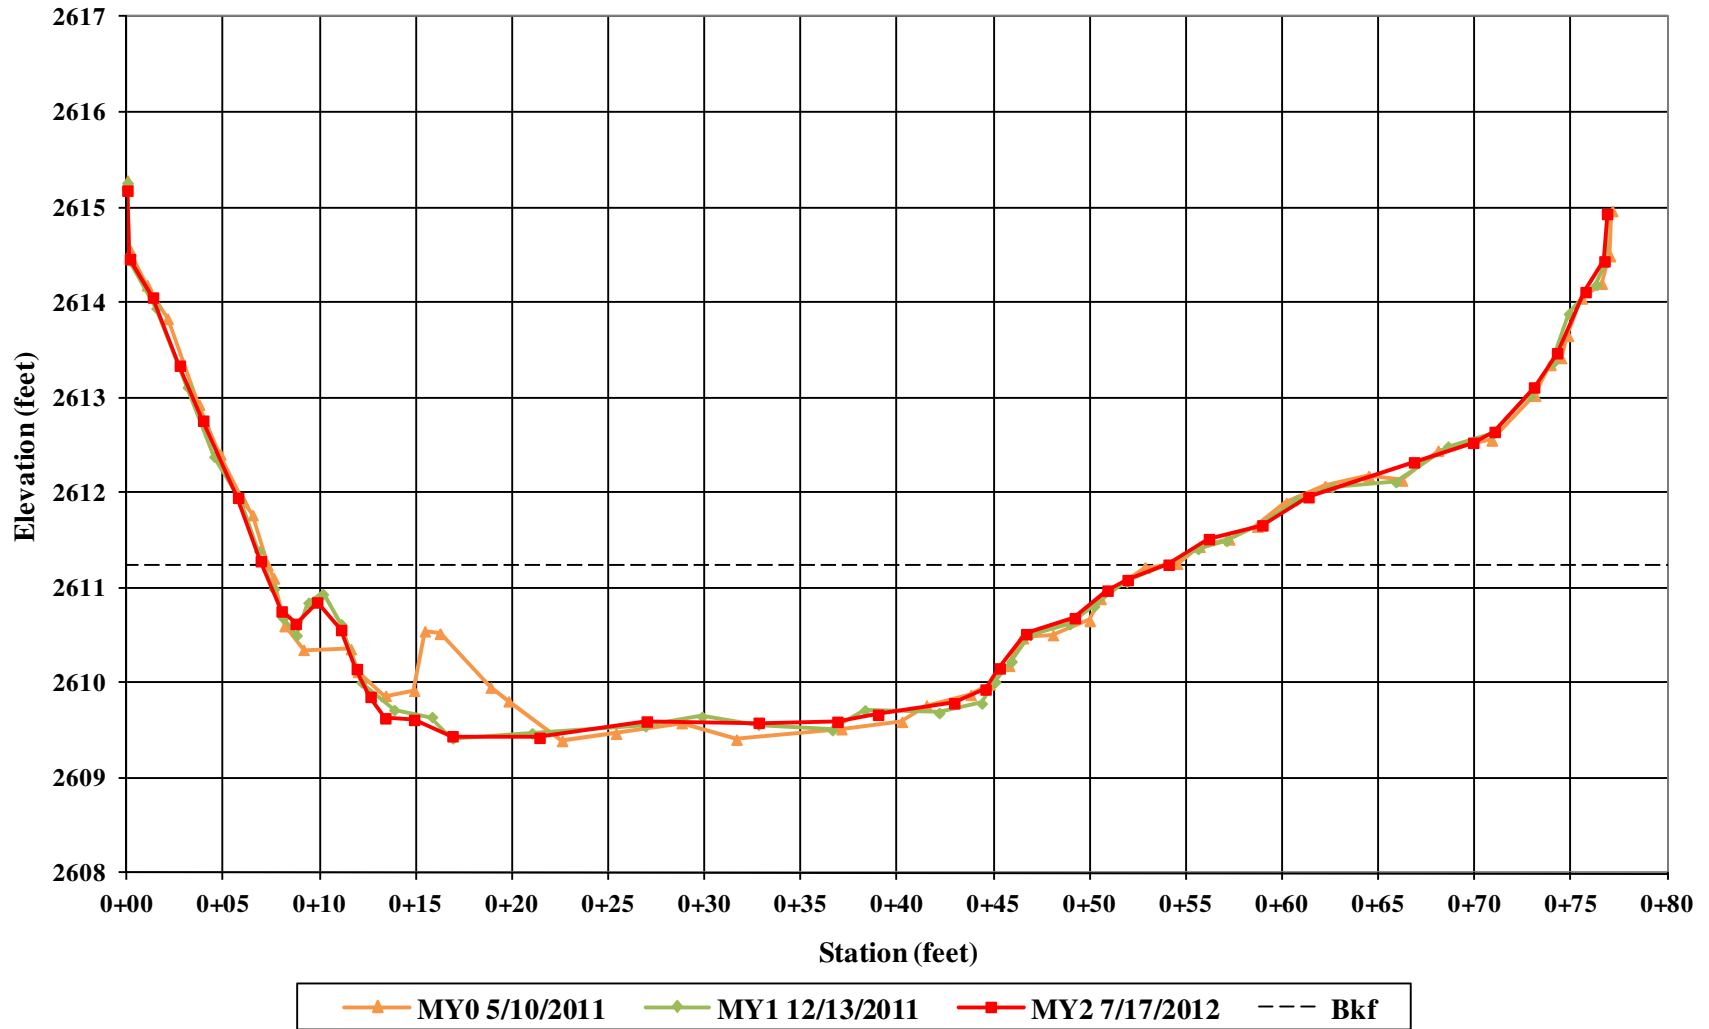



Glade Creek – Cross-Section 3 – Riffle
Left Bank Descending
Monitoring Year 2 – July 17, 2012



Glade Creek – Cross-Section 3 – Riffle
Right Bank Descending
Monitoring Year 2 – July 17, 2012




Glade Creek – Cross-Section 3 – Riffle
Downstream
Monitoring Year 2 – July 17, 2012



Glade Creek – Cross-Section 3 – Riffle
Upstream
Monitoring Year 2 – July 17, 2012

**Glade Creek
Cross-Section 4 - Riffle
Station 15 + 69.44**

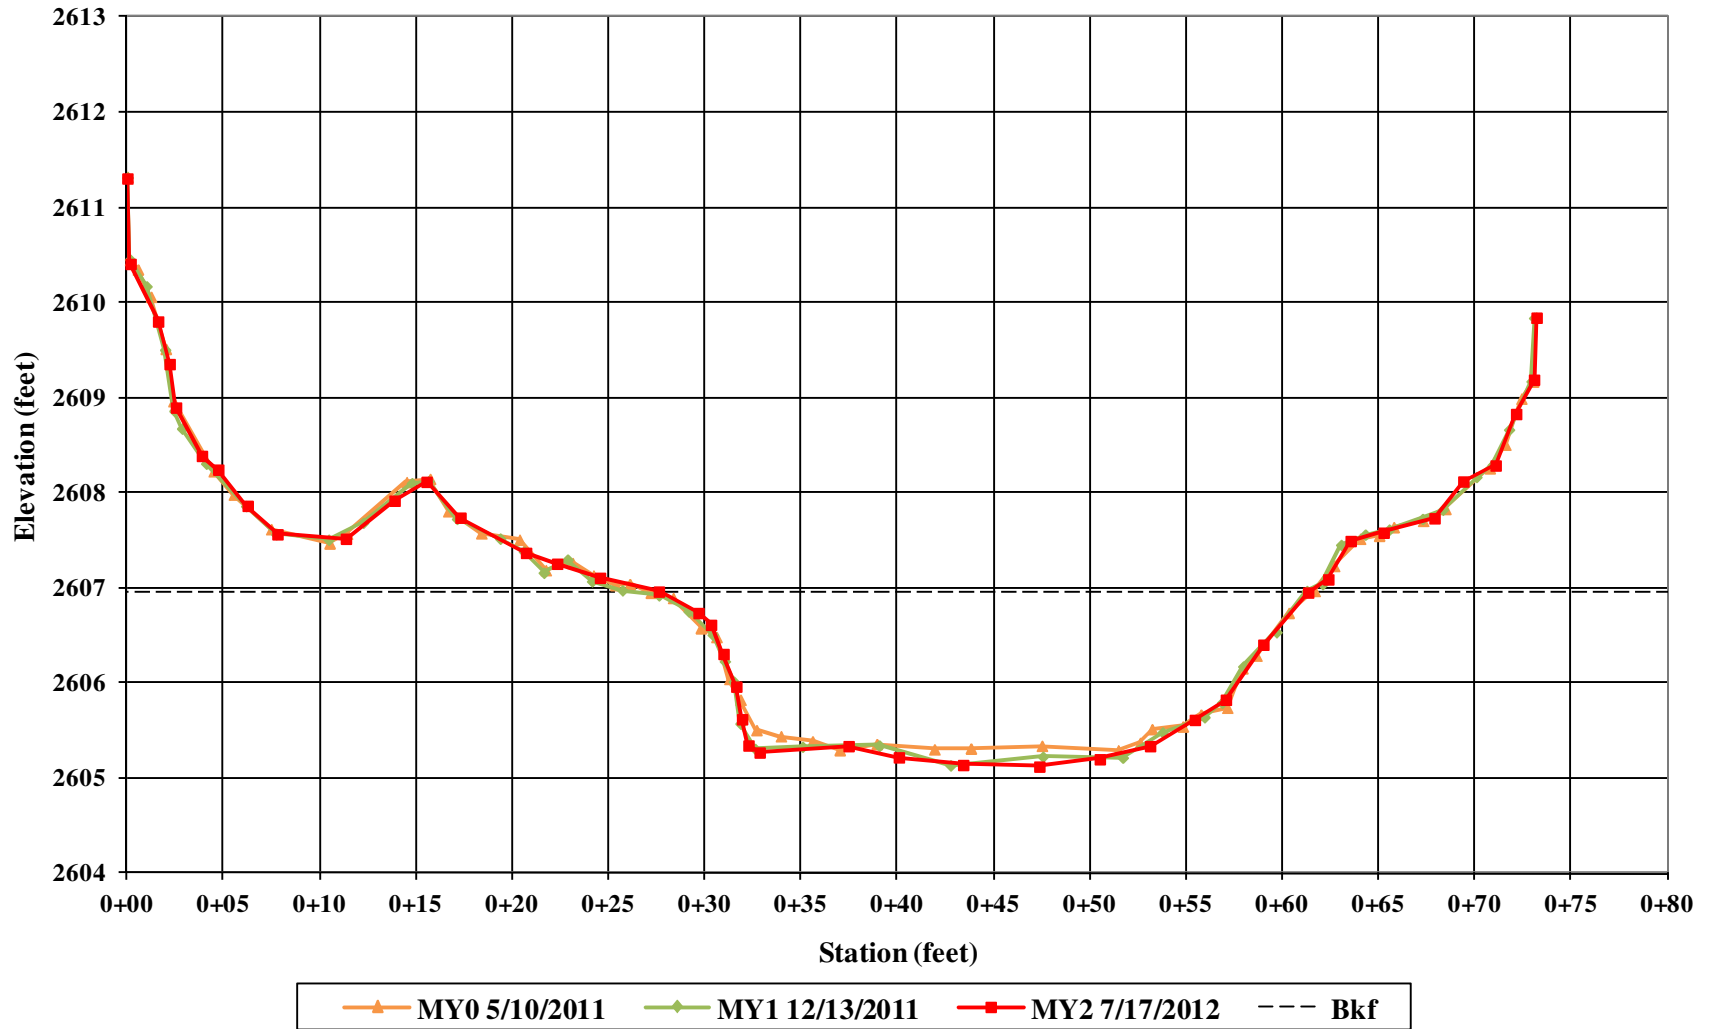



Glade Creek – Cross-Section 4 – Riffle
Left Bank Descending
Monitoring Year 2 – July 17, 2012



Glade Creek – Cross-Section 4 – Riffle
Right Bank Descending
Monitoring Year 2 – July 17, 2012




Glade Creek – Cross-Section 4 – Riffle
Downstream
Monitoring Year 2 – July 17, 2012



Glade Creek – Cross-Section 4 – Riffle
Upstream
Monitoring Year 2 – July 17, 2012

Glade Creek Cross-Section 5 - Pool Station 19 + 71.18

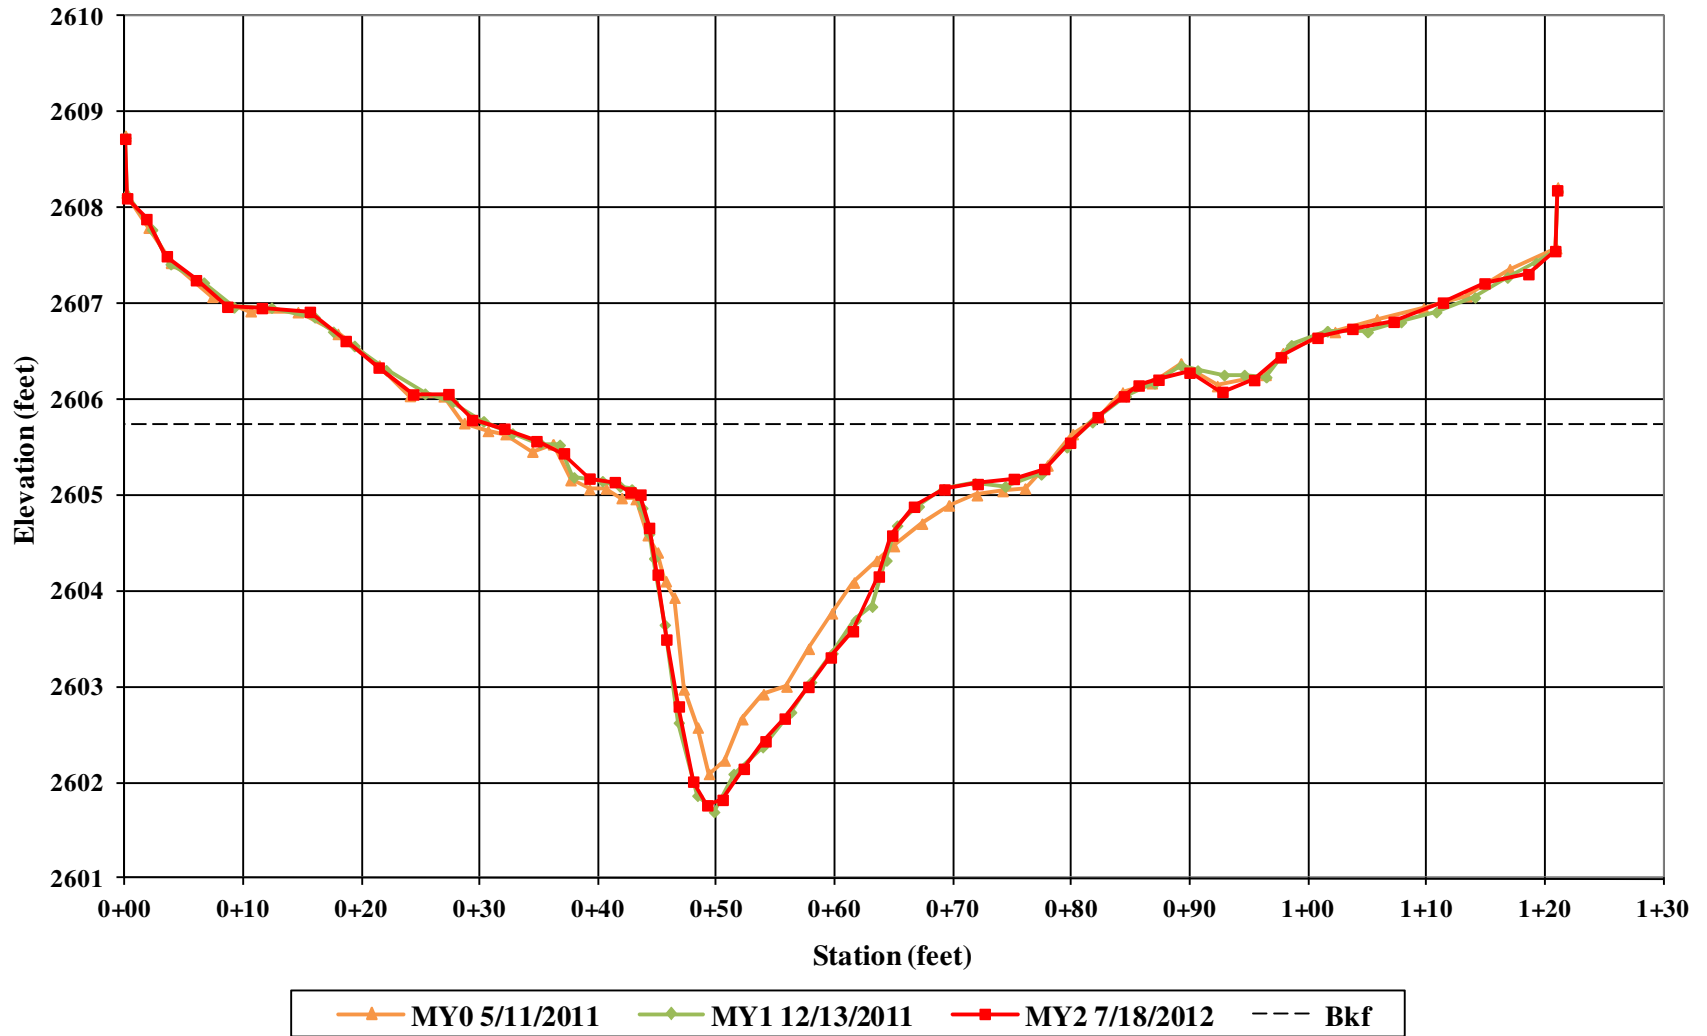



Glade Creek – Cross-Section 5 – Pool
Left Bank Descending
Monitoring Year 2 – July 18, 2012



Glade Creek – Cross-Section 5 – Pool
Right Bank Descending
Monitoring Year 2 – July 18, 2012




Glade Creek – Cross-Section 5 – Pool
Downstream
Monitoring Year 2 – July 18, 2012



Glade Creek – Cross-Section 5 – Pool
Upstream
Monitoring Year 2 – July 18, 2012

**Glade Creek
Cross-Section 6 - Riffle
Station 20 + 24.21**

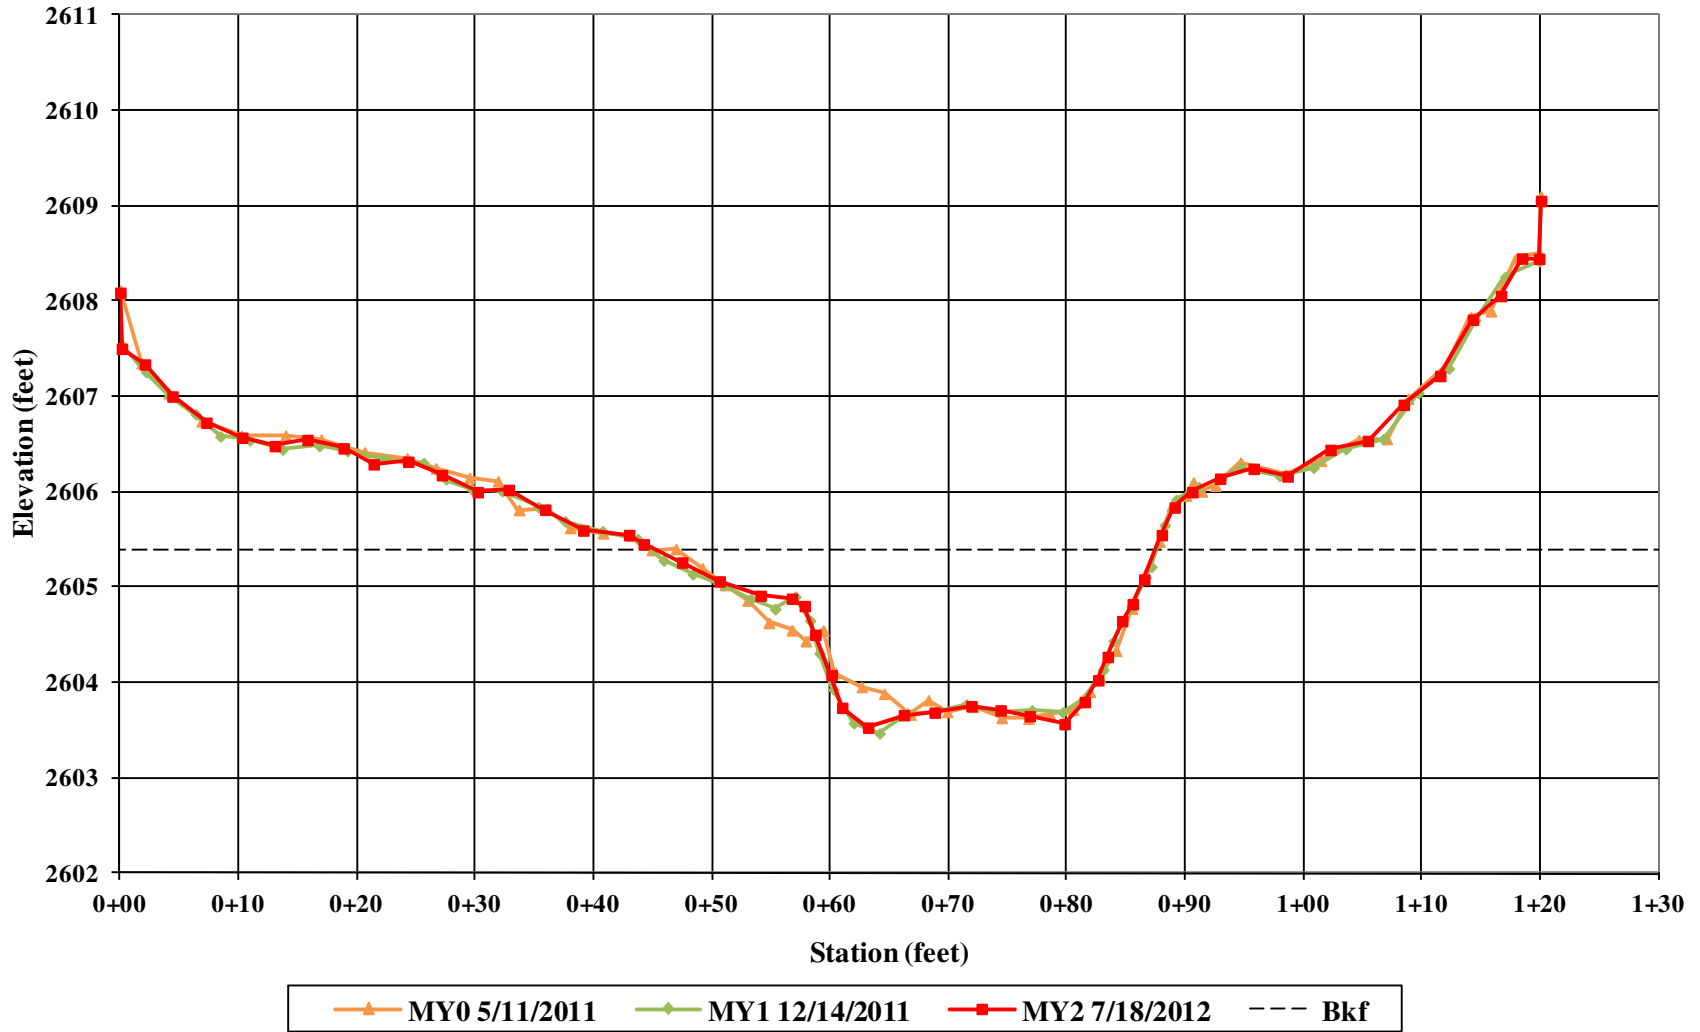



Glade Creek – Cross-Section 6 – Riffle
Left Bank Descending
Monitoring Year 2 – July 18, 2012



Glade Creek – Cross-Section 6 – Riffle
Right Bank Descending
Monitoring Year 2 – July 18, 2012




Glade Creek – Cross-Section 6 – Riffle
Downstream
Monitoring Year 2 – July 18, 2012



Glade Creek – Cross-Section 6 – Riffle
Upstream
Monitoring Year 2 – July 18, 2012

**UT Glade Creek
Cross-Section 7 - Riffle
Station 2 + 38.94**

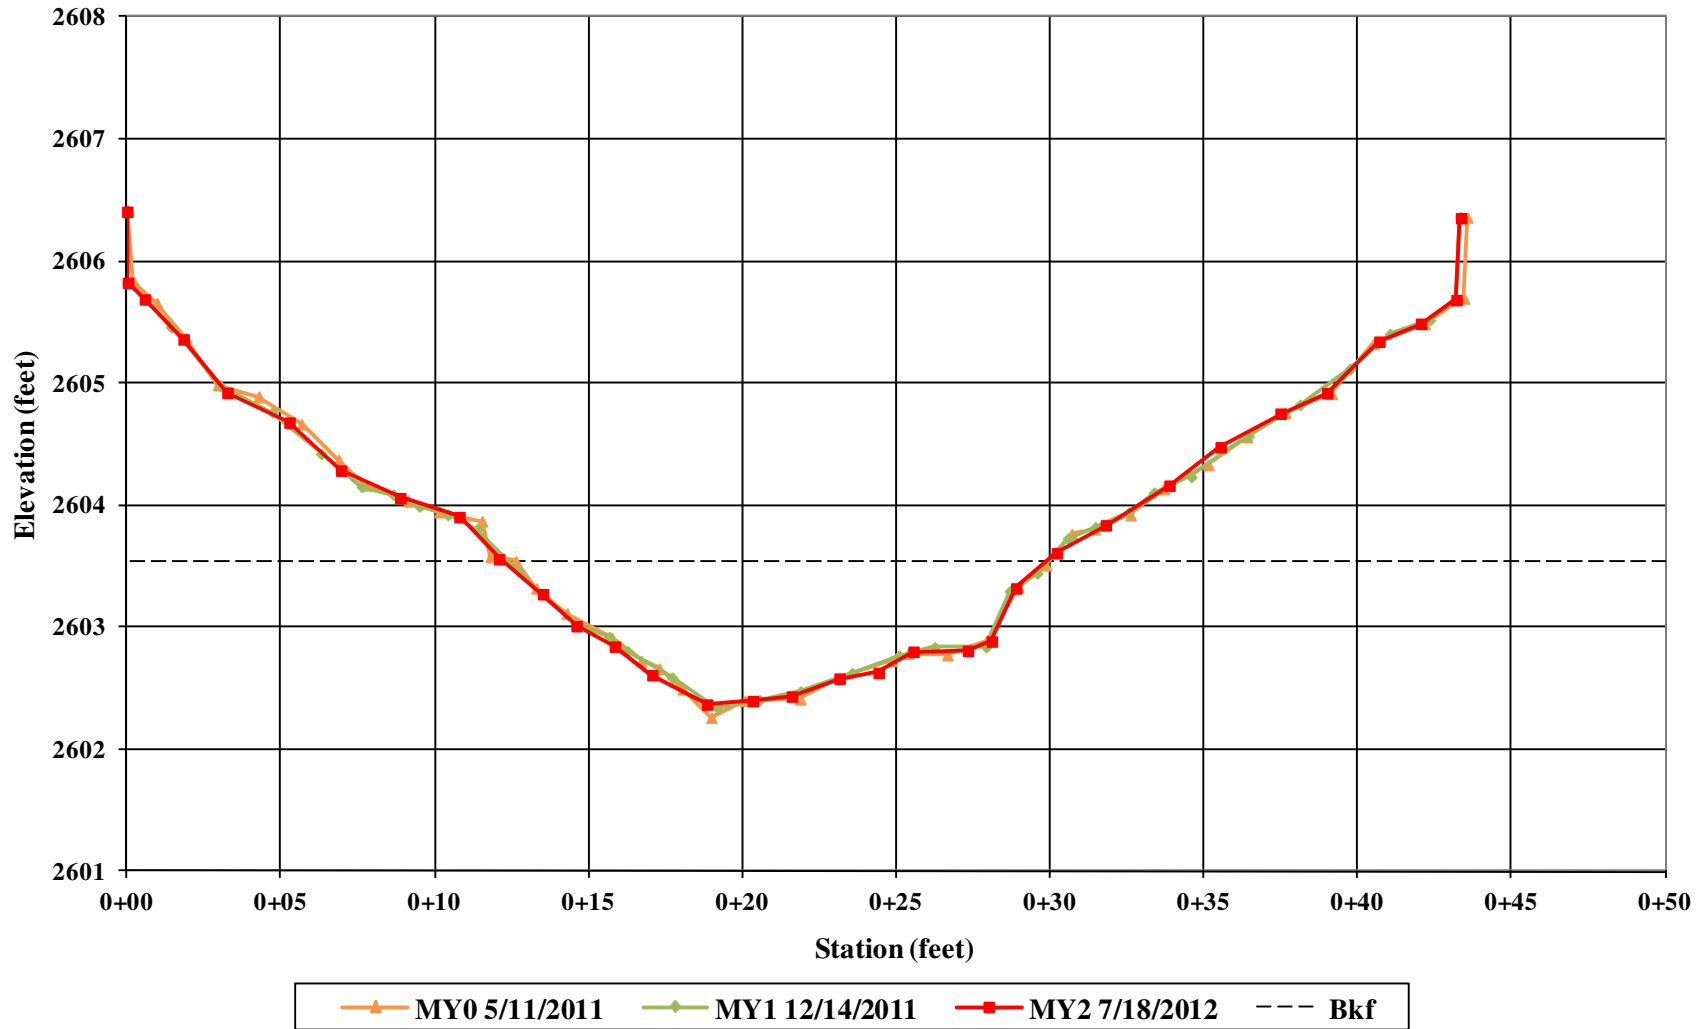



Unnamed Tributary – Cross-Section 7 – Riffle
Left Bank Descending
Monitoring Year 2 – July 18, 2012



Unnamed Tributary – Cross-Section 7 – Riffle
Right Bank Descending
Monitoring Year 2 – July 18, 2012




Unnamed Tributary – Cross-Section 7 – Riffle
Downstream
Monitoring Year 2 – July 18, 2012



Unnamed Tributary – Cross-Section 7 – Riffle
Upstream
Monitoring Year 2 – July 18, 2012

**UT Glade Creek
Cross-Section 8 - Riffle
Station 0 + 53.21**

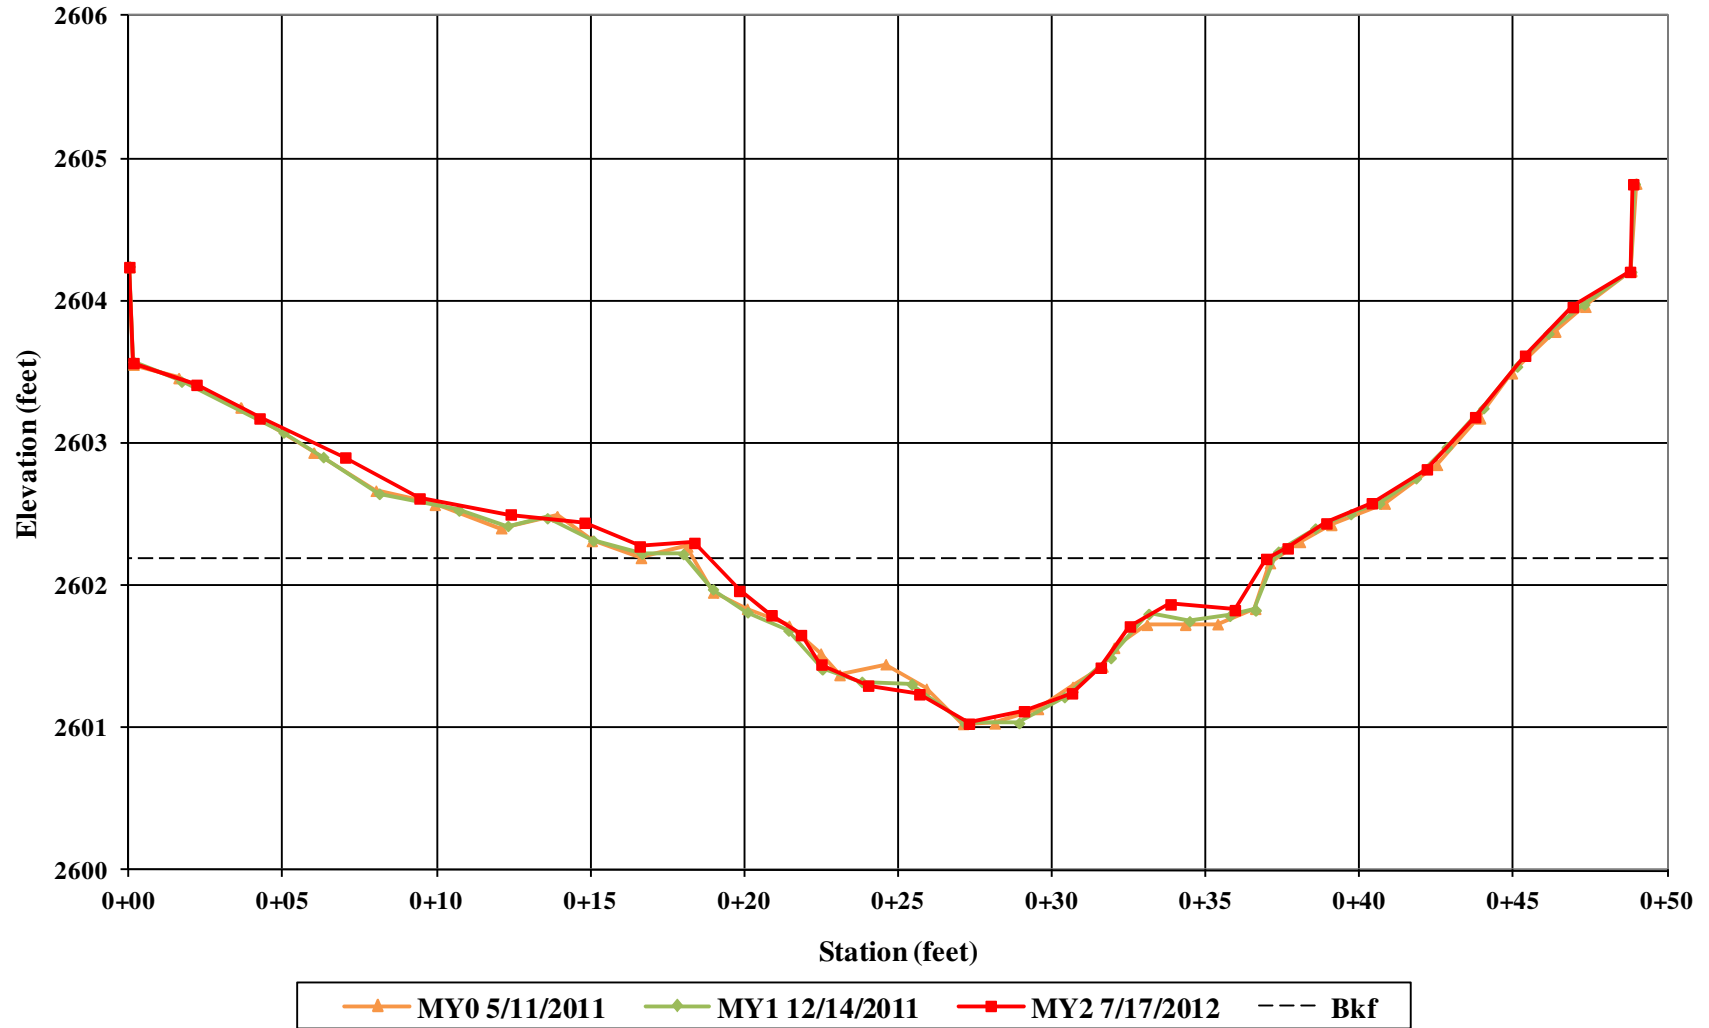



Unnamed Tributary – Cross-Section 8 – Riffle
Left Bank Descending
Monitoring Year 2 – July 18, 2012



Unnamed Tributary – Cross-Section 8 – Riffle
Right Bank Descending
Monitoring Year 2 – July 18, 2012




Unnamed Tributary – Cross-Section 8 – Riffle
Downstream
Monitoring Year 2 – July 18, 2012




Unnamed Tributary – Cross-Section 8 – Riffle
Upstream
Monitoring Year 2 – July 18, 2012

**Glade Creek Mainstem
Longitudinal Profile
Staioning 0+03 - 25+58**


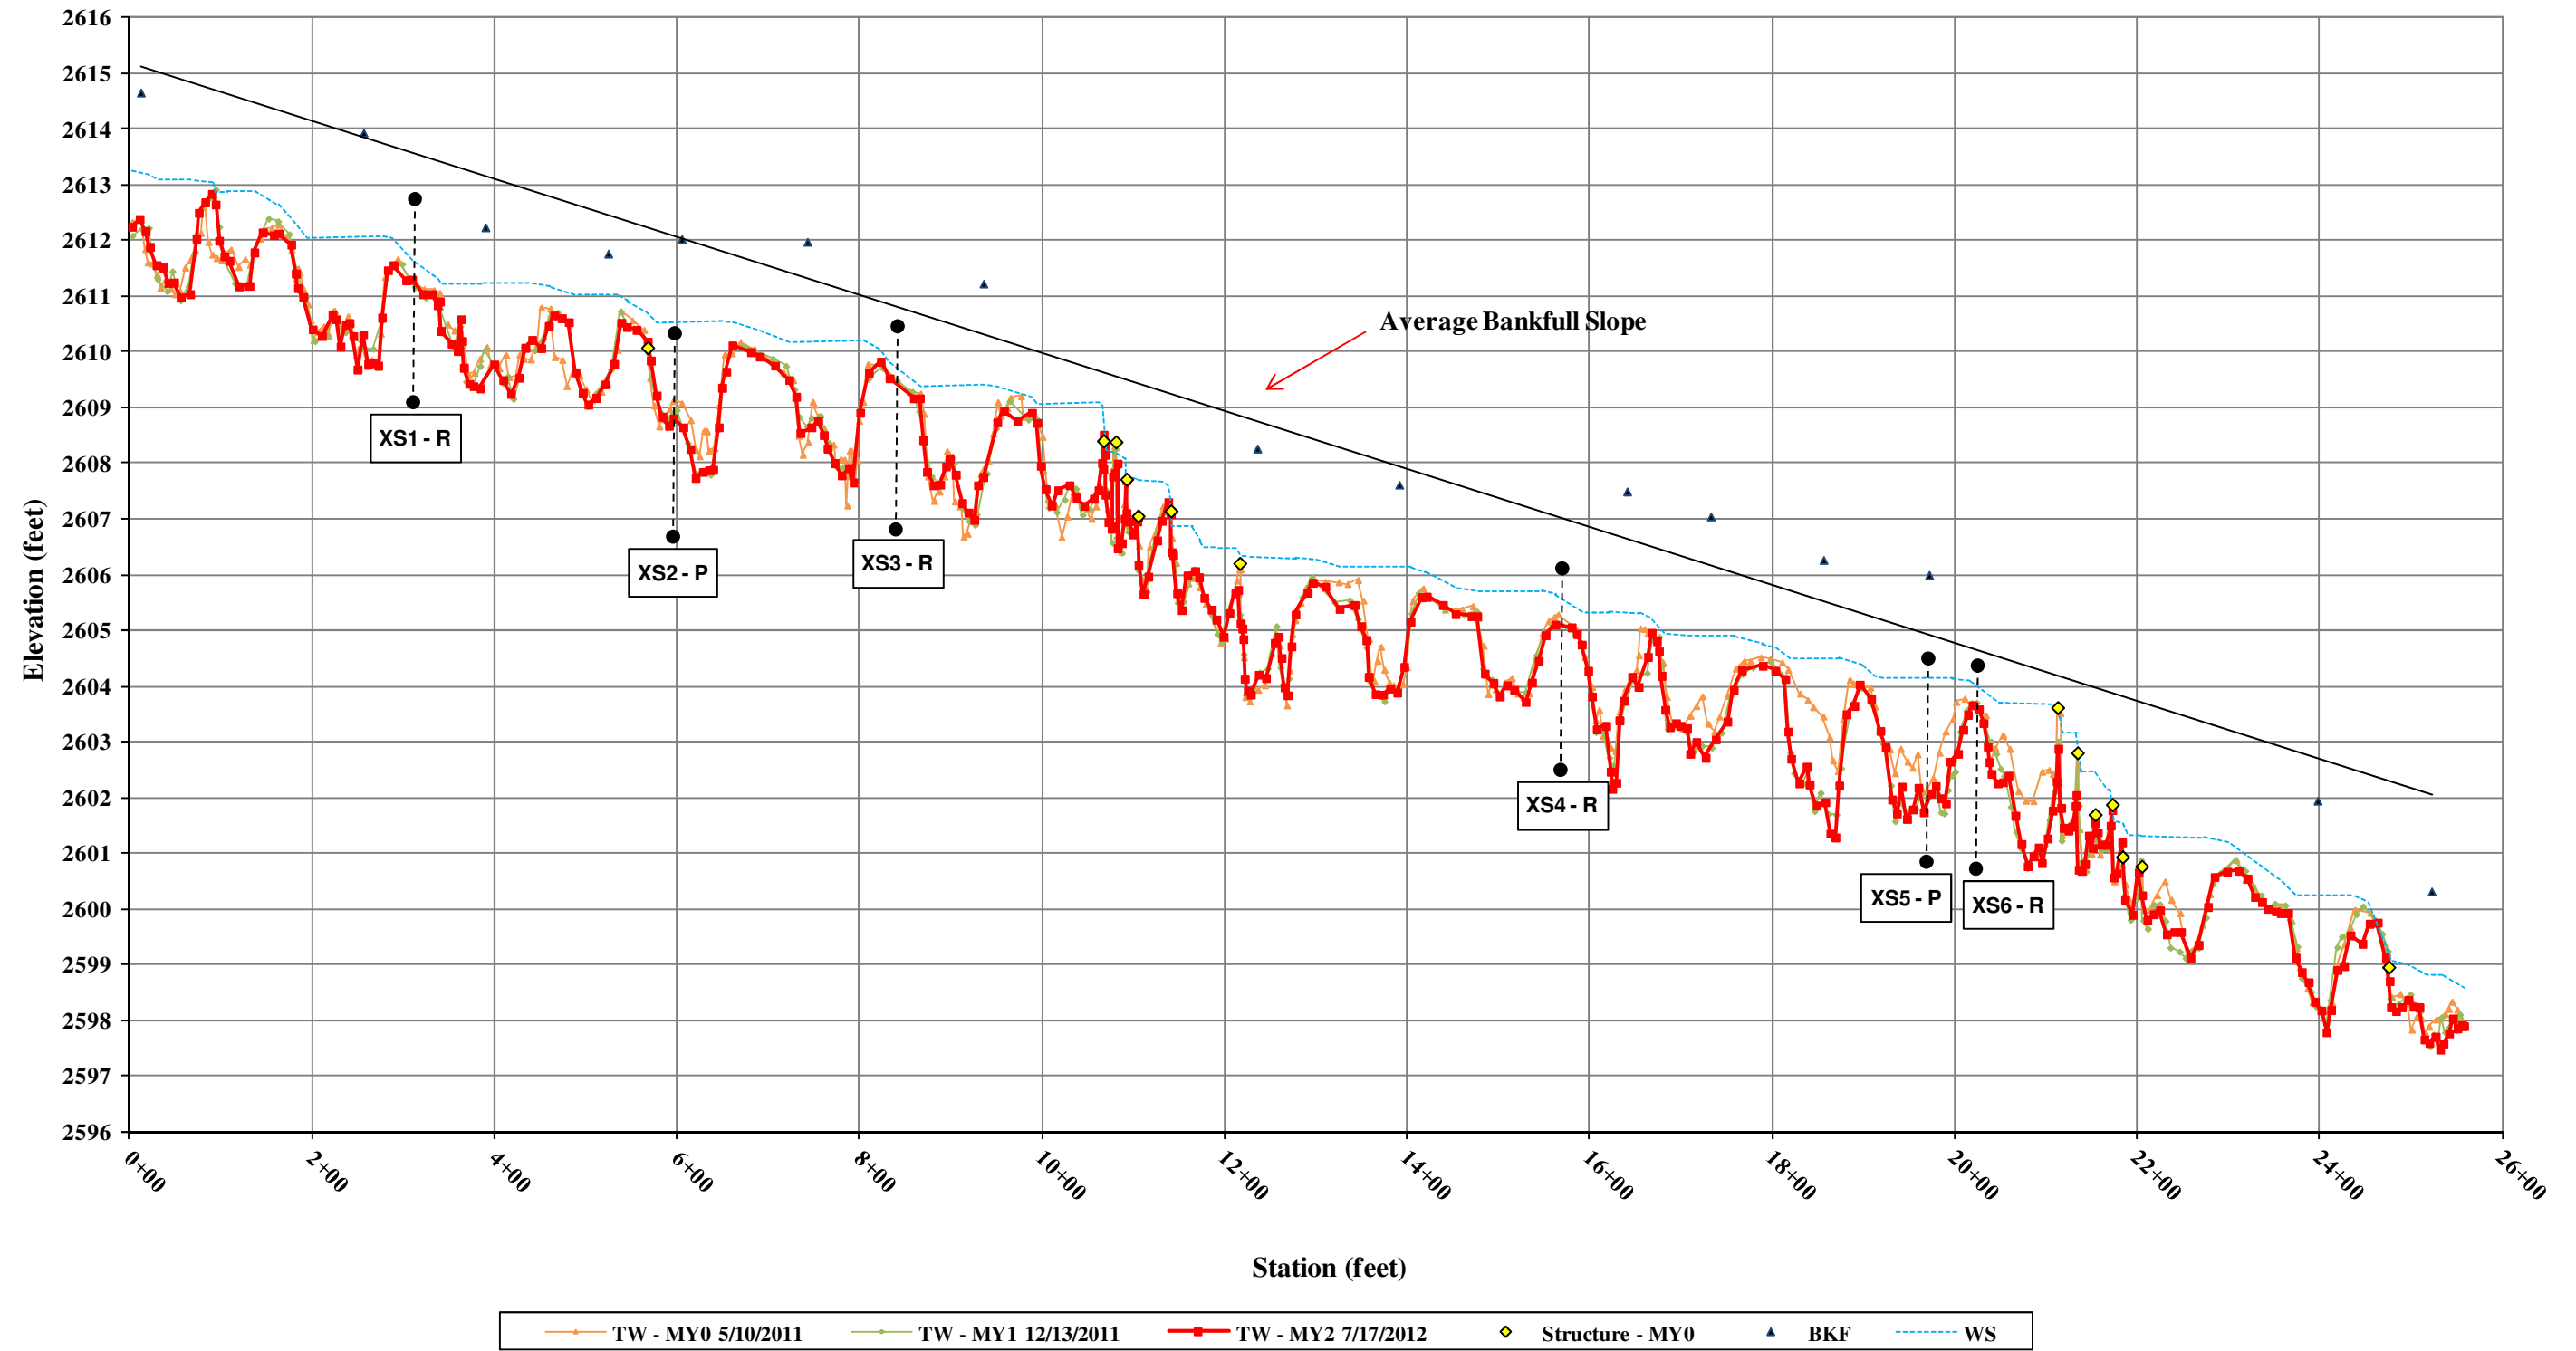


**Unnamed Tributary
Longitudinal Profile
Station 0+03 - 2+68**

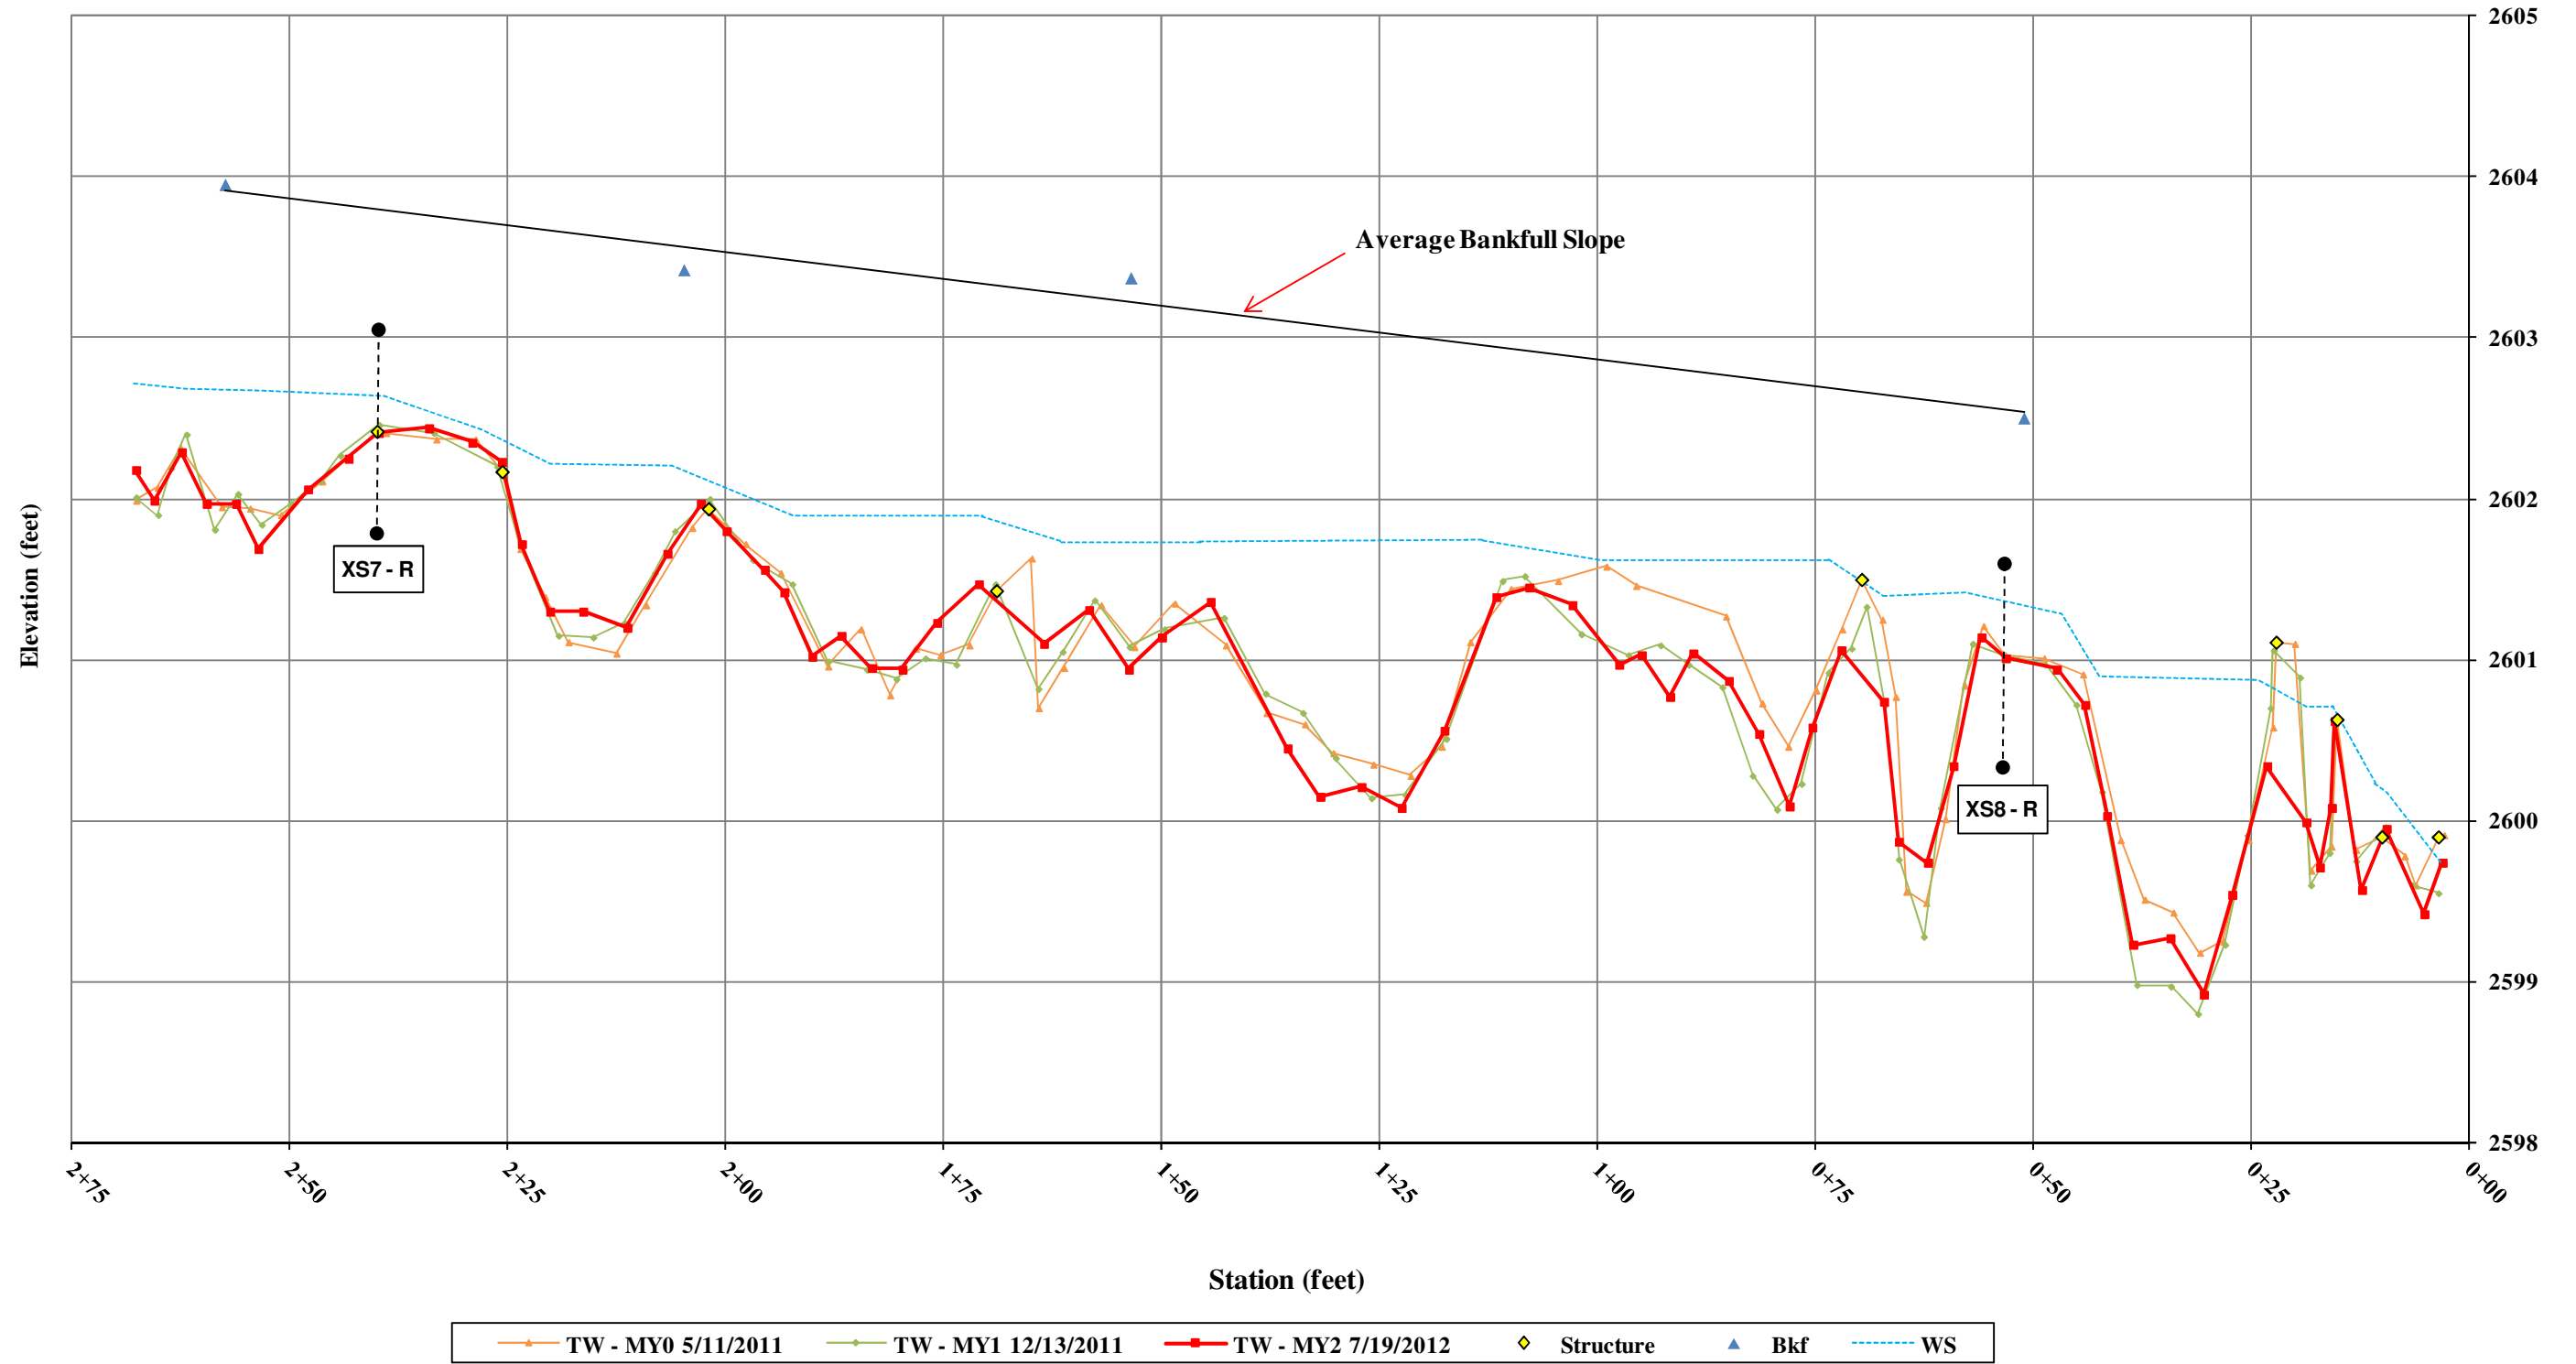



Glade Creek / Project No. 854					
Glade Creek - Cross-Section 1 - Riffle					
Pebble Count Summary					
			Monitoring Year 2		
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	11	11%	11%
Sand	very fine sand	0.125	4	4%	15%
	fine sand	0.25	2	2%	17%
	medium sand	0.50	0	0%	17%
	coarse sand	1.00	2	2%	19%
	very coarse sand	2.00	7	7%	26%
Gravel	very fine gravel	4.0	4	4%	30%
	fine gravel	5.7	2	2%	32%
	fine gravel	8.0	1	1%	33%
	medium gravel	11.3	5	5%	38%
	medium gravel	16.0	4	4%	42%
	coarse gravel	22.3	1	1%	43%
	coarse gravel	32	6	6%	49%
	very coarse gravel	45	8	8%	57%
	very coarse gravel	64	18	18%	75%
Cobble	small cobble	90	15	15%	90%
	medium cobble	128	6	6%	96%
	large cobble	180	4	4%	100%
	very large cobble	256	0	0%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
	very large boulder	4096	0	0%	100%
Bedrock	bedrock	>4096	0	0%	100%
TOTALS			100	100%	100%

Summary Data	
D50	33
D84	79
D95	120

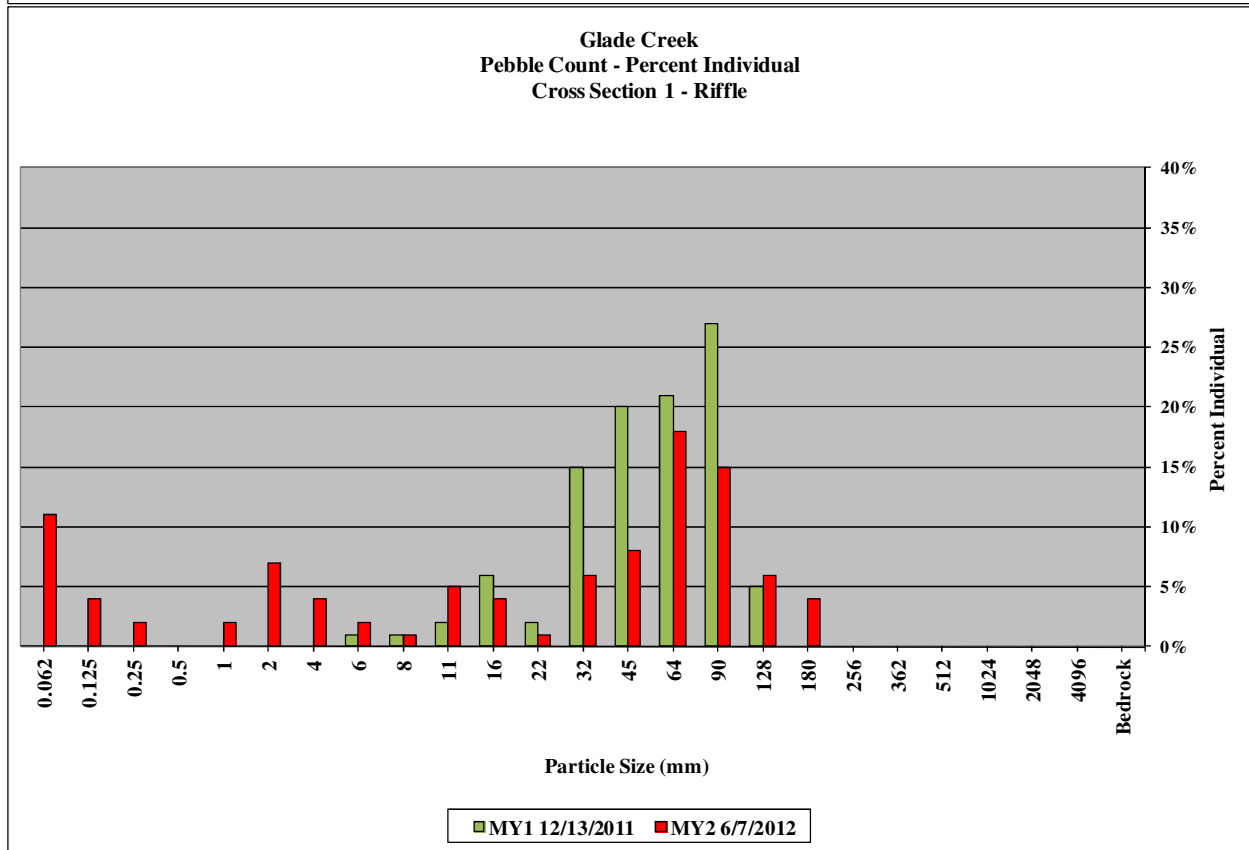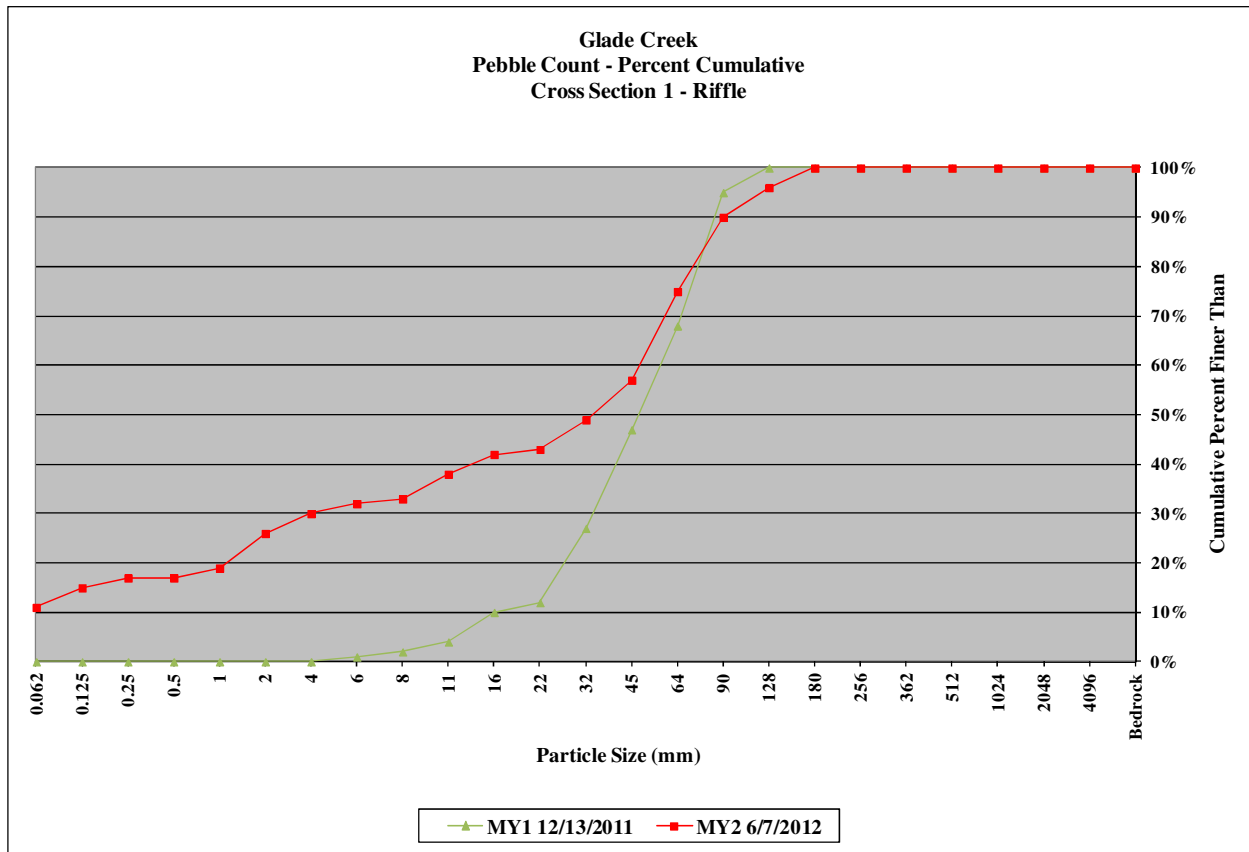



Glade Creek / Project No. 854					
Glade Creek - Cross-Section 2 - Pool					
Pebble Count Summary					
			Monitoring Year 2		
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	9	9%	9%
Sand	very fine sand	0.125	13	13%	22%
	fine sand	0.25	3	3%	25%
	medium sand	0.50	12	12%	37%
	coarse sand	1.00	5	5%	42%
	very coarse sand	2.00	11	11%	53%
Gravel	very fine gravel	4.0	4	4%	57%
	fine gravel	5.7	1	1%	58%
	fine gravel	8.0	6	6%	64%
	medium gravel	11.3	3	3%	67%
	medium gravel	16.0	2	2%	69%
	coarse gravel	22.3	1	1%	70%
	coarse gravel	32	7	7%	77%
	very coarse gravel	45	5	5%	82%
	very coarse gravel	64	4	4%	86%
Cobble	small cobble	90	5	5%	91%
	medium cobble	128	6	6%	97%
	large cobble	180	3	3%	100%
	very large cobble	256	0	0%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
	very large boulder	4096	0	0%	100%
Bedrock	bedrock	>4096	0	0%	100%
TOTALS			100	100%	100%

Summary Data	
D50	1.7
D84	54
D95	110

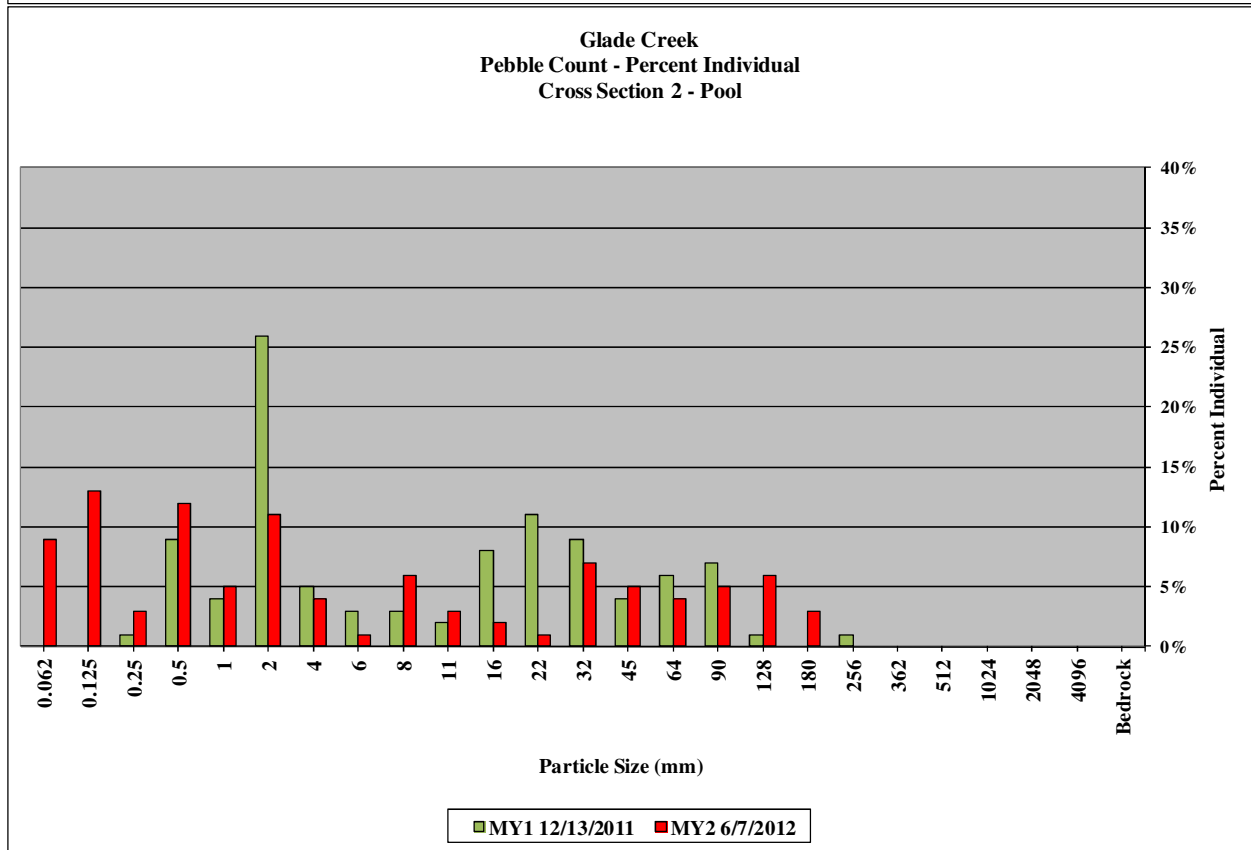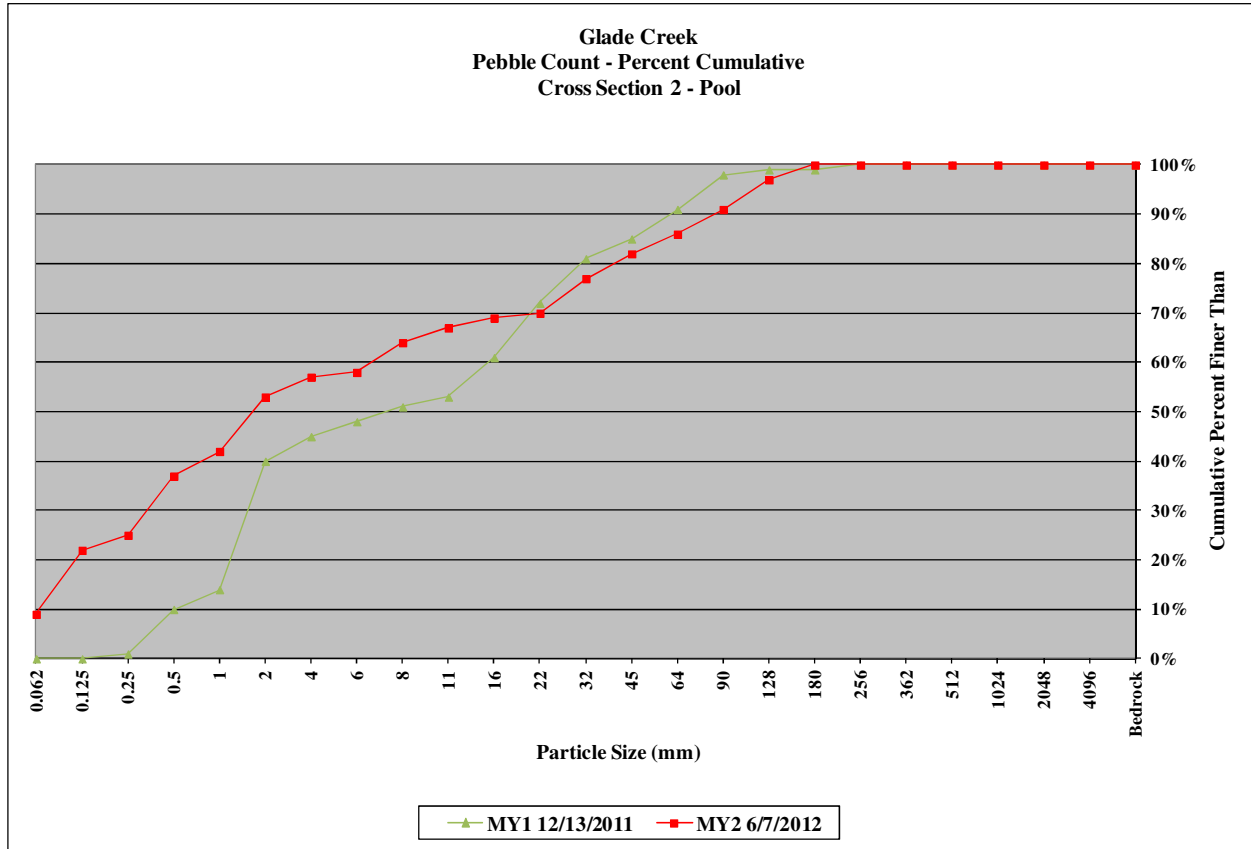



Glade Creek / Project No. 854					
Glade Creek - Cross-Section 3 - Riffle					
Pebble Count Summary					
			Monitoring Year 2		
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	6	6%	6%
Sand	very fine sand	0.125	2	2%	8%
	fine sand	0.25	2	2%	10%
	medium sand	0.50	1	1%	11%
	coarse sand	1.00	6	6%	17%
	very coarse sand	2.00	7	7%	24%
Gravel	very fine gravel	4.0	6	6%	30%
	fine gravel	5.7	5	5%	35%
	fine gravel	8.0	2	2%	37%
	medium gravel	11.3	2	2%	39%
	medium gravel	16.0	7	7%	46%
	coarse gravel	22.3	4	4%	50%
	coarse gravel	32	7	7%	57%
	very coarse gravel	45	7	7%	64%
	very coarse gravel	64	13	13%	77%
Cobble	small cobble	90	13	13%	90%
	medium cobble	128	8	8%	98%
	large cobble	180	2	2%	100%
	very large cobble	256	0	0%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
	very large boulder	4096	0	0%	100%
Bedrock	bedrock	>4096	0	0%	100%
TOTALS			100	100%	100%

Summary Data	
D50	22
D84	77
D95	110

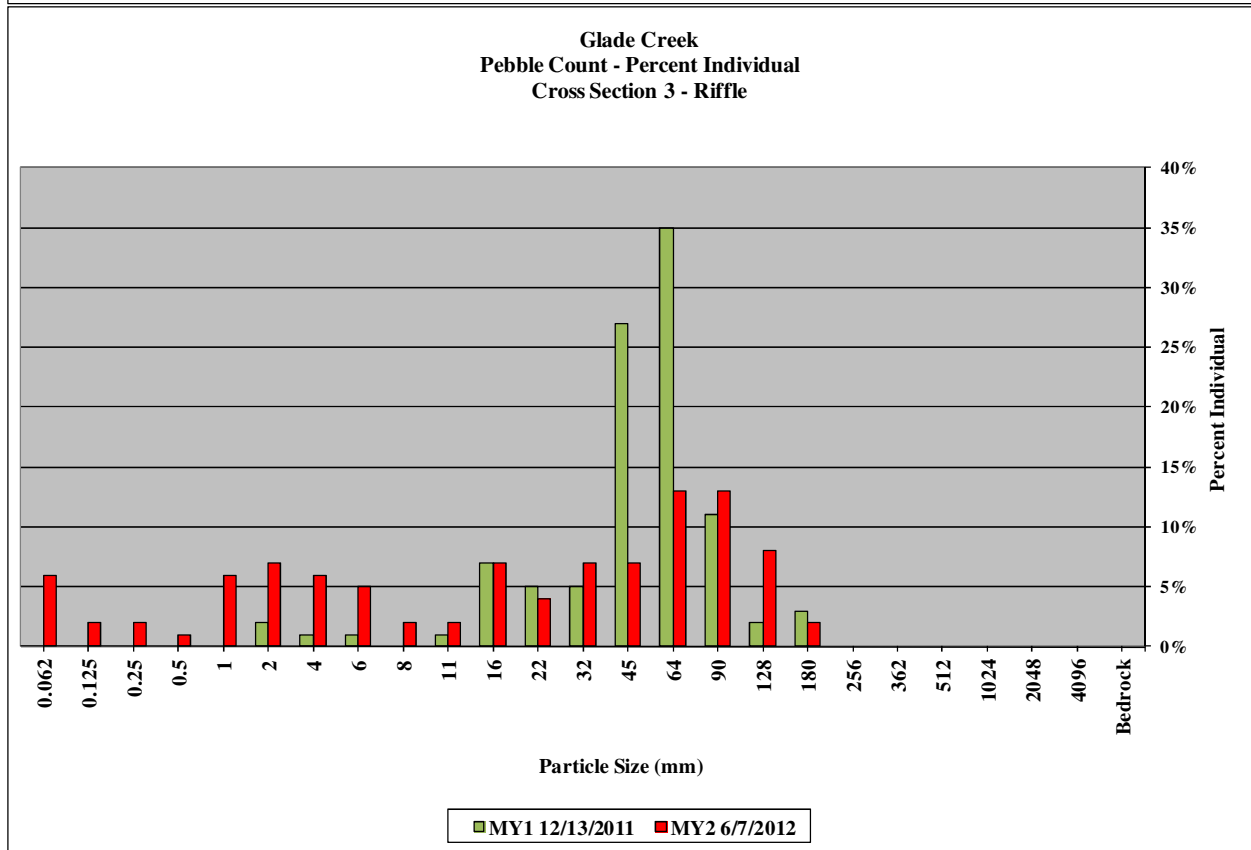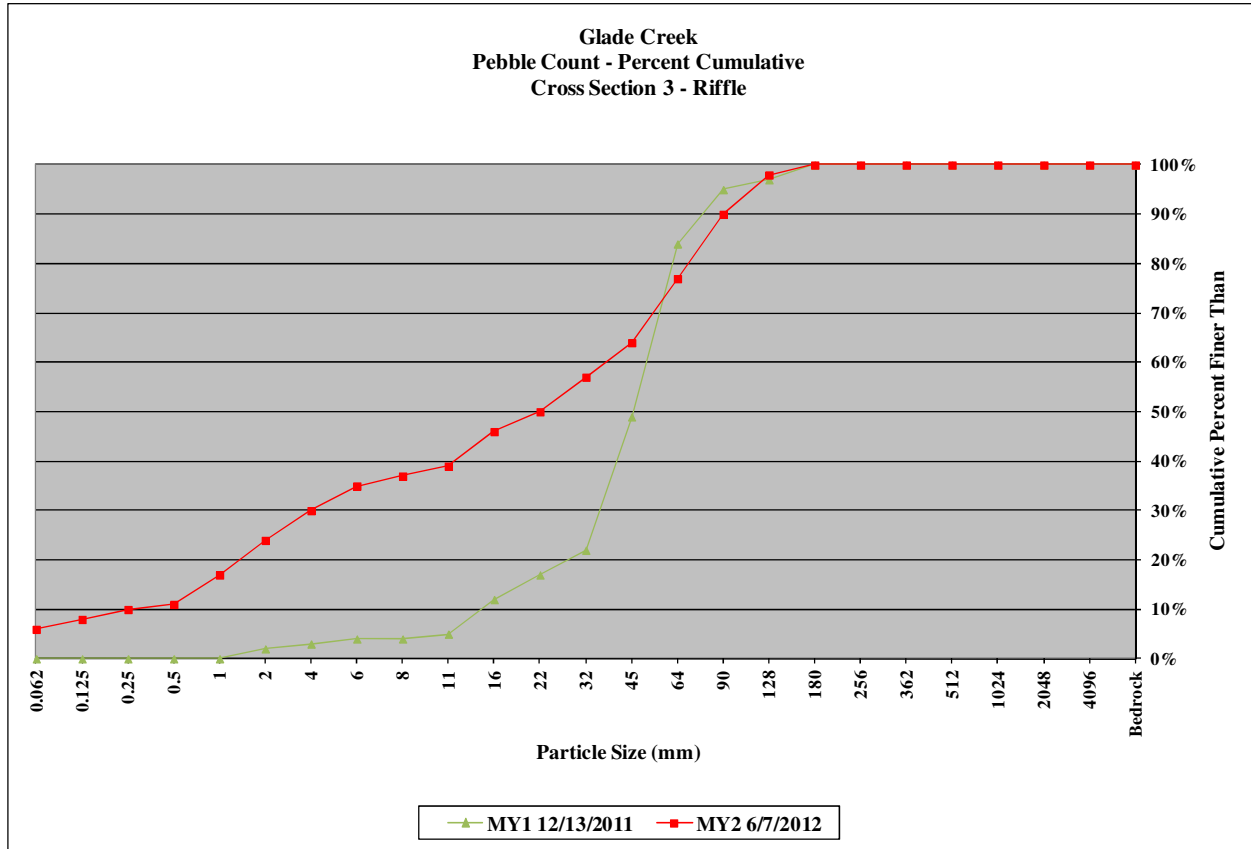



Glade Creek / Project No. 854					
Glade Creek - Cross-Section 4 - Riffle					
Pebble Count Summary					
			Monitoring Year 2		
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	8	8%	8%
Sand	very fine sand	0.125	1	1%	9%
	fine sand	0.25	3	3%	12%
	medium sand	0.50	2	2%	14%
	coarse sand	1.00	1	1%	15%
	very coarse sand	2.00	9	9%	24%
Gravel	very fine gravel	4.0	7	7%	31%
	fine gravel	5.7	10	10%	41%
	fine gravel	8.0	1	1%	42%
	medium gravel	11.3	4	4%	46%
	medium gravel	16.0	7	7%	53%
	coarse gravel	22.3	2	2%	55%
	coarse gravel	32	10	10%	65%
	very coarse gravel	45	9	9%	74%
	very coarse gravel	64	6	6%	80%
Cobble	small cobble	90	10	10%	90%
	medium cobble	128	7	7%	97%
	large cobble	180	0	0%	97%
	very large cobble	256	3	3%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
	very large boulder	4096	0	0%	100%
Bedrock	bedrock	>4096	0	0%	100%
TOTALS			100	100%	100%

Summary Data	
D50	14
D84	73
D95	120

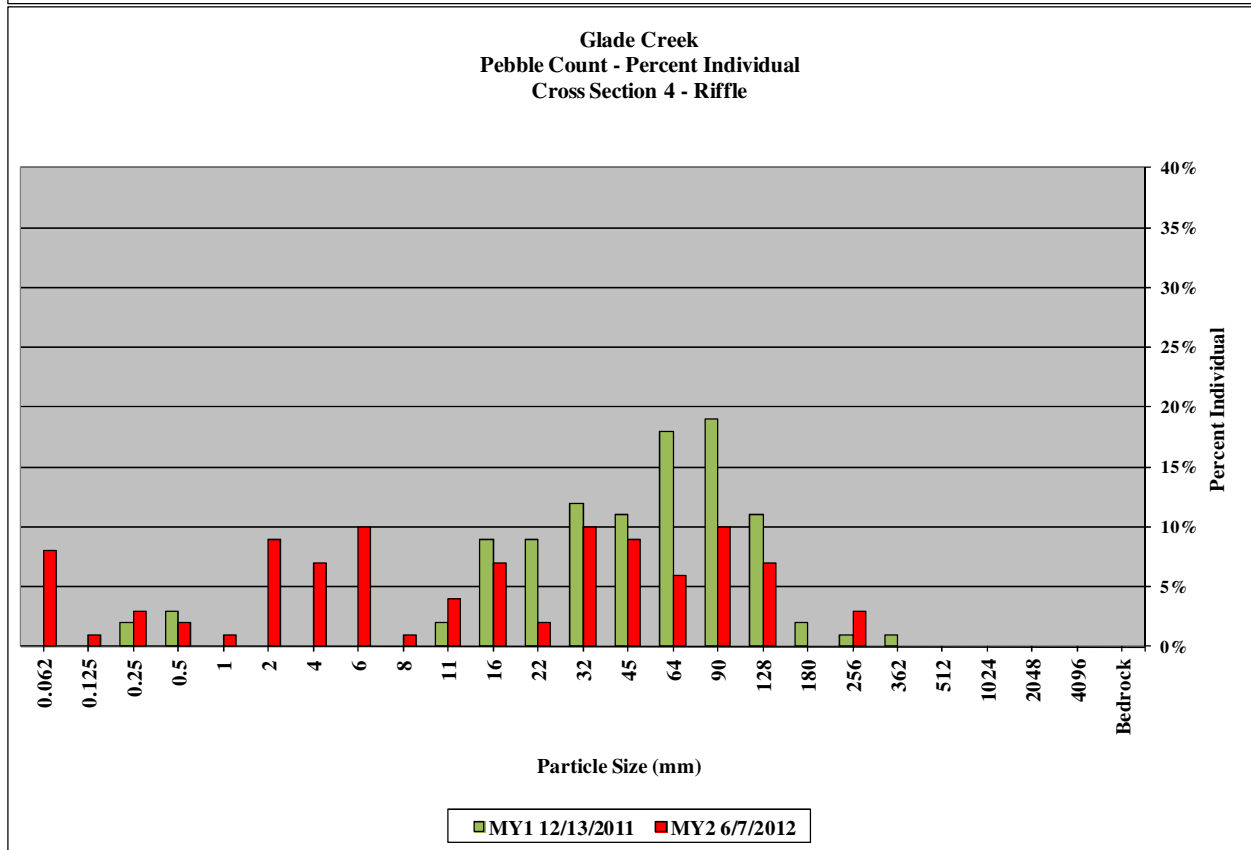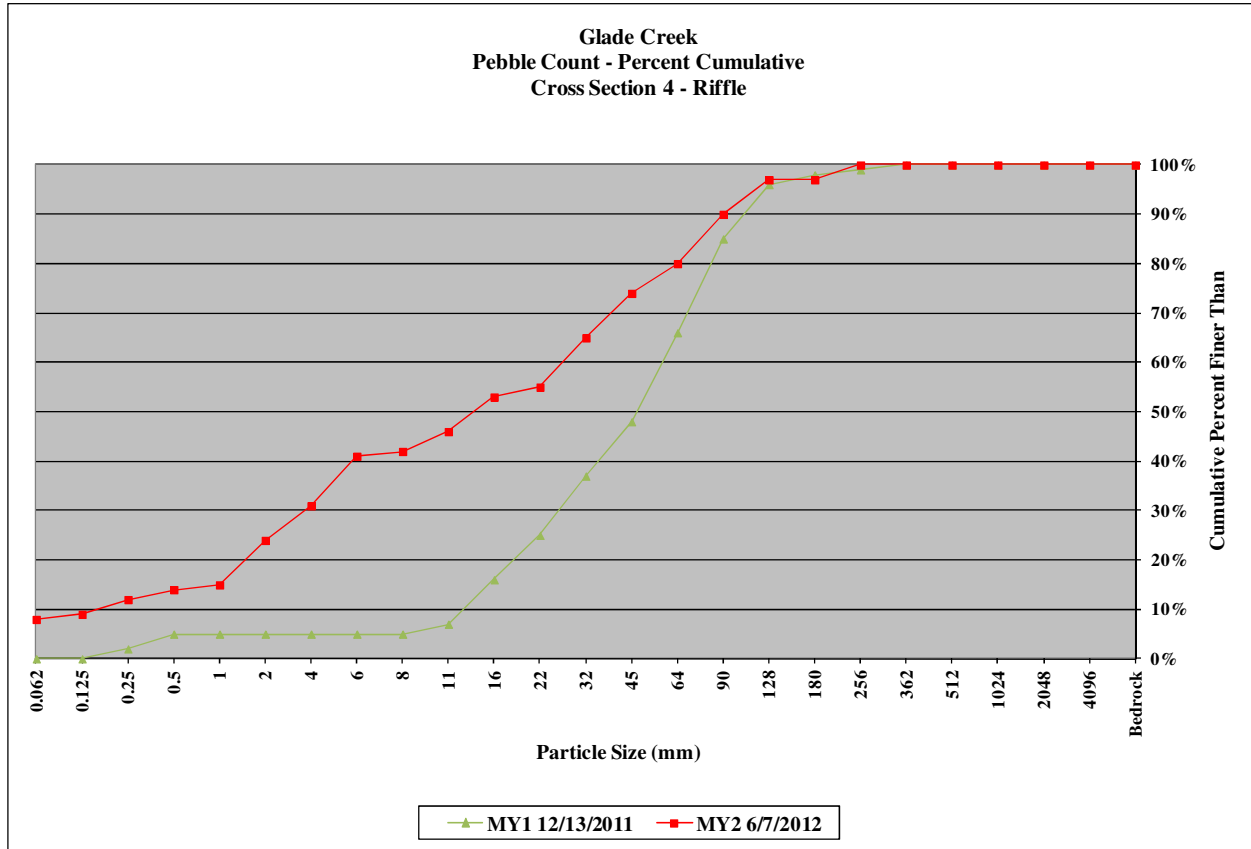



Glade Creek / Project No. 854					
Glade Creek - Cross-Section 5 - Pool					
Pebble Count Summary					
			Monitoring Year 2		
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	21	21%	21%
Sand	very fine sand	0.125	4	4%	25%
	fine sand	0.25	0	0%	25%
	medium sand	0.50	8	8%	33%
	coarse sand	1.00	7	7%	40%
	very coarse sand	2.00	21	21%	61%
Gravel	very fine gravel	4.0	4	4%	65%
	fine gravel	5.7	4	4%	69%
	fine gravel	8.0	3	3%	72%
	medium gravel	11.3	2	2%	74%
	medium gravel	16.0	7	7%	81%
	coarse gravel	22.3	4	4%	85%
	coarse gravel	32	5	5%	90%
	very coarse gravel	45	1	1%	91%
	very coarse gravel	64	2	2%	93%
Cobble	small cobble	90	4	4%	97%
	medium cobble	128	3	3%	100%
	large cobble	180	0	0%	100%
	very large cobble	256	0	0%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
	very large boulder	4096	0	0%	100%
Bedrock	bedrock	>4096	0	0%	100%
TOTALS			100	100%	100%

Summary Data	
D50	1.4
D84	20
D95	76

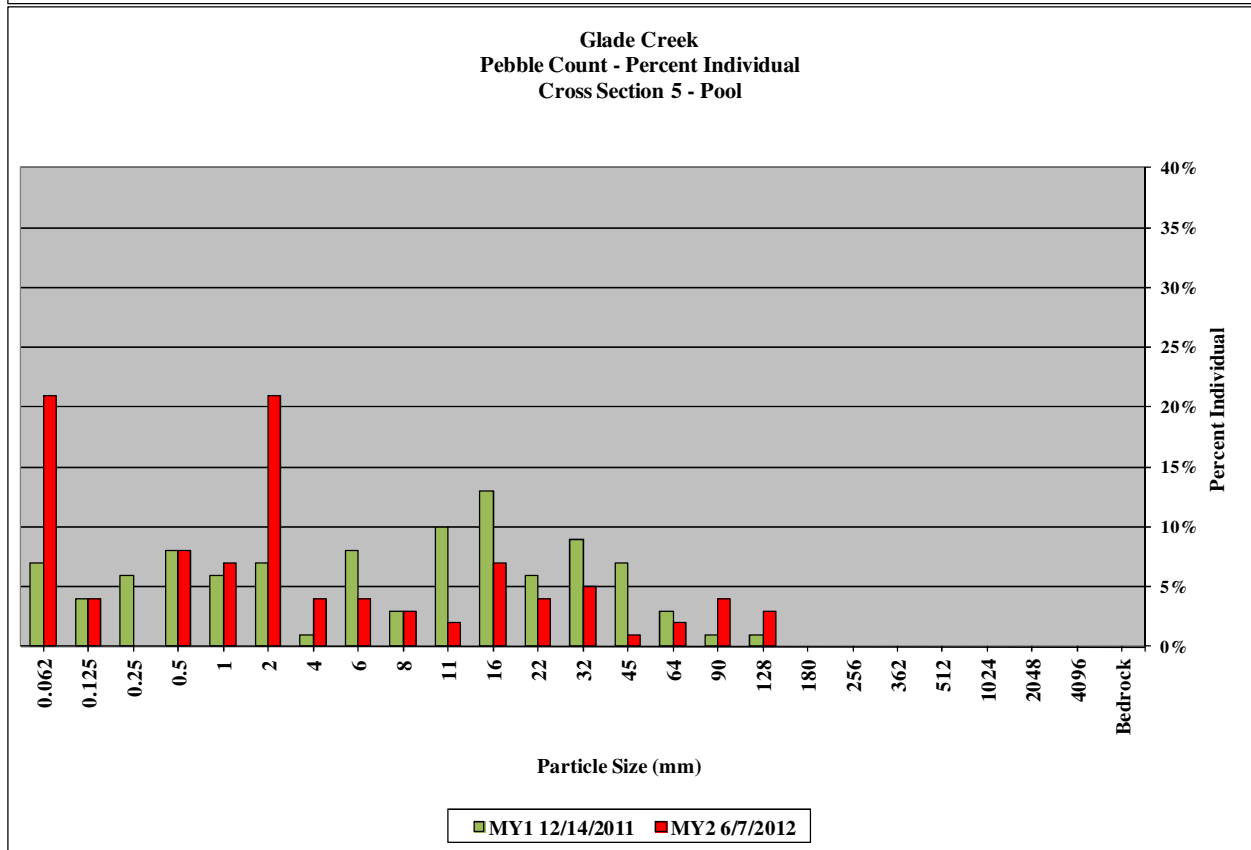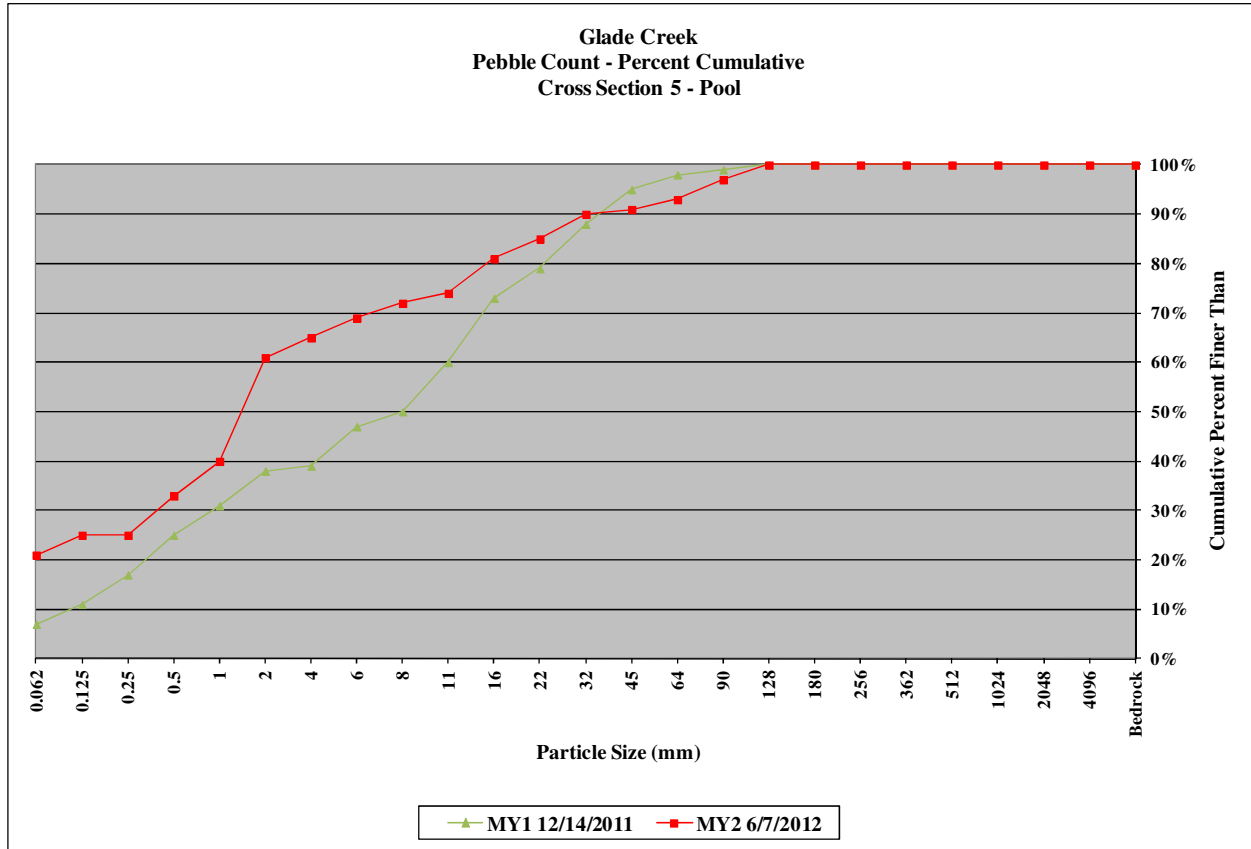



Glade Creek / Project No. 854					
Glade Creek - Cross-Section 6 - Riffle					
Pebble Count Summary					
			Monitoring Year 2		
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	6	6%	6%
Sand	very fine sand	0.125	4	4%	10%
	fine sand	0.25	0	0%	10%
	medium sand	0.50	3	3%	13%
	coarse sand	1.00	3	3%	16%
	very coarse sand	2.00	3	3%	19%
Gravel	very fine gravel	4.0	5	5%	24%
	fine gravel	5.7	4	4%	28%
	fine gravel	8.0	4	4%	32%
	medium gravel	11.3	7	7%	39%
	medium gravel	16.0	9	9%	48%
	coarse gravel	22.3	5	5%	53%
	coarse gravel	32	5	5%	58%
	very coarse gravel	45	7	7%	65%
	very coarse gravel	64	11	11%	76%
Cobble	small cobble	90	10	10%	86%
	medium cobble	128	7	7%	93%
	large cobble	180	5	5%	98%
	very large cobble	256	2	2%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
	very large boulder	4096	0	0%	100%
Bedrock	bedrock	>4096	0	0%	100%
TOTALS			100	100%	100%

Summary Data	
D50	18
D84	84
D95	150

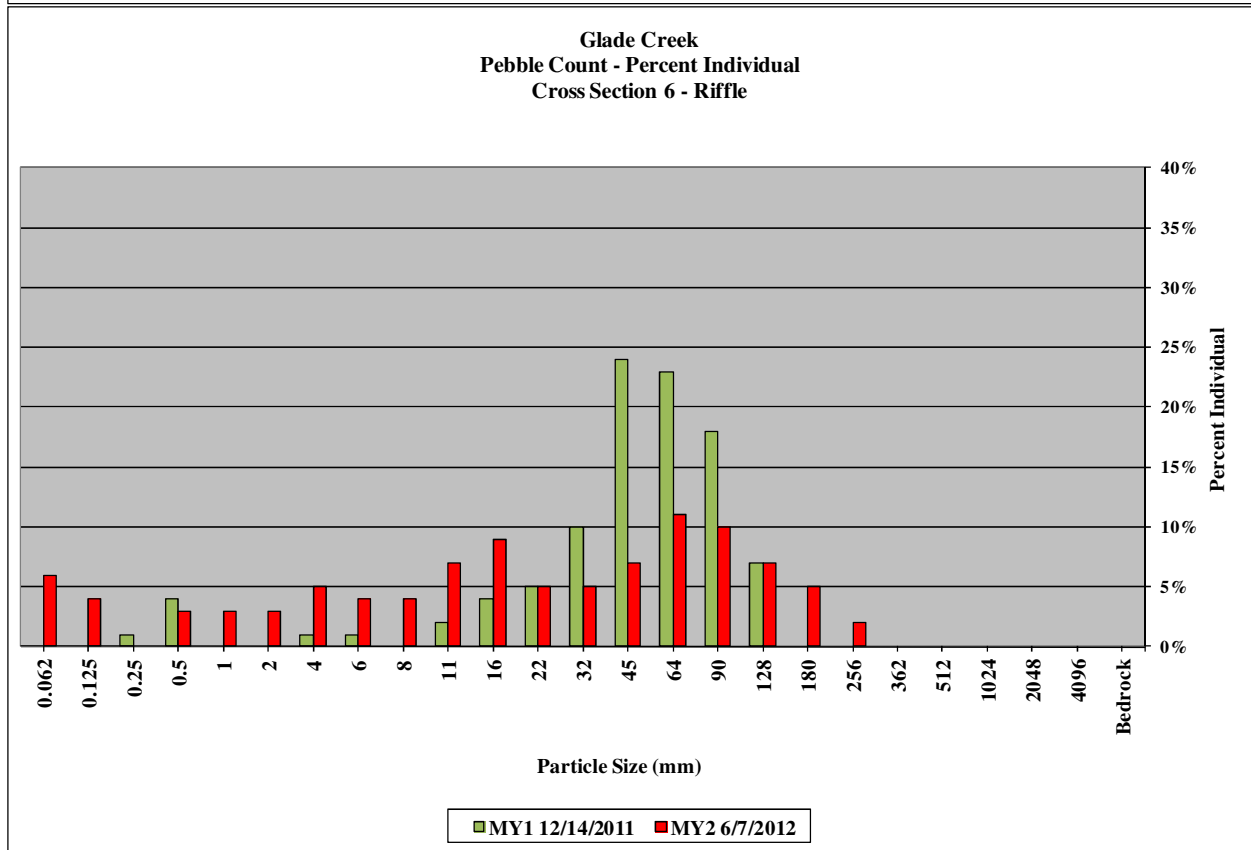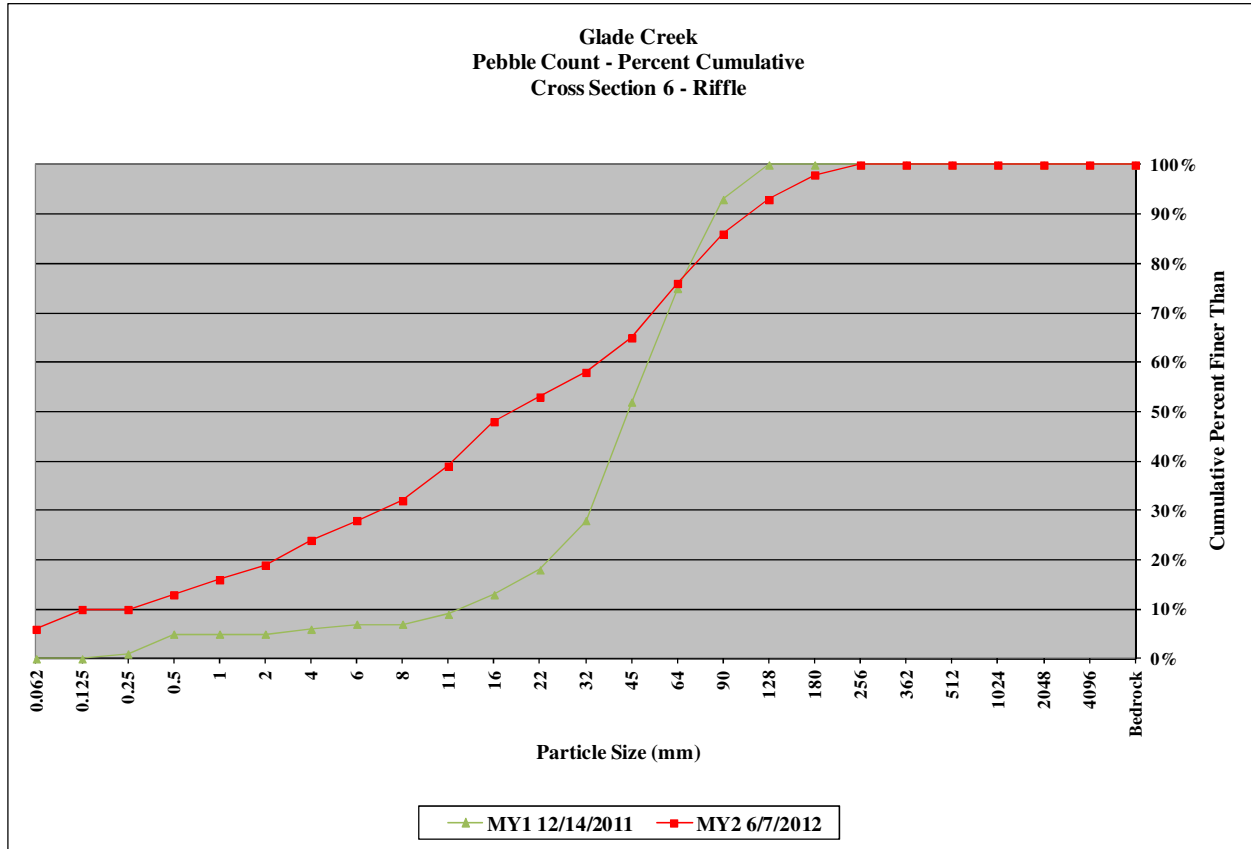

Glade Creek / Project No. 854					
Unnamed Tributary - Cross-Section 7 - Riffle					
Pebble Count Summary					
			Monitoring Year 2		
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	7	7%	7%
Sand	very fine sand	0.125	7	7%	14%
	fine sand	0.25	2	2%	16%
	medium sand	0.50	5	5%	21%
	coarse sand	1.00	1	1%	22%
	very coarse sand	2.00	8	8%	30%
Gravel	very fine gravel	4.0	3	3%	33%
	fine gravel	5.7	5	5%	38%
	fine gravel	8.0	1	1%	39%
	medium gravel	11.3	5	5%	44%
	medium gravel	16.0	6	6%	50%
	coarse gravel	22.3	4	4%	54%
	coarse gravel	32	10	10%	64%
	very coarse gravel	45	7	7%	71%
	very coarse gravel	64	16	16%	87%
Cobble	small cobble	90	7	7%	94%
	medium cobble	128	4	4%	98%
	large cobble	180	0	0%	98%
	very large cobble	256	2	2%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
	very large boulder	4096	0	0%	100%
Bedrock	bedrock	>4096	0	0%	100%
TOTALS			100	100%	100%

Summary Data	
D50	16
D84	60
D95	98

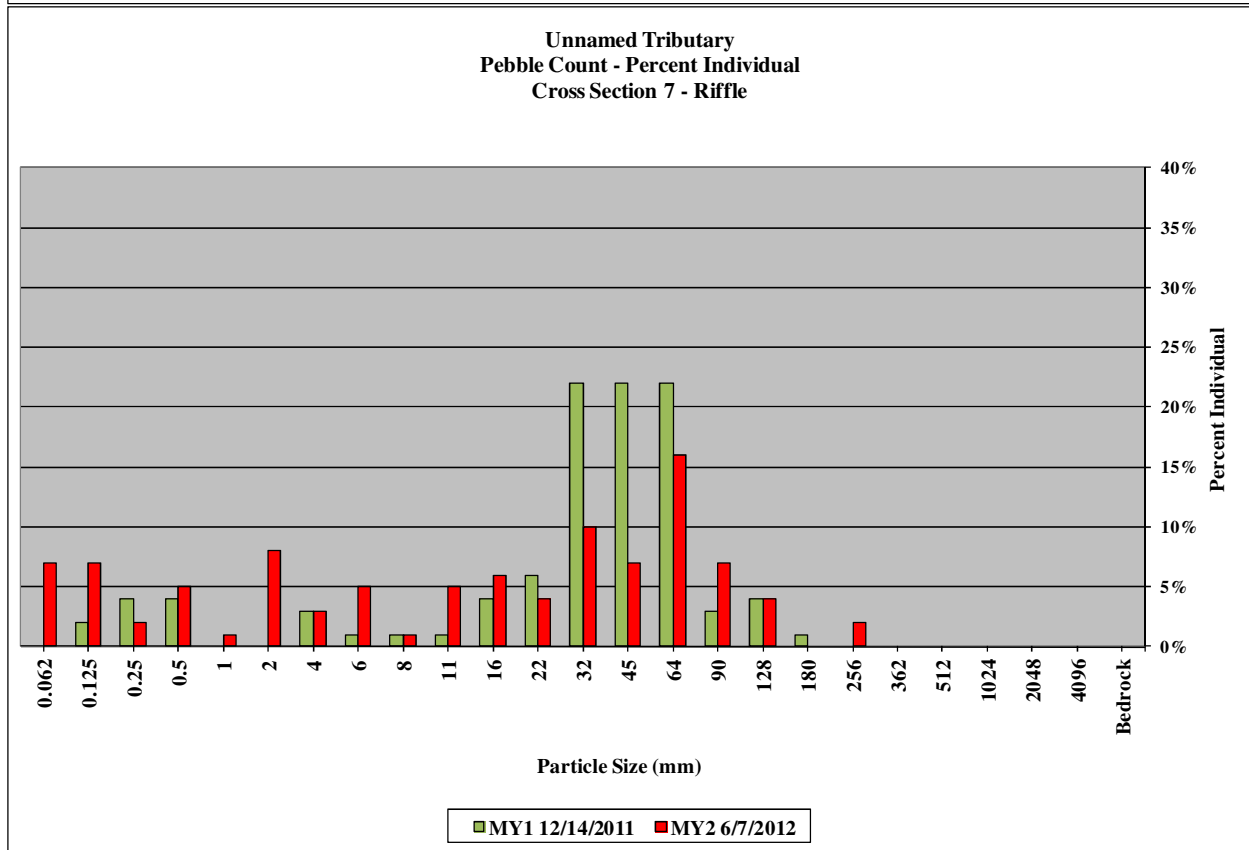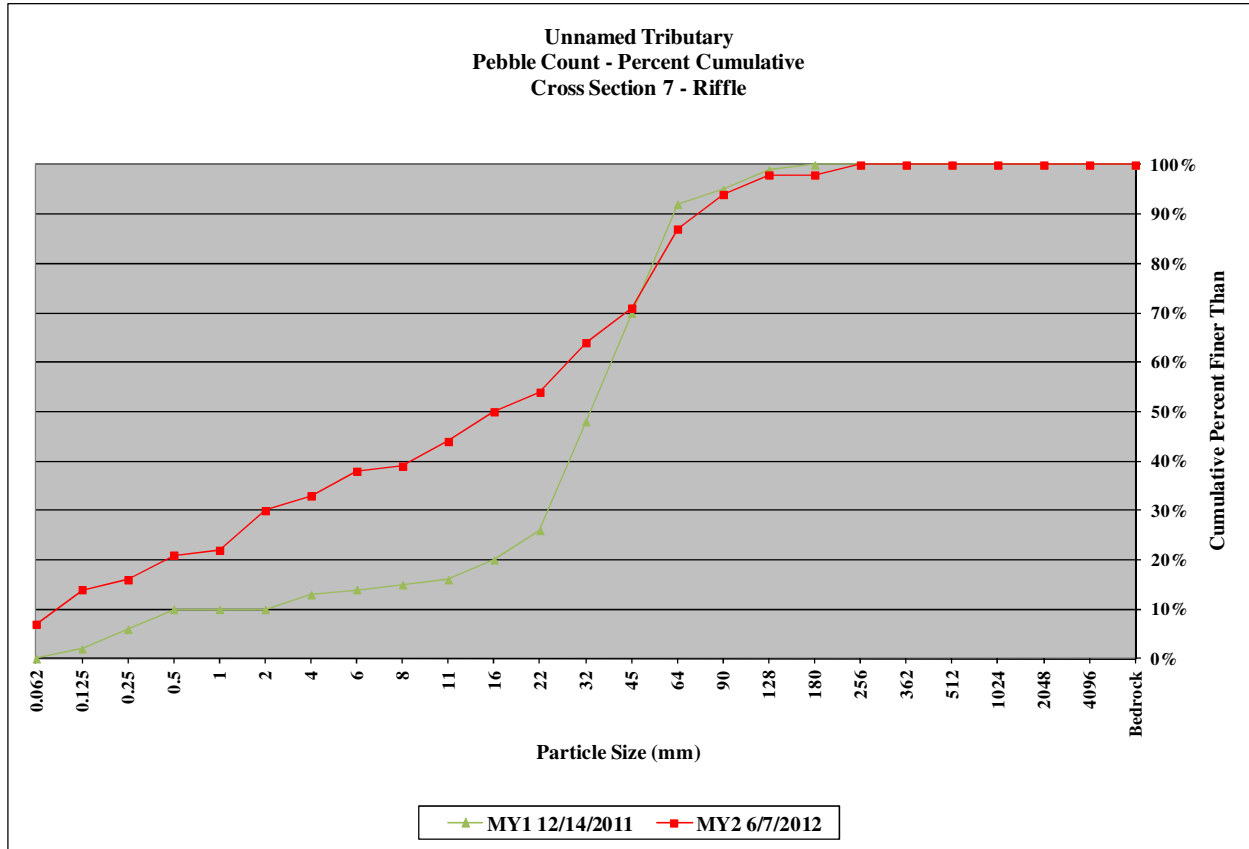

Glade Creek / Project No. 854					
Unnamed Tributary - Cross-Section 8 - Riffle					
Pebble Count Summary					
			Monitoring Year 2		
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	7	7%	7%
Sand	very fine sand	0.125	6	6%	13%
	fine sand	0.25	6	6%	19%
	medium sand	0.50	4	4%	23%
	coarse sand	1.00	3	3%	26%
	very coarse sand	2.00	17	17%	43%
Gravel	very fine gravel	4.0	6	6%	49%
	fine gravel	5.7	1	1%	50%
	fine gravel	8.0	0	0%	50%
	medium gravel	11.3	3	3%	53%
	medium gravel	16.0	3	3%	56%
	coarse gravel	22.3	3	3%	59%
	coarse gravel	32	5	5%	64%
	very coarse gravel	45	8	8%	72%
	very coarse gravel	64	9	9%	81%
Cobble	small cobble	90	11	11%	92%
	medium cobble	128	3	3%	95%
	large cobble	180	5	5%	100%
	very large cobble	256	0	0%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
	very large boulder	4096	0	0%	100%
Bedrock	bedrock	>4096	0	0%	100%
TOTALS			100	100%	100%

Summary Data	
D50	6
D84	70
D95	130

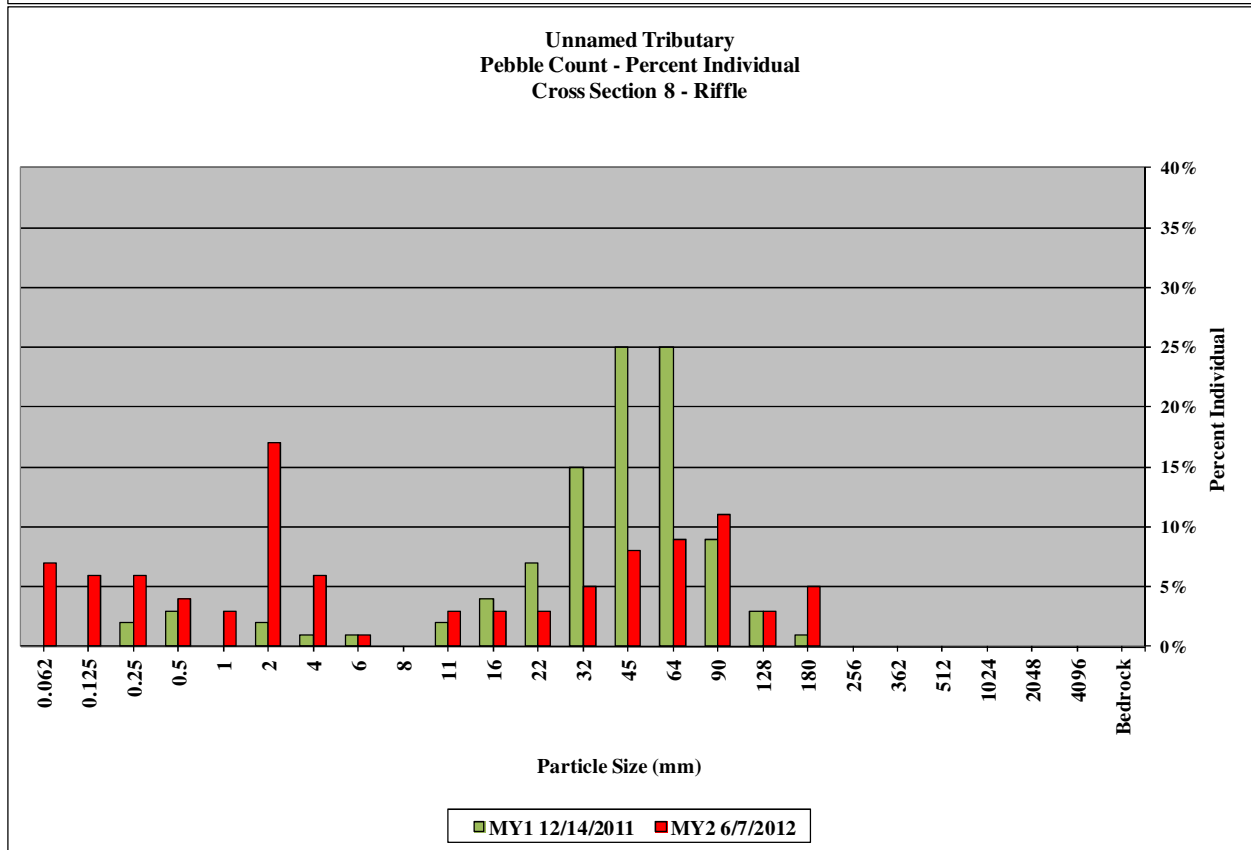
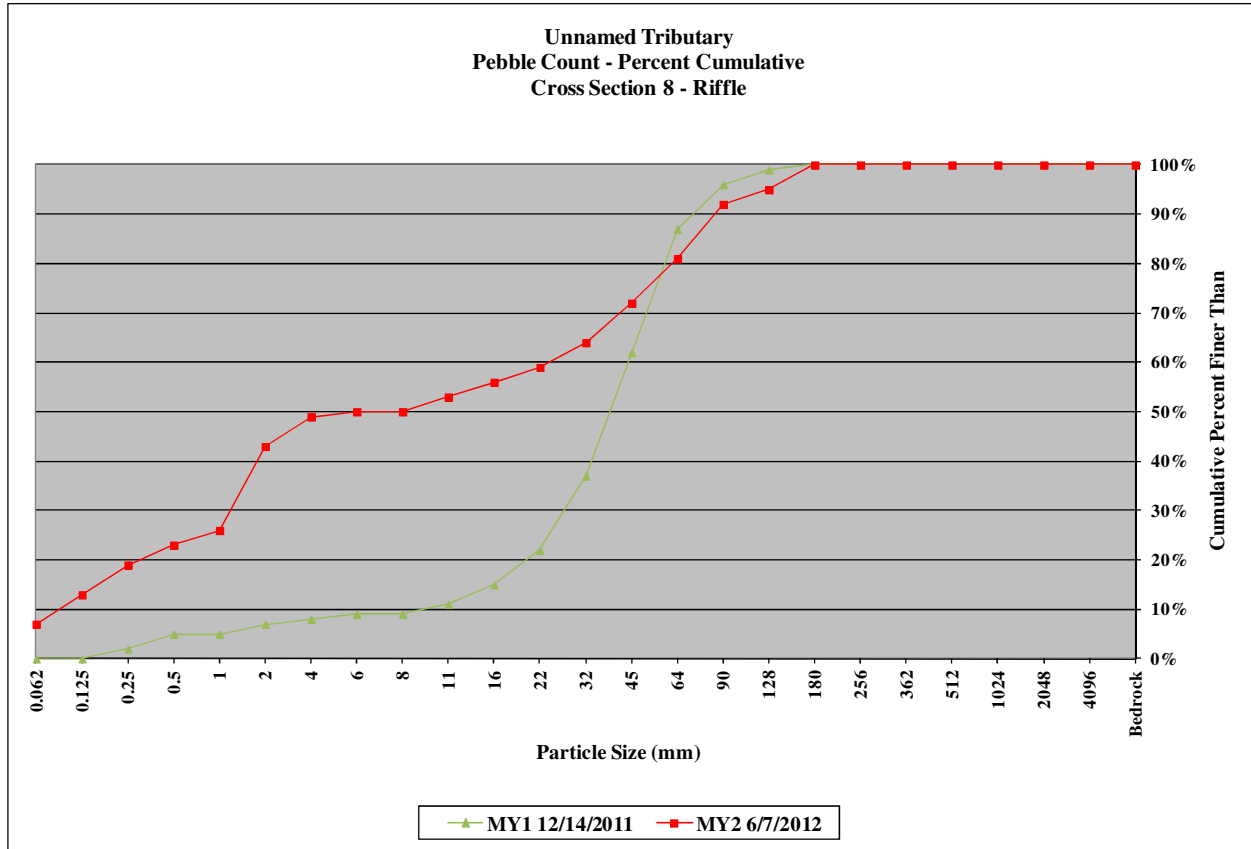


Table 10a. Baseline Stream Data Summary Glade Creek / Project No. 854 - Glade Creek (2,558 feet)																								
Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data						Design			Monitoring Baseline					
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
Dimension & Substrate - Riffle																								
Bankfull Width (ft)	-	-	-	-	44.7	-	-	-	-	-	30.7	-	-	-	-	-	34.0	-	35.2	43.2	44.9	47.7	5.9	4
Floodprone Width (ft)				-	45	-	-	-	-	-	70	-	-	-	-	-	>76	-	68.8	89.1	89.0	109.4	22.5	4
Bankfull Mean Depth (ft)	-	-	-	-	1.41	-	-	-	-	-	1.90	-	-	-	-	-	1.56	-	0.9	1.2	1.2	1.3	0.2	4
Bankfull Max Depth (ft)				-	2.3	-	-	-	-	-	2.5	-	-	-	-	-	2.2	-	1.7	1.8	1.9	1.9	0.1	4
Bankfull Cross Sectional Area (ft ²)	-			-	63.0	-	-	-	-	-	57.4	-	-	-	-	-	53.0	-	41.6	49.1	46.3	62.2	9.1	4
Width/Depth Ratio				-	31.7	-	-	-	-	-	16.4	-	-	-	-	-	22.0	-	27.6	39.0	36.9	62.2	11.3	4
Entrenchment Ratio				-	6.0	-	-	-	-	-	2.3	-	-	-	-	-	>2.2	-	1.5	2.1	2.2	2.6	0.5	4
Bank Height Ratio				1.2	-	-	3.0	-	-	-	1.0	-	-	-	-	-	1.0	-	1.0	1.0	1.0	1.0	0.0	4
Profile																								
Riffle Length (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	14.6	35.3	31.8	54.9	13.1	18
Riffle Slope (ft/ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.002	0.011	0.010	0.025	0.006	18
Pool Length (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7.2	41.7	44.6	74.9	22.8	30
Pool Max Depth (ft)				-	5.7	-	-	-	-	-	3.1	-	-	-	-	-	4.4	-	3.2	4.1	4.1	5.6	0.7	31
Pool Spacing (ft)				110	-	-	228	-	7	-	224	-	-	-	-	91	-	155	10.7	84.5	98.5	162.5	51.0	29
Pattern																								
Channel Belt Width (ft)				77	-	-	184	-	8	90	-	-	104	-	-	55	-	134	59.3	76.7	74.5	92.1	11.22	12
Radius of Curvature (ft)				34	-	-	118	-	8	76	-	-	135	-	-	53	-	172	41.7	57.9	50.3	101.0	17.80	15
Rc: Bankfull Width (ft/ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Meander Wavelength (ft)				66	-	-	403	-	10	-	350	-	-	-	-	136	-	261	163.9	223.6	230.7	259.1	28.34	13
Meander Width Ratio				3.6	-	-	18.7	-	-	2.9	-	-	3.4	-	-	1.6	-	4.0	1.6	1.8	1.7	2.1	0.26	4
Transport Parameters																								
Reach Shear Stress (Competency) lb/ft ²				0.41						-						0.39			0.36					
Max Part Size (mm) Mobilized at Bankfull				11						-						10			21					
Stream Power (Transport Capacity) W/m ²				-						-						-			-					
Additional Reach Parameters																								
Rosgen Classification				C _E 4/F4/G4						C4						C4			C					
Bankfull Velocity (fps)	-			3.3						N/A						3.8								
Bankfull Discharge (cfs)	267-352			200						375						200								
Valley Length (ft)				2,180						-						2,180								
Channel Thalweg Length (ft)				2,569						-						2,555			2,558					
Sinuosity				1.18						1.10						1.17			1.17					
Water Surface Slope (Channel) (ft/ft)				-						-						-			0.0055					
Bankfull Slope (ft/ft)				0.005						0.014						0.004			0.0050					
Bankfull Floodplain Area (acres)				-						-						-			-					
% of Reach with Eroding Banks				-						-						-			-					
Channel Stability or Habitat Metric				-						-						-			-					
Biological or Other				-						-						-			-					

- Information unavailable.
 N/A - Item does not apply.
 Non-Applicable.

Table 10a. Baseline Stream Data Summary Glade Creek / Project No. 854 - Unnamed Tributary (265 feet)																								
Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data						Design			Monitoring Baseline					
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
Dimension & Substrate - Riffle																								
Bankfull Width (ft)	-	-	-	-	12.6	-	-	-	-	-	30.7	-	-	-	-	-	12.0	-	17.3	18.1	18.1	18.9	N/A	2
Floodprone Width (ft)				13	-	-	25	-	-	-	70	-	-	-	-	-	>44	-	33.5	37.7	37.7	41.8	N/A	2
Bankfull Mean Depth (ft)	-	-	-	-	0.8	-	-	-	-	-	1.9	-	-	-	-	-	0.7	-	0.7	0.8	0.8	0.8	N/A	2
Bankfull Max Depth (ft)				-	1.0	-	-	-	-	-	2.5	-	-	-	-	-	1.0	-	1.2	1.3	1.3	1.3	N/A	2
Bankfull Cross Sectional Area (ft ²)				-	9.9	-	-	-	-	-	57.4	-	-	-	-	-	8.2	-	12.7	13.0	13.0	13.2	N/A	2
Width/Depth Ratio				-	16.0	-	-	-	-	-	16.4	-	-	-	-	-	18.0	-	22.7	25.5	25.5	28.3	N/A	2
Entrenchment Ratio				1.1	-	-	2.0	-	-	-	2.3	-	-	-	-	-	>2.2	-	1.9	2.1	2.1	2.2	N/A	2
Bank Height Ratio				-	≥2.0	-	-	-	-	-	1.0	-	-	-	-	-	1.0	-	1.0	1.0	1.0	1.0	N/A	2
Profile																								
Riffle Length (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.8	10.3	10.3	14.6	4.0	6
Riffle Slope (ft/ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.001	0.017	0.015	0.034	0.011	6
Pool Length (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.6	13.3	10.8	29.5	8.5	9
Pool Max Depth (ft)				-	3.5	-	-	-	-	-	3.1	-	-	-	-	-	2.2	-	1.8	2.7	2.6	3.4	0.5	7
Pool Spacing (ft)				-	-	-	-	-	-	-	224	-	-	-	-	31	-	56	5.5	34.1	31.5	59.8	20.8	7
Pattern																								
Channel Belt Width (ft)				57	-	-	79	-	7	90	-	-	104	-	-	30	-	45	28.6	34.3	36.1	37.1	3.51	5
Radius of Curvature (ft)				17	-	-	71	-	10	76	-	-	135	-	-	27	-	33	17.1	19.8	19.5	22.5	2.21	5
Re: Bankfull Width (ft/ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Meander Wavelength (ft)				66	-	-	93	-	6	-	350	-	-	-	-	75	-	84	66.4	77.7	82.7	83.9	9.78	3
Meander Width Ratio				4.5	-	-	6.3	-	-	2.9	-	-	3.4	-	-	2.5	-	3.8	1.9	2.0	2.0	2.1	N/A	2.0
Transport Parameters																								
Reach Shear Stress (Competency) lb/ft ²							0.52										0.17						0.30	
Max Part Size (mm) Mobilized at Bankfull							15										3						65	
Stream Power (Transport Capacity) W/m ²							-										-							
Additional Reach Parameters																								
Rosgen Classification							C4						C4				C4						C	
Bankfull Velocity (fps)				-			2						N/A				2.4							
Bankfull Discharge (cfs)				76 - 98			20						375				20							
Valley Length (ft)							175						-				226							
Channel Thalweg Length (ft)							300						-				275							264
Sinuosity							1.71						1.10				1.22							1.17
Water Surface Slope (ft/ft)							-						-				-							0.0064
Bankfull Slope (ft/ft)							0.011						0.014				0.006							0.0058
Bankfull Floodplain Area (acres)							-						-				-							
% of Reach with Eroding Banks							-						-				-							
Channel Stability or Habitat Metric							-						-				-							
Biological or Other							-						-				-							

- Information unavailable.
N/A - Item does not apply.
Non-Applicable.

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions) Glade Creek / Project No. 854 - Glade Creek (2,558 feet)																									
Parameter	Pre-Existing Condition					Reference Reach Data					Design					Monitoring Baseline									
Ri% / Ru% / P% / G% / S%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	25%	9%	49%	16%	2%
SC% / Sa% / G% / C% / B% / Be%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
d16 / D35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)	0.136	0.87	12.5	114	-	-	-	-	0.17	29	58	180	300	-	-	-	-	-	-	-	-	-	-	-	-
Entrenchment Class	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<1.5 / 1.5 - 1.99 / 2 - 4.9 / 5.0 - 9.9 / >10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Incision Class	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<1.2 / 1.2 - 1.49 / 1.5 - 1.99 / >2.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

- Information unavailable.
Non-Applicable.

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions) Glade Creek / Project No. 854 - Dye Branch-Downstream (265 feet)																									
Parameter	Pre-Existing Condition					Reference Reach Data					Design					Monitoring Baseline									
Ri% / Ru% / P% / G% / S%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	24%	11%	47%	16%	2%
SC% / Sa% / G% / C% / B% / Be%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
d16 / D35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)	0.3	11	27	85	115.0	-	-	-	0.17	29	58	180	300	-	-	-	-	-	-	-	-	-	-	-	-
Entrenchment Class	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<1.5 / 1.5 - 1.99 / 2 - 4.9 / 5.0 - 9.9 / >10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Incision Class	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<1.2 / 1.2 - 1.49 / 1.5 - 1.99 / >2.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

- Information unavailable.
N/A - Item does not apply.
Non-Applicable.

Table 11a. Baseline Morphology & Hydraulic Monitoring Summary																		
Glade Creek / Project No. 854 - Glade Creek (2,558 feet)																		
	Cross-Section 1 Riffle						Cross-Section 2 Pool						Cross-Section 3 Riffle					
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
Record Elevation (datum) Used	2,613	2,613	2,613				2,612	2,612	2,612				2,611	2,611	2,611			
Bankfull Width (ft)	47.7	48.8	51.3				50.4	49.3	49.1				47.6	47.6	47.6			
Floodprone Width (ft)	109.0	109.4	109				69.1	69.1	69.1				70.4	70.4	70.4			
Bankfull Mean Depth (ft)	0.9	0.9	0.9				1.6	1.7	1.7				1.3	1.3	1.3			
Bankfull Max Depth (ft)	1.9	1.9	1.9				3.0	3.3	3.3				1.9	1.9	1.9			
Bankfull Cross Sectional Area (ft ²)	41.6	45.6	45.9				78.3	83.0	83.6				62.2	64.1	63.9			
Bankfull Width/Depth Ratio	54.7	52.2	57.4				32.5	29.3	28.9				36.5	35.3	35.5			
Bankfull Entrenchment Ratio	2.3	2.2	2.1				1.4	1.4	1.4				1.5	1.5	1.5			
Bankfull Bank Height Ratio	1.0	1.0	1.0				1.0	1.0	1.0				1.0	1.0	1.0			
Cross Sectional Area between End Pins (ft ²)	41.8	45.6	45.9				78.3	83.0	83.6				62.2	64.1	63.9			
d50 (mm)	N/A	47	33				N/A	7.3	1.7				N/A	45	22			
	Cross-Section 4 Riffle						Cross-Section 5 Pool						Cross-Section 6 Riffle					
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
Record Elevation (datum) Used	2,607	2,607	2,607				2,606	2,606	2,606				2,605	2,605	2,605			
Bankfull Width (ft)	35.2	36.3	34.9				53.2	51.5	51.9				42.1	42.9	42.4			
Floodprone Width (ft)	68.8	68.8	68.8				117.9	117.9	118				107.6	107.6	108			
Bankfull Mean Depth (ft)	1.3	1.3	1.4				1.3	1.5	1.4				1.1	1.1	1.1			
Bankfull Max Depth (ft)	1.7	1.9	1.9				3.7	4.1	4.0				1.8	1.9	1.9			
Bankfull Cross Sectional Area (ft ²)	44.9	46.9	47.5				68.7	75.0	74.1				47.7	49.0	48.4			
Bankfull Width/Depth Ratio	27.6	28.1	25.6				41.1	35.3	36.3				37.2	37.5	37.1			
Bankfull Entrenchment Ratio	2.0	1.9	2.0				2.2	2.3	2.3				2.6	2.5	2.5			
Bankfull Bank Height Ratio	1.0	1.0	1.0				1.0	1.0	1.0				1.0	1.0	1.0			
Cross Sectional Area between End Pins (ft ²)	44.9	46.9	47.5				68.7	75.0	74.1				47.7	49.0	48.4			
d50 (mm)	N/A	47	14				N/A	8	1.4				N/A	44	18			

N/A - Item does not apply.

Table 11a. Baseline Morphology & Hydraulic Monitoring Summary												
Glade Creek / Project No. 854 - Unnamed Tributary (264 feet)												
	Cross-Section 7 Riffle						Cross-Section 8 Riffle					
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
Record Elevation (datum) Used	2,604	2,604	2,604				2,602	2,602	2,602			
Bankfull Width (ft)	17.3	17.5	17.7				18.9	19.1	18.1			
Floodprone Width (ft)	33.5	33.5	33.5				41.8	41.8	41.8			
Bankfull Mean Depth (ft)	0.8	0.7	0.8				0.7	0.7	0.7			
Bankfull Max Depth (ft)	1.3	1.2	1.2				1.2	1.2	1.2			
Bankfull Cross Sectional Area (ft ²)	13.2	13.0	13.4				12.7	13.0	12.2			
Bankfull Width/Depth Ratio	22.7	23.6	23.4				28.3	28.1	27.0			
Bankfull Entrenchment Ratio	1.9	1.9	1.9				2.2	2.2	2.3			
Bankfull Bank Height Ratio	1.0	1.0	1.0				1.0	1.0	1.0			
Cross Sectional Area between End Pins (ft ²)	13.2	13.0	13.4				12.7	13.0	12.2			
d50 (mm)	N/A	33	16				N/A	38	6			

N/A - Item does not apply.

**Table 11b. Monitoring Data - Stream Reach Data Summary
Glade Creek / Project No. 854 - Glade Creek (2,558 feet)**

Parameter	Baseline						MY - 1						MY - 2						MY - 3						MY - 4						MY - 5					
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
Bankfull Width (ft)	35.2	43.2	44.9	47.7	5.91	4	36.3	43.9	45.3	48.8	5.67	4	34.9	44.1	45.0	51.3	7.11	4																		
Floodprone Width (ft)	68.8	89.1	89.0	109.4	22.48	4	68.8	89.1	89.0	109.4	22.48	4	68.8	89.1	89.2	109.0	22.47	4																		
Bankfull Mean Depth (ft)	0.9	1.2	1.2	1.3	0.19	4	0.9	1.2	1.2	1.3	0.19	4	0.9	1.2	1.2	1.4	0.22	4																		
Bankfull Max Depth (ft)	1.7	1.8	1.9	1.9	0.10	4	1.9	1.9	1.9	1.9	0.00	4	1.9	1.9	1.9	1.9	0.00	4																		
Bankfull Cross-Sectional Area (ft ²)	41.6	49.1	46.3	62.2	9.08	4	45.6	51.4	48.0	64.1	8.58	4	45.9	51.4	48.0	63.9	8.38	4																		
Width/Depth Ratio	27.6	39.0	36.9	54.7	11.34	4	28.1	38.3	36.4	52.2	10.11	4	25.6	38.9	36.3	57.4	13.34	4																		
Entrenchment Ratio	1.5	2.1	2.2	2.6	0.47	4	1.5	2.0	2.1	2.5	0.43	4	1.5	2.0	2.1	2.5	0.41	4																		
Bank Height Ratio	1.0	1.0	1.0	1.0	0.00	4	1.0	1.0	1.0	1.0	0.00	4	1.0	1.0	1.0	1.0	0.00	4																		
Profile																																				
Riffle Length (ft)	14.6	35.3	31.8	54.9	13.12	18	11.0	30.2	25.4	58.0	14.94	19	8.3	27.4	23.5	52.3	14.7	18																		
Riffle Slope (ft/ft)	0.002	0.011	0.010	0.025	0.006	18	0.002	0.010	0.010	0.020	0.005	19	0.002	0.011	0.012	0.020	0.005	18																		
Pool Length (ft)	7.2	41.7	44.6	74.9	22.75	30	7.7	40.2	43.1	76.8	23.59	30	7.8	41.1	44.8	76.3	23.6	30																		
Pool Max Depth (ft)	3.2	4.1	4.1	5.6	0.65	31	2.8	4.0	3.9	5.4	0.65	30	2.5	3.7	3.6	4.9	0.6	30																		
Pool Spacing (ft)	10.7	84.5	98.5	162.5	51.03	29	9.3	84.2	81.2	155.4	53.03	29	11.3	84.4	84.8	170.3	53.3	29																		
Pattern																																				
Channel Belt Width (ft)	59.3	76.7	74.5	92.1	11.22	12																														
Radius of Curvature (ft)	41.7	57.9	50.3	101.0	17.81	15																														
Rc: Bankfull Width (ft/ft)	0.84	0.92	0.92	1.00	N/A	2																														
Meander Wavelength (ft)	163.9	223.6	230.7	259.1	28.34	13																														
Meander Width Ratio	1.6	1.8	1.7	2.1	0.26	4																														
Additional Reach Parameters																																				
Rosgen Classification	C						C4						C4																							
Channel Thalweg Length (ft)	2,548						2,558						2,555																							
Sinuosity (ft)	1.17						1.18						1.18																							
Water Surface Slope (Channel) (ft/ft)	0.0055						0.0054						0.0053																							
Bankfull Slope (ft/ft)	0.0050						0.0050						0.0052																							
Ri% / Ru% / P% / G% / S%	25%	9%	49%	16%	2%		23%	12%	48%	15%	2%		20%	11%	49%	17%	3%																			
SC% / SA% / G% / C% / B% / Be%*							1%	14%	65%	20%	<1%	0%	10%	24%	47%	19%	0%	0%																		
d16 / d35 / d50 / d84 / d95 (mm)													0.504	7.25	21.75	78.25	125																			
% of Reach with Eroding Banks	0%						0%						0%																							
Channel Stability or Habitat Metric	N/A						N/A						N/A																							
Biological or Other	N/A						N/A						N/A																							

N/A - Information does not apply.
 Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step
 SC = Silt-Clay / SA = Sand / G = Gravel / C = Cobble / B = Boulder / Be = Bedrock
 *Percentages based on riffle and pool pebble counts.

**Table 11b. Monitoring Data - Stream Reach Data Summary
Glade Creek / Project No. 854 - Unnamed Tributary (265 feet)**

Parameter	Baseline						MY - 1						MY - 2						MY - 3						MY - 4						MY - 5					
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
Bankfull Width (ft)	17.3	18.1	18.1	18.9	N/A	2	17.5	18.3	18.3	19.1	N/A	2	17.7	17.9	17.9	18.1	N/A	2																		
Floodprone Width (ft)	33.5	37.7	37.7	41.8	N/A	2	33.5	37.7	37.7	41.8	N/A	2	33.5	37.7	37.7	41.8	N/A	2																		
Bankfull Mean Depth (ft)	0.7	0.8	0.8	0.8	N/A	2	0.7	0.7	0.7	0.7	N/A	2	0.7	0.8	0.8	0.8	N/A	2																		
Bankfull Max Depth (ft)	1.2	1.3	1.3	1.3	N/A	2	1.2	1.2	1.2	1.2	N/A	2	1.2	1.2	1.2	1.2	N/A	2																		
Bankfull Cross-Sectional Area (ft ²)	12.7	13.0	13.0	13.2	N/A	2	13.0	13.0	13.0	13.0	N/A	2	12.2	12.8	12.8	13.4	N/A	2																		
Width/Depth Ratio	22.7	25.5	25.5	28.3	N/A	2	23.6	25.9	25.9	28.1	N/A	2	23.4	25.2	25.2	27.0	N/A	2																		
Entrenchment Ratio	1.9	2.1	2.1	2.2	N/A	2	1.9	2.1	2.1	2.2	N/A	2	1.9	2.1	2.1	2.3	N/A	2																		
Bank Height Ratio	1.0	1.0	1.0	1.0	N/A	2	1.0	1.0	1.0	1.0	N/A	2	1.0	1.0	1.0	1.0	N/A	2																		
Profile																																				
Riffle Length (ft)	5.8	10.3	10.3	14.6	4.0	6	3.6	10.1	10.5	16.0	4.9	6	6.18	11.1	10.1	19.2	4.4	6																		
Riffle Slope (ft/ft)	0.001	0.017	0.015	0.034	0.011	6	0.001	0.013	0.011	0.024	0.009	6	0.003	0.013	0.016	0.021	0.008	6																		
Pool Length (ft)	3.6	13.3	10.8	29.5	8.5	9	3.2	13.4	14.1	26.8	7.8	9	3.1	12.2	12.5	26.8	7.2	9																		
Pool Max Depth (ft)	1.8	2.7	2.6	3.4	0.5	7	2.1	2.7	2.6	3.3	0.4	6	2.2	2.6	2.5	2.9	0.3	6																		
Pool Spacing (ft)	5.5	34.1	31.5	59.8	20.8	7	5.3	30.7	35.2	54.6	17.4	8	5.1	30.2	31.5	57.3	17.8	8																		
Pattern																																				
Channel Belt Width (ft)	28.6	34.3	36.1	37.1	3.5	5																														
Radius of Curvature (ft)	17.1	19.8	19.5	22.5	2.2	5																														
Rc: Bankfull Width (ft/ft)	N/A	N/A	N/A	N/A	N/A	N/A																														
Meander Wavelength (ft)	66.4	77.7	82.7	83.9	9.8	3																														
Meander Width Ratio	1.9	2.0	2.0	2.1	N/A	N/A																														
Additional Reach Parameters																																				
Rosgen Classification	C						C4						C4																							
Channel Thalweg Length (ft)	263						264						264																							
Sinuosity (ft)	1.17						1.18						1.18																							
Water Surface Slope (Channel) (ft/ft)	0.0064						0.0068						0.0068																							
Bankfull Slope (ft/ft)	0.0058						0.0066						0.0066																							
Ri% / Ru% / P% / G% / S%	24%	11%	47%	16%	2%		24%	15%	47%	12%	2%		26%	14%	43%	15%	3%																			
SC% / SA% / G% / C% / B% / Be%*							0%	8%	81%	11%	0%	0%	7%	29%	48%	16%	0%	0%																		
d16 / d35 / d50 / d84 / d95 (mm)													0.215	3.05	11	65	114																			
% of Reach with Eroding Banks	0%						0%						0%																							
Channel Stability or Habitat Metric	N/A						N/A						N/A																							
Biological or Other	N/A						N/A						N/A																							

N/A - Information does not apply.
 Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step
 SC = Silt-Clay / SA = Sand / G = Gravel / C = Cobble / B = Boulder / Be = Bedrock
 *Percentages based on riffle and pool pebble counts.