

**Glade Creek
Stream Restoration
NCDMS Project Number: 854
Monitoring Contract Number: D08033S
Monitoring Year 5
2015 Final Report**



**Submitted to
North Carolina Division of Mitigation Services
North Carolina Department of Environmental Quality
December 2015**

**1652 Mail Service Center
Raleigh, NC 27699**

Monitoring Firm



EQUINOX

balance through proper planning

**37 Haywood Street, Suite 100
Asheville, North Carolina 28801
Phone: 828-253-6856**

**Project Contact: Hunter Terrell
Email: Hunter@equinoxenvironmental.com**

Glade Creek Stream Restoration 2015 Monitoring Report (MY 5)

Table of Contents

1.0	Executive Summary/Project Abstract	Page 1
2.0	Methodology	Page 3
3.0	References	Page 4

Appendices

Appendix A. Project Vicinity Map and Background Tables

- Figure 1. Vicinity Map and Directions
- Table 1a. Project Components
- Table 1b. Component Summations
- Table 2. Project Activity and Reporting History
- Table 3. Project Contacts
- Table 4. Project Attributes

Appendix B. Visual Assessment Data

- Figure 2. Integrated Current Condition Plan View
- Table 5. Visual Stream Morphology Stability Assessment
- Table 6. Vegetation Condition Assessment
- Photo Station Photos

Appendix C. Vegetation Plot Data

- Table 7. Vegetation Plot Criteria Attainment
- Vegetation Monitoring Plot Photos
- Table 8. CVS Vegetation Plot Metadata
- Table 9. Planted and Total Stem Counts (Species by Plot with Annual Means)

Appendix D. Stream Survey Data

- Cross-Sections with Annual Overlays and Photos
- Longitudinal Profiles with Annual Overlays
- Pebble Count Plots with Annual Overlays
- Table 10a. Baseline Stream Data Summary
- Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)
- Table 11a. Monitoring Data – Dimensional Morphology Summary (Dimensional Parameters – Cross-Sections)
- Table 11b. Monitoring Data – Stream Reach Data Summary

Appendix E. Hydrological Data

- Table 12. Verification of Bankfull Events
- Table 13. Frequency of Events Greater than 18.59 Feet at the Little River Gauge near Sparta
- Plot of Stage (feet) at the North Carolina Flood Warning Program Gauge at Little River near Sparta

1.0 EXECUTIVE SUMMARY/PROJECT ABSTRACT

The goals and objectives stated in the Glade Creek Restoration Plan (NCEEP 2007) are as follows:

Project Goals

- Rapidly stabilize the channel of Glade Creek relative to natural processes;
- Rapidly stabilize and preserve the channel of the Unnamed Tributary relative to natural processes;
- Restore and rehabilitate channel features and aquatic habitat in Glade Creek and the Unnamed Tributary;
- Rehabilitate the riparian buffer along both streams; and
- Preserve the existing wetlands onsite.

Project Objectives

- Restore approximately 2,430 linear feet of stream channel on Glade Creek;
- Restore approximately 275 linear feet of the Unnamed Tributary;
- Preserve 570 linear feet of the Unnamed Tributary; and
- Preserve the existing 0.33 acre wetlands within the project site.

The monitoring year five (MY5) vegetation plot data indicated the average planted stem density across all plots to be 445 stems/acre; exceeding the 260 stems per acre minimum density criterion that must be achieved by the end of MY5. Stem densities were found to have declined by approximately 6% from the previous year due to dead or missing stems. Additionally, 16 isolated patches of high threat invasive plants previously distributed throughout the project area (Figure 2) were treated with herbicides twice annually starting in September 2013, with a final treatment occurring in April 2015. Project managers for DMS have verified the efficacy of all control efforts and approved of all treatments.

The stream longitudinal profile along the mainstem has remained relatively stable between MY4 and MY5. Bed scour from 9+75 to 9+99 and subsequent deposition in the pool has resulted in a flattening of the bed profile in the approach to the first rock vane/rock step structure series at station 10+67. This has reduced the number of pools in the reach from 28 to 27 and is noted in Table 11b and illustrated in the profile in Appendix D. Downstream of this series, the stream adjustments that occurred between stations 12+79 and 13+69 from MY3 and MY4 have stabilized and show no further signs of degradation. Data at XS-4 (riffle) indicates that downcutting along the left-descending bank presented in MY4 has not progressed. Fine sediment deposition along the bankfull bench has increased the bankfull bank height ratios on cross-sections 1, 4, and 6 from 1.0 to 1.2, 1.2, and 1.1 respectively. Although, adjustment in the channel are apparent within the reach, no signs of significant instability, such as sloughing banks or failing structures, have been documented. The stream longitudinal profile along the unnamed tributary has also remained relatively stable between MY4 and MY5. Scour in the riffle at station 1+90 and deposition in the subsequent pool at station 1+80 increased the riffle slope from 0.010 to 0.017. As in the mainstem, deposition of fine sediment has increased the bankfull bank height ratios from 1.0 to 1.3 in cross-sections 7 and 8 on the unnamed tributary. While these changes represent change from the baseline calculations, they are considered insignificant. In

general, cross-section data indicated that the continued growth of berms and point bars on both the mainstem and the unnamed tributary are resulting in narrower bankfull widths at every cross-section.

A total of four bankfull occurrences have been documented through crest gauge readings or wrack lines at the site over the five-year monitoring period—two in 2013, one in 2014, and one in 2015 (Table 12). However, it is likely that the site has experienced more bankfull events than those documented through methods used during monitoring. To demonstrate the number of bankfull events that are likely to have occurred since construction was completed, data from the North Carolina Flood Warning Program gauge on the Little River near Sparta were examined to determine the number of bankfull events that have occurred since April 2011. The Little River watershed and gauge are located approximately 5.2 miles northwest of Glade Creek. The watershed at the gauge is 4.85 square miles, comparable to the Glade Creek watershed at the site (5.72 square miles). Gauge data was able available back to March 2010. Using peak stage heights, a 1.5 year recurrence interval of 18.59 feet was calculated for the gauge site. Using this stage height as a proxy for bankfull height, data from April 2011—coinciding with the completion of the Glade Creek project—to present was analyzed to calculate the frequency of bankfull events occurring at the gauge site. A total of nine events have occurred since April 2011—five in 2011, one in 2012, and three in 2013 (Table 13). Several large data gaps were present between May 2011 and August 2012, potentially skewing the calculation of recurrence intervals as well as the frequency of bankfull events. However, this analysis demonstrates that the Glade Creek site has likely experienced more bankfull events than indicated through methods used at the site as well as a range of flows with no adverse effects.

Summary information/data related to the occurrence of items such as beaver or easement encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the restoration plan on NCDMS' website (NCEEP 2007). All raw data supporting tables and figures in the appendices are available from NCDMS upon request.

2.0 Methodology

The stream monitoring methodologies utilized in MY5 replicate those employed during the previous monitoring year and are based on standard guidance and procedures documents (Rosgen 1996; USACE 2003). Vegetation monitoring data were collected following the standard CVS-EEP Protocol for Recording Vegetation, Level II, Version 4.2 (Lee et al. 2008).

3.0 References

Lee, M.T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2008. CVS-EEP Protocol for Recording Vegetation. Version 4.2. The University of North Carolina at Chapel Hill, Department of Biology.

NCEEP (North Carolina Ecosystem Enhancement Program). 2007. Restoration Plan. Glade Creek Stream Restoration. Alleghany County, North Carolina. Raleigh.

Rosgen, D.L. 1996. Applied River Morphology. Wildland Hydrology Books, Pagosa Springs, Colorado.

USACE (U.S. Army Corps of Engineers). 2003. Stream Mitigation Guidelines. U.S. Army Corps of Engineers, U.S. Environmental Protection Agency, North Carolina Wildlife Resources Commission, North Carolina Department of Environment and Natural Resources-Division of Water Quality. Wilmington District.

Appendix A
Project Vicinity Map and Background Tables

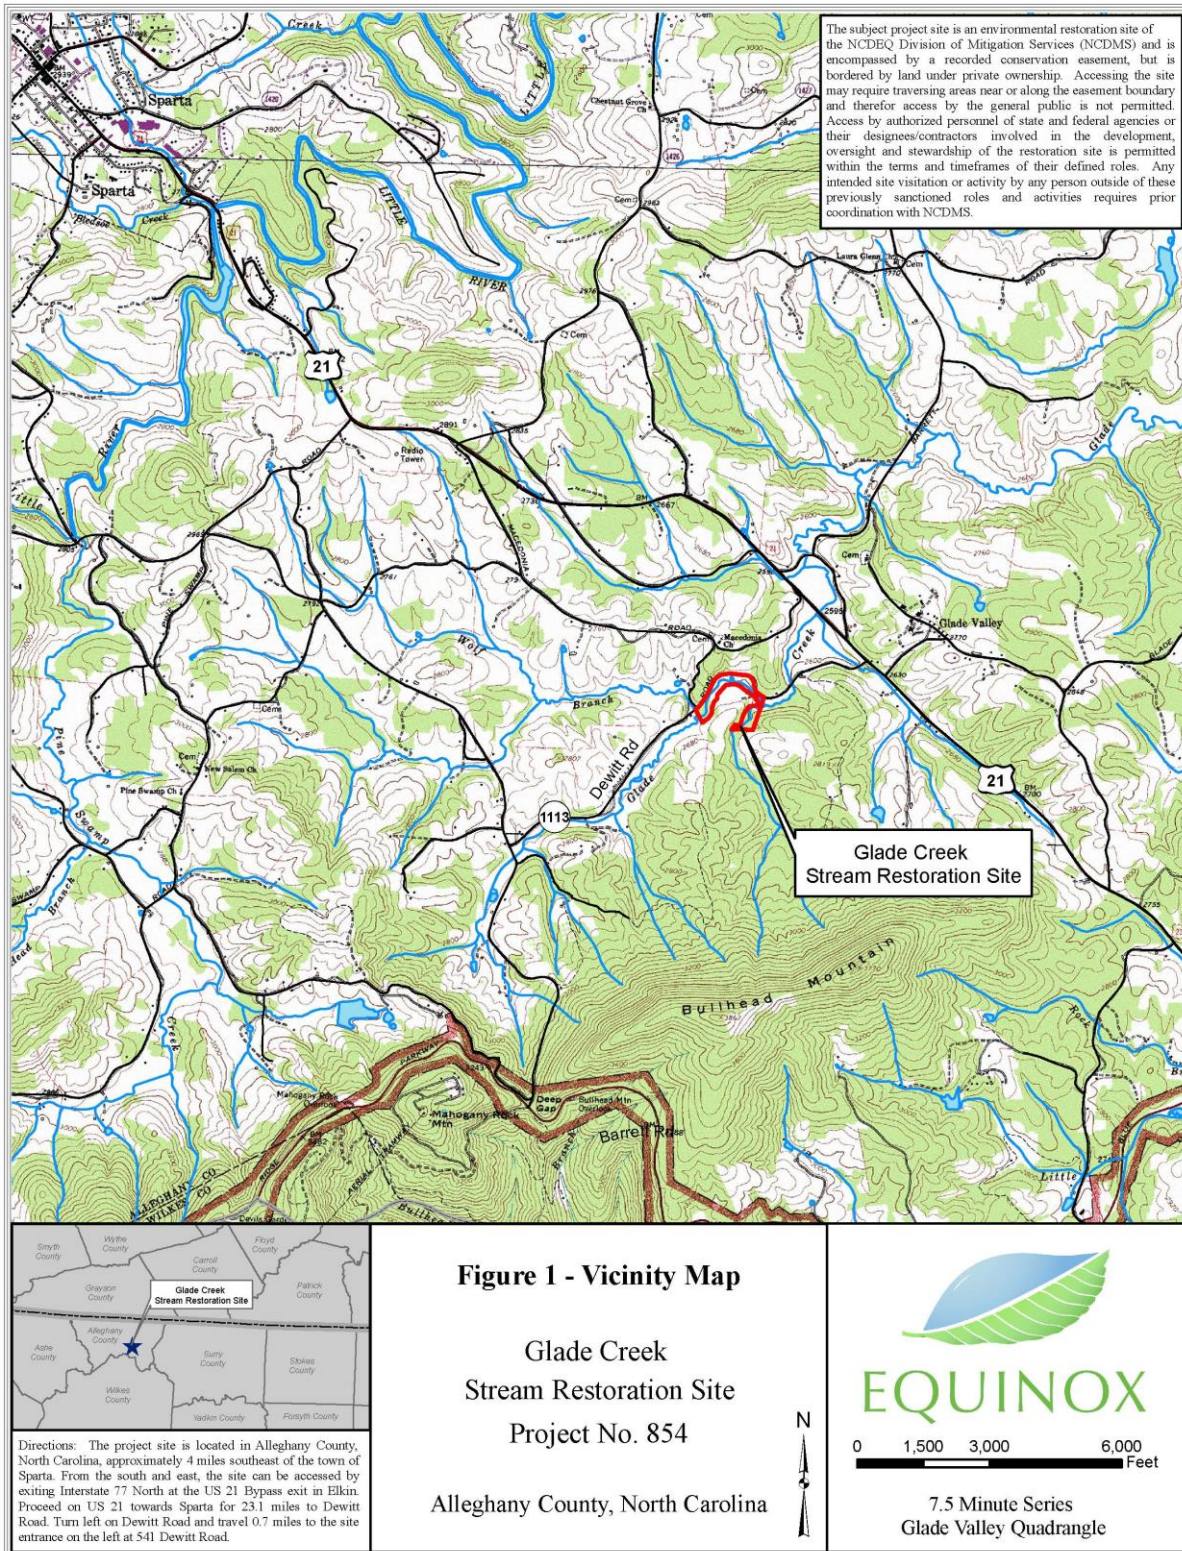


Table 1a. Project Components Glade Creek / Project No. 854								
Project Component or Reach ID	Existing Feet/Acres	Restoration Level	Approach	Footage or Acreage	Stationing	Buffer Acres	BMP Elements	Comment
Glade Creek	2,569 lf	R	P2	2,513 lf*	0+00 - 25+58			
Unnamed Tributary Downstream	300 lf	R	P2	265 lf	0+00 - 2+65			
Unnamed Tributary Upstream	784 lf	P		784 lf	Not Established			
Wetlands	0.26 ac	P		0.26 ac	N/A			

*Excludes the 45 linear feet of stream associated with the private drive access location.

☐ =Non-Applicable

Table 1b. Component Summations Glade Creek / Project No. 854							
Restoration Level	Stream (lf)	Riparian Wetland (Ac)		Non-Riparian (ac)	Upland (ac)	Buffer (ac)	BMP
		Riverine	Non-Riverine				
Restoration	2,778*	0.00	0.00				
Enhancement		0.00	0.00				
Enhancement I	0						
Enhancement II	0						
Creation		0.00	0.00				
Preservation	784	0.00	0.26				
HQ Preservation	0	0.00	0.00				
		0.00	0.00				
Totals	3,562	0.26		0	0	0	0

*Excludes the 45 linear feet of stream associated with the private drive access location.

☐ =Non-Applicable

Table 2. Project Activity and Reporting History Glade Creek / Project No. 854		
Activity or Report	Data Collection Complete	Completion or Delivery
Mitigation Plan	June 2007	Dec 2007
Final Design - Construction Plans	Aug 2007	Dec 2008
Construction	N/A	April 2011
Temporary S&E mix applied to entire project area	N/A	Sept - Nov 2010 March - April 2011
Permanent seed mix applied	N/A	Sept - Nov 2010 March - April 2011
Planting	May 2011	May 2011
Baseline Monitoring Document (Year 0 Monitoring - Baseline)	May 2011	Dec 2011
Year 1 Monitoring	Dec 2011	Feb 2012
Year 2 Monitoring	Nov 2012	Jan 2013
Year 3 Monitoring	Nov 2013	Dec 2013
Year 4 Monitoring	Nov 2014	Nov 2014
Year 5 Monitoring	Nov 2015	Dec 2015

N/A - Item does not apply.

Table 3. Project Contacts Glade Creek / Project No. 854	
Designer	Biohabitats Southeast Bioregion Inc. 8218 Creedmoor Road, Suite 200 Raleigh, North Carolina 27613
Primary Project Design POC	Kevin Nunnery (919) 518-0313
Construction Contractor	Yadkin Valley Construction 2961 Old 60 Highway Ronda, North Carolina 28670
Construction Contractor POC	Terry Benton (336) 984-2219
Planting Contractor	Foggy Mountain Nursery 2251 Ed Little Road Creston, North Carolina 28615
Planting Contractor POC	Glen Sullivan (336) 384-5323
Seeding Contractor	Yadkin Valley Construction 2961 Old 60 Highway Ronda, North Carolina 28670
Seeding Contractor POC	Terry Benton (336) 984-2219
Seed Mix Sources	Hanes Geo (336) 747-1600
Nursery Stock Suppliers	Foggy Mountain Nursery Glen Sullivan (336) 384-5323
Monitoring Performers (Y0) - 2011	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Win Taylor (828) 253-6856
Vegetation Monitoring POC	Win Taylor (828) 253-6856
Monitoring Performers (MY1) - 2011	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Win Taylor (828) 253-6856
Vegetation Monitoring POC	Win Taylor (828) 253-6856
Monitoring Performers (MY2) - 2012	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Kevin Mitchell (828) 253-6856
Vegetation Monitoring POC	Kevin Mitchell (828) 253-6856
Monitoring Performers (MY3)- 2013	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Hunter Terrell (828) 253-6856
Vegetation Monitoring POC	Hunter Terrell (828) 253-6856
Monitoring Performers (MY4)- 2014	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Hunter Terrell (828) 253-6856
Vegetation Monitoring POC	Hunter Terrell (828) 253-6856
Monitoring Performers (MY5)- 2015	Equinox Environmental Consultation & Design, Inc. 37 Haywood Street, Suite 100 Asheville, North Carolina 28801
Stream Monitoring POC	Hunter Terrell (828) 253-6856
Vegetation Monitoring POC	Hunter Terrell (828) 253-6856

Table 4. Project Baseline Information and Attributes			
Glade Creek / Project No. 854			
Project Information			
Project Name	Glade Creek		
County	Alleghany		
Project Area (acres)	15.86		
Project Coordinates (latitude and longitude)	Latitude 36.468090 / Longitude -81.066384		
Project Watershed Summary Information			
Physiographic Province	Blue Ridge		
River Basin	New River		
USGS Hydrologic Unit 8-dgit	05050001		
USGS Hydrologic Unit 14-dgit	05050001000801		
NCDWQ Sub-Basin	05-07-03		
Project Drainage Area (acres)	3,443		
Project Drainage Area Percentage of Impervious Cover	<1%		
CGIA Land Use Classification	Deciduous Forest Land		
Reach Summary Information			
Parameters	Glade Creek	UT-Lower	UT-Upper
Length of Reach (linear feet)	2,558	265	784
Valley Classification	-	-	-
Drainage Area (acres)	2,922	521	520
NCDWQ Stream Identification Score	59	50.5	50.5
NCDWQ Water Quality Classification	C-Tr	C-Tr	C-Tr
Morphological Description (stream type)	C	C	-
Evolutionary Trend	-	-	-
Underlying Mapped Soils	Alluvial	Alluvial	Alluvial
Drainage Class	-	-	-
Soil Hydric Status	-	-	-
Slope	0.0075	0.0075	0.0075
FEMA Classification	-	-	-
Native Vegetation Community	Northern Hardwood Forest & Rich Cove Forest		
Percent Composition of Exotic Invasive Vegetation	14.5%		
Wetland Summary Information			
Parameters	Wetland 1 (Glade Ck)	Wetland 2 (UT)	
Size of Wetland (acres)	0.178	0.085	
Wetland Type	Riparian	Riparian	
Soil Series	Toxaway		
Soil Hydric Status	Hydric		
Source of Hydrology	-	-	
Hydrologic Impairment	-	-	
Native Vegetation Community	High Elevation Seep		
Percent Composition of Exotic Invasive Vegetation	100%	0%	
Regulatory Considerations			
Regulation	Applicable?	Resolved?	Supporting Documentation
Waters of the United States - Section 404	Yes	N/A	-
Waters of the United States - Section 401	Yes	N/A	-
Endangered Species	No	N/A	N/A
Historic Preservation Act	No	N/A	N/A
Coastal Zone Management Act (CZMA)	No	N/A	N/A
Coastal Area Management Act (CAMA)	No	N/A	N/A
FEMA Floodplain Compliance	No	N/A	N/A
Essential Fisheries Habitat	No	N/A	N/A

- Information unavailable.

N/A - Item does not apply.

Appendix B

Visual Assessment Data

Figure 2. Integrated Current Condition Plan View




<p>Prepared for</p> <p>NCDMS</p>	<p>Project: Glade Creek Stream Restoration Year 5 Monitoring Alleghany County, North Carolina</p>	<p>Notes: 1) Base Map Data Provided by NCDMS & Biohabitats 2) NC OneMap 2010 Aerial Photo 3) All Invasives Received A Final Treatment in April 2015</p>	<p>Prepared by</p>	
	<p>Sheet 1 of 1</p>		 <p>EQUINOX</p>	
	<p>Date</p>			<p>Project Number</p>
	<p>November 2015</p>			<p>NCDMS # 854</p>

Table 5. Visual Stream Morphology Stability Assessment Glade Creek / Project No. 854 - Glade Creek Assessed Length 2,558 feet													
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation			
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			2	45	98%						
		2. <u>Degradation</u> - Evidence of downcutting.									0	0	100%
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	17	17							100%		
		2. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	17	17							100%		
	3. Meander Pool Condition	1. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	17	17							100%		
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	17	17							100%		
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	14	17							82%		
		2. Thalweg centering at downstream of meander bend (Glide).	16	16							100%		
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			2	61	99%	N/A	N/A	N/A			
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.						0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.						0	0	100%	N/A	N/A	N/A
Totals					2	61	99%	N/A	N/A	N/A			
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	40	40				100%					
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	13	13				100%					
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	13	13				100%					
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	18	18				100%					
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	22	22				100%					

N/A - Item does not apply.

Table 5. Visual Stream Morphology Stability Assessment Glade Creek / Project No. 854 - Unnamed Tributary - Downstream Assessed Length 265 feet												
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation		
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).					89%					
		2. <u>Degradation</u> - Evidence of downcutting.					100%					
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	4	4		100%						
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	4	5		80%						
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	4	5		80%						
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	5	5		100%						
		2. Thalweg centering at downstream of meander bend (Glide).	5	5		100%						
	2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.									97%
2. Undercut		Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.	0		0			100%	N/A	N/A		N/A
3. Mass Wasting		Bank slumping, calving, or collapse.	0		0			100%	N/A	N/A		N/A
Totals					1	18	97%	N/A	N/A	N/A		
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	13	13			100%					
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	6	6			100%					
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	5	6			83%					
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	9	9			100%					
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	6	6			100%					

N/A - Item does not apply.

Table 6. Vegetation Condition Assessment Glade Creek / Project No. 854 Planted Acreage 4.31					
Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	N/A	0	0.00	0%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	N/A	0	0.00	0%
Totals			0	0.00	0%
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	N/A	0	0.00	0%
Cumulative Totals			0	0.00	0%
Easement Acreage 15.86					
Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage
4. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale).	Cross Hatch (Red - Dense/Yellow - Present/Orange - Treated)	0	0.00	0%
5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	N/A	0	0.00	0%

N/A - Item does not apply.




Glade Creek – Permanent Photo Station 1
Upstream



Glade Creek – Permanent Photo Station 2
Upstream



Glade Creek – Permanent Photo Station 3
Upstream

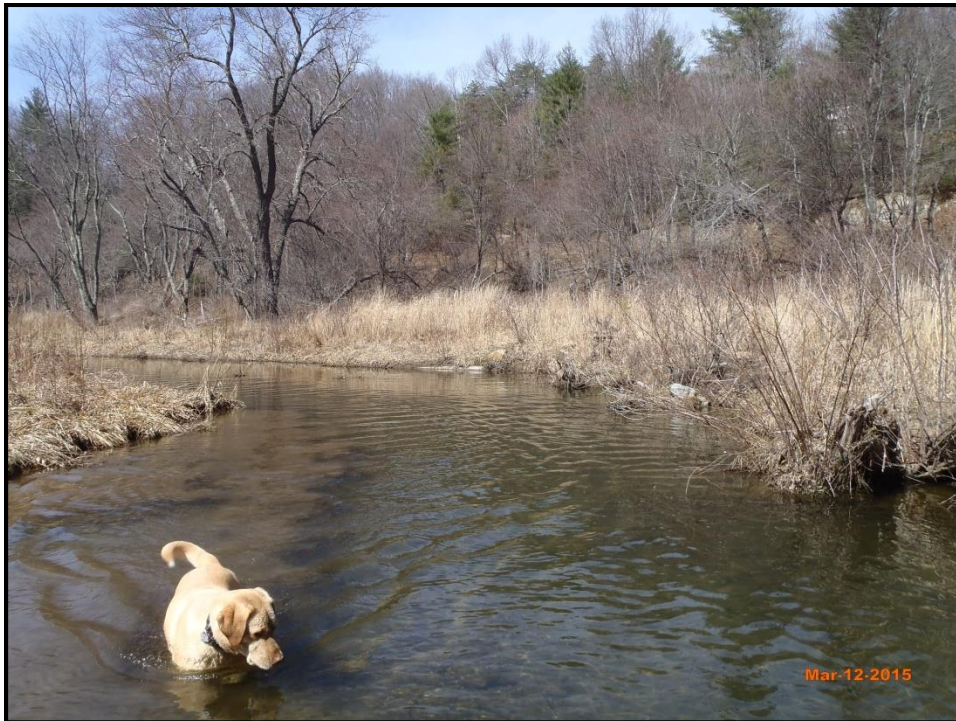

Glade Creek – Permanent Photo Station 4
Upstream



Glade Creek – Permanent Photo Station 5
Upstream



Glade Creek – Permanent Photo Station 5
Downstream



Unnamed Tributary Lower – Permanent Photo Station 6
Upstream



Unnamed Tributary Lower – Permanent Photo Station 7
Upstream

Appendix C

Vegetation Plot Data

Table 7. Vegetation Plot Criteria Attainment Glade Creek / Project No. 854		
Vegetation Plot ID	Vegetation Survival Threshold Met?	Tract Mean
1	Yes	100%
2	Yes	
3	Yes	
4	Yes	
5	Yes	
6	Yes	



Vegetation Monitoring Plot 1
Monitoring Year 5 – August 11, 2015



Vegetation Monitoring Plot 2
Monitoring Year 5 – August 11, 2015



Vegetation Monitoring Plot 3
Monitoring Year 5 – August 11, 2015



Vegetation Monitoring Plot 4
Monitoring Year 5 – August 11, 2015



Vegetation Monitoring Plot 5
Monitoring Year 5 – August 11, 2015




Vegetation Monitoring Plot 6
Monitoring Year 5 – August 11, 2015

Table 8. CVS Vegetation Plot Metadata Glade Creek / Project No. 854	
Report Prepared By	Drew Alderman
Date Prepared	8/12/2015 12:03
database name	Equinox-2015-GladeCreek_MY5.mdb
database location	Z:\ES\NRI&M\EEP Monitoring\Glade Creek\Glade-MY5-2015\Data\Veg
computer name	FIELD-PC
file size	45236224
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
ALL Stems by Plot and spp	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
PROJECT SUMMARY	
Project Code	854
project Name	Glade Creek
Description	
River Basin	New
length(ft)	
stream-to-edge width (ft)	
area (sq m)	
Required Plots (calculated)	
Sampled Plots	6

Appendix D

Stream Survey Data

Glade Creek
Cross-Section 1 - Riffle
Station 3 + 13.39

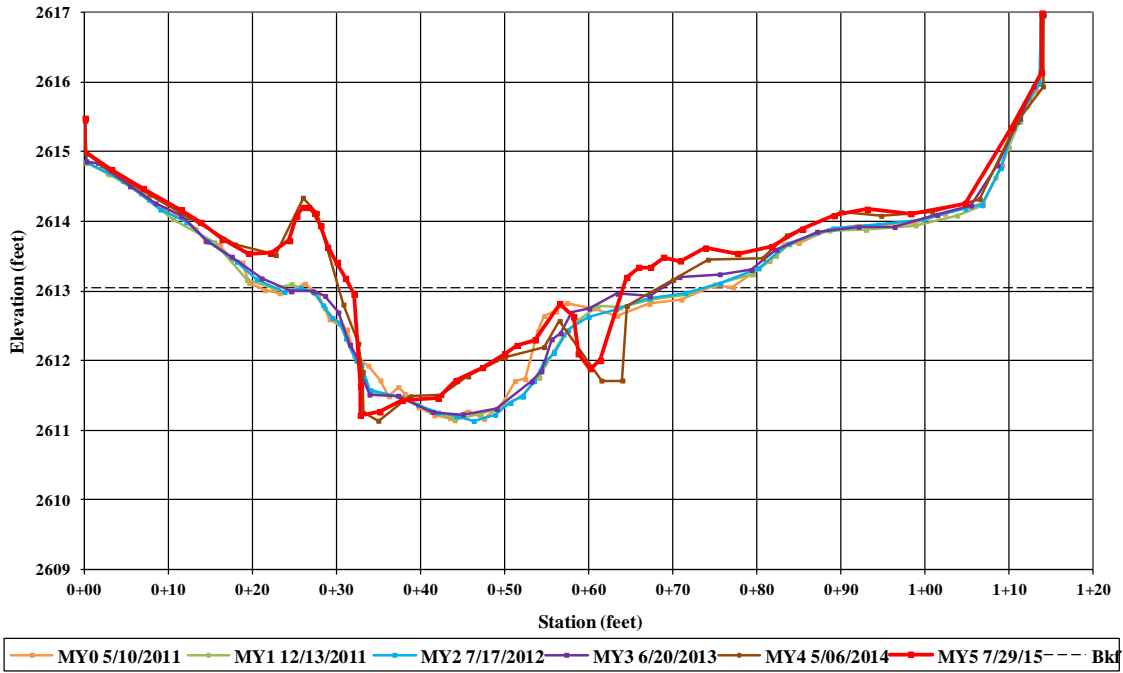

Left Descending Bank



Right Descending Bank




Upstream



Downstream

Glade Creek
Cross-Section 2 - Pool
Station 5 + 99.40

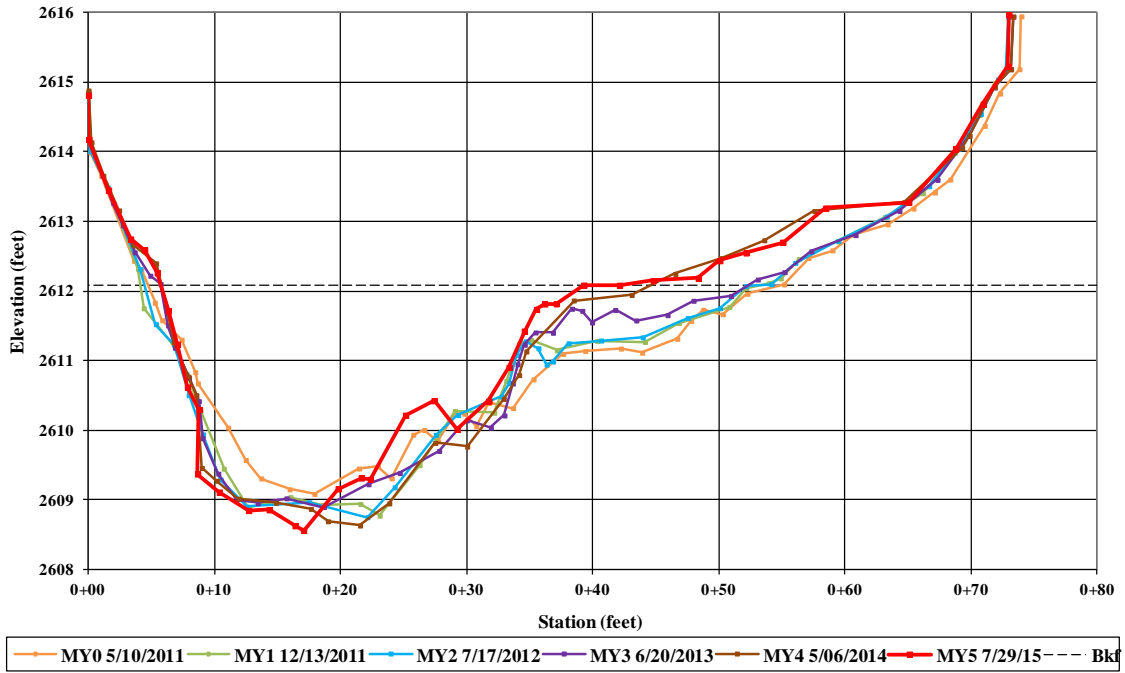

Left Descending Bank



Right Descending Bank




Upstream



Downstream

Glade Creek
 Cross-Section 3 - Riffle
 Station 8 + 39.86

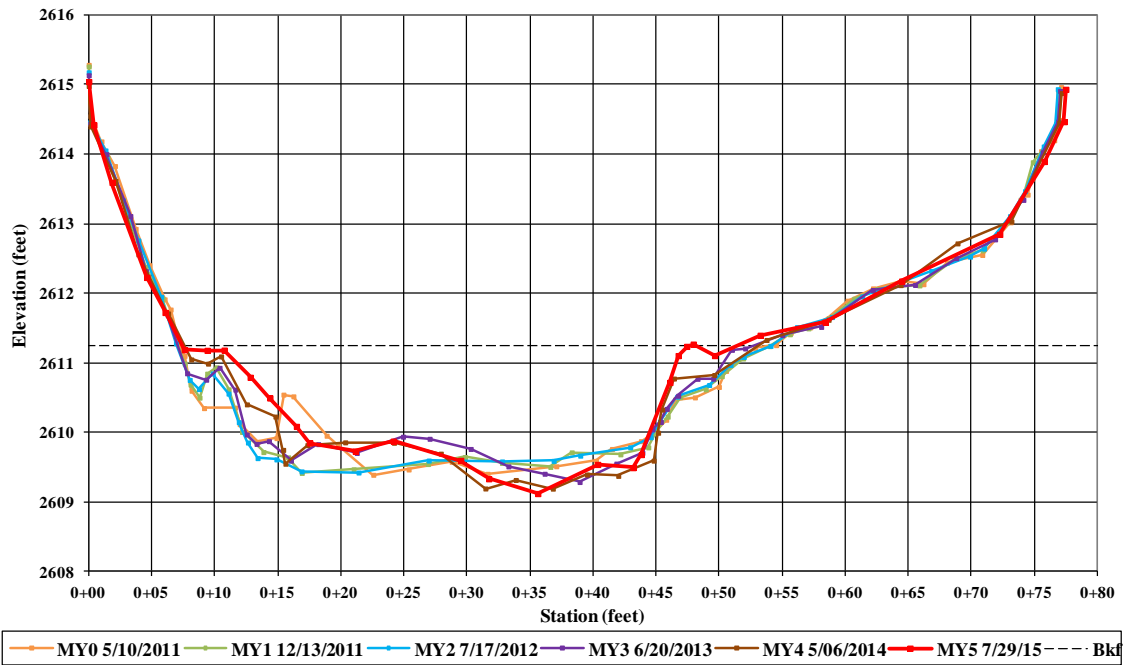

Left Descending Bank



Right Descending Bank




Upstream



Downstream

Glade Creek
 Cross-Section 4 - Riffle
 Station 15 + 69.44

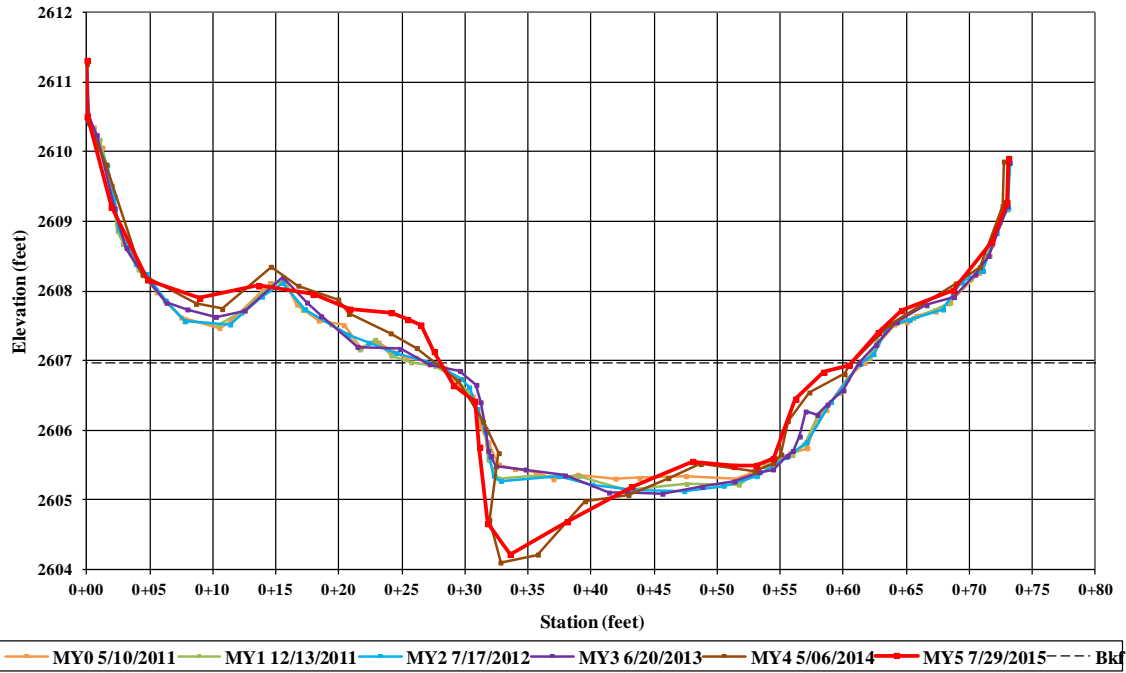

Left Descending Bank




Right Descending Bank



Upstream



Downstream

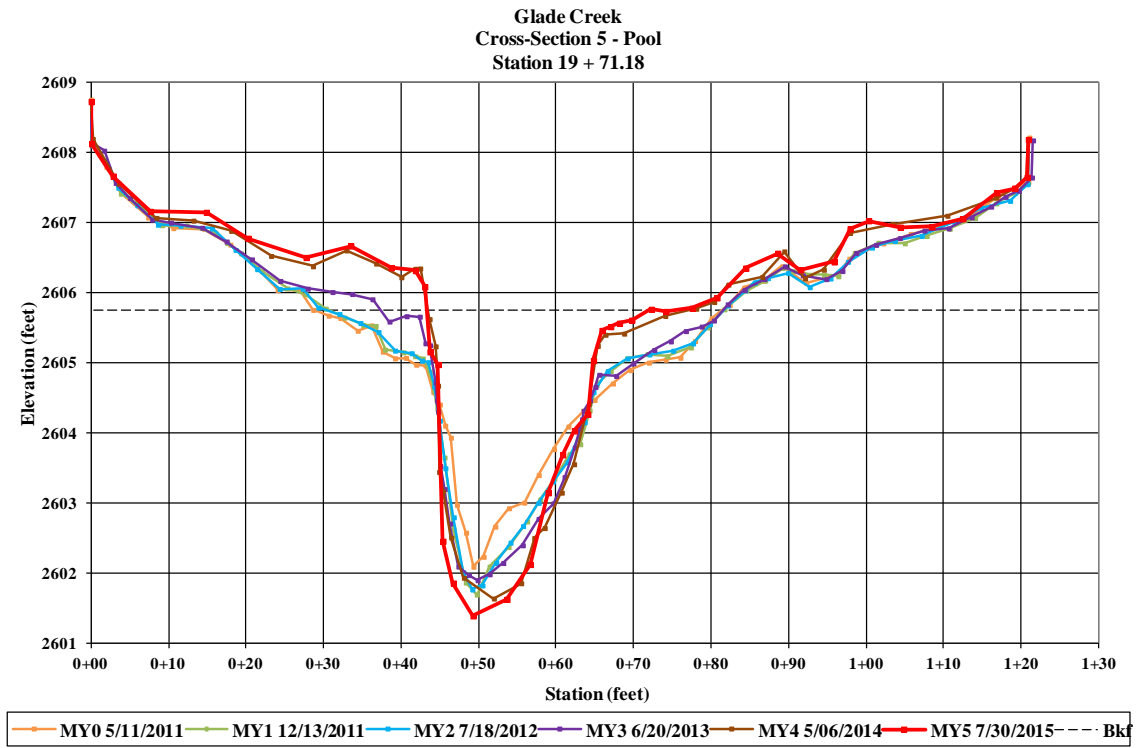

Left Descending Bank



Right Descending Bank




Upstream



Downstream

Glade Creek
 Cross-Section 6 - Riffle
 Station 20 + 24.21

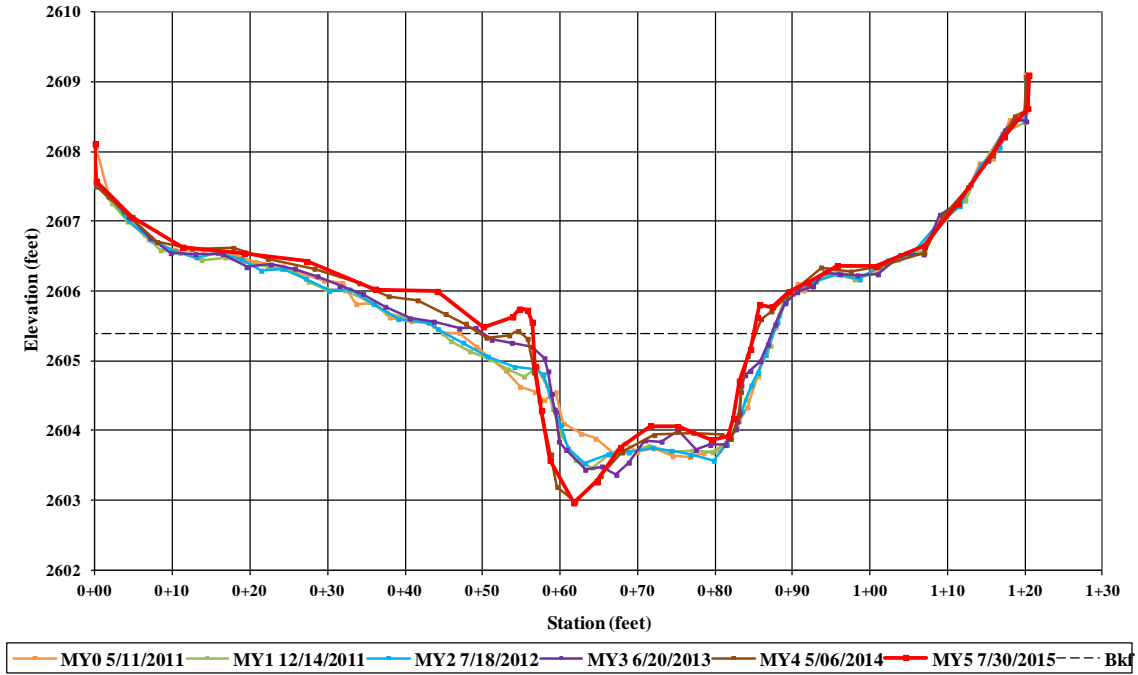

Left Descending Bank



Right Descending Bank




Upstream



Downstream

UT Glade Creek
 Cross-Section 7 - Riffle
 Station 2 + 38.94

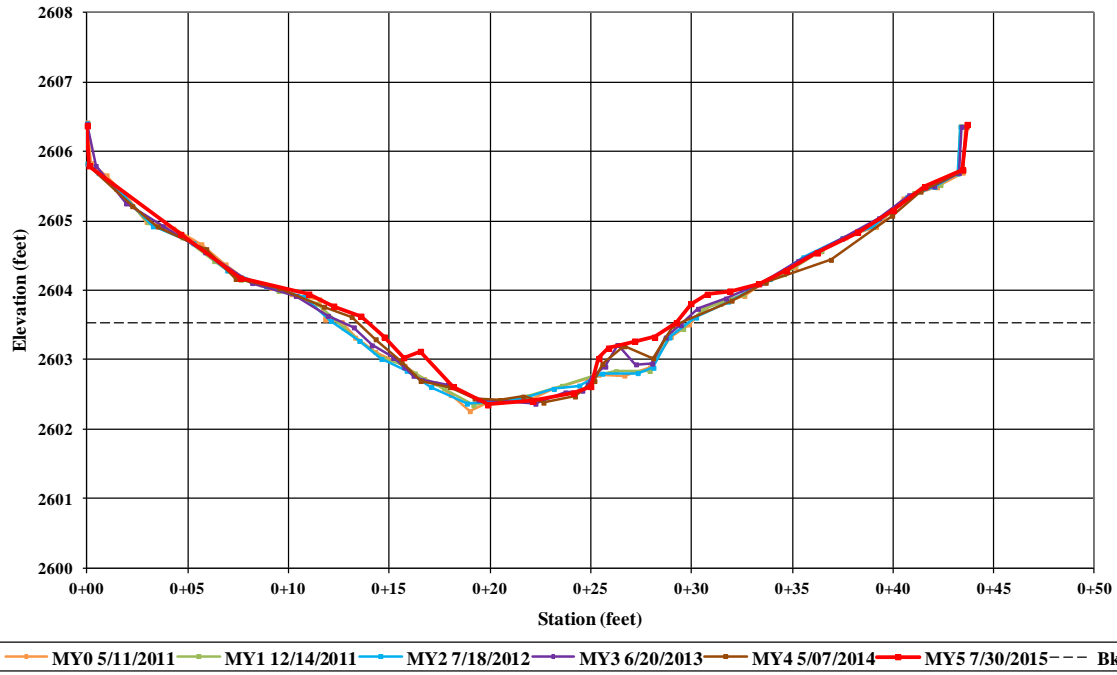

Left Descending Bank



Right Descending Bank




Upstream



Downstream

UT Glade Creek
 Cross-Section 8 - Riffle
 Station 0 + 53.21

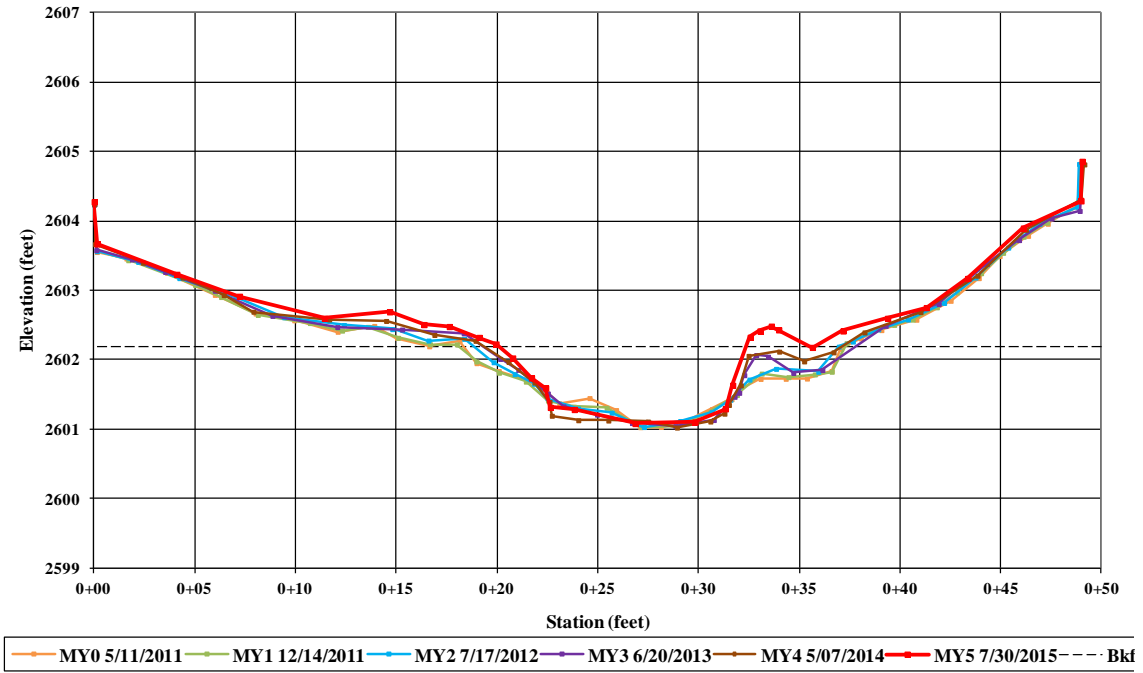

Left Descending Bank



Right Descending Bank




Upstream




Downstream



**Glade Creek Mainstem
Longitudinal Profile
Staioning 0+03 - 25+58**

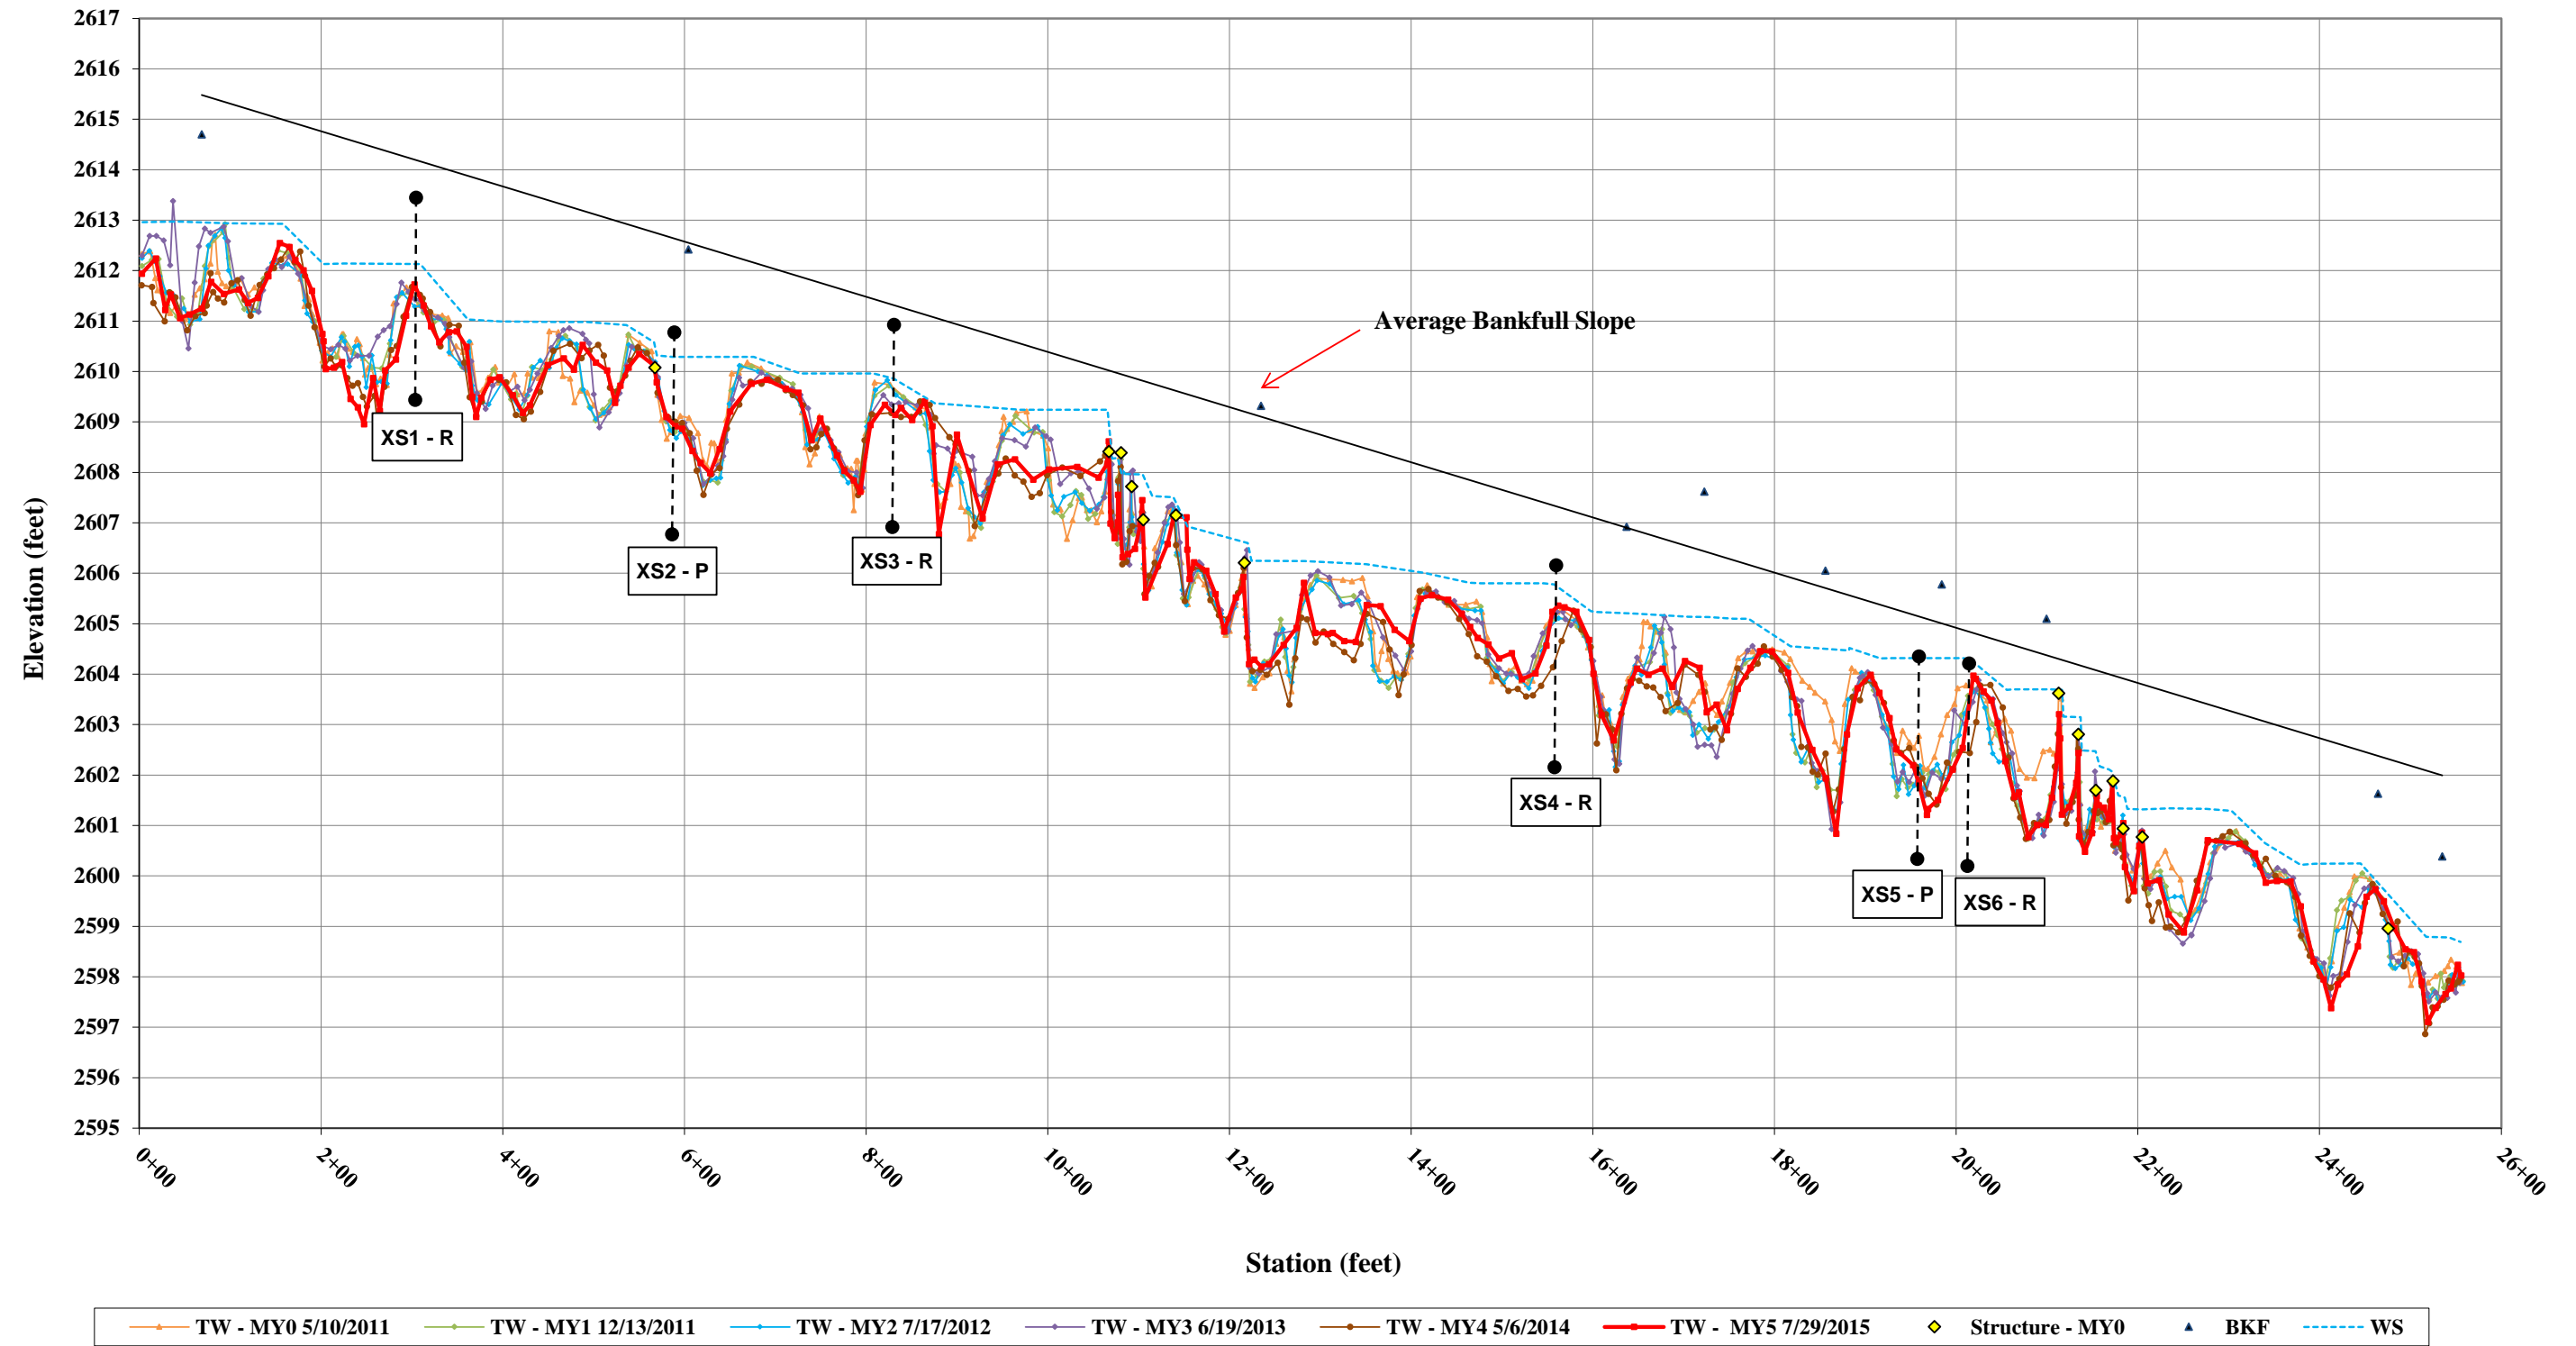



**Unnamed Tributary
Longitudinal Profile
Station 0+03 - 2+68**

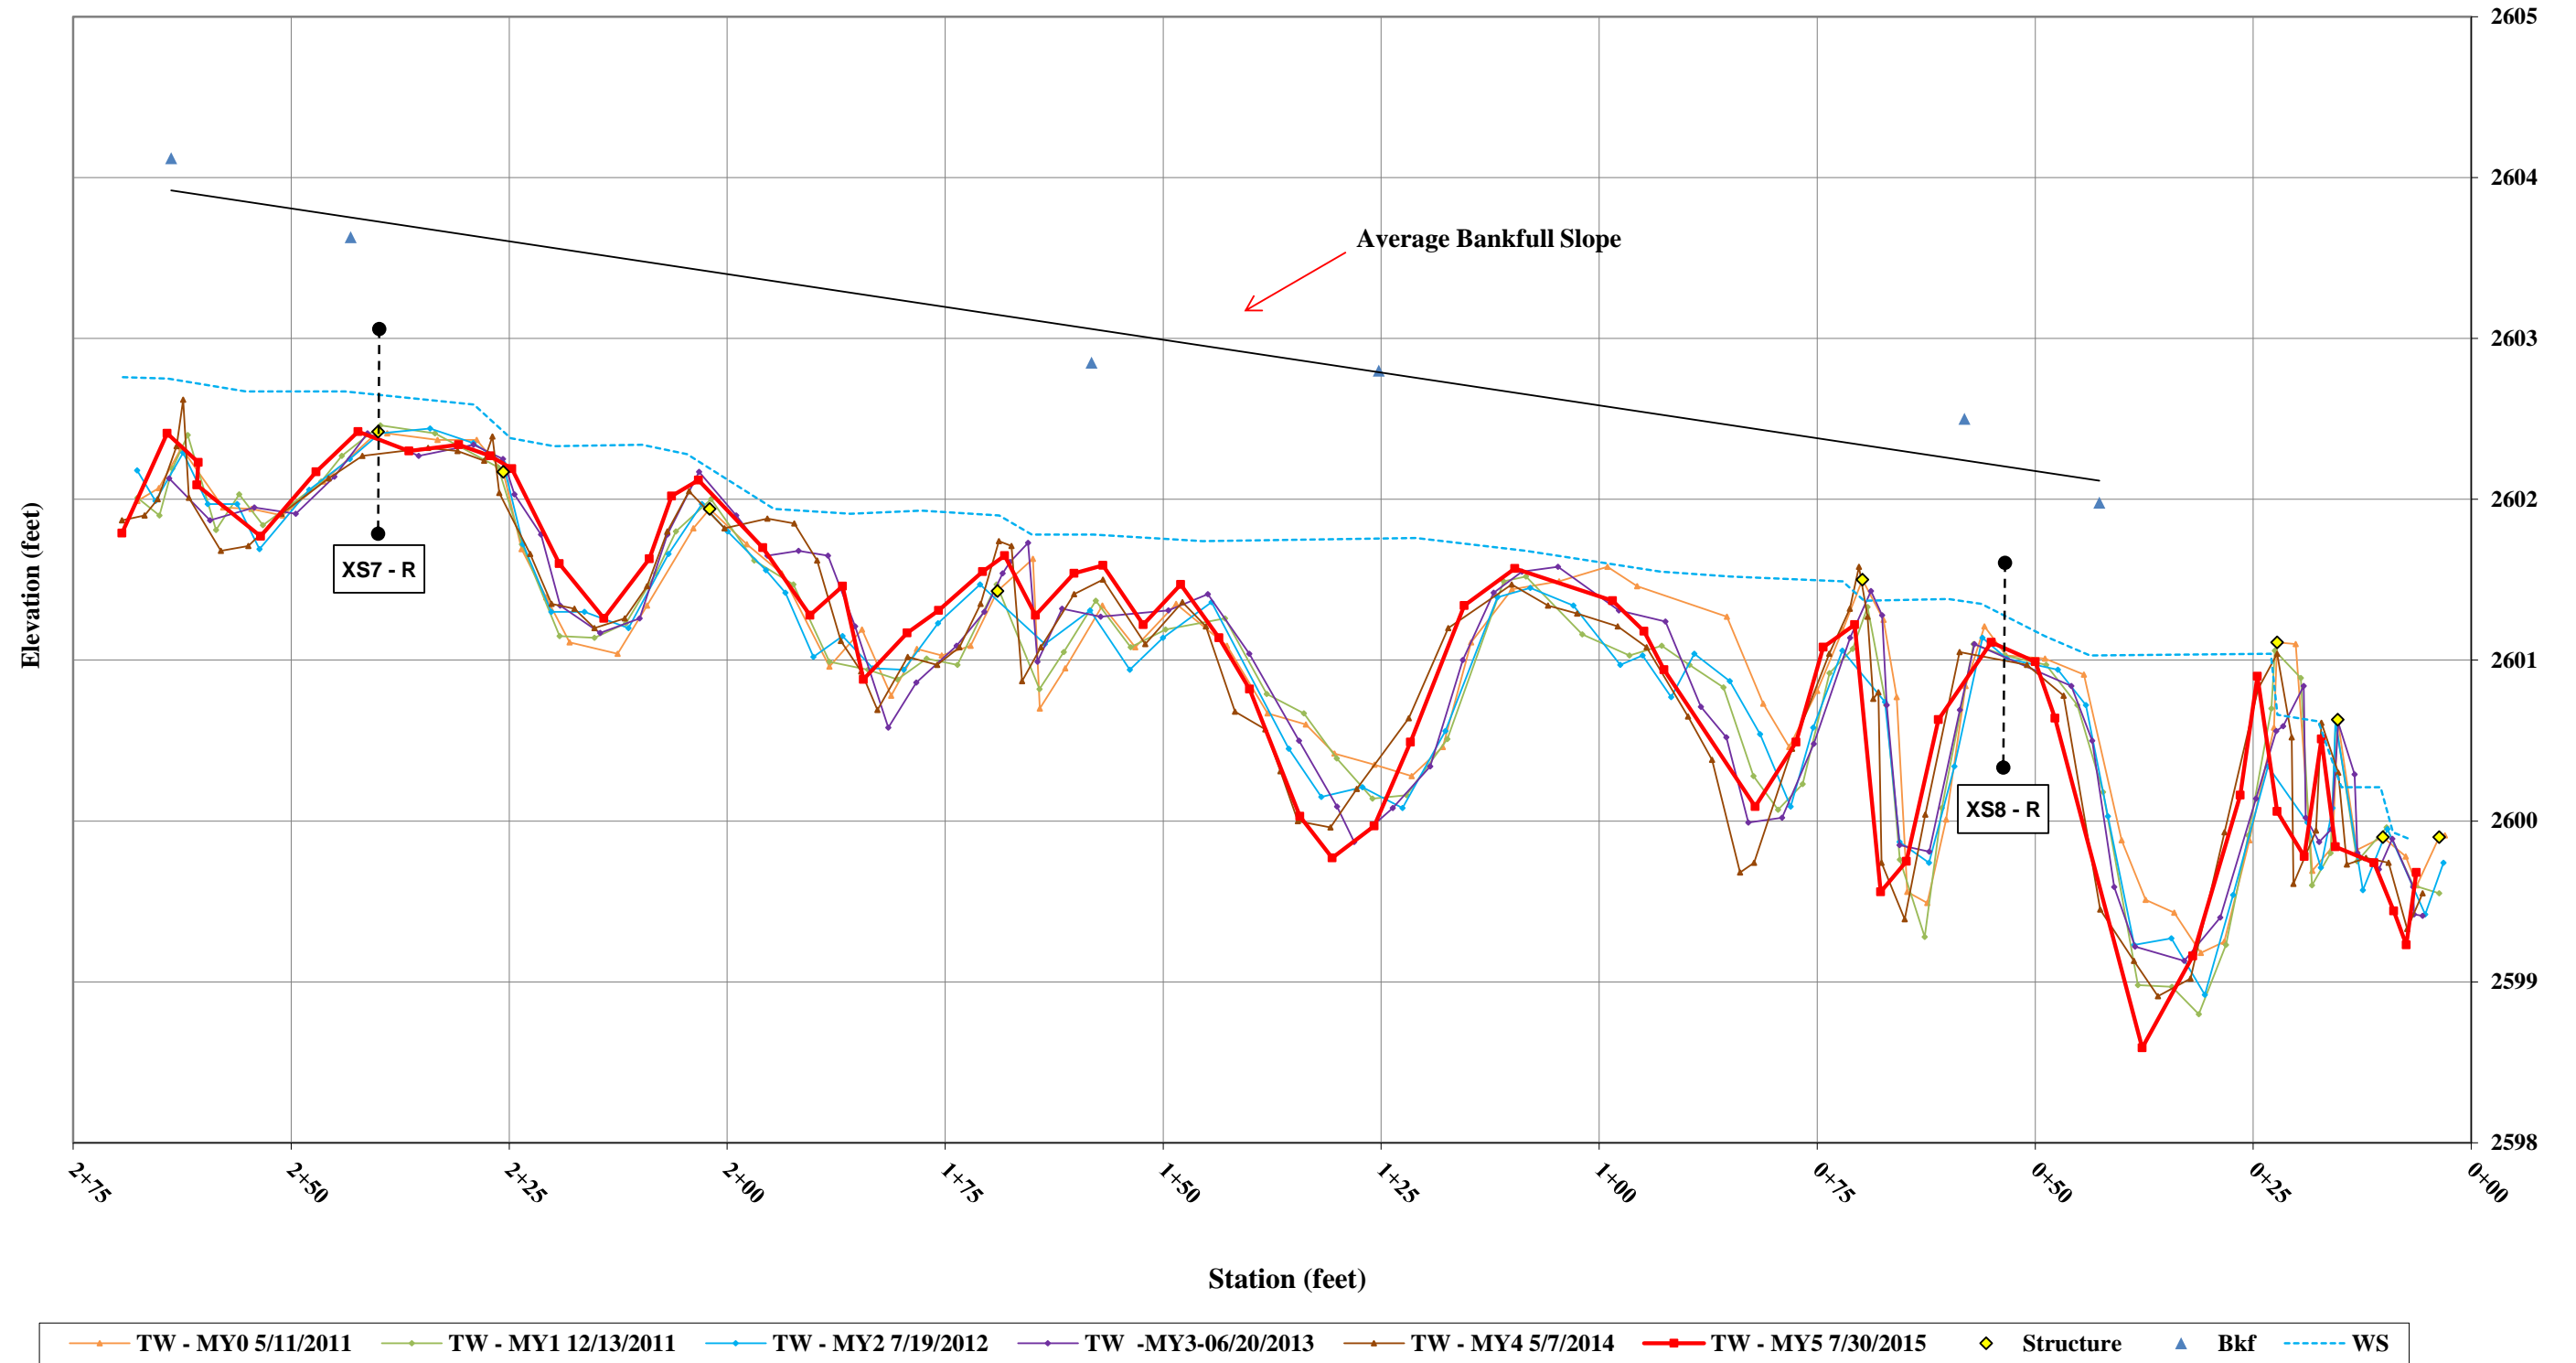



Glade Creek			
Cross Section 1 - Riffle			
Monitoring Year - 2015; MY5			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	0	0.0%	0%
0.062 - 0.125	1	0.9%	1%
0.125 - 0.25	1	0.9%	2%
0.25 - 0.5	1	0.9%	3%
0.5 - 1.0	3	2.8%	6%
1 - 2	14	13.0%	19%
2 - 4	5	4.6%	23%
4 - 8	6	5.6%	29%
8 - 16	19	17.6%	46%
16 - 32	22	20.4%	67%
32 - 64	23	21.3%	88%
64-128	11	10.2%	98%
128-256	2	1.9%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	108	100%	100%
		Summary Data	
		D50	17
		D84	57
		D95	110

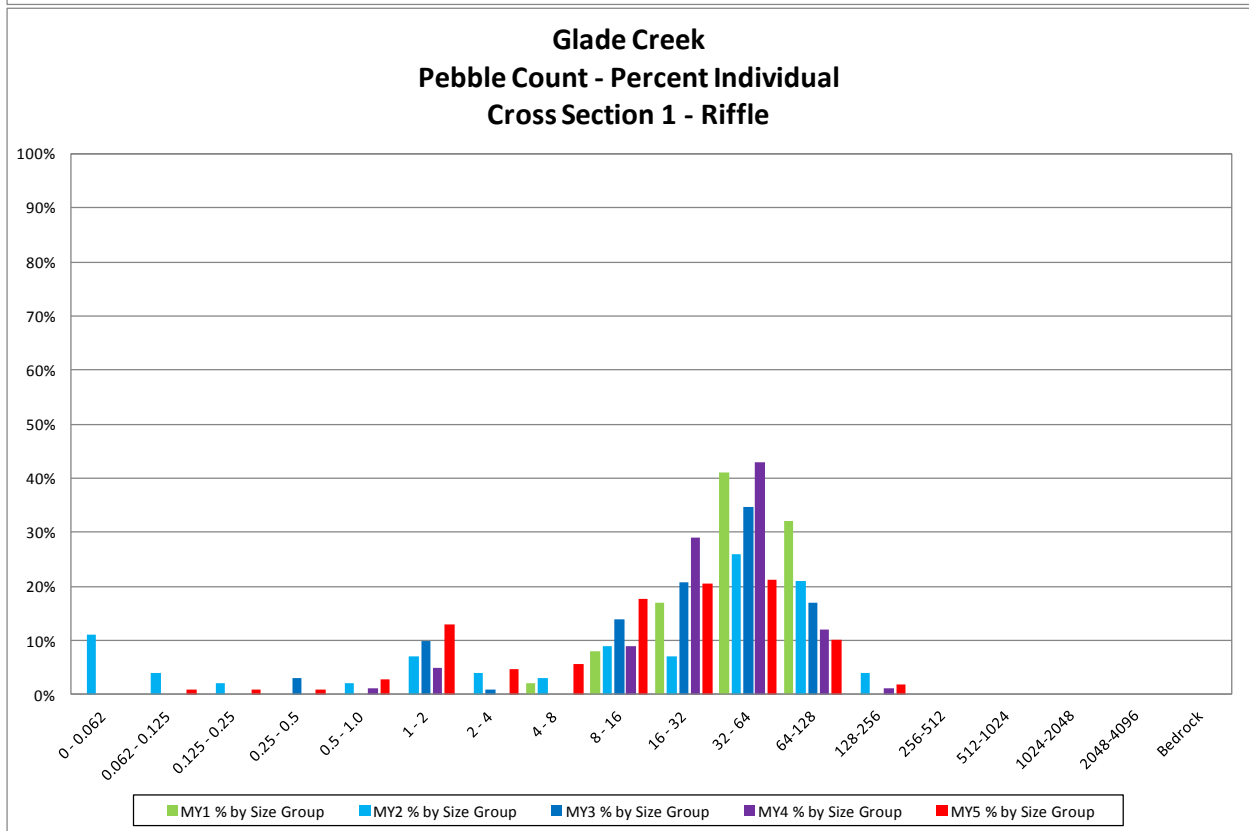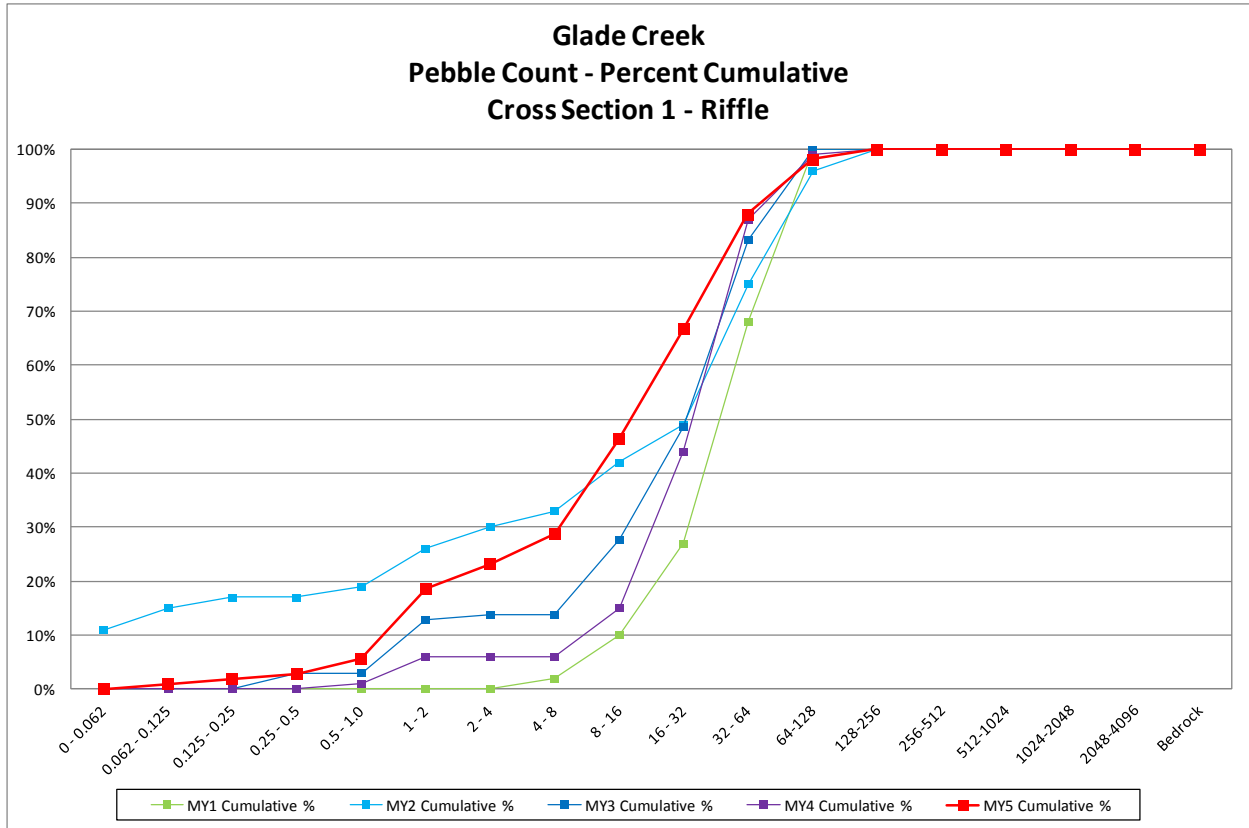



Glade Creek			
Cross Section 2 - Pool			
Monitoring Year - 2015; MY5			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	12	11.3%	11%
0.062 - 0.125	2	1.9%	13%
0.125 - 0.25	4	3.8%	17%
0.25 - 0.5	12	11.3%	28%
0.5 - 1.0	3	2.8%	31%
1 - 2	24	22.6%	54%
2 - 4	1	0.9%	55%
4 - 8	3	2.8%	58%
8 - 16	7	6.6%	64%
16 - 32	12	11.3%	75%
32 - 64	16	15.1%	91%
64-128	10	9.4%	100%
128-256	0	0.0%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	106	100%	100%
		Summary Data	
		D50	1.8
		D84	47
		D95	88

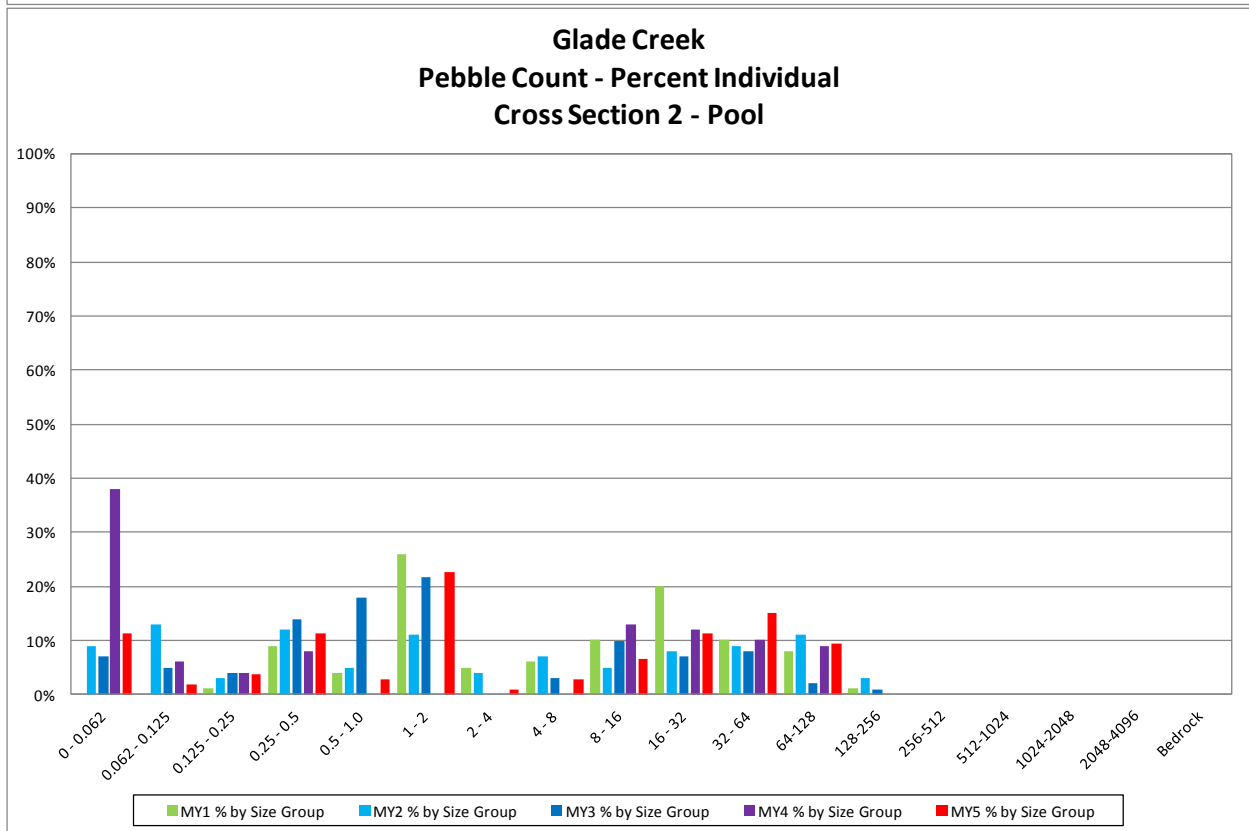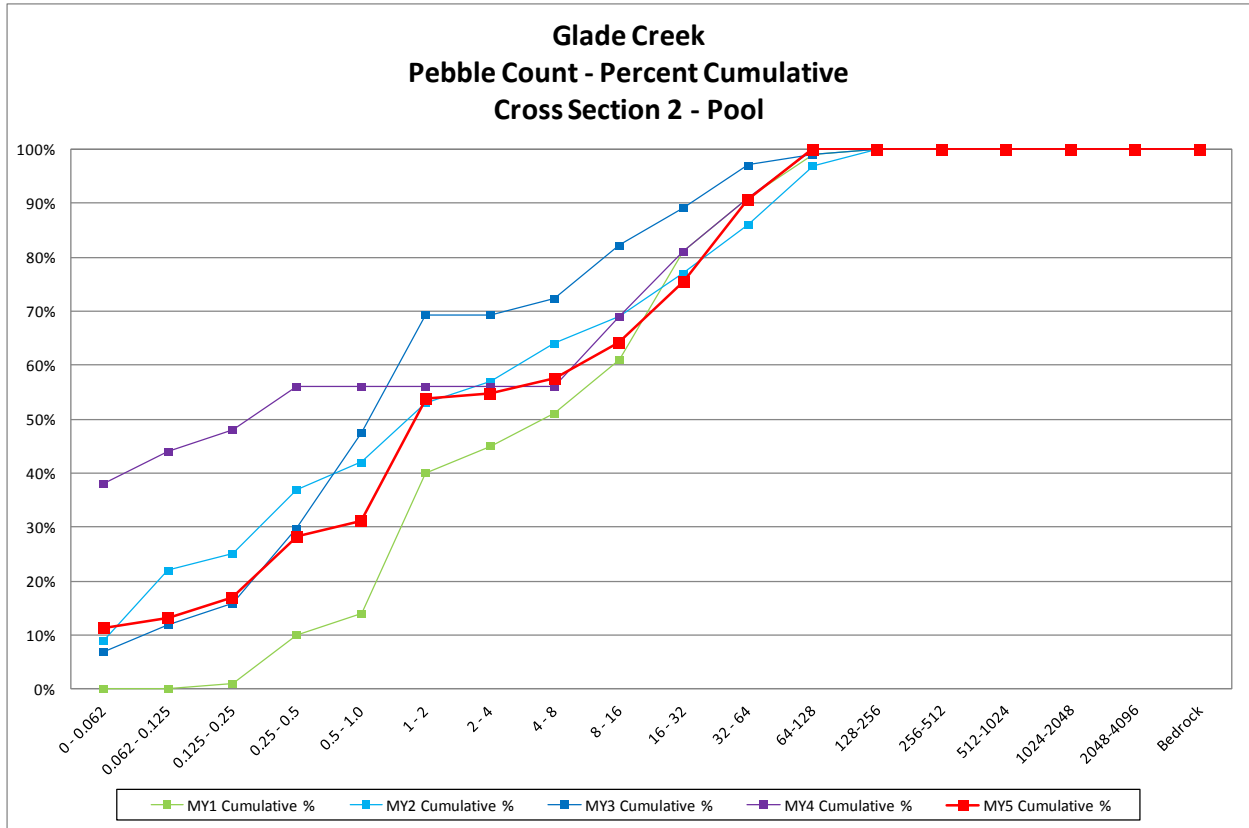



Glade Creek			
Cross Section 3 - Riffle			
Monitoring Year - 2015; MY5			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	0	0.0%	0%
0.062 - 0.125	0	0.0%	0%
0.125 - 0.25	0	0.0%	0%
0.25 - 0.5	2	1.8%	2%
0.5 - 1.0	0	0.0%	2%
1 - 2	20	17.9%	20%
2 - 4	1	0.9%	21%
4 - 8	1	0.9%	21%
8 - 16	5	4.5%	26%
16 - 32	15	13.4%	39%
32 - 64	37	33.0%	72%
64-128	27	24.1%	96%
128-256	4	3.6%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	112	100%	100%
		Summary Data	
		D50	42
		D84	82
		D95	120

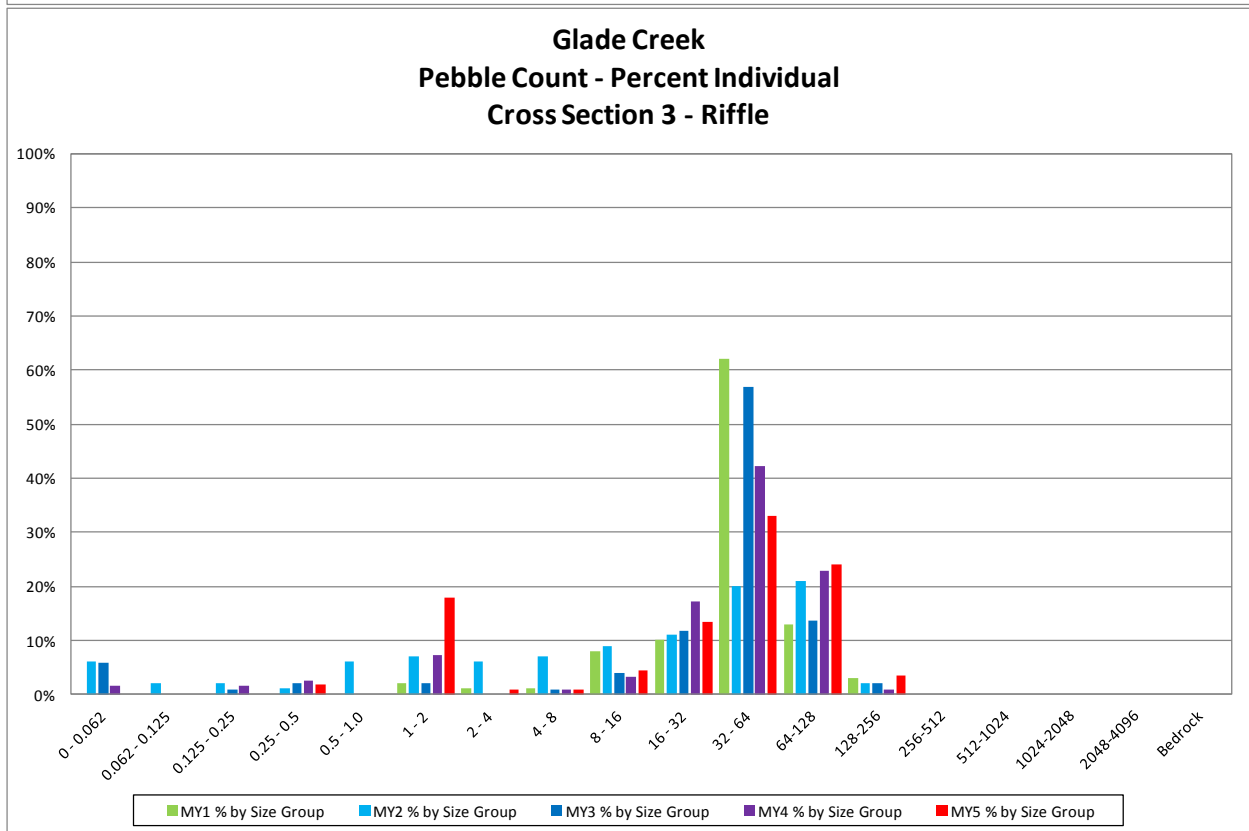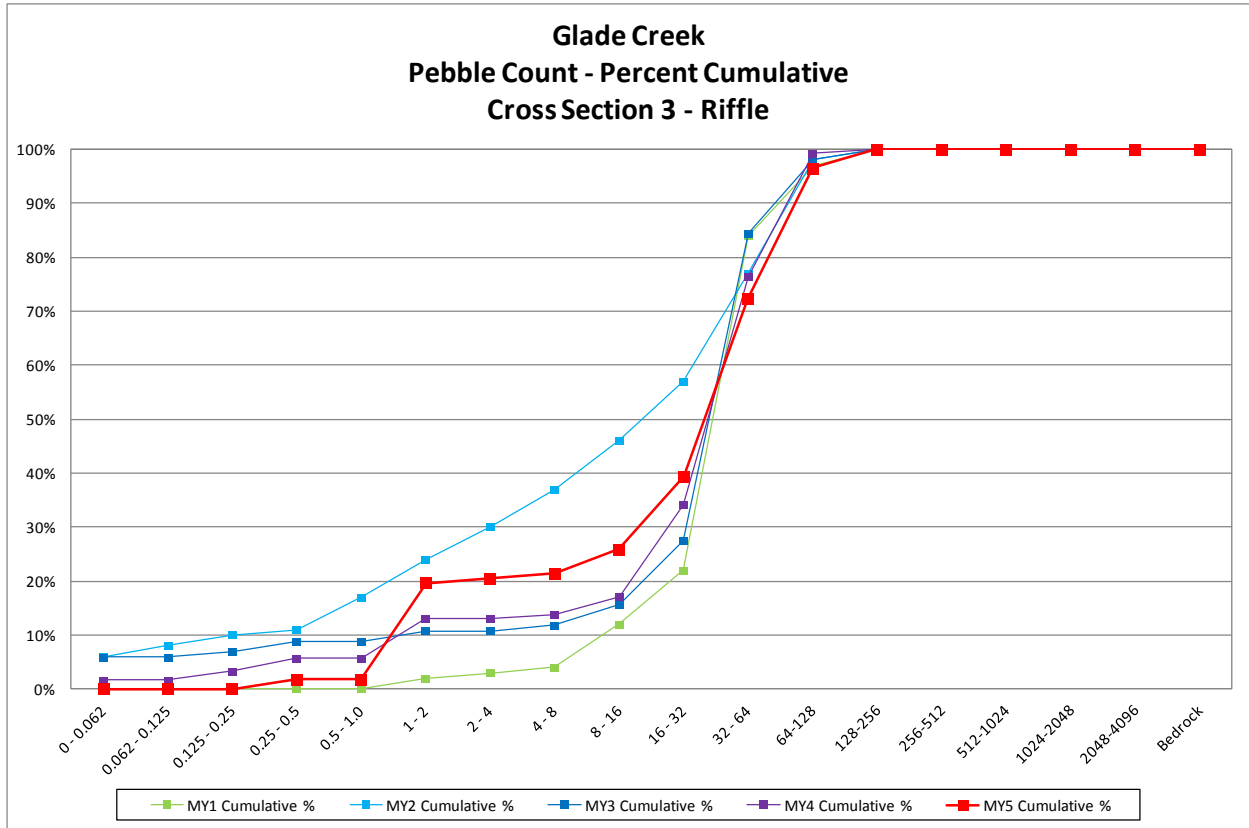



Glade Creek			
Cross Section 4 - Riffle			
Monitoring Year - 2015; MY5			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	6	5.7%	6%
0.062 - 0.125	1	0.9%	7%
0.125 - 0.25	6	5.7%	12%
0.25 - 0.5	6	5.7%	18%
0.5 - 1.0	2	1.9%	20%
1 - 2	11	10.4%	30%
2 - 4	0	0.0%	30%
4 - 8	8	7.5%	38%
8 - 16	13	12.3%	50%
16 - 32	16	15.1%	65%
32 - 64	25	23.6%	89%
64-128	10	9.4%	98%
128-256	2	1.9%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	106	100%	100%
		Summary Data	
		D50	16
		D84	57
		D95	96

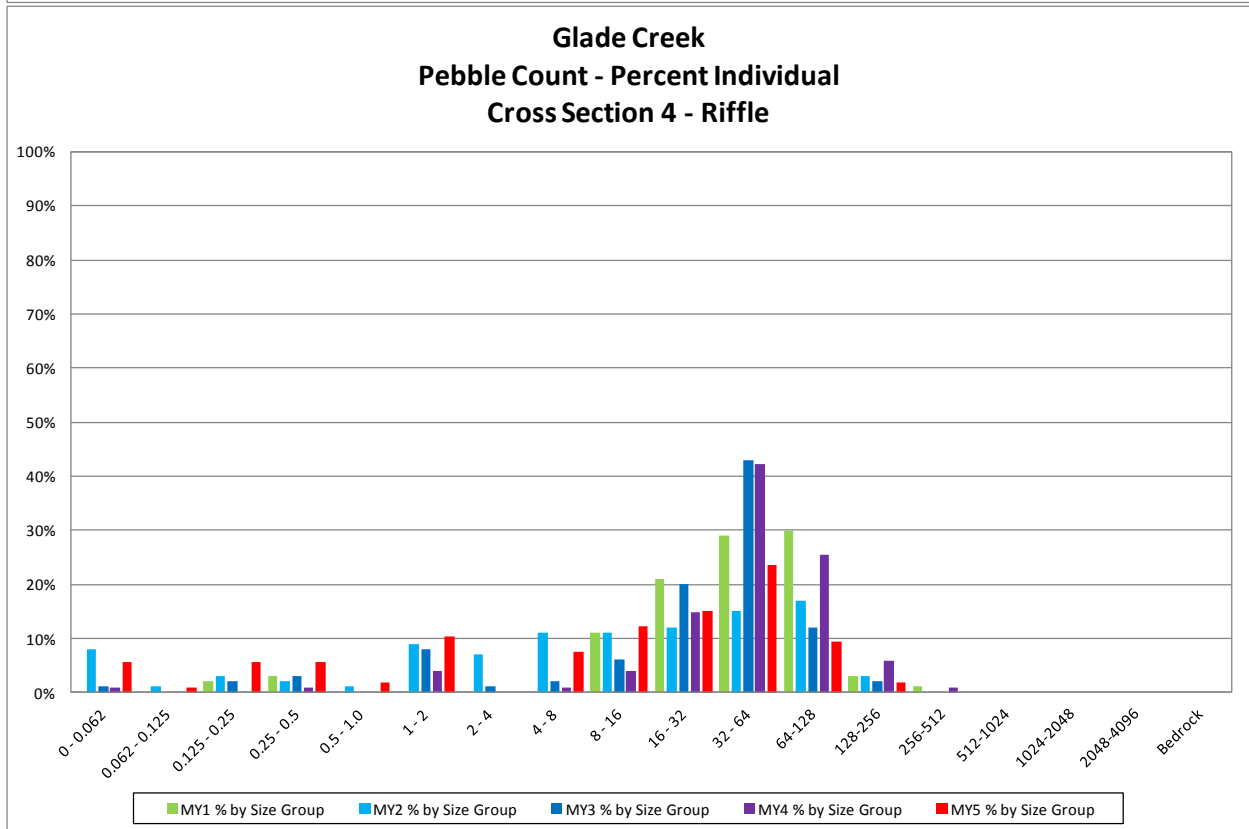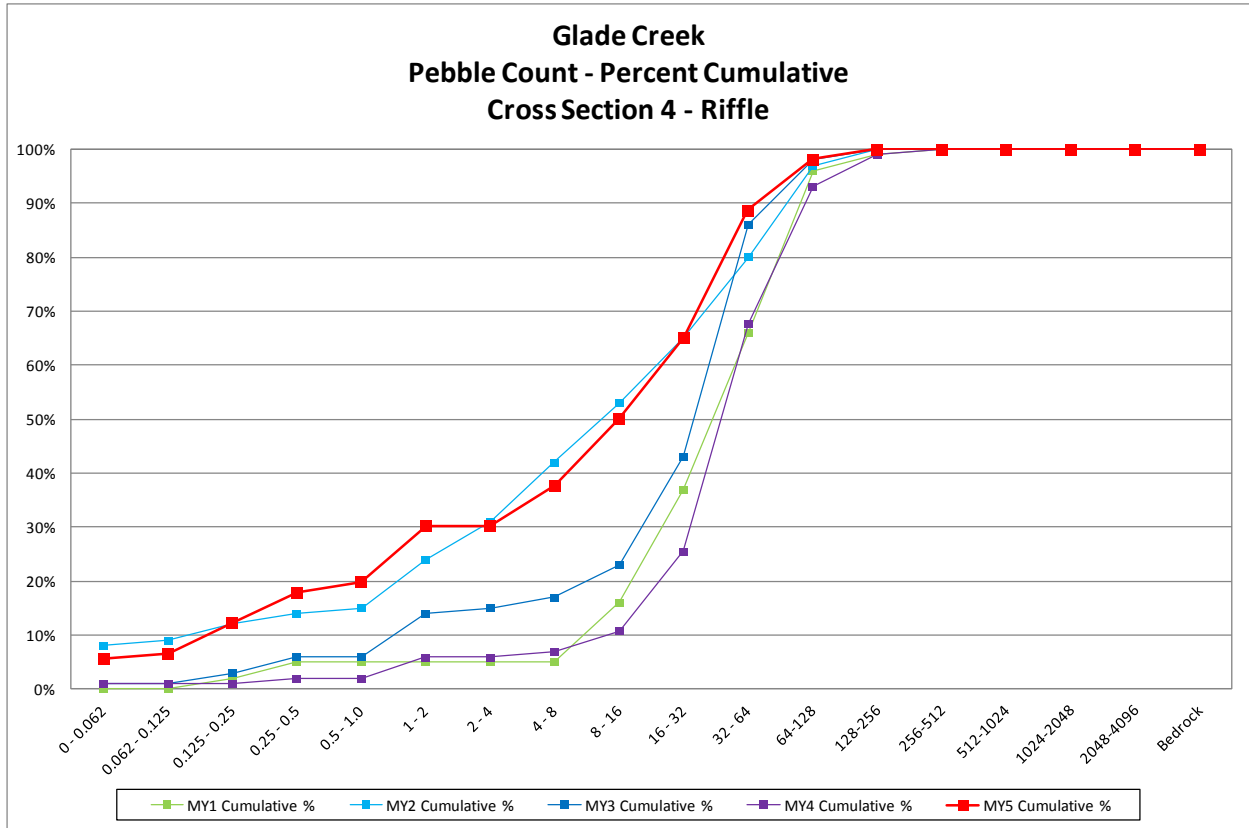



Glade Creek			
Cross Section 5 - Pool			
Monitoring Year - 2015; MY5			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	60	56.1%	56%
0.062 - 0.125	7	6.5%	63%
0.125 - 0.25	10	9.3%	72%
0.25 - 0.5	10	9.3%	81%
0.5 - 1.0	0	0.0%	81%
1 - 2	0	0.0%	81%
2 - 4	0	0.0%	81%
4 - 8	1	0.9%	82%
8 - 16	1	0.9%	83%
16 - 32	0	0.0%	83%
32 - 64	5	4.7%	88%
64-128	10	9.3%	97%
128-256	2	1.9%	99%
256-512	1	0.9%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	107	100%	100%
		Summary Data	
		D50	0.062
		D84	37
		D95	110

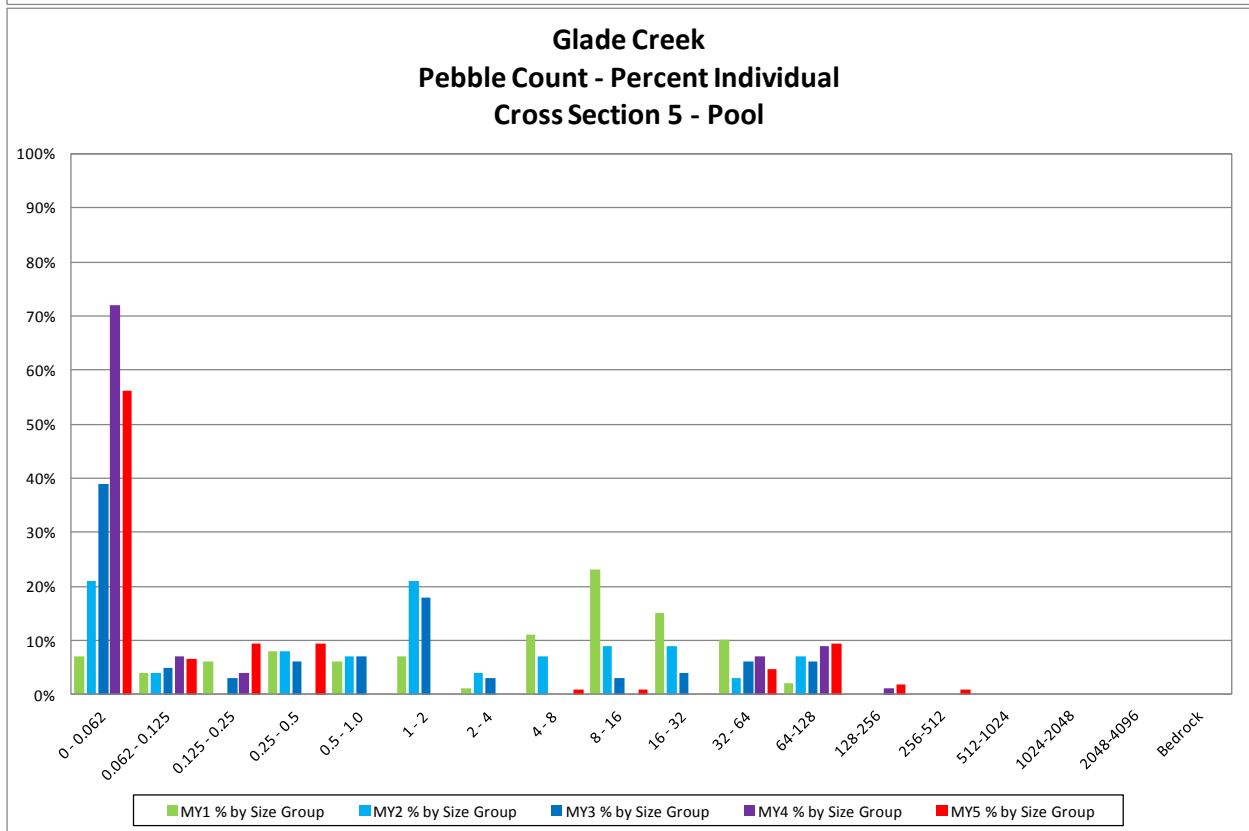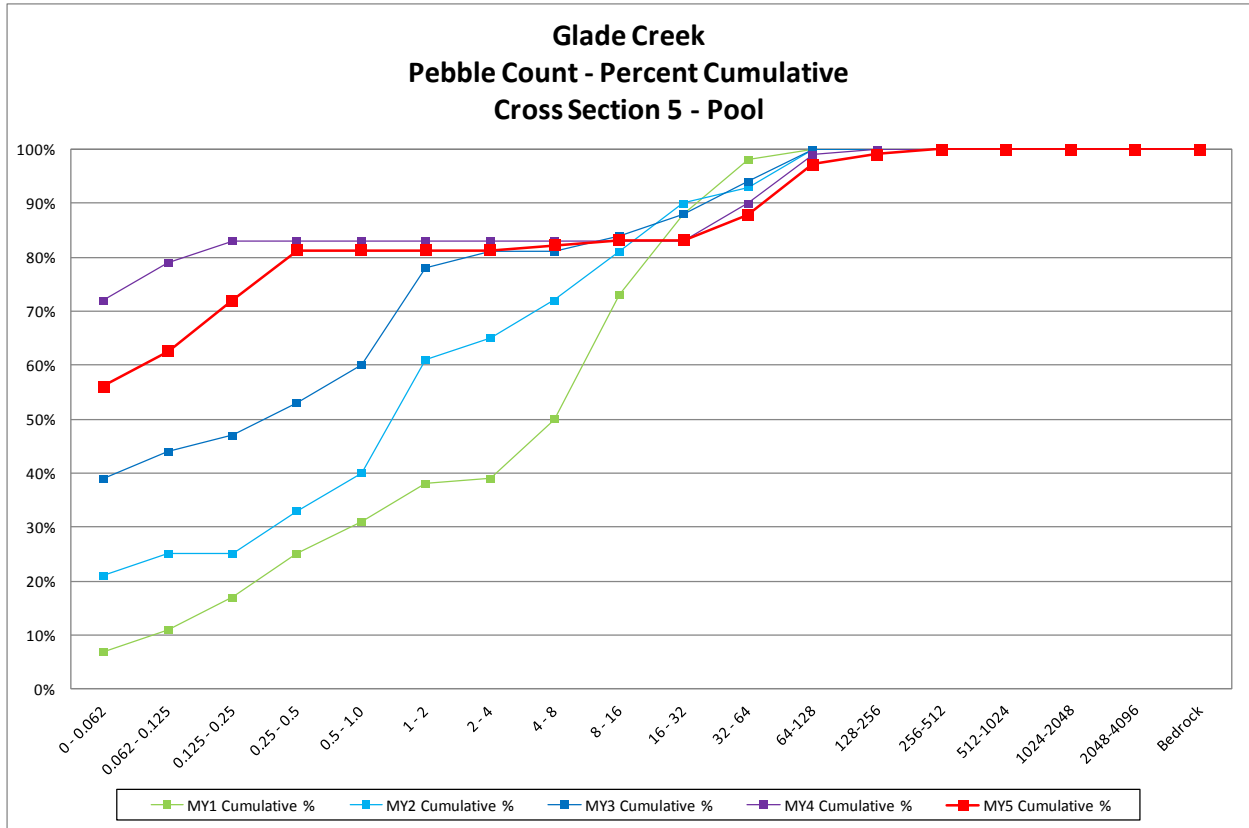

Glade Creek			
Cross Section 6 - Riffle			
Monitoring Year - 2015; MY5			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	7	6.6%	7%
0.062 - 0.125	0	0.0%	7%
0.125 - 0.25	0	0.0%	7%
0.25 - 0.5	0	0.0%	7%
0.5 - 1.0	0	0.0%	7%
1 - 2	27	25.5%	32%
2 - 4	0	0.0%	32%
4 - 8	4	3.8%	36%
8 - 16	12	11.3%	47%
16 - 32	12	11.3%	58%
32 - 64	22	20.8%	79%
64-128	13	12.3%	92%
128-256	9	8.5%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	106	100%	100%
		Summary Data	
		D50	23
		D84	75
		D95	150

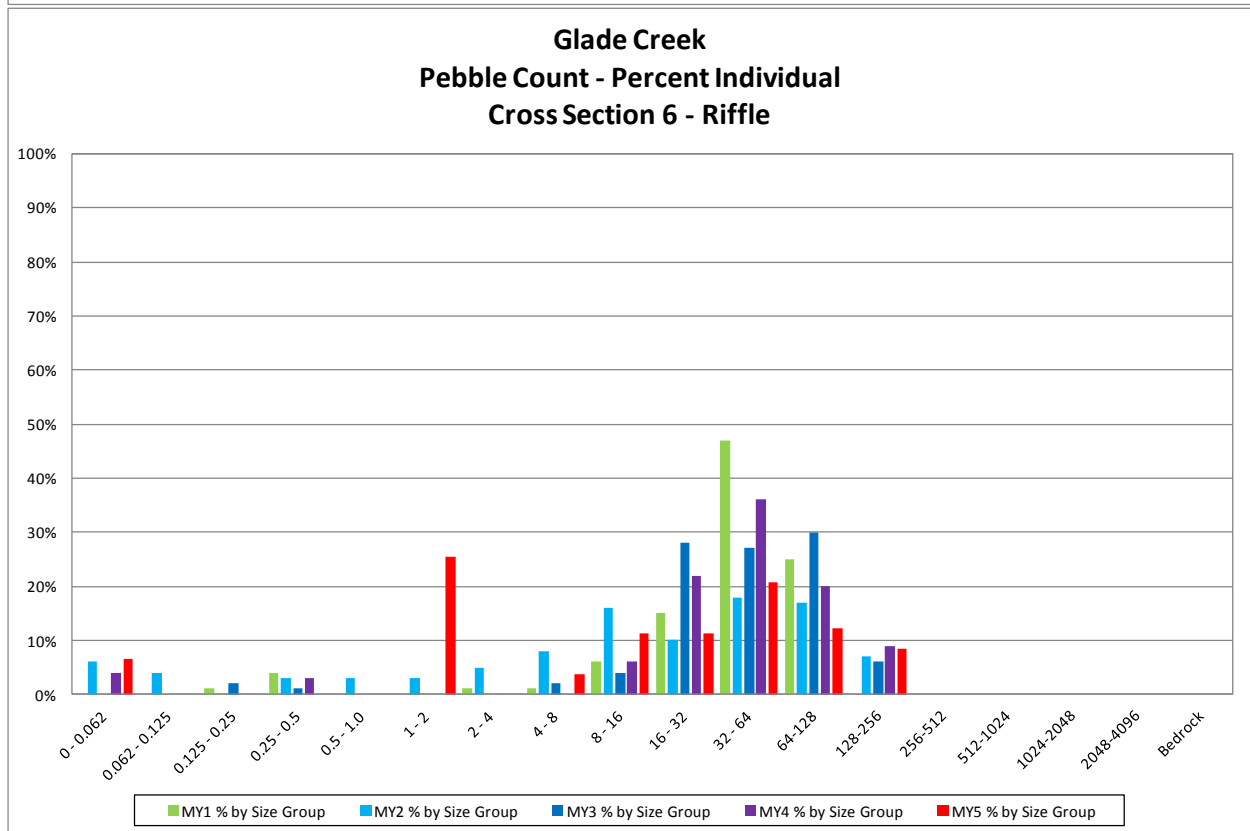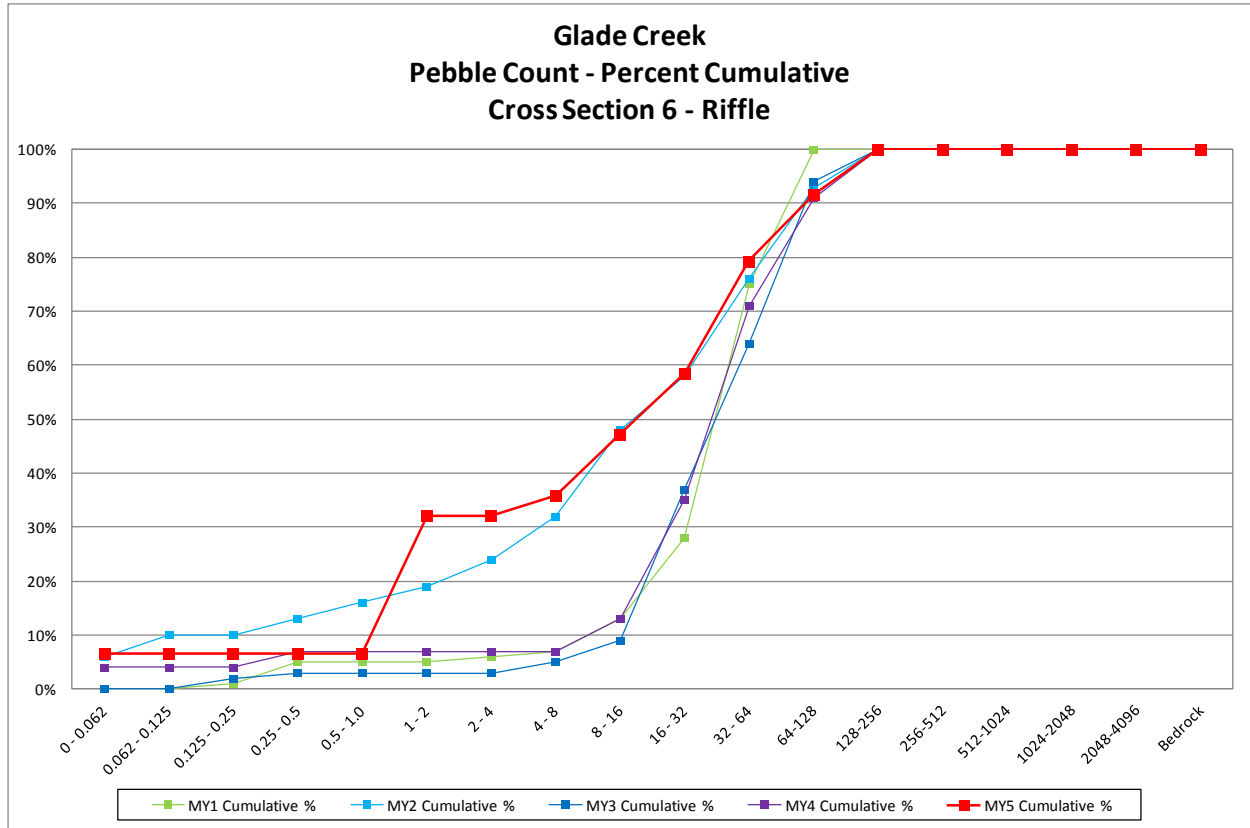

Glade Creek			
Cross Section 7 - Riffle			
Monitoring Year - 2015; MY5			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	2	1.9%	2%
0.062 - 0.125	1	1.0%	3%
0.125 - 0.25	8	7.7%	11%
0.25 - 0.5	0	0.0%	11%
0.5 - 1.0	1	1.0%	12%
1 - 2	10	9.6%	21%
2 - 4	1	1.0%	22%
4 - 8	3	2.9%	25%
8 - 16	11	10.6%	36%
16 - 32	27	26.0%	62%
32 - 64	32	30.8%	92%
64-128	7	6.7%	99%
128-256	1	1.0%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	104	100%	100%
		Summary Data	
		D50	23
		D84	53
		D95	75

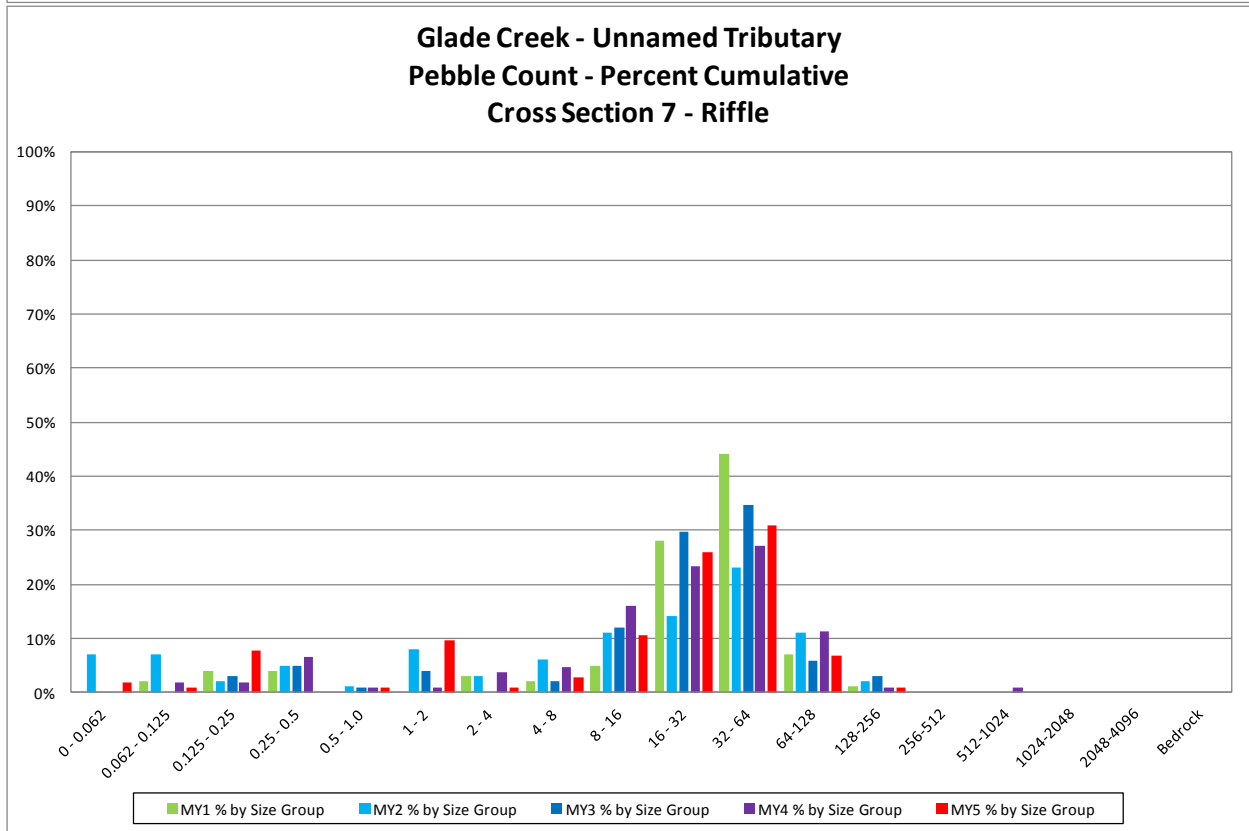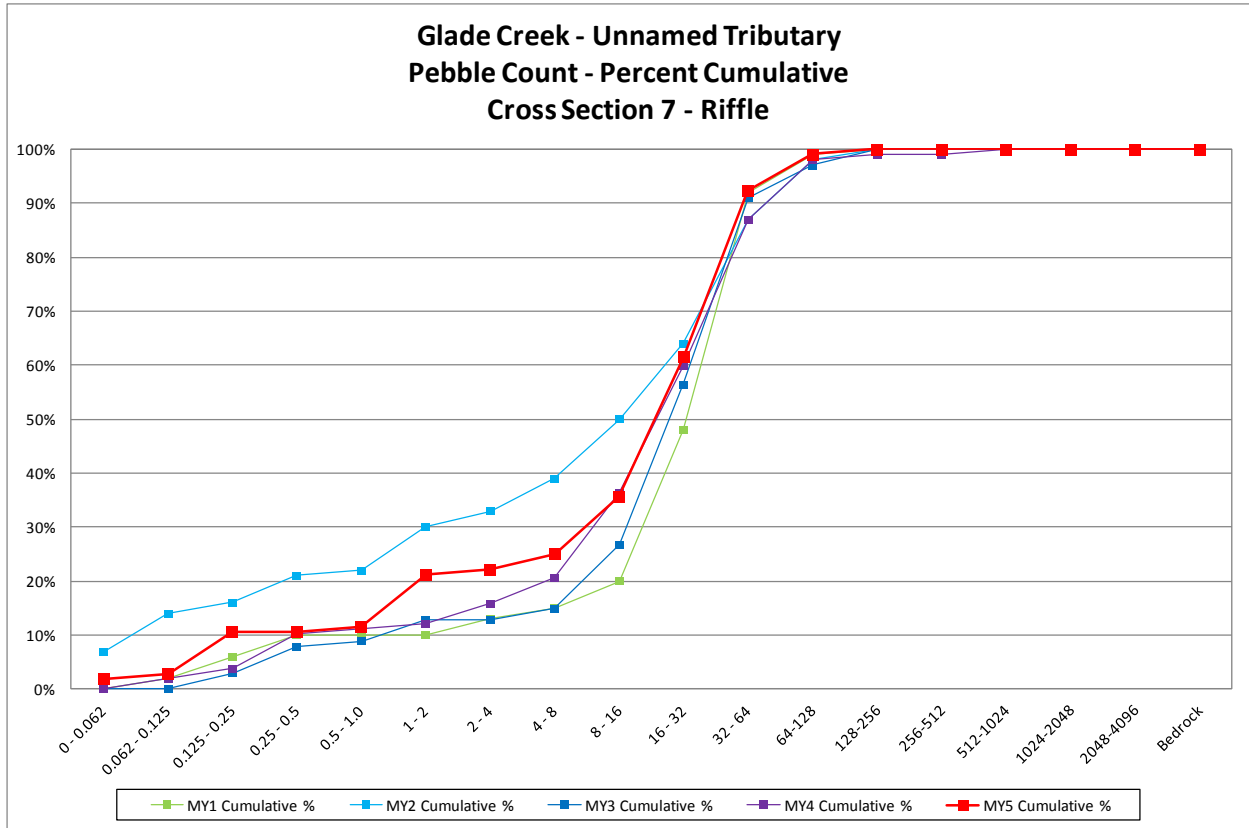

Glade Creek			
Cross Section 8 - Riffle			
Monitoring Year - 2015; MY5			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	2	1.9%	2%
0.062 - 0.125	0	0.0%	2%
0.125 - 0.25	1	0.9%	3%
0.25 - 0.5	0	0.0%	3%
0.5 - 1.0	3	2.8%	6%
1 - 2	11	10.3%	16%
2 - 4	0	0.0%	16%
4 - 8	3	2.8%	19%
8 - 16	18	16.8%	36%
16 - 32	20	18.7%	54%
32 - 64	36	33.6%	88%
64-128	11	10.3%	98%
128-256	2	1.9%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	107	100%	100%
		Summary Data	
		D50	28
		D84	60
		D95	86

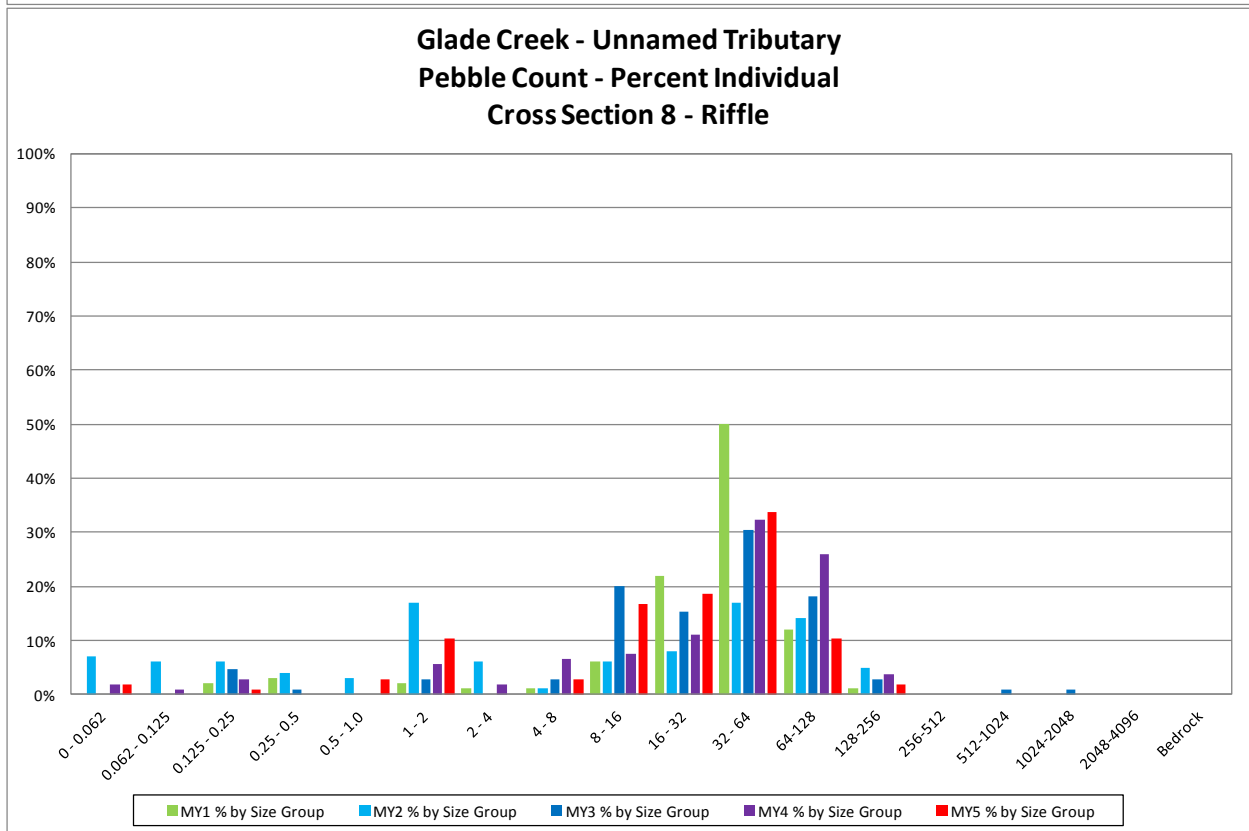
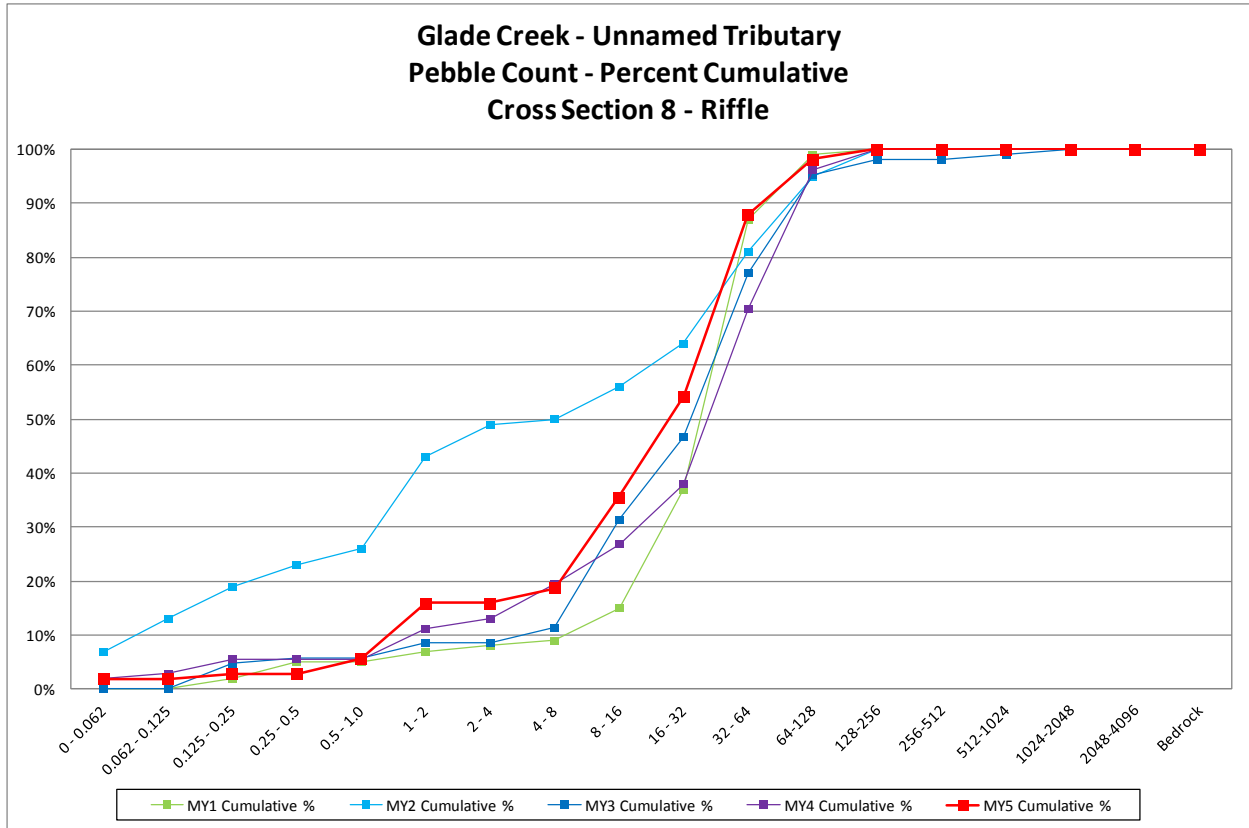


Table 10a. Baseline Stream Data Summary Glade Creek / Project No. 854 - Glade Creek (2,558 feet)																								
Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data						Design			Monitoring Baseline					
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
Dimension & Substrate - Riffle																								
Bankfull Width (ft)	-	-	-	-	44.7	-	-	-	-	-	30.7	-	-	-	-	-	34.0	-	35.2	43.2	44.9	47.7	5.9	4
Floodprone Width (ft)				-	45	-	-	-	-	-	70	-	-	-	-	-	>76	-	68.8	89.1	89.0	109.4	22.5	4
Bankfull Mean Depth (ft)	-	-	-	-	1.41	-	-	-	-	-	1.90	-	-	-	-	-	1.56	-	0.9	1.2	1.2	1.3	0.2	4
Bankfull Max Depth (ft)				-	2.3	-	-	-	-	-	2.5	-	-	-	-	-	2.2	-	1.7	1.8	1.9	1.9	0.1	4
Bankfull Cross Sectional Area (ft ²)	-			-	63.0	-	-	-	-	-	57.4	-	-	-	-	-	53.0	-	41.6	49.1	46.3	62.2	9.1	4
Width/Depth Ratio				-	31.7	-	-	-	-	-	16.4	-	-	-	-	-	22.0	-	27.6	39.0	36.9	62.2	11.3	4
Entrenchment Ratio				-	6.0	-	-	-	-	-	2.3	-	-	-	-	-	>2.2	-	1.5	2.1	2.2	2.6	0.5	4
Bank Height Ratio				1.2	-	-	3.0	-	-	-	1.0	-	-	-	-	-	1.0	-	1.0	1.0	1.0	1.0	0.0	4
Profile																								
Riffle Length (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	14.6	35.3	31.8	54.9	13.1	18
Riffle Slope (ft/ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.002	0.011	0.010	0.025	0.006	18
Pool Length (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7.2	41.7	44.6	74.9	22.8	30
Pool Max Depth (ft)				-	5.7	-	-	-	-	-	3.1	-	-	-	-	-	4.4	-	3.2	4.1	4.1	5.6	0.7	31
Pool Spacing (ft)				110	-	-	228	-	7	-	224	-	-	-	-	91	-	155	10.7	84.5	98.5	162.5	51.0	29
Pattern																								
Channel Belt Width (ft)				77	-	-	184	-	8	90	-	-	104	-	-	55	-	134	59.3	76.7	74.5	92.1	11.22	12
Radius of Curvature (ft)				34	-	-	118	-	8	76	-	-	135	-	-	53	-	172	41.7	57.9	50.3	101.0	17.80	15
Rc: Bankfull Width (ft/ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Meander Wavelength (ft)				66	-	-	403	-	10	-	350	-	-	-	-	136	-	261	163.9	223.6	230.7	259.1	28.34	13
Meander Width Ratio				3.6	-	-	18.7	-	-	2.9	-	-	3.4	-	-	1.6	-	4.0	1.6	1.8	1.7	2.1	0.26	4
Transport Parameters																								
Reach Shear Stress (Competency) lb/ft ²				0.41						-						0.39			0.36					
Max Part Size (mm) Mobilized at Bankfull				11						-						10			21					
Stream Power (Transport Capacity) W/m ²				-						-						-			-					
Additional Reach Parameters																								
Rosgen Classification				C _E 4/F4/G4						C4						C4			C					
Bankfull Velocity (fps)	-			3.3						N/A						3.8								
Bankfull Discharge (cfs)	267-352			200						375						200								
Valley Length (ft)				2,180						-						2,180								
Channel Thalweg Length (ft)				2,569						-						2,555			2,558					
Sinuosity				1.18						1.10						1.17			1.17					
Water Surface Slope (Channel) (ft/ft)				-						-						-			0.0055					
Bankfull Slope (ft/ft)				0.005						0.014						0.004			0.0050					
Bankfull Floodplain Area (acres)				-						-						-								
% of Reach with Eroding Banks				-						-						-								
Channel Stability or Habitat Metric				-						-						-								
Biological or Other				-						-						-								

- Information unavailable.
N/A - Item does not apply.
Non-Applicable.

Table 10a. Baseline Stream Data Summary Glade Creek / Project No. 854 - Unnamed Tributary (265 feet)																								
Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data						Design			Monitoring Baseline					
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
Dimension & Substrate - Riffle																								
Bankfull Width (ft)	-	-	-	-	12.6	-	-	-	-	-	30.7	-	-	-	-	-	12.0	-	17.3	18.1	18.1	18.9	N/A	2
Floodprone Width (ft)				13	-	-	25	-	-	-	70	-	-	-	-	-	>44	-	33.5	37.7	37.7	41.8	N/A	2
Bankfull Mean Depth (ft)	-	-	-	-	0.8	-	-	-	-	-	1.9	-	-	-	-	-	0.7	-	0.7	0.8	0.8	0.8	N/A	2
Bankfull Max Depth (ft)				-	1.0	-	-	-	-	-	2.5	-	-	-	-	-	1.0	-	1.2	1.3	1.3	1.3	N/A	2
Bankfull Cross Sectional Area (ft ²)				-	9.9	-	-	-	-	-	57.4	-	-	-	-	-	8.2	-	12.7	13.0	13.0	13.2	N/A	2
Width/Depth Ratio				-	16.0	-	-	-	-	-	16.4	-	-	-	-	-	18.0	-	22.7	25.5	25.5	28.3	N/A	2
Entrenchment Ratio				1.1	-	-	2.0	-	-	-	2.3	-	-	-	-	-	>2.2	-	1.9	2.1	2.1	2.2	N/A	2
Bank Height Ratio				-	≥2.0	-	-	-	-	-	1.0	-	-	-	-	-	1.0	-	1.0	1.0	1.0	1.0	N/A	2
Profile																								
Riffle Length (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.8	10.3	10.3	14.6	4.0	6
Riffle Slope (ft/ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.001	0.017	0.015	0.034	0.011	6
Pool Length (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.6	13.3	10.8	29.5	8.5	9
Pool Max Depth (ft)				-	3.5	-	-	-	-	-	3.1	-	-	-	-	-	2.2	-	1.8	2.7	2.6	3.4	0.5	7
Pool Spacing (ft)				-	-	-	-	-	-	-	224	-	-	-	-	31	-	56	5.5	34.1	31.5	59.8	20.8	7
Pattern																								
Channel Belt Width (ft)				57	-	-	79	-	7	90	-	-	104	-	-	30	-	45	28.6	34.3	36.1	37.1	3.51	5
Radius of Curvature (ft)				17	-	-	71	-	10	76	-	-	135	-	-	27	-	33	17.1	19.8	19.5	22.5	2.21	5
Rc: Bankfull Width (ft/ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Meander Wavelength (ft)				66	-	-	93	-	6	-	350	-	-	-	-	75	-	84	66.4	77.7	82.7	83.9	9.78	3
Meander Width Ratio				4.5	-	-	6.3	-	-	2.9	-	-	3.4	-	-	2.5	-	3.8	1.9	2.0	2.0	2.1	N/A	2.0
Transport Parameters																								
Reach Shear Stress (Competency) lb/ft ²							0.52										0.17						0.30	
Max Part Size (mm) Mobilized at Bankfull							15										3						65	
Stream Power (Transport Capacity) W/m ²							-										-							
Additional Reach Parameters																								
Rosgen Classification							C4						C4				C4						C	
Bankfull Velocity (fps)							2						N/A				2.4							
Bankfull Discharge (cfs)				76 - 98			20						375				20							
Valley Length (ft)							175						-				226							
Channel Thalweg Length (ft)							300						-				275							264
Sinuosity							1.71						1.10				1.22							1.17
Water Surface Slope (ft/ft)							-						-				-							0.0064
Bankfull Slope (ft/ft)							0.011						0.014				0.006							0.0058
Bankfull Floodplain Area (acres)							-						-				-							
% of Reach with Eroding Banks							-						-				-							
Channel Stability or Habitat Metric							-						-				-							
Biological or Other							-						-				-							

- Information unavailable.
N/A - Item does not apply.
Non-Applicable.

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions) Glade Creek / Project No. 854 - Glade Creek (2,558 feet)																									
Parameter	Pre-Existing Condition						Reference Reach Data						Design						Monitoring Baseline						
Ri% / Ru% / P% / G% / S%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	25%	9%	49%	16%	2%
SC% / Sa% / G% / C% / B% / Be%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
d16 / D35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)	0.136	0.87	12.5	114	-	-	0.17	29	58	180	300	-	-	-	-	-	-	-	-	-					
Entrenchment Class <1.5 / 1.5 - 1.99 / 2 - 4.9 / 5.0 - 9.9 / >10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
Incision Class <1.2 / 1.2 - 1.49 / 1.5 - 1.99 / >2.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					

- Information unavailable.
Non-Applicable.

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions) Glade Creek / Project No. 854 - Dye Branch-Downstream (265 feet)																									
Parameter	Pre-Existing Condition						Reference Reach Data						Design						Monitoring Baseline						
Ri% / Ru% / P% / G% / S%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	24%	11%	47%	16%	2%
SC% / Sa% / G% / C% / B% / Be%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
d16 / D35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)	0.3	11	27	85	115.0	-	0.17	29	58	180	300	-	-	-	-	-	-	-	-	-					
Entrenchment Class <1.5 / 1.5 - 1.99 / 2 - 4.9 / 5.0 - 9.9 / >10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					
Incision Class <1.2 / 1.2 - 1.49 / 1.5 - 1.99 / >2.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-					

- Information unavailable.
N/A - Item does not apply.
Non-Applicable.

Table 11a. Baseline Morphology & Hydraulic Monitoring Summary																		
Glade Creek / Project No. 854 - Glade Creek (2,558 feet)																		
	Cross-Section 1 Riffle						Cross-Section 2 Pool						Cross-Section 3 Riffle					
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
Record Elevation (datum) Used	2,613	2,613	2,613	2,613	2,613	2,613	2,612	2,612	2,612	2,612	2,612	2,612	2,611	2,611	2,611	2,611	2,611	2,611
Bankfull Width (ft)	47.7	48.8	51.3	45.3	38.1	32.5	50.4	49.3	49.1	46.7	39.0	36.4	47.6	47.6	47.6	46.5	46.1	40.7
Floodprone Width (ft)	109.0	109.4	109.4	109.4	109.4	109.4	69.1	69.1	69.1	69.1	69.1	68.9	70.4	70.4	70.4	70.4	70.4	70.4
Bankfull Mean Depth (ft)	0.9	0.9	0.9	0.9	1.1	1.1	1.6	1.7	1.7	1.7	2.0	1.9	1.3	1.3	1.3	1.3	1.3	1.3
Bankfull Max Depth (ft)	1.9	1.9	1.9	1.8	1.9	1.8	3.0	3.3	3.3	3.2	3.5	3.5	1.9	1.9	1.9	2.0	2.1	2.2
Bankfull Cross Sectional Area (ft ²)	41.6	45.6	45.9	42.4	41.0	35.7	78.3	83.0	83.6	78.1	77.8	69.1	62.2	64.1	63.9	59.5	60.5	54.4
Bankfull Width/Depth Ratio	54.7	52.2	57.4	48.4	35.3	29.7	32.5	29.3	28.9	27.9	19.6	19.2	36.5	35.3	35.5	36.3	35.1	30.4
Bankfull Entrenchment Ratio	2.3	2.2	2.1	2.4	2.9	3.4	1.4	1.4	1.4	1.5	1.9	1.9	1.5	1.5	1.5	1.5	1.5	1.7
Bankfull Bank Height Ratio	1.0	1.0	1.0	1.0	1.0	1.2	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Cross Sectional Area between End Pins (ft ²)	41.8	45.6	45.9	48.4	41.0	35.7	78.3	83.0	83.6	78.1	77.8	69.1	62.2	64.1	63.9	59.5	60.5	54.4
d50 (mm)	N/A	47	33	33	35	17	N/A	7.3	1.7	1.1	0.3	1.8	N/A	45	22	40	41	42
	Cross-Section 4 Riffle						Cross-Section 5 Pool						Cross-Section 6 Riffle					
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
Record Elevation (datum) Used	2,607	2,607	2,607	2,607	2,607	2,607	2,606	2,606	2,606	2,606	2,606	2,606	2,605	2,605	2,605	2,605	2,605	2,605
Bankfull Width (ft)	35.2	36.3	34.9	34.8	33.5	32.8	53.2	51.5	51.9	44.4	34.6	33.6	42.1	42.9	42.4	37.4	34.9	28.6
Floodprone Width (ft)	68.8	68.8	68.8	68.8	68.8	68.8	117.9	117.9	117.9	117.9	117.9	117.9	107.6	107.6	107.6	107.6	107.6	107.6
Bankfull Mean Depth (ft)	1.3	1.3	1.4	1.3	1.6	1.5	1.3	1.5	1.4	1.6	2.0	2.0	1.1	1.1	1.1	1.2	1.3	1.5
Bankfull Max Depth (ft)	1.7	1.9	1.9	1.9	2.9	2.8	3.7	4.1	4.0	3.9	4.1	4.4	1.8	1.9	1.9	2.0	2.4	2.4
Bankfull Cross Sectional Area (ft ²)	44.9	46.9	47.5	46.1	50.3	49.4	68.7	75.0	74.1	72.1	68.3	67.8	47.7	49.0	48.4	44.1	45.9	43.8
Bankfull Width/Depth Ratio	27.6	28.1	25.6	26.3	22.3	21.8	41.1	35.3	36.3	27.3	17.5	16.6	37.2	37.5	37.1	31.7	26.5	18.6
Bankfull Entrenchment Ratio	2.0	1.9	2.0	2.0	2.1	2.1	2.2	2.3	2.3	2.7	3.4	3.5	2.6	2.5	2.5	2.9	3.1	3.8
Bankfull Bank Height Ratio	1.0	1.0	1.0	1.0	1.0	1.2	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.1
Cross Sectional Area between End Pins (ft ²)	44.9	46.9	47.5	46.1	50.3	49.4	68.7	75.0	74.1	72.1	68.3	67.8	47.7	49.0	48.4	44.1	45.9	43.8
d50 (mm)	N/A	47	14	38	50	16	N/A	8	1.4	0.062	0.062	0.062	N/A	44	18	51	43	23

N/A - Item does not apply.

Table 11a. Baseline Morphology & Hydraulic Monitoring Summary												
Glade Creek / Project No. 854 - Unnamed Tributary (264 feet)												
Dimension	Cross-Section 7 Riffle						Cross-Section 8 Riffle					
	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
Record Elevation (datum) Used	2,604	2,604	2,604	2,604	2,604	2,604	2,602	2,602	2,602	2,602	2,602	2,602
Bankfull Width (ft)	17.3	17.5	17.7	16.9	16.0	15.3	18.9	19.1	18.1	18.5	17.8	12.4
Floodprone Width (ft)	33.5	33.5	33.5	33.5	33.5	33.5	41.8	41.8	41.8	41.8	41.8	41.8
Bankfull Mean Depth (ft)	0.8	0.7	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.8
Bankfull Max Depth (ft)	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.1	1.2	1.1
Bankfull Cross Sectional Area (ft ²)	13.2	13.0	13.4	12.4	12.0	10.6	12.7	13.0	12.2	12.1	11.7	10.2
Bankfull Width/Depth Ratio	22.7	23.6	23.4	23.1	21.4	21.8	28.3	28.1	27.0	28.4	26.9	15.2
Bankfull Entrenchment Ratio	1.9	1.9	1.9	2.0	2.1	2.2	2.2	2.2	2.3	2.3	2.4	3.4
Bankfull Bank Height Ratio	1.0	1.0	1.0	1.0	1.0	1.3	1.0	1.0	1.0	1.0	1.0	1.3
Cross Sectional Area between End Pins (ft ²)	13.2	13.0	13.4	12.4	12.0	10.6	12.7	13.0	12.2	12.1	11.7	10.2
d50 (mm)	N/A	33	16	28	25	23	N/A	38	6	35	41	28

N/A - Item does not apply.

**Table 11b. Monitoring Data - Stream Reach Data Summary
Glade Creek / Project No. 854 - Glade Creek (2,558 feet)**

Parameter	Baseline						MY - 1						MY - 2						MY - 3						MY - 4						MY - 5					
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
Bankfull Width (ft)	35.2	43.2	44.9	47.7	5.91	4	36.3	43.9	45.3	48.8	5.67	4	34.9	44.1	45.0	51.3	7.11	4	34.8	41.0	41.4	46.5	5.78	4	33.50	38.15	36.50	46.10	5.64	4	28.6	33.7	32.7	40.7	5.07	4
Floodprone Width (ft)	68.8	89.1	89.0	109.4	22.48	4	68.8	89.1	89.0	109.4	22.48	4	68.8	89.1	89.2	109.0	22.47	4	68.8	89.1	89.0	109.4	22.48	4	68.80	89.05	89.00	109.40	22.48	4	68.8	89.1	89.0	109.4	22.48	4
Bankfull Mean Depth (ft)	0.9	1.2	1.2	1.3	0.19	4	0.9	1.2	1.2	1.3	0.19	4	0.9	1.2	1.2	1.4	0.22	4	0.9	1.2	1.3	1.3	0.19	4	1.10	1.40	1.45	1.60	0.24	4	1.1	1.4	1.4	1.5	0.19	4
Bankfull Max Depth (ft)	1.7	1.8	1.9	1.9	0.10	4	1.9	1.9	1.9	1.9	0.00	4	1.9	1.9	1.9	1.9	0.00	4	1.8	1.9	2.0	2.0	0.10	4	1.90	2.33	2.25	2.90	0.43	4	1.8	2.3	2.3	2.8	0.42	4
Bankfull Cross-Sectional Area (ft ²)	41.6	49.1	46.3	62.2	9.08	4	45.6	51.4	48.0	64.1	8.58	4	45.9	51.4	48.0	63.9	8.38	4	42.4	48.0	45.1	59.5	7.80	4	41.00	49.43	48.10	60.50	8.30	4	35.7	45.8	46.6	54.4	8.02	4
Width/Depth Ratio	27.6	39.0	36.9	54.7	11.34	4	28.1	38.3	36.4	52.2	10.11	4	25.6	38.9	36.3	57.4	13.34	4	26.3	35.7	34.0	48.4	9.42	4	22.30	29.80	30.80	35.30	6.47	4	18.6	25.1	25.8	30.4	5.84	4
Entrenchment Ratio	1.5	2.1	2.2	2.6	0.47	4	1.5	2.0	2.1	2.5	0.43	4	1.5	2.0	2.1	2.5	0.41	4	1.5	2.2	2.2	2.9	0.59	4	1.50	2.40	2.50	3.10	0.74	4	1.7	2.8	2.8	3.8	1.01	4
Bank Height Ratio	1.0	1.0	1.0	1.0	0.00	4	1.0	1.0	1.0	1.0	0.00	4	1.0	1.0	1.0	1.0	0.00	4	0.0	0.8	1.0	1.0	0.50	4	1.00	1.00	1.00	1.00	0.00	4	1.0	1.1	1.2	1.2	0.00	4
Profile																																				
Riffle Length (ft)	14.6	35.3	31.8	54.9	13.12	18	11.0	30.2	25.4	58.0	14.94	19	8.3	27.4	23.5	52.3	14.7	18	13.2	30.4	28.1	57.2	15.1	19	7.1	47.4	43.0	97.9	21.7	16	12.6	47.0	47.5	75.4	15.4	16
Riffle Slope (ft/ft)	0.002	0.011	0.010	0.025	0.006	18	0.002	0.010	0.010	0.020	0.005	19	0.002	0.011	0.012	0.020	0.005	18	0.001	0.010	0.010	0.023	0.006	19	0.001	0.011	0.010	0.024	0.008	16	0.001	0.010	0.010	0.021	0.007	16
Pool Length (ft)	7.2	41.7	44.6	74.9	22.75	30	7.7	40.2	43.1	76.8	23.59	30	7.8	41.1	44.8	76.3	23.6	30	6.7	42.2	44.3	90.7	25.0	30	6.4	39.4	32.7	104.5	27.4	28	5.7	45.9	43.3	131.5	33.4	27
Pool Max Depth (ft)	3.2	4.1	4.1	5.6	0.65	31	2.8	4.0	3.9	5.4	0.65	30	2.5	3.7	3.6	4.9	0.6	30	2.7	3.9	3.9	5.2	0.7	30	2.9	4.2	4.2	5.6	0.7	28	2.8	4.1	4.1	5.5	0.7	27
Pool Spacing (ft)	10.7	84.5	98.5	162.5	51.03	29	9.3	84.2	81.2	155.4	53.03	29	11.3	84.4	84.8	170.3	53.3	29	9.8	81.2	91.9	172.6	54.1	30	8.1	91.4	98.3	213.1	63.7	27	7.0	94.5	99.5	256.0	67.1	26
Pattern																																				
Channel Belt Width (ft)	59.3	76.7	74.5	92.1	11.22	12																														
Radius of Curvature (ft)	41.7	57.9	50.3	101.0	17.81	15																														
Rc: Bankfull Width (ft/ft)	0.84	0.92	0.92	1.00	N/A	2																														
Meander Wavelength (ft)	163.9	223.6	230.7	259.1	28.34	13																														
Meander Width Ratio	1.6	1.8	1.7	2.1	0.26	4																														
Additional Reach Parameters																																				
Rosgen Classification	C						C4						C4						C4						C4											
Channel Thalweg Length (ft)	2,548						2,558						2,555						2,556						2,556						2,558					
Sinuosity (ft)	1.17						1.18						1.18						1.18						1.18											
Water Surface Slope (Channel) (ft/ft)	0.0055						0.0054						0.0053						0.0053						0.0054						0.0054					
Bankfull Slope (ft/ft)	0.0050						0.0050						0.0052						0.0054						0.0055						0.0054					
Ri% / Ru% / P% / G% / S%	25%	9%	49%	16%	2%		23%	12%	48%	15%	2%		20%	11%	49%	17%	3%		23%	12%	50%	12%	3%		30%	11%	44%	12%	3%		30%	9%	49%	9%	2%	
SC% / SA% / G% / C% / B% / Be%*							1%	14%	65%	20%	<1%	0%	10%	24%	47%	19%	0%	0%	9%	23%	50%	17%	0%	0%	19%	9%	52%	19%	0%	0%	13%	24%	47%	16%	0%	0%
d16 / d35 / d50 / d84 / d95 (mm)													0.504	7.25	21.75	78.25	125		13.2	27.5	40.5	72.75	108.3		18.5	32.5	42.25	78.75	125		18.5	32.5	42.25	78.75	125	
% of Reach with Eroding Banks	0%						0%						0%						0%						1%											
Channel Stability or Habitat Metric	N/A						N/A						N/A						N/A						N/A											
Biological or Other	N/A						N/A						N/A						N/A						N/A											

N/A - Information does not apply.
 Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step
 SC = Silt-Clay / SA = Sand / G = Gravel / C = Cobble / B = Boulder / Be = Bedrock
 *Percentages based on riffle and pool pebble counts.

**Table 11b. Monitoring Data - Stream Reach Data Summary
Glade Creek / Project No. 854 - Unnamed Tributary (265 feet)**

Parameter	Baseline						MY - 1						MY - 2						MY - 3						MY - 4						MY - 5														
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n									
Bankfull Width (ft)	17.3	18.1	18.1	18.9	N/A	2	17.5	18.3	18.3	19.1	N/A	2	17.7	17.9	17.9	18.1	N/A	2	16.9	17.7	17.7	18.5	N/A	2	16.0	16.9	16.9	17.8	N/A	2	12.4	13.9	13.9	15.3	N/A	2									
Floodprone Width (ft)	33.5	37.7	37.7	41.8	N/A	2	33.5	37.7	37.7	41.8	N/A	2	33.5	37.7	37.7	41.8	N/A	2	33.5	37.7	37.7	41.8	N/A	2	33.5	37.7	37.7	41.8	N/A	2	0.7	20.1	17.8	41.8	N/A	2									
Bankfull Mean Depth (ft)	0.7	0.8	0.8	0.8	N/A	2	0.7	0.7	0.7	0.7	N/A	2	0.7	0.8	0.8	0.8	N/A	2	0.7	0.7	0.7	0.7	N/A	2	0.7	0.7	0.7	0.7	N/A	2	0.7	0.8	0.8	0.8	N/A	2									
Bankfull Max Depth (ft)	1.2	1.3	1.3	1.3	N/A	2	1.2	1.2	1.2	1.2	N/A	2	1.2	1.2	1.2	1.2	N/A	2	1.1	1.2	1.2	1.2	N/A	2	1.2	1.2	1.2	1.2	N/A	2	1.1	1.2	1.2	1.2	N/A	2									
Bankfull Cross-Sectional Area (ft ²)	12.7	13.0	13.0	13.2	N/A	2	13.0	13.0	13.0	13.0	N/A	2	12.2	12.8	12.8	13.4	N/A	2	12.1	12.3	12.3	12.4	N/A	2	11.7	11.9	11.9	12.0	N/A	2	10.2	10.4	10.4	10.6	N/A	2									
Width/Depth Ratio	22.7	25.5	25.5	28.3	N/A	2	23.6	25.9	25.9	28.1	N/A	2	23.4	25.2	25.2	27.0	N/A	2	23.1	25.8	25.8	28.4	N/A	2	21.4	24.2	24.2	26.9	N/A	2	15.2	18.5	18.5	21.8	N/A	2									
Entrenchment Ratio	1.9	2.1	2.1	2.2	N/A	2	1.9	2.1	2.1	2.2	N/A	2	1.9	2.1	2.1	2.3	N/A	2	2.0	2.2	2.2	2.3	N/A	2	2.1	2.3	2.3	2.4	N/A	2	2.2	2.7	2.7	3.1	N/A	2									
Bank Height Ratio	1.0	1.0	1.0	1.0	N/A	2	1.0	1.0	1.0	1.0	N/A	2	1.0	1.0	1.0	1.0	N/A	2	1.0	1.0	1.0	1.0	N/A	2	1.0	1.0	1.0	1.0	N/A	2	1.3	1.3	1.3	1.3	N/A	2									
Profile																																													
Riffle Length (ft)	5.8	10.3	10.3	14.6	4.0	6	3.6	10.1	10.5	16.0	4.9	6	6.18	11.1	10.1	19.2	4.4	6	3.2	10.5	11.8	19.1	6.0	6	7.5	12.3	12.2	15.6	3.1	5	9.5	14.4	15.2	20.8	4.8	5									
Riffle Slope (ft/ft)	0.001	0.017	0.015	0.034	0.011	6	0.001	0.013	0.011	0.024	0.009	6	0.003	0.013	0.016	0.021	0.008	6	0.002	0.012	0.009	0.031	0.011	6	0.004	0.010	0.011	0.014	0.004	5	0.007	0.017	0.011	0.034	0.012	5									
Pool Length (ft)	3.6	13.3	10.8	29.5	8.5	9	3.2	13.4	14.1	26.8	7.8	9	3.1	12.2	12.5	26.8	7.2	9	2.4	12.7	13.1	25.8	7.8	9	2.9	13.7	13.8	27.7	7.9	9	4.5	12.7	10.1	24.5	6.6	9									
Pool Max Depth (ft)	1.8	2.7	2.6	3.4	0.5	7	2.1	2.7	2.6	3.3	0.4	6	2.2	2.6	2.5	2.9	0.3	6	1.8	2.6	2.7	3.3	0.5	8	2.0	2.8	2.9	3.6	0.5	8	2.1	2.6	2.4	3.5	0.5	8									
Pool Spacing (ft)	5.5	34.1	31.5	59.8	20.8	7	5.3	30.7	35.2	54.6	17.4	8	5.1	30.2	31.5	57.3	17.8	8	6.6	31.0	31.0	53.4	16.3	8	6.6	30.5	30.8	51.9	16.1	8	3.5	29.8	29.9	53.8	17.2	8									
Pattern																																													
Channel Belt Width (ft)	28.6	34.3	36.1	37.1	3.5	5																																							
Radius of Curvature (ft)	17.1	19.8	19.5	22.5	2.2	5																																							
Rc: Bankfull Width (ft/ft)	N/A	N/A	N/A	N/A	N/A	N/A																																							
Meander Wavelength (ft)	66.4	77.7	82.7	83.9	9.8	3																																							
Meander Width Ratio	1.9	2.0	2.0	2.1	N/A	N/A																																							
Additional Reach Parameters																																													
Rosgen Classification	C						C4						C4						C4						C4																				
Channel Thalweg Length (ft)	263						264						264						269						271						270														
Sinuosity (ft)	1.17						1.18						1.18						1.20						1.20																				
Water Surface Slope (Channel) (ft/ft)	0.0064						0.0068						0.0068						0.0051						0.0071						0.0082														
Bankfull Slope (ft/ft)	0.0058						0.0066						0.0066						0.0065						0.0051						0.0071														
Ri% / Ru% / P% / G% / S%	24%	11%	47%	16%	2%		24%	15%	47%	12%	2%		26%	14%	43%	15%	3%		25%	14%	46%	12%	2%		24%	14%	48%	13%	2%		29%	14%	45%	11%	1%										
SC% / SA% / G% / C% / B% / Be%*							0%	8%	81%	11%	0%	0%	7%	29%	48%	16%	0%	0%	3.4%	20.0%	60.6%	15.5%	0.5%	0.0%	1%	11%	67%	20%	1%	0%	2%	16%	72%	10%	0%	0%									
d16 / d35 / d50 / d84 / d95 (mm)													0.215	3.05	11.0	65.0	114.0							9.15	22.0	31.5	66.0	107.0							5.1	21.5	33.0	70.0	103.0						
% of Reach with Eroding Banks	0%						0%						0%						0%						3%						3%														
Channel Stability or Habitat Metric	N/A						N/A						N/A						N/A						N/A						N/A														
Biological or Other	N/A						N/A						N/A						N/A						N/A						N/A														

N/A - Information does not apply.
 Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step
 SC = Silt-Clay / SA = Sand / G = Gravel / C = Cobble / B = Boulder / Be = Bedrock
 *Percentages based on riffle and pool pebble counts.

Appendix E

Hydrologic Data

Table 12. Verification of Bankfull Events Glade Creek / Project No. 854			
Date of Collection	Date of Occurrence	Method	Feet Above Average Bankfull Elevation
3/25/2013	1/18/2013	Crest gauge & wrack lines	1.7
10/31/2013	Unknown	Wrack Lines	NA
7/15/2014	Unknown	Crest gauge	0.26
11/19/2015	11/18/2015	Crest gauge & wrack lines	1.8

Table 13. Frequency of events greater than 18.59 feet at the Little River gauge near Sparta Glade Creek/ Project No. 854	
Year	Frequency of Events > 18.59 ft
2011	5
2012	1
2013	3
2014	0
2015	0
Grand Total	9

Plot of stage (feet) at the North Carolina Flood Warning Program gauge at Little River near Sparta

