

Mitigation Project Name Hudson Property
 DMS ID 95361
 River Basin Tar-Pamlico
 Cataloging Unit 03020104

County Beaufort
 Date Project Instituted 6/7/2012
 Date Prepared 8/10/2018

USACE Action ID 2012-01394
 NCDWR Permit No 2014-0422

Credit Release Milestone	Stream Credits						Wetland Credits							
	Scheduled Releases (Stream)	Warm	Cool	Cold	Anticipated Release Year (Stream)	Actual Release Date (Stream)	Scheduled Releases (Forested)	Riparian Riverine	Riparian Non-riverine	Non-riparian	Scheduled Releases (Coastal)	Coastal	Anticipated Release Year (Wetland)	Actual Release Date (Wetland)
Potential Credits (Mitigation Plan)	2,891,000													
Potential Credits (As-Built Survey)	2,891,000													
1 (Site Establishment)	N/A				N/A	N/A	N/A				N/A		N/A	N/A
2 (Year 0 / As-Built)	30%	867,300			2016	11/30/2016	30%						N/A	
3 (Year 1 Monitoring)	10%	289,100			2017	6/8/2017	10%						N/A	
4 (Year 2 Monitoring)	10%	289,100			2018	8/10/2018	10%						N/A	
5 (Year 3 Monitoring)	10%				2019		15%						N/A	
6 (Year 4 Monitoring)	5%				2020		5%						N/A	
7 (Year 5 Monitoring)	10%				2021		15%						N/A	
8 (Year 6 Monitoring)	5%				2022		5%						N/A	
9 (Year 7 Monitoring)	10%				2023		10%						N/A	
Stream Bankfull Standard	10%	289,100			2018	8/10/2018	N/A				N/A			
Total Credits Released to Date		1,734,600												

DEBITS (released credits only)

	Ratios															
	1	1.5	2.5	5	1	3	2	5	1	3	2	5	1	3	2	5
	Stream Restoration	Stream Enhancement I	Stream Enhancement II	Stream Preservation	Riparian Restoration	Riparian Creation	Riparian Enhancement	Riparian Preservation	Nonriparian Restoration	Nonriparian Creation	Nonriparian Enhancement	Nonriparian Preservation	Coastal Marsh Restoration	Coastal Marsh Creation	Coastal Marsh Enhancement	Coastal Marsh Preservation
As-Built Amounts (feet and acres)	2,891,000															
As-Built Amounts (mitigation credits)	2,891,000															
Percentage Released	60%															
Released Amounts (feet / acres)	1,734,600															
Released Amounts (credits)	1,734,600															
NCDWR Permit	USACE Action ID	Project Name														
2005-0785	1999-301143	NCDOT TIP R-2510 - Washington Bypass	867,300													
2005-0785	1999-301143	NCDOT TIP R-2510 - Washington Bypass	289,100													
2005-0785	1999-301143	NCDOT TIP R-2510 - Washington Bypass	578,200													
Remaining Amounts (feet / acres)	0.000															
Remaining Amounts (credits)	0.000															

Contingencies (if any): None


 Signature of Wilmington District Official Approving Credit Release

9/6/18
 Date

- 1 - For NCDMS, no credits are released during the first milestone
- 2 - For NCDMS projects, the second credit release milestone occurs automatically when the as-built report (baseline monitoring report) has been made available to the NCIRT by posting it to the NCDMS Portal, provided the following criteria have been met:
 - 1) Approval of the final Mitigation Plan
 - 2) Recordation of the preservation mechanism, as well as a title opinion acceptable to the USACE covering the property
 - 3) Completion of all physical and biological improvements to the mitigation site pursuant to the mitigation plan
 - 4) Receipt of necessary DA permit authorization or written DA approval for projects where DA permit issuance is not required
- 3 - A 10% reserve of credits is to be held back until the bankfull event performance standard has been met

Year 3 Monitoring Report FINAL

Hudson Property

DMS Project ID #: 95361

DMS Contract #: 004638

USACE Action ID# SAW-2012-01394

Beaufort County, North Carolina



Submitted: March 2019

Submitted to/Prepared for:

NC Department of Environment and Natural Resources

Division of Mitigation Services

1652 Mail Service Center

Raleigh, NC 27699-1652



Prepared by:

ALBEMARLE RESTORATIONS, LLC

P.O. Box 176

Fairfield, NC 27826

Tel (252) 333-0249 Fax (252) 926-9983



Ecotone, Inc.
410.420.2600 (P)
410.420.6983 (F)

January 8, 2019

Jeff Schaffer
State of North Carolina Environmental Quality Division of Mitigation Services
1652 Mail Service Center
Raleigh, NC 27699-1652

Re: Draft Year 3 Monitoring Report for Hudson Property Stream Restoration Project (95361)
Tar-Pamlico River Basin; CU 03020105; Beaufort County, NC
Contract No. 004638

Dear Mr. Schaffer:

This letter is in response to your comments concerning the review of the Draft Monitoring Year 3 Report and digital submittals. To aid in clarity, your comments are italicized below and followed by a response.

1. *The digital data and drawings have been reviewed and DMS has the following comments:*
 - a. *The shapefile labeled as Stream_TB_ALL is not projected in the correct Geographic Coordinate System (GCS_WGS_1983). Please revise to use NAD 1983 State Plane North Carolina (US Feet) as required by contract and stated in DMS's Format, Data Requirements, and Content Guidance for Electronic Drawings Submitted to EEP version 1.0 (03/27/08).*

A new shapefile has been created. "Stream_TB_ALL_NAD shows the correct projection.
 - b. *It is not clear what information the shapefile labeled Hudson_plots_poly_year2 is providing. Please explain.*

A new shapefile was created to replace this one to accurately show vegetative plot success criteria; this shapefile is Hudson_plots_poly.
 - c. *Appendix D: DMS did not find the digital file (spreadsheet and graphs) depicting the Cross-Sections with Annual Overlays. Please provide as required by contract and stated in DMS's Format, Data Requirements, and Content Guidance for Electronic Drawings Submitted to EEP version 1.0 (03/27/08).*

These cross-sections have been included with Appendix D digital files.
2. *Appendix D, Table 11 (all): DMS will review Table 11 for compliance with the guidance prepared by the Technical Workgroup sent out by the IRT regarding the method to be used to calculate Bank Height Ratio (BHR) once the digital Cross-Sections with Annual Overlays are provided per comment 1.c. above.*

Review is noted.

Thank you for your review of the project. Two hard copies (one electronic copy uploaded per DWR request) and a pdf copy with digital files is included with this submission. If you have any questions I can be reached at 410-420-2600 x 117 or mbrady@ecotoneinc.com.

Regards,

Marie V. Brady

Marie Brady
Ecologist

RECEIVED
JAN 15 2019
DIVISION OF
MITIGATION SERVICES

Table of Contents

1.0 Project Summary.....	1
2.0 Project Goals and Objectives.....	1
3.0 Project Success Criteria.....	1
3.1 Stream Restoration Performance Standards.....	1
3.2 Stream Channel Restoration Stability Performance Standards.....	2
3.3 Planted Vegetation Performance Standards.....	2
4.0 Site Conditions and Description.....	2
5.0 Mitigation Components.....	2
6.0 Design Approach.....	3
7.0 Construction and Planting Timeline.....	3
8.0 Plan Deviations.....	3
9.0 Project Performance.....	3
10.0 Methods and References.....	3
Figure 1 – Vicinity Map.....	4
Appendix A – Background Tables.....	5
Table 1. Project Components and Mitigation Credits.....	6
Table 2. Project Activity and Reporting History.....	7
Table 3. Project Contacts.....	7
Table 4. Project Information and Attributes.....	8
Appendix B – CCPV and Photos.....	9
Current Condition Plan View.....	10
Table 5. Visual Stream Morphology Stability Assessment (Reach 1-4).....	16
Table 6. Vegetation Condition Assessment Table.....	20
Site Photos.....	21
Appendix C – Vegetation Plot Data.....	23
Table 7: Vegetation Plot Counts and Densities.....	24
Appendix D – Stream Measurement and Geomorphology Data.....	26
Cross Sections with Annual Overlays (XS 1-11)	
Table 8: Bank Pin Data.....	38
Table 10a. Baseline Stream Data Summary (Reach 1-4).....	39
Table 11a. Monitoring Data – Dimensional Morphology Summary.....	44
Table 11b. Monitoring Data – Stream Reach Data Summary (Reach 1-4).....	44
Appendix E – Hydrologic Data.....	48
Table 9: Verification of Bankfull Events.....	49
Table 12: Verification of Baseflow.....	49
Figure 2: Monthly Rainfall Data with Percentiles.....	50
Figures 3-12: Stream Surface Water Hydrology (Well 1-10).....	51

1.0 PROJECT SUMMARY

The mitigation area is 13.49 acres located within a larger 106-acre property owned by Charles Hudson. It is located in Beaufort County, NC and the Tar-Pamlico River Basin. Mitigation components include five stream reaches totalling 2,891 linear feet contained within a Conservation Easement. Construction was completed in 2015 and planting completed in 2016. The first of seven monitoring years was initiated in 2016. Year 3 monitoring was completed in October 2018.

2.0 PROJECT GOALS AND OBJECTIVES

The project goals of the Hudson property per the approved mitigation plan are as follows:

- Improve and sustain hydrologic connectivity/interaction and storm flow/flood attenuation.
- Reduce nutrient and sediment stressors to the reach and receiving watershed.
- Provide uplift in water quality functions.
- Improve aquatic and terrestrial habitats (complexity, quality).
- Improve and maintain riparian buffer habitat.

The project goals will be addressed through the following project objectives:

- Implement a sustainable, reference-based, rehabilitation of the reach dimension, pattern, and profile to provide needed capacity and competency.
- Support the removal of barriers to anadromous fish movement and to help improve nursery and spawning habitats.
- Strategically install stream structures and plantings designed to maintain vertical and lateral stability and improve habitat diversity/complexity.
- Provide a sustainable and functional bankfull floodplain feature.
- Enhance and maintain hydrologic connection between stream and adjacent floodplain/riparian corridors.
- Utilize the additional width of the swamp runs to provide natural filters for sediment and nutrients and diffuse flow from upstream runoff.
- Install, augment, and maintain appropriate riparian buffer with sufficient density and robustness to support native forest succession.
- Water quality enhancement through riparian forest planting and woody material installation, and increased floodplain interaction/overbank flooding.
- Restore the existing ditched streams to single and multi-thread headwater systems with forested riparian buffers.
- Provide ecologically sound construction techniques that will require minimal grading and disturbance.

3.0 PROJECT SUCCESS CRITERIA

3.1 Stream Restoration Performance Standards

Single Thread Channels (Reaches 1 - 4) and Swamp Run (Reach 5)

Groundwater monitoring wells are installed in and near the thalweg of all five reaches. The wells are equipped with continuous-reading gauges capable of documenting sustained flow. Per the approved Mitigation Plan, each reach must exhibit water flow for at least 30 consecutive days during years with normal rainfall (demonstrating at least intermittent stream status). All restored channels shall receive sufficient flow through the

monitoring period to maintain an Ordinary High-Water Mark (OHWM). Field indicators of flow events include a natural line impressed on the bank; shelving; changes in soil characteristics; destruction of terrestrial vegetation; presence of litter and debris; wracking; vegetation matted down, bent or absent; sediment sorting; leaf litter disturbed or washed away; scour; deposition; bed and bank formation; water staining; or change in plant community. In addition, two overbank flows shall be documented for each reach during the monitoring period using continuously monitored pressure transducers and crest gauges. All collected data and field indicators of water flow shall be documented in each monitoring report. Seven flow monitoring stations are located on Reaches 1 – 4, three are located on Reach 5.

3.2 Stream Channel Restoration Stability Performance Standards

Headwater System (Reach 5)

All stream areas shall remain stable with no areas of excessive erosion such as evidence of bank sloughing or actively eroding banks due to the exceedance in critical bank height and lack of deep rooted stream bank vegetation.

Single Thread Channels (Reaches 1 - 4)

1. Bank Height Ratio (BHR) shall not exceed 1.2 within restored reaches of the stream channel.
2. Entrenchment Ratio (ER) shall be no less than 2.2 within restored reaches of the stream channel.
3. The stream project shall remain stable and all other performance standards shall be met through two separate bankfull events, occurring in separate years, during the 7-year post construction monitoring period.
4. Three bank pin arrays and 11 cross sections are located on Reaches 1 - 4

3.3 Planted Vegetation Performance Standards

1. At least 320 three-year-old planted stems/acre must be present after year three. At year five, density must be no less than 260 five-year-old planted stems/acre. At year 7, density must be no less than 210 seven-year-old planted stems/acre.
2. If this performance standard is met by year 5 and stem density is trending toward success (i.e., no less than 260 five-year-old stems/acre) monitoring of vegetation on the site may be terminated provided written approval is provided by the USACE in consultation with the North Carolina Interagency Review Team (NCIRT).
3. Thirteen vegetation plot samples are located within the project area.

4.0 SITE CONDITIONS AND DESCRIPTION

The Hudson property is 13.49 acres located in Beaufort County, NC and the Tar-Pamlico River Basin. The majority of the site is used for crop production, primarily corn, soybeans and wheat. As a result of the lowering of local water tables and in some cases the complete elimination of ground and surface water interaction, the degradation of water quality and downstream anadromous fish spawning and nursery habitat has occurred. Hydric soils are present on site, meaning that the pre-existing site conditions were appropriate for raising the water table and re-establishing normal base flow conditions (See Figure 1 -Vicinity Map).

5.0 MITIGATION COMPONENTS

Mitigation components are limited to five reaches: Reach 1: 833 lf; Reach 2: 532 lf; Reach 3: 445 lf; Reach 4: 437 lf; Reach 5: 644 lf, for a total restored stream footage of 2,891 linear feet (Table 1).

6.0 DESIGN APPROACH

A natural design approach was used to restore the natural sinuosity and flow of the headwater streams which existed prior to channelization. Grading was done to decrease sediment load and erosion rate while allowing for floodplain connectivity and storage for overland flow. Banks were graded down to distribute flow velocity and the banks and riparian buffers were planted to stabilize the channel and create habitat. A combination of Priority 1 and Priority II restoration types were used. Where the proposed channels tie into the existing, non-restored channels, Priority II restoration was used.

7.0 CONSTRUCTION AND PLANTING TIMELINE

Construction commenced in December 2014 with the installation of recommended erosion control practices and was completed in May 2015. Planting was officially concluded in early January 2016. (Table 2 – Project History Table)

8.0 PLAN DEVIATIONS

There were no significant deviations between construction plans and the As-built conditions.

9.0 PROJECT PERFORMANCE

The Hudson stream restoration project is currently meeting functional goals and objectives. Annual monitoring took place in October and revealed the presence of bankfull events, floodplain connectivity, and lateral and vertical stability. In-stream structures were observed to be functioning as intended with minimal scouring of the channel's banks or bed. Bankfull events were observed during Year 1, Year 2, and Year 3 monitoring. The site is meeting the bankfull standard for success. The entire length of the project is currently exhibiting fully vegetated banks with both herbaceous and woody plants. Overall, woody plantings within the riparian buffer are meeting project goals with some dieback of planted stems and introduction of other woody vegetation in 12 out of 13 vegetation monitoring plots. Year 1 Monitoring identified some areas where woody survivability was low; these areas were spot planted in December 2017. Stream gauges indicated base flow and bankfull events at 10 out of 10 locations. Bank pins could not be located due to dense vegetative growth; erosion is therefore assumed to be minimal given the vegetative stability of the reaches. Aggradation was noted on Reaches 2 and 3, however both reaches remain stable. Stream cross sections are meeting objectives in 11 out of 11 locations. A field meeting with NC Division of Mitigation Services and the USACE in June 2017, identified corrective measures necessary on Reach 5 to raise the stream invert to create a wider swamp run. Regrading was completed in October 2017. A field meeting with NC Division of Mitigation Services and the USACE in April 2018, identified two monitoring wells that required repair; repair was completed. No additional corrective measures are necessary; monitoring will continue as scheduled.

10.0 METHODS AND REFERENCES

Monitoring methodology did not differ from the approved Mitigation Plan. Cross-section dimensions were collected using standard survey methods. Vegetation assessment was done according to the Level 2 protocol specified by the Carolina Vegetation Survey. Hydrology monitoring wells were installed per ERDC TN-WRAP-00-02 "Installing Monitoring Wells/Piezometers in Wetlands" dated 2000. Groundwater levels were recorded using the U20-001-01 water level data loggers manufactured by Onset Computer. The loggers were installed in the wells per the manufacturer's instructions.

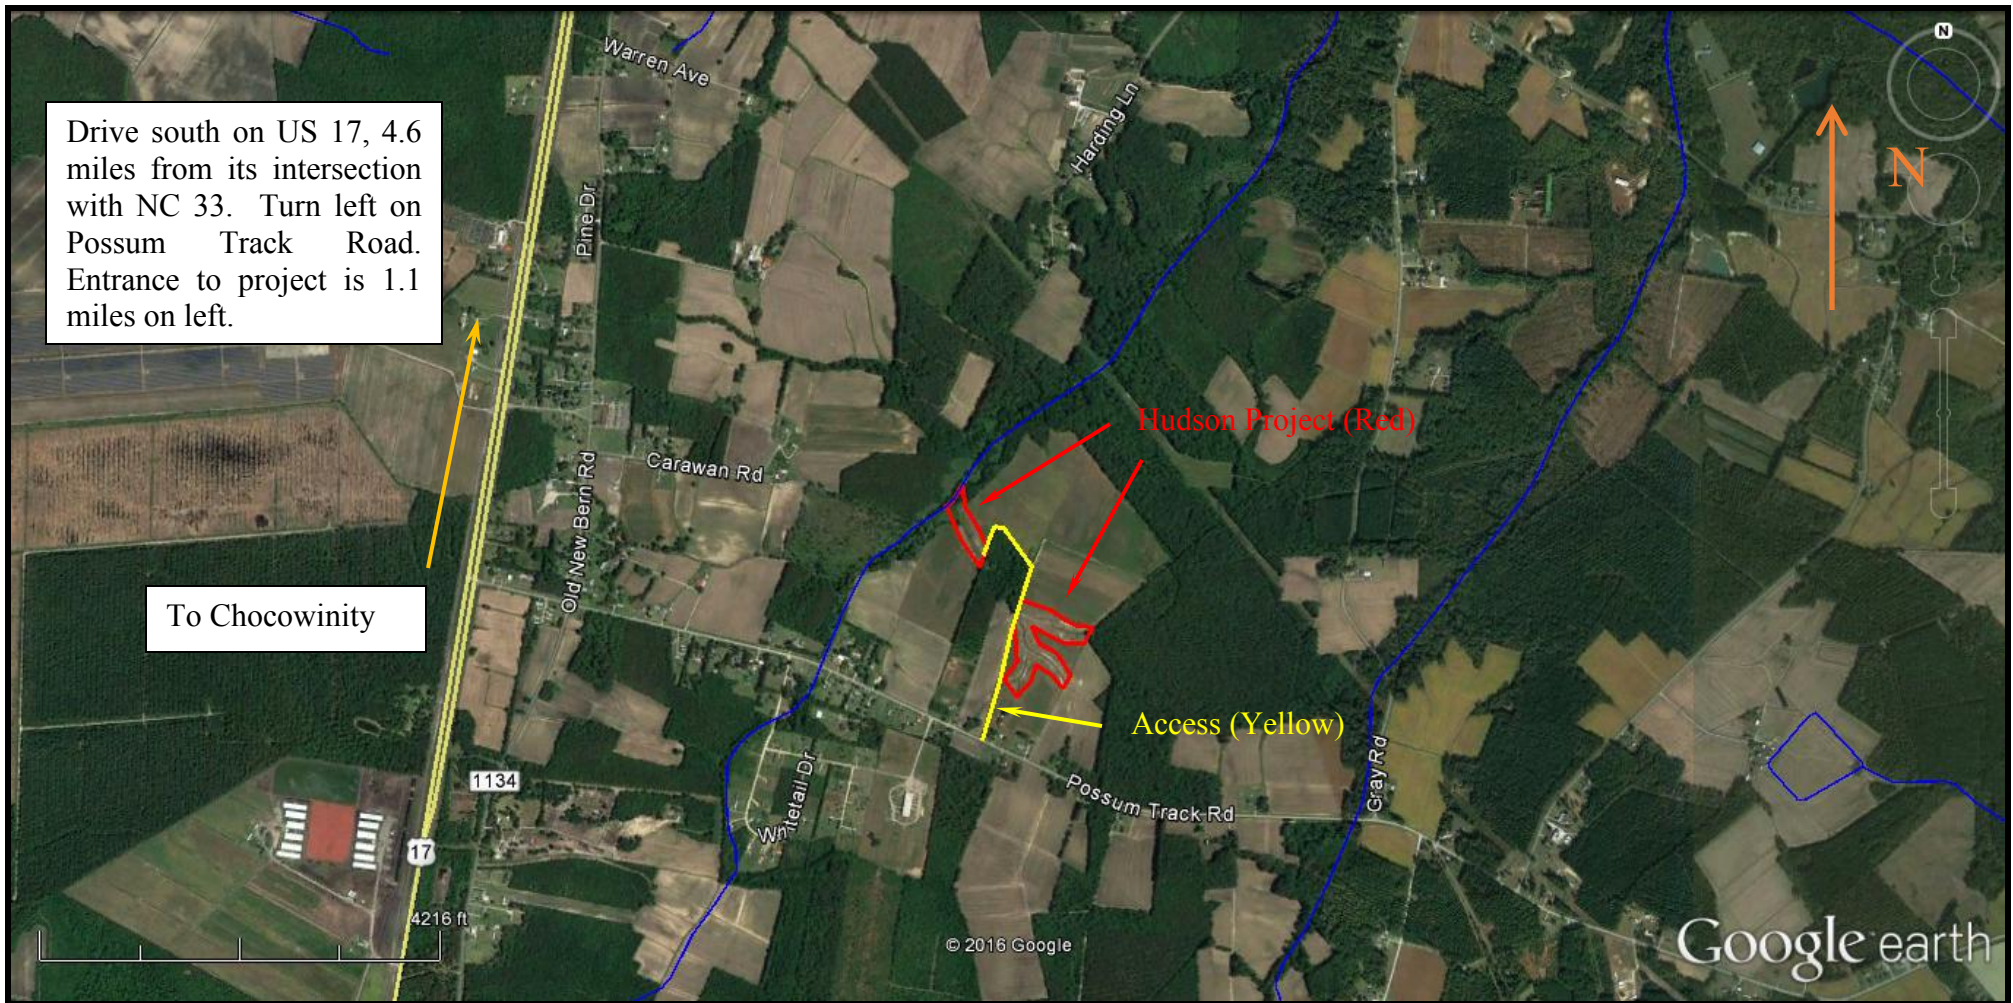


Figure 1 - Vicinity Map
Hudson Stream Mitigation Project
DMS Project #95361
Beaufort County, NC

APPENDIX A: PROJECT BACKGROUND TABLES

Table 1. Project Components and Mitigation Credits

Table 2. Project Activity and Reporting History

Table 3. Project Contacts

Table 4. Project Information and Attributes

Table 1: Project Components and Mitigation Credits Hudson Property, Beaufort County EEP Project Number: 95361									
Mitigation Credits									
	Stream		Riparian wetland		Non-riparian wetland		Buffer	Nitrogen Nutrient Offset	Phosphorous Nutrient Offset
Type	R	RE	R	RE	R	RE			
Totals	2,891								
Project Components									
Project Component or Reach ID	Stationing/Location		Existing Footage/Acreage		Approach (PI, PII etc.)		Restoration or Restoration Equivalent	Restoration Footage or Acreage	Mitigation Ratio
Reach 1			766 LF		PI			833 LF	1:1
Reach 2			516 LF		PI/PII			532 LF	1:1
Reach 3			611 LF		PI/PII			445 LF	1:1
Reach 4			503 LF		PI/PII			437 LF	1:1
Reach 5			689 LF		PI			644 LF	1:1
Total			3,085 LF					2,891 LF	
Component Summation									
Restoration Level	Stream (linear feet)		Riparian Wetland (acres)		Non-riparian Wetland (acres)		Buffer (square feet)	Upland (acres)	
			Riverine	Non-riverine					
Restoration	2,891 LF								
Enhancement									
Enhancement I									
Enhancement II									
Creation									
Preservation									
BMP Elements									
Element	Location				Purpose/Function		Notes		
FB	Adjacent to stream				Buffer		100 feet on either side of stream centerline		

Table 2: Project Activity and Reporting History Hudson Property- EEP Project Number 95361		
Activity, Deliverable, or Milestone	Data Collection Complete	Actual Completion or Delivery
Project Institution	N/A	June 2012
Mitigation Plan	July 2014	Oct 2014
Permits Issued	March 2013	May 2014
Final Design Construction	March 2013	May 2014
Construction	N/A	May 2015
Containerized, Bare Root, and B&B Planting	N/A	January 2016
Baseline Monitoring Document (Year 0 - Baseline)	January 2016	August 2016
Year 1 Monitoring	September 2016	Final: January 2017
Year 2 Monitoring	November 2017	Final: January 2018
Year 3 Monitoring	October 2018	Final: March 2019
Year 4 Monitoring		
Year 5 Monitoring		
Year 6 Monitoring		
Year 7 Monitoring		

Table 3: Project Contacts Hudson Property- EEP Project Number: 95361	
Primary Project Design POC	Ecotone, Inc. Scott McGill (410) 420-2600 P.O. Box 5, Jarrettsville, MD 21084
Construction Contractor POC	Riverside Excavation, Inc. Car Baynor (252) 943-8633
Survey Contractor POC	True Line Surveying Curk Lane (919) 359-0427
Planting and Seeding Contractor POC	Carolina Silvics, Inc. Mary Margaret McKinney (252) 482-8491 908 Indian Trail Road, Edenton, NC 27932
Seed Mix Sources	Ernst Conservation Seeds, LLP, Meadville, PA
Nursery Stock Suppliers	Carolina Silvics, Inc.
Monitoring Performers Stream and Vegetation POC	Ecotone, Inc. Scott McGill (410) 420-2600 P.O. Box 5, Jarrettsville, MD 21084

Table 4: Project information					
Hudson Property- EEP Project Number: 95361					
Project name		HUDSON PROPERTY			
County		BEAUFORT			
Project Area (ac)		13.4 AC			
Project Coordinates (Lat and Long)		77° 06" 13.62' W / 35° 26" 53.20' N			
4.1 Project Watershed Summary Information					
Physiographic province		INNER COASTAL PLAIN			
River basin		TAR-PAMLICO RIVER BASIN			
USGS Hydrologic Unit 8-digit	03020104	USGS Hydrologic Unit 14-digit	03020104010010		
DWQ Sub-basin		CHOCOWINITY CREEK – HORSE BRANCH			
Project Drainage Area (acres)		190.86			
Project Drainage Area Percentage of Impervious Area		1.2 % (2.24 acres)			
CGIA Land Use Classification		2.01.01.07 Annual Row Crop Rotation			
4.2 Reach Summary Information					
Parameters	Reach 1	Reach 2	Reach 3	Reach 4	Reach 5
Length of reach (linear feet)	766	516	611	503	689
Valley classification	VIII	VIII	VIII	VIII	VIII
Drainage area (acres)	40.51	74.63	35.21	150.35	190.86
NCDWR stream identification score	20.75	20.75	20.75	20.75	28
NCDWR Water Quality Classification	C;NSW	C;NSW	C;NSW	C;NSW	C;NSW
Morphological Description (stream type)	G5-G6	G5-G6	G5-G6	G5-G6	G5-G6
Evolutionary trend	Early (CEM)	Early (CEM)	Early (CEM)	Early (CEM)	Early (CEM)
Underlying mapped soils	GoA & CrB	CrB & Ly	CrB & Ly	CrB	CrB & Me
Drainage class	MW	MW & SP	MW & SP	MW	MW & P
Soil Hydric status	Non-Hydric	Non-Hydric	Non-Hydric	Non-Hydric	Hydric
Slope (ft/ft)	0.009	0.006	0.008	0.004	0.003
FEMA classification	N/A	N/A	N/A	N/A	AE/X
Native vegetation community	Pasture/Crop	Pasture/Crop	Pasture/Crop	Pasture/Crop	Pasture/Crop
Percent composition of exotic invasive vegetation	N/A	N/A	N/A	N/A	N/A
4.3 Regulatory Considerations					
Regulation	Applicable?	Resolved?	Supporting Documents		
Waters of the United States – Section 404	YES	YES	Supporting Documents		
Waters of the United States – Section 401	YES	YES	SAW-2012-01394		
Endangered Species Act	NO	YES	NA		
Historic Preservation Act	NO	YES	NA		
Coastal Zone Management Act (CZMA)/ Coastal Area Management Act (CAMA)	NO	YES	NA		
FEMA Floodplain Compliance	NO	YES	NA		
Essential Fisheries Habitat	NO	YES	NA		


APPENDIX B: VISUAL ASSESSMENT DATA

Current Condition Plan View

Table 5. Visual Stream Morphology Stability Assessment (Reach 1-4)

Table 6. Vegetation Condition Assessment Table

Site Photos

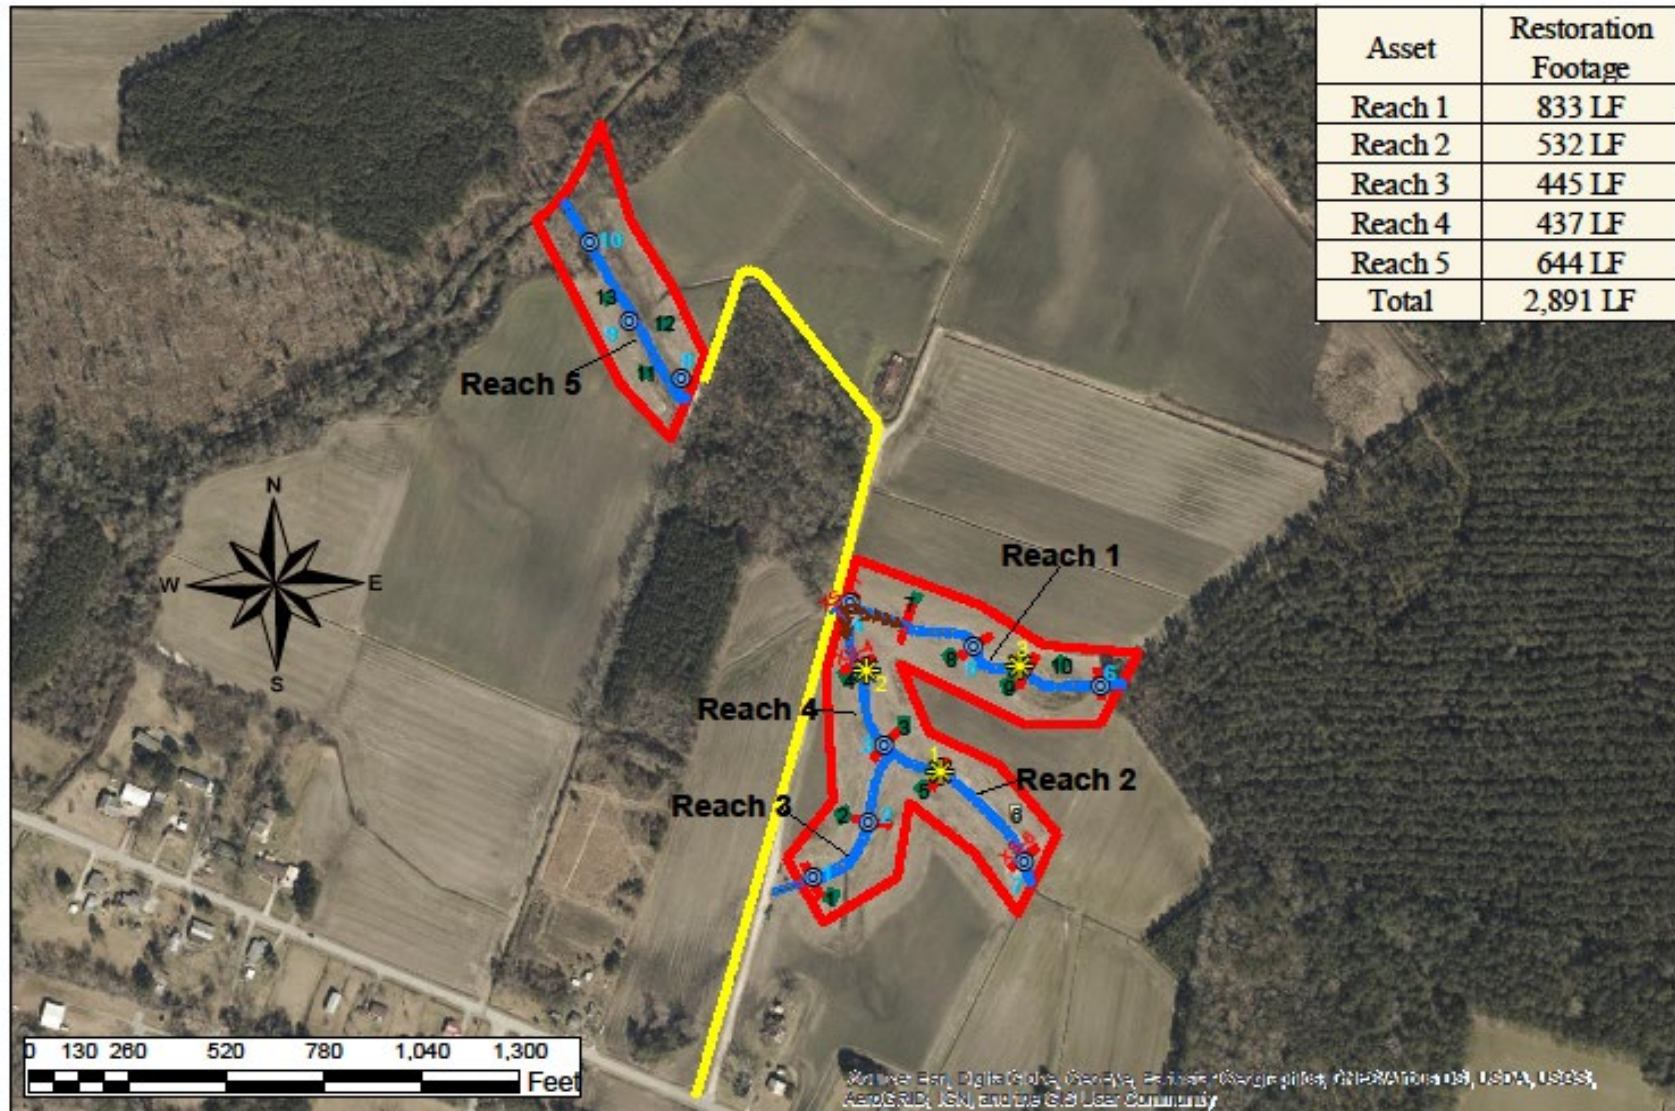


Asset	Restoration Footage
Reach 1	833 LF
Reach 2	532 LF
Reach 3	445 LF
Reach 4	437 LF
Reach 5	644 LF
Total	2,891 LF


Albemarle Restorations, LLC
 Wetland Restoration
 Stream Restoration
 Wildlife Habitat

Hudson Stream Restoration Project
Current Condition Plan View
 Project # 95361
 November 2, 2018

Flow Station	Cross Sections	Woody Riffles	Veg Plot Condition Criteria Met
Bank Pin Array	Access Road	Log Drops	Criteria Unmet
Top of Bank	Stream Centerline	Stream Gauges	In-stream Structure Condition - Stable
Easement Boundary	Hydrology Met		

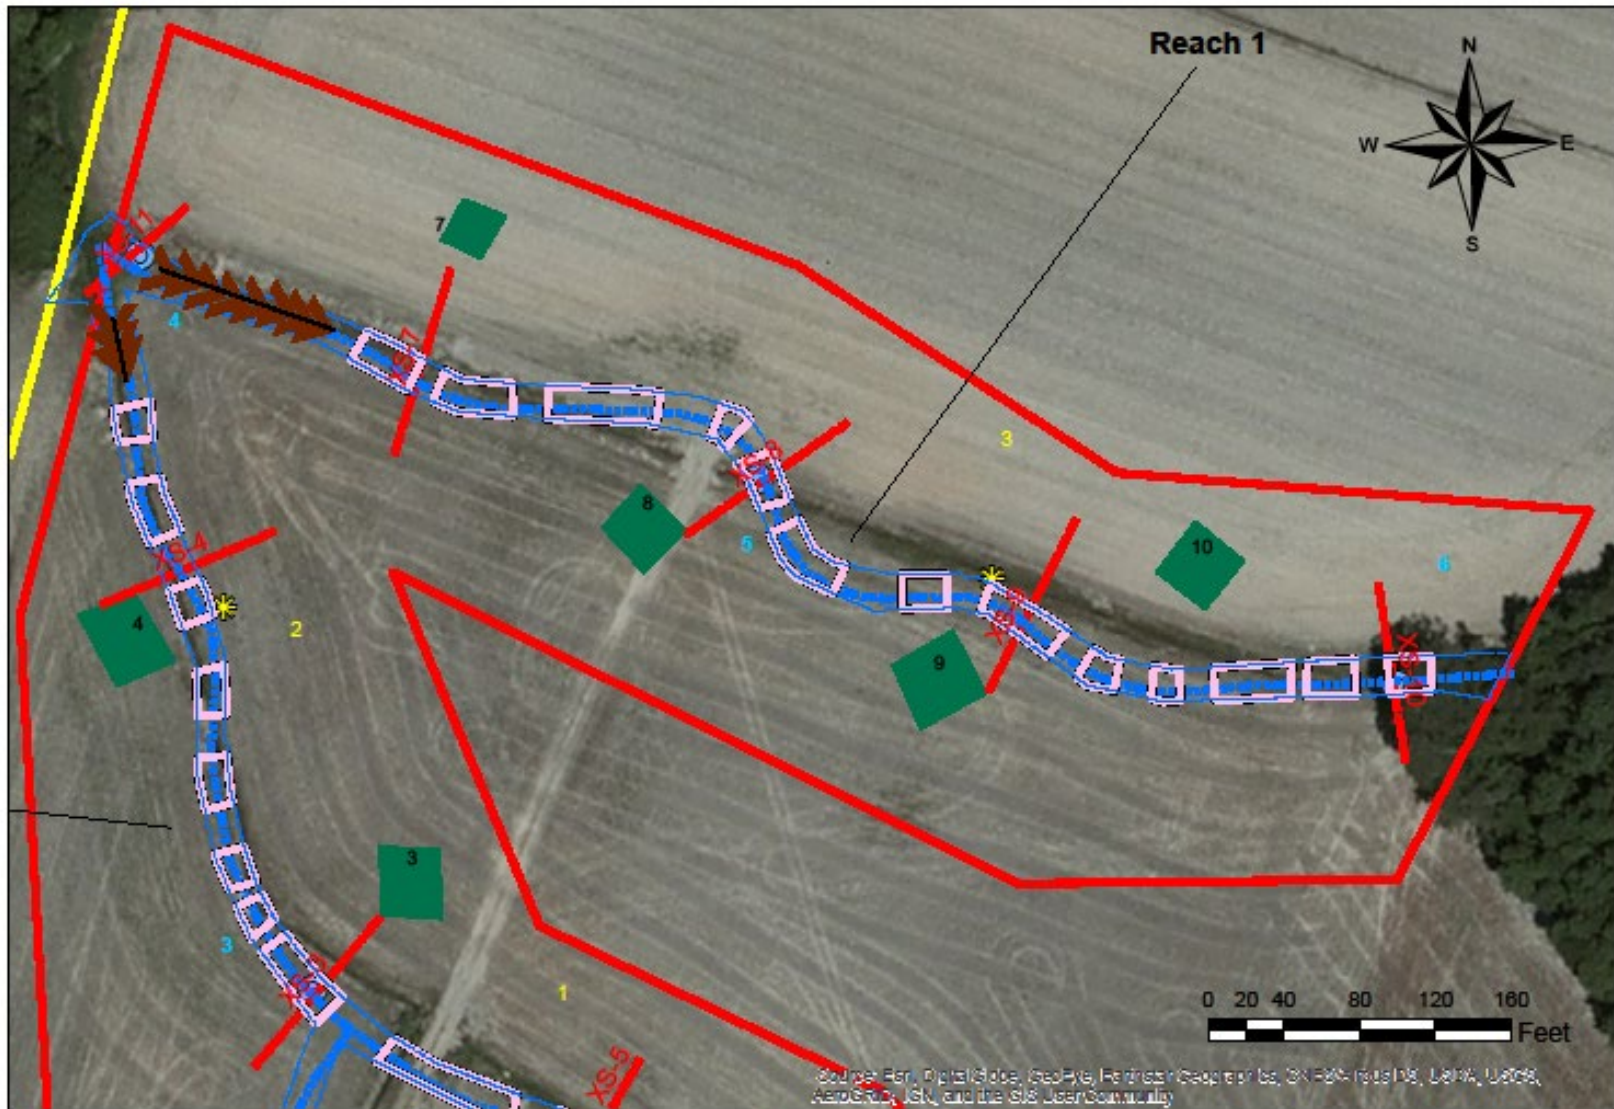


<p>Albemarle Restorations, LLC</p> <p><i>Wetland Restoration Stream Restoration Wildlife Habitat</i></p>	<p>Hudson Stream Restoration Project</p> <p>Current Condition Plan View</p> <p>Project # 95361 November 2, 2018</p>		<p>Top of Bank</p> <p>Woody Riffles</p> <p>Stream Centerline</p> <p>Easement Boundary</p> <p>Bank Pin Array</p>	<p>Cross Sections</p> <p>Access Road</p> <p>Flow Station</p>	<p>Log Drops</p> <p>Stream Gauges</p> <p>Hydrology Met</p>	<p>Veg Plot Condition</p> <p>Criteria Met</p> <p>Criteria Unmet</p> <p>In-stream Structure Condition</p> <p>Stable</p>
	<p><small>Source: Fern, DigitalGlobe, GeoEye, Earthstar (Google Earth), CNR/Airphoto, USDA, U.S.G.S, AeroGRID, IGN, and the GIS User Community</small></p>					

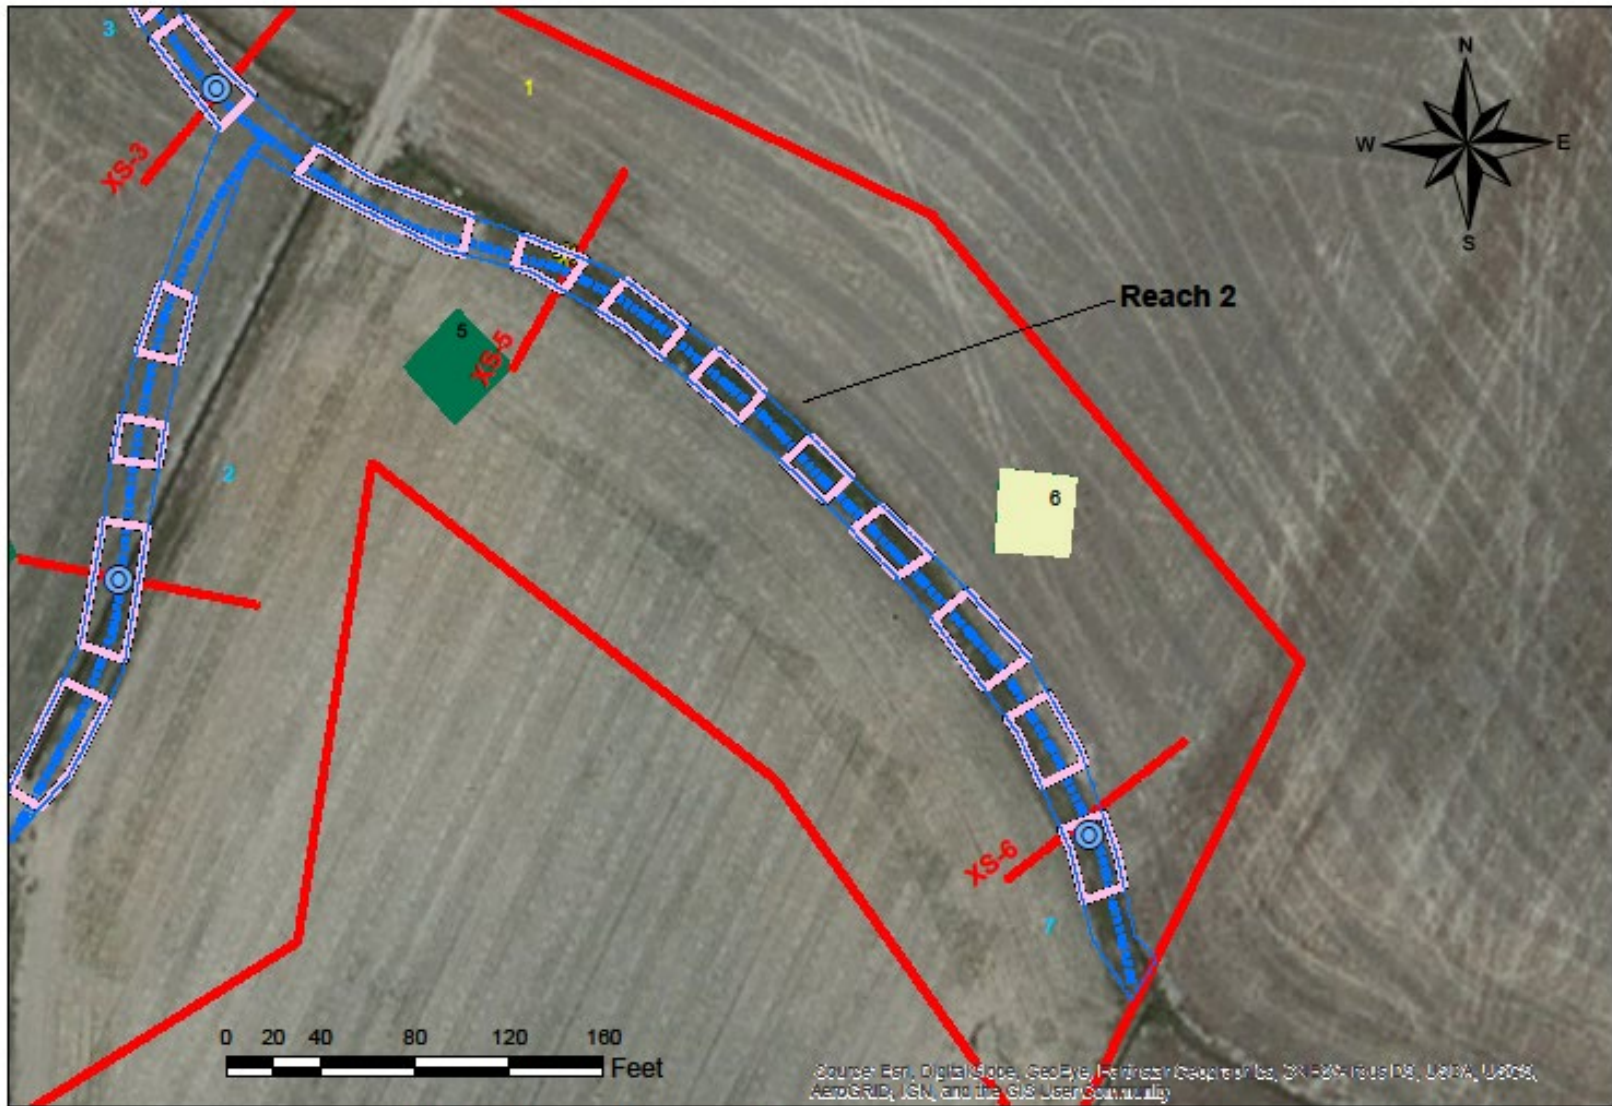


Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNR Aero/Imaging, USDA, USDA, AeroGRID, IGN, and the GIS User community


Albemarle Restorations, LLC Wetland Restoration Stream Restoration Wildlife Habitat	Hudson Stream Restoration Project Current Condition Plan View Project # 95361 November 2, 2018			Flow Station Top of Bank Woody Riffles Stream Centerline	Bank Pin Array Easement Boundary Cross Sections Access Road	Log Drops Stream Gauges Hydrology Met	Veg Plot Condition Criteria Met Criteria Unmet In-stream Structure Condition Stable
---	---	--	--	---	--	---	---

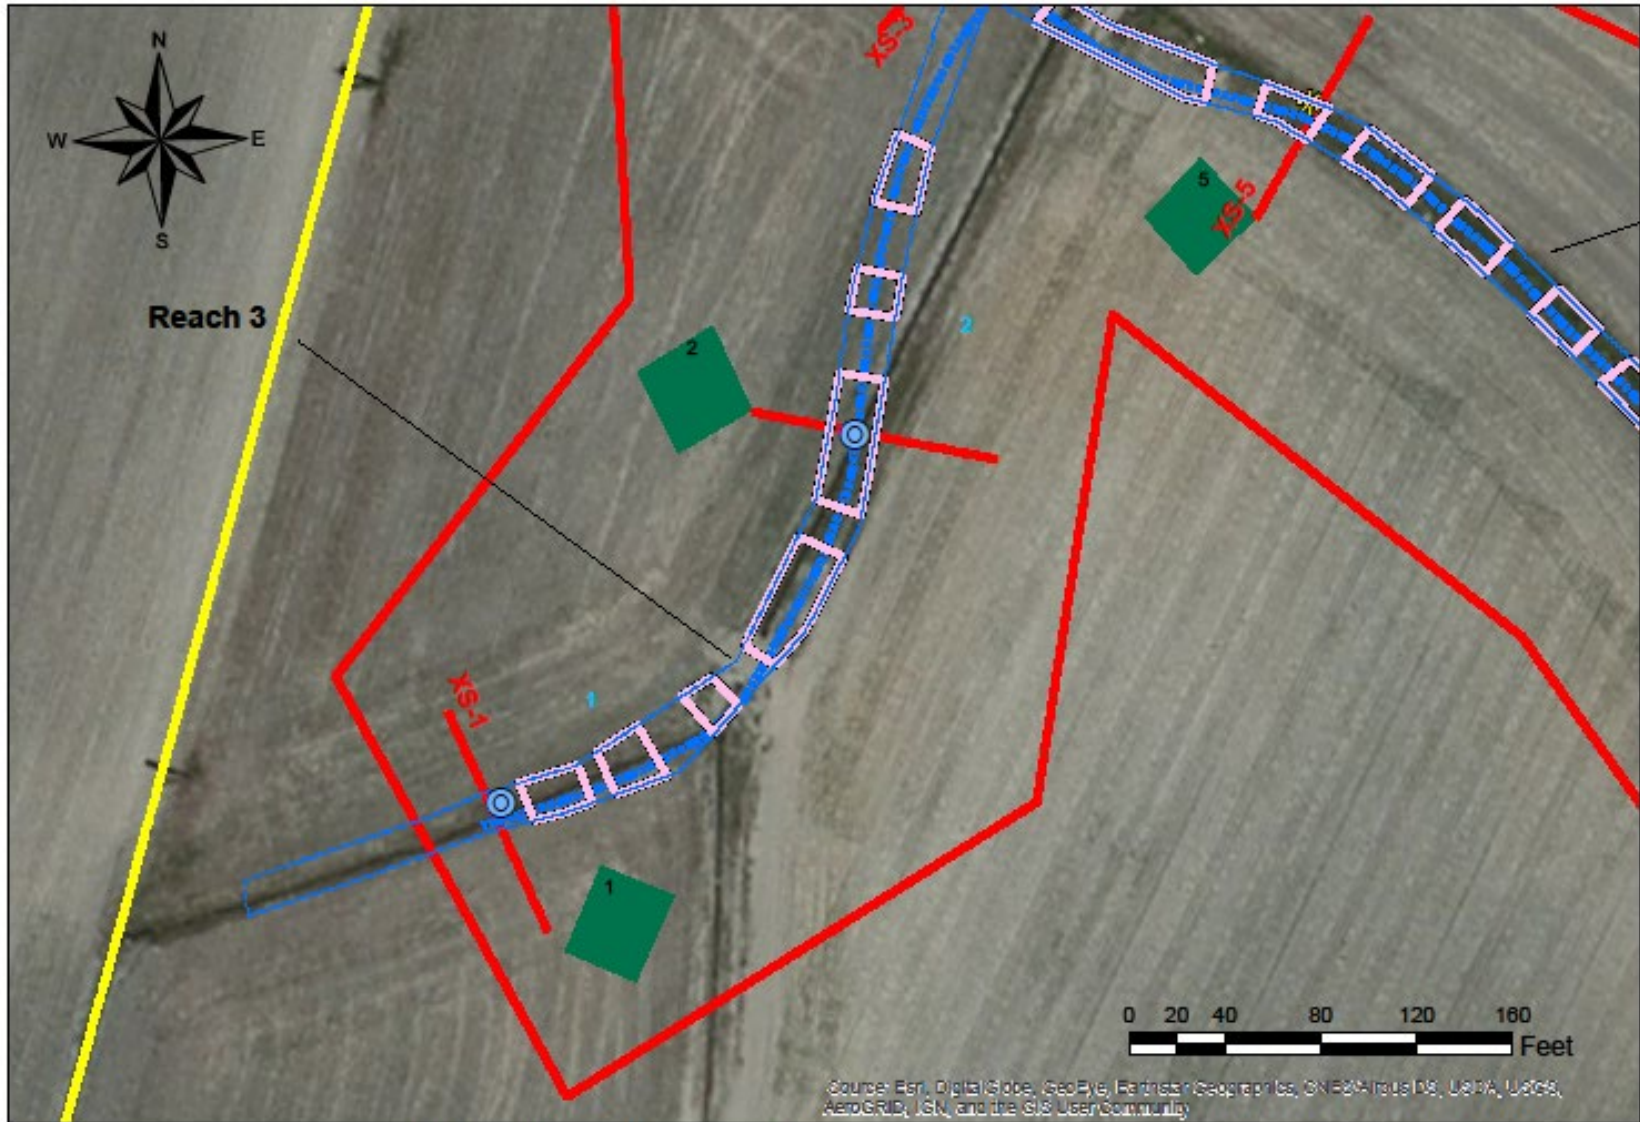

<p><i>Albemarle Restorations, LLC</i></p> <p><i>Wetland Restoration Stream Restoration Wildlife Habitat</i></p>	<p>Hudson Stream Restoration Project Current Condition Plan View</p> <p>Project # 95361 November 2, 2018</p>		<p>Flow Station</p> <p>Top of Bank</p> <p>Woody Riffles</p> <p>Stream Centerline</p>	<p>Bank Pin Array</p> <p>Easement Boundary</p> <p>Cross Sections</p> <p>Access Road</p>	<p>Log Drops</p> <p>Stream Gauges</p> <p>Hydrology Met</p>	<p>Veg Plot Condition</p> <p>Criteria Met</p> <p>Criteria Unmet</p> <p>In-stream Structure Condition</p> <p>Stable</p>
---	--	--	--	---	--	--

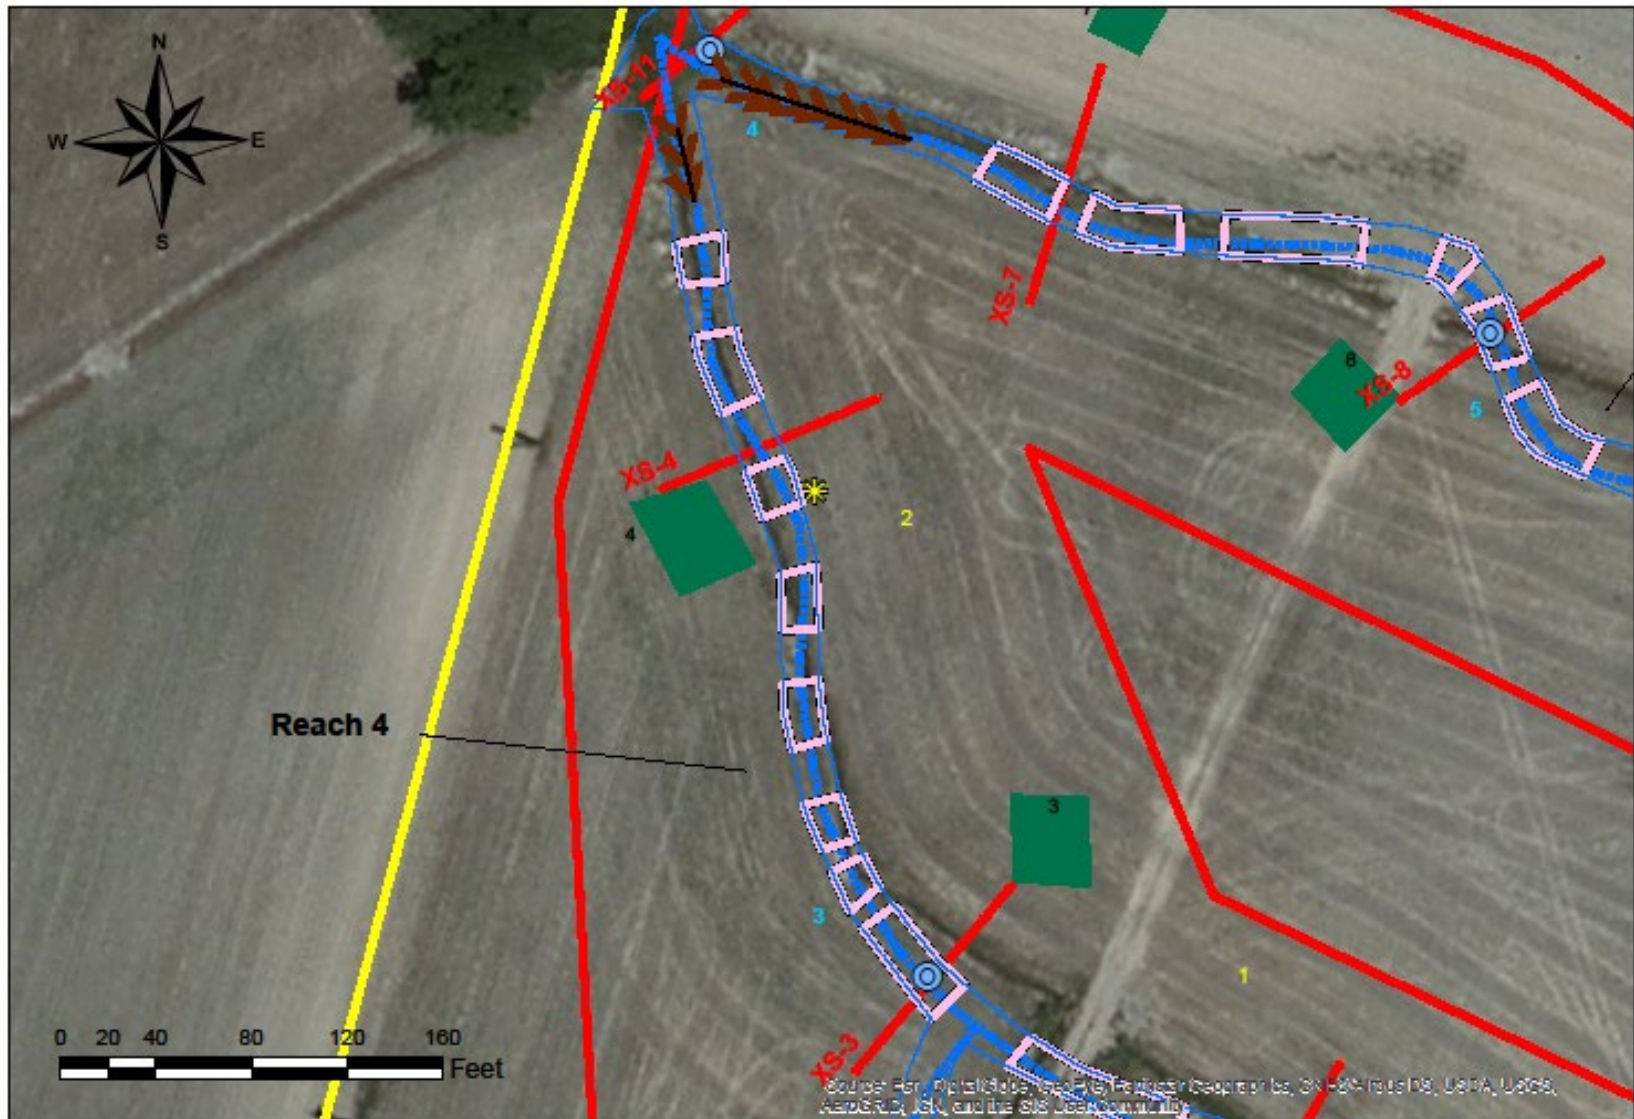

<p><i>Albemarle Restorations, LLC</i></p> <p><small>Wetland Restoration Stream Restoration Wildlife Habitat</small></p>	<p>Hudson Stream Restoration Project Current Condition Plan View</p> <p>Project # 95361 November 2, 2018</p>		<p>Flow Station</p> <p>Top of Bank</p> <p>Woody Riffles</p> <p>Stream Centerline</p>	<p>Bank Pin Array</p> <p>Easement Boundary</p> <p>Cross Sections</p> <p>Access Road</p>	<p>Log Drops</p> <p>Stream Gauges</p> <p>Hydrology Met</p>	<p>Veg Plot Condition</p> <p>Criteria Met</p> <p>Criteria Unmet</p> <p>In-stream Structure Condition</p> <p>Stable</p>
---	--	--	--	---	--	--

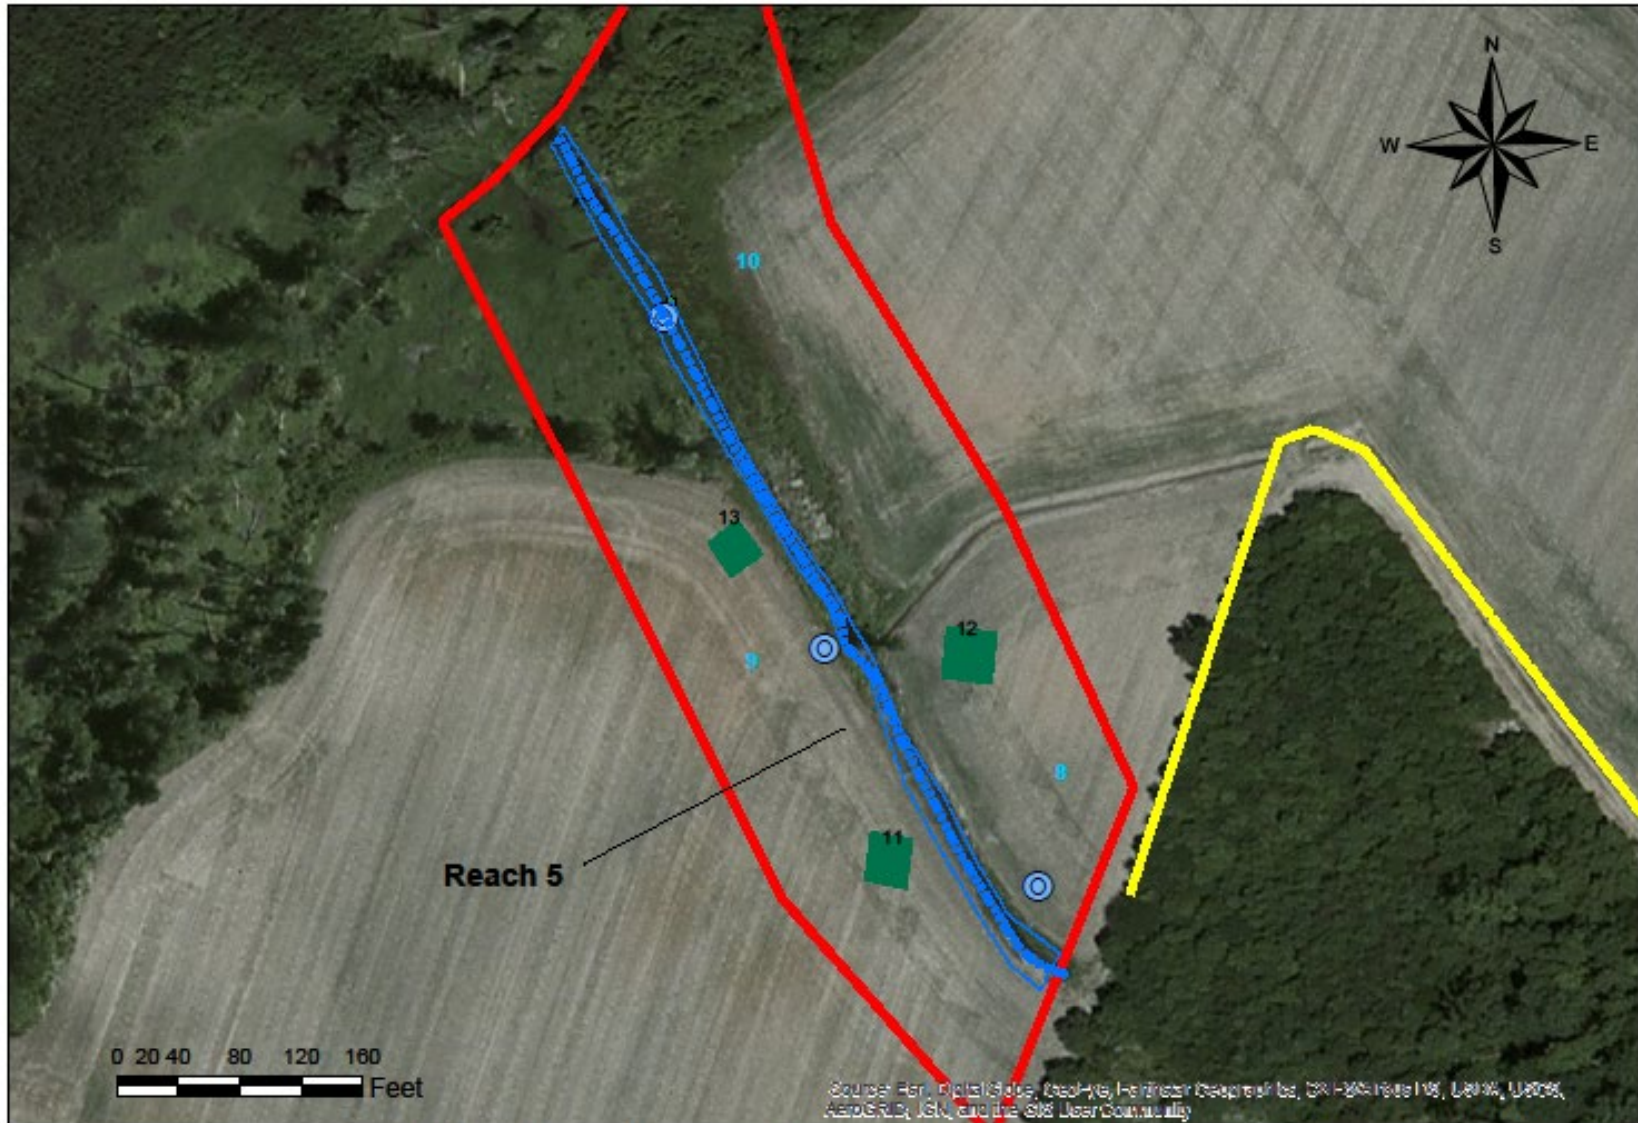

<p><i>Albemarle Restorations, LLC</i></p> <p><i>Wetland Restoration Stream Restoration Wildlife Habitat</i></p>	<p>Hudson Stream Restoration Project Current Condition Plan View</p> <p>Project # 95361 November 2, 2018</p>		<p>Top of Bank</p> <p>Woody Riffles</p> <p>Stream Centerline</p> <p>Easement Boundary</p> <p>Bank Pin Array</p>	<p>Cross Sections</p> <p>Access Road</p> <p>Flow Station</p>	<p>Log Drops</p> <p>Stream Gauges</p> <p>Hydrology Met</p>	<p>Veg Plot Condition</p> <p>Criteria Met</p> <p>Criteria Unmet</p> <p>In-stream Structure Condition</p> <p>Stable</p>
---	--	--	---	--	--	--

Table 5		Visual Stream Morphology Stability Assessment								
Reach ID		Reach 1								
Assessed Length		766								
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	13	13			100%			
		3. Meander Pool Condition								
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6)	5	5			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	5	5			100%			
4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	NA*	NA*			NA*				
	2. Thalweg centering at downstream of meander (Glide)	NA*	NA*			NA*				
Totals										
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%
Totals										
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	8	8			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	8	8			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	8	8			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	8	8			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	8	8			100%			

* Stream's narrow width, layout, and heavily vegetated banks make this attribute not applicable.

Table 5		Visual Stream Morphology Stability Assessment									
Reach ID		Reach 2									
Assessed Length		516									
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation	
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%				
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%				
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	9	9			100%				
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6)	3	3						100%
			2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	3	3						100%
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	NA*	NA*			NA*				
2. Thalweg centering at downstream of meander (Glide)		NA*	NA*			NA*					
Totals					0	0	100%	0	0	100%	
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%	
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%	
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%	
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	0	0			NA				
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	0	0			NA				
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	0	0			NA				
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	0	0			NA				
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	0	0			NA				

* Stream's narrow width, layout, and heavily vegetated banks make this attribute not applicable.

Table 5		Visual Stream Morphology Stability Assessment									
Reach ID		Reach 3									
Assessed Length		611									
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation	
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%				
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%				
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	7	7			100%				
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6)	3	3						100%
			2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	3	3						100%
		4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	NA*	NA*						NA*
	2. Thalweg centering at downstream of meander (Glide)		NA*	NA*			NA*				
Totals											
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%	
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%	
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%	
Totals											
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	0	0			NA				
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	0	0			NA				
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	0	0			NA				
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	0	0			NA				
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	0	0			NA				

* Stream's narrow width, layout, and heavily vegetated banks make this attribute not applicable.

Table 5		Visual Stream Morphology Stability Assessment									
Reach ID		Reach 4									
Assessed Length		503									
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation	
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%				
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%				
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	8	8			NA				
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6)	3	3						NA
			2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	3	3						NA
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	NA*	NA*			NA				
2. Thalweg centering at downstream of meander (Glide)		NA*	NA*			NA					
Totals					0	0	100%	0	0	100%	
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%	
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%	
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%	
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	3	3			NA				
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	3	3			NA				
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	3	3			NA				
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	3	3			NA				
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	3	3			NA				

* Stream's narrow width, layout, and heavily vegetated banks make this attribute not applicable.

Table 6		Vegetation Condition Assessment								
Planted Acreage	12.42									
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage				
1. Bare Areas	Very limited cover of both woody and herbaceous material.	0.1 acres	Pattern and Color	0	0	0.0%				
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY 3, 4 or 5 stem count criteria	0.1 acres	Pattern and Color	0	0	0.0%				
				Total:	0	0	0.0%			
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year	0.25 acres	Pattern and Color	0	0	0.0%				
				Cumulative Total:	0	0	0.0%			
Easement Acreage	13.5									
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage				
4. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale)	1000 sf	Pattern and Color	0	0	0.0%				
5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale)	none	Pattern and Color	0	0	0.0%				
No areas of concern are noted .										



Photo 1: Highly vegetated restoration area along Reach 2 - View North



Photo 2: View Upstream on Reach 1, Cross Section 9 – standing water and wetland vegetation in channel



Photo 3: View of Reach 5 downstream – area of previous corrective measures



Photo 4: View of vegetation plot

APPENDIX C: VEGETATION PLOT DATA

Table 7: Vegetation Plot Counts and Densities

Table 7: Vegetation Plot Counts and Densities

EEP Project Code 0004638. Project Name: Hudson			Current Plot Data (MY3 2018)																									
Scientific Name	Common Name	Species Type	0004638-01-0001			0004638-01-0002			0004638-01-0003			0004638-01-0004			0004638-01-0005			0004638-01-0006			0004638-01-0007			0004638-01-0008				
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T		
Acer rubrum	red maple	Tree																										
Baccharis halimifolia	eastern baccharis	Shrub																										
Ligustrum vulgare	European privet	Exotic																										
Liquidambar styraciflu	sweetgum	Tree			1			1					3			2											3	
Liriodendron tulipifera	tuliptree	Tree	1	1	2					2	2	2																
Morella cerifera	wax myrtle	shrub																									2	
Pinus echinata	shortleaf pine	Tree																										
Pinus taeda	loblolly pine	Tree			6					4			6			6			6								4	
Platanus occidentalis	American sycamore	Tree	3	3	3	4	4	4	4	4	4	4	3	3	3	2	2	2	2	2	2	2	6	6	6	5	5	5
Quercus alba	white oak	Tree	1	1	5	2	2	2				2	2	2														
Quercus bicolor	swamp white oak	Tree	4	4	4	2	2	2														4	4	4				
Quercus michauxii	swamp chestnut oak	Tree																								1	1	1
Quercus nigra	water oak	Tree											2	2	2											4	4	4
Quercus phellos	willow oak	Tree	2	2	2	1	1	3	2	2	2	5	5	5	5	5	5	5	5	5	5	3	3	3	4	4	2	
Taxodium distichum	bald cypress	Tree																										
Stem count			11	11	23	9	9	12	8	8	12	10	10	19	10	10	18	7	7	13	13	13	13	13	12	12	21	
size (ares)			1			1			1			1			1			1			1			1			1	
size (ACRES)			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02	
Species count			5	5	7	4	4	5	3	3	4	3	3	5	4	4	6	2	2	3	3	3	3	4	4	7		
Stems per ACRE			445	445	931	364	364	486	324	324	486	405	405	769	405	405	728	283	283	526	526	526	526	486	486	850		

EEP Project Code 0004638. Project Name: Hudson			Annual Means																										
Scientific Name	Common Name	Species Type	0004638-01-0009			0004638-01-0010			0004638-01-0011			0004638-01-0012			0004638-01-0013			MY3 (2018)			MY2 (2017)			MY1 (2016)			MY0 (2016)		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
Acer rubrum	red maple	Tree																											
Baccharis halimifolia	eastern baccharis	Shrub			1																								
Ligustrum vulgare	European privet	Exotic																											
Liquidambar styraciflu	sweetgum	Tree																											
Liriodendron tulipifera	tuliptree	Tree				8	8	8	2	2	2	1	1	1			14	14	15	15	15	18	12	12	12	31	31	31	
Morella cerifera	wax myrtle	shrub																											
Pinus echinata	shortleaf pine	Tree			1																								
Pinus taeda	loblolly pine	Tree			16			14			8			14															
Platanus occidentalis	American sycamore	Tree	5	5	6				10	10	10	1	1	1	4	4	4	49	49	50	46	46	50	44	44	47	54	54	54
Quercus alba	white oak	Tree									1	1	1	5	5	5	11	11	15	12	12	16	12	12	12	16	16	16	
Quercus bicolor	swamp white oak	Tree							2	2	2	3	3	3			16	16	16	17	17	17	19	19	19	19	19	19	
Quercus michauxii	swamp chestnut oak	Tree							1	1	1	3	3	3	3	3	8	8	8	11	11	12	8	8	8	13	13	13	
Quercus nigra	water oak	Tree	3	3	3				3	3	3	1	1	1			13	13	13	14	14	15	11	11	11	18	18	18	
Quercus phellos	willow oak	Tree	2	2	2	2	2	2									29	29	31	29	29	35	24	24	25	33	33	33	
Taxodium distichum	bald cypress	Tree												3		3													
Stem count			10	10	29	10	10	24	18	18	28	10	10	27	12	12	15	140	140	254	144	144	234	130	130	134	184	184	184
size (ares)			1			1			1			1			1			13			13			13			13		
size (ACRES)			0.02			0.02			0.02			0.02			0.02			0.32			0.32			0.32			0.32		
Species count			3	3	6	2	2	3	5	5	7	6	6	8	3	3	4	7	7	13	7	7	12	7	7	7	7	7	
Stems per ACRE			405	405	1174	405	405	971	728	728	1133	405	405	1093	486	486	607	436	436	791	448	448	728	405	405	417	573	573	573

Table 7: Vegetation Plot Counts and Densities (Continued)

Color for Density
Exceeds requirements by 10%
Exceeds requirements, but by less than 10%
Fails to meet requirements, by less than 10%
Fails to meet requirements by more than 10%

APPENDIX D: STREAM MEASUREMENT AND GEOMORPHOLOGY DATA


Cross Sections with Annual Overlays (XS 1-11)

Table 8: Bank Pin Data


Table 10a. Baseline Stream Data Summary (Reach 1-4)

Table 11a. Monitoring Data – Dimensional Morphology Summary


Table 11b. Monitoring Data – Stream Reach Data Summary (Reach 1-4)

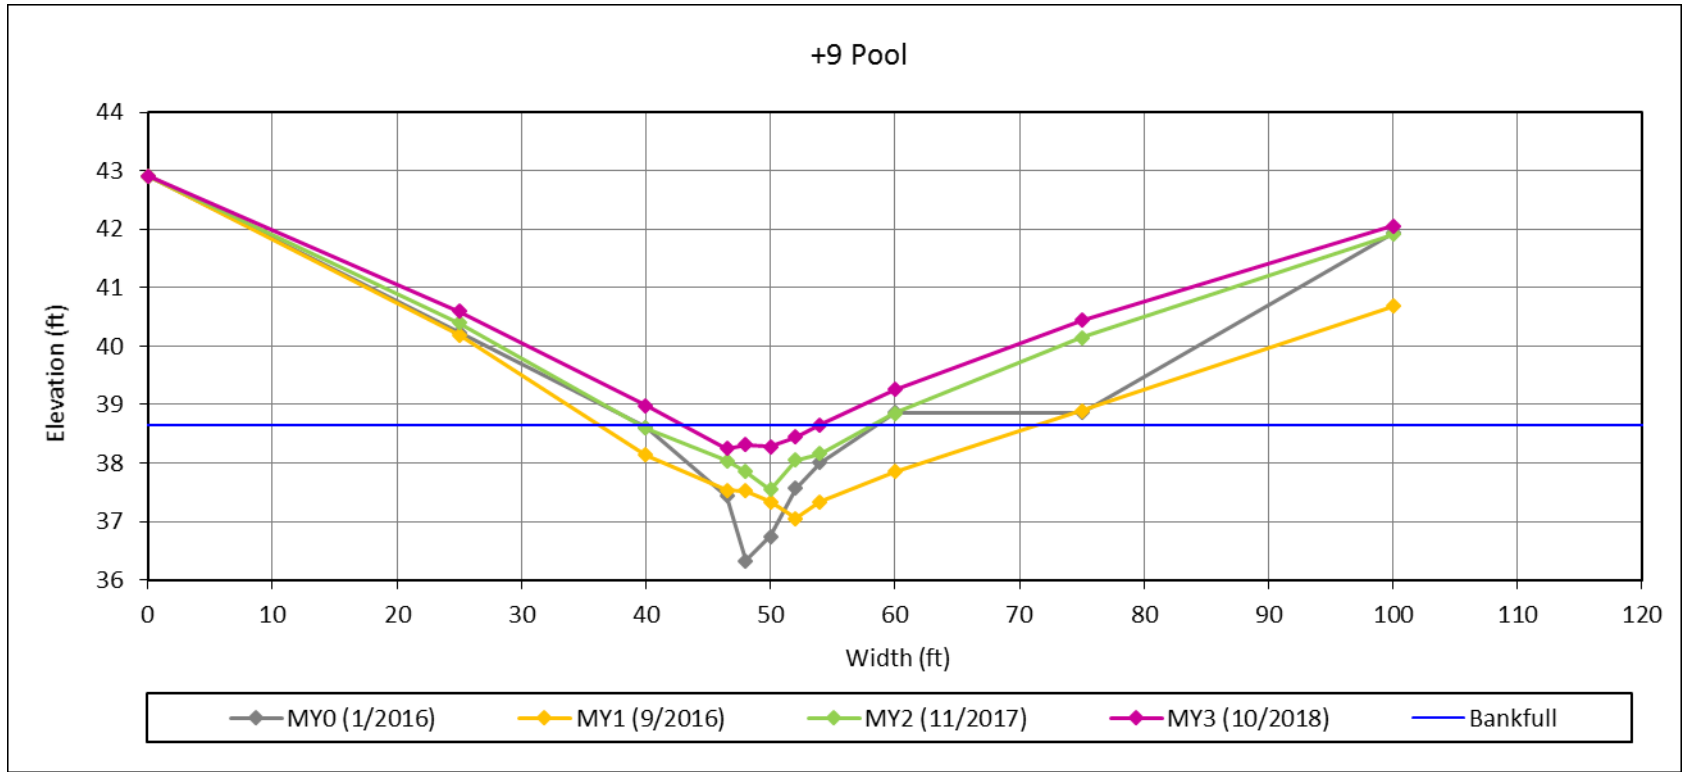


Cross Section 1 – Reach 3

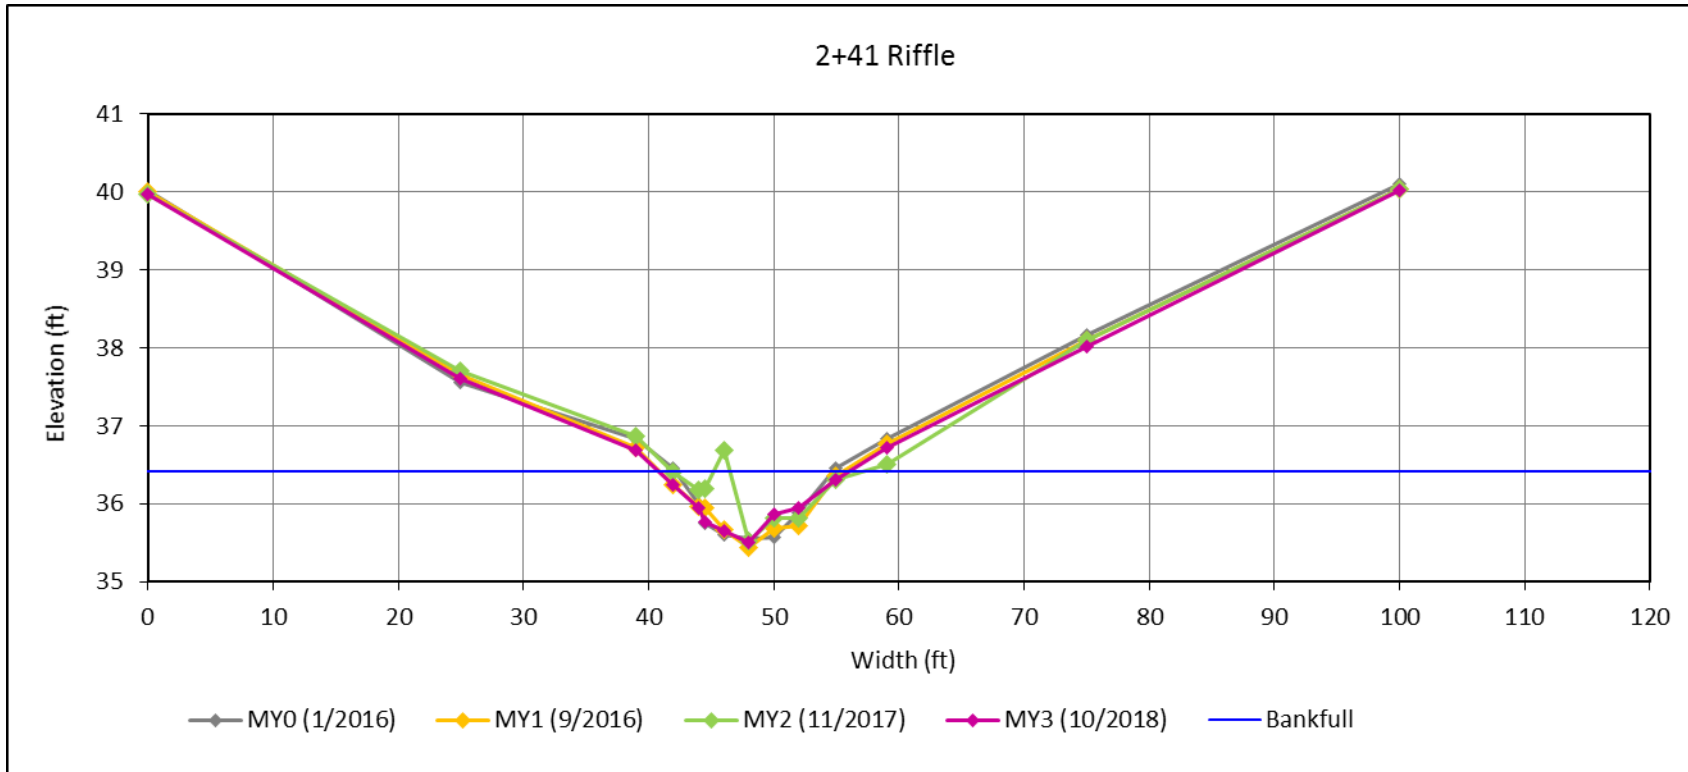


Cross Section 2 – Reach 3

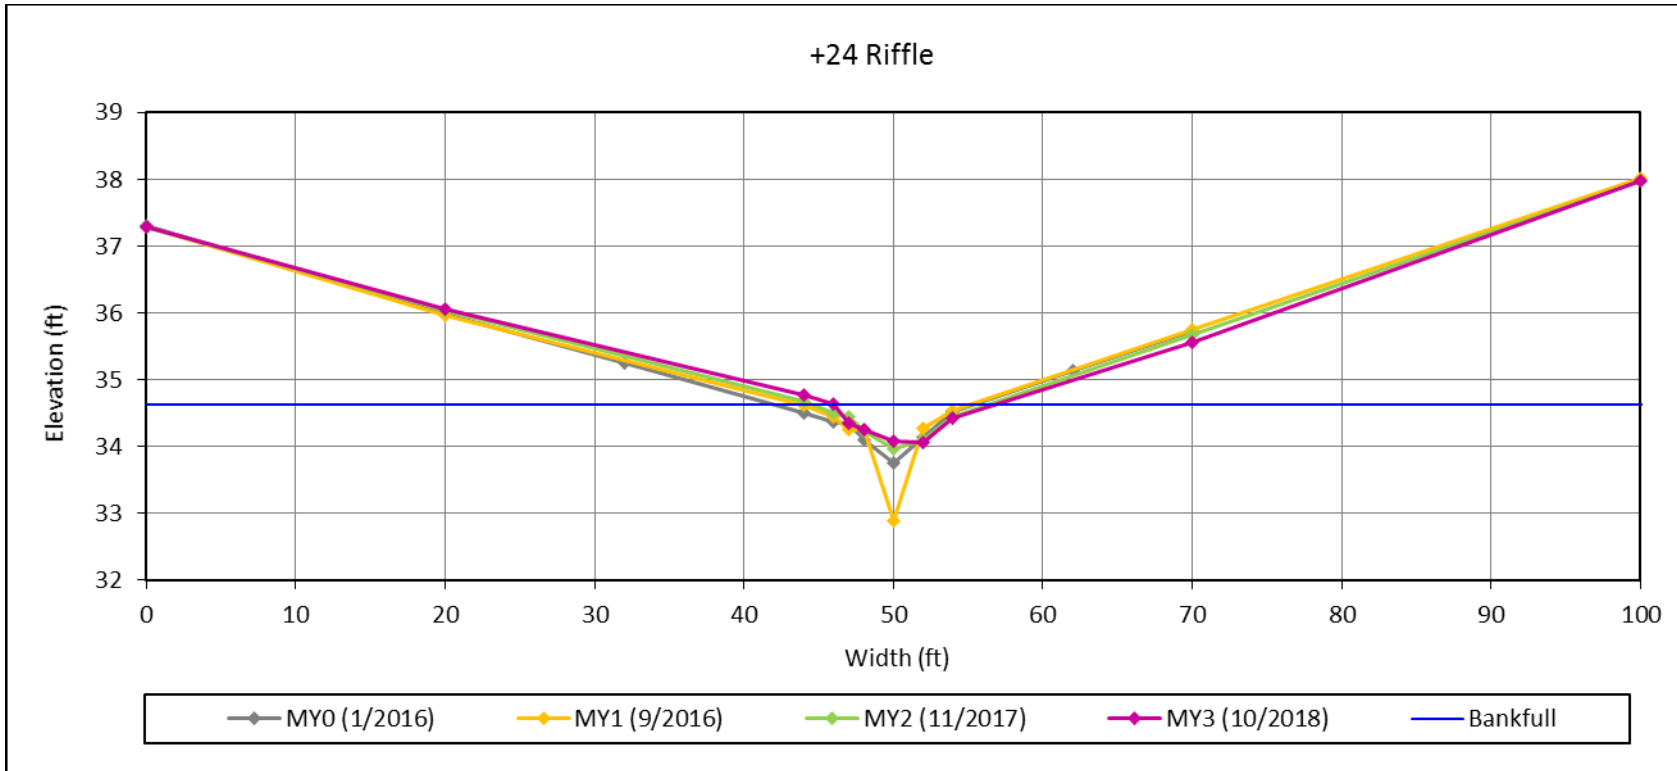


Cross Section 3 – Reach 4

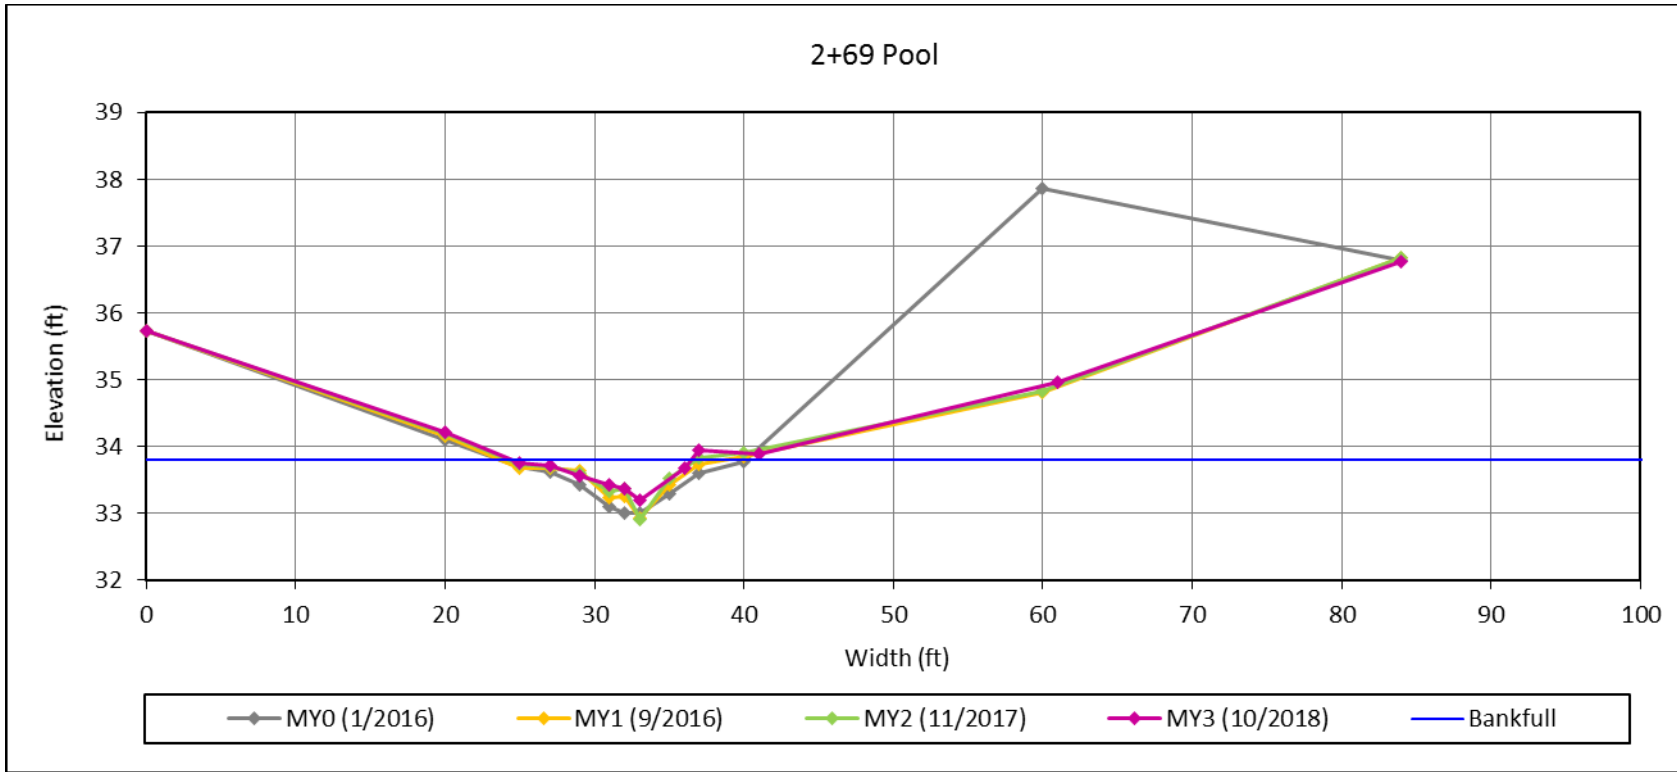


Cross Section 4 – Reach 4

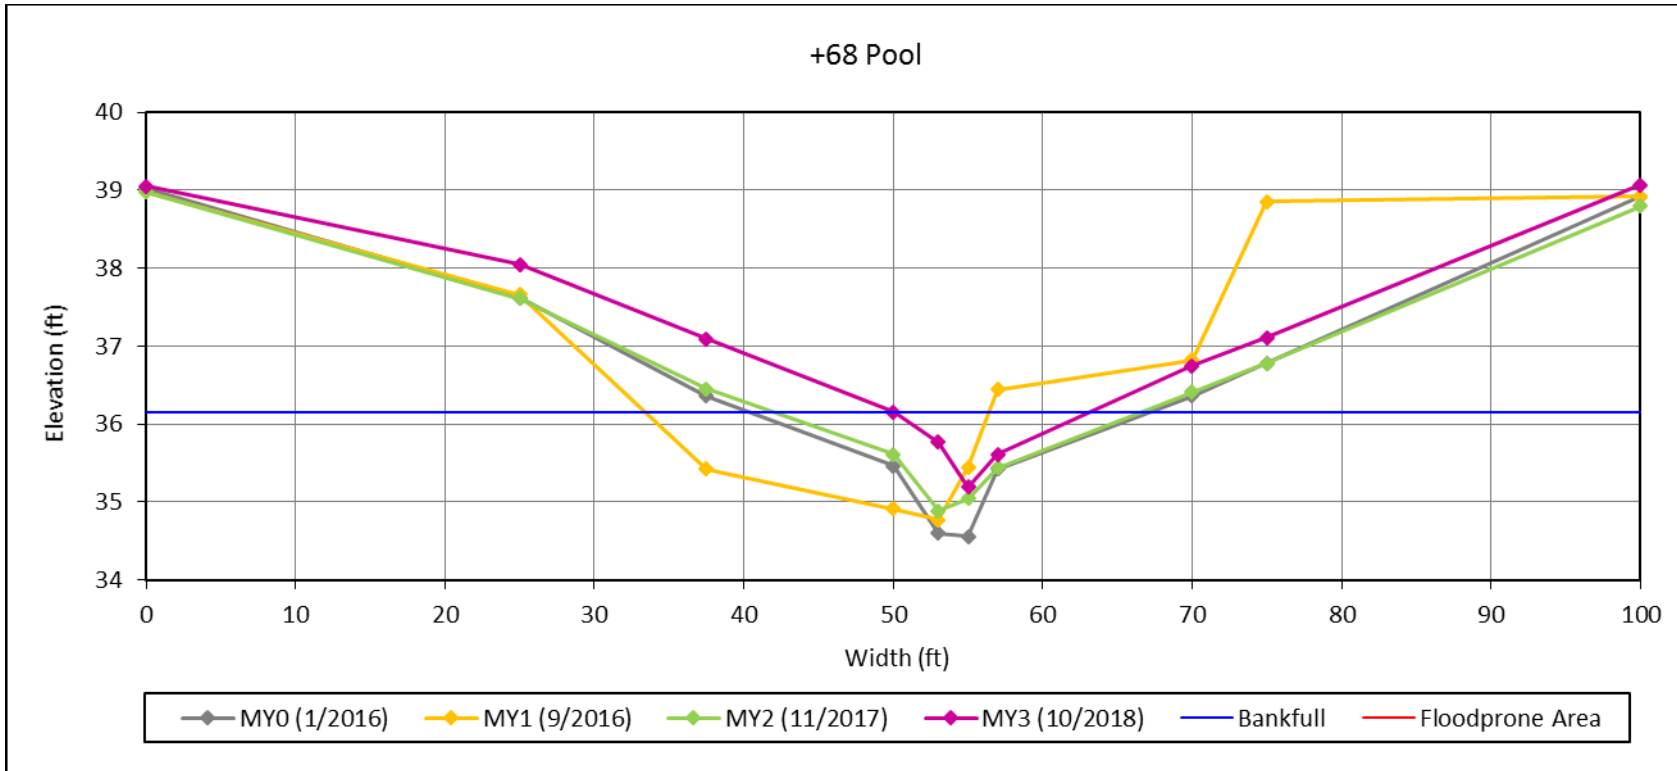


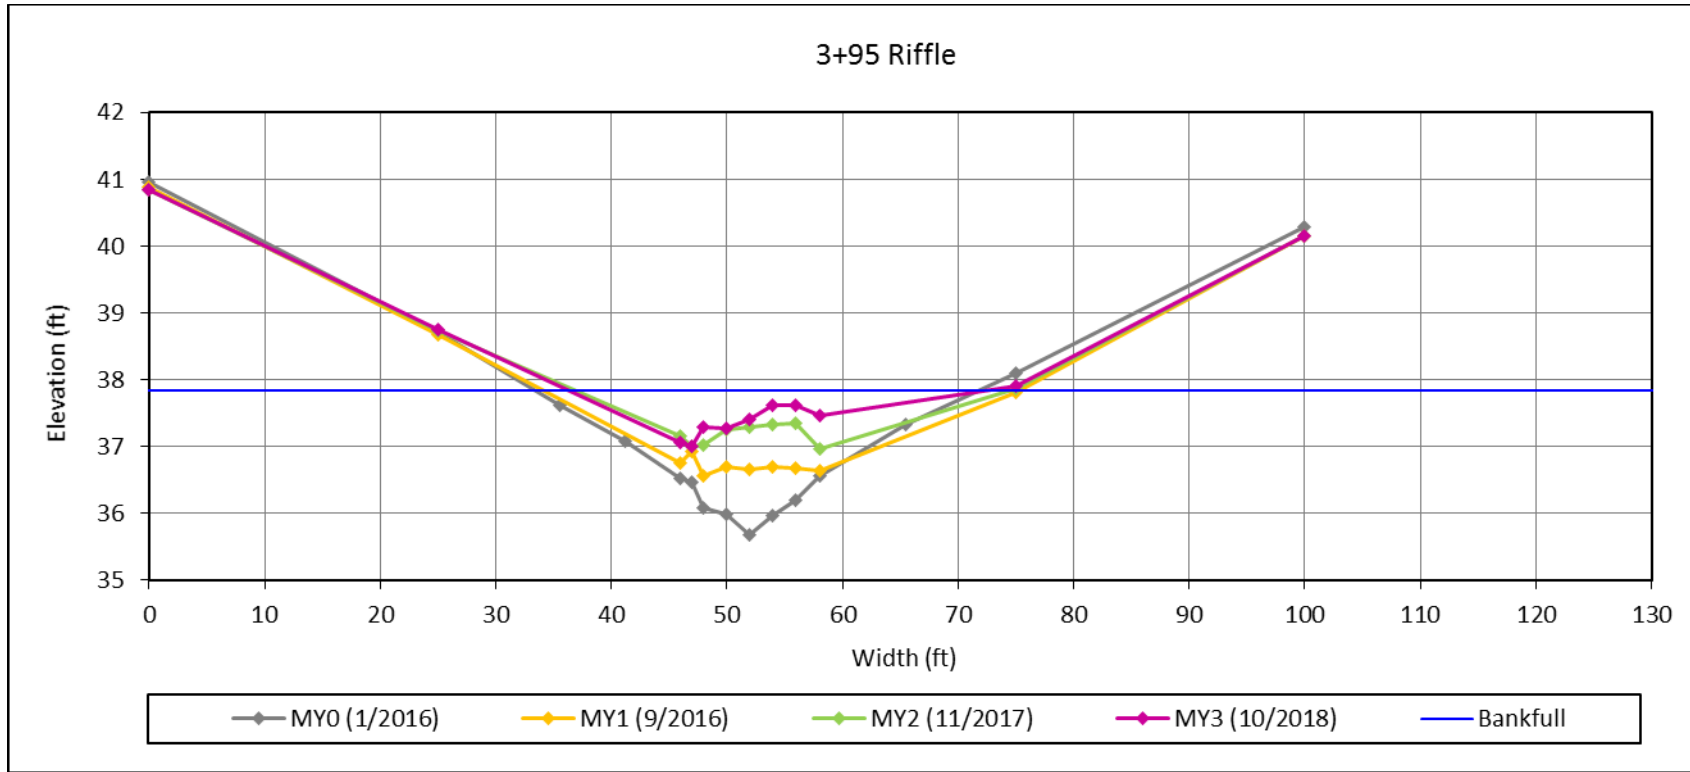


Cross Section 6 – Reach 2

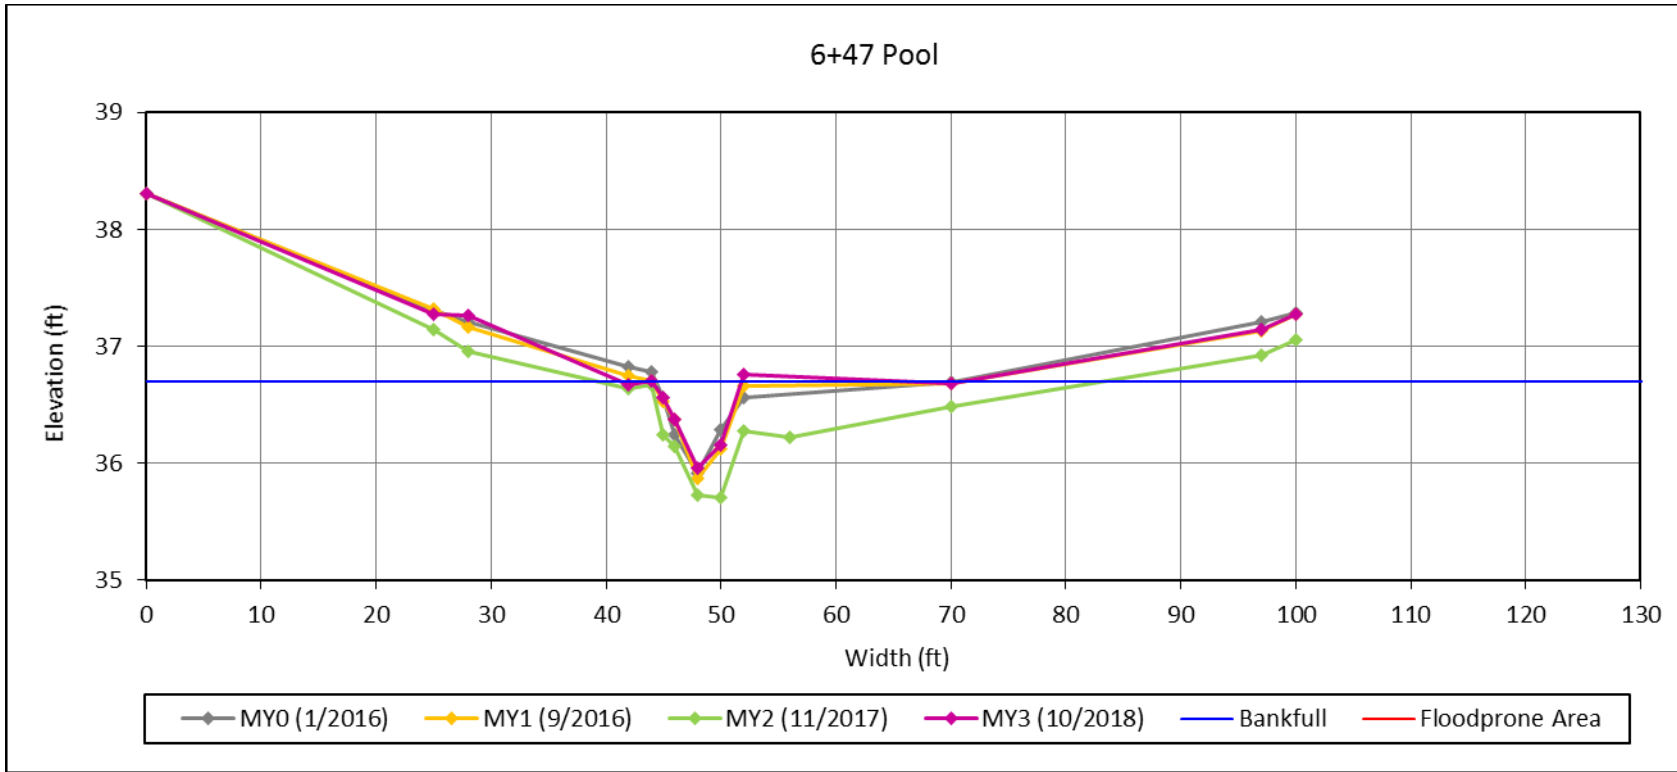


Cross Section 7 – Reach 1

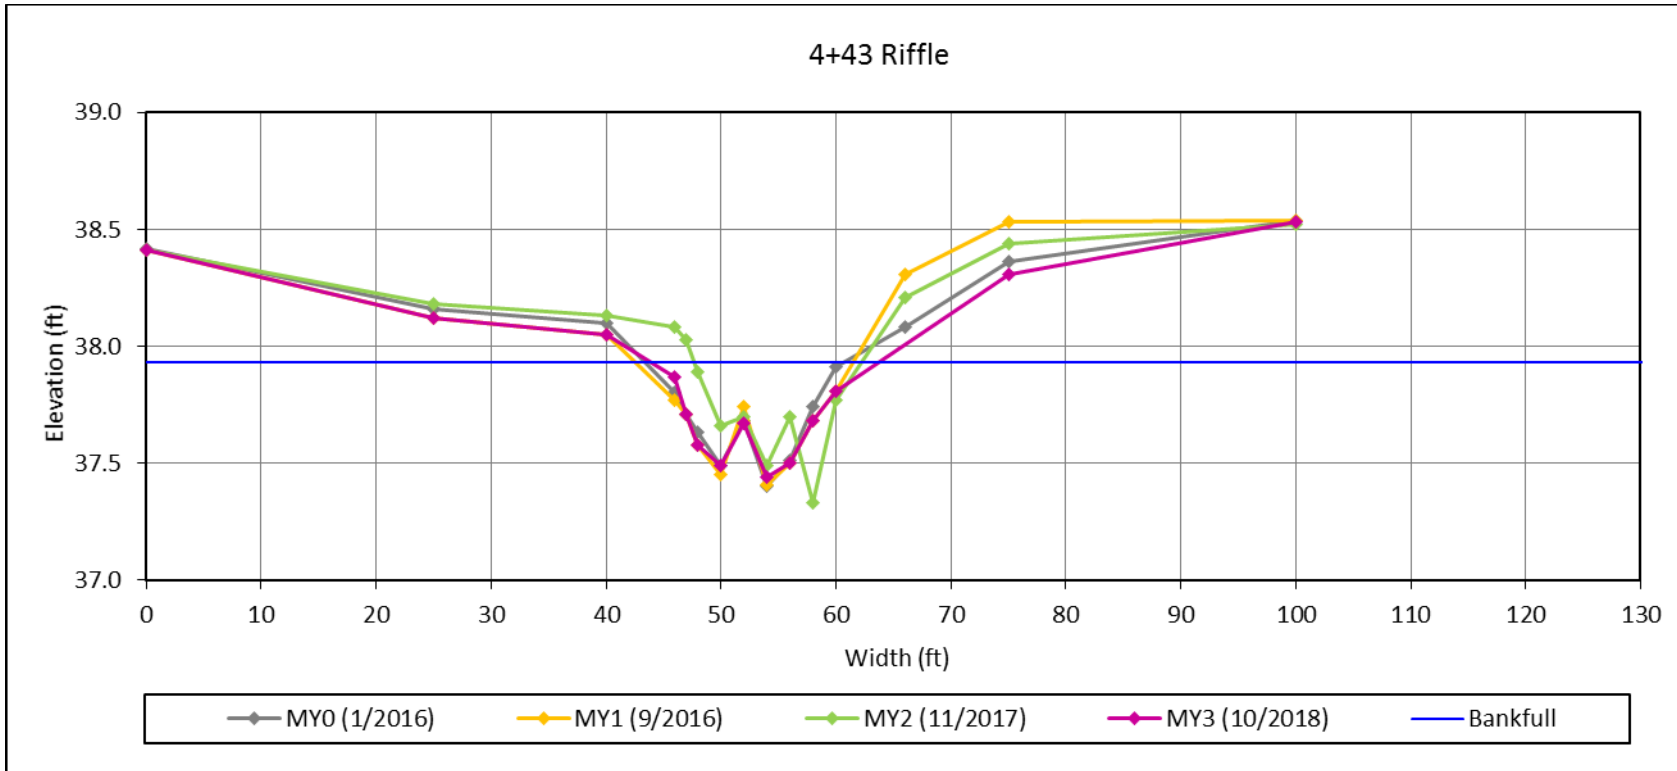


Cross Section 8 – Reach 1

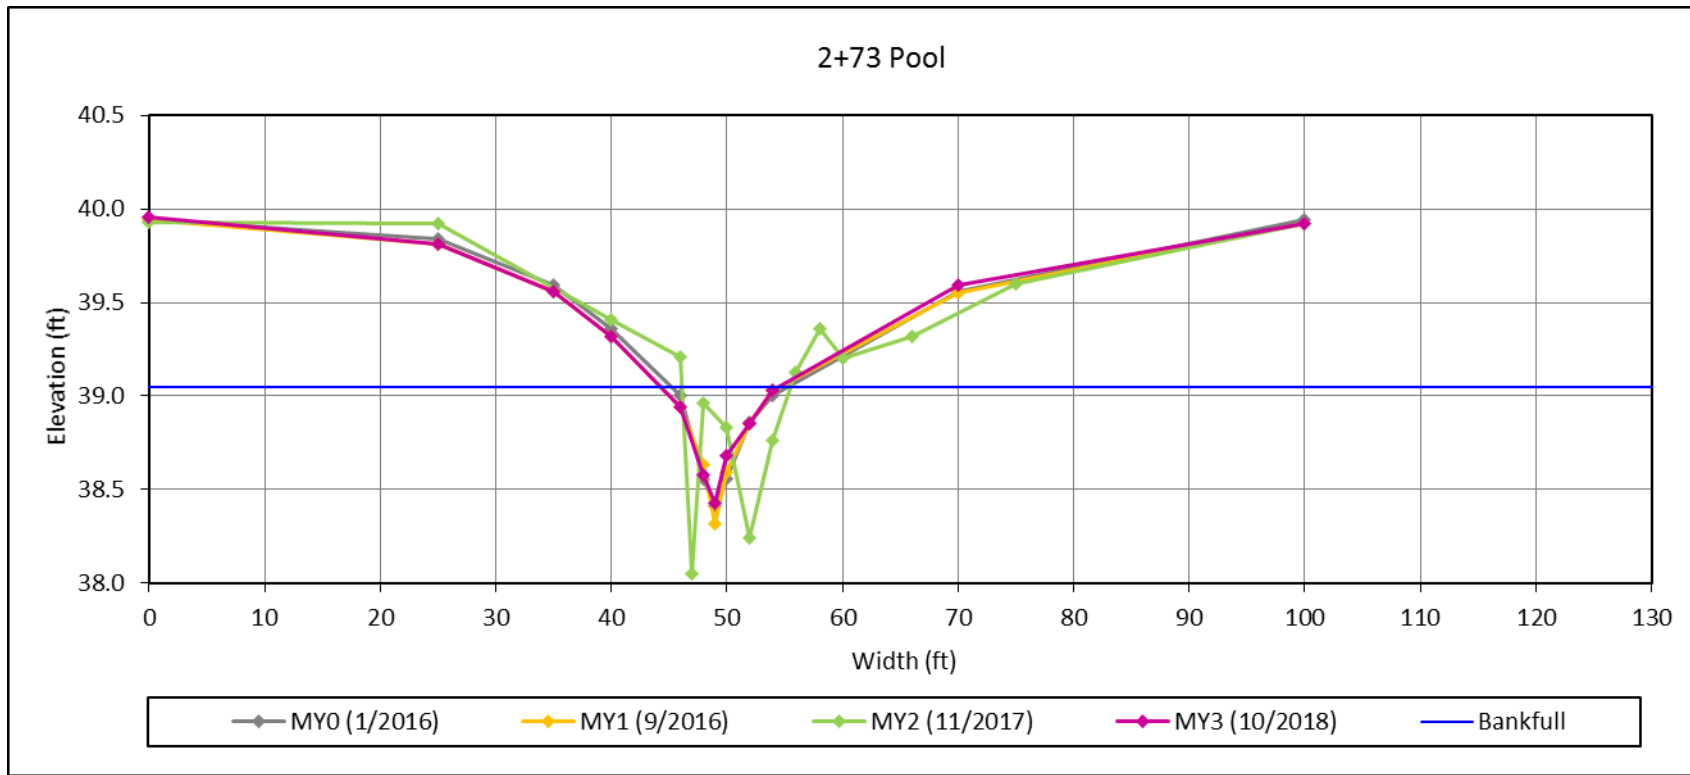

Cross Section 9 – Reach 1

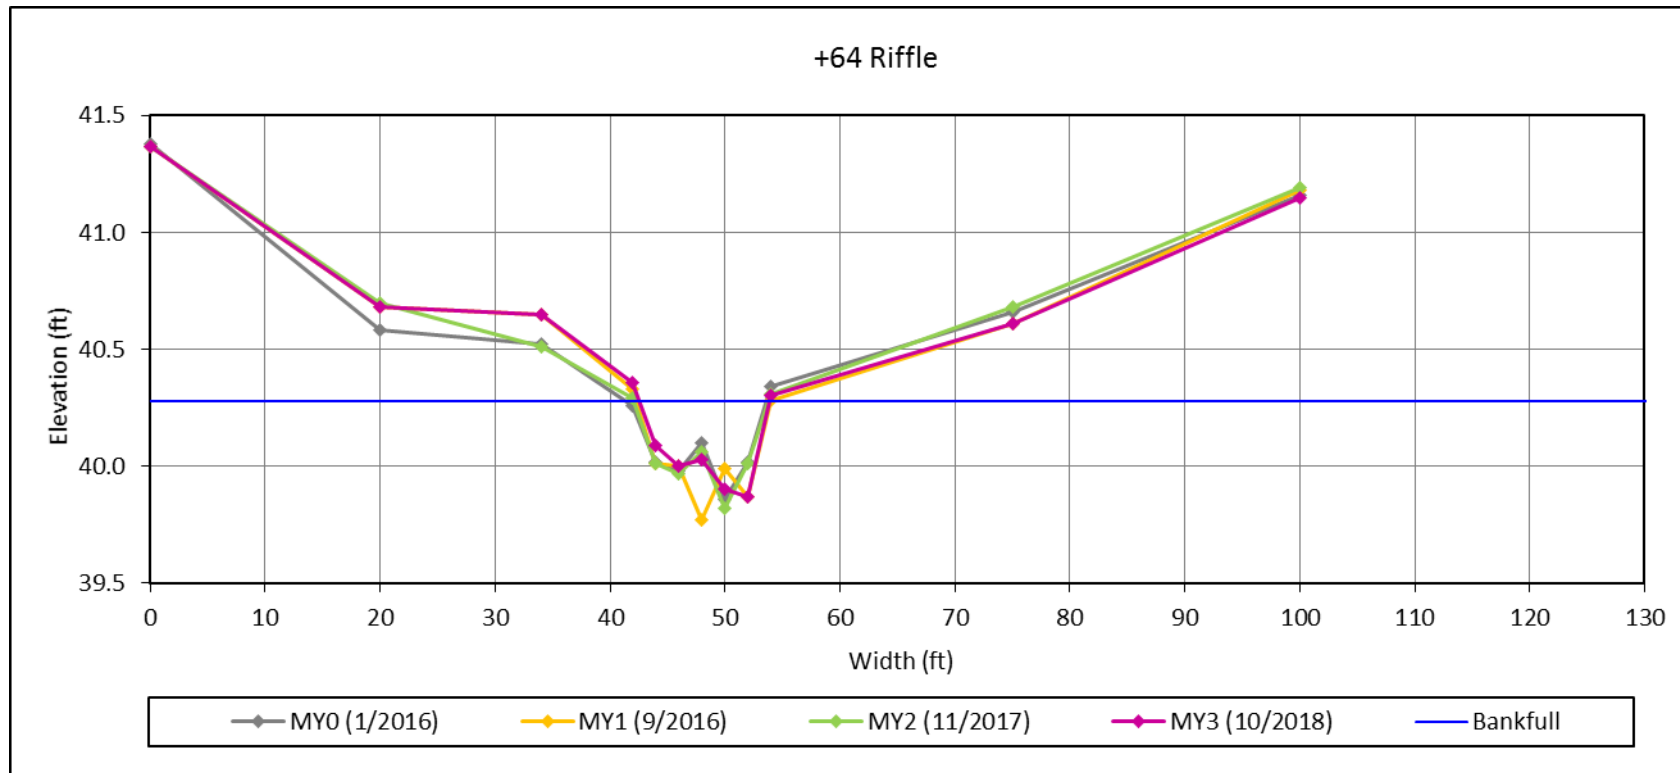

Cross Section 10 – Reach 1

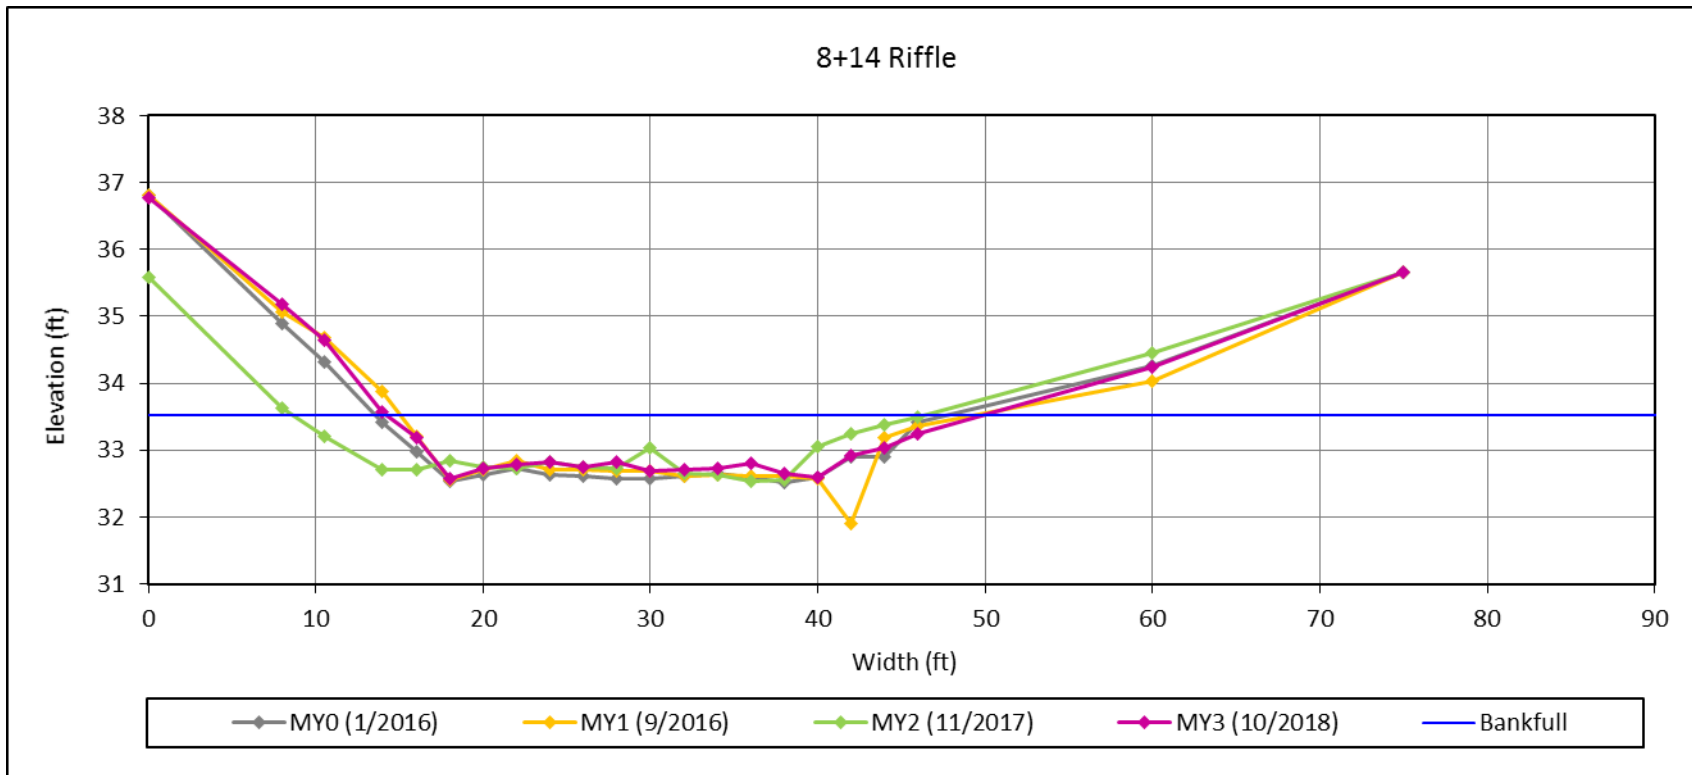

Cross Section 11 – Reach 1 & 4 Confluence

Table 8: Monitoring Year 3 - Bank Pin Data

Pins arrays consist of three pins located in the middle of stream banks along meander bends

Bank Pin Array #1 @ XS 5 - Reach 2 – Station 2+69	
Pin	Exposure
Upstream Pin	Could not find- minor aggradation & dense vegetation
Middle Pin	Could not find- minor aggradation & dense vegetation
Downstream Pin	Could not find- minor aggradation & dense vegetation

Bank Pin Array #2 @ XS 4 - Reach 2 – Station 3+95	
Pin	Exposure
Upstream Pin	Could not find- minor aggradation & dense vegetation
Middle Pin	Could not find- minor aggradation & dense vegetation
Downstream Pin	Could not find- minor aggradation & dense vegetation

Bank Pin Array #1 @ XS 9 - Reach 1 – Station 2+73	
Pin	Exposure
Upstream Pin	Could not find- minor aggradation & dense vegetation
Middle Pin	Could not find- minor aggradation & dense vegetation
Downstream Pin	Could not find- minor aggradation & dense vegetation

Table 10a. Baseline Stream Data Summary
 Project Name/Number (Hudson/ DMS:95361) - Segment/Reach: Reach 1

Parameter	Gauge ²	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline					
		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n
Dimension and Substrate - Riffle Only																									
Bankfull Width (ft)					3.36		3.83	6.02			19.74		21.97	24.2				9.02		11.5			16.2		2
Floodprone Width (ft)					6.47		6.91	10.5			44		64.5	85			18.06	26.74	34.89	57			83.33		2
Bankfull Mean Depth (ft)					0.45		0.52	0.6			0.7		0.75	0.82				0.42		0.22			0.26		2
¹ Bankfull Max Depth (ft)					0.56		0.87	1.07			0.85		1.02	1.18			0.44	0.53	0.61	0.4			0.51		2
Bankfull Cross Sectional Area (ft ²)					1.99		2	2.68			16.09		16.49	16.89				3.8		2.58			4.26		2
Width/Depth Ratio					5.64		7.37	13.52			24.22		29.27	34.67				21.4		52.27			62.31		2
Entrenchment Ratio					1.74		1.8	1.93			2		2.94	3.87			2	2.94	3.87	4.96			5.14		2
¹ Bank Height Ratio																			1			1		2	
Profile																									
Riffle Length (ft)					N/A*						12		46.5	81			4.93	19.09	33.25						
Riffle Slope (ft/ft)					N/A*						0.004		0.011	0.017			0.006	0.016	0.025						
Pool Length (ft)					N/A*						21		30.5	40			4.72	8.41	14.98						
Pool Max depth (ft)					N/A*						1.4		1.65	1.9			0.72	0.93	1.15						
Pool Spacing (ft)					N/A*						40		59	78			16.42	26.95	35.63						
Pattern																									
Channel Beltwidth (ft)					N/A*						27		49	76			11.08	20.11	31.19						
Radius of Curvature (ft)					N/A*						90		92	95			36.94	37.76	38.99						
Rc:Bankfull width (ft/ft)					N/A*												4.10	4.19	4.32						
Meander Wavelength (ft)					N/A*						12.43		15.07	18.25			112.1	135.9	164.6						
Meander Width Ratio					N/A*												1.23	2.23	3.46						
Transport parameters																									
Reach Shear Stress (competency) lb/ft ²								0.26										0.18							
Max part size (mm) mobilized at bankfull																									
Stream Power (transport capacity) W/m ²								0.56										0.14							
Additional Reach Parameters																									
Rosgen Classification								G5-G6						C5-C6				C5-C6							C5/6
Bankfull Velocity (fps)																									
Bankfull Discharge (cfs)								5.6																	
Valley length (ft)								840						264											
Channel Thalweg length (ft)								846						264					833						850
Sinuosity (ft)								1.01						1				1.04							1.04
Water Surface Slope (Channel) (ft/ft)								0.007						0.004				0.007							
BF slope (ft/ft)																									0.006
³ Bankfull Floodplain Area (acres)																									
⁴ % of Reach with Eroding Banks																									
Channel Stability or Habitat Metric																									
Biological or Other																									

Table 10a. Baseline Stream Data Summary
 Project Name/Number (Hudson/ DMS:95361) - Segment/Reach: Reach 2

Parameter	Gauge ²	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline					
		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n
Dimension and Substrate - Riffle Only																									
Bankfull Width (ft)					5.97		6.87	7.2			19.74		21.97	24.2				14.83					11.78		1
Floodprone Width (ft)					10.03		12.03	13.47			44		64.5	85			29.71	43.55	57.39				28.2		1
Bankfull Mean Depth (ft)					0.91		0.92	0.94			0.7		0.75	0.82				0.67					0.45		1
¹ Bankfull Max Depth (ft)					1.38		1.42	1.54			0.85		1.02	1.18			0.7	0.84	0.98				0.86		1
Bankfull Cross Sectional Area (ft ²)					5.59		6.32	6.58			16.09		16.49	16.89				10					5.28		1
Width/Depth Ratio					6.38		7.47	7.88			24.22		29.27	34.67				22					26.18		1
Entrenchment Ratio					1.67		1.68	1.96			2		2.94	3.87				2.94					2.39		1
¹ Bank Height Ratio																							1		1
Profile																									
Riffle Length (ft)					N/A*						12		46.5	81			8.1	31.39	54.68						
Riffle Slope (ft/ft)					N/A*						0.004		0.011	0.017			0.003	0.008	0.012						
Pool Length (ft)					N/A*						21		30.5	40			14.18	20.59	27						
Pool Max depth (ft)					N/A*						1.4		1.65	1.9			1.16	1.48	1.84						
Pool Spacing (ft)					N/A*						40		59	78			27	44.33	58.61						
Pattern																									
Channel Beltwidth (ft)					N/A*						27		49	76			18.23	33.08	51.31						
Radius of Curvature (ft)					N/A*						90		92	95			60.76	62.11	64.14						
Rc:Bankfull width (ft/ft)					N/A*												4.10	4.19	4.32						
Meander Wavelength (ft)					N/A*						12.43		15.07	18.25			184.3	223.5	270.7						
Meander Width Ratio					N/A*												1.23	2.23	3.46						
Transport parameters																									
Reach Shear Stress (competency) lb/ft ²								0.42										0.11							
Max part size (mm) mobilized at bankfull																									
Stream Power (transport capacity) W/m ²								1.25										0.18							
Additional Reach Parameters																									
Rosgen Classification								G5-G6										C5-C6							
Bankfull Velocity (fps)																									
Bankfull Discharge (cfs)								17.2																	
Valley length (ft)								486						264											
Channel Thalweg length (ft)								516						264					532						541
Sinuosity (ft)								1.06						1					1.05						1.05
Water Surface Slope (Channel) (ft/ft)								0.003						0.004					0.003						
BF slope (ft/ft)																									0.0035
³ Bankfull Floodplain Area (acres)																									
⁴ % of Reach with Eroding Banks																									
Channel Stability or Habitat Metric																									
Biological or Other																									

Table 10a. Baseline Stream Data Summary
 Project Name/Number (Hudson/ DMS:95361) - Segment/Reach: Reach 3

Parameter	Gauge ²	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline							
		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n		
Dimension and Substrate - Riffle Only																											
Bankfull Width (ft)					3.55		4.03	5.05			19.74		21.97	24.2				10						12.5		1	
Floodprone Width (ft)					5.97		6.44	9.13			44		64.5	85			20.03	29.36	38.69					32.9		1	
Bankfull Mean Depth (ft)					0.55		0.79	0.84			0.7		0.75	0.82				0.5						0.57		1	
¹ Bankfull Max Depth (ft)					0.88		1.15	1.44			0.85		1.02	1.18			0.52	0.63	0.72					0.85		1	
Bankfull Cross Sectional Area (ft ²)					1.94		3.17	4.26			16.09		16.49	16.89				5						7.07		1	
Width/Depth Ratio					5.12		5.99	6.5			24.22		29.27	34.67				20						21.95		1	
Entrenchment Ratio					1.6		1.68	1.8			2		2.94	3.87			2	2.94	3.87					2.63		1	
¹ Bank Height Ratio																							1		1		
Profile																											
Riffle Length (ft)					N/A*						12		46.5	81			5.46	21.17	36.87								
Riffle Slope (ft/ft)					N/A*						0.004		0.011	0.017			0.005	0.014	0.021								
Pool Length (ft)					N/A*						21		30.5	40			9.56	13.88	18.21								
Pool Max depth (ft)					N/A*						1.4		1.65	1.9			0.86	1.1	1.36								
Pool Spacing (ft)					N/A*						40		59	78			18.21	29.89	39.51								
Pattern																											
Channel Beltwidth (ft)					N/A*						27		49	76			12.29	22.3	24.59								
Radius of Curvature (ft)					N/A*						90		92	95			40.96	41.88	43.24								
Rc:Bankfull width (ft/ft)					N/A*												4.10	4.19	4.32								
Meander Wavelength (ft)					N/A*						12.43		15.07	18.25			124.3	150.7	182.5								
Meander Width Ratio					N/A*												1.23	2.23	3.46								
Transport parameters																											
Reach Shear Stress (competency) lb/ft ²								0.37										0.14									
Max part size (mm) mobilized at bankfull																											
Stream Power (transport capacity) W/m ²								1.02										0.18									
Additional Reach Parameters																											
Rosgen Classification								G5-G6										C5-C6								C 5/6	
Bankfull Velocity (fps)																											
Bankfull Discharge (cfs)								8																			
Valley length (ft)								442						264													
Channel Thalweg length (ft)								460						264					445							446	
Sinuosity (ft)								1.04						1					1.01							1.08	
Water Surface Slope (Channel) (ft/ft)								0.007						0.004					0.007								
BF slope (ft/ft)																										0.005	
³ Bankfull Floodplain Area (acres)																											
⁴ % of Reach with Eroding Banks																											
Channel Stability or Habitat Metric																											
Biological or Other																											

Table 10a. Baseline Stream Data Summary
 Project Name/Number (Hudson/ DMS:95361) - Segment/Reach: Reach 4

Parameter	Gauge ²	Regional Curve			Pre-Existing Condition					Reference Reach(es) Data					Design			Monitoring Baseline								
		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n	
Dimension and Substrate - Riffle Only																										
Bankfull Width (ft)					7.34		7.48	8.84			19.74		21.97	24.2				21.82						9.9		1
Floodprone Width (ft)					12.21		13.83	16.28			44		64.5	85			43.69	64.05	84.41					31.36		1
Bankfull Mean Depth (ft)					0.97		1	1.05			0.7		0.75	0.82				0.78						0.32		1
¹ Bankfull Max Depth (ft)					1.47		1.51	1.82			0.85		1.02	1.18			0.81	0.98	1.13					0.74		1
Bankfull Cross Sectional Area (ft ²)					7.49		7.69	8.58			16.09		16.49	16.89				17						3.17		1
Width/Depth Ratio					7.01		7.47	9.11			24.22		29.27	34.67				28						30.9		1
Entrenchment Ratio					1.63		1.84	1.88			2		2.94	3.87			2	2.94	3.87					3.17		1
¹ Bank Height Ratio																								1		1
Profile																										
Riffle Length (ft)							N/A*				12		46.5	81			11.92	46.18	80.44							
Riffle Slope (ft/ft)							N/A*				0.004		0.011	0.017			0.006	0.016	0.025							
Pool Length (ft)							N/A*				21		30.5	40			20.85	30.29	39.72							
Pool Max depth (ft)							N/A*				1.4		1.65	1.9			1.34	1.71	2.12							
Pool Spacing (ft)							N/A*				40		59	78			39.72	65.21	86.21							
Pattern																										
Channel Beltwidth (ft)							N/A*				27		49	76			26.8	48.66	75.47							
Radius of Curvature (ft)							N/A*				90		92	95			89.37	91.36	94.34							
Rc:Bankfull width (ft/ft)							N/A*										4.096	4.188	4.324							
Meander Wavelength (ft)							N/A*				12.43		15.07	18.25			271.1	328.7	398.2							
Meander Width Ratio							N/A*										1.23	2.23	3.46							
Transport parameters																										
Reach Shear Stress (competency) lb/ft ²								0.48										0.16								
Max part size (mm) mobilized at bankfull																										
Stream Power (transport capacity) W/m ²								1.01										0.22								
Additional Reach Parameters																										
Rosgen Classification								G5-G6						C5-C6				C5-C6								C 5/6
Bankfull Velocity (fps)																										
Bankfull Discharge (cfs)								26.2																		
Valley length (ft)								434					264													
Channel Thalweg length (ft)								503					264					437								447
Sinuosity (ft)								1.16					1					1.01								1.01
Water Surface Slope (Channel) (ft/ft)								0.003					0.004					0.003								
BF slope (ft/ft)																										0.0035
³ Bankfull Floodplain Area (acres)																										
⁴ % of Reach with Eroding Banks																										
Channel Stability or Habitat Metric																										
Biological or Other																										

Table 11a. Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters – Cross Sections)

Project Name/Number (Hudson/ DMS:95361) Segment/Reach: Reach 1-4 (2200 feet)

	Cross Section 1 (Pool - Reach 3)							Cross Section 2 (Riffle - Reach 3)							Cross Section 3 (Riffle - Reach 4)							Cross Section 4 (Pool - Reach 4)							Cross Section 5 (Pool - Reach 2)						
	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+
Bankfull Elevation (ft) - Based on AB-Bankfull ¹ Area								36.40	36.36	36.55	36.42				34.50	34.34	34.60	34.62																	
Bank Height Ratio Based on AB Bankfull ¹ Area								1.00	1.00	0.77	0.88				1.00	1.14	0.77	0.65																	
Thalweg Elevation	36.33	37.05	37.54	38.28				35.55	35.44	35.52	35.51				33.76	32.88	33.96	34.06										33.00	32.92	32.90	33.20				
LTOB ² Elevation	37.57	37.53	38.05	38.65				36.40	36.36	36.31	36.31				34.50	34.55	34.45	34.42										33.60	33.64	33.60	33.75				
LTOB ² Max Depth (ft)	1.24	0.48	0.51	0.37				0.85	0.92	0.79	0.80				0.74	1.67	0.49	0.36										0.60	0.72	0.70	0.55				
LTOB ² Cross Sectional Area (ft ²)	3.90	1.50	1.40	1.80				7.07	7.07	2.90	5.60				3.17	4.40	2.00	1.70										3.19	2.30	1.80	2.50				
	Cross Section 6 (Riffle - Reach 2)							Cross Section 7 (Pool - Reach 1)							Cross Section 8 (Riffle - Reach 1)							Cross Section 9 (Pool - Reach 1)							Cross Section 10 (Riffle - Reach 1)						
	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+
Bankfull Elevation (ft) - Based on AB-Bankfull ¹ Area	36.53	37.13	37.75	37.84											37.91	37.90	37.97	37.93										40.26	40.22	40.27	40.28				
Bank Height Ratio Based on AB Bankfull ¹ Area	1.00	0.63	0.47	0.74											1.00	1.30	1.09	0.88										1.00	1.13	1.04	1.00				
Thalweg Elevation	35.67	36.57	36.97	37.01				35.91	35.87	35.70	35.96				37.40	37.41	37.33	37.44										38.41	38.32	38.05	38.43				
LTOB ² Elevation	36.53	36.92	37.34	37.62				36.56	36.66	36.25	36.70				37.91	38.05	38.03	37.87										39.00	39.03	39.21	39.05				
LTOB ² Max Depth (ft)	0.86	0.35	0.37	0.61				0.65	0.79	0.55	0.74				0.51	0.64	0.70	0.43										0.59	0.71	1.16	0.62				
LTOB ² Cross Sectional Area (ft ²)	5.25	2.82	1.60	2.66				2.30	3.10	2.30	3.20				4.28	7.20	5.01	3.80										2.20	2.40	5.20	2.40				
	Cross Section 11 (Confluence - Reach 1)							The above morphology parameters reflect the 2018 guidance that arose from the mitigation technical workgroup consisting of DMS, the IRT and industry mitigation providers/practitioners. The outcome resulted in the focus on three primary morphological parameters of interest for the purposes of tracking channel change moving forward. They are the bank height ratio using a constant As-built bankfull area and the cross sectional area and max depth based on each years low top of bank. These are calculated as follows: 1 - Bank Height Ratio (BHR) takes the As-built bankfull area as the basis for adjusting each subsequent years bankfull elevation. For example if the As-built bankfull area was 10 ft ² , then the MY1 bankfull elevation would be adjusted until the calculated bankfull area within the MY1 cross section survey = 10 ft ² . The BHR would then be calculated with the difference between the low top of bank (LTOB) elevation for MY1 and the thalweg elevation for MY1 in the numerator with the difference between the MY1 bankfull elevation and the MY1 thalweg elevation in the denominator. This same process is then carried out in each successive year. 2 - LTOB Area and Max depth - These are based on the LTOB elevation for each years survey (The same elevation used for the LTOB in the BHR calculation). Area below the LTOB elevation will be used and tracked for each year as above. The difference between the LTOB elevation and the thalweg elevation (same as in the BHR calculation) will be recorded and tracked above as LTOB max depth.																											
	Base	MY1	MY2	MY3	MY4	MY5	MY+																												
Bankfull Elevation (ft) - Based on AB-Bankfull ¹ Area	33.42	33.44	33.49	33.52																															
Bank Height Ratio Based on AB Bankfull ¹ Area	1.00	0.84	0.73	0.71																															
Thalweg Elevation	32.51	31.91	32.56	32.58																															
LTOB ² Elevation	33.42	33.19	33.24	33.25																															
LTOB ² Max Depth (ft)	0.91	1.28	0.68	0.67																															
LTOB ² Cross Sectional Area (ft ²)	22.54	14.68	14.13	13.85																															

Note: The smaller the channel the closer the survey measurements are to their limit of reliable detection, therefore inter-annual variation in morphological measurement (as a percentage) is by default magnified as channel size decreases. Some of the variability above is the result of this factor and some is due to the large amount of depositional sediments observed.

Exhibit Table 11b. Monitoring Data - Stream Reach Data Summary
Project Name/Number (Hudson/ DMS:95361) Segment/Reach: Reach 1

Parameter	Baseline						MY-1						MY-2						MY-3						MY-4						MY-5					
	Mn	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n
Dimension and Substrate - Riffle only																																				
Bankfull Width (ft)	11.50			16.20	2	11.46				20.00	2	11.19				16.10	2	11.24				17.33	2													
Floodprone Width (ft)	57.00			83.30	2	58.28				86.26	2	53.80				97.70	2	57.38				74.01	2													
Bankfull Mean Depth (ft)	0.22			0.26	2	0.24				0.28	2	0.23				0.26	2	0.25				0.26	2													
¹ Bankfull Max Depth (ft)	0.40			0.51	2	0.49				0.50	2	0.42				0.57	2	0.40				0.45	2													
Bankfull Cross Sectional Area (ft ²)	2.58			4.26	2	3.25				4.77	2	2.58				4.26	2	2.58				4.26	2													
Width/Depth Ratio	52.27			62.31	2	40.49				83.95	2	48.60				60.83	2	38.10				38.50	2													
Entrenchment Ratio	4.96			5.14	2	4.31				5.08	2	5.21				5.36	2	4.27				5.10	2													
¹ Bank Height Ratio	1.00			1.00	2	1.00				1.00	2	1.12				0.88	2	0.91				1.10	2													
Profile																																				
Riffle Length (ft)																																				
Riffle Slope (ft/ft)																																				
Pool Length (ft)																																				
Pool Max depth (ft)																																				
Pool Spacing (ft)																																				
Pattern																																				
Channel Beltwidth (ft)																																				
Radius of Curvature (ft)																																				
Rc:Bankfull width (ft/ft)																																				
Meander Wavelength (ft)																																				
Meander Width Ratio																																				
Additional Reach Parameters																																				
Rosgen Classification				C 5/6						C 5/6						C 5/6						C 5/6														
Channel Thalweg length (ft)				850						850						850						850														
Sinuosity (ft)				1.04						1.04						1.04						1.04														
Water Surface Slope (Channel) (ft/ft)																																				
BF slope (ft/ft)				0.006						0.006						0.006						0.006														
² = Bankfull for XS 6 recalculated																																				
³ R _p % / Ru% / P% / G% / S%																																				
³ SC% / Sa% / G% / C% / B% / Be%																																				
³ d16 / d35 / d50 / d84 / d95 /																																				
² % of Reach with Eroding Banks																																				
Channel Stability or Habitat Metric																																				
Biological or Other																																				

Pattern data will not typically be collected unless visual data, dimensional data or profile data indicate significant shifts from baseline

Shaded cells indicate that these will typically not be filled in.
¹ = The distributions for these parameters can include information from both the cross-section measurements and the longitudinal profile.
² = Proportion of reach exhibiting banks that are eroding based on the visual survey from visual assessment table
³ = Riffle, Run, Pool, Glide, Step, Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave
⁴ = Of value/needed only if the n exceeds 3

Exhibit Table 11b. Monitoring Data - Stream Reach Data Summary																																				
Project Name/Number (Hudson/ DMS:95361) Segment/Reach: Reach 2																																				
Parameter	Baseline					MY-1					MY-2					MY-3					MY-4					MY-5										
Dimension and Substrate - Riffle only	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n
Bankfull Width (ft)			11.8			1			12.5			1			12.5			1			26.2			1												
Floodprone Width (ft)			28.2			1			25			1			42.3			1			48.3			1												
Bankfull Mean Depth (ft)			0.45			1			0.11			1			0.42			1			0.22			1												
¹ Bankfull Max Depth (ft)			0.86			1			0.21			1			0.54			1			0.64			1												
Bankfull Cross Sectional Area (ft ²)			5.28			1			1.39			1			5.28			1			5.28			1												
Width/Depth Ratio			26.2			1			112			1			29.6			1			40.9			1												
Entrenchment Ratio			2.39			1			2			1			2			1			1.8			1												
¹ Bank Height Ratio			1			1			1			1			1			1			1			1												
Profile																																				
Riffle Length (ft)																																				
Riffle Slope (ft/ft)																																				
Pool Length (ft)																																				
Pool Max depth (ft)																																				
Pool Spacing (ft)																																				
Pattern																																				
Channel Beltwidth (ft)									71																											
Radius of Curvature (ft)																																				
Rc:Bankfull width (ft/ft)																																				
Meander Wavelength (ft)																																				
Meander Width Ratio																																				
Additional Reach Parameters																																				
Rosgen Classification			C 5/5						C 5/5						C 5/5						C 5/5															
Channel Thalweg length (ft)			541						541						541						541															
Sinuosity (ft)			1.05						1.05						1.05						1.05															
Water Surface Slope (Channel) (ft/ft)																																				
BF slope (ft/ft)			0.0035						0.0035						0.0035						0.0035															
2 = Bankfull for XS 6 recalculated																																				
³ Ri% / Ru% / P% / G% / S%																																				
³ SC% / Sa% / G% / C% / B% / Be%																																				
³ d16 / d35 / d50 / d84 / d95 /																																				
² % of Reach with Eroding Banks																																				
Channel Stability or Habitat Metric																																				
Biological or Other																																				

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section measurements and the longitudinal profile.

2 = Proportion of reach exhibiting banks that are eroding based on the visual survey from visual assessment table

3 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave

4. = Of value/needed only if the n exceeds 3

Exhibit Table 11b. Monitoring Data - Stream Reach Data Summary
Project Name/Number (Hudson/ DMS:95361) Segment/Reach: Reach 3

Parameter	Baseline						MY-1						MY-2						MY-3						MY-4						MY-5						
	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	
Dimension and Substrate - Riffle only																																					
Bankfull Width (ft)			12.50			1			14.44			1			16.33			1			14.80			1													
Floodprone Width (ft)			32.90			1			36.68			1			42.80			1			36.01			1													
Bankfull Mean Depth (ft)			0.57			1			0.48			1			0.43			1			0.47			1													
¹ Bankfull Max Depth (ft)			0.85			1			0.96			1			1.04			1			0.88			1													
Bankfull Cross Sectional Area (ft ²)			7.07			1			16.24			1			7.07			1			7.07			1													
Width/Depth Ratio			21.95			1			69.34			1			37.73			1			16.80			1													
Entrenchment Ratio			2.63			1			2.53			1			2.25			1			2.42			1													
¹ Bank Height Ratio			1.00			1			1.00			1			1.00			1			0.45			1													
Profile																																					
Riffle Length (ft)																																					
Riffle Slope (ft/ft)																																					
Pool Length (ft)																																					
Pool Max depth (ft)																																					
Pool Spacing (ft)																																					
Pattern																																					
Channel Beltwidth (ft)																																					
Radius of Curvature (ft)																																					
Rc:Bankfull width (ft/ft)																																					
Meander Wavelength (ft)																																					
Meander Width Ratio																																					
Additional Reach Parameters																																					
Rosgen Classification			C 5/6						C 5/6						C 5/6						C 5/6																
Channel Thalweg length (ft)			446						446						446						446																
Sinuosity (ft)			1.08						1.08						1.08						1.08																
Water Surface Slope (Channel) (ft/ft)																																					
BF slope (ft/ft)			0.005						0.005						0.005						0.005																
2 = Bankfull for XS 6 recalculated																																					
³ Ri% / Ru% / P% / G% / S%																																					
³ SC% / Sa% / G% / C% / B% / Be%																																					
³ d16 / d35 / d50 / d84 / d95 /																																					
² % of Reach with Eroding Banks																																					
Channel Stability or Habitat Metric																																					
Biological or Other																																					

Pattern data will not typically be collected unless visual data, dimensional data or profile data indicate significant shifts from baseline

Shaded cells indicate that these will typically not be filled in.
1 = The distributions for these parameters can include information from both the cross-section measurements and the longitudinal profile.
2 = Proportion of reach exhibiting banks that are eroding based on the visual survey from visual assessment table
3 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave
4. = Of value/needed only if the n exceeds 3

Exhibit Table 11b. Monitoring Data - Stream Reach Data Summary
Project Name/Number (Hudson/ DMS:95361) Segment/Reach: Reach 4

Parameter	Baseline						MY-1						MY-2						MY-3						MY-4						MY-5											
	Mn	Mean	Med	Max	SD ⁴	n	Mn	Mean	Med	Max	SD ⁴	n	Mn	Mean	Med	Max	SD ⁴	n	Mn	Mean	Med	Max	SD ⁴	n	Mn	Mean	Med	Max	SD ⁴	n	Mn	Mean	Med	Max	SD ⁴	n						
Dimension and Substrate - Riffle only																																										
Bankfull Width (ft)			9.90			1			8.27			1			10.59			1			10.00			1																		
Floodprone Width (ft)			31.36			1			57.96			1			29.01			1			25.46			1																		
Bankfull Mean Depth (ft)			0.32			1			0.52			1			0.30			1			0.30			1																		
¹ Bankfull Max Depth (ft)			0.74			1			1.62			1			0.62			1			0.52			1																		
Bankfull Cross Sectional Area (ft ²)			3.17			1			4.31			1			3.17			1			3.17			1																		
Width/Depth Ratio			30.90			1			15.86			1			35.39			1			19.23			1																		
Entrenchment Ratio			3.17			1			7.01			1			5.47			1			2.55			1																		
¹ Bank Height Ratio			1.00			1			1.00			1			1.00			1			0.70			1																		
Profile																																										
Riffle Length (ft)																																										
Riffle Slope (ft/ft)																																										
Pool Length (ft)																																										
Pool Max depth (ft)																																										
Pool Spacing (ft)																																										
Pattern																																										
Channel Beltwidth (ft)																																										
Radius of Curvature (ft)																																										
Rc:Bankfull width (ft/ft)																																										
Meander Wavelength (ft)																																										
Meander Width Ratio																																										
Additional Reach Parameters																																										
Rosgen Classification			C 5/6						C 5/6						C 5/6																											
Channel Thalweg length (ft)			447						447						447																											
Sinuosity (ft)			1.01						1.01						1.01																											
Water Surface Slope (Channel) (ft/ft)																																										
BF slope (ft/ft)			0.0035						0.0035						0.0035																											
2 = Bankfull for XS 6 recalculated																																										
³ Ri% / Ru% / P% / G% / S%																																										
³ SC% / Sa% / G% / C% / B% / Be%																																										
³ d16 / d35 / d50 / d84 / d95 /																																										
² % of Reach with Eroding Banks																																										
Channel Stability or Habitat Metric																																										
Biological or Other																																										

Pattern data will not typically be collected unless visual data, dimensional data or profile data indicate significant shifts from baseline

Shaded cells indicate that these will typically not be filled in.
 1 = The distributions for these parameters can include information from both the cross-section measurements and the longitudinal profile.
 2 = Proportion of reach exhibiting banks that are eroding based on the visual survey from visual assessment table
 3 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave
 4. = Of value/needed only if the n exceeds 3

APPENDIX E: HYDROLOGIC DATA

Table 9: Verification of Bankfull Events

Table 12: Verification of Baseflow


Figure 2: Monthly Rainfall Data with Percentiles

Figures 3-12: Stream Surface Water Hydrology (Well 1-10)

Date of Observation	Dates of Occurance	Method	Greater than Qbkf Stage?	Notes
10/5/18	12/8/17-4/6/18, 5/05-5/10, 5/30-6/6, 6/14, 7/24-8/8, 8/22-8/26, 9/13-9/20	On-Site data logger	Y	Reach 1 (Well 5, 6)
10/5/18	1/7-1/16/18, 1/25-2/23, 2/27, 3/24-3/27, 3/21, 4/9-4/15, 8/2-8/5, 9/13-9/20	On-Site data logger	Y	Reach 2 (Well 7)
10/5/18	12/27/17, 1/1/18, 1/6, 1/16, 1/25-2/5, 3/27, 9/13-9/18	On-Site data logger	Y	Reach 3 (Well 1, 2)
10/5/18	11/9, 11/17-11/22/17, 3/24-4/24/18, 5/22-6/10, 9/11-9/19	On-Site data logger	Y	Reach 4 (Well 3)
10/5/18	11/13, 11/17, 12/12, 12/26, 12/31/17, 1/10/18, 2/13-2/15, 3/24-3/26, 4/22, 5/31, 6/1, 7/24, 7/29, 8/8, 9/12, 9/16	On-Site data logger	Y	Reach 1& 4 Confluence (Well 4)

Well (Reach)	Dates of Occurrence	30 Consecutive Days Minimum Flow Requirement Met?	Notes
1 (Reach 3)	Various	Y	On-site data logger
2 (Reach 3)	Various	Y	On-site data logger
3 (Reach 4)	Various	Y	On-site data logger
4 (Confluence R1&4)	Various	Y	On-site data logger
5 (Reach 1)	Various	Y	On-site data logger
6 (Reach 1)	Various	Y	On-site data logger
7 (Reach 2)	Various	Y	On-site data logger
8 (Reach 5)	Various	Y	On-site data logger
9 (Reach 5)	Various	Y	On-site data logger
10 (Reach 5)	Various	Y	On-site data logger

Figure 2: Monthly Rainfall Data

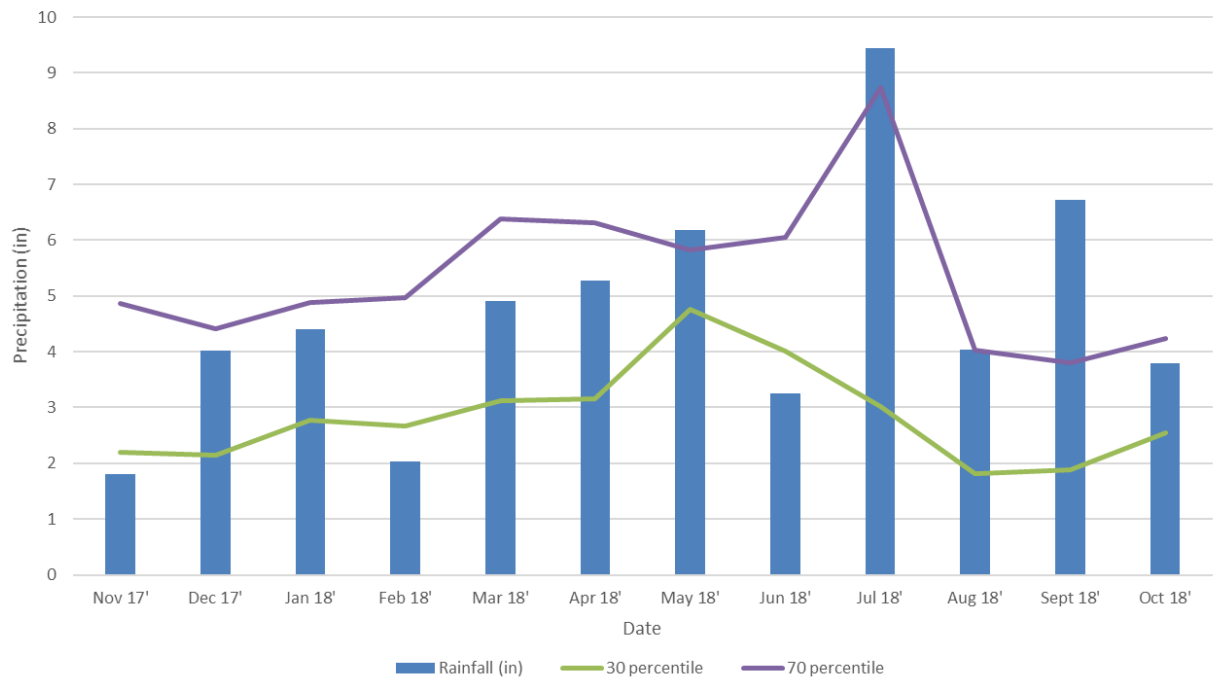

Rainfall Data collected from Washington WWTP in Beaufort County, NC. Data obtained from USDA-NRCS Agricultural Applied Climate Information System. Percentiles calculated from 1997-2018 data.

Figure 3

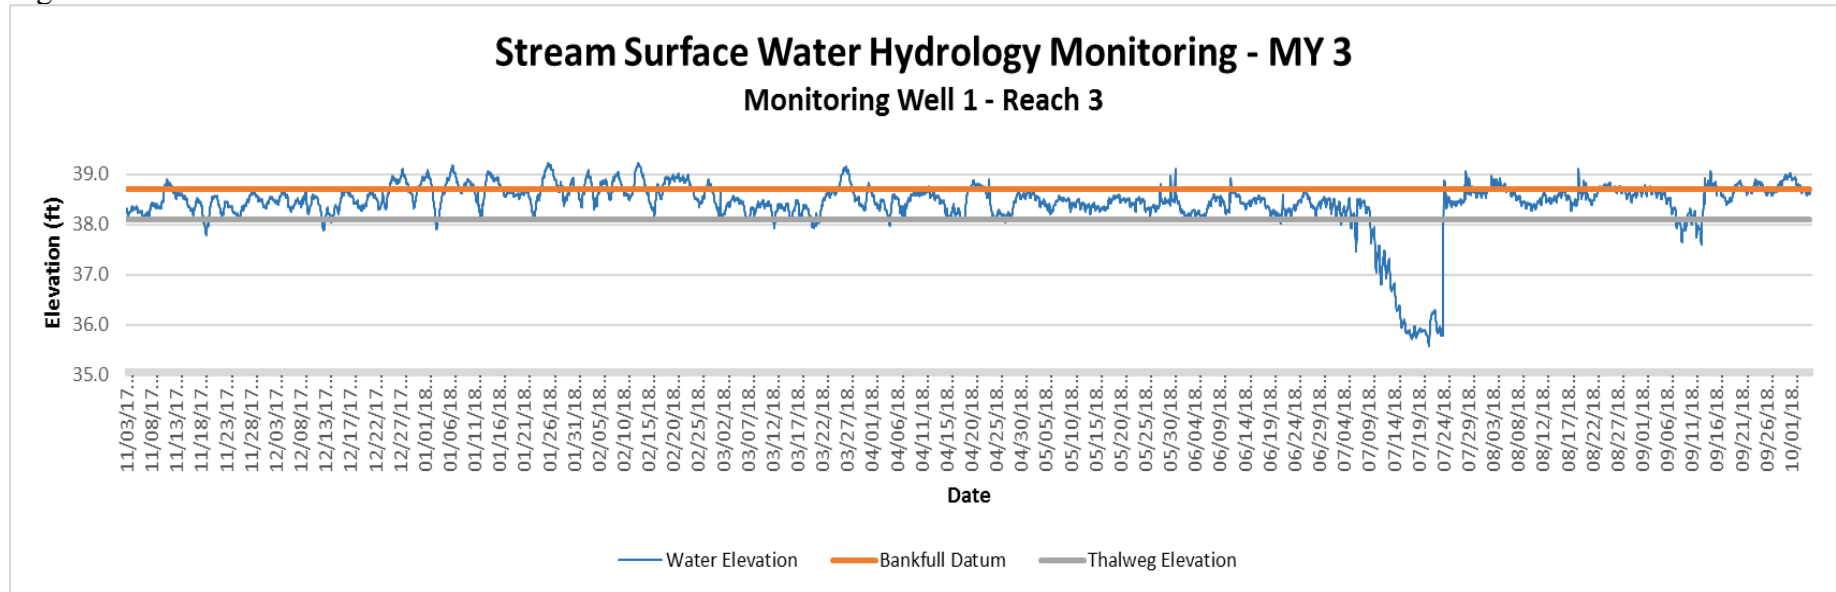


Figure 4

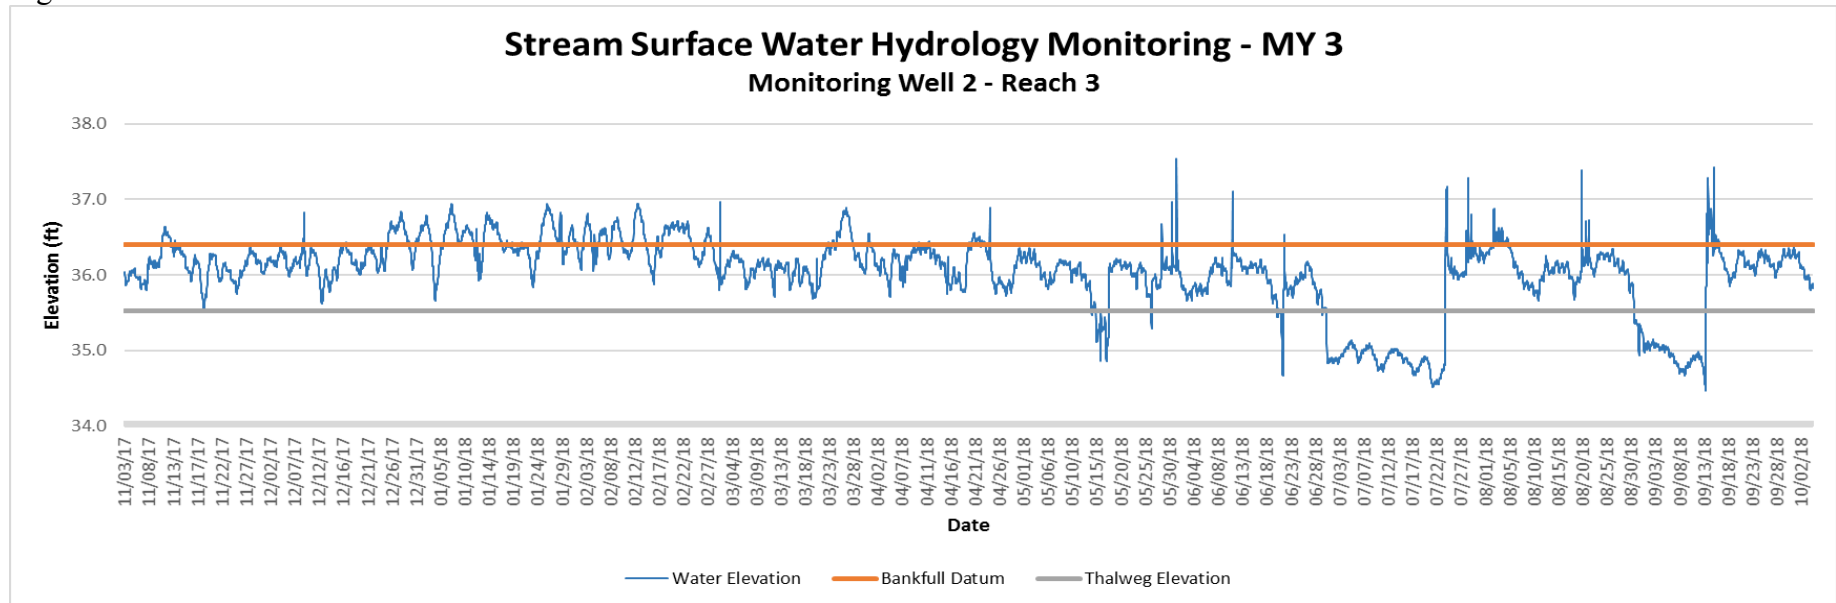


Figure 5



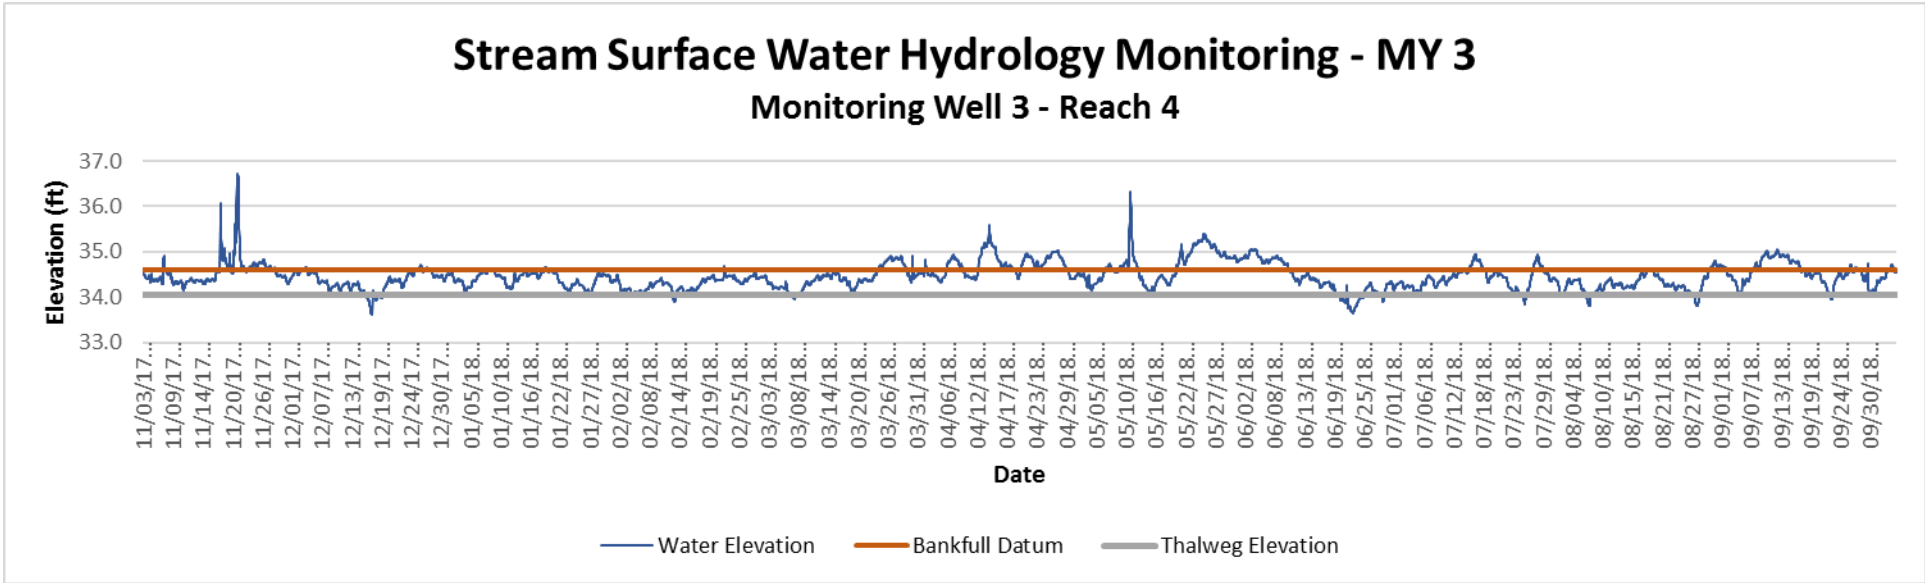


Figure 6

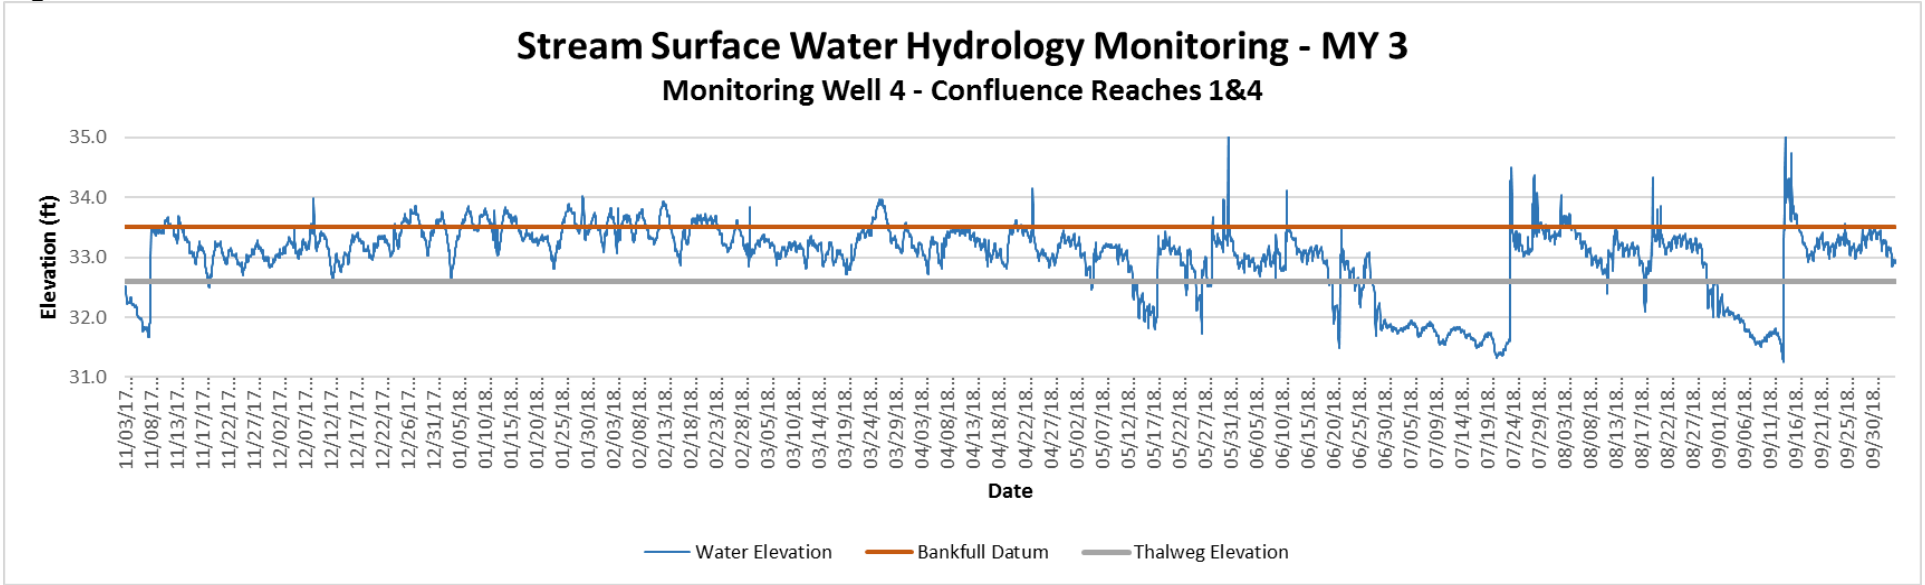


Stream Surface Water Hydrology Monitoring - MY 3

Monitoring Well 5 - Reach 1

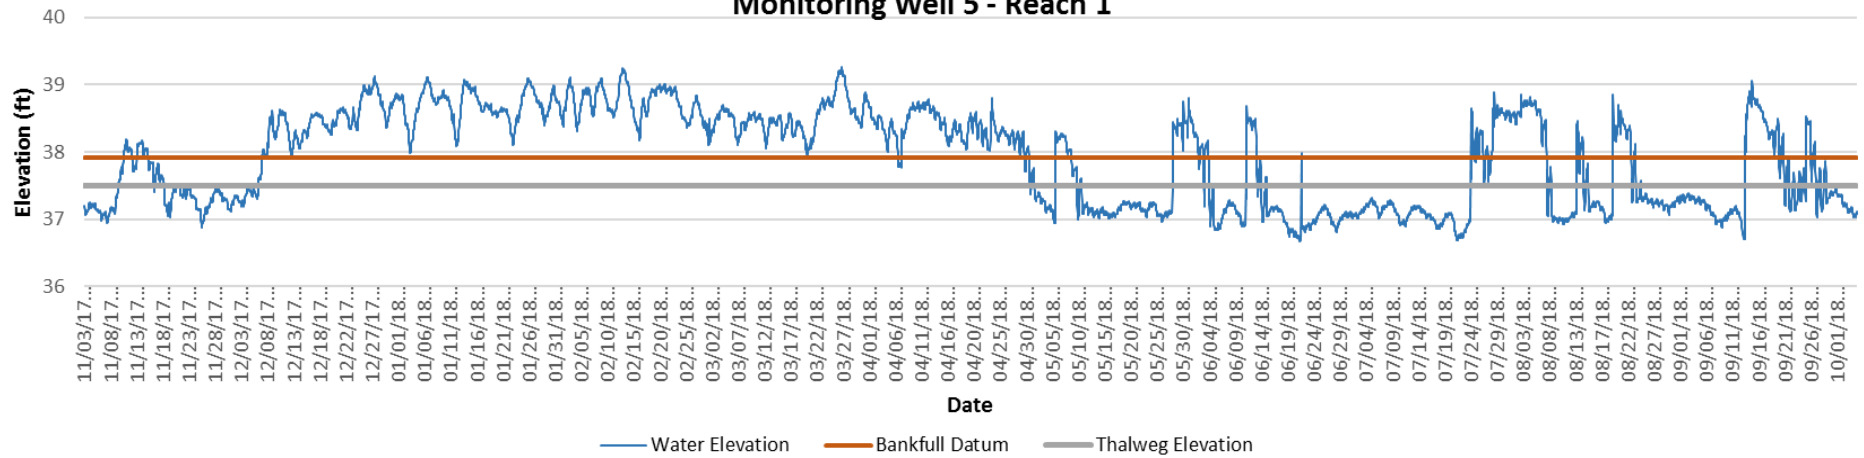

Stream Surface Water Hydrology Monitoring - MY 3

Monitoring Well 6 - Reach 1

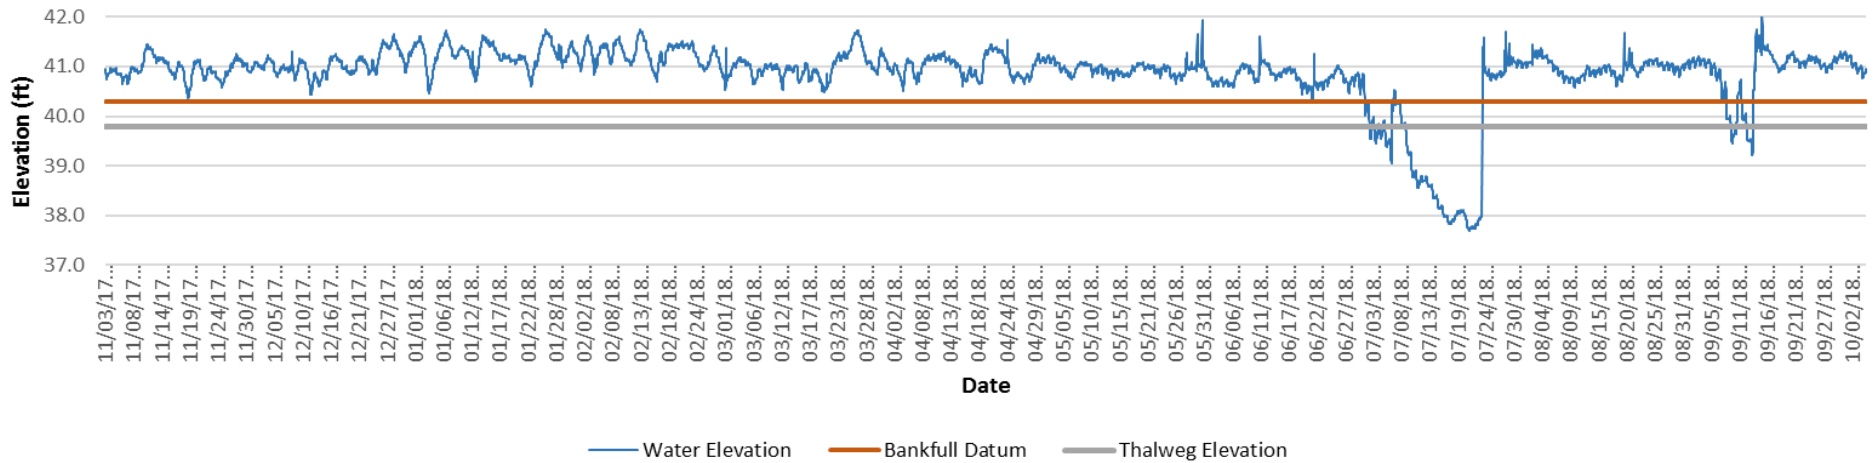



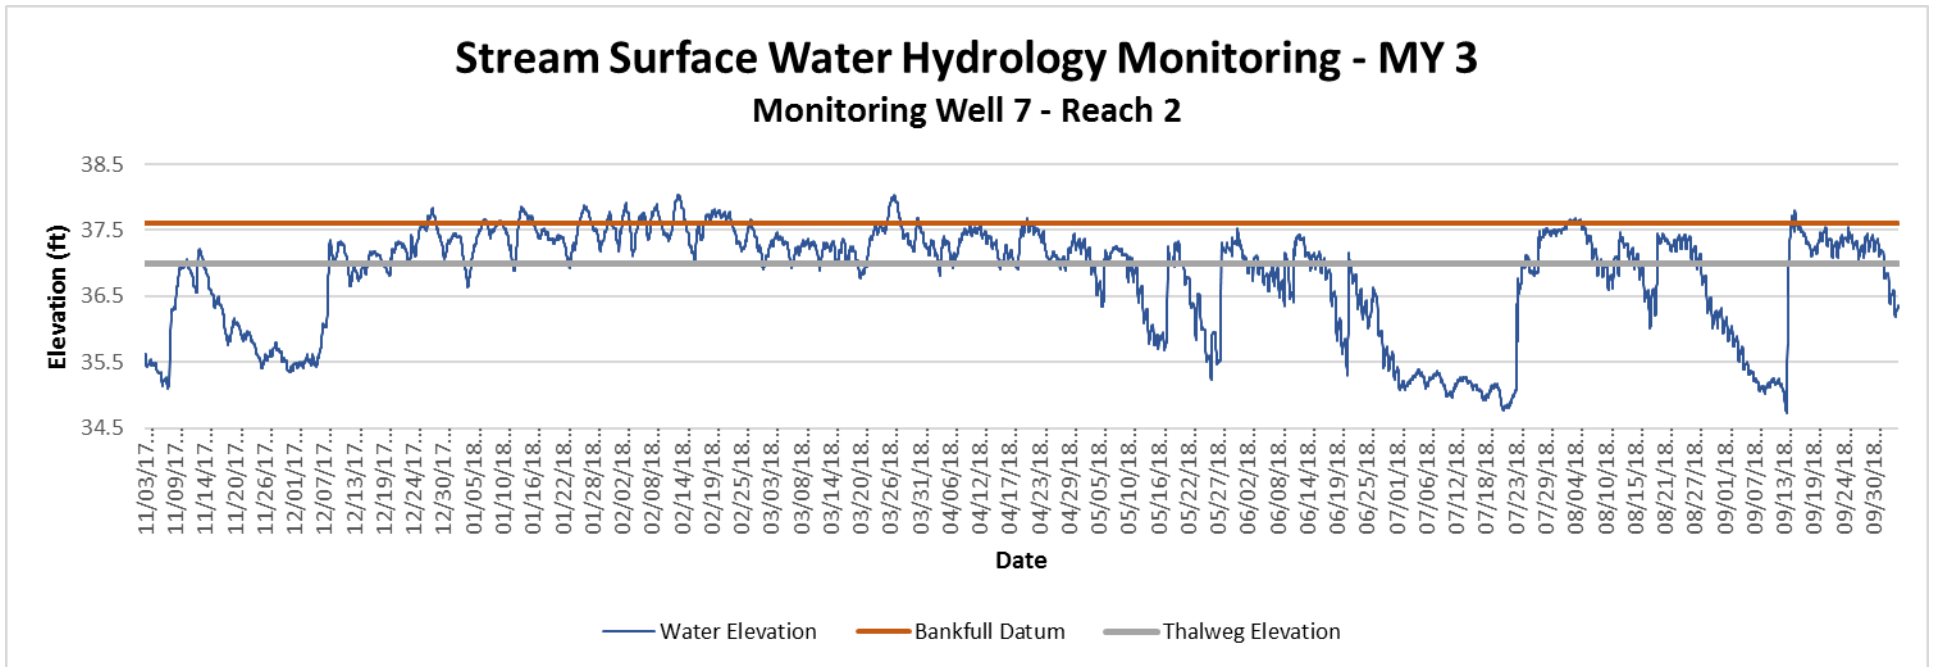


Figure 10

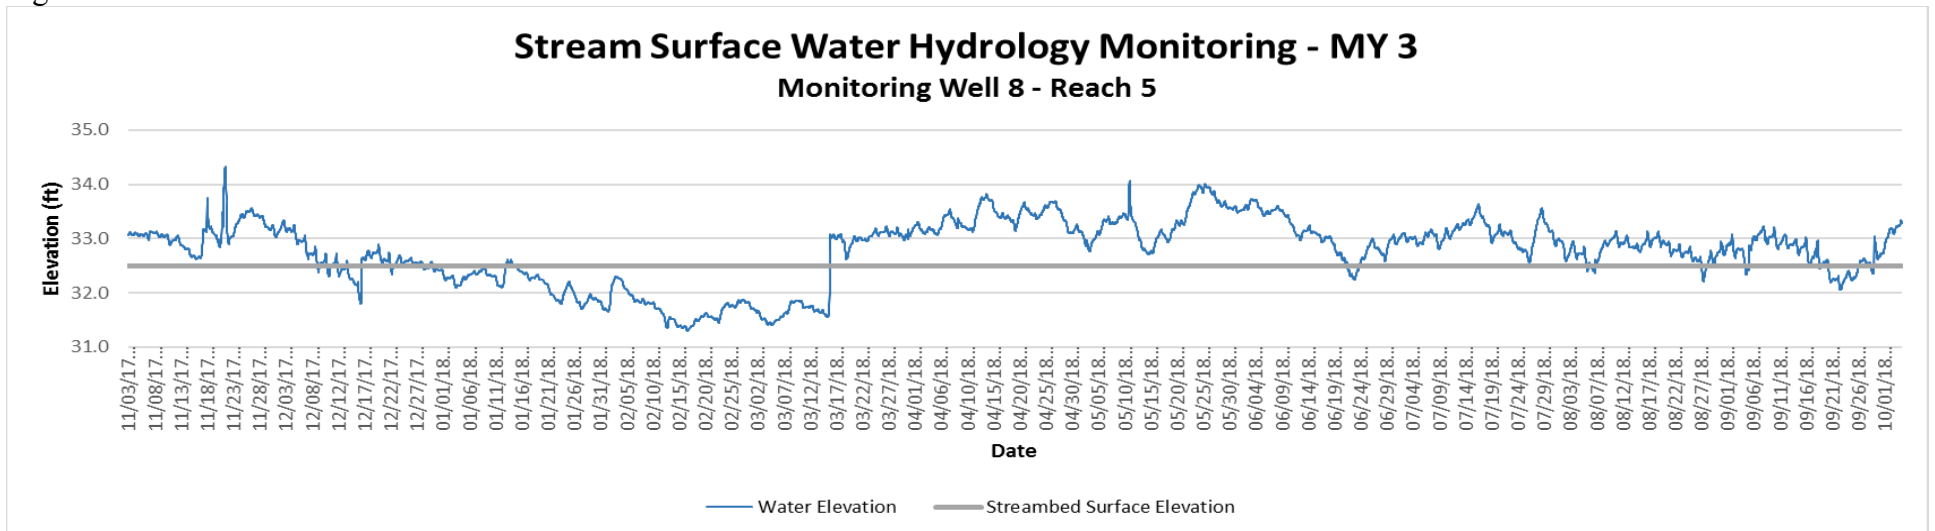

Stream Surface Water Hydrology Monitoring - MY 3 Monitoring Well 9 - Reach 5

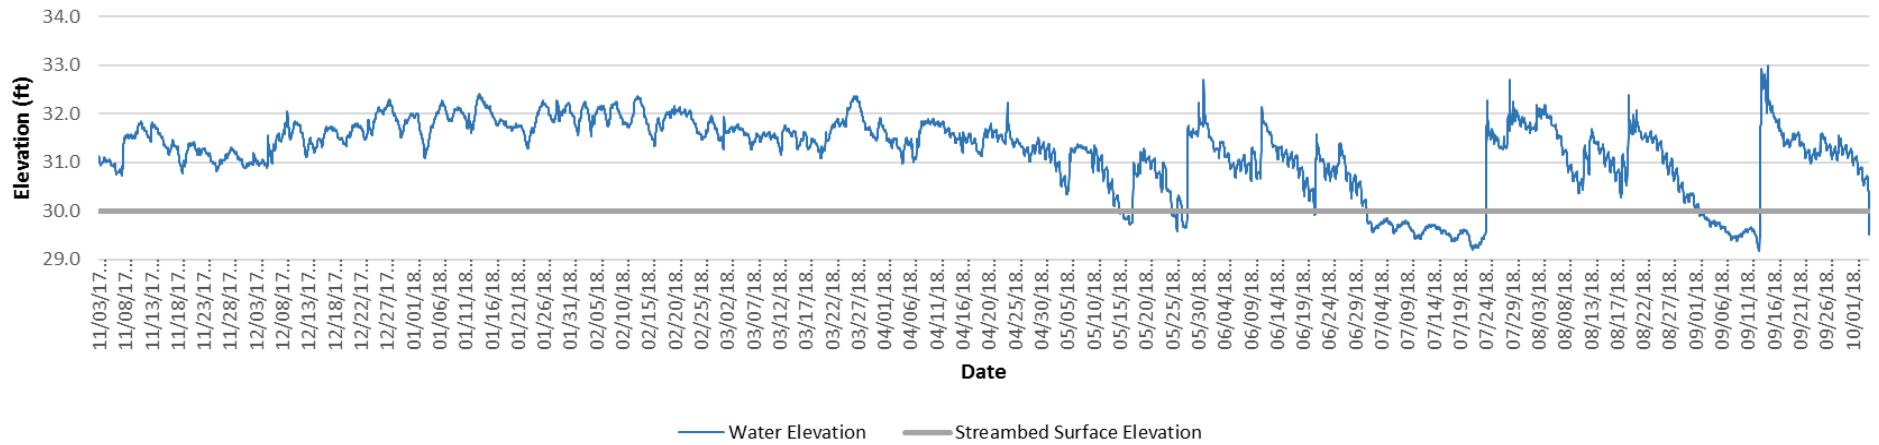

Stream Surface Water Hydrology Monitoring - MY 3 Monitoring Well 10 - Reach 5

