

**Jacob's Ladder**  
**Stream Restoration Monitoring Report**  
**EEP Project # 95023**  
**EEP Contract # 003983**  
**Monitoring Year 01**



Submitted to:



NCDENR-EEP, 1652 Mail Service Center, Raleigh, NC 27699-1652

**Construction Completed: January 2014**

**Data Collection: 2014**

**Submitted: January 2015**

## **Design and Monitoring Firm**



**Landmark Center II, Suite 220  
4601 Six Forks Road  
Raleigh, NC 27609  
Phone: (919) 278-2514  
Fax: (919) 783-9266**

**Project Manager: Adam Spiller  
Email: [adam.spiller@kci.com](mailto:adam.spiller@kci.com)  
Project No: 20110669**

## Table of Contents

<b>1.0</b>	<b>EXECUTIVE SUMMARY/PROJECT ABSTRACT .....</b>	<b>1</b>
<b>2.0</b>	<b>METHODOLOGY .....</b>	<b>2</b>
<b>3.0</b>	<b>REFERENCES.....</b>	<b>2</b>

### Appendix A – Project Vicinity Map and Background Tables

Figure 1.	Vicinity Map .....	4
Figure 2.	Site Asset Map .....	5
Table 1.	Project Components and Mitigation Credits .....	6
Table 2.	Project Activity and Reporting History .....	7
Table 3.	Project Contacts Table .....	7
Table 4.	Project Attribute Table.....	8

### Appendix B – Visual Assessment Data

Current Condition Plan View.....	10
Table 5. Visual Stream Morphology Stability Assessment .....	12
Table 6. Vegetation Condition Assessment .....	14
Photo Reference Points .....	15
Vegetation Monitoring Plot Photos.....	22

### Appendix C – Vegetation Plot Data

Table 7. Vegetation Plot Criteria Attainment .....	26
Table 8. CVS Vegetation Plot Metadata.....	27
Table 9. CVS Stem Count Total and Planted by Plot and Species .....	28

### Appendix D – Stream Survey Data

Cross-Section Plots .....	31
Longitudinal Profile Plots .....	41
Pebble Count Plots.....	43
Table 10. Baseline Stream Data Summary Table .....	50
Table 11a. Cross-Section Morphology Data Table .....	54
Table 11b. Stream Reach Morphology Data Table.....	55

### Appendix E – Hydrologic Data

Table 12. Verification of Bankfull Events .....	61
---	----

## 1.0 EXECUTIVE SUMMARY / PROJECT ABSTRACT

The Jacob's Ladder Stream Restoration Site is a full-delivery project that was developed for the North Carolina Ecosystem Enhancement Program (EEP). Construction was completed in January 2014. The site restored a total of 4,971 linear feet and enhanced 446 linear feet along three tributaries to Irish Buffalo Creek in the Yadkin-Pee Dee River Basin. The project is located west of China Grove and north of Kannapolis off of Saw Road in Rowan County (Figure 1, Appendix A). This project will expand aquatic and terrestrial habitat in the Rocky River Watershed (03040105). The project is within the 03040105020040 Irish Buffalo Creek Local Watershed Unit (14-digit HUC) (NCDENR, EEP 2009). In the North Carolina Ecosystem Enhancement Program's (EEP) most recent publication of Excluded and Targeted Local Watersheds/Hydrologic Units, the 03040105020040 14-digit HUC has been identified as a Targeted Local Watershed. The project is located in the Piedmont Physiographic Province and the project streams initiate as headwater systems out of moderately-sloped, forested hills before reaching the floodplain of Irish Buffalo Creek. The site's 1.07-square mile project watershed is comprised predominantly of pasture and mixed hardwoods, with an area of rural residential development in the northeastern corner. Prior to construction, the site was actively used for timber and cattle production for over five generations.

The project goals and objectives are listed below.

### *Project Goals*

- Restore a diverse riparian corridor that connects forested stream systems upstream and downstream of the project.
- Reduce the sediment supply entering Irish Buffalo Creek.

### *Project Objectives*

- Restore stable channel planforms to streams that have been straightened and modified.
- Reshape and stabilize eroding stream banks.
- Plant the site with native trees to help reestablish a diverse riparian corridor.
- Install exclusion fencing and alternative watering options to keep livestock out of the project streams.

Vegetation success is based on the criteria established in the USACE Stream Mitigation Guidelines (2003). This document states that vegetation monitoring results should have the following planted stem density minimums in the corresponding monitoring years: 320 stems/acre through Year Three, 288 stems/acre in Year Four, and 260 stems/acre in Year Five. The first-year vegetation monitoring was based on the Level 2 CVS-EEP vegetation monitoring protocol. The site's average density for this monitoring period is 379 planted stems/acre, with none of the plots having live stakes in them. Eleven of the sixteen plots had greater than 320 planted stems/acre. There are five monitoring plots that have calculated planted stem densities less than 320 stems/acre; (Plots 6, 8, 11, 15, and 16). This is not seen as problematic given the high potential for desirable volunteers to become established in the plots and across the site. Like natural vegetative communities, some areas will have slightly higher densities than others, but the data from the vegetation monitoring plots reveal that the site has an adequate average stem density. To ensure continued vegetative success, some parts of the site will receive supplemental planting in early 2015. Including volunteers, the monitoring plots averaged 483 total stems/acre. The overall vegetation assessment found the site to be on track to meeting the vegetative success criterion.

First-year monitoring found the Jacob's Ladder streams to be stable, with only minor changes from the as-built conditions. No areas show signs of serious bank erosion or bed degradation potential. The monitoring components were installed in February/March 2014. An automatic recording gauge has been installed on both T1 and T2. The stream gauges have not recorded any bankfull events since the project was constructed early this year. The monitoring plan for each tributary is as follows: T1 has a 1500 foot longitudinal profile, 3 riffle cross-sections

and 2 pool cross-sections; T2 has a 1500 foot longitudinal profile, 4 riffle cross-sections and 1 pool cross-section; T1A is being monitored visually since it is small, partially intermittent , and a mix of mitigation types. Pebble counts were conducted at all ten cross-sections. Nine permanent photo points have been established with a total of nineteen photos to be taken annually. Monitoring year 1 found the stream functioning as designed with little change from the baseline conditions. Several of the pools on T2 show signs of filling in with sediment. These areas will be monitored closely during the next monitoring year to ensure they are not a threat to the stability of the system.

Summary information/data related to the occurrence of items such as beaver or encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report and in the Mitigation Plan documents available on the EEPs website. All raw data supporting the tables and figures in the appendices are available from EEP upon request.

## **2.0 METHODOLOGY**

The survey data were collected with a total station instrument between October 29 and November 4, 2014.

The CVS-EEP protocol, Level 2 (<http://cvs.bio.unc.edu/methods.htm>) was used to collect vegetation data from the site. The vegetation monitoring was completed on September 30, 2014

## **3.0 REFERENCES**


Lee, M.T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2008. CVS-EEP Protocol for Recording Vegetation, Version 4.2 (<http://cvs.bio.unc.edu/methods.htm>)


NCDENR, Ecosystem Enhancement Program. 2009. Lower Yadkin Pee-Dee River Basin Priorities 2009. Raleigh, NC.  
[http://www.nceep.net/services/restplans/Yadkin\\_Pee\\_De\\_RBRP\\_2009\\_Final.pdf](http://www.nceep.net/services/restplans/Yadkin_Pee_De_RBRP_2009_Final.pdf)

USACE. 2003. Stream Mitigation Guidelines. USACE, NCDENR-DWQ, USEPA, NCWRC.

# **Appendix A**

## **Project Vicinity Map and Background Tables**

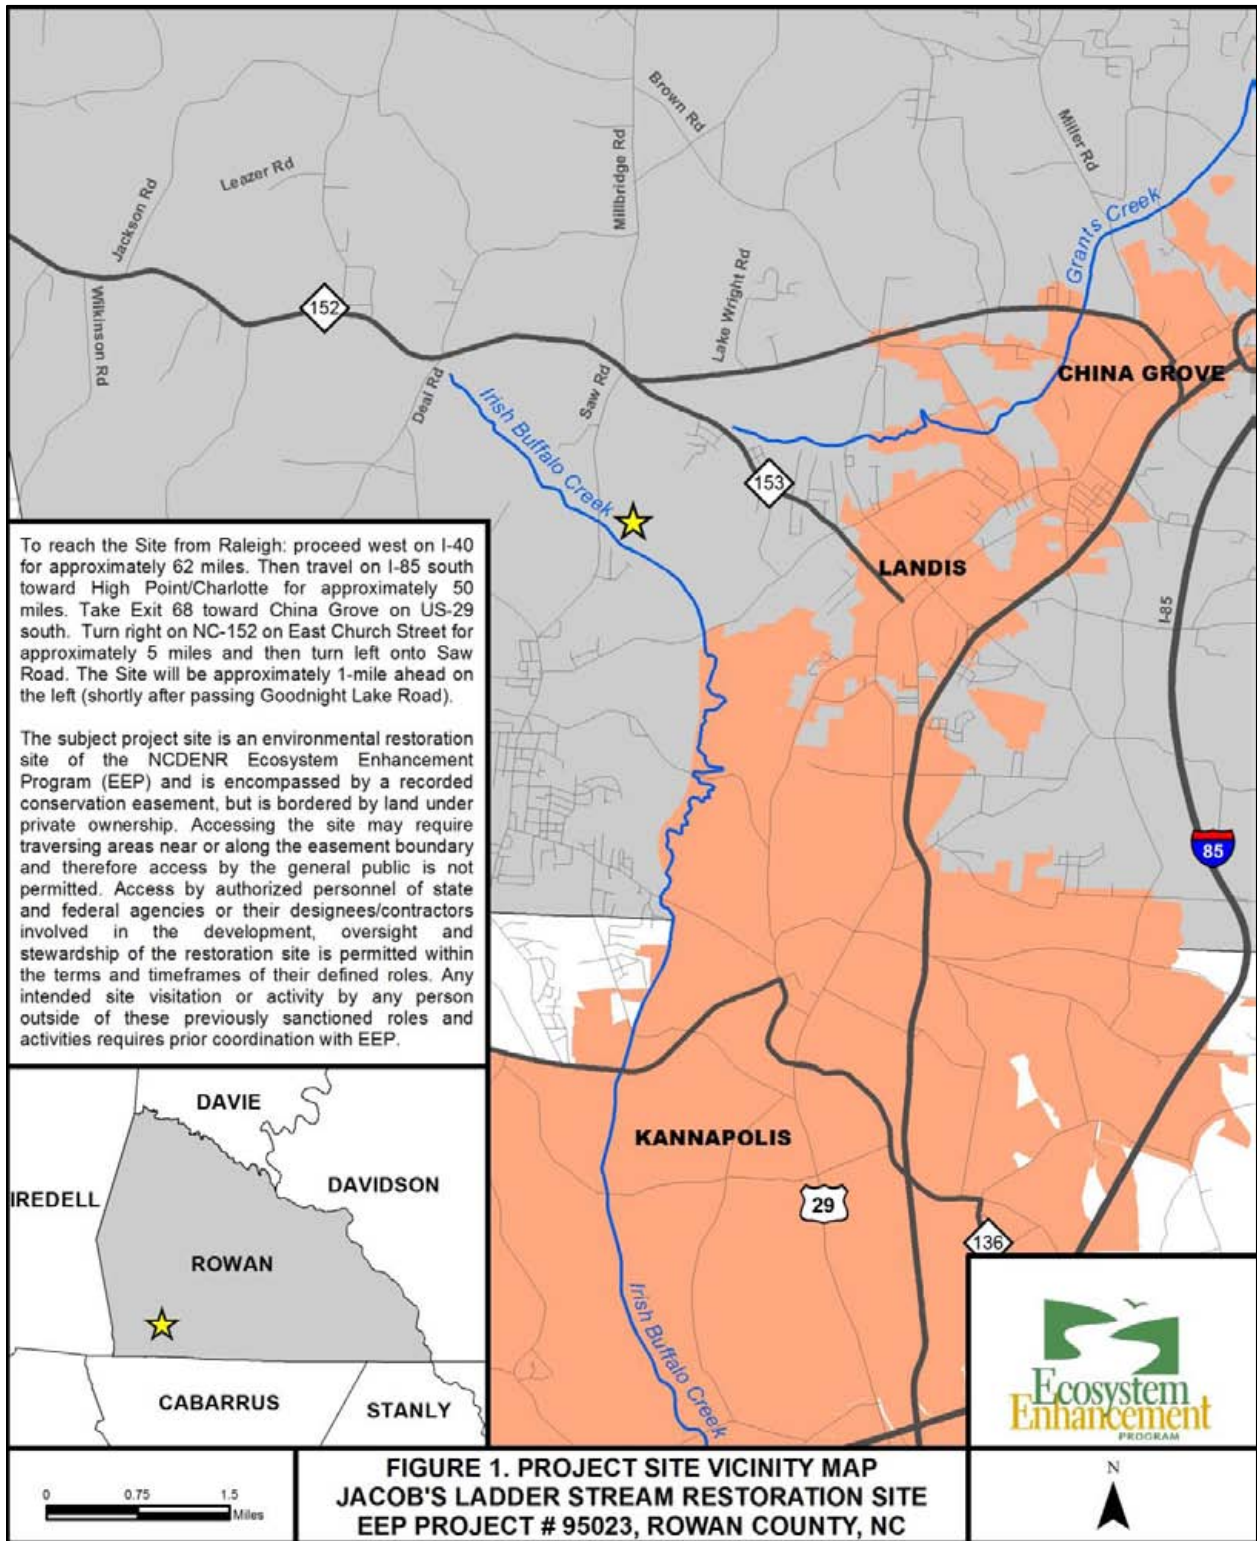

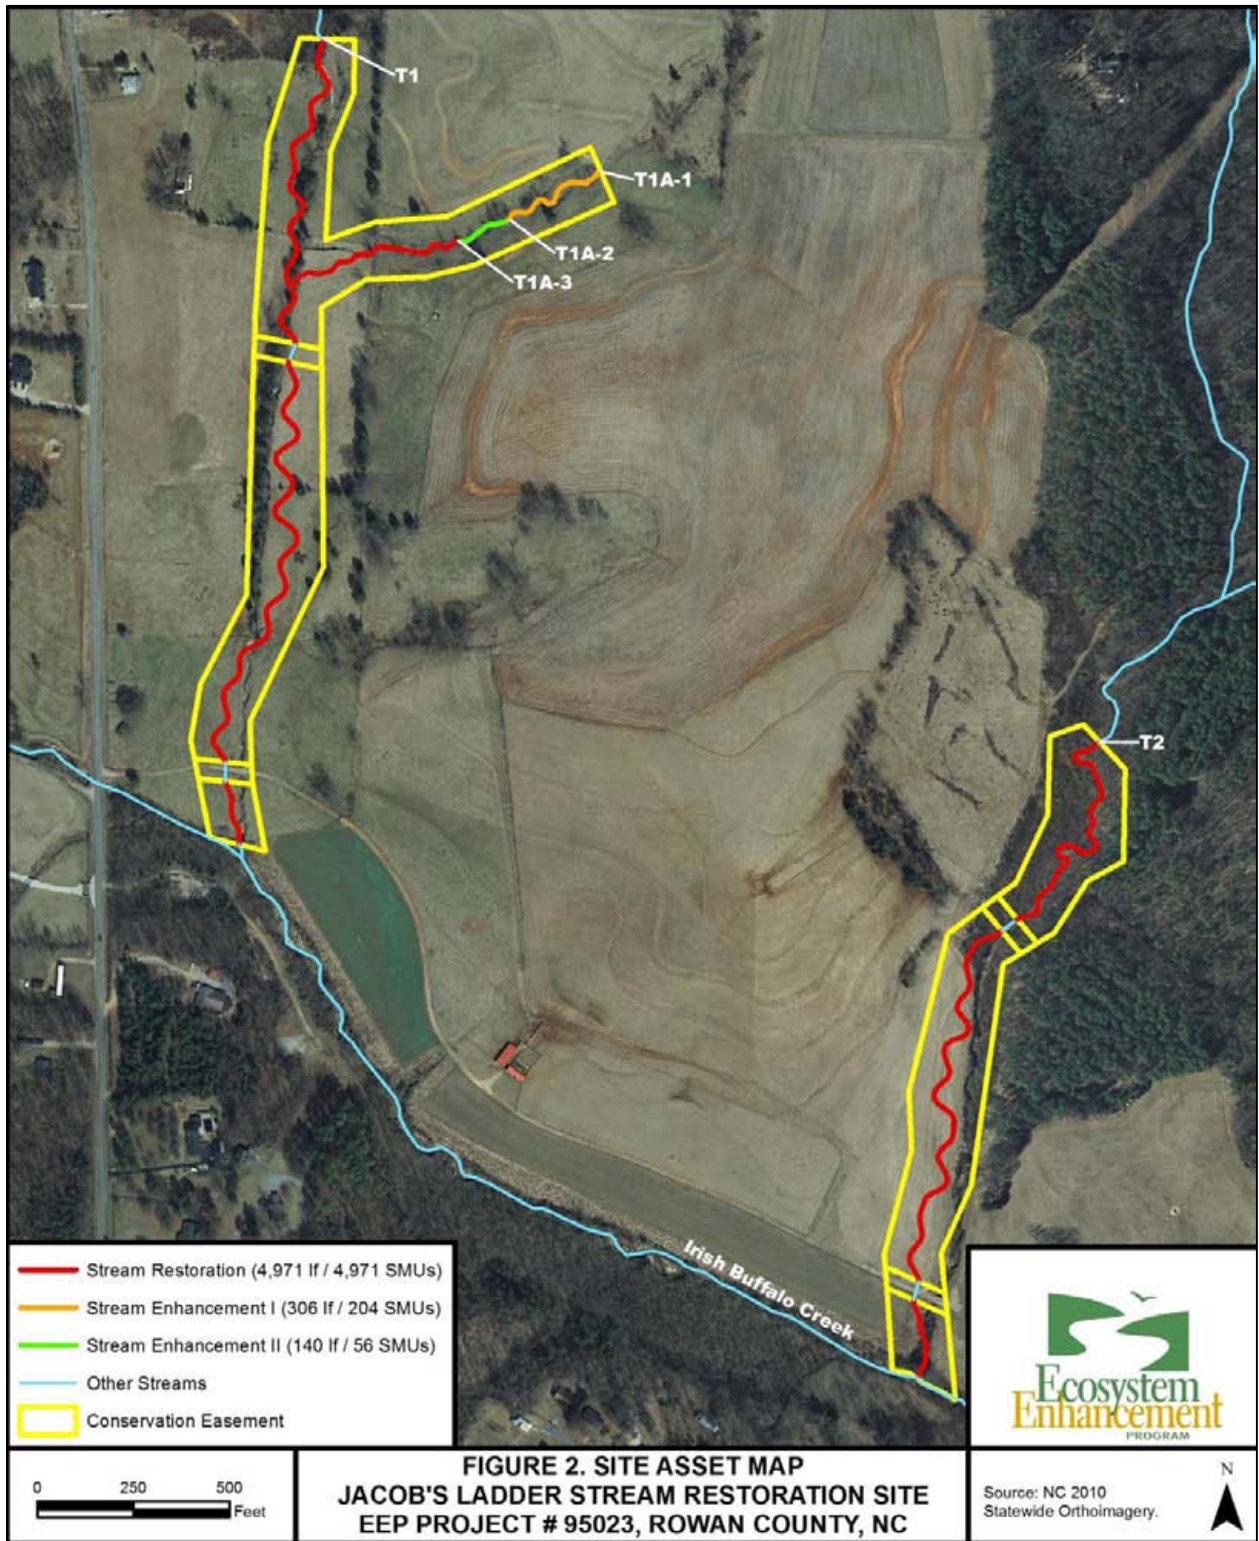



<b>Table 1. Project Components and Mitigation Credits</b>							
<b>Jacob's Ladder Stream Restoration Site, EEP Project # 95023</b>							
<b>Mitigation Credits</b>							
	<b>Stream</b>			<b>Riparian Wetland</b>	<b>Non-riparian Wetland</b>	<b>Buffer</b>	<b>Nitrogen Nutrient Offset</b>
<b>Type</b>	R	EI	EII				
<b>Length</b>	4,971	306	140				
<b>Credits</b>	4,971	204	56				
<b>TOTAL CREDITS</b>	5,231						
<b>Project Components</b>							
<b>Project Component -or- Reach ID</b>	<b>Design Stationing/ Location</b>	<b>Existing Footage</b>	<b>Approach (P1, P2 etc.)</b>	<b>Restoration -or- Restoration Equivalent</b>	<b>Restoration Footage</b>	<b>Mitigation Ratio</b>	
T1	10+00-34+89*	1,809	P1	Restoration	2,389*	1:1	
T1A-1	50+00-53+06	306	-	Enhancement I	306	1:1.5	
T1A-2	53+06-54+46	140	-	Enhancement II	140	1:2.5	
T1A-3	54+46-59+44	470	P1	Restoration	498	1:1	
T2	99+75-121+60*	1,246	P1	Restoration	2,084*	1:1	
<b>Component Summation</b>							
<b>Restoration Level</b>	<b>Stream (linear feet)</b>			<b>Mitigation Units (SMU)</b>			
Restoration	4,971			4,971			
Enhancement I	306			204			
Enhancement II	140			56			

\*Mitigation units have been calculated to exclude the easement exceptions and water utility easements.

There were no BMP elements included in this project.

<b>Table 2. Project Activity &amp; Reporting History Jacob's Ladder Stream Restoration Site, EEP Project # 95023</b>		
<b>Activity or Report</b>	<b>Data Collection Complete</b>	<b>Actual Completion or Delivery</b>
Mitigation Plan		Sept 12
Final Design - Construction Plans		Dec 12
Construction		Aug 13
Planting		Jan 14
Baseline Monitoring/Report	Feb/March 14	April 14
Year 1 Monitoring	Nov 14	Jan 15

<b>Table 3. Project Contacts Jacob's Ladder Stream Restoration Site, EEP Project # 95023</b>	
<b>Design Firm</b>	KCI Associates of North Carolina, PC Landmark Center II, Suite 220 4601 Six Forks Rd. Raleigh, NC 27609 Contact: Mr. Tim Morris Phone: (919) 278-2512 Fax: (919) 783-9266
<b>Construction Contractor</b>	Wright Contracting, LLC 160 Walker Road Lawndale, NC 28090 Contact: Mr. Stephen James Phone: (704) 692-4633
<b>Planting Contractor</b>	Forestree Management Co. 1280 Maudis Road Bailey, NC 27807 Contact: Mr. Tony Cortez Phone: (252) 243-2513
<b>Monitoring Performers</b>	
<b>MY00- MY01</b>	KCI Associates of North Carolina, PC Landmark Center II, Suite 220 4601 Six Forks Rd. Raleigh, NC 27609 Contact: Mr. Adam Spiller Phone: (919) 278-2514 Fax: (919) 783-9266

<b>Table 4. Project Information</b>			
<b>Jacob's Ladder Stream Restoration Site, EEP Project # 95023</b>			
<b>Project Name</b>	Jacob's Ladder Stream Restoration Site		
<b>County</b>	Rowan County		
<b>Project Area (acres)</b>	17.2 acres		
<b>Project Coordinates (lat. and long.)</b>	35.552956 N, 80.653116 W		
<b>Project Watershed Summary Information</b>			
<b>Physiographic Province</b>	Piedmont		
<b>River Basin</b>	Yadkin-Pee Dee		
<b>USGS Hydrologic Unit 8-digit</b>	03040105	USGS Hydrologic Unit 14-digit	03040105020040
<b>DWQ Sub-basin</b>	13-17-09		
<b>Project Drainage Area</b>	682 acres/1.06 square miles		
<b>Project Drainage Area Percentage of Impervious Area</b>	1.1%/8 acres		
<b>CGIA Land Use Classification</b>	15.8% Cultivated, 35.1% Managed Herbaceous Cover, 41.6% Mixed Upland Hardwoods, 6.9% Mixed Hardwoods/Conifers, and 0.5% Southern Yellow Pine		
<b>Reach Summary Information (Post-Restoration)</b>			
<b>Parameters</b>	<b>T1</b>	<b>T1A-1, T1A-2, T1A-3</b>	<b>T2</b>
Length of reach (linear feet)	2,389	944	2,084
Valley classification	VIII	VIII	VIII
Drainage area (acres)	231.6 acres	34.5 acres	450.1 acres
NCDWQ Water Quality Classification	Class C, WSIII	Class C, WSIII	Class C, WSIII
Morphological Description (stream type)	C4	B4c/C4	C4
Evolutionary trend	Stage II (Constructed)	Stage II (Constructed)	Stage II (Constructed)
Mapped Soil Series	Chewacla loam	Pacolet sandy loam	Pacolet sandy loam & Chewacla loam
Drainage class	Poorly drained	Well drained	Well drained
Soil Hydric status	Non hydric	Non hydric	Non hydric
Slope	0-2%	0-2%	0-2%
FEMA classification	AE (portion in backwater of Irish Buffalo Creek only)	N/A	AE (portion in backwater of Irish Buffalo Creek only)
Native vegetation community	Piedmont Alluvial Forest	Mesic Mixed Hardwood Forest & Piedmont Alluvial Forest	Piedmont Alluvial Forest
Percent composition of exotic invasive vegetation	0%	0%	0%
<b>Regulatory Considerations</b>			
<b>Regulation</b>	<b>Applicable?</b>	<b>Resolved?</b>	<b>Supporting Documentation</b>
Waters of the United States – Section 404	Yes	Yes, received 404 permit	N/A
Waters of the United States – Section 401	Yes	Yes, received 401 permit	N/A
Endangered Species Act*	No	N/A	N/A
Historic Preservation Act*	No	N/A	N/A
Coastal Zone Management Act * (CZMA)/ Coastal Area Management Act (CAMA)	No	N/A	N/A
FEMA Floodplain Compliance	Yes	Floodplain development permit completed through Rowan County	N/A
Essential Fisheries Habitat*	No	N/A	N/A

# **Appendix B**


## **Visual Assessment Data**



**LEGEND**

- CONSERVATION EASEMENT
- CROSS-SECTION (XS)
- VEG PLOT ACHIEVING DENSITY CRITERION
- VEG PLOT BELOW DENSITY CRITERION
- 483 / 379 VEG PLOT TOTAL / PLANTED STEM DENSITY
- ↔ PHOTO POINT (PP)
- GAUGE LOCATION

IMAGE SOURCE: NC 2010 STATEWIDE ORTHOIMAGERY

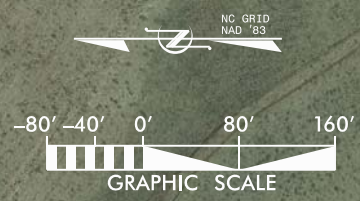

REV	DATE	DESCRIPTION




**KCI**  
ASSOCIATES OF NC  
ENGINEERS • PLANNERS • SCIENTISTS  
4601 SIX FORKS ROAD  
RALEIGH, NORTH CAROLINA 27609

JACOB'S LADDER  
STREAM MITIGATION PROJECT  
MONITORING YEAR 1  
CHINA GROVE, ROWAN COUNTY, NORTH CAROLINA  
REACH T1

DATE: NOV 2014  
SCALE: GRAPHIC


CURRENT  
CONDITION  
PLAN VIEW

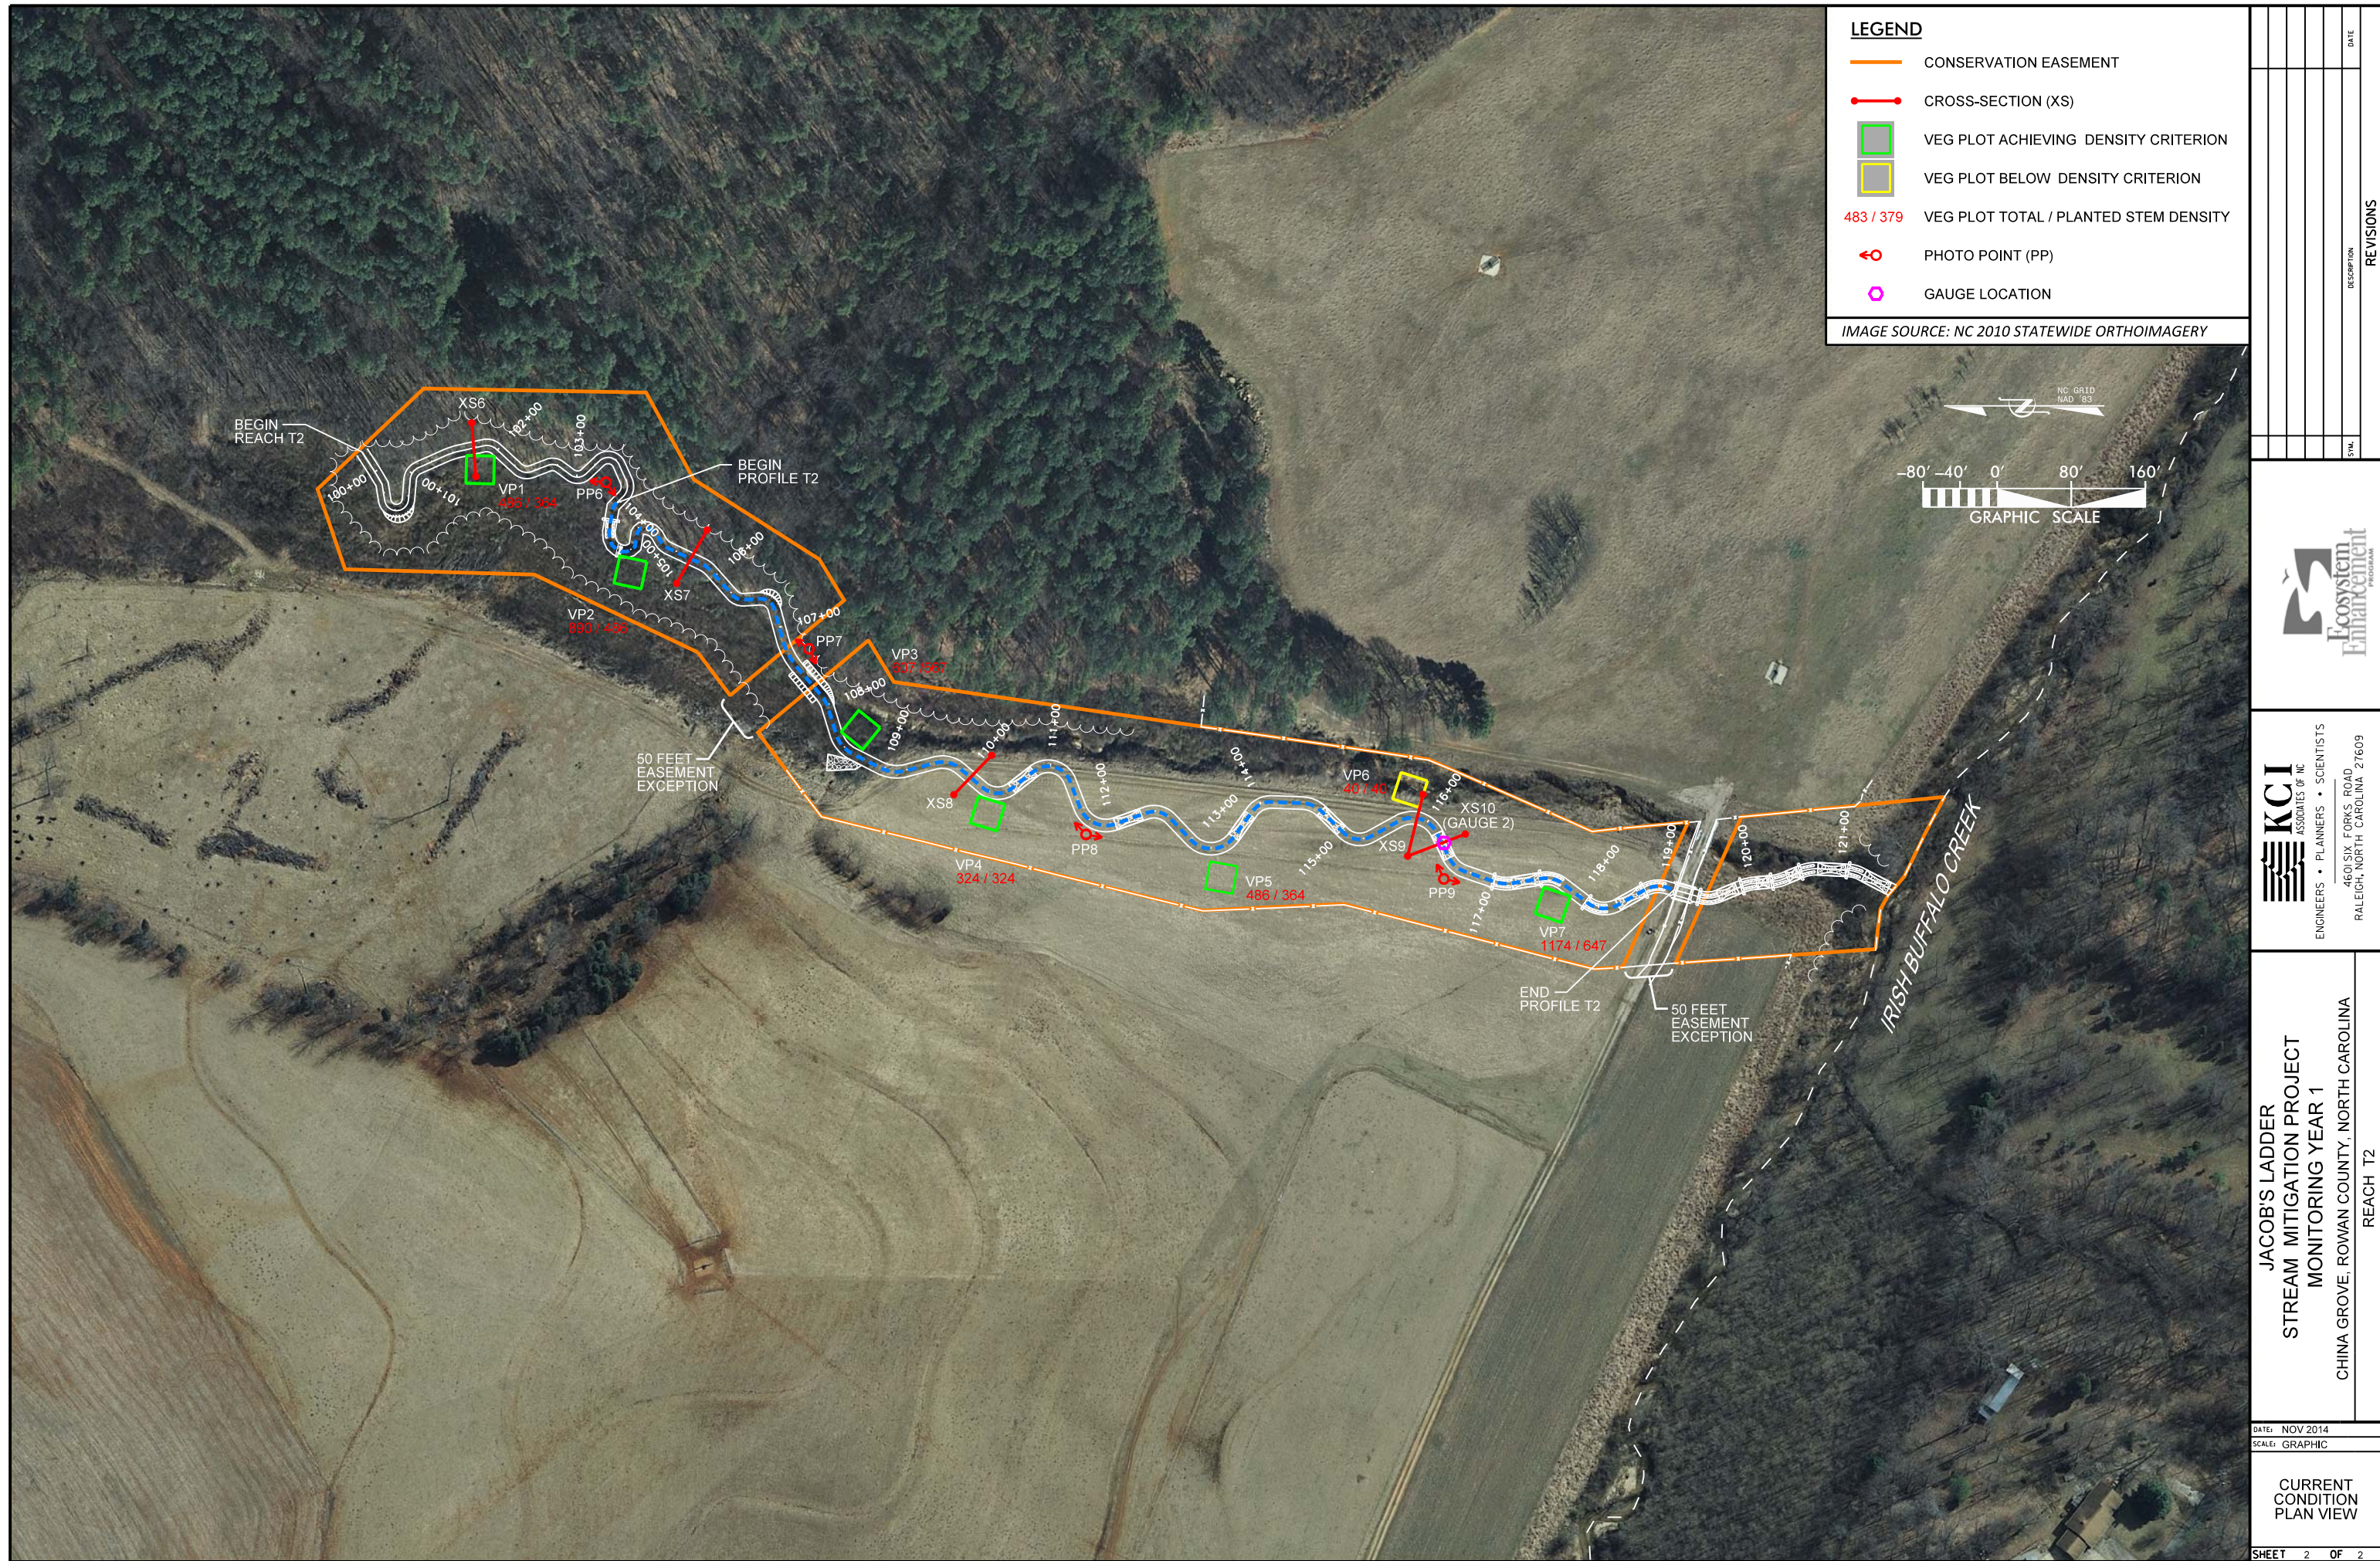

**LEGEND**

- CONSERVATION EASEMENT
- CROSS-SECTION (XS)
- VEG PLOT ACHIEVING DENSITY CRITERION
- VEG PLOT BELOW DENSITY CRITERION
- 483 / 379 VEG PLOT TOTAL / PLANTED STEM DENSITY
- ↔ PHOTO POINT (PP)
- GAUGE LOCATION

IMAGE SOURCE: NC 2010 STATEWIDE ORTHOIMAGERY

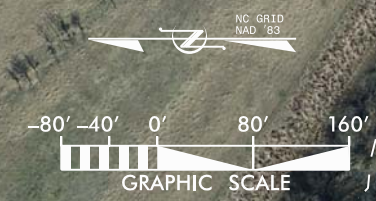

REV	DATE	DESCRIPTION	REVISIONS



**KCI**  
ASSOCIATES OF NC  
ENGINEERS • PLANNERS • SCIENTISTS

4601 SIX FORKS ROAD  
RALEIGH, NORTH CAROLINA 27609

JACOB'S LADDER  
STREAM MITIGATION PROJECT  
MONITORING YEAR 1

CHINA GROVE, ROWAN COUNTY, NORTH CAROLINA  
REACH T2

DATE: NOV 2014  
SCALE: GRAPHIC

CURRENT  
CONDITION  
PLAN VIEW

SHEET 2 OF 2

Table 5. Visual Stream Morphology Stability Assessment Jacob's Ladder Stream Restoration Site, EEP Project # 95023							
Assessed Length		2,389					
		Reach - T1					
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	21	22			95%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6)	16	21			76%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	16	21			76%
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	11	11			100%
		2. Thalweg centering at downstream of meander (Glide)	11	11			100%
	2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0
2. Undercut		Banks undercut/overhanging to the extent that mass wasting appears likely. Does <b>NOT</b> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
3. Mass Wasting		Bank slumping, calving, or collapse			0	0	100%
<b>Totals</b>					<b>0</b>	<b>0</b>	<b>100%</b>
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	9	9			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	9	9			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	1	1			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	2	2			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio $\geq$ 1.6 Rootwads/logs providing some cover at base-flow.	0	0			N/A

Table 5. Visual Stream Morphology Stability Assessment							
Jacob's Ladder Stream Restoration Site, EEP Project # 95023							
Assessed Length 2,084				Reach - T2			
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	20	20			100%
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6)	7	11		
	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)		7	11			64%
	4. Thalweg Position <sup>+</sup>	1. Thalweg centering at upstream of meander bend (Run)	10	10			N/A
		2. Thalweg centering at downstream of meander (Glide)	10	10			N/A
	2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0
2. Undercut		Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
		3. Mass Wasting	Bank slumping, calving, or collapse			0	0
<b>Totals</b>					0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	6	6			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	6	6			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	0	0			N/A
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	3	3			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio $\geq$ 1.6 Rootwads/logs providing some cover at base-flow.	0	0			N/A



<b>Table 6. Vegetation Condition Assessment</b>						
<b>Jacob's Ladder Stream Restoration Site, EEP Project # 95023</b>						
<b>Planted Acreage 15.9</b>			<b>Easement Acreage 17.2</b>			
<b>Vegetation Category</b>	<b>Definitions</b>	<b>Mapping Threshold</b>	<b>CCPV Depiction</b>	<b>Number of Polygons</b>	<b>Combined Acreage</b>	<b>% of Planted Acreage</b>
<b>1. Bare Areas</b>	Very limited cover of both woody and herbaceous material.	0.1 acre	Pattern and Color	0	0.00	0.0%
<b>2. Low Stem Density Areas</b>	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1 acre	Pattern and Color	0	0.00	0.0%
<b>Total</b>				0	0.00	0.0%
<b>3. Areas of Poor Growth Rates or Vigor</b>	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 acre	Pattern and Color	0	0.00	0.0%
<b>Cumulative Total</b>				0	0.00	0.0%
<b>4. Invasive Areas of Concern</b>	Areas or points (if too small to render as polygons at map scale).	1,000 SF	Pattern and Color	0	0.00	0.0%
<b>5. Easement Encroachment Areas</b>	Areas or points (if too small to render as polygons at map scale).	none	Pattern and Color	0	0.00	0.0%

## Photo Reference Points



PP1U – MY-00 – 3/11/14



PP1U – MY01 – 11/4/14



PP1D – MY-00 – 3/11/14



PP1D – MY01 – 11/4/14



PP2U – MY-00 – 3/11/14



PP2U – MY01 – 11/4/14



PP2D – MY-00 – 3/11/14



PP2D – MY01 – 11/4/14



PP3 Tributary – MY-00 – 3/11/14



PP3 Tributary – MY01 – 11/4/14



PP3U – MY-00 – 3/11/14



PP3U – MY01 – 11/4/14



PP3D – MY-00 – 3/11/14



PP3D – MY01 – 11/4/14



PP4U – MY-00 – 3/11/14



PP4U – MY01 – 11/4/14



PP4D – MY-00 – 3/11/14



PP4D – MY01 – 11/4/14



PP5U – MY-00 – 3/11/14



PP5U – MY01 – 11/4/14



PP5D – MY-00 – 3/11/14



PP5D – MY01 – 11/4/14



PP6U – MY-00 – 3/11/14



PP6U – MY01 – 11/4/14



PP6D – MY-00 – 3/11/14



PP6D – MY01 – 11/4/14



PP7U – MY-00 – 3/11/14



PP7U – MY01 – 11/4/14



PP7D – MY-00 – 3/11/14



PP7D – MY01 – 11/4/14



PP8U – MY-00 – 3/11/14



PP8U – MY01 – 11/4/14



PP8D – MY-00 – 3/11/14



PP8D – MY01 – 11/4/14



PP9U – MY-00 – 3/11/14



PP9U – MY01 – 11/4/14



PP9D – MY-00 – 3/11/14



PP9D – MY01 – 11/4/14



## Vegetation Monitoring Plot Photos



Plot 1 Photo: 10/1/14 – MY01



Plot 2 Photo: 10/1/14 – MY01



Plot 3 Photo: 10/1/14 – MY01



Plot 4 Photo: 10/1/14 – MY01



Plot 5 Photo: 10/1/14 – MY01



Plot 6 Photo: 10/1/14 – MY01



Plot 7 Photo: 10/1/14 – MY01



Plot 8 Photo: 10/1/14 – MY01



Plot 9 Photo: 10/1/14 – MY01



Plot 10 Photo: 10/1/14 – MY01



Plot 11 Photo: 10/1/14 – MY01



Plot 12 Photo: 10/1/14 – MY01



Plot 13 Photo: 10/1/14 – MY01



Plot 14 Photo: 10/1/14 – MY01



Plot 15 Photo: 10/1/14 – MY01



Plot 16 Photo: 10/1/14 – MY01

# **Appendix C**

## **Vegetation Plot Data**

**Table 7. Vegetation Plot Criteria Attainment**  
**Jacob's Ladder Stream Restoration Site, EEP Project # 95023**

<b>Vegetation Plot ID</b>	<b>Vegetation Survival Threshold Met?</b>	<b>Monitoring Year 01 Planted Stem Density (stems/acre)</b>	<b>Monitoring Year 01 Total Stem Density (stems/acre)</b>
1	Yes	364	486
2	Yes	486	890
3	Yes	567	607
4	Yes	324	324
5	Yes	364	486
6	No	40	40
7	Yes	647	1,174
8	No	283	283
9	Yes	324	324
10	Yes	728	769
11	No	202	202
12	Yes	486	607
13	Yes	445	486
14	Yes	405	647
15	No	283	283
16	No	121	121

<b>Table 8. CVS Vegetation Plot Metadata Jacob's Ladder Stream Restoration Site, EEP Project # 95023</b>	
<b>Report Prepared By</b>	April eEason
<b>Date Prepared</b>	10/9/2014 9:18
<b>database name</b>	KCI-2014-J.mdb
<b>database location</b>	M:\2011\20110669-Jacobs Ladder\Monitoring\Vegetaton CVS Database
<b>computer name</b>	12-J1V5CX1
<b>file size</b>	61403136
<b>DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----</b>	
<b>Metadata</b>	Description of database file, the report worksheets, and a summary of project(s) and project data.
<b>Proj, planted</b>	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
<b>Proj, total stems</b>	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
<b>Plots</b>	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
<b>Vigor</b>	Frequency distribution of vigor classes for stems for all plots.
<b>Vigor by Spp</b>	Frequency distribution of vigor classes listed by species.
<b>Damage</b>	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
<b>Damage by Spp</b>	Damage values tallied by type for each species.
<b>Damage by Plot</b>	Damage values tallied by type for each plot.
<b>Planted Stems by Plot and Spp</b>	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
<b>ALL Stems by Plot and spp</b>	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
<b>PROJECT SUMMARY-----</b>	
<b>Project Code</b>	95023
<b>project Name</b>	Jacobs Ladder
<b>Description</b>	Stream Restoration Site
<b>River Basin</b>	Yadkin-Pee Dee
<b>length(ft)</b>	5417
<b>area (sq m)</b>	1.06
<b>Required Plots (calculated)</b>	16
<b>Sampled Plots</b>	16

Table 9. CVS Stem Count Total and Planted by Plot and Species

			Current Plot Data (MY1 2014)																										
Scientific Name	Common Name	Species Type	95023-01-0001			95023-01-0002			95023-01-0003			95023-01-0004			95023-01-0005			95023-01-0006			95023-01-0007			95023-01-0008			95023-01-0009		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer negundo</i>	Boxelder	Tree																		1	1	1							
<i>Acer rubrum</i>	Red Maple	Tree																											
<i>Alnus serrulata</i>	Tag Alder	Shrub												1	1	1										2	2	2	
<i>Betula nigra</i>	River Birch	Tree				7	7	14	6	6	6							1	1	1						2	2	2	
<i>Callicarpa americana</i>	American Beautyberry	Shrub										1	1	1	1	1	1			1	1	1							
<i>Diospyros virginiana</i>	Common Persimmon	Tree				1	1	2								1													
<i>Fraxinus pennsylvanica</i>	Green Ash	Tree	4	4	4							7	7	7	2	2	2			5	5	5	2	2	2	1	1	1	
<i>Liquidambar styraciflua</i>	Sweetgum	Tree																											
<i>Liriodendron tulipifera</i>	Tuliptree	Tree							5	5	5				1	1	1												
<i>Platanus occidentalis</i>	American sycamore	Tree			2				1	1	1								3	3	3	1	1	1	1	1	1	1	
<i>Populus deltoides</i>	Eastern Cottonwood	Tree																	2	2	7								
<i>Quercus</i>	Oak	Tree																											
<i>Quercus alba</i>	White Oak	Tree																											
<i>Quercus nigra</i>	Water Oak	Tree																											
<i>Quercus palustris</i>	Pin Oak	Tree																											
<i>Quercus phellos</i>	Willow Oak	Tree	5	5	5																				1	1	1	1	
<i>Quercus rubra</i>	Northern Red Oak	Tree																							1	1	1	1	
<i>Salix nigra</i>	Black Willow	Tree			1	3	3	3	2	2	3				4	4	6			4	4	12							
<i>Sambucus canadensis</i>	Common Elderberry	Shrub						2																					
<i>Unknown</i>		Shrub or Tree				1	1	1																4	4	4			
<b>Stem count</b>			9	9	12	12	12	22	14	14	15	8	8	8	9	9	12	1	1	1	16	16	29	7	7	7	8	8	8
<b>size (ares)</b>			1			1			1			1			1			1			1			1			1		
<b>size (ACRES)</b>			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02		
<b>Species count</b>			2	2	4	4	4	5	4	4	4	2	2	2	5	5	6	1	1	1	6	6	6	3	3	3	6	6	6
<b>Stems per ACRE</b>			364	364	486	486	486	890	567	567	607	324	324	324	364	364	486	40	40	40	647	647	1174	283	283	283	324	324	324

Table 9. CVS Stem Count Total and Planted by Plot and Species cont'd

Scientific Name	Common Name	Species Type	Current Plot Data (MY1 2014)																		Annual Means											
			95023-01-0010			95023-01-0011			95023-01-0012			95023-01-0013			95023-01-0014			95023-01-0015			95023-01-0016			MY1 (2014)			MY0 (2014)					
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T			
<i>Acer negundo</i>	Boxelder	Tree															1										1	1	2			
<i>Acer rubrum</i>	Red Maple	Tree			1																								1			
<i>Alnus serrulata</i>	Tag Alder	Shrub							4	4	4													7	7	7						
<i>Betula nigra</i>	River Birch	Tree													1	1	1							17	17	24	39	39	39			
<i>Callicarpa americana</i>	American Beautyberry	Shrub										6	6	6										9	9	9						
<i>Diospyros virginiana</i>	Common Persimmon	Tree	5	5	5																			6	6	8	1	1	1			
<i>Fraxinus pennsylvanica</i>	Green Ash	Tree				3	3	3	2	2	2	3	3	3	2	2	2	1	1	1				32	32	32						
<i>Liquidambar styraciflua</i>	Sweetgum	Tree									2			1			4									7						
<i>Liriodendron tulipifera</i>	Tuliptree	Tree	4	4	4							1	1	1				3	3	3	1	1	1	15	15	15	40	40	40			
<i>Platanus occidentalis</i>	American Sycamore	Tree				1	1	1				1	1	1	5	5	5				2	2	2	15	15	17	62	62	62			
<i>Populus deltoides</i>	Eastern Cottonwood	Tree															1							2	2	8						
<i>Quercus</i>	Oak	Tree	1	1	1																			1	1	1	2	2	2			
<i>Quercus alba</i>	White Oak	Tree									1															1						
<i>Quercus nigra</i>	Water Oak	Tree																									1	1	1			
<i>Quercus palustris</i>	Pin Oak	Tree	6	6	6										1	1	1							7	7	7						
<i>Quercus phellos</i>	Willow Oak	Tree	2	2	2	1	1	1	6	6	6							2	2	2				17	17	17	24	24	24			
<i>Quercus rubra</i>	Northern Red Oak	Tree																						1	1	1						
<i>Salix nigra</i>	Black Willow	Tree													1	1	1							14	14	26	13	13	13			
<i>Sambucus canadensis</i>	Common Elderberry	Shrub																								2						
<i>Unknown</i>		Shrub or Tree																1	1	1				6	6	6	51	51	51			
<b>Stem count</b>			18	18	19	5	5	5	12	12	15	11	11	12	10	10	16	7	7	7	3	3	3	150	150	191	233	233	233			
<b>size (ares)</b>			1			1			1			1			1			1			16			16								
<b>size (ACRES)</b>			0.02			0.02			0.02			0.02			0.02			0.02			0.40			0.40								
<b>Species count</b>			5	5	6	3	3	3	3	3	5	4	4	5	5	5	8	4	4	4	2	2	2	15	15	19	9	9	9			
<b>Stems per ACRE</b>			728	728	769	202	202	202	486	486	607	445	445	486	405	405	647	283	283	283	121	121	121	379	379	483	589	589	589			




# **Appendix D**

## **Stream Survey Data**

<b>River Basin:</b>	Yadkin-Pee Dee
<b>Watershed:</b>	Jacob's Ladder
<b>XS ID</b>	XS-1, Riffle (T1)
<b>Drainage Area (sq mi):</b>	0.21
<b>Date:</b>	10/29/2014
<b>Field Crew:</b>	T. Seelinger and M. Underwood

Station	Elevation
0.0	767.08
2.4	766.93
6.0	767.00
9.8	766.95
14.3	766.85
17.4	766.89
18.8	766.64
20.7	765.96
22.1	765.47
22.7	765.32
23.4	765.13
23.9	764.85
24.9	764.74
25.7	764.88
26.7	765.16
27.6	765.41
28.6	765.72
29.7	766.31
30.1	766.50
32.3	766.59
35.0	766.64
38.5	766.64
41.8	766.72
46.0	766.67
48.6	766.66
50.5	766.64
50.6	767.05

SUMMARY DATA	
<b>Bankfull Elevation:</b>	766.5
<b>Bankfull Cross-Sectional Area:</b>	10.8
<b>Bankfull Width:</b>	10.9
<b>Flood Prone Area Elevation:</b>	768.2
<b>Flood Prone Width:</b>	50.6
<b>Max Depth at Bankfull:</b>	1.8
<b>Mean Depth at Bankfull:</b>	1.0
<b>W / D Ratio:</b>	11.0
<b>Entrenchment Ratio:</b>	4.6
<b>Bank Height Ratio:</b>	1.0

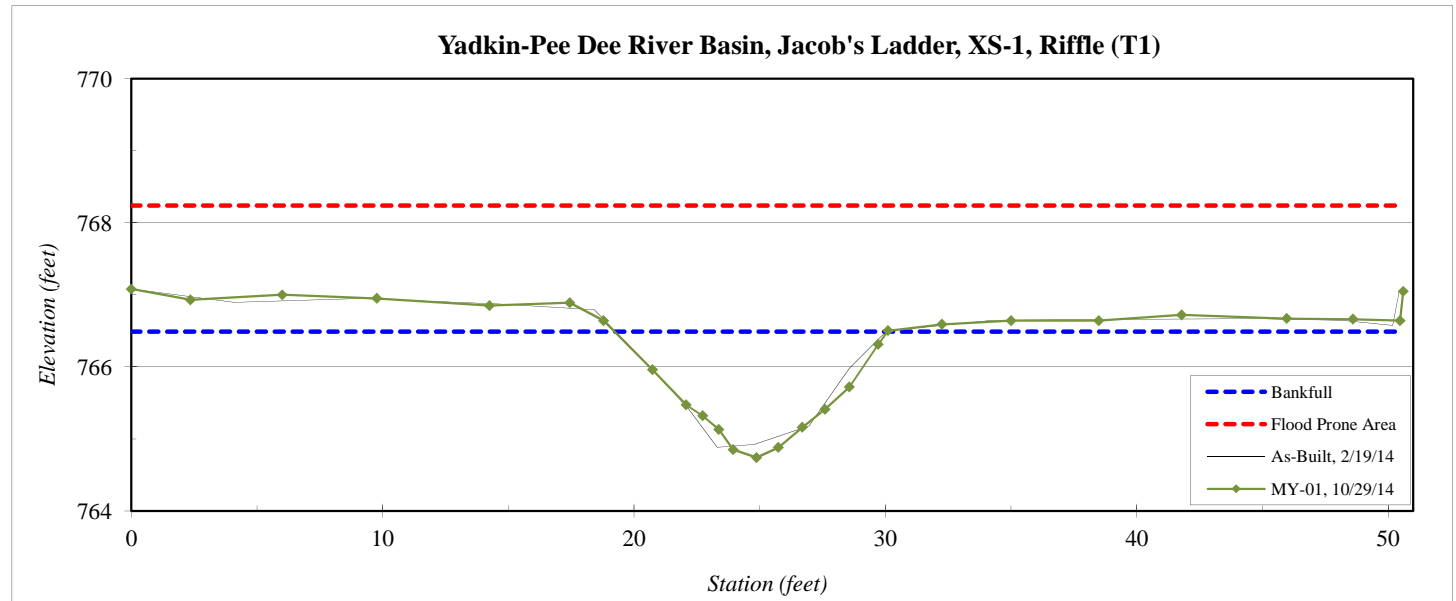


<b>River Basin:</b>	Yadkin-Pee Dee
<b>Watershed:</b>	Jacob's Ladder
<b>XS ID</b>	XS-2, Pool (T1)
<b>Drainage Area (sq mi):</b>	0.21
<b>Date:</b>	10/29/2014
<b>Field Crew:</b>	T. Seelinger and M. Underwood



Station	Elevation
0.0	765.38
2.8	765.36
6.0	765.27
9.1	765.05
13.0	764.98
14.7	764.75
17.1	764.54
18.4	764.36
19.3	763.66
19.1	763.24
19.8	762.58
20.7	762.27
21.5	762.04
23.3	762.36
24.0	762.71
24.8	763.26
25.3	763.70
26.0	763.85
27.3	764.17
28.8	764.93
31.6	765.28
34.6	765.37
37.5	765.38
40.6	765.55
43.6	765.63
45.7	765.76
47.5	765.65
47.7	766.13

SUMMARY DATA	
<b>Bankfull Elevation:</b>	764.4
<b>Bankfull Cross-Sectional Area:</b>	12.9
<b>Bankfull Width:</b>	9.9
<b>Flood Prone Area Elevation:</b>	766.8
<b>Flood Prone Width:</b>	47.7
<b>Max Depth at Bankfull:</b>	2.4
<b>Mean Depth at Bankfull:</b>	1.3
<b>W / D Ratio:</b>	-
<b>Entrenchment Ratio:</b>	-
<b>Bank Height Ratio:</b>	-

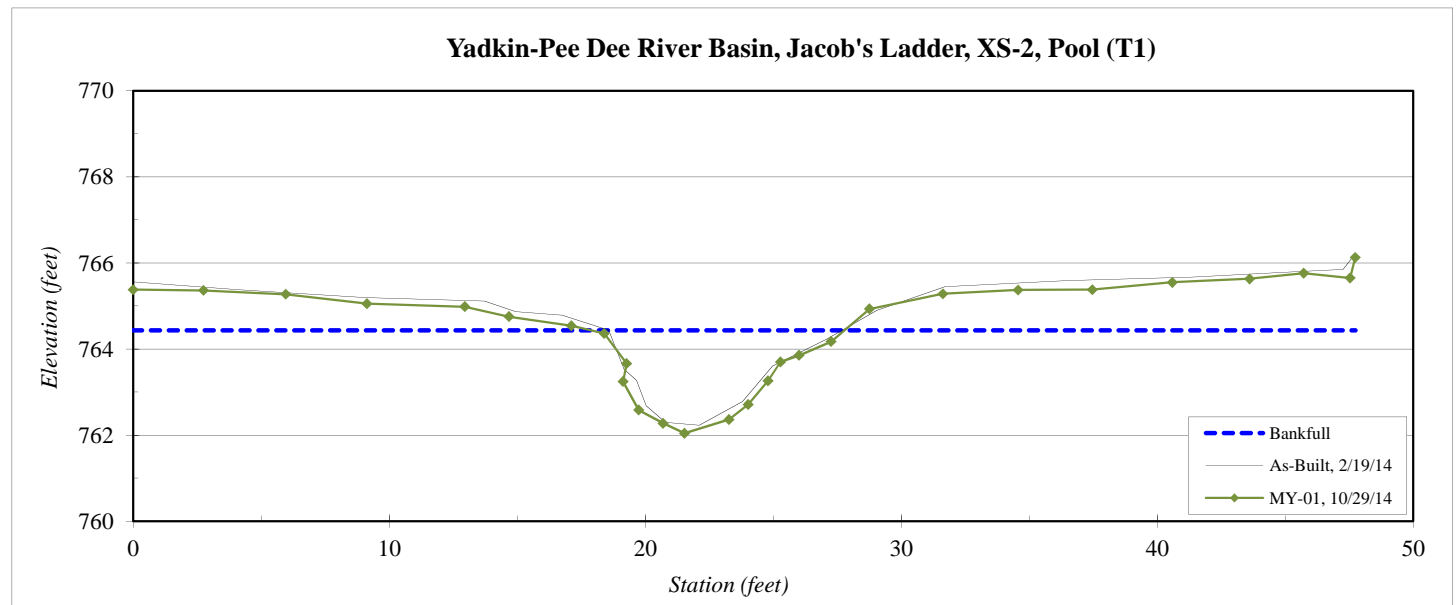


<b>River Basin:</b>	Yadkin-Pee Dee
<b>Watershed:</b>	Jacob's Ladder
<b>XS ID</b>	XS-3, Riffle (T1)
<b>Drainage Area (sq mi):</b>	0.36
<b>Date:</b>	10/30/2014
<b>Field Crew:</b>	T. Seelinger and M. Underwood



Station	Elevation
0.0	757.09
2.7	757.11
4.8	757.09
7.7	756.92
10.7	757.09
13.7	756.95
15.5	756.79
16.2	756.79
17.2	756.41
18.6	755.88
19.3	755.53
20.0	755.52
20.4	755.30
20.8	755.18
21.3	755.25
21.9	755.17
22.3	755.10
22.8	755.21
23.5	755.20
23.9	755.48
24.9	755.54
25.9	756.16
26.2	756.40
26.8	756.74
27.8	756.99
28.8	757.13
31.9	757.09
34.9	757.12
37.6	757.10
41.3	757.17
45.5	757.16
46.5	757.14
46.6	757.63


SUMMARY DATA	
<b>Bankfull Elevation:</b>	756.9
<b>Bankfull Cross-Sectional Area:</b>	12.4
<b>Bankfull Width:</b>	12.9
<b>Flood Prone Area Elevation:</b>	758.7
<b>Flood Prone Width:</b>	46.6
<b>Max Depth at Bankfull:</b>	1.8
<b>Mean Depth at Bankfull:</b>	1.0
<b>W / D Ratio:</b>	13.4
<b>Entrenchment Ratio:</b>	3.5
<b>Bank Height Ratio:</b>	1.0

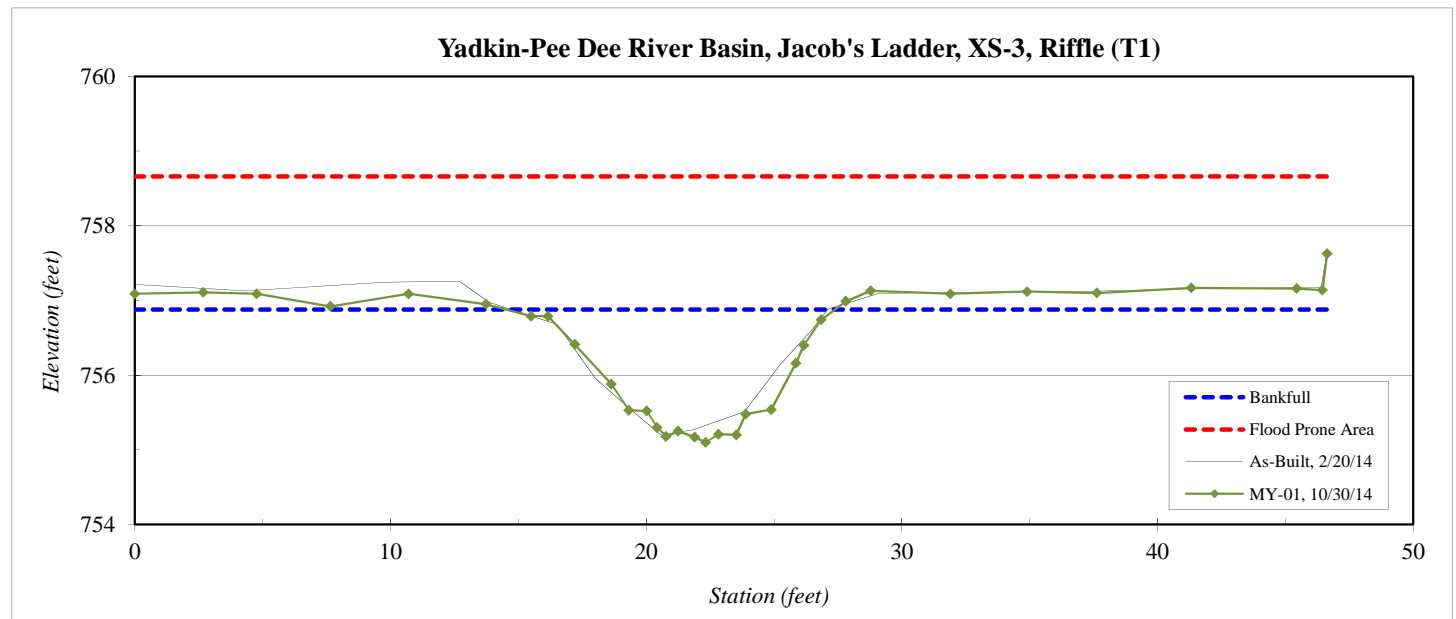

<b>River Basin:</b>	Yadkin-Pee Dee
<b>Watershed:</b>	Jacob's Ladder
<b>XS ID</b>	XS-4, Pool (T1)
<b>Drainage Area (sq mi):</b>	0.36
<b>Date:</b>	10/30/2014
<b>Field Crew:</b>	T. Seelinger and M. Underwood

Station	Elevation
0.0	755.47
3.4	755.30
9.6	755.33
12.8	755.19
15.0	754.87
16.1	755.01
17.0	754.97
17.9	754.63
18.8	754.37
19.6	754.15
20.0	753.92
20.1	753.58
21.1	753.09
22.5	752.30
23.1	752.00
24.0	751.92
25.3	752.07
25.8	752.48
26.7	752.97
27.6	753.16
28.2	753.41
28.5	753.75
29.2	753.86
29.3	754.08
30.0	754.08
31.0	754.42
32.4	754.59
33.4	754.70
34.7	754.94
36.6	755.10
38.2	755.10
41.4	755.31
44.9	755.31
47.8	755.32
49.6	755.40
49.6	755.84


SUMMARY DATA	
<b>Bankfull Elevation:</b>	755.0
<b>Bankfull Cross-Sectional Area:</b>	24.5
<b>Bankfull Width:</b>	18.0
<b>Flood Prone Area Elevation:</b>	758.0
<b>Flood Prone Width:</b>	49.6
<b>Max Depth at Bankfull:</b>	3.0
<b>Mean Depth at Bankfull:</b>	1.4
<b>W / D Ratio:</b>	-
<b>Entrenchment Ratio:</b>	-
<b>Bank Height Ratio:</b>	-

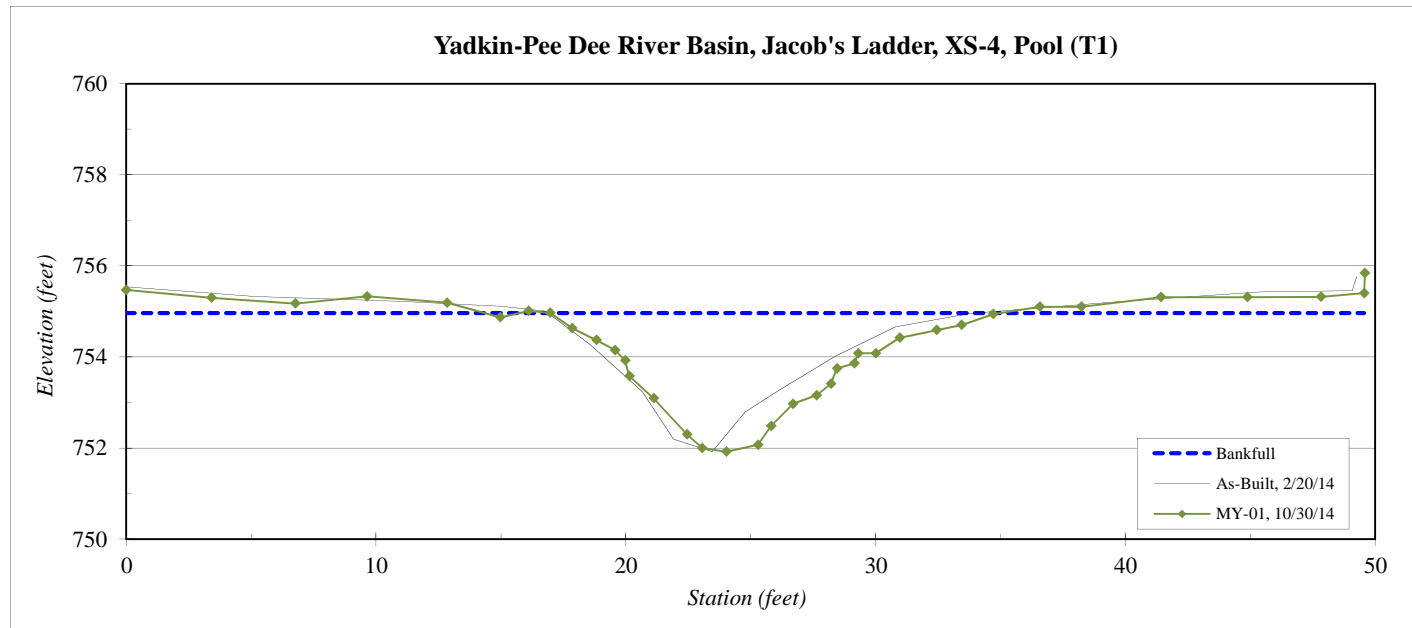

<b>River Basin:</b>	Yadkin-Pee Dee
<b>Watershed:</b>	Jacob's Ladder
<b>XS ID</b>	XS-5, Riffle (T1)
<b>Drainage Area (sq mi):</b>	0.36
<b>Date:</b>	10/30/2014
<b>Field Crew:</b>	T. Seelinger and M. Underwood

Station	Elevation
0.0	753.71
3.7	753.75
7.8	753.80
10.8	753.85
13.5	753.73
16.1	753.71
18.1	753.72
18.7	753.67
20.1	753.08
21.3	752.67
22.0	752.59
22.5	752.39
22.5	752.54
23.9	752.15
24.3	752.13
24.6	752.11
25.0	752.30
25.6	752.53
26.6	752.55
26.7	752.56
28.4	753.18
29.6	753.61
31.0	753.90
32.2	754.04
35.7	754.04
43.4	754.04
47.2	754.28
50.0	754.31
50.0	754.64


SUMMARY DATA	
<b>Bankfull Elevation:</b>	753.7
<b>Bankfull Cross-Sectional Area:</b>	10.6
<b>Bankfull Width:</b>	12.1
<b>Flood Prone Area Elevation:</b>	755.4
<b>Flood Prone Width:</b>	50.0
<b>Max Depth at Bankfull:</b>	1.6
<b>Mean Depth at Bankfull:</b>	0.9
<b>W / D Ratio:</b>	13.8
<b>Entrenchment Ratio:</b>	4.1
<b>Bank Height Ratio:</b>	1.0

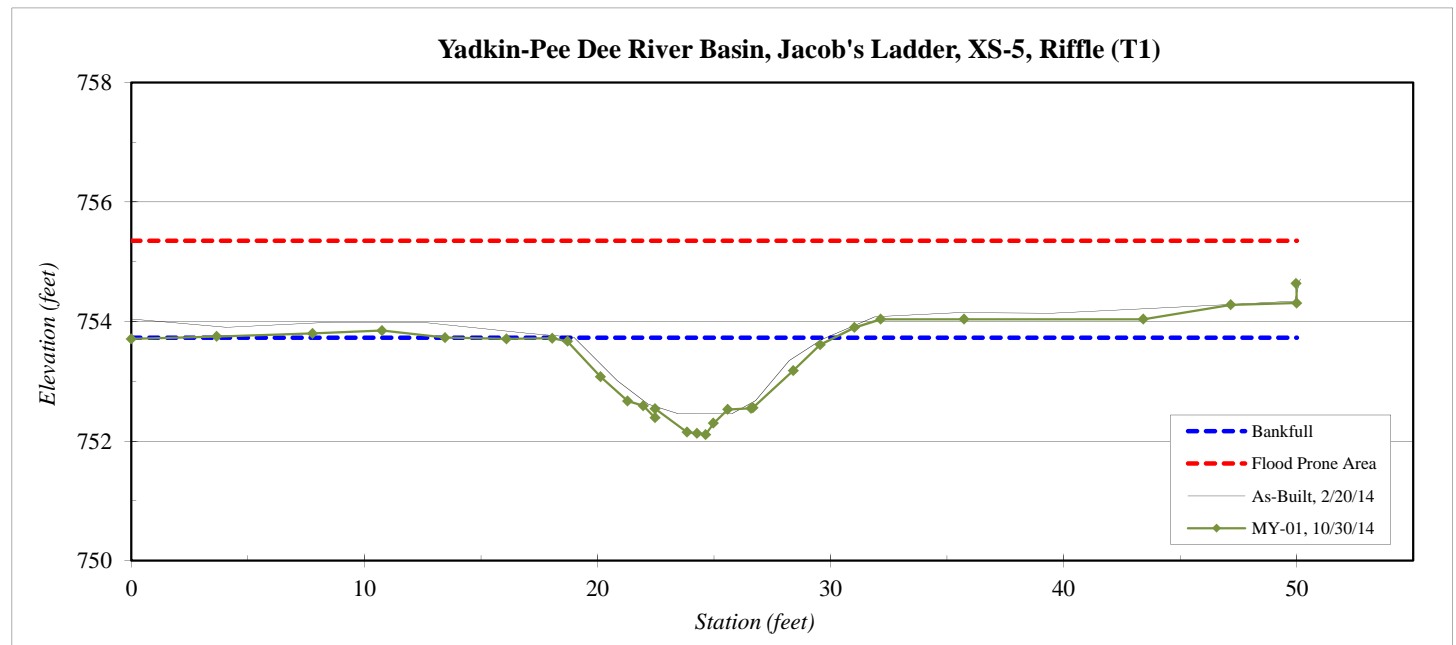

<b>River Basin:</b>	Yadkin-Pee Dee
<b>Watershed:</b>	Jacob's Ladder
<b>XS ID</b>	XS-6, Riffle (T2)
<b>Drainage Area (sq mi):</b>	0.67
<b>Date:</b>	11/4/2014
<b>Field Crew:</b>	T. Seelinger and M. Underwood

Station	Elevation
0.0	757.46
0.1	757.02
3.4	756.85
6.7	756.57
10.6	756.33
13.1	755.74
14.4	755.06
16.6	754.98
18.1	754.36
19.7	754.06
20.9	753.70
21.0	753.66
21.7	753.06
22.8	753.07
24.2	753.22
25.4	753.11
25.9	753.20
26.4	753.53
27.4	753.82
27.9	754.04
29.6	754.31
31.2	754.78
34.2	754.87
37.5	755.00
39.4	755.36
42.4	756.52
44.4	757.03
48.3	757.54
53.0	757.63
55.6	757.75
58.1	757.63

SUMMARY DATA	
<b>Bankfull Elevation:</b>	754.8
<b>Bankfull Cross-Sectional Area:</b>	14.2
<b>Bankfull Width:</b>	14.1
<b>Flood Prone Area Elevation:</b>	756.5
<b>Flood Prone Width:</b>	35.3
<b>Max Depth at Bankfull:</b>	1.7
<b>Mean Depth at Bankfull:</b>	1.0
<b>W / D Ratio:</b>	14.0
<b>Entrenchment Ratio:</b>	2.5
<b>Bank Height Ratio:</b>	1.0

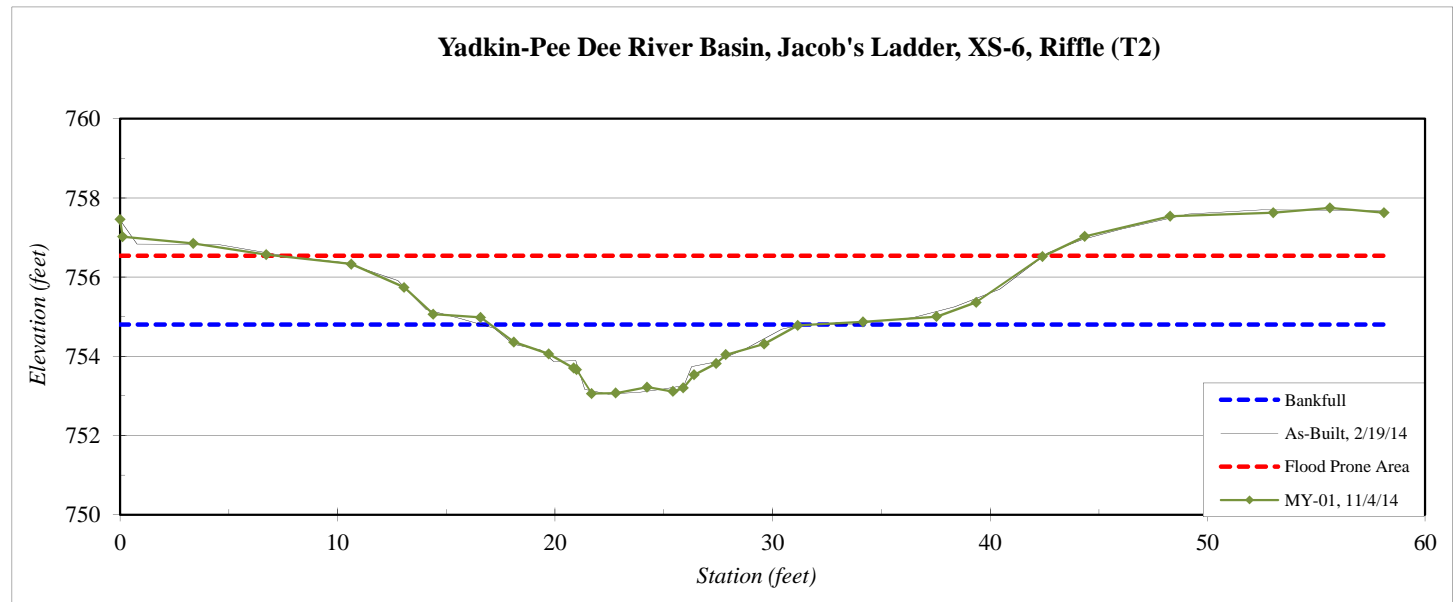


<b>River Basin:</b>	Yadkin-Pee Dee
<b>Watershed:</b>	Jacob's Ladder
<b>XS ID</b>	XS-7, Riffle (T2)
<b>Drainage Area (sq mi):</b>	0.67
<b>Date:</b>	11/4/2014
<b>Field Crew:</b>	T. Seelinger and M. Underwood

Station	Elevation
0.0	755.83
0.0	755.44
7.2	755.50
11.6	755.24
14.9	755.12
17.9	754.97
19.5	754.05
22.5	752.64
26.1	752.40
28.8	751.57
30.3	751.24
30.7	751.20
31.8	750.69
32.6	750.61
34.0	750.51
35.6	750.51
36.8	750.81
37.7	751.21
38.8	751.22
41.1	751.74
42.5	752.22
44.8	752.31
48.3	752.28
51.3	753.30
53.0	754.05
56.9	754.25
61.4	754.30
64.1	754.37
66.3	754.41

SUMMARY DATA	
<b>Bankfull Elevation:</b>	752.2
<b>Bankfull Cross-Sectional Area:</b>	16.2
<b>Bankfull Width:</b>	15.9
<b>Flood Prone Area Elevation:</b>	753.9
<b>Flood Prone Width:</b>	33
<b>Max Depth at Bankfull:</b>	1.7
<b>Mean Depth at Bankfull:</b>	1.0
<b>W / D Ratio:</b>	15.6
<b>Entrenchment Ratio:</b>	2.1
<b>Bank Height Ratio:</b>	1.0



Yadkin-Pee Dee River Basin, Jacob's Ladder, XS-7, Riffle (T2)

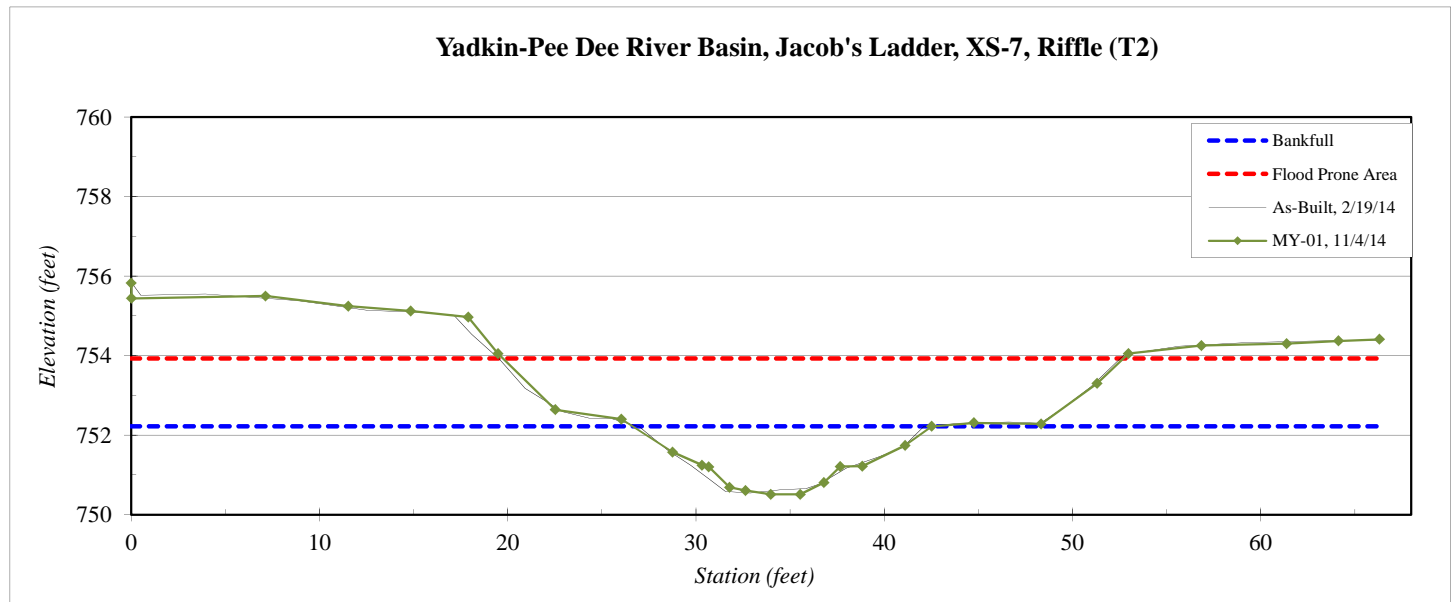




<b>River Basin:</b>	Yadkin-Pee Dee
<b>Watershed:</b>	Jacob's Ladder
<b>XS ID</b>	XS-8, Riffle (T2)
<b>Drainage Area (sq mi):</b>	0.70
<b>Date:</b>	11/4/2014
<b>Field Crew:</b>	T. Seelinger and M. Underwood

Station	Elevation
0.0	750.94
0.2	750.71
4.4	750.56
8.9	750.49
13.2	750.21
18.6	750.23
23.6	750.28
26.0	749.62
27.3	749.17
28.0	749.11
29.1	748.69
31.0	748.59
32.7	748.61
33.7	748.79
34.2	749.11
36.2	749.59
37.6	749.99
38.8	750.32
41.6	750.44
44.1	750.47
47.8	750.37
51.2	750.40
54.6	750.50
58.9	750.52


SUMMARY DATA	
<b>Bankfull Elevation:</b>	750.3
<b>Bankfull Cross-Sectional Area:</b>	15.6
<b>Bankfull Width:</b>	15.1
<b>Flood Prone Area Elevation:</b>	752.0
<b>Flood Prone Width:</b>	59
<b>Max Depth at Bankfull:</b>	1.7
<b>Mean Depth at Bankfull:</b>	1.0
<b>W / D Ratio:</b>	14.6
<b>Entrenchment Ratio:</b>	4.0
<b>Bank Height Ratio:</b>	1.0

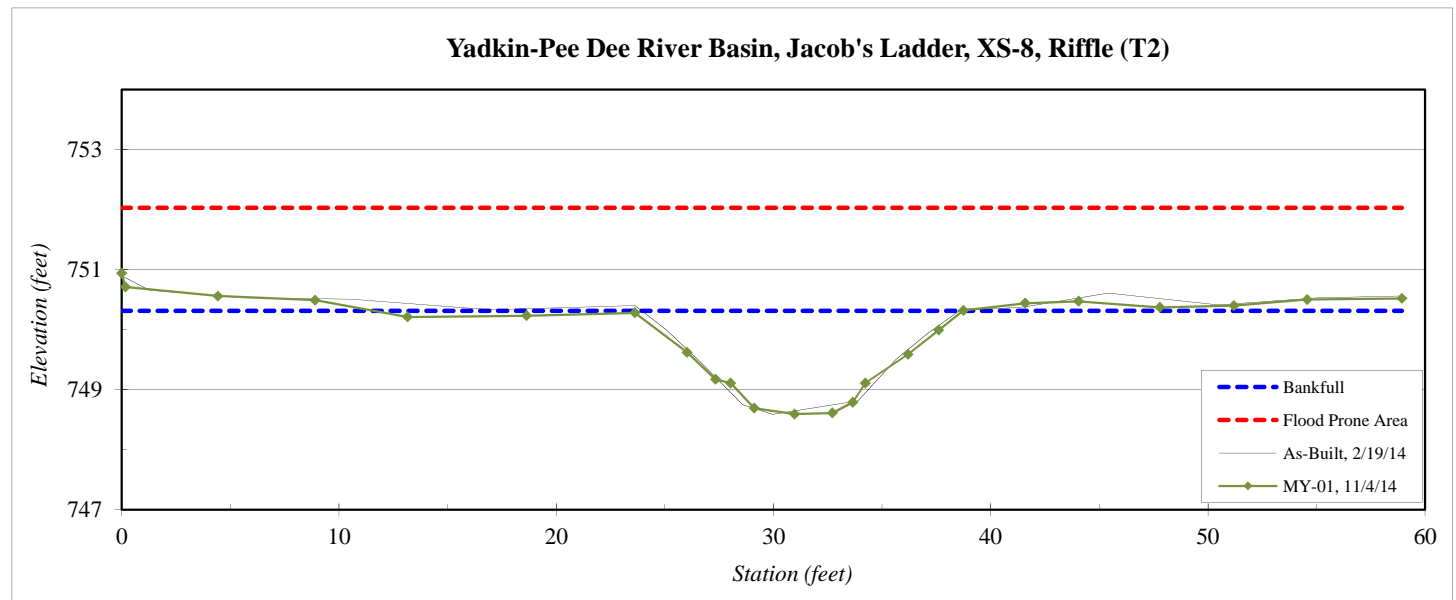

<b>River Basin:</b>	Yadkin-Pee Dee
<b>Watershed:</b>	Jacob's Ladder
<b>XS ID</b>	XS-9, Pool (T2)
<b>Drainage Area (sq mi):</b>	0.70
<b>Date:</b>	11/4/2014
<b>Field Crew:</b>	T. Seelinger and M. Underwood

Station	Elevation
0.0	746.62
0.2	746.19
5.6	746.03
10.9	745.80
14.2	745.93
16.5	745.82
19.0	745.75
20.6	744.74
21.4	744.17
21.9	743.41
23.5	743.34
24.7	743.72
25.9	743.69
26.9	743.62
27.9	743.66
28.3	744.20
30.9	744.46
32.2	744.46
34.4	744.92
37.3	745.53
41.6	745.50
46.4	745.63
51.0	745.68
55.8	745.91
61.5	746.06
65.7	746.04
69.1	745.96


SUMMARY DATA	
<b>Bankfull Elevation:</b>	745.6
<b>Bankfull Cross-Sectional Area:</b>	23.1
<b>Bankfull Width:</b>	18.1
<b>Flood Prone Area Elevation:</b>	747.8
<b>Flood Prone Width:</b>	55.8
<b>Max Depth at Bankfull:</b>	2.3
<b>Mean Depth at Bankfull:</b>	1.3
<b>W / D Ratio:</b>	-
<b>Entrenchment Ratio:</b>	-
<b>Bank Height Ratio:</b>	-

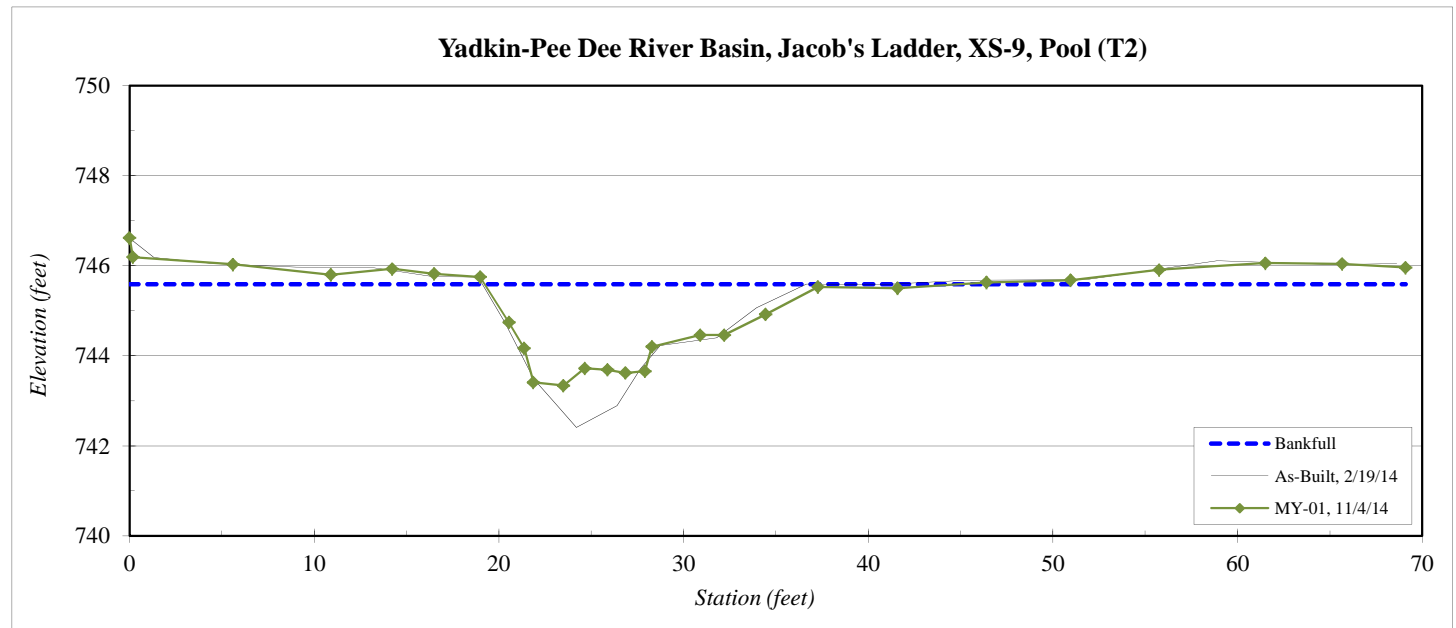


<b>River Basin:</b>	Yadkin-Pee Dee
<b>Watershed:</b>	Jacob's Ladder
<b>XS ID</b>	XS-10, Riffle (T2)
<b>Drainage Area (sq mi):</b>	0.70
<b>Date:</b>	11/4/2014
<b>Field Crew:</b>	T. Seelinger and M. Underwood

Station	Elevation
0.0	745.80
0.0	745.41
5.4	745.26
9.2	745.38
13.1	745.37
16.4	745.41
17.2	745.40
19.5	745.28
20.4	745.24
22.6	744.75
23.8	744.14
24.3	743.95
26.0	743.63
26.9	743.51
28.5	743.43
29.3	743.61
30.3	743.88
30.5	744.24
32.8	744.78
34.4	745.46
38.8	745.65
43.3	745.77
47.4	745.80
52.7	745.91
57.1	745.96
61.0	745.97
64.1	746.03
66.4	745.98



SUMMARY DATA	
<b>Bankfull Elevation:</b>	745.4
<b>Bankfull Cross-Sectional Area:</b>	16.7
<b>Bankfull Width:</b>	17.1
<b>Flood Prone Area Elevation:</b>	747.4
<b>Flood Prone Width:</b>	66
<b>Max Depth at Bankfull:</b>	2.0
<b>Mean Depth at Bankfull:</b>	1.0
<b>W / D Ratio:</b>	17.5
<b>Entrenchment Ratio:</b>	3.9
<b>Bank Height Ratio:</b>	1.0

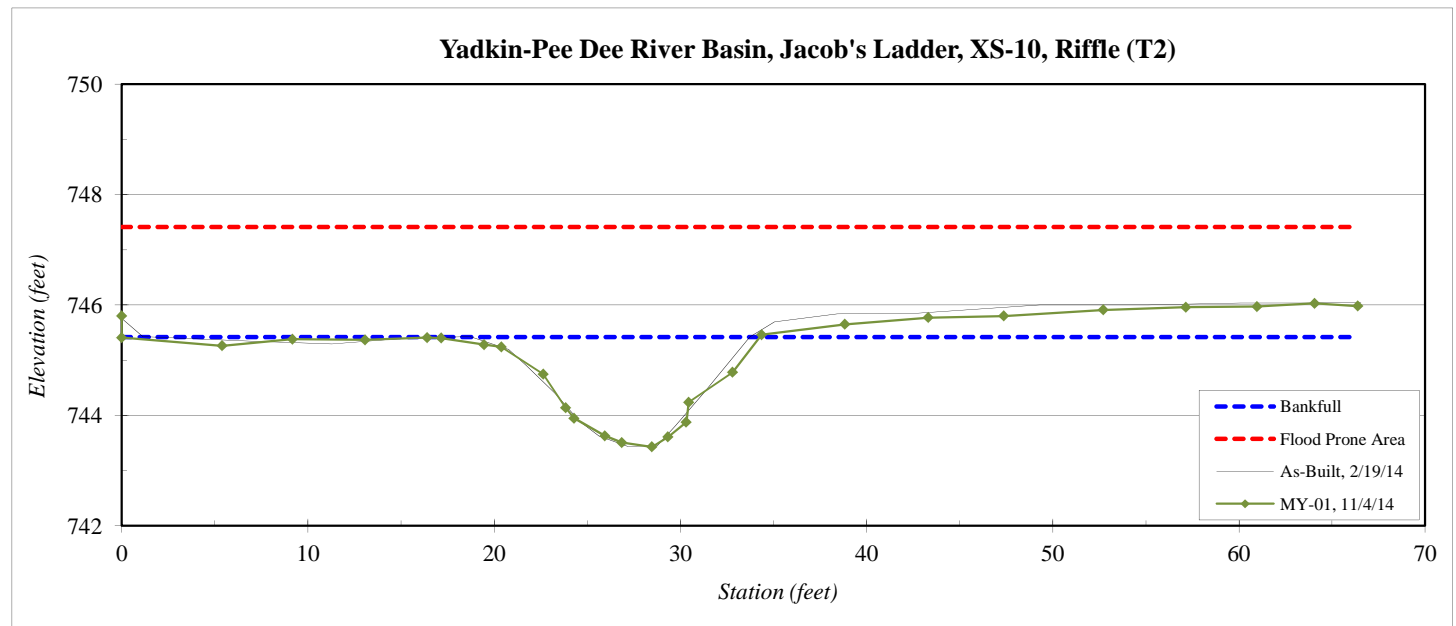


Jacob's Ladder Stream Restoration Site  
Longitudinal Profile  
T1 MY-01

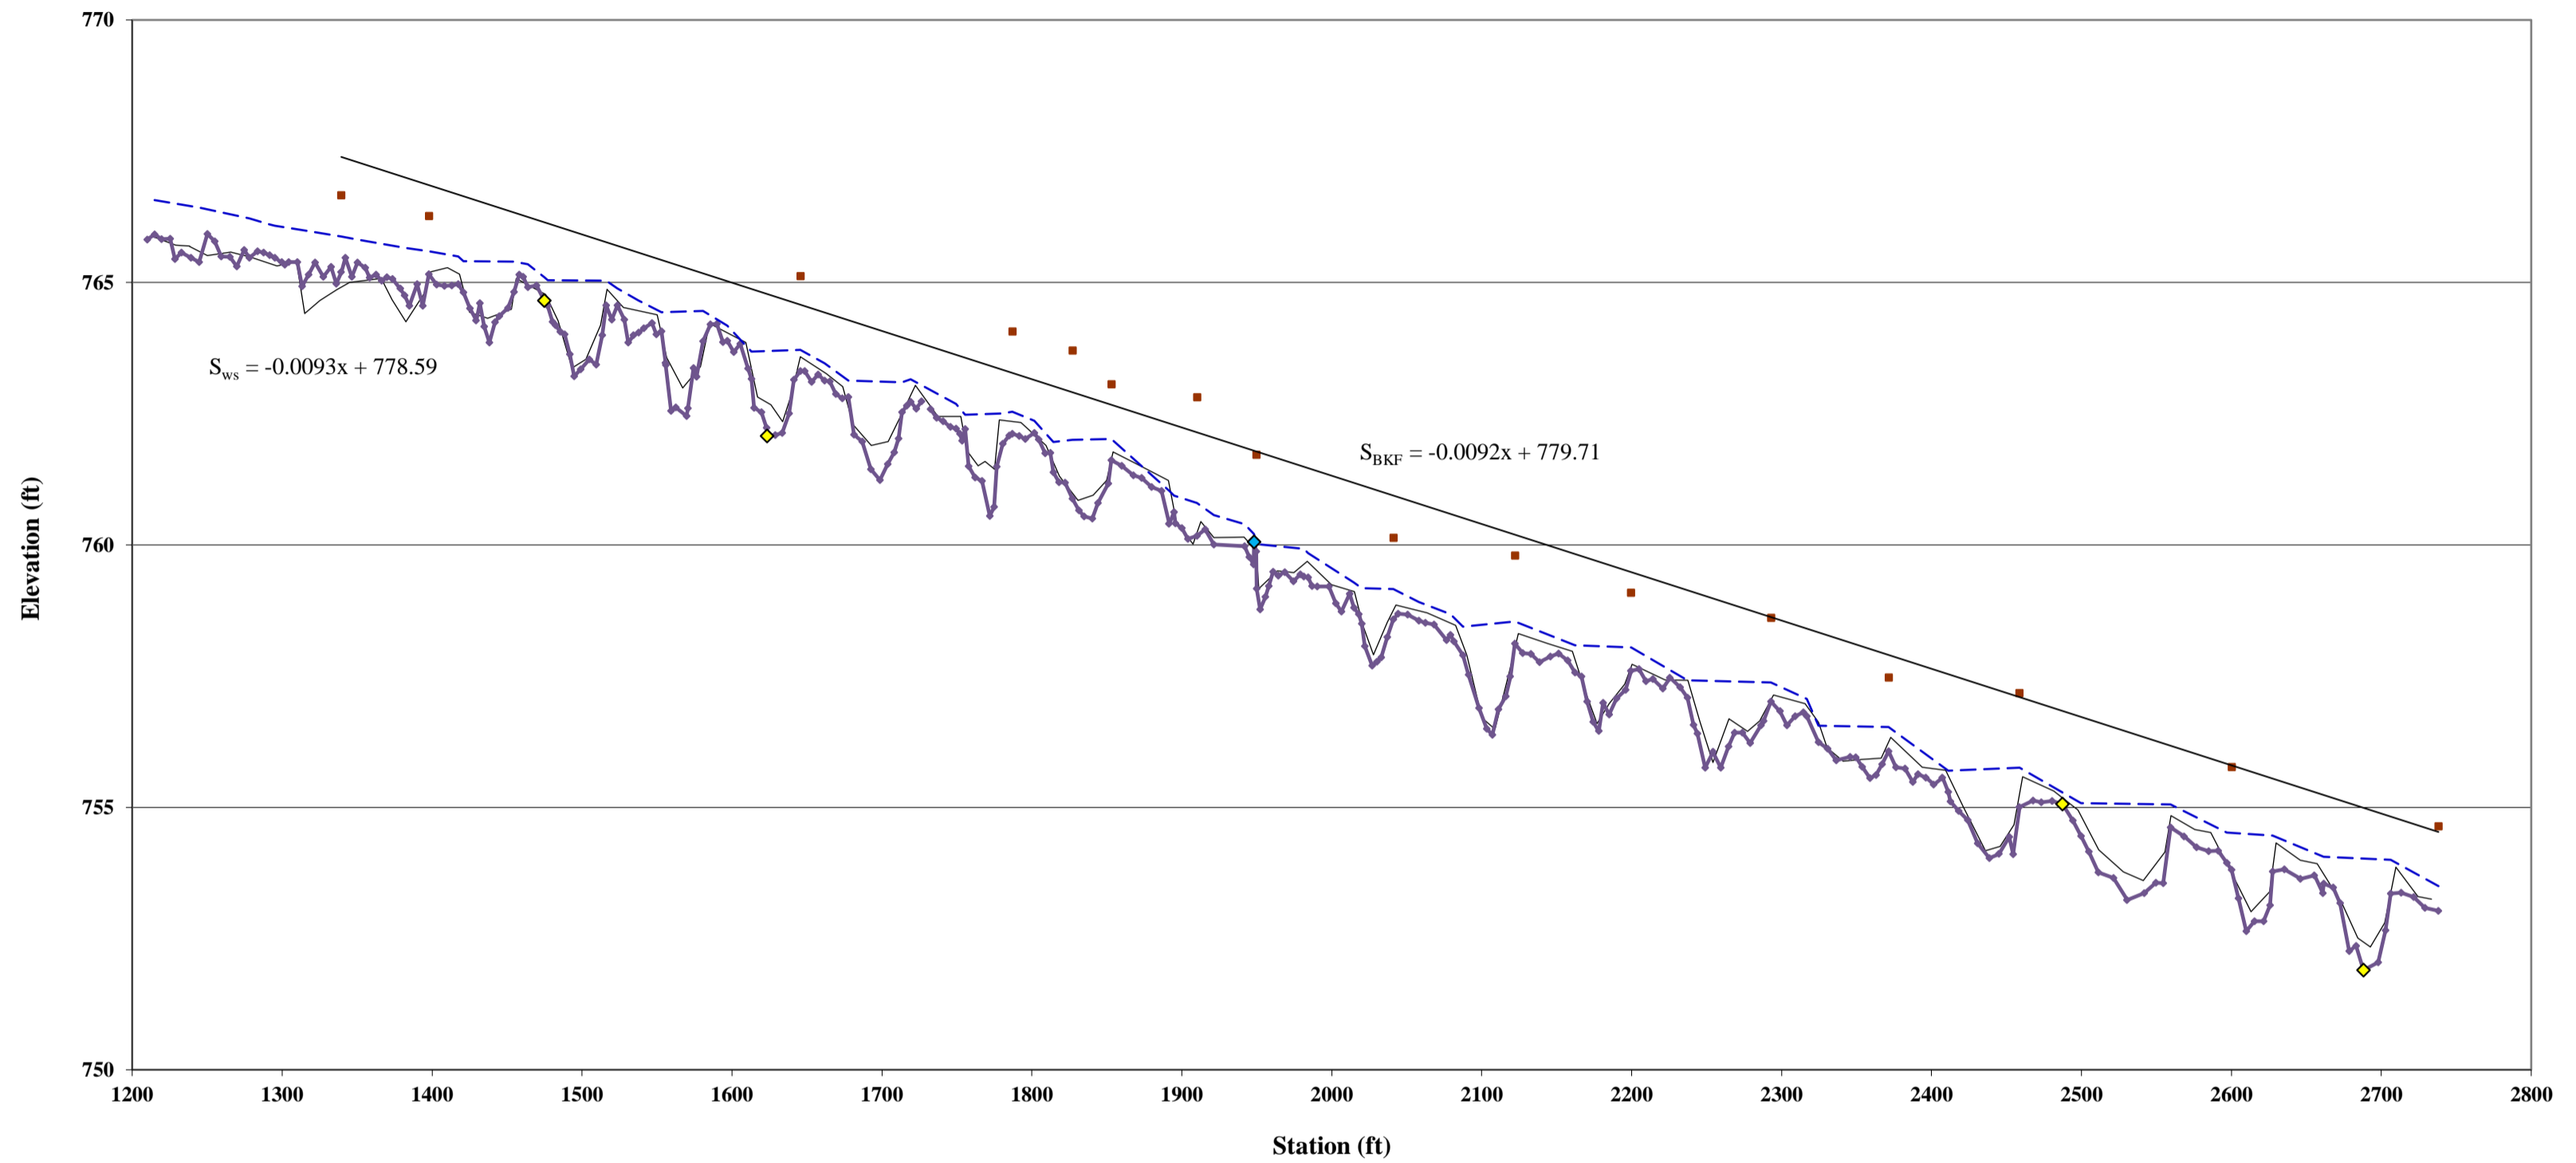

**Jacob's Ladder Stream Restoration Site  
Longitudinal Profile  
T2 MY-01**

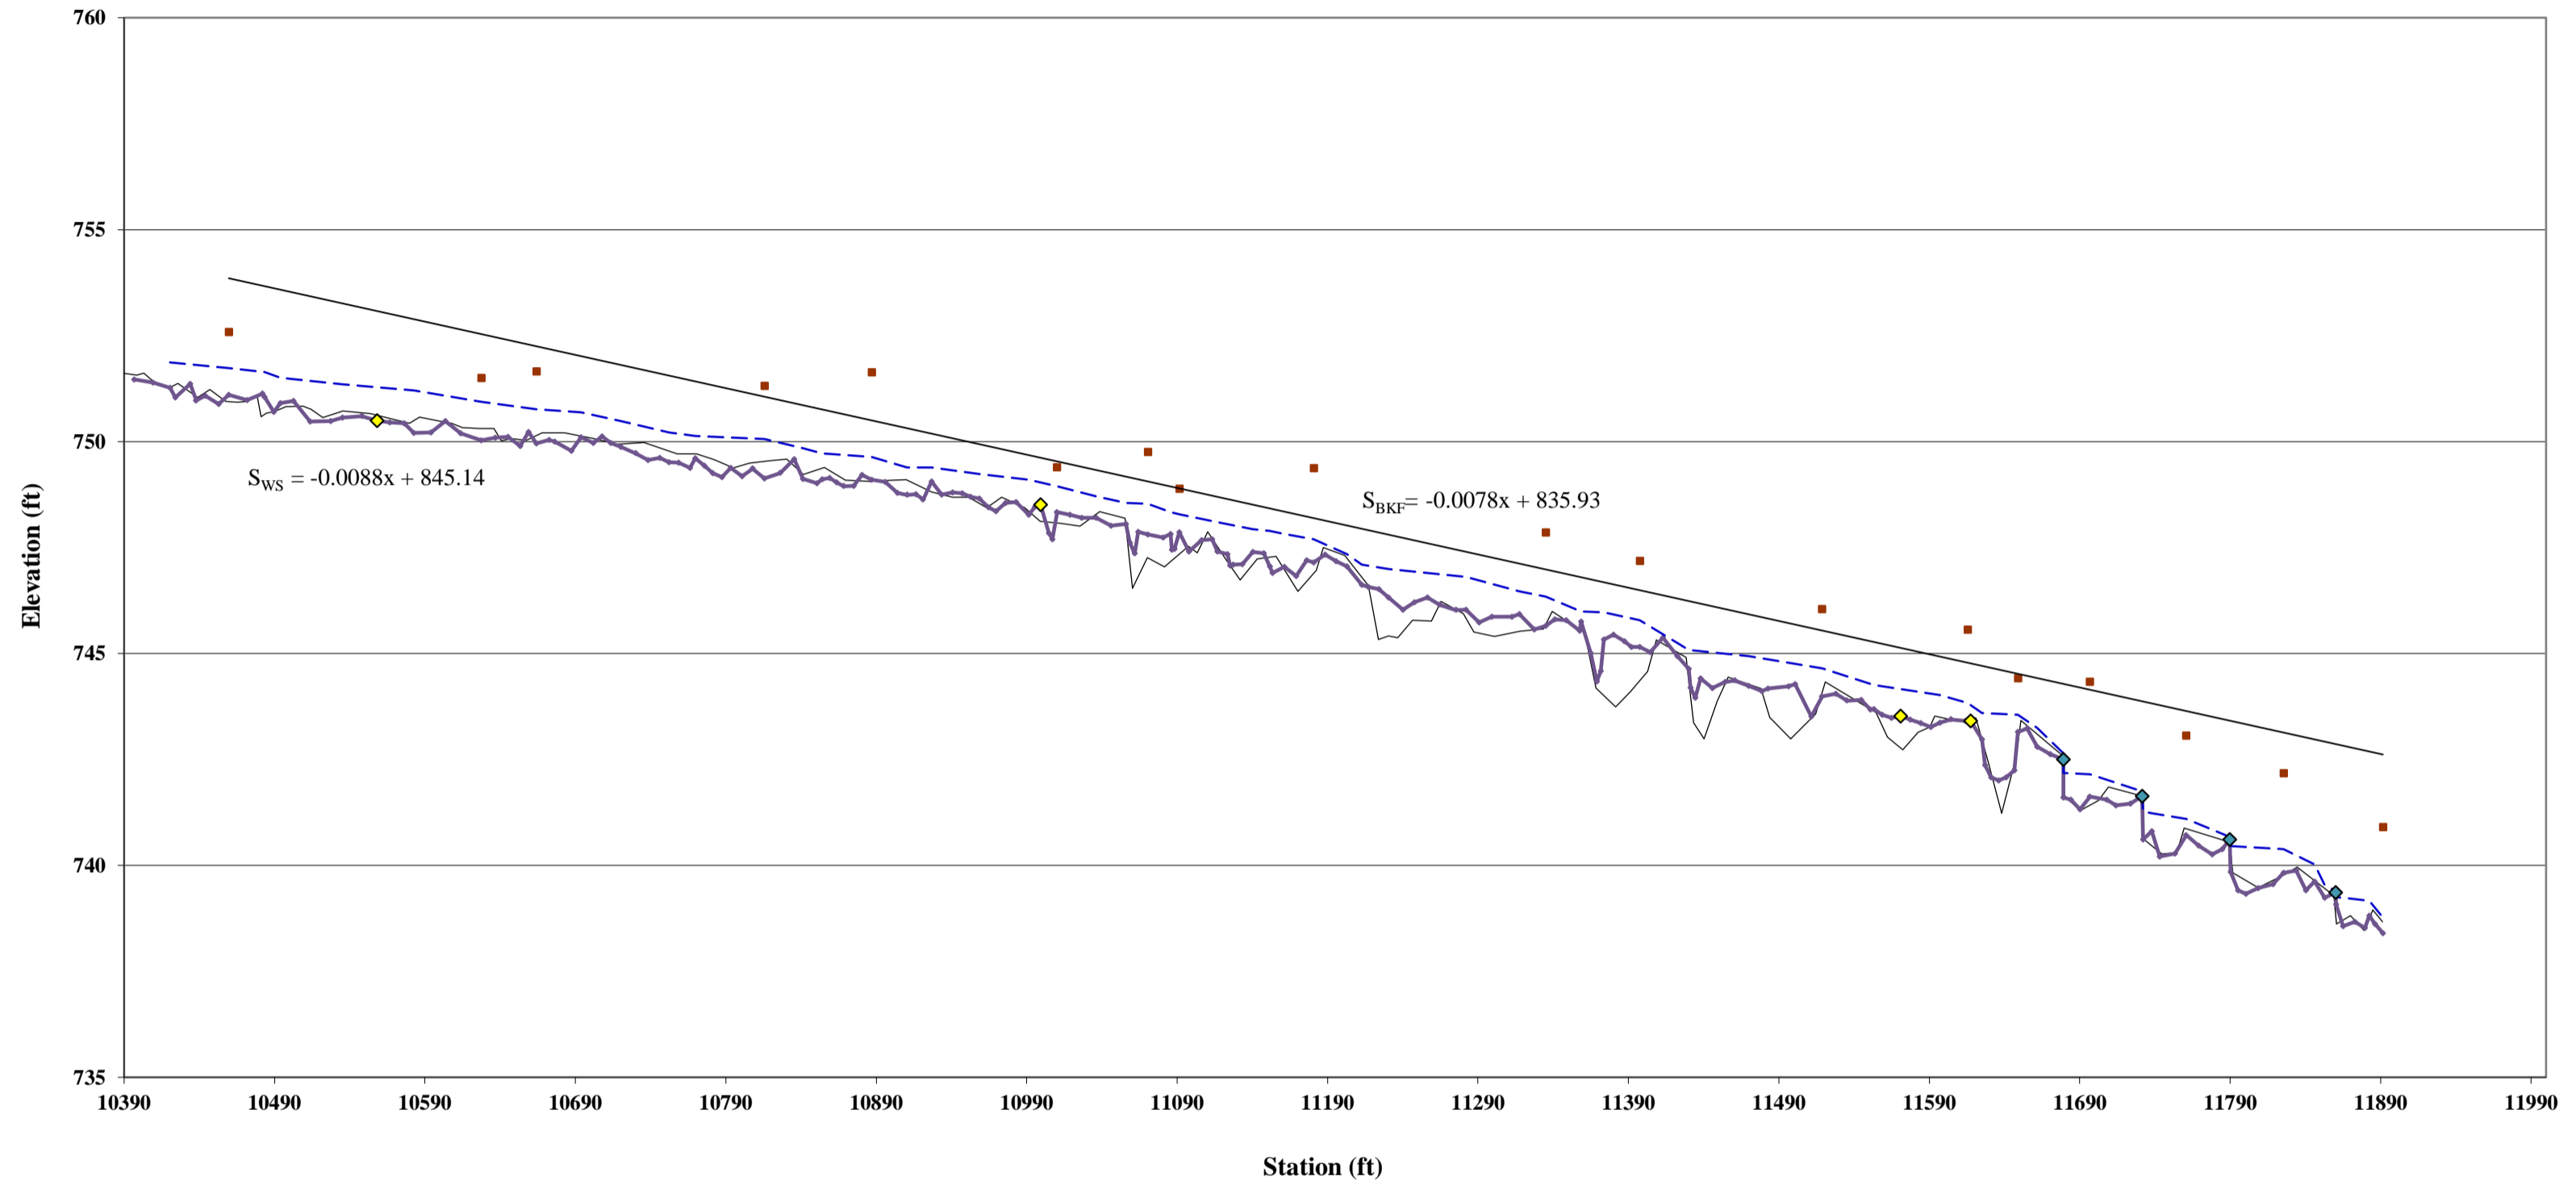

Cross-Section 1 Riffle - MY-01			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	
Coarse	.50 - 1	D	
Very Coarse	1 - 2	S	
Very Fine	2 - 4		
Fine	4 - 5.7	G	
Fine	5.7 - 8	R	
Medium	8 - 11.3	A	
Medium	11.3 - 16	V	
Coarse	16 - 22.6	E	2
Coarse	22.6 - 32	L	2
Very Coarse	32 - 45	S	10
Very Coarse	45 - 64		8
Small	64 - 90	C	14
Small	90 - 128	O	34
Large	128 - 180	B	21
Large	180 - 256	L	7
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		<b>Total</b>	<b>98</b>

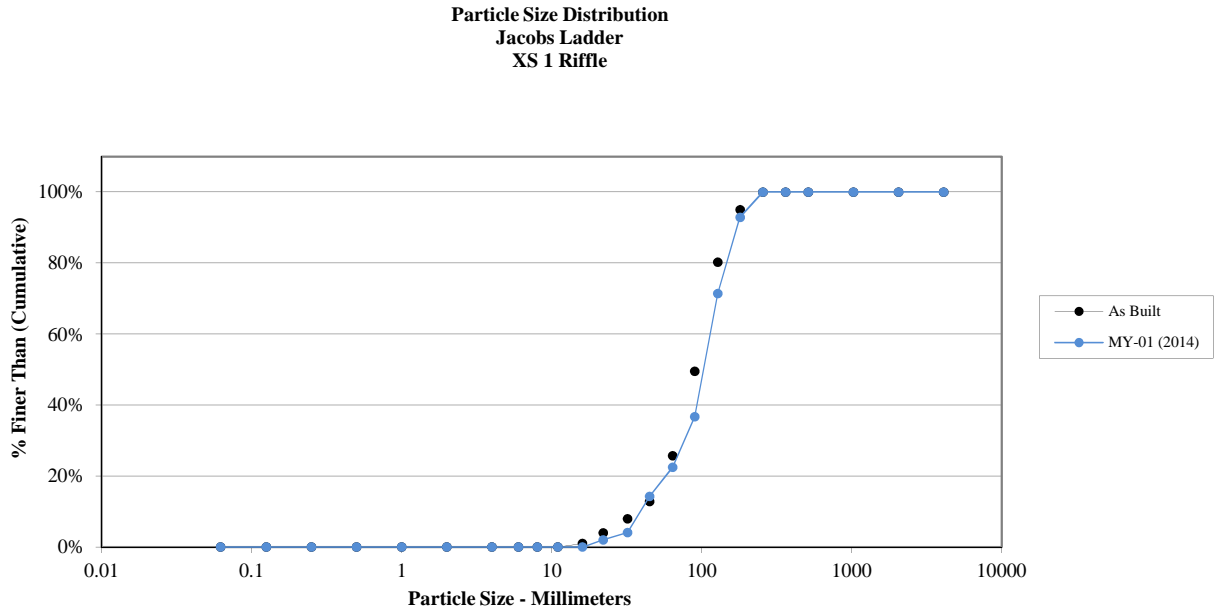


Note:

Size (mm)	
D16	48
D35	86
D50	100
D65	120
D84	160
D95	200

Size Distribution	
mean	87.6
dispersion	1.8
skewness	-0.08

Type	
silt/clay	0%
sand	0%
gravel	22%
cobble	78%
boulder	0%
bedrock	0%
hardpan	0%
wood/det	0%
artificial	0%

Cross-Section 2 Pool - MY-01			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	95
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	
Coarse	.50 - 1	D	
Very Coarse	1 - 2	S	
Very Fine	2 - 4		
Fine	4 - 5.7	G	
Fine	5.7 - 8	R	
Medium	8 - 11.3	A	
Medium	11.3 - 16	V	
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45		
Very Coarse	45 - 64		1
Small	64 - 90	C	
Small	90 - 128	O	1
Large	128 - 180	B	2
Large	180 - 256	L	1
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		<b>Total</b>	100
Note:			

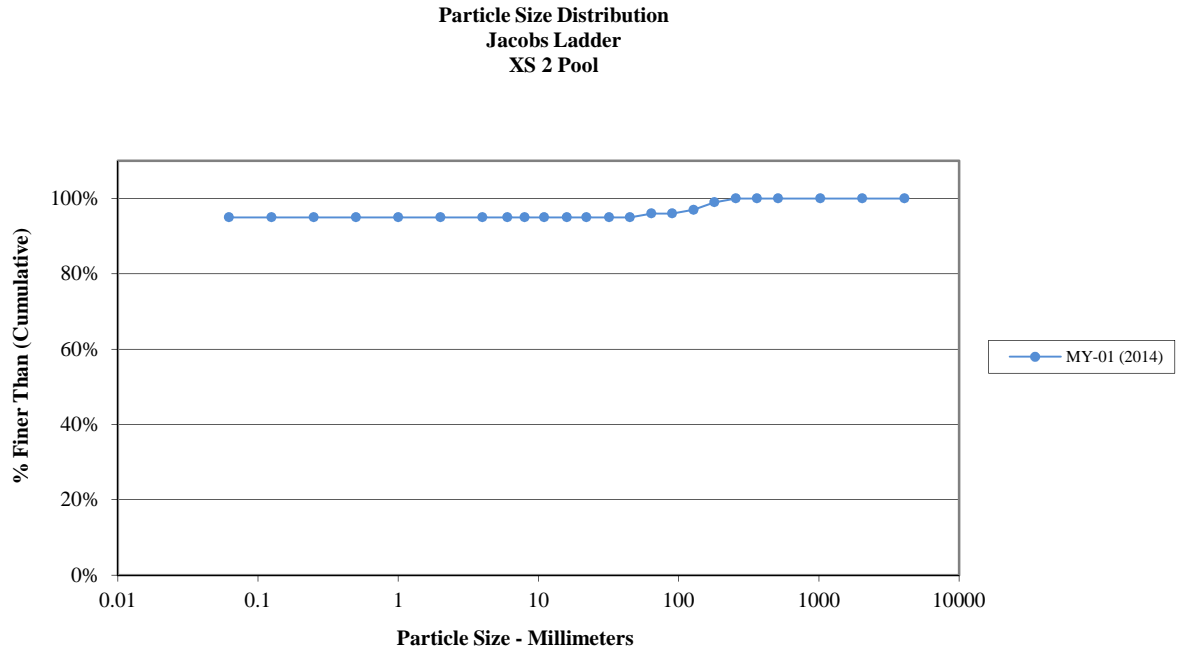


Size (mm)	
D16	0.062
D35	0.062
D50	0.062
D65	0.062
D84	0.062
D95	0.062

Size Distribution	
mean	0.1
dispersion	1.0
skewness	---

Type	
silt/clay	95%
sand	0%
gravel	1%
cobble	4%
boulder	0%
bedrock	0%
hardpan	0%
wood/det	0%
artificial	0%

Cross-Section 3 Riffle - MY-01			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	
Coarse	.50 - 1	D	
Very Coarse	1 - 2	S	4
Very Fine	2 - 4		4
Fine	4 - 5.7	G	3
Fine	5.7 - 8	R	2
Medium	8 - 11.3	A	2
Medium	11.3 - 16	V	1
Coarse	16 - 22.6	E	9
Coarse	22.6 - 32	L	16
Very Coarse	32 - 45	S	20
Very Coarse	45 - 64		13
Small	64 - 90	C	8
Small	90 - 128	O	11
Large	128 - 180	B	5
Large	180 - 256	L	3
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		<b>Total</b>	101
Note:			

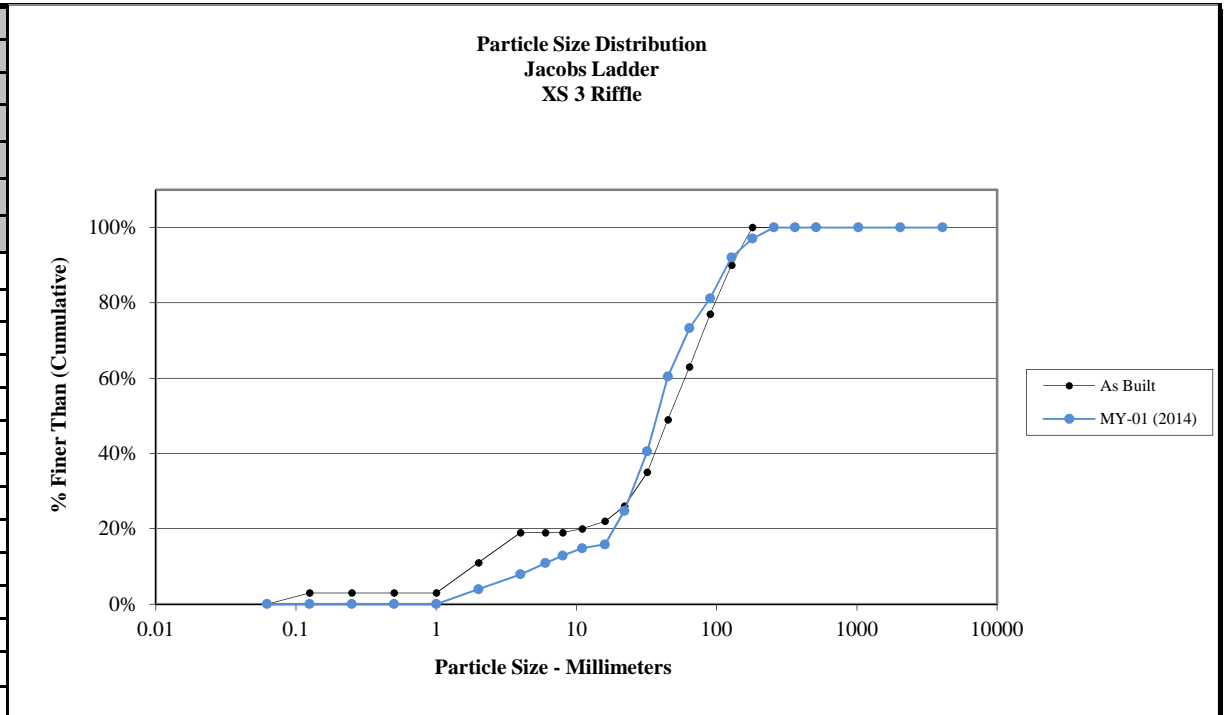


Size (mm)	
D16	16
D35	28
D50	38
D65	51
D84	99
D95	160

Size Distribution	
mean	39.8
dispersion	2.5
skewness	0.02

Type	
silt/clay	0%
sand	4%
gravel	69%
cobble	27%
boulder	0%
bedrock	0%
hardpan	0%
wood/det	0%
artificial	0%



Cross-Section 4 Pool - MY-01			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	100
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	
Coarse	.50 - 1	D	
Very Coarse	1 - 2	S	
Very Fine	2 - 4		
Fine	4 - 5.7	G	
Fine	5.7 - 8	R	
Medium	8 - 11.3	A	
Medium	11.3 - 16	V	
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		<b>Total</b>	100
Note:			

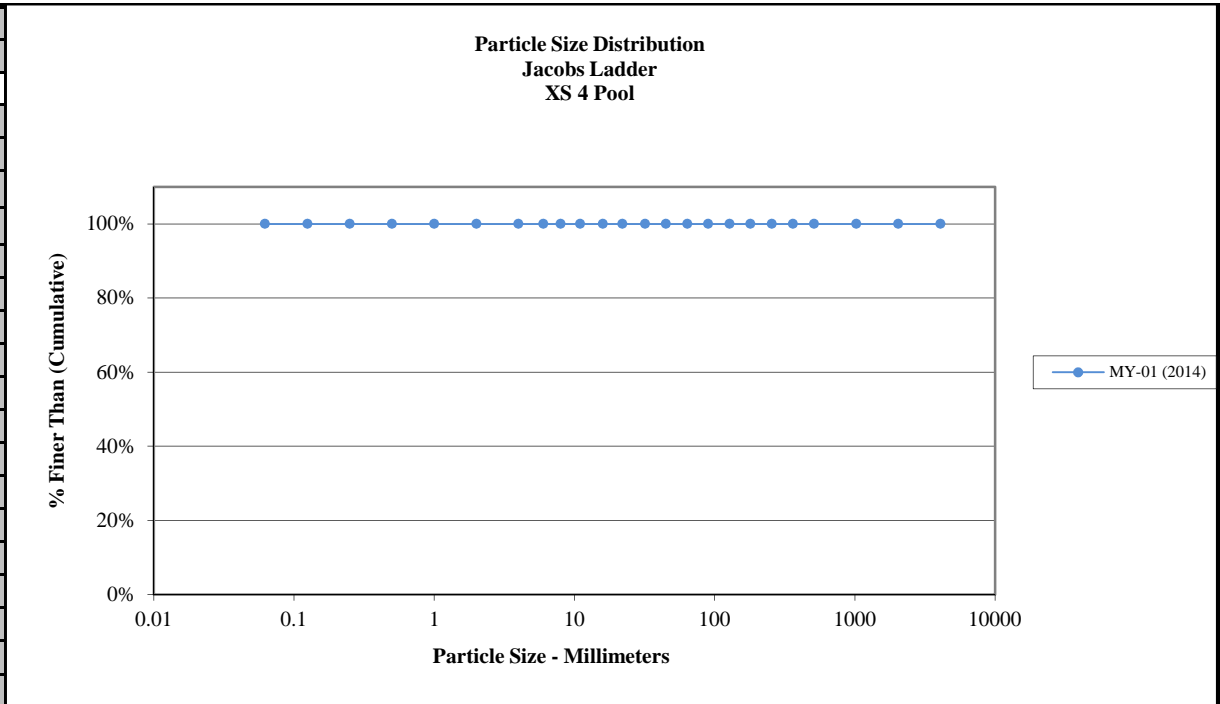


Size (mm)	
D16	0.062
D35	0.062
D50	0.062
D65	0.062
D84	0.062
D95	0.062

Size Distribution	
mean	0.1
dispersion	1.0
skewness	---

Type	
silt/clay	100%
sand	0%
gravel	0%
cobble	0%
boulder	0%
bedrock	0%
hardpan	0%
wood/det	0%
artificial	0%

Cross-Section 5 Riffle - MY-01			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	10
Very Fine	.062 - .125	S	18
Fine	.125 - .25	A	
Medium	.25 - .50	N	
Coarse	.50 - 1	D	
Very Coarse	1 - 2	S	
Very Fine	2 - 4		5
Fine	4 - 5.7	G	
Fine	5.7 - 8	R	1
Medium	8 - 11.3	A	3
Medium	11.3 - 16	V	2
Coarse	16 - 22.6	E	9
Coarse	22.6 - 32	L	12
Very Coarse	32 - 45	S	11
Very Coarse	45 - 64		8
Small	64 - 90	C	6
Small	90 - 128	O	13
Large	128 - 180	B	4
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		<b>Total</b>	102
Note:			

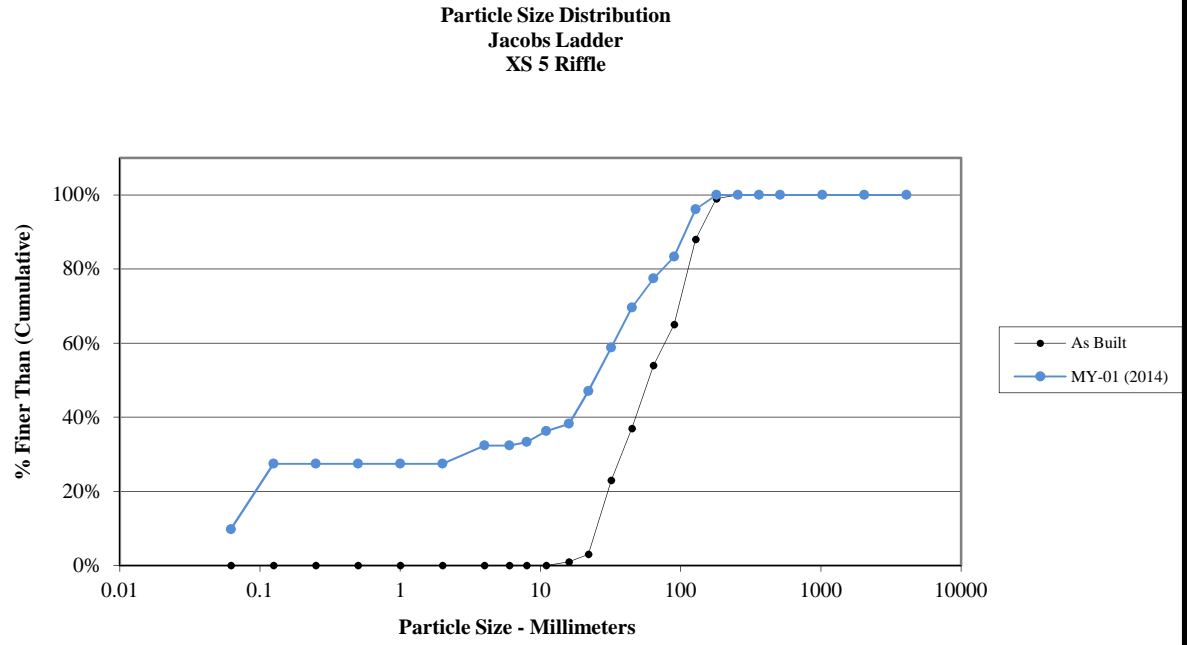


Size (mm)	
D16	0.079
D35	9.6
D50	24
D65	39
D84	92
D95	120

Size Distribution	
mean	2.7
dispersion	153.8
skewness	-0.54

Type	
silt/clay	10%
sand	18%
gravel	50%
cobble	23%
boulder	0%
bedrock	0%
hardpan	0%
wood/det	0%
artificial	0%

Cross-Section 6 Riffle -MY-01			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	18
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	
Coarse	.50 - 1	D	
Very Coarse	1 - 2	S	16
Very Fine	2 - 4		17
Fine	4 - 5.7	G	17
Fine	5.7 - 8	R	9
Medium	8 - 11.3	A	5
Medium	11.3 - 16	V	9
Coarse	16 - 22.6	E	3
Coarse	22.6 - 32	L	2
Very Coarse	32 - 45	S	3
Very Coarse	45 - 64		
Small	64 - 90	C	1
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		<b>Total</b>	<b>100</b>
Note:			

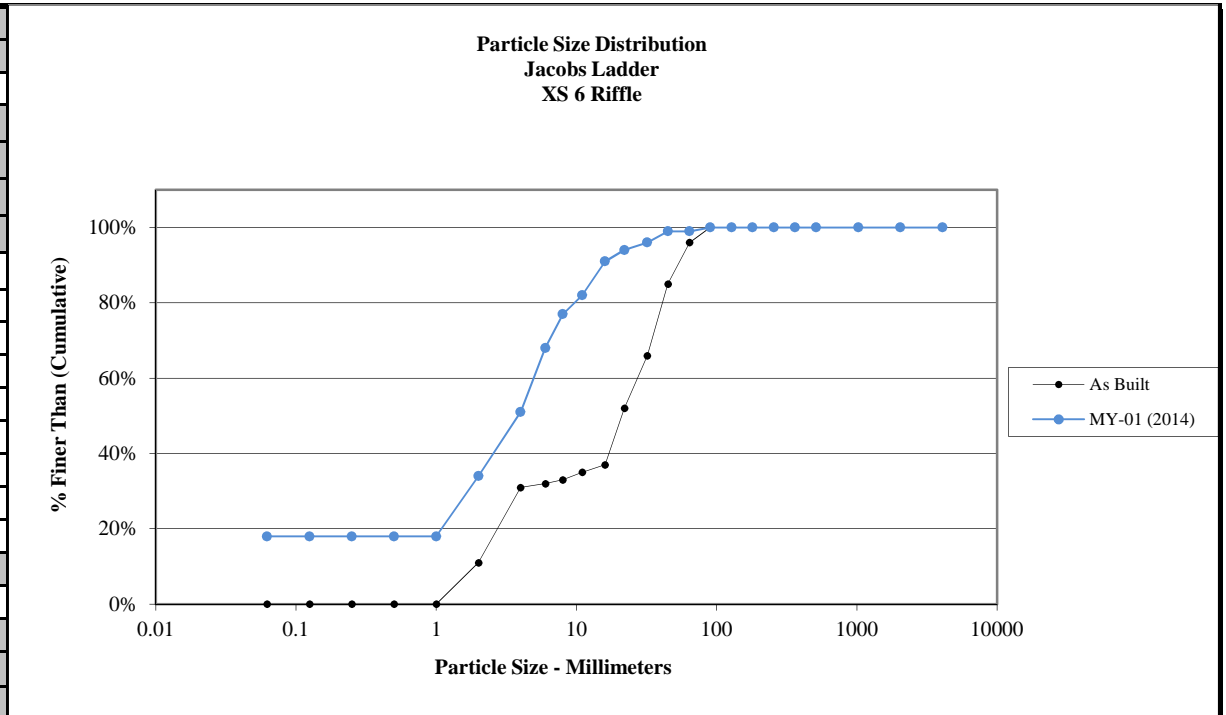


Size (mm)	
D16	0.062
D35	2.1
D50	3.8
D65	5.6
D84	12
D95	27

Size Distribution	
mean	0.9
dispersion	32.2
skewness	-0.43

Type	
silt/clay	18%
sand	16%
gravel	65%
cobble	1%
boulder	0%
bedrock	0%
hardpan	0%
wood/det	0%
artificial	0%

Cross-Section 7 Riffle - MY-01			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	14
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	
Coarse	.50 - 1	D	12
Very Coarse	1 - 2	S	19
Very Fine	2 - 4		15
Fine	4 - 5.7	G	23
Fine	5.7 - 8	R	10
Medium	8 - 11.3	A	5
Medium	11.3 - 16	V	1
Coarse	16 - 22.6	E	1
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		<b>Total</b>	100
Note:			

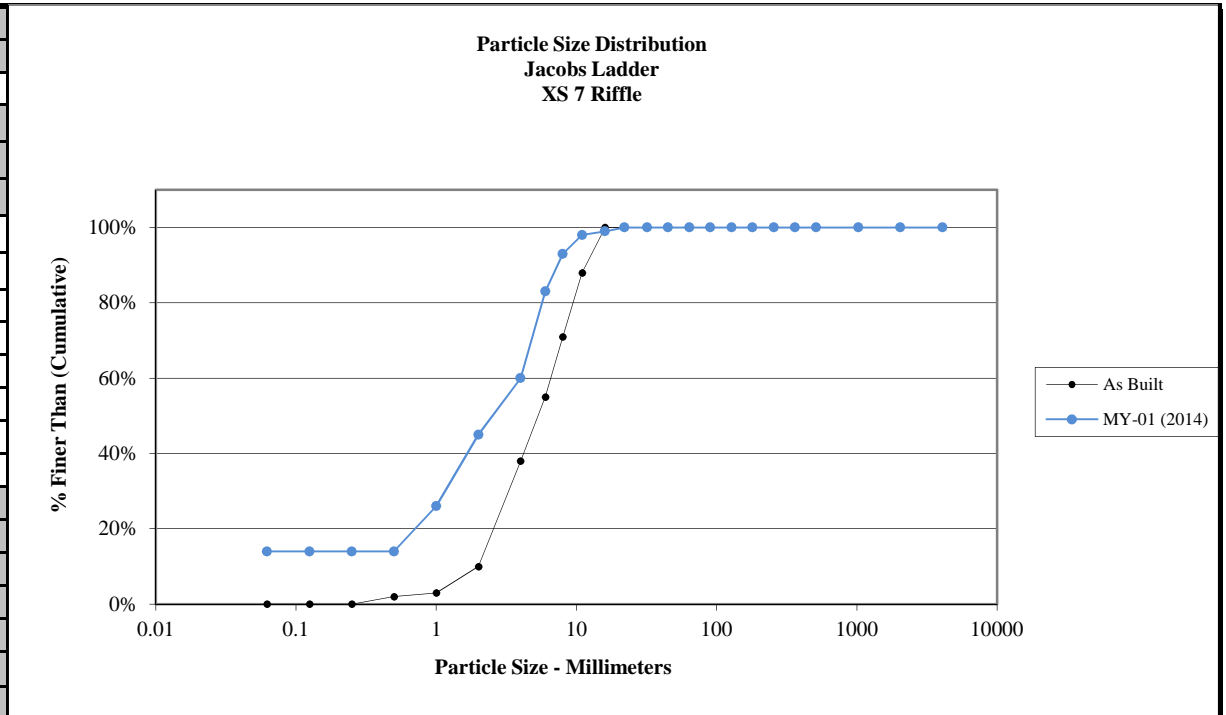


Size (mm)	
D16	0.56
D35	1.4
D50	2.5
D65	4.4
D84	6.2
D95	9.1

Size Distribution	
mean	1.9
dispersion	3.5
skewness	-0.12

Type	
silt/clay	14%
sand	31%
gravel	55%
cobble	0%
boulder	0%
bedrock	0%
hardpan	0%
wood/det	0%
artificial	0%

Cross-Section 8 Riffle -MY-01			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	16
Very Fine	.062 - .125	S	10
Fine	.125 - .25	A	
Medium	.25 - .50	N	3
Coarse	.50 - 1	D	4
Very Coarse	1 - 2	S	10
Very Fine	2 - 4		24
Fine	4 - 5.7	G	12
Fine	5.7 - 8	R	2
Medium	8 - 11.3	A	2
Medium	11.3 - 16	V	
Coarse	16 - 22.6	E	3
Coarse	22.6 - 32	L	9
Very Coarse	32 - 45	S	7
Very Coarse	45 - 64		2
Small	64 - 90	C	2
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		<b>Total</b>	106
Note:			

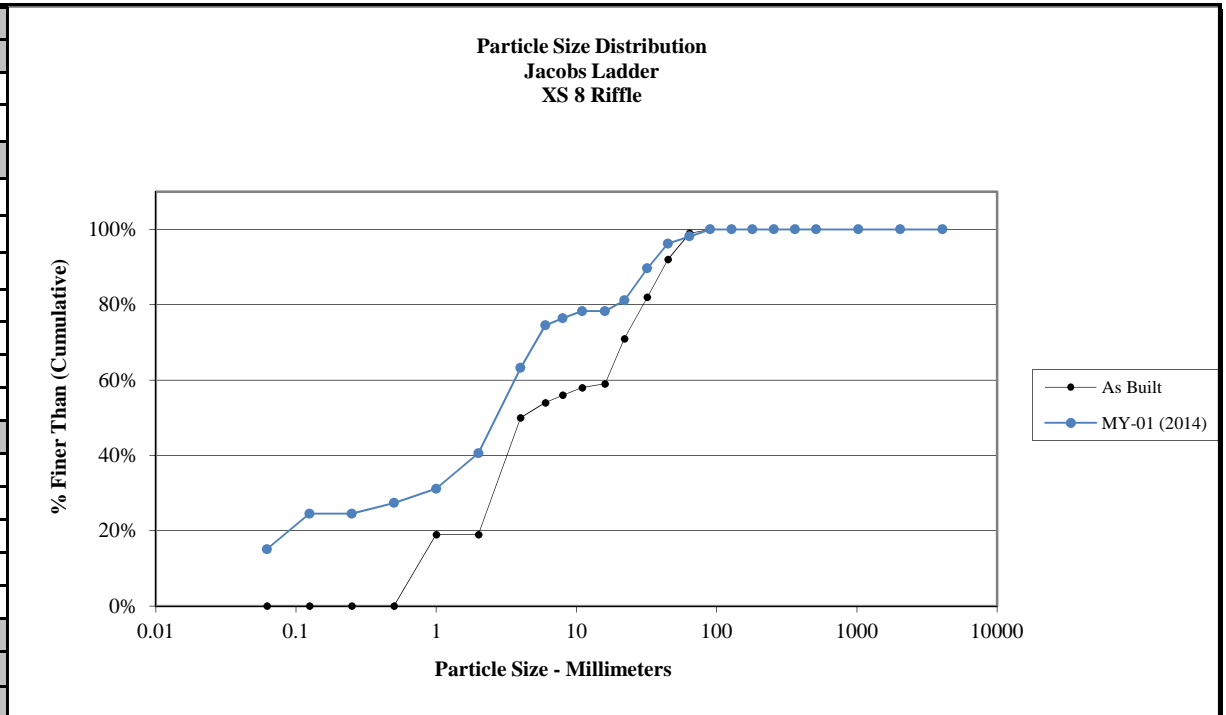


Size (mm)	
D16	0.066
D35	1.3
D50	2.7
D65	4.3
D84	25
D95	42

Size Distribution	
mean	1.3
dispersion	25.1
skewness	-0.20

Type	
silt/clay	15%
sand	25%
gravel	58%
cobble	2%
boulder	0%
bedrock	0%
hardpan	0%
wood/det	0%
artificial	0%

Cross-Section 9 Pool - MY-01			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	49
Very Fine	.062 - .125	S	13
Fine	.125 - .25	A	7
Medium	.25 - .50	N	14
Coarse	.50 - 1	D	20
Very Coarse	1 - 2	S	6
Very Fine	2 - 4		
Fine	4 - 5.7	G	
Fine	5.7 - 8	R	
Medium	8 - 11.3	A	
Medium	11.3 - 16	V	
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45		
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		<b>Total</b>	109
Note:			

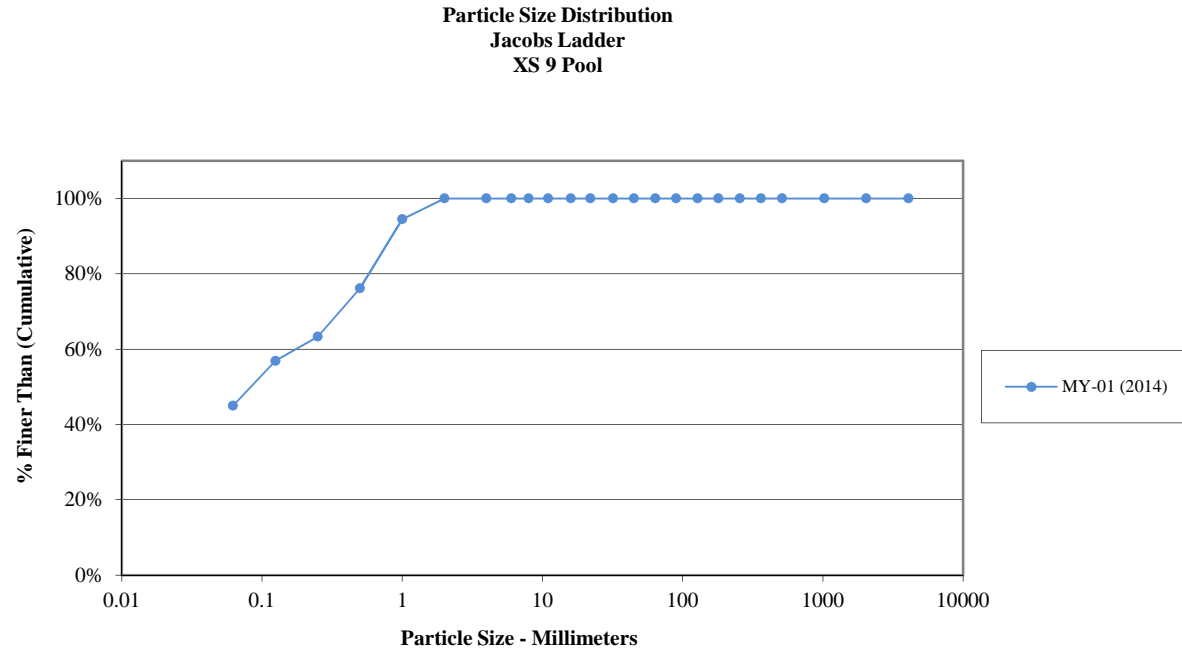


Size (mm)	
D16	0.062
D35	0.062
D50	0
D65	0.27
D84	0.67
D95	1.1

Size Distribution	
mean	0.2
dispersion	4.7
skewness	0.38

Type	
silt/clay	45%
sand	55%
gravel	0%
cobble	0%
boulder	0%
bedrock	0%
hardpan	0%
wood/det	0%
artificial	0%

Cross-Section 10 Riffle - MY-01			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	19
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	3
Medium	.25 - .50	N	8
Coarse	.50 - 1	D	6
Very Coarse	1 - 2	S	14
Very Fine	2 - 4		2
Fine	4 - 5.7	G	8
Fine	5.7 - 8	R	6
Medium	8 - 11.3	A	9
Medium	11.3 - 16	V	3
Coarse	16 - 22.6	E	2
Coarse	22.6 - 32	L	1
Very Coarse	32 - 45	S	6
Very Coarse	45 - 64		3
Small	64 - 90	C	1
Small	90 - 128	O	2
Large	128 - 180	B	9
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		<b>Total</b>	102
Note:			

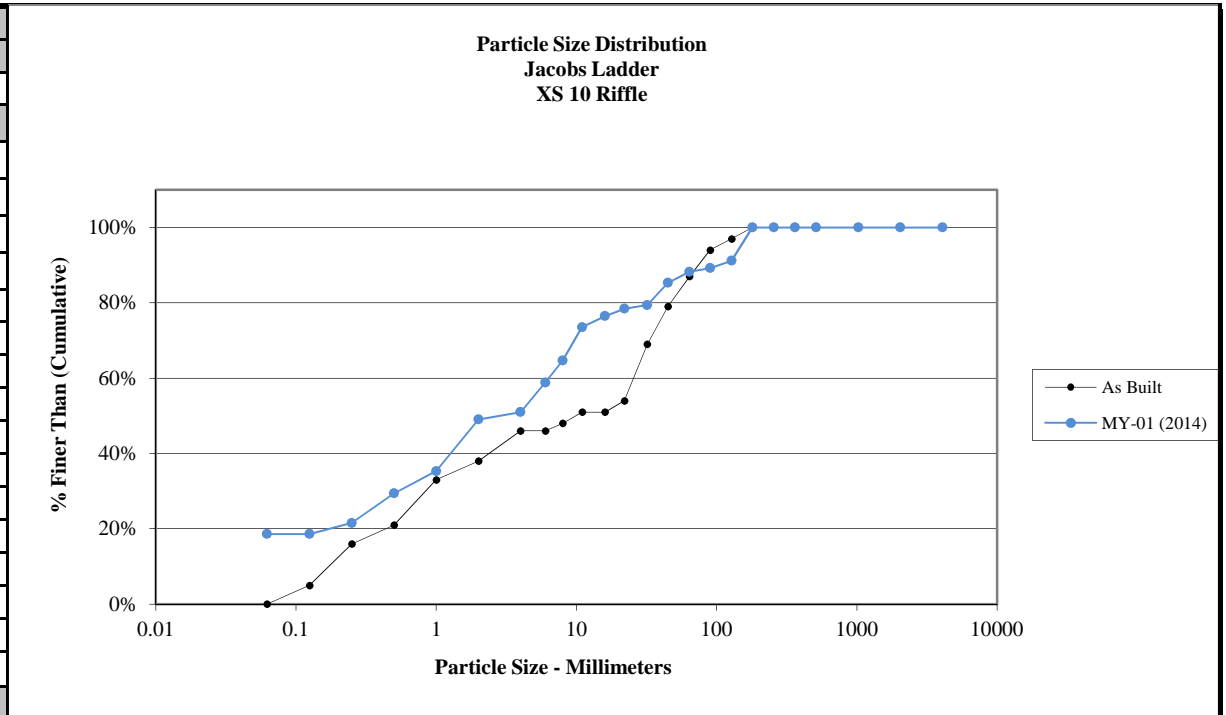

Size (mm)	
D16	0.062
D35	0.97
D50	3
D65	8.1
D84	42
D95	150

Size Distribution	
mean	1.6
dispersion	30.1
skewness	-0.14

Type	
silt/clay	19%
sand	30%
gravel	39%
cobble	12%
boulder	0%
bedrock	0%
hardpan	0%
wood/det	0%
artificial	0%

**Table 10a. T1 Baseline Stream Data Summary**  
**Jacob's Ladder Stream Restoration Site, EEP Project # 95023**

Parameter	Pre-Existing Condition					Reference Reach(es) Data					Design		As-built			
<b>Dimension - Riffle</b>	Min	Mean	Med	Max	n	Min	Mean	Med	Max	n	Min	Max	Min	Mean	Max	n
Bankfull Width (ft)	6.7	8.2		9.6	2	6.9				1	10.3	11.5	10.8	11.3	12.4	3
Floodprone Width (ft)	12	14		16	2	23				1	23	70	>45	>48	>50	3
Bankfull Mean Depth (ft)	1.1	1.3		1.5	2	1.1				1	0.9	1.0	0.8	0.9	1.0	3
Bankfull Max Depth (ft)	1.7	2.1		2.4	2	1.6				1	1.4	1.5	1.3	1.5	1.7	3
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	9.8	10.2		10.5	2	7.4				1	9.0	11.0	8.8	10.3	11.6	3
Width/Depth Ratio	4.6	6.7		8.8	2	6.4				1	12.0	12.0	11.2	12.6	13.3	3
Entrenchment Ratio	1.3	1.8		2.2	2	3.4				1	2.2	6.0	3.6	4.3	4.6	3
Bank Height Ratio	2.3	2.8		3.3	2	1.0				1	1.0	1.0	1.0	1.0	1.0	3
<b>Pattern</b>																
Channel Beltwidth (ft)				*		14	26		38	2	25	70	25	48	70	
Radius of Curvature (ft)				*		12	19		25	2	20	45	20	33	45	
Rc:Bankfull width (ft/ft)				*		1.7	2.7		3.6	2	2	4	2	3	4	
Meander Wavelength (ft)				*		43	73		102	2	65	140	65	103	140	
Meander Width Ratio				*		2.0	3.8		5.5	2	2.4	5.8	2.4	4.0	5.8	
<b>Profile</b>																
Riffle Length (ft)													20	31	40	21
Riffle Slope (ft/ft)	0.010			0.035		0.011			0.025	2	0.004	0.017	0.003	0.015	0.022	21
Pool Length (ft)						16			23		12	40	18	28	49	19
Pool Spacing (ft)						28			57		47	95	54	76	95	19
<b>Substrate and Transport Parameters</b>																
SC% / Sa% / G% / C% / B% / Be%	0% / 21% / 79% / 0% / 0% / 0%										0% / 4% / 44% / 52% / 0% / 0%					
d16 / d35 / d50 / d84 / d95 (mm)	1 / 6 / 8 / 11 / 17 / 22										27 / 49 / 65 / 89 / 123 / 163					
<b>Additional Reach Parameters</b>																
Channel length (ft)	2,179										2,361		2,389			
Drainage Area (SM)	0.36					0.16					0.36		0.36			
Rosgen Classification	G4					E4					C4		C4			
Sinuosity	1.03					1.18					1.14-1.18		1.14-1.18			
Water Surface Slope (ft/ft)	0.011					0.007					0.011		0.008			



**Table 10b. T2 Baseline Stream Data Summary**

**Jacob's Ladder Stream Restoration Site, EEP Project # 95023**

Parameter	Pre-Existing Condition					Reference Reach(es) Data					Design		As-built			
<b>Dimension - Riffle</b>	Min	Mean	Med	Max	n	Min	Mean	Med	Max	n	Min	Max	Min	Mean	Max	n
Bankfull Width (ft)	10.6	12.6		16.5	3	6.9				1	13.5	13.5	14.6	14.9	15.2	4
Floodprone Width (ft)	16	24		35	3	23				1	30	70	33	34	66	4
Bankfull Mean Depth (ft)	1.2	1.7		2.3	3	1.1				1	1.1	1.1	0.9	1.1	1.1	4
Bankfull Max Depth (ft)	2.1	2.6		3.4	3	1.6				1	1.8	1.8	1.7	1.7	1.8	4
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	18.5	21.4		25.0	3	7.4				1	15.3	15.3	13.9	15.4	16.3	4
Width/Depth Ratio	4.7	8.0		13.2	3	6.4				1	12.0	12.0	13.9	14.4	15.5	4
Entrenchment Ratio	1.5	1.8		2.1	3	3.4				1	2.2	5.2	2.2	3.3	4.4	4
Bank Height Ratio	1.9	2.0		2.0	3	1.0				1	1.0	1.0	1.0	1.0	1.0	4
<b>Pattern</b>																
Channel Beltwidth (ft)	20	40		60	3	14	26		38	2	20	70	20	45	70	
Radius of Curvature (ft)	5	10		15	3	12	19		25	2	20	54	20	37	54	
Rc:Bankfull width (ft/ft)	0.5	1.0		1.4	3	1.7	2.7		3.6	2	2	4	2	3	4	
Meander Wavelength (ft)	23	87		150	3	43	73		102	2	58	140	58	99	140	
Meander Width Ratio	1.8	3.8		5.8	3	2.0	3.8		5.5	2	2.2	5.2	2.2	4.0	5.2	
<b>Profile</b>																
Riffle Length (ft)													5	15	23	23
Riffle Slope (ft/ft)	0.004			0.018	3	0.011			0.025	2			0.001	0.011	0.041	23
Pool Length (ft)						16			23				13	26	49	16
Pool Spacing (ft)						28			57				52	69	92	16
<b>Substrate and Transport Parameters</b>																
SC% / Sa% / G% / C% / B% / Be%	4% / 21% / 75% / 0% / 0% / 0%										0% / 20% / 76% / 5% / 0% / 0%					
d16 / d35 / d50 / d84 / d95 (mm)	1 / 2 / 3 / 6 / 11 / 19										1 / 5 / 10 / 22 / 36 / 57					
<b>Additional Reach Parameters</b>																
Channel length (ft)	2,083										2,084		2,084			
Drainage Area (SM)	0.70					0.16					0.70		0.70			
Rosgen Classification	G4					E4					C4		C4			
Sinuosity	1.00-1.47					1.18					1.16-1.45		1.16-1.45			
Water Surface Slope (ft/ft)	0.006-0.013					0.007					0.007-0.012		0.008			

<b>Table 10c. T1A-1, T1A-2 Baseline Stream Data Summary</b>																
<b>Jacob's Ladder Stream Restoration Site, EEP Project # 95023</b>																
<b>Parameter</b>	<b>Pre-Existing Condition</b>					<b>Reference Reach(es) Data</b>					<b>Design</b>		<b>As-built</b>			
<b>Dimension - Riffle</b>	Min	Mean	Med	Max	n	Min	Mean	Med	Max	n	Min	Max	Min	Mean	Max	n
Bankfull Width (ft)	12.7				1	7.7	9.3		10.8	2	7.0					
Floodprone Width (ft)	30				1	13	15		16	2	0.9					
Bankfull Mean Depth (ft)	0.4				1	0.7	0.8		0.9	2	0.6					
Bankfull Max Depth (ft)	0.9				1	1.3	1.5		1.7	2	0.9					
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	4.5				1	6.1	7.5		8.8	2	3.9					
Width/Depth Ratio	35.8				1	8.5	9.9		11.4	2	12.5					
Entrenchment Ratio	2.4				1	1.6	1.8		2.1	2	2.2					
Bank Height Ratio	1.0				1	1.0				1	1.0					
<b>Pattern</b>																
Channel Beltwidth (ft)			*			22				1	10	30				
Radius of Curvature (ft)			*			11			23	2	12	25				
Rc:Bankfull width (ft/ft)			*			1			3	2	2	4				
Meander Wavelength (ft)			*			49			59	2	55	95				
Meander Width Ratio			*			2			3	2	1.0	4.3				
<b>Profile</b>																
Riffle Length (ft)																
Riffle Slope (ft/ft)	0.013			0.018	2	0.012			0.028	2	0.006	0.020				
Pool Length (ft)						5			9		7	11				
Pool Spacing (ft)											22	63				
<b>Substrate and Transport Parameters</b>																
SC% / Sa% / G% / C% / B% / Be%						0%, 18%, 82%, 1%, 0%, 0%										
d16 / d35 / d50 / d84 / d95 (mm)						3, 7, 9, 13, 17, 25										
<b>Additional Reach Parameters</b>																
Channel length (ft)	446										446					
Drainage Area (SM)	0.05					0.15					0.05					
Rosgen Classification	C4					B4c					B4c/C4					
Sinuosity	1.11					1.20					1.11					
Water Surface Slope (ft/ft)	0.015					0.012					0.012					

\*Not a meandering channel and mostly composed of riffles and runs; therefore no pattern data or pool data was shown

<b>Table 10d. T1A-3 Baseline Stream Data Summary</b>																
<b>Jacob's Ladder Stream Restoration Site, EEP Project # 95023</b>																
<b>Parameter</b>	<b>Pre-Existing Condition</b>					<b>Reference Reach(es) Data</b>					<b>Design</b>		<b>As-built</b>			
<b>Dimension - Riffle</b>	Min	Mean	Med	Max	n	Min	Mean	Med	Max	n	Min	Max	Min	Mean	Max	n
Bankfull Width (ft)	9.3				1	9.0	9.5		10.0	2	6.0					
Floodprone Width (ft)	10				1	13	17		21	2	14					
Bankfull Mean Depth (ft)	0.5				1	1.1	1.1		1.2	2	0.5					
Bankfull Max Depth (ft)	0.7				1	1.3	1.4		1.5	2	0.9					
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	4.3				1	10.4	10.5		10.7	2	3.2					
Width/Depth Ratio	20.1				1	8.0	9.0		10.0	2	11.2					
Entrenchment Ratio	1.1				1	1.3	1.8		2.3	2	2.2					
Bank Height Ratio	8.6				1	1.0				1	1.0					
<b>Pattern</b>																
Channel Beltwidth (ft)			*			45				1	15	30				
Radius of Curvature (ft)			*			13			42	2	12	27				
Rc:Bankfull width (ft/ft)			*			1.3			4.4	2	2.0	4.5				
Meander Wavelength (ft)			*			93			136	2	50	80				
Meander Width Ratio			*			4.5			5.0	2	2.5	5.0				
<b>Profile</b>																
Riffle Length (ft)																
Riffle Slope (ft/ft)						0.013			0.028	2	0.020	0.030				
Pool Length (ft)						3			25	2	6	12				
Pool Spacing (ft)						30			39	2	20	40				
<b>Substrate and Transport Parameters</b>																
SC% / Sa% / G% / C% / B% / Be%																
d16 / d35 / d50 / d84 / d95 (mm)																
<b>Additional Reach Parameters</b>																
Channel length (ft)			470								498					
Drainage Area (SM)			0.05					0.40			0.05					
Rosgen Classification			F4					B4c			B4c/C4					
Sinuosity			1.06					1.20			1.09					
Water Surface Slope (ft/ft)			0.018					0.013			0.017					

Table 11. Cross-Section Morphology Data Tables																																			
Jacob's Ladder Stream Restoration Site, EEP Project # 95023																																			
Dimension and Substrate	Cross-Section 1 (T1-Riffle) Station 14+75							Cross-Section 2 (T1-Pool) Station 16+40							Cross-Section 3 (T1-Riffle) Station 24+88							Cross-Section 4 (T1-Pool) Station 26+98							Cross-Section 5 (T1-Riffle) Station 28+75						
	Based on fixed baseline elevation	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5
Bankfull Width (ft)	10.8	10.9						9.1	9.9						12.4	12.9						17.0	18.0					10.8	12.1						
Floodprone Width (ft)	>50	>50						-	-						>45	>45						-	-					>50	>50						
Bankfull Mean Depth (ft)	1.0	1.0						1.3	1.3						0.9	1.0						1.3	1.4					0.8	0.9						
Bankfull Max Depth (ft)	1.6	1.8						2.2	2.4						1.7	1.8						3.0	3.0					1.3	1.6						
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	10.4	10.8						11.5	12.9						11.6	12.4						21.4	24.5					8.8	10.6						
Bankfull Width/Depth Ratio	11.2	11.0						-	-						13.3	13.4						-	-					13.3	13.8						
Bankfull Entrenchment Ratio	4.6	4.6						-	-						3.6	3.5						-	-					4.6	4.1						
Bankfull Bank Height Ratio	1.0	1.0						-	-						1.0	1.0						-	-					1.0	1.0						
d50 (mm)	91	100						-	-						46	38						-	-					59	24						
Dimension and Substrate	Cross-Section 6 (T2-Riffle) Station 101+73							Cross-Section 7 (T2-Riffle) Station 105+67							Cross-Section 8 (T2-Riffle) Station 110+00							Cross-Section 9 (T2-Pool) Station 115+88							Cross-Section 10 (T2-Riffle) Station 116+28						
	Based on fixed baseline elevation	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5
Bankfull Width (ft)	14.7	14.1						15.2	15.9						14.6	15.1						17.5	18.1					15.0	17.1						
Floodprone Width (ft)	35.0	35.0						33.0	33.0						>60	>60						-	-					>66	>66						
Bankfull Mean Depth (ft)	0.9	1.0						1.1	1.0						1.0	1.0						1.5	1.3					1.1	1.0						
Bankfull Max Depth (ft)	1.8	1.7						1.7	1.7						1.7	1.7						3.2	2.3					2.0	2.0						
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	13.9	14.2						16.3	16.2						15.2	15.6						26.5	23.1					16.2	16.7						
Bankfull Width/Depth Ratio	15.5	15.4						14.2	15.6						14.0	14.6						-	-					13.9	17.5						
Bankfull Entrenchment Ratio	2.4	2.4						2.2	2.1						4.1	4.0						-	-					4.4	3.9						
Bankfull Bank Height Ratio	1.0	1.0						1.0	1.0						1.0	1.0						-	-					1.0	1.0						
d50 (mm)	21	4						5	2.5						4	2.7						-	-					10	2.8						

**Table 11b. Stream Reach Morphology Data Tables**  
**Jacob's Ladder Stream Restoration Site, EEP Project # 95023**  
**Reach: T1 (2,389 ft.)**

Parameter	MY01 (2014)						MY02 (2015)						MY03 (2016)						MY04 (2017)						MY05 (2018)					
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
<b>Dimension</b>																														
Bankfull Width (ft)	9.9	11.5	11.5	12.9	1.143	4																								
Floodprone Width (ft)	45.0	49.1	50.0	50.0	1.761	3																								
Bankfull Mean Depth (ft)	0.9	1.0	1.0	1.3	0.162	4																								
Bankfull Max Depth (ft)	1.6	1.9	1.8	2.4	0.298	4																								
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	10.6	11.7	11.6	12.9	0.993	4																								
Width/Depth Ratio	11.0	12.7	13.4	13.8	1.243	3																								
Entrenchment Ratio	3.5	4.1	4.1	4.6	0.472	3																								
Bank Height Ratio	1	1	1	1	0	3																								
<b>Pattern</b>																														
Channel Beltwidth (ft)	25	48		70																										
Radius of Curvature (ft)	20	33		45																										
Rad. of Curv. : Bankfull Width (ft/ft)	2	3		4																										
Meander Wavelength (ft)	65	103		140																										
Meander Width Ratio	234.0	4		5.8																										
<b>Profile</b>																														
Riffle Length (ft)	17	34	35	46	7.00	20																								
Riffle Slope (ft/ft)	0.000	0.018	0.016	0.061	0.011	21																								
Pool Length (ft)	8	28	27	50	10.8	16																								
Pool Max Depth (ft)	2.4	2.4	2.4	2.4	0.0	1																								
Pool Spacing (ft)	39	51	46	99	14.6	15																								
<b>Additional Reach Parameters</b>																														
Channel Thalweg Length (ft)				2,389																										
Sinuosity				0.36																										
Water Surface Slope (ft/ft)				0.0093																										
Bankfull Slope (ft/ft)				0.0092																										
Rosgen Classification				C4																										
SC% / Sa% / G% / C% / B% / Be%				41%/4%/29%/26%/0%/0%																										
d16/d35/d50 / d84 / d95				10/19/25/50/64																										
% of Reach with Eroding Banks				0%																										

**Table 11c. Stream Reach Morphology Data Tables**  
**Jacob's Ladder Stream Restoration Site, EEP Project # 95023**  
**Reach: T2 (2,084 ft.)**

Parameter	MY01 (2014)						MY02 (2015)						MY03 (2016)						MY04 (2017)						MY05 (2018)					
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
<b>Dimension</b>																														
Bankfull Width (ft)	14.8	16.2	15.9	18.1	1.24	5																								
Floodprone Width (ft)	33.0	48.4	47.1	66.0	14.5	4																								
Bankfull Mean Depth (ft)	1.0	1.1	1.0	1.3	1.05	5																								
Bankfull Max Depth (ft)	1.7	1.9	1.7	2.3	1.88	5																								
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	14.2	17.2	16.2	23.1	3.09	5																								
Width/Depth Ratio	14.6	15.8	15.5	17.5	1.06	4																								
Entrenchment Ratio	2.1	3.1	3.1	4.0	0.851	4																								
Bank Height Ratio	1	1	1	1	0	4																								
<b>Pattern</b>																														
Channel Beltwidth (ft)	20	45		70																										
Radius of Curvature (ft)	20	37		54																										
Rad. of Curv. : Bankfull Width (ft/ft)	2	3		4																										
Meander Wavelength (ft)	58	99		140																										
Meander Width Ratio	2.2	4		5.2																										
<b>Profile</b>																														
Riffle Length (ft)	9	38	31	134	28.94	20																								
Riffle Slope (ft/ft)	0.003	0.015	0.012	0.045	0.012	20																								
Pool Length (ft)	0	4	1	19	5.6	14																								
Pool Max Depth (ft)	2.3	2.3	2.3	2.3	0.0	1																								
Pool Spacing (ft)	0	44	0	238	74.9	13																								
<b>Additional Reach Parameters</b>																														
Channel Thalweg Length (ft)	2,084																													
Sinuosity	1.16-1.45																													
Water Surface Slope (ft/ft)	0.0088																													
Bankfull Slope (ft/ft)	0.0078																													
Rosgen Classification	C4																													
SC% / Sa% / G% / C% / B% / Be%	22%/32%/43%/3%/0%/0%																													
d16 / d35 / d50 / d84 / d95	0.2/1/2/17/46																													
% of Reach with Eroding Banks	0%																													

# **Appendix E**

## **Hydrologic Data**

**Table 12. Verification of Bankfull Events  
Jacob's Ladder Stream Restoration Site, EEP Project # 95023**

<b>Date of Data Collection</b>	<b>Date of Occurrence</b>	<b>Method</b>	<b>Photo Number</b>
None recorded	None recorded	N/A	N/A