



MONITORING YEAR 2 REPORT

Final

LITTLE PINE III STREAM AND WETLAND RESTORATION PROJECT

Alleghany County, NC

DEQ Contract 6844

DMS Project Number 94903

DWR # 14-0041

USACE Action ID 2012-01299

Data Collection Period: May - December 2017

Final Submission Date: February 2, 2018

PREPARED FOR:



**NC Department of Environmental Quality
Division of Mitigation Services**

1652 Mail Service Center
Raleigh, NC 27699-1652

PREPARED BY:



Wildlands Engineering, Inc.
1430 South Mint Street, Suite 104
Charlotte, NC 28203
Phone: 704.332.7754
Fax: 704.332.3306



February 2, 2018

Mr. Harry Tsomides
Project Manager
Division of Mitigation Services
5 Ravenscroft Dr., Suite 102
Asheville, NC 28801

RE: Response to MY2 Draft Report Comments
Little Pine Creek III Mitigation Site
DMS ID 94903
DEQ Contract Number 6844
New River Basin - #CU# 05050001 - Alleghany County, North Carolina

Dear Mr. Tsomides:

Wildlands Engineering, Inc. (Wildlands) has reviewed the Division of Mitigation Services (DMS) comments from the Draft Monitoring Year 2 report for the Little Pine Creek III Mitigation Project. The following Wildlands responses to DMS's report comments are noted in italics lettering.

DMS comment; Stream adaptive management actions are recommended for bank instability on UT2a and the clogged culvert on UT2. Please indicate that a repair design is underway to address areas of stream instability along UT2a and UT2, including the formation of head-cuts, lateral stream migration, and excessive streambank erosion. The reach segments that will be addressed include:

- **Reach UT2A: Station 426+50 (downstream end of existing stream crossing) to Station 432+17 (confluence with UT2), for a total of approximately 567 linear feet.**
- **Reach UT2: Station 332+00 (downstream end of existing stream crossing) to Station 340+00 (upstream end of existing stream crossing), for a total of approximately 800 linear feet.**

Wildlands response; Text has been added to the Executive Summary, and Sections 1.2.4 and 1.3 to indicate that a repair design is underway to address areas of stream instability along UT2a (Bank erosion near STA's 427+75, 429+75, 431+00, and 431+50, headcut near STA 432+00) and UT2 (Bank erosion near STA's 330+00-332+50 and 333+70, headcut near STA 332+90).

DMS comment; Stream adaptive management actions are recommended for invasive vegetation. Please indicate that the project vegetation maintenance contract was recently terminated due to a contract dispute and that vegetation areas of concern will continue to be monitored and addressed as needed in the future.

Wildlands response; Text has been added to Section 1.2.2 to indicate the status of the vegetation maintenance contract and that vegetation areas of concern will continue to be monitored and addressed.



DMS comment; Wetland Assessment – It is indicated that the gage was installed to monitor the wetland restoration area (Wetland FF). Wetland FF is a wetland enhancement area.

Wildlands response; This has been corrected in Section 1.2.6 to indicate that Wetland FF is a wetland enhancement area.

DMS comment; A field visit by DMS staff on 9/27/17 showed that noticeable aggradation had developed in the UT1-lower section. This included the Enhancement II section from the culvert crossing flowing through Wetland FF to Station 202+07, and then continuing beyond the installed rock A-vane at the downgradient end of the wetland for an additional 400 feet along the segment of UT1 that was relocated to tie in with the new Little Pine Creek alignment (see designer record drawing Sheet 2.9). Please discuss the silted-in reach concern, and possible causes. If adaptive management is recommended, please discuss the feasibility/ long-term viability of any recommended management actions so DMS can make informed action decisions.

Wildlands response; Text has been added in Section 1.2.4 to discuss the aggradation that was observed by DMS in the UT1-lower section. Wildlands agrees that UT 1 is choked with vegetation and losing its channel form, the channel is still intact and flowing but vegetation is beginning to choke this out as it is part of a bog-like system. We believe that as woody vegetation (mainly the live stakes) grow up and shade the vegetation that the channel will remain and prosper. Our team will remove some of the herbaceous vegetation in the interim and continue to monitor this channel during our monitoring period.

DMS comment; Table 6 – Please indicate LF of assessed reach.

Wildlands response; LF of assessed reach was added to the top line of Tables 6a-g.

DMS comment; If possible please reformat the asset totals to reflect the nearest tenth SMU (6,328.60 to 6,328.6 “R”, and 645 to 644.8 “RE”).

Wildlands response; In Table 1, these asset totals were reformatted to reflect the nearest tenth SMU.

DMS comment; It would be helpful in future reports to have a wrack line photo or two to accompany the bankfull events table.

Wildlands response; When possible, Wildlands will include wrack line photo(s) in future reports to accompany the bankfull event table. The bankfull photos for MY2 can be found in the electronic support files (LittlePineIII_94903_MY2_2017\Support Files\Visual Assessment Data\Photos\Stream\BKF).

DMS comment; Data tables and graphs on opposing pages are upside down in the hard copy. Please make sure any printed copy graphs and pages read in the same orientation when printed.

Wildlands response; Hard copies of the Final Monitoring Report will be corrected for this issue.



Four (4) hard copies of the Final Monitoring Report and a full electronic submittal has been mailed to the DMS western field office. Please contact me at 704-332-7754 x110 if you have any questions.

Sincerely,

A handwritten signature in cursive script that reads "Kirsten Y. Gimbert".

Kirsten Y. Gimbert

Project Manager

kgimbert@wildlandseng.com

EXECUTIVE SUMMARY

Wildlands Engineering, Inc. (Wildlands) completed design and construction management for the North Carolina Division of Mitigation Services (DMS) as part of a design-bid-build contract at the Little Pine III Stream and Wetland Restoration Project (Site). The Site is in Alleghany County approximately eight miles east of the Town of Sparta, NC and approximately four miles south of the Virginia border. The Site lies within the New River Basin; eight-digit Cataloging Unit (CU) 05050001 and the 14-digit Hydrologic Unit Code (HUC) 05050001030030 (Figure 1). Site streams consist of Little Pine Creek, a third order stream, as well as an unnamed second order tributary to Little Pine Creek (UT2), an unnamed first order tributary to Little Pine Creek (UT2a), four unnamed zero order tributaries to Little Pine Creek (UT1, UT2b, UT3, and UT4), and 2.9 acres of wetlands (Figure 2). The project design and construction restored, enhanced, and preserved a total of 13,112 linear feet (LF) of perennial and intermittent stream, and enhanced and preserved 2.9 acres of wetlands. The Site is expected to generate 6,973 stream mitigation units (SMUs), and 1.40 wetland mitigation units (WMUs) for the New River Basin (Table 1).

The Site is within a Targeted Local Watershed (TLW) identified in the New River Basin Restoration Priority (RBRP) plan (NCDENR, 2009). The Site is also located within the Little River & Brush Creek Local Watershed Plan (LWP). The project goals from the mitigation plan (Wildlands, 2014) were established with careful consideration of RBRP goals and objectives to address stressors identified in the LWP. The established project goals include:

- Restore unforested buffers;
- Remove livestock from buffers;
- Remove livestock from streams;
- Repair heavily eroded stream banks and improve stream bank stability;
- Reforest steep landscape around streams; and
- Enhance wetland vegetation.

Site construction and as-built survey were completed in 2016 with planting and baseline monitoring activities occurring between December 2015 and May 2016. The monitoring year (MY) 1 monitoring activities were completed in October 2016. The monitoring year 2 activities occurred in April through December 2017.

Overall, the Site is on track to meet the MY5 monitoring success criteria for vegetation, geomorphology, and hydrology performance standards. However, adaptive management is recommended to address areas of bank instability on UT2a, a clogged culvert on UT2, and areas of invasive plant populations. A repair design is underway to address areas of stream instability along UT2a and UT2, including the formation of head-cuts, lateral stream migration, and excessive streambank erosion. The vegetation survey resulted in an average of 493 planted stems per acre, which meets the interim MY3 monitoring requirement of 320 stems per acre with 20 of the 21 plots (95%) individually meeting this requirement. The vegetation monitoring and visual assessment revealed few vegetation areas of concern. The observed vegetation areas of concern include areas of invasive plant populations in the upstream portions of UT2a, UT2, and UT4. Morphological surveys and visual assessment indicate that the channel dimensions are stable and functioning as designed, except for a isolated areas on UT2, UT2a and Little Pine Creek Reach 2b. Stream areas of concern identified on UT2 in MY1 were repaired in December 2016 and appear stable. At least one bankfull event occurred during MY2 data collection which was recorded by crest gages and by visual indicators. The performance standard of two recorded bankfull events in separate monitoring years has been met for Little Pine Creek and UT2, and partially met for UT2b. No target performance standard was established for wetland hydrology success; however, the groundwater gage in Wetland FF recorded 169 consecutive days of the groundwater levels at or within 12 inches of the ground surface, consisting of 100% of the growing season.



LITTLE PINE III STREAM AND WETLAND RESTORATION PROJECT
Monitoring Year 2 Report

TABLE OF CONTENTS

Section 1: PROJECT OVERVIEW	1-1
1.1 Project Goals and Objectives	1-1
1.2 Monitoring Year 2 Data Assessment.....	1-2
1.2.1 Vegetation Assessment.....	1-2
1.2.2 Vegetation Areas of Concern	1-3
1.2.3 Stream Assessment.....	1-3
1.2.4 Stream Areas of Concern	1-4
1.2.5 Hydrology Assessment.....	1-4
1.2.6 Wetland Assessment.....	1-4
1.3 Monitoring Year 2 Summary	1-5
Section 2: METHODOLOGY	2-1
Section 3: REFERENCES	3-1

APPENDICES

Appendix 1	General Tables and Figures
Figure 1	Project Vicinity Map
Figure 2	Project Component/Asset Map
Table 1	Project Components and Mitigation Credits
Table 2	Project Activity and Reporting History
Table 3	Project Contact Table
Table 4	Project Information and Attributes
Table 5	Monitoring Component Summary
Appendix 2	Visual Assessment Data
Figure 3.0 – 3.2	Current Condition Plan View (CCPV) Maps
Table 6a – g	Visual Stream Morphology Stability Assessment Table
Table 7	Vegetation Condition Assessment Table
	Stream Photographs
	Vegetation Photographs
Appendix 3	Vegetation Plot Data
Table 8	Vegetation Plot Criteria Attainment
Table 9	CVS Vegetation Plot Metadata
Table 10a-b	Planted and Total Stem Counts (Species by Plot with Annual Means)
Appendix 4	Morphological Summary Data and Plots
Table 11a-b	Baseline Stream Data Summary
Table 12a-b	Morphology and Hydraulic Summary (Dimensional Parameters – Cross-Section)
Table 13a-f	Monitoring Data – Stream Reach Data Summary
	Longitudinal Profile Plots
	Cross-Section Plots
	Reachwide and Cross-Section Pebble Count Plots
Appendix 5	Hydrology Summary Data and Plots
Table 14	Verification of Bankfull Events
Table 15	Wetland Gage Attainment Summary
	Groundwater Gage Plot
	Monthly Rainfall Data



Section 1: PROJECT OVERVIEW

The Site is a design-bid-build contract with DMS in Alleghany County, NC, located in the New River Basin; eight-digit Cataloging Unit (CU) 05050001 and the 14-digit Hydrologic Unit Code (HUC) 05050001030030 (Figure 1). Located in the Blue Ridge Belt of the Blue Ridge Province (USGS, 1998), the project watershed includes primarily managed herbaceous, mixed upland hardwoods, and other forested land. The drainage area for the Site is 2,784 acres. Little Pine Creek flows into Brush Creek several hundred feet downstream of the Site boundary. The land adjacent to the streams and wetlands is primarily maintained cattle pasture and forest.

The project streams consist of Little Pine Creek, a third order stream, as well as an unnamed second order tributary to Little Pine Creek (UT2), an unnamed first order tributary to Little Pine Creek (UT2a) and four unnamed zero order tributaries to Little Pine Creek (UT1, UT2b, UT3, and UT4) (Figure 2). Mitigation work within the site included restoring and enhancing 9,888 linear feet (LF) and preserving 3,224 LF of perennial stream, enhancing 2.71 acres of wetlands and preserving a 0.19 acres existing wetland. The Site is expected to provide 6,973 SMUs, and 1.40 WMUs.

The Site is located on portions of parcels owned by Jeffery C. Anders, Eddie and Joye G. Edwards, Frances R. Huber, and Thomas E. Rector. A conservation easement within these tracts protecting 57.3 acres in perpetuity was purchased by the State of North Carolina and recorded with Alleghany County Register of Deeds in 2012. The final mitigation plan was submitted and accepted by DMS in March 2014. Construction activities were completed in September 2015 by North State Environmental, Inc. Planting was completed in December 2015 by Bruton Environmental, Inc. Kee Surveying, Inc. completed the as-built survey in April 2016 and Wildlands completed the baseline monitoring activities in May 2016, and MY1 activities in October 2016. Repairs were completed in March and December 2016. Appendix 1 includes detailed project activity, history, contact information, and background information. Directions and a map of the Site are provided in Figure 1. Site components are discussed in Table 1 and illustrated in Figure 2.

1.1 Project Goals and Objectives

Prior to construction activities, livestock had full access to most of the Site streams and used them as a water source. The riparian buffers in areas proposed for restoration were primarily herbaceous with a few sparse trees. Deposition of fine sediment, severe bank erosion, and trampling of banks impacted the in-stream habitat. Channel widening and incision indicated instability. Table 4 in Appendix 1 and Table 11 in Appendix 4 provide pre-restoration condition details.

The Site is intended to provide numerous ecological benefits within the New River Basin. While many of these benefits are limited to the Site area, others, such as pollutant removal, reduced sediment loading, and improved aquatic and terrestrial habitat, have farther-reaching effects. Expected improvements to water quality and ecological processes are outlined below as secondary goals and objectives. These project goals were established with careful consideration of goals and objectives that were described in the RBRP and to address stressors identified in the LWP.

The project specific goals of the Site address stressors identified in the LWP and include the following:

- Restore unforested buffers;
- Remove livestock from buffers;
- Remove livestock from streams;
- Repair heavily eroded stream banks and improve stream bank stability;
- Reforest steep landscape around streams; and
- Enhance wetland vegetation.



Secondary goals include the following:

- Remove harmful nutrients from creek flow;
- Reduce pollution of creek by excess sediment;
- Improve in-stream habitat; and
- Improve aesthetics.

The project objectives have been defined as follows:

- Restore 26.3 acres of forested riparian buffer;
- Fence off livestock from 57.32 acres of buffer and 14,736 LF of existing streams;
- Stream bank erosion which contributes sediment load to the creek will be greatly reduced, if not eliminated, in the project area. Eroding stream banks will be stabilized by increased woody root mass in banks, reducing channel incision, and by using natural channel design techniques, grading, and planting to reduce bank angles and bank height;
- Steep, unforested landscape within the conservation easement will be reforested;
- Eight of the nine onsite wetlands will be enhanced with supplemental plantings;
- Flood flows will be filtered through restored floodplain areas, where flood flow will spread through native vegetation. Vegetation takes up excess nutrients;
- Storm flow containing grit and fine sediment will be filtered through restored floodplain areas, where flow will spread through native vegetation. The spreading of flood flows will reduce velocity allowing sediment to settle out;
- In-stream structures will promote aeration of water;
- In-stream structures will be constructed to improve habitat diversity and trap detritus. Wood structures will be incorporated into the stream as part of the restoration design. Such structures may include log drops and rock structures that incorporate woody debris; and
- Site aesthetics will be enhanced by planting native plant species, treating invasive species, and stabilizing eroding and unstable areas throughout the project.

1.2 Monitoring Year 2 Data Assessment

Annual monitoring was conducted during MY2 to assess the condition of the project. The stream restoration success criteria for the Site follows the approved performance standards presented in the Little Pine III Stream & Wetland Restoration Project Final Mitigation Plan (Wildlands, 2014).

1.2.1 Vegetation Assessment

Planted woody vegetation is being monitored in accordance with the guidelines and procedures developed by the Carolina Vegetation Survey-NCEP Level 2 Protocol (Lee et al., 2008). A total of 21 vegetation monitoring plots were established during baseline monitoring within the project easement areas using a standard 10 by 10 meter plot. Please refer to Figures 3.0-3.2 in Appendix 2 for the vegetation monitoring locations. The final vegetation success criterion is the survival of 260 planted stems per acre in the riparian corridor along restored and enhanced reaches at the end of year five of the monitoring period. The interim measure of vegetation success for the Site is the survival of at least 320 planted stems per acre at the end of year three of the monitoring period.

The MY2 vegetation survey was completed in September 2017, resulting in an average planted stem density of 493 stems per acre. The Site has met the MY3 interim requirement of 320 stems per acre, with 20 of the 21 plots (95%) individually meeting this requirement. The planted stem mortality was approximately 6% of the MY1 stem count (522 stems per acre). There is an average of 12 stems per plot as compared to 13 stems per plot in MY1. Approximately 5% of the remaining planted stems scored a vigor of 1, indicating that they are unlikely to survive. In addition, approximately 40% of the remaining planted stems scored a vigor of 2, indicating more than minor damage to leaf material and/or bark



tissue exists. This low vigor rating is due to damage from suffocation, insects, vines, deer, saturated soils, or other unknown factors. Please refer to Appendix 2 for vegetation plot photographs and Appendix 3 for vegetation data tables.

1.2.2 Vegetation Areas of Concern

The MY2 vegetation monitoring and visual assessment revealed some vegetation areas of concern. Small patches of poor/bare herbaceous cover in the left floodplain of Little Pine Creek Reach 1 and Reach 2a were identified in MY1. These areas were observed in MY2 and are showing growth in herbaceous cover. Some vegetation problem areas of invasive plant populations have been identified in MY2 throughout the Site with predominant species including: European barberry (*Berberis vulgaris*), Multiflora rose (*Rosa multiflora*), and Chinese privet (*Ligustrum sinense*). Areas of European barberry and Multiflora rose are becoming prevalent especially in the upper preservation reach of UT2a, upstream of the Wetland JJ on UT4, and UT2 Reach 1 upper riparian area. The project vegetation maintenance contract was recently terminated and vegetation areas of concern will continue to be monitored and addressed as needed by DMS. These vegetation areas of concern are shown in Figure 3 in Appendix 2.

1.2.3 Stream Assessment

Morphological surveys for MY2 were conducted in May 2017. Overall, results indicate that the channel dimensions are stable and functioning as designed, with the exception of stream areas of concern identified section 1.2.4.

In general, the cross-sections on Little Pine Creek, UT2, and UT2b show little to no change in the bankfull area, maximum depth ratio, or width-to-depth ratio compared to baseline. Surveyed riffle cross-sections fell within the parameters defined for channels of the appropriate Rosgen stream type (Rosgen, 1996). While cross-section 10 on UT2b and cross-sections 15 and 16 on UT2 vary significantly from baseline conditions, their dimensions remain stable in MY2. In MY1, pool cross-section 10 deepened resulting in a max depth and cross-sectional area roughly double that recorded at baseline. This is not considered detrimental to either the stability of the channel or project goals. Cross-section 10 dimensions showed little change between MY1 and MY2, indicating that the deepening displayed in MY1 has stabilized. In MY1, Pool cross-section 15 filled in partially with sediment resulting in a decreased depth and cross-sectional area. The sediment deposition within the pool was temporary and the bankfull depth has increased in MY2. Between MY0 and MY1, the channel thalweg shifted laterally due to channel erosion within the vicinity of riffle cross-section 16. In December 2016, repairs to the Site included bank repairs and installing new riffle materials at riffle cross-section 16. The channel appears to be stable and in good condition with cross-section 16 dimensions similar to the baseline.

The surveyed longitudinal profile data for the project streams illustrates that bedform features are maintaining lateral and vertical stability between MY1 and MY2, except for isolated areas on UT2 discussed below. The longitudinal profile parameters on Little Pine Creek, UT2, and UT2b showed little change from baseline in slope (riffle, water surface, bankfull) with minor differences in pool-to-pool spacing and pool length. Max pool depths increased in most reaches due to scour from log structures, which enhances aquatic habitat. The overall pattern of all project streams remained the same compared to the baseline data. Several instances of structure piping and sediment deposition were noted during the MY2 survey and are discussed in Section 1.2.4.

In general, substrate counts in the restoration reaches indicated maintenance of coarser materials in the riffle reaches and finer particles in the pools. The particle size distributions for MY2 resemble the as-built data in coarseness and distribution. Refer to Appendix 2 for the visual stability assessment table,

Current Condition Plan View (CCPV) maps, and reference photographs. Refer to Appendix 4 for the morphological summary data and plots.

1.2.4 Stream Areas of Concern

Stream areas of concern included instances of structure piping, bank scour, sediment deposition, and clogged culverts. On Little Pine Creek Reach 1, a wedge of sediment has deposited forming a mid-channel bar at the upstream start of the project. At the riffle located at cross-section 1 (STA 104+00), sediment deposition was observed with some vegetation in the stream. Downstream of the confluence with UT1, Little Pine Creek Reach 2a has one small section of erosion on the right bank (STA 121+50) and flow piping under a log structure (STA 123+00). Little Pine Creek Reach 2b has instances of structure piping, located at STA 124+00 and 124+50.

During a field visit on 9/27/17, DMS observed areas of sediment aggradation on UT1 downstream of the culvert crossing through Wetland FF to STA 202+07 and beyond the installed rock A-vane (approximately 400 LF). In future years as woody vegetation becomes more established and shades out the herbaceous cover, the baseflow is expected to become stronger and transport the accumulated fine sediment in the reach. Currently a defined baseflow channel is still present and this area will continue to be monitored for additional sediment aggradation in future years.

UT2 Reach 1 Upper had 3 instances of structures piping (STA 303+16, 309+14, and 309+96) resulting in the degradation of one riffle at STA 303+20. UT2 Reach 1 Lower has an area of sediment deposition (STA 325+80 to 326+50), located directly upstream of a crossing where the culvert inlet has been clogged with debris and sediment. On UT2 Reach 2, the bank erosion from 333+75 to 334+00 was repaired in December 2016 and appears stable. In MY1, UT2 Reach 2 had one instance of streambed erosion from STA 338+50-339+30 resulting in riffle degradation, shifting of thalweg position, floodplain scour, and sediment deposition. This area was also repaired in December 2016 and the channel appears stable.

UT2a has instances of localized bank erosion (STA 427+80, 431+00) along the right outer bends of the channel. Just upstream of the confluence with UT2, UT2a is exhibiting an area of high instability with vertical eroding right bank at the channel bend (STA 431+50). The sections of eroding banks on UT2a and UT2 are in enhancement I and enhancement II reaches, in areas where no bank work was performed. Adaptive management is recommended in MY3 for sections of eroding banks on UT2a. These stream areas of concern are indicated in Table 6 and on Figure 3 in Appendix 2.

DMS has a repair design underway to address areas of stream instability along UT2a and UT2, including the formation of head-cuts, lateral stream migration, and excessive streambank erosion.

1.2.5 Hydrology Assessment

At least one bankfull event occurred on Little Pine and UT2 reaches during the MY2 data collection, which was recorded by crest gages and by visual indicators. No bankfull indicators were observed for UT2b in MY2. Two bankfull flow events occurring in separate years must be documented on the restoration reaches within the five year monitoring period. Therefore, the performance standard has been met in MY2 for Little Pine and UT2. One additional bankfull event verification is required for UT2b to meet the performance standard. Refer to Appendix 5 for hydrologic data and graphs.

1.2.6 Wetland Assessment

One groundwater monitoring gage (GWG 1) was established during the baseline monitoring within the Wetland FF area using logging hydrology pressure transducers. The gage was installed at an appropriate location so that the data collected will provide an indication of groundwater levels throughout the wetland enhancement area. No target performance standard for wetland hydrology success was established within the Mitigation Plan (2014). Wetland hydrology attainment typically consists of recorded groundwater levels within 12 inches of the ground surface for a consecutive period consisting

of a pre-defined percentage of the growing season. Under typical precipitation conditions, Allegheny County's growing season extends 169 days from April 26th to October 11th. No onsite rainfall data is available; however, daily precipitation data was collected from closest NC CRONOS Station, Glade Valley 3.0 ENE. GWG 1 recorded 169 consecutive days of the groundwater levels at or within 12 inches of the ground surface, consisting of 100% of the growing season. The climate data from nearby NC CRONOS station suggests that the Site received more than typical amounts of rain in 2017. The monthly rainfall in April, May, and October exceeded the 70th percentile for the area (USDA, 2017). Please refer to Appendix 2 for the groundwater gage location and Appendix 5 for groundwater hydrology data and plots.

1.3 Monitoring Year 2 Summary

Overall, the Site is on track to meet the MY5 monitoring success criteria for vegetation, geomorphology, and hydrology performance standards. However, adaptive management is recommended to address areas of bank instability on UT2a, a clogged culvert on UT2, and areas of invasive plant populations. DMS has a repair design underway to address areas of stream instability along UT2a and UT2, including the formation of head-cuts, lateral stream migration, and excessive streambank erosion. The vegetation survey resulted in an average of 493 planted stems per acre, which meets the interim MY3 monitoring requirement of 320 stems per acre with 20 of the 21 plots (95%) individually meeting this requirement. The vegetation monitoring and visual assessment revealed few vegetation areas of concern. The observed vegetation areas of concern include areas of invasive plant populations in the upstream portions of UT2a, UT2, and UT4. Morphological surveys and visual assessment indicate that the channel dimensions are stable and functioning as designed, except for a isolated areas on UT2, UT2a and Little Pine Creek Reach 2b. Stream areas of concern identified on UT2 in MY1 were repaired in December 2016 and appear stable. At least one bankfull event occurred during MY2 data collection which was recorded by crest gages and by visual indicators. The performance standard of two recorded bankfull events in separate monitoring years has been met for Little Pine Creek and UT2, and partially met for UT2b. No target performance standard was established for wetland hydrology success; however, the groundwater gage in Wetland FF recorded 169 consecutive days of the groundwater levels at or within 12 inches of the ground surface, consisting of 100% of the growing season.

Summary information and data related to the performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these annual monitoring reports can be found in the Mitigation Plan documents available on DMS's website. All raw data supporting the tables and figures in the appendices are available from DMS upon request.

Section 2: METHODOLOGY

Geomorphic data was collected following the standards outlined in The Stream Channel Reference Site: An Illustrated Guide to Field Techniques (Harrelson et al., 1994) and in the Stream Restoration: A Natural Channel Design Handbook (Doll et al., 2003). Longitudinal and cross-sectional data were collected using a total station and were georeferenced. All Current Condition Plan View mapping was recorded using a Trimble handheld GPS with sub-meter accuracy and processed using Pathfinder and ArcView. Crest gages were installed in surveyed riffle cross-sections and monitored annually. Hydrology attainment installation and monitoring methods are in accordance with the standards published in the United States Army Corps of Engineers Stream Mitigation Guidelines (2003). Vegetation monitoring protocols followed the Carolina Vegetation Survey-NCEEP Level 2 Protocol (Lee et al., 2008).




Section 3: REFERENCES

- Doll, B.A., Grabow, G.L., Hall, K.A., Halley, J., Harman, W.A., Jennings, G.D., and Wise, D.E. 2003. Stream Restoration A Natural Channel Design Handbook.
- Harrelson, Cheryl C; Rawlins, C.L.; Potyondy, John P. 1994. *Stream Channel Reference Sites: An Illustrated Guide to Field Technique*. Gen. Tech. Rep. RM-245. Fort Collins, CO: U.S. Department of Agriculture, Forest Service, Rocky Mountain Forest and Range Experiment Station. 61 p.
- Lee, Michael T., Peet, Robert K., Steven D., Wentworth, Thomas R. 2008. CVS-EEP Protocol for Recording Vegetation Version 4.2. Retrieved from: <http://cvs.bio.unc.edu/protocol/cvs-EEP-protocol-v4.2-lev1-2.pdf>
- North Carolina Division of Water Resources (NCDWR). 2016. Surface Water Classifications. Retrieved from <http://deq.nc.gov/about/divisions/water-resources/planning/classification-standards/classifications>
- NCDENR. 2009. New River Basin Restoration Priorities. Retrieved from <http://deq.nc.gov/about/divisions/mitigation-services/dms-planning/watershed-planning-documents/new-river-basin>
- NCDENR. 2007. Little River & Brush Creek Local Watershed Plan (LWP) Project Atlas. Retrieved from <http://deq.nc.gov/about/divisions/mitigation-services/dms-planning/watershed-planning-documents/new-river-basin>
- Rosgen, D.L. 1996. Applied River Morphology. Pagosa Springs, CO: Wildland Hydrology Books.
- United States Army Corps of Engineers (USACE), 2003. Stream Mitigation Guidelines. USACE, NCDENR-DWQ, USEPA, NCWRC.
- United States Geological Survey (USGS), 1998. North Carolina Geology. <https://deq.nc.gov/about/divisions/energy-mineral-land-resources/north-carolina-geological-survey/>
- Wildlands Engineering, Inc. 2014. Little Pine III Stream & Wetland Restoration Project Final Mitigation Plan. NCEEP, Raleigh, NC.
- Wildlands Engineering, Inc. 2016. Little Pine III Stream & Wetland Restoration Project As-Built Baseline Monitoring Report. NCDEQ-DMS, Raleigh, NC.



APPENDIX 1. General Tables and Figures

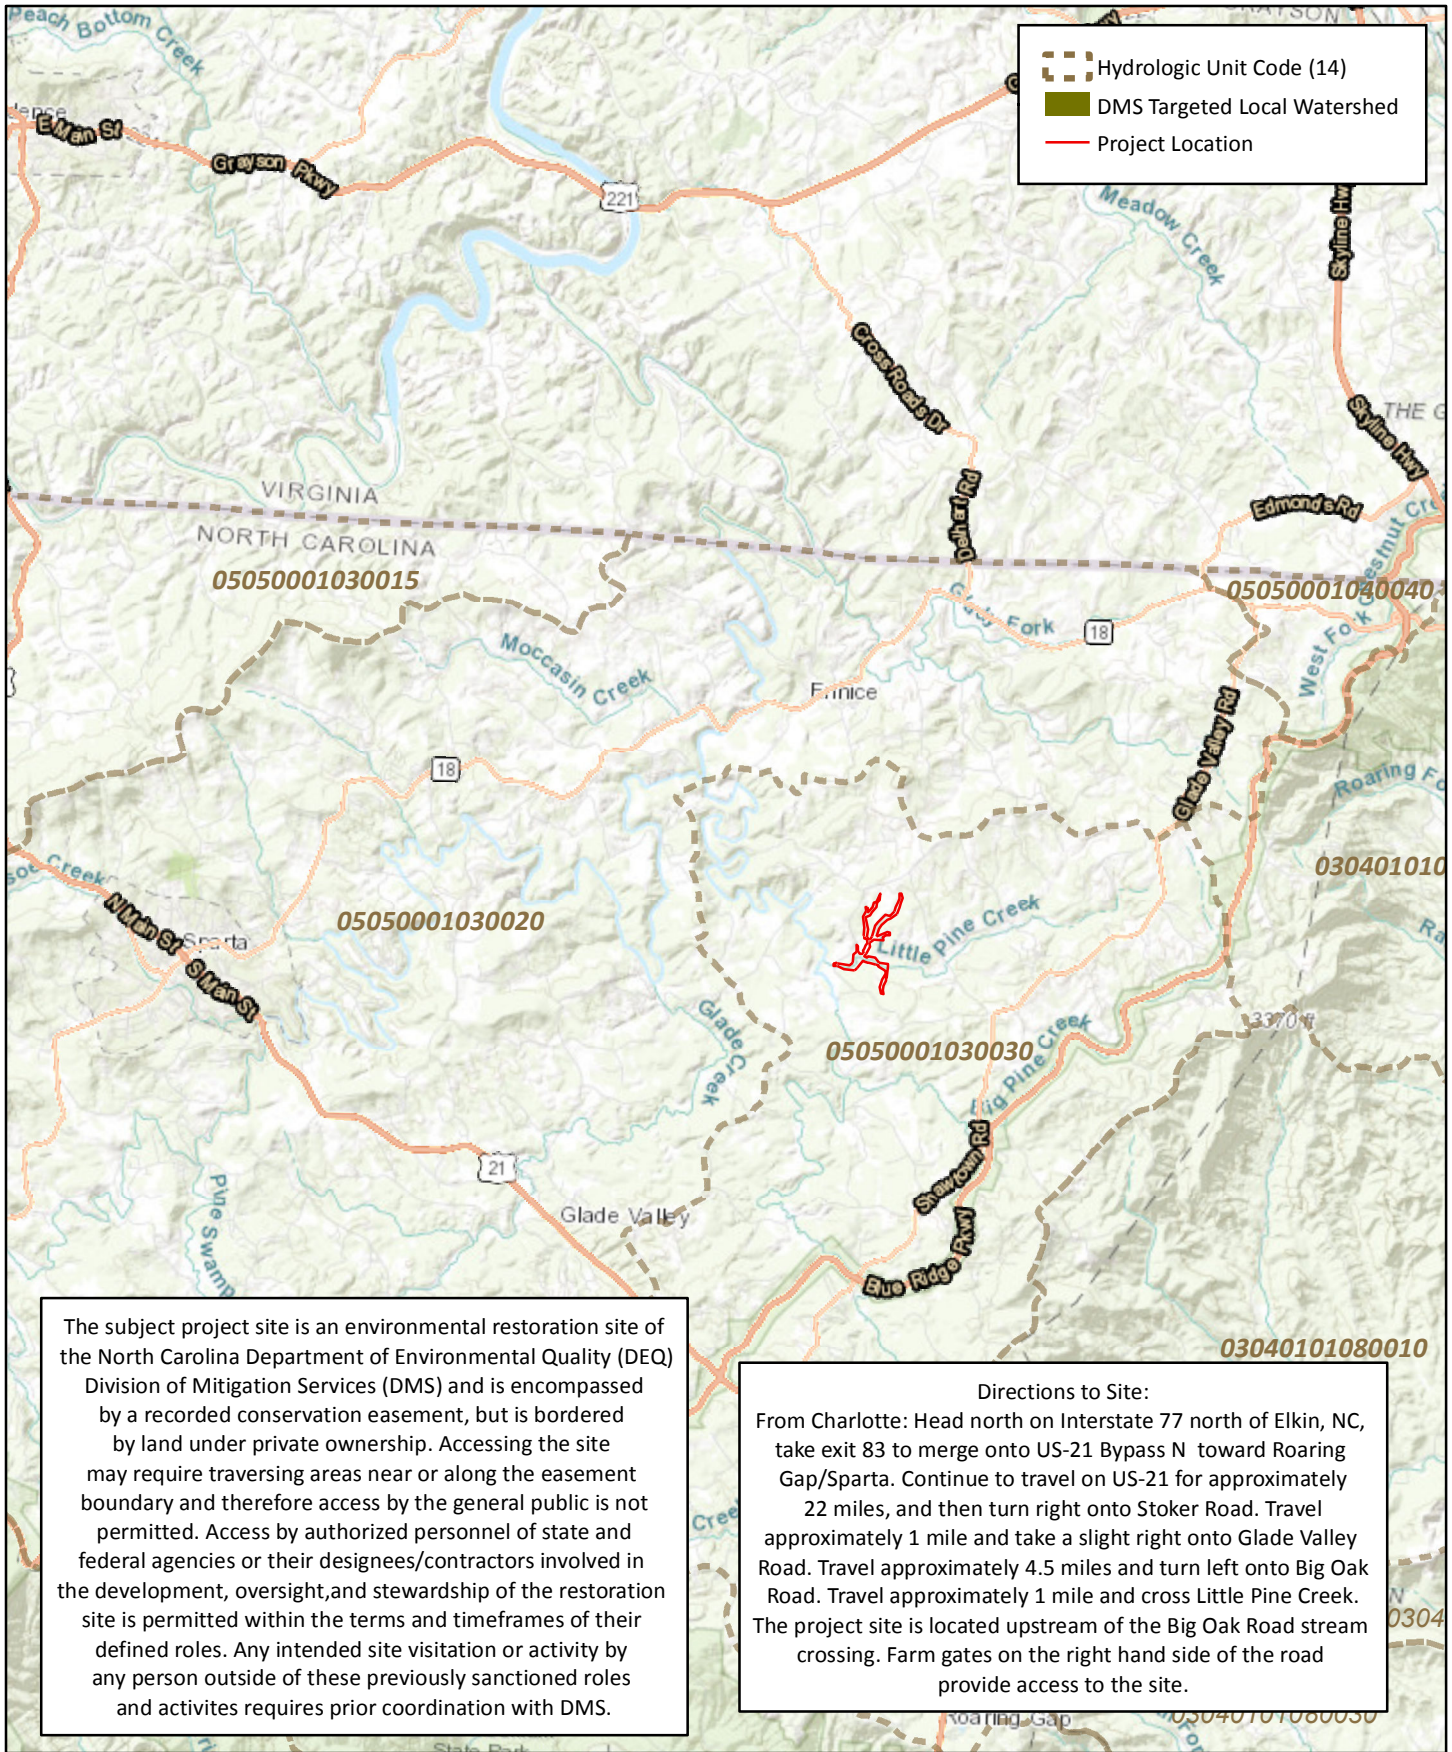

Hydrologic Unit Code (14)
DMS Targeted Local Watershed
Project Location

The subject project site is an environmental restoration site of the North Carolina Department of Environmental Quality (DEQ) Division of Mitigation Services (DMS) and is encompassed by a recorded conservation easement, but is bordered by land under private ownership. Accessing the site may require traversing areas near or along the easement boundary and therefore access by the general public is not permitted. Access by authorized personnel of state and federal agencies or their designees/contractors involved in the development, oversight, and stewardship of the restoration site is permitted within the terms and timeframes of their defined roles. Any intended site visitation or activity by any person outside of these previously sanctioned roles and activities requires prior coordination with DMS.

Directions to Site:
From Charlotte: Head north on Interstate 77 north of Elkin, NC, take exit 83 to merge onto US-21 Bypass N toward Roaring Gap/Sparta. Continue to travel on US-21 for approximately 22 miles, and then turn right onto Stoker Road. Travel approximately 1 mile and take a slight right onto Glade Valley Road. Travel approximately 4.5 miles and turn left onto Big Oak Road. Travel approximately 1 mile and cross Little Pine Creek. The project site is located upstream of the Big Oak Road stream crossing. Farm gates on the right hand side of the road provide access to the site.




Figure 1 Project Vicinity Map
Little Pine Creek III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

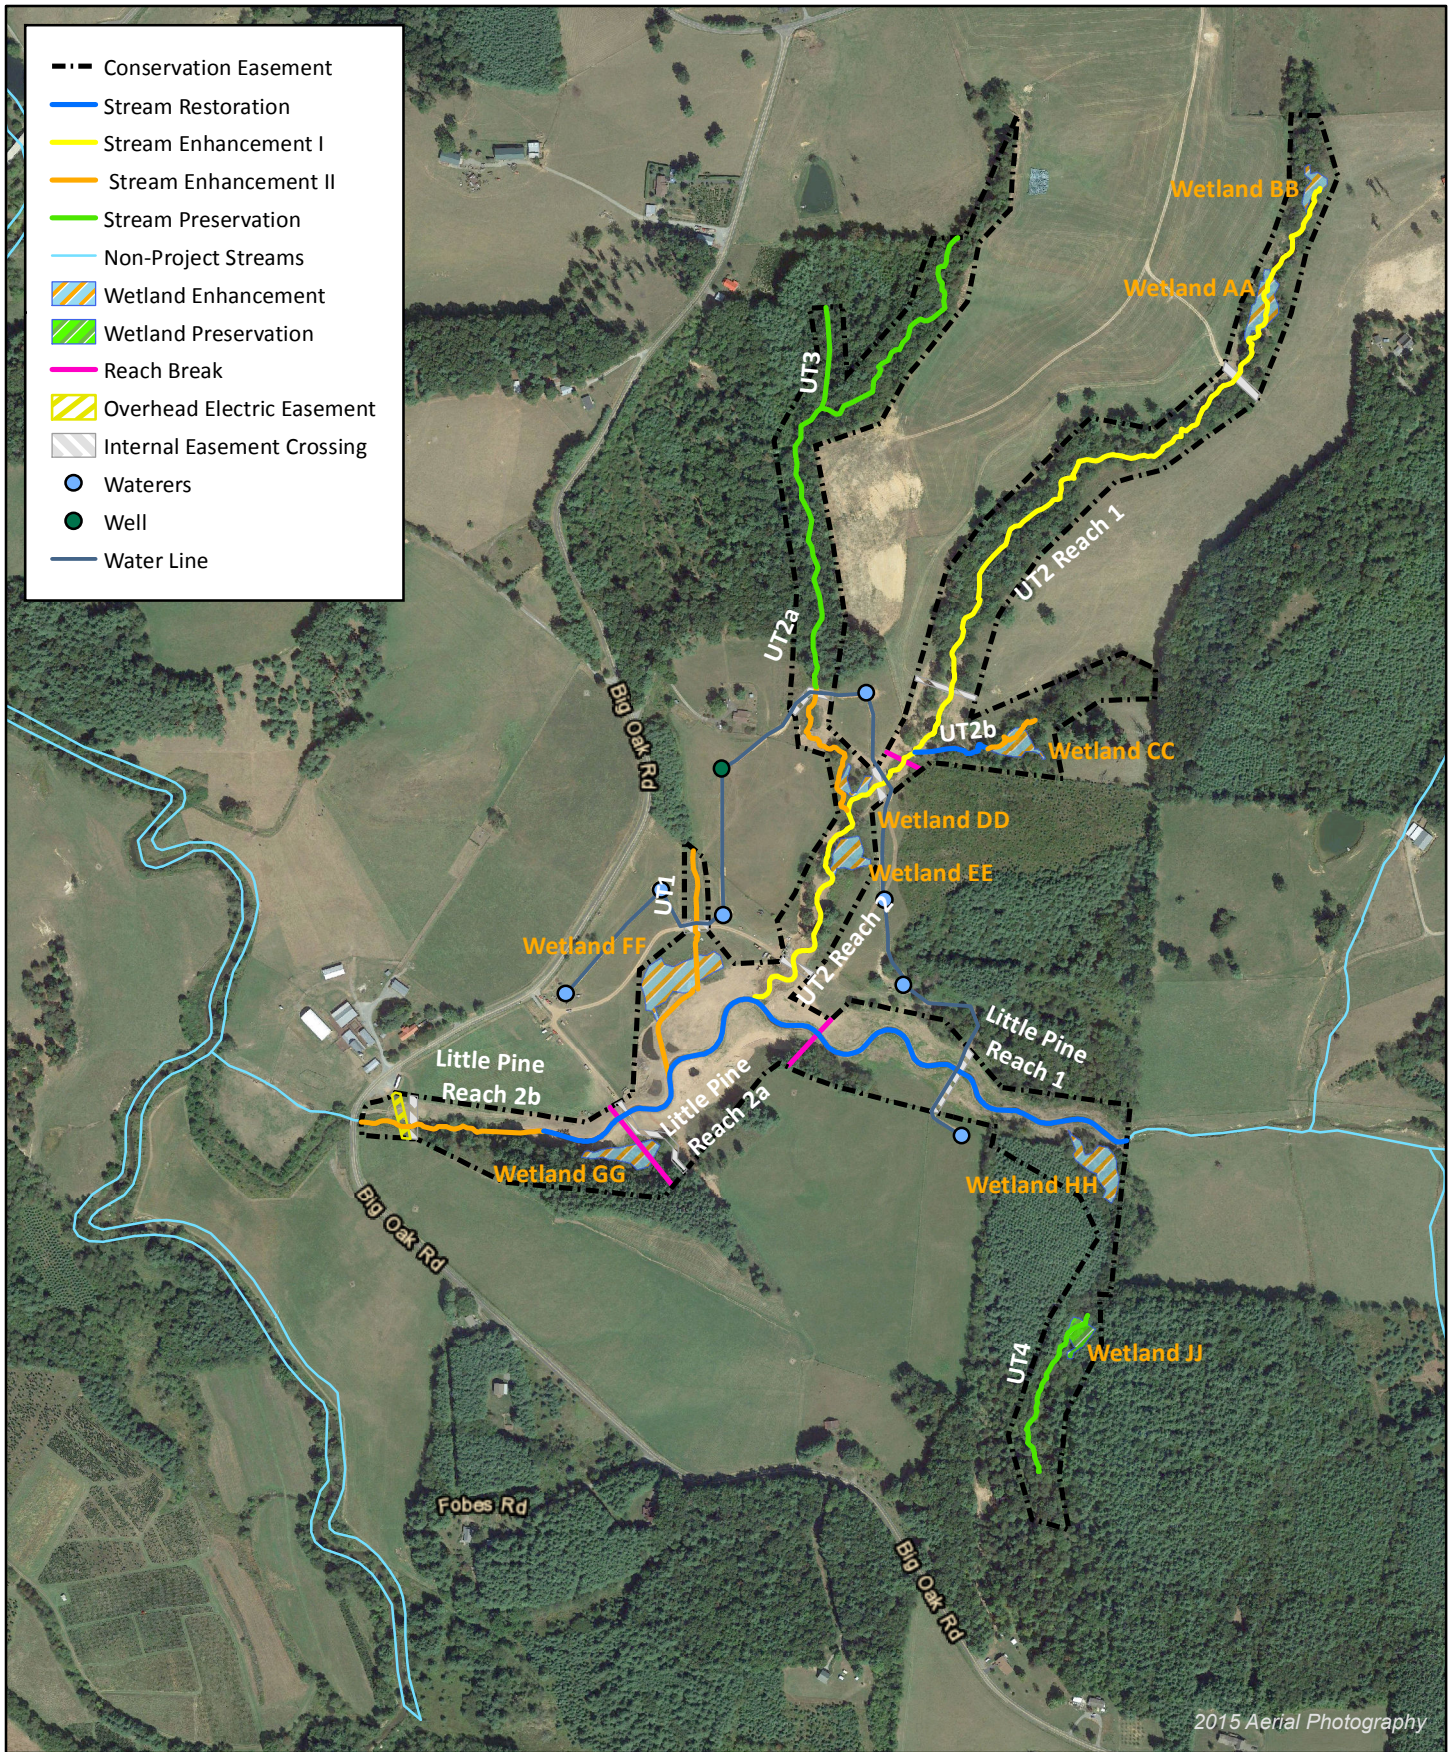


Figure 2 Project Component/Asset Map
 Little Pine Creek III Stream & Wetland Restoration Project
 DMS Project No. 94903
 Monitoring Year 2 - 2017

Table 1. Project Components and Mitigation Credits

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Mitigation Credits									
	Stream		Riparian Wetland		Non-Riparian Wetland		Buffer	Nitrogen Nutrient Offset	Phosphorous Nutrient Offset
Type	R	RE	R	RE	R	RE			
Totals	6,328.6	644.8	N/A	1.40	N/A	N/A	N/A	N/A	N/A
Project Components									
Reach ID	Existing Footage/Acreage	Approach	Restoration (R) or Restoration Equivalent (RE)	As-Built Stationing/Location	As-Built Footage/Acreage	Restoration Footage/Acreage ¹	Mitigation Ratio ²	Credits ¹ (SMU/WMU)	Notes ¹
STREAMS									
Little Pine Reach 1	4,016	P1/P2	Restoration (R)	100+00 to 114+44	1,444	1,417	1:1	1,417.0	Excludes one 27 foot wide ford crossing.
Little Pine Reach 2a		P1	Restoration (R)	114+44 to 125+27	1,083	1,058	1:1	1,058.0	Excludes one 25 foot wide ford crossing.
Little Pine Reach 2b		P1/P2	Restoration (R)	125+27 to 130+20	493	493	1:1	493.0	
		Planting, fencing	Enhancement II (R)	130+20 to 135+60	540	509	2.5:1	197.0	Excludes one 31 foot wide ford crossing, Includes 50% reduction for 33 ft overhead electric easement crossing.
UT1	540	Planting, fencing	Enhancement II (R)	197+26 to 202+24	498	463	2.5:1	185.2	Excludes one 35 foot wide culvert crossing.
		Planting, fencing, channel creation	Enhancement II (R)	202+24 to 206+26	402	402	2.5:1	160.8	
UT2 Reach 1	5,270	P1/P2/P4, preservation	Enhancement I (R)	297+18-343+18	4,600	4,474	2:1	2,237.0	Excludes four constructed culvert crossings; 32, 24, 32, and 38 feet wide respectively.
UT2 Reach 2									
UT2a	2,921	Planting, fencing	Enhancement II (R) ³	401+78 to 403+34 & 403+75 to 404+34	215 ³	215 ³	n/a	n/a	Easement Break 403+34 - 403+75
		Preservation	Preservation (RE)	405+15 to 426+58	2,143	2,143	5:1	428.6	
		Planting, fencing	Enhancement II (R)	426+58 to 432+09	551	519	2.5:1	207.6	Excludes one 32 foot wide constructed culvert crossing.
UT2b	553	Planting, fencing	Enhancement II (R)	500+00 to 503+00	300	300	2.5:1	120.0	
		P2	Restoration (R)	503+00 to 505+53	253	253	1:1	253.0	
UT3	400	Preservation	Preservation (RE)	602+44 to 606+44	400	384	5:1	76.8	Excludes one 16 foot wide constructed ford crossing.
UT4	1,036	Preservation	Preservation (RE)	701+26 to 708+23	697	697	5:1	139.4	
WETLANDS									
Wetland AA	0.38	Planting, fencing	Enhancement (RE)	UT2 floodplain		0.38	2:1	0.19	
Wetland BB	0.16	Planting, fencing	Enhancement (RE)	UT2 floodplain		0.16	2:1	0.08	
Wetland CC	0.26	Grade control, planting, fencing	Enhancement (RE)	UT2b headwaters		0.26	2:1	0.13	
Wetland DD	0.12	Planting, fencing	Enhancement (RE)	North of UT2/UT2a		0.12	2:1	0.06	
Wetland EE	0.28	Planting fencing	Enhancement (RE)	UT2 floodplain		0.28	2:1	0.140	
Wetland FF	0.76	Outlet stabilization, planting, fencing	Enhancement (RE)	North of UT1/Little Pine		0.76	2:1	0.38	
Wetland GG	0.33	Planting fencing	Enhancement (RE)	Little Pine		0.33	2:1	0.17	
Wetland HH	0.42	Planting, grade control	Enhancement (RE)	South of UT4/ Little Pine		0.42	2:1	0.21	
Wetland JJ	0.19	Preservation	Preservation (RE)	UT4 floodplain		0.19	5:1	0.04	

Component Summation					
Restoration Level	Stream (LF)	Riparian Wetland (acres)	Non-Riparian Wetland	Buffer (square feet)	Upland (acres)
Restoration	3221				
Enhancement I	4474				
Enhancement II	2193				
Enhancement		2.71			
Preservation	3224	0.19			

¹Restoration footage based off of the surveyed as-built thalweg alignment is greater than design centerline alignment, resulting in credited length greater than that reported in the Mitigation Plan.

²Unique ratio for UT2 was discussed in field with IRT members and recorded 8/15/2012 in meeting notes.

³Length not included in component summation since no credit is sought

Table 2. Project Activity and Reporting History

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Activity or Report	Data Collection Complete	Completion or Scheduled Delivery
Mitigation Plan	March 2013	March 2014
Final Design - Construction Plans	N/A	September 2014
Construction	N/A	September 2015
Temporary S&E mix applied to entire project area ¹	N/A	July - September 2015
Permanent seed mix applied to reach/segments ¹	N/A	July - September 2015
Bare root and live stake plantings for reach/segments	N/A	December 2015
Repair Work	N/A	March 2016 / December 2016
Baseline Monitoring Document (Year 0)	Vegetaion Survey	July 2016
	Stream Survey	
Year 1 Monitoring	Vegetaion Survey	December 2016
	Stream Survey	
Year 2 Monitoring	Vegetaion Survey	December 2017
	Stream Survey	
Year 3 Monitoring	Vegetaion Survey	December 2018
	Stream Survey	
Year 4 Monitoring	Vegetaion Survey	December 2019
	Stream Survey	
Year 5 Monitoring	Vegetaion Survey	December 2020
	Stream Survey	

¹Seed and mulch was added as each section of construction was completed.

Table 3. Project Contact Table

Little Pine III Stream & Wetland Restoration Project
DMS Project No.94903
Monitoring Year 2 - 2017

Designer Aaron Early, PE, CFM	Wildlands Engineering, Inc. 1430 South Mint Street, Ste 104 Charlotte, NC 28205 704.332.7754
Construction Contractor	North State Environmental, Inc. 2889 Lowery Street Winston-Salem, NC 27101
Planting Contractor	Bruton Natural Systems, Inc P.O. Box 1197 Fremont, NC 27830
Seeding Contractor	North State Environmental, Inc. 2889 Lowery Street Winston-Salem, NC 27101
Seed Mix Sources	Green Resource, LLC
Nursery Stock Suppliers Bare Roots Live Stakes Plugs	Bruton Natural Systems, Inc Foggy Mountain Nursery Mellow Marsh Farms
Monitoring Performers	Wildlands Engineering, Inc. Kirsten Gimbert 704.332.7754, ext. 110
Monitoring, POC	

Table 4. Project Information and Attributes
 Little Pine III Stream & Wetland Restoration Project
 DMS Project No. 94903
 Monitoring Year 2 - 2017

Project Information											
Project Name	Little Pine Creek III Stream & Wetland Restoration										
County	Allegheny County										
Project Area (acres)	57.32										
Project Coordinates (latitude and longitude)	36° 30' 29.16" N, 81° 0' 6.12" W										
Project Watershed Summary Information											
Physiographic Province	Blue Ridge Belt of the Blue Ridge Province										
River Basin	New										
USGS Hydrologic Unit 8-digit	05050001										
USGS Hydrologic Unit 14-digit	05050001030030										
DWR Sub-basin	05-07-03										
Project Drainage Area (acres)	2,784										
Project Drainage Area Percentage of Impervious Area	<1%										
CGIA Land Use Classification	Managed Herbaceous (74%), Mixed Upland Hardwoods (20%), Mixed Hardwoods/Conifers (5%), Southern Yellow Pine (<1%), Mountain Conifers (<1%)										
Reach Summary Information											
Parameters	LP Reach 1	LP Reach 2a	LP2 Reach b	UT1	UT2 Reach 1	UT2 Reach 2	UT2 Reach 3	UT2a	UT2b	UT3	UT4
Length of Reach (linear feet) - Post-Restoration ¹	1,444	1,083	1,033	900	4,600			2,909	553	400	697
Drainage Area (acres)	2,496	2,752	2,784	28	75	185	196	89	19	23	33
NCDWR Stream Identification Score - Pre-Restoration	45.5	45.5	45.5	22.25	36	36	41.5	42	28/37.5	38.5	31.5
NCDWR Water Quality Classification	C, Tr										
Morphological Description (stream type) - Pre-Restoration	C4	C/E4	C4	N/A	A4	E4b	E4	C4b	F4b	N/A	N/A
Evolutionary Trend (Simon's Model) - Pre-Restoration	IV/V	III/IV	IV/V	N/A ²	N/A ⁴	N/A ⁴	N/A ⁴	V	N/A ⁴	N/A ²	N/A ²
Underlying Mapped Soils	Alluvial land, wet (Nikwasi); Ashe stony fine sandy loam (25-45% slopes); Chester loam (10-25% slopes); Chester clay loam (25-45% slopes), eroded (Evard); Codorus complex (Arkaqua); Tate loam (6-10% slopes); Watauga loam (6-45% slopes).										
Drainage Class	Well-drained										
Soil Hydric Status	A/D (Nikwasi); B (Ashe stony fine sandy loam, Chester loam, Tate loam, Watauga loam); B/D (Codorus complex);										
Slope - Pre-Restoration	0.0043	0.0059	0.0087	N/A ²	0.047	0.036	0.028	0.044	0.064	N/A ²	N/A ²
FEMA Classification	AE ³										
Native Vegetation Community	Piedmont/Mountain Bottomland Forest, Rich Cove										
Percent Composition Exotic Invasive Vegetation -Post-Restoration	0%										
Regulatory Considerations											
Regulation	Applicable?							Resolved?	Supporting Documentation		
Waters of the United States - Section 404	Yes							Yes	USACE Nationwide Permit No.27 and DWQ 401 Water Quality Certification No. 3885. Action ID# 14-0041		
Waters of the United States - Section 401	Yes							Yes			
Division of Land Quality (Dam Safety)	N/A							N/A	N/A		
Endangered Species Act	Yes							Yes	LPIII Categorical Exclusion (CE) Approved 7/6/2012		
Historic Preservation Act	Yes							Yes	No historic resources were found to be impacted (letter from SHPO dated 5/3/2012)		
Coastal Zone Management Act (CZMA)/Coastal Area Management Act (CAMA)	No							N/A	N/A		
FEMA Floodplain Compliance	Yes ³							No impact application was prepared for local review. No post-project activities required.	LPIII Final Mitigation Plan (3/4/2014) and LPIII CE Approved 7/6/2012		
Essential Fisheries Habitat	Yes							Yes	LPIII Final Mitigation Plan (3/4/2014) and LPIII CE Approved 7/6/2012		

1: Length includes internal easment crossings.

2: UT1 is enhancement II only, and UT3 and UT4 are preservation only. Geomorphic surveys were not performed for these streams in existing conditions.

3: The downstream 400 LF of Little Pine Creek near Big Oak Road is within a FEMA Zone AE floodplain on Firm panel 4010. The Zone AE floodplain is due to the backwater of Brush Creek; Little Pine Creek is not a FEMA studied stream.


4: Streams do not fit into Simon Evolutionary Sequence.

Table 5. Monitoring Component Summary
 Little Pine III Stream & Wetland Restoration Project
 DMS Project No. 94903
Monitoring Year 2 - 2017

Parameter	Monitoring Feature	Quantity/ Length by Reach										Frequency
		Little Pine Reach 1	Little Pine Reach 2a	Little Pine Reach 2b	UT1	UT2	UT2a	UT2b	UT3	UT4	Wetlands	
	Riffle Cross Section	2	2	2	N/A	4	N/A	1	N/A	N/A	N/A	Annual
	Pool Cross Section	1	1	1	N/A	3	N/A	1	N/A	N/A	N/A	
Pattern	Pattern	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Profile	Longitudinal Profile	Y			N/A	Y	N/A	Y	N/A	N/A	N/A	N/A
Substrate	Reach Wide (RW) / Riffle (RF) 100 Pebble Count	RW-1, RF-1	RW-1, RF-1	RW-1, RF-1	N/A	RW-1, RF-3	N/A	RW-1, RF-1	N/A	N/A	N/A	N/A
Stream Hydrology	Crest Gage	1			N/A	1	N/A	1	N/A	N/A	N/A	Annual
Wetland Hydrology	Groundwater Gages	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	1	Annual
Vegetation¹	CVS Level 2	21										Annual
Visual Assessment	All Streams	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Annual
Exotic and nuisance vegetation												
Project Boundary												
Reference Photos	Photographs	42										Annual

¹A deviation from the vegetation plot quantity indicated in the Mitigation Plan is due to a smaller than expected planted area.

APPENDIX 2. Visual Assessment Data

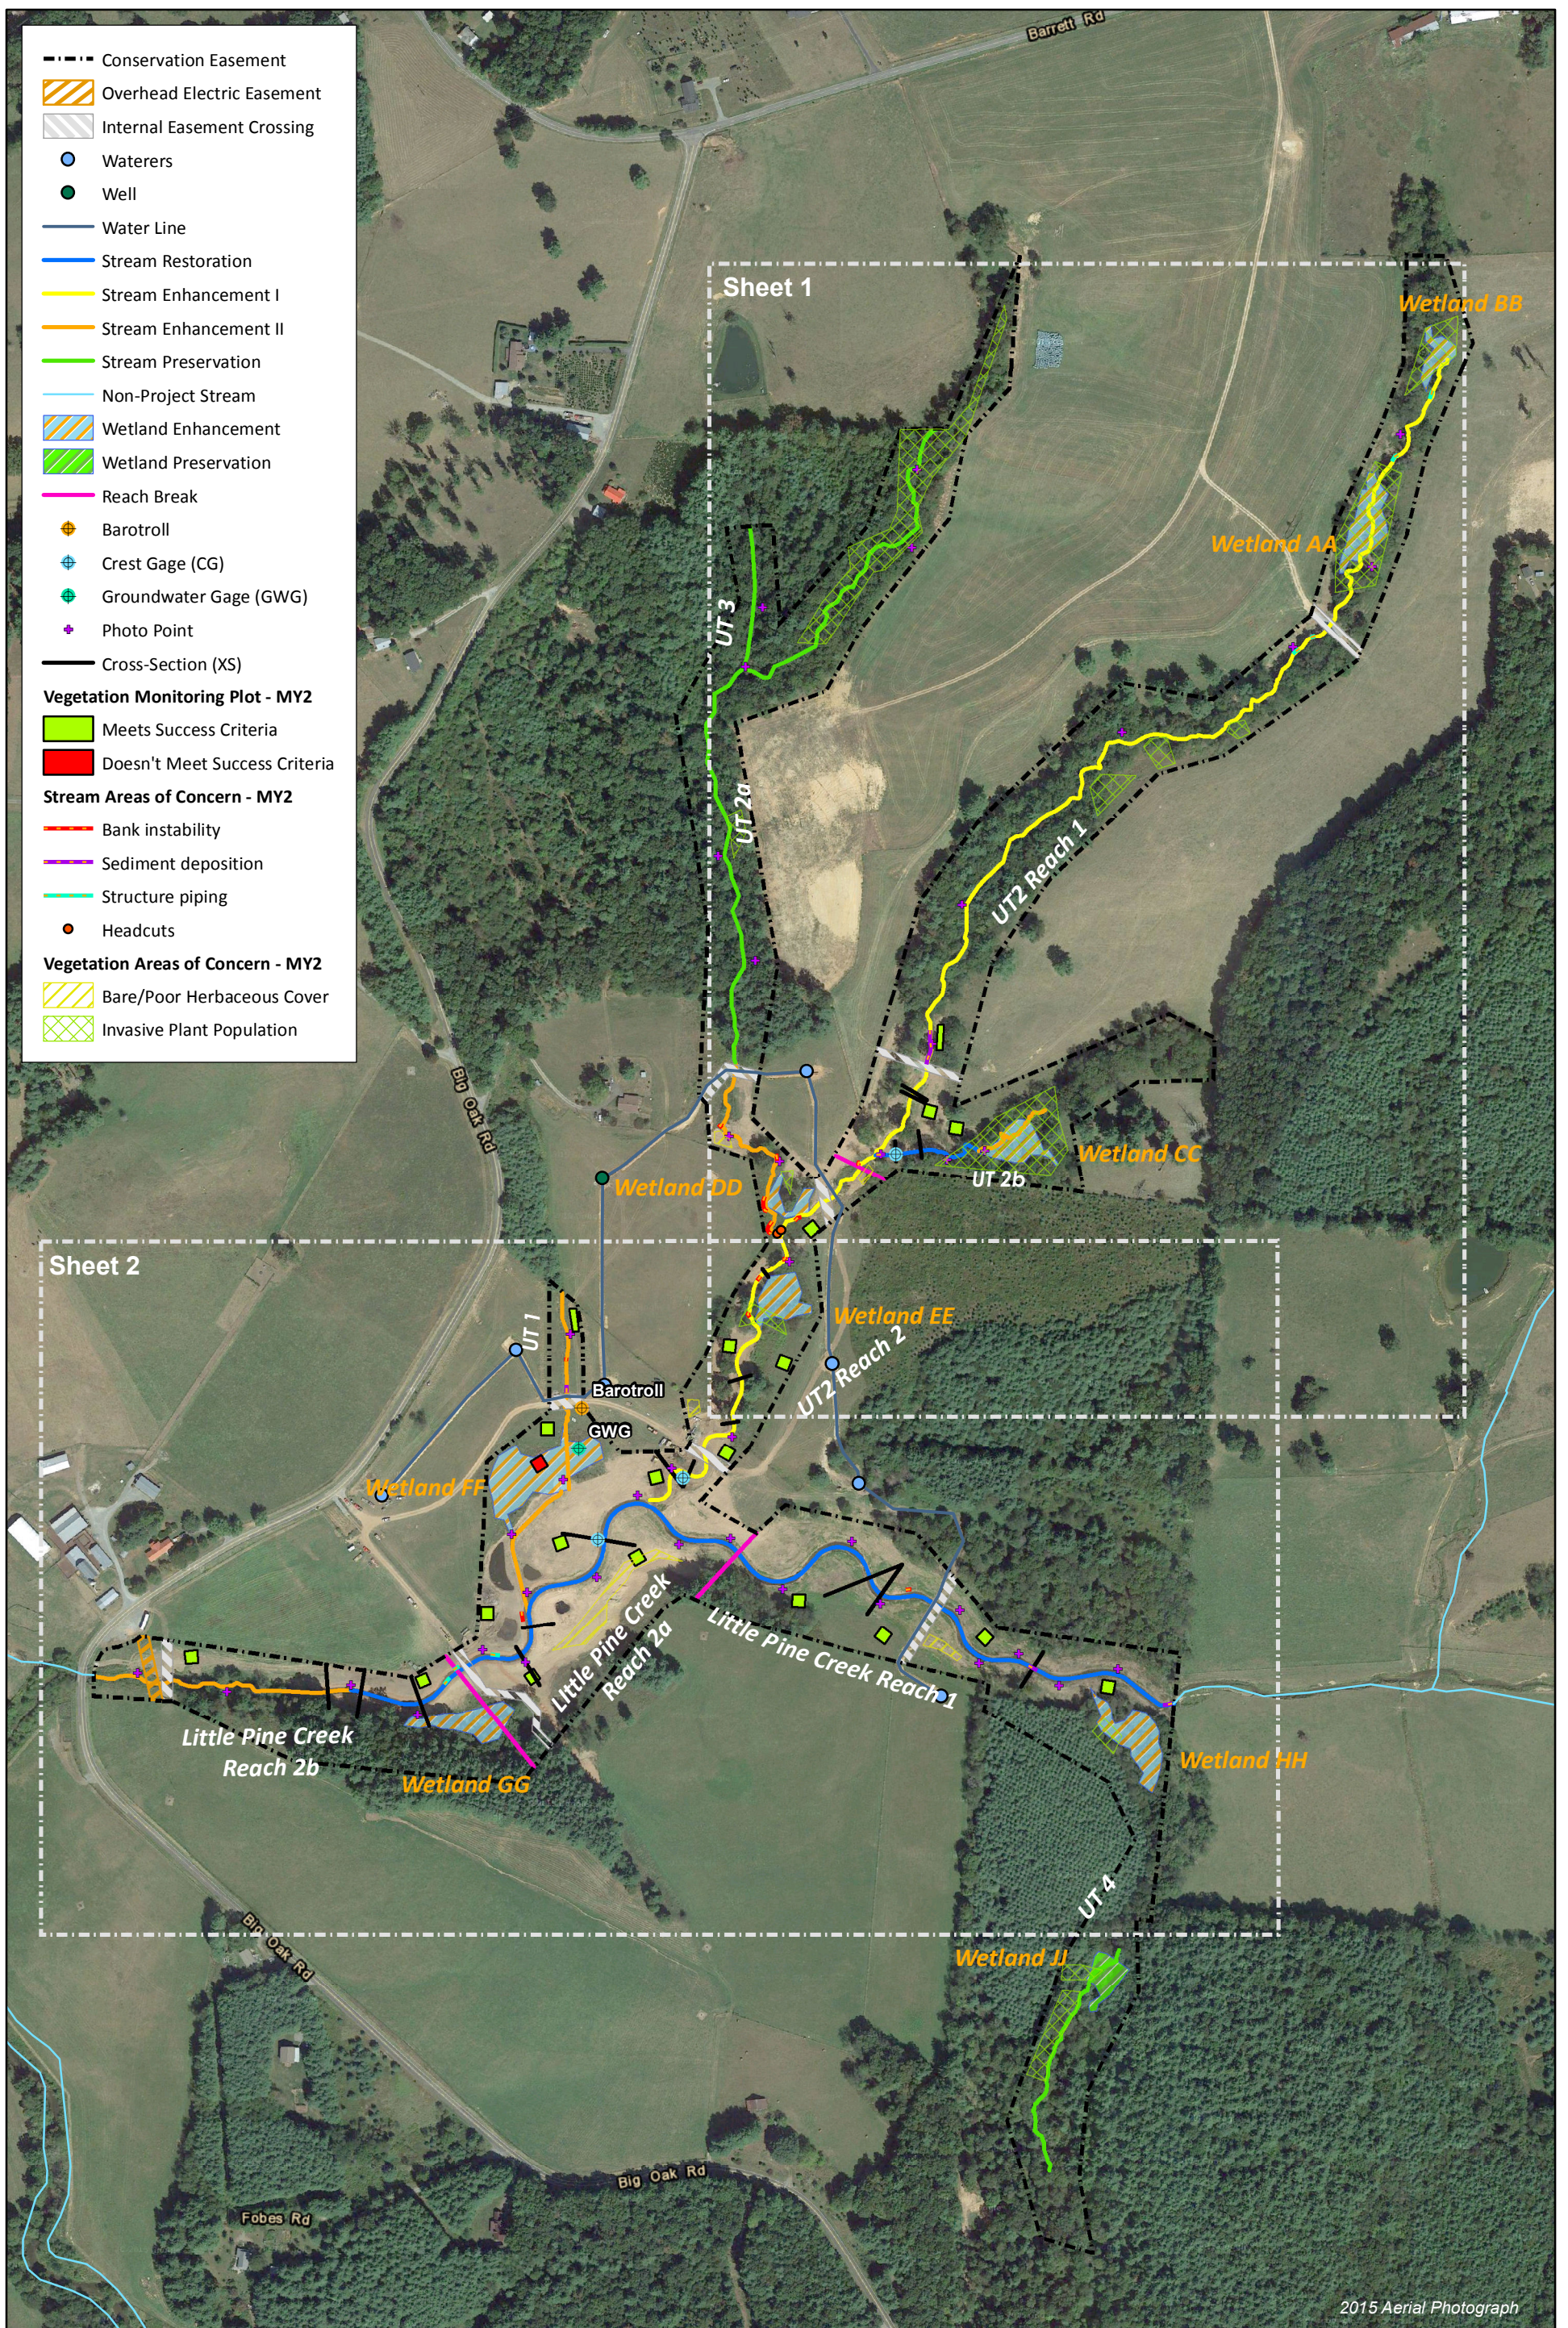


2015 Aerial Photograph



0 200 400 Feet



Figure 3.0 Integrated Current Condition Plan View Map (Key)
 Little Pine Creek III Stream & Wetland Restoration Project
 DMS Project No. 94903
 Monitoring Year 2 - 2017

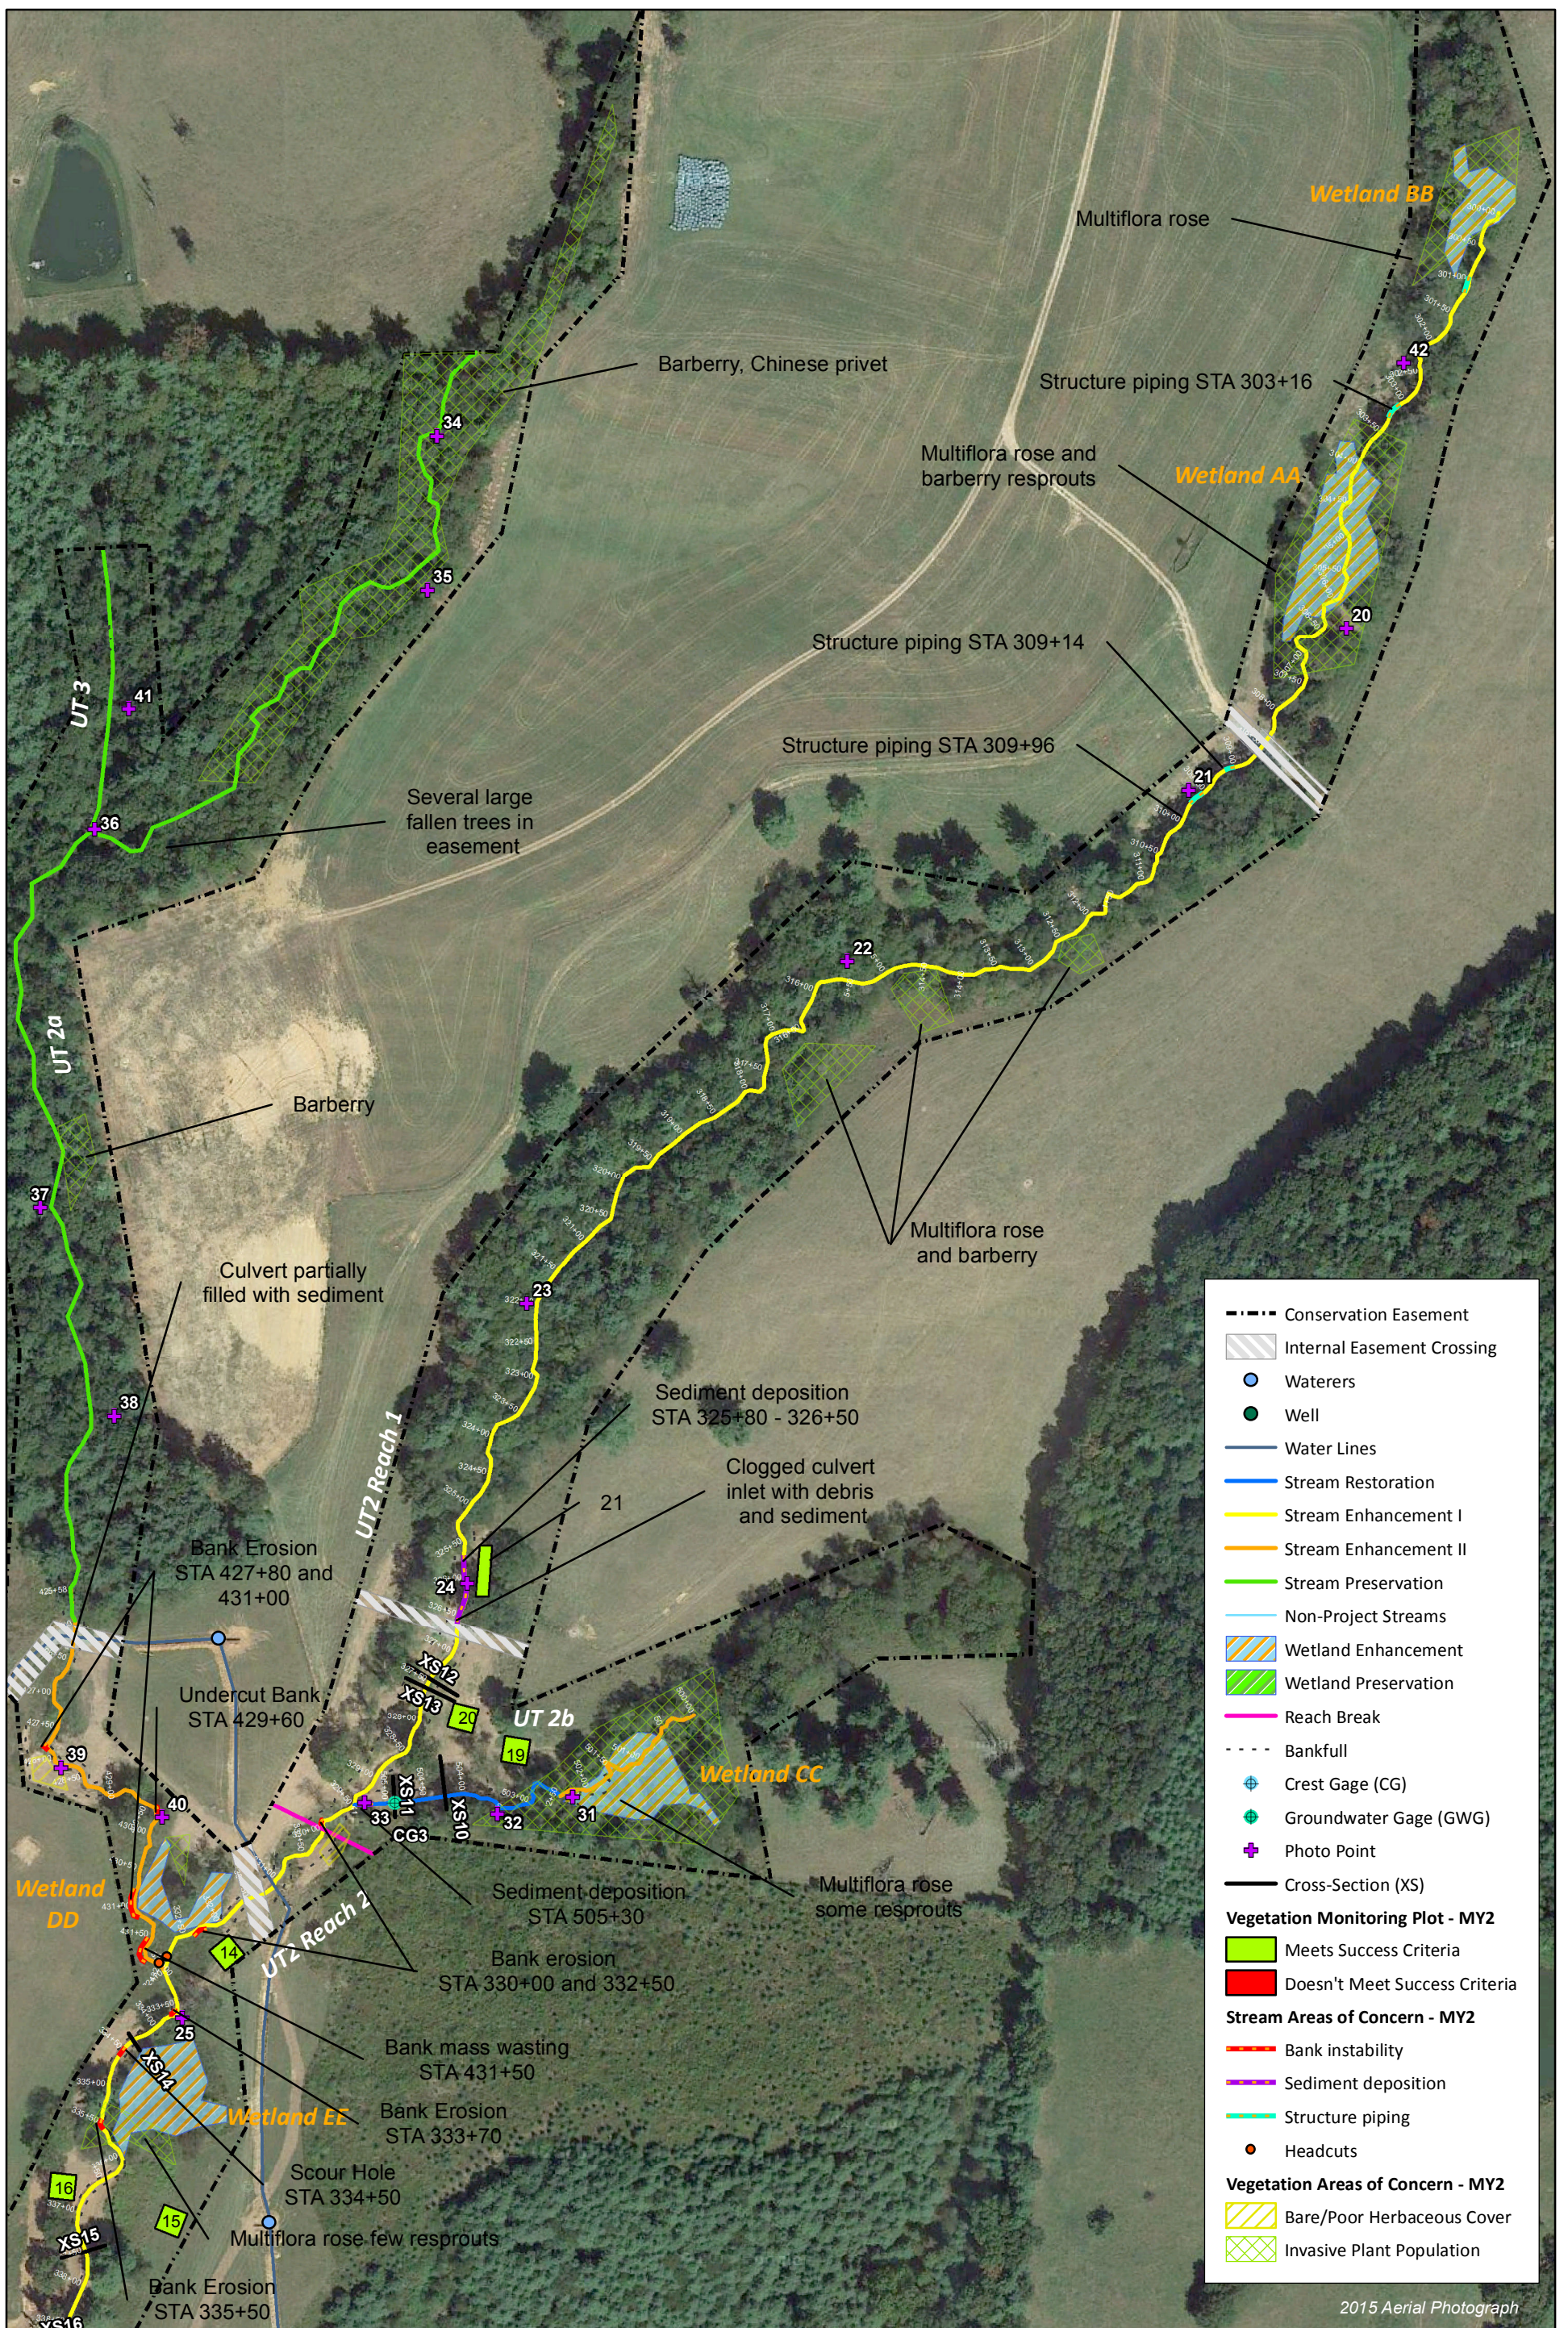

2015 Aerial Photograph




Figure 3.1 Integrated Current Condition Plan View Map (Sheet 1 of 2)
 Little Pine Creek III Stream & Wetland Restoration Project
 DMS Project No. 94903
 Monitoring Year 2 - 2017
 Alleghany County, NC

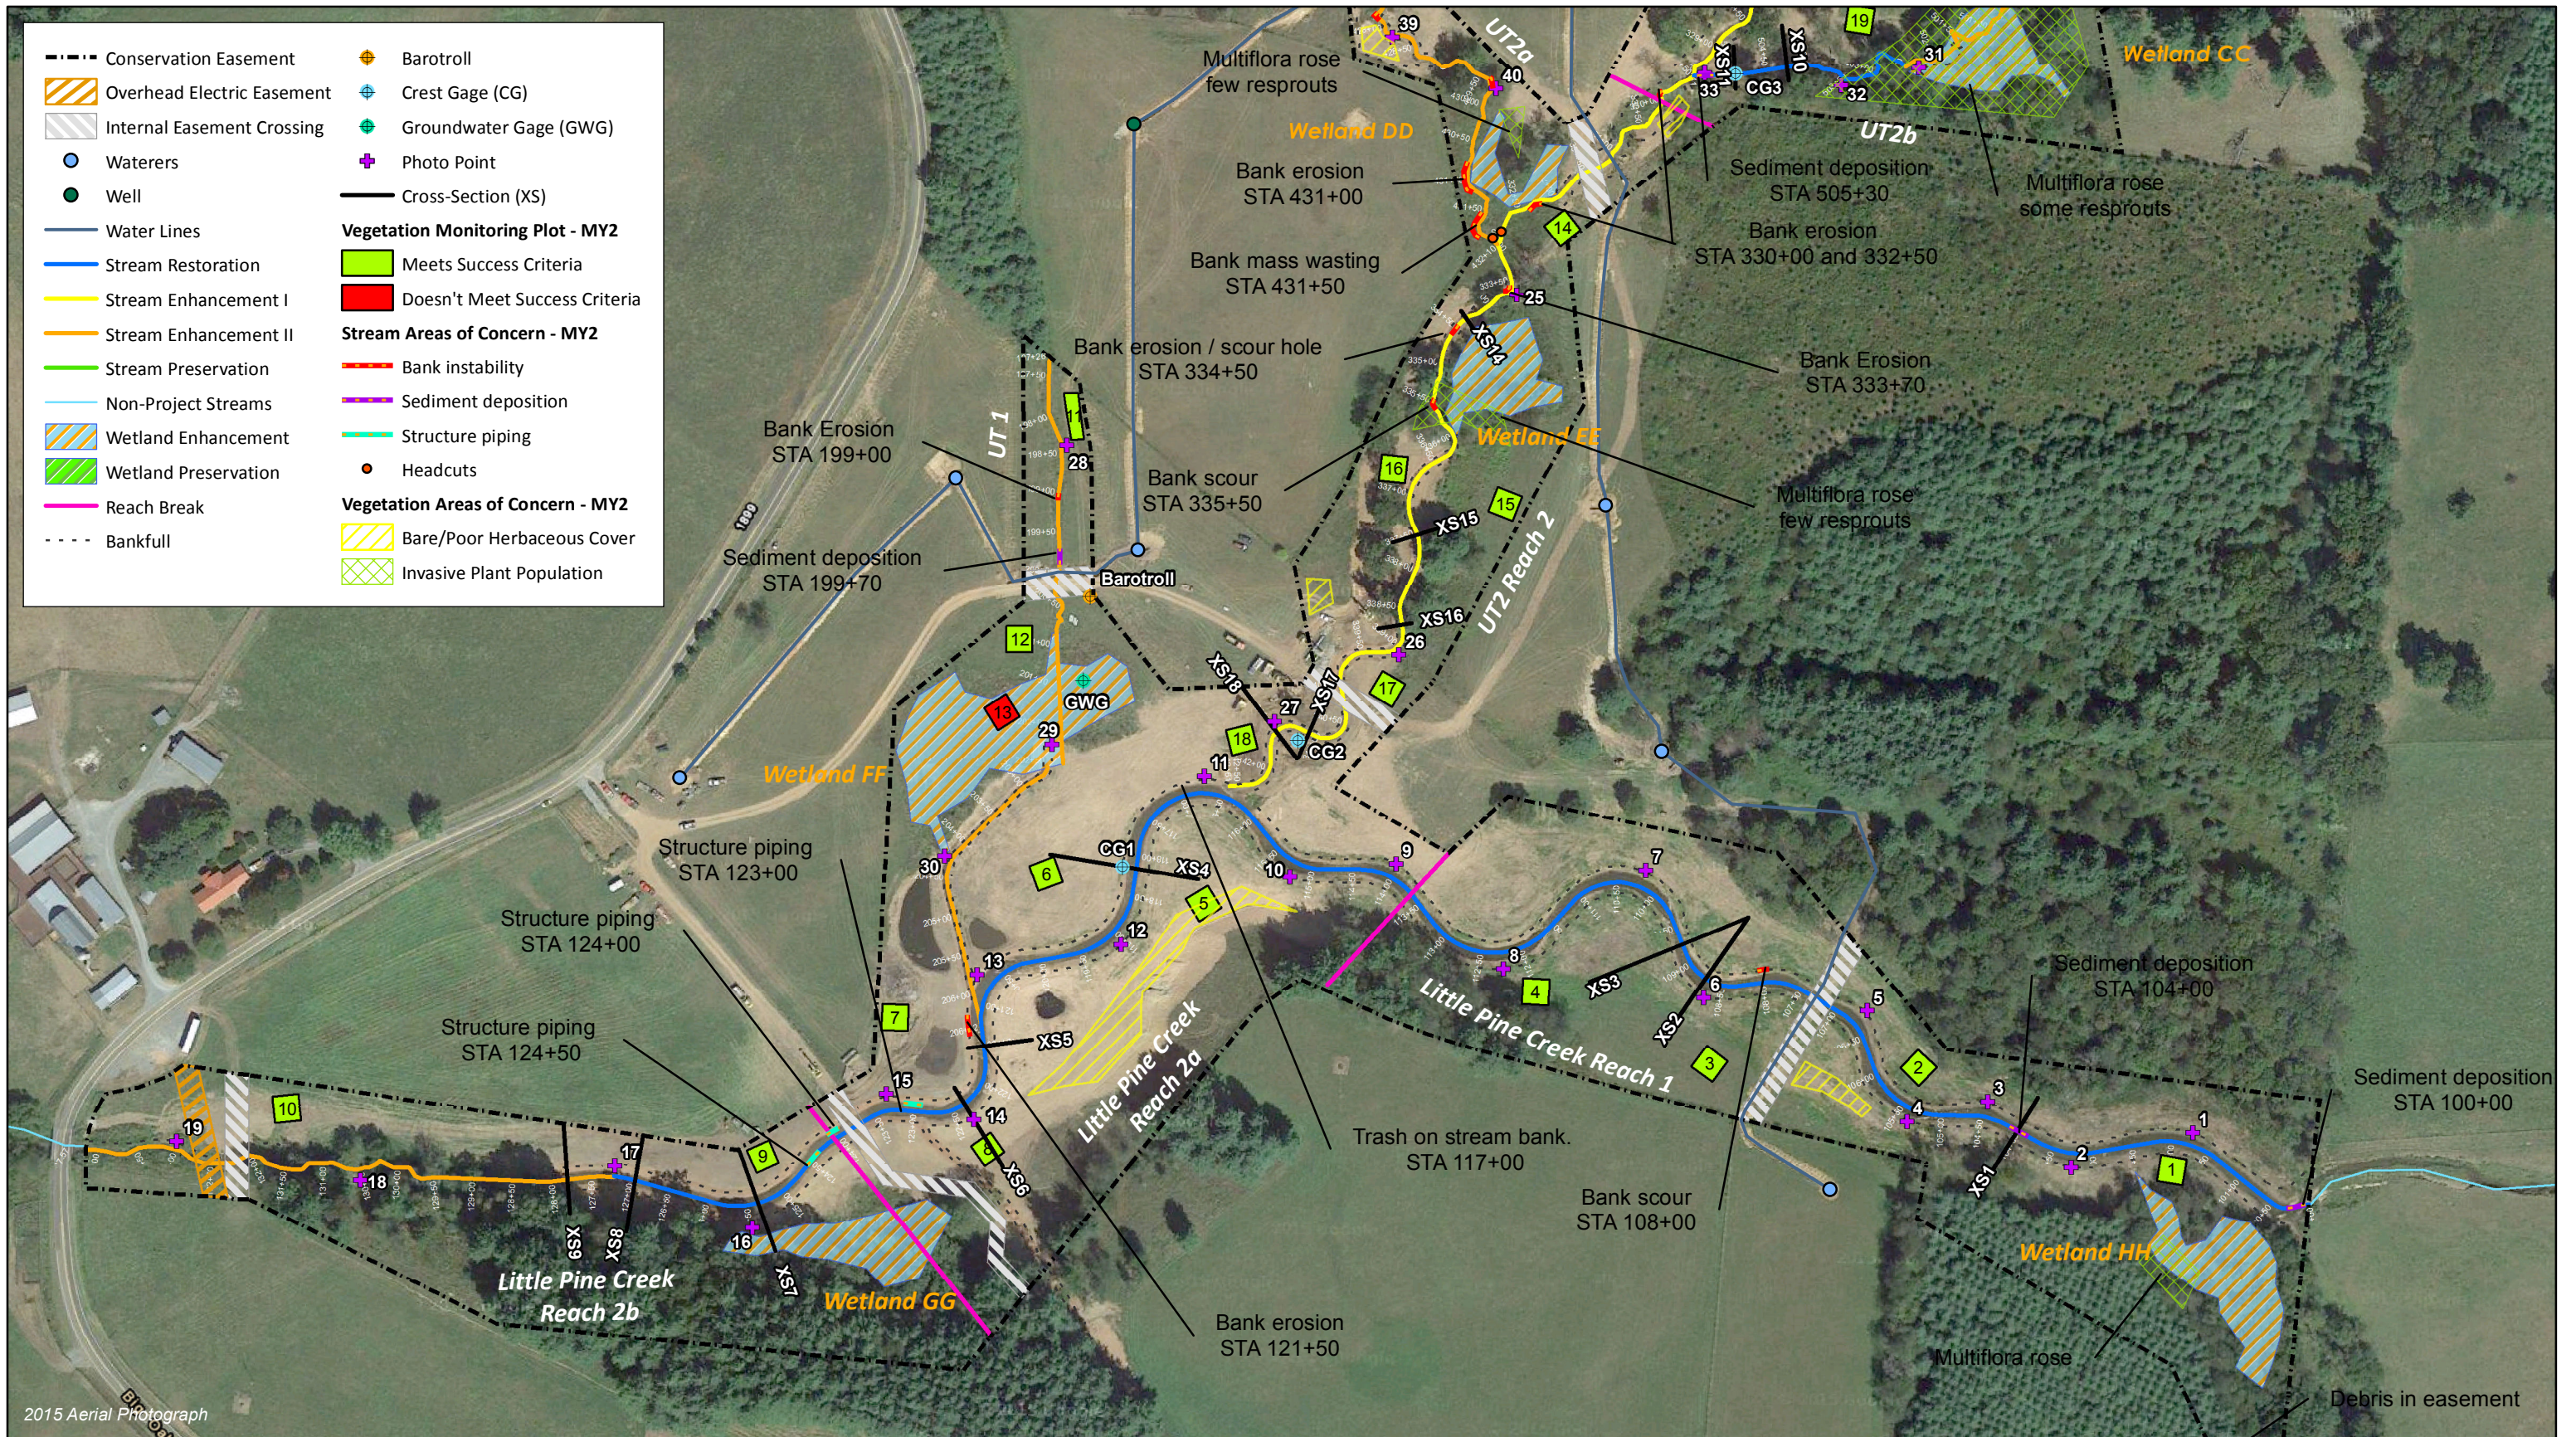


Figure 3.2 Integrated Current Condition Plan View Map (Sheet 2 of 2)
 Little Pine Creek III Stream & Wetland Restoration Project
 DMS Project No. 94903
 Monitoring Year 2 - 2017
 Alleghany County, NC




Table 6a. Visual Stream Morphology Stability Assessment Table

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 1 (STA 100+00 - 114+44) 1,444 LF assessed

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			2	50	97%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	10	10		100%				
	3. Meander Pool Condition	Depth Sufficient	7	7		100%				
		Length Appropriate	7	7		100%				
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	9	9		100%				
Thalweg centering at downstream of meander bend (Glide)		9	9	100%						
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			1	15	99%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	n/a	n/a	n/a
Totals					1	15	99%	n/a	n/a	n/a
3. Engineered Structures ¹	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	3	3			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	3	3			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	3	3			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%.	3	3			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow.	3	3			100%			

¹Excludes constructed riffles since they are evaluated in section 1.

Table 6b. Visual Stream Morphology Stability Assessment Table

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 2a (114+44-125+27) 1,083 LF assessed

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	7	7		100%				
	3. Meander Pool Condition	Depth Sufficient	6	6		100%				
		Length Appropriate	6	6		100%				
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	7	7		100%				
Thalweg centering at downstream of meander bend (Glide)		7	7	100%						
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			1	25	99%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	n/a	n/a	n/a
Totals					1	25	99%	n/a	n/a	n/a
3. Engineered Structures ¹	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	5	5			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	4	5			80%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	4	5			80%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%.	5	5			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow.	5	5			100%			

¹Excludes constructed riffles since they are evaluated in section 1.

Table 6c. Visual Stream Morphology Stability Assessment Table

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 2b (125+27-130+20) 493 LF assessed

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation	4	4	0	0	100%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	4	4		100%				
	3. Meander Pool Condition	Depth Sufficient	4	4		100%				
		Length Appropriate	4	4		100%				
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	4	4		100%				
Thalweg centering at downstream of meander bend (Glide)		4	4	100%						
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion	4	4	0	0	100%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	n/a	n/a	n/a
Totals					0	0	100%	n/a	n/a	n/a
3. Engineered Structures ¹	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	3	5			60%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	3	5			60%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	3	5			60%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%.	5	5			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow.	5	5			100%			

¹Excludes constructed riffles since they are evaluated in section 1.

Table 6d. Visual Stream Morphology Stability Assessment Table

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

UT2 Reach 1 Upper (STA 297+18 - 310+50) 1,332 LF assessed

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	9	10			90%			
	3. Meander Pool Condition	Depth Sufficient	n/a	n/a			n/a			
		Length Appropriate	n/a	n/a			n/a			
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	n/a	n/a			n/a			
Thalweg centering at downstream of meander bend (Glide)		n/a	n/a	n/a						
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	n/a	n/a	n/a
Totals					0	0	100%	n/a	n/a	n/a
3. Engineered Structures ¹	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	21	21			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	17	21			81%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	17	21			81%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%.	21	21			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow.	21	21			100%			

¹Excludes constructed riffles since they are evaluated in section 1.

Table 6e. Visual Stream Morphology Stability Assessment Table

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

UT2 Reach 1 Lower (STA 325+67 - 330+00) 433 LF assessed

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			1	80	82%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	9	12		75%				
	3. Meander Pool Condition	Depth Sufficient	n/a	n/a		n/a				
		Length Appropriate	n/a	n/a		n/a				
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	n/a	n/a		n/a				
Thalweg centering at downstream of meander bend (Glide)		n/a	n/a	n/a						
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			1	10	99%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	n/a	n/a	n/a
Totals					1	10	99%	n/a	n/a	n/a
3. Engineered Structures ¹	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	15	20			75%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	15	20			75%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	15	20			75%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%.	15	20			75%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow.	15	20			75%			

¹Excludes constructed riffles since they are evaluated in section 1.

Table 6f. Visual Stream Morphology Stability Assessment Table

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

UT2 Reach 2 (STA 330+00 - 343+18) 1,318 LF assessed

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation	14	15	0	0	100%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate					93%			
	3. Meander Pool Condition	Depth Sufficient	4	5			80%			
		Length Appropriate	4	5			80%			
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	5	5			100%			
Thalweg centering at downstream of meander bend (Glide)		5	5	100%						
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			3	50	98%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	n/a	n/a	n/a
Totals					3	50	98%	n/a	n/a	n/a
3. Engineered Structures ¹	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	19	19			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	18	19			95%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	19	19			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%.	19	19			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow.	18	19			95%			

¹Excludes constructed riffles since they are evaluated in section 1.

Table 6g. Visual Stream Morphology Stability Assessment Table

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

UT2b (STA 503+00 - 505+53) 253 LF assessed

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation	7	9	1	20	92%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate					78%			
	3. Meander Pool Condition	Depth Sufficient	n/a	n/a			n/a			
		Length Appropriate	n/a	n/a			n/a			
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	n/a	n/a			n/a			
Thalweg centering at downstream of meander bend (Glide)		n/a	n/a			n/a				
Totals					0	0	100%	n/a	n/a	n/a
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	n/a	n/a	n/a
Totals					0	0	100%	n/a	n/a	n/a
3. Engineered Structures ¹	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	23	23			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	23	23			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	23	23			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%.	23	23			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow.	23	23			100%			

¹Excludes constructed riffles since they are evaluated in section 1.

Table 7. Vegetation Condition Assessment Table

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Planted Acreage 27.8

Vegetation Category	Definitions	Mapping Threshold (acres)	Number of Polygons	Combined Acreage	% of Planted Acreage
Bare Areas	Very limited cover of both woody and herbaceous material	0.1	5	0.4	2%
Low Stem Density Areas¹	Woody stem densities clearly below target levels based on MY3, 4, 5, or 7 stem count criteria.	0.1	2	0.1	0.2%
			Total	0.5	2%
Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	0	0	0.0	0%
			Cumulative Total	0.5	2%

Easement Acreage 57.3

Vegetation Category	Definitions	Mapping Threshold (SF)	Number of Polygons	Combined Acreage	% of Planted Acreage
Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale).	1000	13	4.3	8%
<hr/>					
Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	none	0	0	0%

¹Acreage calculated from permanent vegetation monitoring plots and temporary vegetation monitoring plots from current year Site Assessment Report.

Stream Photographs



Photo Point 1 – Little Pine Reach 1, looking upstream (5/04/2017)



Photo Point 1 – Little Pine Reach 1, looking downstream (5/04/2017)



Photo Point 2 – Little Pine Reach 1, looking upstream (5/04/2017)



Photo Point 2 – Little Pine Reach 1, looking downstream (5/04/2017)



Photo Point 3 – Little Pine Reach 1, looking upstream (5/04/2017)



Photo Point 3 – Little Pine Reach 1, looking downstream (5/04/2017)



Photo Point 4 – Little Pine Reach 1, looking upstream (5/04/2017)



Photo Point 4 – Little Pine Reach 1, looking downstream (5/04/2017)



Photo Point 5 – Little Pine Reach 1, looking upstream (5/04/2017)



Photo Point 5 – Little Pine Reach 1, looking downstream (5/04/2017)



Photo Point 6 – Little Pine Reach 1, looking upstream (5/04/2017)



Photo Point 6 – Little Pine Reach 1, looking downstream (5/04/2017)



Photo Point 7 – Little Pine Reach 1, looking upstream (5/04/2017)



Photo Point 7 – Little Pine Reach 1, looking downstream (5/04/2017)



Photo Point 8 – Little Pine Reach 1, looking upstream (5/04/2017)



Photo Point 8 – Little Pine Reach 1, looking downstream (5/04/2017)



Photo Point 9 – Little Pine Reach 2a, looking upstream (5/04/2017)



Photo Point 9 – Little Pine Reach 2a, looking downstream (5/04/2017)



Photo Point 10 – Little Pine Reach 2a, looking upstream (5/04/2017)



Photo Point 10 – Little Pine Reach 2a, looking downstream (5/04/2017)



Photo Point 11 – Little Pine Reach 2a, looking upstream (5/04/2017)



Photo Point 11 – Little Pine Reach 2a, looking downstream (5/04/2017)



Photo Point 12 – Little Pine Reach 2a, looking upstream (5/04/2017)



Photo Point 12 – Little Pine Reach 2a, looking downstream (5/04/2017)



Photo Point 13 – Little Pine Reach 2a, looking upstream (5/04/2017)



Photo Point 13 – Little Pine Reach 2a, looking downstream (5/04/2017)



Photo Point 14 – Little Pine Reach 2a, looking upstream (5/04/2017)



Photo Point 14 – Little Pine Reach 2a, looking downstream (5/04/2017)



Photo Point 15 – Little Pine Reach 2a, looking upstream (5/04/2017)



Photo Point 15 – Little Pine Reach 2a, looking downstream (5/04/2017)



Photo Point 16 – Little Pine Reach 2b, looking upstream (5/04/2017)



Photo Point 16 – Little Pine Reach 2b, looking downstream (5/04/2017)



Photo Point 17 – Little Pine Reach 2b, looking upstream (5/04/2017)



Photo Point 17 – Little Pine Reach 2b, looking downstream (5/04/2017)



Photo Point 18 – Little Pine Reach 2b, looking upstream (5/04/2017)



Photo Point 18 – Little Pine Reach 2b, looking downstream (5/04/2017)



Photo Point 19 – Little Pine Reach 2b, looking upstream (5/04/2017)



Photo Point 19 – Little Pine Reach 2b, looking downstream (5/04/2017)



Photo Point 20 – UT2 Reach 1, looking upstream (5/09/2017)



Photo Point 20 – UT2 Reach 1, looking downstream (5/09/2017)



Photo Point 21 – UT2 Reach 1, looking upstream (5/09/2017)



Photo Point 21 – UT2 Reach 1, looking downstream (5/09/2017)



Photo Point 22 – UT2 Reach 1, looking upstream (5/09/2017)



Photo Point 22 – UT2 Reach 1, looking downstream (5/09/2017)



Photo Point 23 – UT2 Reach 1, looking upstream (5/09/2017)



Photo Point 23 – UT2 Reach 1, looking downstream (5/09/2017)



Photo Point 24 – UT2 Reach 1, looking upstream (5/09/2017)



Photo Point 24 – UT2 Reach 1, looking downstream (5/09/2017)



Photo Point 25 – UT2 Reach 2, looking upstream (5/09/2017)



Photo Point 25 – UT2 Reach 2, looking downstream (5/09/2017)



Photo Point 26 – UT2 Reach 2, looking upstream (5/09/2017)



Photo Point 26 – UT2 Reach 2, looking downstream (5/09/2017)



Photo Point 27 – UT2 Reach 2, looking upstream (9/07/2017)



Photo Point 27 – UT2 Reach 2, looking downstream (9/07/2017)



Photo Point 28 – UT1, looking upstream (5/09/2017)



Photo Point 28 – UT1, looking downstream (5/09/2017)



Photo Point 29 – UT1, looking upstream (5/09/2017)



Photo Point 29 – UT1, looking downstream (5/09/2017)



Photo Point 30 – UT1, looking upstream (5/09/2017)



Photo Point 30 – UT1, looking downstream (5/09/2017)



Photo Point 31 – UT2b, looking upstream (5/09/2017)



Photo Point 31 – UT2b, looking downstream (5/09/2017)



Photo Point 32 – UT2b, looking upstream (5/09/2017)



Photo Point 32 – UT2b, looking downstream (5/09/2017)



Photo Point 33 – UT2, looking upstream (5/09/2017)



Photo Point 33 – UT2b, looking upstream (5/09/2017)



Photo Point 33 – UT2, looking downstream (5/09/2017)



Photo Point 34 – UT2a, looking upstream (5/09/2017)



Photo Point 34 – UT2a, looking downstream (5/09/2017)



Photo Point 35 – UT2a, looking upstream (5/09/2017)



Photo Point 35 – UT2a, looking downstream (5/09/2017)



Photo Point 36 – UT2a, looking upstream (5/09/2017)



Photo Point 36 – looking upstream UT3 (5/09/2017)



Photo Point 36 – UT2a, looking downstream (5/09/2017)



Photo Point 37 – UT2a, looking upstream (5/09/2017)



Photo Point 37 – UT2a, looking downstream (5/09/2017)



Photo Point 38 – UT2a, looking upstream (5/09/2017)



Photo Point 38 – UT2a, looking downstream (5/09/2017)



Photo Point 39 – UT2a, looking upstream (5/09/2017)



Photo Point 39 – UT2a, looking downstream (5/09/2017)



Photo Point 40 – UT2a, looking upstream (5/09/2017)



Photo Point 40 – UT2a, looking downstream (5/09/2017)



Photo Point 41 – UT3, looking upstream (5/09/2017)



Photo Point 41 – UT3, looking downstream (5/09/2017)



Photo Point 42 – UT2 Reach 1, looking upstream (5/09/2017)



Photo Point 42 – UT2 Reach 1, looking downstream (5/09/2017)

Vegetation Photographs



Vegetation Plot 1 – (09/26/2016)



Vegetation Plot 2 – (09/26/2016)



Vegetation Plot 3 – (09/05/2017)



Vegetation Plot 4 – (09/05/2017)



Vegetation Plot 5 – (09/05/2017)



Vegetation Plot 6 – (09/05/2017)



Vegetation Plot 7 – (09/05/2017)



Vegetation Plot 8 – (09/05/2017)



Vegetation Plot 9 – (09/05/2017)



Vegetation Plot 10 – (09/05/2017)



Vegetation Plot 11 – (09/06/2017)



Vegetation Plot 12 – (09/06/2017)



Vegetation Plot 13 – (09/06/2017)



Vegetation Plot 14 – (09/06/2017)



Vegetation Plot 15 – (09/06/2017)



Vegetation Plot 16 – (09/06/2017)



Vegetation Plot 17 – (09/06/2017)



Vegetation Plot 18 – (09/06/2017)



Vegetation Plot 19 – (09/06/2017)



Vegetation Plot 20 – (09/06/2017)



Vegetation Plot 21 – (09/06/2017)

APPENDIX 3. Vegetation Plot Data

Table 8. Vegetation Plot Criteria Attainment

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Plot	MY4 Success Criteria Met (Y/N)	Tract Mean
1	Y	95%
2	Y	
3	Y	
4	Y	
5	Y	
6	Y	
7	Y	
8	Y	
9	Y	
10	Y	
11	Y	
12	Y	
13	N	
14	Y	
15	Y	
16	Y	
17	Y	
18	Y	
19	Y	
20	Y	
21	Y	

Table 9. CVS Vegetation Plot Metadata

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Database Name	cvs-eep-entrytool-v2.5.0 LP III MY2.mdb
Database Location	Q:\ActiveProjects\005-02160 Little Pine III Monitoring\Monitoring\Monitoring Year 2\Vegetation Assessment
Computer Name	BULLPEN
File Size	74616832
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
ALL Stems by Plot and spp	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
PROJECT SUMMARY-----	
Project Code	94903
Project Name	Little Pine Creek III Stream & Wetland Restoration Project
Description	Little Pine Creek III Stream & Wetland Restoration Project
River Basin	
Length(ft)	
Stream-to-edge Width (ft)	
Area (sq m)	
Required Plots (calculated)	
Sampled Plots	21
Required Plots (calculated)	21
Sampled Plots	21

Table 10a. Planted and Total Stem Counts
 Little Pine III Stream & Wetland Restoration Project
 DMS Project No. 94903
 Monitoring Year 2 - 2017

		Current Plot Data (MY2 2017)																					
Scientific Name	Common Name	Species Type	94903-WEI-0001			94903-WEI-0002			94903-WEI-0003			94903-WEI-0004			94903-WEI-0005			94903-WEI-0006			94903-WEI-0007		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
Acer rubrum	Red Maple	Tree				1	1	1	2	2	2	5	5	5	4	4	4	2	2	2			1
Alnus serrulata	Tag Alder	Shrub Tree																		1			
Betula nigra	River Birch	Tree	1	1	1	3	3	3	3	3	3	3	3	3				5	5	5			2
Cercis canadensis	Redbud	Shrub Tree	2	2	2							3	3	3	5	5	5				5	5	5
Fraxinus pennsylvanica	Green Ash	Tree	1	1	1	2	2	2	2	2	2	2	2	5	2	2	2				5	5	5
Liriodendron tulipifera	Tulip Poplar	Tree																					
Platanus occidentalis	Sycamore	Tree	1	1	1	1	1	1				1	1	1	1	1	1	3	3	3	3	3	3
Ulmus americana	American Elm	Tree	8	8	8	3	3	3	8	8	8				3	3	3	1	1	1			
Stem count			13	13	13	10	10	10	15	15	15	14	14	17	15	15	15	11	11	12	13	13	16
size (ares)			1			1			1			1			1			1					
size (ACRES)			0.0247			0.0247			0.0247			0.0247			0.0247			0.0247					
Species count			5	5	5	5	5	5	4	4	4	5	5	5	5	5	5	4	4	5	3	3	5
Stems per ACRE			526	526	526	405	405	405	607	607	607	567	567	688	607	607	607	445	445	486	526	526	647

		Current Plot Data (MY2 2017)																					
Scientific Name	Common Name	Species Type	94903-WEI-0008			94903-WEI-0009			94903-WEI-0010			94903-WEI-0011			94903-WEI-0012			94903-WEI-0013			94903-WEI-0014		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
Acer rubrum	Red Maple	Tree	7	7	7	3	3	3	2	2	2	4	4	4	1	1	1						
Alnus serrulata	Tag Alder	Shrub Tree																					
Betula nigra	River Birch	Tree				1	1	1	1	1	1	2	2	2	4	4	4				2	2	2
Cercis canadensis	Redbud	Shrub Tree	2	2	2	1	1	2	2	2	3	1	1	1	2	2	2				1	1	1
Fraxinus pennsylvanica	Green Ash	Tree	4	4	4	3	3	3	4	4	7	4	4	4	4	4	4	5	5	5	2	2	2
Liriodendron tulipifera	Tulip Poplar	Tree																					
Platanus occidentalis	Sycamore	Tree	1	1	1				2	2	2				1	1	1	1	1	1	2	2	2
Ulmus americana	American Elm	Tree				4	4	4				1	1	1	3	3	3				5	5	5
Stem count			14	14	14	12	12	13	11	11	15	12	12	12	15	15	15	6	6	6	12	12	12
size (ares)			1			1			1			1			1			1					
size (ACRES)			0.0247			0.0247			0.0247			0.0247			0.0247			0.0247					
Species count			4	4	4	5	5	5	5	5	5	5	5	5	6	6	6	2	2	2	5	5	5
Stems per ACRE			567	567	567	486	486	526	445	445	607	486	486	486	607	607	607	243	243	243	486	486	486

Color for Density

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of planted stems excluding live stakes
 P-all: Number of planted stems including live stakes
 T: Total stems

Table 10b. Planted and Total Stem Counts

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

		Current Plot Data (MY2)																								
Scientific Name	Common Name	Species Type	94903-WEI-0015			94903-WEI-0016			94903-WEI-0017			94903-WEI-0018			94903-WEI-0019			94903-WEI-0020			94903-WEI-0021					
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T			
Acer rubrum	Red Maple	Tree				5	5	5										1	1	1			2	4	4	5
Alnus serrulata	Tag Alder	Shrub Tree																								
Betula nigra	River Birch	Tree	3	3	3				3	3	3	3	3	3	1	1	1	1	1	1	1	1	1	3	3	3
Cercis canadensis	Redbud	Shrub Tree										5	5	5	2	2	2	3	3	3	1	1	1	1	1	1
Fraxinus pennsylvanica	Green Ash	Tree	2	2	2	4	4	4	4	4	4	2	2	2	4	4	4	2	2	2	3	3	3	3	3	3
Liriodendron tulipifera	Tulip Poplar	Tree																								1
Platanus occidentalis	Sycamore	Tree	8	8	8	1	1	1				5	5	5										2	2	2
Ulmus americana	American Elm	Tree							3	3	3	1	1	1	2	2	2	5	5	5						
Stem count			13	13	13	10	10	10	10	10	10	16	16	16	10	10	10	11	11	13	13	13	15			
size (ares)			1			1			1			1			1			1			1					
size (ACRES)			0.0247			0.0247			0.0247			0.0247			0.0247			0.0247			0.0247					
Species count			3	3	3	3	3	3	3	3	3	5	5	5	5	5	5	4	4	5	5	5	6			
Stems per ACRE			526	526	526	405	405	405	405	405	405	647	647	647	405	405	405	445	445	526	526	526	607			

		Annual Means									
Scientific Name	Common Name	Species Type	MY2 (2017)			MY1 (10/2016)			MY0 (05/2016)		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
Acer rubrum	Red Maple	Tree	41	41	45	45	45	45	50	50	50
Alnus serrulata	Tag Alder	Shrub Tree			1			1			
Betula nigra	River Birch	Tree	39	39	41	41	41	41	49	49	49
Cercis canadensis	Redbud	Shrub Tree	35	35	37	44	44	44	46	46	46
Fraxinus pennsylvanica	Green Ash	Tree	61	61	67	58	58	58	58	58	58
Liriodendron tulipifera	Tulip Poplar	Tree			1						
Platanus occidentalis	Sycamore	Tree	33	33	33	33	33	33	30	30	30
Ulmus americana	American Elm	Tree	47	47	47	50	50	50	52	52	52
Stem count			256	256	272	271	271	272	285	285	285
size (ares)			21			21			21		
size (ACRES)			0.52			0.52			0.52		
Species count			6	6	8	6	6	7	6	6	6
Stems per ACRE			493	493	524	522	522	524	549	549	549

Color for Density

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of planted stems excluding live stakes

P-all: Number of planted stems including live stakes

T: Total stems

APPENDIX 4. Morphological Summary Data and Plots

Table 11a. Baseline Stream Data Summary
 Little Pine III Stream & Wetland Restoration Project
 DMS Project No.94903
 Monitoring Year 2 - 2017

Little Pine Reach 1, Reach 2a, Reach 2b

Parameter	Gage	Pre-Restoration Condition						Reference Reach Data		Design						As-Built/Baseline					
		Little Pine Reach 1		Little Pine Reach 2a		Little Pine Reach 2b		Meadow Fork		Little Pine Reach 1		Little Pine Reach 2a		Little Pine Reach 2b		Little Pine Reach 1		Little Pine Reach 2a		Little Pine Reach 2b ¹	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Dimension and Substrate - Riffle																					
Bankfull Width (ft)	N/A	25.8	33.4	24.9		29.0		21.4		30.0		30.0		31.0		30.3	33.5	29.1	30.7	28.7	31.9
Floodprone Width (ft)		>200		>200		>200		>200		>200		>200		>200		133	>200		>200		>200
Bankfull Mean Depth		1.7	1.8	2.1		1.8		2.1		1.8		1.8		1.8		1.6	1.8	1.6	1.9	2.0	2.1
Bankfull Max Depth		3.3	3.3	3.7		2.2		3.1		2.5		2.5		2.5		2.7	3.2	2.6	3.9	3.1	3.4
Bankfull Cross-sectional Area (ft ²)		45.5	47.5	53.3		53.3		44.0		54.5		53.0		54.9		52.2	53.5	46.6	56.9	58.8	64.2
Width/Depth Ratio		1.4	23.9	11.6		16.1		10.2		16.5		17.0		17.5		17.1	21.4	16.6	18.1	14.0	15.9
Entrenchment Ratio		>2.2		>2.2		>2.2		>2.2		>2.2		>2.2		>2.2		4.4	>6.0	>6.5	>6.9	>6.3	>7
Bank Height Ratio		1.2	1.4	1.6		1.0		1.1		1.0		1.0		1.0		0.8	1.0		1.0		1.0
D50 (mm)			10.2	1.3		18.4		---		---		---		---		50.7		87.6		47.4	
Riffle																					
Riffle Length (ft)	N/A							---		---		---		---	28.4	80.5	37.8	68.3	30.44	132.29	
Riffle Slope (ft/ft)		0.012	0.019	0.0095	0.031	0.028	0.045	0.0239	0.007	0.0125	0.0098	0.0175	0.0155	0.0278	0.0040	0.0275	0.0101	0.0274	0.0055	0.0236	
Pool Length (ft)								---		---		---		---	44.5	96.5	38.7	108.9	40.92	99.41	
Pool Max Depth (ft)								---		---		---		---	3.5	5.8	4.7	5.8	2.6	5.4	
Pool Spacing (ft)		38	85	55	227	65	229	---	75	270	75	270	78	279	71	191	132	206	88	190	
Pool Volume (ft ³)								---		---		---		---							
Pattern																					
Channel Beltwidth (ft)	N/A	63	82	77	94	57		45	210	45	210	47	217	45	154	48	108		89		
Radius of Curvature (ft)		25	59	39	58	34	70		60	210	60	120	62	124	60	96	63	77	82	124	
Rc:Bankfull Width (ft/ft)		1.0	1.8	1.6	2.3	1.3	2.4		2.0	4.0	2.0	4.0	2.0	4.0	2.0	2.9	2.2	2.5	2.9	3.9	
Meander Length (ft)		86	140	110	186	100	134		210	360	210	360	217	372	207	313	288	337	334	329	
Meander Width Ratio		2.4	2.5	3.1	3.8	2.0			1.5	7.0	1.5	7.0	1.5	7.0	1.5	4.6	1.6	3.5		3.1	
Substrate, Bed and Transport Parameters																					
Ri%/Ru%/P%/G%/S%	N/A																				
SC%/Sa%/G%/C%/B%/Be%																					
d16/d35/d50/d84/d95/d100		SC/4.5/10.2/61.2/143.4/>2048	SC/0.4/1.3/77.8/180.0/362	SC/0.5/18.4/79.2/143.4/256											0.22/0.48/2.0/88.2/146.7/362	0.22/1.0/37.9/111.8/160.7/256	0.38/21.6/47.4/122.3/208.8/362				
Reach Shear Stress (Competency) lb/ft ²		0.85	0.66	2.43		0.56	0.75	1.20	0.46	0.51	0.69	0.74	1.21	1.23							
Max part size (mm) mobilized at bankfull		134	122	289		99	123	174													
Stream Power (Capacity) W/m ²																					
Additional Reach Parameters																					
Drainage Area (SM)	N/A	3.9		4.3		4.4		4.4		3.9		4.3		4.4		3.9		4.3		4.4	
Watershed Impervious Cover Estimate (%)		<1%		<1%		<1%		<1%		<1%		<1%		<1%		<1%		<1%		<1%	
Rosgen Classification		C4		E/C5		C4		E4		C4		C5		C4		C4		C4		C4	
Bankfull Velocity (fps)		4.2	4.6	4.0		4.4		5.1		3.8		4.0		4.1		3.6	3.8	4.1	4.3	3.6	3.7
Bankfull Discharge (cfs)		205		215		225		224		205		215		225		205		215		225	
Q-NFF regression (2-yr)																					
Q- NC Mountain Regional Curve (cfs)		284		306		308															
Q-USGS extrapolation (1.2-yr)		177		191		193															
Q-Mannings		199	211	213		235									188	204	199	231	219	232	
Valley Length (ft)															1,184		876		476		
Channel Thalweg Length (ft)				4,016						1,350 ¹		1,025 ¹		481 ²		1,444		1,083		493	
Sinuosity		1.2		1.7		1.1				1.14		1.17		1.01		1.22		1.24		1.04	
Water Surface Slope (ft/ft)		0.0048	0.0058	0.0033	0.0057	0.0049	0.0058	0.0100	0.0050	0.0070	0.0111	0.0049	0.0072	0.0118							
Bankfull Slope (ft/ft)		0.0057		0.0087		0.0089			0.0057	0.0082	0.0089	0.0051	0.0074	0.0101							

SC: Silt/Clay <0.062 mm diameter particles

(---): Data was not provided

N/A: Not Applicable

¹ Little Pine Reach 2b: Calculations only include reaches with a P1 or P2 approach

Table 11b. Baseline Stream Data Summary

Little Pine III Stream & Wetland Restoration Project
 DMS Project No.94903
 Monitoring Year 2 - 2017

UT2, UT2b

Parameter	Gage	Pre-Restoration Condition						Reference Reach Data		Design						As-Built/Baseline					
		UT2 Reach 1		UT2 Reach 2/3		UT2b		UT2a Reference		UT2 Reach 1 Lower		UT2 Reach 2		UT2b ²		UT2 Reach 1 Lower		UT2 Reach 2		UT2b ²	
		Min	Max	Reach 2	Reach 3	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Dimension and Substrate - Riffle																					
Bankfull Width (ft)	N/A	4.9	9.7	6.1	7.0	8.3		12.6		9.0		11.6		5.9		8.1		8.9	12.8	6.7	
Floodprone Width (ft)		5.4	29.9	49.3	41.0	10.6		31.0		98		17	195	15	30	28.4		21.5	>200	15.9	
Bankfull Mean Depth		0.9	1.2	1.4	1.2	0.4		1.4		0.49		0.65		0.35		0.6		0.5	0.9	0.5	
Bankfull Max Depth		1.4		2.3	1.9	0.6		2.0		0.7		0.95		0.55		1.0		1.10	2.10	0.9	
Bankfull Cross-sectional Area (ft ²)		5.9	8.6	8.7	8.5	3.1		18.1		4.4		7.6		2.1		5.1		4.2	12.0	3.7	
Width/Depth Ratio		4.1	11.0	4.2	5.7	22.6		8.7		18.5		17.7		16.8		13.0		13.6	20.1	12.2	
Entrenchment Ratio		1.1	3.1	8.1	5.9	1.3		2.4		10.9		1.5	16.8	2.5	5.1	3.5		2.0	>22.4	2.4	
Bank Height Ratio		2.6	3.2	1.0	1.2	5.8		1.0		1.0		1.0		1.0		1.0		1.0		1.0	
D50 (mm)		10.7		15		16.0		---		---		---		---		56.9		44	53	43	
Profile																					
Riffle Length (ft)	N/A							---		---		---		---		10.7	25.0	16.8	29.3	4.4	23.0
Riffle Slope (ft/ft)		0.012	0.083	0.0327-0.063	0.0092-0.068	0.0178	0.081	0.0404	0.0517	0.0512	0.0681	0.026	0.046	0.0436	0.0750	0.0360	0.0853	0.0262	0.0575	0.0448	0.0659
Pool Length (ft)								---		---		---		---		5.0	22.3	13.3	46.3	3.1	14.3
Pool Max Depth (ft)		---		---		---		2.2	2.5	---		---		---		1.9	5.0	1.6	3.2	0.6	2.1
Pool Spacing (ft)		11.6	40.5	14-68	22-63	8	34	78		6.5	41.5	19	95	5	21	7	34	24	98	3	33
Pool Volume (ft ³)							---		---		---		---								
Pattern																					
Channel Beltwidth (ft)	N/A	---		49-52	120	N/A		---		---		45	68	---		---		61	66	---	
Radius of Curvature (ft)		---		10-48	8-27	N/A		---		---		29	39	---		---		19	63	---	
Rc:Bankfull Width (ft/ft)		---		1.6-7.9	1.1-3.9	N/A		---		---		2.5	3.4	---		---		2.1	4.9	---	
Meander Length (ft)		---		64-188	43-141	N/A		---		---		88	135	---		---		105	135	---	
Meander Width Ratio		---		8.0-8.5	17.1	N/A		---		---		3.9	5.9	---		---		7	5	---	
Substrate, Bed and Transport Parameters																					
Ri%/Ru%/P%/G%/S%	N/A																				
SC%/Sa%/G%/C%/B%/Be%																					
d16/d35/d50/d84/d95/d100		SC/5.9/10.7/21.5/36.7/90.0		SC/8.0/15/55.6/84.6/180.0		SC/11/16/52.6/128/180		---								0.25/11.0/27.6/96.0/143.4/256.0		0.78/28.5/41.6/85.0/123.3/180.0			
Reach Shear Stress (Competency) lb/ft ²		1.53		0.73		0.75				1.49		0.96		1.38		1.95		0.83	1.69	1.98	
Max part size (mm) mobilized at bankfull		208		121		123				208		148		193							
Stream Power (Capacity) W/m ²																					
Additional Reach Parameters																					
Drainage Area (SM)	N/A	0.12		0.29	0.31	0.030		0.12		0.12		0.31		0.03		0.12		0.31		0.03	
Watershed Impervious Cover Estimate (%)		<1%		<1%		<1%		<1%		<1%		<1%		<1%		<1%		<1%		<1%	
Rosgen Classification		A4		E4b	E4	F4b		A/B4/1		B4a		C4b		B4a		B4a		C4b		B4a	
Bankfull Velocity (fps)		2.3	3.4	4.0	4.1	3.2		---		4.5		4.6		4.7		4.1		2.7	4.3	5.1	
Bankfull Discharge (cfs)		20		35		10		20		20		35		10		20		35		10	
Q-NFF regression (2-yr)		---		---		---		---		---		---		---		---		---		---	
Q- NC Mountain Regional Curve (cfs)		21		44		7		---		---		---		---		---		---		---	
Q-USGS extrapolation (1.2-yr)		10		21		3		---		---		---		---		---		---		---	
Q-Mannings		35		43		8		---		---		---		---		21		11.2	51.0	18.7	
Valley Length (ft)		---		---		---		---		---		---		---		3,988				231	
Channel Thalweg Length (ft)		5270 ¹				553		---		433		1264		241		433		1318		253	
Sinuosity		1.1		1.3		2.1		1.1		---		1.05		1.20		1.04		1.05		1.2	
Water Surface Slope (ft/ft) ²		0.0436		0.0290		0.0136		0.0406		0.0433		0.0501		0.0239		0.0639		0.0560		0.0231	
Bankfull Slope (ft/ft)		0.0476		0.0363		0.028		0.0667		---		0.0525		0.0280		0.0667		0.0563		0.0237	

SC: Silt/Clay <0.062 mm diameter particles
 FS: Fine Sand 0.125-0.250mm diameter particles
 (---): Data was not provided
 N/A: Not Applicable
¹entire length of UT2
²UT2b: Calculations only include reach with a P2 approach

Table 12a. Morphology and Hydraulic Summary (Dimensional Parameters - Cross-Section)

Little Pine III Stream & Wetland Restoration Project

DMS Project No.94903

Monitoring Year 2 - 2017

	Cross-Section 1, Little Pine Reach 1 (Riffle)						Cross-Section 2, Little Pine Reach 1 (Pool)						Cross-Section 3, Little Pine Reach 1 (Riffle)					
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
<i>based on fixed bankfull elevation</i>	2,535.4	2,535.4	2,535.4				2,533.2	2,533.2	2,533.2				2,532.9	2,532.9	2,532.9			
Bankfull Width (ft)	30.3	29.9	30.8				30.6	30.9	30.9				33.5	32.9	32.3			
Floodprone Width (ft)	132.9	135.1	135.1				---	---	---				>200	>200	>200			
Bankfull Mean Depth (ft)	1.8	1.7	1.7				2.2	2.1	2.2				1.6	1.6	1.6			
Bankfull Max Depth (ft)	2.7	2.8	3.2				4.3	3.9	4.4				3.2	3.1	3.0			
Bankfull Cross Sectional Area (ft2)	53.5	49.8	52.8				68.0	65.9	66.9				52.2	51.8	52.2			
Bankfull Width/Depth Ratio	17.1	18.0	18.0				---	---	---				21.4	20.9	20.0			
Bankfull Entrenchment Ratio	4.4	4.5	4.4				---	---	---				>6.0	>6.1	>6.2			
Bankfull Bank Height Ratio	1.0	1.0	1.0				---	---	---				1.0	1.0	0.9			
	Cross-Section 4, Little Pine Reach 2a (Riffle)						Cross-Section 5, Little Pine Reach 2a (Riffle)						Cross-Section 6, Little Pine Reach 2a (Pool)					
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
<i>based on fixed bankfull elevation</i>	2,527.4	2,527.4	2,527.4				2,525.4	2,525.4	2,525.4				2,524.8	2,524.8	2,524.8			
Bankfull Width (ft)	29.1	29.3	28.5				30.7	31.3	31.0				35.4	35.5	35.4			
Floodprone Width (ft)	>200	>200	>200				>200	>200	>200				---	---	---			
Bankfull Mean Depth (ft)	1.6	1.6	1.8				1.9	1.8	1.9				2.6	2.4	2.4			
Bankfull Max Depth (ft)	2.6	2.6	2.9				3.9	3.6	3.5				5.7	5.1	5.3			
Bankfull Cross Sectional Area (ft2)	46.6	46.4	49.8				56.9	56.7	58.2				93.4	83.6	86.5			
Bankfull Width/Depth Ratio	18.1	18.5	16.2				16.6	17.2	16.5				---	---	---			
Bankfull Entrenchment Ratio	>6.9	>6.8	>7.0				>6.5	>6.4	>6.5				---	---	---			
Bankfull Bank Height Ratio	1.0	1.0	1.0				1.0	1.0	1.0				---	---	---			
	Cross-Section 7, Little Pine Reach 2b (Pool)						Cross-Section 8, Little Pine Reach 2b (Riffle)						Cross-Section 9, Little Pine Reach 2b (Riffle)					
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
<i>based on fixed bankfull elevation</i>	2,522.0	2,522.0	2,522.0				2,520.1	2,520.1	2,520.1				2,519.5	2,519.5	2,519.5			
Bankfull Width (ft)	35.3	35.5	35.2				28.7	29.8	29.4				31.9	30.7	29.3			
Floodprone Width (ft)	---	---	---				>200	>200	>200				>200	>200	>200			
Bankfull Mean Depth (ft)	2.9	2.8	2.8				2.1	2.1	2.0				2.0	2.0	2.1			
Bankfull Max Depth (ft)	5.4	5.6	5.4				3.4	3.6	3.4				3.1	3.2	3.0			
Bankfull Cross Sectional Area (ft2)	103.7	100.0	97.2				58.8	61.2	59.0				64.2	62.3	60.2			
Bankfull Width/Depth Ratio	---	---	---				14.0	14.5	14.4				15.9	15.2	14.2			
Bankfull Entrenchment Ratio	---	---	---				>7.0	>6.7	>6.8				>6.3	>6.5	>6.9			
Bankfull Bank Height Ratio	---	---	---				1.0	1.0	1.0				1.0	1.0	1.0			

Table 12b. Morphology and Hydraulic Summary (Dimensional Parameters - Cross-Section)

Little Pine III Stream & Wetland Restoration Project

DMS Project No.94903

Monitoring Year 2 - 2017

	Cross-Section 10, UT2b (Pool)						Cross-Section 11, UT2b (Riffle)						Cross-Section 12, UT2 Reach 1 Lower (Riffle)					
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
<i>based on fixed bankfull elevation</i>	2,570.0	2,570.0	2,570.0				2,566.4	2,566.4	2,566.4				2,573.8	2,573.8	2,573.8			
Bankfull Width (ft)	5.9	6.0	6.1				6.7	6.3	6.6				8.1	8.4	8.6			
Floodprone Width (ft)	---	---	---				15.9	17.7	17.9				28.4	30.0	30.0			
Bankfull Mean Depth (ft)	1.0	2.3	2.4				0.5	0.7	0.7				0.6	0.7	0.6			
Bankfull Max Depth (ft)	1.7	3.4	3.3				0.9	1.1	1.1				1.0	1.3	1.2			
Bankfull Cross Sectional Area (ft2)	5.7	14.0	14.9				3.7	4.3	4.5				5.1	5.7	5.4			
Bankfull Width/Depth Ratio	---	---	---				12.2	9.1	9.6				13.0	12.5	13.9			
Bankfull Entrenchment Ratio	---	---	---				2.4	2.8	2.7				3.5	3.6	3.5			
Bankfull Bank Height Ratio	---	---	---				1.0	1.0	0.9				1.0	1.0	0.9			
	Cross-Section 13, UT2 Reach 1 Lower (Pool)						Cross-Section 14, UT2 Reach 2 (Riffle)						Cross-Section 15, UT2 Reach 2 (Pool)					
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
<i>based on fixed bankfull elevation</i>	2,573.3	2,573.3	2,573.3				2,547.2	2,547.2	2,547.2				2,539.1	2,539.1	2,539.1			
Bankfull Width (ft)	9.8	10.1	10.4				10.8	8.0	9.2				12.2	11.6	12.0			
Floodprone Width (ft)	---	---	---				21.5	23.2	23.5				---	---	---			
Bankfull Mean Depth (ft)	1.3	1.2	1.4				0.5	0.8	0.7				1.5	1.0	1.2			
Bankfull Max Depth (ft)	2.2	1.9	2.5				1.1	1.2	1.2				3.1	1.7	2.2			
Bankfull Cross Sectional Area (ft2)	12.8	12.5	15.0				5.9	6.6	6.6				18.7	11.9	14.4			
Bankfull Width/Depth Ratio	---	---	---				20.1	9.7	13.0				---	---	---			
Bankfull Entrenchment Ratio	---	---	---				2.0	2.9	2.5				---	---	---			
Bankfull Bank Height Ratio	---	---	---				1.0	1.0	0.9				---	---	---			
	Cross-Section 16, UT2 Reach 2 (Riffle)						Cross-Section 17, UT2 Reach 2 (Riffle)						Cross-Section 18, UT2 Reach 2 (Pool)					
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
<i>based on fixed bankfull elevation</i>	2,535.0	2,535.0	2,535.0				2,531.2	2,531.2	2,531.2				2,530.4	2,530.4	2,530.4			
Bankfull Width (ft)	8.9	10.0	6.9				12.8	12.9	13.6				19.3	19.5	21.4			
Floodprone Width (ft)	>200	>200	>200				>200	>200	>200				---	---	---			
Bankfull Mean Depth (ft)	0.5	0.5	0.4				0.9	0.9	0.9				0.8	0.8	0.8			
Bankfull Max Depth (ft)	1.1	0.8	0.6				2.1	1.8	1.9				2.0	2.3	2.1			
Bankfull Cross Sectional Area (ft2)	4.2	5.0	2.8				12.0	12.0	12.0				15.8	16.3	16.9			
Bankfull Width/Depth Ratio	19.2	19.9	17.1				13.6	13.8	15.4				---	---	---			
Bankfull Entrenchment Ratio	>22.4	>20.0	>28.9				>15.7	>15.5	>14.7				---	---	---			
Bankfull Bank Height Ratio	1.0	1.0	1.2				1.0	1.0	1.0				---	---	---			

Table 13a. Monitoring Data - Stream Reach Data Summary

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 1

Parameter	As-Built/Baseline		MY-1		MY-2		MY-3		MY-4		MY-5	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Dimension and Substrate - Riffle												
Bankfull Width (ft)	30.3	33.5	29.9	32.9	30.8	32.3						
Floodprone Width (ft)	133	>200	135	>200	135	>200						
Bankfull Mean Depth	1.6	1.8	1.6	1.7	1.6	1.7						
Bankfull Max Depth	2.7	3.2	2.8	3.1	3.0	3.2						
Bankfull Cross-sectional Area (ft ²)	52.2	53.5	49.8	51.8	52.2	52.8						
Width/Depth Ratio	17.1	21.4	18	20.9	18	20						
Entrenchment Ratio	4.4	>6.0	4.5	>6.1	4.4	>6.2						
Bank Height Ratio	0.8	1.0	0.8	1.0	0.9	1.0						
D50 (mm)	50.7		56.9		45.0							
Profile												
Riffle Length (ft)	28	81	21	47	32	76						
Riffle Slope (ft/ft)	0.0040	0.0275	0.0064	0.0283	0.0052	0.0183						
Pool Length (ft)	44	96	66	176	49	177						
Pool Max Depth (ft)	3.5	5.8	3.0	4.7	3.9	6.2						
Pool Spacing (ft)	71	191	77	224	94	210						
Pool Volume (ft ³)												
Pattern												
Channel Beltwidth (ft)	45	154										
Radius of Curvature (ft)	60	96										
Rc:Bankfull Width (ft/ft)	2.0	2.9										
Meander Wave Length (ft)	207	313										
Meander Width Ratio	1.5	4.6										
Additional Reach Parameters												
Rosgen Classification	C4		C4		C4							
Channel Thalweg Length (ft)	1,444		1,444		1,444							
Sinuosity (ft)	1.22											
Water Surface Slope (ft/ft)	0.0049		0.0049		0.0050							
Bankfull Slope (ft/ft)	0.0051		0.0043		0.0045							
Ri%/Ru%/P%/G%/S%												
SC%/Sa%/G%/C%/B%/Be%												
d16/d35/d50/d84/d95/d100	0.22/0.48/2.0/88/147/362		0.22/3.4/22/81/123/362		0.13/0.38/11/789/180/1024							
% of Reach with Eroding Banks	0%		0%		1%							

Table 13b. Monitoring Data - Stream Reach Data Summary

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 2a

Parameter	As-Built/Baseline		MY-1		MY-2		MY-3		MY-4		MY-5	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Dimension and Substrate - Riffle												
Bankfull Width (ft)	29.1	30.7	29.3	31.3	28.5	31.0						
Floodprone Width (ft)	>200		>200		>200							
Bankfull Mean Depth	1.6	1.9	1.6	1.8	1.8	1.9						
Bankfull Max Depth	2.6	3.9	2.6	3.6	2.9	3.5						
Bankfull Cross-sectional Area (ft ²)	46.6	56.9	46.4	56.7	49.8	58.2						
Width/Depth Ratio	16.6	18.1	17.2	18.5	16.2	16.5						
Entrenchment Ratio	>6.5	>6.9	>6.4	>6.8	>6.5	>7.0						
Bank Height Ratio	1.0		1.0		1.0							
D50 (mm)	87.6		72.4		75.9							
Profile												
Riffle Length (ft)	38	68	19	49	27	55						
Riffle Slope (ft/ft)	0.0101	0.0274	0.0112	0.0471	0.0143	0.0280						
Pool Length (ft)	39	109	39	145	66	186						
Pool Max Depth (ft)	4.7	5.8	4.3	6.6	4.0	6.7						
Pool Spacing (ft)	132	206	78	206	121	279						
Pool Volume (ft ³)												
Pattern												
Channel Beltwidth (ft)	48	108										
Radius of Curvature (ft)	63	77										
Rc:Bankfull Width (ft/ft)	2.2	2.5										
Meander Wave Length (ft)	288	337										
Meander Width Ratio	1.6	3.5										
Additional Reach Parameters												
Rosgen Classification	C4		C4		C4							
Channel Thalweg Length (ft)	1,083		1,083		1,083							
Sinuosity (ft)	1.24											
Water Surface Slope (ft/ft)	0.0072		0.0073		0.0075							
Bankfull Slope (ft/ft)	0.0074		0.0059		0.0067							
Ri%/Ru%/P%/G%/S%												
SC%/Sa%/G%/C%/B%/Be%												
d16/d35/d50/d84/d95/d100	0.22/1.0/38/112/161/256		0.29/11/36/90/157/1024		0.21/12.5/523/121/168/1024							
% of Reach with Eroding Banks	0%		0%		2%							

Table 13c. Monitoring Data - Stream Reach Data Summary

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 2b

Parameter	As-Built/Baseline		MY-1		MY-2		MY-3		MY-4		MY-5	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Dimension and Substrate - Riffle												
Bankfull Width (ft)	28.7	31.9	29.8	30.7	29.3	29.4						
Floodprone Width (ft)	>200		>200		>200							
Bankfull Mean Depth	2.0	2.1	2.0	2.1	2.0	2.1						
Bankfull Max Depth	3.1	3.4	3.2	3.6	3.0	3.4						
Bankfull Cross-sectional Area (ft ²)	58.8	64.2	61.2	62.3	59.8	60.2						
Width/Depth Ratio	14.0	15.9	14.5	15.2	14.2	14.4						
Entrenchment Ratio	>6.3	>7	>6.5	>6.7	>6.8	>6.9						
Bank Height Ratio	1.0		1.0		1.0							
D50 (mm)	47.4		72		70.2							
Profile												
Riffle Length (ft)	30	132	26	102	26	44						
Riffle Slope (ft/ft)	0.0055	0.0236	0.0169	0.0254	0.0116	0.0177						
Pool Length (ft)	41	99	55	153	26	149						
Pool Max Depth (ft)	2.6	5.4	3.8	6.3	3.7	5.0						
Pool Spacing (ft)	88	190	12	129	8	175						
Pool Volume (ft ³)												
Pattern												
Channel Beltwidth (ft)	89											
Radius of Curvature (ft)	82	124										
Rc:Bankfull Width (ft/ft)	2.9	3.9										
Meander Wave Length (ft)	334	329										
Meander Width Ratio	3.1											
Additional Reach Parameters												
Rosgen Classification	C4		C4		C4							
Channel Thalweg Length (ft)	493		493		493							
Sinuosity (ft)	1.04											
Water Surface Slope (ft/ft)	0.0118		0.0101		0.0082							
Bankfull Slope (ft/ft)	0.0101		0.0107		0.0103							
Ri%/Ru%/P%/G%/S%												
SC%/Sa%/G%/C%/B%/Be%												
d16/d35/d50/d84/d95/d100	0.38/22/47/122/209/362		0.22/10/29/111/171/362		0.3/8.0/29.0/107.3/180/362							
% of Reach with Eroding Banks	0%		0%		0%							

Table 13d. Monitoring Data - Stream Reach Data Summary

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

UT2 Reach 1 Lower

Parameter	As-Built/Baseline		MY-1		MY-2		MY-3		MY-4		MY-5	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Dimension and Substrate - Riffle												
Bankfull Width (ft)	8.1		8.4		8.6							
Floodprone Width (ft)	28.4		30.0		30.0							
Bankfull Mean Depth	0.6		0.7		0.6							
Bankfull Max Depth	1.0		1.3		1.2							
Bankfull Cross-sectional Area (ft ²)	5.1		5.7		5.4							
Width/Depth Ratio	13.0		12.5		13.9							
Entrenchment Ratio	3.5		3.6		3.5							
Bank Height Ratio	1.0		1.0		0.9							
D50 (mm)	56.9		39.8		38.7							
Profile												
Riffle Length (ft)	11	25	13	39	5	24						
Riffle Slope (ft/ft)	0.0360	0.0853	0.0136	0.0730	0.0253	0.0793						
Pool Length (ft)	5	22	2	15	4	17						
Pool Max Depth (ft)	1.9	5.0	1.0	2.9	2.0	3.8						
Pool Spacing (ft)	7	34	8	52	6	53						
Pool Volume (ft ³)												
Pattern												
Channel Beltwidth (ft)	---											
Radius of Curvature (ft)	---											
Rc:Bankfull Width (ft/ft)	---											
Meander Wave Length (ft)	---											
Meander Width Ratio	---											
Additional Reach Parameters												
Rosgen Classification	B4a		B4a		B4a							
Channel Thalweg Length (ft)	433		433		433							
Sinuosity (ft)	1.05											
Water Surface Slope (ft/ft)	0.0560		0.0477		0.0481							
Bankfull Slope (ft/ft)	0.0563		0.0483		0.0485							
Ri%/Ru%/P%/G%/S%												
SC%/Sa%/G%/C%/B%/Be%												
d16/d35/d50/d84/d95/d100	0.25/11/28/96/143/256		6.1/14/23/75/153/256		0.7/11/28/76/118/256							
% of Reach with Eroding Banks	0%		6%		2%							

Table 13e. Monitoring Data - Stream Reach Data Summary

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

UT2 Reach 2

Parameter	As-Built/Baseline		MY-1		MY-2		MY-3		MY-4		MY-5	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Dimension and Substrate - Riffle												
Bankfull Width (ft)	8.9	12.8	8.0	12.9	6.9	13.6						
Floodprone Width (ft)	21.5	>200	23.2	>200	23.5	>200						
Bankfull Mean Depth	0.5	0.9	0.5	0.9	0.4	0.9						
Bankfull Max Depth	1.1	2.1	0.8	1.8	0.6	1.9						
Bankfull Cross-sectional Area (ft ²)	4.2	12.0	5.0	12.0	2.8	12.0						
Width/Depth Ratio	13.6	20.1	9.7	19.9	13.0	17.1						
Entrenchment Ratio	2.0	>22.4	2.9	>20.0	2.5	>28.9						
Bank Height Ratio		1.0		1.0	0.9	1.2						
D50 (mm)	44	53	15	90	34.5	34.8						
Profile												
Riffle Length (ft)	17	29	10	36	5	62						
Riffle Slope (ft/ft)	0.0262	0.0575	0.0141	0.0658	0.0093	0.0773						
Pool Length (ft)	13	46	4	40	6	35						
Pool Max Depth (ft)	1.6	3.2	1.5	3.8	1.1	4.6						
Pool Spacing (ft)	24	98	8	113	10	207						
Pool Volume (ft ³)												
Pattern												
Channel Beltwidth (ft)	61	66										
Radius of Curvature (ft)	19	63										
Rc:Bankfull Width (ft/ft)	2.1	4.9										
Meander Wave Length (ft)	105	135										
Meander Width Ratio	7	5										
Additional Reach Parameters												
Rosgen Classification	C4b		C4b		C4b							
Channel Thalweg Length (ft)	1,318		1,318		1,318							
Sinuosity (ft)	1.2											
Water Surface Slope (ft/ft)	0.0231		0.0225		0.0235							
Bankfull Slope (ft/ft)	0.0237		0.0214		0.0245							
Ri%/Ru%/P%/G%/S%												
SC%/Sa%/G%/C%/B%/Be%												
d16/d35/d50/d84/d95/d100	0.25/11/28/96/143/256		6.1/14/23/75/153/256		0.7/11/28/76/118/256							
% of Reach with Eroding Banks	0%		0%		4%							

Table 13f. Monitoring Data - Stream Reach Data Summary

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

UT2b

Parameter	As-Built/Baseline		MY-1		MY-2		MY-3		MY-4		MY-5	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Dimension and Substrate - Riffle												
Bankfull Width (ft)	6.7		6.3		6.6							
Floodprone Width (ft)	15.9		17.7		17.9							
Bankfull Mean Depth	0.5		0.7		0.7							
Bankfull Max Depth	0.9		1.1		1.1							
Bankfull Cross-sectional Area (ft ²)	3.7		4.3		4.5							
Width/Depth Ratio	12.2		9.1		9.6							
Entrenchment Ratio	2.4		2.8		2.7							
Bank Height Ratio	1.0		1.0		0.9							
D50 (mm)	43		36		32							
Profile												
Riffle Length (ft)	4	23	7	24	7	25						
Riffle Slope (ft/ft)	0.0448	0.0659	0.0276	0.0451	0.0127	0.0702						
Pool Length (ft)	3	14	3	8	4	15						
Pool Max Depth (ft)	0.6	2.1	2.0	3.9	0.8	3.8						
Pool Spacing (ft)	3	33	4	30	3	30						
Pool Volume (ft ³)												
Pattern												
Channel Beltwidth (ft)	---											
Radius of Curvature (ft)	---											
Rc:Bankfull Width (ft/ft)	---											
Meander Wave Length (ft)	---											
Meander Width Ratio	---											
Additional Reach Parameters												
Rosgen Classification	B4a		B4a		B4a							
Channel Thalweg Length (ft)	253		253		253							
Sinuosity (ft)	1.10											
Water Surface Slope (ft/ft)	0.0616		0.0614		0.0557							
Bankfull Slope (ft/ft)	0.0536		0.0608		0.0612							
Ri%/Ru%/P%/G%/S%												
SC%/Sa%/G%/C%/B%/Be%												
d16/d35/d50/d84/d95/d100	0.78/29/42/85/123/180		0.28/7.4/23/82/128/362		0.5/13/26/87/143/256							
% of Reach with Eroding Banks	0%		0%		0%							



Longitudinal Profile Plots

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 1 (STA 100+00 - 114+44) and Reach 2a (114+44-125+27)

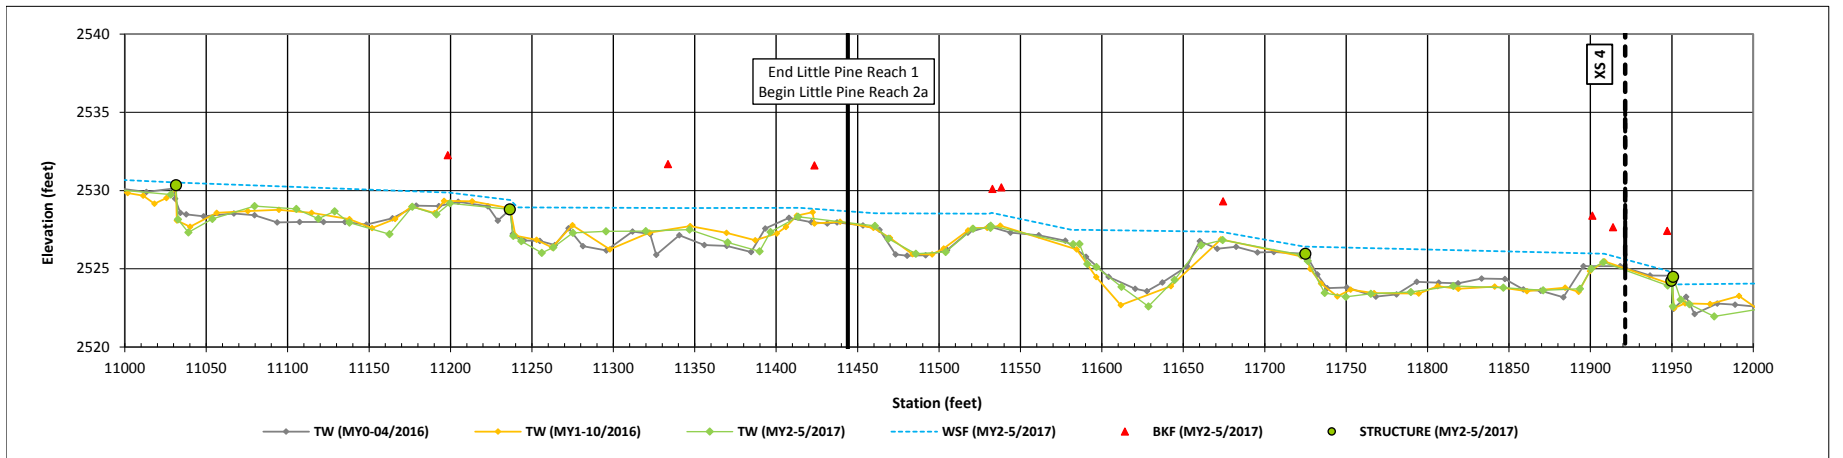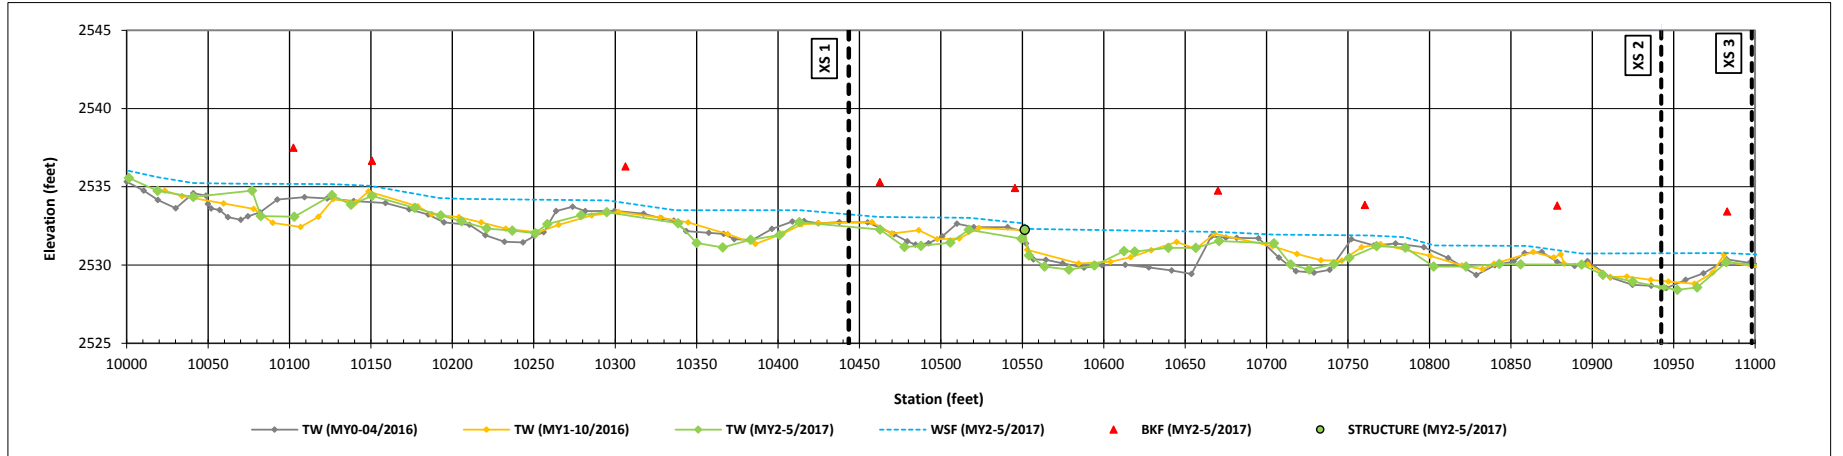


Longitudinal Profile Plots

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 2a (114+44-125+27) and Reach 2b (125+27-130+20)

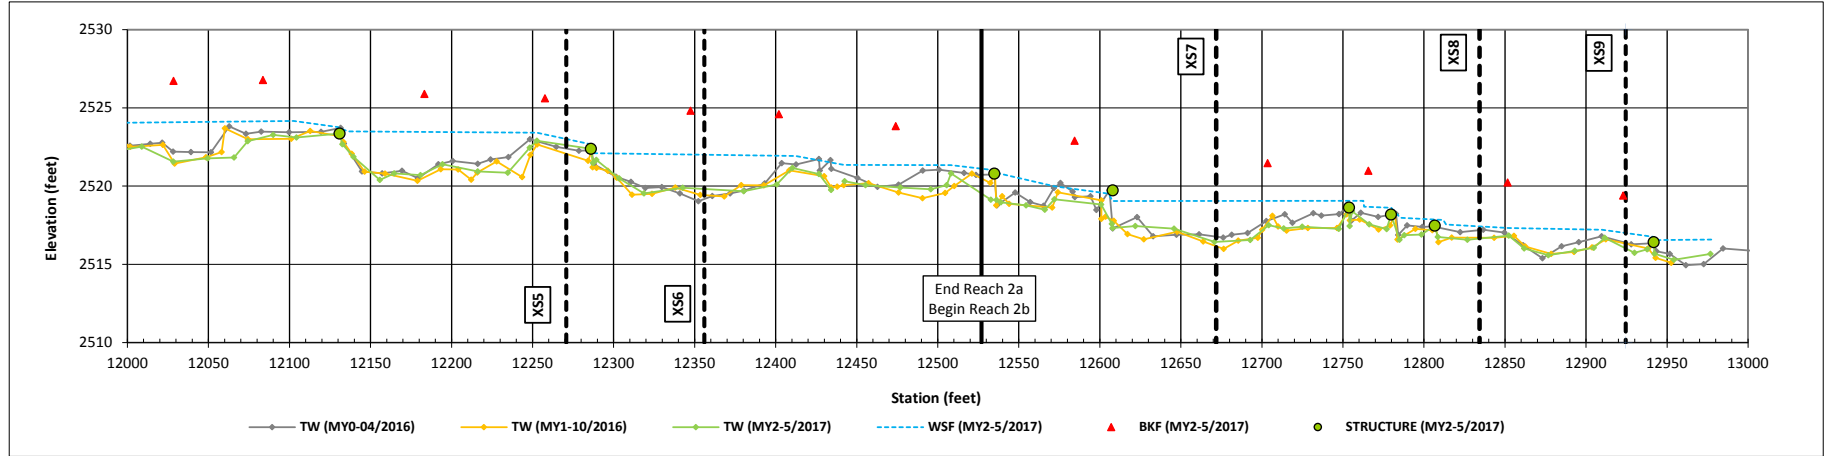


Longitudinal Profile Plots

Little Pine III Stream & Wetland Restoration Project

DMS Project No.94903

Monitoring Year 2 - 2017

UT2 Reach 1 Upper (STA 297+18 - 310+50)

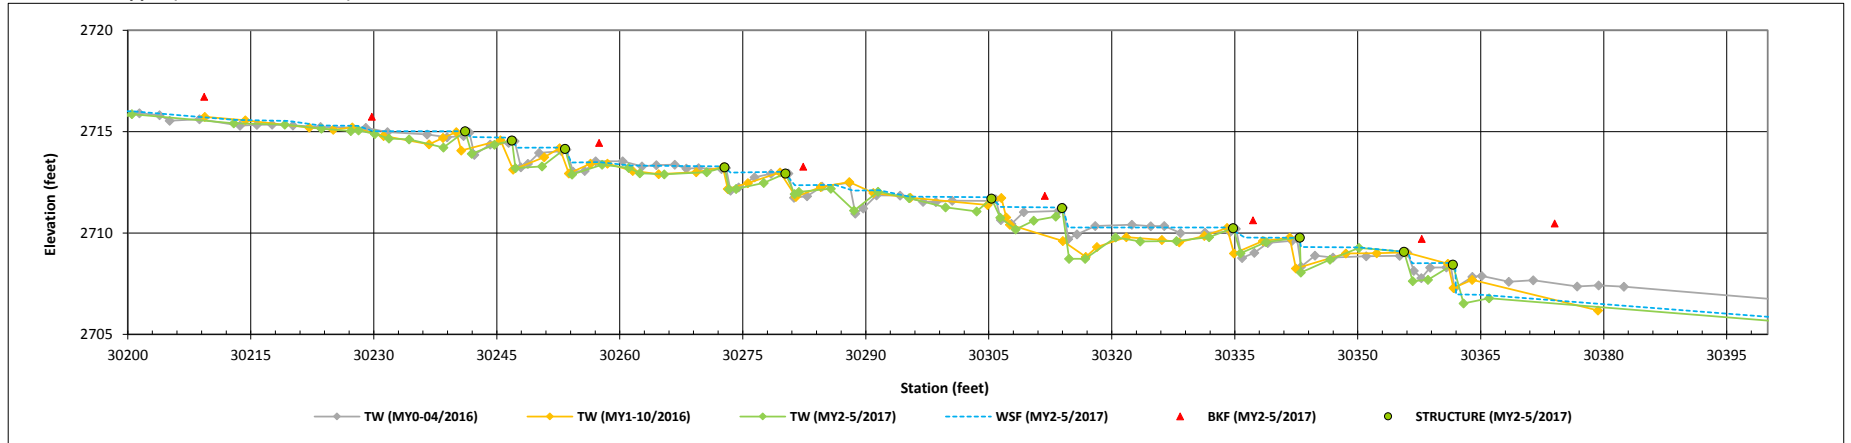



Longitudinal Profile Plots

Little Pine III Stream & Wetland Restoration Project

DMS Project No.94903

Monitoring Year 2 - 2017

UT2 Reach 1 Upper (STA 297+18 - 310+56)

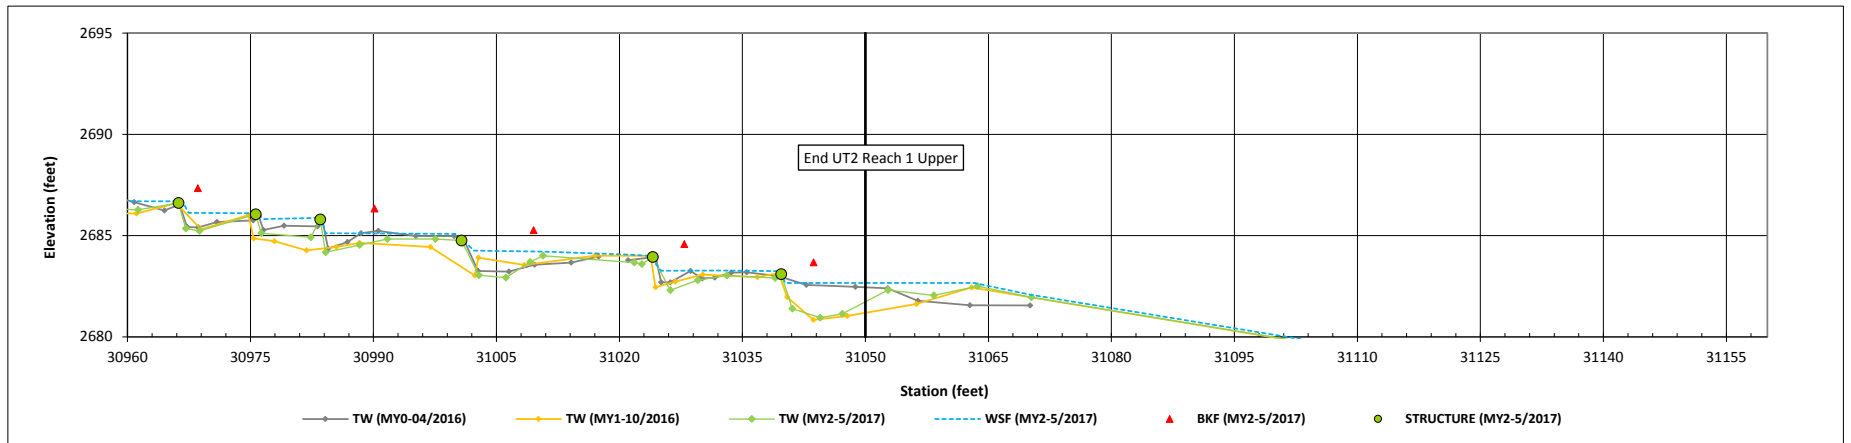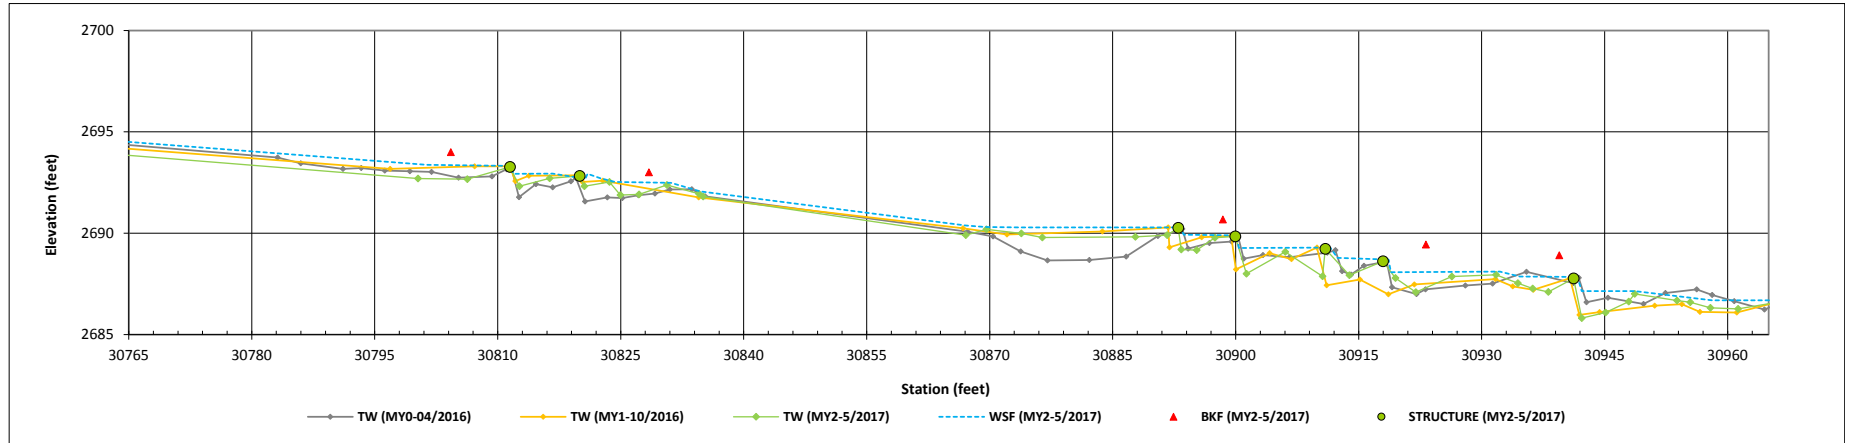



Longitudinal Profile Plots

Little Pine III Stream & Wetland Restoration Project

DMS Project No.94903

Monitoring Year 2 - 2017

UT2 Reach 1 Lower (STA 325+67 - 330+00)

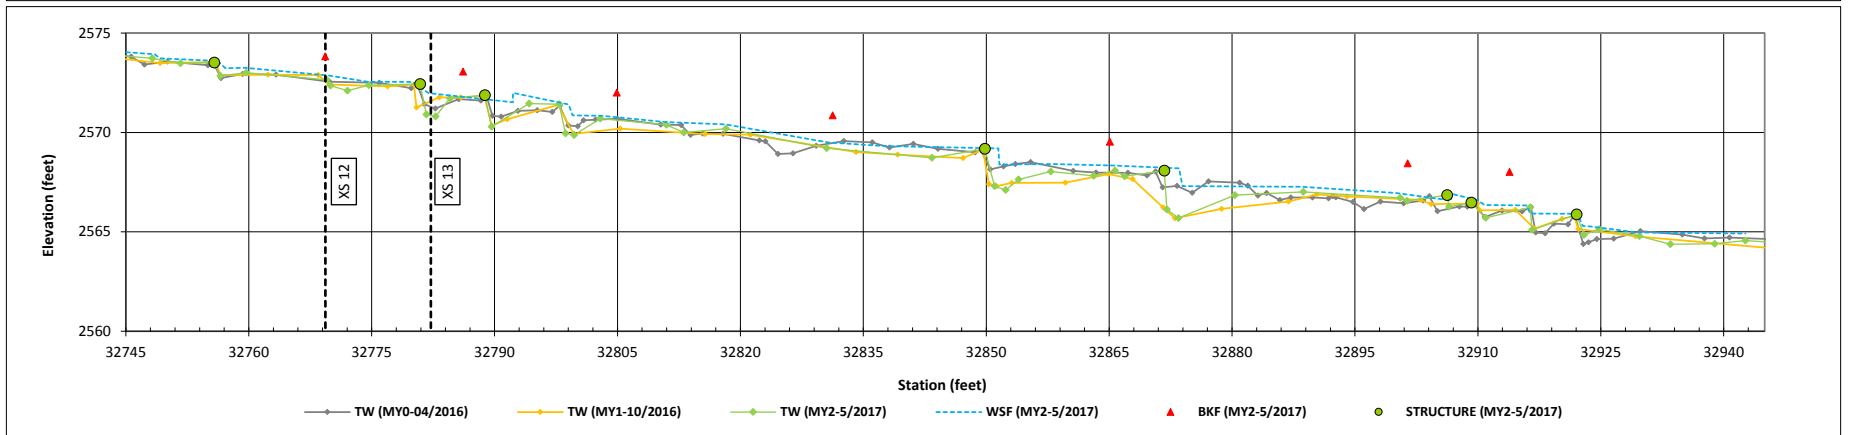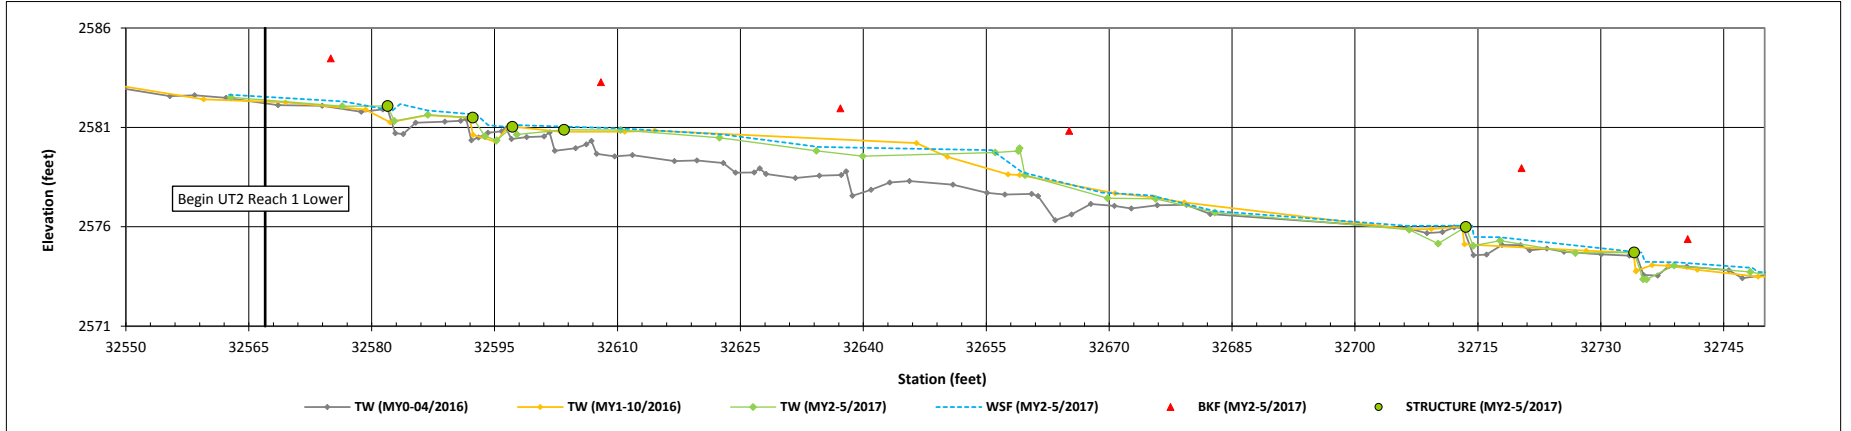


Longitudinal Profile Plots

Little Pine III Stream & Wetland Restoration Project

DMS Project No.94903

Monitoring Year 2 - 2017

UT2 Reach 2 (STA 330+00 - 343+18)

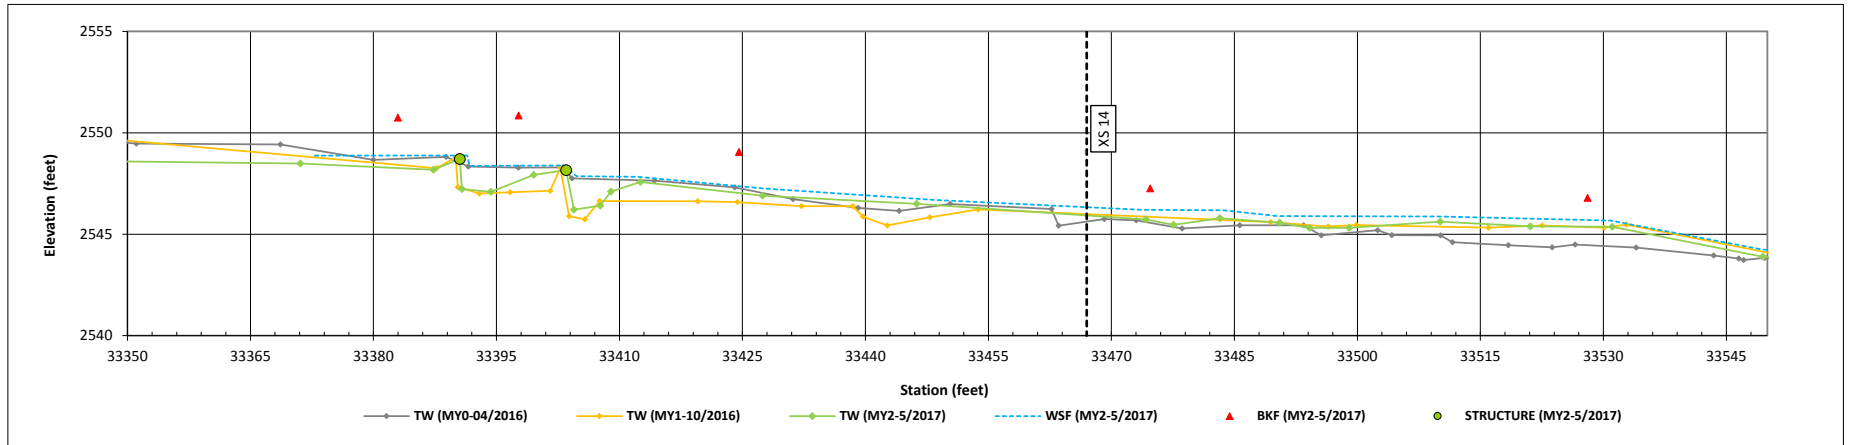


Longitudinal Profile Plots

Little Pine III Stream & Wetland Restoration Project

DMS Project No.94903

Monitoring Year 2 - 2017

UT2 Reach 2 (STA 330+00 - 343+18)

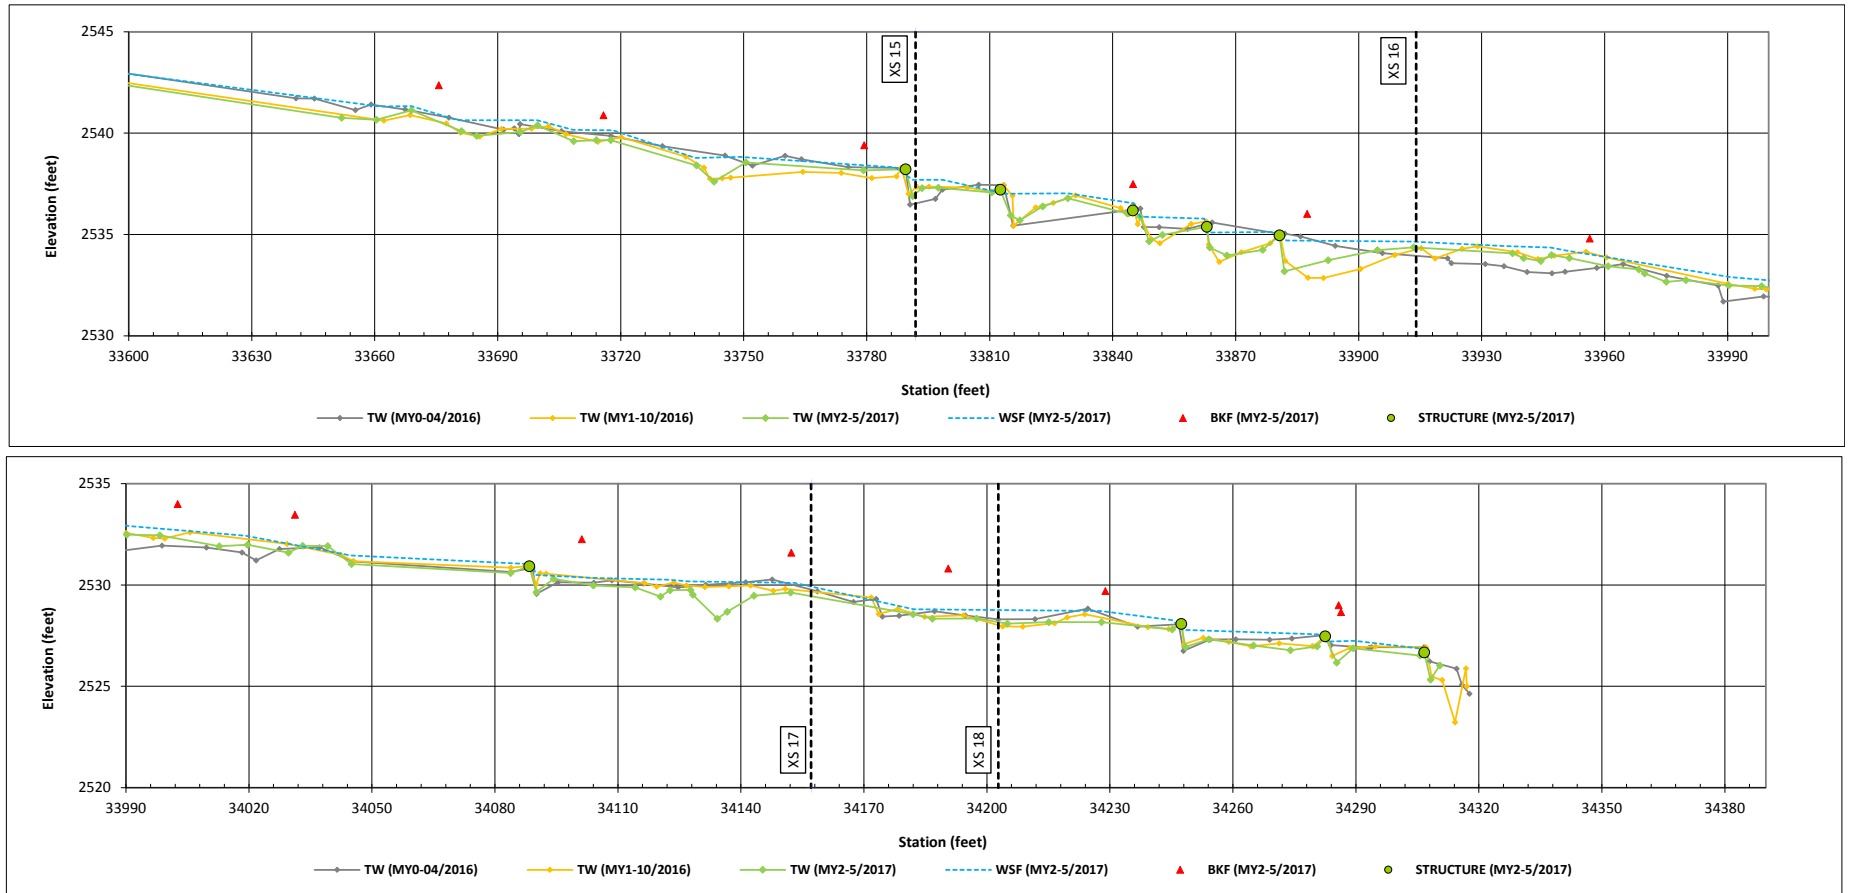



Longitudinal Profile Plots

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017


UT2b (STA 503+00 - 505+53)

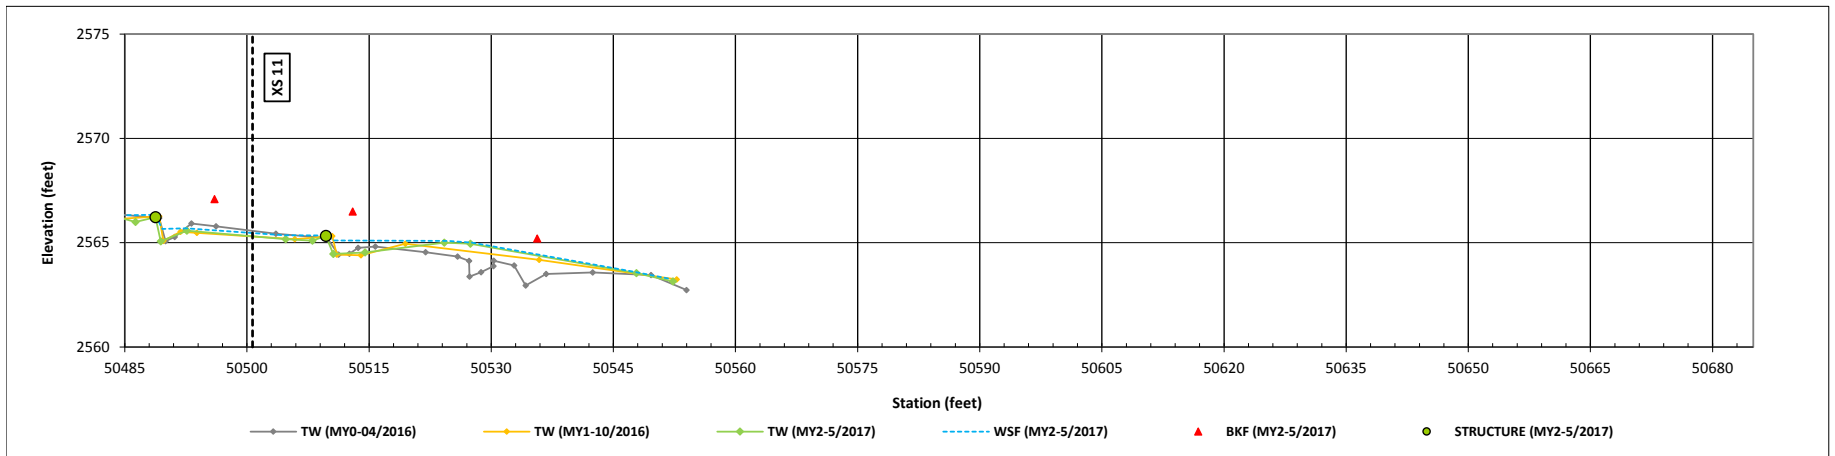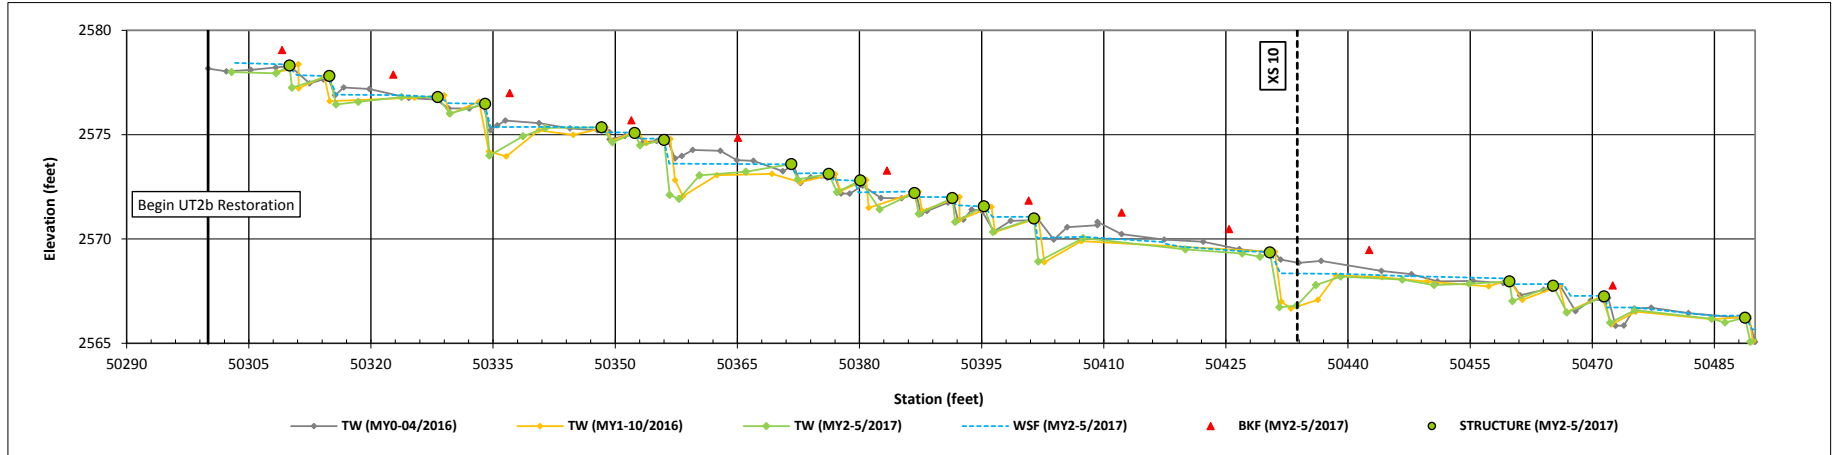

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 1- Little Pine Reach 1

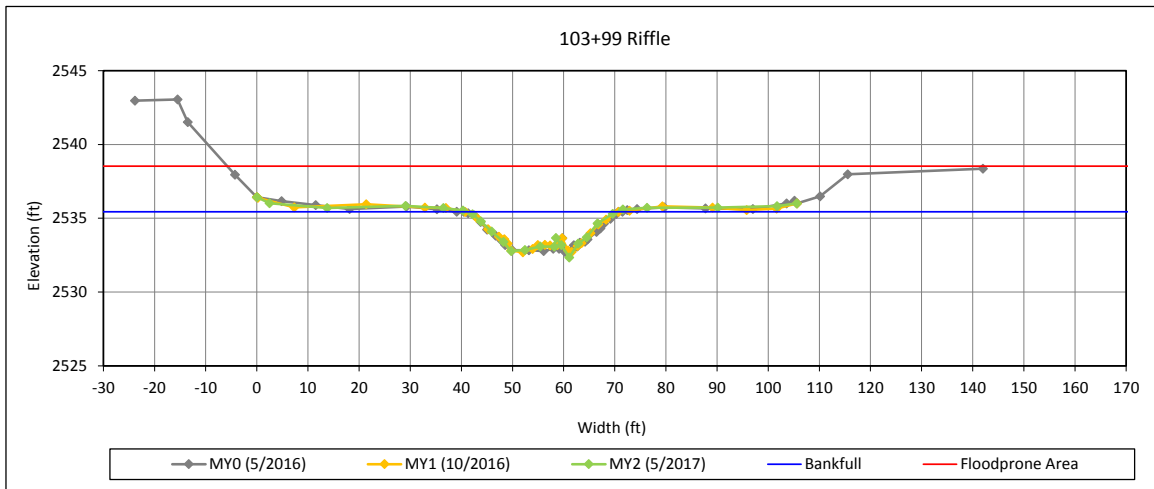

Bankfull Dimensions

50.1	x-section area (ft.sq.)
29.6	width (ft)
1.7	mean depth (ft)
3.1	max depth (ft)
31.2	wetted perimeter (ft)
1.6	hydraulic radius (ft)
17.5	width-depth ratio
135.1	W flood prone area (ft)
4.6	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2017

Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Cross-Section 2- Little Pine Reach 1

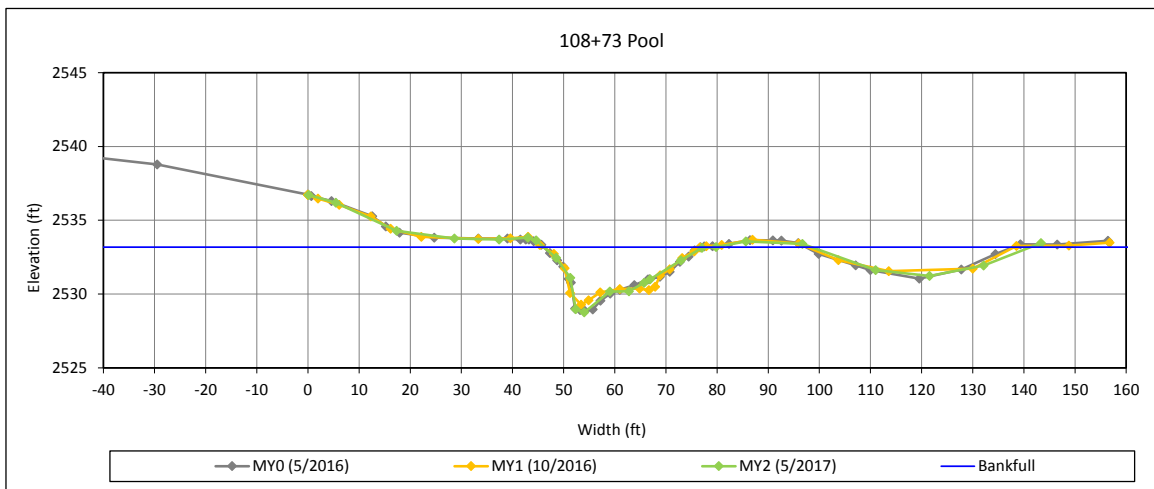

Bankfull Dimensions

66.9	x-section area (ft.sq.)
30.9	width (ft)
2.2	mean depth (ft)
4.4	max depth (ft)
33.2	wetted perimeter (ft)
2.0	hydraulic radius (ft)
14.3	width-depth ratio

Survey Date: 5/2017

Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 3- Little Pine Reach 1

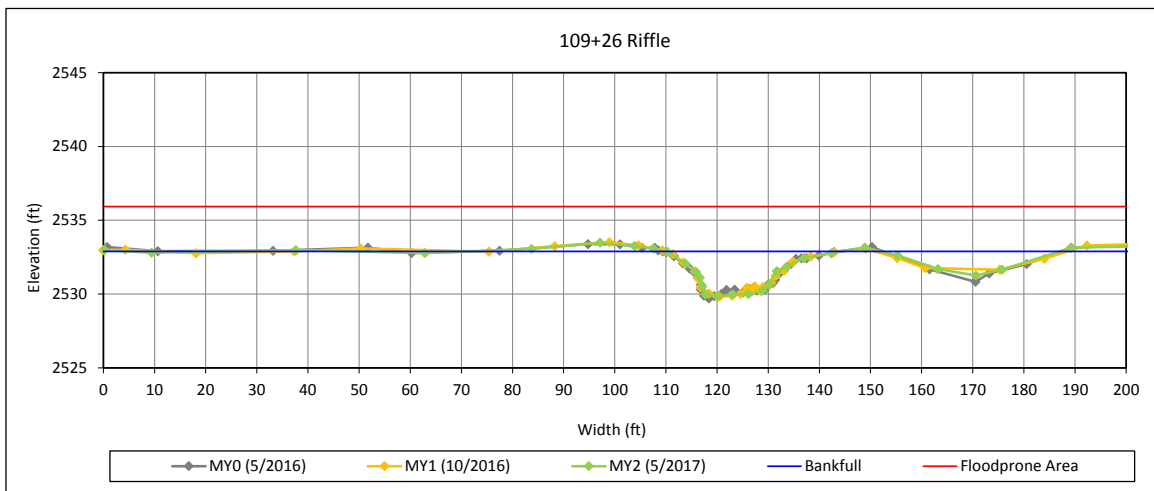

Bankfull Dimensions

52.2	x-section area (ft.sq.)
32.3	width (ft)
1.6	mean depth (ft)
3.0	max depth (ft)
33.5	wetted perimeter (ft)
1.6	hydraulic radius (ft)
20.0	width-depth ratio
200	W flood prone area (ft)
6.2	entrenchment ratio
0.9	low bank height ratio

Survey Date: 5/2017

Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 4 - Little Pine Reach 2a

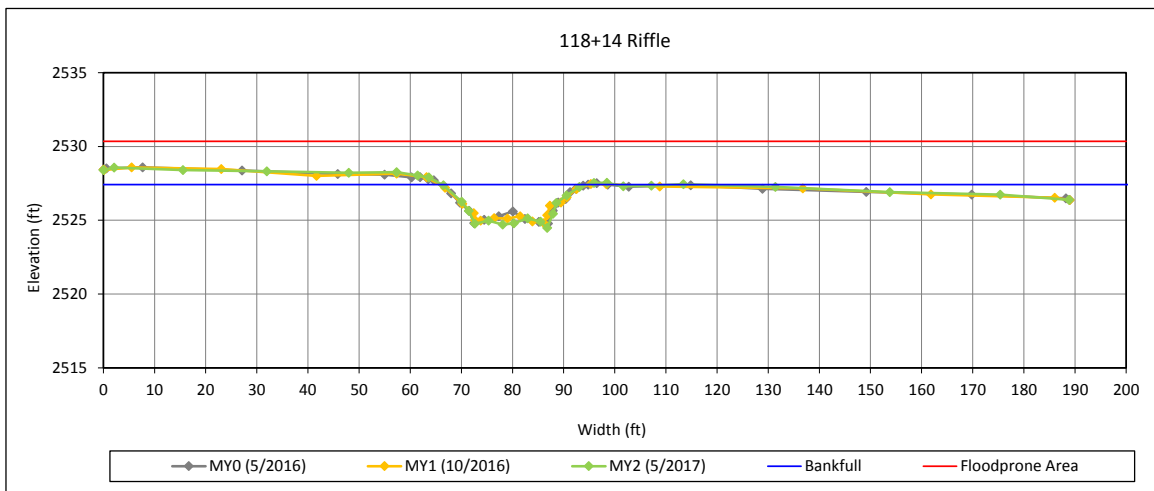

Bankfull Dimensions

49.8	x-section area (ft.sq.)
28.5	width (ft)
1.8	mean depth (ft)
2.9	max depth (ft)
30.0	wetted perimeter (ft)
1.7	hydraulic radius (ft)
16.2	width-depth ratio
200	W flood prone area (ft)
7.0	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2017

Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Cross-Section 5- Little Pine Reach 2a

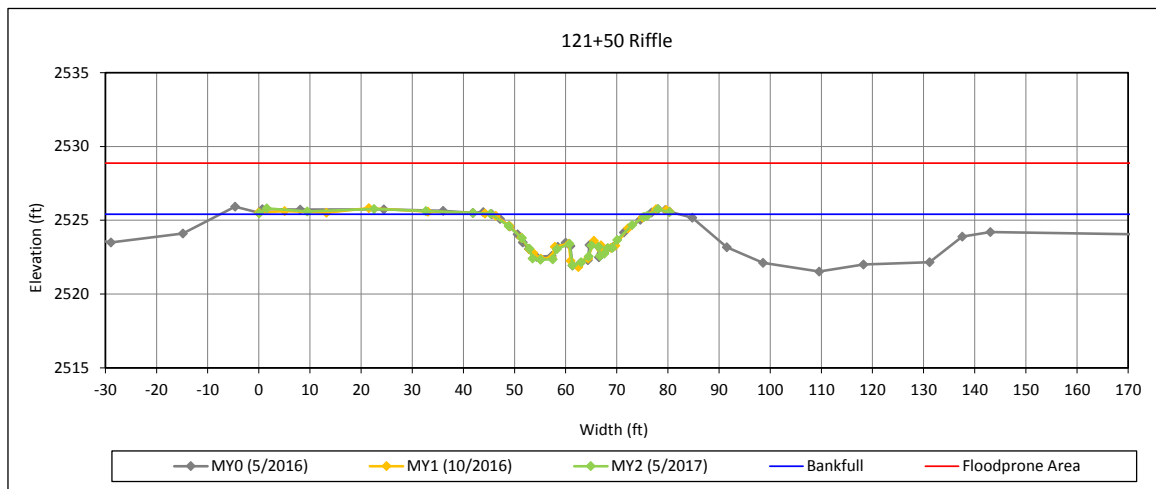

Bankfull Dimensions

58.2	x-section area (ft.sq.)
31.0	width (ft)
1.9	mean depth (ft)
3.5	max depth (ft)
34.3	wetted perimeter (ft)
1.7	hydraulic radius (ft)
16.5	width-depth ratio
200.0	W flood prone area (ft)
6.5	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2017

Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 6- Little Pine Reach 2a

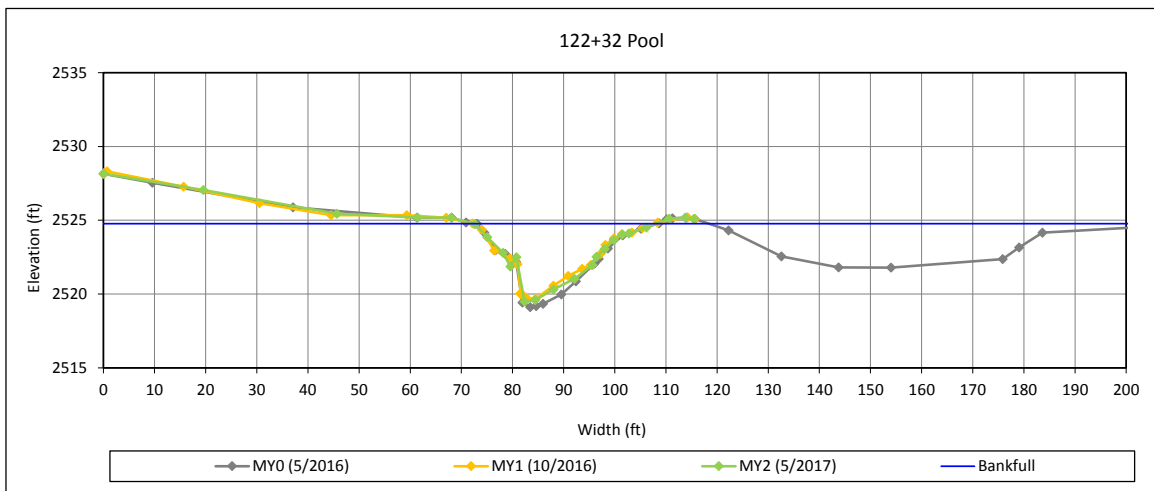

Bankfull Dimensions

86.5	x-section area (ft.sq.)
35.4	width (ft)
2.4	mean depth (ft)
5.3	max depth (ft)
38.7	wetted perimeter (ft)
2.2	hydraulic radius (ft)
14.5	width-depth ratio

Survey Date: 5/2017
Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 7 - Little Pine Reach 2b

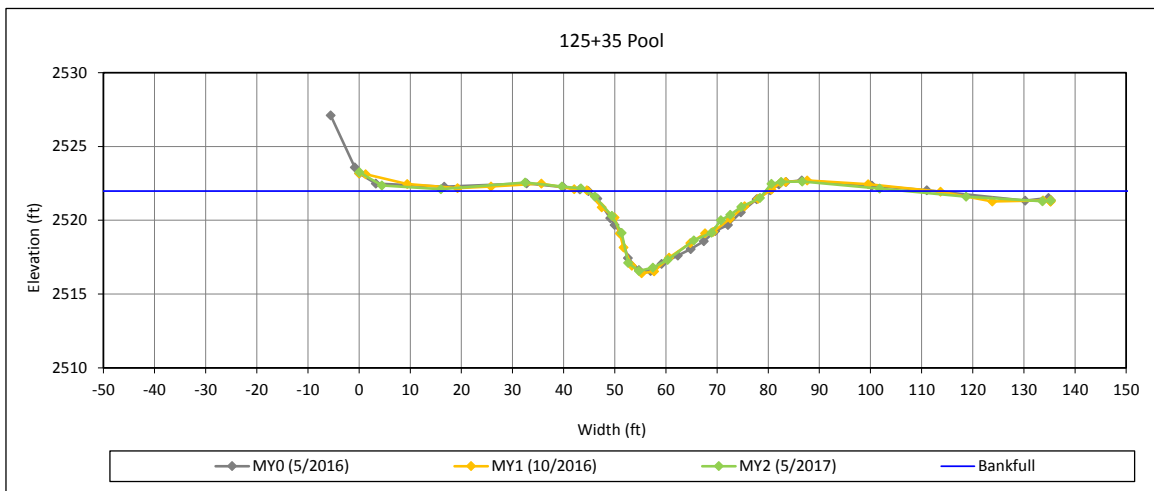

Bankfull Dimensions

97.2	x-section area (ft.sq.)
35.2	width (ft)
2.8	mean depth (ft)
5.4	max depth (ft)
37.7	wetted perimeter (ft)
2.6	hydraulic radius (ft)
12.7	width-depth ratio

Survey Date: 5/2017
Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 8 - Little Pine Reach 2b

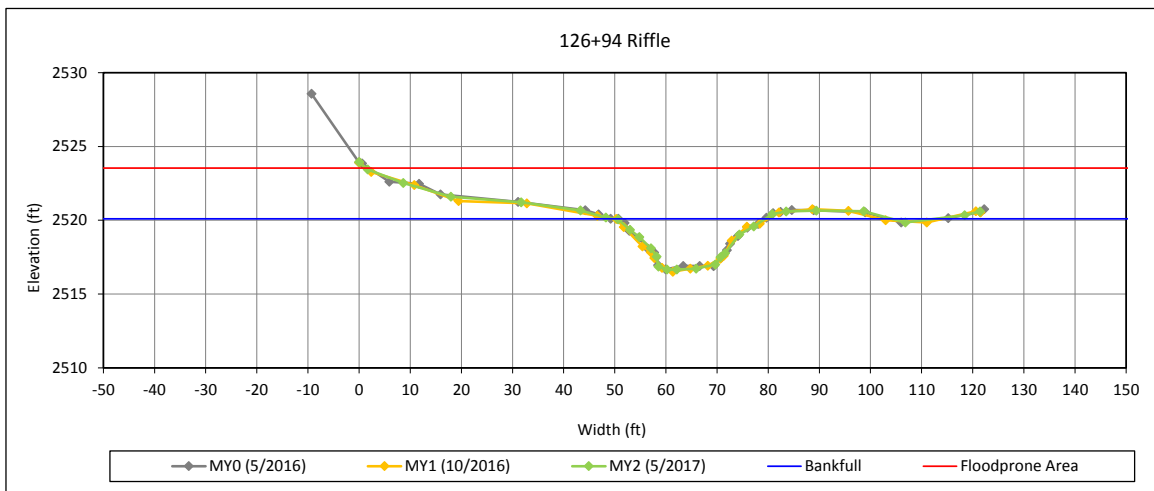

Bankfull Dimensions

59.8	x-section area (ft.sq.)
29.4	width (ft)
2.0	mean depth (ft)
3.4	max depth (ft)
30.8	wetted perimeter (ft)
1.9	hydraulic radius (ft)
14.4	width-depth ratio
200	W flood prone area (ft)
6.8	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2017

Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 9 - Little Pine Reach 2b

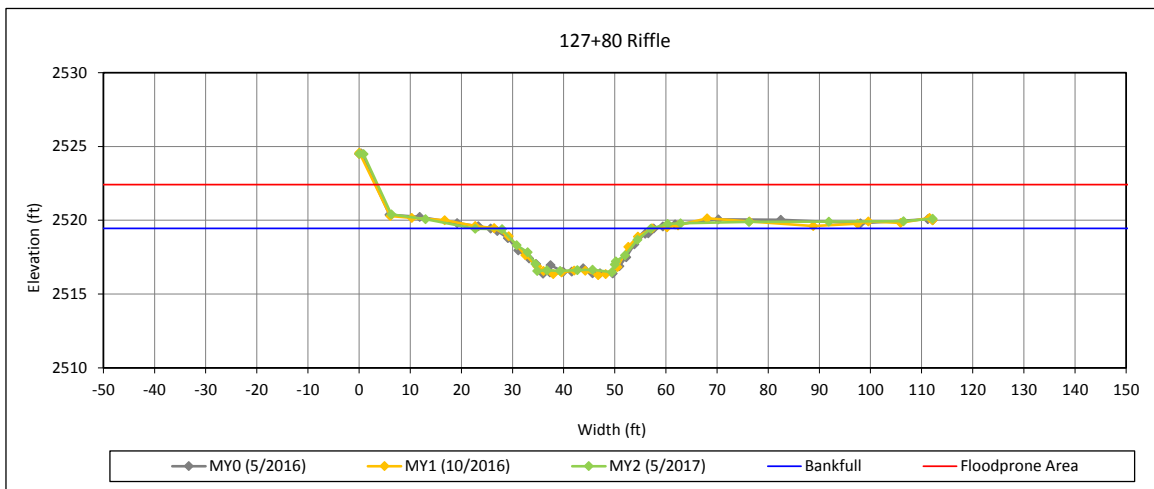

Bankfull Dimensions

60.2	x-section area (ft.sq.)
29.3	width (ft)
2.1	mean depth (ft)
3.0	max depth (ft)
30.6	wetted perimeter (ft)
2.0	hydraulic radius (ft)
14.2	width-depth ratio
200.0	W flood prone area (ft)
6.8	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2017

Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 10 - UT2b

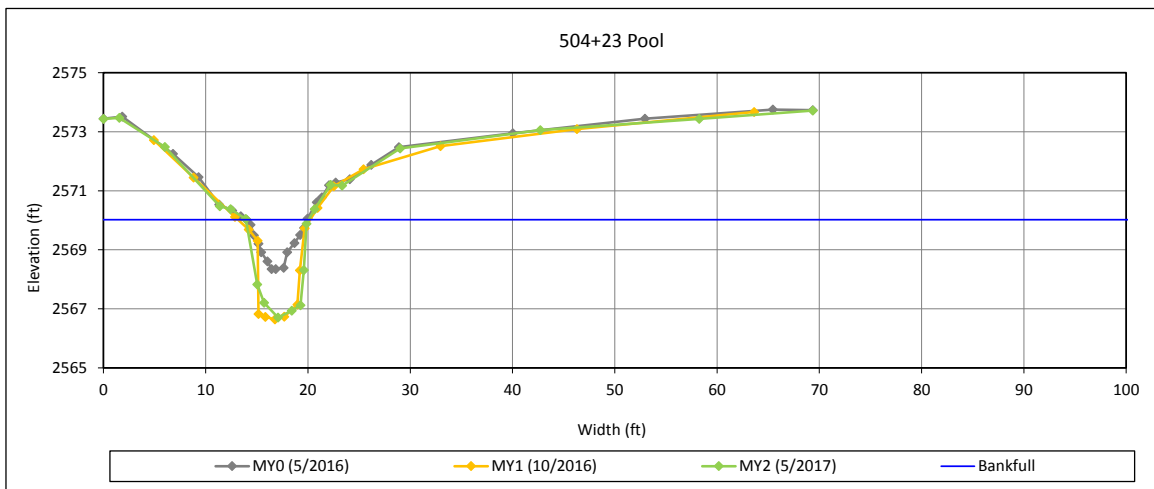

Bankfull Dimensions

14.9	x-section area (ft.sq.)
6.1	width (ft)
2.4	mean depth (ft)
3.3	max depth (ft)
10.1	wetted perimeter (ft)
1.5	hydraulic radius (ft)
2.5	width-depth ratio

Survey Date: 5/2017
Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
 DMS Project No. 94903
 Monitoring Year 2 - 2017

Cross-Section 11 - UT2b

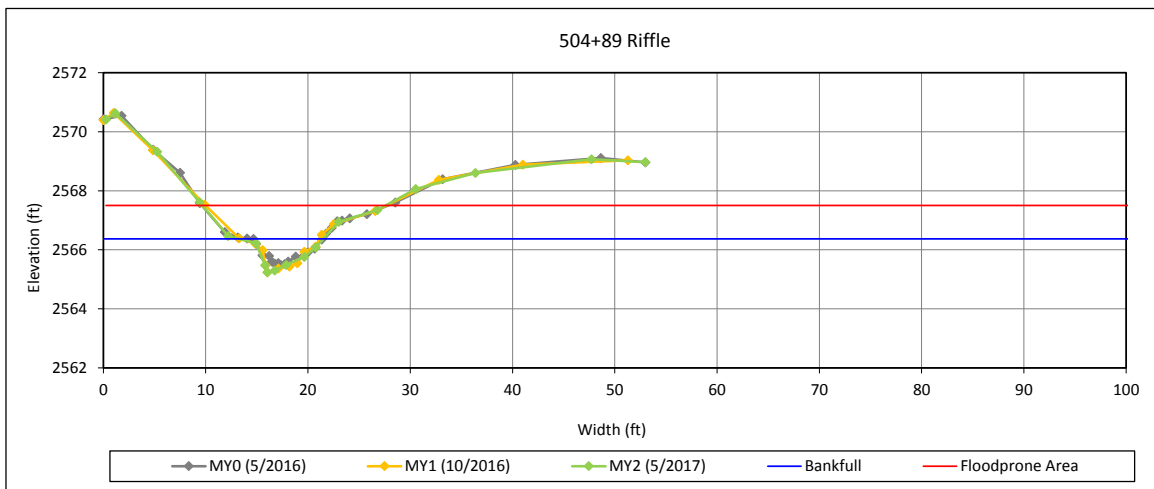

Bankfull Dimensions

- 4.5 x-section area (ft.sq.)
- 6.6 width (ft)
- 0.7 mean depth (ft)
- 1.1 max depth (ft)
- 7.1 wetted perimeter (ft)
- 0.6 hydraulic radius (ft)
- 9.6 width-depth ratio
- 17.9 W flood prone area (ft)
- 2.7 entrenchment ratio
- 0.9 low bank height ratio

Survey Date: 5/2017

Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
 DMS Project No. 94903
 Monitoring Year 2 - 2017

Cross-Section 12 - UT2

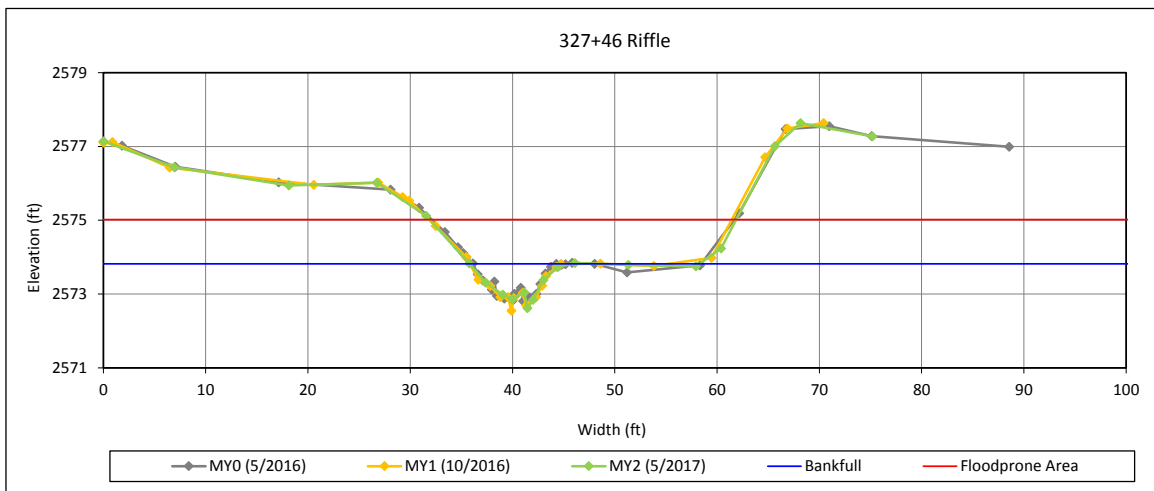

Bankfull Dimensions

- 5.4 x-section area (ft.sq.)
- 8.6 width (ft)
- 0.6 mean depth (ft)
- 1.2 max depth (ft)
- 9.2 wetted perimeter (ft)
- 0.6 hydraulic radius (ft)
- 13.9 width-depth ratio
- 30.0 W flood prone area (ft)
- 3.5 entrenchment ratio
- 0.9 low bank height ratio

Survey Date: 5/2017

Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 13 - UT2

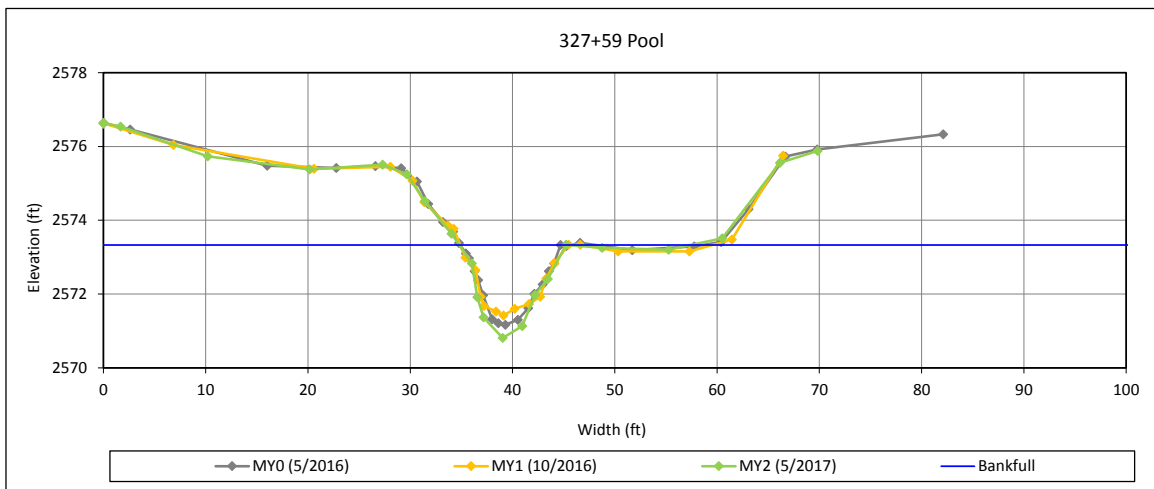

Bankfull Dimensions

15.0	x-section area (ft.sq.)
10.4	width (ft)
1.4	mean depth (ft)
2.5	max depth (ft)
11.9	wetted perimeter (ft)
1.3	hydraulic radius (ft)
7.3	width-depth ratio

Survey Date: 5/2017
Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 14 - UT2

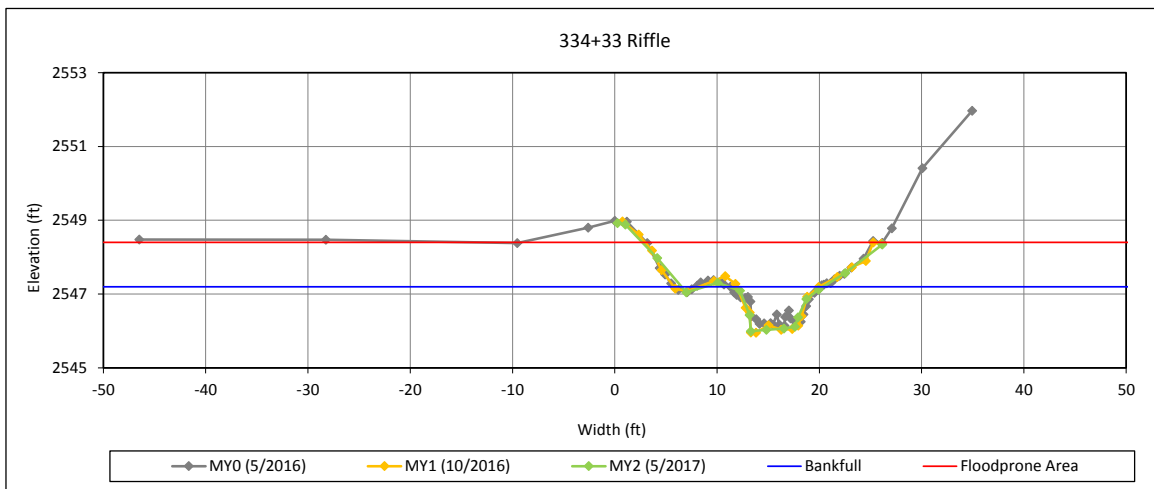

Bankfull Dimensions

6.6	x-section area (ft.sq.)
9.2	width (ft)
0.7	mean depth (ft)
1.2	max depth (ft)
10.0	wetted perimeter (ft)
0.7	hydraulic radius (ft)
13.0	width-depth ratio
23.5	W flood prone area (ft)
2.5	entrenchment ratio
0.9	low bank height ratio

Survey Date: 5/2017

Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 15 - UT2

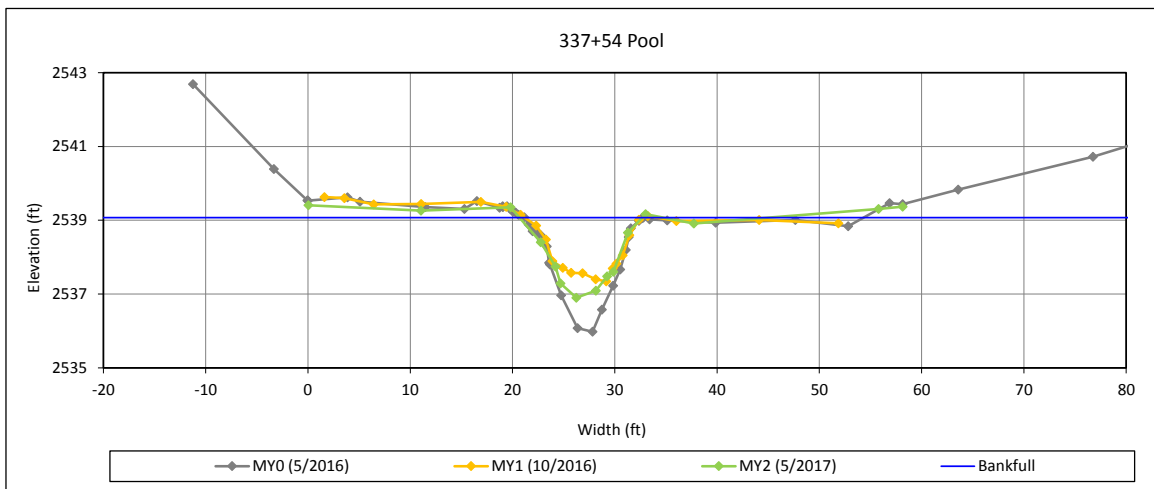

Bankfull Dimensions

14.4	x-section area (ft.sq.)
12.0	width (ft)
1.2	mean depth (ft)
2.2	max depth (ft)
13.0	wetted perimeter (ft)
1.1	hydraulic radius (ft)
10.0	width-depth ratio

Survey Date: 5/2017
Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 16 - UT2

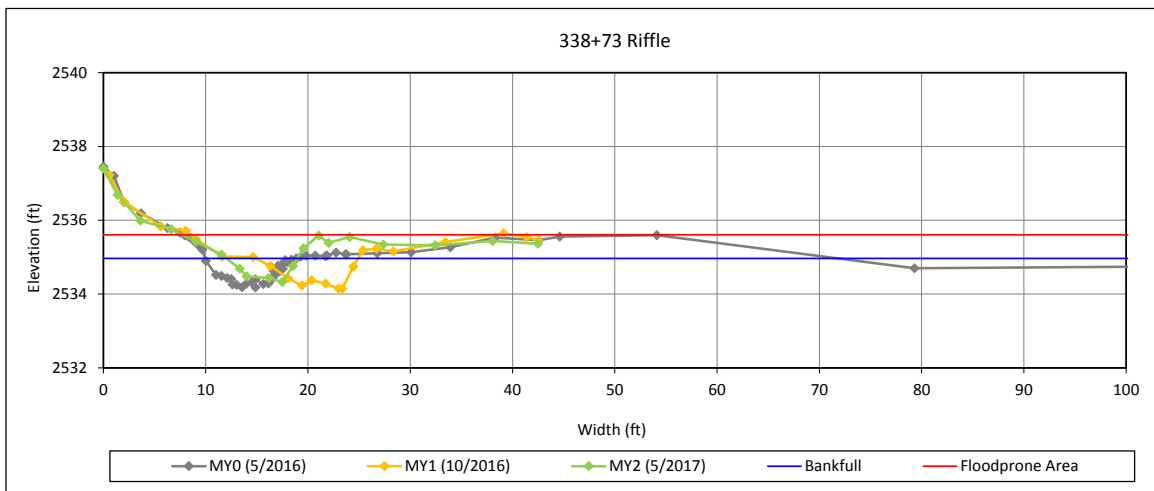

Bankfull Dimensions

- 2.8 x-section area (ft.sq.)
- 6.9 width (ft)
- 0.4 mean depth (ft)
- 0.6 max depth (ft)
- 7.1 wetted perimeter (ft)
- 0.4 hydraulic radius (ft)
- 17.1 width-depth ratio
- 200.0 W flood prone area (ft)
- 28.9 entrenchment ratio
- 1.2 low bank height ratio

Survey Date: 5/2017

Field Crew: Wildlands Engineering



View Downstream


Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Cross-Section 17 - UT2

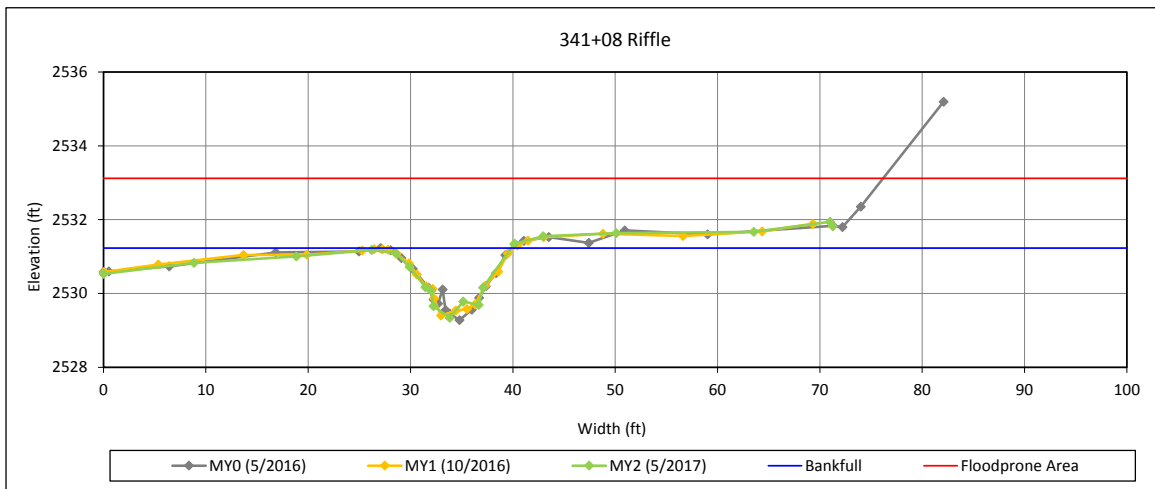

Bankfull Dimensions

12.0	x-section area (ft.sq.)
13.6	width (ft)
0.9	mean depth (ft)
1.9	max depth (ft)
14.5	wetted perimeter (ft)
0.8	hydraulic radius (ft)
15.4	width-depth ratio
200.0	W flood prone area (ft)
14.7	entrenchment ratio
1.0	low bank height ratio

Survey Date: 5/2017

Field Crew: Wildlands Engineering




View Downstream

Cross-Section Plots

Little Pine III Stream & Wetland Restoration Project
DMS Project No. 94903
Monitoring Year 2 - 2017

Cross-Section 18 - UT2

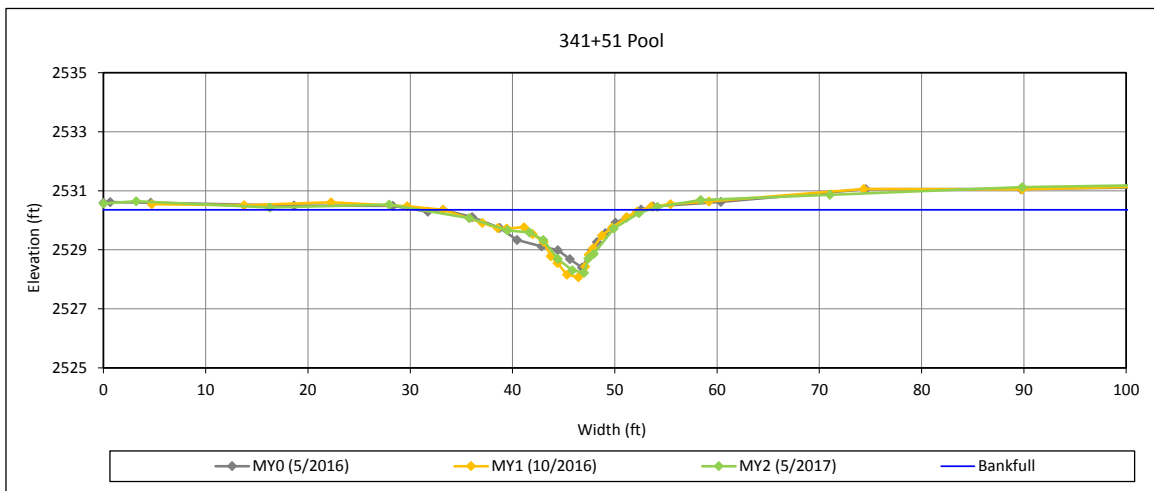

Bankfull Dimensions

16.9	x-section area (ft.sq.)
21.4	width (ft)
0.8	mean depth (ft)
2.1	max depth (ft)
22.1	wetted perimeter (ft)
0.8	hydraulic radius (ft)
27.2	width-depth ratio



View Downstream

Survey Date: 5/2017
Field Crew: Wildlands Engineering

Reachwide and Cross-Section Pebble Count Plots

Little Pine Creek III Stream & Wetland Restoration Project



DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 1, Reachwide

Particle Class		Diameter (mm)		Particle Count			Reach Summary	
		min	max	Riffle	Pool	Total	Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062		3	3	3	3
SAND	Very fine	0.062	0.125	1	11	12	12	15
	Fine	0.125	0.250	3	14	17	17	32
	Medium	0.25	0.50	1	4	5	5	37
	Coarse	0.5	1.0		1	1	1	38
	Very Coarse	1.0	2.0	1		1	1	39
GRAVEL	Very Fine	2.0	2.8	1		1	1	40
	Very Fine	2.8	4.0	2	3	5	5	45
	Fine	4.0	5.6	2		2	2	47
	Fine	5.6	8.0					47
	Medium	8.0	11.0	1	2	3	3	50
	Medium	11.0	16.0	2		2	2	52
	Coarse	16.0	22.6	2	2	4	4	56
	Coarse	22.6	32	2	2	4	4	60
	Very Coarse	32	45	6	4	10	10	70
	Very Coarse	45	64	7	1	8	8	78
COBBLE	Small	64	90	9	1	10	10	88
	Small	90	128	3	2	5	5	93
	Large	128	180	2		2	2	95
	Large	180	256	1		1	1	96
BOULDER	Small	256	362	3		3	3	99
	Small	362	512					99
	Medium	512	1024	1		1	1	100
	Large/Very Large	1024	2048					100
BEDROCK	Bedrock	2048	>2048					100
		Total		50	50	100	100	100

Reachwide Channel materials (mm)	
D ₁₆ =	0.13
D ₃₅ =	0.38
D ₅₀ =	11.0
D ₈₄ =	78.5
D ₉₅ =	180.0
D ₁₀₀ =	1024.0

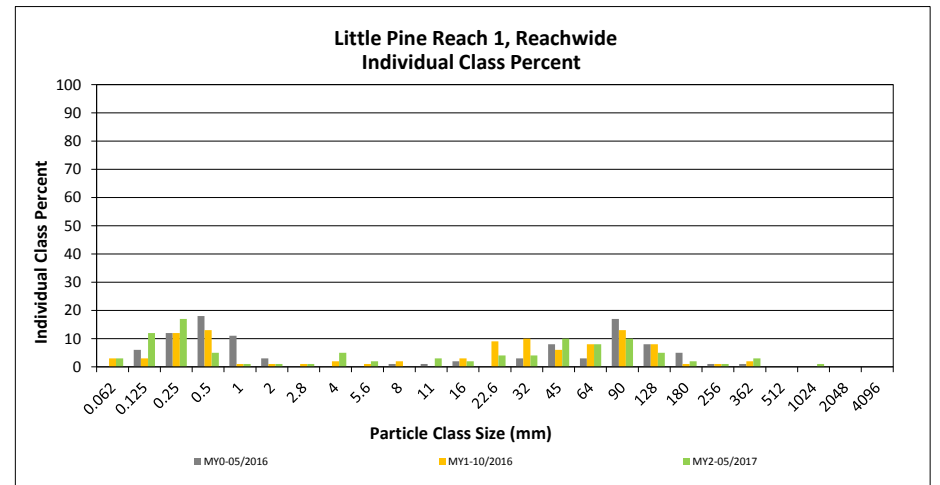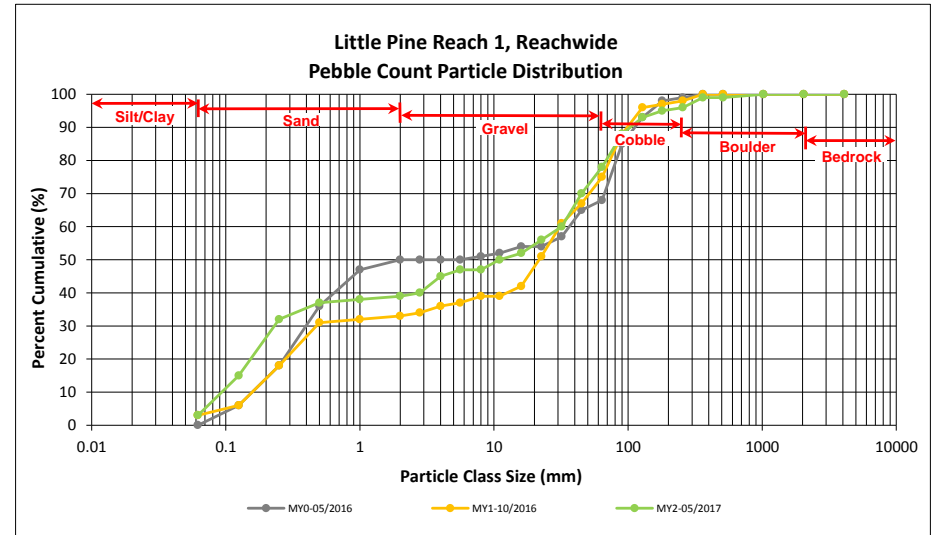

Reachwide and Cross-Section Pebble Count Plots

Little Pine Creek III Stream & Wetland Restoration Project



DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 1, Cross-Section 3

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062			0
SAND	Very fine	0.062	0.125			0
	Fine	0.125	0.250	2	4	4
	Medium	0.25	0.50	5	10	14
	Coarse	0.5	1.0			14
	Very Coarse	1.0	2.0	1	2	16
GRAVEL	Very Fine	2.0	2.8			16
	Very Fine	2.8	4.0			16
	Fine	4.0	5.6			16
	Fine	5.6	8.0			16
	Medium	8.0	11.0			16
	Medium	11.0	16.0			16
	Coarse	16.0	22.6	2	4	20
	Coarse	22.6	32	5	10	30
	Very Coarse	32	45	10	20	50
	Very Coarse	45	64	8	16	66
COBBLE	Small	64	90	11	22	88
	Small	90	128	2	4	92
	Large	128	180	1	2	94
	Large	180	256			94
BOULDER	Small	256	362	1	2	96
	Small	362	512	1	2	98
	Medium	512	1024	1	2	100
BEDROCK	Large/Very Large	1024	2048			100
	Bedrock	2048	>2048			100
Total				50	100	100

Cross Section 3	
Channel materials (mm)	
D ₁₆ =	2.00
D ₃₅ =	34.85
D ₅₀ =	45.0
D ₈₄ =	84.6
D ₉₅ =	304.4
D ₁₀₀ =	1024.0

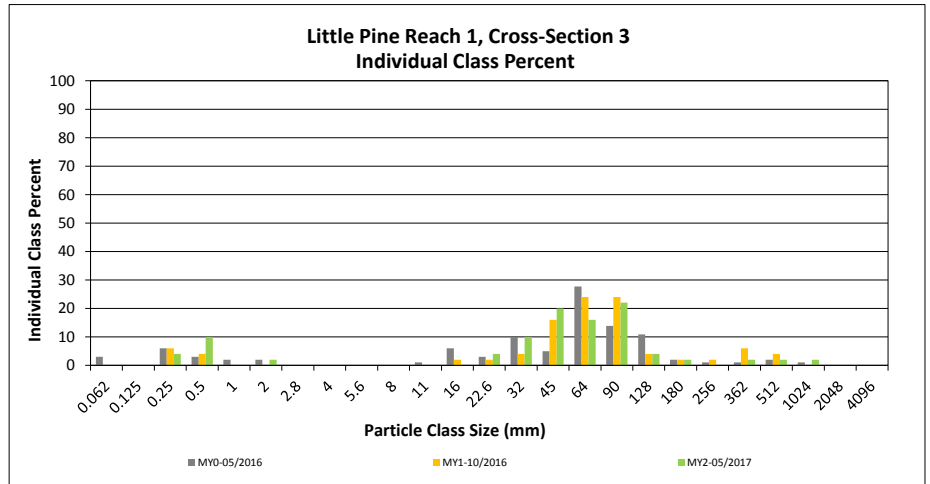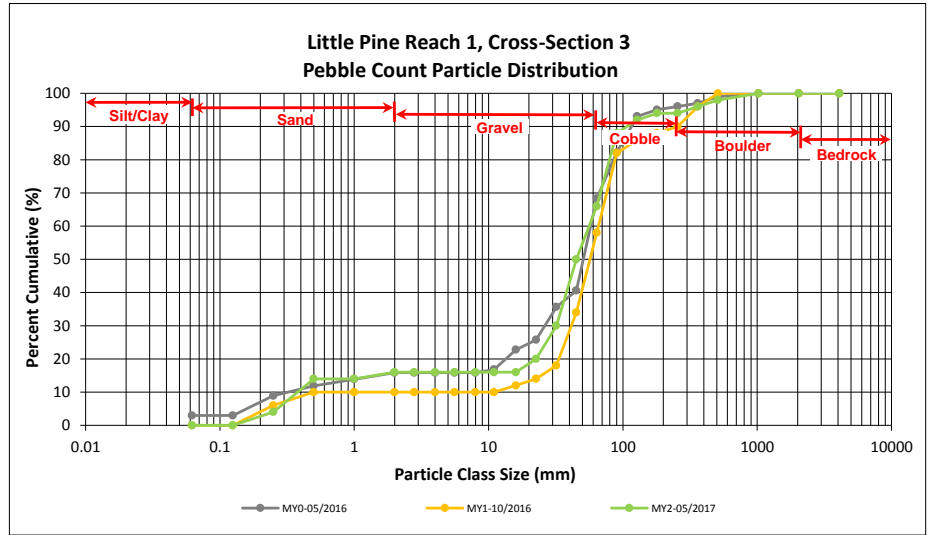

Reachwide and Cross-Section Pebble Count Plots

Little Pine Creek III Stream & Wetland Restoration Project



DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 2a, Reachwide

Particle Class		Diameter (mm)		Particle Count			Reach Summary	
		min	max	Riffle	Pool	Total	Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062		4	4	4	4
SAND	Very fine	0.062	0.125		5	5	5	9
	Fine	0.125	0.250		9	9	9	18
	Medium	0.25	0.50		7	7	7	25
	Coarse	0.5	1.0		2	2	2	27
	Very Coarse	1.0	2.0					27
GRAVEL	Very Fine	2.0	2.8					27
	Very Fine	2.8	4.0		1	1	1	28
	Fine	4.0	5.6					28
	Fine	5.6	8.0		2	2	2	30
	Medium	8.0	11.0	2	2	4	4	34
	Medium	11.0	16.0	2	1	3	3	37
	Coarse	16.0	22.6	5		5	5	42
	Coarse	22.6	32		1	1	1	43
	Very Coarse	32	45	1	1	2	2	45
	Very Coarse	45	64	8	3	11	11	56
COBBLE	Small	64	90	10	2	12	12	68
	Small	90	128	12	7	19	19	87
	Large	128	180	7	3	10	10	97
	Large	180	256	1		1	1	98
BOULDER	Small	256	362	1		1	1	99
	Small	362	512					99
	Medium	512	1024	1		1	1	100
	Large/Very Large	1024	2048					100
BEDROCK	Bedrock	2048	>2048					100
		Total		50	50	100	100	100

Reachwide Channel materials (mm)	
D ₁₆ =	0.21
D ₃₅ =	12.46
D ₅₀ =	52.8
D ₈₄ =	121.1
D ₉₅ =	168.1
D ₁₀₀ =	1024.0

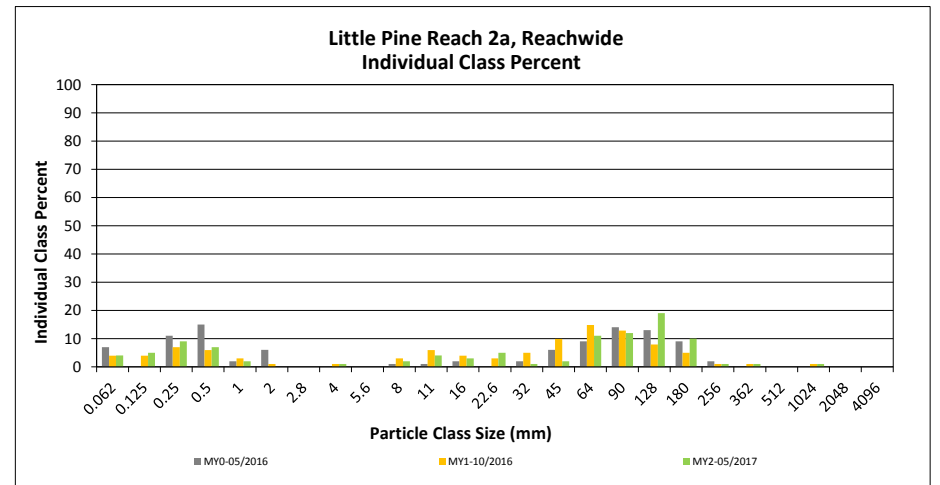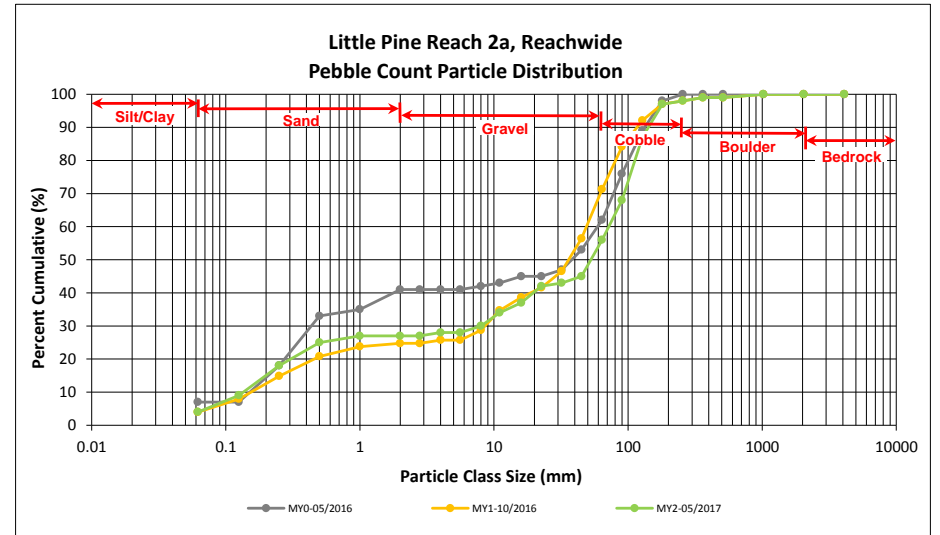

Reachwide and Cross-Section Pebble Count Plots

Little Pine Creek III Stream & Wetland Restoration Project



DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 2a, Cross-Section 5

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062			0
SAND	Very fine	0.062	0.125			0
	Fine	0.125	0.250	1	2	2
	Medium	0.25	0.50			2
	Coarse	0.5	1.0			2
	Very Coarse	1.0	2.0			2
GRAVEL	Very Fine	2.0	2.8			2
	Very Fine	2.8	4.0			2
	Fine	4.0	5.6			2
	Fine	5.6	8.0			2
	Medium	8.0	11.0			2
	Medium	11.0	16.0			2
	Coarse	16.0	22.6	6	12	14
	Coarse	22.6	32	2	4	18
	Very Coarse	32	45	3	6	24
	Very Coarse	45	64	8	16	40
COBBLE	Small	64	90	10	20	60
	Small	90	128	3	6	66
	Large	128	180	10	20	86
	Large	180	256	1	2	88
BOULDER	Small	256	362	4	8	96
	Small	362	512			96
	Medium	512	1024	2	4	100
BEDROCK	Large/Very Large	1024	2048			100
	Bedrock	2048	>2048			100
		Total		50	100	100

Cross Section 5 Channel materials (mm)	
D ₁₆ =	26.89
D ₃₅ =	57.33
D ₅₀ =	75.9
D ₈₄ =	174.0
D ₉₅ =	346.7
D ₁₀₀ =	1024.0

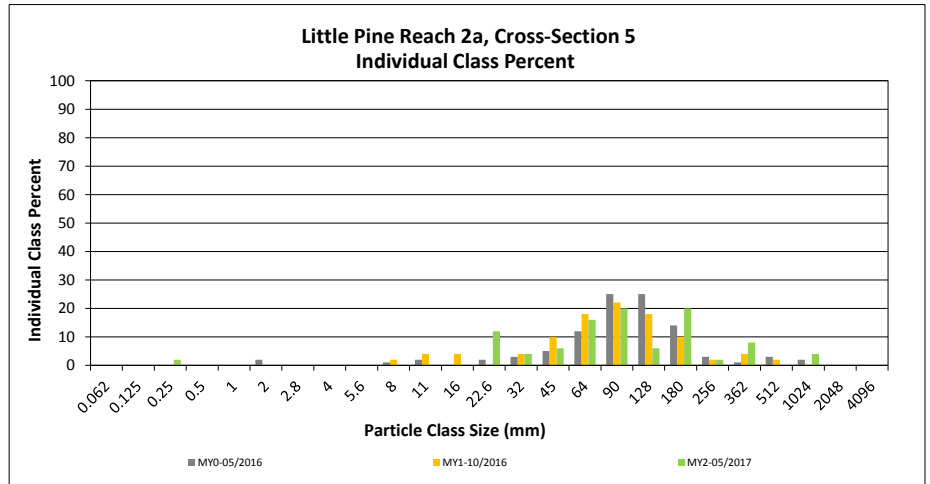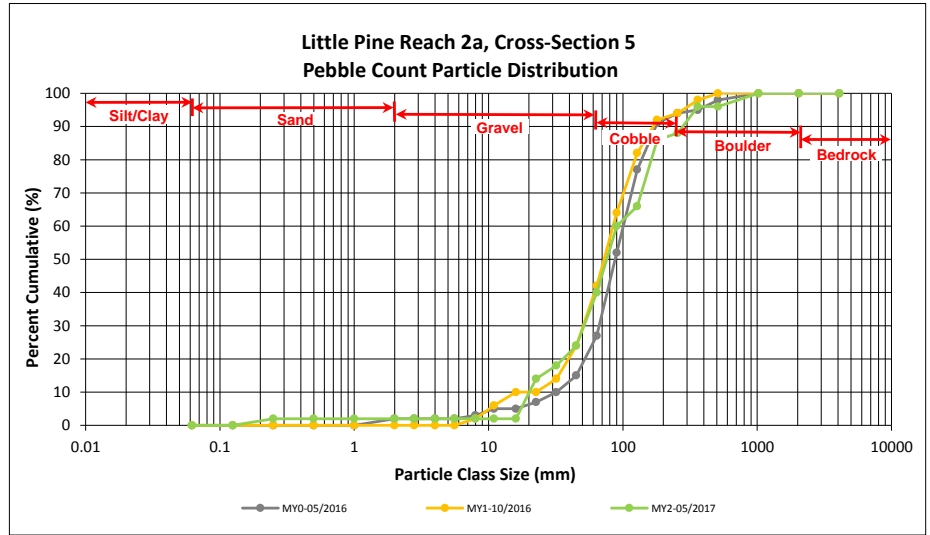

Reachwide and Cross-Section Pebble Count Plots

Little Pine Creek III Stream & Wetland Restoration Project



DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 2b, Reachwide

Particle Class		Diameter (mm)		Particle Count			Reach Summary	
		min	max	Riffle	Pool	Total	Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062	1	1	1	1	1
SAND	Very fine	0.062	0.125		8	8	8	9
	Fine	0.125	0.250		5	5	5	14
	Medium	0.25	0.50		7	7	7	21
	Coarse	0.5	1.0	1		1	1	22
	Very Coarse	1.0	2.0		1	1	1	23
GRAVEL	Very Fine	2.0	2.8					23
	Very Fine	2.8	4.0		3	3	3	26
	Fine	4.0	5.6	3	1	4	4	30
	Fine	5.6	8.0	2	3	5	5	35
	Medium	8.0	11.0	2	2	4	4	39
	Medium	11.0	16.0	1	2	3	3	42
	Coarse	16.0	22.6		3	3	3	45
	Coarse	22.6	32	4	3	7	7	52
	Very Coarse	32	45	2	6	8	8	60
	Very Coarse	45	64	6	6	12	12	72
COBBLE	Small	64	90	4	3	7	7	79
	Small	90	128	7	3	10	10	89
	Large	128	180	5	1	6	6	95
	Large	180	256	2	2	4	4	99
BOULDER	Small	256	362	1		1	1	100
	Small	362	512					100
	Medium	512	1024					100
	Large/Very Large	1024	2048					100
BEDROCK	Bedrock	2048	>2048					100
		Total		40	60	100	100	100

Reachwide Channel materials (mm)	
D ₁₆ =	0.30
D ₃₅ =	8.00
D ₅₀ =	29.0
D ₈₄ =	107.3
D ₉₅ =	180.0
D ₁₀₀ =	362.0

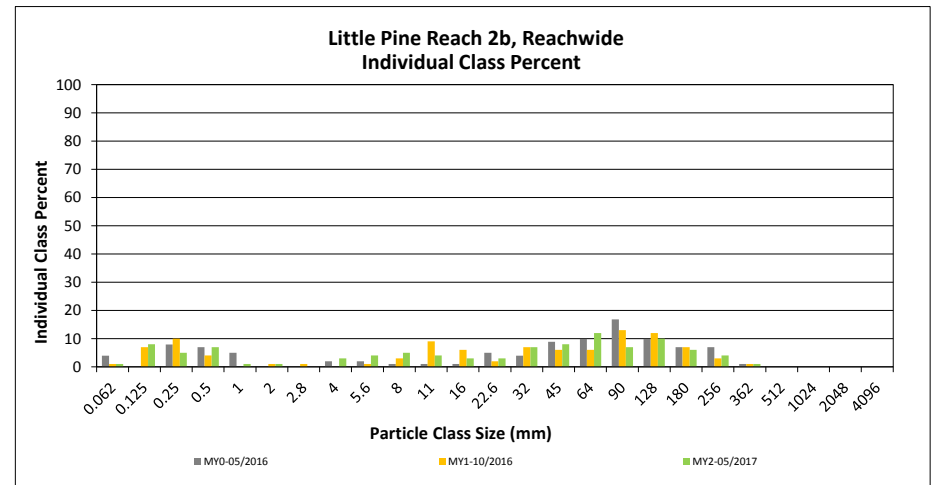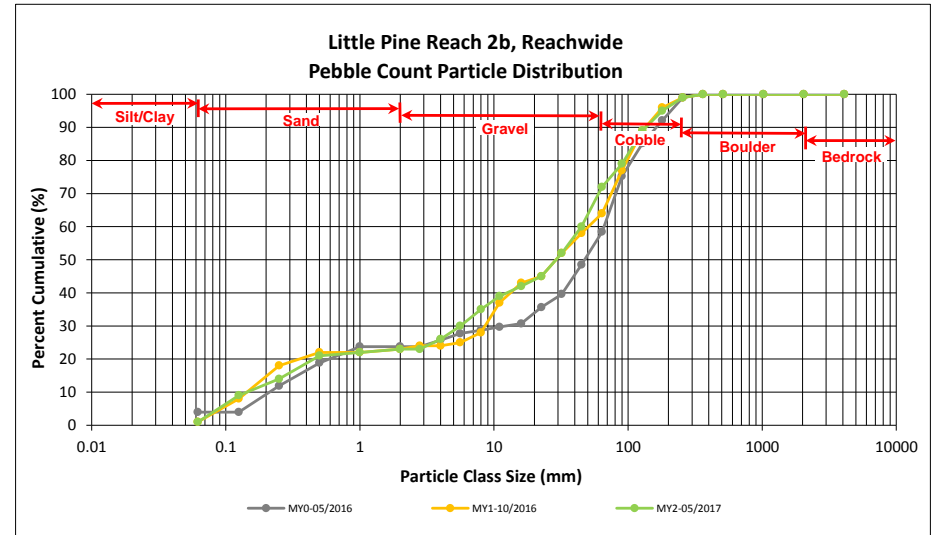

Reachwide and Cross-Section Pebble Count Plots

Little Pine Creek III Stream & Wetland Restoration Project



DMS Project No. 94903

Monitoring Year 2 - 2017

Little Pine Reach 2b, Cross-Section 9

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062			0
SAND	Very fine	0.062	0.125			0
	Fine	0.125	0.250	1	2	2
	Medium	0.25	0.50			2
	Coarse	0.5	1.0			2
	Very Coarse	1.0	2.0			2
GRAVEL	Very Fine	2.0	2.8			2
	Very Fine	2.8	4.0	2	4	6
	Fine	4.0	5.6	2	4	10
	Fine	5.6	8.0	1	2	12
	Medium	8.0	11.0	1	2	14
	Medium	11.0	16.0			14
	Coarse	16.0	22.6			14
	Coarse	22.6	32	4	8	22
	Very Coarse	32	45	6	12	34
	Very Coarse	45	64	5	10	44
COBBLE	Small	64	90	11	22	66
	Small	90	128	11	22	88
	Large	128	180	2	4	92
	Large	180	256	3	6	98
BOULDER	Small	256	362			98
	Small	362	512			98
	Medium	512	1024	1	2	100
BEDROCK	Large/Very Large	1024	2048			100
	Bedrock	2048	>2048			100
Total				50	100	100

Cross Section 9	
Channel materials (mm)	
D ₁₆ =	24.65
D ₃₅ =	46.61
D ₅₀ =	70.2
D ₈₄ =	120.1
D ₉₅ =	214.7
D ₁₀₀ =	1024.0

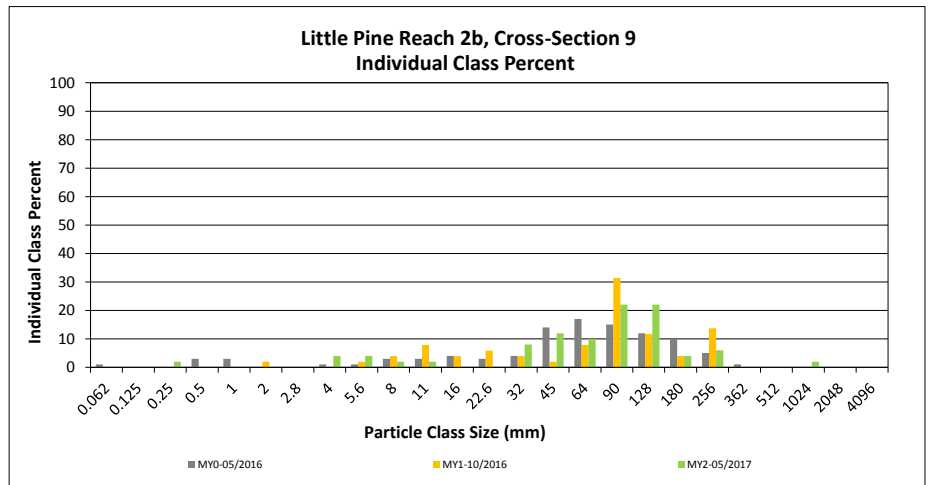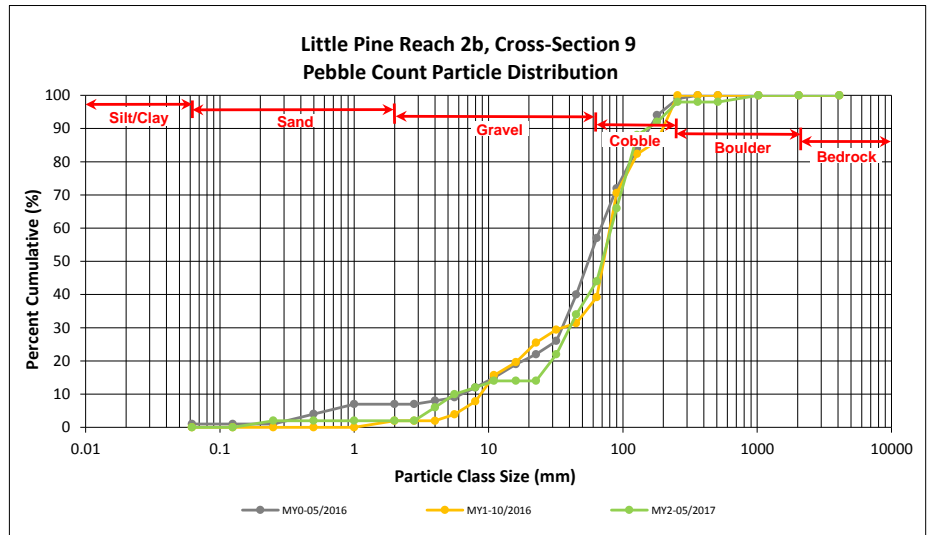

Reachwide and Cross-Section Pebble Count Plots

Little Pine Creek III Stream & Wetland Restoration Project



DMS Project No. 94903

Monitoring Year 2 - 2017

UT2, Reachwide

Particle Class		Diameter (mm)		Particle Count			Reach Summary	
		min	max	Riffle	Pool	Total	Class Percentage	Percent Cumulative
SILT/CLAY		Silt/Clay	0.000	0.062	1	1	1	1
SAND	Very fine	0.062	0.125	1	4	5	5	6
	Fine	0.125	0.250	3	3	6	6	12
	Medium	0.25	0.50		2	2	2	14
	Coarse	0.5	1.0	2	2	4	4	18
	Very Coarse	1.0	2.0		1	1	1	19
GRAVEL	Very Fine	2.0	2.8		1	1	1	20
	Very Fine	2.8	4.0	1	3	4	4	24
	Fine	4.0	5.6					24
	Fine	5.6	8.0	2	1	3	3	27
	Medium	8.0	11.0	6	2	8	8	35
	Medium	11.0	16.0	2	2	4	4	39
	Coarse	16.0	22.6	4	3	7	7	46
	Coarse	22.6	32	5	2	7	7	53
	Very Coarse	32	45	10	1	11	11	64
	Very Coarse	45	64	15	1	16	16	80
COBBLE	Small	64	90	8		8	8	88
	Small	90	128	9		9	9	97
	Large	128	180		1	1	1	98
	Large	180	256	2		2	2	100
BOULDER	Small	256	362					100
	Small	362	512					100
	Medium	512	1024					100
	Large/Very Large	1024	2048					100
BEDROCK	Bedrock	2048	>2048					100
Total				70	30	100	100	100

Reachwide Channel materials (mm)	
D ₁₆ =	0.7
D ₃₅ =	11.0
D ₅₀ =	27.6
D ₈₄ =	75.9
D ₉₅ =	118.4
D ₁₀₀ =	256.0

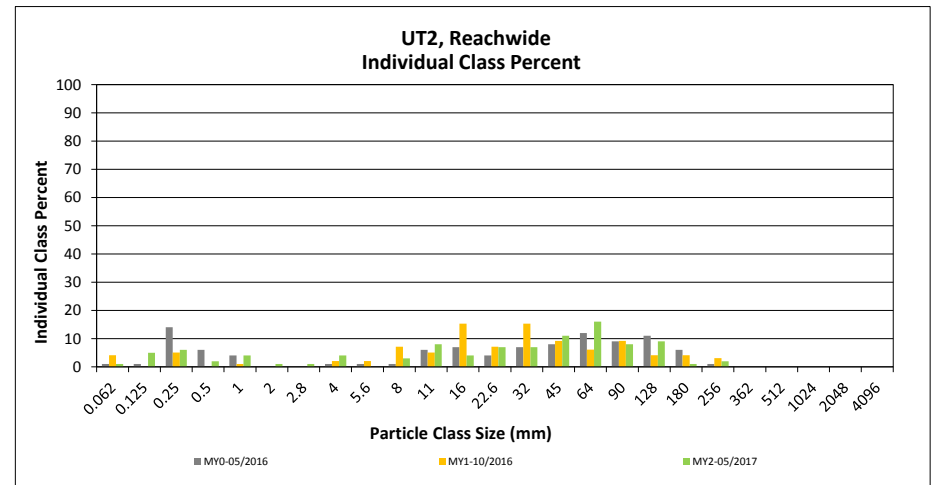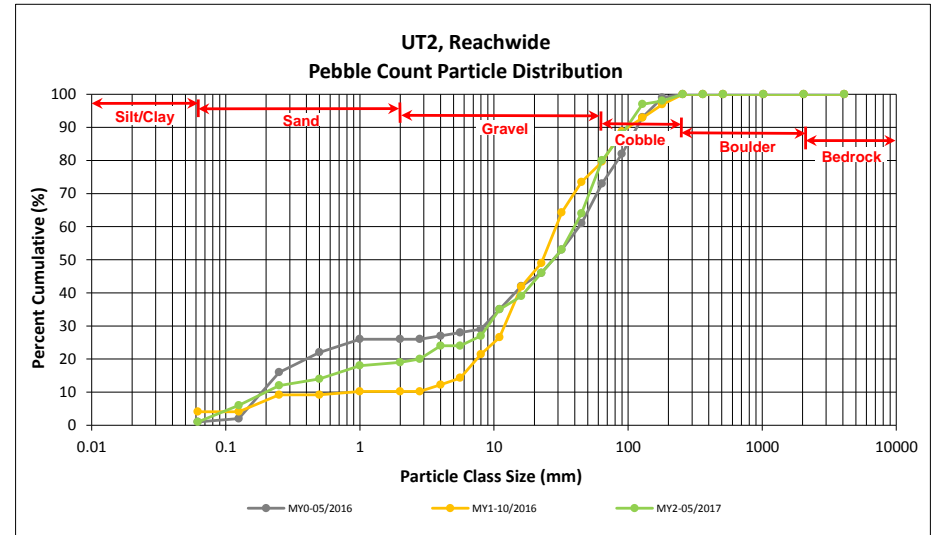

Reachwide and Cross-Section Pebble Count Plots

Little Pine Creek III Stream & Wetland Restoration Project



DMS Project No. 94903

Monitoring Year 2 - 2017

UT2, Cross-Section 12

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062			0
SAND	Very fine	0.062	0.125			0
	Fine	0.125	0.250	2	4	4
	Medium	0.25	0.50			4
	Coarse	0.5	1.0			4
	Very Coarse	1.0	2.0			4
GRAVEL	Very Fine	2.0	2.8			4
	Very Fine	2.8	4.0			4
	Fine	4.0	5.6			4
	Fine	5.6	8.0			4
	Medium	8.0	11.0			4
	Medium	11.0	16.0	3	6	10
	Coarse	16.0	22.6	8	16	26
	Coarse	22.6	32	7	14	40
	Very Coarse	32	45	9	18	58
Very Coarse	45	64	9	18	76	
COBBLE	Small	64	90	7	14	90
	Small	90	128	2	4	94
	Large	128	180	1	2	96
	Large	180	256	1	2	98
BOULDER	Small	256	362	1	2	100
	Small	362	512			100
	Medium	512	1024			100
BEDROCK	Large/Very Large	1024	2048			100
	Bedrock	2048	>2048			100
Total				50	100	100

Cross Section 12	
Channel materials (mm)	
D ₁₆ =	18.21
D ₃₅ =	28.26
D ₅₀ =	38.7
D ₈₄ =	77.8
D ₉₅ =	151.8
D ₁₀₀ =	362.0

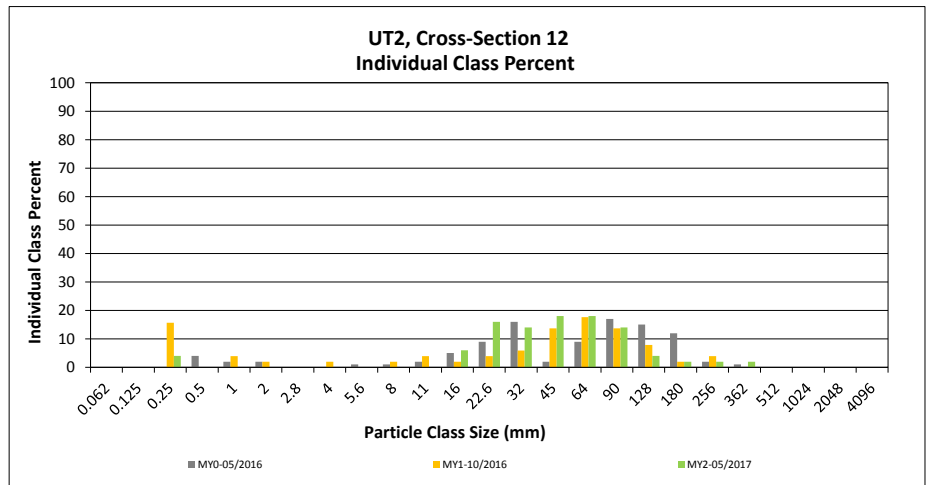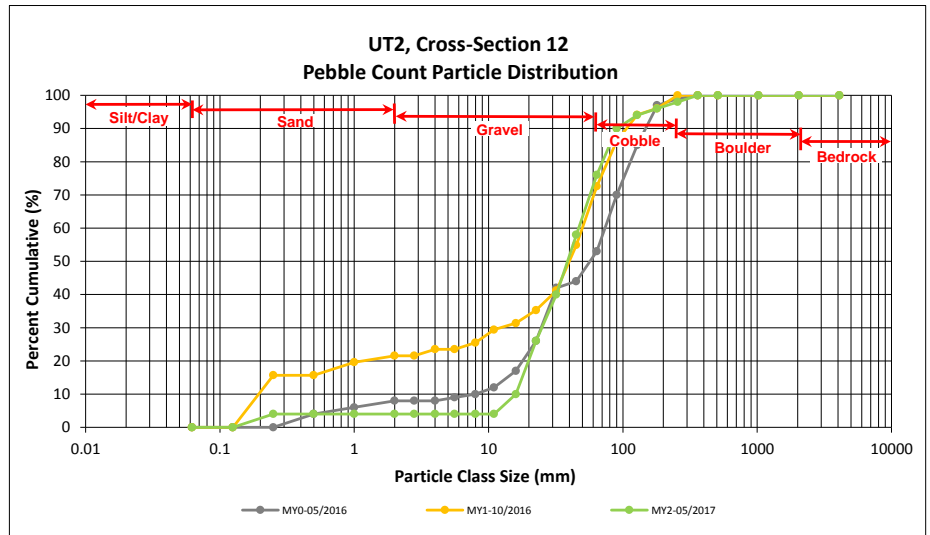

Reachwide and Cross-Section Pebble Count Plots

Little Pine Creek III Stream & Wetland Restoration Project



DMS Project No. 94903

Monitoring Year 2 - 2017

UT2, Cross-Section 14

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062			0
SAND	Very fine	0.062	0.125			0
	Fine	0.125	0.250			0
	Medium	0.25	0.50	1	2	2
	Coarse	0.5	1.0	3	6	8
	Very Coarse	1.0	2.0			8
GRAVEL	Very Fine	2.0	2.8			8
	Very Fine	2.8	4.0			8
	Fine	4.0	5.6			8
	Fine	5.6	8.0	2	4	12
	Medium	8.0	11.0	1	2	14
	Medium	11.0	16.0	3	6	20
	Coarse	16.0	22.6	6	12	32
	Coarse	22.6	32	7	14	46
COBBLE	Very Coarse	32	45	9	18	64
	Very Coarse	45	64	4	8	72
	Small	64	90	2	4	76
	Small	90	128	5	10	86
BOULDER	Large	128	180	2	4	90
	Large	180	256	5	10	100
BEDROCK	Small	256	362			100
	Small	362	512			100
	Medium	512	1024			100
BEDROCK	Large/Very Large	1024	2048			100
	Bedrock	2048	>2048			100
		Total		50	100	100

Cross Section 14	
Channel materials (mm)	
D ₁₆ =	12.46
D ₃₅ =	24.35
D ₅₀ =	34.5
D ₈₄ =	119.3
D ₉₅ =	214.7
D ₁₀₀ =	256.0

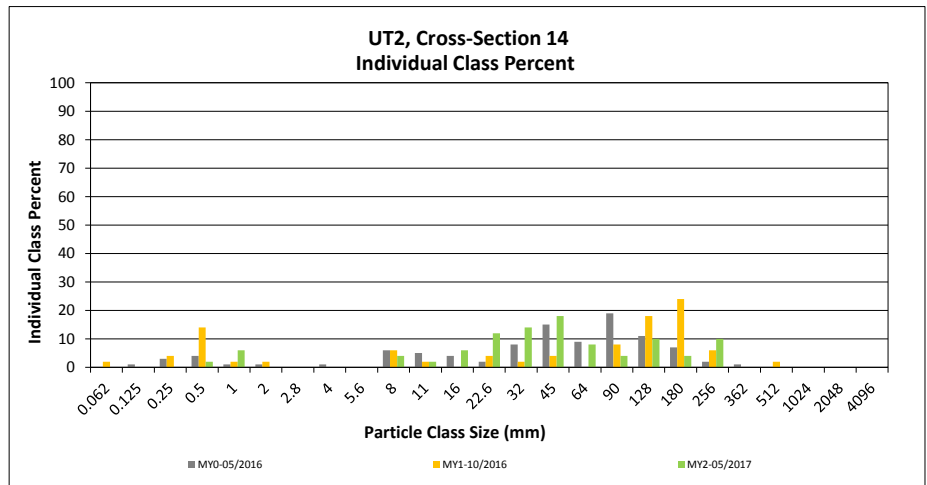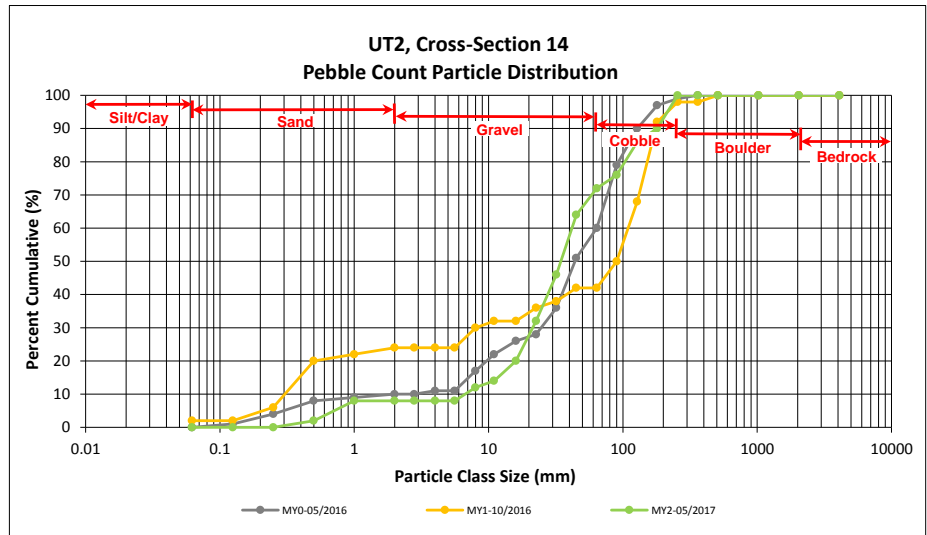

Reachwide and Cross-Section Pebble Count Plots

Little Pine Creek III Stream & Wetland Restoration Project



DMS Project No. 94903

Monitoring Year 2 - 2017

UT2, Cross-Section 17

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062			0
SAND	Very fine	0.062	0.125			0
	Fine	0.125	0.250	2	4	4
	Medium	0.25	0.50	1	2	6
	Coarse	0.5	1.0	2	4	10
	Very Coarse	1.0	2.0			10
GRAVEL	Very Fine	2.0	2.8			10
	Very Fine	2.8	4.0			10
	Fine	4.0	5.6	1	2	12
	Fine	5.6	8.0	2	4	16
	Medium	8.0	11.0	2	4	20
	Medium	11.0	16.0	4	8	28
	Coarse	16.0	22.6	2	4	32
	Coarse	22.6	32	8	16	48
	Very Coarse	32	45	4	8	56
	Very Coarse	45	64	5	10	66
COBBLE	Small	64	90	3	6	72
	Small	90	128	5	10	82
	Large	128	180	4	8	90
	Large	180	256	2	4	94
BOULDER	Small	256	362	2	4	98
	Small	362	512	1	2	100
	Medium	512	1024			100
BEDROCK	Large/Very Large	1024	2048			100
	Bedrock	2048	>2048			100
Total				50	100	100

Cross Section 17	
Channel materials (mm)	
D ₁₆ =	8.00
D ₃₅ =	24.12
D ₅₀ =	34.8
D ₈₄ =	139.4
D ₉₅ =	279.2
D ₁₀₀ =	512.0

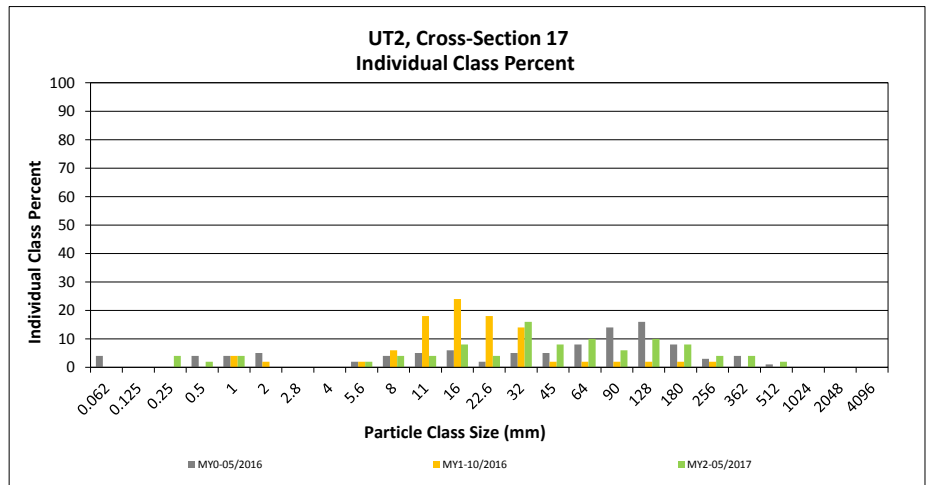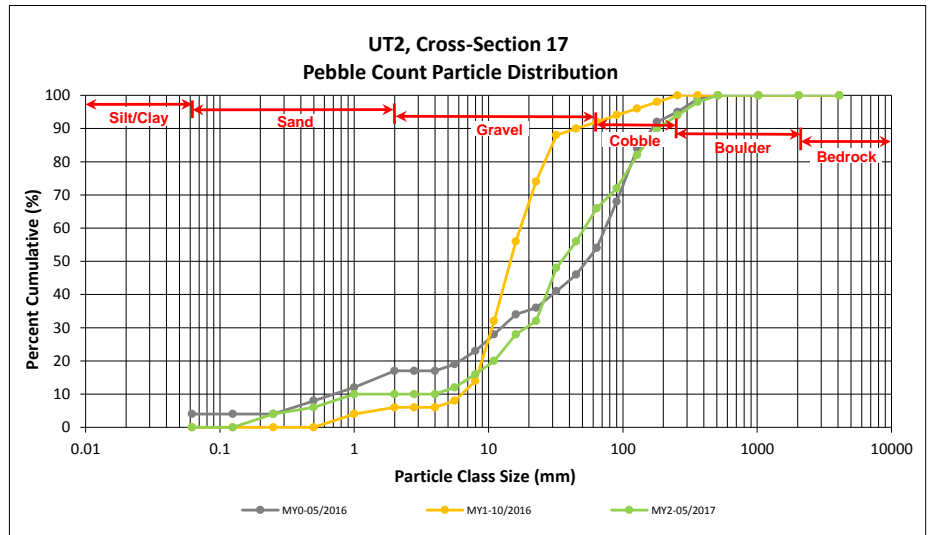

Reachwide and Cross-Section Pebble Count Plots

Little Pine Creek III Stream & Wetland Restoration Project



DMS Project No. 94903

Monitoring Year 2 - 2017

UT2b, Reachwide

Particle Class		Diameter (mm)		Particle Count			Reach Summary	
		min	max	Riffle	Pool	Total	Class Percentage	Percent Cumulative
SILT/CLAY		Silt/Clay	0.000	0.062	1	1	1	1
SAND	Very fine	0.062	0.125	3	1	4	4	5
	Fine	0.125	0.250	4	2	6	6	11
	Medium	0.25	0.50	3	2	5	5	16
	Coarse	0.5	1.0		2	2	2	18
	Very Coarse	1.0	2.0		1	1	1	19
GRAVEL	Very Fine	2.0	2.8					19
	Very Fine	2.8	4.0		1	1	1	20
	Fine	4.0	5.6	1	1	2	2	22
	Fine	5.6	8.0		6	6	6	28
	Medium	8.0	11.0	2	2	4	4	32
	Medium	11.0	16.0	3	3	6	6	38
	Coarse	16.0	22.6	5	5	10	10	48
	Coarse	22.6	32	4	1	5	5	53
	Very Coarse	32	45	12	3	15	15	68
	Very Coarse	45	64	7		7	7	75
COBBLE	Small	64	90	10		10	10	85
	Small	90	128	9		9	9	94
	Large	128	180	3		3	3	97
	Large	180	256	3		3	3	100
BOULDER	Small	256	362					100
	Small	362	512					100
	Medium	512	1024					100
	Large/Very Large	1024	2048					100
BEDROCK	Bedrock	2048	>2048					100
		Total		70	30	100	100	100

Reachwide Channel materials (mm)	
D ₁₆ =	0.50
D ₃₅ =	13.27
D ₅₀ =	26.0
D ₈₄ =	87.0
D ₉₅ =	143.4
D ₁₀₀ =	256.0

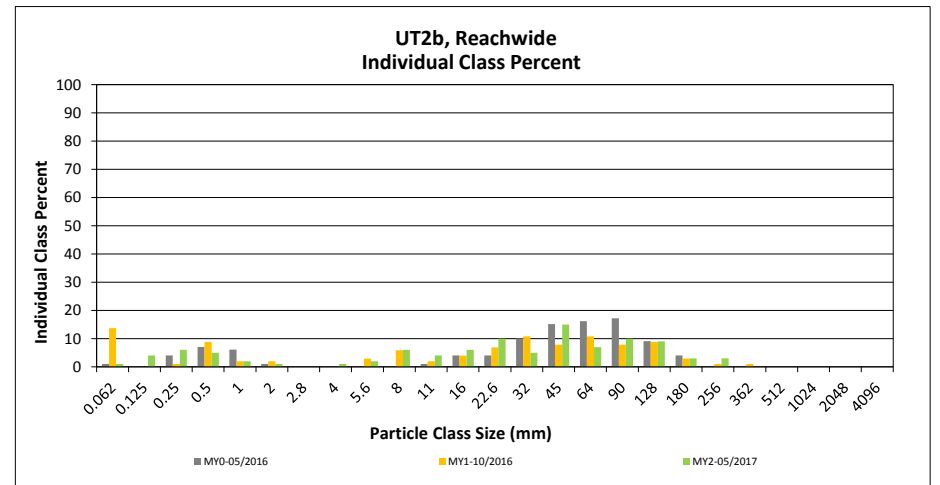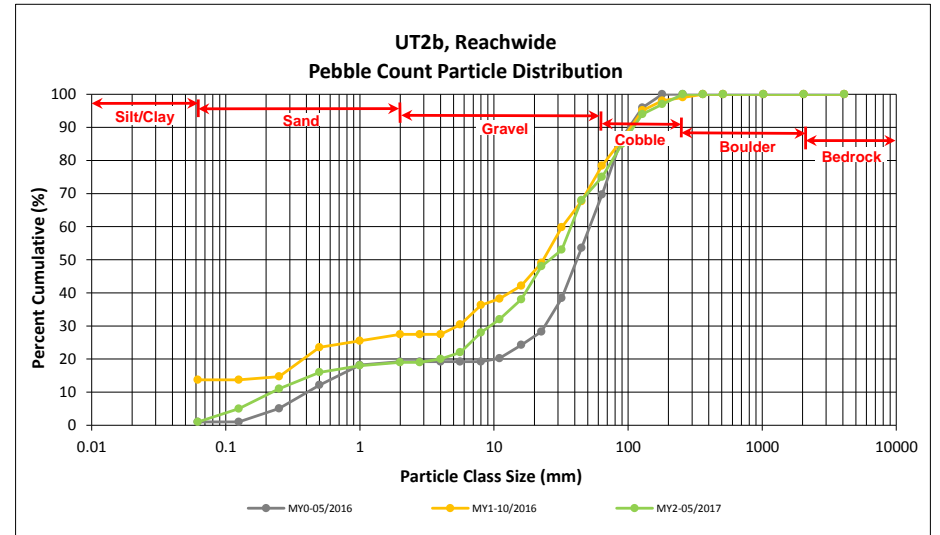

Reachwide and Cross-Section Pebble Count Plots

Little Pine Creek III Stream & Wetland Restoration Project



DMS Project No. 94903

Monitoring Year 2 - 2017

UT2b, Cross-Section 11

Particle Class		Diameter (mm)		Riffle 100-Count	Summary	
		min	max		Class Percentage	Percent Cumulative
SILT/CLAY	Silt/Clay	0.000	0.062			0
SAND	Very fine	0.062	0.125			0
	Fine	0.125	0.250	1	2	2
	Medium	0.25	0.50			2
	Coarse	0.5	1.0			2
	Very Coarse	1.0	2.0	2	4	6
GRAVEL	Very Fine	2.0	2.8			6
	Very Fine	2.8	4.0	1	2	8
	Fine	4.0	5.6	2	4	12
	Fine	5.6	8.0	3	6	18
	Medium	8.0	11.0	1	2	20
	Medium	11.0	16.0	3	6	26
	Coarse	16.0	22.6	7	14	40
	Coarse	22.6	32	5	10	50
	Very Coarse	32	45	2	4	54
	Very Coarse	45	64	3	6	60
COBBLE	Small	64	90	4	8	68
	Small	90	128	5	10	78
	Large	128	180	8	16	94
	Large	180	256	3	6	100
BOULDER	Small	256	362			100
	Small	362	512			100
	Medium	512	1024			100
BEDROCK	Large/Very Large	1024	2048			100
	Bedrock	2048	>2048			100
		Total		50	100	100

Cross Section 11	
Channel materials (mm)	
D ₁₆ =	7.10
D ₃₅ =	19.98
D ₅₀ =	32.0
D ₈₄ =	145.5
D ₉₅ =	190.9
D ₁₀₀ =	256.0

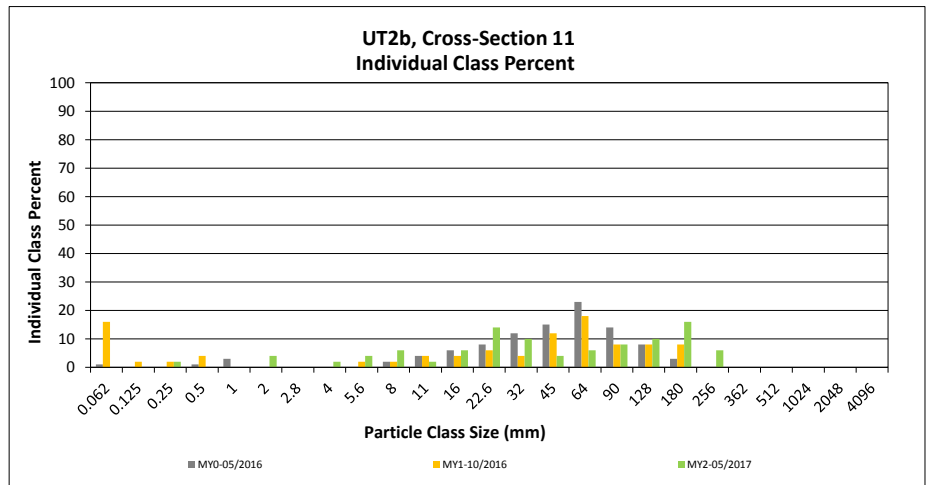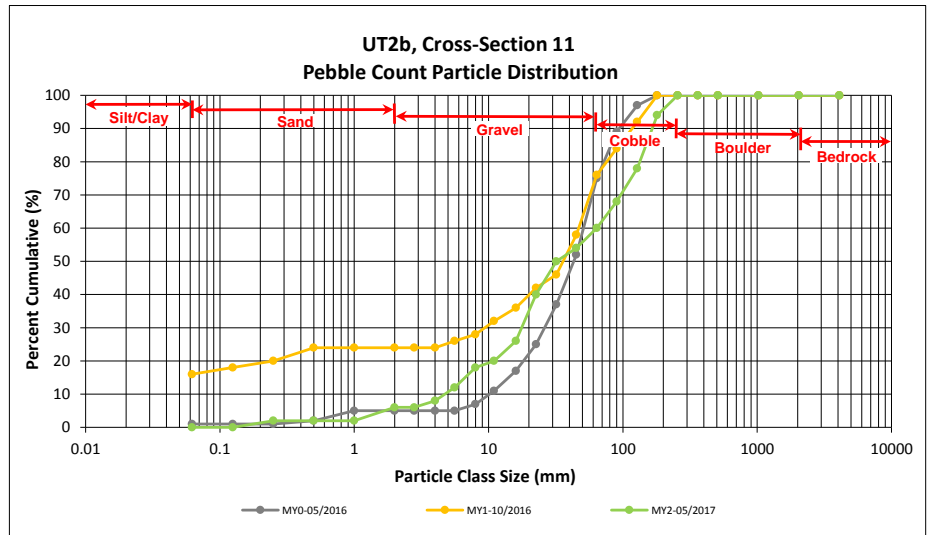

APPENDIX 5. Hydrology Summary Data and Plots

Table 14. Verification of Bankfull Events

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Reach	Year of Occurrence	Date of Data Collection	Date of Occurrence	Method
Little Pine	MY1	9/25/2016	unknown	Crest Gage
	MY2	5/23/2017	unknown	Wrack Lines and alluvial sediment deposit
UT2	MY1	10/5/2016	unknown	Crest Gage
	MY2	5/23/2017	unknown	Crest Gage
UT2B	MY1	9/27/2016	unknown	Crest Gage

Table 15. Wetland Gage Attainment Summary

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

Summary of Groundwater Gage Results for MY2					
Gage	Success Criteria Achieved/Max Consecutive Days During Growing Season ¹ (%)				
	Year 1 (2016)	Year 2 (2017)	Year 3 (2018)	Year 4 (2019)	Year 5 (2020)
Wetland FF	Yes/112 Days (66.6%)	Yes/169 Days (100%)			

No wetland success criteria established


¹Growing season starts April 26, 2017 and ends October 11, 2017.

Groundwater Gage Plots

Little Pine III Stream & Wetland Mitigation Project
DMS Project No. 94903

Monitoring Year 2 - 2017

Wetland FF

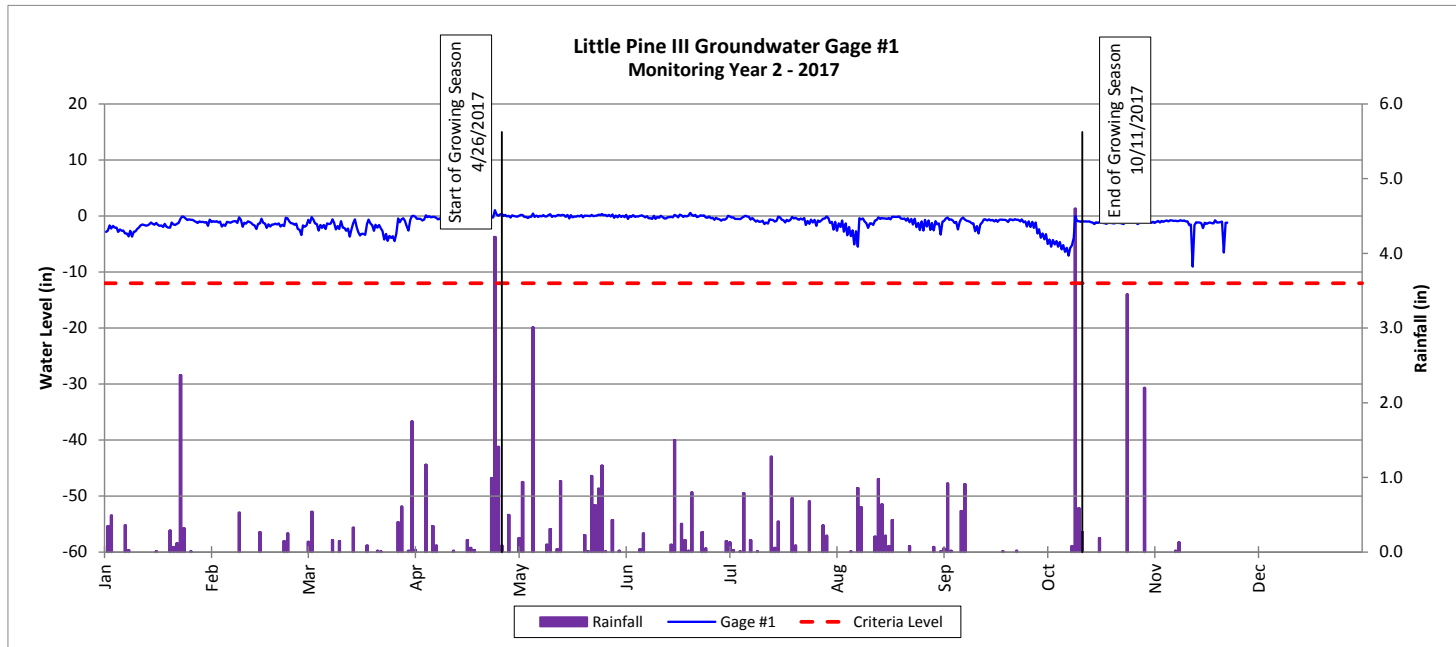


Monthly Rainfall Data

Little Pine III Stream & Wetland Restoration Project

DMS Project No. 94903

Monitoring Year 2 - 2017

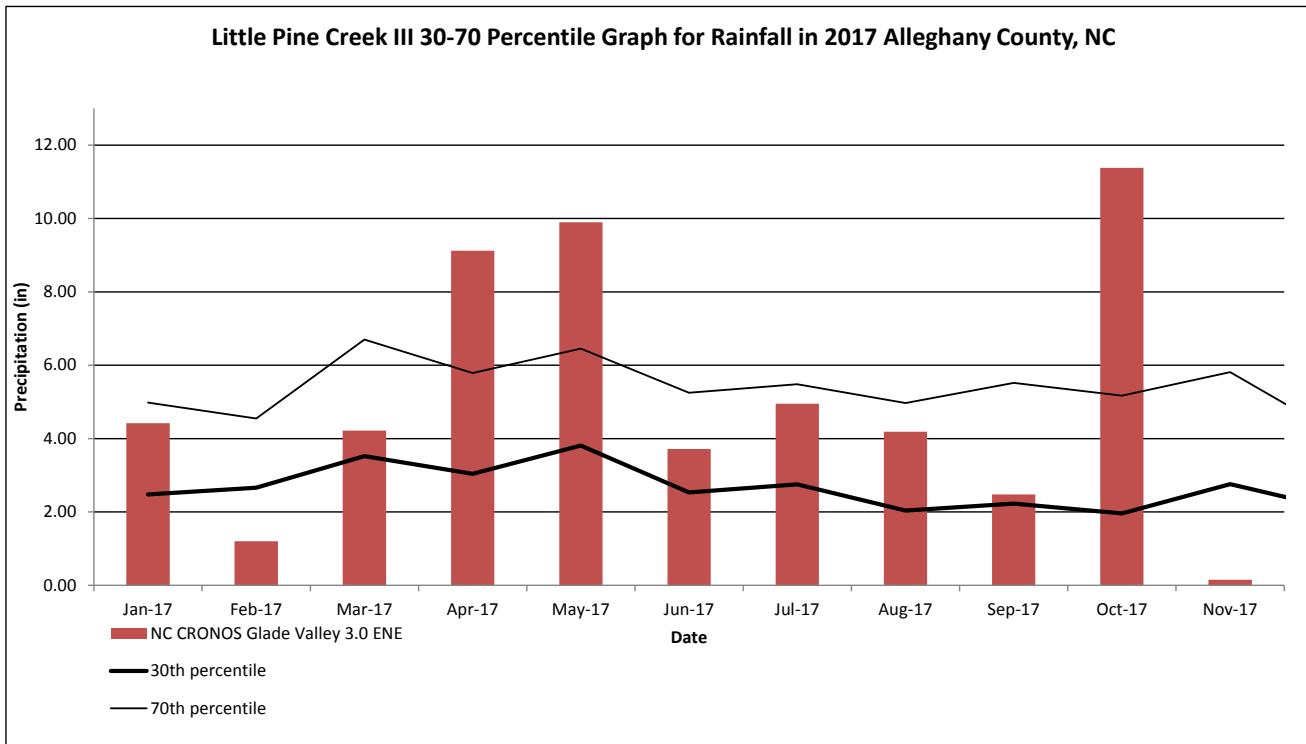

¹ 2017 rainfall collected from NC CRONOS Station Name: Glade Valley 3.0 ENE (NCSU, 2017)

² 30th and 70th percentile rainfall data collected from weather station Sparta, NC8158 (USDA, 2017)