

**Little Troublesome Site  
Stream Restoration Monitoring Report  
EEP Project # 749  
Monitoring Year 01**



Submitted to:



NCDENR-EEP, 1652 Mail Service Center, Raleigh, NC 27699-1652

**Construction Completed: December 2009**

**Data Collection: 2010**

**Submitted: December 2010**

**Design and Monitoring Firm**



**Landmark Center II, Suite 220  
4601 Six Forks Road  
Raleigh, NC 27609  
Phone: (919) 278-2514  
Fax: (919) 783-9266**

**Project Manager: Adam Spiller  
Email: [adam.spiller@kci.com](mailto:adam.spiller@kci.com)  
Project No: 12071067C\_LT10**

## Table of Contents

<b>1.0</b>	<b>EXECUTIVE SUMMARY / PROJECT ABSTRACT .....</b>	<b>1</b>
<b>2.0</b>	<b>METHODOLOGY .....</b>	<b>2</b>
<b>3.0</b>	<b>REFERENCES.....</b>	<b>2</b>

### **Appendix A – Project Vicinity Map and Background Tables**

Figure 1.	Vicinity Map.....	4
Figure 2.	Site Map.....	5
Table 1a.	Project Restoration Components.....	6
Table 1b.	Project Component Summations.....	7
Table 2.	Project Activity and Reporting History .....	7
Table 3.	Project Contacts Table .....	8
Table 4.	Project Attribute Table.....	9

### **Appendix B – Visual Assessment Data**

Figure 2.	Current Condition Plan View.....	11
Table 5.	Visual Stream Morphology Stability Assessment .....	12
Table 6.	Vegetation Condition Assessment .....	14
Stream Station Photos .....		15
Vegetation Monitoring Plot Photos.....		19

### **Appendix C – Vegetation Plot Data**

Table 7.	Vegetation Plot Criteria Attainment .....	22
Table 8.	CVS Vegetation Plot Metadata.....	22
Table 9.	CVS Stem Count Total and Planted by Plot and Species .....	23

### **Appendix D – Stream Survey Data**

Cross-Section Plots .....		25
Longitudinal Profile Plots .....		32
Pebble Count Plots .....		34
Table 10.	Baseline-Stream Data Summary Table.....	41
Table 11a.	Monitoring –Cross-Section Morphology Data Table .....	43
Table 11b.	Monitoring – Stream Reach Morphology Data Table .....	45

### **Appendix E – Hydrologic Data**

Table 12.	Verification of Bankfull Events .....	46
-----------	---------------------------------------	----

## 1.0 EXECUTIVE SUMMARY / PROJECT ABSTRACT

The Little Troublesome Stream and Wetland Restoration Site, completed in December 2009, restored a total of 2,188 linear feet of stream in the Upper Cape Fear River Basin. In addition, there are approximately 4.5 acres of wetland preservation, 1.9 acres of wetland enhancement, and 2,754 linear feet of stream preservation within the site. The project is located in the USGS Hydrologic Unit 03030002-01-0030 of the Cape Fear River Basin. This HU is within the EEP's Upper Cape Fear Basin Local Watershed Plan and is also listed as a Targeted Local Watershed (TLW) in EEP's *Cape Fear River Basin Priorities Plan* (2009). The project goals and objectives are listed below.

### *Project Goals*

- Restore a stable channel morphology to the project stream that is capable of moving the flows and sediment provided by its watershed.
- Improve water quality for an NCDWQ stream, classified as a Class C and Nutrient Sensitive Waters by reducing bank erosion and bed degradation.
- Enhance aquatic and terrestrial habitat.
- Enhance and preserve existing wetlands and forested buffers.

### *Project Objectives*

- Restore 2,188 linear feet of stable stream channel with the appropriate pattern, profile, and dimension that can support a gravel transport system
- Restore a natural riparian buffer.
- Restore the hyporheic zone in the project streams and re-establish the natural stream features.
- Plug ditches to increase groundwater input to existing wetlands.
- Plant native trees and shrubs throughout the site.

The vegetation monitoring success criterion for the planted stream riparian zone is a density of 320 stems/acre after the third year of monitoring and an allowance for 10% mortality in the fourth and fifth years with a final density of 260 stems/acre. The first-year vegetation monitoring was based on the Level 2 CVS-EEP vegetation monitoring protocol. The site's average density for this monitoring period was 693 planted stems/acre, including live stakes, and 662 planted stems/acre, excluding live stakes. All of the eight plots had greater than 320 planted stems/acre. Including volunteers, the site averaged 2,994 total stems/acre. The 2010 monitoring found that the slope from the left bank of the tributary to the terrace (the north facing slope) had sparse vegetation coverage with some bare areas. There has been high live stake survival along the tributary and variable survival along Little Troublesome Creek.

First-year monitoring found Little Troublesome Creek to be stable, with only minor changes from the as-built conditions. The tributary has had areas of localized bed degradation and bank erosion since construction. These areas do not appear to be destabilizing and the plentiful streamside vegetation should continue to help stabilize these parts of the tributary. The longitudinal and cross-section data also reflect overall stability in the project streams. As a part of the stream success criterion, the stream must experience at least two bankfull events, each in separate monitoring years. The site has experienced multiple bankfull events since construction.

Summary information/data related to the occurrence of items such as beaver or encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly the Restoration Plan) documents available on the EEPs website. All raw data supporting the tables and figures in the appendices are available from EEP upon request.

## **2.0 METHODOLOGY**

The survey data were collected with a total station instrument.

The stationing for the longitudinal profile is based on the thalweg stationing and has been adjusted to match grade control structures from previous longitudinal profiles.

Some of the cross-section surveys on Little Troublesome Creek showed slightly lower top of bank measurements than during the previous year. In the cases where the top of bank measurement was only nominally lower than the bankfull elevation, the bankfull width was limited to just include the distance between the tops of left and right banks. This ensures that the bankfull width measurement is representative of the cross-section, and not abnormally large because of insignificant changes in the surveyed cross-section.

The CVS-EEP protocol, Level 2 (<http://cvs.bio.unc.edu/methods.htm>) was used to collect vegetation data from the site.

## **3.0 REFERENCES**

EEP. 2004. Troublesome and Little Troublesome Local Watershed Plan.

([http://www.nceep.net/services/lwps/Troublesome\\_Creek/trouble-summ.pdf](http://www.nceep.net/services/lwps/Troublesome_Creek/trouble-summ.pdf))

EEP. 2009. Cape Fear River Basin Restoration Priorities.


([http://www.nceep.net/services/lwps/cape\\_fear/RBRP%20Cape%20Fear%202008.pdf](http://www.nceep.net/services/lwps/cape_fear/RBRP%20Cape%20Fear%202008.pdf))

Lee, Michael T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2006. CVS-EEP Protocol for Recording Vegetation, Version 4.0 (<http://cvs.bio.unc.edu/methods.htm>)






USACE. 2003. Stream Mitigation Guidelines. USACE, NCDENR-DWQ, USEPA, NCWRC.

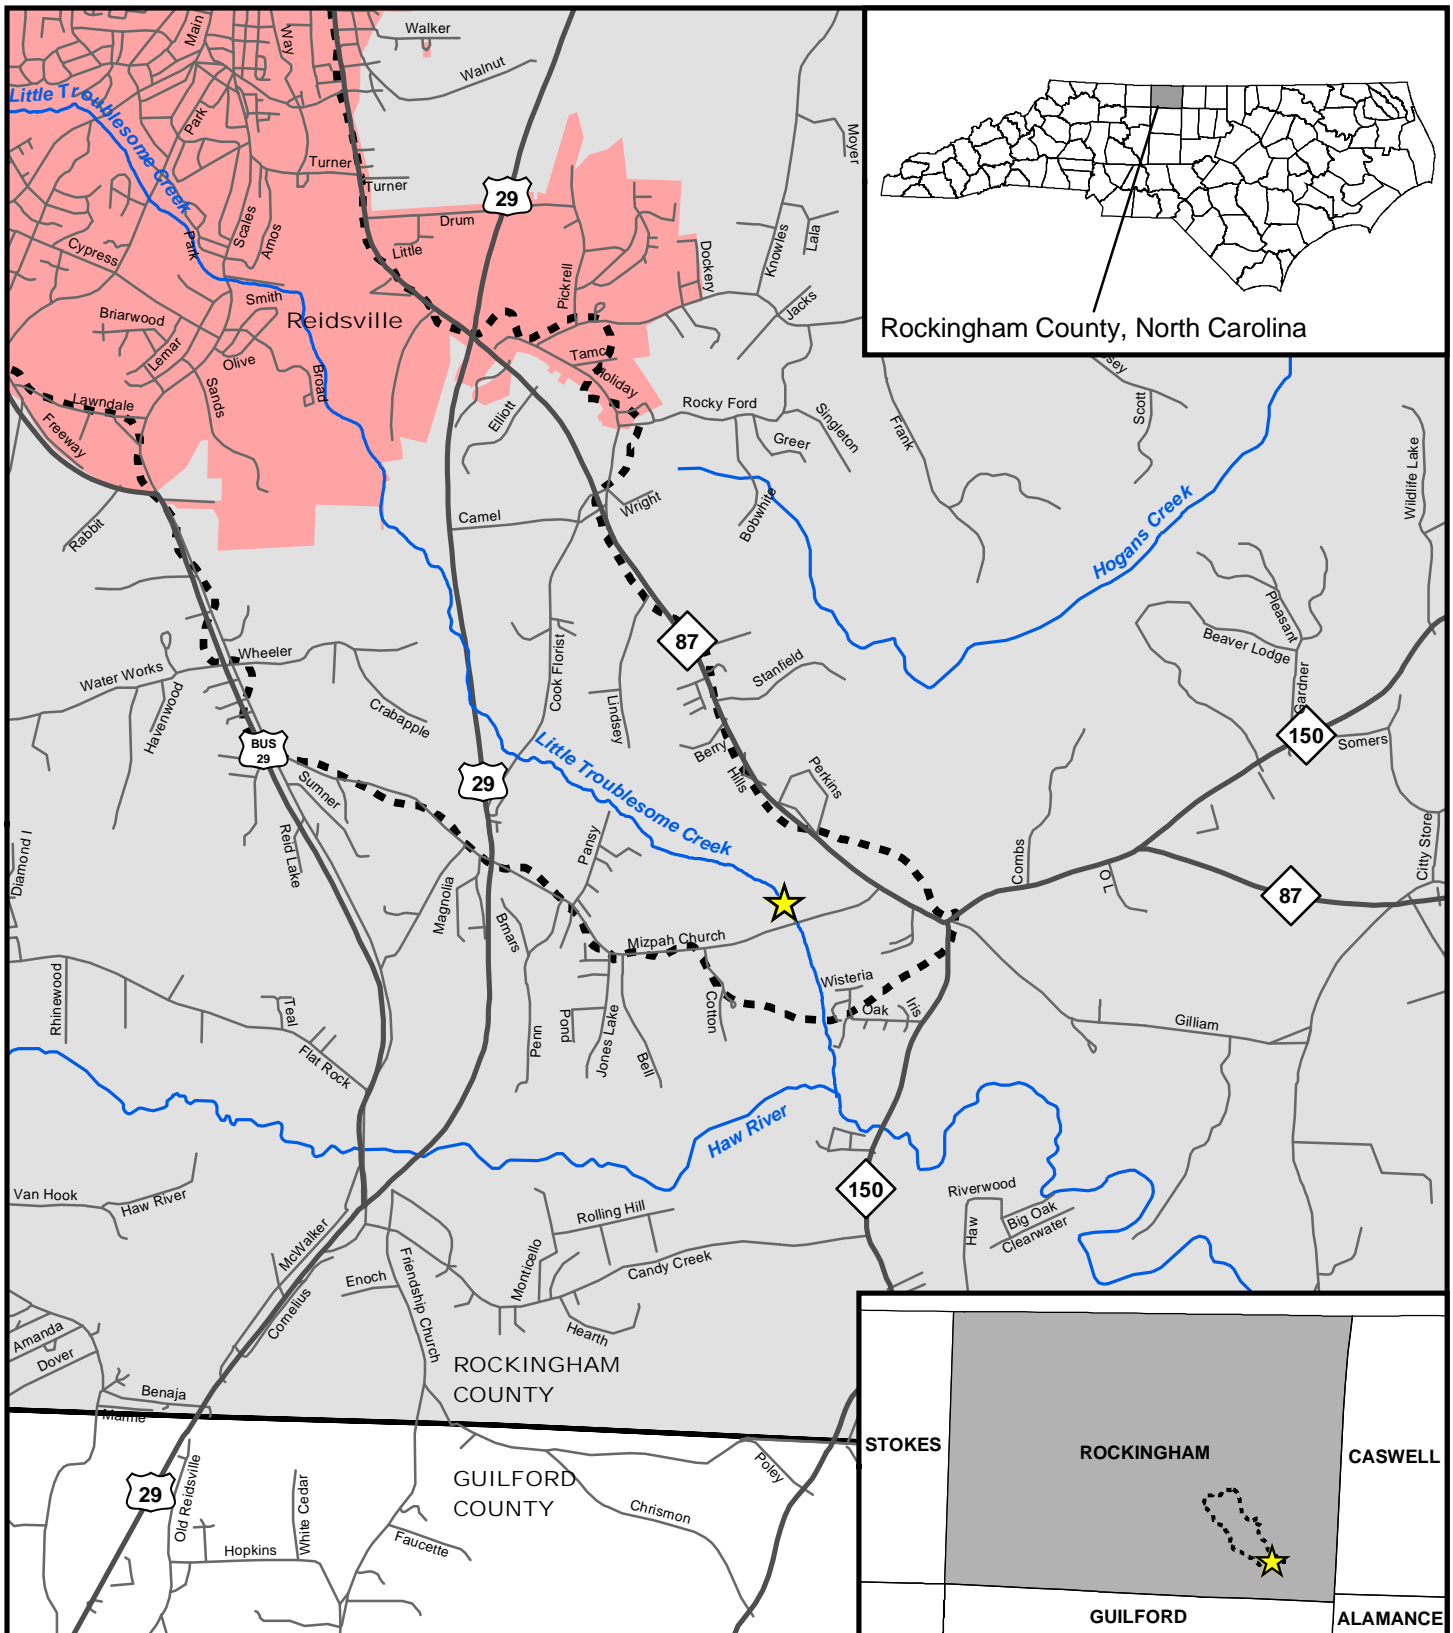

# **Appendix A**

## **Project Vicinity Map and Background Tables**




**Figure 1. Vicinity Map**


-  Project Site Location
-  Major Streams and Rivers
-  Major Roads
-  Other Roads
-  Local Watershed Plan Boundary

-  Cities and Towns
-  County Boundaries



1:63,360  
1 inch = 1 miles



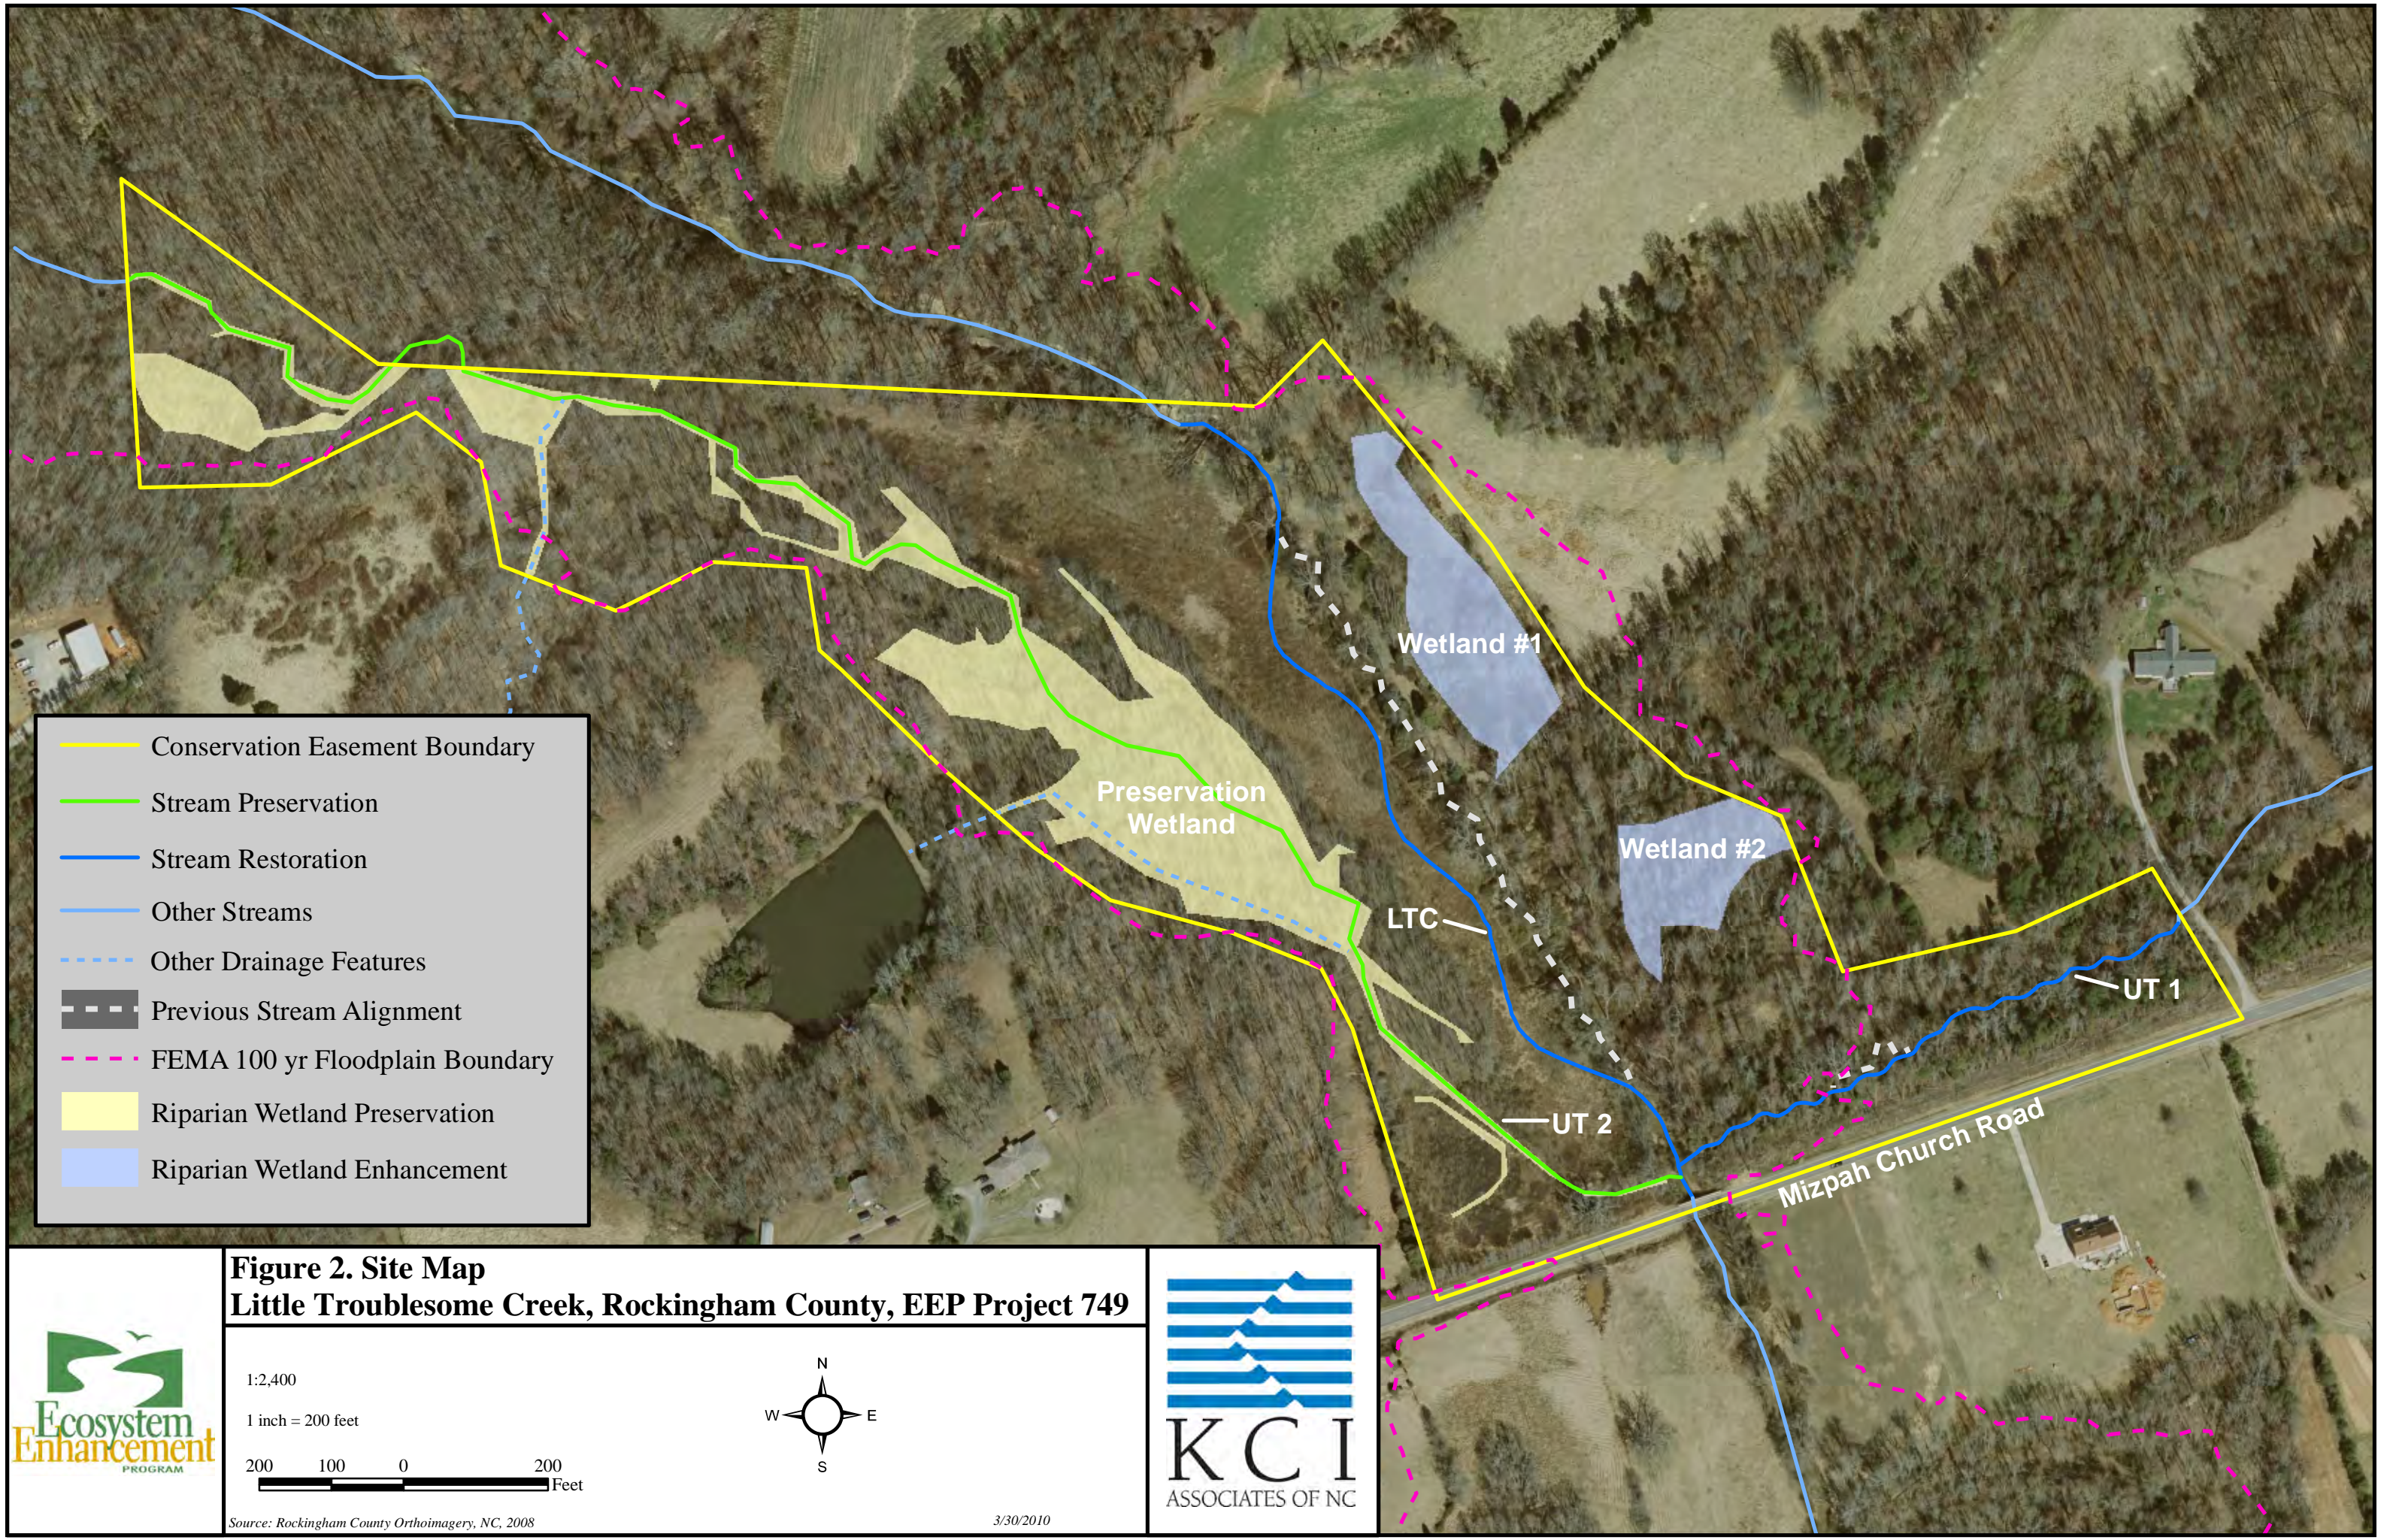


- Conservation Easement Boundary
- Stream Preservation
- Stream Restoration
- Other Streams
- - - Other Drainage Features
- - - Previous Stream Alignment
- - - FEMA 100 yr Floodplain Boundary
- Riparian Wetland Preservation
- Riparian Wetland Enhancement

**Figure 2. Site Map**  
**Little Troublesome Creek, Rockingham County, EEP Project 749**



1:2,400  
 1 inch = 200 feet  
 200 100 0 200  
 Feet



Source: Rockingham County Orthoimagery, NC, 2008

3/30/2010



**Table 1a. Project Restoration Components  
Little Troublesome / Project No. 749**

<b>Project Component or Reach ID</b>	<b>Existing Feet/Acres</b>	<b>Restoration Level</b>	<b>Approach</b>	<b>Footage or Acreage</b>	<b>Stationing</b>	<b>BMP Elements</b>	<b>Comment</b>
LTC	175	R	P3	175	10+00 - 11+75		In-stream structures, including offset rock cross vanes, riffle grade controls, and rock sills, were used to stabilize restored channel. Planted a riparian buffer.
	975	R	P2	1,020	11+75 - 21+95		In-stream structures, including offset rock cross vanes, riffle grade controls, and rock sills, were used to stabilize restored channel. Planted a riparian buffer.
	179	R	P3	180	21+95 - 23+75		In-stream structures, including offset rock cross vanes, riffle grade controls, and rock sills, were used to stabilize restored channel. Planted a riparian buffer.
UT1	873	R	P3	813	50+00 - 58+13		Stream channel stabilized with in-stream structures, including step pools and riffle grade control. Riffles enhanced with graded gravel material to mimic existing stable riffle features. Planted a riparian buffer.
UT2	2,754	P		2,754			
Enhancement Wetland #1	1.17 ac	E		1.17 ac			Enhanced hydrology and vegetation by plugging ditches to increase groundwater; planted vegetation to increase species diversity. Invasive vegetation was treated.
Enhancement Wetland #2	0.74 ac	E		0.74 ac			Enhanced hydrology and vegetation by plugging ditches to increase groundwater; planted vegetation to increase species diversity. Invasive vegetation was treated.
Preservation Wetland	4.5 ac	P		4.5 ac			Preserved a Piedmont Bottomland Hardwood community

R = Restoration    P = Preservation    P2 = Priority 2  
E = Enhancement    P3 = Priority 3

<b>Table 1b. Project Component Summations</b>							
<b>Little Troublesome / Project No. 749</b>							
<b>Restoration Level</b>	<b>Stream (lf)</b>	<b>Riparian Wetland (Ac)</b>		<b>Non-Ripar (Ac)</b>	<b>Upland (Ac)</b>	<b>Buffer (Ac)</b>	<b>BMP</b>
		<b>Riverine</b>	<b>Non-Riverine</b>				
Restoration	2,188						
Enhancement		1.91					
Enhancement I							
Enhancement II							
Creation							
Preservation	2,754	4.50					
HQ Preservation							
<b>Totals (Feet/Acres)</b>	<b>4,942</b>	<b>6.41</b>					
<b>MU Totals</b>	<b>2,739</b>	<b>1.86</b>					

<b>Table 2. Project Activity &amp; Reporting History</b>		
<b>Little Troublesome / Project No. 749</b>		
<b>Elapsed Time Since Grading and Planting Complete: 1 yr 0 months</b>		
<b>Number of Reporting Years: 1</b>		
<b>Activity or Report</b>	<b>Data Collection Complete</b>	<b>Actual Completion or Delivery</b>
Environmental Resource Technical Report	Sep 2006	Sep 2006
Restoration Plan	May 2007	June 2007
Final Design - Construction Plans		Feb 2007
Construction		Dec 2009
Temporary S&E mix applied		Oct 2009
Permanent seed mix applied		Dec 2009
Planting		Dec 2009
Baseline Monitoring	Feb 2010	May 2010
Year 1 Monitoring	Sep 2010	Dec 2010

<b>Table 3. Project Contacts Table Little Troublesome / Project No. 749</b>	
<b>Designer</b>	KCI Associates of North Carolina 4601 Six Forks Road, Suite 220 Raleigh, NC 27609
Primary Project Design POC	April Helms (919) 783-9214
<b>Construction Contractor</b>	Angler Environmental 12811 Randolph Ridge Lane Manassas, VA 20109
Construction Contractor POC	Andrew Griffey (703) 393-4844
<b>Planting Contractor</b>	HARP, Inc. 301 McCullough Drive, 4th Floor Charlotte, NC 28262
Planting Contractor POC	Alan Peoples (704) 841-2841
<b>Seeding Contractor</b>	Angler Environmental Manassas, VA 20109
Seeding Contractor POC	Andrew Griffey (703) 393-4844
Seed Mix Sources	MD Seed and Environmental Services Gaithersburg, MD 20879
<b>Monitoring Performers</b>	KCI Associates of North Carolina 4601 Six Forks Road, Suite 220 Raleigh, NC 27609
Monitoring POC	Adam Spiller (919) 278-2514






**Table 4. Project Attribute Table  
Little Troublesome / Project No. 749**

Project County	Rockingham County	
Physiographic Region	Piedmont	
Ecoregion	Northern Inner Piedmont	
River Basin	Cape Fear	
USGS HUC	03030002010030	
NCDWQ Sub-Basin	03-06-01	
Within Extent of EEP Watershed Plan	Yes - Upper Cape Fear Basin LWP	
WRC Class	Warm	
% of Project Easement Demarcated	100%	
Beaver Activity Observed During Design Phase	No	
<b>Restoration Component Attributes</b>		
	<b>LTC</b>	<b>UT1</b>
Drainage Area (sq.mi.)	12.09	0.1
Stream Order	Third	First
Restored Length (feet)	1,375	813
Perennial or Intermittent	Perennial	Perennial
Watershed Type	Suburban	Suburban
Watershed LULC Distribution		
Forest/Wetland	49%	
Pasture/Managed Herbaceous	21%	
Developed	30%	
Watershed Impervious Cover	21%	
NCDWQ AU/Index Number	16-7	
NCDWQ Classification	C; NSW	
303d Listed	Yes	
Upstream of 303d Listed Segment	Yes	
Reasons for 303d Listing or Stressor	Aquatic life	
Total Acreage of Easement	30.3	
Total Vegetated Acreage within Easement	30.0	
Total Planted Acreage as Part of Restoration	12.2	
Rosgen Classification of Pre-Existing	E4	G4c
Rosgen Classification of As-Built	E4/C4	B4c
Valley Type		
Valley Slope	0.002	0.021
Valley Side Slope Range		
Valley Toe Slope Range		
Cowardin Classification		
Trout Waters Designation	No	
Species of Concern, Endangered, Etc.	Carolina ladle crayfish ( <i>Cambarus davidi</i> )	
Dominant Soil Series and Characteristics		
Series	Chewacla	
Depth	Deep	
Clay%		
K		
T		







# **Appendix B**

## **Visual Assessment Data**

# LEGEND



- EASEMENT BOUNDARY..... 
- AS-BUILT STATIONED CENTERLINE AND TOP OF BANK..... 
- PHOTO POINT..... 
- CROSS-SECTION..... 
- OLD STREAM CHANNEL..... 

# PROJECT CONDITION

- STREAM BED DEGRADATION..... 
- BANK EROSION..... 
- UNDERCUT BANK..... 
- MASS WASTING OF BANK..... 
- VEG PLOT ACHIEVING DENSITY CRITERION..... 
- VEG PLOT BELOW DENSITY CRITERION..... 

# PROJECT CONDITION DETAILS

VEG PLOT TOTAL / PLANTED STEM DENSITY. . . . . 2306/607  
 STRUCTURE NOT PROVIDING INTENDED POOL HABITAT. . . . . H

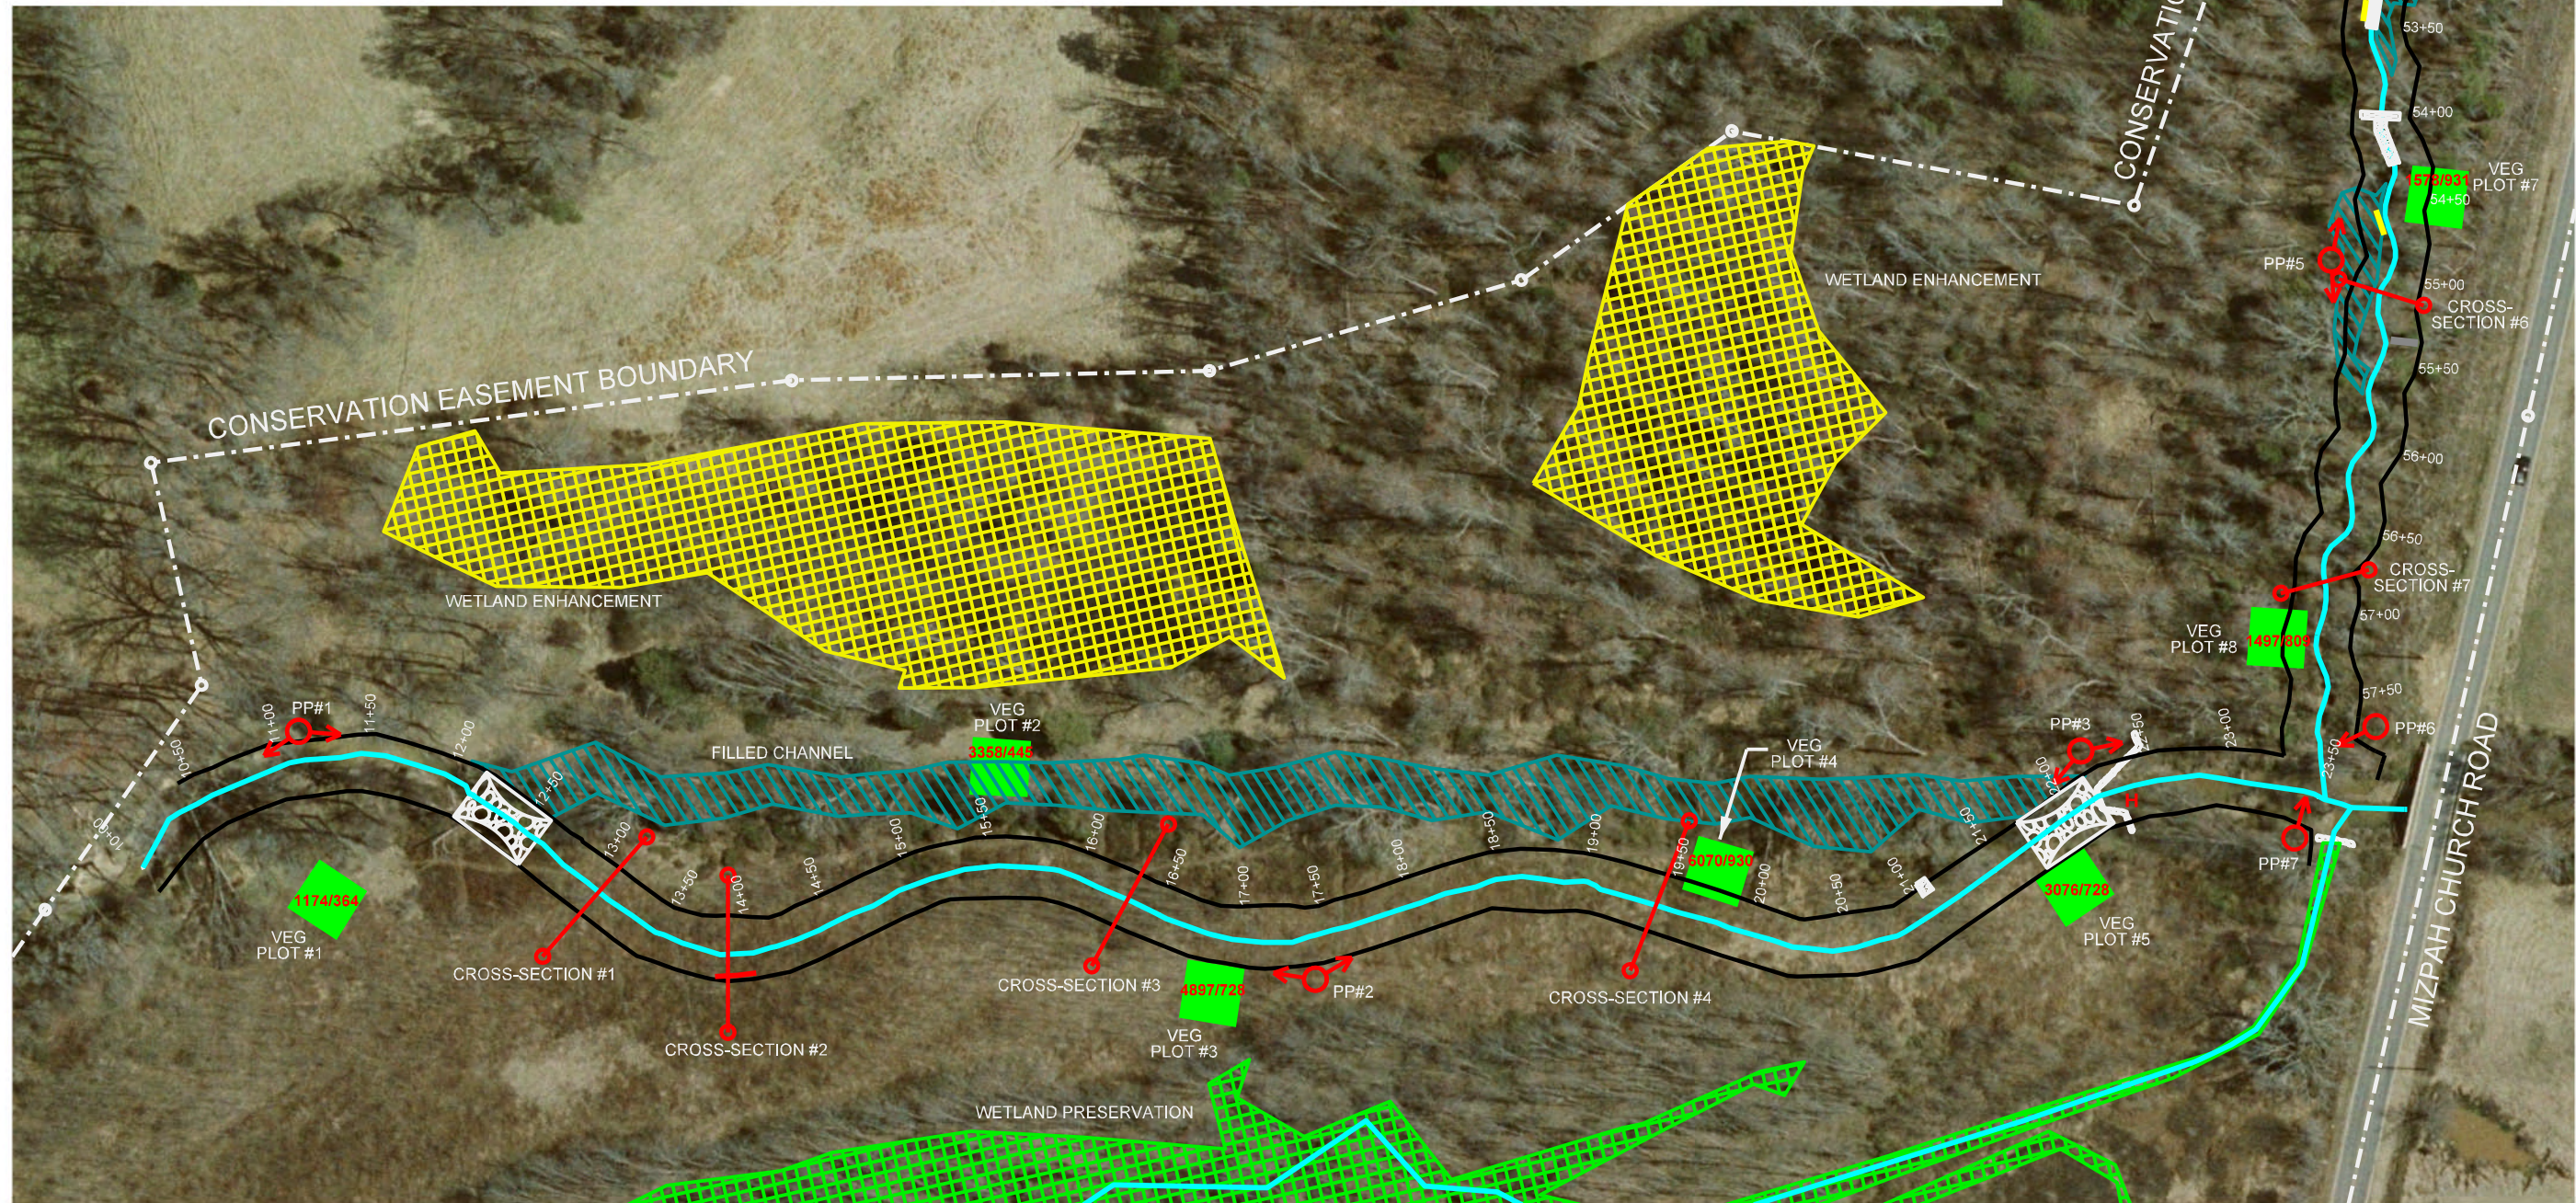

NO.	SYMBOL	DESCRIPTION	DATE	APPROVED



**KCI**  
 ASSOCIATES OF NC  
 ENGINEERS • PLANNERS • SCIENTISTS  
 4601 SIX FORKS ROAD  
 RALEIGH, NORTH CAROLINA 27609

**LITTLE TROUBLESOME CREEK  
 PROJECT #749 - MONITORING YEAR 01**  
 ROCKINGHAM COUNTY, NORTH CAROLINA  
 LITTLE TROUBLESOME CREEK AND UT1

DATE: DEC 2010  
 SCALE: 1" = 100'  
 CURRENT CONDITION PLAN VIEW  
 SHEET 1 OF 1

**Table 5. Visual Stream Morphology Stability Assessment**

**Project Number and Name: 749 - Little Troublesome**

**Assessed Length 1,375**

**Reach - Little Troublesome**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
<b>1. Bed</b>	<b>1. Vertical Stability</b> (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	<b>2. Riffle Condition</b>	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	7	7			100%			
		<b>3. Meander Pool Condition</b>	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6)	6	7					
	<b>4. Thalweg Position</b>	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	6	7			86%			
		1. Thalweg centering at upstream of meander bend (Run)	7	7			100%			
		2. Thalweg centering at downstream of meander (Glide)	7	7			100%			
<b>2. Bank</b>	<b>1. Scoured/Eroding</b>	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%
	<b>2. Undercut</b>	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%
	<b>3. Mass Wasting</b>	Bank slumping, calving, or collapse			1	23	99%	0	0	99%
<b>Totals</b>					1	23	99%	0	0	99%
<b>3. Engineered Structures</b>	<b>1. Overall Integrity</b>	Structures physically intact with no dislodged boulders or logs.	1	1			100%			
	<b>2. Grade Control</b>	Grade control structures exhibiting maintenance of grade across the sill.	1	1			100%			
	<b>2a. Piping</b>	Structures lacking any substantial flow underneath sills or arms.	1	1			100%			
	<b>3. Bank Protection</b>	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	1	1			100%			
	<b>4. Habitat</b>	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio $\geq$ 1.6 Rootwads/logs providing some cover at base-flow.	0	1			0%			

Table 5. Visual Stream Morphology Stability Assessment										
Project Number and Name: 749 - Little Troublesome										
Assessed Length 813										
Reach - UT1										
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting			3	37	95%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	13	11			118%			
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6)	16	14					
	4. Thalweg Position <sup>+</sup>	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	7	14			50%			
		1. Thalweg centering at upstream of meander bend (Run)					N/A			
		2. Thalweg centering at downstream of meander (Glide)					N/A			
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			7	79	95%	1	12	96%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			1	10	99%	0	0	99%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%
<b>Totals</b>					8	89	95%	1	12	95%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	2	2			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	2	2			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	2	2			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	0	0			N/A			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio $\geq$ 1.6 Rootwads/logs providing some cover at base-flow.	0	0			N/A			

<sup>+</sup>Due to this reach's small size and the scale of the pattern, the exact position of the thalweg in relation to the meanders and morphological features is inconsistent and not practical to evaluate .



<b>Table 6. Vegetation Condition Assessment</b>						
<b>Project Number and Name: 749 - Little Troublesome</b>						
<b>Planted Acreage 12.2</b>			<b>Easement Acreage 30.3</b>			
<b>Vegetation Category</b>	<b>Definitions</b>	<b>Mapping Threshold</b>	<b>CCPV Depiction</b>	<b>Number of Polygons</b>	<b>Combined Acreage</b>	<b>% of Planted Acreage</b>
<b>1. Bare Areas</b>	Very limited cover of both woody and herbaceous material.	0.1 acre	Pattern and Color*	1	0.14	1.1%
<b>2. Low Stem Density Areas</b>	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1 acre	Pattern and Color <sup>+</sup>	2	0.30	2.5%
<b>Total</b>				<b>3</b>	<b>0.44</b>	<b>3.6%</b>
<b>3. Areas of Poor Growth Rates or Vigor</b>	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 acre	Pattern and Color	0	0.00	0.0%
<b>Cumulative Total</b>				<b>3</b>	<b>0.44</b>	<b>3.6%</b>
<b>4. Invasive Areas of Concern</b>	Areas or points (if too small to render as polygons at map scale).	1,000 SF	Pattern and Color	0	0.00	0.0%
<b>5. Easement Encroachment Areas</b>	Areas or points (if too small to render as polygons at map scale).	none	Pattern and Color	0	0.00	0.0%

\*These areas were not depicted on the CCPV. Generally, the left slope of UT1 has many small scattered bare areas that are below the mapping threshold, but are significant when combined.

<sup>+</sup>These areas were not depicted on the CCPV. Generally, the left and right slopes of UT1 have many scattered areas of noticeable low stem densities that are below the mapping threshold, but are significant when combined.

## Stream Station Photos



**Photo Point 1u:** View looking upstream near Station 11+10. 2/23/10 – Baseline



**Photo Point 1u:** View looking upstream near Station 11+10. 12/10/10 – MY-01



**Photo Point 1d:** View looking downstream near Station 11+10. 2/23/10 – Baseline



**Photo Point 1d:** View looking downstream near Station 11+10. 12/10/10 – MY-01



**Photo Point 2u:** View looking upstream taken near Station 17+40. 2/23/10 – Baseline



**Photo Point 2u:** View looking upstream taken near Station 17+40. 12/10/10 – MY-01



**Photo Point 2d:** View looking downstream taken near Station 17+40. 2/23/10 – Baseline



**Photo Point 2d:** View looking downstream taken near Station 17+40. 12/10/10 – MY-01



**Photo Point 3u:** View looking upstream near Station 22+25. 2/23/10 – Baseline



**Photo Point 3u:** View looking upstream near Station 22+25. 12/10/10 – MY-01



**Photo Point 3d:** View looking downstream near Station 22+25. 2/23/10 – Baseline



**Photo Point 3d:** View looking downstream near Station 22+25. 12/10/10 – MY-01



**Photo Point 4:** View looking upstream near Station 24+00. 2/23/10 – Baseline



**Photo Point 4:** View looking upstream near Station 24+00. 2/23/10 – 12/10/10 – MY-01



**Photo Point 5:** View looking downstream near Station 50+00. 2/23/10 – Baseline



**Photo Point 5:** View looking downstream near Station 50+00. 12/10/10 – MY-01



**Photo Point 6u:** View looking upstream near Station 54+90. 2/23/10 – Baseline



**Photo Point 6u:** View looking upstream near Station 54+90. 12/10/10 – MY-01



**Photo Point 6d:** View looking downstream near Station 54+90. 2/23/10 – Baseline



**Photo Point 6d:** View looking downstream near Station 54+90. 12/10/10 – MY-01



**Photo Point 7:** View looking upstream at the tributary confluence. 2/23/10 – Baseline



**Photo Point 7:** View looking upstream at the tributary confluence. 12/10/10 – MY-01

## Vegetation Plot Photos



**Plot 1 Photo: 10/7/10 – MY01**




**Plot 2 Photo: 10/7/10 – MY01**



**Plot 3 Photo: 10/7/10 – MY01**




**Plot 4 Photo: 10/7/10 – MY01**

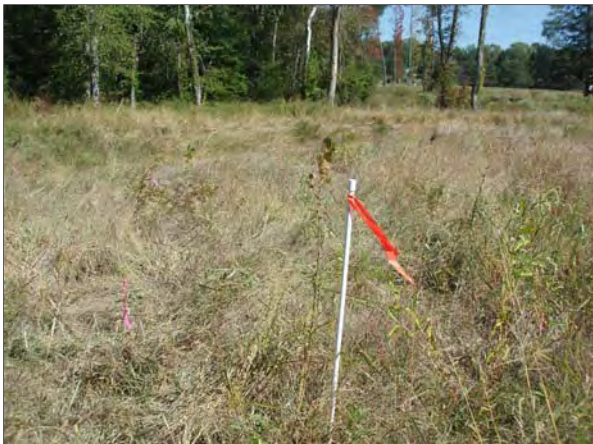

**Plot 5 Photo: 10/7/10 – MY01**



**Plot 6 Photo: 10/7/10 – MY01**

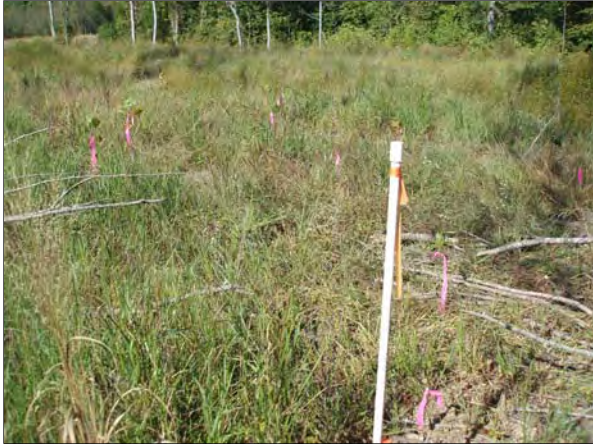

**Plot 7 Photo:** 10/7/10 – MY01



**Plot 8 Photo:** 10/7/10 – MY01

# **Appendix C**

## **Vegetation Plot Data**



**Table 7. Vegetation Plot Criteria Attainment  
Little Troublesome / Project No. 749**

Vegetation Plot ID	Vegetation Survival Threshold Met?
1	Yes
2	Yes
3	Yes
4	Yes
5	Yes
6	Yes
7	Yes
8	Yes

**Table 8. CVS Vegetation Plot Metadata  
Little Troublesome / Project No. 749**

<b>Report Prepared By</b>	Adam Spiller
<b>Date Prepared</b>	12/15/2010 9:22
<b>database name</b>	KCI-2010-LT.mdb
<b>database location</b>	M:\2007\12071067_2007 EEP OPEN END\Veg_database
<b>computer name</b>	12-CSPV0M1
<b>file size</b>	55812096
<b>DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----</b>	
<b>Metadata</b>	Description of database file, the report worksheets, and a summary of project(s) and project data.
<b>Proj, planted</b>	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
<b>Proj, total stems</b>	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
<b>Plots</b>	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
<b>Vigor</b>	Frequency distribution of vigor classes for stems for all plots.
<b>Vigor by Spp</b>	Frequency distribution of vigor classes listed by species.
<b>Damage</b>	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
<b>Damage by Spp</b>	Damage values tallied by type for each species.
<b>Damage by Plot</b>	Damage values tallied by type for each plot.
<b>Planted Stems by Plot and Spp</b>	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
<b>ALL Stems by Plot and spp</b>	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
<b>PROJECT SUMMARY-----</b>	
<b>Project Code</b>	749
<b>project Name</b>	Little Troublesome Creek
<b>Description</b>	Stream and Wetland Restoration Site
<b>River Basin</b>	Cape Fear
<b>length(ft)</b>	2200
<b>stream-to-edge width (ft)</b>	60
<b>area (sq m)</b>	24523.92
<b>Required Plots (calculated)</b>	8
<b>Sampled Plots</b>	8



# **Appendix D**

## **Stream Survey Data**

<b>River Basin:</b>	Cape Fear
<b>Watershed:</b>	Little Troublesome Creek, MY-01
<b>XS ID</b>	XS - 1, Riffle
<b>Drainage Area (sq mi):</b>	12.09
<b>Date:</b>	9/16/2010
<b>Field Crew:</b>	A. French, A. Helms




Station	Elevation
0.0	655.79
0.3	655.38
6.1	654.90
13.6	654.65
20.4	654.62
23.4	654.61
24.9	653.72
26.5	652.54
28.8	651.11
30.2	650.30
32.2	650.13
34.5	650.14
35.5	650.10
37.6	649.89
40.3	649.79
42.9	649.91
45.4	650.06
48.5	650.29
50.5	650.52
51.9	651.38
53.8	652.54
55.5	653.98
56.5	654.53
58.2	654.56
62.3	654.58
66.2	654.45
72.8	654.46
80.7	654.45
89.5	654.57
89.8	654.92

SUMMARY DATA	
<b>Bankfull Elevation:</b>	654.6
<b>Bankfull Cross-Sectional Area:</b>	118.4
<b>Bankfull Width:</b>	33.0
<b>Flood Prone Area Elevation:</b>	659.3
<b>Flood Prone Width:</b>	>200
<b>Max Depth at Bankfull:</b>	4.8
<b>Mean Depth at Bankfull:</b>	3.6
<b>W / D Ratio:</b>	9.2
<b>Entrenchment Ratio:</b>	>6.0
<b>Bank Height Ratio:</b>	1.0

<b>Stream Type</b>	E4/C4
--------------------	-------

Cape Fear River Basin, Little Troublesome Creek, MY-01, XS - 1, Riffle

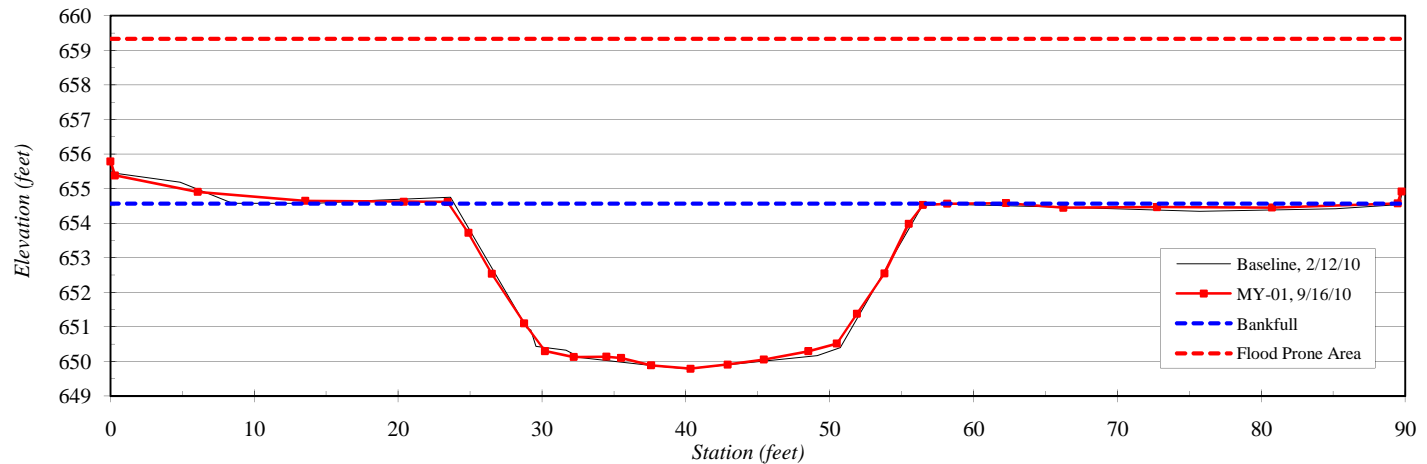


<b>River Basin:</b>	Cape Fear
<b>Watershed:</b>	Little Troublesome Creek, MY-01
<b>XS ID</b>	XS - 2, Pool
<b>Drainage Area (sq mi):</b>	12.09
<b>Date:</b>	9/16/2010
<b>Field Crew:</b>	A. French, A. Helms



Station	Elevation
0.0	654.86
0.3	654.43
5.4	654.41
11.8	654.49
16.9	654.51
20.4	654.28
23.3	654.11
25.2	653.50
26.6	652.90
29.3	652.04
32.1	651.33
33.7	650.71
35.6	650.03
37.1	649.81
38.5	649.94
40.5	649.77
42.2	649.61
44.0	649.11
45.5	648.38
47.3	647.53
50.0	647.01
50.8	647.27
51.6	647.89
52.2	650.32
52.7	650.69
53.8	650.96
55.4	651.70
57.1	653.34
59.2	654.40
62.6	654.60
70.6	654.61
80.6	654.49
88.9	654.69
89.1	655.07

SUMMARY DATA	
<b>Bankfull Elevation:</b>	654.3
<b>Bankfull Cross-Sectional Area:</b>	134.3
<b>Bankfull Width:</b>	39.1
<b>Flood Prone Area Elevation:</b>	-
<b>Flood Prone Width:</b>	-
<b>Max Depth at Bankfull:</b>	7.3
<b>Mean Depth at Bankfull:</b>	3.4
<b>W / D Ratio:</b>	-
<b>Entrenchment Ratio:</b>	-
<b>Bank Height Ratio:</b>	-

<b>Stream Type</b>	E4/C4
--------------------	-------

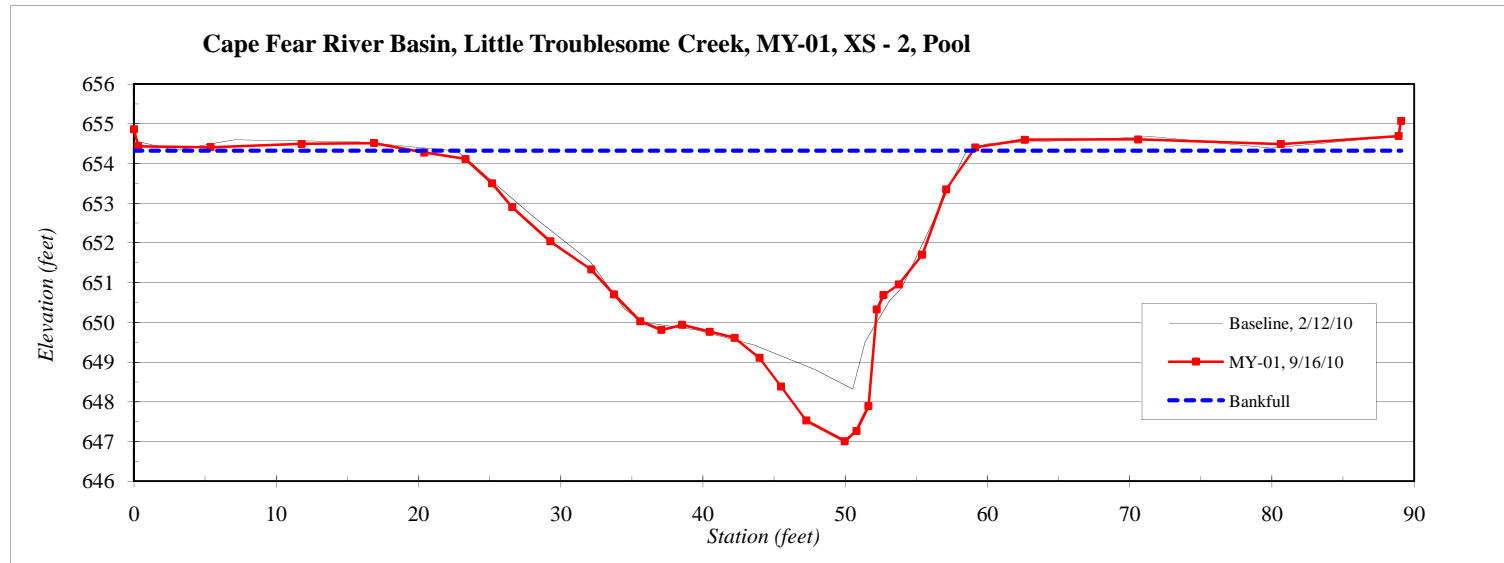


<b>River Basin:</b>	Cape Fear
<b>Watershed:</b>	Little Troublesome Creek, MY-01
<b>XS ID</b>	XS - 3, Riffle
<b>Drainage Area (sq mi):</b>	12.09
<b>Date:</b>	9/16/2010
<b>Field Crew:</b>	A. French, A. Helms

Station	Elevation
0.0	655.87
0.5	655.47
4.9	655.28
8.6	654.98
10.1	654.69
11.5	654.31
13.1	653.88
17.7	654.02
25.4	653.89
30.4	653.89
32.2	653.88
33.1	653.49
34.5	652.52
36.4	651.41
37.9	650.42
39.1	649.65
41.0	649.32
42.9	649.32
45.3	649.22
48.3	649.06
51.9	649.06
55.5	649.29
57.1	649.53
58.3	649.72
59.2	650.12
60.6	651.36
61.9	652.05
63.0	652.82
64.5	653.78
66.7	653.92
74.0	653.82
80.6	653.88
87.8	653.85
91.3	654.44

SUMMARY DATA	
<b>Bankfull Elevation:</b>	653.9
<b>Bankfull Cross-Sectional Area:</b>	117.5
<b>Bankfull Width:</b>	32.3
<b>Flood Prone Area Elevation:</b>	658.8
<b>Flood Prone Width:</b>	>200
<b>Max Depth at Bankfull:</b>	4.9
<b>Mean Depth at Bankfull:</b>	3.6
<b>W / D Ratio:</b>	8.9
<b>Entrenchment Ratio:</b>	>6.0
<b>Bank Height Ratio:</b>	1.0



<b>Stream Type</b>	E4/C4
--------------------	-------

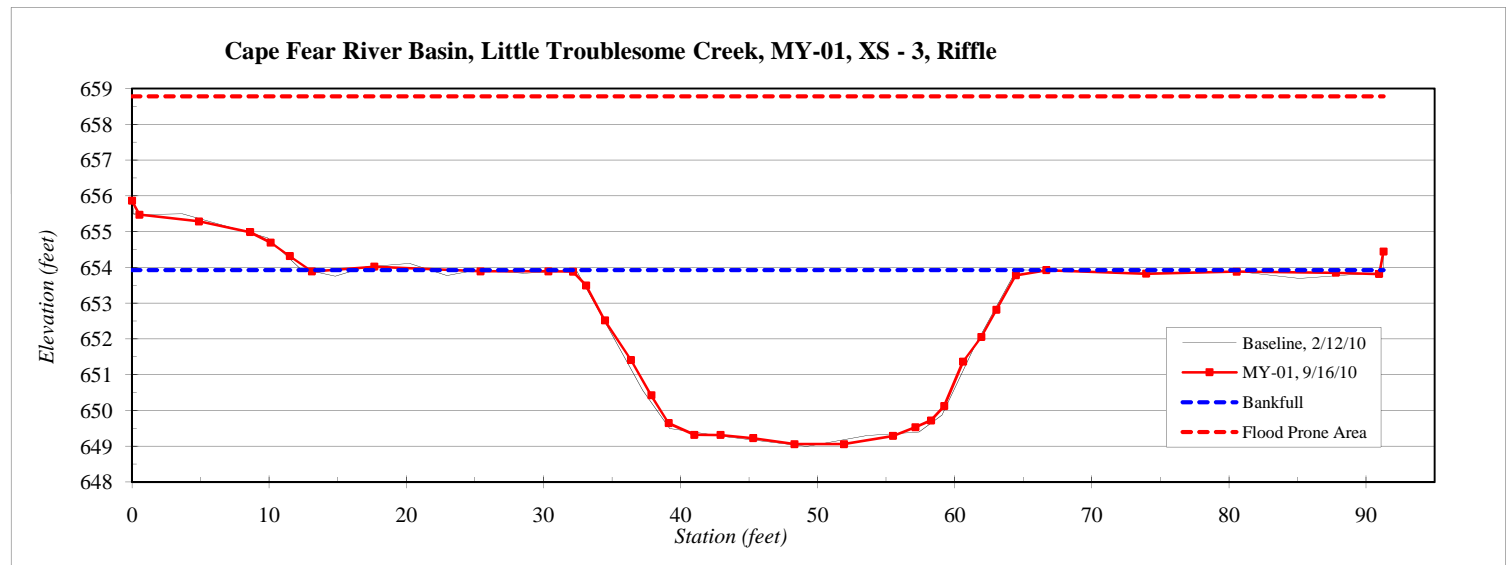


<b>River Basin:</b>	Cape Fear
<b>Watershed:</b>	Little Troublesome Creek, MY-01
<b>XS ID</b>	XS - 4, Riffle
<b>Drainage Area (sq mi):</b>	12.09
<b>Date:</b>	9/16/2010
<b>Field Crew:</b>	A. French, A. Helms



Station	Elevation
0.0	655.21
0.2	654.84
4.9	654.74
9.6	654.53
11.7	654.49
14.2	654.32
15.3	653.75
17.7	653.20
22.9	653.03
28.1	653.29
31.6	653.50
32.8	653.41
34.7	652.43
36.0	651.53
37.4	651.11
38.7	650.11
39.7	649.28
40.4	648.85
43.2	648.71
46.5	648.55
49.2	648.46
51.2	648.35
53.7	648.42
55.5	648.56
57.1	648.64
59.0	648.71
59.2	649.58
60.4	650.07
61.3	650.08
62.0	650.39
63.9	651.62
65.2	652.33
66.1	653.16
91.3	653.93

SUMMARY DATA	
<b>Bankfull Elevation:</b>	653.3
<b>Bankfull Cross-Sectional Area:</b>	120.0
<b>Bankfull Width:</b>	33.5
<b>Flood Prone Area Elevation:</b>	658.2
<b>Flood Prone Width:</b>	>200
<b>Max Depth at Bankfull:</b>	4.9
<b>Mean Depth at Bankfull:</b>	3.6
<b>W / D Ratio:</b>	9.4
<b>Entrenchment Ratio:</b>	>6.0
<b>Bank Height Ratio:</b>	1.0

Stream Type E4/C4

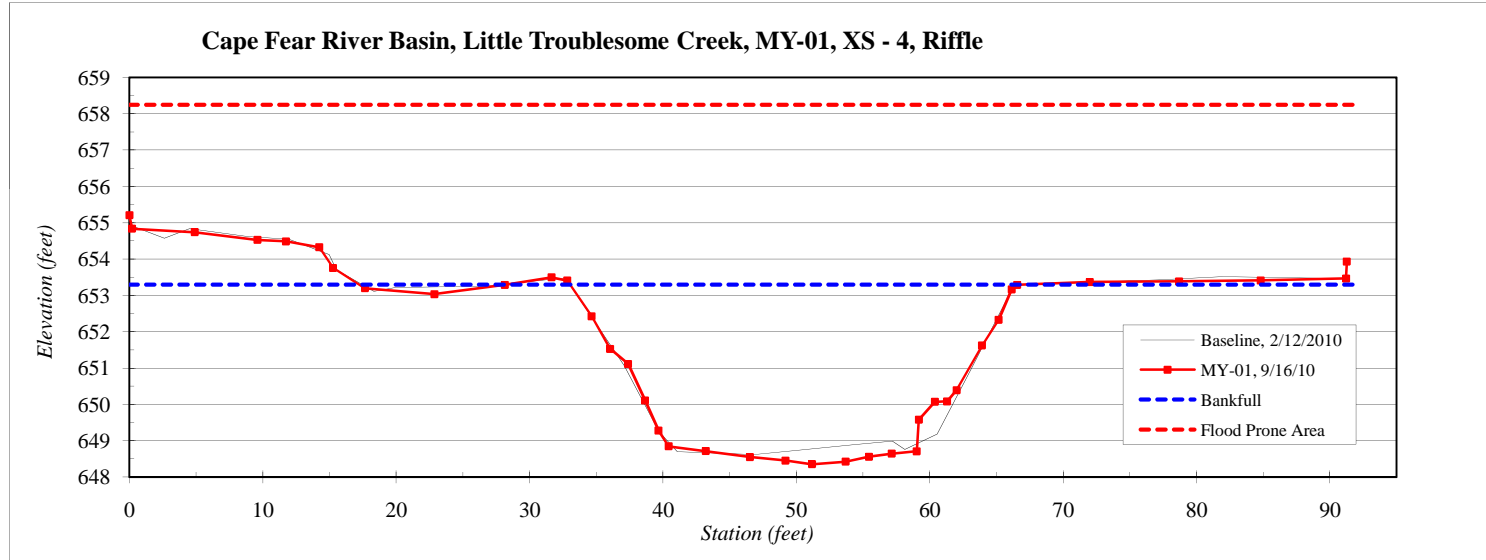


<b>River Basin:</b>	Cape Fear
<b>Watershed:</b>	Little Troublesome Creek, MY-01
<b>XS ID</b>	XS - 5, Riffle
<b>Drainage Area (sq mi):</b>	0.10
<b>Date:</b>	9/17/2010
<b>Field Crew:</b>	A. French, A. Helms

Station	Elevation
0.0	666.78
0.7	666.37
4.0	666.44
6.6	666.39
8.4	665.64
10.5	664.69
12.9	663.55
15.8	662.30
18.7	661.06
20.5	660.36
21.4	659.86
22.3	659.55
23.1	659.32
23.8	659.11
25.3	659.24
26.2	659.50
27.5	659.78
28.7	660.02
30.0	660.62
31.7	661.33
34.5	662.98
38.7	664.99
42.9	666.73
46.7	668.18
50.0	668.40
52.9	668.48
53.1	668.83

SUMMARY DATA	
<b>Bankfull Elevation:</b>	660.1
<b>Bankfull Cross-Sectional Area:</b>	4.1
<b>Bankfull Width:</b>	7.7
<b>Flood Prone Area Elevation:</b>	661.0
<b>Flood Prone Width:</b>	12.7
<b>Max Depth at Bankfull:</b>	0.9
<b>Mean Depth at Bankfull:</b>	0.5
<b>W / D Ratio:</b>	14.5
<b>Entrenchment Ratio:</b>	1.6
<b>Bank Height Ratio:</b>	1.0



<b>Stream Type</b>	B4c
--------------------	-----

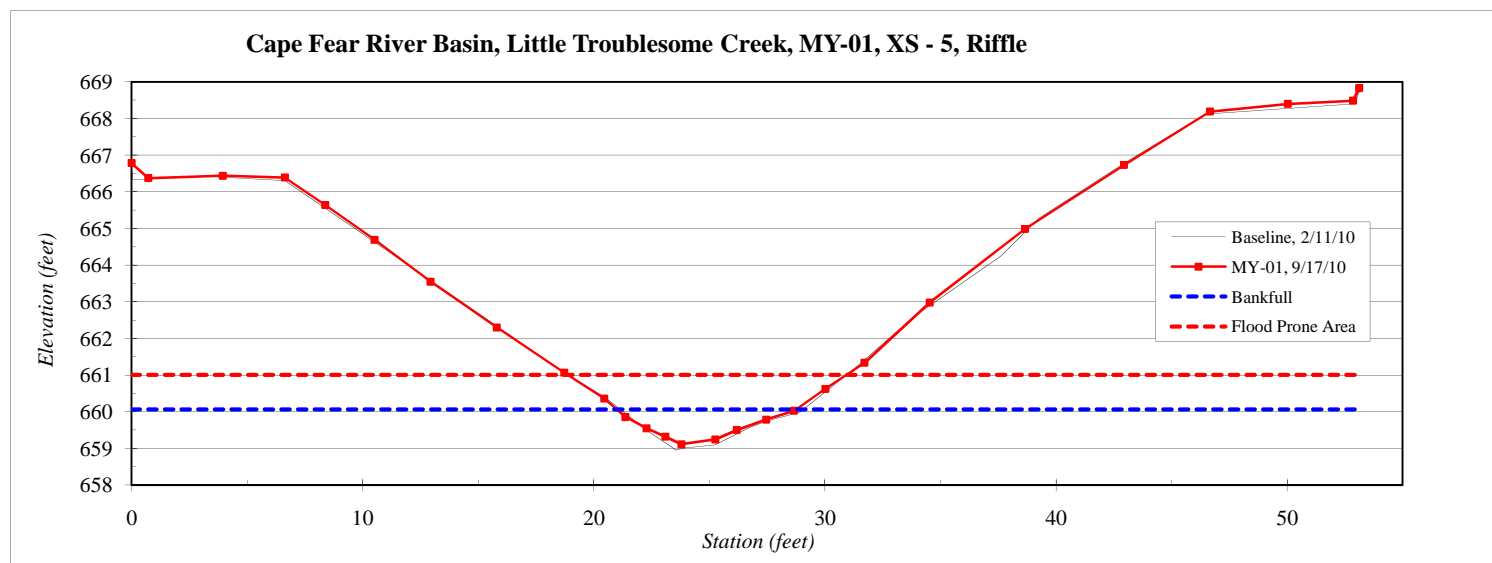




<b>River Basin:</b>	Cape Fear
<b>Watershed:</b>	Little Troublesome Creek, MY-01
<b>XS ID</b>	XS - 6, Pool
<b>Drainage Area (sq mi):</b>	0.10
<b>Date:</b>	9/17/2010
<b>Field Crew:</b>	A. French, A. Helms



Station	Elevation
0.0	660.64
0.4	660.34
3.6	660.36
7.4	659.35
11.3	657.92
14.3	656.90
17.2	655.86
19.8	654.94
21.4	654.31
22.9	653.79
23.8	653.46
24.3	652.18
24.9	652.10
25.3	652.00
26.1	652.11
27.1	652.49
27.4	653.26
28.3	653.62
29.2	654.14
30.8	654.78
33.2	655.51
35.7	656.68
39.2	658.20
42.1	659.32
43.9	659.62
47.5	659.85
50.0	659.85
50.3	660.13

SUMMARY DATA	
<b>Bankfull Elevation:</b>	653.6
<b>Bankfull Cross-Sectional Area:</b>	4.8
<b>Bankfull Width:</b>	4.8
<b>Flood Prone Area Elevation:</b>	-
<b>Flood Prone Width:</b>	-
<b>Max Depth at Bankfull:</b>	1.6
<b>Mean Depth at Bankfull:</b>	1.0
<b>W / D Ratio:</b>	-
<b>Entrenchment Ratio:</b>	-
<b>Bank Height Ratio:</b>	-

<b>Stream Type</b>	B4c
--------------------	-----

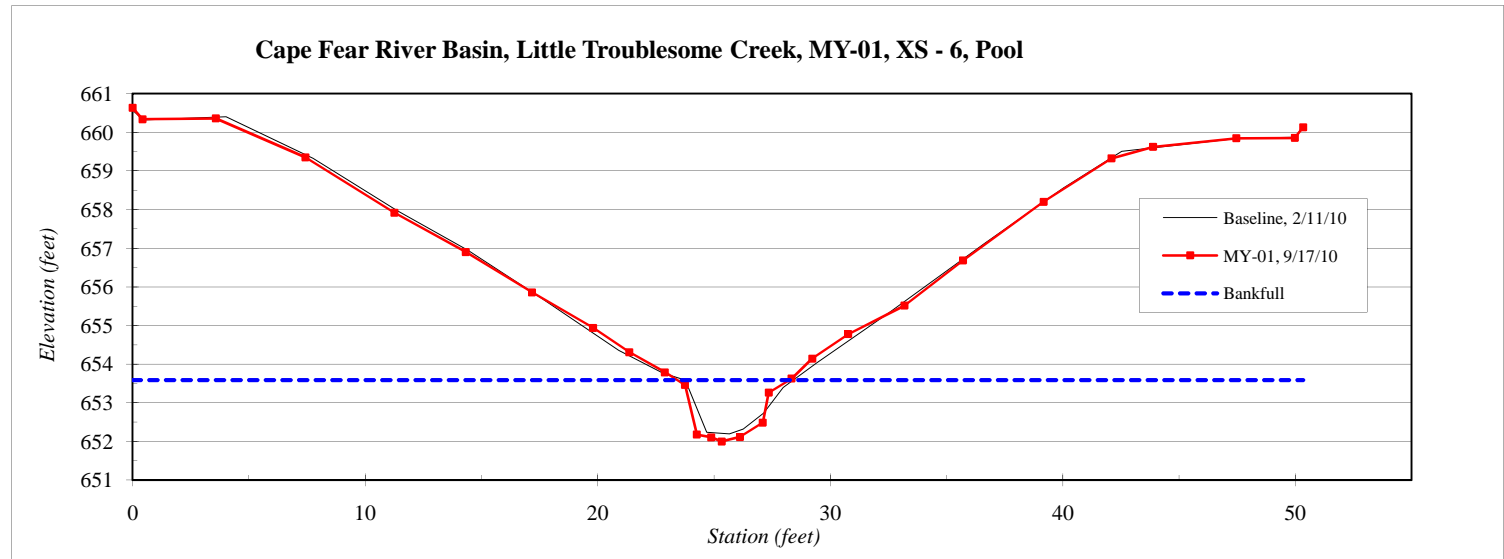


<b>River Basin:</b>	Cape Fear
<b>Watershed:</b>	Little Troublesome Creek, MY-01
<b>XS ID</b>	XS - 7, Riffle
<b>Drainage Area (sq mi):</b>	0.10
<b>Date:</b>	9/17/2010
<b>Field Crew:</b>	A. French, A. Helms

Station	Elevation
0.0	657.66
0.9	657.25
4.8	657.20
7.9	656.59
10.0	656.33
12.5	655.22
14.9	654.03
17.9	652.83
19.9	651.90
22.2	651.01
24.1	650.58
25.0	650.23
25.5	649.93
25.8	649.85
26.0	649.89
27.1	649.92
27.6	650.00
28.6	650.19
29.5	650.87
31.3	651.43
34.1	652.36
36.8	653.42
40.3	655.05
44.2	655.64
48.4	655.87
51.1	655.88
51.7	656.34



SUMMARY DATA	
<b>Bankfull Elevation:</b>	650.9
<b>Bankfull Cross-Sectional Area:</b>	4.3
<b>Bankfull Width:</b>	6.9
<b>Flood Prone Area Elevation:</b>	651.9
<b>Flood Prone Width:</b>	13.6
<b>Max Depth at Bankfull:</b>	1.0
<b>Mean Depth at Bankfull:</b>	0.6
<b>W / D Ratio:</b>	11.1
<b>Entrenchment Ratio:</b>	2.0
<b>Bank Height Ratio:</b>	1.0





<b>Stream Type</b>	B4c
--------------------	-----

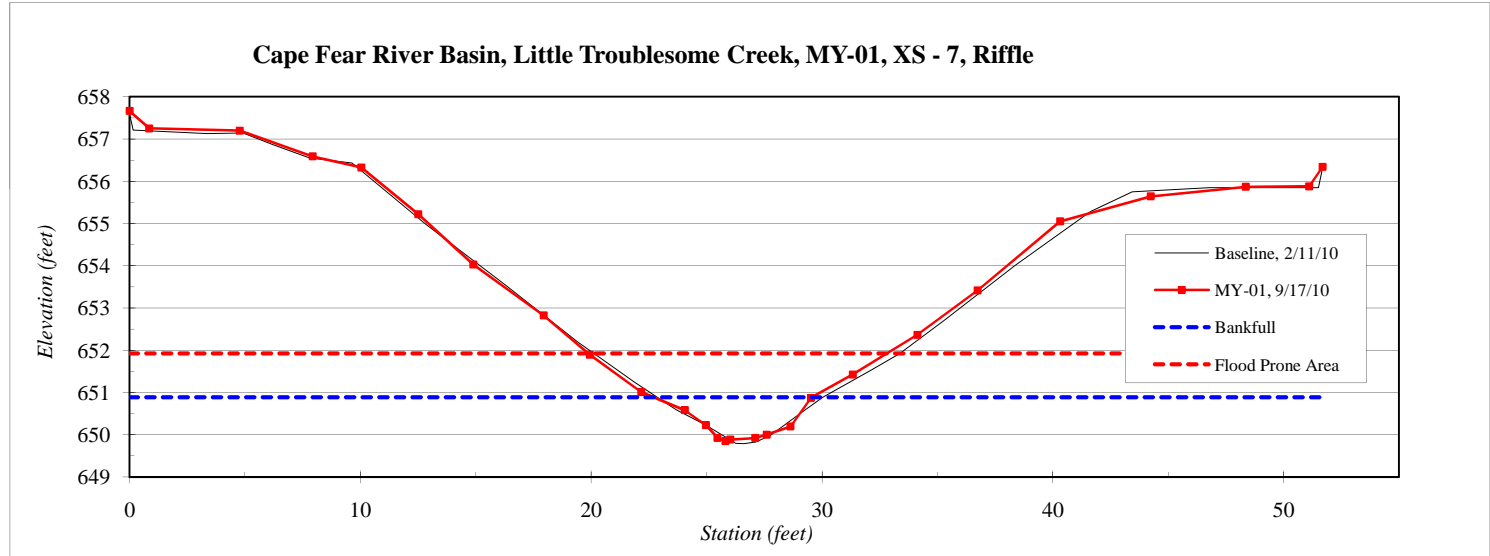



**Longitudinal Profile  
Little Troublesome Creek  
EEP Project Number - 749  
Station 10+00 - 24+50**

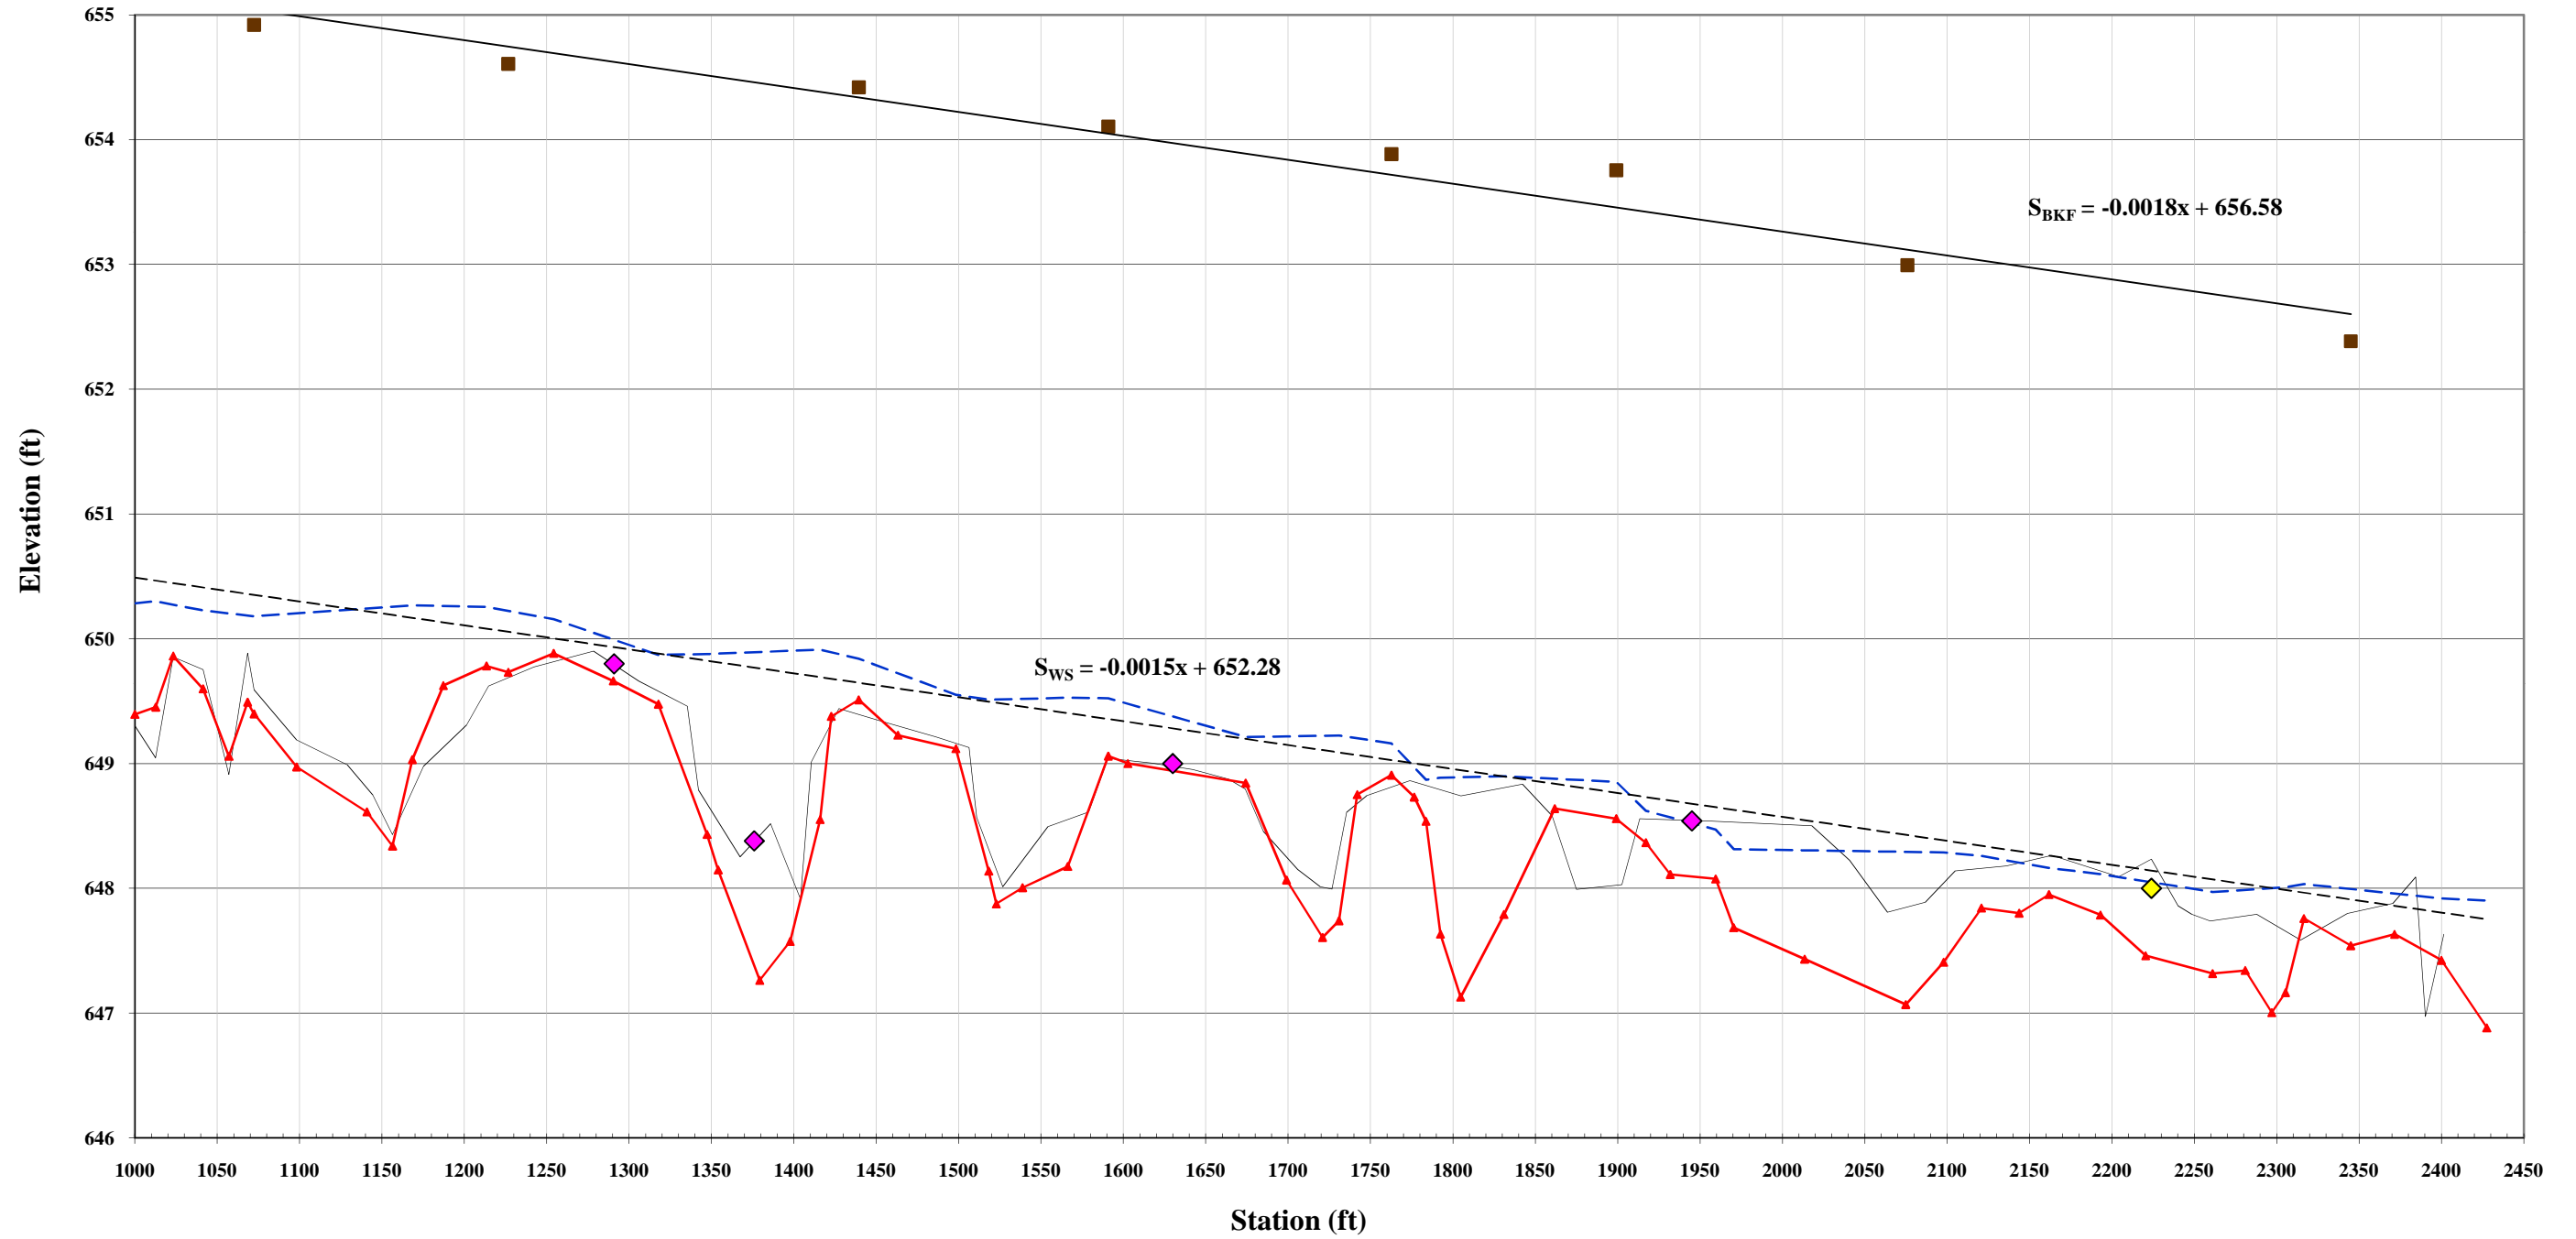



**Longitudinal Profile**  
**UT1 to Little Troublesome Creek**  
**EEP Project Number - 749**  
**Station 50+00 - 58+50**

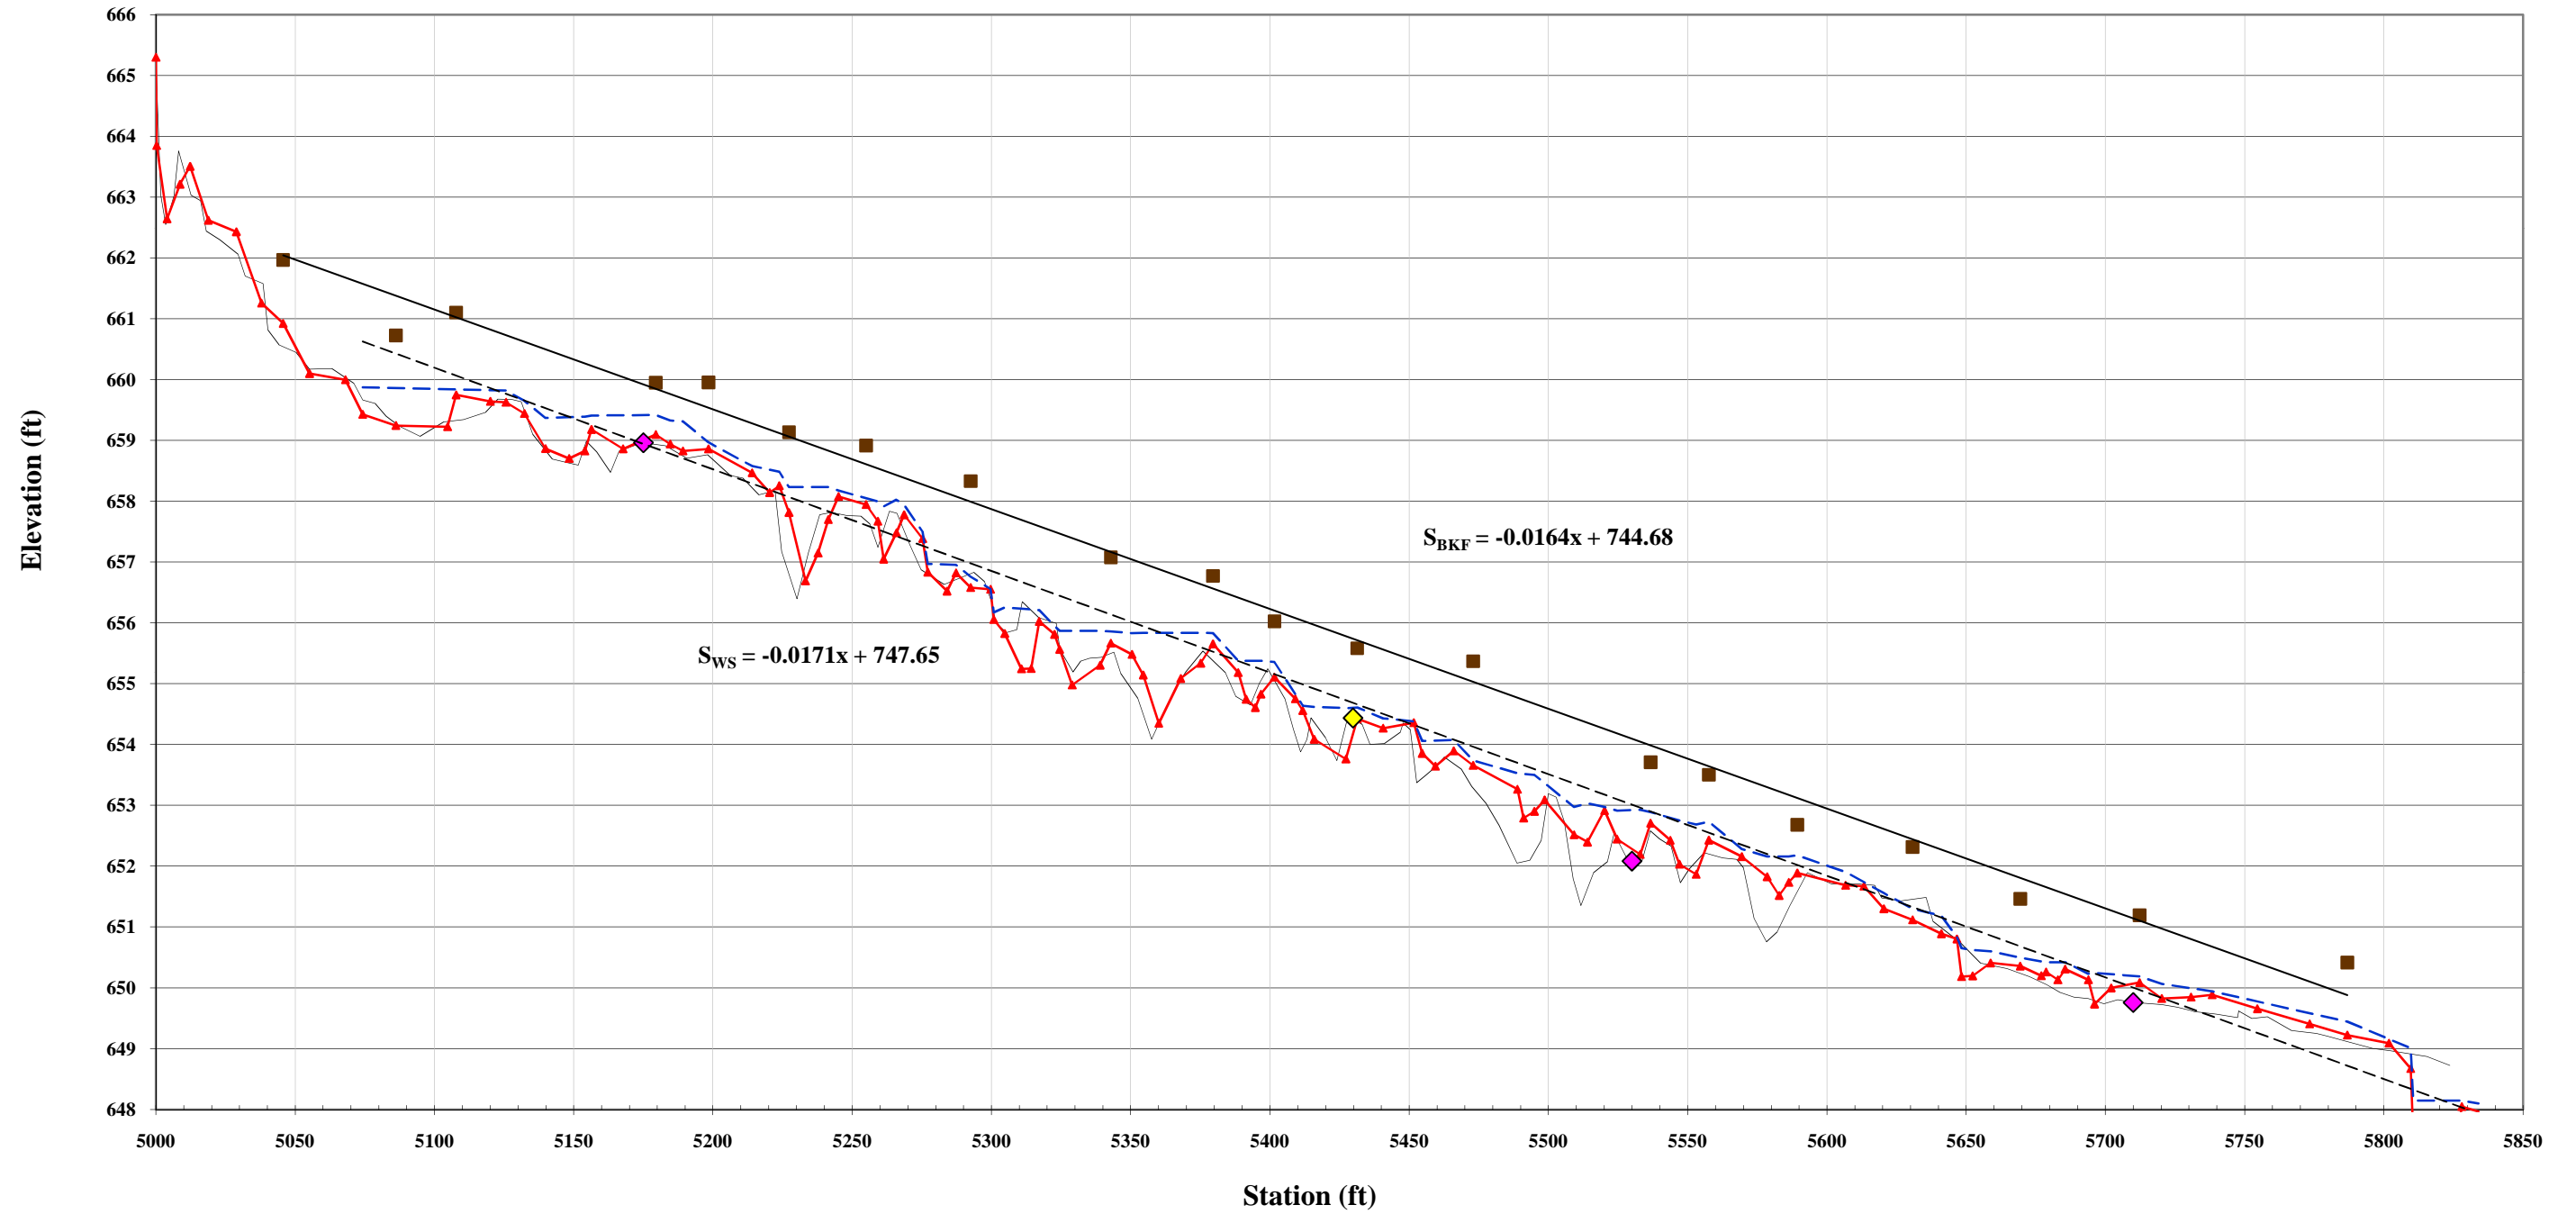



Cross-Section 1 Riffle - LTC MY-01						
Particle	Millimeter	Material	Count	Item %	Cum %	
Silt/Clay	< 0.062	S/C		0%	0%	
Very Fine	.062 - .125	S		0%	0%	
Fine	.125 - .25	A		0%	0%	
Medium	.25 - .50	N		0%	0%	
Coarse	.50 - 1	D	1	1%	1%	
Very Coarse	1 - 2	S		0%	1%	
Very Fine	2 - 4	G	2	2%	3%	
Fine	4 - 5.7			0%	3%	
Fine	5.7 - 8		R	3	3%	6%
Medium	8 - 11.3		A	14	14%	20%
Medium	11.3 - 16		V	6	6%	26%
Coarse	16 - 22.6		E	10	10%	36%
Coarse	22.6 - 32		L	20	20%	55%
Very Coarse	32 - 45		S	17	17%	72%
Very Coarse	45 - 64			18	18%	90%
Small	64 - 90		C	5	5%	95%
Small	90 - 128	O	5	5%	100%	
Large	128 - 180	B		0%	100%	
Large	180 - 256	L		0%	100%	
Small	256 - 362	B		0%	100%	
Small	362 - 512	L		0%	100%	
Medium	512 - 1024	D		0%	100%	
Lrg- Very Lrg	1024 - 2048	R		0%	100%	
Bedrock	>2048	BDRK		0%	100%	
		<b>Total</b>	<b>101</b>	<b>100%</b>	<b>100%</b>	
Summary Data						
D50	29					
D84	57					
D95	90					

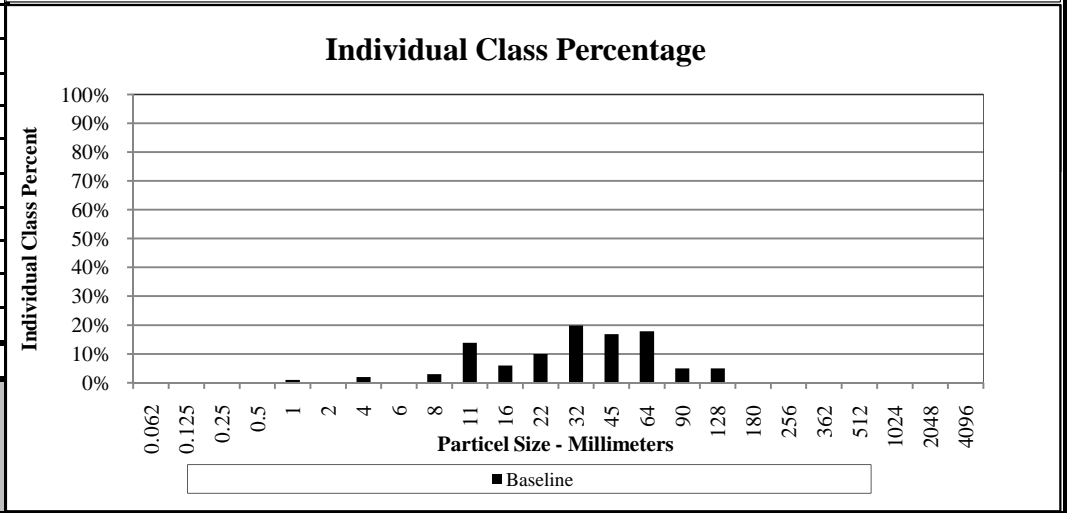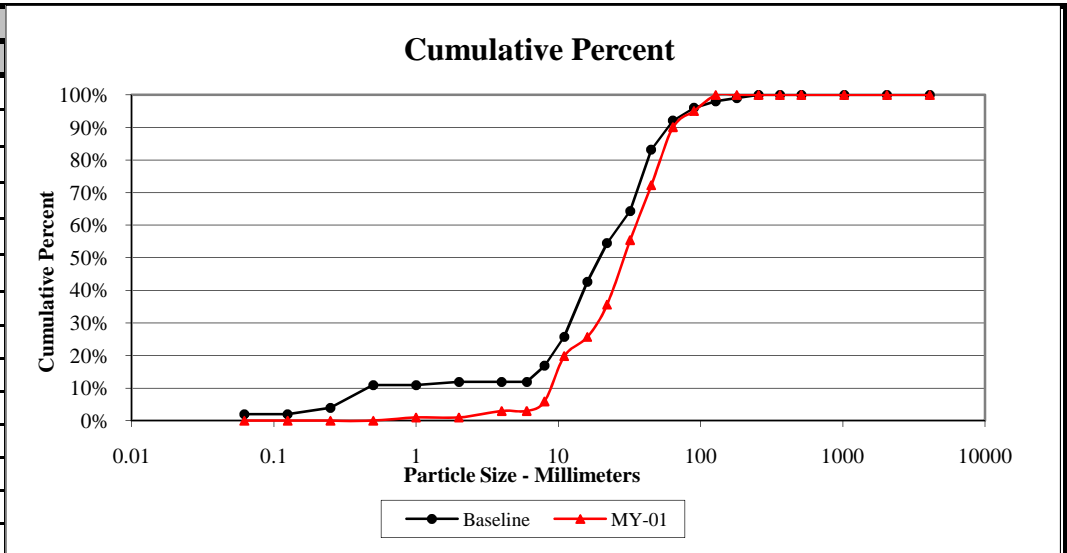



Cross-Section 2 Pool - LTC MY-01						
Particle	Millimeter	Material	Count	Item %	Cum %	
Silt/Clay	< 0.062	S/C	5	5%	5%	
Very Fine	.062 - .125	S	20	20%	25%	
Fine	.125 - .25	A	9	9%	34%	
Medium	.25 - .50	N	30	30%	64%	
Coarse	.50 - 1	D	9	9%	73%	
Very Coarse	1 - 2	S	17	17%	90%	
Very Fine	2 - 4	G	3	3%	93%	
Fine	4 - 5.7		1	1%	94%	
Fine	5.7 - 8		3	3%	97%	
Medium	8 - 11.3		A	2	2%	99%
Medium	11.3 - 16		V		0%	99%
Coarse	16 - 22.6		E	1	1%	100%
Coarse	22.6 - 32		L		0%	100%
Very Coarse	32 - 45		S		0%	100%
Very Coarse	45 - 64				0%	100%
Small	64 - 90		C		0%	100%
Small	90 - 128	O		0%	100%	
Large	128 - 180	B		0%	100%	
Large	180 - 256	L		0%	100%	
Small	256 - 362	B		0%	100%	
Small	362 - 512	L		0%	100%	
Medium	512 - 1024	D		0%	100%	
Lrg- Very Lrg	1024 - 2048	R		0%	100%	
Bedrock	>2048	BDRK		0%	100%	
		<b>Total</b>	100	100%	100%	
Summary Data						
D50	0.36					
D84	1.6					
D95	6.6					

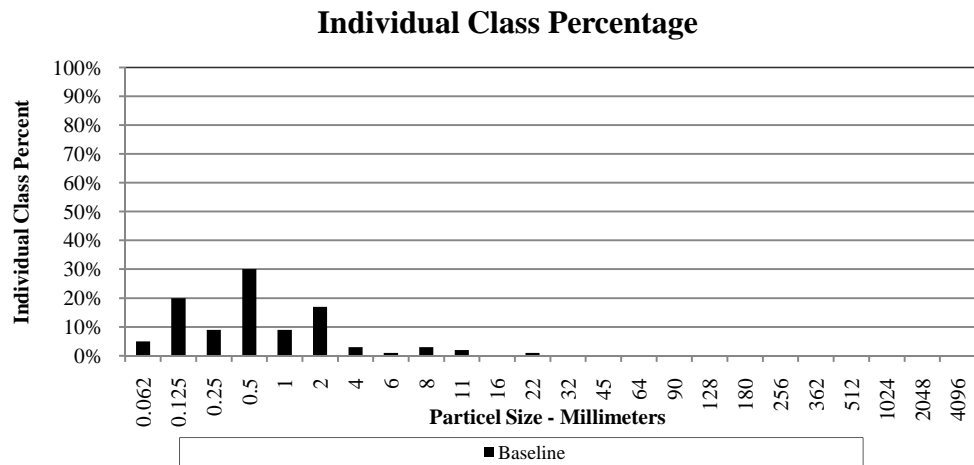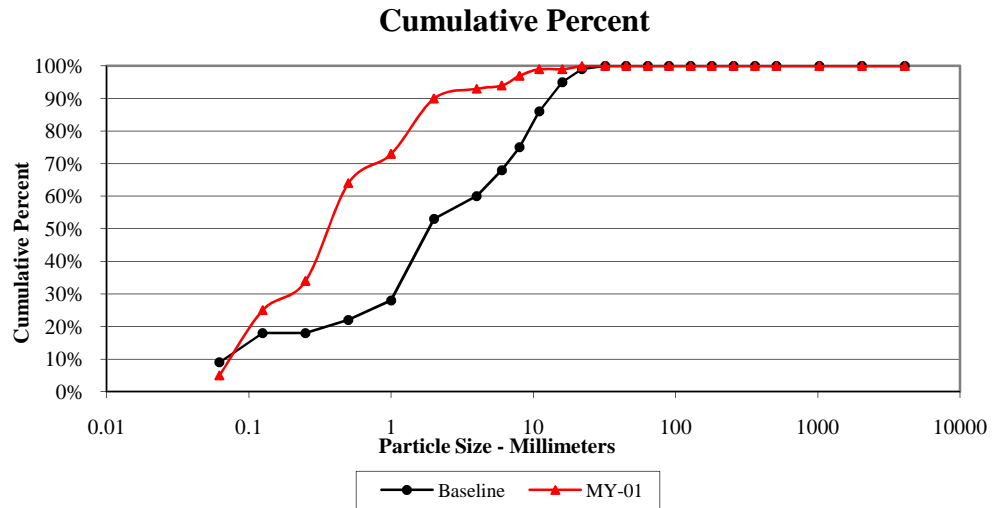

Cross-Section 3 Riffle - LTC MY-01						
Particle	Millimeter	Material	Count	Item %	Cum %	
Silt/Clay	< 0.062	S/C		0%	0%	
Very Fine	.062 - .125	S		0%	0%	
Fine	.125 - .25	A		0%	0%	
Medium	.25 - .50	N		0%	0%	
Coarse	.50 - 1	D	10	10%	10%	
Very Coarse	1 - 2	S	2	2%	12%	
Very Fine	2 - 4	G		0%	12%	
Fine	4 - 5.7		2	2%	14%	
Fine	5.7 - 8		3	3%	17%	
Medium	8 - 11.3		10	10%	27%	
Medium	11.3 - 16		6	6%	33%	
Coarse	16 - 22.6		16	16%	49%	
Coarse	22.6 - 32		22	22%	71%	
Very Coarse	32 - 45		9	9%	80%	
Very Coarse	45 - 64		13	13%	93%	
Small	64 - 90		C	4	4%	97%
Small	90 - 128		O	3	3%	100%
Large	128 - 180		B		0%	100%
Large	180 - 256		L		0%	100%
Small	256 - 362	B		0%	100%	
Small	362 - 512	L		0%	100%	
Medium	512 - 1024	D		0%	100%	
Lrg- Very Lrg	1024 - 2048	R		0%	100%	
Bedrock	>2048	BDRK		0%	100%	
		<b>Total</b>	100	100%	100%	
Summary Data						
D50	22					
D84	50					
D95	76					

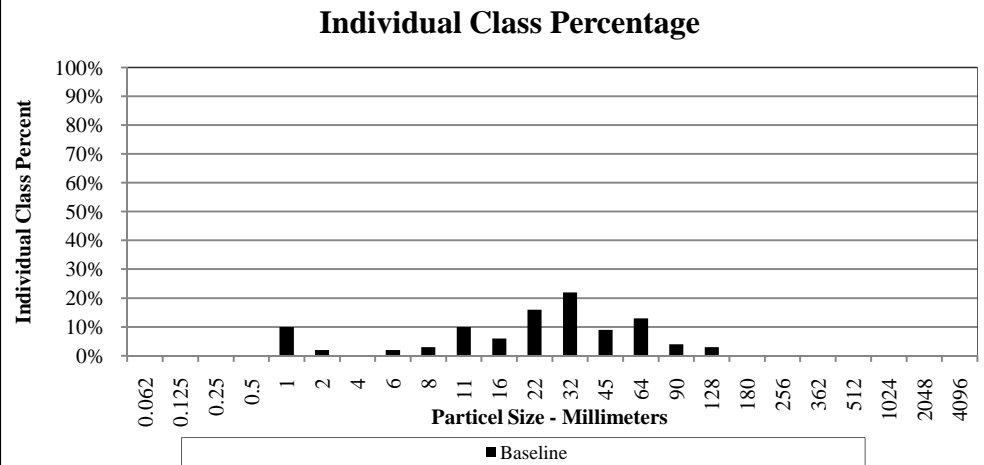
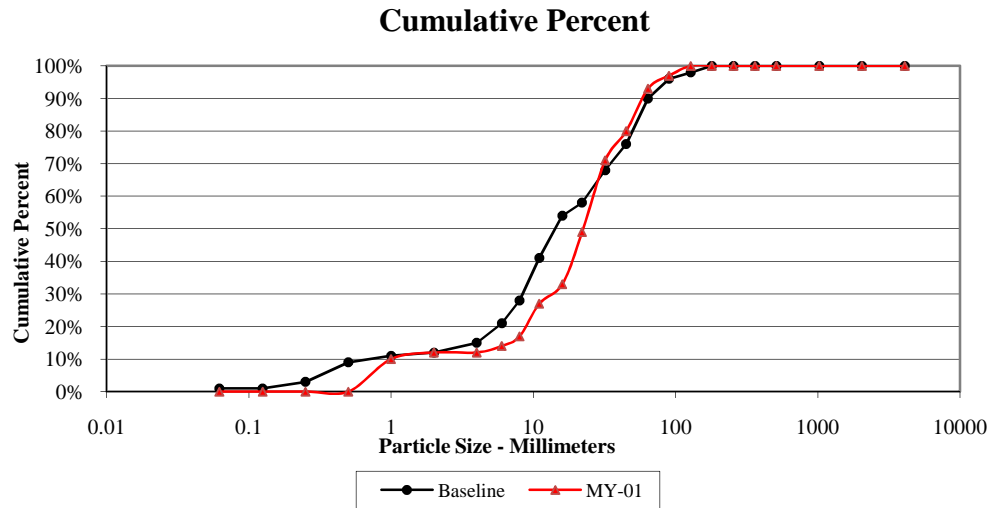


Cross-Section 4 Riffle - LTC MY-01						
Particle	Millimeter	Material	Count	Item %	Cum %	
Silt/Clay	< 0.062	S/C	2	2%	2%	
Very Fine	.062 - .125	S	3	3%	5%	
Fine	.125 - .25	A		0%	5%	
Medium	.25 - .50	N	1	1%	6%	
Coarse	.50 - 1	D		0%	6%	
Very Coarse	1 - 2	S	3	3%	9%	
Very Fine	2 - 4	G	22	22%	31%	
Fine	4 - 5.7		10	10%	41%	
Fine	5.7 - 8		7	7%	48%	
Medium	8 - 11.3		A	16	16%	63%
Medium	11.3 - 16		V	9	9%	72%
Coarse	16 - 22.6		E	3	3%	75%
Coarse	22.6 - 32		L	7	7%	82%
Very Coarse	32 - 45		S	4	4%	86%
Very Coarse	45 - 64			7	7%	93%
Small	64 - 90		C	4	4%	97%
Small	90 - 128	O	3	3%	100%	
Large	128 - 180	B		0%	100%	
Large	180 - 256	L		0%	100%	
Small	256 - 362	B		0%	100%	
Small	362 - 512	L		0%	100%	
Medium	512 - 1024	D		0%	100%	
Lrg- Very Lrg	1024 - 2048	R		0%	100%	
Bedrock	>2048	BDRK		0%	100%	
		<b>Total</b>	101	100%	100%	
Summary Data						
D50	8.4					
D84	37					
D95	76					

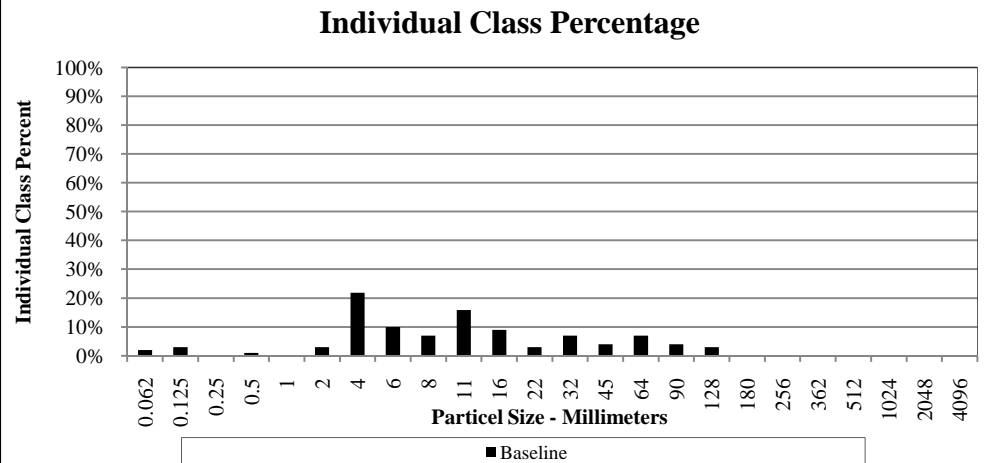
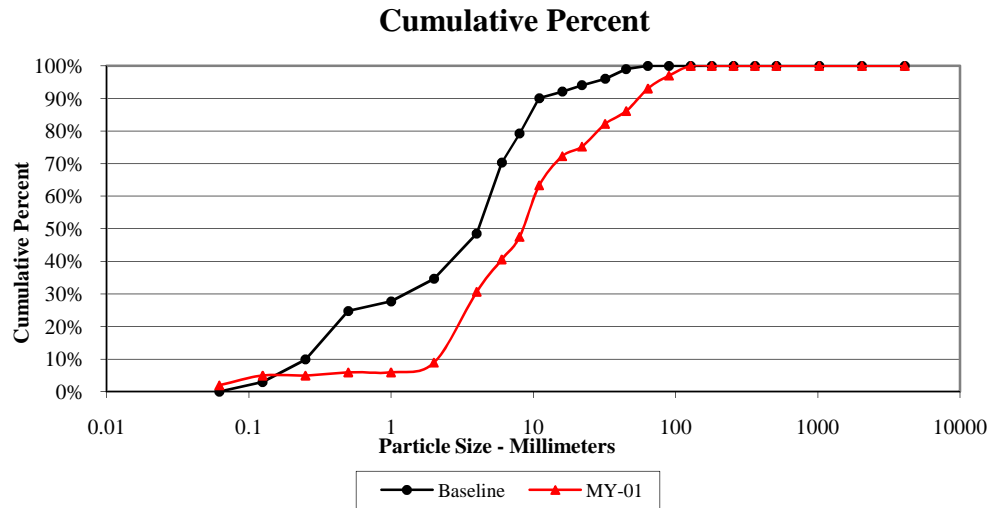






Cross-Section 5 Riffle - UT1 MY-01						
Particle	Millimeter	Material	Count	Item %	Cum %	
Silt/Clay	< 0.062	S/C		0%	0%	
Very Fine	.062 - .125	S	16	16%	16%	
Fine	.125 - .25	A	2	2%	18%	
Medium	.25 - .50	N	14	14%	31%	
Coarse	.50 - 1	D	1	1%	32%	
Very Coarse	1 - 2	S	3	3%	35%	
Very Fine	2 - 4	G	8	8%	43%	
Fine	4 - 5.7		1	1%	44%	
Fine	5.7 - 8		R	3	3%	47%
Medium	8 - 11.3		A	9	9%	56%
Medium	11.3 - 16		V	11	11%	67%
Coarse	16 - 22.6		E	10	10%	76%
Coarse	22.6 - 32		L	7	7%	83%
Very Coarse	32 - 45		S	10	10%	93%
Very Coarse	45 - 64			3	3%	96%
Small	64 - 90		C	3	3%	99%
Small	90 - 128	O		0%	99%	
Large	128 - 180	B	1	1%	100%	
Large	180 - 256	L		0%	100%	
Small	256 - 362	B		0%	100%	
Small	362 - 512	L		0%	100%	
Medium	512 - 1024	D		0%	100%	
Lrg- Very Lrg	1024 - 2048	R		0%	100%	
Bedrock	>2048	BDRK		0%	100%	
		<b>Total</b>	<b>102</b>	<b>100%</b>	<b>100%</b>	
Summary Data						
D50	8.9					
D84	33					
D95	56					

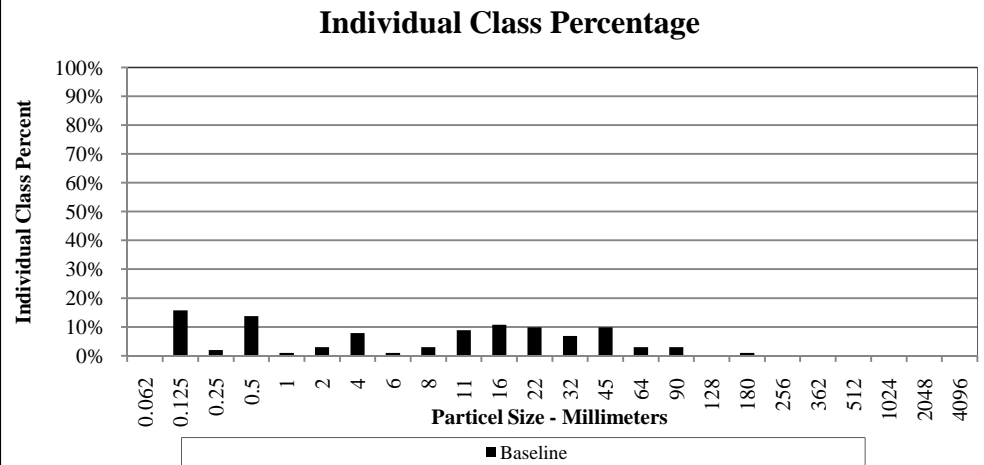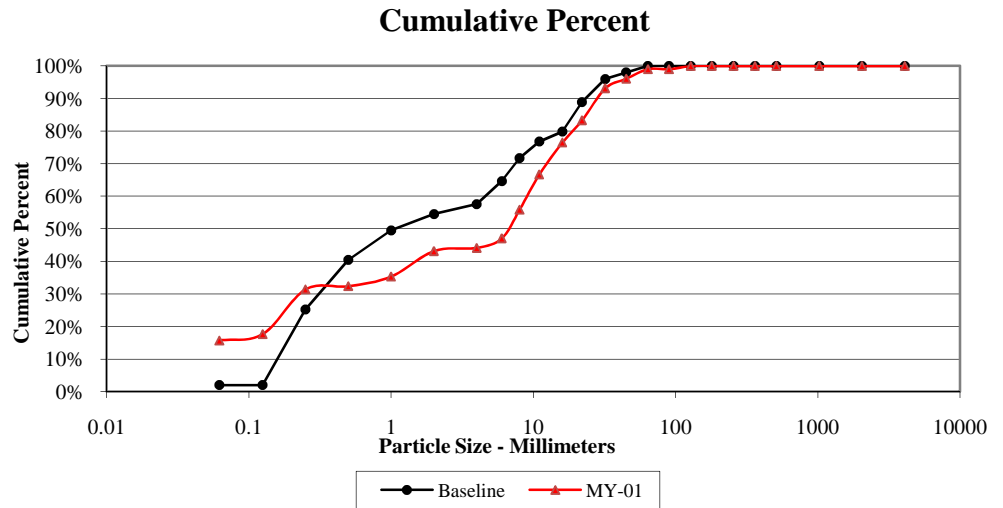

Cross-Section 6 Pool - UT1 MY-01					
Particle	Millimeter	Material	Count	Item %	Cum %
Silt/Clay	< 0.062	S/C	3	3%	3%
Very Fine	.062 - .125	S		0%	3%
Fine	.125 - .25	A		0%	3%
Medium	.25 - .50	N	12	11%	14%
Coarse	.50 - 1	D	4	4%	18%
Very Coarse	1 - 2	S	8	8%	26%
Very Fine	2 - 4	G R A V E L S	8	8%	33%
Fine	4 - 5.7		5	5%	38%
Fine	5.7 - 8		8	8%	46%
Medium	8 - 11.3		26	25%	70%
Medium	11.3 - 16		14	13%	84%
Coarse	16 - 22.6		11	10%	94%
Coarse	22.6 - 32		2	2%	96%
Very Coarse	32 - 45		3	3%	99%
Very Coarse	45 - 64		1	1%	100%
Small	64 - 90		C		0%
Small	90 - 128	O		0%	100%
Large	128 - 180	B		0%	100%
Large	180 - 256	L		0%	100%
Small	256 - 362	B		0%	100%
Small	362 - 512	L		0%	100%
Medium	512 - 1024	D		0%	100%
Lrg- Very Lrg	1024 - 2048	R		0%	100%
Bedrock	>2048	BDRK		0%	100%
		<b>Total</b>	<b>105</b>	<b>100%</b>	<b>100%</b>
Summary Data					
D50	8.6				
D84	17				
D95	38				

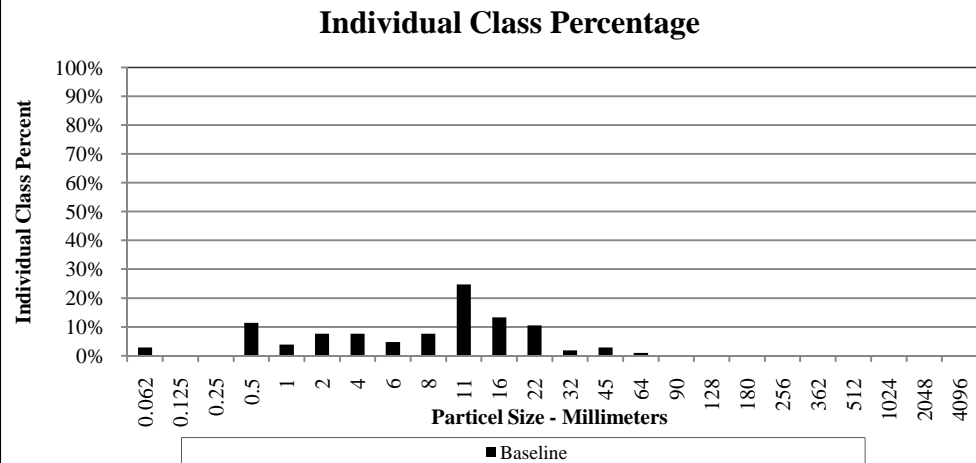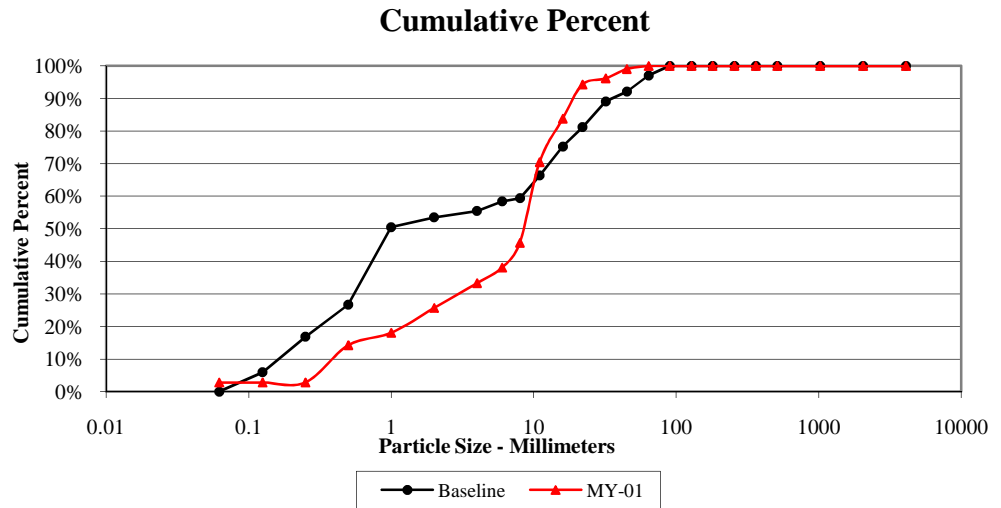

Cross-Section 7 Riffle - UT1 MY-01						
Particle	Millimeter	Material	Count	Item %	Cum %	
Silt/Clay	< 0.062	S/C	3	3%	3%	
Very Fine	.062 - .125	S	8	8%	11%	
Fine	.125 - .25	A	15	15%	25%	
Medium	.25 - .50	N	38	37%	62%	
Coarse	.50 - 1	D	18	17%	80%	
Very Coarse	1 - 2	S	6	6%	85%	
Very Fine	2 - 4	G	5	5%	90%	
Fine	4 - 5.7		1	1%	91%	
Fine	5.7 - 8		2	2%	93%	
Medium	8 - 11.3		A	5	5%	98%
Medium	11.3 - 16		V	1	1%	99%
Coarse	16 - 22.6		E	1	1%	100%
Coarse	22.6 - 32		L		0%	100%
Very Coarse	32 - 45		S		0%	100%
Very Coarse	45 - 64				0%	100%
Small	64 - 90		C		0%	100%
Small	90 - 128	O		0%	100%	
Large	128 - 180	B		0%	100%	
Large	180 - 256	L		0%	100%	
Small	256 - 362	B		0%	100%	
Small	362 - 512	L		0%	100%	
Medium	512 - 1024	D		0%	100%	
Lrg- Very Lrg	1024 - 2048	R		0%	100%	
Bedrock	>2048	BDRK		0%	100%	
		<b>Total</b>	103	100%	100%	
Summary Data						
D50	0.4					
D84	1.7					
D95	9					

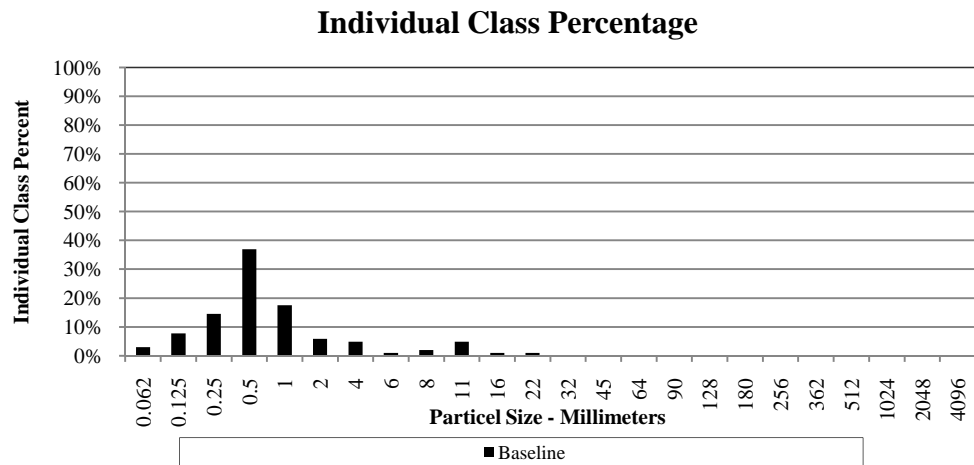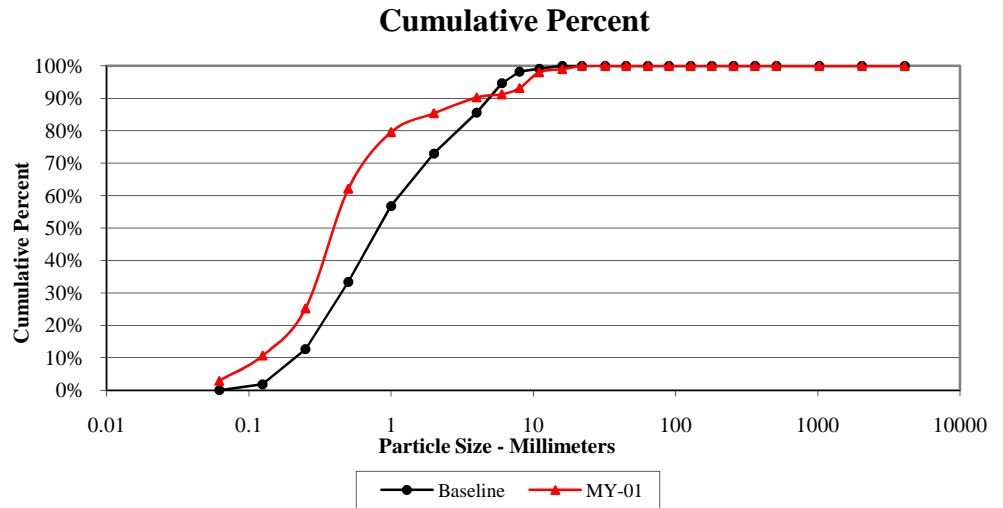

**Table 10a. Baseline Stream Data Summary Table: Little Troublesome Creek - 1,375 lf**

**Little Troublesome / Project No. 749**

Parameter	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			As-built									
	LL	UL	Eq.	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Med	Max	Min	Mean	Med	Max	SD	n				
<b>Dimension and Substrate - Riffle</b>																												
Bankfull Width (ft)				21.3	24.2	23.3	29.0	3.4	4	11.9			20.1		2		31.6		32.1	32.7	32.6	33.3	0.6	3				
Floodprone Width (ft)					>65				3		>60				2		>60			>200				3				
Bankfull Mean Depth (ft)				4.4	4.7	4.8	5.0	0.2	4	1.7			2.7		2		3.7		3.6	3.7	3.7	3.7	0.1	3				
Bankfull Max Depth (ft)				6.2	6.6	6.7	6.9	0.3	4	3.3			4.2		2		4.9		4.7	4.8	4.8	4.9	0.1	3				
Bankfull Cross-Sectional Area (ft <sup>2</sup> )				106.1	114.3	107.6	135.8	14.4	4	32.4			33.4		2		118.0		118.6	118.8	118.6	119.2	0.3	3				
Width/Depth Ratio				4.2	5.0	4.7	6.2	1.0	3	4.4			12.1		2		8.5		8.7	9.0	8.9	9.3	0.3	3				
Entrenchment Ratio				2.0	2.6	2.7	3.0	0.5	3	2.0			3.0		2		>3.0			>6.0				3				
Bank Height Ratio				1.0	1.1	1.1	1.2	0.1	3	1.0			1.1		2		1.0		1.0	1.0	1.0	1.0	0.0	3				
d50 (mm)				4.5	6.8	6.8	9.1	3.3	2	1.9			3.4		2				4.1	12.7	14.0	20.0	8.0	3				
<b>Profile</b>																												
Riffle Length (ft)																	58		60	90	89	121	21	6				
Riffle Slope (ft/ft)										0.0010			0.0070			0.002		0.004	0.0008	0.0022	0.0018	0.0039	0.0013	6				
Pool Length (ft)										13			21			20		56	11	60	42	144	42	7				
Pool Max Depth										1.5			2.5				7.5		4.9	5.7	5.8	6.2	0.5	7				
Pool Spacing (ft)										32			80			50		212	169	199	180	285	44	6				
Pool Volume (ft <sup>3</sup> )																												
<b>Pattern</b>																												
Channel Beltwidth (ft)										50			60				125		51	63	55	85	15	6				
Radius of Curvature (ft)										24			31			72		126	59	87	90	120	24	7				
Rc:Bankfull width (ft/ft)										1.2			2.6			2.3		4.0	1.8	2.7	2.8	3.7						
Meander Wavelength (ft)										77			138			158		358	293	328	318	385	35	5				
Meander Width Ratio										2.5			5.0				3.9		1.6	1.9	1.7	2.6						
<b>Substrate, bed and transport parameters</b>																												
Ri%/Ru%/P%/G%/S%																												
SC% / Sa% / G% / C% / B% / Be%					3%	54%	40%	3%	0%	0%		0%	52%	48%	0%	0%	0%		1%	19%	75%	6%	0%	0%				
d16 / d35 / d50 / d84 / d95 / di <sup>p</sup> / di <sup>sp</sup> (mm)					0.26	0.56	1.4	8.1	15	-	-		0.7	1.2	1.9	16	26	-	-		0.79	6.1	10	18	42	71	-	-
Reach Shear Stress (competency) lb/ft <sup>2</sup>																	0.38					0.28						
Max part size (mm) mobilized at bankfull																	28					20						
Stream Power (transport capacity) W/m <sup>2</sup>																												
<b>Additional Reach Parameters</b>																												
Drainage Area (SM)						12.09						1.68					12.09				12.09							
Impervious cover estimate						21%											21%				21%							
Rosgen Classification						E4						E4					E4/C4				E4/C4							
Bankfull Velocity (fps)						4.1 - 5.3						3.4 - 4.4					4.3											
Bankfull Discharge (cfs)						553 - 564						115 - 150					510 - 550											
Valley length (ft)						1,273											1,273				1,273							
Channel thalweg length (ft)						1,329											1,379				1,401							
Sinuosity						1.06											1.10				1.10							
Water Surface Slope (Channel) (ft/ft)						0.0020						0.0030					0.0020				0.0015							
BF slope (ft/ft)						0.0020											0.0020				0.0018							
Bankfull Floodplain Area (acres)																												
Proportion over wide (%)																												
Entrenchment Class (ER Range)																												
Incision Class (BHR Range)																												
BEHI VL% / L% / M% / H% / VH% / E%																												
Channel Stability or Habitat Metric																												
Biological or Other																												

**Table 10b. Baseline Stream Data Summary Table: UT1 - 813 lf  
Little Troublesome / Project No. 749**

Parameter	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			As-built					
	LL	UL	Eq.	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Med	Max	Min	Mean	Med	Max	SD	n
<b>Dimension and Substrate - Riffle</b>																								
Bankfull Width (ft)				4.0	5.4	5.1	7.7	1.4	5	7.7			10.8				6.3		7.2	7.6		7.9	0.5	2
Floodprone Width (ft)				5	6	6	7	0.9	3	13			16				12		13	13		14	0.6	2
Bankfull Mean Depth (ft)				0.7	0.9	0.9	1.1	0.2	5	0.7			0.9				0.6		0.6	0.6		0.6	0	2
Bankfull Max Depth (ft)				1.0	1.3	1.1	1.9	0.4	5	1.1			1.4				1.0		1.1	1.1		1.1	0	2
Bankfull Cross-Sectional Area (ft <sup>2</sup> )				3.6	4.6	4.3	5.8	1.0	5	6.1			8.8				3.5		4.5	4.7		4.8	0.2	2
Width/Depth Ratio				4.4	5.7	5.6	7.0	1.3	3	8.5			11.4				11.4		11.5	12.3		13.0	1.1	2
Entrenchment Ratio				1.0	1.3	1.4	1.5	0.3	3	1.6			2.1				1.9		1.6	1.8		1.9	0.2	2
Bank Height Ratio				5.3	6.1	6.4	6.5	0.7	3								1.0		1.0	1.0		1.0	0	2
d50 (mm)				2.2	11.2	12.3	19.2	8.6	3										0.8	1.0		1.1	0.2	2
<b>Profile</b>																								
Riffle Length (ft)																			3	11	8	32	9	11
Riffle Slope (ft/ft)										0.0120			0.0280			0.0180		0.0400	0.0077	0.0378	0.0318	0.1022	0.0283	11
Pool Length (ft)										5			9			3		11	5	13	12	36	8	14
Pool Max Depth										0.8			0.9				1.4		1.7	2.3	2.2	3.0	0.5	12
Pool Spacing (ft)																			21	44	41	81	22	13
Pool Volume (ft <sup>3</sup> )																								
<b>Pattern</b>																								
Channel Beltwidth (ft)											22						13		6	9	9	14	2.1	19
Radius of Curvature (ft)										11			23			13		32	14	18	18	27	4.5	27
Rc:Bankfull width (ft/ft)										1.0			3.0			2.0		5.0	1.8	2.4	2.4	3.6		
Meander Wavelength (ft)										45			59			32		63	40	51	49	69	7.6	25
Meander Width Ratio										2.0			2.9			2.0		2.9	0.8	1.2	1.2	1.9		
<b>Substrate, bed and transport parameters</b>																								
Ri%/Ru%/P%/G%/S%																								
SC% / Sa% / G% / C% / B% / Be%							0% / 27% / 73% / 0% / 0%						6% / 45% / 42% / 7% / 0%									1% / 63% / 36% / 0% / 0% / 0%		
d16 / d35 / d50 / d84 / d95 / di <sup>p</sup> / di <sup>sp</sup> (mm)							1.4 / 3.2 / 7.3 / 15 / 20						0.14 / 0.38 / 1.8 / 18 / 139									0.22 / 0.47 / 0.87 / 2.1 / 7.3 / 23		
Reach Shear Stress (competency) lb/ft <sup>2</sup>																	0.42					0.60		
Max part size (mm) mobilized at bankfull																	32					35		
Stream Power (transport capacity) W/m <sup>2</sup>																								
<b>Additional Reach Parameters</b>																								
Drainage Area (SM)							0.10						0.15				0.10					0.10		
Impervious cover estimate																								
Rosgen Classification							G4c						B4c				B4c					B4c		
Bankfull Velocity (fps)							4.3 - 4.7						5.1 - 5.8				3.7					3.7		
Bankfull Discharge (cfs)							16 - 20						31 - 49				13 - 20					17		
Valley length (ft)							769										769					769		
Channel thalweg length (ft)							873										813					824		
Sinuosity							1.02						1.20				1.10					1.10		
Water Surface Slope (Channel) (ft/ft)							0.019						0.012				0.018					0.017		
BF slope (ft/ft)							0.021						0.017				0.021					0.016		
Bankfull Floodplain Area (acres)																								
Proportion over wide (%)																								
Entrenchment Class (ER Range)																								
Incision Class (BHR Range)																								
BEHI VL% / L% / M% / H% / VH% / E%																								
Channel Stability or Habitat Metric																								
Biological or Other																								

**Table 11. Cross-Section Morphology Data Tables**  
**Little Troublesome / Project No. 749**

Dimension and Substrate	Cross-Section 1 (LTC, Riffle)							Cross-Section 2 (LTC, Pool)							Cross-Section 3 (LTC, Riffle)							Cross-Section 4 (LTC, Riffle)							Cross-Section 5 (UT1, Riffle)														
Based on fixed baseline elevation	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+								
Bankfull Width (ft)	32.6	33.0						36.0	39.1						32.1	32.3							33.3	33.5						7.9	7.7												
Floodprone Width (ft)	>200	>200						-	-						>200	>200							>200	>200						13	13												
Bankfull Mean Depth (ft)	3.7	3.6						3.4	3.4						3.7	3.6							3.6	3.6						0.6	0.5												
Bankfull Max Depth (ft)	4.8	4.8						6.0	7.3						4.9	4.9							4.7	4.9						1.1	0.9												
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	119.2	118.4						123.1	134.3						118.6	117.5							118.6	120.0						4.8	4.1												
Bankfull Width/Depth Ratio	8.9	9.2						-	-						8.7	8.9							9.3	9.4						13.0	14.5												
Bankfull Entrenchment Ratio	>6.0	>6.0						-	-						>6.0	>6.0							>6.0	>6.0						1.6	1.6												
Bankfull Bank Height Ratio	1.0	1.0						-	-						1.0	1.0							1.0	1.0						1.0	1.0												
Cross-Sectional Area Between End Pins (ft <sup>2</sup> )	142.4	147.9						158.5	141.9						156.0	160.1							162.2	127.7						150.8	156.3												
d50 (mm)	20.0	29.0						1.8	0.36						14.0	22.0							4.1	8.4						1.1	8.9												
		Cross-Section 6 (UT1, Pool)							Cross-Section 7 (UT1, Riffle)																																		
Based on fixed baseline elevation	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+																													
Bankfull Width (ft)	4.6	4.8						7.2	6.9																																		
Floodprone Width (ft)	-	-						13.6	13.6																																		
Bankfull Mean Depth (ft)	0.9	1.0						0.6	0.6																																		
Bankfull Max Depth (ft)	1.4	1.6						1.1	1.0																																		
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	4.2	4.8						4.5	4.3																																		
Bankfull Width/Depth Ratio	-	-						11.5	11.1																																		
Bankfull Entrenchment Ratio	-	-						1.9	2.0																																		
Bankfull Bank Height Ratio	-	-						1.0	1.0																																		
Cross-Sectional Area Between End Pins (ft <sup>2</sup> )	146.9	149.8						120.6	123.6																																		
d50 (mm)	1.0	8.6						0.82	0.4																																		

**Table 11. Cross-Section Morphology Data Tables**

**Little Troublesome / Project No. 749**

**Segment Reach: Little Troublesome Creek (1,375 ft.)**

Parameter	MY01 (2010)						MY02 (2011)						MY03 (2012)						MY04 (2013)						MY05 (2014)					
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
<b>Dimension</b>																														
Bankfull Width (ft)	32.3	33.0		33.5		3																								
Floodprone Width (ft)	200	200		200		3																								
Bankfull Mean Depth (ft)	3.6	3.6		3.6		3																								
Bankfull Max Depth (ft)	4.8	4.9		4.9		3																								
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	117.5	118.4		120.0		3																								
Width/Depth Ratio	8.9	9.2		9.4		3																								
Entrenchment Ratio	6.0	6.0		6.0		3																								
Bank Height Ratio	1.0	1.0		1.0		3																								
<b>Pattern</b>																														
Channel Beltwidth (ft)	66	89	90	110	18.2	6																								
Radius of Curvature (ft)	80	96	80	120	21.9	5																								
Rad. of Curv. : Bankfull Width (ft/ft)	2.4	2.9	2.4	3.6																										
Meander Wavelength (ft)	280	318	314	375	33.2	6																								
Meander Width Ratio	2.0	2.7	2.7	3.3																										
<b>Profile</b>																														
Riffle Length (ft)	21	65	60	104	26	7																								
Riffle Slope (ft/ft)	0.002	0.005	0.004	0.014	0.004	7																								
Pool Length (ft)	32	65	48	127	35	7																								
Pool Max Depth (ft)	7.3	7.3		7.3		1																								
Pool Spacing (ft)	93	198	179	291	73	6																								
<b>Additional Reach Parameters</b>																														
Valley Length (ft)			1,285																											
Channel Thalweg Length (ft)			1,402																											
Sinuosity			1.08																											
Water Surface Slope (ft/ft)			0.0015																											
Bankfull Slope (ft/ft)			0.0018																											
Rosgen Classification			C5																											
Ri% / Ru% / P% / G% / S%			25 / 20 / 30 / 25 / 0																											
SC% / Sa% / G% / C% / B% / Be%			0%/12%/81%/7%/0%																											
d16 / d35 / d50 / d84 / d95			7.3/17/22/50/76																											
% of Reach with Eroding Banks			1%																											

**Table 11. Cross-Section Morphology Data Tables**  
**Little Troublesome / Project No. 749**  
**Segment Reach: UT1 (813 ft.)**

Parameter	MY01 (2010)						MY02 (2011)						MY03 (2012)						MY04 (2013)						MY05 (2014)					
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
Bankfull Width (ft)	6.9	7.3		7.7	0.566	2																								
Floodprone Width (ft)	12.7	13.15		13.6	0.636	2																								
Bankfull Mean Depth (ft)	0.5	0.6		0.6	0.064	2																								
Bankfull Max Depth (ft)	0.9	1.0		1.0	0.064	2																								
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	4.1	4.2		4.3	0.141	2																								
Width/Depth Ratio	11.1	12.8		14.5	2.396	2																								
Entrenchment Ratio	1.6	1.8		2.0	0.283	2																								
Bank Height Ratio	1.0	1.0		1.0	0.000	2																								
<b>Pattern</b>																														
Channel Beltwidth (ft)	7	12	12	17	2.91	21																								
Radius of Curvature (ft)	12	18.1	20	25	3.19	26																								
Rad. of Curv. : Bankfull Width (ft/ft)	2.1	2.5	2.7	3.4	0.44	26																								
Meander Wavelength (ft)	45	50.1	50	56	2.79	22																								
Meander Width Ratio	1.0	1.64	1.64	2.33	0.39	21																								
<b>Profile</b>																														
Riffle Length (ft)	2	10	6	42	12	13																								
Riffle Slope (ft/ft)	0.000	0.075	0.049	0.243	0.071	13																								
Pool Length (ft)	3	9	6	30	7	16																								
Pool Max Depth (ft)	1.6		1.6	1.6		1																								
Pool Spacing (ft)	18	39	33	69	18	15																								
<b>Additional Reach Parameters</b>																														
Valley Length (ft)			780																											
Channel Thalweg Length (ft)			811																											
Sinuosity			1.04																											
Water Surface Slope (ft/ft)			0.0171																											
Bankfull Slope (ft/ft)			0.0164																											
Rosgen Classification			B5																											
Ri% / Ru% / P% / G% / S%*																														
SC% / Sa% / G% / C% / B% / Be%			3%/83%/15%/0%/0%																											
d16 / d35 / d50 / d84 / d95			0.16/0.3/0.4/1.7/9																											
% of Reach with Eroding Banks			5%																											

\*The small size of UT 1 combined with vegetation growing in the channel creates poorly defined features.



<b>Table 12. Verification of Bankfull Events</b>			
<b>Little Troublesome / Project No. 749</b>			
<b>Date of Data Collection</b>	<b>Date of Occurrence</b>	<b>Method</b>	<b>Photo Number</b>
6/14/2009	6/11/2009	Site visit to evaluate indicators of stage after storm event	N/A
11/11/2009	11/11/2009	Site visit to evaluate indicators of stage after storm event	N/A
12/25/2009	12/25/2009	Land owner, eye-witness account	N/A
1/25/2010	1/25/2010	Site visit to evaluate indicators of stage after storm event	N/A
10/7/2010	9/26/2010	Site visit to evaluate indicators of stage after storm event	1, see below

**Bankfull Photo #1**

