

**Little Troublesome Site
Stream Restoration Monitoring Report
EEP Project # 749
EEP Contract # 004711
Monitoring Year 03**



Submitted to:



NCDENR-EEP, 1652 Mail Service Center, Raleigh, NC 27699-1652

**Construction Completed: December 2009
Data Collection: 2012**

Design and Monitoring Firm



**Landmark Center II, Suite 220
4601 Six Forks Road
Raleigh, NC 27609
Phone: (919) 278-2514
Fax: (919) 783-9266**

**Project Manager: Adam Spiller
Email: adam.spiller@kci.com
Project No: 16121975_LT12**

Table of Contents

1.0	EXECUIVE SUMMARY/PROJECT ABSTRACT.....	1
2.0	METHODOLOGY	2
3.0	REFERENCES.....	2

Appendix A – Project Vicinity Map and Background Tables

Figure 1.	Vicinity Map.....	4
Figure 2.	Site Map.....	5
Table 1.	Project Components and Mitigation Credits.....	6
Table 2.	Project Activity and Reporting History	7
Table 3.	Project Contacts Table	7
Table 4.	Project Attribute Table.....	8

Appendix B – Visual Assessment Data

Current Condition Plan View.....	10
Table 5. Visual Stream Morphology Stability Assessment	11
Table 6. Vegetation Condition Assessment	13
Stream Station Photos	14
Vegetation Monitoring Plot Photos.....	18

Appendix C – Vegetation Plot Data

Table 7. Vegetation Plot Criteria Attainment	21
Table 8. CVS Vegetation Plot Metadata.....	22
Table 9. CVS Stem Count Total and Planted by Plot and Species	23

Appendix D – Stream Survey Data

Cross-Section Plots	26
Longitudinal Profile Plots	33
Pebble Count Plots.....	35
Table 10. Baseline Stream Data Summary Table	42
Table 11a. Cross-Section Morphology Data Table	44
Table 11b. Stream Reach Morphology Data Table.....	46

Appendix E – Hydrologic Data

Table 12. Verification of Bankfull Events	47
---	----

1.0 EXECUTIVE SUMMARY / PROJECT ABSTRACT

The Little Troublesome Stream and Wetland Restoration Site, completed in December 2009, restored a total of 2,188 linear feet of stream in the Upper Cape Fear River Basin. In addition, there are approximately 4.5 acres of wetland preservation, 1.9 acres of wetland enhancement, and 2,754 linear feet of stream preservation within the site. The project is located in the USGS Hydrologic Unit 03030002-01-0030 of the Cape Fear River Basin. This HU is within the EEP's Upper Cape Fear Basin Local Watershed Plan and is also listed as a Targeted Local Watershed (TLW) in EEP's *Cape Fear River Basin Priorities Plan* (2009). The project goals and objectives are listed below.

Project Goals

- Restore a stable channel morphology to the project stream that is capable of moving the flows and sediment provided by its watershed.
- Improve water quality for an NCDWQ stream, classified as a Class C and Nutrient Sensitive Waters by reducing bank erosion and bed degradation.
- Enhance aquatic and terrestrial habitat.
- Enhance and preserve existing wetlands and forested buffers.

Project Objectives

- Restore 2,188 linear feet of stable stream channel with the appropriate pattern, profile, and dimension that can support a gravel transport system
- Restore a natural riparian buffer.
- Restore the hyporheic zone in the project streams and re-establish the natural stream features.
- Plug ditches to increase groundwater input to existing wetlands.
- Plant native trees and shrubs throughout the site.

The vegetation monitoring success criterion for the planted stream riparian zone is a density of 320 stems/acre after the third year of monitoring and an allowance for 10% mortality in the fourth and fifth years with a final density of 260 stems/acre. The third-year vegetation monitoring was based on the Level 2 CVS-EEP vegetation monitoring protocol. The site's average density for this monitoring period is 637 planted stems/acre, including live stakes, and 607 planted stems/acre, excluding live stakes. All of the eight plots had greater than 320 planted stems/acre. There are many volunteer woody stems throughout the site. Including volunteers, the monitoring plots averaged 3,232 total stems/acre.

The 2012 monitoring found that the slope from the left bank of the tributary to the terrace (the north-facing slope) had sparse vegetation coverage with some bare areas. There has been high live stake survival along the tributary and variable survival along Little Troublesome Creek. Multiflora rose (*Rosa multiflora*) is scattered throughout the easement along Little Troublesome Creek and UT1. A small area of Japanese hops (*Humulus japonicas*) is located on Little Troublesome at Station 21+30.

Third-year monitoring found Little Troublesome Creek to be stable, with only minor changes from the previous monitoring conditions. The tributary has had isolated areas of localized bed degradation and bank erosion since construction. For the third monitoring year these areas (predominantly from Station 52+80 to 53+40) appear to be stabilizing. The isolated areas of erosion on the outer bends of Little Troublesome are trending toward stability, with only two areas still displaying minor bank erosion. There are three beaver dams on Little Troublesome Creek. The first one is located near the start of Little Troublesome at Station 12+25 on the riffle grade control structure. The second beaver dam is located at approximately Stations 21+25 in conjunction with a fallen tree, and the third dam is located at 22+90. The longitudinal and cross-sectional data also reflect overall stability in the project streams. As a part of the

stream success criterion, the stream must experience at least two bankfull events, each in separate monitoring years. The site has experienced multiple bankfull events since construction.

Summary information/data related to the occurrence of items such as beaver or encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly the Restoration Plan) documents available on the EEPs website. All raw data supporting the tables and figures in the appendices are available from EEP upon request.

2.0 METHODOLOGY

The survey data were collected with a total station instrument the week of August 20, 2012.

The stationing for the longitudinal profile is based on the thalweg stationing and has been adjusted to match grade control structures from previous longitudinal profiles.

Some of the cross-section surveys on Little Troublesome Creek showed slightly lower top of bank measurements than the baseline measurements. In the cases where the top of bank measurement was only nominally lower than the bankfull elevation, the bankfull width was limited to just include the distance between the tops of left and right banks. This ensures that the bankfull width measurement is representative of the cross-section, and not abnormally large because of insignificant changes in the surveyed cross-section.

The CVS-EEP protocol, Level 2 (<http://cvs.bio.unc.edu/methods.htm>) was used to collect vegetation data from the site. The vegetation monitoring was completed during the week of September 4, 2012.

3.0 REFERENCES

Lee, M.T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2006. CVS-EEP Protocol for Recording Vegetation, Version 4.0 (<http://cvs.bio.unc.edu/methods.htm>)

NCEEP. 2004. Troublesome and Little Troublesome Local Watershed Plan. (http://www.nceep.net/services/lwps/Troublesome_Creek/trouble-summ.pdf)

NCEEP. 2009. Cape Fear River Basin Restoration Priorities. (http://www.nceep.net/services/lwps/cape_fear/RBRP%20Cape%20Fear%202008.pdf)

USACE. 2003. Stream Mitigation Guidelines. USACE, NCDENR-DWQ, USEPA, NCWRC.

Appendix A

Project Vicinity Map and Background Tables












Figure 1. Vicinity Map

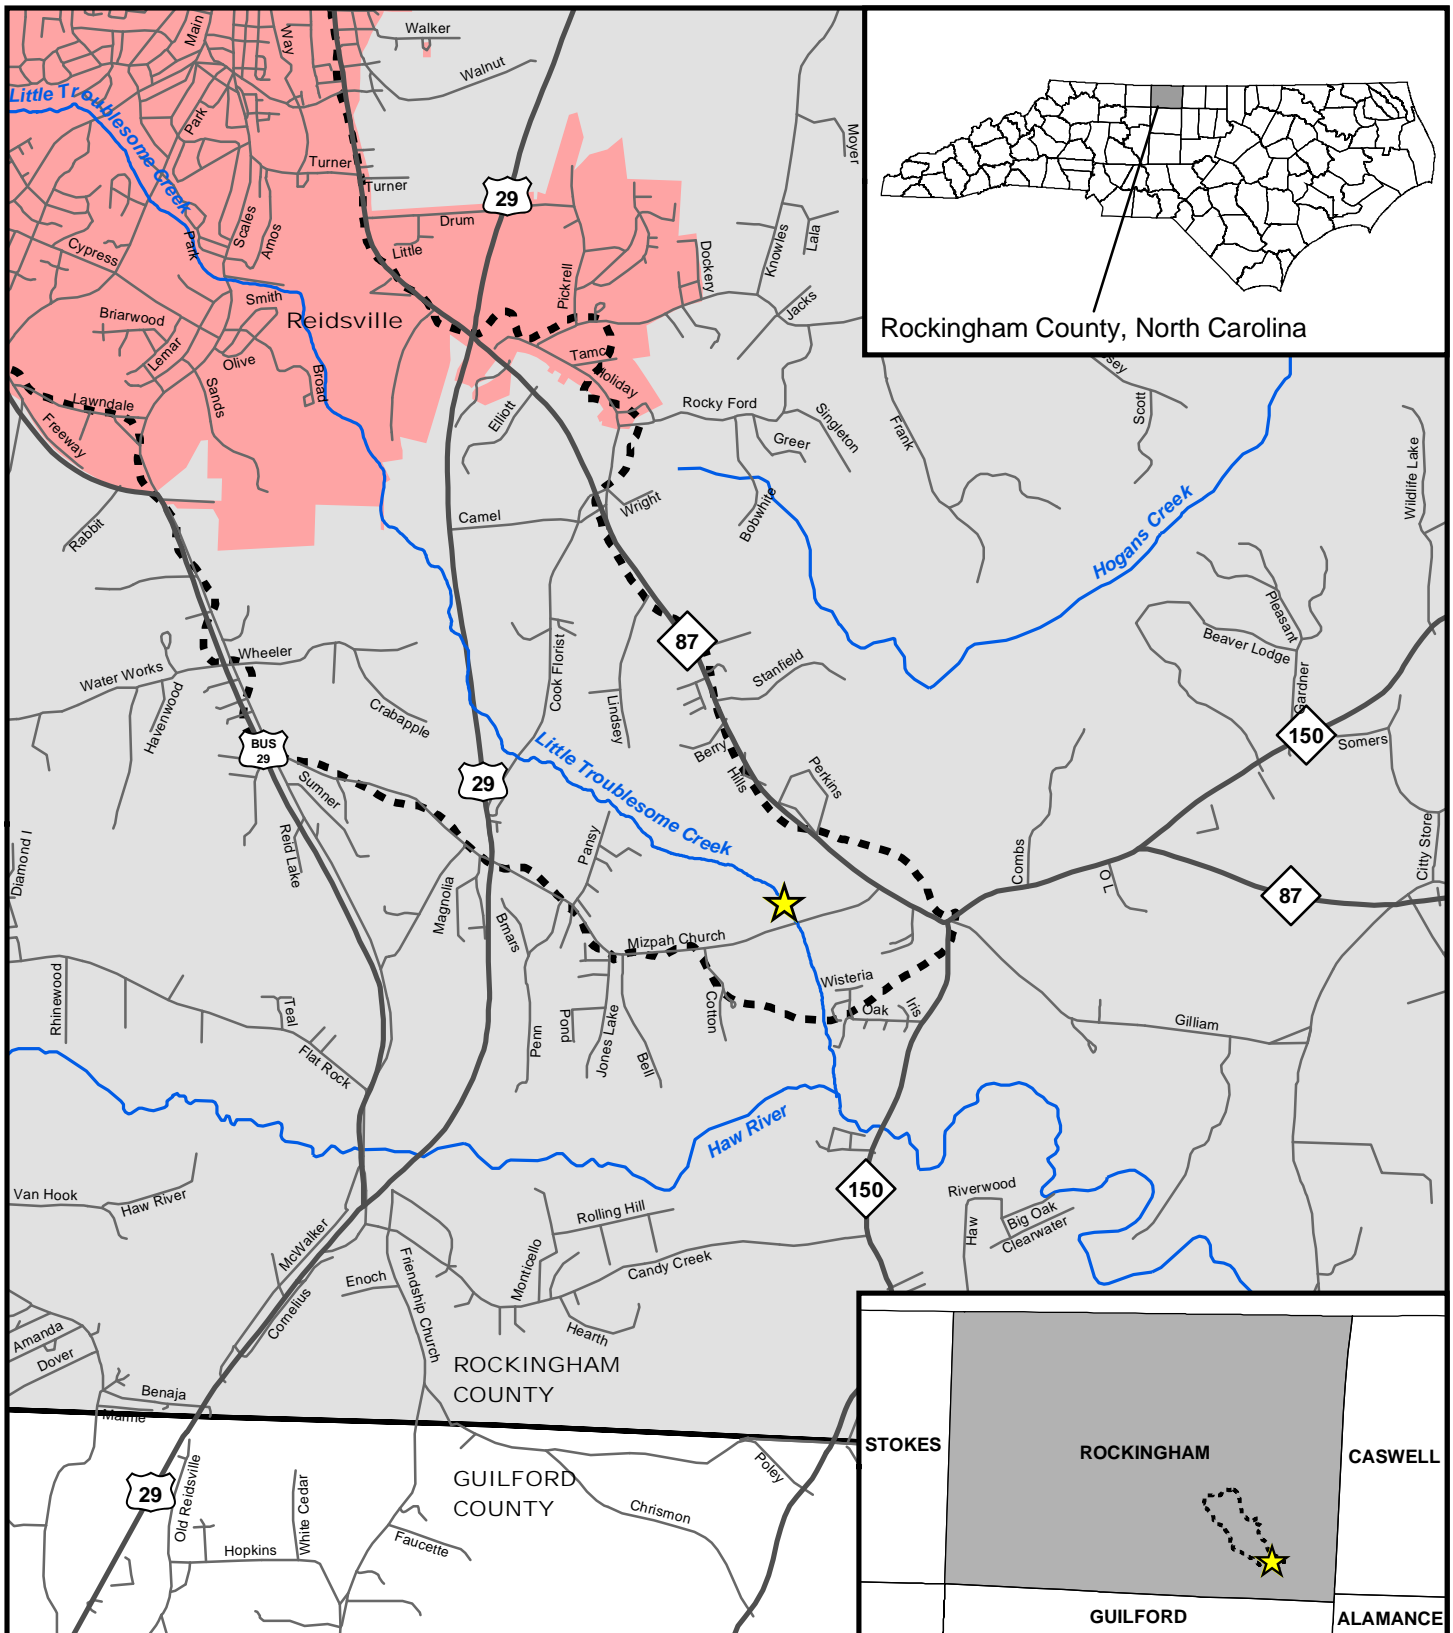
-  Project Site Location
-  Major Streams and Rivers
-  Major Roads
-  Other Roads
-  Local Watershed Plan Boundary

-  Cities and Towns
-  County Boundaries



1:63,360
1 inch = 1 miles



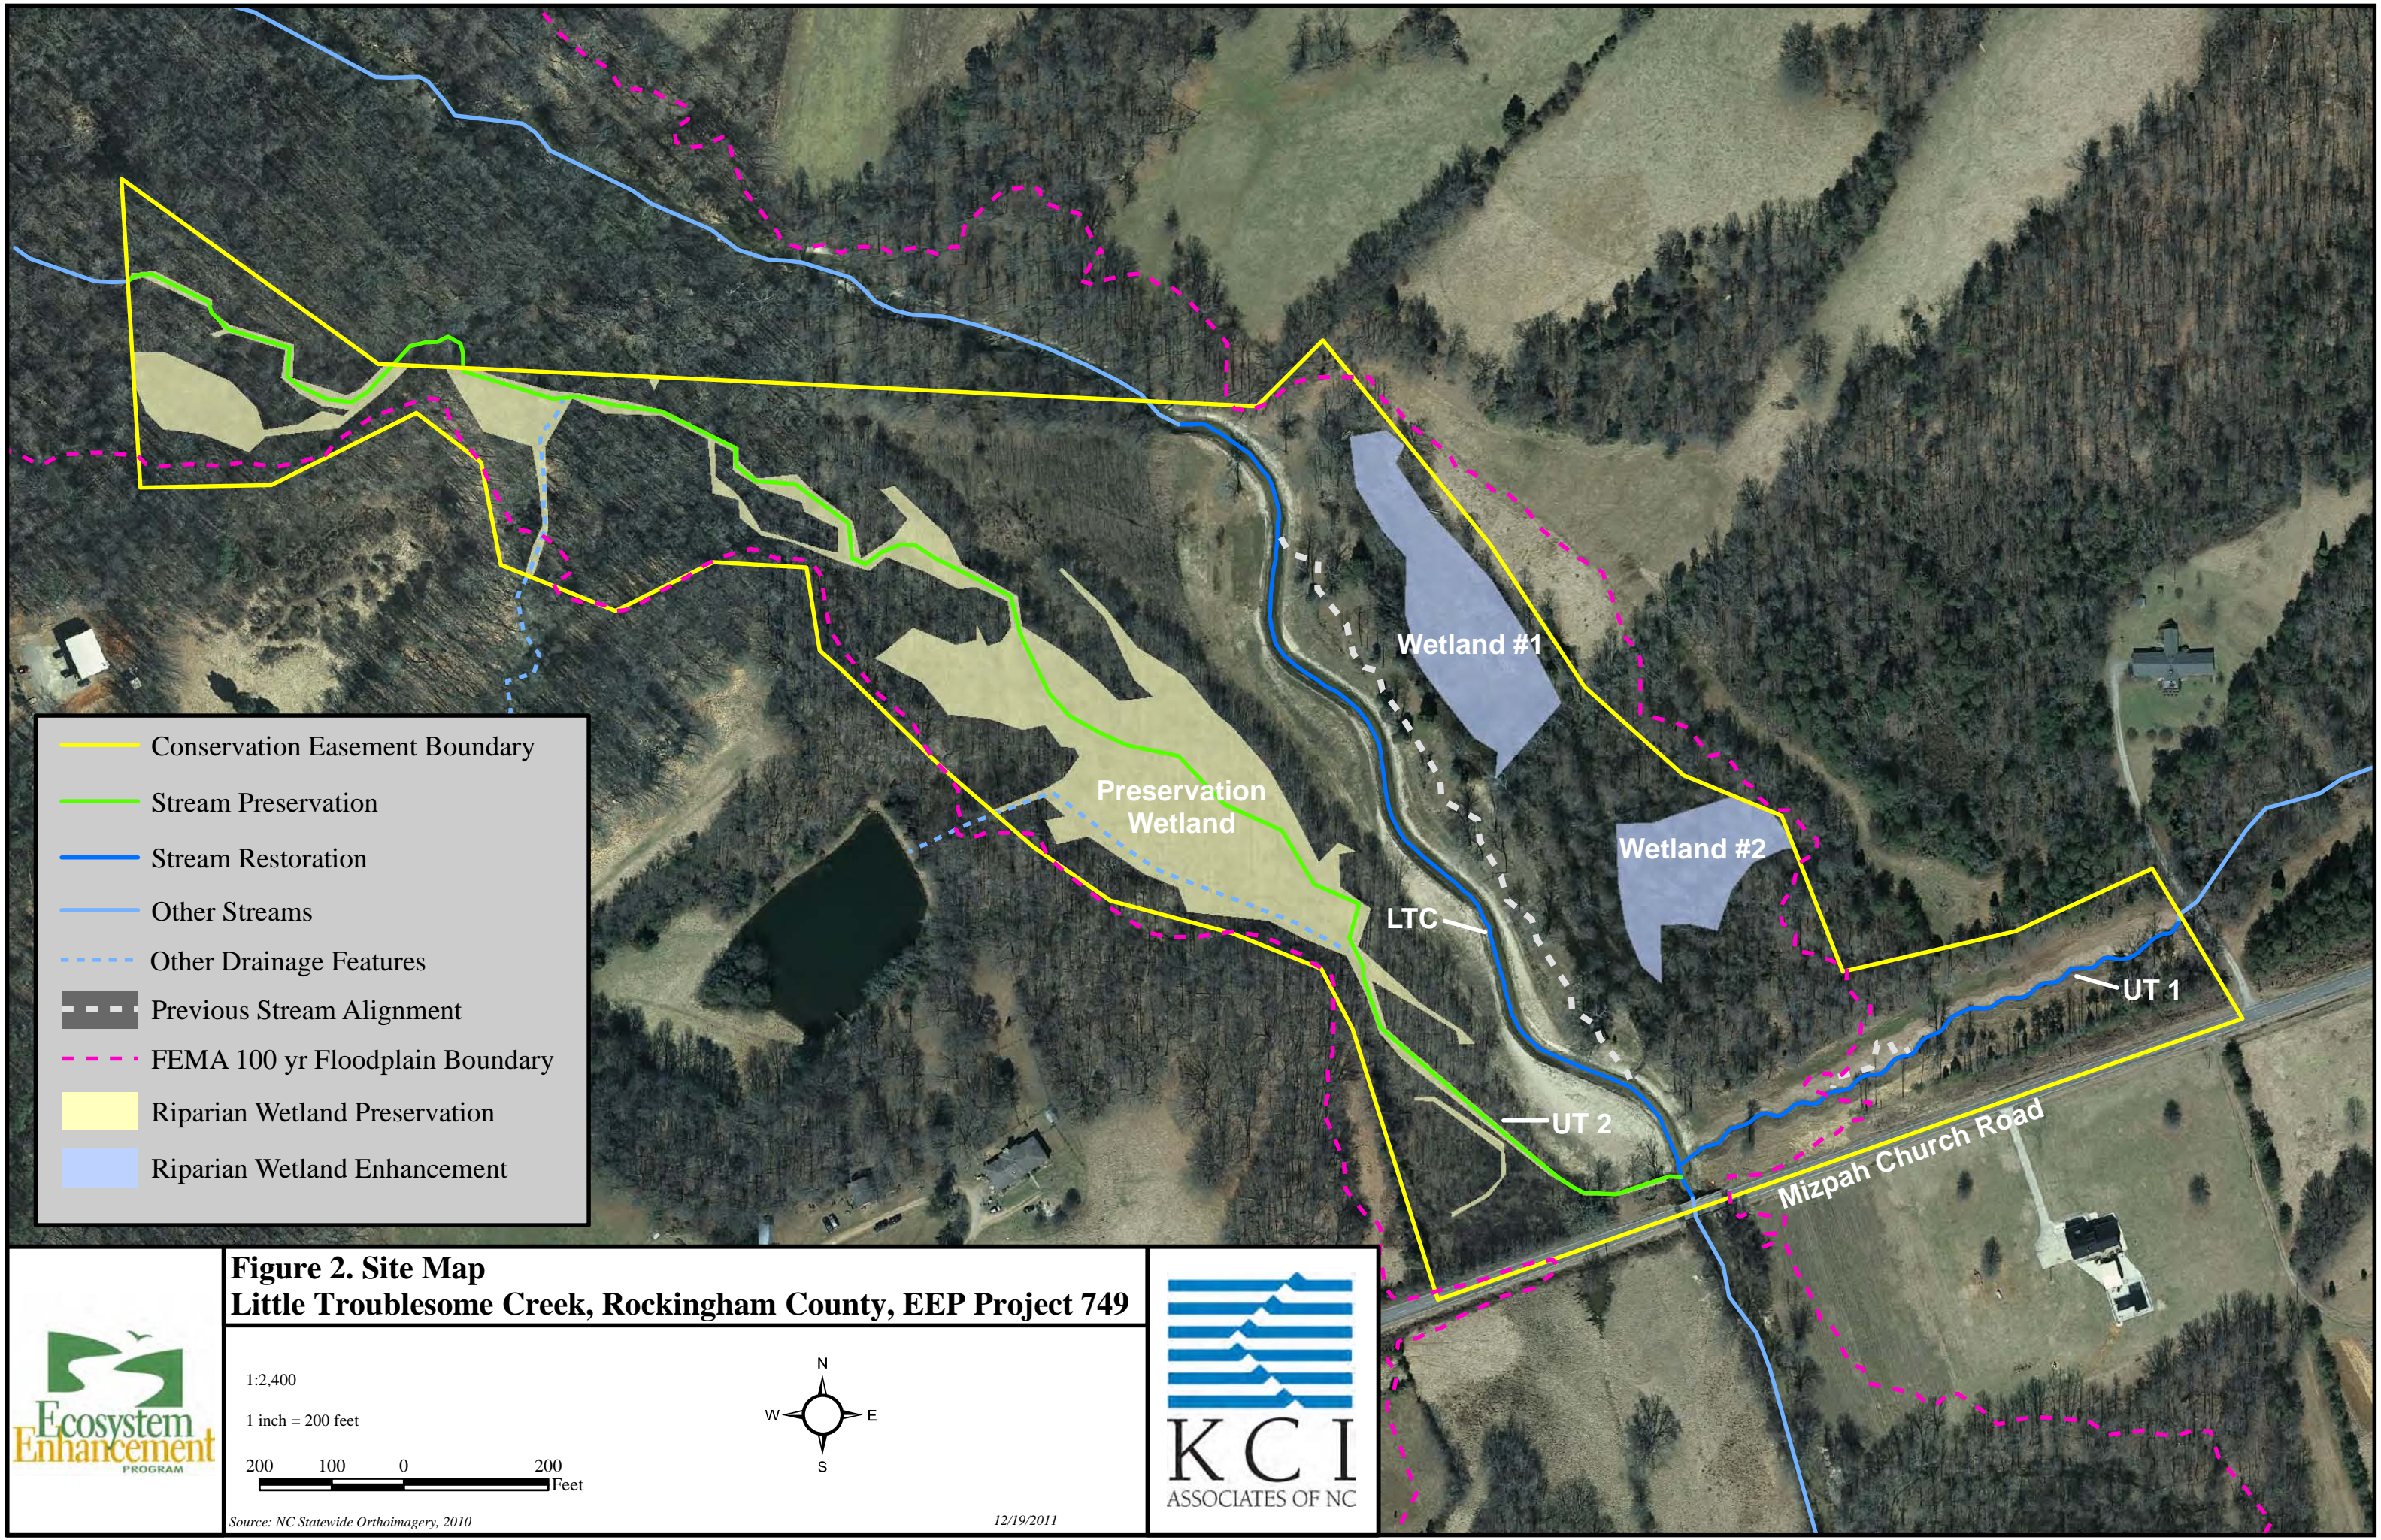


- Conservation Easement Boundary
- Stream Preservation
- Stream Restoration
- Other Streams
- - - Other Drainage Features
- - - Previous Stream Alignment
- - - FEMA 100 yr Floodplain Boundary
- Riparian Wetland Preservation
- Riparian Wetland Enhancement

Figure 2. Site Map
Little Troublesome Creek, Rockingham County, EEP Project 749



1:2,400
 1 inch = 200 feet
 200 100 0 200
 Feet



Source: NC Statewide Orthoimagery, 2010

12/19/2011

**Table 1. Project Components and Mitigation Credits
Little Troublesome / Project No. 749**

Mitigation Credits									
	Stream		Riparian Wetland		Non-riparian Wetland		Buffer	Nitrogen Nutrient Offset	Phosphorous Nutrient Offset
Type	R	RE	R	RE	R	RE			
Totals	2188	551		1.86					
Project Components									
Project Component	Stationing/Location		Existing Footage/Acreage	Approach	Restoration or Restoration Equivalent	Restoration Footage or Acreage	Mitigation Ratio		
Little Troublesome Creek	10+00 - 11+75		175	P3	R	175	1:1		
Little Troublesome Creek	11+75 - 21+95		975	P2	R	1020	1:1		
Little Troublesome Creek	21+95 - 23+75		179	P3	R	180	1:1		
UT1	50+00 - 58+13		813	P3	R	813	1:1		
UT2	see Fig 2.		2754	-	RE	2754	5:1		
Enhancement Wetland #1	see Fig 2.		1.17	-	RE	1.17	2:1		
Enhancement Wetland #2	see Fig 2.		0.74	-	RE	0.74	2:1		
Preservation Wetland	see Fig 2.		4.5	-	RE	4.5	5:1		
Component Summation									
Restoration Level	Stream (linear feet)		Riparian Wetland (acres)		Non-riparian Wetland (acres)		Buffer (square feet)	Upland (acres)	
			Riverine	Non-Riverine					
Restoration	2188								
Enhancement			1.91						
Enhancement I									
Enhancement II									
Creation									
Preservation	2754		4.5						
High Quality Preservation									

Table 2. Project Activity & Reporting History Little Troublesome / Project No. 749		
Elapsed Time Since Grading and Planting Complete: 3 yr 0 months		
Number of Reporting Years: 3		
Activity or Report	Data Collection Complete	Actual Completion or Delivery
Environmental Resource Technical Report	Sep 2006	Sep 2006
Restoration Plan	May 2007	June 2007
Final Design - Construction Plans		Feb 2007
Construction		Dec 2009
Temporary S&E mix applied		Oct 2009
Permanent seed mix applied		Dec 2009
Planting		Dec 2009
Baseline Monitoring	Feb 2010	May 2010
Year 1 Monitoring	Sep 2010	Dec 2010
Year 2 Monitoring	Jul 2011	Dec 2011
Year 3 Monitoring	Aug 2012	Nov 2012

Table 3. Project Contacts Table Little Troublesome / Project No. 749	
Designer	KCI Associates of North Carolina 4601 Six Forks Road, Suite 220 Raleigh, NC 27609
Primary Project Design POC	April Helms (919) 783-9214
Construction Contractor	Angler Environmental 12811 Randolph Ridge Lane Manassas, VA 20109
Construction Contractor POC	Andrew Griffey (703) 393-4844
Planting Contractor	HARP, Inc. 301 McCullough Drive, 4th Floor Charlotte, NC 28262
Planting Contractor POC	Alan Peoples (704) 841-2841
Seeding Contractor	Angler Environmental Manassas, VA 20109
Seeding Contractor POC	Andrew Griffey (703) 393-4844
Seed Mix Sources	MD Seed and Environmental Services Gaithersburg, MD 20879
Monitoring Performers	KCI Associates of North Carolina 4601 Six Forks Road, Suite 220 Raleigh, NC 27609
Monitoring POC	Adam Spiller (919) 278-2514

**Table 4. Project Attribute Table
Little Troublesome / Project No. 749**

Project County	Rockingham County	
Physiographic Region	Piedmont	
Ecoregion	Northern Inner Piedmont	
River Basin	Cape Fear	
USGS HUC	03030002010030	
NCDWQ Sub-Basin	03-06-01	
Within Extent of EEP Watershed Plan	Yes - Upper Cape Fear Basin LWP	
WRC Class	Warm	
% of Project Easement Demarcated	100%	
Beaver Activity Observed During Design Phase	No	
Restoration Component Attributes		
	LTC	UT1
Drainage Area (sq.mi.)	12.09	0.1
Stream Order	Third	First
Restored Length (feet)	1,375	813
Perennial or Intermittent	Perennial	Perennial
Watershed Type	Suburban	Suburban
Watershed LULC Distribution		
	Forest/Wetland	49%
	Pasture/Managed Herbaceous	21%
	Developed	30%
Watershed Impervious Cover	21%	
NCDWQ AU/Index Number	16-7	
NCDWQ Classification	C; NSW	
303d Listed	Yes	
Upstream of 303d Listed Segment	Yes	
Reasons for 303d Listing or Stressor	Aquatic life	
Total Acreage of Easement	30.3	
Total Vegetated Acreage within Easement	30.0	
Total Planted Acreage as Part of Restoration	12.2	
Rosgen Classification of Pre-Existing	E4	G4c
Rosgen Classification of As-Built	E4/C4	B4c
Valley Type		
Valley Slope	0.002	0.021
Valley Side Slope Range		
Valley Toe Slope Range		
Cowardin Classification		
Trout Waters Designation	No	
Species of Concern, Endangered, Etc.	Carolina ladle crayfish (<i>Cambarus davidi</i>)	
Dominant Soil Series and Characteristics		
	Series	Chewacla
	Depth	Deep
	Clay%	
	K	
	T	

Appendix B

Visual Assessment Data

LEGEND

- EASEMENT BOUNDARY.....
- AS-BUILT STATIONED CENTERLINE AND TOP OF BANK.....
- PHOTO POINT.....
- CROSS-SECTION.....
- OLD STREAM CHANNEL.....
- RIFFLE GRADE CONTROL.....
- LOG SILL.....
- ROCK CROSS VANE.....
- BED STABILIZATION.....



PROJECT CONDITION

- STREAM BED DEGRADATION.....
- BANK EROSION.....
- UNDERCUT BANK.....
- VEG PLOT ACHIEVING DENSITY CRITERION.....
- VEG PLOT BELOW DENSITY CRITERION.....
- LOW PLANTED STEM DENSITY.....
- BEAVER DAM.....
- INVASIVE SPECIES.....


PROJECT CONDITION DETAILS

VEG PLOT TOTAL / PLANTED STEM DENSITY..... 2306/607

IMAGE SOURCE: NC 2010 STATEWIDE ORTHOIMAGERY

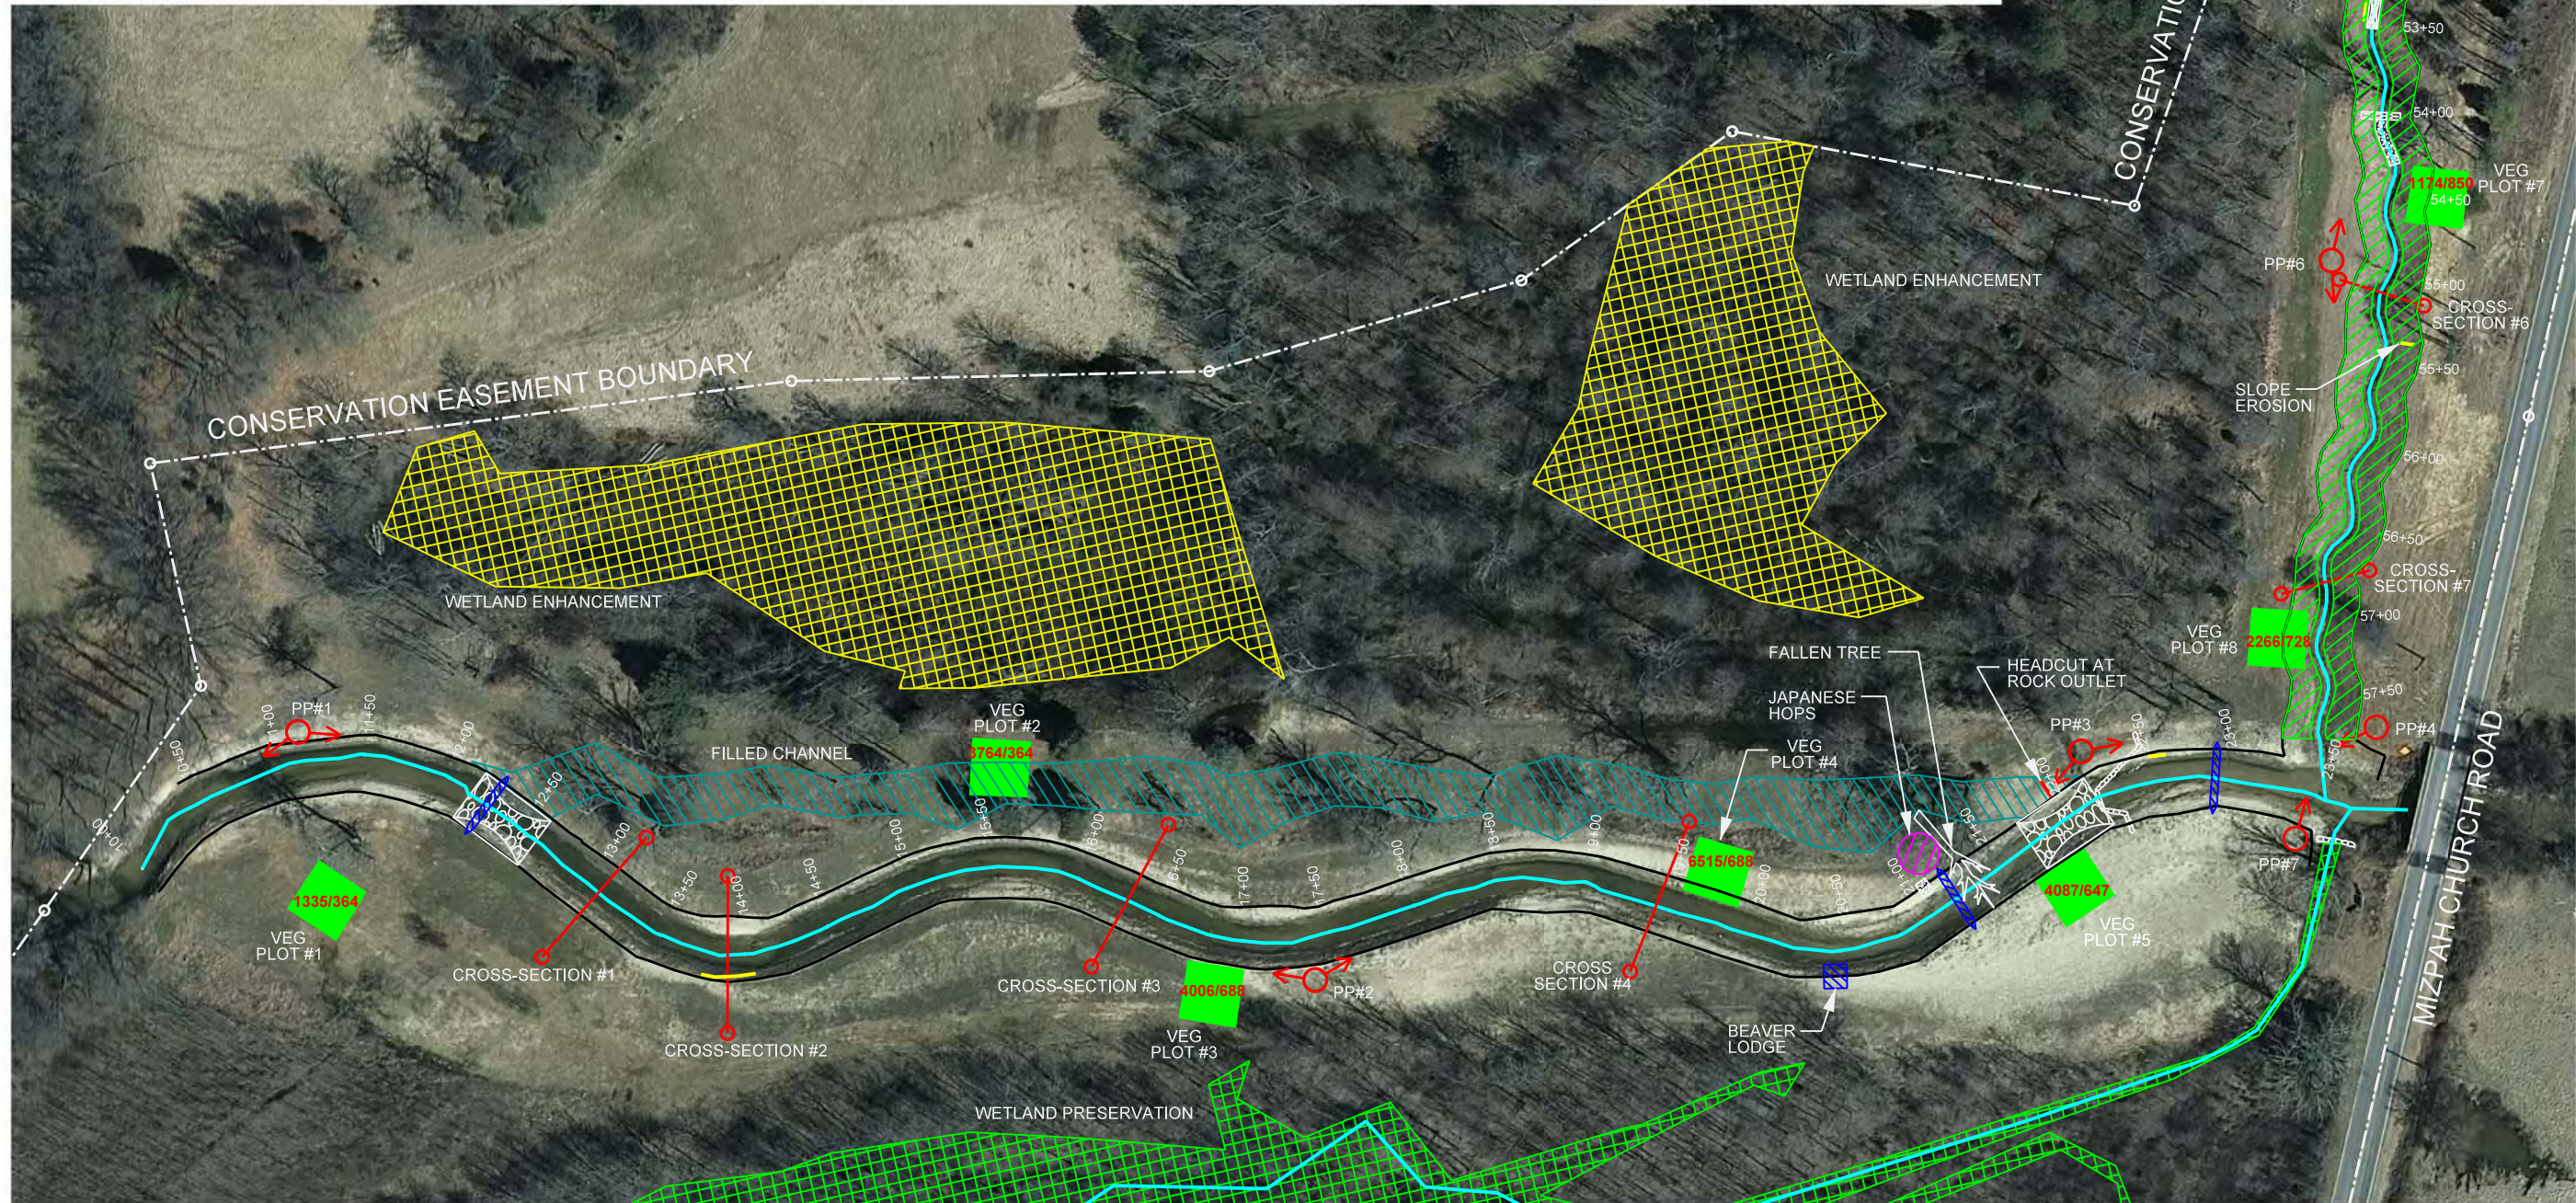

SYMBOL	DESCRIPTION	DATE	APPROVED



**LITTLE TROUBLESOME CREEK
PROJECT #749 - MONITORING YEAR 03**
ROCKINGHAM COUNTY, NORTH CAROLINA
LITTLE TROUBLESOME CREEK AND UT1

DATE: NOV 2012
SCALE: 1" = 100'
CURRENT CONDITION PLAN VIEW
SHEET 1 OF 1

Table 5. Visual Stream Morphology Stability Assessment							
Project Number and Name: 749 - Little Troublesome							
Assessed Length		1,375					
		Reach - Little Troublesome					
Major Channel Category	Channel Category	Sub-Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	7	7			100%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth > 1.6)	7	7			100%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	7	7			100%
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	7	7			100%
		2. Thalweg centering at downstream of meander (Glide)	7	7			100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			2	40	99%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
Totals					2	40	99%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	3	3			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	3	3			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	1	1			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP <u>monitoring guidance document</u>)	1	1			100%
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	1	1			100%

Table 5. Visual Stream Morphology Stability Assessment							
Project Number and Name: 749 - Little Troublesome							
Assessed Length 813			Reach - UT1				
Major Channel Category	Channel Category	Sub-Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%
		2. <u>Degradation</u> - Evidence of downcutting			1	15	98%
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	11	13			85%
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth > 1.6)	14	16			88%
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	7	14			50%
	4. Thalweg Position ⁺	1. Thalweg centering at upstream of meander bend (Run)					N/A
2. Thalweg centering at downstream of meander (Glide)				N/A			
Totals					3	25	98%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			2	15	99%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			1	10	99%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%
Totals					3	25	98%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	2	2			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	2	2			100%
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	2	2			100%
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%. (See guidance for this table in EEP monitoring guidance document)	0	0			N/A
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	0	0			N/A

Table 6. Vegetation Condition Assessment						
Project Number and Name: 749 - Little Troublesome						
Planted Acreage 12.2			Easement Acreage 30.3			
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	0.1 acre	Pattern and Color*	0	0.00	0.0%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1 acre	Pattern and Color ⁺	0	0.30	2.5%
Total				0	0.30	2.5%
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 acre	Pattern and Color	0	0.00	0.0%
Cumulative Total				0	0.30	2.5%
4. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale).	1,000 SF	Pattern and Color	1	0.05	0.2%
5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	none	Pattern and Color	0	0.00	0.0%

Stream Station Photos



Photo Point 1u: View looking upstream near Station 11+10. 2/23/10 – Baseline



Photo Point 1u: View looking upstream near Station 11+10. 11/5/2012 – MY-03



Photo Point 1d: View looking downstream near Station 11+10. 2/23/10 – Baseline



Photo Point 1d: View looking downstream near Station 11+10. 11/5/2012 – MY-03



Photo Point 2u: View looking upstream taken near Station 17+40. 2/23/10 – Baseline

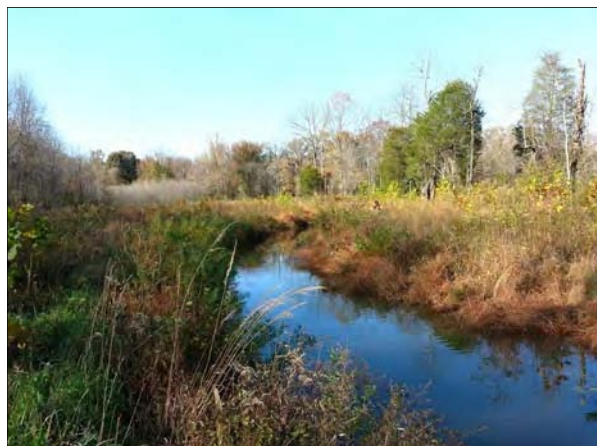


Photo Point 2u: View looking upstream taken near Station 17+40. 11/5/2012 – MY-03



Photo Point 2d: View looking downstream taken near Station 17+40. 2/23/10 – Baseline



Photo Point 2d: View looking downstream taken near Station 17+40. 11/5/2012 – MY-03



Photo Point 3u: View looking upstream near Station 22+25. 2/23/10 – Baseline

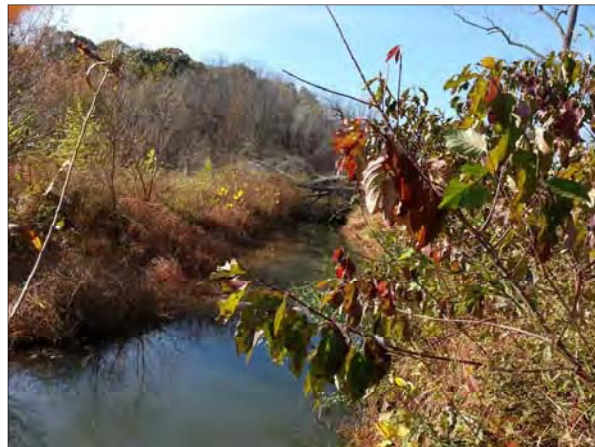


Photo Point 3u: View looking upstream near Station 22+25. 11/5/2012 – MY-03



Photo Point 3d: View looking downstream near Station 22+25. 2/23/10 – Baseline



Photo Point 3d: View looking downstream near Station 22+25. 11/5/2012 – MY-03



Photo Point 4: View looking upstream near Station 24+00. 2/23/10 – Baseline



Photo Point 4: View looking upstream near Station 24+00. 11/5/2012 – MY-03



Photo Point 5: View looking downstream near Station 50+00. 2/23/10 – Baseline



Photo Point 5: View looking downstream near Station 50+00. 11/5/2012 – MY-03



Photo Point 6u: View looking upstream near Station 54+90. 2/23/10 – Baseline



Photo Point 6u: View looking upstream near Station 54+90. 11/5/2012 – MY-03



Photo Point 6d: View looking downstream near Station 54+90. 2/23/10 – Baseline



Photo Point 6d: View looking downstream near Station 54+90. 11/5/2012 – MY-03



Photo Point 7: View looking upstream at the tributary confluence. 2/23/10 – Baseline



Photo Point 7: View looking upstream at the tributary confluence. 11/5/2012 – MY-03

Vegetation Monitoring Plot Photos



Plot 1 Photo: 7/18/12 – MY03



Plot 2 Photo: 7/18/12 – MY03



Plot 3 Photo: 7/18/12 – MY03



Plot 4 Photo: 7/18/12 – MY03



Plot 5 Photo: 7/18/12 – MY03



Plot 6 Photo: 7/18/12 – MY03



Plot 7 Photo: 7/18/12 – MY03



Plot 8 Photo: 7/18/12 – MY03

Appendix C

Vegetation Plot Data

Table 7. Vegetation Plot Criteria Attainment			
Little Troublesome / Project No. 749			
Vegetation Plot ID	Vegetation Survival Threshold Met? (320 planted stems/acre after MY03)	Monitoring Year 03 Planted Stem Density (stems/acre)	Monitoring Year 03 Total Stem Density (stems/acre)
1	Yes	364	1,335
2	Yes	364	3,764
3	Yes	688	4,006
4	Yes	688	6,515
5	Yes	647	4,087
6	Yes	526	2,711
7	Yes	850	1,174

Table 8. CVS Vegetation Plot Metadata Little Troublesome / Project No. 749	
Report Prepared By	April Helms
Date Prepared	11/2/2012 15:32
database name	KCI-2012-L.mdb
database location	M:\2007\12071067_2007 EEP OPEN END\Veg_database
computer name	12-CV76KF1
file size	55836672
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
ALL Stems by Plot and spp	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
PROJECT SUMMARY-----	
Project Code	749
project Name	Little Troublesome Creek
Description	Stream and Wetland Restoration Site
River Basin	Cape Fear
length(ft)	2200
stream-to-edge width (ft)	60
area (sq m)	24523.92
Required Plots (calculated)	8
Sampled Plots	8

Table 9. CVS Stem Count Total and Planted by Plot and Species																										
			Current Plot Data (MY3 2012)																							
Scientific Name	Common Name	Species Type	E749-A-0001			E749-A-0002			E749-A-0003			E749-A-0004			E749-A-0005			E749-A-0006			E749-A-0007			E749-A-0008		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer negundo</i>	boxelder	Tree									5						1									
<i>Acer rubrum</i>	red maple	Tree						7																		
<i>Aronia arbutifolia</i>	Red Chokeberry	Shrub											1	1	1									1	1	1
<i>Baccharis</i>	baccharis	Shrub																								
<i>Betula nigra</i>	river birch	Tree	4	4	5	1	1	1				1	1	28	8	8	38	2	2	3	4	4	5	7	7	22
<i>Celtis laevigata</i>	sugarberry	Tree									3	3	5			2	2	2	2				1			2
<i>Celtis occidentalis</i>	common hackberry	Tree						1																		
<i>Cornus amomum</i>	silky dogwood	Shrub											1	1												
<i>Diospyros virginiana</i>	common persimmon	Tree			8			2										1	1	12	2	2	2	1	1	9
<i>Fraxinus pennsylvanica</i>	green ash	Tree			7			38			54			93			42			4			1			3
<i>Ilex</i>	holly	Shrub or Tree																								
<i>Ilex decidua</i>	possumhaw	shrub																						1	1	1
<i>Juglans nigra</i>	black walnut	Tree																								1
<i>Liquidambar styraciflua</i>	sweetgum	Tree			2			12			1			4			3									2
<i>Liriodendron tulipifera</i>	tuliptree	Tree																								
<i>Pinus taeda</i>	loblolly pine	Tree																								
<i>Pinus virginiana</i>	Virginia pine	Tree																								
<i>Platanus occidentalis</i>	American sycamore	Tree	1	1	1	1	1	8	5	5	5	3	3	9	2	2	3	4	4	6	9	9	9	1	1	3
<i>Quercus</i>	oak	Tree																								
<i>Quercus michauxii</i>	swamp chestnut oak	Tree	4	4	4	4	4	4	4	4	4	8	8	8	2	2	3	4	4	4	4	4	4	3	3	3
<i>Quercus palustris</i>	pin oak	Tree									3	3	3	3	3	3								3	3	3
<i>Quercus phellos</i>	willow oak	Tree				3	3	3	2	2	2	1	1	1	1	1	1	2	2	3	1	1	1	1	1	1
<i>Quercus rubra</i>	northern red oak	Tree																					1	1	1	
<i>Rhus</i>	sumac	shrub																								
<i>Salix</i>	willow	Shrub or Tree																								
<i>Salix sericea</i>	silky willow	Shrub											5	5												
<i>Sambucus canadensis</i>	Common Elderberry	Shrub																								
<i>Ulmus</i>	elm	Tree																								
<i>Ulmus americana</i>	American elm	Tree			6			17			20			6			7			1						7
<i>Unknown</i>		Shrub or Tree																								
<i>Viburnum nudum</i>	possumhaw	Shrub													1	1	1									
Stem count			9	9	33	9	9	93	17	17	99	17	23	161	16	16	101	13	13	67	21	21	29	18	18	56
size (ares)			1			1			1			1			1			1			1			1		
size (ACRES)			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02		
Species count			3	3	7	4	4	10	5	5	9	6	8	12	6	6	10	5	5	12	6	6	9	8	8	12
Stems per ACRE			364	364	1335	364	364	3764	688	688	4006	688	931	6515	647	647	4087	526	526	2711	850	850	1174	728	728	2266

Table 9. CVS Stem Count Total and Planted by Plot and Species continued														
Scientific Name	Common Name	Species Type	Annual Means											
			MY3 (2012)			MY2 (2011)			MY1 (2010)			MY0 (2010)		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer negundo</i>	boxelder	Tree			6						13			
<i>Acer rubrum</i>	red maple	Tree			7			13			33			
<i>Aronia arbutifolia</i>	Red Chokeberry	Shrub	2	2	2	2	2	2	2	2	2			
<i>Baccharis</i>	baccharis	Shrub			1									
<i>Betula nigra</i>	river birch	Tree	27	27	102	27	27	55	31	31	60	35	35	35
<i>Celtis laevigata</i>	sugarberry	Tree	5	5	12	5	5	9	5	5	17			
<i>Celtis occidentalis</i>	common hackberry	Tree			1									
<i>Cornus amomum</i>	silky dogwood	Shrub		1	1		1	1		1	1	1	3	3
<i>Diospyros virginiana</i>	common persimmon	Tree	4	4	33	3	3	52	2	2	36			
<i>Fraxinus pennsylvanica</i>	green ash	Tree			242			247			190			
<i>Ilex</i>	holly	Shrub or Tree				1	1	1	1	1	1			
<i>Ilex decidua</i>	possumhaw	shrub	1	1	1									
<i>Juglans nigra</i>	black walnut	Tree			1			1			1			
<i>Liquidambar styraciflua</i>	sweetgum	Tree			40			23			16			
<i>Liriodendron tulipifera</i>	tuliptree	Tree						2			1			
<i>Pinus taeda</i>	loblolly pine	Tree						1			1			
<i>Pinus virginiana</i>	Virginia pine	Tree			19									
<i>Platanus occidentalis</i>	American sycamore	Tree	26	26	44	28	28	44	28	28	51	29	29	29
<i>Quercus</i>	oak	Tree				2	2	2	2	2	2	22	22	22
<i>Quercus michauxii</i>	swamp chestnut oak	Tree	33	33	34	30	30	31	32	32	32			
<i>Quercus palustris</i>	pin oak	Tree	9	9	10	9	9	9	9	9	9			
<i>Quercus phellos</i>	willow oak	Tree	11	11	12	11	11	14	12	12	12	4	4	4
<i>Quercus rubra</i>	northern red oak	Tree	1	1	1									
<i>Rhus</i>	sumac	shrub									1			
<i>Salix</i>	willow	Shrub or Tree											6	6
<i>Salix sericea</i>	silky willow	Shrub		5	5		5	5		5	5			
<i>Sambucus canadensis</i>	Common Elderberry	Shrub											1	1
<i>Ulmus</i>	elm	Tree									101			
<i>Ulmus americana</i>	American elm	Tree			64			91						
Unknown		Shrub or Tree				2	2	2	6	6	6	59	59	59
<i>Viburnum nudum</i>	possumhaw	Shrub	1	1	1	1	1	1	1	1	1			
Stem count			120	126	639	121	127	606	131	137	592	150	159	159
size (ares)			8			8			8			8		
size (ACRES)			0.20			0.20			0.20			0.20		
Species count			11	13	22	12	14	21	12	14	23	6	8	8
Stems per ACRE			607	637	3232	612	642	3065	663	693	2995	759	804	804

Appendix D

Stream Survey Data

River Basin:	Cape Fear
Watershed:	Little Troublesome Creek, MY-03
XS ID	LTC (XS - 1, Riffle) Station 13+08
Drainage Area (sq mi):	12.09
Date:	8/23/2012
Field Crew:	A. Helms, F. Davis




Stream Type	E4/C4
--------------------	-------

Station	Elevation
0.0	655.78
1.6	655.22
7.1	654.66
10.6	654.50
16.1	654.49
22.5	654.61
23.9	654.37
25.4	653.40
27.3	652.03
29.6	651.35
31.7	650.56
34.3	649.99
35.7	649.91
37.3	649.80
39.1	649.80
40.9	649.81
43.3	649.76
45.9	649.90
48.4	650.21
49.6	650.73
51.6	651.82
54.3	652.83
56.4	654.41
60.0	654.41
64.1	654.50
68.6	654.36
73.0	654.31
78.3	654.34
84.5	654.38
89.3	654.52
89.8	654.86

SUMMARY DATA	
Bankfull Elevation:	654.6
Bankfull Cross-Sectional Area:	115.5
Bankfull Width:	33.6
Flood Prone Area Elevation:	659.4
Flood Prone Width:	>90
Max Depth at Bankfull:	4.8
Mean Depth at Bankfull:	3.4
W / D Ratio:	9.8
Entrenchment Ratio:	2.7
Bank Height Ratio:	1.0

Cape Fear River Basin, Little Troublesome Creek, MY-03, LTC (XS - 1, Riffle) Station 13+08

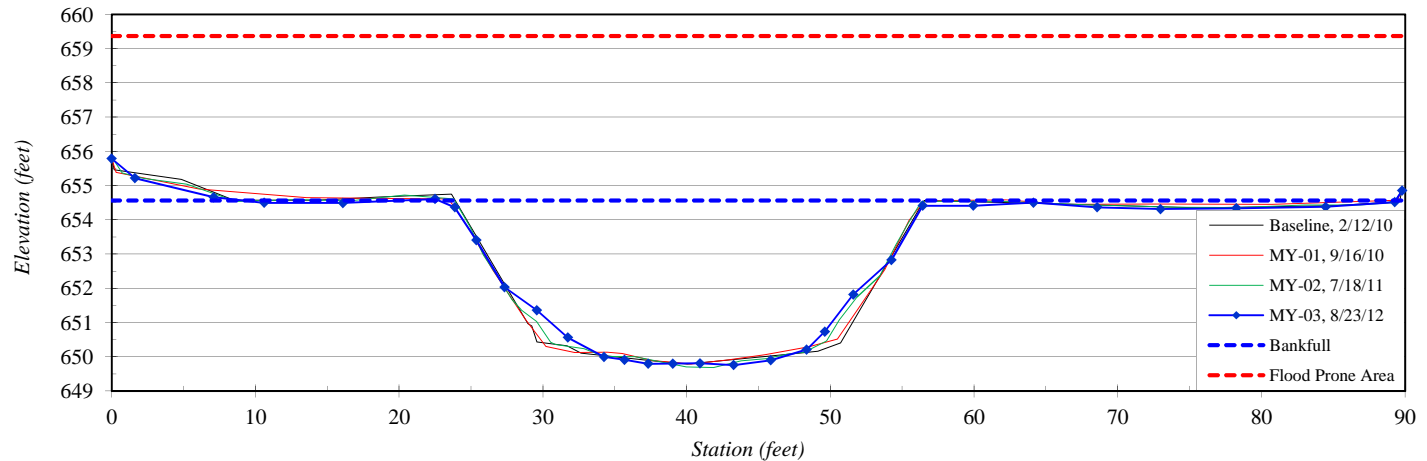

River Basin:	Cape Fear
Watershed:	Little Troublesome Creek, MY-03
XS ID	LTC (XS - 2, Pool) Station 13+90
Drainage Area (sq mi):	12.09
Date:	8/23/2012
Field Crew:	A. Helms, F. Davis




Station	Elevation
0.0	654.84
1.7	654.25
6.4	654.36
10.5	654.45
14.0	654.47
17.6	654.44
21.5	654.22
25.2	653.47
28.6	652.59
30.5	652.19
32.3	651.91
33.8	651.76
36.0	651.25
37.1	650.66
37.6	650.11
38.3	649.57
39.3	649.47
41.0	649.43
43.0	649.60
44.6	649.51
46.0	649.06
47.1	648.75
48.6	648.50
50.6	648.15
51.3	648.02
52.2	648.15
52.8	649.05
53.9	649.47
54.3	650.37
56.5	651.61
57.4	652.06
58.2	653.02
59.0	654.22
61.8	654.54

SUMMARY DATA	
Bankfull Elevation:	654.3
Bankfull Cross-Sectional Area:	128.8
Bankfull Width:	40.2
Flood Prone Area Elevation:	-
Flood Prone Width:	-
Max Depth at Bankfull:	6.3
Mean Depth at Bankfull:	3.2
W / D Ratio:	
Entrenchment Ratio:	-
Bank Height Ratio:	-

Stream Type	E4/C4
--------------------	-------

Cape Fear River Basin, Little Troublesome Creek, MY-03, LTC (XS - 2, Pool) Station 13+90

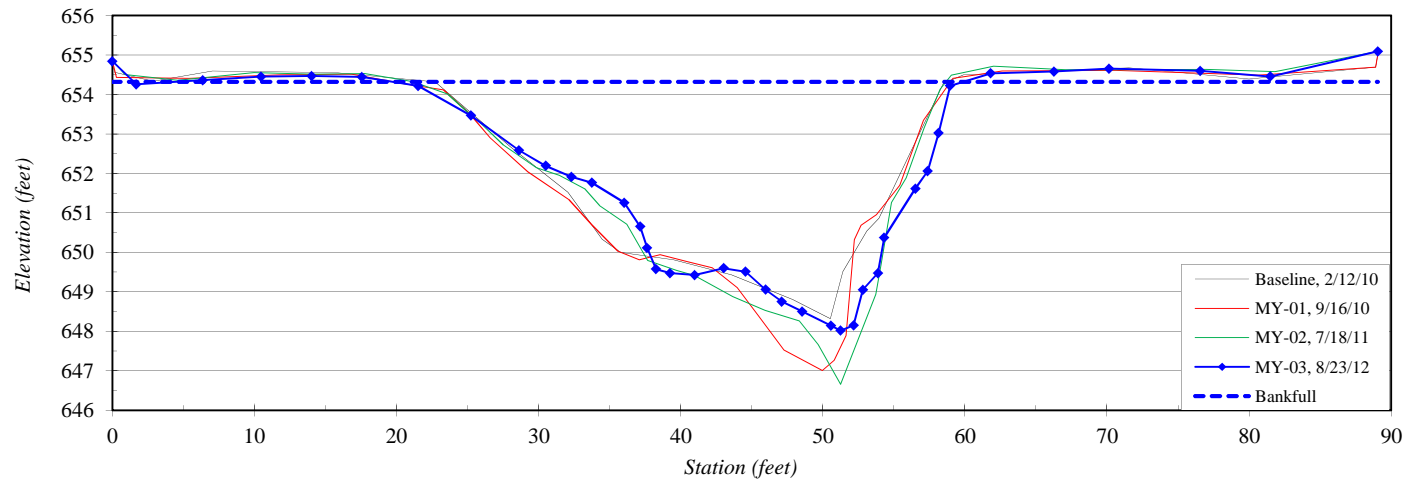

*Other shots not included due to space

River Basin:	Cape Fear
Watershed:	Little Troublesome Creek, MY-03
XS ID	LTC (XS - 3, Riffle) Station 16+30
Drainage Area (sq mi):	12.09
Date:	8/23/2012
Field Crew:	A. Helms, F. Davis




Stream Type	E4/C4
--------------------	-------

Station	Elevation
1.7	655.46
6.1	655.06
16.2	654.00
21.8	653.81
25.2	653.99
31.4	654.01
34.0	652.67
36.1	651.62
39.4	650.13
41.5	649.49
44.3	649.25
46.4	649.18
47.6	648.97
49.5	648.84
51.9	649.14
54.2	649.34
56.9	650.53
60.9	652.20
62.6	652.75
65.3	653.87
70.7	653.74
76.5	653.81
82.8	653.72
88.8	653.72
91.3	654.43

SUMMARY DATA	
Bankfull Elevation:	653.9
Bankfull Cross-Sectional Area:	109.7
Bankfull Width:	33.8
Flood Prone Area Elevation:	659.0
Flood Prone Width:	>90
Max Depth at Bankfull:	5.1
Mean Depth at Bankfull:	3.2
W / D Ratio:	27.7
Entrenchment Ratio:	2.7
Bank Height Ratio:	1.0

Cape Fear River Basin, Little Troublesome Creek, MY-03, LTC (XS - 3, Riffle) Station 16+30

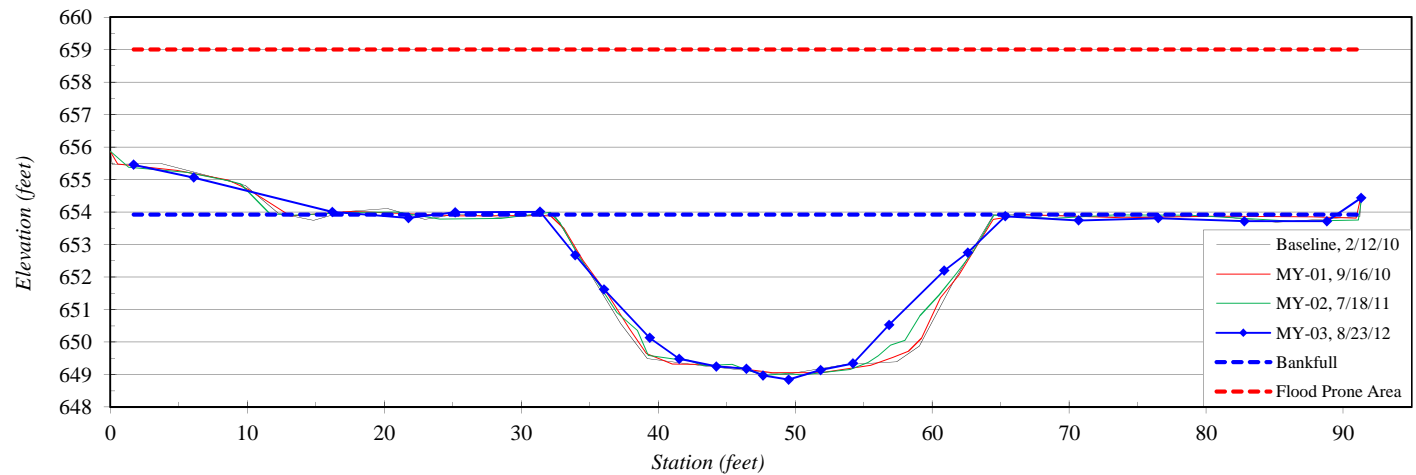


River Basin:	Cape Fear
Watershed:	Little Troublesome Creek, MY-03
XS ID	LTC (XS - 4, Riffle) Station 19+42
Drainage Area (sq mi):	12.09
Date:	8/23/2012
Field Crew:	A. Helms, F. Davis

Station	Elevation
0.0	655.13
4.9	654.62
10.0	654.24
14.5	654.25
17.1	653.37
22.5	653.00
29.5	653.19
33.2	653.19
35.8	651.65
39.0	650.94
41.8	649.16
44.3	648.53
46.7	648.75
47.7	648.35
49.9	648.25
51.4	648.22
52.7	648.25
54.7	648.36
56.8	648.63
59.7	650.57
62.9	651.34
70.1	653.24
75.6	653.19
81.8	653.43

SUMMARY DATA	
Bankfull Elevation:	653.3
Bankfull Cross-Sectional Area:	115.6
Bankfull Width:	36.9
Flood Prone Area Elevation:	658.4
Flood Prone Width:	>90
Max Depth at Bankfull:	5.1
Mean Depth at Bankfull:	3.1
W / D Ratio:	11.8
Entrenchment Ratio:	2.4
Bank Height Ratio:	1.0



Stream Type	E4/C4
--------------------	-------

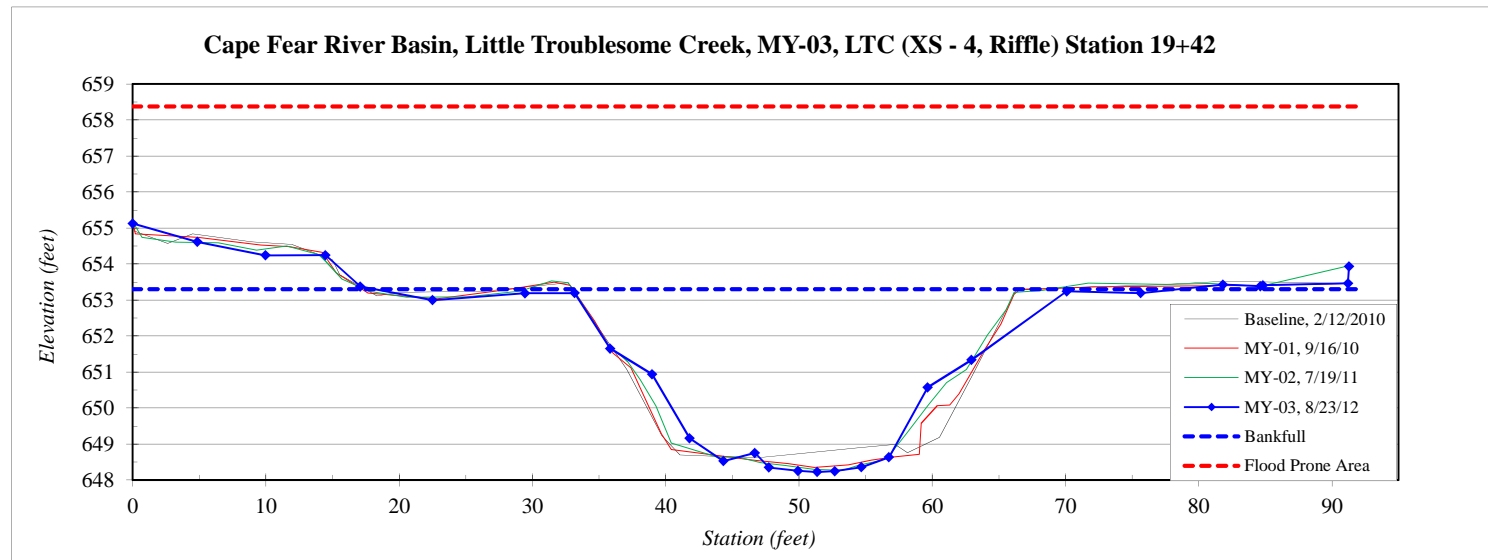


River Basin:	Cape Fear
Watershed:	Little Troublesome Creek, MY-03
XS ID	UT1 (XS - 5, Riffle) Station 51+56
Drainage Area (sq mi):	0.10
Date:	8/22/2012
Field Crew:	A. Helms, F. Davis

Station	Elevation
0.0	666.69
0.6	666.28
2.0	666.32
4.6	666.36
6.8	666.04
8.8	665.04
11.4	663.97
13.4	663.03
15.1	662.28
17.6	661.31
18.8	660.64
20.2	660.43
21.8	659.89
22.9	659.67
23.7	659.48
24.4	659.65
24.9	660.00
26.8	660.15
29.3	660.32
31.2	661.31
33.5	662.65
36.2	664.05
39.7	665.48
43.1	666.95
46.2	668.12
50.0	668.36
52.4	668.45
53.0	668.81

SUMMARY DATA	
Bankfull Elevation:	660.1
Bankfull Cross-Sectional Area:	1.6
Bankfull Width:	5.6
Flood Prone Area Elevation:	660.8
Flood Prone Width:	11.0
Max Depth at Bankfull:	0.7
Mean Depth at Bankfull:	0.3
W / D Ratio:	19.6
Entrenchment Ratio:	2.0
Bank Height Ratio:	1.0



Stream Type B4c

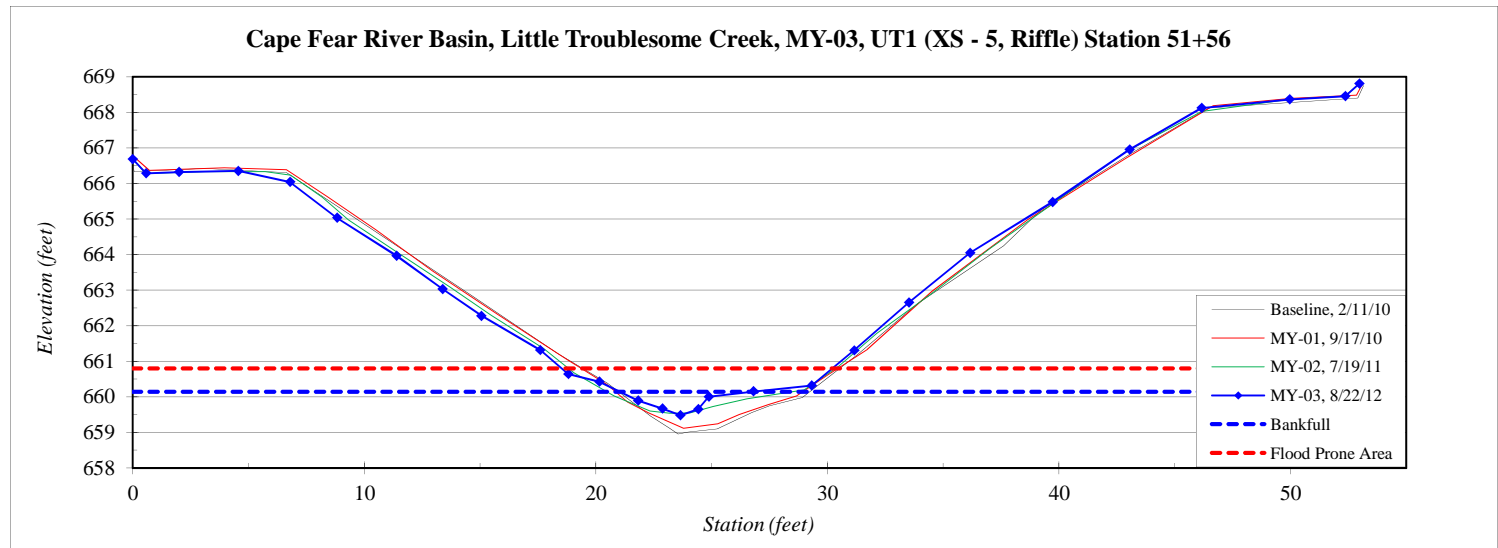


River Basin:	Cape Fear
Watershed:	Little Troublesome Creek, MY-03
XS ID	UT1 (XS - 6, Pool) Station 55+08
Drainage Area (sq mi):	0.10
Date:	8/22/2012
Field Crew:	A. Helms, F. Davis



Stream Type	B4c
--------------------	-----

Station	Elevation
0.0	660.63
0.5	660.34
4.2	660.16
7.4	659.26
10.2	658.31
14.6	656.53
17.3	655.65
19.5	654.77
21.5	654.20
23.4	653.52
24.2	652.31
24.9	652.20
25.7	652.34
26.8	652.78
27.4	653.54
29.6	654.35
32.5	655.21
35.2	656.48
39.2	658.09
44.4	659.55
49.6	659.80
50.1	660.12

SUMMARY DATA	
Bankfull Elevation:	653.6
Bankfull Cross-Sectional Area:	3.9
Bankfull Width:	4.3
Flood Prone Area Elevation:	-
Flood Prone Width:	-
Max Depth at Bankfull:	1.4
Mean Depth at Bankfull:	0.9
W / D Ratio:	-
Entrenchment Ratio:	-
Bank Height Ratio:	-

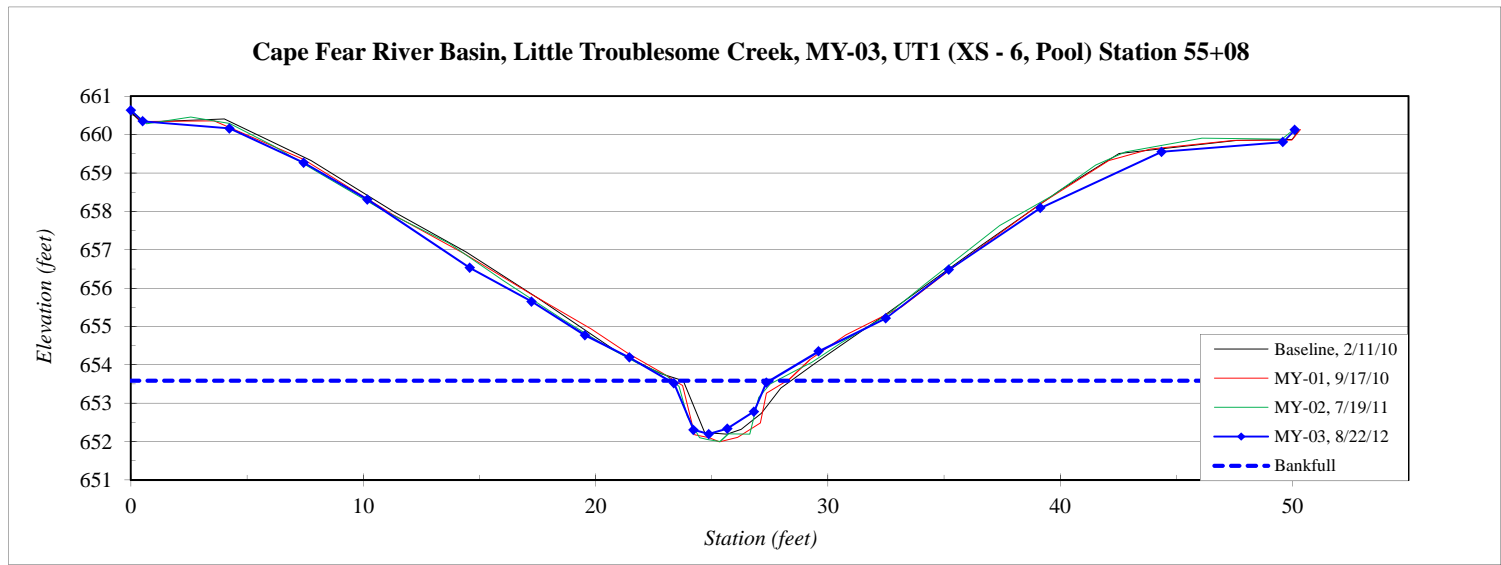


River Basin:	Cape Fear
Watershed:	Little Troublesome Creek, MY-03
XS ID	UT1 (XS - 7, Riffle) Station 56+84
Drainage Area (sq mi):	0.10
Date:	8/22/2012
Field Crew:	A. Helms, F. Davis

Station	Elevation
0.0	657.60
1.2	657.19
4.7	657.11
7.9	656.51
11.0	655.79
13.6	654.50
16.0	653.57
18.5	652.55
20.6	651.65
23.1	650.79
25.3	650.35
25.6	650.03
26.7	650.00
28.2	650.27
29.1	650.66
31.8	651.44
36.4	653.01
39.7	654.61
43.1	655.79
51.0	655.86
51.7	656.29



SUMMARY DATA	
Bankfull Elevation:	650.9
Bankfull Cross-Sectional Area:	3.5
Bankfull Width:	7.0
Flood Prone Area Elevation:	651.8
Flood Prone Width:	12.6
Max Depth at Bankfull:	0.9
Mean Depth at Bankfull:	0.5
W / D Ratio:	14.0
Entrenchment Ratio:	1.8
Bank Height Ratio:	1.0




Stream Type	B4c
--------------------	-----

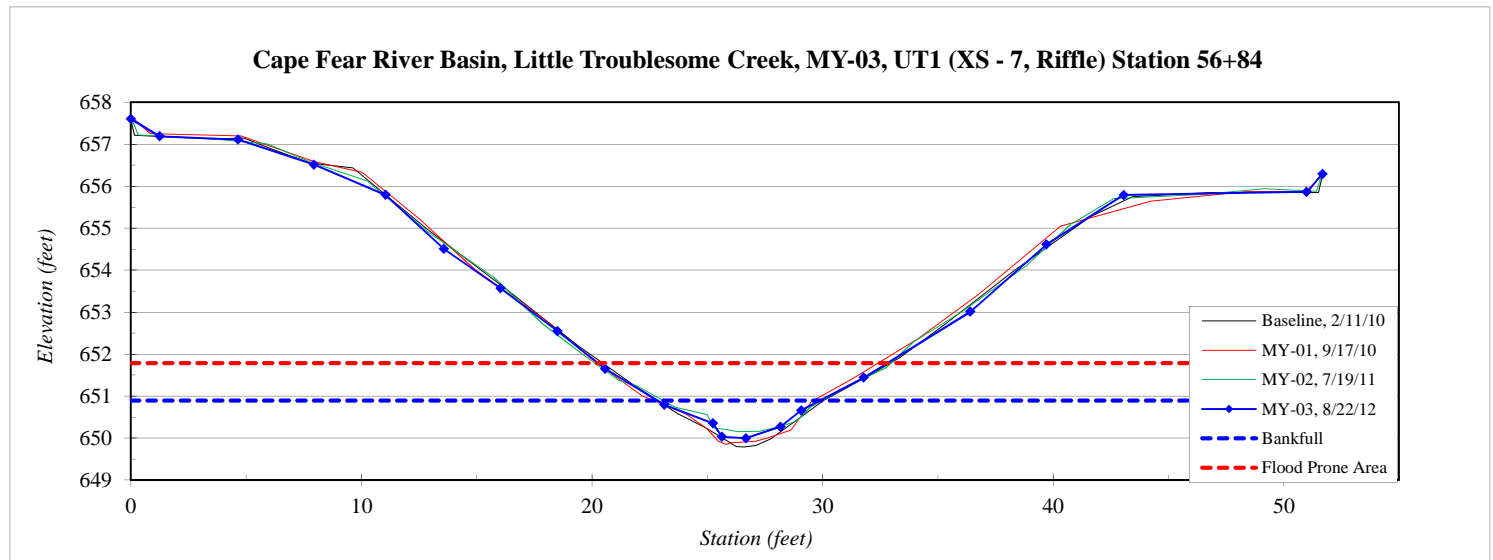

**Longitudinal Profile
Little Troublesome Creek
EEP Project Number - 749
Station 10+00 - 24+50**


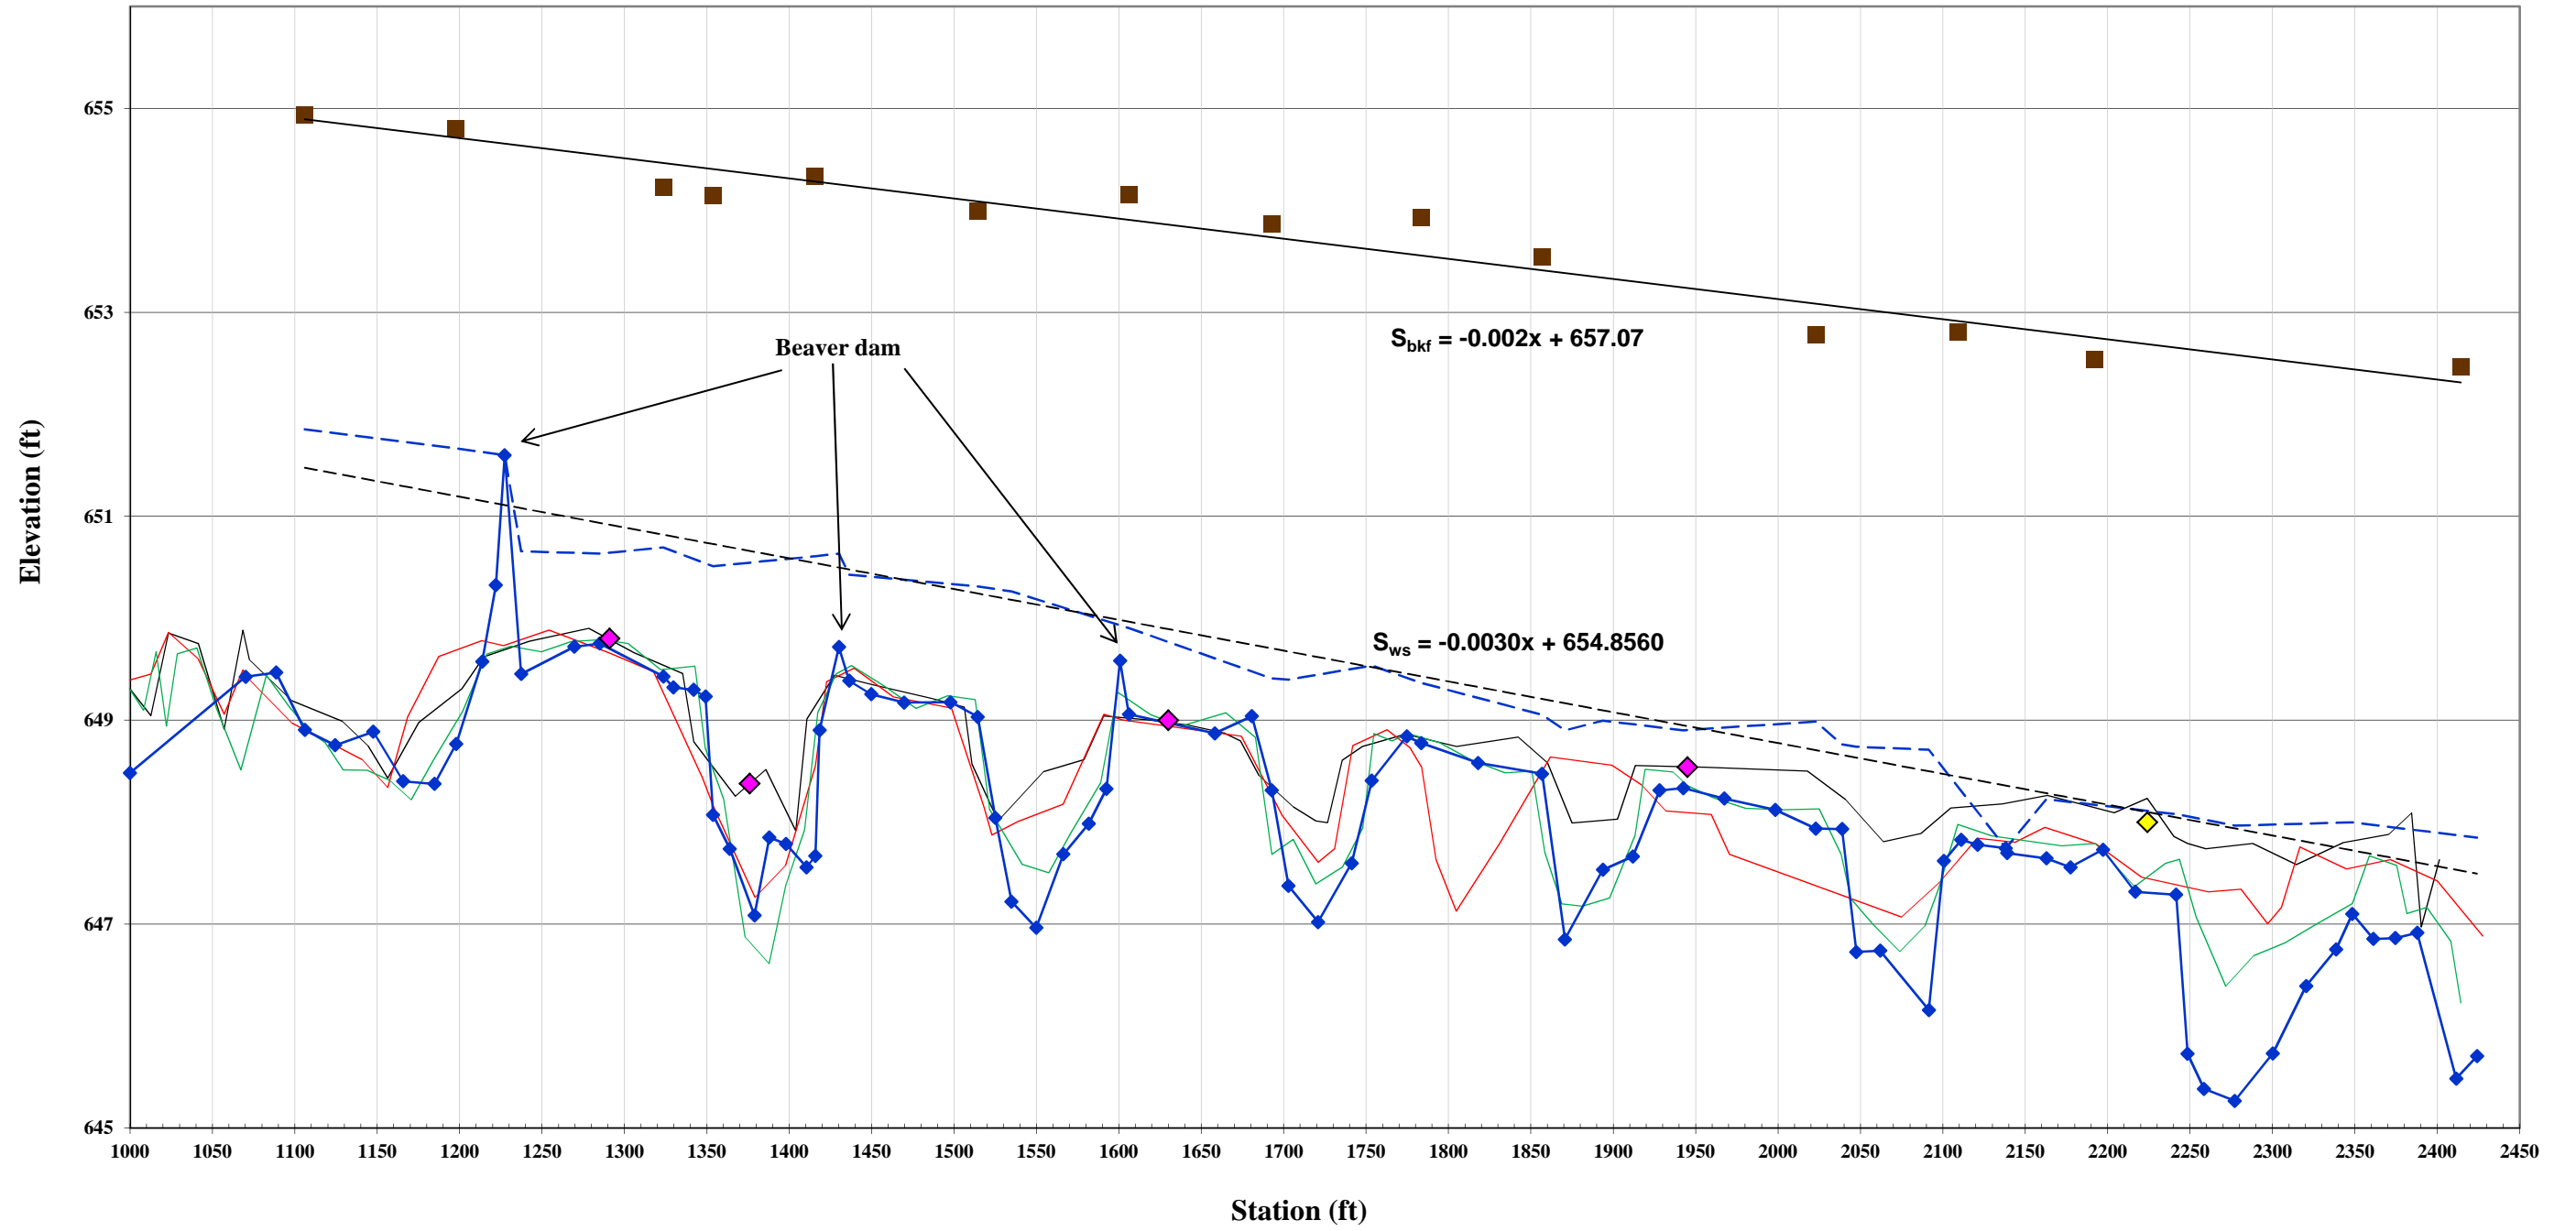


Longitudinal Profile
UT1 to Little Troublesome Creek
EEP Project Number - 749
Station 50+00 - 58+50


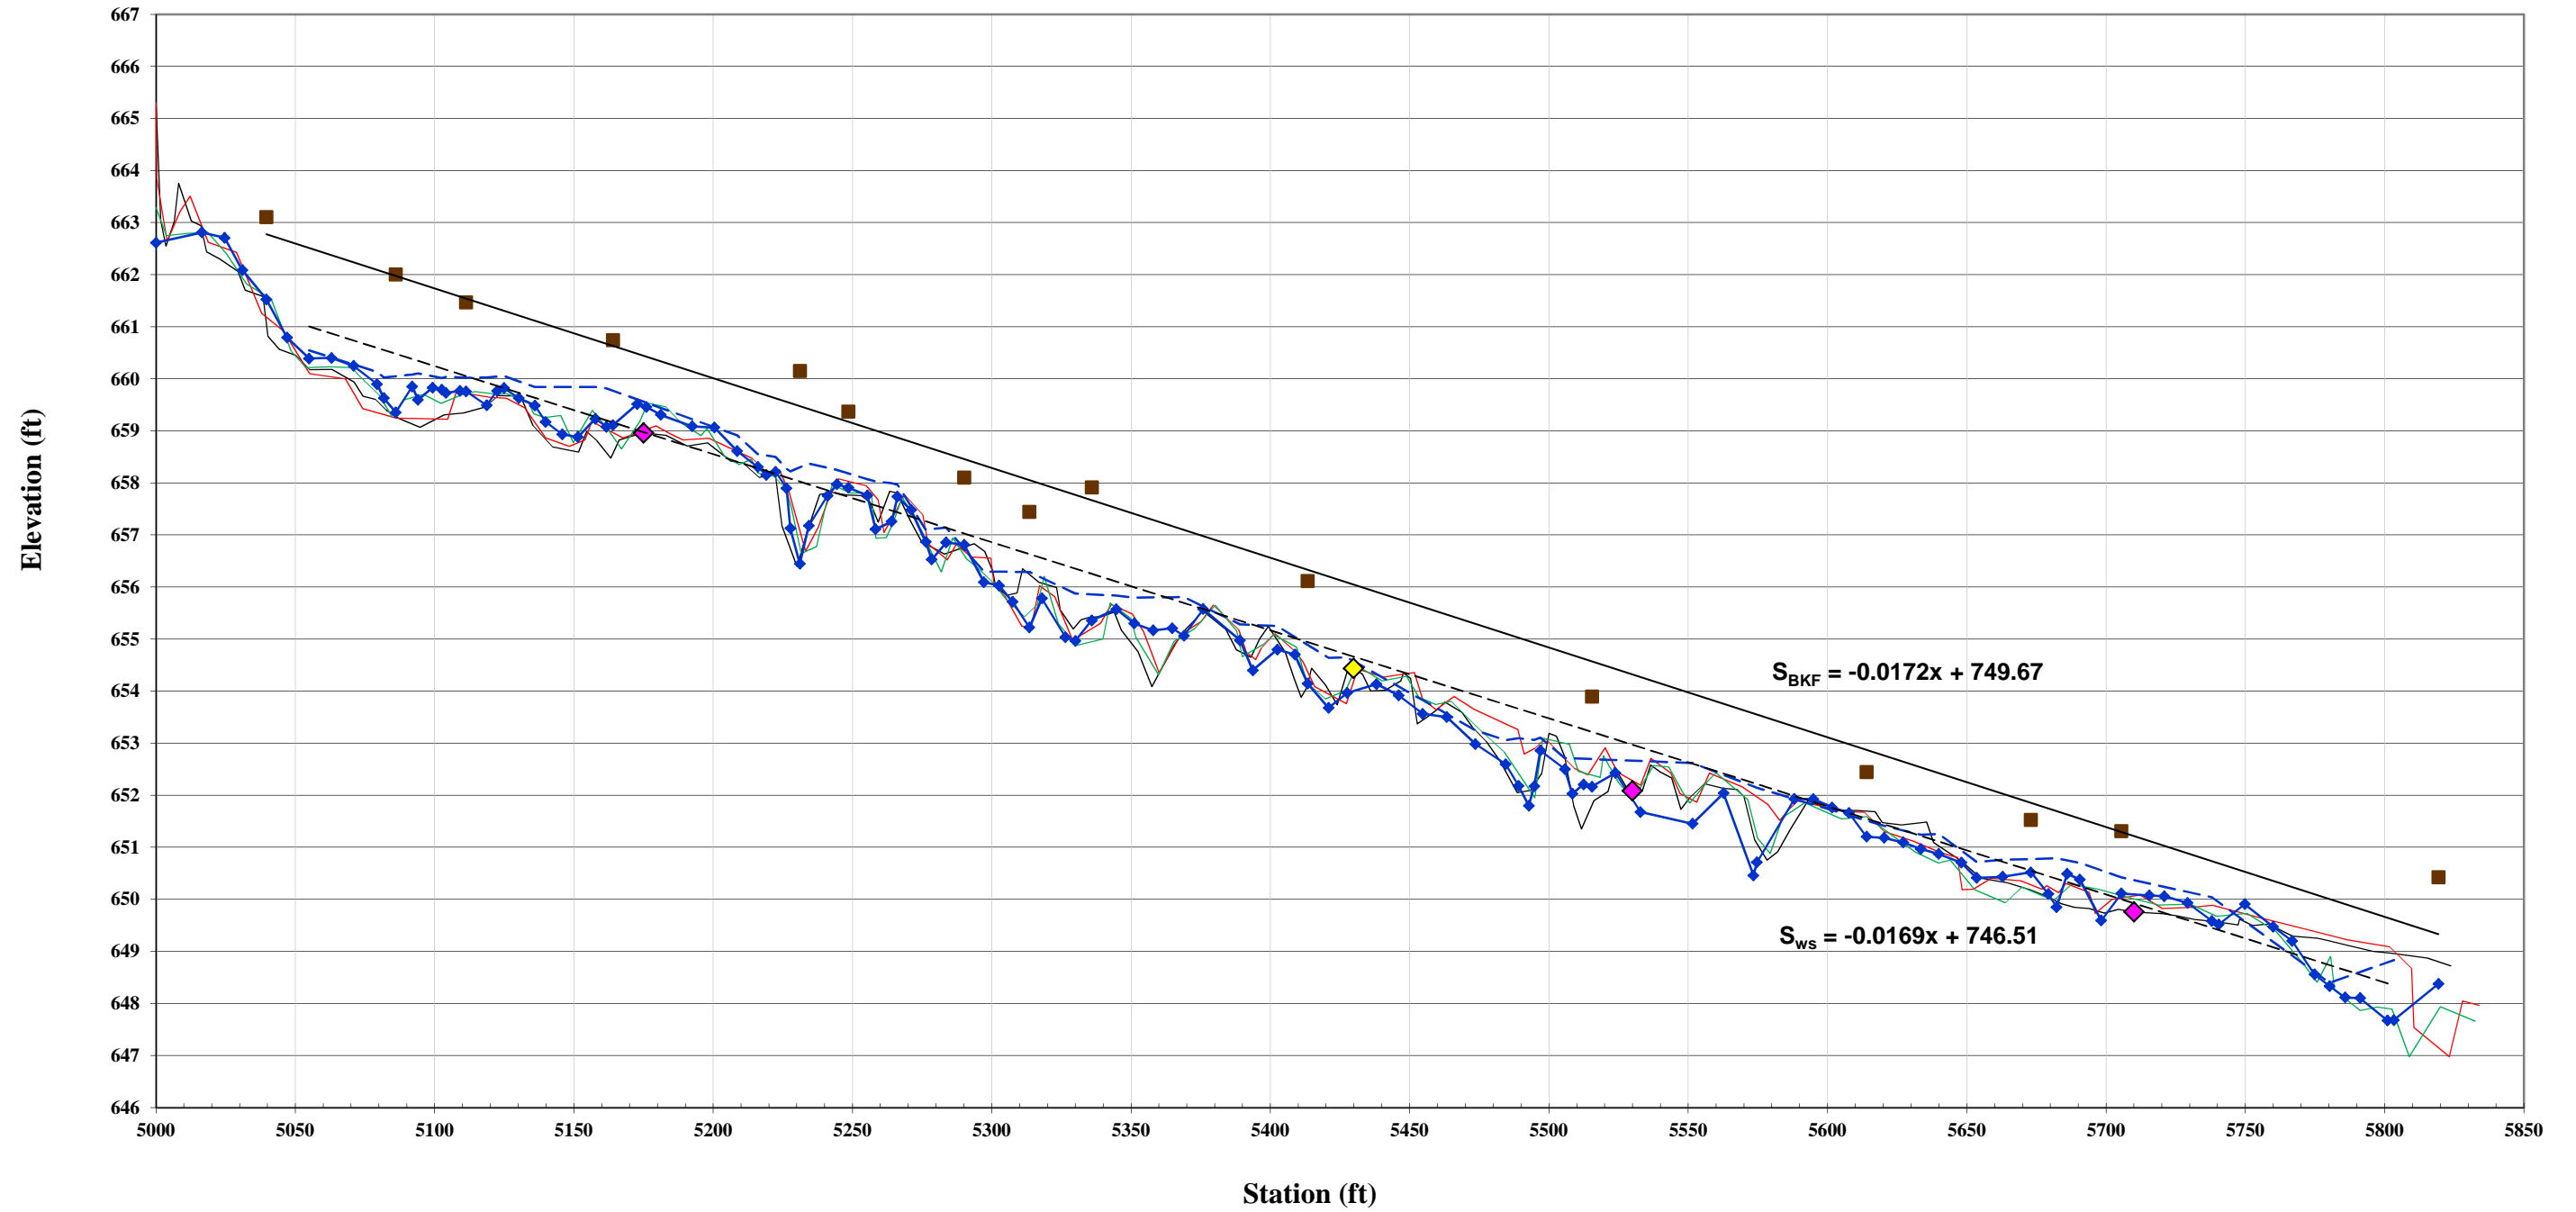


Baseline, 2/12/10
 MY-01, 9/17/10
 MY-02, 7/20/11
 MY-03, 8/22/12
 Water Surface
 Bankfull
 Structure
 Cross-Section
 WS Slope
 BKF Slope



Cross-Section 1 Riffle - LTC MY-03					
Particle	Millimeter	Material	Count	Item %	Cum %
Silt/Clay	< 0.062	S/C		0%	0%
Very Fine	.062 - .125	S		0%	0%
Fine	.125 - .25	A		0%	0%
Medium	.25 - .50	N		0%	0%
Coarse	.50 - 1	D		0%	0%
Very Coarse	1 - 2	S		0%	0%
Very Fine	2 - 4	G		0%	0%
Fine	4 - 5.7		2	2%	2%
Fine	5.7 - 8		5	5%	7%
Medium	8 - 11.3		12	12%	19%
Medium	11.3 - 16		16	16%	34%
Coarse	16 - 22.6		23	23%	57%
Coarse	22.6 - 32		22	22%	78%
Very Coarse	32 - 45		12	12%	90%
Very Coarse	45 - 64		2	2%	92%
Small	64 - 90		C	7	7%
Small	90 - 128	O	1	1%	100%
Large	128 - 180	B		0%	100%
Large	180 - 256	L		0%	100%
Small	256 - 362	B		0%	100%
Small	362 - 512	L		0%	100%
Medium	512 - 1024	D		0%	100%
Lrg- Very Lrg	1024 - 2048	R		0%	100%
Bedrock	>2048	BDRK		0%	100%
		Total	102	100%	100%
Size (mm)		Type			
D50	20	silt/clay	0%		
D84	38	sand	0%		
D95	74	gravel	92%		
		cobble	8%		

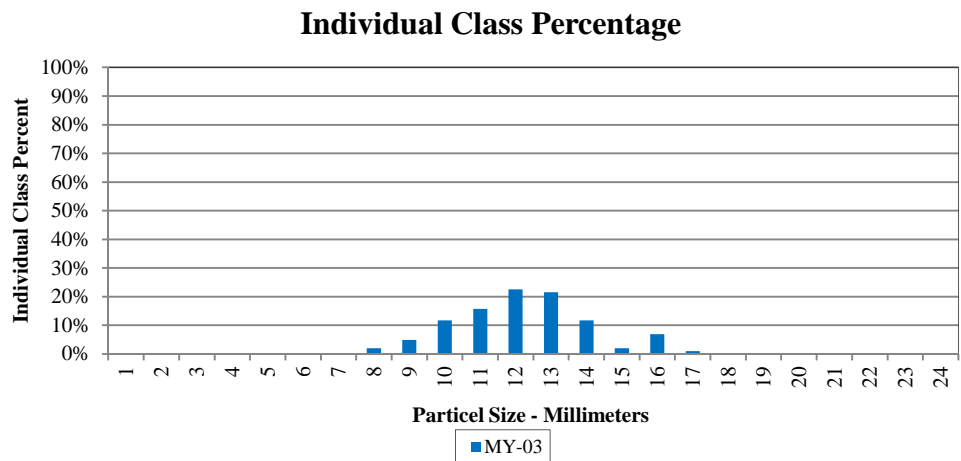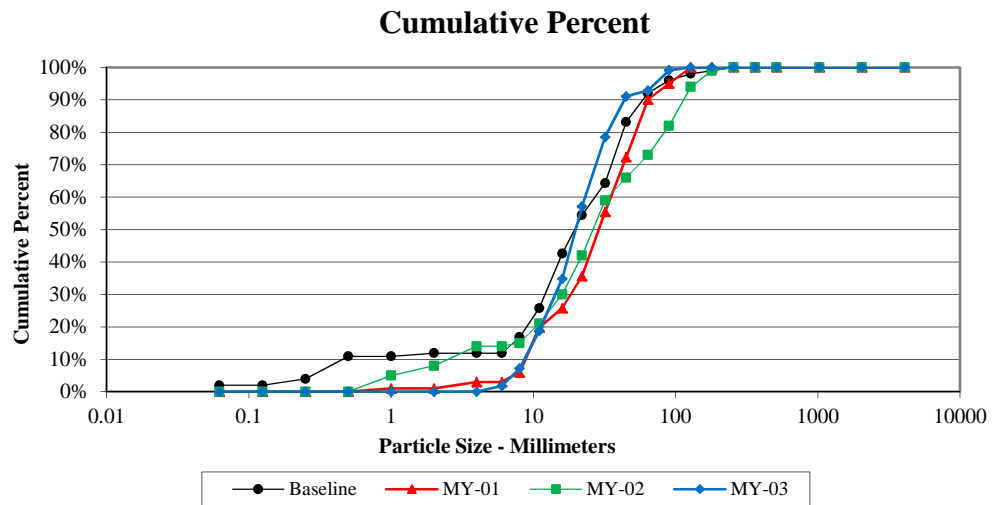



Cross-Section 2 Pool - LTC MY-03					
Particle	Millimeter	Material	Count	Item %	Cum %
Silt/Clay	< 0.062	S/C	3	3%	3%
Very Fine	.062 - .125	S	6	6%	9%
Fine	.125 - .25	A	22	22%	31%
Medium	.25 - .50	N	24	24%	55%
Coarse	.50 - 1	D	20	20%	75%
Very Coarse	1 - 2	S	22	22%	97%
Very Fine	2 - 4			0%	97%
Fine	4 - 5.7	G	2	2%	99%
Fine	5.7 - 8	R		0%	99%
Medium	8 - 11.3	A		0%	99%
Medium	11.3 - 16	V		0%	99%
Coarse	16 - 22.6	E	1	1%	100%
Coarse	22.6 - 32	L		0%	100%
Very Coarse	32 - 45	S		0%	100%
Very Coarse	45 - 64			0%	100%
Small	64 - 90	C		0%	100%
Small	90 - 128	O		0%	100%
Large	128 - 180	B		0%	100%
Large	180 - 256	L		0%	100%
Small	256 - 362	B		0%	100%
Small	362 - 512	L		0%	100%
Medium	512 - 1024	D		0%	100%
Lrg- Very Lrg	1024 - 2048	R		0%	100%
Bedrock	>2048	BDRK		0%	100%
Total			100	100%	100%
Size (mm)		Type			
D50	0.43	silt/clay	3%		
D84	1.3	sand	94%		
D95	1.9	gravel	3%		
		cobble	0%		

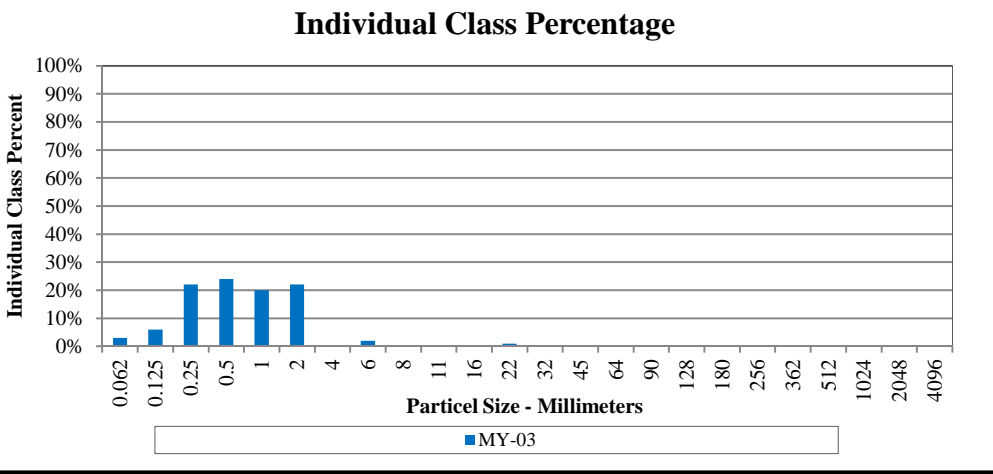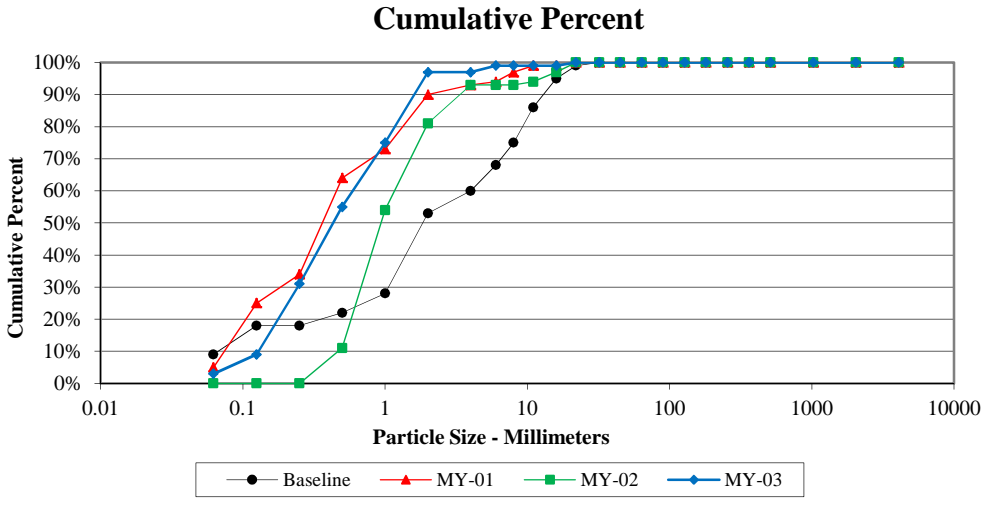



Cross-Section 3 Riffle - LTC MY-03						
Particle	Millimeter	Material	Count	Item %	Cum %	
Silt/Clay	< 0.062	S/C		0%	0%	
Very Fine	.062 - .125	S		0%	0%	
Fine	.125 - .25	A	7	7%	7%	
Medium	.25 - .50	N	19	19%	26%	
Coarse	.50 - 1	D	13	13%	39%	
Very Coarse	1 - 2	S	6	6%	45%	
Very Fine	2 - 4	G	5	5%	50%	
Fine	4 - 5.7				0%	50%
Fine	5.7 - 8		R	2	2%	52%
Medium	8 - 11.3		A	4	4%	56%
Medium	11.3 - 16		V	7	7%	63%
Coarse	16 - 22.6		E	9	9%	72%
Coarse	22.6 - 32		L	10	10%	82%
Very Coarse	32 - 45		S	9	9%	91%
Very Coarse	45 - 64			5	5%	96%
Small	64 - 90		C	3	3%	99%
Small	90 - 128	O		0%	99%	
Large	128 - 180	B	1	1%	100%	
Large	180 - 256	L		0%	100%	
Small	256 - 362	B		0%	100%	
Small	362 - 512	L		0%	100%	
Medium	512 - 1024	D		0%	100%	
Lrg- Very Lrg	1024 - 2048	R		0%	100%	
Bedrock	>2048	BDRK		0%	100%	
Total			100	100%	100%	
Size (mm)		Type				
D50	4	silt/clay	0%			
D84	35	sand	45%			
D95	60	gravel	51%			
		cobble	4%			

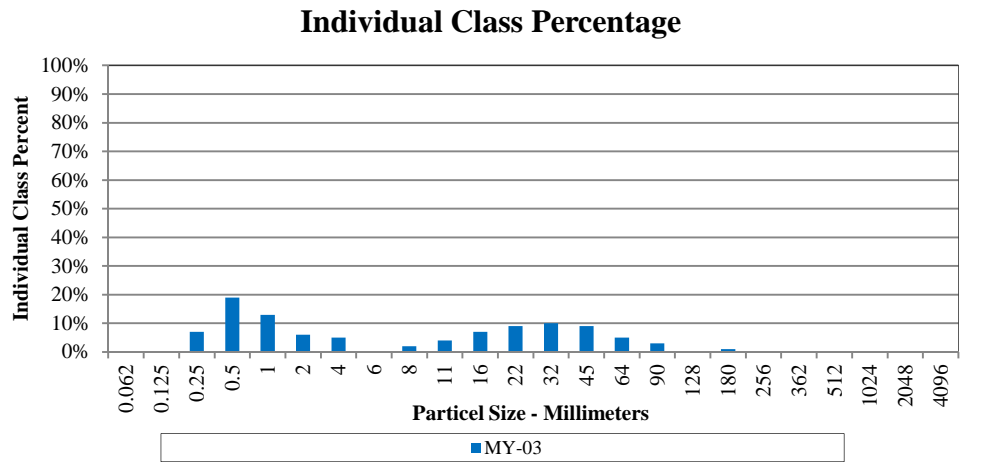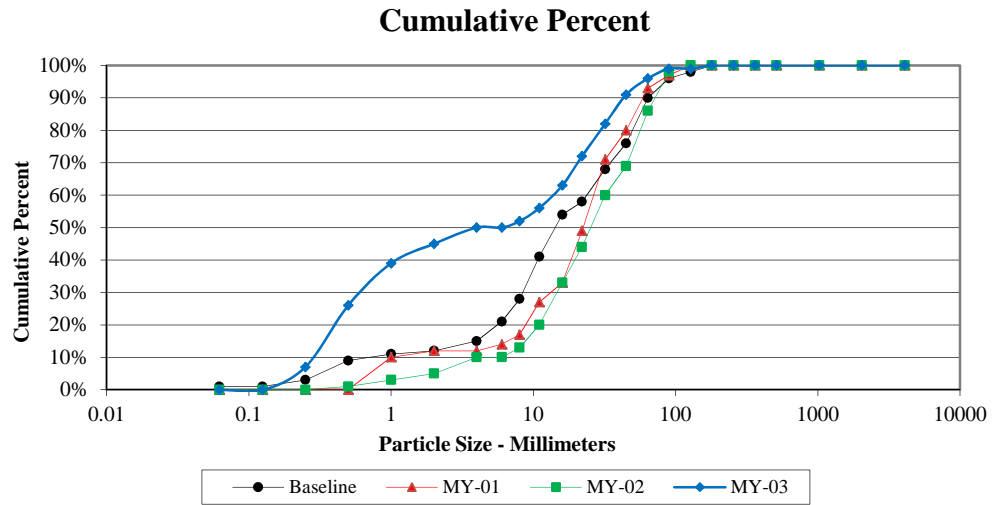



Cross-Section 4 Riffle - LTC MY-03					
Particle	Millimeter	Material	Count	Item %	Cum %
Silt/Clay	< 0.062	S/C		0%	0%
Very Fine	.062 - .125	S		0%	0%
Fine	.125 - .25	A		0%	0%
Medium	.25 - .50	N	8	8%	8%
Coarse	.50 - 1	D	2	2%	10%
Very Coarse	1 - 2	S	1	1%	11%
Very Fine	2 - 4	G R A V E L S	8	8%	19%
Fine	4 - 5.7		4	4%	23%
Fine	5.7 - 8		8	8%	31%
Medium	8 - 11.3		26	26%	56%
Medium	11.3 - 16		16	16%	72%
Coarse	16 - 22.6		10	10%	82%
Coarse	22.6 - 32		15	15%	97%
Very Coarse	32 - 45		3	3%	100%
Very Coarse	45 - 64			0%	100%
Small	64 - 90		C		0%
Small	90 - 128	O		0%	100%
Large	128 - 180	B		0%	100%
Large	180 - 256	L		0%	100%
Small	256 - 362	B		0%	100%
Small	362 - 512	L		0%	100%
Medium	512 - 1024	D		0%	100%
Lrg- Very Lrg	1024 - 2048	R		0%	100%
Bedrock	>2048	BDRK		0%	100%
Total			101	100%	100%
Size (mm)		Type			
D50	10	silt/clay	0%		
D84	23	sand	11%		
D95	30	gravel	89%		
		cobble	0%		

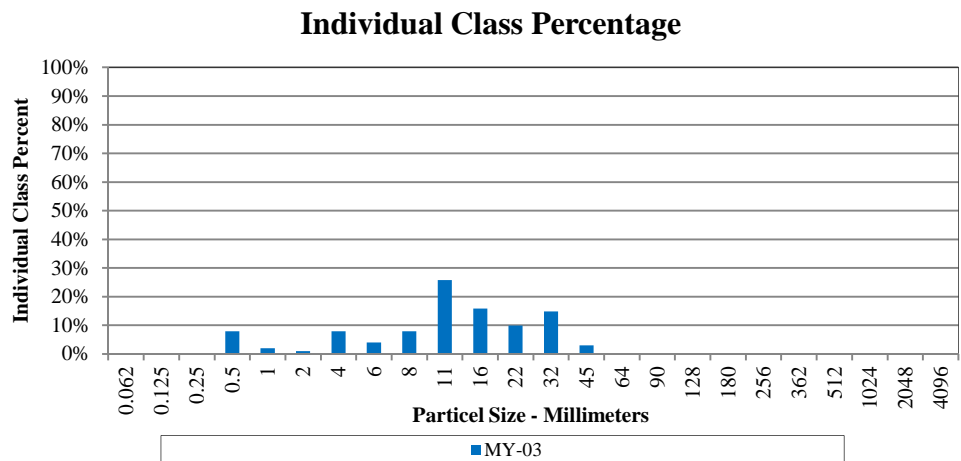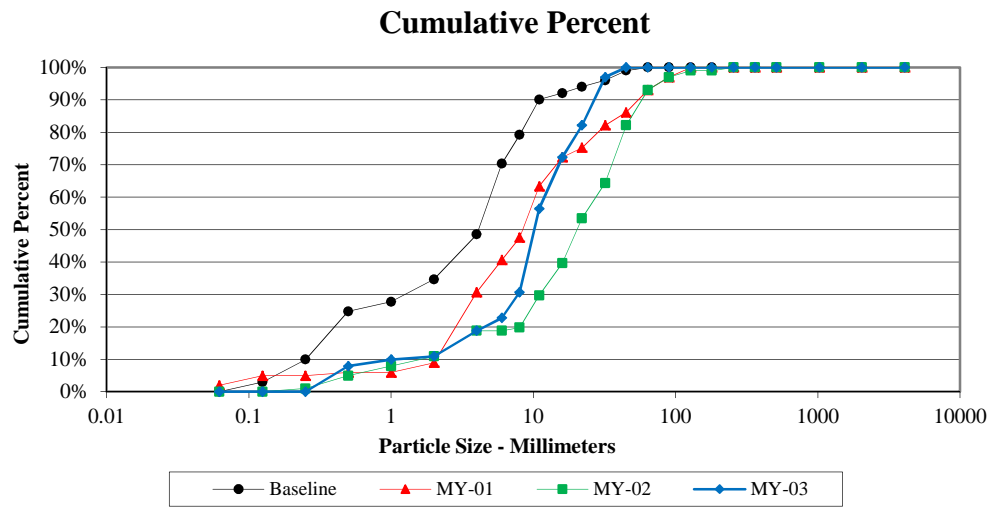



Cross-Section 5 Riffle - UT1 MY-03					
Particle	Millimeter	Material	Count	Item %	Cum %
Silt/Clay	< 0.062	S/C		0%	0%
Very Fine	.062 - .125	S	2	2%	2%
Fine	.125 - .25	A	20	20%	22%
Medium	.25 - .50	N	25	25%	47%
Coarse	.50 - 1	D	36	36%	83%
Very Coarse	1 - 2	S	15	15%	98%
Very Fine	2 - 4	G R A V E L S	2	2%	100%
Fine	4 - 5.7		0%	100%	
Fine	5.7 - 8		0%	100%	
Medium	8 - 11.3		0%	100%	
Medium	11.3 - 16		0%	100%	
Coarse	16 - 22.6		0%	100%	
Coarse	22.6 - 32		0%	100%	
Very Coarse	32 - 45		0%	100%	
Very Coarse	45 - 64		0%	100%	
Small	64 - 90		C		0%
Small	90 - 128	O		0%	100%
Large	128 - 180	B		0%	100%
Large	180 - 256	L		0%	100%
Small	256 - 362	B		0%	100%
Small	362 - 512	L		0%	100%
Medium	512 - 1024	D		0%	100%
Lrg- Very Lrg	1024 - 2048	R		0%	100%
Bedrock	>2048	BDRK		0%	100%
Total			100	100%	100%
Size (mm)		Type			
D50	0.53	silt/clay	0%		
D84	1	sand	98%		
D95	1.7	gravel	2%		
		cobble	0%		

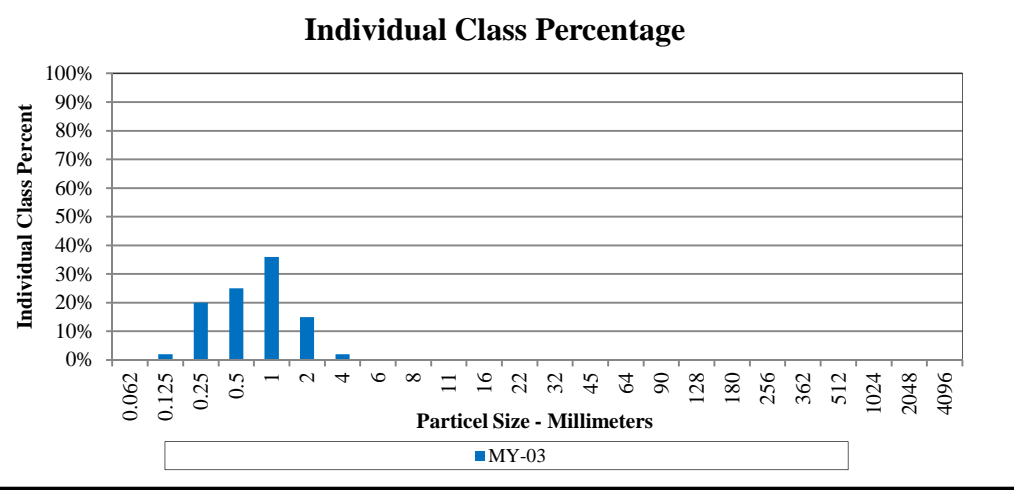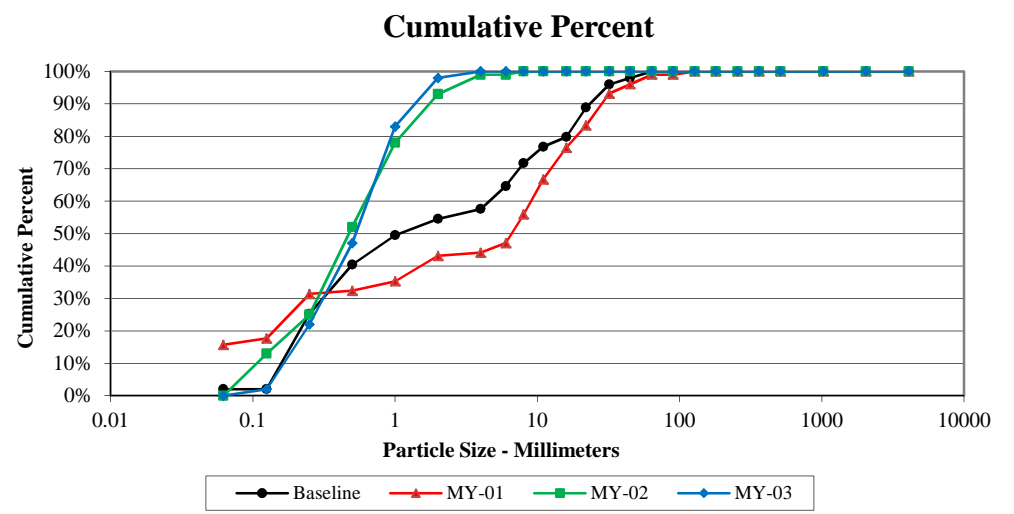

Cross-Section 6 Pool - UT1 MY-03						
Particle	Millimeter	Material	Count	Item %	Cum %	
Silt/Clay	< 0.062	S/C		0%	0%	
Very Fine	.062 - .125	S		0%	0%	
Fine	.125 - .25	A		0%	0%	
Medium	.25 - .50	N		0%	0%	
Coarse	.50 - 1	D	8	8%	8%	
Very Coarse	1 - 2	S	13	13%	21%	
Very Fine	2 - 4	G	4	4%	25%	
Fine	4 - 5.7		10	10%	35%	
Fine	5.7 - 8		29	29%	64%	
Medium	8 - 11.3		21	21%	85%	
Medium	11.3 - 16		5	5%	90%	
Coarse	16 - 22.6		8	8%	98%	
Coarse	22.6 - 32		2	2%	100%	
Very Coarse	32 - 45		S		0%	100%
Very Coarse	45 - 64				0%	100%
Small	64 - 90		C		0%	100%
Small	90 - 128	O		0%	100%	
Large	128 - 180	B		0%	100%	
Large	180 - 256	L		0%	100%	
Small	256 - 362	B		0%	100%	
Small	362 - 512	L		0%	100%	
Medium	512 - 1024	D		0%	100%	
Lrg- Very Lrg	1024 - 2048	R		0%	100%	
Bedrock	>2048	BDRK		0%	100%	
Total			100	100%	100%	
Size (mm)		Type				
D50	7	silt/clay	0%			
D84	11	sand	21%			
D95	20	gravel	79%			
		cobble	0%			

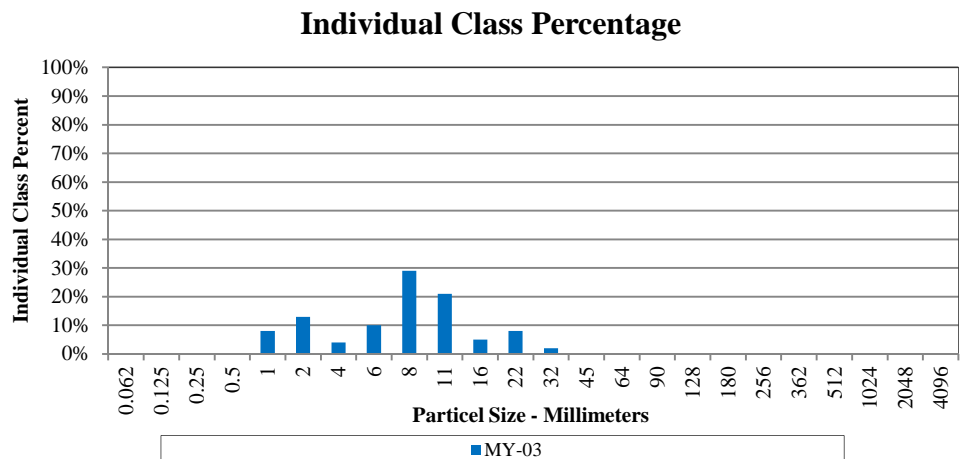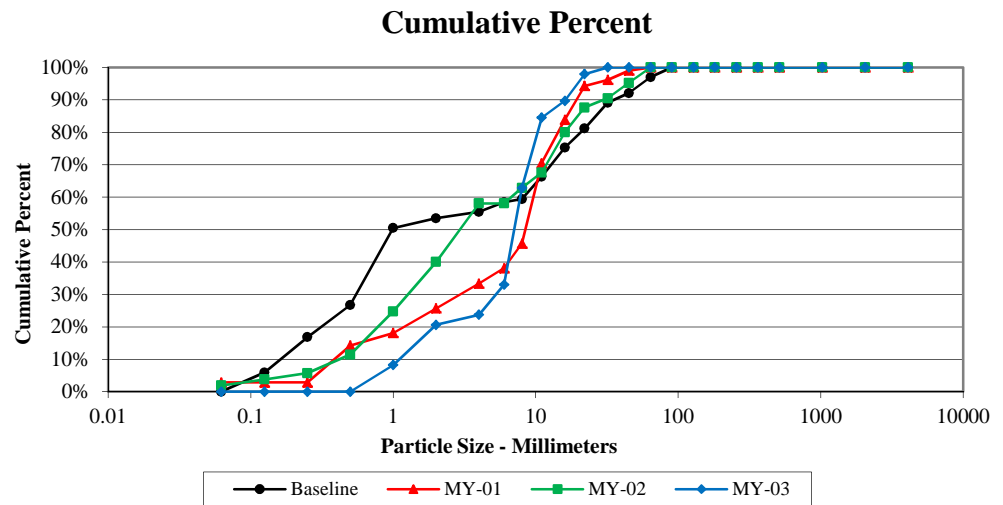

Cross-Section 7 Riffle - UT1 MY-03					
Particle	Millimeter	Material	Count	Item %	Cum %
Silt/Clay	< 0.062	S/C		0%	0%
Very Fine	.062 - .125	S		0%	0%
Fine	.125 - .25	A		0%	0%
Medium	.25 - .50	N	12	12%	12%
Coarse	.50 - 1	D	24	23%	35%
Very Coarse	1 - 2	S	29	28%	63%
Very Fine	2 - 4	G R A V E L S	25	24%	87%
Fine	4 - 5.7		4	4%	91%
Fine	5.7 - 8		7	7%	98%
Medium	8 - 11.3		2	2%	100%
Medium	11.3 - 16			0%	100%
Coarse	16 - 22.6			0%	100%
Coarse	22.6 - 32			0%	100%
Very Coarse	32 - 45			0%	100%
Very Coarse	45 - 64			0%	100%
Small	64 - 90		C		0%
Small	90 - 128	O		0%	100%
Large	128 - 180	B		0%	100%
Large	180 - 256	L		0%	100%
Small	256 - 362	B		0%	100%
Small	362 - 512	L		0%	100%
Medium	512 - 1024	D		0%	100%
Lrg- Very Lrg	1024 - 2048	R		0%	100%
Bedrock	>2048	BDRK		0%	100%
Total			103	100%	100%
Size (mm)		Type			
D50	1.4	silt/clay	0%		
D84	3.6	sand	63%		
D95	7	gravel	37%		
		cobble	0%		

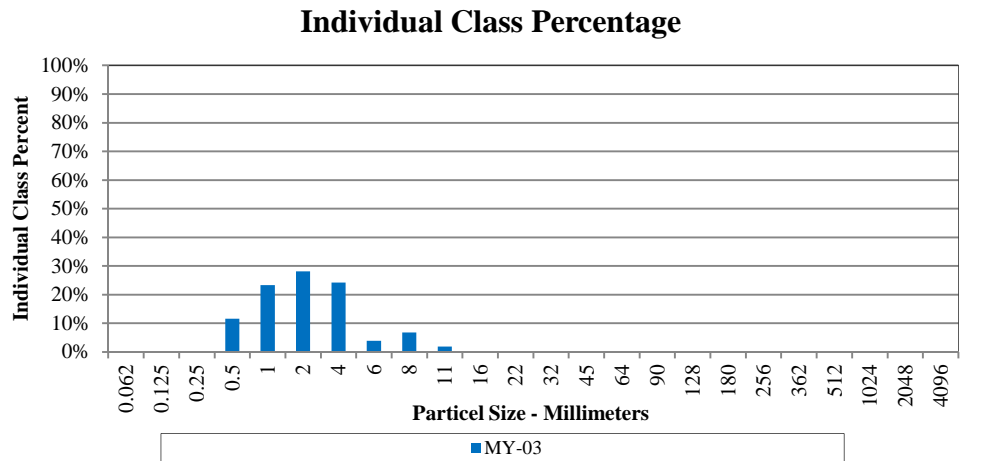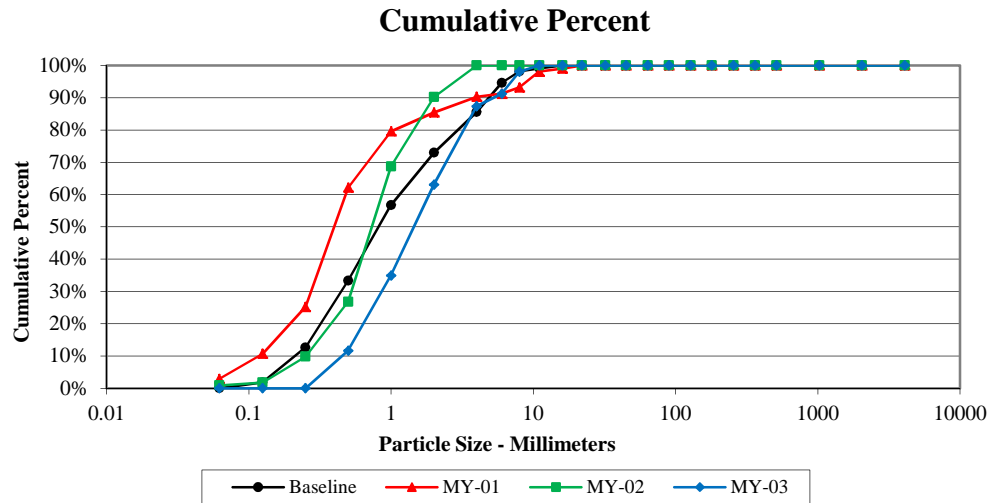

**Table 10 Baseline Stream Data Summary Table: Little Troublesome Creek - 1,375 lf
Little Troublesome / Project No. 749**

Parameter	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			As-built								
	LL	UL	Eq.	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Med	Max	Min	Mean	Med	Max	SD	n			
Dimension and Substrate - Riffle																											
Bankfull Width (ft)				21.3	24.2	23.3	29.0	3.4	4	11.9			20.1		2		31.6		32.1	32.7	32.6	33.3	0.6	3			
Floodprone Width (ft)					>65				3		>60				2		>60			>200				3			
Bankfull Mean Depth (ft)				4.4	4.7	4.8	5.0	0.2	4	1.7			2.7		2		3.7		3.6	3.7	3.7	3.7	0.1	3			
Bankfull Max Depth (ft)				6.2	6.6	6.7	6.9	0.3	4	3.3			4.2		2		4.9		4.7	4.8	4.8	4.9	0.1	3			
Bankfull Cross-Sectional Area (ft ²)				106.1	114.3	107.6	135.8	14.4	4	32.4			33.4		2		118.0		118.6	118.8	118.6	119.2	0.3	3			
Width/Depth Ratio				4.2	5.0	4.7	6.2	1.0	3	4.4			12.1		2		8.5		8.7	9.0	8.9	9.3	0.3	3			
Entrenchment Ratio				2.0	2.6	2.7	3.0	0.5	3	2.0			3.0		2		>3.0			>6.0				3			
Bank Height Ratio				1.0	1.1	1.1	1.2	0.1	3	1.0			1.1		2		1.0		1.0	1.0	1.0	1.0	0.0	3			
d50 (mm)				4.5	6.8	6.8	9.1	3.3	2	1.9			3.4		2				4.1	12.7	14.0	20.0	8.0	3			
Profile																											
Riffle Length (ft)																	58		60	90	89	121	21	6			
Riffle Slope (ft/ft)										0.0010			0.0070			0.002		0.004	0.0008	0.0022	0.0018	0.0039	0.0013	6			
Pool Length (ft)										13			21			20		56	11	60	42	144	42	7			
Pool Max Depth										1.5			2.5				7.5		4.9	5.7	5.8	6.2	0.5	7			
Pool Spacing (ft)										32			80			50		212	169	199	180	285	44	6			
Pool Volume (ft ³)																											
Pattern																											
Channel Beltwidth (ft)										50			60				125		51	63	55	85	15	6			
Radius of Curvature (ft)										24			31			72		126	59	87	90	120	24	7			
Rc:Bankfull width (ft/ft)										1.2			2.6			2.3		4.0	1.8	2.7	2.8	3.7					
Meander Wavelength (ft)										77			138			158		358	293	328	318	385	35	5			
Meander Width Ratio										2.5			5.0				3.9		1.6	1.9	1.7	2.6					
Substrate, bed and transport parameters																											
Ri%/Ru%/P%/G%/S%																											
SC% / Sa% / G% / C% / B% / Be%					3%	54%	40%	3%	0%	0%		0%	52%	48%	0%	0%	0%		1%	19%	75%	6%	0%	0%			
d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)					0.26	0.56	1.4	8.1	15	-	-		0.7	1.2	1.9	16	26	-		0.79	6.1	10	18	42	71	-	-
Reach Shear Stress (competency) lb/ft ²																	0.38				0.28						
Max part size (mm) mobilized at bankfull																	28				20						
Stream Power (transport capacity) W/m ²																											
Additional Reach Parameters																											
Drainage Area (SM)						12.09						1.68				12.09				12.09							
Impervious cover estimate						21%										21%				21%							
Rosgen Classification						E4						E4				E4/C4				E4/C4							
Bankfull Velocity (fps)						4.1 - 5.3						3.4 - 4.4				4.3											
Bankfull Discharge (cfs)						553 - 564						115 - 150				510 - 550											
Valley length (ft)						1,273										1,273					1,273						
Channel thalweg length (ft)						1,329										1,379					1,401						
Sinuosity						1.06										1.10					1.10						
Water Surface Slope (Channel) (ft/ft)						0.0020						0.0030				0.0020				0.0015							
BF slope (ft/ft)						0.0020										0.0020				0.0018							
Bankfull Floodplain Area (acres)																											
Proportion over wide (%)																											
Entrenchment Class (ER Range)																											
Incision Class (BHR Range)																											
BEHI VL% / L% / M% / H% / VH% / E%																											
Channel Stability or Habitat Metric																											
Biological or Other																											

**Table 10 Baseline Stream Data Summary Table: UT1 - 813 lf
Little Troublesome / Project No. 749**

Parameter	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			As-built						
	LL	UL	Eq.	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Med	Max	Min	Mean	Med	Max	SD	n	
Dimension and Substrate - Riffle																									
Bankfull Width (ft)				4.0	5.4	5.1	7.7	1.4	5	7.7			10.8				6.3		7.2	7.6		7.9	0.5	2	
Floodprone Width (ft)				5	6	6	7	0.9	3	13			16				12		13	13		14	0.6	2	
Bankfull Mean Depth (ft)				0.7	0.9	0.9	1.1	0.2	5	0.7			0.9				0.6		0.6	0.6		0.6	0	2	
Bankfull Max Depth (ft)				1.0	1.3	1.1	1.9	0.4	5	1.1			1.4				1.0		1.1	1.1		1.1	0	2	
Bankfull Cross-Sectional Area (ft ²)				3.6	4.6	4.3	5.8	1.0	5	6.1			8.8				3.5		4.5	4.7		4.8	0.2	2	
Width/Depth Ratio				4.4	5.7	5.6	7.0	1.3	3	8.5			11.4				11.4		11.5	12.3		13.0	1.1	2	
Entrenchment Ratio				1.0	1.3	1.4	1.5	0.3	3	1.6			2.1				1.9		1.6	1.8		1.9	0.2	2	
Bank Height Ratio				5.3	6.1	6.4	6.5	0.7	3								1.0		1.0	1.0		1.0	0	2	
d50 (mm)				2.2	11.2	12.3	19.2	8.6	3										0.8	1.0		1.1	0.2	2	
Profile																									
Riffle Length (ft)																			3	11	8	32	9	11	
Riffle Slope (ft/ft)										0.0120			0.0280			0.0180		0.0400	0.0077	0.0378	0.0318	0.1022	0.0283	11	
Pool Length (ft)										5			9			3		11	5	13	12	36	8	14	
Pool Max Depth										0.8			0.9				1.4		1.7	2.3	2.2	3.0	0.5	12	
Pool Spacing (ft)																			21	44	41	81	22	13	
Pool Volume (ft ³)																									
Pattern																									
Channel Beltwidth (ft)											22					13		6	9	9	14	2.1	19		
Radius of Curvature (ft)										11			23		13		32	14	18	18	27	4.5	27		
Rc:Bankfull width (ft/ft)										1.0			3.0		2.0		5.0	1.8	2.4	2.4	3.6				
Meander Wavelength (ft)										45			59		32		63	40	51	49	69	7.6	25		
Meander Width Ratio										2.0			2.9		2.0		2.9	0.8	1.2	1.2	1.9				
Substrate, bed and transport parameters																									
Ri%/Ru%/P%/G%/S%																									
SC% / Sa% / G% / C% / B% / Be%					0%	27%	73%	0%	0%		6%	45%	42%	7%	0%					1%	63%	36%	0%	0%	0%
d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)					1.4	3.2	7.3	15	20		0.14	0.38	1.8	18	139					0.22	0.47	0.87	2.1	7.3	23
Reach Shear Stress (competency) lb/ft ²																0.42					0.60				
Max part size (mm) mobilized at bankfull																32					35				
Stream Power (transport capacity) W/m ²																									
Additional Reach Parameters																									
Drainage Area (SM)					0.10								0.15			0.10					0.10				
Impervious cover estimate																									
Rosgen Classification						G4c							B4c			B4c					B4c				
Bankfull Velocity (fps)						4.3 - 4.7							5.1 - 5.8			3.7					3.7				
Bankfull Discharge (cfs)						16 - 20							31 - 49			13 - 20					17				
Valley length (ft)						769										769					769				
Channel thalweg length (ft)						873										813					824				
Sinuosity						1.02							1.20			1.10					1.10				
Water Surface Slope (Channel) (ft/ft)						0.019							0.012			0.018					0.017				
BF slope (ft/ft)						0.021							0.017			0.021					0.016				
Bankfull Floodplain Area (acres)																									
Proportion over wide (%)																									
Entrenchment Class (ER Range)																									
Incision Class (BHR Range)																									
BEHI VL% / L% / M% / H% / VH% / E%																									
Channel Stability or Habitat Metric																									
Biological or Other																									

**Table 11a. Cross-Section Morphology Data Tables
Little Troublesome / Project No. 749**

Dimension and Substrate	Cross-Section 1 (LTC, Riffle) Station 13+08							Cross-Section 2 (LTC, Pool) Station 13+90							Cross-Section 3 (LTC, Riffle) Station 16+30							Cross-Section 4 (LTC, Riffle) Station 19+42							Cross-Section 5 (UT1, Riffle) Station 51+56						
	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+
Based on fixed baseline elevation																																			
Bankfull Width (ft)	32.6	33.0	33.2	33.6				36.0	39.1	37.5	37.4				32.1	32.3	32.2	33.8				33.3	33.5	33.1	36.9				7.9	7.7	6.9	5.6			
Floodprone Width (ft)	>200	>200	>200	>200				-	-	-	-				>200	>200	>200	>200				>200	>200	>200	>200				13	13	11	11			
Bankfull Mean Depth (ft)	3.7	3.6	3.5	3.4				3.4	3.4	3.6	3.2				3.7	3.6	3.6	3.2				3.6	3.6	3.5	3.1				0.6	0.5	0.3	0.3			
Bankfull Max Depth (ft)	4.8	4.8	4.9	4.8				6.0	7.3	7.7	6.3				4.9	4.9	4.9	5.1				4.7	4.9	5.0	5.1				1.1	0.9	0.5	0.7			
Bankfull Cross-Sectional Area (ft ²)	119.2	118.4	117.4	115.5				123.1	134.3	135.0	128.8				118.6	117.5	114.8	109.7				118.6	120.0	115.9	115.6				4.8	4.1	2.0	1.6			
Bankfull Width/Depth Ratio	8.9	9.2	9.4	9.8				-	-	-	-				8.7	8.9	9.0	10.4				9.3	9.4	9.5	11.8				13.0	14.5	23.3	19.6			
Bankfull Entrenchment Ratio	>6.0	>6.0	>6.0	>6.0				-	-	-	-				>6.0	>6.0	>6.0	>6.0				>6.0	>6.0	>6.0	>6.0				1.6	1.6	1.5	2.0			
Bankfull Bank Height Ratio	1.0	1.0	1.0	1.0				-	-	-	-				1.0	1.0	1.0	1.0				1.0	1.0	1.0	1.0				1.0	1.0	1.0	1.0			
Cross-Sectional Area Between End Pins (ft ²)	142.4	147.9	144.2	144.6				170.0	171.1	170.2	169.2				156.0	160.1	156.7	151.7				162.2	165.8	161.2	159.7				150.8	156.3	152.5	150.8			
d50 (mm)	20.0	29.0	26.0	20.0				1.8	0.36	0.94	0.43				14.0	22.0	25.0	4.0				4.1	8.4	20.0	10.0				1.1	8.9	0.47	0.53			
	Cross-Section 6 (UT1, Pool) Station 55+08							Cross-Section 7 (UT1, Riffle) Station 56+84																											
Based on fixed baseline elevation	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+																					
Bankfull Width (ft)	4.6	4.8	4.5	4.3				7.2	6.9	6.9	7																								
Floodprone Width (ft)	-	-	-	-				13.6	13.6	12.0	12.6																								
Bankfull Mean Depth (ft)	0.9	1.0	1.0	0.9				0.6	0.6	0.5	0.5																								
Bankfull Max Depth (ft)	1.4	1.6	1.6	1.4				1.1	1.0	0.7	0.9																								
Bankfull Cross-Sectional Area (ft ²)	4.2	4.8	4.5	3.9				4.5	4.3	3.2	3.5																								
Bankfull Width/Depth Ratio	-	-	-	-				11.5	11.1	15.0	14.0																								
Bankfull Entrenchment Ratio	-	-	-	-				1.9	2.0	1.7	1.8																								
Bankfull Bank Height Ratio	-	-	-	-				1.0	1.0	1.0	1.0																								
Cross-Sectional Area Between End Pins (ft ²)	146.9	149.8	149.9	152.4				120.6	123.6	121.4	122.8																								
d50 (mm)	1.0	8.6	2.9	7.0				0.82	0.4	0.73	0.73																								

Table 11b. Stream Reach Morphology Data Tables

Little Troublesome / Project No. 749

Segment Reach: Little Troublesome Creek (1,375 ft.)

Parameter	MY01 (2010)						MY02 (2011)						MY03 (2012)						MY04 (2013)						MY05 (2014)					
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
Dimension																														
Bankfull Width (ft)	32.3	33.0		33.5		3	32.2	32.8		33.2		3	33.7	34.8		36.9		3												
Floodprone Width (ft)	200	200		200		3	200	200		200		3	200.0	200.0		200.0		3												
Bankfull Mean Depth (ft)	3.6	3.6		3.6		3	3.5	3.5		3.6		3	3.1	3.2		3.4		3												
Bankfull Max Depth (ft)	4.8	4.9		4.9		3	4.9	4.9		5.0		3	4.8	5.0		5.1		3												
Bankfull Cross-Sectional Area (ft ²)	117.5	118.4		120.0		3	114.8	116.0		117.4		3	109.0	113.8		116.8		3												
Width/Depth Ratio	8.9	9.2		9.4		3	9.0	9.3		9.5		3	9.8	10.7		11.8		3												
Entrenchment Ratio	6.0	6.0		6.0		3	6.0	6.0		6.0		3	6.0	6.0		6.0		3												
Bank Height Ratio	1.0	1.0		1.0		3	1.0	1.0		1.0		3	1.0	1.0		1.0		3												
Pattern																														
Channel Beltwidth (ft)	66	89	90	110	18.2	6																								
Radius of Curvature (ft)	80	96	80	120	21.9	5																								
Rad. of Curv. : Bankfull Width (ft/ft)	2.4	2.9	2.4	3.6																										
Meander Wavelength (ft)	280	318	314	375	33.2	6																								
Meander Width Ratio	2.0	2.7	2.7	3.3																										
Profile																														
Riffle Length (ft)	21	65	60	104	26	7	75	86	83	112	14	7	73	83	82	96	8	7												
Riffle Slope (ft/ft)	0.002	0.005	0.004	0.014	0.004	7	0.001	0.003	0.003	0.005	0.001	7	0.001	0.011	0.003	0.053	0.021	7												
Pool Length (ft)	32	65	48	127	35	7	53	79	68	161	39	7	23	57	58	92	22	7												
Pool Max Depth (ft)	7.3	7.3		7.3		1	7.7	7.7		7.7		1	6.3	6.3		6.3		1												
Pool Spacing (ft)	93	198	179	291	73	6	166	202	179	308	54	6	168	190	179	248	31	6												
Additional Reach Parameters																														
Valley Length (ft)			1,285						1,285						1,285															
Channel Thalweg Length (ft)			1,402						1,402						1,402															
Sinuosity			1.08						1.08						1.08															
Water Surface Slope (ft/ft)			0.0015						0.0015						0.0015															
Bankfull Slope (ft/ft)			0.0018						0.0018						0.0018															
Rosgen Classification			C5						C5						C5															
Ri% / Ru% / P% / G% / S%			25 / 20 / 30 / 25 / 0						25 / 20 / 30 / 25 / 0						25 / 20 / 30 / 25 / 0															
SC% / Sa% / G% / C% / B% / Be%			0%/12%/81%/7%/0%/0%						0%/26%/62%/12%/0%/0%						1%/38%/59%/3%/0%/0%															
d50 / d84 / d95			22/50/76						18/52/78						9/24/41															
% of Reach with Eroding Banks			1%						1%						1%															

Table 11b. Stream Reach Morphology Data Tables
Little Troublesome / Project No. 749
Segment Reach: UT1 (813 ft.)

Parameter	MY01 (2010)						MY02 (2011)						MY03 (2012)						MY04 (2013)						MY05 (2014)					
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
Dimension																														
Bankfull Width (ft)	6.9	7.3		7.7	0.566	2	6.9	6.9		6.9	0.000	2	5.0	5.9		6.8	1.273	2												
Floodprone Width (ft)	12.7	13.15		13.6	0.636	2	10.5	11.3		12.0	1.061	2	11.4	12		12.6	0.849	2												
Bankfull Mean Depth (ft)	0.5	0.6		0.6	0.064	2	0.3	0.4		0.5	0.141	2	0.3	0.4		0.5	0.141	2												
Bankfull Max Depth (ft)	0.9	1.0		1.0	0.064	2	0.5	0.6		0.7	0.141	2	0.6	0.8		0.9	0.212	2												
Bankfull Cross-Sectional Area (ft ²)	4.1	4.2		4.3	0.141	2	2.0	2.6		3.2	0.849	2	1.4	2.5		3.5	1.485	2												
Width/Depth Ratio	11.1	12.8		14.5	2.396	2	15.0	19.2		23.3	5.869	2	12.6	15.1		17.6	3.536	2												
Entrenchment Ratio	1.6	1.8		2.0	0.283	2	1.5	1.6		1.7	0.141	2	1.9	2.1		2.3	0.283	2												
Bank Height Ratio	1.0	1.0		1.0	0.000	2	1.0	1.0		1.0	0.000	2	1.0	1.0		1.0	0.000	2												
Pattern																														
Channel Beltwidth (ft)	7	12	12	17	2.91	21																								
Radius of Curvature (ft)	12	18.1	20	25	3.19	26																								
Rad. of Curv. : Bankfull Width (ft/ft)	1.7	2.5	2.7	2.5																										
Meander Wavelength (ft)	45	50.1	50	56	2.79	22																								
Meander Width Ratio	1.0	1.64	1.64	2.33																										
Profile																														
Riffle Length (ft)	2	10	6	42	12	13	8	12	9	22	6	6	7	19	10	63	22	6												
Riffle Slope (ft/ft)	0.000	0.061	0.049	0.162	0.053	13	0.026	0.045	0.041	0.076	0.020	6	0.001	0.022	0.015	0.049	0.021	6												
Pool Length (ft)	3	9	6	30	7	16	6	14	11	38	10	9	0	12	10	43	12	9												
Pool Max Depth (ft)	1.6		1.6	1.6		1	1.6		1.6	1.6		1	1.4		1.4	1.4		1												
Pool Spacing (ft)	18	39	33	69	18	15	24	55	47	98	27	8	19	61	42	138	45	8												
Additional Reach Parameters																														
Valley Length (ft)			780						780						780															
Channel Thalweg Length (ft)			811						811						811															
Sinuosity			1.04						1.04						1.04															
Water Surface Slope (ft/ft)			0.0171						0.0181						0.0181															
Bankfull Slope (ft/ft)			0.0164						0.0164						0.0164															
Rosgen Classification			B5						B5						B5															
Ri% / Ru% / P% / G% / S%*																														
SC% / Sa% / G% / C% / B% / Be%			3%/83%/15%/0%/0%/0%						1%/73%/26%/0%/0%/0%						0%/61%/39%/0%/0%/0%															
d50 / d84 / d95			0.4/1.7/9						1.4/7.3/16.4						3/5/10															
% of Reach with Eroding Banks			5%						5%						2%															

*The small size of UT 1 combined with vegetation growing in the channel creates poorly defined features.

**Table 12. Verification of Bankfull Events
Little Troublesome / Project No. 749**

Date of Data Collection	Date of Occurrence	Method	Photo Number
6/14/2009	6/11/2009	Site visit to evaluate indicators of stage after storm event	N/A
11/11/2009	11/11/2009	Site visit to evaluate indicators of stage after storm event	N/A
12/25/2009	12/25/2009	Land owner, eye-witness account	N/A
1/25/2010	1/25/2010	Site visit to evaluate indicators of stage after storm event	N/A
10/7/2010	9/26/2010	Site visit to evaluate indicators of stage after storm event	see MY01 report photo
11/18/2011	unknown	Crest gauge and indicators of storm event	N/A
11/5/2012	unknown	Crest gauge and indicators of storm event	N/A