

**LYLE CREEK MITIGATION SITE**  
*Catawba County, NC*  
*DENR Contract 003241*  
*NCEEP Project Number 94643*

**Monitoring Year 2 Annual Report**  
**FINAL**

Data Collection Period: May-October 2013

Draft Submission Date: November 26, 2013

Final Submission Date: December 23, 2013



Prepared for:



NCDENR, NCEEP  
1652 Mail Service Center  
Raleigh, NC  
27699-1652

Prepared by:



Wildlands Engineering, Inc.  
1430 S. Mint Street, #104  
Charlotte, NC 28203  
P – 704-332-7754  
F – 704-332-3306

**LYLE CREEK MITIGATION SITE  
Monitoring Year 2 Annual Report**

1.0	Executive Summary .....	1
1.1	Project Goals and Objectives.....	1
1.2	Monitoring Year 2 Data Assessment .....	3
1.2.1	Vegetative Assessment.....	3
1.2.2	Stream Assessment .....	4
1.2.3	Hydrology Assessment .....	5
1.2.4	Wetland Assessment .....	5
1.3	Monitoring Year 2 Summary .....	5
2.0	Methodology .....	5
3.0	References.....	7

**APPENDICES**

**Appendix 1      General Tables and Figures**

Figure 1	Project Vicinity Map
Figure 2	Project Component/Asset Map
Table 1	Project Components and Mitigation Credits
Table 2	Project Activity and Reporting History
Table 3	Project Contact Table
Table 4	Project Information and Attributes

**Appendix 2      Visual Assessment Data**

Figure 3.0-3.3	Integrated Current Condition Plan View
Table 5a-e	Visual Stream Morphology Stability Assessment Table
Table 6	Vegetation Condition Assessment Table
Stream Photographs	
Vegetation Photographs	

**Appendix 3      Vegetation Plot Data**

Table 7	Vegetation Plot Criteria Attainment
Table 8	CVS Vegetation Plot Metadata
Table 9	Planted and Total Stem Counts (Species by Plot with Annual Means)

**Appendix 4      Morphological Summary Data and Plots**

Table 10a-b	Baseline Stream Data Summary
Table 11	Monitoring Data – Dimensional Morphology Summary (Dimensional Parameters – Cross-Section)
Table 12a-e	Monitoring Data – Stream Reach Data Summary
Longitudinal Profile Plots	
Cross-Section Plots	

<b>Appendix 5</b>	<b>Hydrology Summary Data and Plots</b>
Table 13	Verification of Bankfull Events
Table 14	Wetland Gage Attainment Summary
	Hydrology Summary Data and Plots
	Monthly Rainfall Data

## 1.0 Executive Summary

The Lyle Creek Mitigation Site, hereafter referred to as the Site, is a full-delivery stream and wetland restoration project for the North Carolina Ecosystem Enhancement Program (NCEEP) in Catawba County, NC. The Site is located in the Catawba River Basin Hydrologic Unit Code (HUC) 03050101140010, and North Carolina Division of Water Quality (NCDWQ) Subbasin 03-08-32, which is within a NCEEP Targeted Local Watershed. This HUC qualifies as a service area for an adjacent HUC; as a result, the Lyle Creek Mitigation Site was submitted for mitigation credit in the Catawba River Basin HUC 03050103. The Site is located west of NC Highway 10/ North Main Street in the Town of Catawba, NC on an active tree farm surrounded by woods and residential land use. The Site is bounded by Lyle Creek to the north, NC Highway 10/ North Main Street to the east and an elevated railroad right-of-way to the south.

The project stream reaches consist of UT1, UT1A, UT1B (stream restoration) and UT1C and UT1D (stream enhancement level II). The project wetland areas consist of RW1 and RW2 (wetland restoration and creation). Mitigation work within the Site included restoring and enhancing 6,795 linear feet (LF) of perennial and intermittent stream channel and restoring and creating 9.5 acres of riparian wetland. The stream and wetland areas were planted with native vegetation to improve habitat and protect water quality. Construction and planting activities were completed by River Works in April 2012. The Site is located on one (1) parcel owned by the Garmon Family. A Conservation Easement held by the State of North Carolina has been recorded with the Catawba County Register of Deeds on the 26.62-acre Lyle Creek project study area within the Garmon parcel. The conservation easement protects the project area in perpetuity.

Directions and a map of the Site are provided in Figure 1 and project components are illustrated for the Site in Figure 2.

### 1.1 Project Goals and Objectives

Prior to construction activities, the project streams were regularly modified and maintained and therefore lacked bedform diversity, habitat, and riparian buffer. The primary impacts to the project streams were the result of mowing, ditching, vegetation maintenance, and dredging associated with tree farming activities. As a result of the aforementioned land activities, the onsite streams were incised and overly wide with shallow flow. The streams were unable to maintain their channel form and subsequently filled in with sediment, organic matter, and vegetation. In-stream bedform diversity was extremely poor and the longitudinal profile was dominated by shallow runs. The lack of bedform diversity combined with continued anthropogenic disturbance resulted in degraded aquatic habitat, altered hydrology (related to loss of floodplain connection and lowered water table), and water quality concerns such as lower dissolved oxygen levels (due to shallow flow with few re-aeration points). Table 4 in Appendix 1 and Tables 10a, 10b, and 10c in Appendix 4 present the pre-restoration conditions in detail.

The primary goals of the project were to provide ecological and water quality enhancements to the Catawba River Basin while creating a functional riparian corridor at the site level, providing wetland habitat and ecological function, and restoring a Piedmont Bottomland Forest as described by Schafale and Weakley (1990). These goals were achieved by restoring 5,411 linear feet (LF) of perennial and intermittent stream channel and 6.6 acres (ac) of wetland area, enhancing 1,384 LF of intermittent stream channel and creating 2.9 ac of wetland area. Approximately 179 LF of stream was excluded from the total project credit calculations from crossings (farm roads and power line easements). The Site's riparian areas were also planted to stabilize streambanks and wetland areas, improve habitat, and protect water quality. The ecological uplift can be summarized as starting from tree farming-impacted streams and wetlands and moving to stable channels and wetlands in a protected riparian corridor.

Restoration of dimension, pattern, and profile was implemented for UT1, UT1A, and UT1B; enhancement of profile and dimension was implemented for UT1C and UT1D. Wetland restoration and creation included RW1 and RW2. UT1A and UT1B discharge into an anastomosed wetland complex upstream of their confluence with UT1 as depicted in Figure 2. This anastomosed wetland complex was not proposed for stream mitigation credit. Figure 2 and Table 1 present the implemented design for the Site.

Monitored enhancements to water quality and ecological processes established in the mitigation plan are outlined below, followed by expected project benefits which are associated with restoration, but will not be monitored as part of this project:

#### *Monitored Project Goals*

- Wetland areas will be disked to increase surface roughness and better capture rainfall which will improve connection with the water table for groundwater recharge. Adjacent streams will be stabilized and established with a floodplain elevation to promote hydrologic transfer between wetland and stream.
- A channel with riffle-pool sequences and some rock and wood structures will be created in the steeper project reaches and a channel with run-pool sequences and woody debris structures will be created in the low sloped project reaches for macroinvertebrate and fish habitat. Introduction of wood including root wads and woody 'riffles' along with native stream bank vegetation will substantially increase habitat value. Gravel areas will be added as appropriate to further diversify available habitats.
- Adjacent buffer areas will be restored by removing invasive vegetation and planting native vegetation. These areas will be allowed to receive more regular and inundating flows. Riparian wetland areas will be restored and enhanced to provide wetland habitat.
- Sediment input from eroding stream banks will be reduced by installing bioengineering and in-stream structures while creating a stable channel form using geomorphic design principles.

#### *Expected Project Benefits*

- Chemical fertilizer and pesticide levels will be decreased by filtering runoff from adjacent tree farm operations through restored native buffer zones and wetlands. Offsite nutrient input will be absorbed onsite by filtering flood flows through restored floodplain areas and wetlands, where flood flows can disperse through native vegetation and be captured in vernal pools. Increased surface water residency time will provide contact treatment time and groundwater recharge potential.
- Sediment from offsite sources will be captured during bankfull or greater flows by deposition on restored floodplain areas where native vegetation will slow overland flow velocities.
- Restored riffle/step-pool sequences on the upper reach of UT1A, where distinct points of re-aeration can occur, will allow for oxygen levels to be maintained in the perennial reaches. Small log steps on the upstream portion of UT1B and UT1 Reach 1 Upper will also provide re-aeration points.
- Creation of deep pool zones will lower temperature, helping to maintain dissolved oxygen concentrations. Pools will form below drops on the steeper project reaches and around areas of woody debris on the low-sloped project reaches. Establishment and maintenance of riparian buffers will create long-term shading of the channel flow to minimize thermal heating.

The design streams and wetlands were restored to the appropriate type based on the surrounding landscape, climate, and natural vegetation communities but also with strong consideration to existing watershed conditions and trajectory.

The stream restoration success criteria for the Site follows the approved performance criteria presented in the NCEEP Mitigation Plan Template (version 1.0, 11/20/2009) and the Stream Mitigation Guidelines issued in April 2003 by the USACE and NCDWQ. Annual monitoring and quarterly site visits will be conducted to assess the condition of the finished project for five (5) years, or until success criteria are met. The stream restoration reaches (UT1, UT1A, and UT1B) of the project were assigned specific performance criteria components for stream morphology, hydrology, and vegetation. The enhancement reaches (UT1c and UT1d) were documented through photographs and visual assessments to verify that no significant degradational changes are occurring in the stream channel or riparian corridor. Monitoring for wetland vegetation will extend seven (7) years beyond completion of construction. The wetland restoration and creation sections have been assigned specific performance criteria for hydrology and vegetation. The final mitigation plan was submitted and accepted by the NCEEP in August 2011. Construction activities were completed by River Works, Inc. in April 2012. Baseline monitoring (Year 0) and as-built survey was conducted between April and May 2012. Annual monitoring will be conducted for seven (7) years; stream and vegetation assessment will be conducted for five (5) years and wetland assessment will be conducted for seven (7) years. The final monitoring activities will be conducted in 2018 with the close-out anticipated to commence in 2019 given the success criteria are met. Appendix 1 provides more detailed project activity, history, contact information, and watershed/site background information for this project.

## 1.2 *Monitoring Year 2 Data Assessment*

Annual monitoring and quarterly site visits were conducted during monitoring year (MY) 2 to assess the condition of the project. The stream and wetland mitigation success criteria for the Site follow the approved success criteria presented in the Lyle Mitigation Plan (2011).

### 1.2.1 *Vegetative Assessment*

Planted woody vegetation is being monitored in accordance with the guidelines and procedures developed by the Carolina Vegetation Survey-NCEEP Level 2 Protocol (Lee et al., 2006). A total of 35 vegetation monitoring plots were established during the baseline monitoring within the project easement areas using a standard 10 meter by 10 meter plot. The final vegetative success criteria will be the survival of 260 planted stems per acre in the riparian corridor along restored and enhanced reaches at the end of year five (5) of the monitoring period. The interim measure of vegetative success for the Site will be the survival of at least 320 planted stems per acre at the end of year three (3) of the monitoring period.

The MY-2 vegetative survey was completed in June 2013. The annual vegetation monitoring resulted in an average stem density of 417 stems per acre, which is greater than the interim requirement of 320 stems/acre, but approximately 22% less than the MY-0 density recorded (532 stems/acre) in April 2012 and 11% greater than the MY-1 density recorded (372 stems/acre). MY-2 resulted in an average of 12 stems per plot, which has remained consistent with the average of 12 stems per plot found in MY-0 and MY-1. Due to the high mortality rates observed during the MY-1 vegetation assessment, supplemental plantings were warranted and installed during December 2012. The increase in planted stems found in MY-2 compared to MY-1 can be attributed both to the supplemental plantings as well as to re-sprouting of previously planted stems.

A total of 31 out of 35 plots are on track to meet the success criteria required for monitoring year 3 (Table 9, Appendix 3). Additional maintenance is planned to address the low stem density observed during MY-2 as described below. Invasive species have been identified onsite, including Kudzu, Johnson grass, and cattails. However, the presence of these species does not appear to be affecting the survivability of planted stems. Please refer to Appendix 3 for vegetation summary tables and

raw data tables and Appendix 2 for vegetation plot photographs and the vegetation condition assessment table.

### *Maintenance Plan*

The Site was re-planted in late winter 2012 in response to the dead bare roots observed during the MY-1 vegetative survey. Most likely, the mortality of the planted stems was a result of dry soil conditions, low precipitation, and/or from grass suffocation or crowding of planted stems. To promote better success, the planting list was modified slightly to account for species that were not successful in the initial planting. Wildlands will re-evaluate the low stem density areas from the MY-2 vegetation survey during the winter 2013 and determine where and if supplemental planting is needed on the Site. The small areas where invasive species have been noted within the Site were treated during suitable months over the 2013 monitoring year. These areas will continue to be monitored and treated on a regular basis.

#### 1.2.2 Stream Assessment

Morphological surveys for the MY-2 were conducted in May 2013. The majority of the streams within the Site have met the success criteria for MY-2 with the exception of a short length of UT1A. Aggradation is occurring on UT1A from station 301+50 to 304+00. This area of concern is further described below. Please refer to Appendix 2 for the visual assessment table, current condition plan view (CCPV), and photographs and Appendix 4 for morphological data and plots.

In general cross-sections along UT1 and UT1B show little to no change in the bankfull area, maximum depth ratio, or width-to-depth ratio. However due to the sand/silt nature of the substrate throughout the project, fluctuations in bed elevations were observed and expected. These fluctuations are temporary and seem to typically correspond to storm events. At the downstream end of UT1, near the confluence with Lyle Creek, minor aggradation has occurred. This aggradation is most likely attributed to backwater conditions from Lyle Creek. Surveyed riffle cross-sections fell within the parameters defined for channels of the appropriate Rosgen stream type with the exception of cross-sections 9 and 10 along UT1A, which experienced sedimentation from the contributing upstream watershed. The sedimentation rate increased in MY-2 and has impacted channel stability along UT1A. A plan to address the high sedimentation rate is discussed below in the maintenance plan.

The surveyed longitudinal profile data for the stream restoration reaches illustrates that the bedform features are maintaining lateral and vertical stability. The riffles and runs are remaining steeper and shallower than the pools, while the pools are remaining deeper than the riffles and maintaining flat water surface slopes. The longitudinal profiles show that the bank height ratios remain very near to 1.0 for the restoration reaches. In-stream structures, such as brush mattresses and sod mats used to enhance channel habitat and stability on the outside bank of meander bends are providing stability and habitat as designed. Pattern data will be collected in MY-5 only if there are indicators from the profile or dimensions that significant geomorphic adjustments have occurred. No changes were observed during MY-2 that indicated a change in the radius of curvature or channel belt width.

### *Maintenance Plan*

During MY-2 sedimentation rates increased along UT1A. This sediment deposition is due to upstream bank erosion and mass wasting occurring upstream of the Site that is outside of the conservation easement. Since this area of erosion is outside of the easement, Wildlands proposes to create a small sediment basin/trap to capture this sediment at the upstream limits of UT1A. Wildlands will maintain this basin/trap by cleaning out the sediment as needed throughout the



monitoring period. Wildlands will prepare and submit a design plan for the sediment basin/trap to EEP for approval prior to any work being conducted.

### 1.2.3 Hydrology Assessment

At the end of the five (5) year monitoring period, two or more bankfull events must have occurred in separate years within the restoration reaches. Bankfull events were recorded on UT1, UT1A and UT1B using a crest gage during MY-2. Please refer to Appendix 5 for hydrologic data.

### 1.2.4 Wetland Assessment

Ten groundwater monitoring gages were established during the baseline monitoring throughout the wetland restoration and creation areas. The gages were installed at appropriate locations so that the data collected will provide an indication of groundwater levels throughout the wetland project area. Historical growing season data isn't available for Catawba County therefore the growing season currently used for success criteria was applied from nearby Iredell County growing season data. This growing season runs from April 7<sup>th</sup> to October 28<sup>th</sup> (203 days). However, additional growing season data is being collected by two (2) soil temperature loggers that were installed one (1) within each wetland. These probes will be used to better define the growing season using the threshold soil temperature of 41 degrees or higher measured at a depth of 12 inches (USACE, 2010) in subsequent monitoring years. If the probes indicate a longer growing season than that adapted from Iredell County, the growing season will be adjusted based on on-site soil temperature conditions. A barotroll logger and a rain gage were also installed onsite.

All monitoring gages were downloaded on a quarterly basis and will be maintained on an as needed basis. The success criteria for wetland hydrology is to have a free groundwater surface within 12 inches of the ground surface for 7 percent of the growing season, which is measured on consecutive days under typical precipitation conditions. All groundwater gages met the annual wetland hydrology success criteria for MY-2. Please refer to Appendix 2 for the groundwater gage locations and Appendix 5 for groundwater hydrology data and plots.

## 1.3 *Monitoring Year 2 Summary*

With the exception of the upstream portion of UT1A, all streams within the Site are stable and functioning as designed. Aggradation observed on UT1A will be addressed to decrease the sedimentation rates observed in MY-2. The average stem density for the Site is on track to meet the MY-5 success criteria; however, a portion of the individual vegetation plots did not meet the current success criteria as noted in the CCPV map. A vegetation maintenance plan will be implemented in late winter 2013/2014. There has been two (2) bankfull events recorded in separate monitoring years along each restored project reach since construction commenced; therefore, the Site has met the MY-5 stream hydrology attainment requirement. All groundwater gages are meeting the success criteria for wetland hydrology.

Summary information and data related to the performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Mitigation Plan documents available on NCEEP's website. All raw data supporting the tables and figures in the appendices are available from NCEEP upon request.

## 2.0 Methodology

Geomorphic data was collected followed the standards outlined in The Stream Channel Reference Site: An Illustrated Guide to Field Techniques (Harrelson et al., 1994) and in the Stream Restoration: A Natural Channel Design Handbook (Doll et al., 2003). Longitudinal and cross-sectional data were collected using

a total station and were georeferenced. All CCPV mapping was recorded using a Trimble handheld GPS with sub-meter accuracy and processed using was Pathfinder and ArcView. Crest gages were installed in surveyed riffle cross-sections and monitored quarterly. Hydrology attainment installation and monitoring methods are in accordance with the USACE (2003) standards. Vegetation monitoring protocols followed the Carolina Vegetation Survey-NCEP Level 2 Protocol (Lee et al., 2008).

### 3.0 References

- Doll, B.A., Grabow, G.L., Hall, K.A., Halley, J., Harman, W.A., Jennings, G.D., and Wise, D.E. 2003. Stream Restoration A Natural Channel Design Handbook.
- Harrelson, C.C., Rawlins, C.L., Potyondy, J.P. 1994. *Stream Channel Reference Sites: An Illustrated Guide to Field Technique*. Gen. Tech. Rep. RM-245. Fort Collins, CO: U.S. Department of Agriculture, Forest Service, Rocky Mountain Forest and Range Experiment Station. 61 p.
- Lee, M.T., Peet, R.K., S.D., Wentworth, T.R. 2008. CVS-EEP Protocol for Recording Vegetation Version 4.2. Retrieved from <http://cvs.bio.unc.edu/protocol/cvs-eeep-protocol-v4.2-lev1-5.pdf>.
- Rosgen, D. L. 1994. A classification of natural rivers. *Catena* 22:169-199.
- Rosgen, D.L. 1996. Applied River Morphology. Pagosa Springs, CO: Wildland Hydrology Books.
- Rosgen, D.L. 1997. A Geomorphological Approach to Restoration of Incised Rivers. Proceedings of the Conference on Management of Landscapes Disturbed by Channel Incision. Center For Computational Hydroscience and Bioengineering, Oxford Campus, University of Mississippi, Pages 12-22.
- Schafale, M.P. and A.S. Weakley. 1990. Classification of the Natural Communities of North Carolina, 3rd approx. North Carolina Natural Heritage Program, Raleigh, North Carolina.
- Simon, A. 1989. A model of channel response in disturbed alluvial channels. *Earth Surface Processes and Landforms* 14(1):11-26.
- United States Army Corps of Engineers (USACE). 2010. Interim Regional Supplement to the Corps of Engineers Wetland Delineation Manual: Eastern Mountains and Piedmont Region (ERDC/EL TR-10-9). U.S. Army Engineer Research and Development Center, Vicksburg, MS
- United States Department of Agriculture (USDA). 2002. Natural Resources Conservation Service, Climate Information for Catawba County, NC (1971-2000). WETS Station: Catawba 3 NNW, NC1579. <http://www.wcc.nrcs.usda.gov/ftpref/support/climate/wetlands/nc/37035.txt>
- United States Department of Agriculture (USDA). 2009. Natural Resources Conservation Service, Soil Survey Geographic (SSURGO) database for Catawba County, North Carolina. <http://SoilDataMart.nrcs.usda.gov>
- United States Geological Survey (USGS). 1998. North Carolina Geology. <http://www.geology.enr.state.nc.us/usgs/carolina.htm>
- Weakley, A.S. 2008. *Flora of the Carolinas, Virginia, Georgia, Northern Florida, and Surrounding Areas* (Draft April 2008). University of North Carolina at Chapel Hill: Chapel Hill, NC.
- Wildlands Engineering, Inc. 2011. Lyle Creek Mitigation Plan. NCEEP, Raleigh, NC.
- Wildlands Engineering, Inc. 2012. Lyle Creek Mitigation Site Baseline Monitoring Document and As-Built Baseline Report. NCEEP, Raleigh, NC.

## **APPENDIX 1. General Tables and Figures**

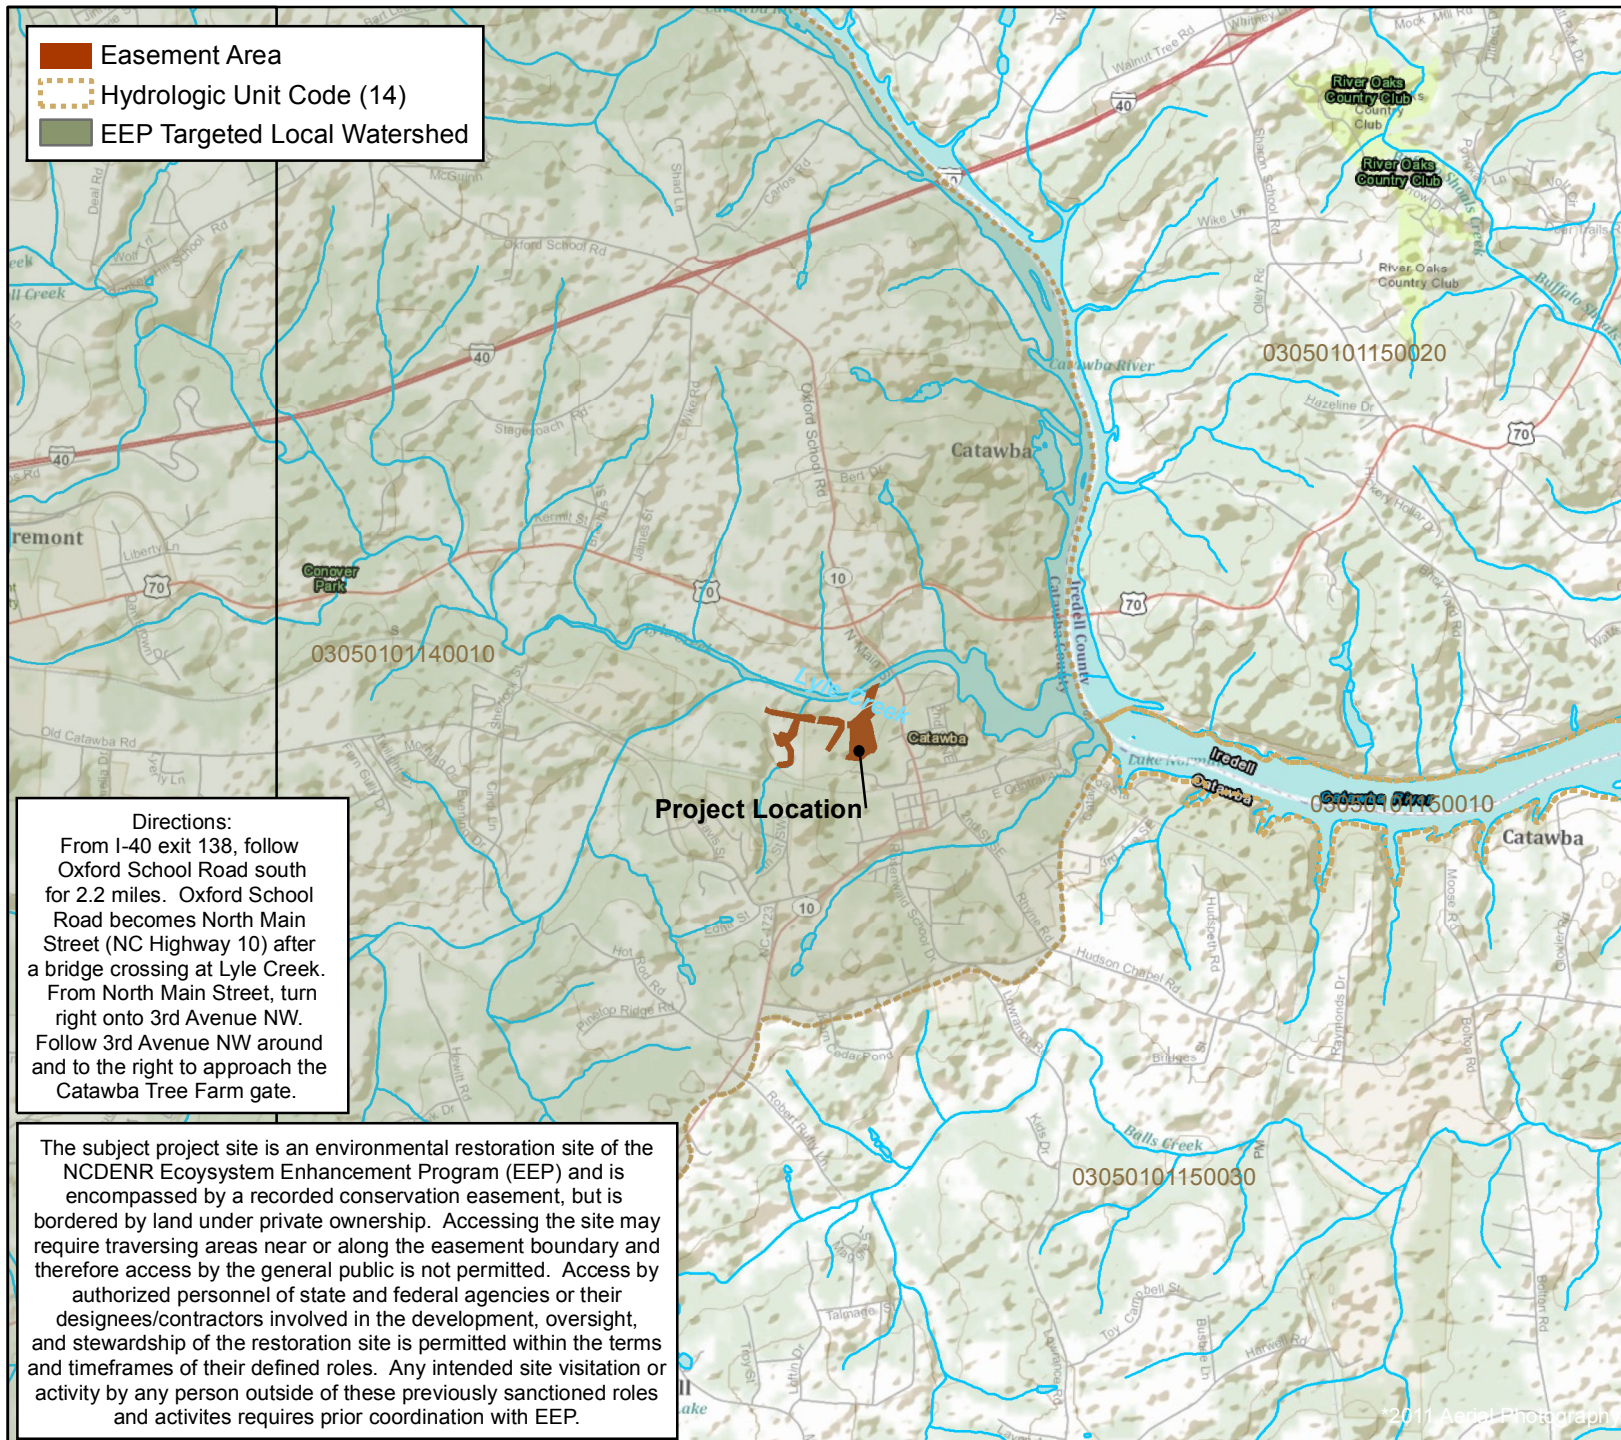


Figure 1. Project Vicinity Map  
 Lyle Creek Mitigation Site  
 EEP Project Number 94643  
 Monitoring Year 2


Catawba County, NC



Figure 2. Project Component/  
Asset Map  
Lyle Creek Mitigation Site  
EEP Project Number 94643  
Monitoring Year 2  
Catawba County, NC



- Stream Restoration
- Stream Enhancement
- Braided Reach (no credit)
- ▨ Wetland Restoration
- ▨ Wetland Creation
- Conservation Easement
- Railroad
- Power Lines
- - - Irrigation Lines
- Parcels



**Table 1. Project Components and Mitigation Credits**  
**Lyle Creek Mitigation Site (NCEP Project No.94643)**  
**Monitoring Year 2**

Mitigation Credits									
	Stream		Riparian Wetland		Non-Riparian Wetland		Buffer	Nitrogen Nutrient Offset	Phosphorous Nutrient Offset
Type	R	RE	R	RE	R	RE			
Totals	5,965	N/A	7.6	N/A	N/A	N/A	N/A	N/A	N/A
Project Components									
Reach ID	As-Built Stationing/ Location	Existing Footage (LF)	Approach	Restoration or Restoration Equivalent	As-Built Mitigation Length/Area (LF/acres)	Mitigation Ratio			
UT1	100+00-141+30	4,071	Priority 1/2	Restoration	3,951 LF <sup>1</sup>	1:1			
UT1a	300+00-306+15	1,141	Priority 1	Restoration	615 LF <sup>2</sup>	1:1			
UT1b	201+52-209+97	890	Priority 1/2	Restoration	845 LF <sup>3</sup>	1:1			
UT1c	400+00-406+77	695	in-stream structures, grading, planting	Enhancement II	677 LF <sup>4</sup>	2.5:1			
UT1d	500+00-507+07	760	in-stream structures, grading, planting	Enhancement II	707 LF	2.5:1			
RW1	N/A	N/A	grading, planting	Restoration	5.8 AC	1:1			
RW1	N/A	N/A	grading, planting	Creation	1.1 AC	3:1			
RW2	N/A	N/A	grading, planting	Restoration	0.8 AC	1:1			
RW2	N/A	N/A	grading, planting	Creation	1.8 AC	3:1			
Component Summation									
Restoration Level	Stream (linear feet)	Riparian Wetland (acres)		Non-Riparian Wetland (acres)	Buffer (square feet)	Upland (acres)			
		Riverine	Non-Riverine						
Restoration	5,411	6.6							
Enhancement									
Enhancement I									
Enhancement II	1,384								
Creation		2.9							
Preservation									
High Quality Preservation									

<sup>1</sup> Excludes 179 LF in crossings (farm road and power line easements). Includes length from station 125+42 to 125+60 where left bank buffer width ranges from 48.5' to 50'. The right bank buffer width in this area exceeds 100'.

<sup>2</sup> Excludes downstream 306 LF of UT1a that is in the anastomosed wetland complex

<sup>3</sup> Excludes downstream 243 LF of UT1b that is in the anastomosed wetland complex

<sup>4</sup> Includes length from station 4+48 to 6+11 where left bank buffer width ranges from 28.7' to 50'. The right bank buffer width in this area ranges from 65.5' to 102.6'.

Table 2. Project Activity and Reporting History  
 Lyle Creek Mitigation Site (NCEEP Project No.94643)  
 Monitoring Year 2

Activity or Report	Date Collection Complete	Completion or Scheduled Delivery
Mitigation Plan	May 2011	August 2011
Final Design - Construction Plans	October 2011	December 2011
Construction	Jan-Apr 2012	April 2012
Temporary S&E mix applied to entire project area*	April 2012	April 2012
Permanent seed mix applied to reach/segments	April 2012	April 2012
Bare root and live stake plantings for reach/segments	April 2012	April 2012
Baseline Monitoring Document (Year 0 Monitoring - baseline)	April 2012	July 2012
Year 1 Monitoring	October 2012	December 2012
Year 2 Monitoring	October 2013	November 2013
Year 3 Monitoring	2014	December 2014
Year 4 Monitoring	2015	December 2015
Year 5 Monitoring	2016	December 2016
Year 6 Monitoring	2017	December 2017
Year 7 Monitoring	2018	December 2018

\*Seed and mulch is added as each section of construction is completed.

Table 3. Project Contact Table  
 Lyle Creek Mitigation Site (NCEEP Project No.94643)  
 Monitoring Year 2

<b>Designer</b>	<b>Wildlands Engineering, Inc.</b> 1430 S. Mint St, Suite 104 Charlotte, NC 28203 704.332.7754
Emily Reinicker, PE, CFM	
<b>Construction Contractor</b>	<b>River Works, Inc.</b> 6105 Chapel Hill Rd Raleigh, NC 27607 336.279.1002
Bill Wright	
<b>Planting Contractor</b>	<b>River Works, Inc.</b> 6105 Chapel Hill Rd Raleigh, NC 27607 336.279.1002
George Morris	
<b>Seeding Contractor</b>	<b>River Works, Inc.</b> 6105 Chapel Hill Rd Raleigh, NC 27607 336.279.1002
George Morris	
<b>Seed Mix Sources</b>	<b>Green Resource</b>
<b>Nursery Stock Suppliers</b>	<b>ArborGlen</b> <b>Superior Tree</b> <b>Mellow Marsh Farm</b>
<b>Monitoring Performers</b>	<b>Wildlands Engineering, Inc.</b> Kirsten Y. Gimbert 704.332.7754, ext. 110
Stream, Vegetation, and Wetland Monitoring POC	



**Table 4. Project Information and Attributes**  
**Lyle Creek Mitigation Site (NCEEP Project No.94643)**  
**Monitoring Year 2**

Project Information							
Project Name	Lyle Creek Mitigation Site						
County	Catawba County, NC						
Project Area (acres)	26.62						
Project Coordinates (latitude and longitude)	35° 42' 39.218" N, 81° 4' 54.628" W						
Project Watershed Summary Information							
Physiographic Province	Piedmont						
River Basin	Catawba						
USGS Hydrologic Unit 8-digit	03050101						
USGS Hydrologic Unit 14-digit	03050101140010						
DWQ Sub-basin	Catawba River Subbasin 03-08-32						
Project Drainage Area (acres)	315						
Project Drainage Area Percentage of Impervious Area	5%						
CGIA Land Use Classification	50% Forested, 20% Developed, 17% Agricultural, 8% Shrubland, 5% Herbaceous Upland						
Reach Summary Information							
Parameters	UT1	UT1A	UT1B	UT1C	UT1D	RW1	RW2
Length of reach (linear feet) - Post-Restoration	3,941 <sup>1</sup>	615 <sup>2</sup>	845 <sup>3</sup>	677	707	N/A	N/A
Drainage area (acres)	315	56	78	26	9	96	134
NCDWQ stream identification score	Lyle Creek - 11-76-(4.5)						
NCDWQ Water Quality Classification	Lyle Creek - WS-IV;CA						
Morphological Description (stream type) of Pre-Existing	F5 <sup>4</sup> , F6 <sup>4</sup> , G6 <sup>4</sup>	F6 <sup>4</sup>	F6 <sup>4</sup>	F6 <sup>4</sup>	F6 <sup>4</sup>	N/A	N/A
Morphological Description (stream type) of Design	B5c, C6	B6c, C6	C6	C6	C6	N/A	N/A
Evolutionary trend (Simon's Model) - Pre- Restoration	Stage II - Channelized						
Underlying mapped soils	Chewacla loam	Chewacla loam	Wehadkee fine sandy loam	Chewacla loam	Congaree complex	Chewacla loam and Wehadkee fine sand	Chewacla loam
Drainage class	somewhat poorly drained	somewhat poorly drained	frequently flooded	somewhat poorly drained	moderately well drained	somewhat poorly drained and frequently flooded	somewhat poorly drained
Soil Hydric status	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Slope	0-2%	0-2%	0-2%	0-2%	0-2%	0-2%	0-2%
FEMA classification	AE <sup>5</sup>						
Native vegetation community	Palustrine Emergent System						
Percent composition of exotic invasive vegetation - Post-Restoration	0%						
Regulatory Considerations							
Regulation	Applicable?	Resolved?	Supporting Documentation				
Waters of the United States - Section 404	X	X	USACE Nationwide Permit No.27 and DWQ 401 Water Quality Certification No. 3689				
Waters of the United States - Section 401	X	X					
Division of Land Quality (Dam Safety)	N/A	N/A	N/A				
Endangered Species Act	X	X	Lyle Creek Mitigation Plan: two federally listed species, the bald eagle ( <i>Haliaeetus leucocephalus</i> ) and dwarf-flowered hearleaf ( <i>Hexastylis naniflora</i> ), are currently listed in Catawba County. Studies found "no individual species, critical habitat, or suitable habitat was found to exist on the site" (letter to USFWS; no response was received within the 30-day time frame from USFWS)				
Historic Preservation Act	X	X	No historic resources were found to be impacted (letter from SHPO and THPO)				
Coastal Zone Management Act (CZMA)/Coastal Area Management	N/A	N/A	N/A				
FEMA Floodplain Compliance	X	X	No-rise certification and floodplain development permit approved by Catawba County floodplain administrator.				
Essential Fisheries Habitat	X	X	Project area has warm water fisheries; found no reason to object to the restoration project (letter from NCWRC).				

<sup>1</sup> Excludes 200 LF of crossings

<sup>2</sup> Excludes 306 LF of UT1a in the anastomosed wetlands complex

<sup>3</sup> Excludes 243 LF of UT1b in the anastomosed wetlands complex

<sup>4</sup> The Rosgen classification system is for natural streams. These channels have been heavily manipulated by man and therefore the Rosgen classification system is not applicable. These classifications are provided for illustrative purposes only.

<sup>5</sup> The project area does not have an associate regulated floodplain; however, the project reaches and wetland areas are located within the floodway and flood fringe of Lyle Creek.

## APPENDIX 2. Visual Assessment Data



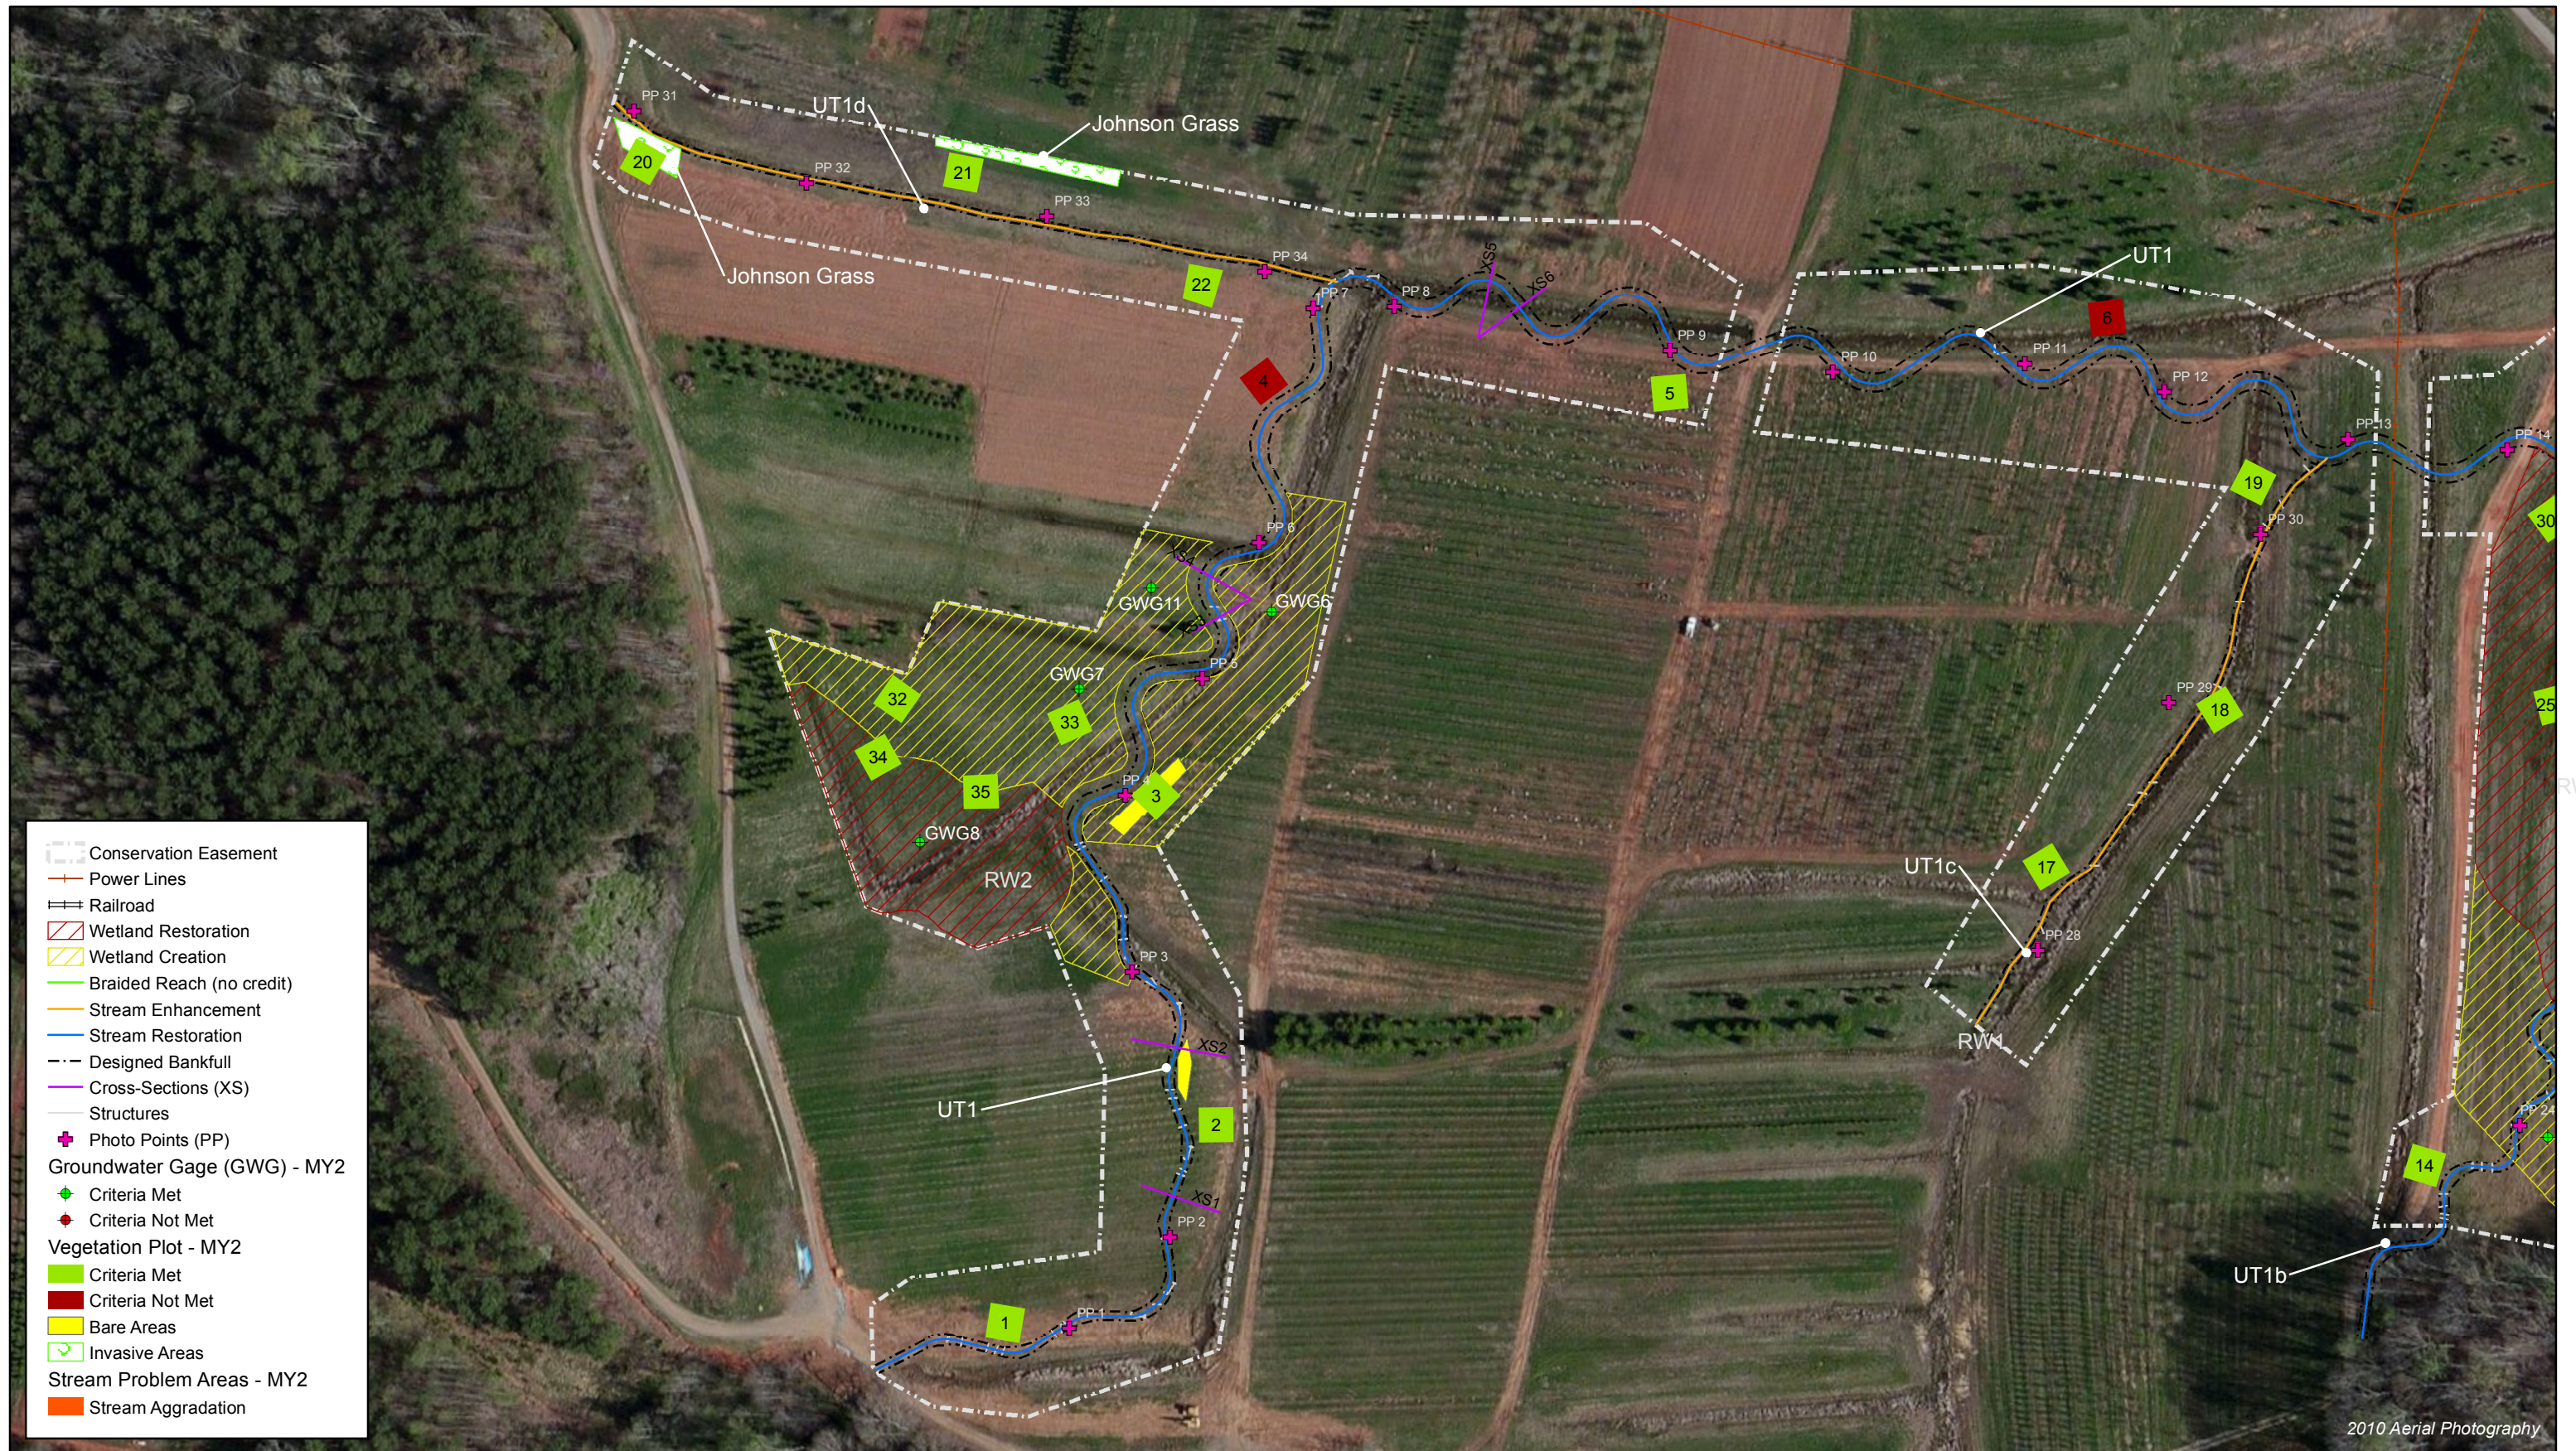






Table 5a. Visual Stream Morphology Stability Assessment Table  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 1 Upper (700 LF)  
 Monitoring Year 2

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate		15		0%				
	3. Meander Pool Condition	Depth Sufficient		9		0%				
		Lenth Appropriate		9		0%				
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)		9		0%				
Thalweg centering at downstream of meander bend (Glide)			9	100%						
<b>Totals</b>										
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%
<b>Totals</b>										
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dilodged boulders or logs.		40			0%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill		39			0%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.		24			0%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%.		40			0%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow.		6			0%			

Table 5b. Visual Stream Morphology Stability Assessment Table  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 1 Lower (2,558 LF)  
 Monitoring Year 2

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation	
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%				
		Degradation			0	0	100%				
	2. Riffle Condition	Texture/Substrate	24	24		100%					
	3. Meander Pool Condition	Depth Sufficient	29	29		100%					
		Lenth Appropriate	29	29		100%					
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	29	29		100%					
		Thalweg centering at downstream of meander bend (Glide)	29	29		100%					
					<b>Totals</b>	0	0	100%	0	0	100%
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%	
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	0	0	100%	
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%	
					<b>Totals</b>	0	0	100%	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dilodged boulders or logs.	34	34			100%				
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	30	30			100%				
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	2	2			100%				
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%.	34	34			100%				
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow.	4	4			100%				



Table 5c. Visual Stream Morphology Stability Assessment Table  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 2 (883 LF)  
 Monitoring Year 2

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation	
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%				
		Degradation			0	0	100%				
	2. Riffle Condition	Texture/Substrate	12	12		100%					
	3. Meander Pool Condition	Depth Sufficient	10	10		100%					
		Lenth Appropriate	10	10		100%					
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	10	10		100%					
		Thalweg centering at downstream of meander bend (Glide)	10	10		100%					
					<b>Totals</b>	0	0	100%	0	0	100%
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%	
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	0	0	100%	
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%	
					<b>Totals</b>	0	0	100%	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dilodged boulders or logs.	16	16			100%				
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	13	13			100%				
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	4	4			100%				
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%.	16	16			100%				
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow.	4	4			100%				

Table 5d. Visual Stream Morphology Stability Assessment Table  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1A (615 LF)  
 Monitoring Year 2

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			1	250	59%			
		Degredation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	8	8		100%				
	3. Meander Pool Condition	Depth Sufficient <sup>1</sup>	17	20		85%				
		Length Appropriate	11	11		100%				
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	11	11		100%				
		Thalweg centering at downstream of meander bend (Glide)	11	11		100%				
<b>Totals</b>										
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%
<b>Totals</b>										
					0	0	100%	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dilodged boulders or logs.	43	43			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	43	43			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	35	35			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%.	43	43			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow. <sup>1</sup>	6	10			60%			

<sup>1</sup> Pools are expected to fill in slightly and re-scour over time due to the fine-grained substrate in the system.

Table 5e. Visual Stream Morphology Stability Assessment Table  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1B (997 LF)  
 Monitoring Year 2

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation	
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%				
		Degredation			0	0	100%				
	2. Riffle Condition	Texture/Substrate	11	11		100%					
	3. Meander Pool Condition	Depth Sufficient	18	19		95%					
		Lenth Appropriate	19	19		100%					
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	19	19		100%					
		Thalweg centering at downstream of meander bend (Glide)	19	19		100%					
					<b>Totals</b>	0	0	100%	0	0	100%
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%	
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	0	0	100%	
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%	
					<b>Totals</b>	0	0	100%	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dilodged boulders or logs.	31	31			100%				
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	31	31			100%				
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	21	21			100%				
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%.	31	31			100%				
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow.	0	0			100%				

Table 6. Vegetation Condition Assessment Table  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 Monitoring Year 2

Planted Acreage		26.2			
Vegetation Category	Definitions	Mapping Threshold (acres)	Number of Polygons	Combined Acreage	% of Planted Acreage*
Bare Areas	Very limited cover of both woody and herbaceous material	0.1	0	0	0.00%
Low Stem Density Areas <sup>^</sup>	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1	0	0.0	0.0%
<b>Total</b>			<b>0</b>	<b>0.0</b>	<b>0.0%</b>
Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 acres	0	0	0%
<b>Cumulative Total</b>			<b>0</b>	<b>0.0</b>	<b>0%</b>

Easement Acreage		26.62			
Vegetation Category	Definitions	Mapping Threshold (SF)	Number of Polygons	Combined Acreage	% of Planted Acreage
Invasive Areas of Concern	Areas of points (if too small to render as polygons at map scale).	1000	4	0.22	0.8%
Easement Encroachment Areas	Areas of points (if too small to render as polygons at map scale).	none	0	0	0%

<sup>^</sup>Acreage calculated from vegetation plots monitored for site.

## Stream Photographs



Photo Point 1 – looking upstream (05/15/2013)



Photo Point 1 – looking downstream (05/15/2013)



Photo Point 2 – looking upstream (05/15/2013)



Photo Point 2 – looking downstream (05/15/2013)



Photo Point 3 – looking upstream (05/15/2013)



Photo Point 3 – looking downstream (05/15/2013)



Photo Point 4 – looking upstream (05/21/2013)



Photo Point 4 – looking downstream (05/21/2013)



Photo Point 5 – looking upstream (05/21/2013)



Photo Point 5 – looking downstream (05/21/2013)



Photo Point 6 – looking upstream (05/21/2013)



Photo Point 6 – looking downstream (05/21/2013)



Photo Point 7 – looking upstream (05/21/2013)



Photo Point 7 – looking downstream (05/21/2013)



Photo Point 8 – looking upstream (05/21/2013)



Photo Point 8 – looking downstream (05/21/2013)



Photo Point 9 – looking upstream (05/21/2013)



Photo Point 9 – looking downstream (05/21/2013)





Photo Point 10 – looking upstream (05/21/2013)



Photo Point 10 – looking downstream (05/21/2013)



Photo Point 11 – looking upstream (05/21/2013)



Photo Point 11 – looking downstream (05/21/2013)



Photo Point 12 – looking upstream (05/21/2013)



Photo Point 12 – looking downstream (05/21/2013)



Photo Point 13 – looking upstream (05/15/2013)



Photo Point 13 – looking downstream (05/15/2013)



Photo Point 14 – looking upstream (05/15/2013)



Photo Point 14 – looking downstream (05/15/2013)



Photo Point 15 – looking upstream (05/15/2013)



Photo Point 15 – looking downstream (05/15/2013)



Photo Point 16 – looking upstream (05/15/2013)



Photo Point 16 – looking downstream (05/15/2013)



Photo Point 17 – looking upstream (05/15/2013)



Photo Point 17 – looking downstream (05/15/2013)



Photo Point 18 – looking upstream (05/15/2013)



Photo Point 18 – looking downstream (05/15/2013)



Photo Point 19 – looking upstream (05/15/2013)



Photo Point 19 – looking downstream (05/15/2013)



Photo Point 20 – looking upstream (05/15/2013)



Photo Point 20 – looking downstream (05/15/2013)



Photo Point 21 – looking upstream (05/15/2013)



Photo Point 21 – looking downstream (05/15/2013)



Photo Point 22 – looking upstream (05/15/2013)



Photo Point 22 – looking downstream (05/15/2013)



Photo Point 23 – looking upstream (05/15/2013)



Photo Point 23 – looking downstream (05/15/2013)



Photo Point 24 – looking upstream (05/15/2013)



Photo Point 24 – looking downstream (05/15/2013)



Photo Point 25 – looking upstream (05/15/2013)



Photo Point 25 – looking downstream (05/15/2013)



Photo Point 26 – looking upstream (05/15/2013)



Photo Point 26 – looking downstream (05/15/2013)



Photo Point 27 – looking upstream (05/15/2013)



Photo Point 27 – looking downstream (05/15/2013)



Photo Point 28 – looking upstream (06/27/2013)



Photo Point 28 – looking downstream (06/27/2013)



Photo Point 29 – looking upstream (05/15/2013)



Photo Point 29 – looking downstream (05/15/2013)



Photo Point 30 – looking upstream (05/15/2013)



Photo Point 30 – looking downstream (05/15/2013)



Photo Point 31 – looking upstream (05/21/2013)



Photo Point 31 – looking downstream (05/21/2013)



Photo Point 32 – looking upstream (05/21/2013)



Photo Point 32 – looking downstream (05/21/2013)



Photo Point 33 – looking upstream (05/21/2013)



Photo Point 33 – looking downstream (05/21/2013)





Photo Point 34 – looking upstream (05/21/2013)



Photo Point 34 – looking downstream (05/21/2013)

## Vegetation Photographs



Vegetation Plot 1 (06/27/2013)



Vegetation Plot 2 (06/27/2013)



Vegetation Plot 3 (06/27/2013)



Vegetation Plot 4 (06/27/2013)



Vegetation Plot 5 (06/27/2013)



Vegetation Plot 6 (06/27/2013)



Vegetation Plot 7 (06/20/2013)



Vegetation Plot 8 (06/20/2013)



Vegetation Plot 9 (06/20/2013)



Vegetation Plot 10 (06/20/2013)



Vegetation Plot 11 (06/19/2013)



Vegetation Plot 12 (06/19/2013)



Vegetation Plot 13 (06/20/2013)



Vegetation Plot 14 (06/19/2013)



Vegetation Plot 15 (06/19/2013)



Vegetation Plot 16 (06/27/2013)



Vegetation Plot 17 (06/27/2013)



Vegetation Plot 18 (06/27/2013)



Vegetation Plot 19 (06/27/2013)



Vegetation Plot 20 (06/27/2013)



Vegetation Plot 21 (06/27/2013)



Vegetation Plot 22 (06/27/2013)



Vegetation Plot 23 (06/19/2013)



Vegetation Plot 24 (06/19/2013)



Vegetation Plot 25 (06/19/2013)



Vegetation Plot 26 (06/19/2013)



Vegetation Plot 27 (06/19/2013)



Vegetation Plot 28 (06/19/2013)



Vegetation Plot 29 (06/27/2013)



Vegetation Plot 30 (06/27/2013)



Vegetation Plot 31 (06/20/2013)



Vegetation Plot 32 (06/27/2013)



Vegetation Plot 33 (06/27/2013)



Vegetation Plot 34 (06/27/2013)



Vegetation Plot 35 (06/27/2013)



## APPENDIX 3. Vegetation Plot Data

Table 7. Vegetation Plot Criteria Attainment  
 Lyle Creek Mitigation Site (NCEEP Project No. 94643)  
 Monitoring Year 2

Plot	MY2 Success Criteria Met (Y/N)	Tract Mean
1	Y	89%
2	Y	
3	Y	
4	N	
5	Y	
6	N	
7	Y	
8	Y	
9	Y	
10	Y	
11	Y	
12	Y	
13	Y	
14	Y	
15	Y	
16	Y	
17	Y	
18	Y	
19	N	
20	Y	
21	Y	
22	Y	
23	Y	
24	Y	
25	Y	
26	Y	
27	Y	
28	Y	
29	N	
30	Y	
31	Y	
32	Y	
33	Y	
34	Y	
35	Y	

Table 8. CVS Vegetation Plot Metadata  
 Lyle Creek Mitigation Site (NCEEP Project No. 94643)  
 Monitoring Year 2

<b>Report Prepared By</b>	<i>Alea Tuttle</i>
<b>Date Prepared</b>	<i>7/15/2013 13:08</i>
<b>database name</b>	<i>Lyle Creek-cvs-eep-entrytool-v2.2.7 (MY-2).mdb</i>
<b>database location</b>	<i>Q:\ActiveProjects\005-02123 Lyle Creek Mitigation FDP\Monitoring\Monitoring Year 2\Vegetation Assessment</i>
<b>DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----</b>	
<b>Metadata</b>	<i>Description of database file, the report worksheets, and a summary of project(s) and project data.</i>
<b>Plots</b>	<i>Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.</i>
<b>Stem Count by Plot and Spp</b>	<i>A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.</i>
<b>PROJECT SUMMARY-----</b>	
<b>Project Code</b>	94643
<b>project Name</b>	Lyle Creek Mitigation Site
<b>Description</b>	Stream and Wetland Mitigation
<b>length (ft)</b>	
<b>stream-to-edge width (ft)</b>	
<b>area (sq m)</b>	
<b>Required Plots (calculated)</b>	35
<b>Sampled Plots</b>	35

Table 9. Planted and Total Stem Counts (Species by Plot with Annual Means)  
 Lyle Creek Mitigation Site (NCEEP Project No. 94643)  
 Monitoring Year 2

Scientific Name	Common Name	Species Type	Current Plot Data (MY2 2013)																										
			94643-WEI-0001			94643-WEI-0002			94643-WEI-0003			94643-WEI-0004			94643-WEI-0005			94643-WEI-0006			94643-WEI-0007			94643-WEI-0008			94643-WEI-0009		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
Acer negundo	boxelder	Tree	1	1	1							1	1	1							1	1	1				2	2	2
Alnus serrulata	hazel alder	Shrub	1	1	1	1	1	1				3	3	3	2	2	2				2	2	2	2	2	2	1	1	1
Betula nigra	river birch	Tree																								2	2	2	
Callicarpa americana	American beautyberry	Shrub																											
Carpinus caroliniana	American hornbeam	Tree										1	1	1										1	1	1			
Celtis laevigata	sugarberry	Tree				5	5	5															1	1	1				
Cephalanthus	buttonbush	Shrub																											
Cephalanthus occidentalis	common buttonbush	Shrub																											
Cercis canadensis	eastern redbud	Tree																									1		
Diospyros virginiana	common persimmon	Tree							1	1	1				3	3	3				1	1	1						
Fraxinus pennsylvanica	green ash	Tree				1	1	1	1	1	1				2	2	2	2	2	2	1	1	1	4	4	4	1	1	1
Juglans nigra	black walnut	Tree																											
Liquidambar styraciflua	sweetgum	Tree																											
Liriodendron tulipifera	tuliptree	Tree				1	1	1				1	1	2	1	1	1	3	3	3	1	1	1	2	2	2	1	1	1
Nyssa sylvatica	blackgum	Tree	4	4	4				2	2	2																		
Platanus occidentalis	American sycamore	Tree	4	4	4	1	1	1	3	3	3							2	2	2	3	3	3						
Populus deltoides	eastern cottonwood	Tree			1																								
Prunus serotina	black cherry	Tree																											
Quercus michauxii	swamp chestnut oak	Tree							4	4	4	1	1	1															
Quercus phellos	willow oak	Tree				1	1	1																			3	3	3
Rosa carolina	Carolina rose	Shrub						7																					
Salix	willow	Shrub or Tree																											
Salix nigra	black willow	Tree																											
<b>Stem count</b>			10	10	11	10	10	17	11	11	11	7	7	8	8	8	8	7	7	7	9	9	13	10	10	11	10	10	10
<b>size (ares)</b>			1			1			1			1			1			1			1			1			1		
<b>size (ACRES)</b>			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02		
<b>Species count</b>			4	4	5	6	6	7	5	5	5	5	5	5	4	4	4	3	3	3	6	6	8	5	5	6	6	6	6
<b>Stems per ACRE</b>			405	405	445	405	405	688	445	445	445	283	283	324	324	324	324	283	283	283	364	364	526	405	405	445	405	405	405

**Color Coding for Table**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes  
 P-all: Number of planted stems including live stakes  
 T: Total Stems

Table 9. Planted and Total Stem Counts (Species by Plot with Annual Mear  
 Lyle Creek Mitigation Site (NCEEP Project No. 94643)  
 Monitoring Year 2

Scientific Name	Common Name	Species Type	Current Plot Data (MY2 2013)																													
			94643-WEI-0010			94643-WEI-0011			94643-WEI-0012			94643-WEI-0013			94643-WEI-0014			94643-WEI-0015			94643-WEI-0016			94643-WEI-0017			94643-WEI-0018					
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T			
Acer negundo	boxelder	Tree			1																						4	4	4	1	1	1
Alnus serrulata	hazel alder	Shrub																												2	2	2
Betula nigra	river birch	Tree				2	2	2	1	1	1	3	3	3				5	5	5	2	2	2	4	4	4						
Callicarpa americana	American beautyberry	Shrub																														
Carpinus caroliniana	American hornbeam	Tree																														
Celtis laevigata	sugarberry	Tree													1	1	1										1	1	1			
Cephalanthus	buttonbush	Shrub																														
Cephalanthus occidentalis	common buttonbush	Shrub						2						3									2									
Cercis canadensis	eastern redbud	Tree																														
Diospyros virginiana	common persimmon	Tree	1	1	1																			1	1	1						
Fraxinus pennsylvanica	green ash	Tree	1	1	1	4	4	4	1	1	2	6	6	6	10	10	10	3	3	3	7	7	7							1	1	1
Juglans nigra	black walnut	Tree								1																						
Liquidambar styraciflua	sweetgum	Tree						3																								
Liriodendron tulipifera	tuliptree	Tree				1	1	1	3	3	3							4	4	4												
Nyssa sylvatica	blackgum	Tree				1	1	1	2	2	2	4	4	4							5	5	5									
Platanus occidentalis	American sycamore	Tree	6	6	20	4	4	4	1	1	1	1	1	1																3	3	3
Populus deltoides	eastern cottonwood	Tree																														
Prunus serotina	black cherry	Tree																														
Quercus michauxii	swamp chestnut oak	Tree										1	1	1																1	1	1
Quercus phellos	willow oak	Tree																												1	1	1
Rosa carolina	Carolina rose	Shrub																														
Salix	willow	Shrub or Tree									1						28															
Salix nigra	black willow	Tree																														
	<b>Stem count</b>		8	8	23	12	12	17	8	8	11	15	15	18	11	11	39	12	12	12	14	14	16	9	9	9	10	10	10			
	<b>size (ares)</b>		1			1			1			1			1			1			1			1								
	<b>size (ACRES)</b>		0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02								
	<b>Species count</b>		3	3	4	5	5	7	5	5	7	5	5	6	2	2	3	3	3	3	3	3	4	3	3	3	7	7	7			
	<b>Stems per ACRE</b>		324	324	931	486	486	688	324	324	445	607	607	728	445	445	1578	486	486	486	567	567	647	364	364	364	405	405	405			

**Color Coding for Table**

	Exceeds requirements by 10%
	Exceeds requirements, but by less than 10%
	Fails to meet requirements, by less than 10%
	Fails to meet requirements by more than 10%
	Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes  
 P-all: Number of planted stems including live stakes  
 T: Total Stems

Table 9. Planted and Total Stem Counts (Species by Plot with Annual Mean)  
 Lyle Creek Mitigation Site (NCEEP Project No. 94643)  
 Monitoring Year 2

Scientific Name	Common Name	Species Type	Current Plot Data (MY2 2013)																										
			94643-WEI-0019			94643-WEI-0020			94643-WEI-0021			94643-WEI-0022			94643-WEI-0023			94643-WEI-0024			94643-WEI-0025			94643-WEI-0026			94643-WEI-0027		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
Acer negundo	boxelder	Tree							1	1	1																		
Alnus serrulata	hazel alder	Shrub				1	1	1	1	1	1				2	2	2				1	1	1				1	1	1
Betula nigra	river birch	Tree				1	1	4	1	1	1	3	3	3	1	1	1	3	3	3	3	3	3						
Callicarpa americana	American beautyberry	Shrub																										3	
Carpinus caroliniana	American hornbeam	Tree															2	2	2										
Celtis laevigata	sugarberry	Tree														1	1	1											
Cephalanthus	buttonbush	Shrub																											
Cephalanthus occidentalis	common buttonbush	Shrub			2																								
Cercis canadensis	eastern redbud	Tree																											
Diospyros virginiana	common persimmon	Tree																											
Fraxinus pennsylvanica	green ash	Tree	2	2	3	2	2	2	1	1	4	3	3	3	3	3	3	2	2	2	4	4	4	1	1	1	1	1	1
Juglans nigra	black walnut	Tree																											
Liquidambar styraciflua	sweetgum	Tree																											
Liriodendron tulipifera	tuliptree	Tree										1	1	1									1	1	1				
Nyssa sylvatica	blackgum	Tree												4	4	4	4	4	4				4	4	4				
Platanus occidentalis	American sycamore	Tree	4	4	4	8	8	8	6	6	21	2	2	2						3	3	3	4	4	4	5	5	5	
Populus deltoides	eastern cottonwood	Tree																											
Prunus serotina	black cherry	Tree									3																		
Quercus michauxii	swamp chestnut oak	Tree														1	1	1											
Quercus phellos	willow oak	Tree										2	2	2												7	7	7	
Rosa carolina	Carolina rose	Shrub						14					3																
Salix	willow	Shrub or Tree																				3							
Salix nigra	black willow	Tree			1																								
<b>Stem count</b>			6	6	10	12	12	29	10	10	31	11	11	14	10	10	10	13	13	13	11	11	14	10	10	10	14	14	17
<b>size (ares)</b>			1			1			1			1			1			1			1			1			1		
<b>size (ACRES)</b>			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02		
<b>Species count</b>			2	2	4	4	4	5	5	5	6	5	5	6	4	4	4	6	6	6	4	4	5	4	4	4	4	4	5
<b>Stems per ACRE</b>			243	243	405	486	486	1174	405	405	1255	445	445	567	405	405	405	526	526	526	445	445	567	405	405	405	567	567	688

**Color Coding for Table**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes  
 P-all: Number of planted stems including live stakes  
 T: Total Stems



## APPENDIX 4. Morphological Summary Data and Plots



Table 10a. Baseline Stream Data Summary  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reaches 1 and 2  
 Monitoring Year 2

Parameter	Gauge	Regional Curve									Pre-Restoration Condition <sup>1</sup>						Reference Reach Data								Design						As-Built/Baseline						
		UT1 Reach 1			UT1 Reach 2			UT1 Reach 3			Reach 1		Reach 2		Reach 3		UT to Lyle Creek		UT to Catawba River		UT to Lake Wheeler		Westbrook Lowlands		UT1 Reach 1 Upper		UT1 Reach 1 Lower		UT1 Reach 2		UT1 Reach 1 Upper		UT1 Reach 1 Lower		UT1 Reach 2		
		LL	UL	Eq.	LL	UL	Eq.	LL	UL	Eq.	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
<b>Dimension and Substrate - Riffle</b>																																					
Bankfull Width (ft)	n/a																																				
Floodprone Width (ft)																																					
Bankfull Mean Depth																																					
Bankfull Max Depth																																					
Bankfull Cross-sectional Area (ft <sup>2</sup> )																																					
Width/Depth Ratio																																					
Entrenchment Ratio																																					
Bank Height Ratio																																					
D50 (mm)																																					
<b>Profile</b>																																					
Riffle Length (ft)	n/a																																				
Riffle Slope (ft/ft)																																					
Pool Length (ft)																																					
Pool Max Depth (ft)																																					
Pool Spacing (ft) <sup>4</sup>																																					
Pool Volume (ft <sup>3</sup> )																																					
<b>Pattern</b>																																					
Channel Beltwidth (ft)	n/a																																				
Radius of Curvature (ft)																																					
Rc:Bankfull Width (ft/ft)																																					
Meander Wave Length (ft)																																					
Meander Width Ratio																																					
<b>Substrate, Bed and Transport Parameters</b>																																					
Ri%/Ru%/P%/G%/S% SC%/Sa%/G%/C%/B%/Be%	n/a																																				
d16/d35/d50/d84/d95/d100																																					
Reach Shear Stress (Competency) lb/ft <sup>2</sup>																																					
Max part size (mm) mobilized at bankfull																																					
Stream Power (Capacity) W/m <sup>2</sup>																																					
<b>Additional Reach Parameters</b>																																					
Drainage Area (SM)	n/a																																				
Impervious Cover Estimate (%)																																					
Rosgen Classification																																					
Bankfull Velocity (fps)																																					
Bankfull Discharge (cfs)																																					
Q-NFF regression																																					
Q-USGS extrapolation																																					
Q-Mannings																																					
Valley Length (ft)																																					
Channel Thalweg Length (ft)																																					
Sinuosity (ft)																																					
Water Surface Slope (ft/ft)																																					
Bankfull Slope (ft/ft)																																					

(-): Data was not provided  
 N/A: Not Applicable  
<sup>1</sup>Pre-Restoration Reaches differ from the as-built/baseline reaches.  
<sup>2</sup>Channel was straightened, moved, and/or maintained to prevent pattern formation prior to restoration.  
<sup>3</sup>The Rosgen classification system is for natural streams. These channels have been heavily manipulated by man and therefore the Rosgen classification system is not applicable. These classifications are provided for illustrative purposes only.  
<sup>4</sup>UT1 Reach 3 drops down to meet the Lyle Creek water surface elevation, which accounts for a channel slope steeper than the valley slope.  
<sup>5</sup>Data not provided in reference reach report (Lowther, 2008).  
<sup>6</sup>Data not provided in Neu-Con Umbrella Wetland and Stream Mitigation Bank Westbrook Lowgrounds Site Specific Mitigation Plan (Environmental Bank and Exchange, 2002).  
<sup>7</sup>Lowther reported a range of possible discharges from 46.8 to 108.9 cfs based on different Manning's 'n' estimation techniques (Lowther, 2008).

Table 10b. Baseline Stream Data Summary  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1A and UT1B  
 Monitoring Year 2

Parameter	Gauge	Regional Curve						Pre-Restoration Condition <sup>1</sup>				Reference Reach Data		Design										As-Built/Baseline											
		UT1A			UT1B			UT1A		UT1B		Min	Max	UT1A Upper		UT1A Lower		UT1B 200+00 to 203+20		UT1B 203+21 to 207+18		UT1B 207+18 to 209+97		UT1A Upper		UT1A Lower		UT1B 200+00 to 203+20		UT1B 203+21 to 207+18		UT1B 207+18 to 209+97			
		LL	UL	Eq.	LL	UL	Eq.	Min	Max	Min	Max			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
<b>Dimension and Substrate - Riffle</b>																																			
Bankfull Width (ft)	n/a							8.7	16.3	refer to table 5a				6.5		8.0		5.8		4.5															
Floodprone Width (ft)								21.0	42.0	14.3+		11.0+		67.3																					
Bankfull Mean Depth								0.53	0.48	0.5		0.6		0.5																					
Bankfull Max Depth								0.8	1.0	0.8		1.0		1.0																					
Bankfull Cross-sectional Area (ft <sup>2</sup> )								4.6	7.9	3.2		5.0		2.2																					
Width/Depth Ratio								16.5	33.6	13.3		12.8		9.0																					
Entrenchment Ratio								2.4	2.6	2.2+		2.2+		2.2+																					
Bank Height Ratio								0.8	1.0	1.0		1.0		1.0																					
D50 (mm)								Silt <sup>2</sup>	Silt <sup>2</sup>																										
<b>Profile</b>																																			
Riffle Length (ft)	n/a							-	-	refer to table 5a				-	-	-	-	-	-	-	-	8	19	10	23	19	31	15	22	10	20				
Riffle Slope (ft/ft)								0.0035	0.0320	0.0056	0.0160	0.0350	0.0571	0.0156	0.0192	0.0263	0.0309	0.0145	0.0218	0.0045	0.0079	0.0353	0.0477	0.0086	0.0290	0.0224	0.0593	0.0072	0.0323	0.0032	0.0217				
Pool Length (ft)								-	-	1.1		1.6		4	14	10	25	18	64	15	22	16	20	5	12	12	34	23	40	17	41	28	42		
Pool Max Depth (ft)												1.25	1.45	1.05	1.45	1.6	1.8	1.2	1.8	1.4	1.7	1.0	1.9	1.2	1.9	1.2	2.1	1.3	2.4	1.9	2.2				
Pool Spacing (ft)								35	68	28	87	13	30	31	52	49	63	37	58	49	57	4	33	29	90	43	71	34	61	46	66				
Pool Volume (ft <sup>3</sup> )																																			
<b>Pattern</b>																																			
Channel Beltwidth (ft)	n/a							N/A <sup>2</sup>	N/A <sup>2</sup>	N/A <sup>2</sup>	N/A <sup>2</sup>	refer to table 5a				N/A	N/A	25	35	35	39	23	39	29	41	N/A	N/A	25	35	35	39	23	39	29	41
Radius of Curvature (ft)								N/A <sup>2</sup>	N/A <sup>2</sup>	N/A <sup>2</sup>	N/A <sup>2</sup>	N/A	N/A	14	20	19	27	16	26	19	26	N/A	N/A	14	20	19	27	16	26	19	26				
Rc:Bankfull Width (ft/ft)								N/A <sup>2</sup>	N/A <sup>2</sup>	N/A <sup>2</sup>	N/A <sup>2</sup>	N/A	N/A	2	3	2	3	2	3	2	3	N/A	N/A	2	3	2	3	2	3	2	3				
Meander Wave Length (ft)								N/A <sup>2</sup>	N/A <sup>2</sup>	N/A <sup>2</sup>	N/A <sup>2</sup>	N/A	N/A	53	82	83	106	N/A	78	86	79	90	N/A	N/A	53	82	83	106	78	86	79	90			
Meander Width Ratio								N/A <sup>2</sup>	N/A <sup>2</sup>	N/A <sup>2</sup>	N/A <sup>2</sup>	N/A	N/A	4	5	4	5	3	5	4	5	N/A	N/A	4	5	4	5	3	5	4	5				
<b>Substrate, Bed and Transport Parameters</b>																																			
Ri%/Ru%/P%/G%/S%	n/a									refer to table 5a																									
SC%/Sa%/G%/C%/B%/Be%																																			
d16/d35/d50/d84/d95/d100								-	-																										
Reach Shear Stress (Competency) lb/ft <sup>2</sup>								0.35	0.06			0.84	0.28	0.6	0.32	0.12																			
Max part size (mm) mobilized at bankfull								20	4			60	17	38	20	7																			
Stream Power (Capacity) W/m <sup>2</sup>																																			
<b>Additional Reach Parameters</b>																																			
Drainage Area (SM)	n/a							0.05	0.13	refer to table 5a																									
Impervious Cover Estimate (%)																																			
Rosgen Classification								F6 <sup>3</sup>	F6 <sup>3</sup>			B6	C6	C6	C	E																			
Bankfull Velocity (fps)								2.0	1.6			2.8	2.6	-	-																				
Bankfull Discharge (cfs)								8	13			9	13																						
Q-NFF regression								-	-																										
Q-USGS extrapolation								4	9	10	18																								
Q-Mannings								-	-																										
Valley Length (ft)								-	-			190	352	279	326	227																			
Channel Thalweg Length (ft)								1141	890			201	414	320	398	279																			
Sinuosity (ft)								1.0	1.0			1.1	1.2	1.1	1.2	1.1	1.2	1.1	1.2	1.1	1.2	1.1	1.2	1.1	1.2	1.1	1.2	1.1	1.2						
Water Surface Slope (ft/ft)								0.0106	0.0085			0.0284	0.0095	0.0131	0.0086	0.0032	0.0296	0.0089	0.0187	0.0080	0.0039														
Bankfull Slope (ft/ft)								0.0106	0.0085			0.0284	0.0095	0.0161	0.0086	0.0032	0.0294	0.0091	0.0190	0.0079	0.0039														

(-): Data was not provided  
 N/A: Not Applicable  
<sup>1</sup>Pre-Restoration Reaches differ from the as-built/baseline reaches.  
<sup>2</sup>Channel was straightened, moved, and/or maintained to prevent pattern formation prior to restoration.  
<sup>3</sup>The Rosgen classification system is for natural streams. These channels have been heavily manipulated by man and therefore the Rosgen classification system is not applicable. These classifications are provided for illustrative purposes only.  
<sup>4</sup>UT1 Reach 3 drops down to meet the Lyle Creek water surface elevation, which accounts for a channel slope steeper than the valley slope.  
<sup>5</sup>Data not provided in reference reach report (Lowther, 2008).  
<sup>6</sup>Data not provided in Neu-Con Umbrella Wetland and Stream Mitigation Bank Westbrook Lowgrounds Site Specific Mitigation Plan (Environmental Bank and Exchange, 2002).  
<sup>7</sup>Lowther reported a range of possible discharges from 46.8 to 108.9 cfs based on different Manning's 'n' estimation techniques (Lowther, 2008).

Table 11. Morphology and Hydraulic Monitoring Summary (Dimensional Parameters - Cross-Section)  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reaches 1 and 2, UT1A and UT1B  
 Monitoring Year 2

Parameter	UT1 Reach 1 Upper											UT1 Reach 1 Lower												
	Cross-Section 1 (Riffle)					Cross-Section 2 (Pool)					Cross-Section 3 (Riffle)					Cross-Section 4 (Pool)								
Dimension and Substrate	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
<i>based on fixed bankfull elevation</i>																								
Bankfull Width (ft)	11.2	6.1	6.0				13.6	9.8	10.3				22.4	17.1	20.5				20.7	17.3	17.7			
Floodprone Width (ft)	65.0	63.8	65.2				N/A	N/A	N/A				62.6	63.4	55.7				N/A	N/A	N/A			
Bankfull Mean Depth (ft)	0.3	0.4	0.4				1.0	0.9	0.8				0.6	0.6	0.6				1.1	1.0	1.0			
Bankfull Max Depth (ft)	0.8	0.8	0.8				2.4	1.9	1.9				1.7	1.3	1.5				2.4	2.2	2.3			
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	3.3	2.2	2.3				14.2	9.8	8.2				14.3	9.7	11.5				22.5	16.8	18.5			
Bankfull Width/Depth Ratio	37.5	17.2	15.4				13.0	12.0	13.0				35.0	30.1	36.8				19.0	17.9	17.0			
Bankfull Entrenchment Ratio	2.2+	2.2+	2.2+				N/A	N/A	N/A				2.2+	2.2+	2.2+				N/A	N/A	N/A			
Bankfull Bank Height Ratio	1.0	1.0	1.0				N/A	N/A	N/A				1.0	1.0	1.1				N/A	N/A	N/A			
Parameter	UT1 Reach 1 Lower											UT1 Reach 2												
	Cross-Section 5 (Pool)					Cross-Section 6 (Riffle)					Cross-Section 7 (Riffle)					Cross-Section 8 (Pool)								
Dimension and Substrate	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
<i>based on fixed bankfull elevation</i>																								
Bankfull Width (ft)	16.6	16.9	18.0				12.3	13.3	13.5				14.7	11.5	14.7				22.1	21.0	28.1			
Floodprone Width (ft)	N/A	N/A	N/A				79.6	80.3	76.9				69.7	70.8	65.9				N/A	N/A	N/A			
Bankfull Mean Depth (ft)	1.0	0.9	0.8				0.7	0.7	0.7				0.8	0.9	0.8				1.2	1.0	0.9			
Bankfull Max Depth (ft)	2.1	1.9	1.9				1.5	1.3	1.5				1.8	1.7	1.8				2.9	2.1	2.8			
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	16.5	13.4	14.8				9.0	9.5	8.8				12.3	10.6	11.8				27.0	21.4	26.5			
Bankfull Width/Depth Ratio	16.7	16.6	21.9				16.8	18.5	20.8				17.6	12.5	18.4				18.1	20.5	29.8			
Bankfull Entrenchment Ratio	N/A	N/A	N/A				2.2+	2.2+	2.2+				2.2+	2.2+	2.2+				N/A	N/A	N/A			
Bankfull Bank Height Ratio	N/A	N/A	N/A				1.0	1.0	1.0				1.0	1.0	1.0				N/A	N/A	N/A			
Parameter	UT1A											UT1B												
	Cross-Section 9 (Riffle)					Cross-Section 10 (Pool)					Cross-Section 11 (Riffle)					Cross-Section 12 (Pool)								
Dimension and Substrate	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
<i>based on fixed bankfull elevation</i>																								
Bankfull Width (ft)	5.8	2.5	2.1				6.3	*	2.8				4.5	6.1	5.7				7.8	7.4	8.8			
Floodprone Width (ft)	30.5	31.4	27.0				N/A	N/A	N/A				67.3	66.5	64.2				N/A	N/A	N/A			
Bankfull Mean Depth (ft)	0.4	0.3	0.4				0.5	*	0.3				0.5	0.5	0.4				0.6	0.5	0.4			
Bankfull Max Depth (ft)	0.8	0.4	0.6				1.0	*	0.6				1.0	1.1	1.0				1.2	1.0	0.7			
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	2.1	0.7	0.8				2.9	*	1.0				2.2	2.8	2.3				4.6	4.0	3.1			
Bankfull Width/Depth Ratio	16.0	9.4	5.2				13.6	*	8.1				9.0	13.3	13.7				13.1	13.9	25.1			
Bankfull Entrenchment Ratio	2.2+	2.2+	2.2+				N/A	N/A	N/A				2.2+	2.2+	2.2+				N/A	N/A	N/A			
Bankfull Bank Height Ratio	1.0	1.0	1.2				N/A	N/A	N/A				1.0	1.0	1.0				N/A	N/A	N/A			


\*In MY1 (2012) sediment deposition occurred within cross-section 10 filling in the majority of the channel. Storm flows have flushed out the sediment flows and the channel dimensions appear to be adjusting back toward the as-built channel dimensions.

Table 12a. Monitoring Data - Stream Reach Data Summary  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 1 Upper  
 Monitoring Year 2

Parameter	As-Built/Baseline		MY-1			MY-2			MY-3			MY-4			MY-5		
	Min	Max	Min	Med	Max	Min	Med	Max	Min	Med	Max	Min	Med	Max	Min	Med	Max
<b>Dimension and Substrate - Riffle</b>																	
Bankfull Width (ft)	11.2			6.1			6.0										
Floodprone Width (ft)	65.0			63.8			65.2										
Bankfull Mean Depth	0.3			0.4			0.4										
Bankfull Max Depth	0.8			0.8			0.8										
Bankfull Cross-sectional Area (ft <sup>2</sup> )	3.3			2.2			2.3										
Width/Depth Ratio	37.5			17.2			15.4										
Entrenchment Ratio	2.2+			2.2+			2.2+										
Bank Height Ratio	1.0			1.0			1.0										
D50 (mm)																	
<b>Profile</b>																	
Riffle Length (ft)	7	23	3	12	26	4	10	23									
Riffle Slope (ft/ft)	0.0025	0.0598	0.0043	0.0230	0.0518	0.0100	0.0260	0.0505									
Pool Length (ft)	10	39	10	16	26	8	20	28									
Pool Max Depth (ft)	1	3	0.3	0.7	2.4	0.3	0.8	1.1									
Pool Spacing (ft)	23	49	17	29	61	12	39	61									
Pool Volume (ft <sup>3</sup> )																	
<b>Pattern</b>																	
Channel Beltwidth (ft)	N/A																
Radius of Curvature (ft)	N/A																
Rc:Bankfull Width (ft/ft)	N/A																
Meander Wave Length (ft)	N/A																
Meander Width Ratio	N/A																
<b>Additional Reach Parameters</b>																	
Rosgen Classification	Bc			Bc			Bc										
Channel Thalweg Length (ft)	700			700			700										
Sinuosity (ft)	1.1			1.1			1.1										
Water Surface Slope (ft/ft)	0.0140			0.0147			0.0147										
Bankfull Slope (ft/ft)	0.0140			0.0146			0.0150										
Ri%/Ru%/P%/G%/S%																	
SC%/Sa%/G%/C%/B%/Be%																	
d16/d35/d50/d84/d95/d100	N/A			N/A			N/A										
% of Reach with Eroding Banks				0%			0%										

(-): Data was not provided  
 N/A: Not Applicable

Longitudinal Profile Plots  
Lyle Creek Mitigation Site (EEP Project No. 94643)  
UT1 Reach 1 Upper  
Monitoring Year 2

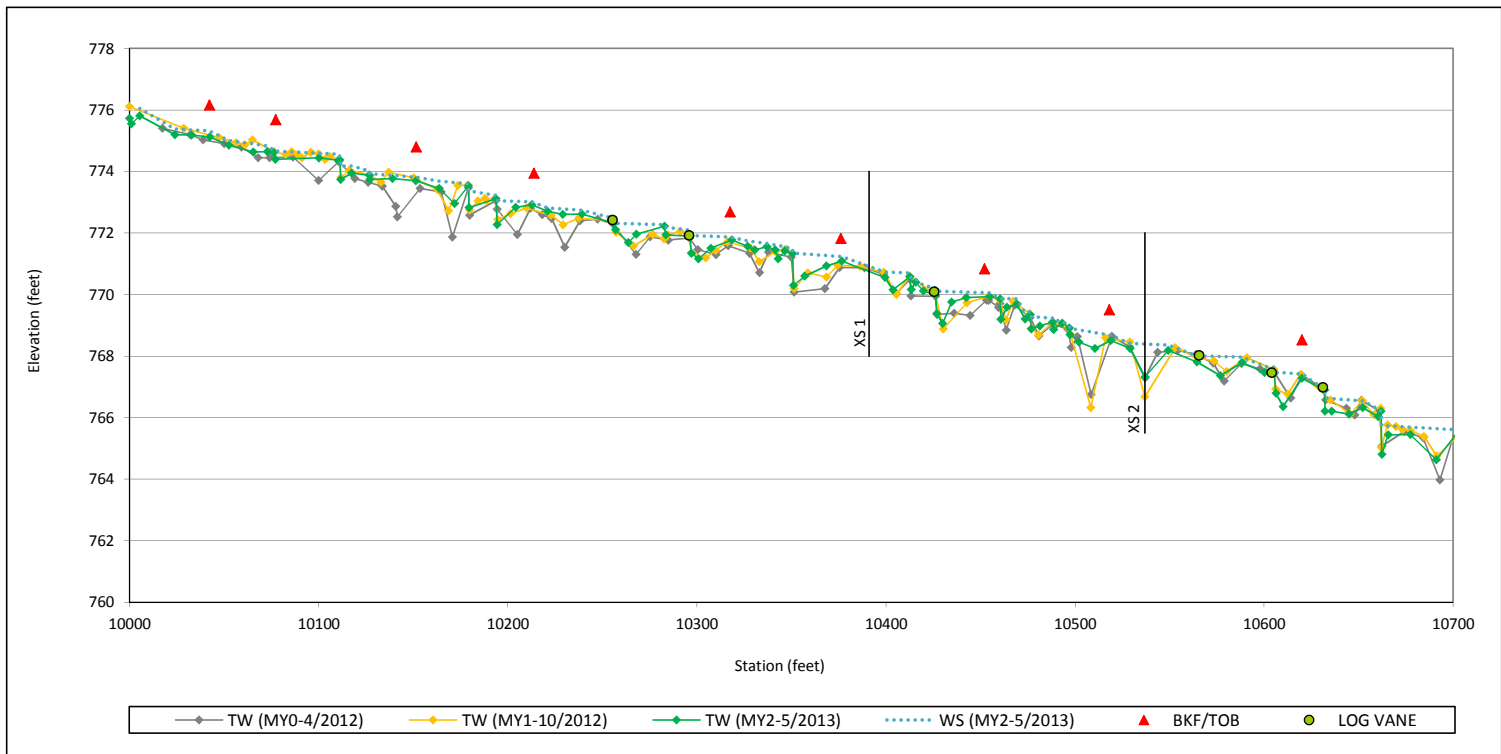

Cross-Section Plots  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 1 Upper  
 Monitoring Year 2

River Basin	Catawba 03050101
Watershed	NCDWQ Subbasin 03-08-32
XS ID	XS1 (Riffle)
Drainage Area	315 Acres
Date	5/21/2013
Field Crew	Wildlands, IE, AKT


Summary Data	
Bankfull Elevation (ft)	771.7
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	2.3
Bankfull Width (ft)	6.0
Flood Prone Area Elevation (ft)	772.5
Flood Prone Width (ft)	65.2
Max Depth at Bankfull (ft)	0.8
Mean Depth at Bankfull (ft)	0.4
W/D Ratio	15.4
Entrenchment Ratio	2.2+
Bank Height Ratio	1.0
Stream Type	Bc



Cross-Section 1: View Upstream



Cross-Section 1: View Downstream

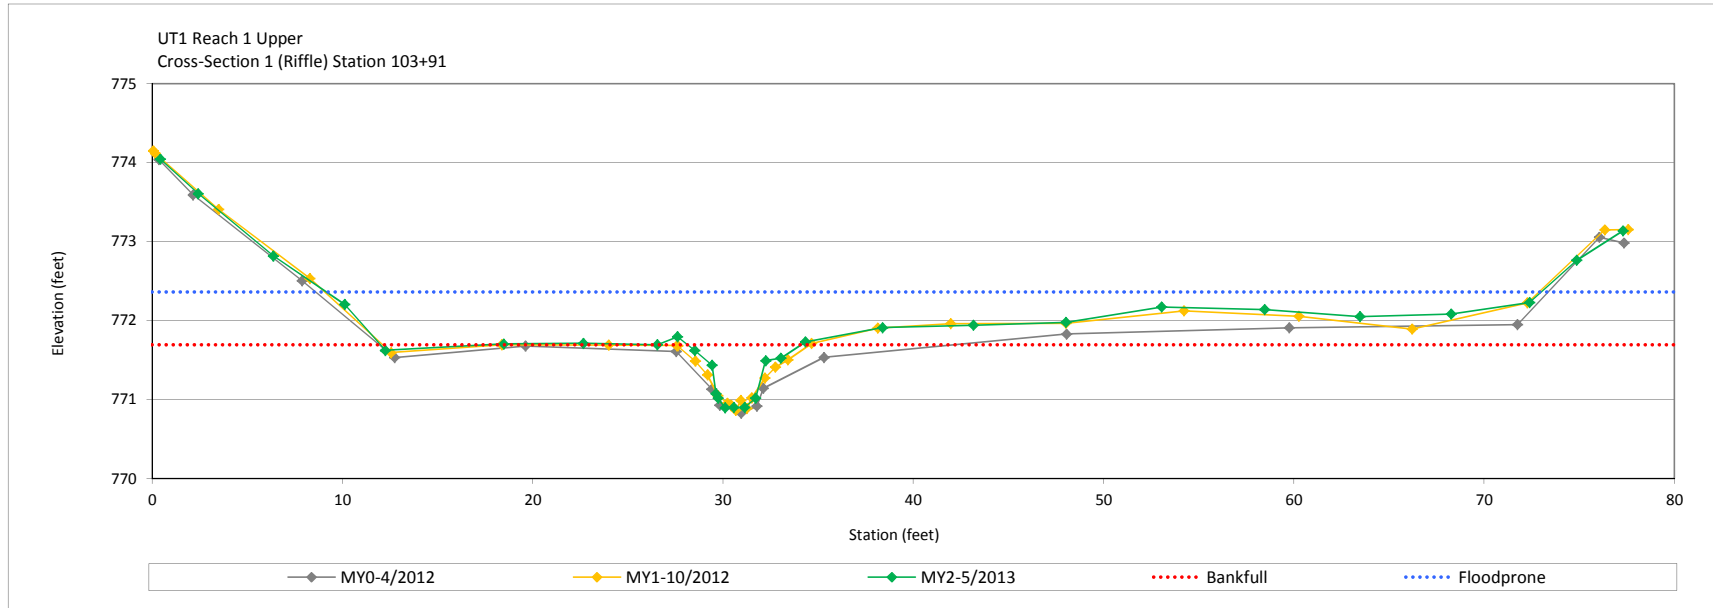

Cross-Section Plots  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 1 Upper  
 Monitoring Year 2

River Basin	Catawba 03050101
Watershed	NCDWQ Subbasin 03-08-32
XS ID	XS2 (Pool)
Drainage Area	315 Acres
Date	5/21/2013
Field Crew	Wildlands, IE, AKT

Summary Data	
Bankfull Elevation (ft)	769.4
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	8.2
Bankfull Width (ft)	10.3
Flood Prone Area Elevation (ft)	N/A
Flood Prone Width (ft)	N/A
Max Depth at Bankfull (ft)	1.9
Mean Depth at Bankfull (ft)	0.8
W/D Ratio	13.0
Entrenchment Ratio	N/A
Bank Height Ratio	N/A
Stream Type	N/A



Cross-Section 2: View Upstream



Cross-Section 2: View Downstream

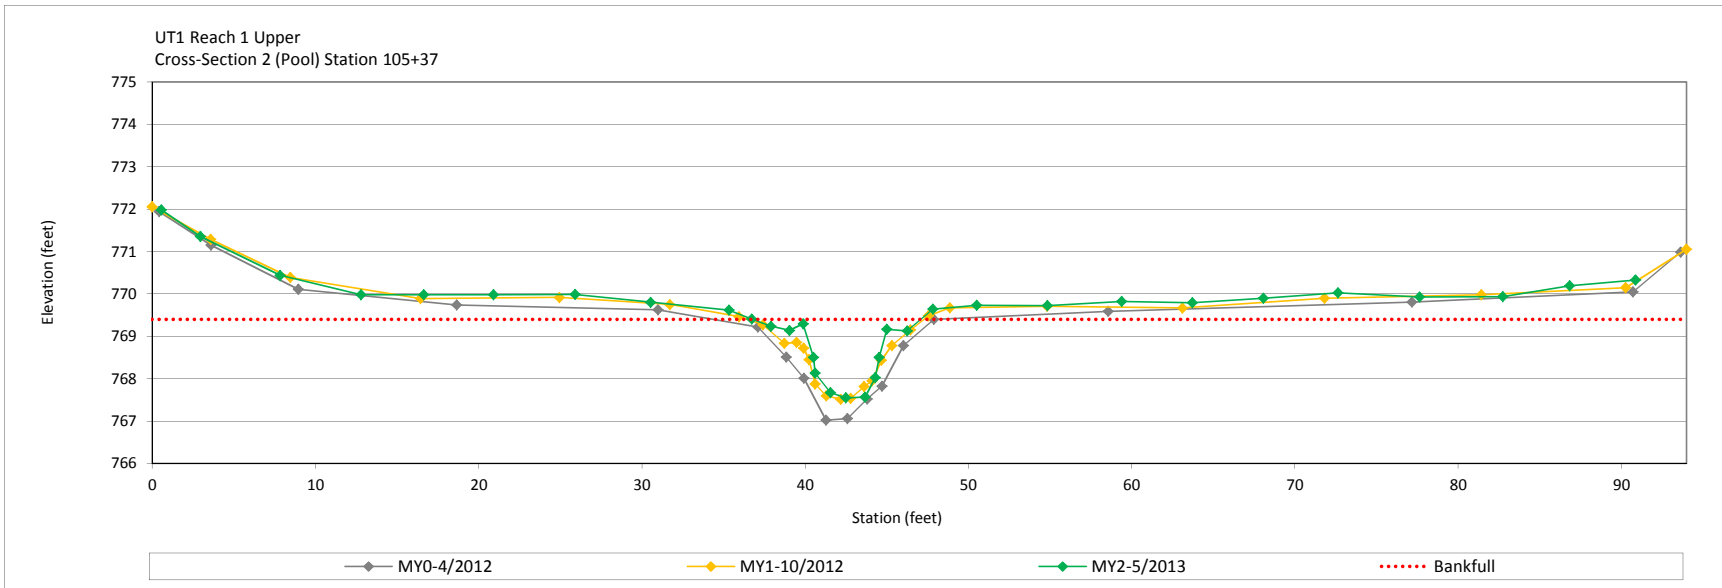



Table 12b. Monitoring Data - Stream Reach Data Summary  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 1 Lower  
 Monitoring Year 2

Parameter	As-Built/Baseline		MY-1			MY-2			MY-3			MY-4			MY-5		
	Min	Max	Min	Med	Max	Min	Med	Max	Min	Med	Max	Min	Med	Max	Min	Med	Max
<b>Dimension and Substrate - Riffle</b>																	
Bankfull Width (ft)	12.3	22.4	13.3	15.2	17.1	13.5	17.0	20.5									
Floodprone Width (ft)	62.6	79.6	63.4	71.9	80.3	55.7	66.3	76.9									
Bankfull Mean Depth	0.5	0.7	0.6	0.7	0.7	0.6	0.6	0.7									
Bankfull Max Depth	1.5	1.7	1.3	1.3	1.3	1.5	1.5	1.5									
Bankfull Cross-sectional Area (ft <sup>2</sup> )	10.1	14.3	9.5	9.6	9.7	8.8	10.1	11.5									
Width/Depth Ratio	36.8	35.0	18.5	24.3	30.1	20.8	28.8	36.8									
Entrenchment Ratio	2.2+	2.2+	2.2+	2.2+	2.2+	2.2+	2.2+	2.2+									
Bank Height Ratio	1.0	1.0	1.0	1.0	1.0	1.0	1.1	1.1									
D50 (mm)																	
<b>Profile</b>																	
Riffle Length (ft)	10	75	8	28	70	12	31	81									
Riffle Slope (ft/ft)	0.000	0.029	0.000	0.005	0.025	0.001	0.005	0.026									
Pool Length (ft)	6	81	12	56	95	5	54	81									
Pool Max Depth (ft)	1.4	3.6	0.7	1.2	2.0	0.4	1.2	1.9									
Pool Spacing (ft)	51	131	29	82	118	35	80	117									
Pool Volume (ft <sup>3</sup> )																	
<b>Pattern</b>																	
Channel Beltwidth (ft)	36	78															
Radius of Curvature (ft)	27	48															
Rc:Bankfull Width (ft/ft)	2	3															
Meander Wave Length (ft)	100	166															
Meander Width Ratio	2	5															
<b>Additional Reach Parameters</b>																	
Rosgen Classification	C		C			C											
Channel Thalweg Length (ft)	2558		2558			2558											
Sinuosity (ft)	1.3		1.3			1.3											
Water Surface Slope (ft/ft)	0.0015		0.0024			0.0025											
Bankfull Slope (ft/ft)	0.0015		0.0024			0.0023											
Ri%/Ru%/P%/G%/S%																	
SC%/Sa%/G%/C%/B%/Be%																	
d16/d35/d50/d84/d95/d100	N/A		N/A			N/A											
% of Reach with Eroding Banks			0%			0%											

(-): Data was not provided  
 N/A: Not Applicable



Longitudinal Profile Plots  
Lyle Creek Mitigation Site (EEP Project No. 94643)  
UT1 Reach 1 Lower  
Monitoring Year 2

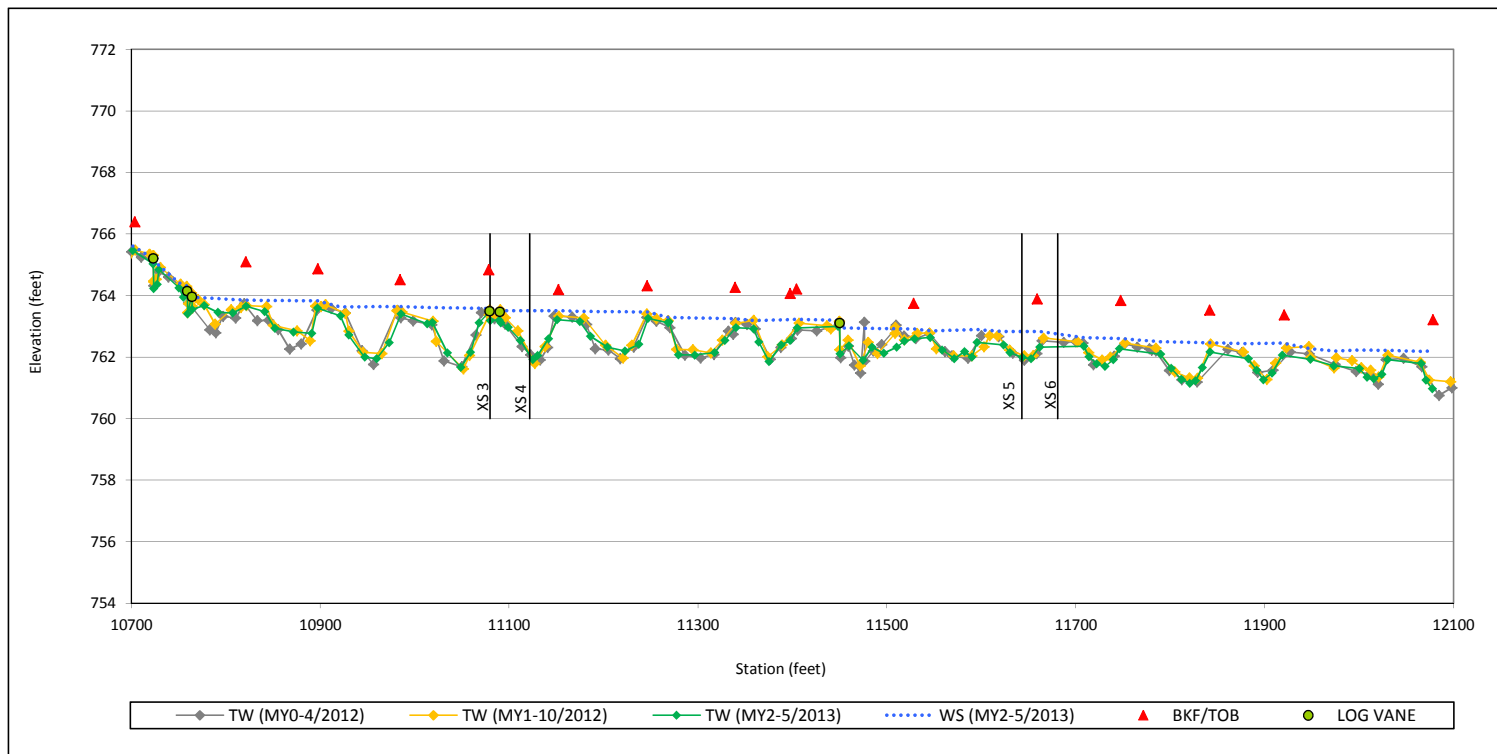

Cross-Section Plots  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 1 Lower  
 Monitoring Year 2

River Basin	Catawba 03050101
Watershed	NCDWQ Subbasin 03-08-32
XS ID	XS3 (Riffle)
Drainage Area	315 Acres
Date	5/21/2013
Field Crew	Wildlands, IE, AKT


Summary Data	
Bankfull Elevation (ft)	764.7
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	11.5
Bankfull Width (ft)	20.5
Flood Prone Area Elevation (ft)	766.1
Flood Prone Width (ft)	55.7
Max Depth at Bankfull (ft)	1.5
Mean Depth at Bankfull (ft)	0.6
W/D Ratio	36.8
Entrenchment Ratio	2.2+
Bank Height Ratio	1.1
Stream Type	C



Cross-Section 3: View Upstream



Cross-Section 3: View Downstream

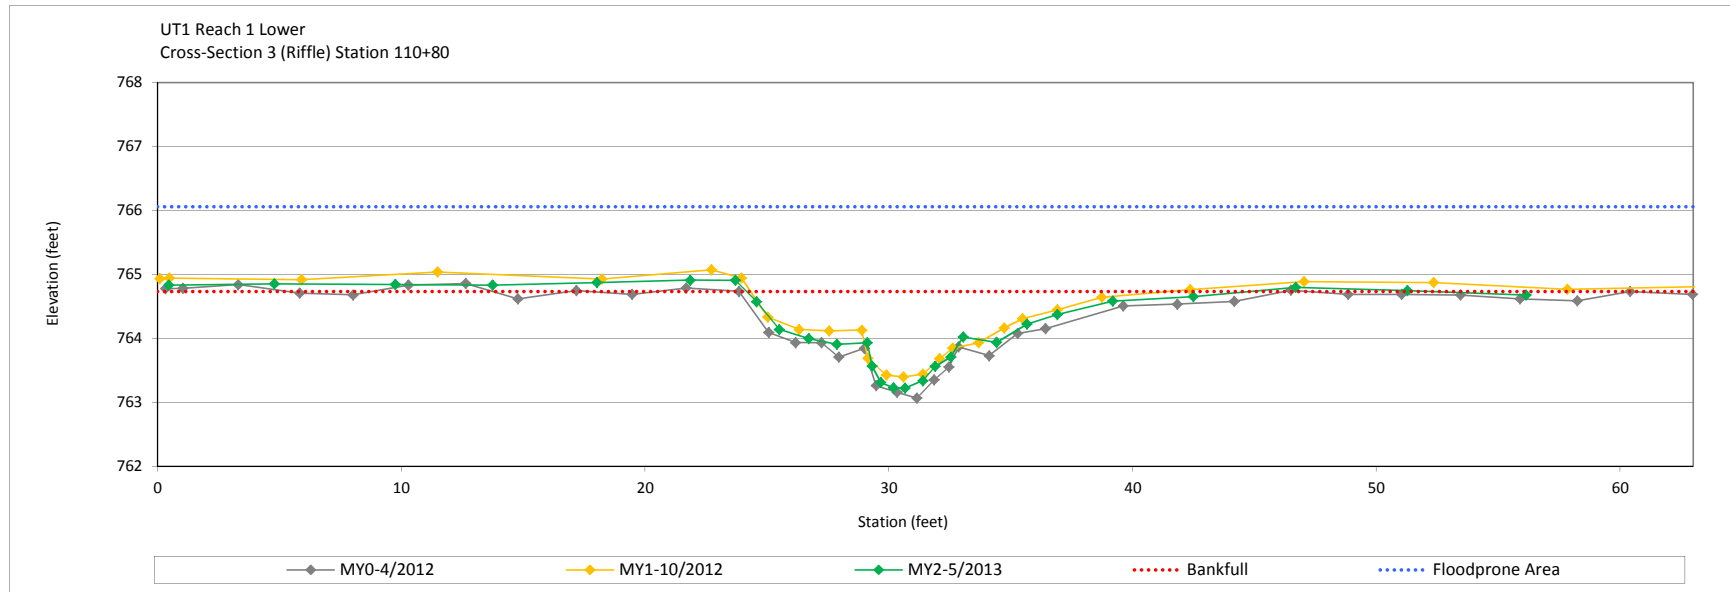

Cross-Section Plots  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 1 Lower  
 Monitoring Year 2

<b>River Basin</b>	Catawba 03050101
<b>Watershed</b>	NCDWQ Subbasin 03-08-32
<b>XS ID</b>	XS4 (Pool)
<b>Drainage Area</b>	315 Acres
<b>Date</b>	5/21/2013
<b>Field Crew</b>	Wildlands, IE, AKT


Summary Data	
<b>Bankfull Elevation (ft)</b>	764.4
<b>Bankfull Cross-Sectional Area (ft<sup>2</sup>)</b>	18.5
<b>Bankfull Width (ft)</b>	17.7
<b>Flood Prone Area Elevation (ft)</b>	N/A
<b>Flood Prone Width (ft)</b>	N/A
<b>Max Depth at Bankfull (ft)</b>	2.3
<b>Mean Depth at Bankfull (ft)</b>	1.0
<b>W/D Ratio</b>	17.0
<b>Entrenchment Ratio</b>	N/A
<b>Bank Height Ratio</b>	N/A
<b>Stream Type</b>	N/A



Cross-Section 4: View Upstream



Cross-Section 4: View Downstream

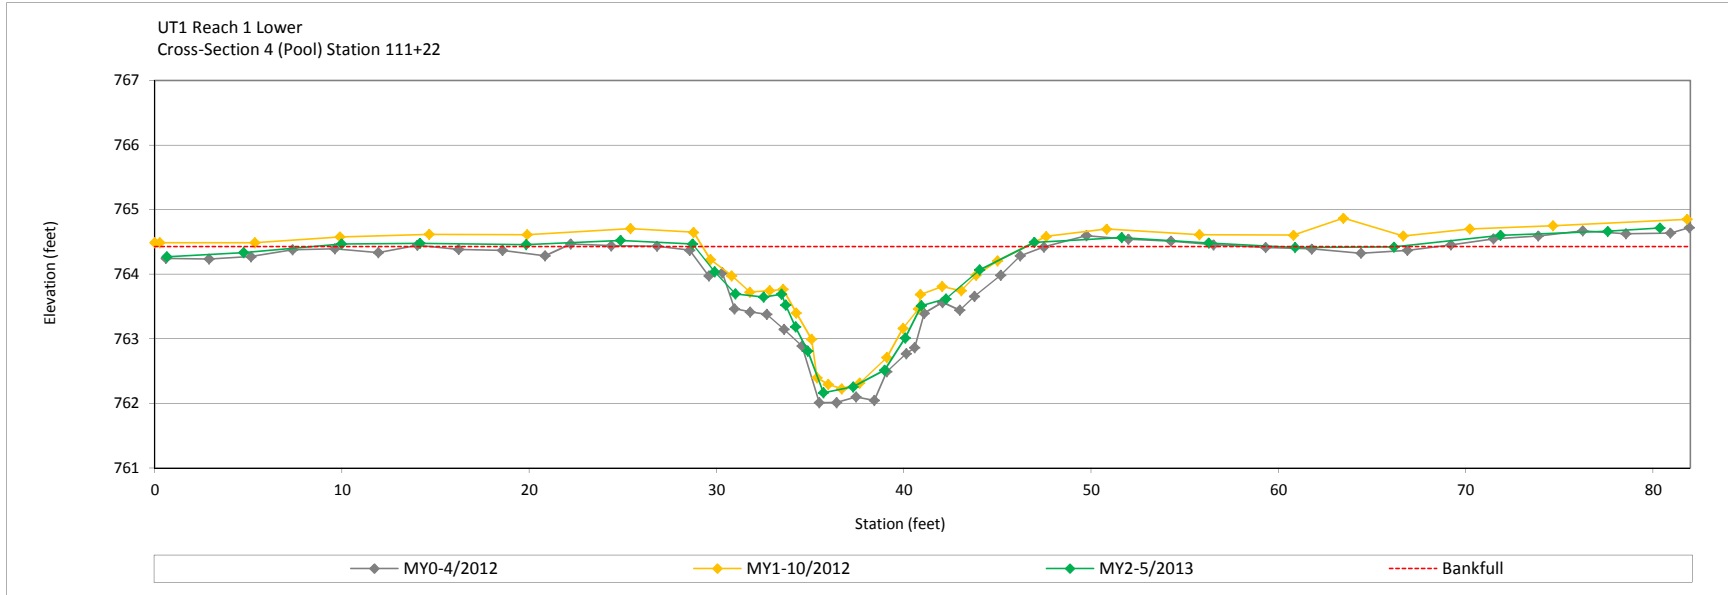

Cross-Section Plots  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 1 Lower  
 Monitoring Year 2

<b>River Basin</b>	Catawba 03050101
<b>Watershed</b>	NCDWQ Subbasin 03-08-32
<b>XS ID</b>	XS5 (Pool)
<b>Drainage Area</b>	315 Acres
<b>Date</b>	5/21/2013
<b>Field Crew</b>	Wildlands, IE, AKT


Summary Data	
<b>Bankfull Elevation (ft)</b>	763.9
<b>Bankfull Cross-Sectional Area (ft<sup>2</sup>)</b>	14.8
<b>Bankfull Width (ft)</b>	18.0
<b>Flood Prone Area Elevation (ft)</b>	N/A
<b>Flood Prone Width (ft)</b>	N/A
<b>Max Depth at Bankfull (ft)</b>	1.9
<b>Mean Depth at Bankfull (ft)</b>	0.8
<b>W/D Ratio</b>	21.9
<b>Entrenchment Ratio</b>	N/A
<b>Bank Height Ratio</b>	N/A
<b>Stream Type</b>	N/A



Cross-Section 5: View Upstream



Cross-Section 5: View Downstream

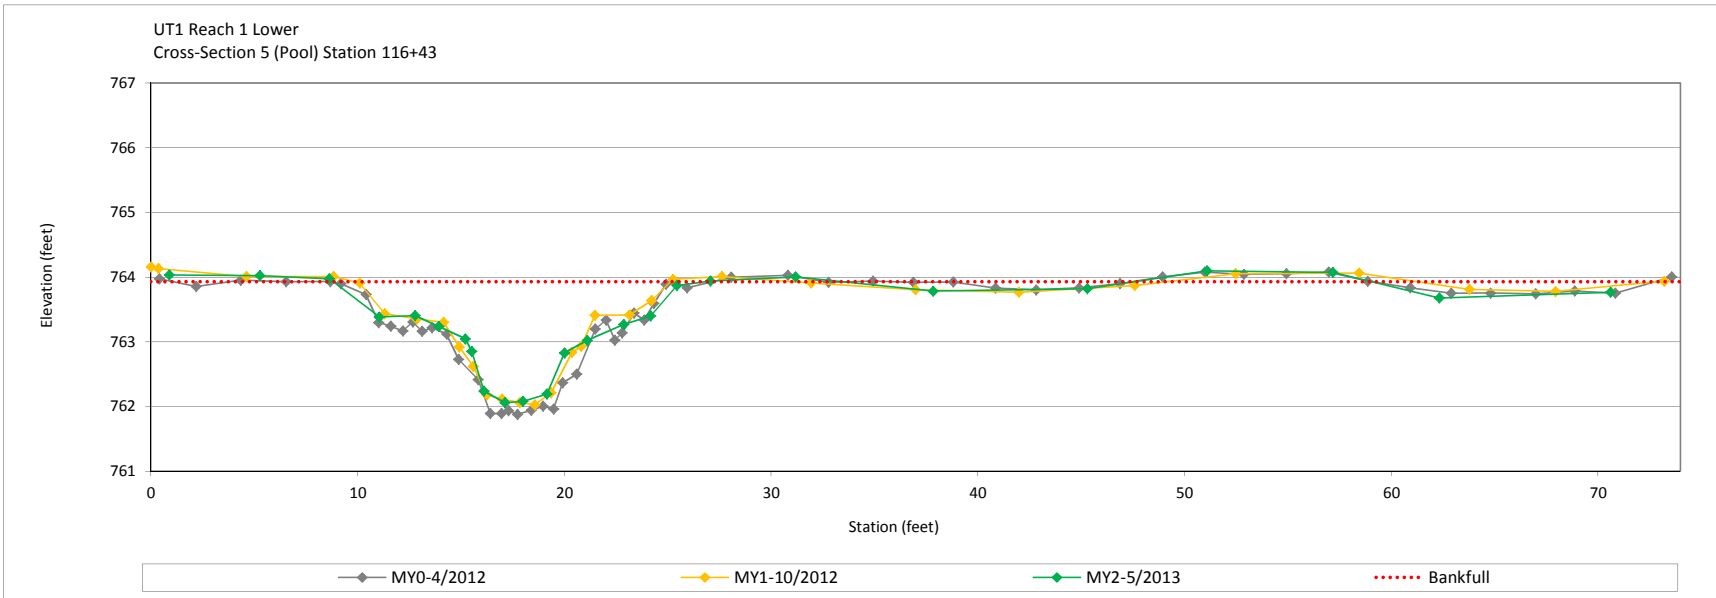

Cross-Section Plots  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 1 Lower  
 Monitoring Year 2

River Basin	Catawba 03050101
Watershed	NCDWQ Subbasin 03-08-32
XS ID	XS6 (Riffle)
Drainage Area	315 Acres
Date	5/21/2013
Field Crew	Wildlands, IE, AKT


Summary Data	
Bankfull Elevation (ft)	763.8
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	8.8
Bankfull Width (ft)	13.5
Flood Prone Area Elevation (ft)	765.3
Flood Prone Width (ft)	80+
Max Depth at Bankfull (ft)	1.5
Mean Depth at Bankfull (ft)	0.7
W/D Ratio	20.8
Entrenchment Ratio	2.2+
Bank Height Ratio	1.0
Stream Type	C



Cross-Section 6: View Upstream




Cross-Section 6: View Downstream

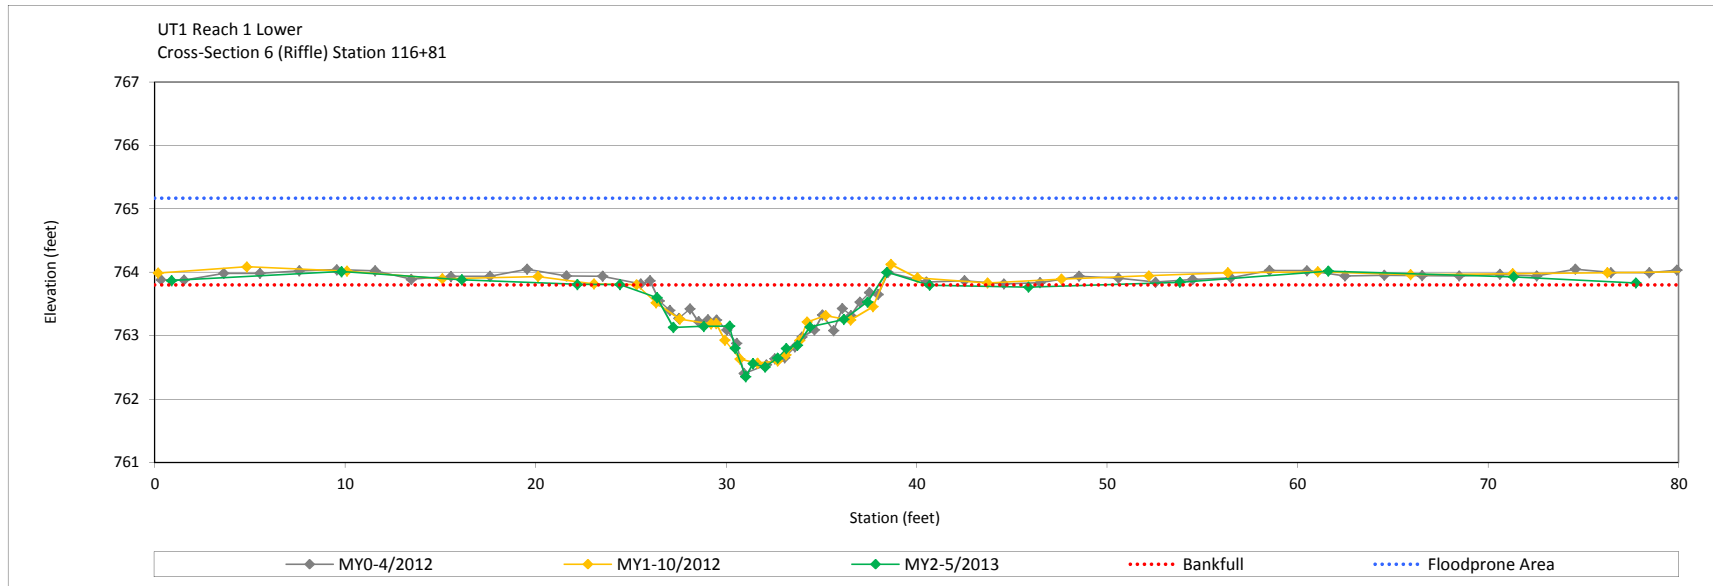



Longitudinal Profile Plots  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 2  
 Monitoring Year 2

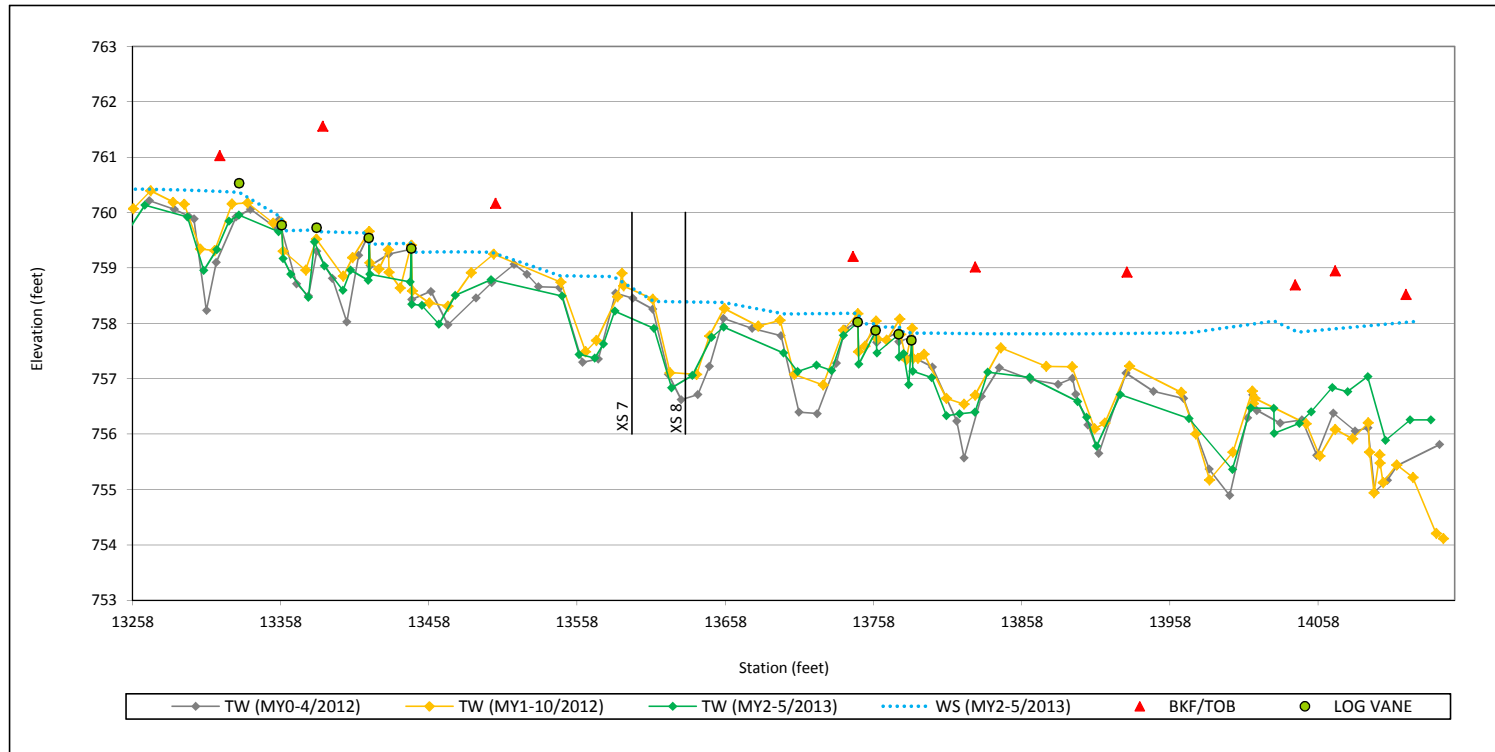

Cross-Section Plots  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 2  
 Monitoring Year 2

River Basin	Catawba 03050101
Watershed	NCDWQ Subbasin 03-08-32
XS ID	XS7 (Riffle)
Drainage Area	315 Acres
Date	5/21/2013
Field Crew	Wildlands, IE, AKT


Summary Data	
Bankfull Elevation (ft)	760.1
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	11.8
Bankfull Width (ft)	14.7
Flood Prone Area Elevation (ft)	761.8
Flood Prone Width (ft)	65.9
Max Depth at Bankfull (ft)	1.8
Mean Depth at Bankfull (ft)	0.8
W/D Ratio	18.4
Entrenchment Ratio	2.2+
Bank Height Ratio	1.0
Stream Type	C



Cross-Section 7: View Upstream



Cross-Section 7: View Downstream

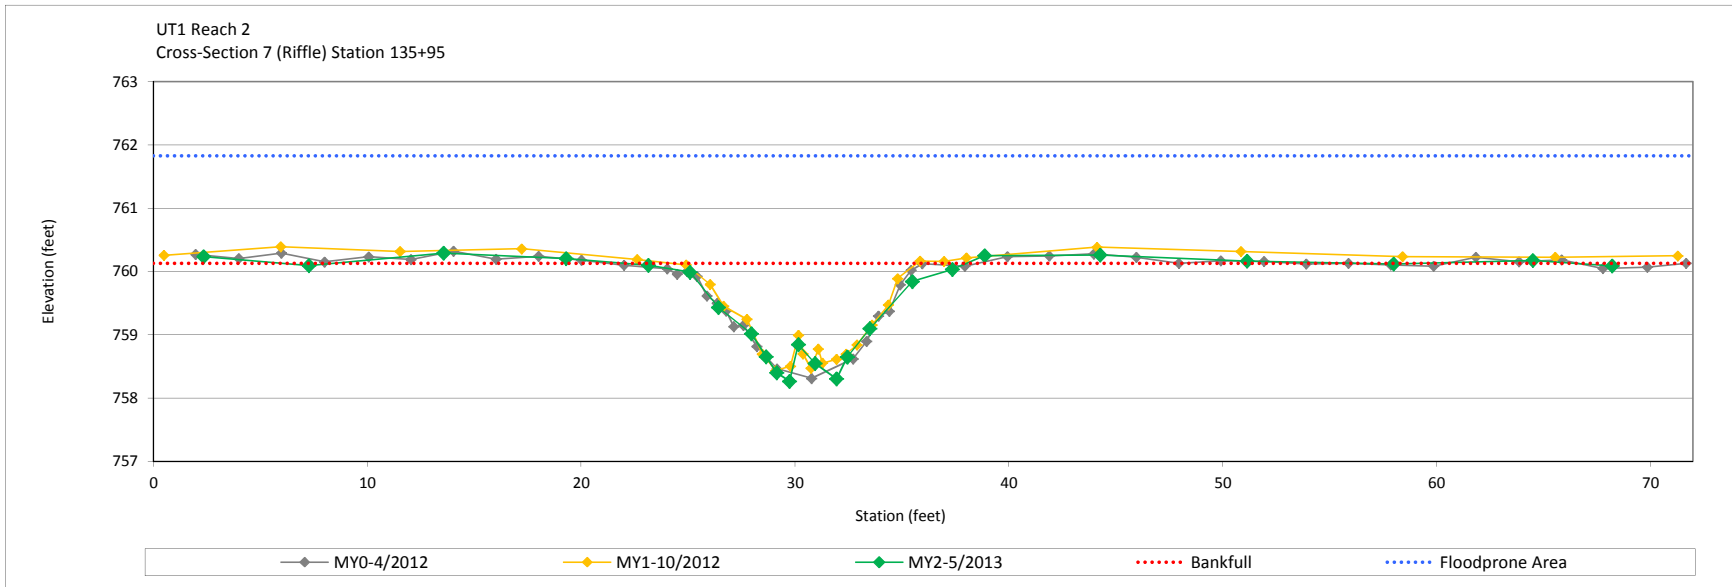



Cross-Section Plots  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1 Reach 2  
 Monitoring Year 2

River Basin	Catawba 03050101
Watershed	NCDWQ Subbasin 03-08-32
XS ID	XS8 (Pool)
Drainage Area	315 Acres
Date	5/21/2013
Field Crew	Wildlands, IE, AKT

Summary Data	
Bankfull Elevation (ft)	759.7
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	26.5
Bankfull Width (ft)	28.1
Flood Prone Area Elevation (ft)	N/A
Flood Prone Width (ft)	N/A
Max Depth at Bankfull (ft)	2.8
Mean Depth at Bankfull (ft)	0.9
W/D Ratio	29.8
Entrenchment Ratio	N/A
Bank Height Ratio	N/A
Stream Type	N/A



Cross-Section 8: View Upstream



Cross-Section 8: View Downstream


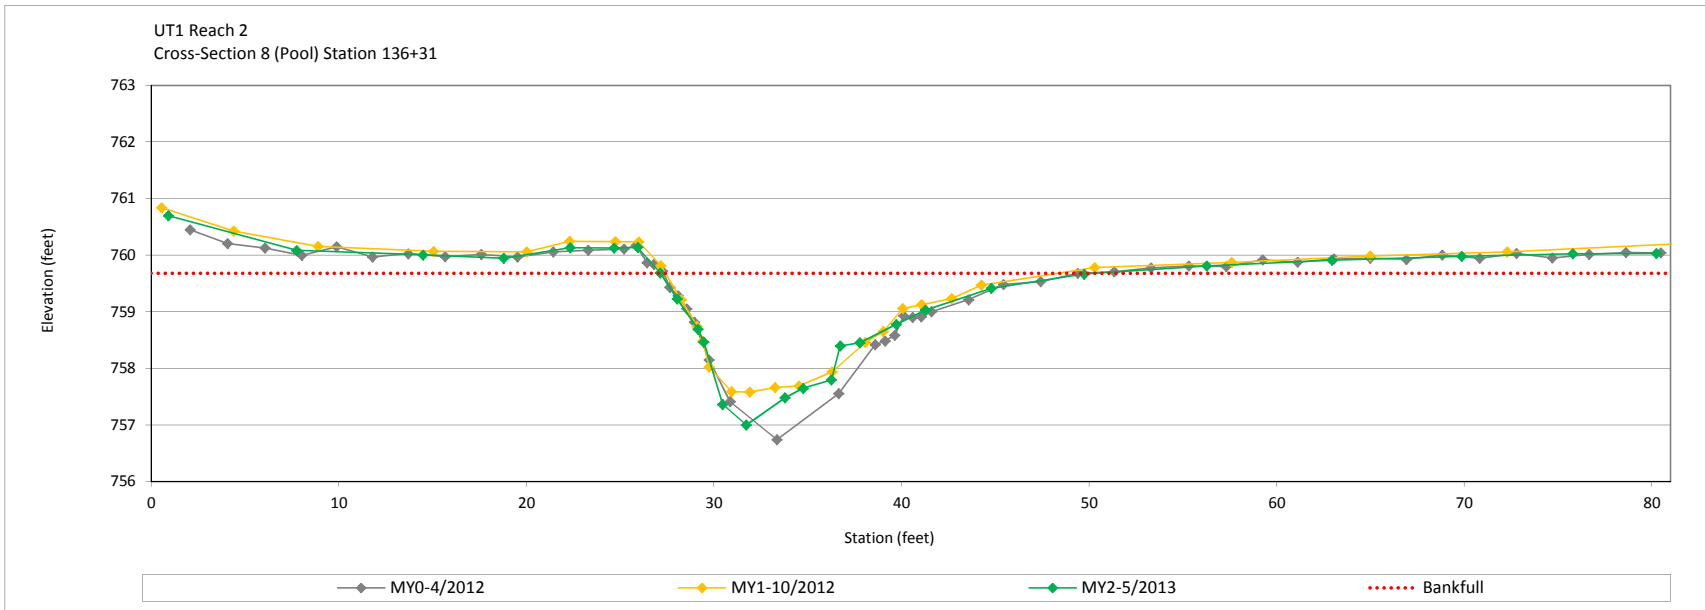


Table 12d. Monitoring Data - Stream Reach Data Summary  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1A  
 Monitoring Year 2

Parameter	As-Built/Baseline				MY-1		MY-2		MY-3		MY-4		MY-5	
	UT1A Upper		UT1A Lower		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
	Min	Max	Min	Max										
<b>Dimension and Substrate - Riffle</b>														
Bankfull Width (ft)	5.8				2.5		2.1							
Floodprone Width (ft)	30.5				31.4		27.0							
Bankfull Mean Depth	0.4				0.3		0.4							
Bankfull Max Depth	0.8				0.4		0.6							
Bankfull Cross-sectional Area (ft <sup>2</sup> )	2.1				0.7		0.8							
Width/Depth Ratio	16.0				9.4		5.2							
Entrenchment Ratio	2.2+				2.2+		2.2+							
Bank Height Ratio	1.0				1.0		1.2							
D50 (mm)														
<b>Profile</b>														
Riffle Length (ft)	8	19	10	23	4	27	9	31						
Riffle Slope (ft/ft)	0.035	0.048	0.009	0.029	0.000	0.056	0.007	0.046						
Pool Length (ft)	5	12	12	34	4	31	4	30						
Pool Max Depth (ft)	1.0	1.9	1.2	1.9	0.2	1.1	0.2	1.0						
Pool Spacing (ft)	4	33	29	90	12	55	5	88						
Pool Volume (ft <sup>3</sup> )														
<b>Pattern</b>														
Channel Beltwidth (ft)	N/A	N/A	25	35										
Radius of Curvature (ft)	N/A	N/A	14	20										
Rc:Bankfull Width (ft/ft)	N/A	N/A	2	3										
Meander Wave Length (ft)	N/A	N/A	53	82										
Meander Width Ratio	N/A	N/A	4	5										
<b>Additional Reach Parameters</b>														
Rosgen Classification	C		E		C/E		C/E							
Channel Thalweg Length (ft)	201		414		615		615							
Sinuosity (ft)	1.1		1.2		1.2		1.2							
Water Surface Slope (ft/ft)	0.0296		0.0089		0.0162		0.0159							
Bankfull Slope (ft/ft)	0.0294		0.0091		0.0160		0.0159							
Ri%/Ru%/P%/G%/S%														
SC%/Sa%/G%/C%/B%/Be%														
d16/d35/d50/d84/d95/d100	N/A		N/A		N/A		N/A							
% of Reach with Eroding Banks					0%		0%							

N/A: Not Applicable

Longitudinal Profile Plots  
Lyle Creek Mitigation Site (EEP Project No. 94643)  
UT1A  
Monitoring Year 2

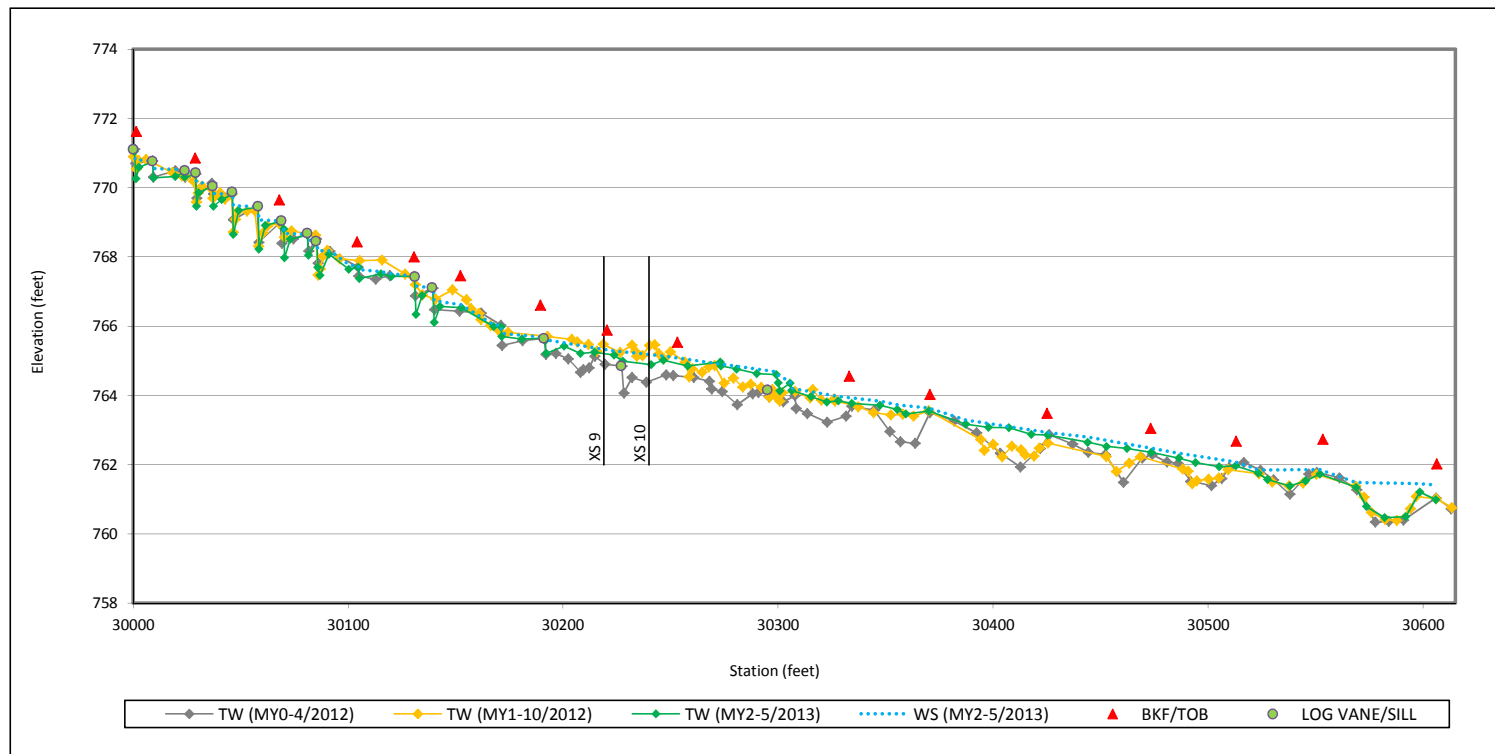

Cross-Section Plots

Lyle Creek Mitigation Site (EEP Project No. 94643)

UT1A

Monitoring Year 2

River Basin	Catawba 03050101
Watershed	NCDWQ Subbasin 03-08-32
XS ID	XS9 (Riffle)
Drainage Area	56 Acres
Date	05/2013
Field Crew	Wildlands IJE, AKT


Summary Data	
Bankfull Elevation (ft)	765.8
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	0.8
Bankfull Width (ft)	2.1
Flood Prone Area Elevation (ft)	766.2
Flood Prone Width (ft)	27.0
Max Depth at Bankfull (ft)	0.6
Mean Depth at Bankfull (ft)	0.4
W/D Ratio	5.2
Entrenchment Ratio	2.2+
Bank Height Ratio	1.2
Stream Type	E



Cross-Section 9: View Upstream



Cross-Section 9: View Downstream

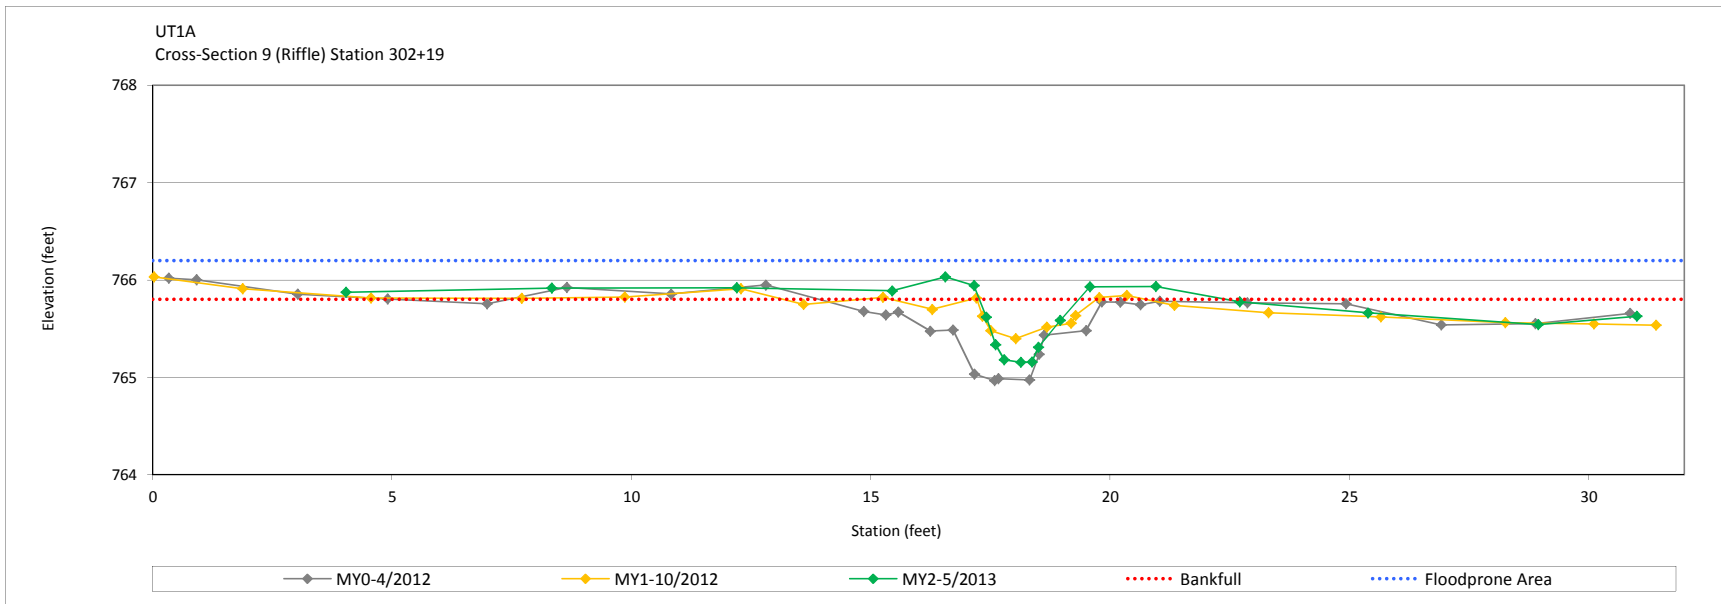

Cross-Section Plots

Lyle Creek Mitigation Site (EEP Project No. 94643)

UT1A

Monitoring Year 2

River Basin	Catawba 03050101
Watershed	NCDWQ Subbasin 03-08-32
XS ID	XS10 (Pool)
Drainage Area	56 Acres
Date	05/2013
Field Crew	Wildlands IJE, AKT

Summary Data	
Bankfull Elevation (ft)	765.5
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	1.0
Bankfull Width (ft)	2.8
Flood Prone Area Elevation (ft)	N/A
Flood Prone Width (ft)	N/A
Max Depth at Bankfull (ft)	0.6
Mean Depth at Bankfull (ft)	0.3
W/D Ratio	8.1
Entrenchment Ratio	N/A
Bank Height Ratio	N/A
Stream Type	N/A



Cross-Section 10: View Upstream



Cross-Section 10: View Downstream

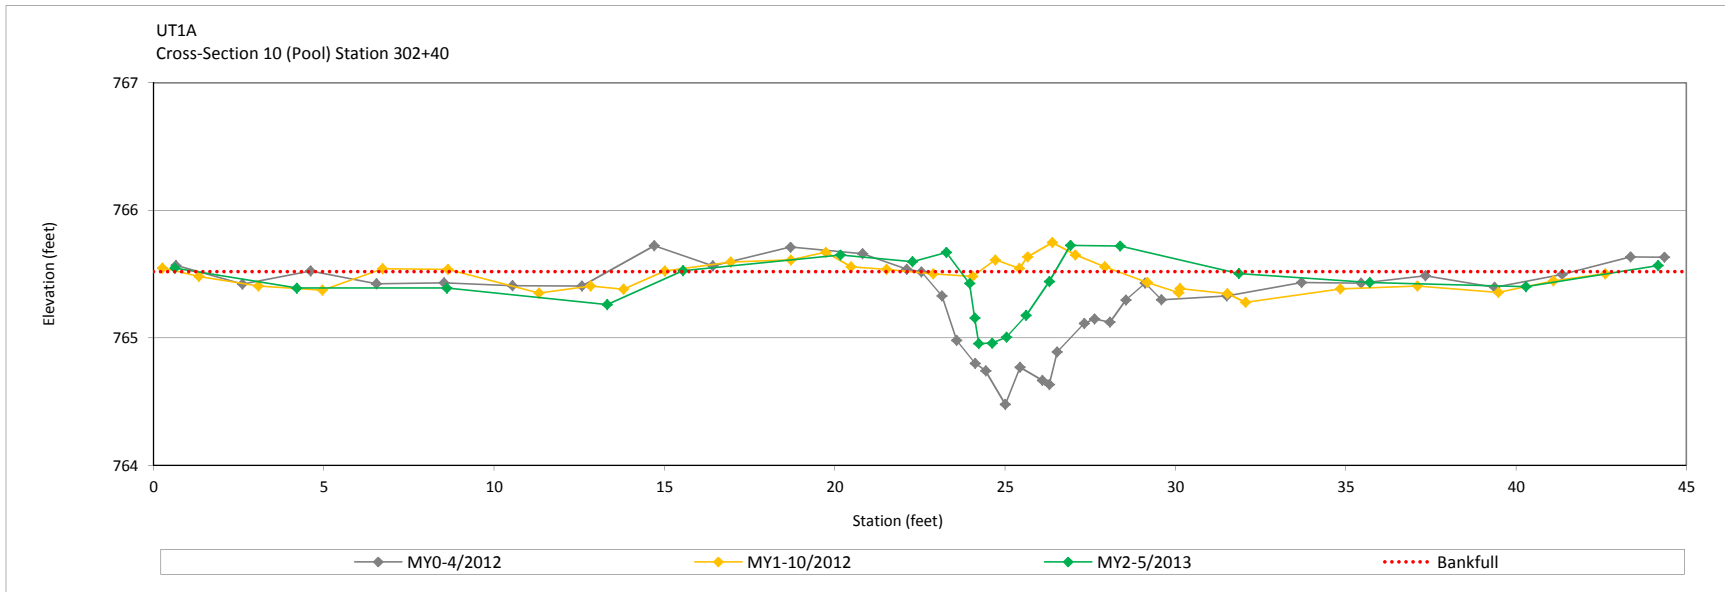


Table 12e. Monitoring Data - Stream Reach Data Summary  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1B  
 Monitoring Year 2

Parameter	As-Built/Baseline						MY-1		MY-2		MY-3		MY-4		MY-5	
	UT1B 200+00 to 203+20		UT1B 203+21 to 207+18		UT1B 207+18 to 209+97		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
	Min	Max	Min	Max	Min	Max										
<b>Dimension and Substrate - Riffle</b>																
Bankfull Width (ft)			4.5				6.1		5.7							
Floodprone Width (ft)			67.3				66.5		64.2							
Bankfull Mean Depth			0.5				0.5		0.4							
Bankfull Max Depth			1.0				1.1		1.0							
Bankfull Cross-sectional Area (ft <sup>2</sup> )			2.2				2.8		2.3							
Width/Depth Ratio			9.0				13.3		13.7							
Entrenchment Ratio			2.2+				2.2+		2.2+							
Bank Height Ratio			1.0				1.0		1.0							
D50 (mm)																
<b>Profile</b>																
Riffle Length (ft)	19	31	15	22	10	20	15	35	9	40						
Riffle Slope (ft/ft)	0.0224	0.0593	0.0072	0.0323	0.0032	0.0217	0.0048	0.0589	0.0020	0.0340						
Pool Length (ft)	23	40	17	41	28	42	11	44	14	55						
Pool Max Depth (ft)	1.2	2.1	1.3	2.4	1.9	2.2	0.4	1.5	0.1	1.5						
Pool Spacing (ft)	43	71	34	61	46	66	28	77	32	79						
Pool Volume (ft <sup>3</sup> )																
<b>Pattern</b>																
Channel Beltwidth (ft)	35	39	23	39	29	41										
Radius of Curvature (ft)	19	27	16	26	19	26										
Rc:Bankfull Width (ft/ft)	2	3	2	3	2	3										
Meander Wave Length (ft)	83	106	78	86	79	90										
Meander Width Ratio	4	5	3	5	4	5										
<b>Additional Reach Parameters</b>																
Rosgen Classification			E				C/E		C/E							
Channel Thalweg Length (ft)	320		398		279		997		997							
Sinuosity (ft)	1.1		1.2		1.2		1.2		1.2							
Water Surface Slope (ft/ft)	0.0187		0.0080		0.0039		0.0085		0.0086							
Bankfull Slope (ft/ft)	0.0190		0.0079		0.0039		0.0081		0.0083							
Ri%/Ru%/P%/G%/S%																
SC%/Sa%/G%/C%/B%/Be%																
d16/d35/d50/d84/d95/d100			N/A				N/A		N/A							
% of Reach with Eroding Banks							0%		0%							

(-): Data was not provided

N/A: Not Applicable

Longitudinal Profile Plots  
Lyle Creek Mitigation Site (EEP Project No. 94643)  
UT1B  
Monitoring Year 2



Cross-Section Plots

Lyle Creek Mitigation Site (EEP Project No. 94643)

UT1B

Monitoring Year 2

River Basin	Catawba 03050101
Watershed	NCDWQ Subbasin 03-08-32
XS ID	XS11 (Riffle)
Drainage Area	78 Acres
Date	05/2013
Field Crew	Wildlands IJE, AKT


Summary Data	
Bankfull Elevation (ft)	764.0
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	2.3
Bankfull Width (ft)	5.7
Flood Prone Area Elevation (ft)	765.1
Flood Prone Width (ft)	64.2
Max Depth at Bankfull (ft)	1.0
Mean Depth at Bankfull (ft)	0.4
W/D Ratio	13.7
Entrenchment Ratio	2.2+
Bank Height Ratio	1.0
Stream Type	C/E



Cross-Section 11: View Upstream



Cross-Section 11: View Downstream

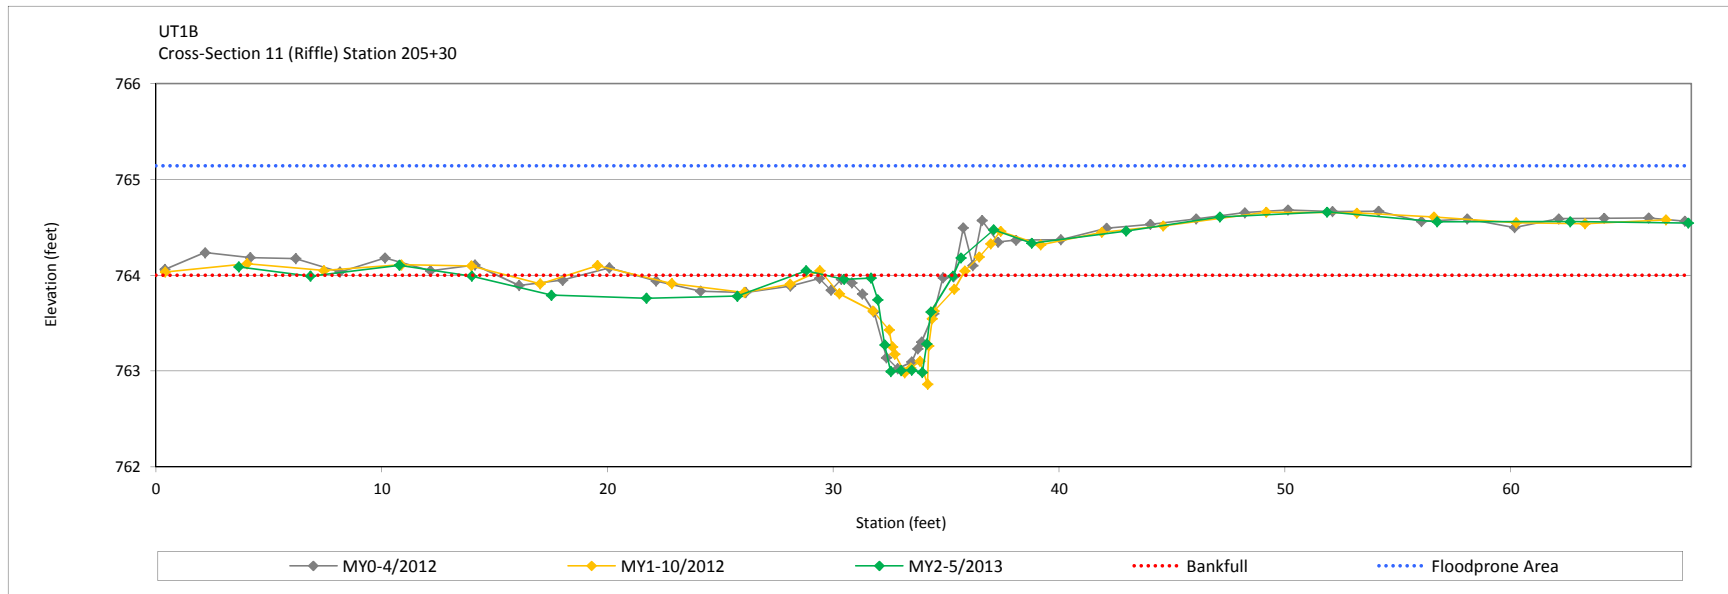



Cross-Section Plots

Lyle Creek Mitigation Site (EEP Project No. 94643)

UT1B

Monitoring Year 2

River Basin	Catawba 03050101
Watershed	NCDWQ Subbasin 03-08-32
XS ID	XS12 (Pool)
Drainage Area	78 Acres
Date	05/2013
Field Crew	Wildlands IJE, AKT


Summary Data	
Bankfull Elevation (ft)	763.5
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	3.1
Bankfull Width (ft)	8.8
Flood Prone Area Elevation (ft)	N/A
Flood Prone Width (ft)	N/A
Max Depth at Bankfull (ft)	0.7
Mean Depth at Bankfull (ft)	0.4
W/D Ratio	25.1
Entrenchment Ratio	N/A
Bank Height Ratio	N/A
Stream Type	N/A



Cross-Section 11: View Upstream



Cross-Section 11: View Downstream

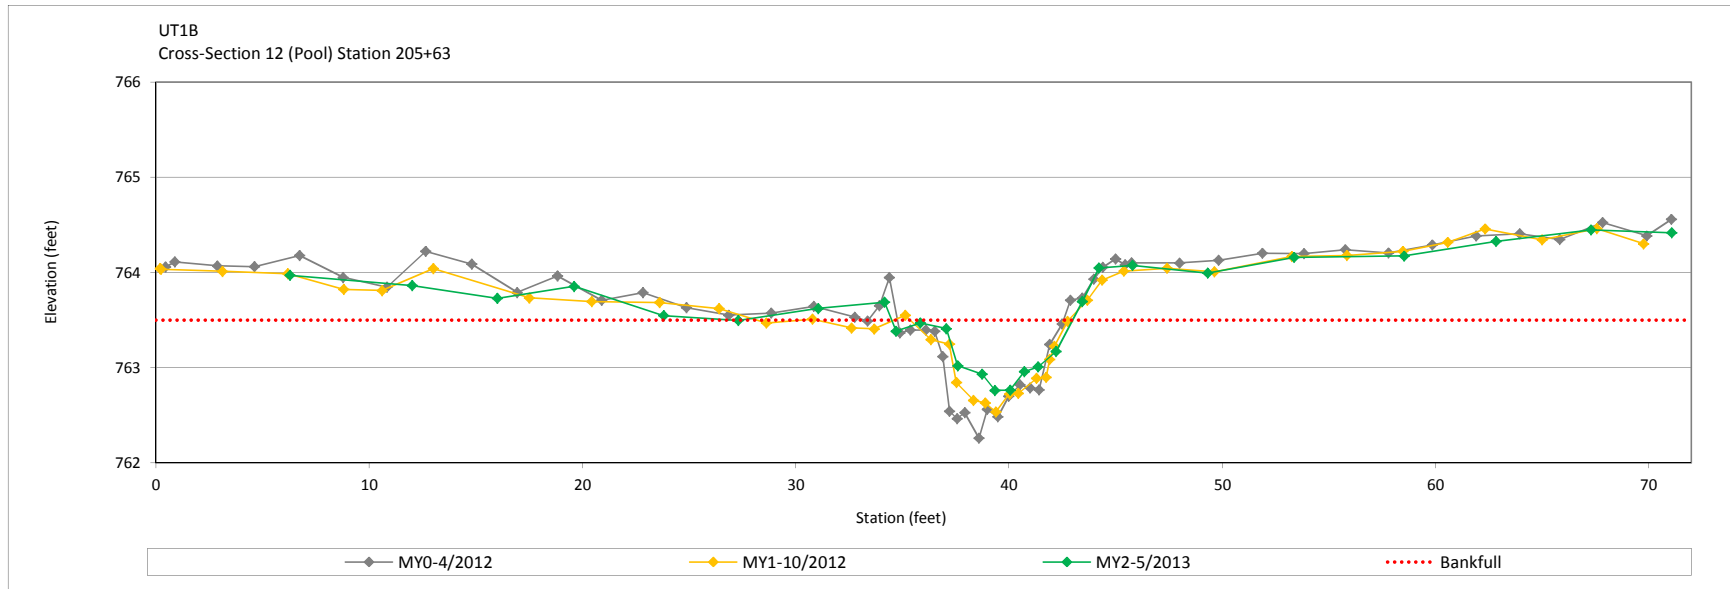

## **APPENDIX 5. Hydrology Summary Data and Plots**

Table 13. Verification of Bankfull Events  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 UT1, UT1A, and UT1B  
 Monitoring Year 2

Reach	Date of Data Collection	Date of Occurrence	Method
UT1	10/31/2013	U	Crest Gage
UT1A	3/7/2013	U	Crest Gage
UT1B	10/31/2013	U	Crest Gage


u: unknown

Table 14. Wetland Gage Attainment Summary  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 Wetlands RW1 and RW2  
 Monitoring Year 2


Summary of Groundwater Gage Results for Years 1 through 7							
Gage	Success Criteria Achieved/Max Consecutive Days During Growing Season (Percentage)						
	Year 1 (2012)	Year 2 (2013)	Year 3 (2014)	Year 4 (2015)	Year 5 (2016)	Year 6 (2017)	Year 7 (2018)
1	No/5 Days (2.5 %)	Yes/49 Days (24 %)					
2	No/0 Days (0 %)	Yes/93 Days (46 %)					
3	Yes/29 Days (14 %)	Yes/49 Days (24 %)					
4	Yes/27 Days (13 %)	Yes/54.5 Days (27 %)					
5	No/11 Days (5 %)	Yes/41.5 Days (20.3 %)					
6	No/5 Days (2.5 %)	Yes/16 Days (7.8 %)					
7	Yes/22 Days (11 %)	Yes/179 Days (88 %)					
8	No/12 Days (6 %)	Yes/53 Days (26 %)					
10	N/A	Yes/180 Days (88 %)					
11	N/A	Yes/80 Days (39 %)					

N/A: gages were installed after MY1


Groundwater Gage Plots  
Lyle Creek Mitigation Site (EEP Project No. 94643)  
Wetland Number: RW1  
Monitoring Year 2

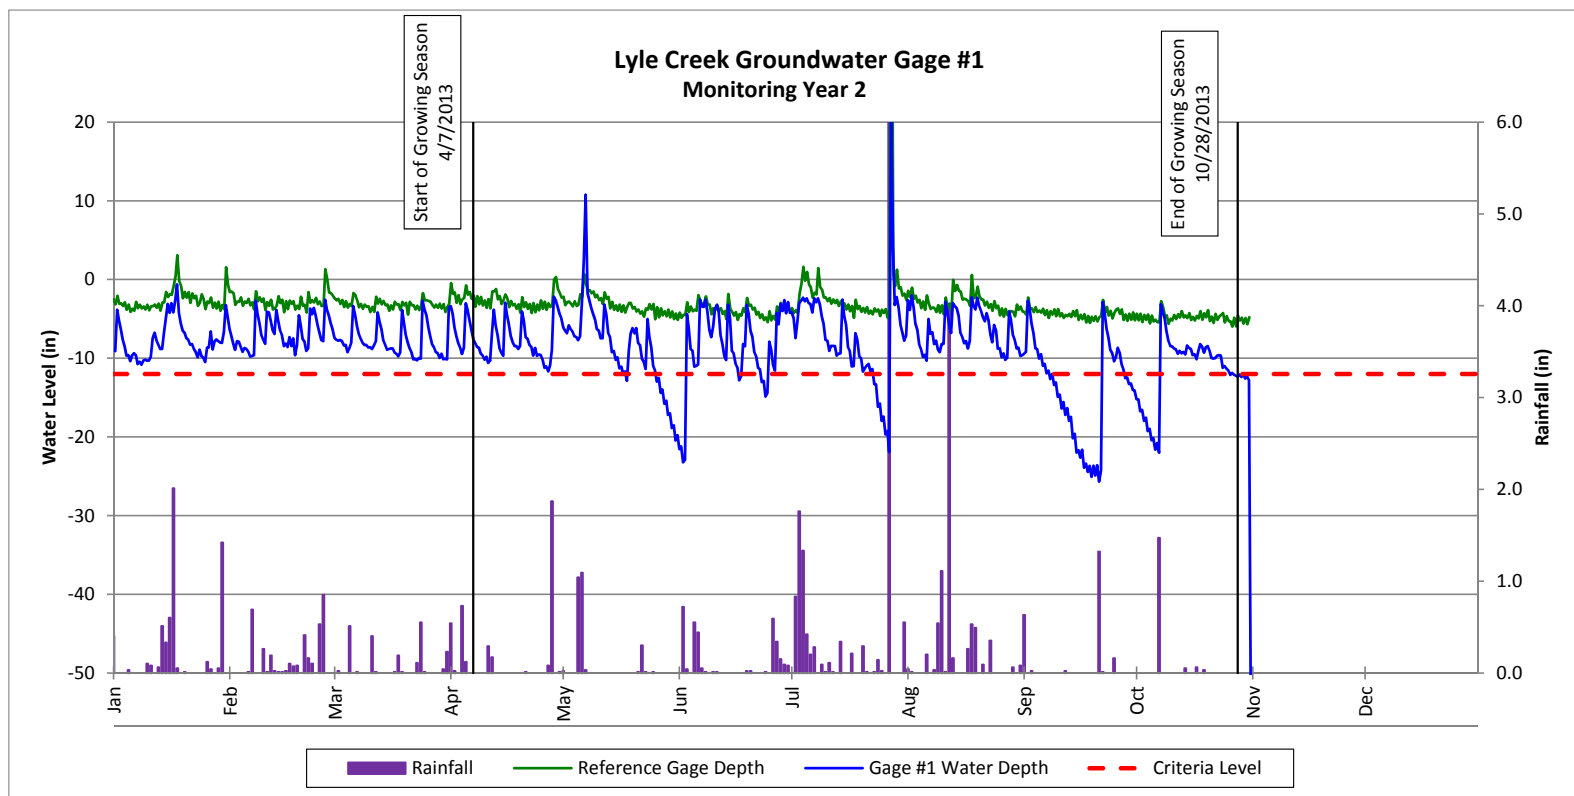


Groundwater Gage Plots  
Lyle Creek Mitigation Site (EEP Project No. 94643)  
Wetland Number: RW1  
Monitoring Year 2

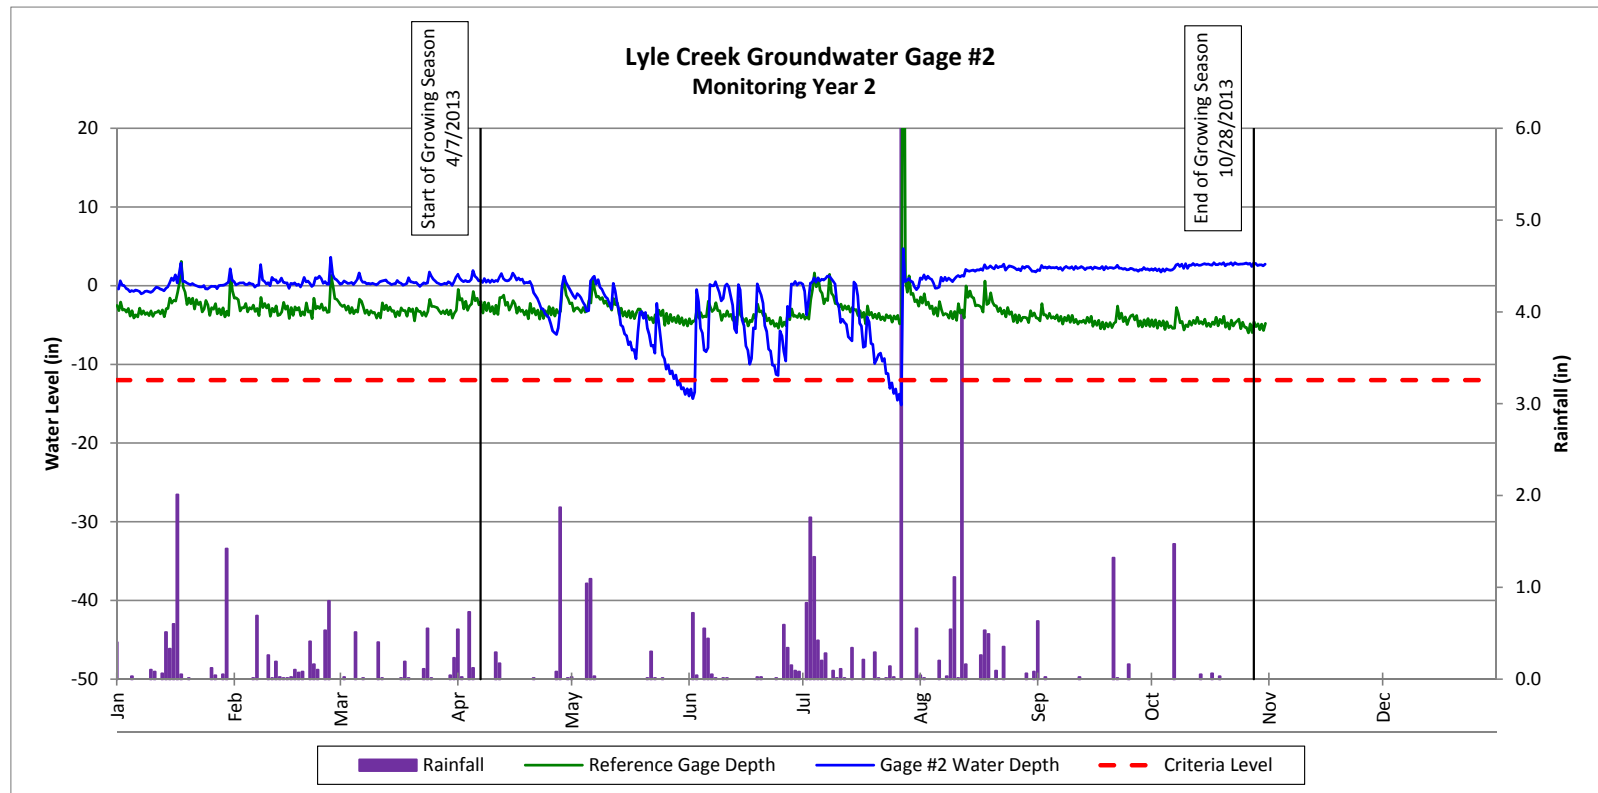


Groundwater Gage Plots  
Lyle Creek Mitigation Site(EEP Project No. 94643)  
Wetland Number: RW1  
Monitoring Year 2

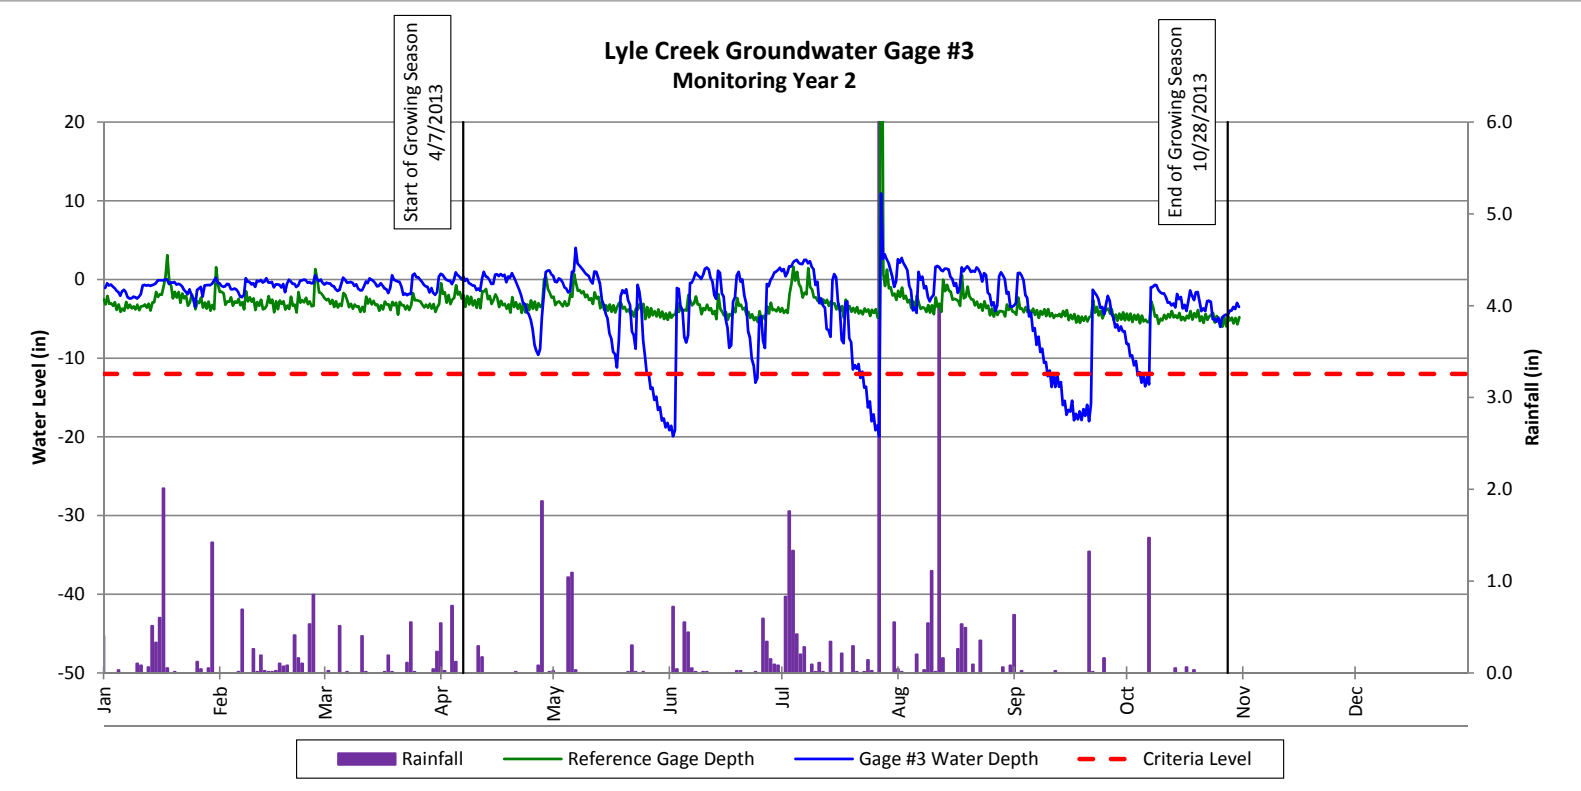

Groundwater Gage Plots  
Lyle Creek Mitigation Site(EEP Project No. 94643)  
Wetland Number: RW1  
Monitoring Year 2

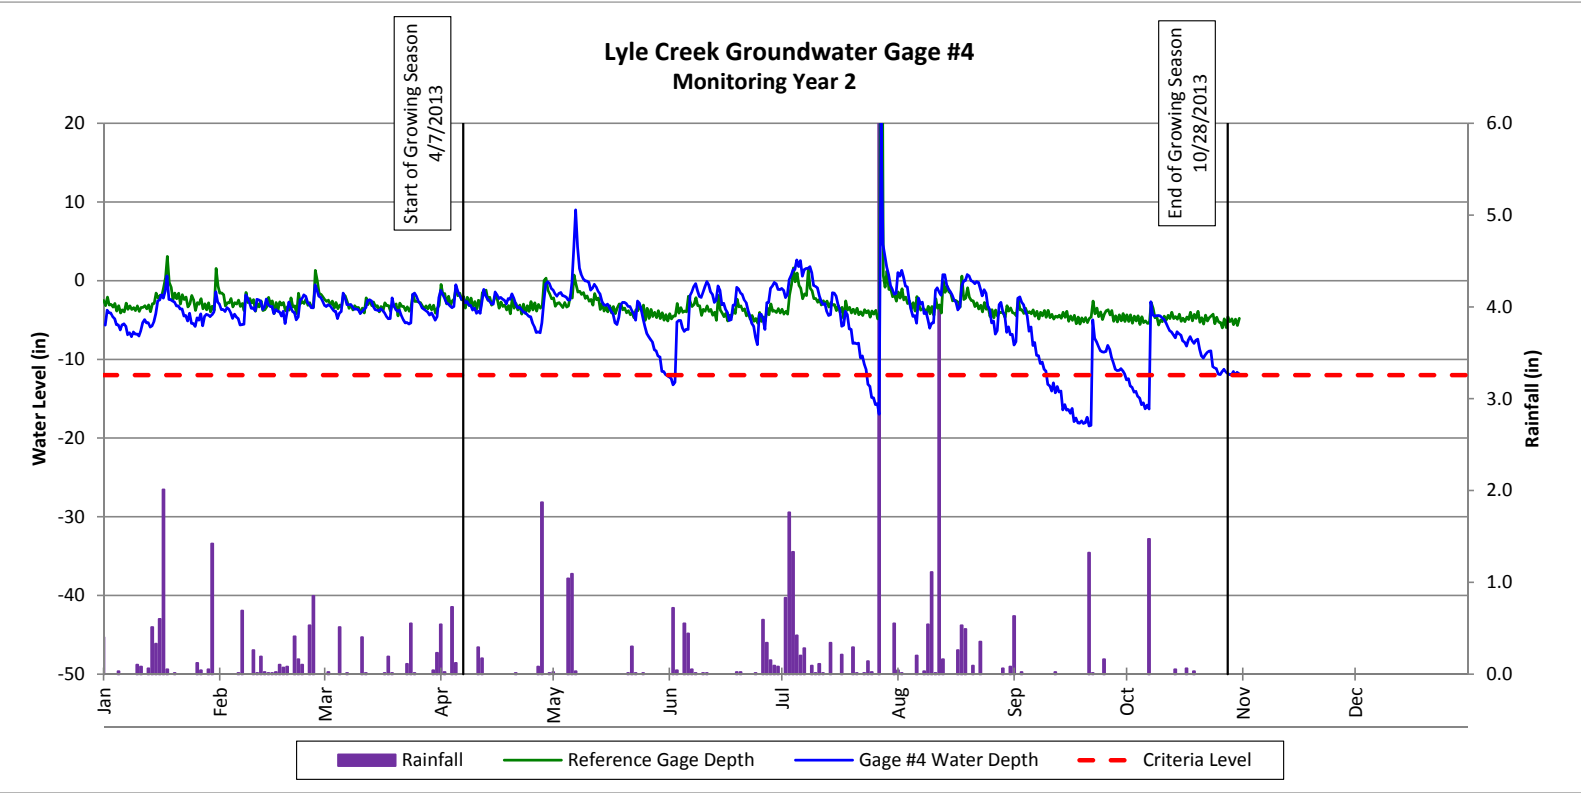


Groundwater Gage Plots  
Lyle Creek Mitigation Site(EEP Project No. 94643)  
Wetland Number: RW1  
Monitoring Year 2

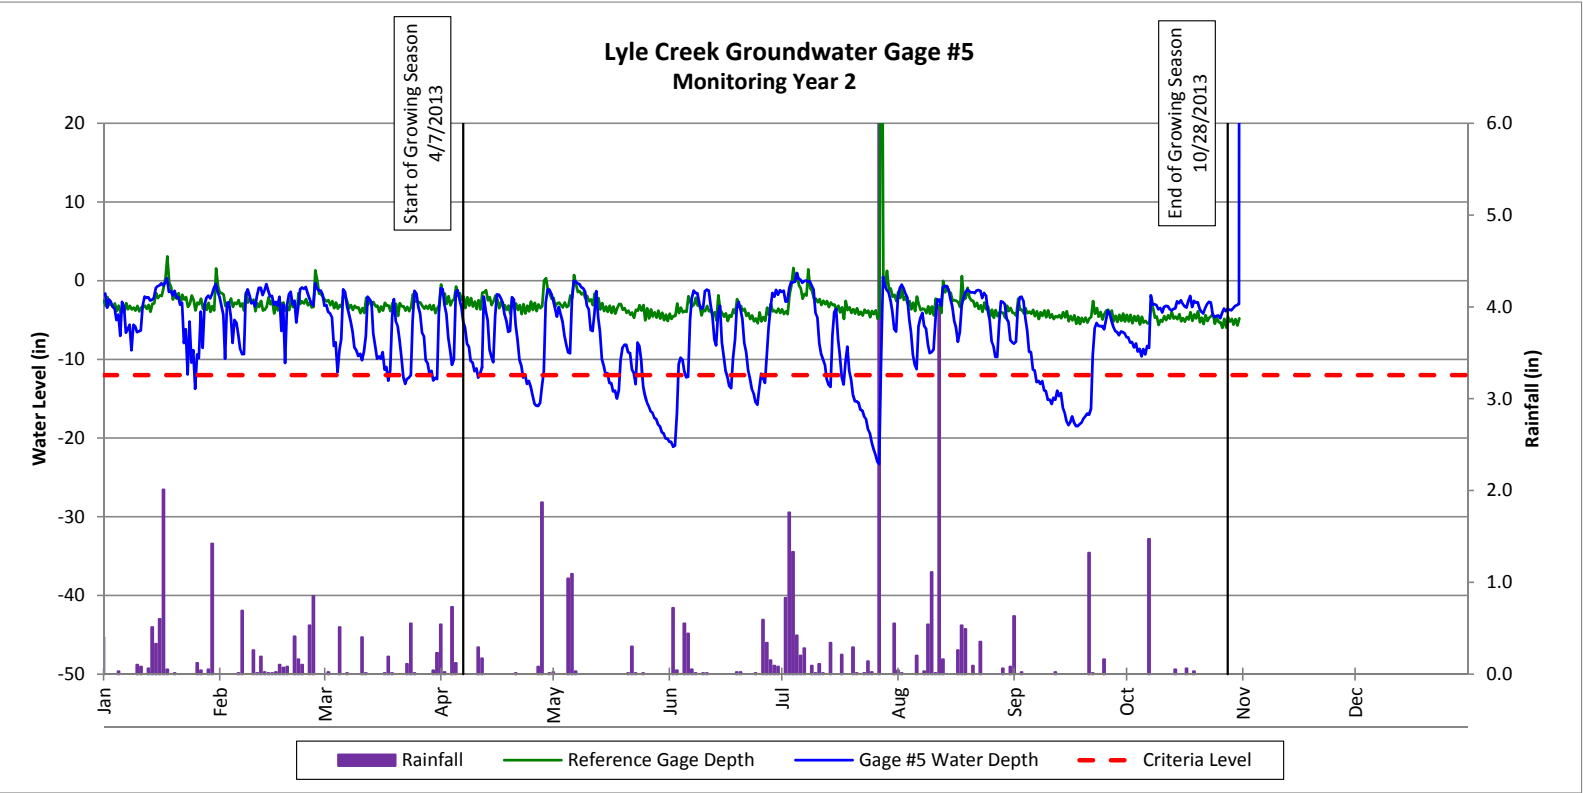





Groundwater Gage Plots  
Lyle Creek Mitigation Site(EEP Project No. 94643)  
Wetland Number: RW2  
Monitoring Year 2

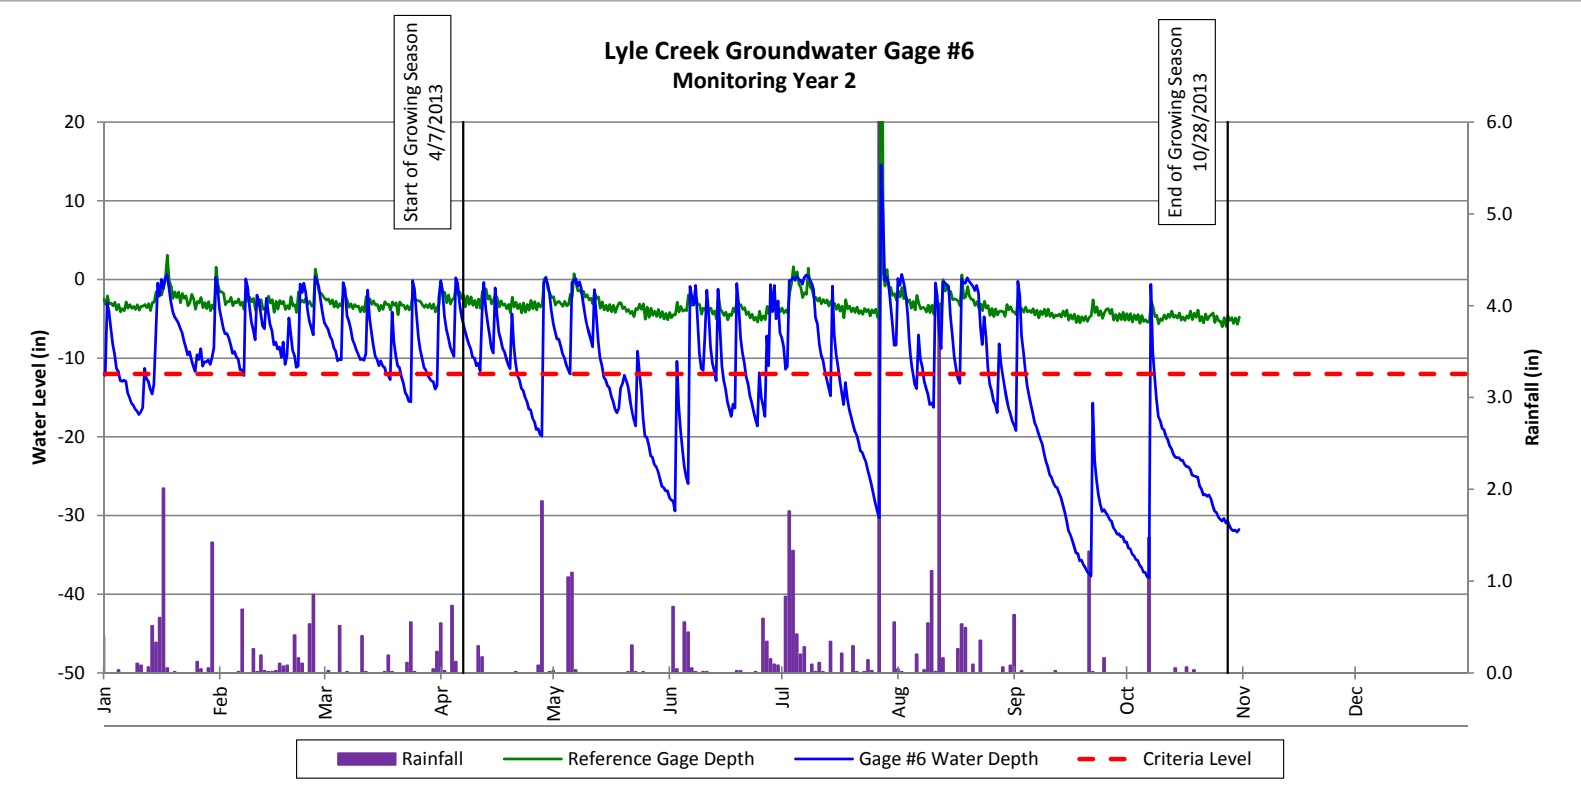


Groundwater Gage Plots  
Lyle Creek Mitigation Site (EEP Project No. 94643)  
Wetland Number: RW2  
Monitoring Year 2

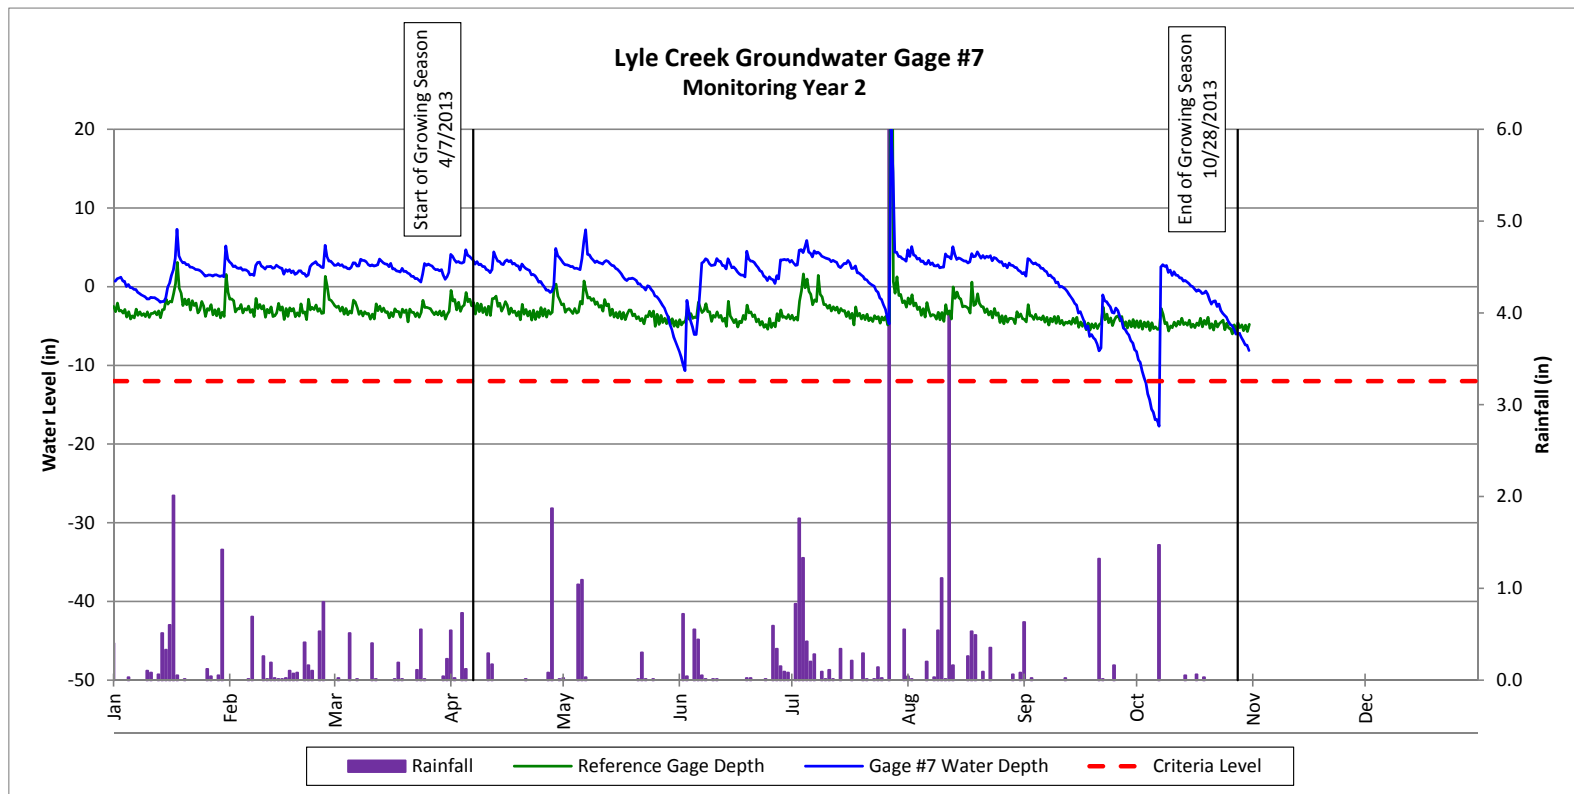


Groundwater Gage Plots  
Lyle Creek Mitigation Site(EEP Project No. 94643)  
Wetland Number: RW2  
Monitoring Year 2

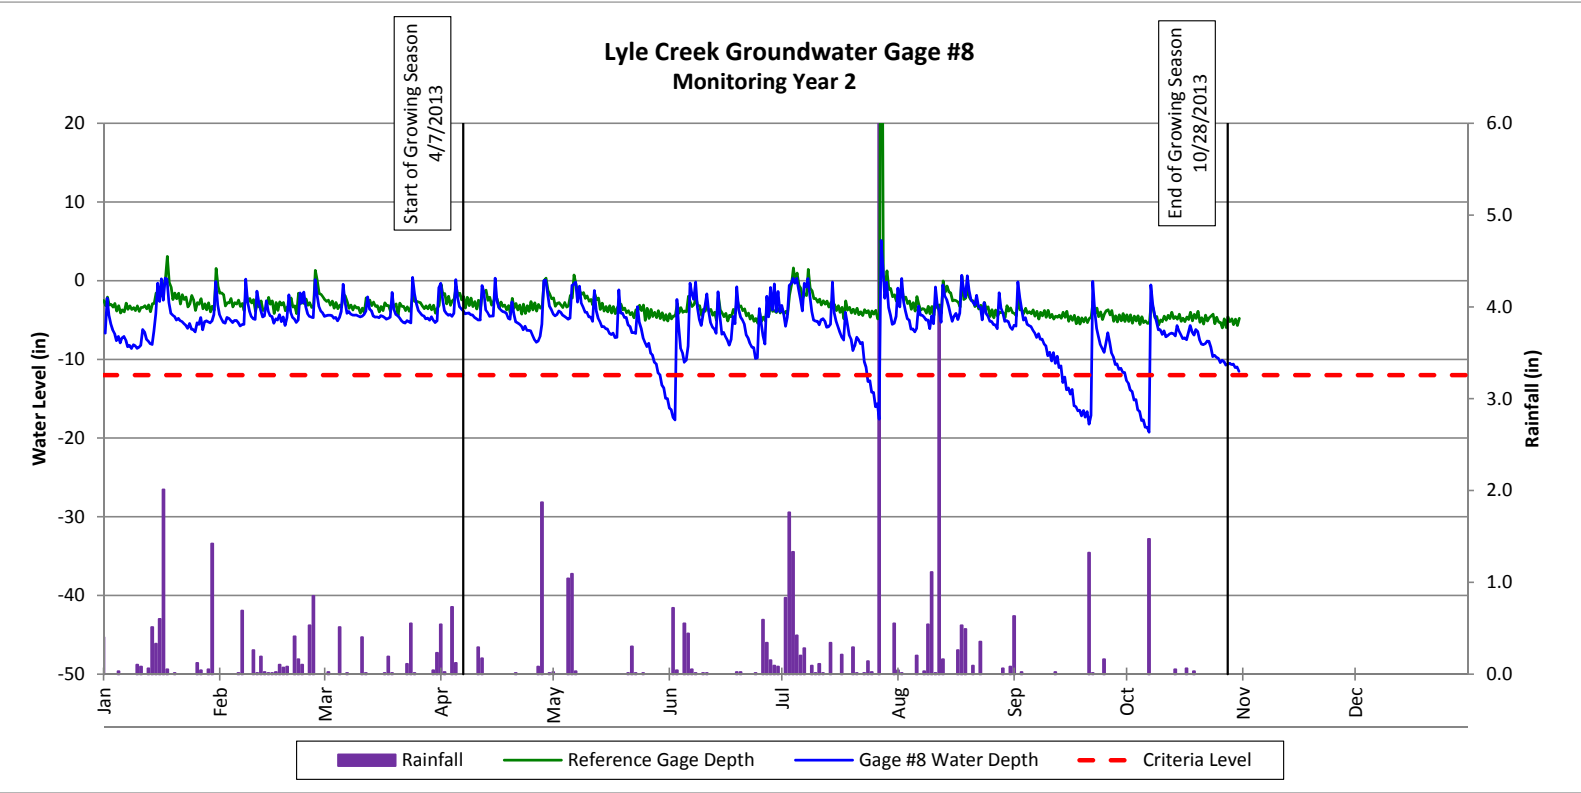


Groundwater Gage Plots  
Lyle Creek Mitigation Site (EEP Project No. 94643)  
Wetland Number: RW2  
Monitoring Year 2

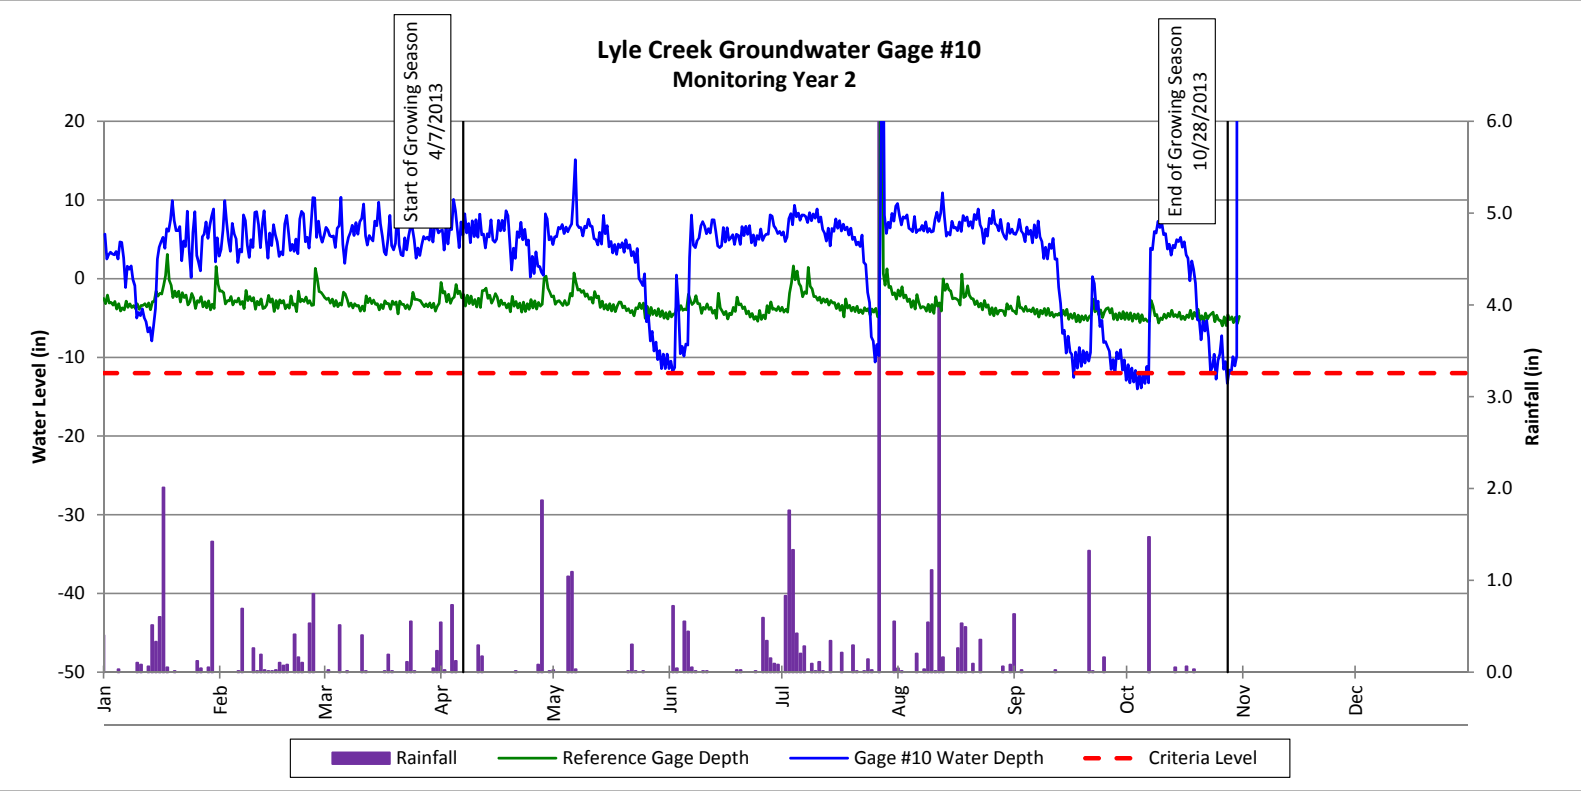

Groundwater Gage Plots  
Lyle Creek Mitigation Site(EEP Project No. 94643)  
Wetland Number: RW1  
Monitoring Year 2

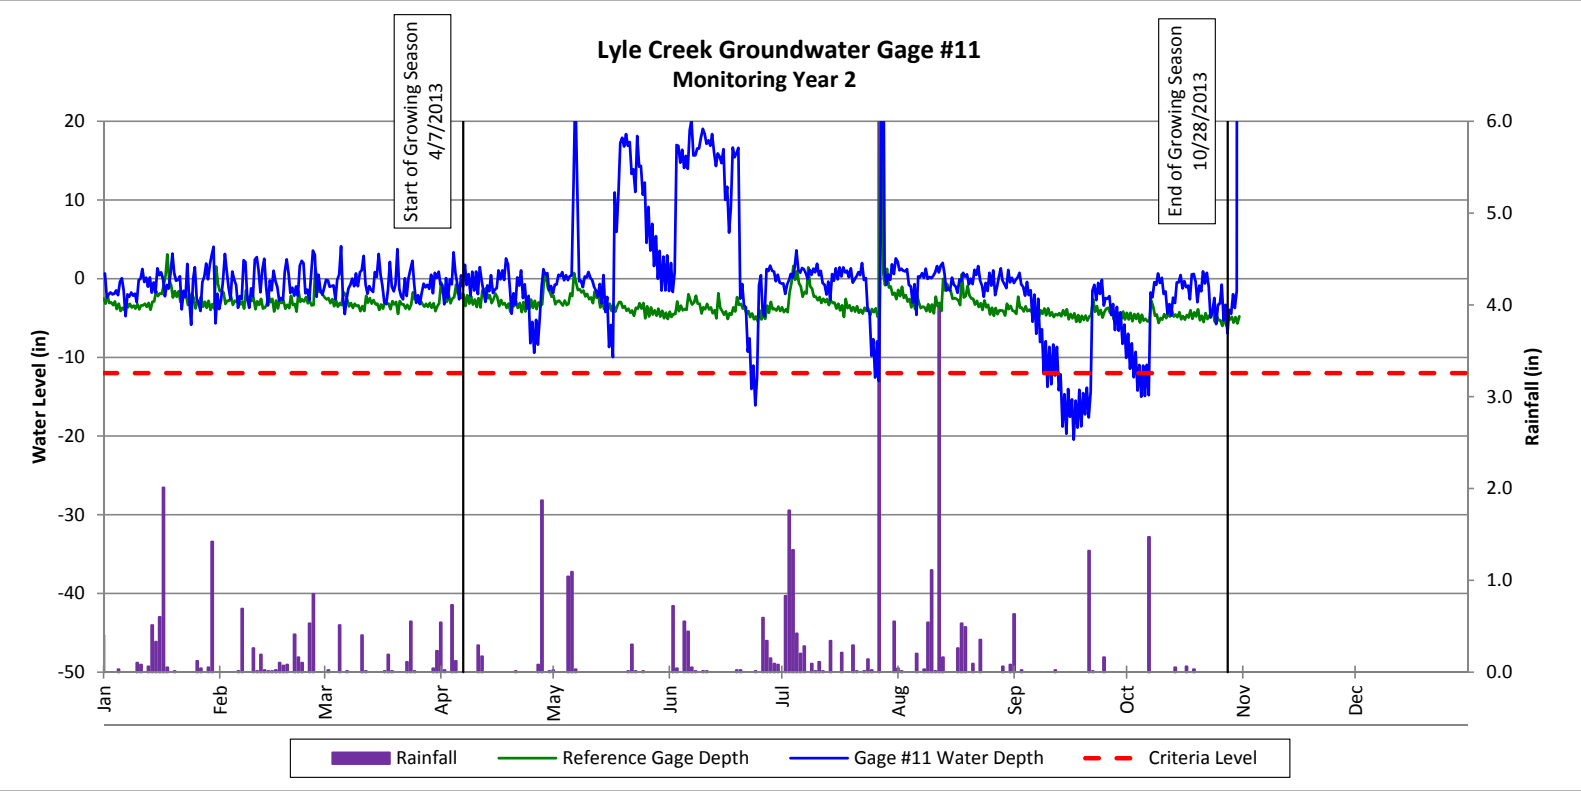

Monthly Rainfall Data  
 Lyle Creek Mitigation Site (EEP Project No. 94643)  
 Monitoring Year 2

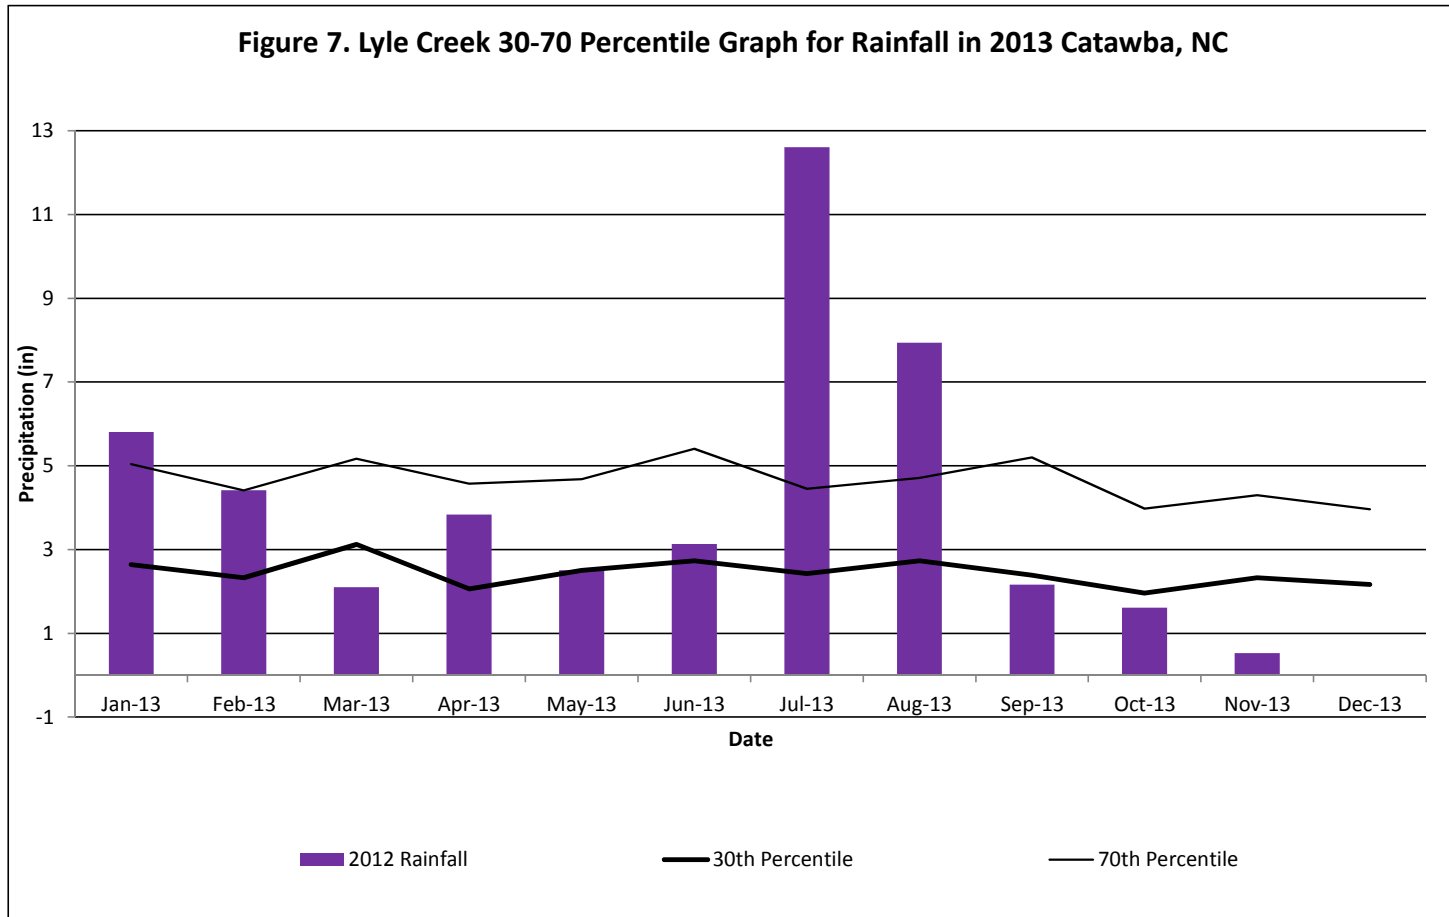

<sup>1</sup> 2013 rainfall collected by onsite rainfall gage from 1/1/2013 to 6/24/2013. 6/25/2013 to 12/31/2013 rainfall data was collected from USGS station 354616081085145

<sup>2</sup> 30th and 70th percentile rainfall data collected from weather station Catawba 3 NNW, NC1579 (USDA, 2002)