

**Meadowbranch Swamp Wetland Restoration
2012 Final Monitoring Report
Monitoring Year One**

**Ecosystem Enhancement Program Project Number 92351
Ecosystem Enhancement Program Contract Number 004800**



Submitted to: NCDENR-Ecosystem Enhancement Program
1652 Mail Service Center
Raleigh, NC 27699-1652

Project Designed by: EcoEngineering – A Division of the John R. McAdams Co.
2905 Meridian Parkway
Durham, NC 27713
Construction Complete: February 2011

Submitted: January 2, 2013



**Meadowbranch Swamp Wetland Restoration
2012 Final Monitoring Report
Monitoring Year One**

**Ecosystem Enhancement Program Project Number 92351
Ecosystem Enhancement Program Contract Number 004800**



Prepared by:

URS Corporation – North Carolina
1600 Perimeter Park Drive, Suite 400
Morrisville, NC 27560

Project Manager:

Kathleen McKeithan
kathleen.mckeithan@urs.com
919-461-1597

Submitted: January 2, 2013

Table of Contents

1.0	Executive Summary/Project Abstract	1
2.0	Methodology	3
3.0	References.....	5

List of Tables

Table 1a: Project Restoration Components.....	9
Table 1b: Project Restoration Components	10
Table 2: Project Activity and Reporting History	11
Table 3: Project Contacts Table	12
Table 4: Project Baseline Information and Attributes.....	13
Table 5: Vegetation Condition Assessment Table	18
Table 6: Vegetation Plot Mitigation Success Summary Table	22
Table 7: CVS Vegetation Metadata Table	23
Table 8: CVS Stem Count Total and Planted by Plot and Species	24
Table 9: Stem Count Total by Random Transect Plot	25
Table 10: Verification of Bankfull Events	27
Table 11: Wetland Hydrology Criteria Attainment	36

List of Figures

Figure 1: Vicinity Map and Directions	8
Figure 2: Current Condition Plan View (CCPV)	15
Figure 2a: Current Condition Plan View (CCPV)	16
Figure 2b: Current Condition Plan View (CCPV)	17
Figure 3: USGS Proximal Gauge Lumber River at Lumberton, NC	28
Figure 4: Meadowbranch Swamp Canal 30-70 Percentile Graph for Rainfall in 2012, Lumberton, NC ..	28
Figure 5: Monitoring Gauge 1	29
Figure 6: Monitoring Gauge 2	29
Figure 7: Monitoring Gauge 3	30
Figure 8: Monitoring Gauge 4	30
Figure 9: Monitoring Gauge 5	31
Figure 10: Monitoring Gauge 6	31
Figure 11: Monitoring Gauge 7	32
Figure 12: Monitoring Gauge 8	32
Figure 13: Monitoring Gauge 9	33
Figure 14: Monitoring Gauge 10 – Reference Gauge.....	33
Figure 15: Monitoring Gauge 11	34
Figure 16: Monitoring Gauge 12	34
Figure 17: Monitoring Gauge 13	35

List of Appendices

Appendix A: Project Vicinity Map and Background Tables	7
Appendix B: Visual Assessment Data	14
Appendix C: Vegetation Plot Data.....	21
Appendix D: Hydrologic Data	26

1.0 EXECUTIVE SUMMARY/PROJECT ABSTRACT

The goal of this project was to restore, enhance, and preserve the project area. The project created low areas in an access road adjacent to the Meadowbranch Canal based on flood elevations, removed a former logging road, and planted native wetland vegetation in select areas. According to the Restoration Plan (The John R. McAdams Company, Inc, 2007) and the Baseline Monitoring Report (EcoEngineering, 2011), the intent of this project was to return the site to a more natural hydrologic state to accomplish the following objectives:

- Store and treat runoff from 1.8 square miles of developed land, nearly half of Lumberton, which drains to the project site.
- Allow for retention and treatment of sediment, nutrients, and toxins to improve water quality of the Lumber River which is listed as impaired approximately six miles downstream of the project site.
- Support the goals outlined in the 2003 Lumber River Basinwide Water Quality Plan by implementing a project within a watershed that has been identified by the NC Wetlands Restoration Program (NCWRP) as having the greatest need.
- Assist in the improvement of water quality; the Basinwide Water Quality Plan indicates 406 miles of waters within Subbasin 03-07-51 are impaired.
- Provide a more natural flood regime and flood storage for waters in Meadowbranch Swamp.
- Connect to surrounding wetland areas and enhance the wildlife habitat present in the wetland.

The project site is approximately one-half mile west-northwest of Lumberton, in Robeson County, North Carolina. The site consists of a wooded parcel owned by the Lumber River Conservancy which encompasses approximately 55.4 acres. The site is located along Carthage Road which bounds the site to the south. Located immediately adjacent to the west of the site is a channelized water feature known as Meadowbranch Swamp Canal. There is an access road, which is maintained by the City of Lumberton, along Meadowbranch Swamp Canal which extends north from Carthage Road to NC 211. In addition, there was a former logging road located within the interior of the site which began approximately 100 feet from Meadowbranch Swamp Canal. The former logging road began at Carthage Road and extended north, roughly paralleling Meadowbranch Swamp Canal for a distance of approximately 2,000 feet. Along the eastern edge of the former logging road was a ditch feature.

The site is located in the Inner Coastal Plain Physiographic Region of North Carolina and lies within US Geological Survey (USGS) Hydrologic Unit Code 03040203 080010 (NCDENR, 2003), which falls within the Lumber River Basin. The NC Division of Water Quality (NCDWQ) River Subbasin for the project area is listed as the Lumber 03-07-51 (NCDENR, 2003). The current state classification (NCDENR, 2006) for Meadowbranch Swamp (Stream Index # 14-12) from its source to the Lumber River, is C; Sw (swamp waters). Class C waters support aquatic life, wildlife, and they can also be used for secondary recreation and agriculture. The Sw classification is intended for waters which have low velocities and other natural characteristics different from adjacent streams.

The project site is almost entirely forested primarily with young hardwoods and some areas of young pine. This is due to the fact that the site was logged approximately 15 years ago. Due to the timing of the logging, the site is currently at a stage of succession where the vegetation is very dense. Currently, there are a few small areas near the access road along Meadowbranch Swamp that still have stands of relatively older growth bald cypress (*Taxodium distichum*) and would be designated as Cypress-Gum Swamp. Other larger areas have some young bald cypress, but the areas are more dominated by red maple (*Acer rubrum*) and river birch (*Betula nigra*). Aside from the few areas of Cypress-Gum Swamp on the site, the remainder of the area could best be described as a disturbed site undergoing succession to a Coastal Plain Bottomland Hardwood (based on reference wetland conditions). In general, the majority of the site appears to have characteristics of a Coastal Plain Bottomland Hardwood forest. However, some portions of the site contained large concentrations of Chinese privet (*Ligustrum sinense*) which have been removed and treated. These areas have been replanted with native vegetation.

Year 1 field investigations took place on November 16, 2012. All vegetation plots were found to be in good condition and all are meeting vegetative success criteria.

Two random transects were inventoried within the Chinese privet removal areas. Both transects contained large amounts of Chinese privet and very little else. It was difficult to distinguish between naturally regenerating native stems and planted native stems; however, the dominant shrub stratum in both transects was Chinese privet. There are some larger native canopy trees in the area, but native species were observed in very small numbers in the shrub and sapling stratum. The percentage of Chinese privet in the two random transects was 92 percent and 94 percent, respectively. These results are presented in Table 9 of Appendix C.

Overall, the site is in good condition, with the exception of the presence of Chinese privet. Chinese privet was observed scattered along the entirety of the canal road. It appeared to be most problematic within the transect areas leading to the groundwater gauges. This could be due to the clearing that took place in the transect areas. The northern portions of the site support the largest populations. The Chinese privet is particularly abundant between berm cuts 8 and 9 and along the canal road and removal areas. Very large specimens (20-30 feet) were observed in this area.

The growing season is 213 days, and has been set from April 1 to October 30. Criteria established for the site state that groundwater levels must be at or above 12 inches of the ground surface for 10 percent of the growing season, or 21 days. Only one (GG3) of the 13 groundwater gauges installed on-site met the hydrologic success criteria established for the site. One of the 13 gauges (GG10) is a reference gauge, which also did not meet success criteria.

A rain gauge was installed on the site in October of 2006, but does not appear to be functioning properly. Data were downloaded on November 16, 2012 and resulted in readings for two days only. The NC Climate Retrieval and Observations Network of the Southeast (NC CRONOS) database was used to generate rainfall data for the site (NC CRONOS, 2012). Station 315177 – Lumberton was used. This station is less than two miles southeast (downstream) of the site. Normal annual precipitation for the station is 47.9 inches. Rainfall over the past 12 months totaled 43.9 inches, indicating that the past year has been dryer than an average year. The

Drought Monitor of North Carolina (NC Drought Management Advisory Council, 2012) indicates that Robeson County is currently under abnormally dry conditions.

On-site stream gauge data, as well as USGS stream gauge data support the lack of rainfall during the past 12 months. Neither recorded a bankfull event.

Prior erosion was noted at Roadway Cut 1 and Roadway Cut 2. Erosion was evident behind the matting at both sites. It was unclear whether these events had happened prior to the placement of the matting, however, both sites appear to be stable. Photos have been included, but these were not identified as problem areas at this time. These two sites will be monitored for changes during future monitoring events.

Summary information/data related to the occurrence of items such as beaver or encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly Restoration Plan) documents available on EEP's website. All raw data supporting the tables and figures in the appendices is available from EEP upon request.

2.0 METHODOLOGY

Three vegetation plots have been established along the former logging road within the project site. These plots were established according to CVS-EEP Protocol for Recording Vegetation (Lee et. al, v.4.2, 2008) and are 20 meters by five meters in size. During MY1, the corners of each plot were marked with three-foot PVC piping and flagged. The southwest corner of each plot, or plot origin, was flagged with orange and the remaining three corners were flagged with blue. Planted stems were flagged with white.

Version 4.2 of the CVS-EEP Protocol for Recording Vegetation was used to inventory these plots (Level 1-2). Natural regeneration stems were recorded but not flagged. A reference photograph was taken from the origin of each plot, facing across the plot.

Additionally, two random transects, 50 meters by two meters in size were established within the Chinese privet areas and inventoried for stems greater than one meter high. Stem counts included planted stems, volunteers, and invasive species (Chinese privet). Stem species and count were recorded. No stems were flagged within the transects.

Ten automated groundwater gauges, a stream gauge, and a rainfall gauge were installed at the site in October 2006. These gauges were installed in order to monitor the water table at the site during the initial project investigation and design. One of the 10 gauges was placed on the west side of Meadowbranch Swamp Canal in the reference wetland area in order to monitor reference wetland hydrology. Following the completion of construction, three additional automated groundwater gauges (gauges 11 through 13) were placed within the limits of the restored area of the former logging road to measure the groundwater table. All 13 gauges were located and marked with blue and white striped flagging. All 13 gauges are *Ecotone* brand water level monitors that were downloaded using a handheld *Meazura* MEZ1000 data logger. For the

gauges where transects were used to locate them away from the former logging road or maintenance road, pink flagging was used to mark transect lines.

The stream gauge and rainfall gauge are also *Ecotone* brand monitors and were downloaded using the same equipment stated above.

3.0 REFERENCES

EcoEngineering. 2011. Meadowbranch Swamp Wetland Restoration Baseline Monitoring Report. SCO# 06-06731-01, EEP ID# 92351, Robeson County. EcoEngineering, A division of the John R. McAdams Company, Inc. Prepared for NC Ecosystem Enhancement Program. November 14, 2011.

EEP. 2011. Procedural Guidance and Content Requirements for EEP Monitoring Reports. Version 1.4 (11/07/11). NCDENR, NCEEP. 46pp.

Lee, Michael T., Peek, Robert K., Roberts, Steven D., Wentworth, Thomas R. 2008. CVS-EEP Protocol for Recording Vegetation. All Levels of Plot Sampling. Version 4.2. (<http://cvs.bio.unc.edu/protocol/cvs-EEP-protocol-v4.2-lev1-5.pdf>).

NC CRONOS. 2012. NC Climate Retrieval and Observations Network of the Southeast. State Climate Office of North Carolina. Station 315177 – Lumberton. <http://www.nc-climate.ncsu.edu/cronos>.

NCDENR. 2006. Surface Water Classifications. <http://h2o.enr.state.nc.us/csu/swc.html>

NCDENR. 2003. 2003 Lumber River Basinwide Water Quality Plan. Division of Water Quality.

NC Drought Management Advisory Council. 2012. US Drought Monitor of North Carolina. <http://www.ncdrought.org>.


The John R. McAdams Company, Inc. 2007. Meadowbranch Swamp Wetland Restoration Restoration Plan. USGS HUC 03040203, Robeson County, North Carolina. Prepared for NC Ecosystem Enhancement Program. June 18, 2007.

USGS. 2012. Lumber River at Lumberton, NC streamflow gauge. USGS Real-Time Water Data. Gauge 02134170. <http://waterdata.usgs.gov>.

Appendices for Project Background, Condition and Performance Data

Appendix A: Project Vicinity Map and Background Tables

Directions to the Site:
 From I-95 South, take exit 19 for Carthage Road. Turn right onto West Carthage Road. Just before the guardrail, there is a pull off on the right side of the road with a metal gate. The gate opens onto the access road for the site.

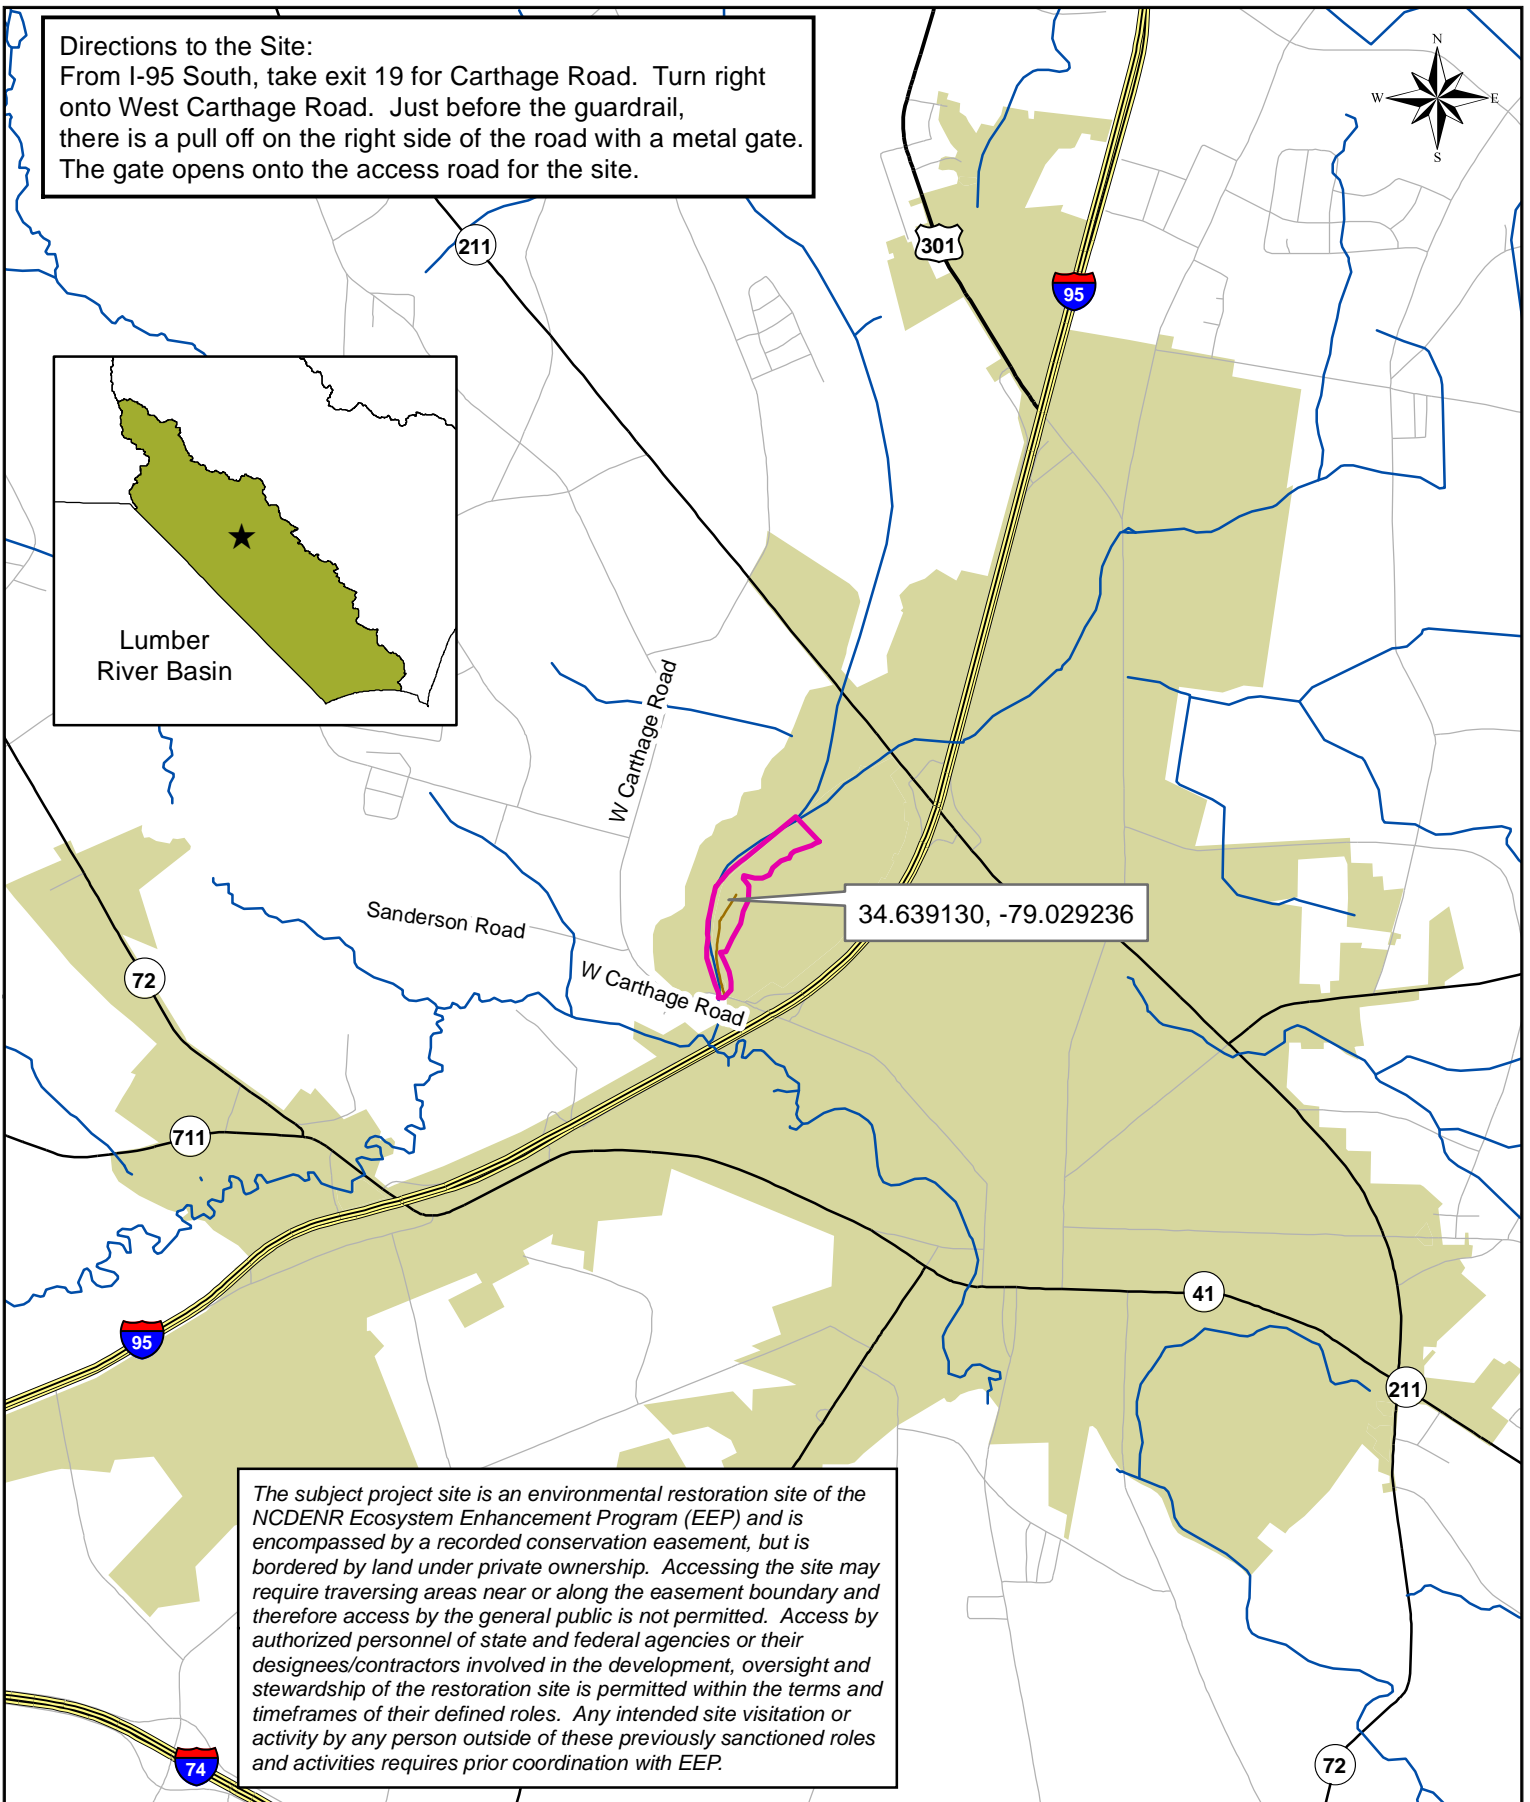

The subject project site is an environmental restoration site of the NCDENR Ecosystem Enhancement Program (EEP) and is encompassed by a recorded conservation easement, but is bordered by land under private ownership. Accessing the site may require traversing areas near or along the easement boundary and therefore access by the general public is not permitted. Access by authorized personnel of state and federal agencies or their designees/contractors involved in the development, oversight and stewardship of the restoration site is permitted within the terms and timeframes of their defined roles. Any intended site visitation or activity by any person outside of these previously sanctioned roles and activities requires prior coordination with EEP.












<p>Prepared By: URS Corporation - North Carolina 1600 Perimeter Park Drive Suite 400 Morrisville, NC 27560 Phone: 919-461-1100 Fax: 919-461-1415</p> 	<p>Prepared For: NC Ecosystem Enhancement Program</p> 	<p>Project: Meadowbranch Swamp Wetland Restoration Robeson County, NC CU 03040203</p> <table border="1"> <tr> <td data-bbox="483 1963 690 2041"> <p>Project Number: 92351</p> </td> <td data-bbox="690 1963 917 2041"> <p>Date: December 2012</p> </td> </tr> </table>	<p>Project Number: 92351</p>	<p>Date: December 2012</p>	<p>Legend</p> <ul style="list-style-type: none">  Project Area  Former Logging Road  Streams  Interstate  US Hwy  NC Hwy  Local Road  Municipal Boundary 	<p align="center">Figure 1 Vicinity Map and Directions</p> <p align="center">0 0.25 0.5 1  Miles</p>
<p>Project Number: 92351</p>	<p>Date: December 2012</p>					

Table 1a: Project Restoration Components

Meadowbranch Swamp Wetland Restoration EEP Project Number 92351									
Project Component	Existing Acres	Restoration Level	Approach	Acreege	Stationing	Mitigation Ratio	Mitigation Units	BMP Elements	Comments
Former Logging Road	2.88	R1	Grading of Road, Removal of Ditch Feature, & Replanting	2.88	50+00 – 72+50	1:1	2.88		
Enhancement of Wetlands (Hydrological)	39.5	E	Improved Hydrologic Connections from Berm Cuts & Road Crossings	39.5		2:1	19.75		
Enhancement of Wetlands (Hydrological & Vegetative)	4.93	E	Improved Hydrologic Connections from Berm Cuts & Road Crossings, Privet Removal, Herbicide Treatment, & Replanting	4.93		2:1	2.47		
Enhancement of Wetlands (Vegetative)	0.35	E	Privet Removal, Herbicide Treatment, & Replanting	0.35		2:1	0.18		
Preservation (Wetlands)	0.87	P	Preservation of Existing Wetlands	0.87		5:1	0.17		

I = BR = Bioretention Cell; SF = Sand Filter; SW = Stormwater Wetland; WDP = Wet Detention Pond; DDP = Dry Detention Pond; FS = Filter Strip; S = Grassed Swale; LS = Level Spreader; NI – Natural Infiltration Area; O = Other
 CF = Cattle Fencing; WS = Watering System; CH = Livestock Housing; Not Applicable = 

Table 1b: Project Restoration Components

Meadowbranch Swamp Wetland Restoration EEP Project Number 92351							
Restoration Level	Stream (lf)	Riparian Wetland (Ac)		Non-Riparian (Ac)	Upland (Ac)	Buffer (Ac)	BMP
		Riverine	Non-Riverine				
Restoration		2.88					
Enhancement (Hydrological)		39.5					
Enhancement (Hydrological & Vegetative)		4.93					
Enhancement (Vegetative)		0.35					
Preservation (Wetlands)		0.87					
		48.53					
Totals (Acres)	0	48.53		0	0	0	0
MU Totals	0	25.45		0	0	0	0

Not Applicable = 

Table 2: Project Activity and Reporting History

Elapsed Time Since Grading Complete: 2 yr 0 months

Elapsed Time Since Planting Complete: 1 yr 7 months

Number of Reporting Years: 1

Meadowbranch Swamp Wetland Restoration EEP Project Number 92351		
Activity or Deliverable	Data Collection Complete	Completion or Delivery
Restoration Plan	Apr-07	Jun-07
Final Design – Construction Plans	Oct-10	Dec-10
Construction	N/A	Feb-11
Containerized, bare root and B&B plantings for reach/segments 1&2	N/A	Feb-11
Mitigation Plan/As-Built (Year 0 Monitoring – baseline)	Sep-11	Oct-11
Year 1 Monitoring	Nov-12	Jan-13
Year 2 Monitoring		
Year 3 Monitoring		
Year 4 Monitoring		
Year 5 Monitoring		


Table 3: Project Contacts Table

Meadowbranch Swamp Wetland Restoration EEP Project Number 92351	
Designer Primary project design POC	EcoEngineering – A Division of The John R. McAdams Co. 2905 Meridian Parkway Durham, NC 27713 George Buchholz 919-287-4262
Construction Contractor Construction contractor POC	EQR, LLC 1405 Benson Court, Suite C Arbutus, MD 21227 James Walker 443-304-3314
Survey Contractor Survey contractor POC	Turner Land Surveying PO Box 41023 Raleigh, NC 27629 David Turner 919-623-5095
Planting Contractor Planting contractor POC	Natives, Inc. 550 East Westinghouse Boulevard Charlotte, NC 28273 Gregg Antemann 866-527-1177
Seeding Contractor Seeding contractor POC	EQR, LLC 1405 Benson Court, Suite C Arbutus, MD 21227 James Walker 443-304-3314
Seed Mix Sources	ERNST Seeds 9066 Mercer Pike Meadville, PA 16335 800-873-3321
Nursery Stock Suppliers	NC Division of Forest Resources 1616 Mail Service Center Raleigh, NC 27699 919-733-2162
Monitoring Performers – Year 0 Monitoring POC	EcoEngineering – A Division of The John R. McAdams Co. 2905 Meridian Parkway Durham, NC 27713 George Buchholz 919-287-4262
Monitoring Performers – Year 1 Monitoring POC	URS Corporation – North Carolina 1600 Perimeter Park Drive, Suite 400 Morrisville, NC 27560 Kathleen McKeithan 919-461-1597

Table 4: Project Baseline Information and Attributes

Snow Creek EEP Project Number 00344	
Project County	Robeson
Physiographic Region	Inner Coastal Plain
Ecoregion	Southeastern Floodplains and Low Terrace
Project River Basin	Lumber
USGS HUC for Project (14 digit)	03040203 080010
NCDWQ Sub-basin for Project	03-07-51
Within extent of EEP Watershed Plan?	N/A
WRC Hab Class (Warm, Cool, Cold)	Warm
% of project easement fenced or demarcated	100%; by canal & by EEP markers
Beaver activity observed during design phase?	Yes
Restoration Component Attribute Table	
	PROJECT SITE
Meadowbranch Canal Drainage Area	34.4 ac
Stream order	3 rd
Restored length	N/A
Perennial or Intermittent	N/A
Watershed type (rural, urban, developing, etc.)	Developing
Watershed LULC Distribution	N/A
Watershed impervious cover	N/A
NCDWQ AU/Index number	14-12
NCDWQ classification	C; Sw
303(d) listed?	No
Upstream of a 303(d) listed segment?	No
Reasons for 303(d) listing or stressor	N/A
Total acreage of easement	55.4
Total vegetated acreage within the easement (wetland & privet areas)	50.61
Total planted acreage as part of the restoration (former logging road & privet areas)	8.16
Dominant soil series and characteristics	
Series	Bibb
Depth	N/A
Clay %	N/A
K	N/A
T	N/A


Appendix B: Visual Assessment Data

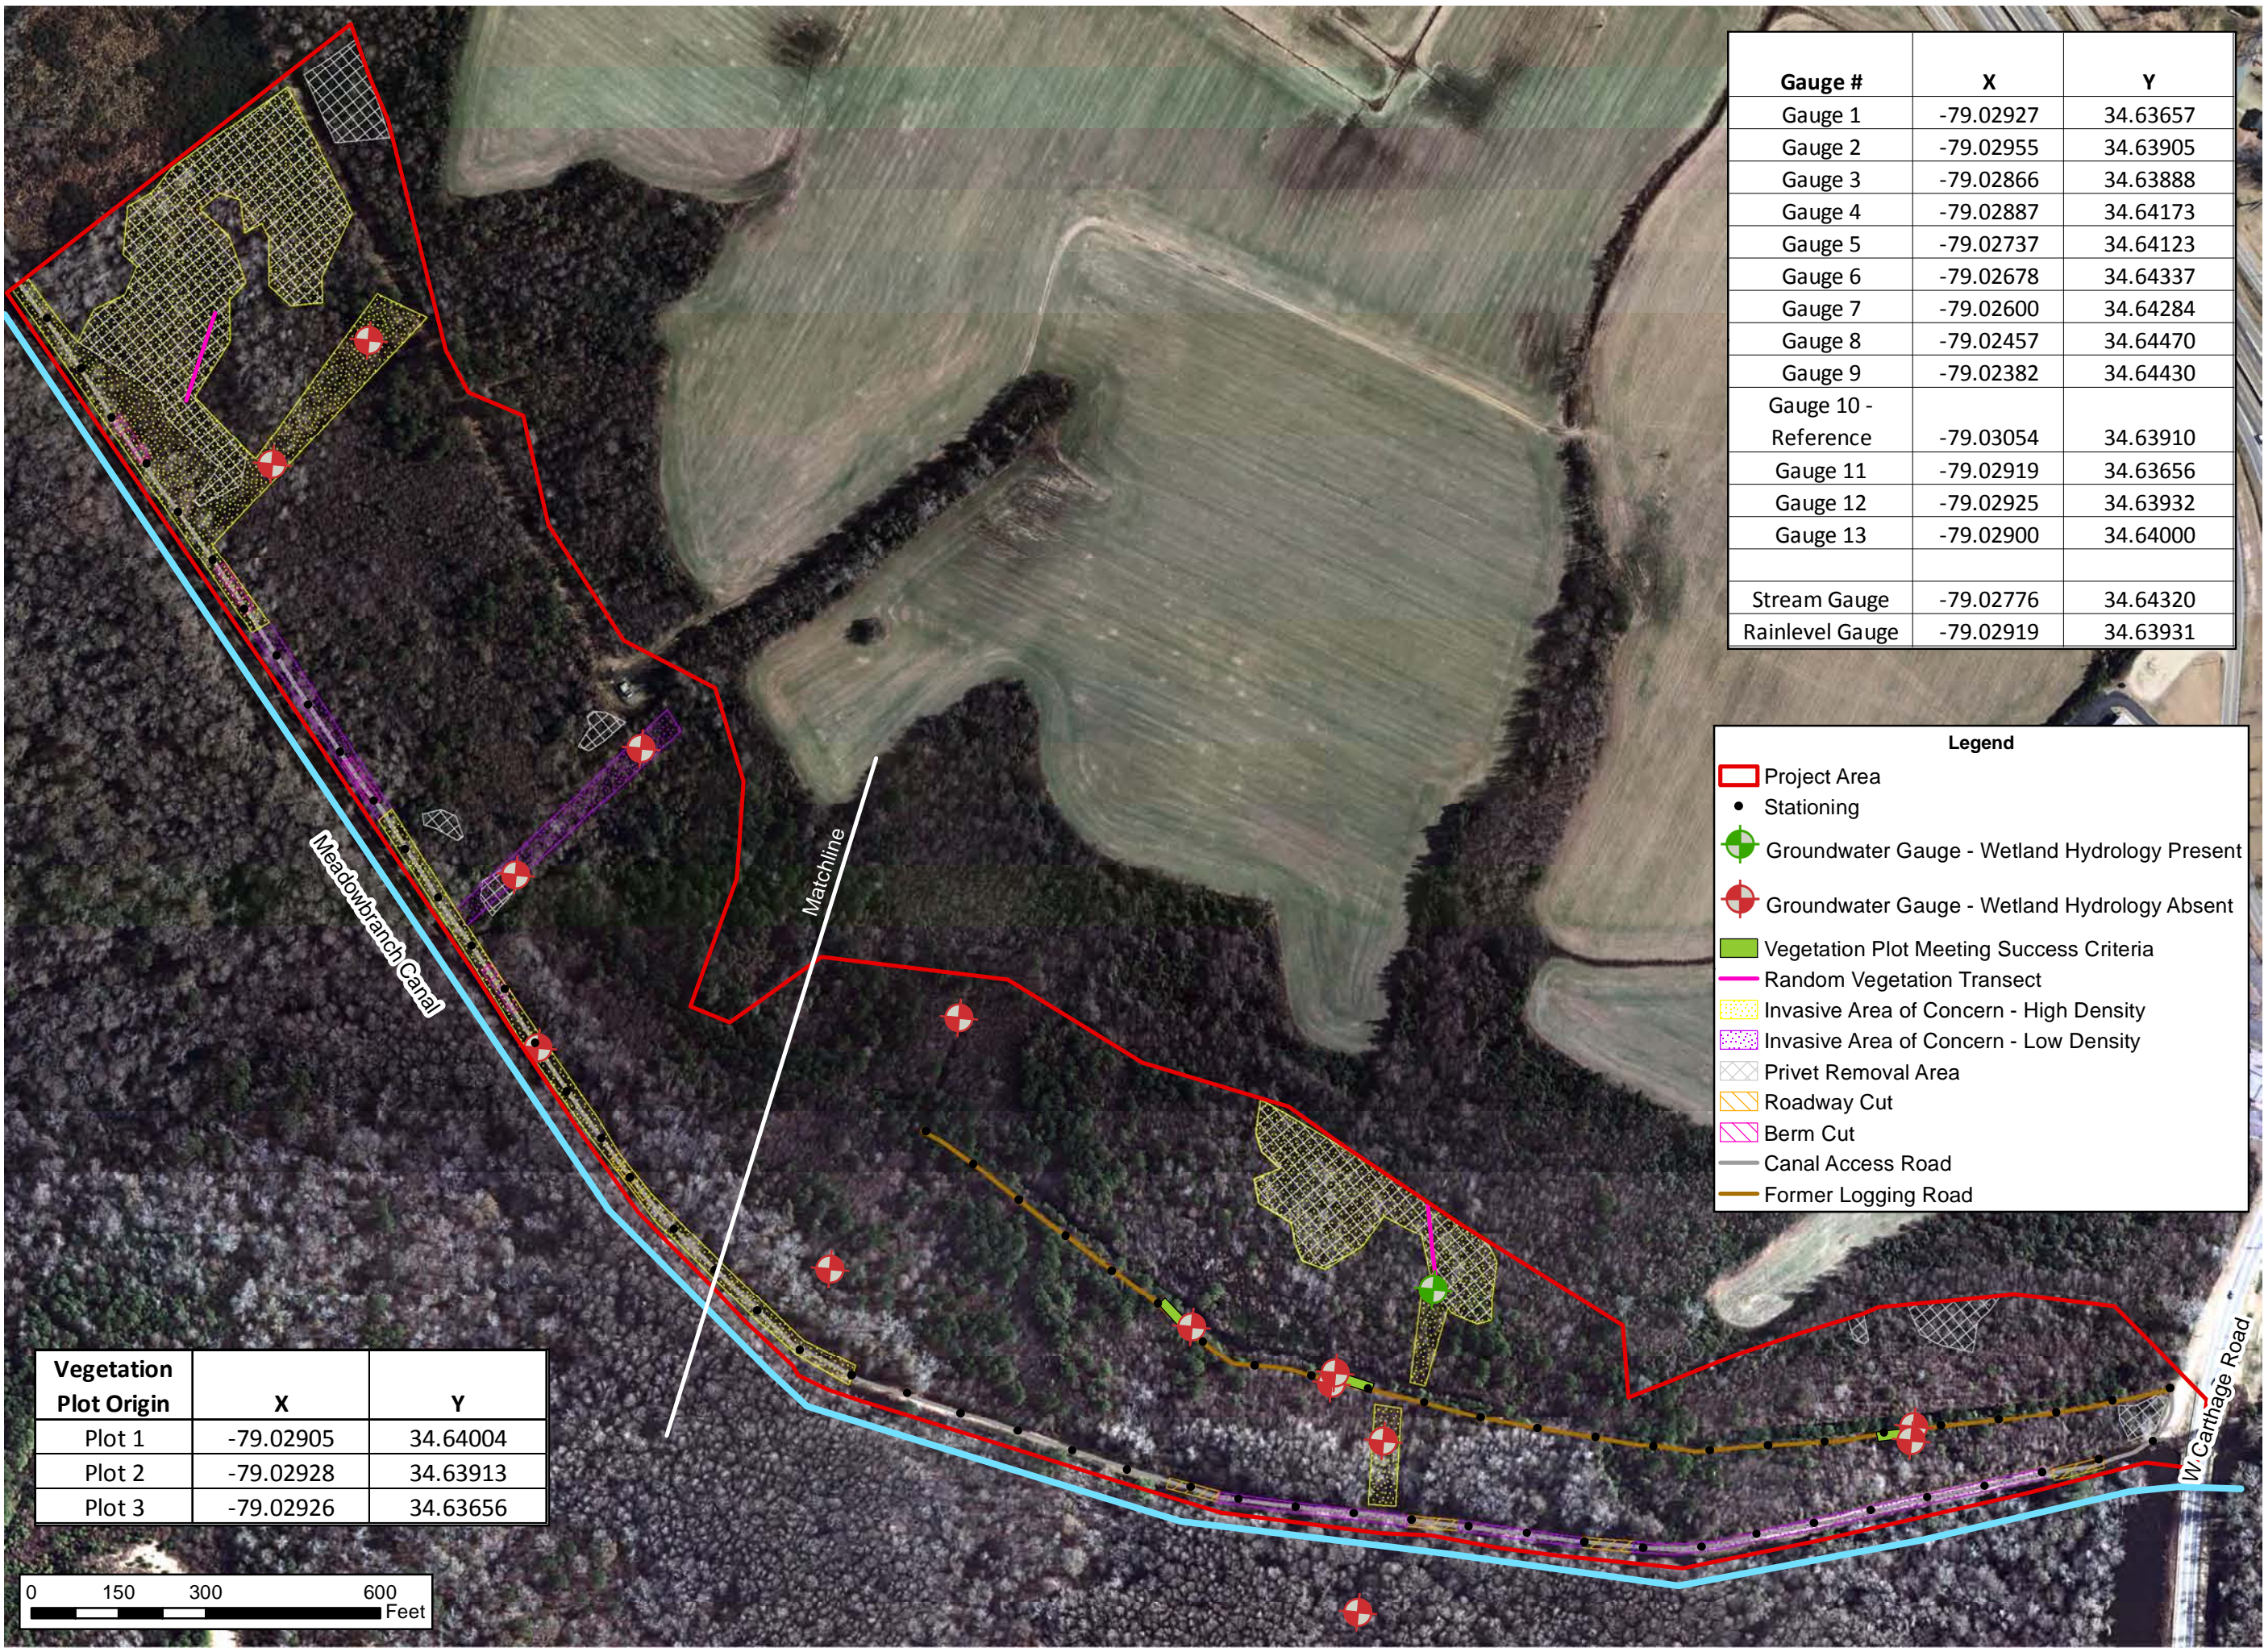

Gauge #	X	Y
Gauge 1	-79.02927	34.63657
Gauge 2	-79.02955	34.63905
Gauge 3	-79.02866	34.63888
Gauge 4	-79.02887	34.64173
Gauge 5	-79.02737	34.64123
Gauge 6	-79.02678	34.64337
Gauge 7	-79.02600	34.64284
Gauge 8	-79.02457	34.64470
Gauge 9	-79.02382	34.64430
Gauge 10 - Reference	-79.03054	34.63910
Gauge 11	-79.02919	34.63656
Gauge 12	-79.02925	34.63932
Gauge 13	-79.02900	34.64000
Stream Gauge	-79.02776	34.64320
Rainlevel Gauge	-79.02919	34.63931

Legend	
[Red Outline]	Project Area
[Black Dot]	Stationing
[Green Circle with Crosshair]	Groundwater Gauge - Wetland Hydrology Present
[Red Circle with Crosshair]	Groundwater Gauge - Wetland Hydrology Absent
[Green Polygon]	Vegetation Plot Meeting Success Criteria
[Pink Line]	Random Vegetation Transect
[Yellow Dotted Polygon]	Invasive Area of Concern - High Density
[Purple Dotted Polygon]	Invasive Area of Concern - Low Density
[White Polygon with X-hatch]	Privet Removal Area
[Orange Polygon]	Roadway Cut
[Pink Polygon]	Berm Cut
[Grey Line]	Canal Access Road
[Brown Line]	Former Logging Road

Vegetation Plot Origin	X	Y
Plot 1	-79.02905	34.64004
Plot 2	-79.02928	34.63913
Plot 3	-79.02926	34.63656



Prepared By:
 URS Corporation - North Carolina
 1600 Perimeter Park Drive
 Suite 400
 Morrisville, NC 27560
 Phone: 919-461-1100
 Fax: 919-461-1415



Prepared For:
 NC Ecosystem
 Enhancement Program



Project:
 Meadowbranch Swamp
 Wetland Restoration
 Robeson County, NC
 CU 03040203

Monitoring Year:
 1 (2012)


Project Number:
 92351

Date:
 December 2012



2010 Aerial
 Orthophotography
 (Source: NCOneMap)

Figure 2
 Current Condition
 Plan View
 Project Overview

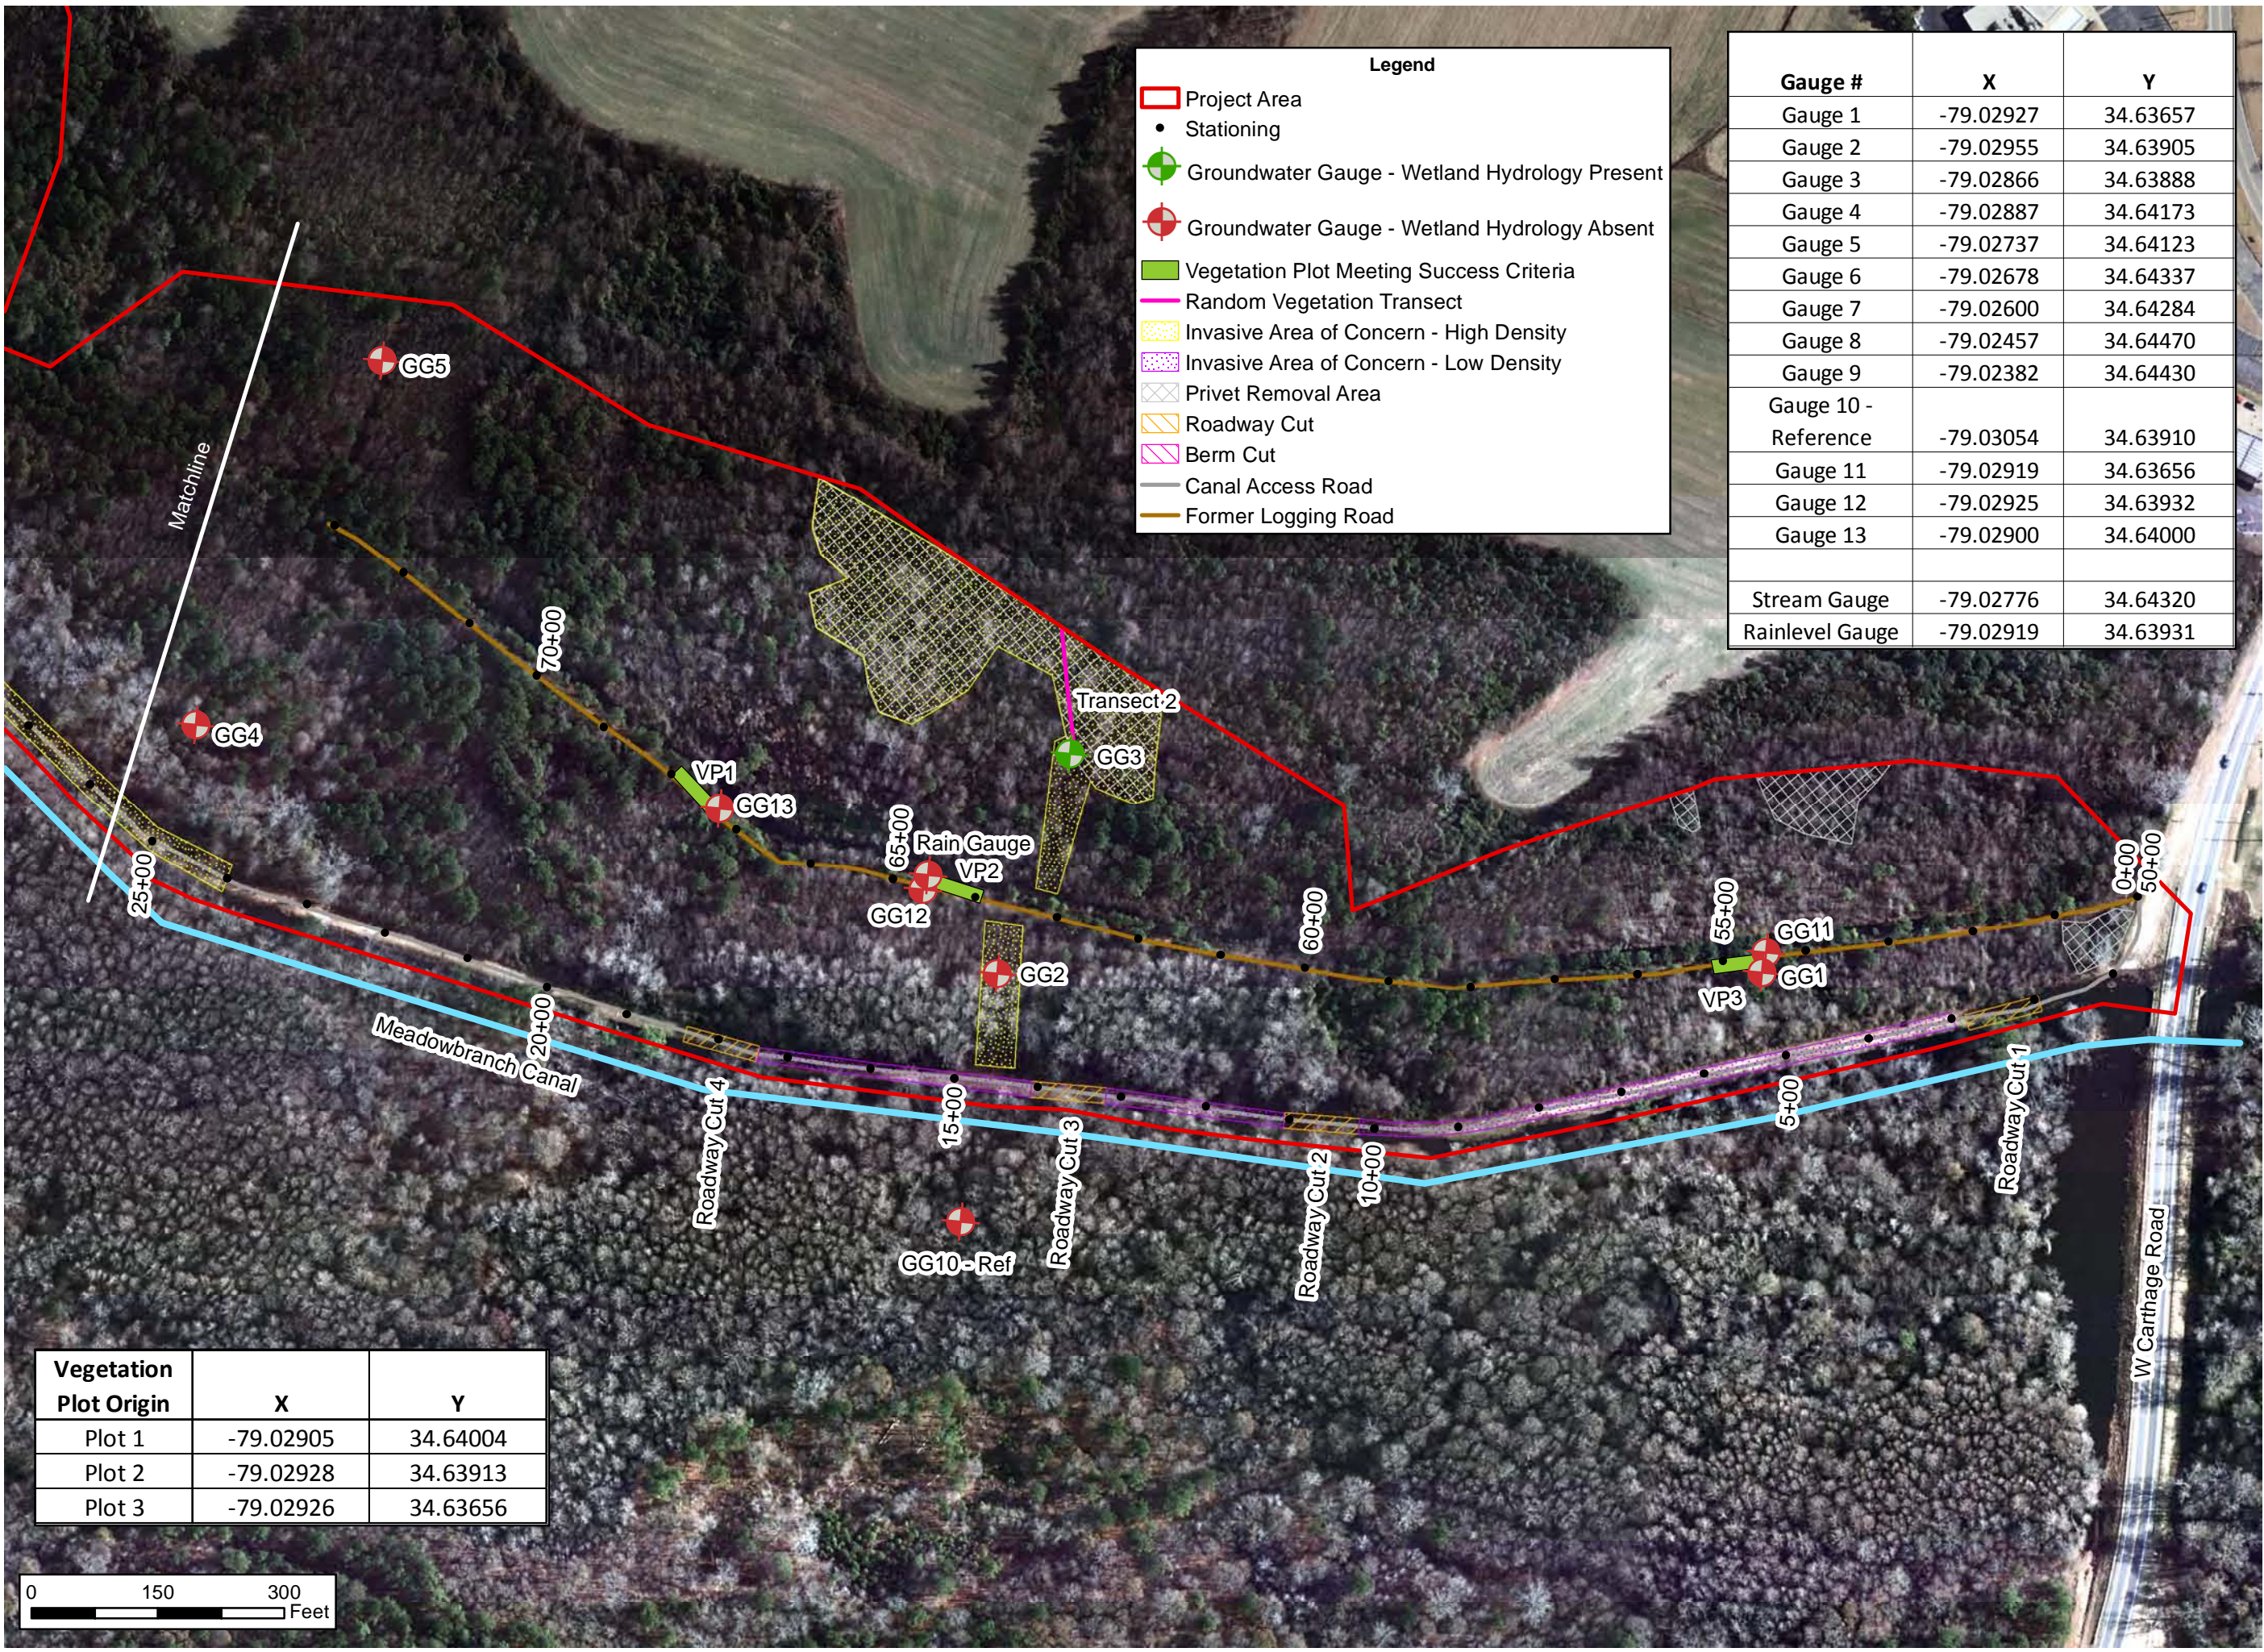


Legend

- Project Area
- Stationing
- Groundwater Gauge - Wetland Hydrology Present
- Groundwater Gauge - Wetland Hydrology Absent
- Vegetation Plot Meeting Success Criteria
- Random Vegetation Transect
- Invasive Area of Concern - High Density
- Invasive Area of Concern - Low Density
- Privet Removal Area
- Roadway Cut
- Berm Cut
- Canal Access Road
- Former Logging Road

Gauge #	X	Y
Gauge 1	-79.02927	34.63657
Gauge 2	-79.02955	34.63905
Gauge 3	-79.02866	34.63888
Gauge 4	-79.02887	34.64173
Gauge 5	-79.02737	34.64123
Gauge 6	-79.02678	34.64337
Gauge 7	-79.02600	34.64284
Gauge 8	-79.02457	34.64470
Gauge 9	-79.02382	34.64430
Gauge 10 - Reference	-79.03054	34.63910
Gauge 11	-79.02919	34.63656
Gauge 12	-79.02925	34.63932
Gauge 13	-79.02900	34.64000
Stream Gauge	-79.02776	34.64320
Rainlevel Gauge	-79.02919	34.63931

Vegetation Plot Origin	X	Y
Plot 1	-79.02905	34.64004
Plot 2	-79.02928	34.63913
Plot 3	-79.02926	34.63656



Prepared By:
 URS Corporation - North Carolina
 1600 Perimeter Park Drive
 Suite 400
 Morrisville, NC 27560
 Phone: 919-461-1100
 Fax: 919-461-1415



Prepared For:
 NC Ecosystem
 Enhancement Program



Project:
 Meadowbranch Swamp
 Wetland Restoration
 Robeson County, NC
 CU 03040203

Monitoring Year:
 1 (2012)


Project Number:
 92351

Date:
 December 2012



2010 Aerial
 Orthophotography
 (Source: NCOneMap)

Figure 2a
 Current Condition
 Plan View

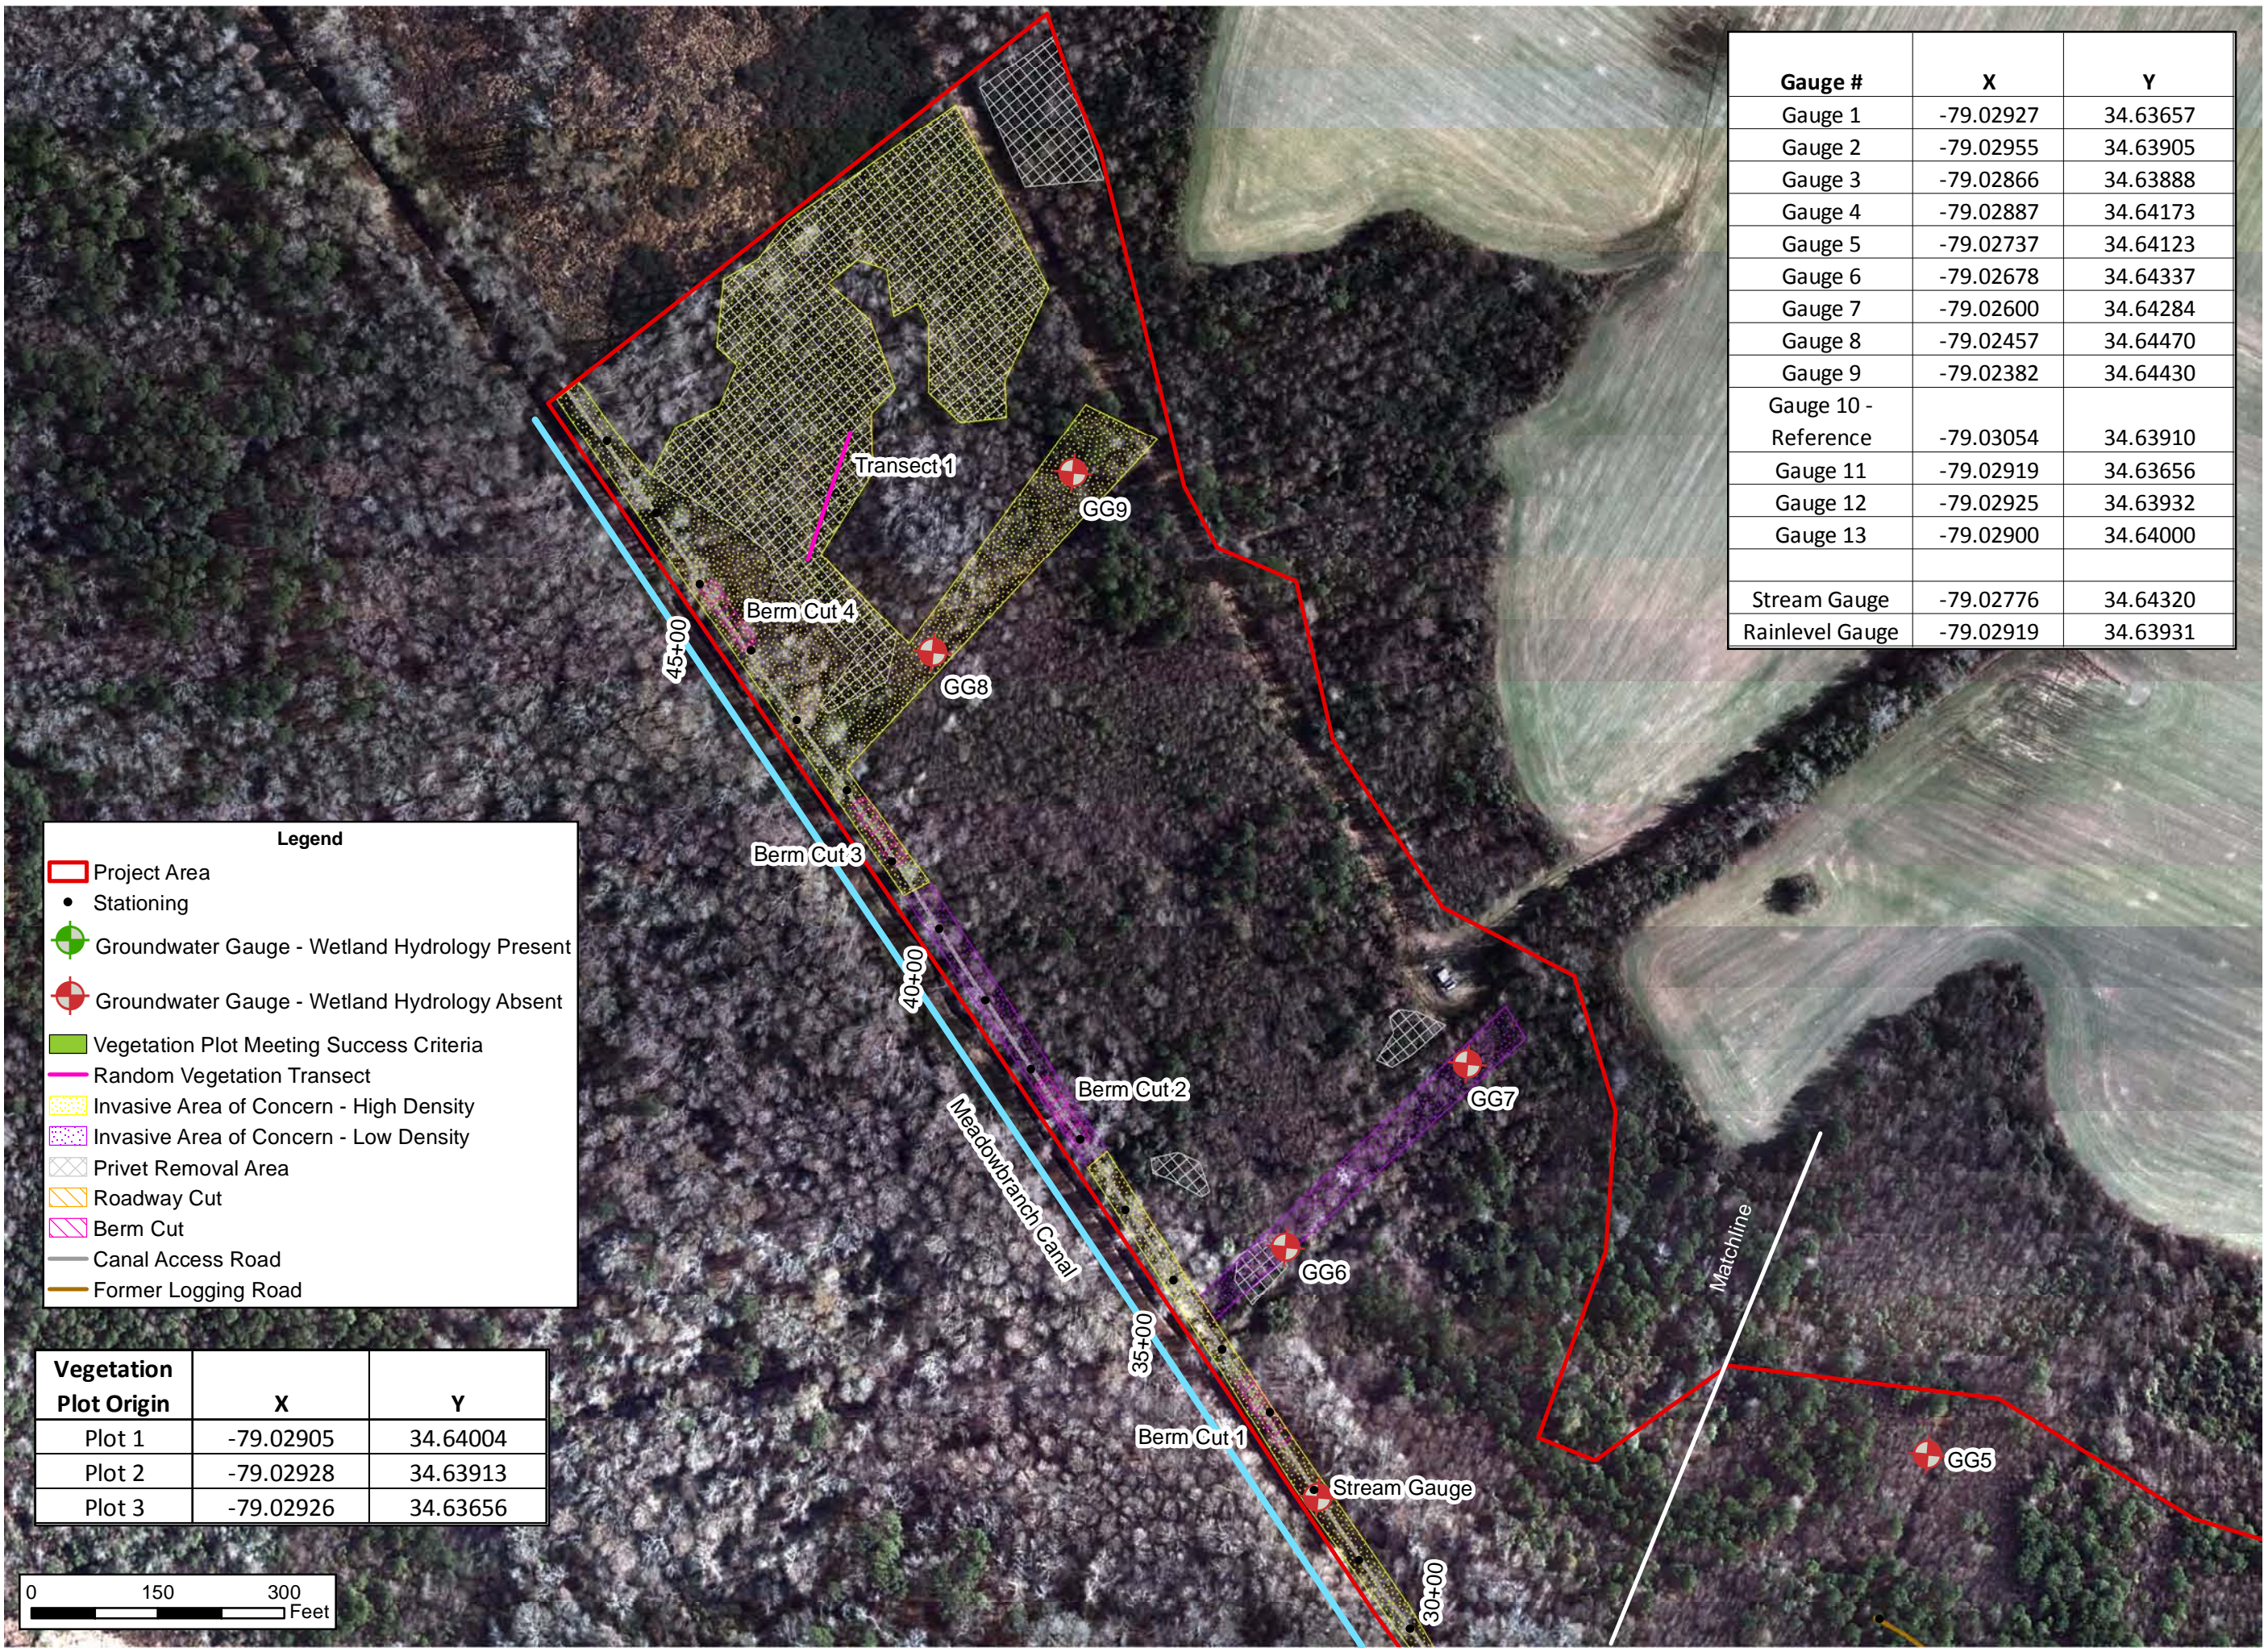

Gauge #	X	Y
Gauge 1	-79.02927	34.63657
Gauge 2	-79.02955	34.63905
Gauge 3	-79.02866	34.63888
Gauge 4	-79.02887	34.64173
Gauge 5	-79.02737	34.64123
Gauge 6	-79.02678	34.64337
Gauge 7	-79.02600	34.64284
Gauge 8	-79.02457	34.64470
Gauge 9	-79.02382	34.64430
Gauge 10 - Reference	-79.03054	34.63910
Gauge 11	-79.02919	34.63656
Gauge 12	-79.02925	34.63932
Gauge 13	-79.02900	34.64000
Stream Gauge	-79.02776	34.64320
Rainlevel Gauge	-79.02919	34.63931

Prepared By:
 URS Corporation - North Carolina
 1600 Perimeter Park Drive
 Suite 400
 Morrisville, NC 27560
 Phone: 919-461-1100
 Fax: 919-461-1415



Prepared For:
 NC Ecosystem
 Enhancement Program



Project:
 Meadowbranch Swamp
 Wetland Restoration
 Robeson County, NC
 CU 03040203

Monitoring Year:
 1 (2012)

Project Number:
 92351

Date:
 December 2012



2010 Aerial
 Orthophotography
 (Source: NCOneMap)

Figure 2b
 Current Condition
 Plan View

Legend

- Project Area
- Stationing
- + Groundwater Gauge - Wetland Hydrology Present
- + Groundwater Gauge - Wetland Hydrology Absent
- Vegetation Plot Meeting Success Criteria
- Random Vegetation Transect
- Invasive Area of Concern - High Density
- Invasive Area of Concern - Low Density
- Privet Removal Area
- Roadway Cut
- Berm Cut
- Canal Access Road
- Former Logging Road

Vegetation Plot Origin	X	Y
Plot 1	-79.02905	34.64004
Plot 2	-79.02928	34.63913
Plot 3	-79.02926	34.63656




Table 5: Vegetation Condition Assessment Table

Meadowbranch Swamp Wetland Restoration EEP Project Number 92351						
Planted Acreage	8.16					
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material	0.1 acres	N/A	0	0	0
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria	0.1 acres	N/A	0	0	0
Total				0	0	0
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year	0.25 acres	N/A	0	0	0
Cumulative Total				0	0	0
Easement Acreage	55.4					
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
4. Invasive Areas of Concern – High Density	Areas of presence and/or re-growth of Chinese privet with high density	1000 SF	Yellow dot pattern	4	7.14	12.9
5. Invasive Areas of Concern – Low Density	Areas of presence and/or re-growth of Chinese privet with low density, or spotty growth	1000 SF	Purple dot pattern	5	9.79	17.7
6. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale)	none	N/A	0	0	0

Vegetation Monitoring Plot Photos



VP1



VP2



VP3

Appendix C: Vegetation Plot Data

Table 6: Vegetation Plot Mitigation Success Summary Table
Meadowbranch Swamp Wetland Restoration
EEP Project Number 92351

Tract	Vegetation Plot ID	Vegetation Survival Threshold Met?
Meadowbranch	VP1	Yes
	VP2	Yes
	VP3	Yes

Table 7: CVS Vegetation Metadata Table

Report Prepared By	Susan Westberry
Date Prepared	11/20/2012 15:30
database name	cvs-eep-entrytool-v2.3.1.mdb
database location	Z:\Share\SW\Monitoring\cvs-eep-entrytool-v2.3.1
computer name	1612LP-W70005
file size	59342848
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
PROJECT SUMMARY-----	
Project Code	92351
project Name	Meadowbranch Swamp Wetland Restoration
Description	restore surface flow and groundwater elevations within the site area by removing the former logging road and modifying the canal access road
River Basin	Lumber
length(ft)	4788
stream-to-edge width (ft)	7
area (sq m)	6226.85
Required Plots (calculated)	3
Sampled Plots	3

Table 8: CVS Stem Count Total and Planted by Plot and Species

Scientific Name	Common Name	Species Type	Current Plot Data (MY1 2012)									Annual Means						
			E92351-01-0001			E92351-01-0002			E92351-01-0003			MY1 (2012)			MY0 (2011)			
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	
Acer rubrum	red maple	Tree										6			6			
Betula nigra	river birch	Tree	7	7	8	4	4	4	4	4	4	15	15	16	16	16	16	16
Fraxinus pennsylvanica	green ash	Tree	2	2	2	1	1	1	2	2	2	5	5	5	7	7	7	7
Pinus taeda	loblolly pine	Tree						1							1			
Quercus	oak	Tree							2	2	2	2	2	2	3	3	3	3
Quercus laurifolia	laurel oak	Tree	1	1	1	3	3	3				4	4	4	4	4	4	4
Quercus lyrata	overcup oak	Tree	1	1	1	2	2	3				3	3	4	6	6	6	6
Quercus nigra	water oak	Tree													3	3	3	3
Quercus pagoda	cherrybark oak	Tree													1	1	1	1
Quercus phellos	willow oak	Tree	1	1	1	5	5	5	6	6	6	12	12	12	15	15	15	15
Taxodium distichum	bald cypress	Tree	1	1	1							1	1	1	1	1	1	1
		Stem count	13	13	14	15	15	17	14	14	20	42	42	51	56	56	56	56
		size (ares)	1			1			1			3			3			
		size (ACRES)	0.02			0.02			0.02			0.07			0.07			
		Species count	6	6	6	5	5	6	4	4	5	7	7	9	9	9	9	9
		Stems per ACRE	526.1	526.1	566.6	607	607	688	566.6	566.6	809.4	566.6	566.6	688	755.4	755.4	755.4	755.4

Color for Density

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%

Table 9: Stem Count Total by Random Transect Plot

Scientific Name	Common Name	Species Type	Current Plot Data (MY1 2012)	
			Random Transect 1	Random Transect 2
			Total	Total
<i>Acer rubrum</i>	red maple	Tree		2
<i>Ligustrum sinense</i>	Chinese privet	Shrub/Tree	90	166
<i>Liriodendron tulipifera</i>	tulip tree	Tree		2
<i>Nyssa sylvatica</i>	black gum	Tree	2	
<i>Salix nigra</i>	black willow	Tree		2
<i>Sambucus canadensis</i>	elderberry	Shrub		4
<i>Taxodium distichum</i>	bald cypress	Tree	6	
Total stem count			98	176
Invasive stem count			90	166
Native stem count			8	10
size (ares)			1	
size (ACRES)			0.02	
Species count			3	5
Native stems per acre			333	417
Percent of total stems invasive			91.8	94.3

Appendix D: Hydrologic Data

Table 10: Verification of Bankfull Events

Meadowbranch Swamp Wetland Restoration EEP Project Number 92351			
Date of Data Collection	Date of Occurrence	Method	Photo # (if available)
11/16/12	None between 5/26/12 and 11/16/12*	On-site data logger (<i>Ecotone</i> water level gauge)	
11/16/12	Unknown	Site photographs (wrack lines)	39
11/16/12	None between 11/16/11 and 11/16/12	Proximal USGS gauge resource	

* Data logger data began on 5/26/12.

The data logger on-site did not record any bankfull events between May 26, 2012 and November 16, 2012. Proximal USGS gauge data support this finding. Potential bankfull occurrence for the entire year (November 16, 2011 to November 16, 2012) was extrapolated based on USGS stream gauge discharge data for the Lumber River at Lumberton, NC. The USGS gauge plot is shown below (Figure 3). The gauge is located less than two miles downstream from the project site and has a drainage area of 708 square miles.

An estimate of the number of bankfull events between November 16, 2011 and November 16, 2012 was made by comparing the stream discharges from the USGS data in cubic feet per second (cfs) against the bankfull discharge estimated from the drainage area on the Coastal Plain Regional Curve. According to the regional curve, a bankfull event occurs on a stream with a 708-square mile drainage area when the discharge is about 2,000 cfs. This discharge was not exceeded during the past year.

Rainfall data are presented in Figure 4.



Photo 39. Wrack lines at bankfull along canal

Figure 5: USGS Proximal Gauge Lumber River at Lumberton, NC

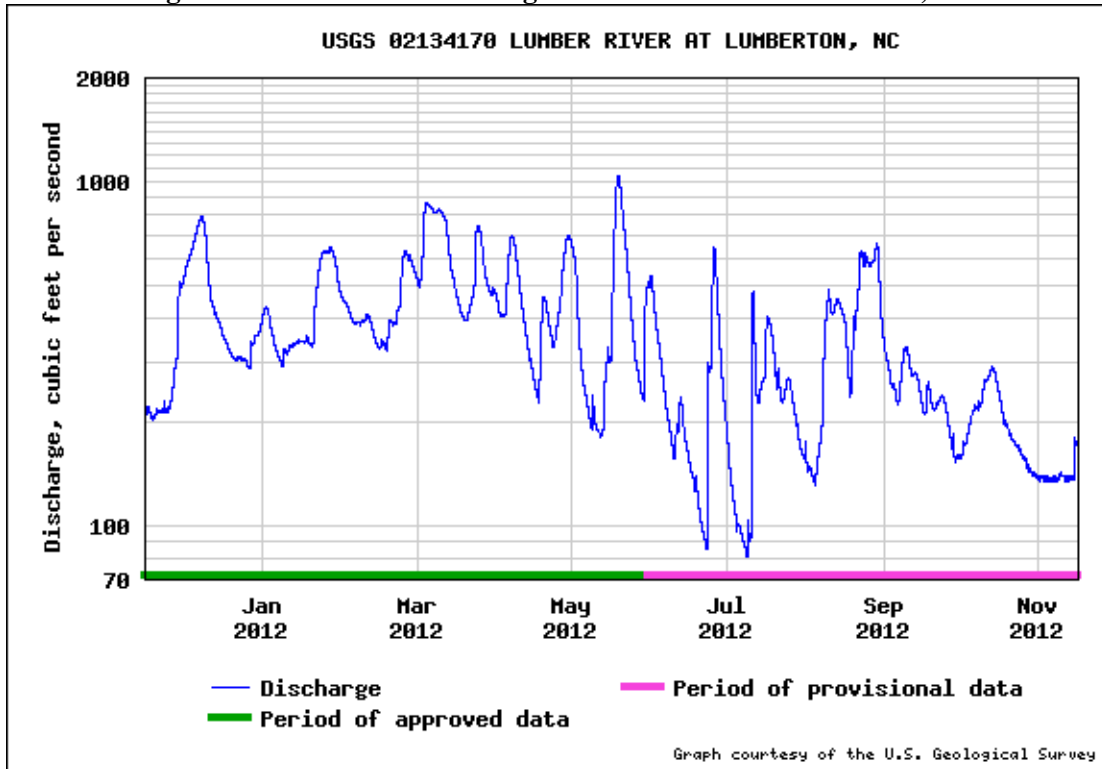


Figure 6: Meadowbranch Swamp Canal 30-70 Percentile Graph for Rainfall in 2012, Lumberton, NC

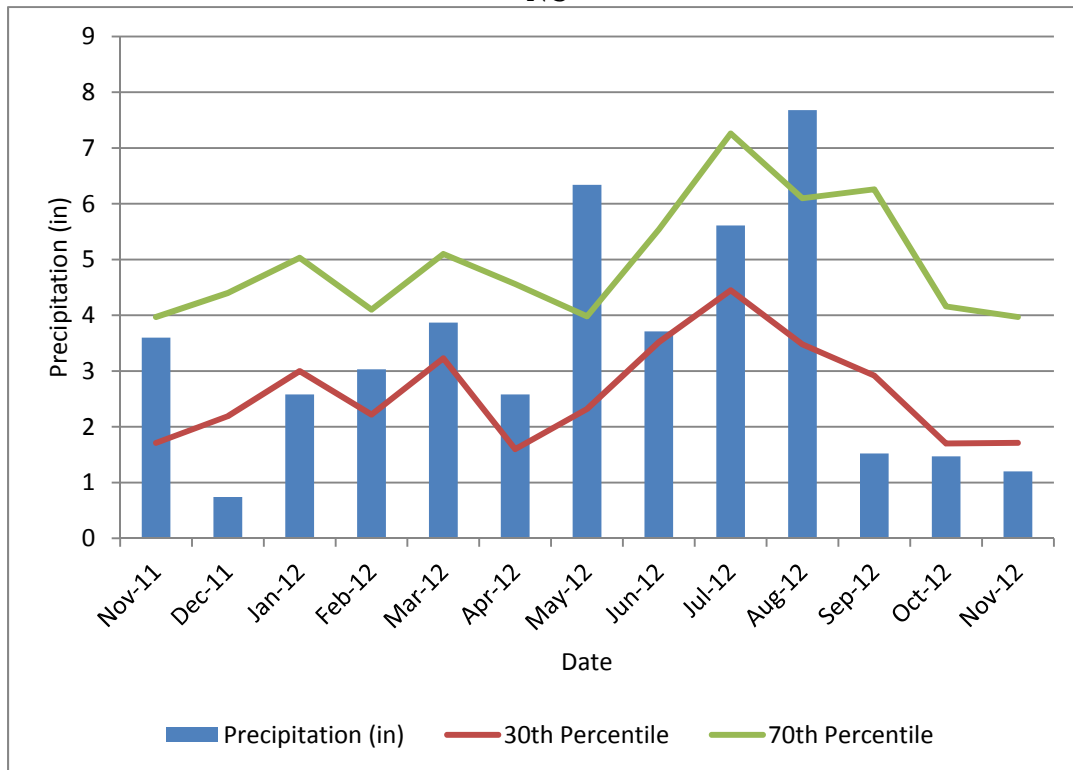


Figure 7: Monitoring Gauge 1

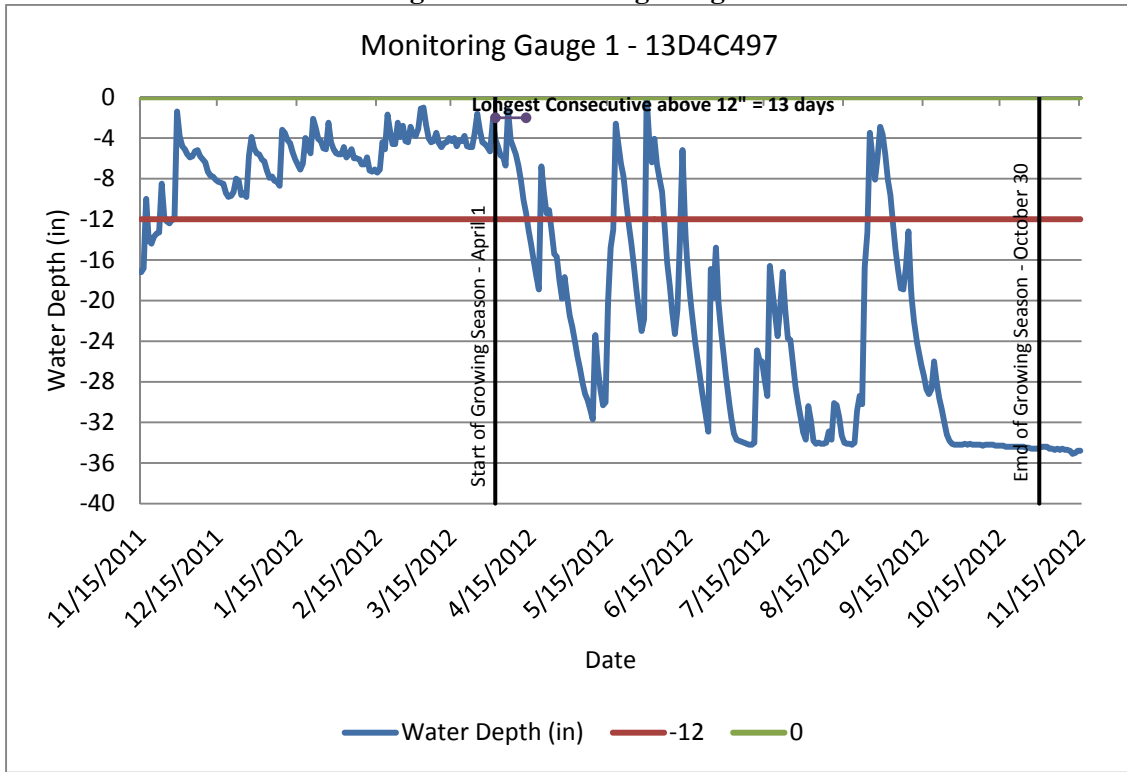


Figure 8: Monitoring Gauge 2

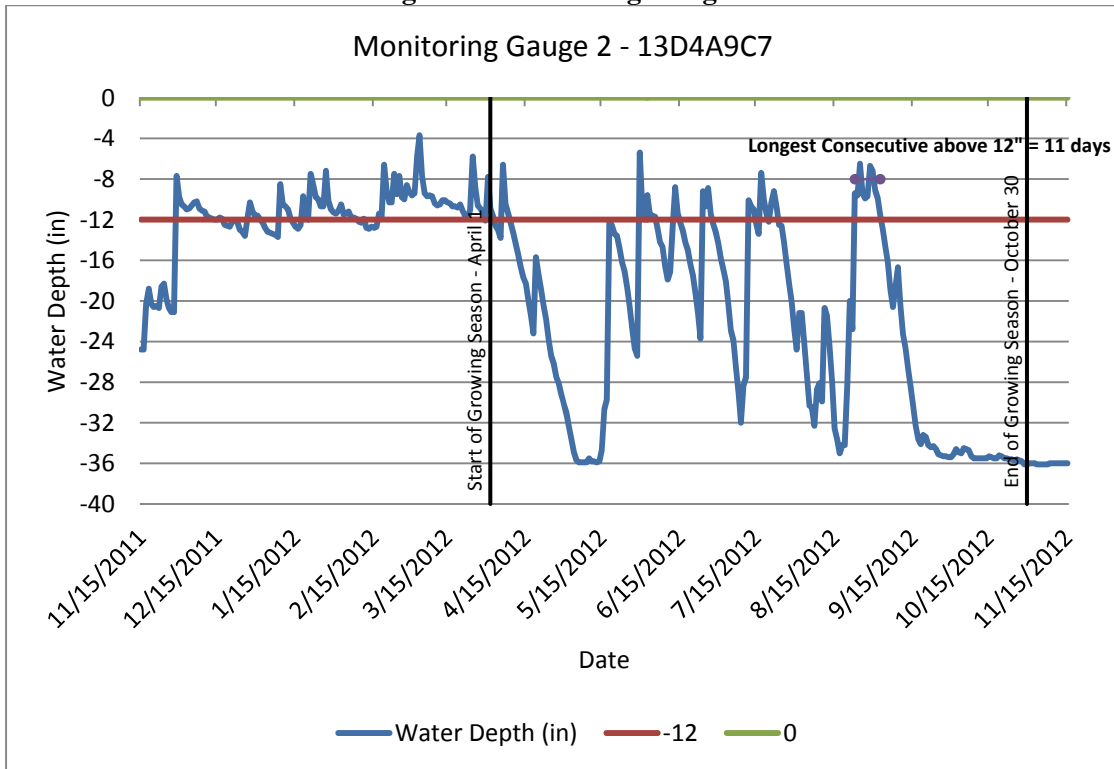


Figure 9: Monitoring Gauge 3

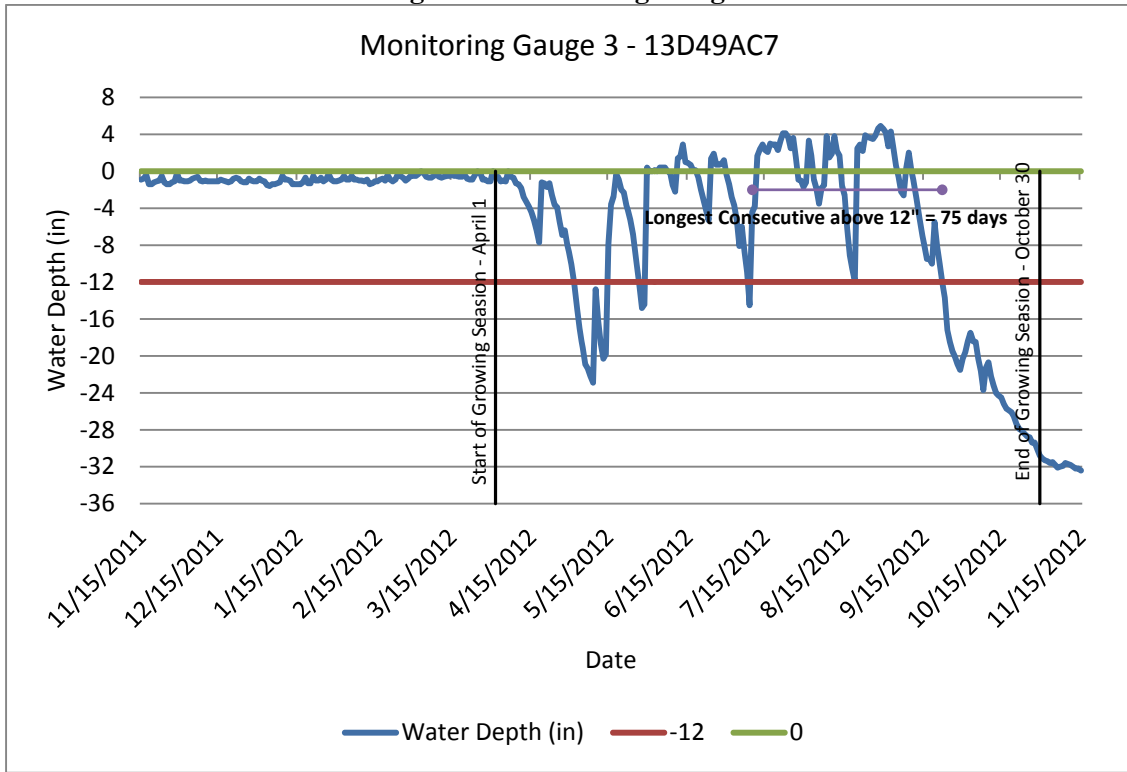


Figure 10: Monitoring Gauge 4

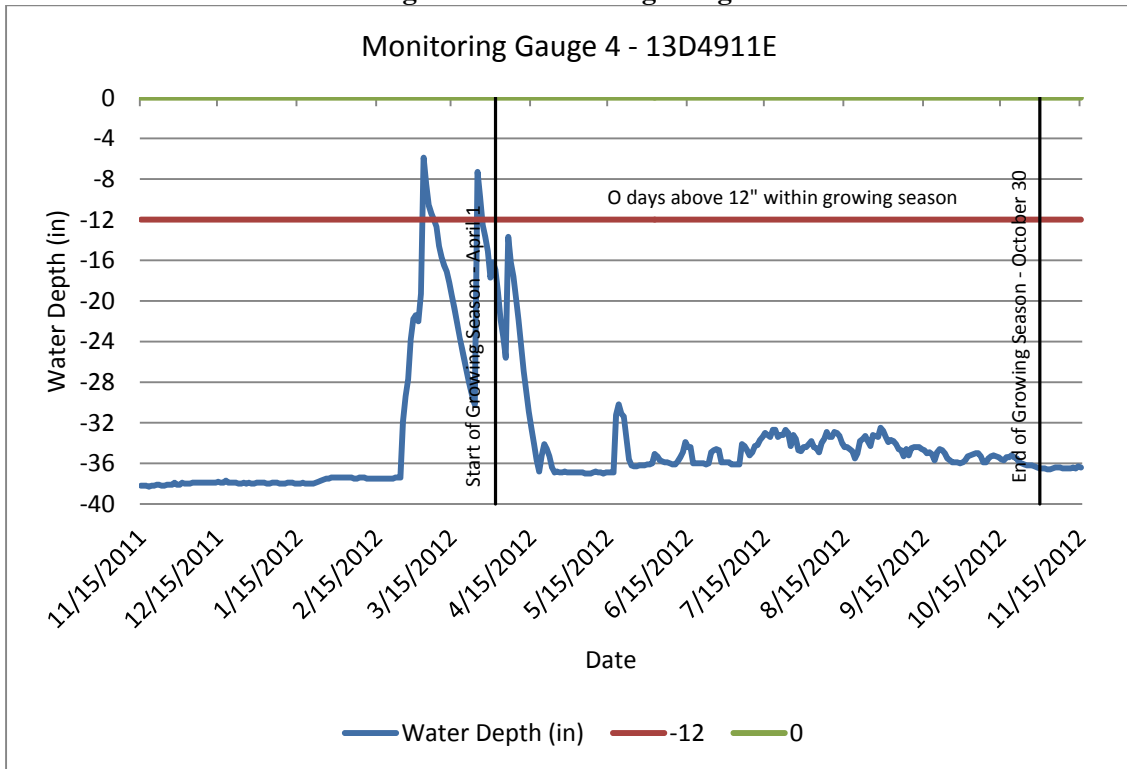


Figure 11: Monitoring Gauge 5

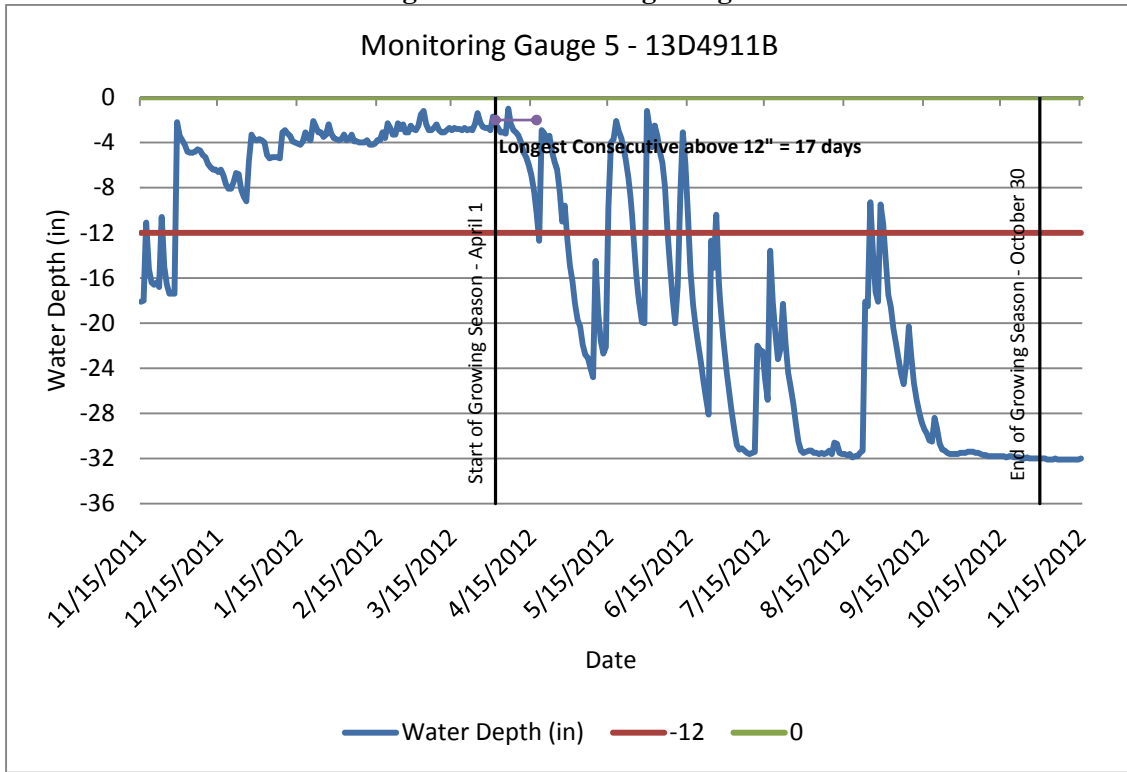


Figure 12: Monitoring Gauge 6

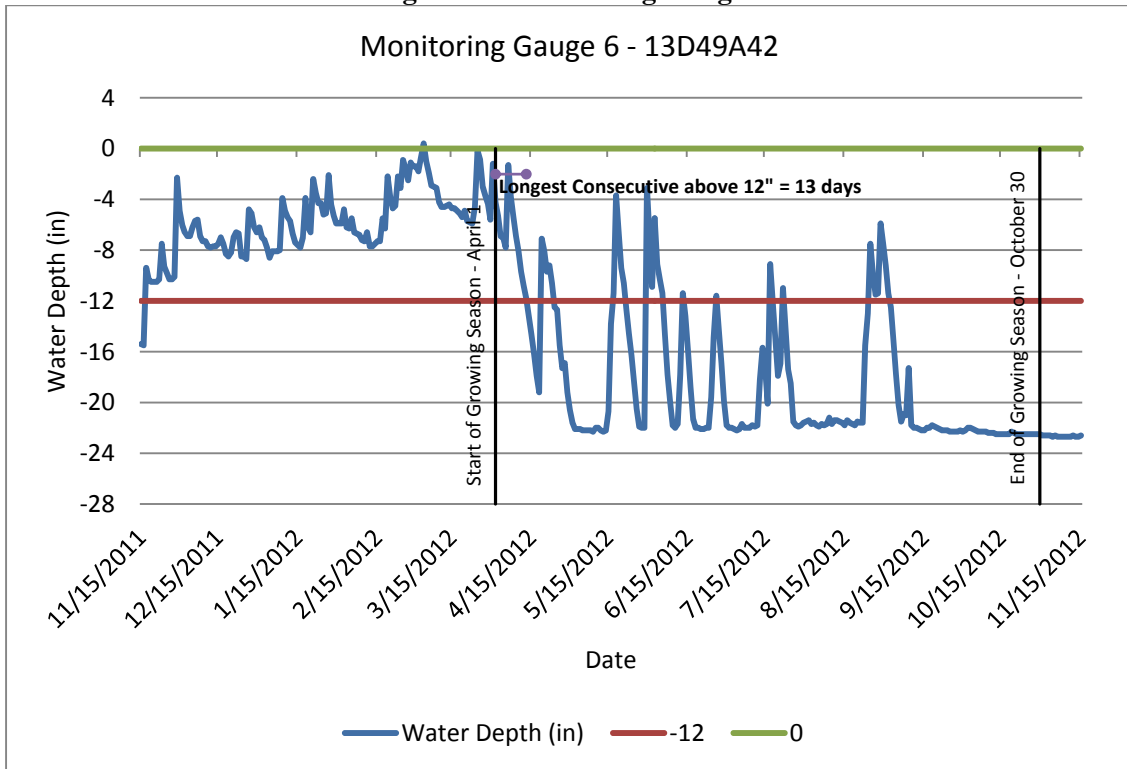


Figure 13: Monitoring Gauge 7

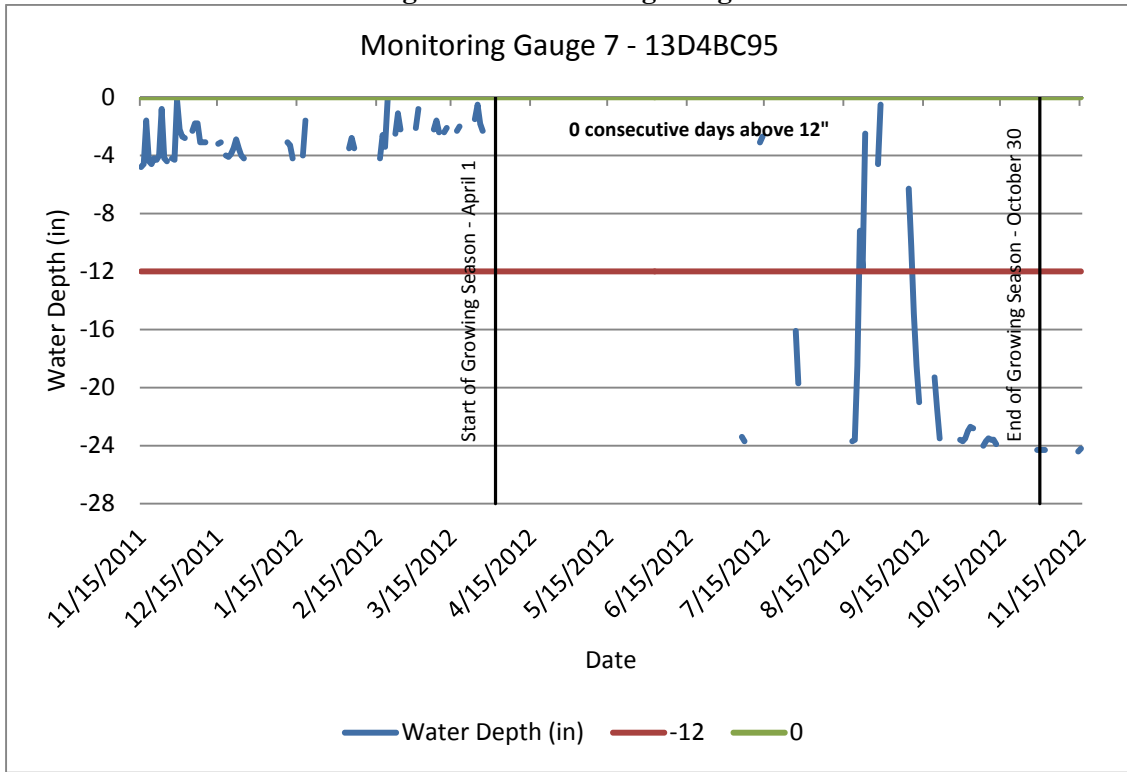


Figure 14: Monitoring Gauge 8

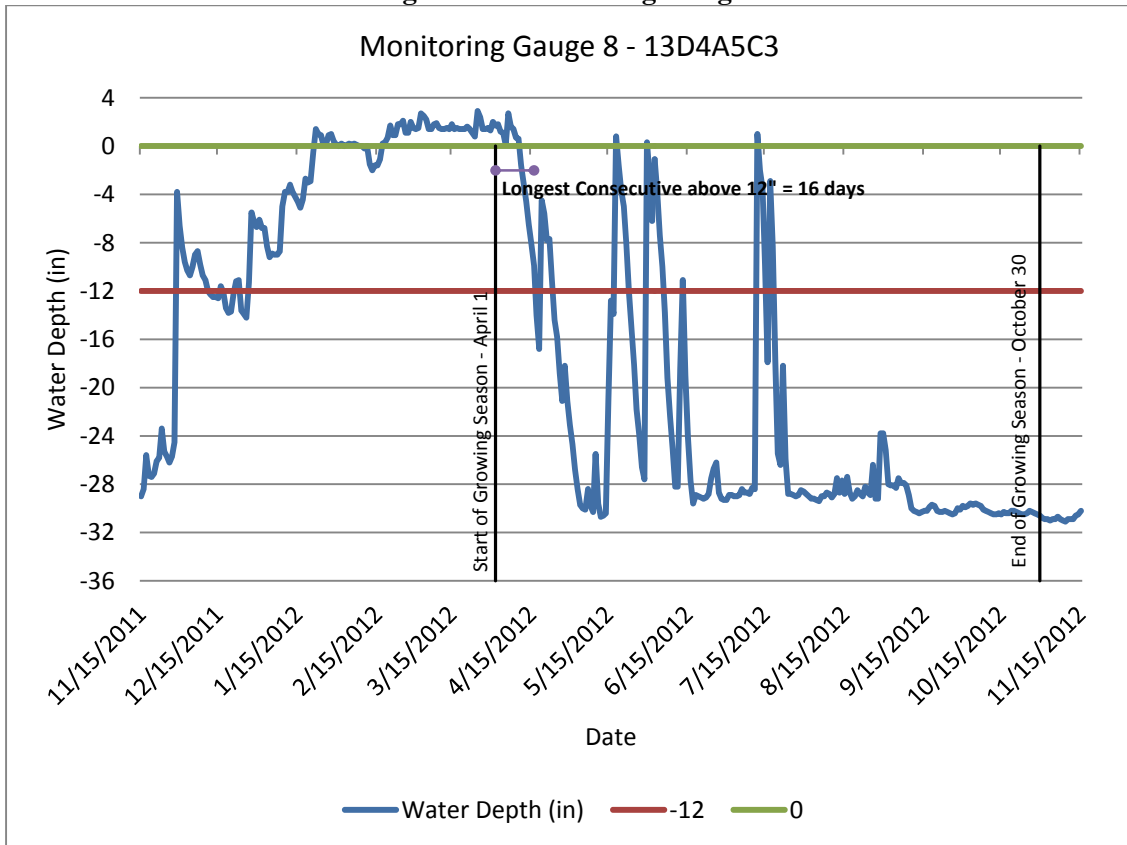


Figure 15: Monitoring Gauge 9

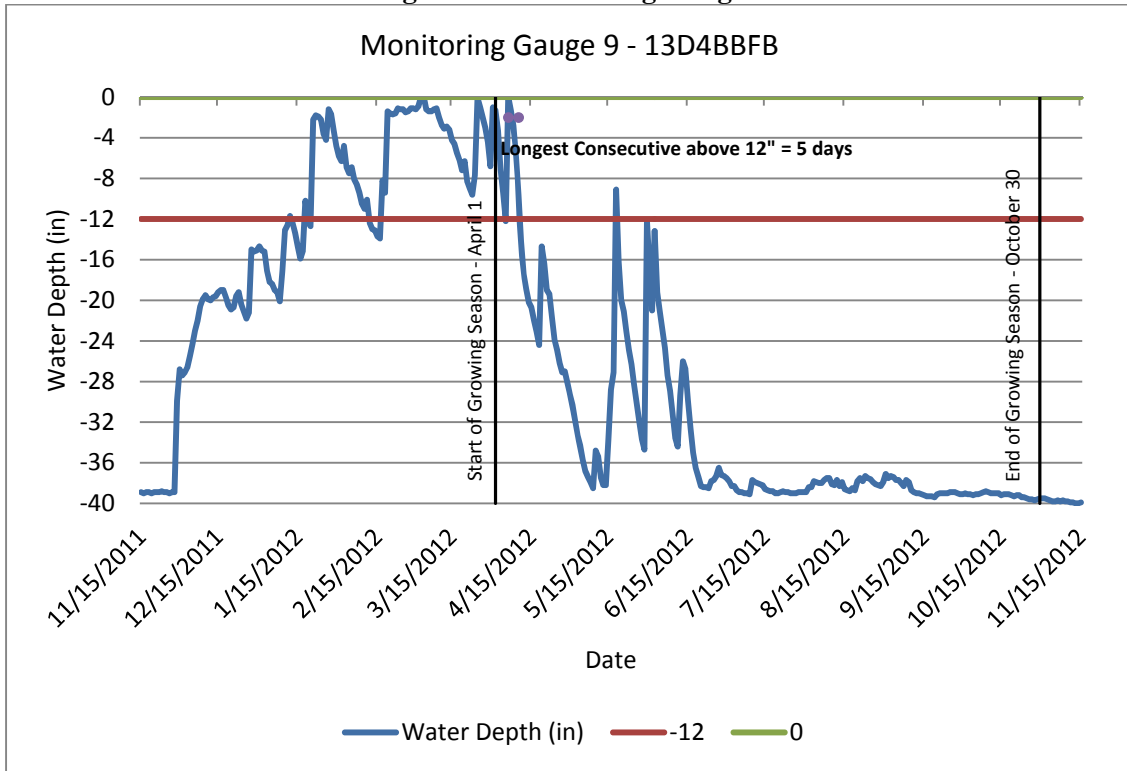


Figure 16: Monitoring Gauge 10 – Reference Gauge

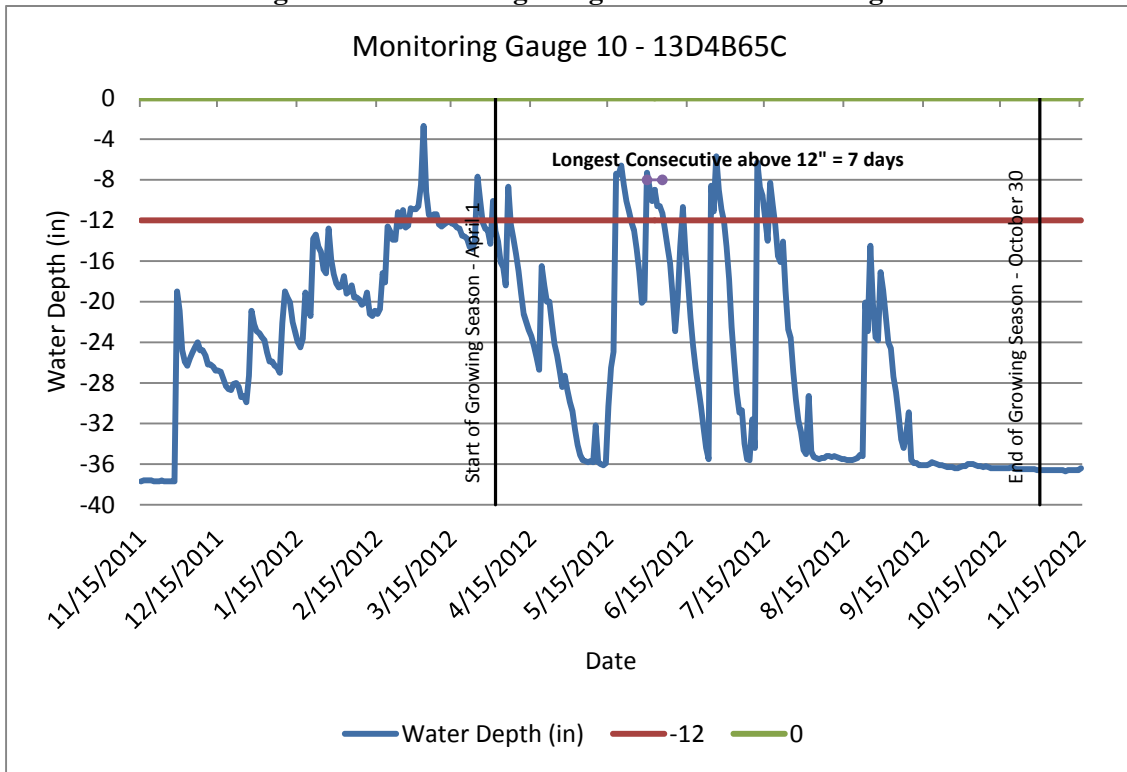


Figure 17: Monitoring Gauge 11

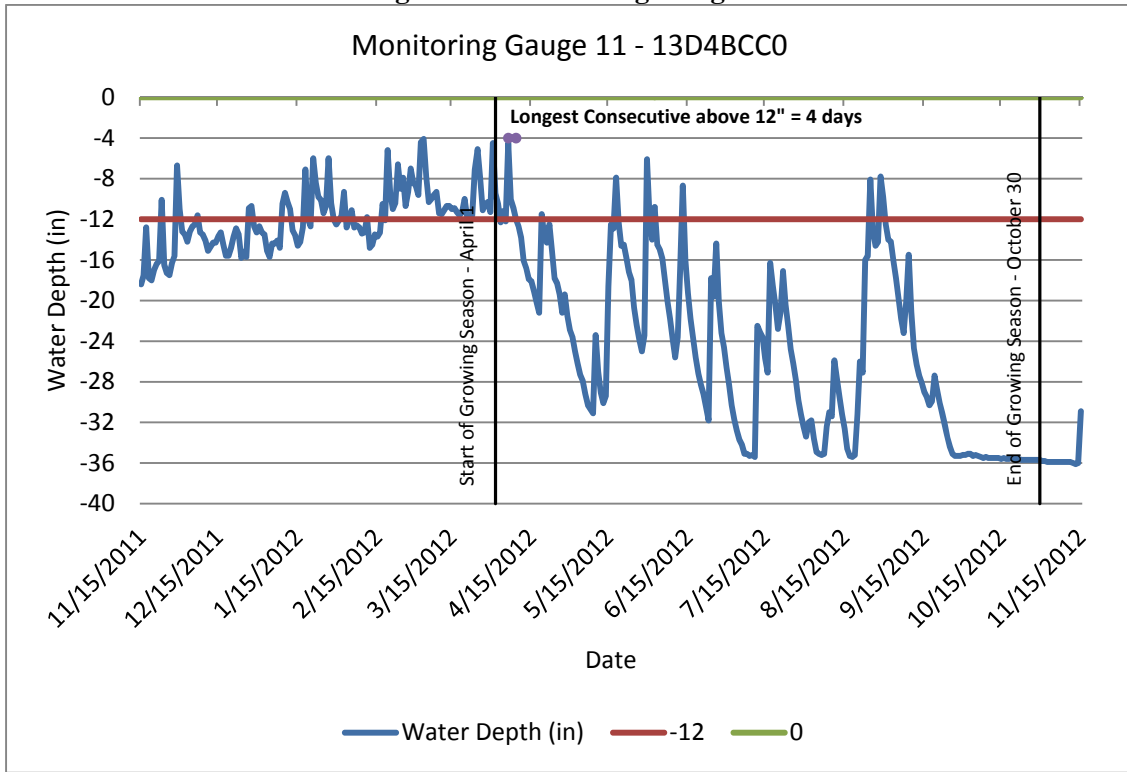


Figure 18: Monitoring Gauge 12

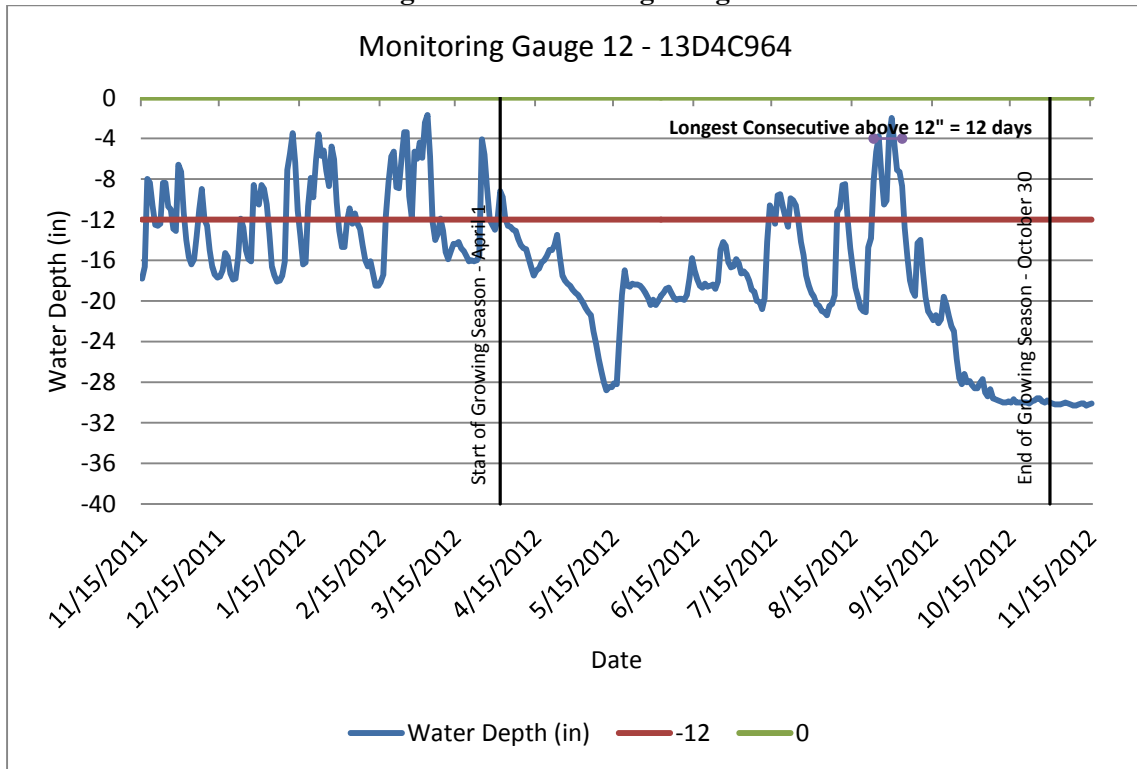


Figure 19: Monitoring Gauge 13

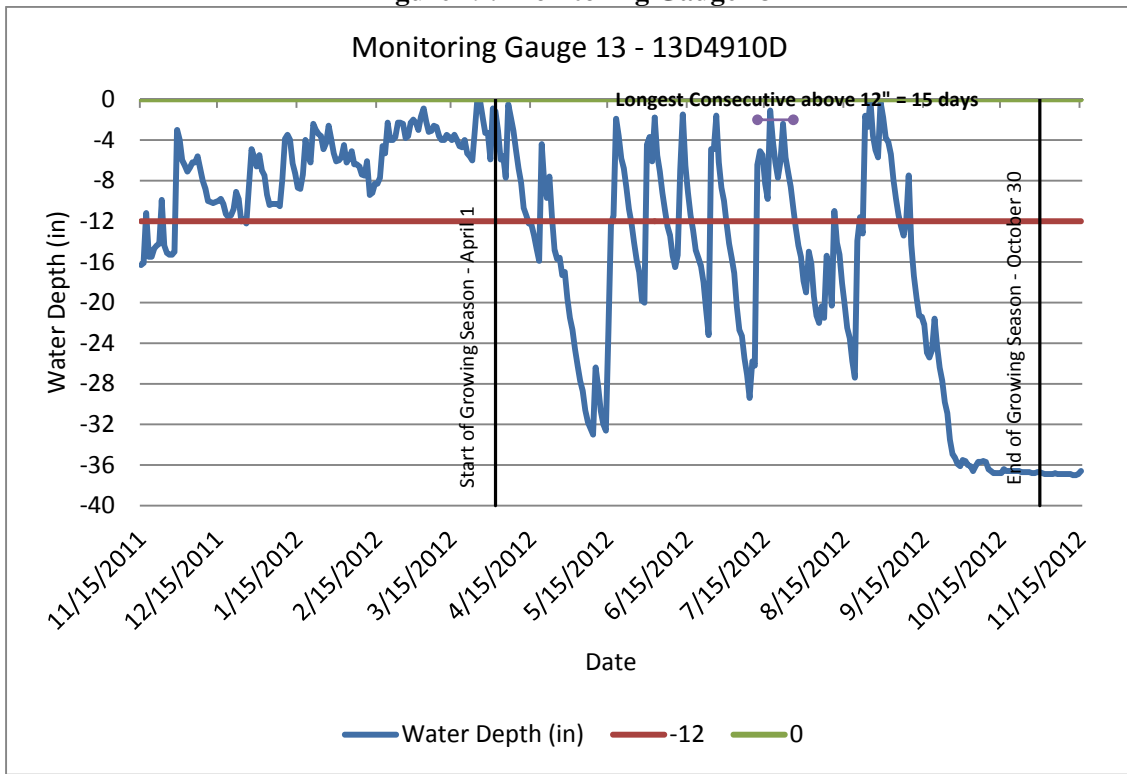


Table 11: Wetland Hydrology Criteria Attainment

Meadowbranch Swamp Wetland Restoration EEP Project Number 92351						
	Success Criteria Achieved/Max Consecutive Days During Growing Season (Percentage)*					
Gauge	Year 0 (2011)	Year 1 (2012)	Year 2 (2013)	Year 3 (2014)	Year 4 (2015)	Year 5 (2016)
1	No/0 (0%)	No/13 (6.1%)				
2	Yes/50 (23.5%)	No/11 (5.2%)				
3	No/0 (0%)	Yes/75 (35.2%)				
4	No/8 (3.8%)	No/0 (0%)				
5	Yes/55 (25.8%)	No/17 (8%)				
6	Yes/73 (34.3%)	No/13** (6.1%)				
7	Yes/83 (39%)	No/3** (1.4%)				
8	No/13 (6.1%)	No/16 (7.5%)				
9	Yes/50 (23.5%)	No/5 (2.3%)				
10 - Ref	Yes/21 (9.9%)	No/7 (3.3%)				
11	N/A	No/4 (1.9%)				
12	N/A	No/12 (5.6%)				
13	N/A	No/15 (7%)				

* Growing season is 213 days. Ten percent of growing season is equal to 21 days or more of consecutive readings above 12 inches.

** Gauges 6 and 7 were both protruding from the ground. The elevations were adjusted to compensate for the distance between the calibration level and the ground surface. Gauge 6 was 6.5 inches above the ground, and gauge 7 was 5 inches above the ground. Gauge 7 contained a large number of days with no readings and appears to be malfunctioning. Gauge 7 should be replaced.