

# Morgan Creek Stream Restoration Site

Haywood County, North Carolina

Cataloging Unit: 06010106

EEP Contract #: D06035-A

December 14, 2010

## MONITORING REPORT 2010 (YEAR 2)



### **Submitted to:**

North Carolina Department of Environment and Natural Resources

North Carolina Ecosystem Enhancement Program

1652 Mail Service Center

Raleigh, NC 27699-1652

### **Submitted by:**

Restoration Systemss, LLC

1101 Haynes Street, Suite 211

Raleigh, North Carolina 27604

### **Prepared by:**

Wolf Creek Engineering, pllc

51 North Knob Lane

Asheville, NC 28787



**TABLE OF CONTENTS**

EXECUTIVE SUMMARY .....	iii
1.0 PROJECT GOALS, BACKGROUND, AND ATTRIBUTES .....	1
1.1 General Project Description .....	1
1.1.1 USGS and NCDWQ River Basin Designations.....	1
1.1.2 NCDWQ Surface Water Classification .....	1
1.2 Project Goals and Objectives .....	3
1.3 Project Structure.....	3
1.4 Restoration Type and Approach .....	5
1.5 Project History, Contacts and Attribute Data .....	5
Insert Table II-IV .....	6
2.0 PROJECT CONDITION AND MONITORING RESULTS.....	8
2.1 Vegetation Assessment .....	8
2.1.1 Stem Counts .....	8
2.1.2 Vegetative Problems .....	8
2.1.3 Vegetation Plot Photos.....	9
2.2 Stream Assessment .....	9
2.2.1 Hydrology .....	9
2.2.2 Geomorphology .....	9
2.2.4 Photo Point Stations.....	17
2.2.5 Stability Assessment .....	18
2.3 Wetland Assessment .....	19
2.3.1 Hydrology .....	19
2.3.2 Vegetation.....	20
2.4 Conclusion .....	20
3.0 References.....	21

**LIST OF TABLES**

Table I.	Project Components .....	4
Table II.	Project Activity and Reporting History .....	6
Table III.	Project Contacts .....	6
Table IV.	Project Attributes.....	7
Table V.	Vegetation Summary.....	8
Table VI.	Baseline Morphology and Hydraulic Summary.....	10-11
Table VII.	Morphology and Hydraulic Monitoring Summary.....	12-16
Table VIII.	Verification of Bankfull Events.....	9
Table IX.	Categorical Stream Feature Visual Stability Assessment.....	18-19
Table X.	Wetland Criteria Attainment.....	19

**LIST OF FIGURES**

Figure 1.	Vicinity Map.....	5
-----------	-------------------	---

- APPENDIX A: Monitoring Plans
- APPENDIX B: Vegetation Raw Data
- APPENDIX C: Geomorphic Raw Data
- APPENDIX D: Wetland Raw Data

## **EXECUTIVE SUMMARY**

The Morgan Creek Site is located in Haywood County, North Carolina within the French Broad River Basin, Cataloging Unit 06010106, specifically within the targeted local watershed 06010106020040. The project consisted of restoring and enhancing approximately 3,900 linear feet of stream, restoring approximately 9.8 acres of riparian buffers, and restoring and enhancing approximately 1.11 acres of wetlands. The Site is in a rural setting in the Blue Ridge hydrophysiographic ecoregion and was previously used to pasture cattle with woody vegetation confined to isolated areas. Prior to restoration, the channels were highly degraded due to unrestricted livestock access, channelization activities, and lack of riparian vegetation. The restoration design was based on a Priority Level 1 and 2 approach to restore proper channel dimension and allow for appropriate sediment transport. Cross-vanes, J-Hook vanes, and in-stream log structures have been integrated into the channel to provide grade control, maintain stable streambanks while the riparian vegetation establishes, and provide in-stream habitat. Sod mats were harvested onsite and were used to stabilize the newly graded streambanks. Excavated materials from the existing channel were used to backfill around in-stream structures and to build riffles with a natural substrate and function.

### **Hydrology**

Following the completion of construction in January of 2009, the Site has been subjected to at least one bankfull event and two greater-than-bankfull events. The portions of the southwest region of the state experienced rainfall well above normal during the spring of 2009. In July of 2009 a high rainfall event resulted in high water at 0.8 ft. above bankfull or 1.6 times maximum channel depth. No bankfull or greater-than-bankfull flows were recorded during the second year of monitoring (2010).

### **Stream**

The stream reaches have managed the high-flow events of the first two years. Visual inspection of the Site following the bankfull event in June of 2009 revealed no noticeable adjustments in the bed or bank. The overbank event in July of 2009 resulted in noticeable adjustments in many of the riffles. The overall grade of the channel has been maintained, while there are numerous local adjustments in the riffles and pools. These adjustments appear to be consistent with the channel form and have generally not affected structure stability or function. Visual observation during the performance of Year 2 monitoring indicates that most adjustments to the bed have stabilized and no further degradation has occurred in the last year. The banks of the channels are intact throughout the Site.

### **Vegetation**

Native woody and herbaceous species were used to establish, at minimum, a thirty-foot riparian buffer on each side of the restored reach. Herbaceous species have successfully established throughout the entire site. On-site sod transplants used to reconstruct the channel banks are well established and show evidence of vigorous growth. Riparian buffer planting had a good survival rate although minor issues with encroachment of cattle did occur in 2009. These issues have been addressed and have not been a factor in 2010. The average density for planted living stems at the end of Monitoring Year 2 is 546 stems per acre.

**Wetland**

Wetland hydrology criteria was met on two of the three groundwater gauges in the first year of monitoring and one of the three gauges in the second year. Site wetland hydrology appears to have diminished under drought conditions during Monitoring Year 2. The gauges that did not meet minimum wetland hydrology suggest that restoration efforts may not be successful in areas that are the farthest removed from the seep sources, particularly in marginal years of precipitation. Herbaceous wetland vegetation was documented in the vegetation plots located in the wetland restoration areas.

**Planned Action**

The riparian buffer bare-root planting has remained successfully established through the second year. In general, herbaceous planting resulted in vigorous growth throughout the site, and no remedial action with respect to vegetation is necessary.

In order to address the concern with the performance of the groundwater hydrology in the wetland restoration areas, Restoration Systems will set up a field meeting with EEP in the Spring of 2011 to discuss the appropriate response.

Continued visual monitoring is planned for stream areas that have been identified as “Areas of Concern”. No repair work is required at this time for any reaches of the channel.

## 1.0 PROJECT GOALS, BACKGROUND, AND ATTRIBUTES

The purpose of the Morgan Creek Stream Restoration Site (Site) was to restore degraded sections of Morgan Creek and three of its tributaries located in Haywood County, North Carolina. This monitoring report presents information regarding the site and watershed conditions, the restoration approach for the project, the monitoring results, remedial action plan and detailed monitoring drawings of the site.

### 1.1 General Project Description

The site is located approximately 10 miles northeast of the City of Waynesville in rural Haywood County, North Carolina (Figure 1: Vicinity Map). The site consists of approximately 9.8 acres of floodplain, approximately 3,900 linear feet of stream designated as Morgan Creek and its tributaries, and 0.51 acres of existing wetlands. The stream reaches consist of perennial and intermittent, first and second order streams that have historically been impacted by riparian and bank vegetation removal, channel straightening, unrestricted livestock access, and agricultural land-use practices. Existing land use within the site consists of forested areas and pasture land. The site is located within moderate to steep, sloping colluvial valleys and elevations range from approximately 2500 ft. to 2625 ft. (NGVD). Past land management activities have consisted of timber harvesting with subsequent land clearing for agricultural uses including cattle grazing. The land outside of the conservation easement remains in active agricultural production.


#### 1.1.1 USGS and NCDWQ River Basin Designations

The project reach is located in the Pigeon River watershed of the French Broad River Basin (United States Geological Survey (USGS) 14-digit Hydrologic Unit 06010106020040) within North Carolina Division of Water Quality (NCDWQ) sub-basin 04-03-05. This sub-basin is primarily forested, although agriculture accounts for a significant portion of the land-use. Morgan Creek drains into Fines Creek at the downstream end of the Site, which in turn flows to the Pigeon River five miles farther downstream.

#### 1.1.2 NCDWQ Surface Water Classification

Morgan Creek, in the vicinity of the Site, is assigned a best usage classification of C by the NCDWQ and as such there are no restrictions on watershed development or types of discharge. These waters are suitable for aquatic life propagation and survival, fishing, wildlife, secondary recreation, and agriculture. Secondary recreation includes wading, boating, and other uses not involving human body contact with water on an organized or frequent basis.


Fines Creek, from its source to the Pigeon River, as well as the portion of the Pigeon River located approximately 5 miles south of the Site, are listed on the DWQ final 2006 303(d) list. Streams which are included in the 303(d) list either do not meet water quality standards or have impaired uses. Listing of these streams likely results from non-point agriculture and urban runoff, and potentially from industrial point source discharges. Specifically, the reason given for the listing of Fines Creek and the Pigeon River is "Impaired Biological Integrity."

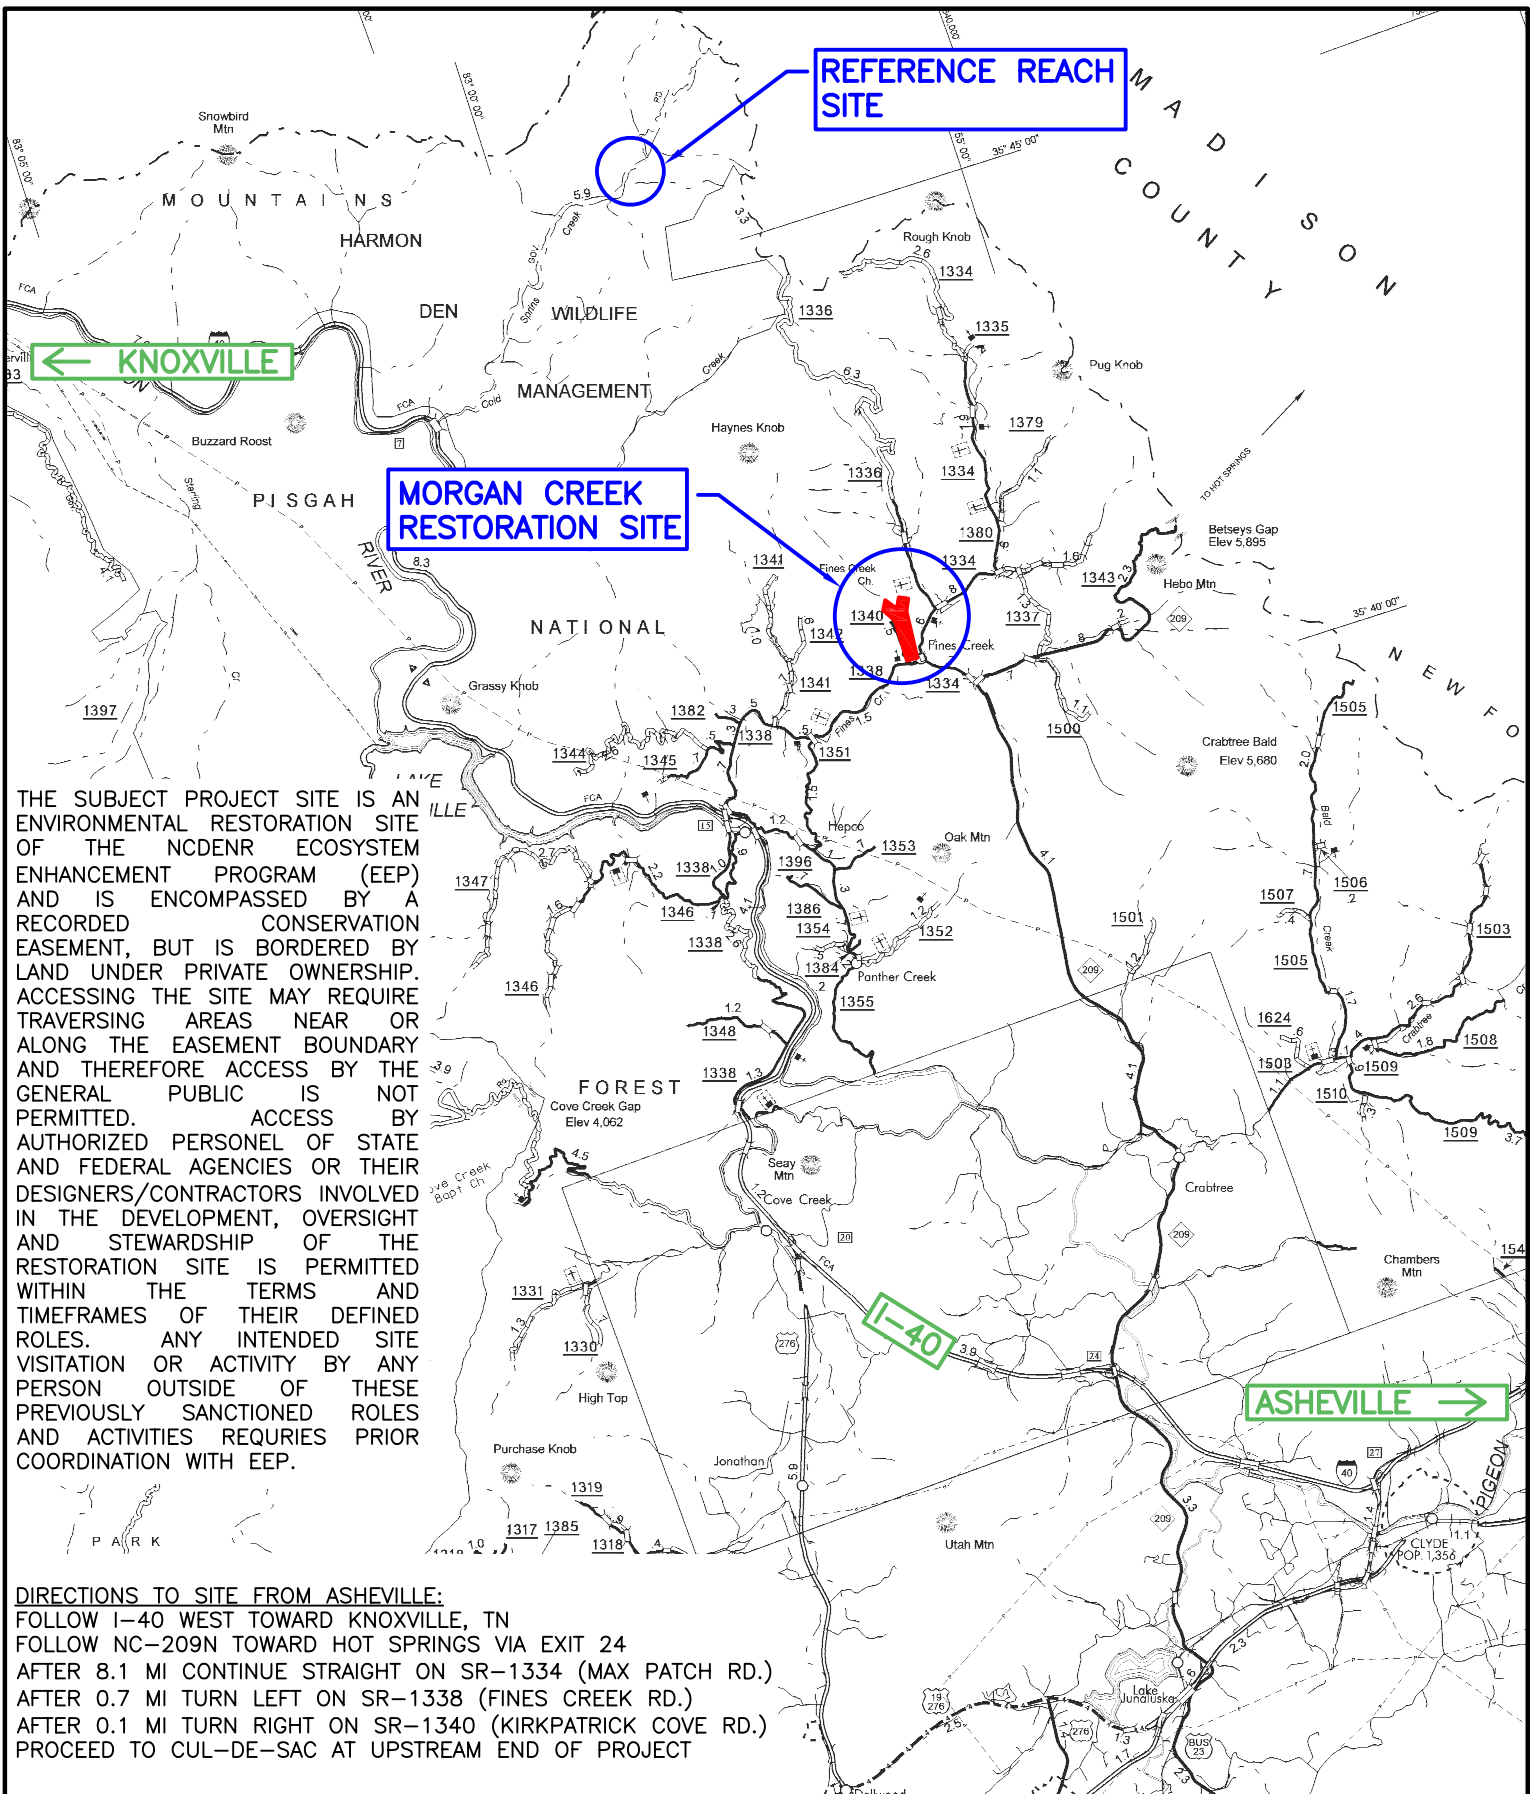

THE SUBJECT PROJECT SITE IS AN ENVIRONMENTAL RESTORATION SITE OF THE NCDENR ECOSYSTEM ENHANCEMENT PROGRAM (EEP) AND IS ENCOMPASSED BY A RECORDED CONSERVATION EASEMENT, BUT IS BORDERED BY LAND UNDER PRIVATE OWNERSHIP. ACCESSING THE SITE MAY REQUIRE TRAVERSING AREAS NEAR OR ALONG THE EASEMENT BOUNDARY AND THEREFORE ACCESS BY THE GENERAL PUBLIC IS NOT PERMITTED. ACCESS BY AUTHORIZED PERSONEL OF STATE AND FEDERAL AGENCIES OR THEIR DESIGNERS/CONTRACTORS INVOLVED IN THE DEVELOPMENT, OVERSIGHT AND STEWARDSHIP OF THE RESTORATION SITE IS PERMITTED WITHIN THE TERMS AND TIMEFRAMES OF THEIR DEFINED ROLES. ANY INTENDED SITE VISITATION OR ACTIVITY BY ANY PERSON OUTSIDE OF THESE PREVIOUSLY SANCTIONED ROLES AND ACTIVITIES REQUIRES PRIOR COORDINATION WITH EEP.

**DIRECTIONS TO SITE FROM ASHEVILLE:**  
 FOLLOW I-40 WEST TOWARD KNOXVILLE, TN  
 FOLLOW NC-209N TOWARD HOT SPRINGS VIA EXIT 24  
 AFTER 8.1 MI CONTINUE STRAIGHT ON SR-1334 (MAX PATCH RD.)  
 AFTER 0.7 MI TURN LEFT ON SR-1338 (FINES CREEK RD.)  
 AFTER 0.1 MI TURN RIGHT ON SR-1340 (KIRKPATRICK COVE RD.)  
 PROCEED TO CUL-DE-SAC AT UPSTREAM END OF PROJECT

PREPARED FOR: PREPARED BY: AND BY:



**SITE VICINITY MAP**

MORGAN CREEK RESTORATION SITE  
 HAYWOOD COUNTY, NORTH CAROLINA

FIGURE 1



## 1.2 Project Goals and Objectives

The primary goals of the Morgan Creek Stream Restoration Project are to:

- Restore aquatic and riparian habitat within portions of the Morgan Creek watershed.
- Restore geomorphic stability to the subject stream reaches.

These goals will be accomplished through the following objectives:

- Restoration of approximately ten acres of Montane Alluvial Forest along both sides of Morgan Creek.
- Removing nonpoint sources of pollution associated with cattle raising and agricultural activities including the exclusion of livestock from Morgan Creek and adjacent floodplain and establishing a native woody riparian buffer (at least 50' wide) adjacent to streams and wetlands to treat surface runoff which may be laden with sediment and/or agricultural pollutants from the adjacent landscape.
- Reestablishing stream stability and the capacity to transport watershed flows and sediment loads by restoring a stable dimension, pattern, and profile supported by natural in-stream habitat and grade/bank stabilization structures.
- Promoting floodwater attenuation through a) reconnecting bankfull stream flows to the abandoned floodplain terrace, b) restoring secondary, entrenched tributaries thereby reducing floodwater velocities, c) restoring floodplain wetlands, thereby increasing the storage capacity for floodwaters within the Site, and d) revegetating floodplains to increase frictional resistance on floodwaters crossing the Site.
- Improving aquatic habitat by enhancing stream bed variability and the use of in-stream structures.
- Providing wildlife habitat including seepage slope wetlands.

These accomplishments will result in:

- Restoration and enhancement of 4083 Stream Mitigation Units.
- Providing 0.83 Wetland Mitigation Units.
- Protecting the Site with a perpetual conservation easement.

## 1.3 Project Structure

The project is composed of four distinct stream reaches; the main channel, Morgan Creek, and its three tributaries, North Branch, Middle Branch, and South Branch. The project structure is tabulated in Table I (See Below).

Restoration Reach/Area	Restoration Level	Approach	Pre-Restoration LF or AC	Post-Restoration LF or AC	Station Range/Location
Morgan Creek	R	P2	892	900	100+00 – 109+73
Morgan Creek	R	P1	340	340	108+73 – 112+00
Morgan Creek	R	P2	1402	1438	112+00 – 126+36
Morgan Creek	E1	E1	141	141	126+36 – 127+77
Morgan Creek	R	P2	213	212	127+77 – 129+72
North Branch	R	R2	288	296	200+00 – 202+96
North Branch	R	P2	63	66	203+38 – 204+02
Lower North Branch	R	P1	2	254	500+00 – 502+46
Middle Branch	E1	E1	148	148	300+00 – 301+48
Middle Branch	E1	E1	154	154	301+48 – 303+02
South Branch	R	P1	197	205	400+00 – 402+05
South Branch	E1	E1	115	115	402+05 – 403+20
A, C, D, E, F, G, H, I, J, K	E		0.46	0.46	
R1, R2, R3, R4, R5, R6, R7	R		0.6	0.6	

Restoration Level	Stream (LF)	Riparian Wetland (Ac)		Non-Riparian (Ac)	Upland (Ac)	Buffer (Ac)	BMP
		Riverine	Non-Riverine				
Restoration	3,711		0.6				
Enhancement			0.46				
Enhancement I	558						
Enhancement II							
Creation							
Preservation							
HQ Preservation							
			1.06				
<b>Totals</b>	<b>4,269</b>		<b>1.06</b>				

Applicable	Non-Applicable
------------	----------------

## **1.4 Restoration Type and Approach**

Restoration and enhancement practices implemented on this project were designed to minimize unnecessary disturbance to adjacent land and to protect mature riparian vegetation where it exists. Consideration was given to the potential functional lift provided by restoration activities in comparison to the functional lift that could be realized through the natural process of channel evolution. Included in this consideration was an attempt to determine the disturbance and sedimentation that could occur as a result of this natural process. Where restoration was determined to be warranted, consideration was given to which reaches could best be served by maintaining as much of the existing channel pattern as possible.

The proposed reaches of Morgan Creek and its tributaries are designed as Type B4 and Type B4a streams. This channel configuration provides the most stable and natural form in the moderately sloping colluvial valleys that are found throughout the Site. Additionally, since broad alluvial valleys are not found within the Site, the lower sinuosity of the Type B4 streams will result in minimizing grading and earthwork activities. The proposed channel dimensions, patterns, and profiles are based on hydraulic relationships and morphologic dimensionless ratios of the reference reaches. The installation of rock and wood structures was utilized throughout the restored reaches of the Site. Rock and log structures were installed in runs for grade control to prevent headcut formation. Log vanes with rootwads were installed in meander bends to direct the flow away from the outside of the bend and provide toe and bank protection. Sod transplants were used extensively throughout the project to stabilize newly constructed channel banks. On-site material including sod, bed material, boulders, and logs were used to the maximum extent possible.

Proposed wetland areas are underlain by hydric soils but are non-jurisdictional due to insufficient hydrology. Channel restoration reestablished a connection between the floodplain and the channel. Overbank flooding and better utilization of nearby seepage hydrology will provide the needed hydrology to sustain these hydric soil zones as jurisdictional wetlands. Areas where jurisdictional wetlands existed have been enhanced by the planting of appropriate woody and herbaceous species. Each wetland restoration and enhancement area has been planted with species appropriate to the ecoregion and will promote the functionality of the wetlands as integral parts of the riparian corridor.

## **1.5 Project History, Contacts and Attribute Data**

Tables II and III (below) provide an overview of the project implementation timeline as well as the individual companies responsible for managing and completing various project milestones. Information defining current land use within the watershed, Rosgen classification of the stream reaches within the site, and various other data attributes for the site are provided in Table IV (below).

<b>Table II. Project Activity and Reporting History</b> <b>Morgan Creek Restoration Project / EEP Contract# D06035-A</b>		
<b>Activity or Report</b>	<b>Data Collection Complete</b>	<b>Completion or Delivery</b>
Restoration Plan	Nov 2007	Jan 2008
Final Design - Construction Plans	N/A	Jul 2008
Construction	N/A	Jan 2009
Temporary S&E mix applied to entire project area	N/A	Dec 2008
Permanent seed mix applied to entire site	N/A	Dec 2008
Bare-root plantings for floodplain and uplands	N/A	Jan 2009
Mitigation Plan / As-Built (Year 0 Monitoring - baseline)	Jan 2009	Feb 2009
Year 1 Monitoring	Oct 2009	Dec 2009
Year 2 Monitoring	Oct 2010	Nov 2010
Year 3 Monitoring		
Year 4 Monitoring		
Year 5 Monitoring		

<b>Table III. Project Contact Table</b> <b>Morgan Creek Restoration Project / EEP Contract# D06035-A</b>		
<b>Full Delivery Provider</b> Restoration Systems, Inc Travis Hamrick	1101 Haynes St., Suite 211 Raleigh, NC 27604 919-755-9490	
<b>Designer</b> Wolf Creek Engineering, pllc S. Grant Ginn, P.E.	51 North Knob Lane Asheville, NC 28787 828-658-3649	
<b>Construction Contractor</b> North State Environmental, Inc Darrell Westmoreland	2889 Lowery St. Winston-Salem, NC 27101 336-725-2010	
<b>Project Manager</b> American Wetlands Lamar Beasley	2310 Valley Carline Court Ruston, VA 20191 703-860-0045	
<b>Planting &amp; Seeding Contractor</b> North State Environmental, Inc Stephen Joyce	2889 Lowery St. Winston-Salem, NC 27101 336-725-2010	
<b>Monitoring Performers</b> Stream Monitoring - Wolf Creek Engineering, pllc Vegetation Monitoring - Axiom Environmental, Inc	S. Grant Ginn, P.E. Grant Lewis	828-658-3649 919-215-1693

Table IV. Project Attribute Table					
Morgan Creek Restoration Project / EEP Contract# D06035-A					
Project County	Haywood				
Physiographic Region	Blue Ridge				
Ecoregion	Southern Crystalline Ridges and Mountains				
Project River Basin	French Broad River Basin				
USGS HUC for Project (14 digit)	06010106020040				
NCDWQ Sub-basin for Project	04-03-05				
Within extent of EEP Watershed Plan?					
WRC Class (Warm, Cool, Cold)					
% of project easement fenced or demarcated	100% Demarcated Easement Corners				
Beaver activity observed during design phase?	None within project site				
Restoration Component Attribute Table					
	Morgan	North	Lower North	Middle	South
Drainage area (mi <sup>2</sup> )	0.71	0.12	0.18	0.004	0.006
Stream order	Second	First	First	First	First
Restored length (feet)	2890	362.5	254	-	250
Perennial or Intermittent	Perennial	Perennial	Perennial	Intermittent	Perennial
Watershed type	Rural	Rural	Rural	Rural	Rural
Watershed LULC Distribution (e.g.)					
Residential	15%	30%	35%	0%	0%
Ag-Row Crop	0%	0%	0%	0%	0%
Ag-Livestock	35%	0%	0%	65%	55%
Forested	50%	70%	65%	35%	45%
Watershed impervious cover (%)	5	5	5	0	0
NCDWQ AU/Index number	5-32-7				
NCDWQ classification	C	C	C	C	C
303d listed?	No				
Upstream of a 303d listed segment?	Yes				
Reasons for 303d listing or stressor	non-point urban and agricultural runoff, agricultural activities				
Total acreage of easement	10.25				
Total vegetated acreage within easement	9.8				
Total planted acreage as part of the restoration	9.5				
Rosgen classification of pre-existing	C4b, G4	A4	A4	G4	F4
Rosgen classification of As-Built	B4	B4a	B4	B4a	B4a
Valley type	II	II	II	II	II
Valley slope	0.0376	0.0515	0.0365	0.118	0.1271
Valley side slope range	4% - 44%				
Valley toe slope range	4.5% - 8%				
Cowardin classification	N/A				
Trout waters designation	N/A				
Species of concern, endangered?	small whorled pagonia, Indiana and Gray bat				
Dominant soil series and characteristics	CxA	EvE, SdD, CxA	CxA	HaD2	FnE2, HaD2
Series	Cullowhee-Nikwasi	Evard-Cowee, Saunook	Cullowhee-Nikwasi	Hayesville Clay Loam	Fannin Loam
Depth (in)	0-65	0-72, 0-65	0-65	0-60	0-61
Clay %	-	-	-	-	0-35
K	mod. rapid - rapid	moderate - mod. rapid	moderately rapid	moderate	moderate
T	-	-	-	-	-

## 2.0 PROJECT CONDITION AND MONITORING RESULTS

### 2.1 Vegetation Assessment

Sampling was conducted as outlined in the CVS-EEP Protocol for Recording Vegetation, Version 4.0 (Lee et al. 2006) (<http://cvs.bio.unc.edu/methods.htm>) to determine the planting pattern of woody stems with respect to species, spacing, and density as well as to forecast survivability and growth of planted stems in subsequent monitoring years. The taxonomic standard for vegetation used for this document was Flora of the Carolinas, Virginia, Georgia, and Surrounding Areas (Weakley 2008). Following Site construction six vegetative sampling plots (five standard [10m x 10m] plots and one [5m x 20m] plot) were established, monumented at each corner with rebar and PVC pipes, and recorded during baseline surveys. All planted stems and plot corners were marked with orange flagging tape to facilitate relocation during subsequent monitoring years. Four plots were established in stream restoration areas and two within wetland areas (one within a wetland enhancement area and one within a wetland restoration area). Plots were placed within the applicable planting zones to capture the heterogeneity of the designed vegetative communities.

#### 2.1.1 Stem Counts

Year 2 vegetation monitoring for the Site occurred in late July 2010. Vegetation sampling across the Site was above the required average density with 546 planted stems per acre. Native herbaceous cover has successfully established throughout the Site. Volunteer woody species were documented within three of the six monitoring plots (Plots 1, 2, and 4) during Year 2.

**Table V: Vegetation Summary**

Plot	Date Sampled	Planted Living Stems	Dead or Missing Stems	Volunteer Stems	Total Living Stems	Average Stems Per Acre	# species
1	7/27/2010	13	6	1	14	526.09	8
2	7/27/2010	18	0	3	21	728.43	9
3	7/27/2010	14	4	0	14	566.56	7
4	7/27/2010	11	2	2	13	445.15	8
5	7/27/2010	14	1	0	14	566.56	6
6	7/27/2010	11	1	0	11	445.15	7

#### 2.1.2 Vegetative Problems

Stem loss which occurred at the Site since baseline monitoring may be due to several factors, including livestock encroachment in Plots 2 and 4, and mowing within Plot 5. Supplemental planting occurred during the Year 1 (2009 monitoring season) within areas that had experienced stem loss. During Year 2 (2010) monitoring, average overall vigor of planted stems was noted as good to excellent; however, planted stems should continue to be monitored closely in subsequent monitoring years.

### 2.1.3 Vegetation Plot Photos

A photo point was established in each vegetation plot. Photo points are positioned for each plot at the origin looking diagonally across the plot to the opposite corner. The photographs were captured on the same day as the vegetation plot surveys (Appendix B).

## 2.2 Stream Assessment

Monitoring protocol follows that outlined within the EEP Site Specific Mitigation Plan and detailed in the U.S. Army Corps of Engineers (USACE) Stream Mitigation Guidelines for Monitoring Level I. Stream monitoring included measurements of stream dimension, profile, pattern, bed materials, photo documentation, and stream bankfull return interval. (Baseline, Year 1, and Year 2 summary data are provided in Tables VI and VII below).

Most of the stream reaches have managed the extreme flow events of the first and second years reasonably well. The overall bed profile of Morgan Creek has been maintained; however, there are numerous local adjustments to riffle and pool features. These adjustments appear to have stabilized during Monitoring Year 2 (2010), and exhibit no additional degradation. The channel banks are stable and fully vegetated throughout the project. Most of the in-stream structures are intact and functional. The few structures that have been partially compromised appear to have stabilized and are not presently in need of repair. No repairs or remediation is called for at this time.

### 2.2.1 Hydrology

Since completion of construction in January of 2009, the site has been subjected to at least three bankfull or greater events. In July of 2009, a weather system crossed western North Carolina resulting in four inches of rainfall on-site and water elevations 0.8 feet above bankfull on Morgan Creek. It is estimated that this storm was between a twenty-five and fifty-year event. Heavy rainfall in the late summer of 2009 again resulted in water elevations above bankfull. No bankfull event was recorded during Monitoring Year 2 (2010). It should be noted that regional precipitation maps from the National Oceanic and Atmospheric Administration (NOAA) website document the entire Southeast as having received “below average” rainfall during the 2010 calendar year.

**Table VIII. Verification of Bankfull Events**

<b>Date of Data Collection</b>	<b>Date of Occurrence of Bankfull Event</b>	<b>Height Above Bankfull (ft)</b>	<b>Method of Data Collection</b>
6/16/09	Spring 2009	At Bankfull	Debris evidence at bankfull
7/9/09	7/8/09	0.8	Crest Gauge
10/6/09	Summer 2009	0.6	Crest Gauge

### 2.2.2 Geomorphology

Following the procedures established in the USDA Forest Service Manual (Harrelson et al 1994) and the methodologies utilized in the Rosgen stream assessment and classification system (Rosgen 1994, 1996), data collected consisted of detailed dimension and pattern measurements, longitudinal profiles, and bed materials sampling.

Table VI - Baseline Morphology and Hydraulic Summary  
Morgan Creek Restoration Site - Morgan Creek (3031 ft)

Parameter	Gauge			Regional Curve			Pre-Existing Condition			Reference Reach(es) Data			Design			As-Built / Baseline					
	LL	UL	Eq.	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
Dimension and Substrate - Riffling																					
Bankfull Width (ft)																					
Floodprone Width (ft)																					
Bankfull Mean Depth (ft)																					
Bankfull Max Depth (ft)																					
Bankfull Cross-Sectional Area (ft <sup>2</sup> )																					
Width/Depth Ratio																					
Entrenchment Ratio																					
Bank Height Ratio																					
d50 (mm)																					
Profile																					
Riffling Length (ft)																					
Riffling Slope (ft/ft)																					
Pool Length (ft)																					
Pool Max Depth (ft)																					
Pool Spacing (ft)																					
Pool Volume (ft <sup>3</sup> )																					
Pattern																					
Channel Beltwidth (ft)																					
Radius of Curvature (ft)																					
Radius of Curvature Ratio (ft/ft)																					
Meander Wavelength (ft)																					
Meander Width Ratio (ft/ft)																					
Substrate, bed and transport parameters																					
<sup>4</sup> R% / R0% / P% / G% / S%																					
<sup>5</sup> SC% / S8% / G% / C% / B% / Be%																					
<sup>6</sup> d16 / d35 / d50 / d84 / d95 / dip / disp (mm)																					
Reach Shear Stress (competency) lb/ft <sup>2</sup>																					
Max part size (mm) mobilized at bankfull																					
Stream Power (transport capacity) W/m <sup>2</sup>																					
Additional Reach Parameters																					
Drainage Area (sq mi)																					
Impervious cover estimate (%)																					
Rosgen Classification																					
Bankfull Velocity (fps)																					
Bankfull discharge (cfs)																					
Valley length (ft)																					
Channel Thalweg length (ft)																					
Stuosity (ft)																					
Water Surface Slope (channel) (ft/ft)																					
BF slope (ft/ft)																					
<sup>8</sup> Bankfull Floodplain Area (acres)																					
<sup>9</sup> Proportion Overwide (%)																					
<sup>7</sup> Entrenchment Class (ER Range)																					
<sup>8</sup> Incision Class (BHR Ranch)																					
BEHI VL% / L% / M% / H% / VH% / E%																					
Channel Stability or Habitat Metric																					
Biological or Other																					



Table VI - Baseline Morphology and Hydraulic Summary  
Morgan Creek Restoration Site - North Branch (4151f)

Parameter	Gauge			Regional Curve			Pre-Existing Condition			Reference Reach(es) Data			Design			As-Built / Baseline					
	LL	UL	Eq.	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
Dimension and Substrate - Riffling																					
Bankfull Width (ft)						7.1					8					9.4					
Floodprone Width (ft)						14					11.6					21					
Bankfull Mean Depth (ft)						1					0.52					0.5					
Bankfull Max Depth (ft)						1.5					0.77					0.9					
Bankfull Cross-Sectional Area (ft <sup>2</sup> )						6.9					4.2					5					
Width/Depth Ratio						7.1					15.4					17.7					
Entrenchment Ratio						2					1.45					2.23					
Bank Height Ratio						1.5					1					1					
d50 (mm)						27					27										
Profile																					
Riffle Length (ft)																					
Riffle Slope (ft/ft)						0.078					0.142					0.036					
Pool Length (ft)																					
Pool Max Depth (ft)						1.5					0.95					6.5					
Pool Spacing (ft)						95					68					1.9					
Pool Volume (ft <sup>3</sup> )																22					
Channel Beltwidth (ft)						23					17					7					
Radius of Curvature (ft)							14				13					11					
Radius of Curvature Ratio (ft/ft)						5					17					17					
Meander Wavelength (ft)						0.7					1.6					3					
Meander Width Ratio (ft/ft)											29					36					
											2.1					2.8					
Substrate, bed and transport parameters																					
<sup>4</sup> R% / R0% / P% / G% / S%																					
<sup>5</sup> SC% / S8% / G% / C% / B% / Be%						5	26	51	17	0	1	1	10	48	41	0	1				
<sup>6</sup> d16 / d35 / d50 / d84 / d95 / dip / disp (mm)						0.32	5.37	16.7	69	119			5.2	22	45	130	190				
Reach Shear Stress (competency) lb/ft <sup>2</sup>																					
Max part size (mm) mobilized at bankfull																					
Stream Power (transport capacity) W/m <sup>2</sup>																					
Additional Reach Parameters																					
Drainage Area (sq mi)																					
Impervious cover estimate (%)																					
Rosgen Classification																					
Bankfull Velocity (fps)																					
Bankfull discharge (cfs)																					
Valley length (ft)																					
Channel Thalweg length (ft)																					
Stuavity (ft)																					
Water Surface Slope (channel) (ft/ft)																					
BF slope (ft/ft)																					
<sup>8</sup> Bankfull Floodplain Area (acres)																					
<sup>9</sup> Proportion Overwide (%)																					
<sup>7</sup> Entrenchment Class (ER Range)																					
<sup>8</sup> Incision Class (BHR Ranch)																					
BEHI VL% / L% / M% / H% / VH% / E%																					
Channel Stability or Habitat Metric																					
Biological or Other																					

**Table VII. Morphology and Hydraulic Monitoring Summary  
Morgan Creek Stream Restoration Site (D06035-A)  
Reach 1: Morgan Creek**

Parameter	Cross Section RFI Riffle					Cross Section PL1 Pool					Cross Section									
	MY1	MY2	MY3	MY4	MY5	MY+	MY1	MY2	MY3	MY4	MY5	MY+	MY1	MY2	MY3	MY4	MY5	MY+		
<b>Dimension</b>																				
Bkf Width (ft)	12.9	13					14.0	13.9												
Floodprone Width (ft)	63	63					-	-												
Bkf Cross Sectional Area (ft <sup>2</sup> )	11.4	11.6					13.4	12.5												
Bkf Mean Depth (ft)	0.9	0.9					1.0	0.9												
Bkf Max Depth (ft)	1.3	1.3					1.5	1.4												
Width/Depth Ratio	14.6	14.6					-	-												
Entrenchment Ratio	4.9	4.9					-	-												
Bank Height Ratio	1.0	1.0					-	-												
Wetted Perimeter (ft)																				
Hydraulic Radius (ft)																				
<b>Substrate</b>																				
D <sub>50</sub> (mm)	94	17.6																		
D <sub>84</sub> (mm)	207	122																		

Parameter	MY-1 (2009)			MY-2 (2010)			MY-3 (2011)			MY-4 (2012)			MY-5 (2013)			MY+ (2014)				
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med		
<b>Pattern</b>																				
Beltwidth (ft)	18	24	21	18	24	21	18	24	21											
Radius of Curvature (ft)	28	87	36	28	87	36	28	87	36											
Meander Wavelength (ft)	61	84	72	61	84	72	61	84	72											
Meander Width Ratio	1.4	1.9	1.6	1.4	1.9	1.6	1.4	1.9	1.6											
<b>Profile</b>																				
Riffle Length (ft)	8.5	25.5	12	5.5	22.9	16														
Riffle Slope (ft/ft)	0.0156	0.0864	0.0342	0.0195	0.0657	0.0422														
Pool length (ft)	3.3	16.5	9	-	-	-														
Pool Spacing (ft)	15	46	37	15	137.5	43														
<b>Additional Reach Parameters</b>																				
Valley Length (ft)	-	-	740	-	-	740														
Channel Length (ft)	-	-	773	-	-	773														
Sinuosity	-	-	1.04	-	-	1.04														
Water Surface Slope (ft/ft)	0.036	0.080	0.048	0.0355	0.0471	-														
Bkf Slope (ft/ft)	0.036	0.080	0.048	-	-	0.0444														
Rosgen Classification	-	-	B3a	-	-	B3a														
Habitat Index																				
Macrobenthos																				

**Table VII. Morphology and Hydraulic Monitoring Summary  
Morgan Creek Stream Restoration Site (D06035-A)  
Reach 2: Morgan Creek**

Parameter	Cross Section RF2 Riffle					Cross Section PL2 Pool					Cross Section									
	MY1	MY2	MY3	MY4	MY5	MY+	MY1	MY2	MY3	MY4	MY5	MY+	MY1	MY2	MY3	MY4	MY5	MY+		
<b>Dimension</b>																				
Bkf Width (ft)	13.3	14.1					15.2	16.3												
Floodprone Width (ft)	33	33					-	-												
Bkf Cross Sectional Area (ft <sup>2</sup> )	12	10.6					21.8	20.2												
Bkf Mean Depth (ft)	0.9	0.7					1.4	1.2												
Bkf Max Depth (ft)	1.6	1.5					2.2	2.1												
Width/Depth Ratio	14.8	18.8					-	-												
Entrenchment Ratio	2.5	2.5					-	-												
Bank Height Ratio	1.0	1					-	-												
Wetted Perimeter (ft)																				
Hydraulic Radius (ft)																				
<b>Substrate</b>																				
D <sub>50</sub> (mm)	51	26																		
D <sub>84</sub> (mm)	139	109																		

Parameter	MY-1 (2009)			MY-2 (2010)			MY-3 (2011)			MY-4 (2012)			MY-5 (2013)			MY+ (2014)				
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med		
<b>Pattern</b>																				
Beltwidth (ft)	16	30	24	16	30	24														
Radius of Curvature (ft)	30	88	40	30	88	40														
Meander Wavelength (ft)	73	93	88	73	93	88														
Meander Width Ratio	1.2	2.3	1.8	1.2	2.3	1.8														
<b>Profile</b>																				
Riffle Length (ft)	14	29	21	8.5	84	44.5														
Riffle Slope (ft)	0.0261	0.0542	0.0332	0.0218	0.033	0.0275														
Pool length (ft)	8	15	9.5	-	-	-														
Pool Spacing (ft)	33	67	45	34	107	48														
<b>Additional Reach Parameters</b>																				
Valley Length (ft)	-	-	541	-	-	541														
Channel Length (ft)	-	-	573	-	-	573														
Sinuosity	-	-	1.1	-	-	1.06														
Water Surface Slope (ft/ft)	0.037	0.043	0.037	0.0334	0.0404	-														
Bkf Slope (ft/ft)	0.037	0.043	0.037	-	-	0.0337														
Rosgen Classification	-	-	B4	-	-	B4														
Habitat Index																				
Macrobenthos																				

**Table VII. Morphology and Hydraulic Monitoring Summary  
Morgan Creek Stream Restoration Site (D06035-A)  
Reach 3: Morgan Creek**

Parameter	Cross Section RF3 Riffle						Cross Section PL3 Pool						Cross Section					
	MY1	MY2	MY3	MY4	MY5	MY+	MY1	MY2	MY3	MY4	MY5	MY+	MY1	MY2	MY3	MY4	MY5	MY+
<b>Dimension</b>																		
Bkf Width (ft)	14.6	14.9					14.9	13.4										
Floodprone Width (ft)	36	36					-	-										
Bkf Cross Sectional Area (ft <sup>2</sup> )	15.3	12.3					11.8	10										
Bkf Mean Depth (ft)	1	0.8					0.8	0.7										
Bkf Max Depth (ft)	1.9	1.7					1.2	1.1										
Width/Depth Ratio	14	18					-	-										
Entrenchment Ratio	2.5	2.5					-	-										
Bank Height Ratio	1.0	1					-	-										
Wetted Perimeter (ft)																		
Hydraulic Radius (ft)																		
<b>Substrate</b>																		
D <sub>50</sub> (mm)	44	39.1																
D <sub>84</sub> (mm)	132	1607																

Parameter	MY-1 (2009)			MY-2 (2010)			MY-3 (2011)			MY-4 (2012)			MY-5 (2013)			MY+ (2014)		
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med
<b>Pattern</b>																		
Beltwidth (ft)	22	28	26	22	28	26												
Radius of Curvature (ft)	33	80	52	33	80	52												
Meander Wavelength (ft)	73	122	101	73	122	101												
Meander Width Ratio	1.5	1.9	1.8	1.5	1.9	1.8												
<b>Profile</b>																		
Riffle Length (ft)	4	30	17	12	68	18.6												
Riffle Slope (ft)	0.0135	0.0600	0.0359	0.0119	0.0615	0.0318												
Pool length (ft)	5.5	21	13	-	-	-												
Pool Spacing (ft)	35	76	53	3	76	48												
<b>Additional Reach Parameters</b>																		
Valley Length (ft)	-	-	328	-	-	328												
Channel Length (ft)	-	-	344	-	-	344												
Sinuosity	-	-	1.05	-	-	1.05												
Water Surface Slope (ft/ft)	0.030	0.037	0.030	0.0279	0.0347	-												
Bkf Slope (ft/ft)	0.030	0.037	0.030	-	-	0.0313												
Rosgen Classification	-	-	B4	-	-	B4												
Habitat Index																		
Macrobenthos																		

**Table VII. Morphology and Hydraulic Monitoring Summary  
Morgan Creek Stream Restoration Site (D06035-A)  
Reach 4: Morgan Creek**

Parameter	Cross Section RF4 Riffle						Cross Section PL4 Pool						Cross Section					
	MY1	MY2	MY3	MY4	MY5	MY+	MY1	MY2	MY3	MY4	MY5	MY+	MY1	MY2	MY3	MY4	MY5	MY+
<b>Dimension</b>	MY1	MY2	MY3	MY4	MY5	MY+	MY1	MY2	MY3	MY4	MY5	MY+	MY1	MY2	MY3	MY4	MY5	MY+
Bkf Width (ft)	15.7	15.7					15.4	16.9										
Floodprone Width (ft)	44	44					-	-										
Bkf Cross Sectional Area (ft <sup>2</sup> )	19.1	18.2					18.3	20.8										
Bkf Mean Depth (ft)	1.2	1.2					1.2	1.2										
Bkf Max Depth (ft)	2.0	1.9					2.1	2.4										
Width/Depth Ratio	12.9	13.5					-	-										
Entrenchment Ratio	2.8	2.8					-	-										
Bank Height Ratio	1.0	1					-	-										
Wetted Perimeter (ft)																		
Hydraulic Radius (ft)																		
<b>Substrate</b>																		
D <sub>50</sub> (mm)	50	49.9																
D <sub>84</sub> (mm)	144	103																

Parameter	MY-1 (2009)			MY-2 (2010)			MY-3 (2011)			MY-4 (2012)			MY-5 (2013)			MY+ (2014)		
	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med	Min	Max	Med
<b>Pattern</b>																		
Beltwidth (ft)	21	30	23	21	30	23												
Radius of Curvature (ft)	33	92	47	33	92	47												
Meander Wavelength (ft)	82	108	91	82	108	91												
Meander Width Ratio	1.3	1.9	1.5	1.3	1.9	1.5												
<b>Profile</b>																		
Riffle Length (ft)	5.2	28	18.2	14	77	18.5												
Riffle Slope (ft)	0.0169	0.0700	0.0322	0.0181	0.0736	0.0275												
Pool length (ft)	4	35	13.5	-	-	-												
Pool Spacing (ft)	19	52	32	19	99	37												
<b>Additional Reach Parameters</b>																		
Valley Length (ft)	-	-	717	-	-	717												
Channel Length (ft)	-	-	741	-	-	741												
Sinuosity	-	-	1.03	-	-	1.03												
Water Surface Slope (ft/ft)	0.020	0.032	0.031	0.03	0.0316	-												
Bkf Slope (ft/ft)	0.020	0.032	0.031	-	-	0.03												
Rosgen Classification	-	-	B4	-	-	B4												
Habitat Index																		
Macrobenthos																		

**Table VII. Morphology and Hydraulic Monitoring Summary  
Morgan Creek Stream Restoration Site (D06035-A)  
Reach 5: North Branch**

Parameter	Cross Section RF5 Riffle					Cross Section PL5 Pool					Cross Section								
	MY1	MY2	MY3	MY4	MY5	MY+	MY1	MY2	MY3	MY4	MY5	MY+	MY1	MY2	MY3	MY4	MY5	MY+	
<b>Dimension</b>																			
Bkf Width (ft)	8.6	7.1					8.4	7.9											
Floodprone Width (ft)	22	22					-	-											
Bkf Cross Sectional Area (ft <sup>2</sup> )	4.5	3.9					8.7	6.7											
Bkf Mean Depth (ft)	0.5	0.6					1.0	0.9											
Bkf Max Depth (ft)	1.0	0.9					1.9	1.4											
Width/Depth Ratio	16.5	12.9					-	-											
Entrenchment Ratio	2.6	2.6					-	-											
Bank Height Ratio	1.0	1					-	-											
Wetted Perimeter (ft)																			
Hydraulic Radius (ft)																			
<b>Substrate</b>																			
D <sub>50</sub> (mm)	31	51																	
D <sub>84</sub> (mm)	177	160																	

Parameter	MY-1 (2009)					MY-2 (2010)					MY-3 (2011)					MY-4 (2012)					MY-5 (2013)					MY+ (2014)					
	Min	Max	Med	Min	Max	Min	Max	Med	Min	Max	Min	Max	Med	Min	Max	Min	Max	Med	Min	Max	Min	Max	Med	Min	Max	Med	Min	Max	Med		
<b>Pattern</b>																															
Beltwidth (ft)	11	16	13	11	16	13	11	16	13	11	16	13	11	16	13	11	16	13	11	16	13	11	16	13	11	16	13	11	16	13	
Radius of Curvature (ft)	16	30	18	16	30	18	16	30	18	16	30	18	16	30	18	16	30	18	16	30	18	16	30	18	16	30	18	16	30	18	
Meander Wavelength (ft)	34	41	39	34	41	39	34	41	39	34	41	39	34	41	39	34	41	39	34	41	39	34	41	39	34	41	39	34	41	39	
Meander Width Ratio	1.3	1.9	1.5	1.3	1.9	1.5	1.3	1.9	1.5	1.3	1.9	1.5	1.3	1.9	1.5	1.3	1.9	1.5	1.3	1.9	1.5	1.3	1.9	1.5	1.3	1.9	1.5	1.3	1.9	1.5	
<b>Profile</b>																															
Riffle Length (ft)	3	10.2	4.5	1.2	27	9.4																									
Riffle Slope (ft)	0.0267	0.1171	0.0667	0.024	0.0976	0.0664																									
Pool length (ft)	3.2	10.5	4.2	-	-	-																									
Pool Spacing (ft)	8.5	33	20.3	14.1	37	21.3																									
<b>Additional Reach Parameters</b>																															
Valley Length (ft)	-	-	246	-	-	246																									
Channel Length (ft)	-	-	266	-	-	266																									
Sinuosity	-	-	1.08	-	-	1.08																									
Water Surface Slope (ft/ft)	0.045	0.06	0.054	0.0508	0.0664	-																									
Bkf Slope (ft/ft)	0.045	0.06	0.054	-	-	0.0527																									
Rosgen Classification	-	-	B4a	-	-	B4a																									
Habitat Index																															
Macrobenthos																															

Re-survey of the permanent cross sections and profile reaches have shown some alterations in local bed elevations with the bed form and the channel pattern remaining consistent with the Year 1 condition. On Morgan Creek, none of the four riffle sections that were taken showed noteworthy variation from the Year 1 condition. Any changes to the riffle sections between Year 1 and Year 2 were minor and none suggest a systemic problem at the Site. Of the four pool sections that were taken, one pool (PL4) showed moderate adjustment from Year 1 conditions. The remaining pool sections on Morgan Creek remained fairly consistent with conditions present during the performance of Year 1 monitoring and none of the adjustments are cause for concern regarding performance of the stream.

The riffle and pool sections that were taken on North Branch indicate minor change from the Year 1 survey. The riffle section remains consistent with Year 1 conditions while the pool section filled in approximately 0.5 feet. The deposition in the pool section appears to be in response to the normal sediment load transported through the site and may indicate an initial over-excavation of the pool during construction. Inspection of the profile indicates that two additional pools have filled in but the channel is generally consistent with the Year 1 survey.

Pebble counts were conducted at each cross-section, as well as across the overall study reach. Pebble count data was plotted by size distribution in order to assess the  $D_{50}$  and  $D_{84}$  size class. On Morgan Creek, the material size generally decreased from the Year 1 condition with the  $D_{50}$  decreasing from 56 mm to 19 mm on the upper reach, from 71 to 49 on the third reach, and from 30mm to 25mm on the second and lower reaches. Likewise the  $D_{84}$  decreased from 311mm to 122mm on the upper reach, from 160mm to 115mm on the middle reaches, and from 150mm to 64mm on the lower reach. On North Branch the  $D_{50}$  increased from 14mm to 50mm while the  $D_{84}$  decreased slightly from 154mm to 145mm. This may have resulted from the input of finer material from upstream of the site and/or a generally lower number of elevated flow events during 2010.

### 2.2.3 Problem Areas

There are several areas of concern that should be monitored but that presently appear to be stable. These areas have been identified on the monitoring plan sheets and generally consist of two scenarios. First, where adjustments have occurred to the grade of the upstream end of the riffle, it has exaggerated the drop on the structure immediately upstream (Appendix B, Problem Area Photo). Second, where adjustments have occurred to the grade of the lower end of the riffle, the existing bed material has limited the extent of the adjustment by forming cobble nick points (Appendix B, Problem Area Photos). While these adjustments did not heal themselves during Year 2, they appear to have stabilized and show no further evidence of degradation.

### 2.2.4 Photo Point Stations

Photo Point Stations (PPSs) have been established to assist in characterizing the site and to allow qualitative evaluation of the site conditions. The location of each photo station has been permanently marked in the field and the bearing/orientation of the photograph is indicated on the monitoring plans to allow for consistent repetition. A total of ten (10) PPSs have been established along the restored stream (Appendix B). An additional ten (10) photo stations have been located upstream of the permanent monitoring cross sections. These photographs are

taken facing downstream looking at the section, and show as much of the banks and channel as possible.

### 2.2.5 Stability Assessment

The following three tables provide a summary of the stream stability assessment and the morphologic parameters of the Site. The Stability Assessment Table is a semi-quantitative summary of the results from the visual inspection conducted of each reach using Table B2 (Appendix B). The Baseline Morphology and Hydraulic Summary Table and the Morphology and Hydraulic Monitoring Summary Table provide the quantitative summary of data from the cross sectional and longitudinal surveys for the As-built condition and for each subsequent monitoring year.

**Table IX. Categorical Stream Feature Visual Stability Assessment**

	<b>Performance Percentage – Morgan Creek (Reach 1-4) (3,031 ft)</b>					
<b>Feature</b>	<b>Initial</b>	<b>MY-01</b>	<b>MY-02</b>	<b>MY-03</b>	<b>MY-04</b>	<b>MY-05</b>
Riffles	100%	95%	96%			
Pools	100%	85%	82%			
Thalweg	100%	100%	100%			
Meanders	100%	98%	98%			
Bed General	100%	93%	100%			
Vanes / J Hooks etc.	100%	97%	98%			
Wads and Boulders	100%	100%	100%			

	<b>Performance Percentage - North Branch (Reach 5) (616 ft)</b>					
<b>Feature</b>	<b>Initial</b>	<b>MY-01</b>	<b>MY-02</b>	<b>MY-03</b>	<b>MY-04</b>	<b>MY-05</b>
Riffles	100%	100%	100%			
Pools	100%	97%	95%			
Thalweg	100%	100%	100%			
Meanders	100%	100%	100%			
Bed General	100%	100%	100%			
Vanes / J Hooks etc.	100%	100%	100%			
Wads and Boulders	100%	100%	100%			

	<b>Performance Percentage - Middle Branch (302 ft)</b>					
<b>Feature</b>	<b>Initial</b>	<b>MY-01</b>	<b>MY-02</b>	<b>MY-03</b>	<b>MY-04</b>	<b>MY-05</b>
Riffles	100%	100%	100%			
Pools	100%	100%	100%			
Thalweg	100%	100%	100%			
Meanders	100%	100%	100%			
Bed General	100%	100%	100%			
Vanes / J Hooks etc.	100%	100%	100%			
Wads and Boulders	100%	100%	100%			
	<b>Performance Percentage - South Branch (320 ft)</b>					



Feature	Initial	MY-01	MY-02	MY-03	MY-04	MY-05
Riffles	100%	100%	100%			
Pools	100%	100%	100%			
Thalweg	100%	100%	100%			
Meanders	100%	100%	100%			
Bed General	100%	100%	100%			
Vanes / J Hooks etc.	100%	97%	100%			
Wads and Boulders	100%	100%	100%			

### 2.3 Wetland Assessment

Evaluation of the success of restored wetland areas consists of monitoring groundwater hydrology and vegetation survival. Continuously-recording groundwater monitoring gauges were installed in accordance with specifications in *Installing Monitoring Wells/Piezometers in Wetlands* (NCWRP 1993). Monitoring gauges were set to a depth of approximately 24 inches below the soil surface. Screened portions of each gauge were surrounded by filter fabric, buried in screened well sand, and sealed with a bentonite cap to prevent siltation and surface flow infiltration. Three groundwater gauges were installed in wetland restoration areas to provide representative coverage of the Site. Hydrological sampling was performed in restoration areas during the growing season at intervals necessary to satisfy the hydrology success criteria within each physiographic landscape area (USEPA 1990).

Groundwater hydrology success criteria for the five-year monitoring period will include a minimum regulatory criterion, comprising saturation (free water) within one foot of the soil surface for 5 percent of the growing season or nine (9) consecutive days. The growing season in Haywood County has a duration of 175 days, beginning on April 22<sup>nd</sup> and ending on October 14<sup>th</sup>.

#### 2.3.1 Hydrology

One of the three gauges met wetland hydrology criteria during the 2010 growing season (Table III). Gauge GW1 had groundwater present within twelve (12) inches of the surface throughout the entire growing season. Gauge GW2 had groundwater present within 12 inches for a total of 42 days with a peak of 7 consecutive days. Gauge GW3 had groundwater present within 12 inches for a total of 21 days with a peak of 5 consecutive days. Plots of the gauge data can be found in Appendix C

**Exhibit Table X. Wetland Criteria Attainment**

Tract	Well ID	Well Hydrology Threshold Met?	Consecutive Days of Hydrology Met	% of Growing Season Met	Tract Mean	Vegetation Plot ID	Veg Survival Threshold Met?	Tract Mean
1	GW1	Yes	176	100	33%	-	-	100%
	GW2	No	7	24		4	Yes	
	GW3	No	5	12		2	Yes	

### 2.3.2 Vegetation

Vegetation plots 2 and 4 are located in wetland enhancement/restoration areas in order to represent wetland vegetation survival rates. Each of these plots was well-above the minimum 320 stems per acre required to be surviving after three years of monitoring with 728 and 567 planted stems per plot, respectively (Table V). In addition, herbaceous vegetation establishing within these areas included soft rush (*Juncus effusus*), tearthumb (*Persicaria sagittata*), hollow joe-pye-weed (*Eutrochium fistulosum*), and ironweed (*Vernonia noveboracensis*) all of which are FACW, OBL, or FAC+.

## 2.4 Conclusions

The vegetation appears to be surviving at an acceptable rate and is expected to meet interim success criteria in Monitoring Year 3. Continued visual observation is planned; however, no action is recommended at this time.

In general, Site wetland areas appear to have suffered insufficient hydrology due to drought conditions during Monitoring Year 2. Restoration Systems will coordinate with EEP in the Spring 2011 to develop an appropriate response.

Continued visual monitoring is planned for stream areas that have been identified as “Areas of Concern”. Repair work is not warranted at this time on any of the areas. This is based on the judgment that these issues have not risen to the level of posing a threat to channel or structure stability and are not resulting in excessive erosion. It is recommended that natural stream processes and natural re-vegetation be allowed the opportunity to mend these areas and then re-assess their condition in the next monitoring cycle.

### 3.0 REFERENCES

- Lee, Michael T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2006. CVS-EEP Protocol for Recording Vegetation, Version 4.0. (online). Available: <http://cvs.bio.unc.edu/methods.htm>
- Weakley, Alan S. 2008. Flora of the Carolinas, Virginia, Georgia, and Surrounding Areas (working draft) (online). Available: [http://www.herbarium.unc.edu/WeakleyFlora\\_2008-Apr.pdf](http://www.herbarium.unc.edu/WeakleyFlora_2008-Apr.pdf). University of North Carolina Herbarium, North Carolina Botanical Garden, University of North Carolina, Chapel Hill, North Carolina.



**APPENDIX A**  
**MONITORING PLANS**



Wolf Creek Engineering  
 ENGINEERING & ENVIRONMENTAL CONSULTING  
 51 North Knob Lane Weaverville, NC 28787  
 PHONE: (828) 658-3649 WWW.WOLFCREEKENG.COM


PROJECT MORGAN CREEK RESTORATION PROJECT  
 OWNER RESTORATION SYSTEMS, INC.

TITLE **MONITORING PLANS - YEAR 2**


SCALE	AS NOTED	DEVL. BY	cmc	PROJECT NO.	1026	SHEET NUMBER	MP-1
DATE	10/29/10	CHEK. BY	SGC				
DATE	BY	REV.					DESCRIPTION

MONITORING REACH 1

MONITORING REACH 2

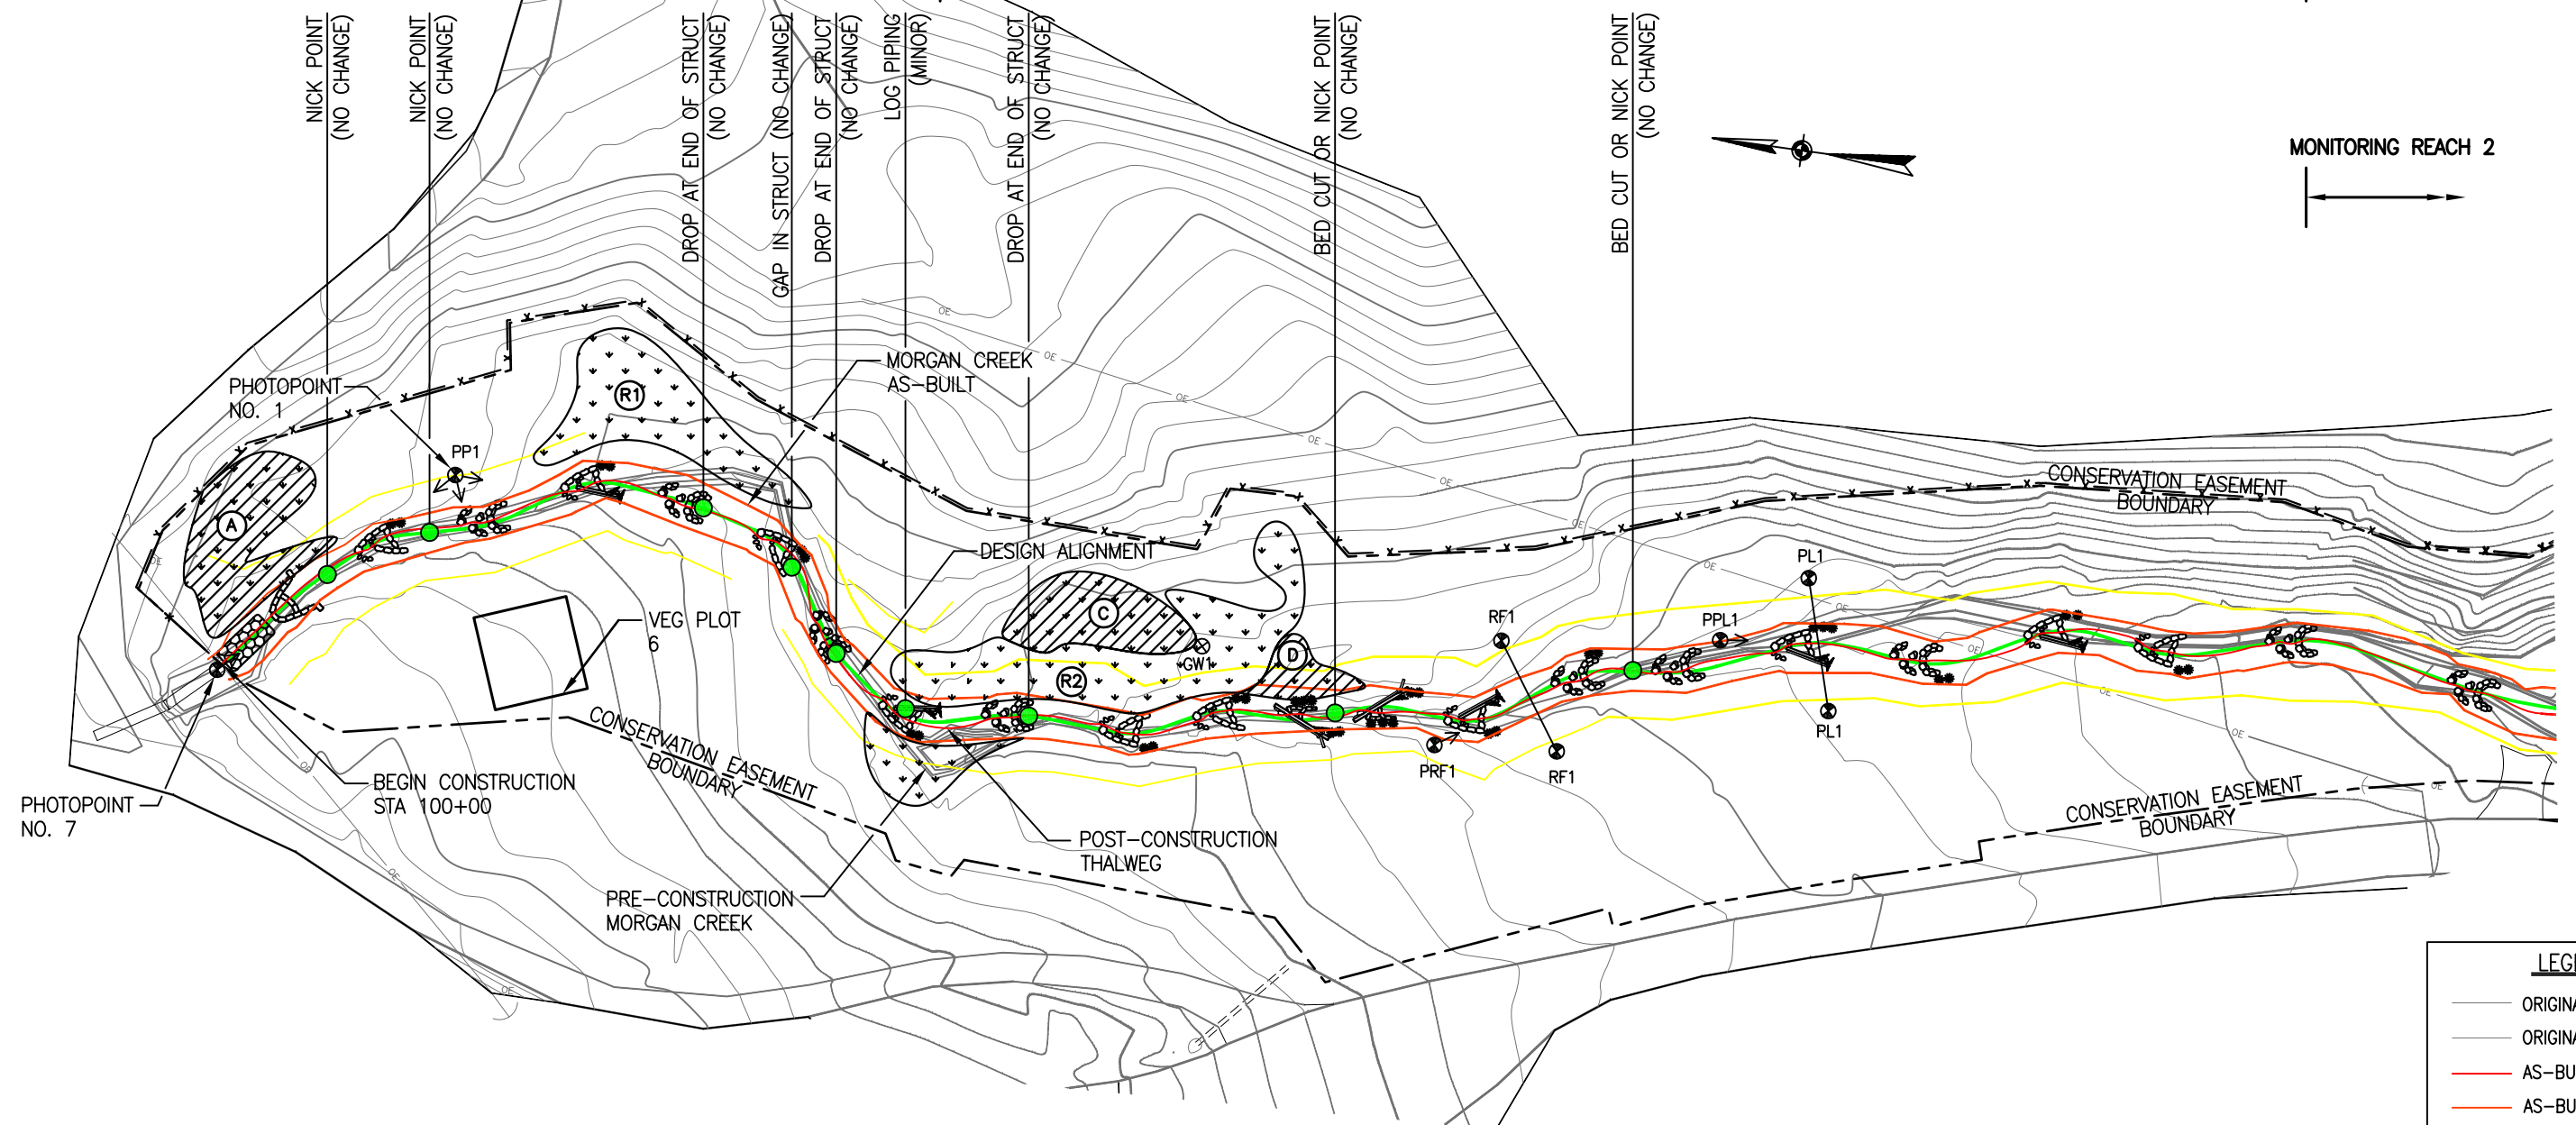

POINT NO.	POINT DESCRIPTION	NORTHING (FT)	EASTING (FT)	ELEVATION (FT)
PP1	PHOTOPOINT NO. 1	729156.17	826117.25	2605.55
PRF 1	PHOTOPOINT RIFFLE	728807.03	826071.48	2583.49
RF1 LT	RIFFLE X.S.	728789.03	826110.51	2584.66
RF1 RT	RIFFLE X.S.	728764.74	826075.17	2581.69
PPL 1	PHOTOPOINT POOL	728713.94	826121.16	2578.04
PL1 LT	POOL X.S.	728686.50	826146.71	2578.57
PL1 RT	POOL X.S.	728673.40	826102.02	2578.35
PP7	PHOTOPOINT NO. 7	729228.60	826039.00	2587.80
GW1	GROUNDWATER GAUGE 1	728891.56	826094.25	2587.80





**LEGEND**

- ORIGINAL CHANNEL
- ORIGINAL CONTOUR
- AS-BUILT THALWEG
- AS-BUILT BANK
- AS-BUILT F/P
- DESIGN CENTERLINE
- WETLAND RESTORATION
- ▨ WETLAND ENHANCEMENT
- ⊠ ROCK STRUCTURE
- ⊠ LOG STRUCTURE
- ⊗ IRON ROD
- ⊗ GAUGE
- LOW CONCERN
- MODERATE CONCERN
- HIGH CONCERN







POINT NO.	POINT DESCRIPTION	NORTHING (FT)	EASTING (FT)	ELEVATION (FT)
PP2	PHOTOPOINT NO. 2	728094.17	826203.48	2554.37
PRF 2	PHOTOPOINT RIFFLE	728294.27	826165.96	2563.21
RF2 LT	RIFFLE X.S.	728281.42	826202.97	2562.65
RF2 RT	RIFFLE X.S.	728261.46	826171.32	2562.41
PPL 2	PHOTOPOINT POOL	728238.80	826193.37	2560.66
PL2 LT	POOL X.S.	728204.54	826179.02	2560.35
PL2 RT	POOL X.S.	728213.76	826222.59	2559.93
PP3	PHOTOPOINT NO. 3	727779.50	826446.95	2555.50
PRF 3	PHOTOPOINT RIFFLE	727894.62	826306.28	2545.28
RF3 LT	RIFFLE X.S.	727845.51	826321.07	2544.75
RF3 RT	RIFFLE X.S.	727849.12	826282.49	2544.40
PPL 3	PHOTOPOINT POOL	727688.01	826311.19	2538.56
PL3 LT	POOL X.S.	727650.23	826355.57	2541.87
PL3 RT	POOL X.S.	727638.51	826288.18	2538.88
PP8	PHOTOPOINT NO. 8	728342.47	826112.30	-
GW2	GROUNDWATER GAUGE 2	727962.16	826321.04	2548.84
GW3	GROUNDWATER GAUGE 3	727749.93	826347.15	2542.04

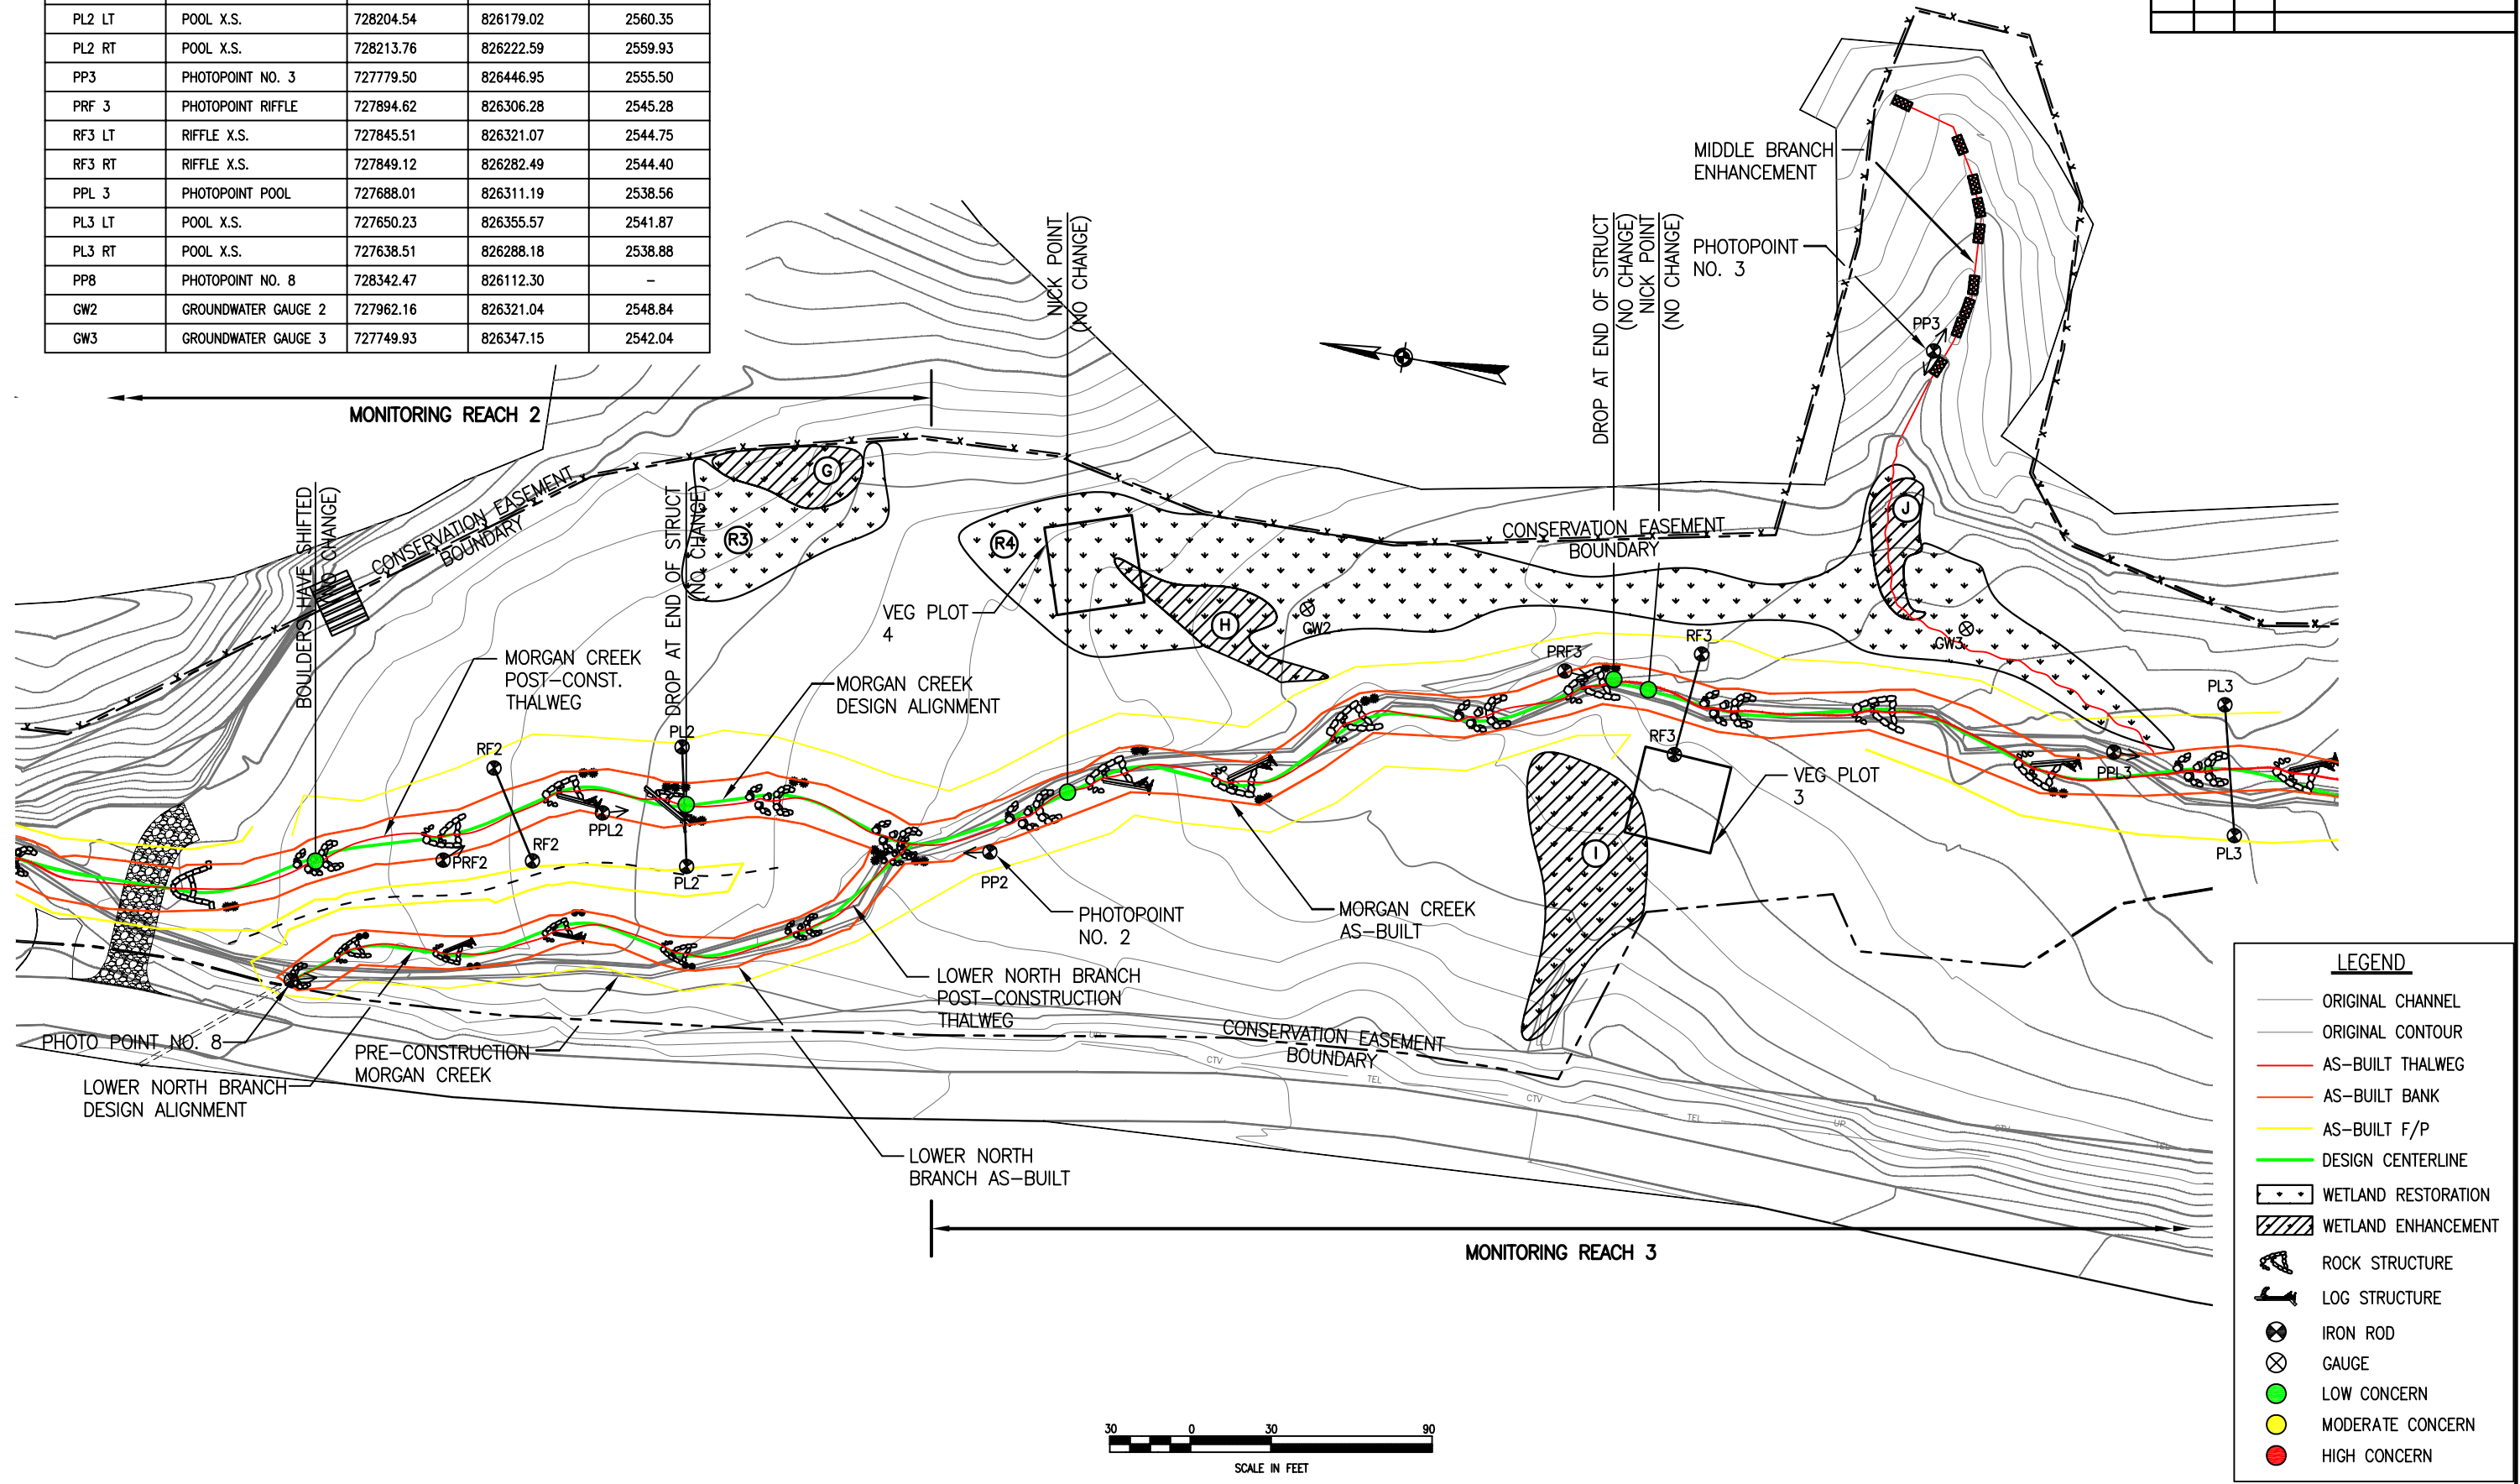



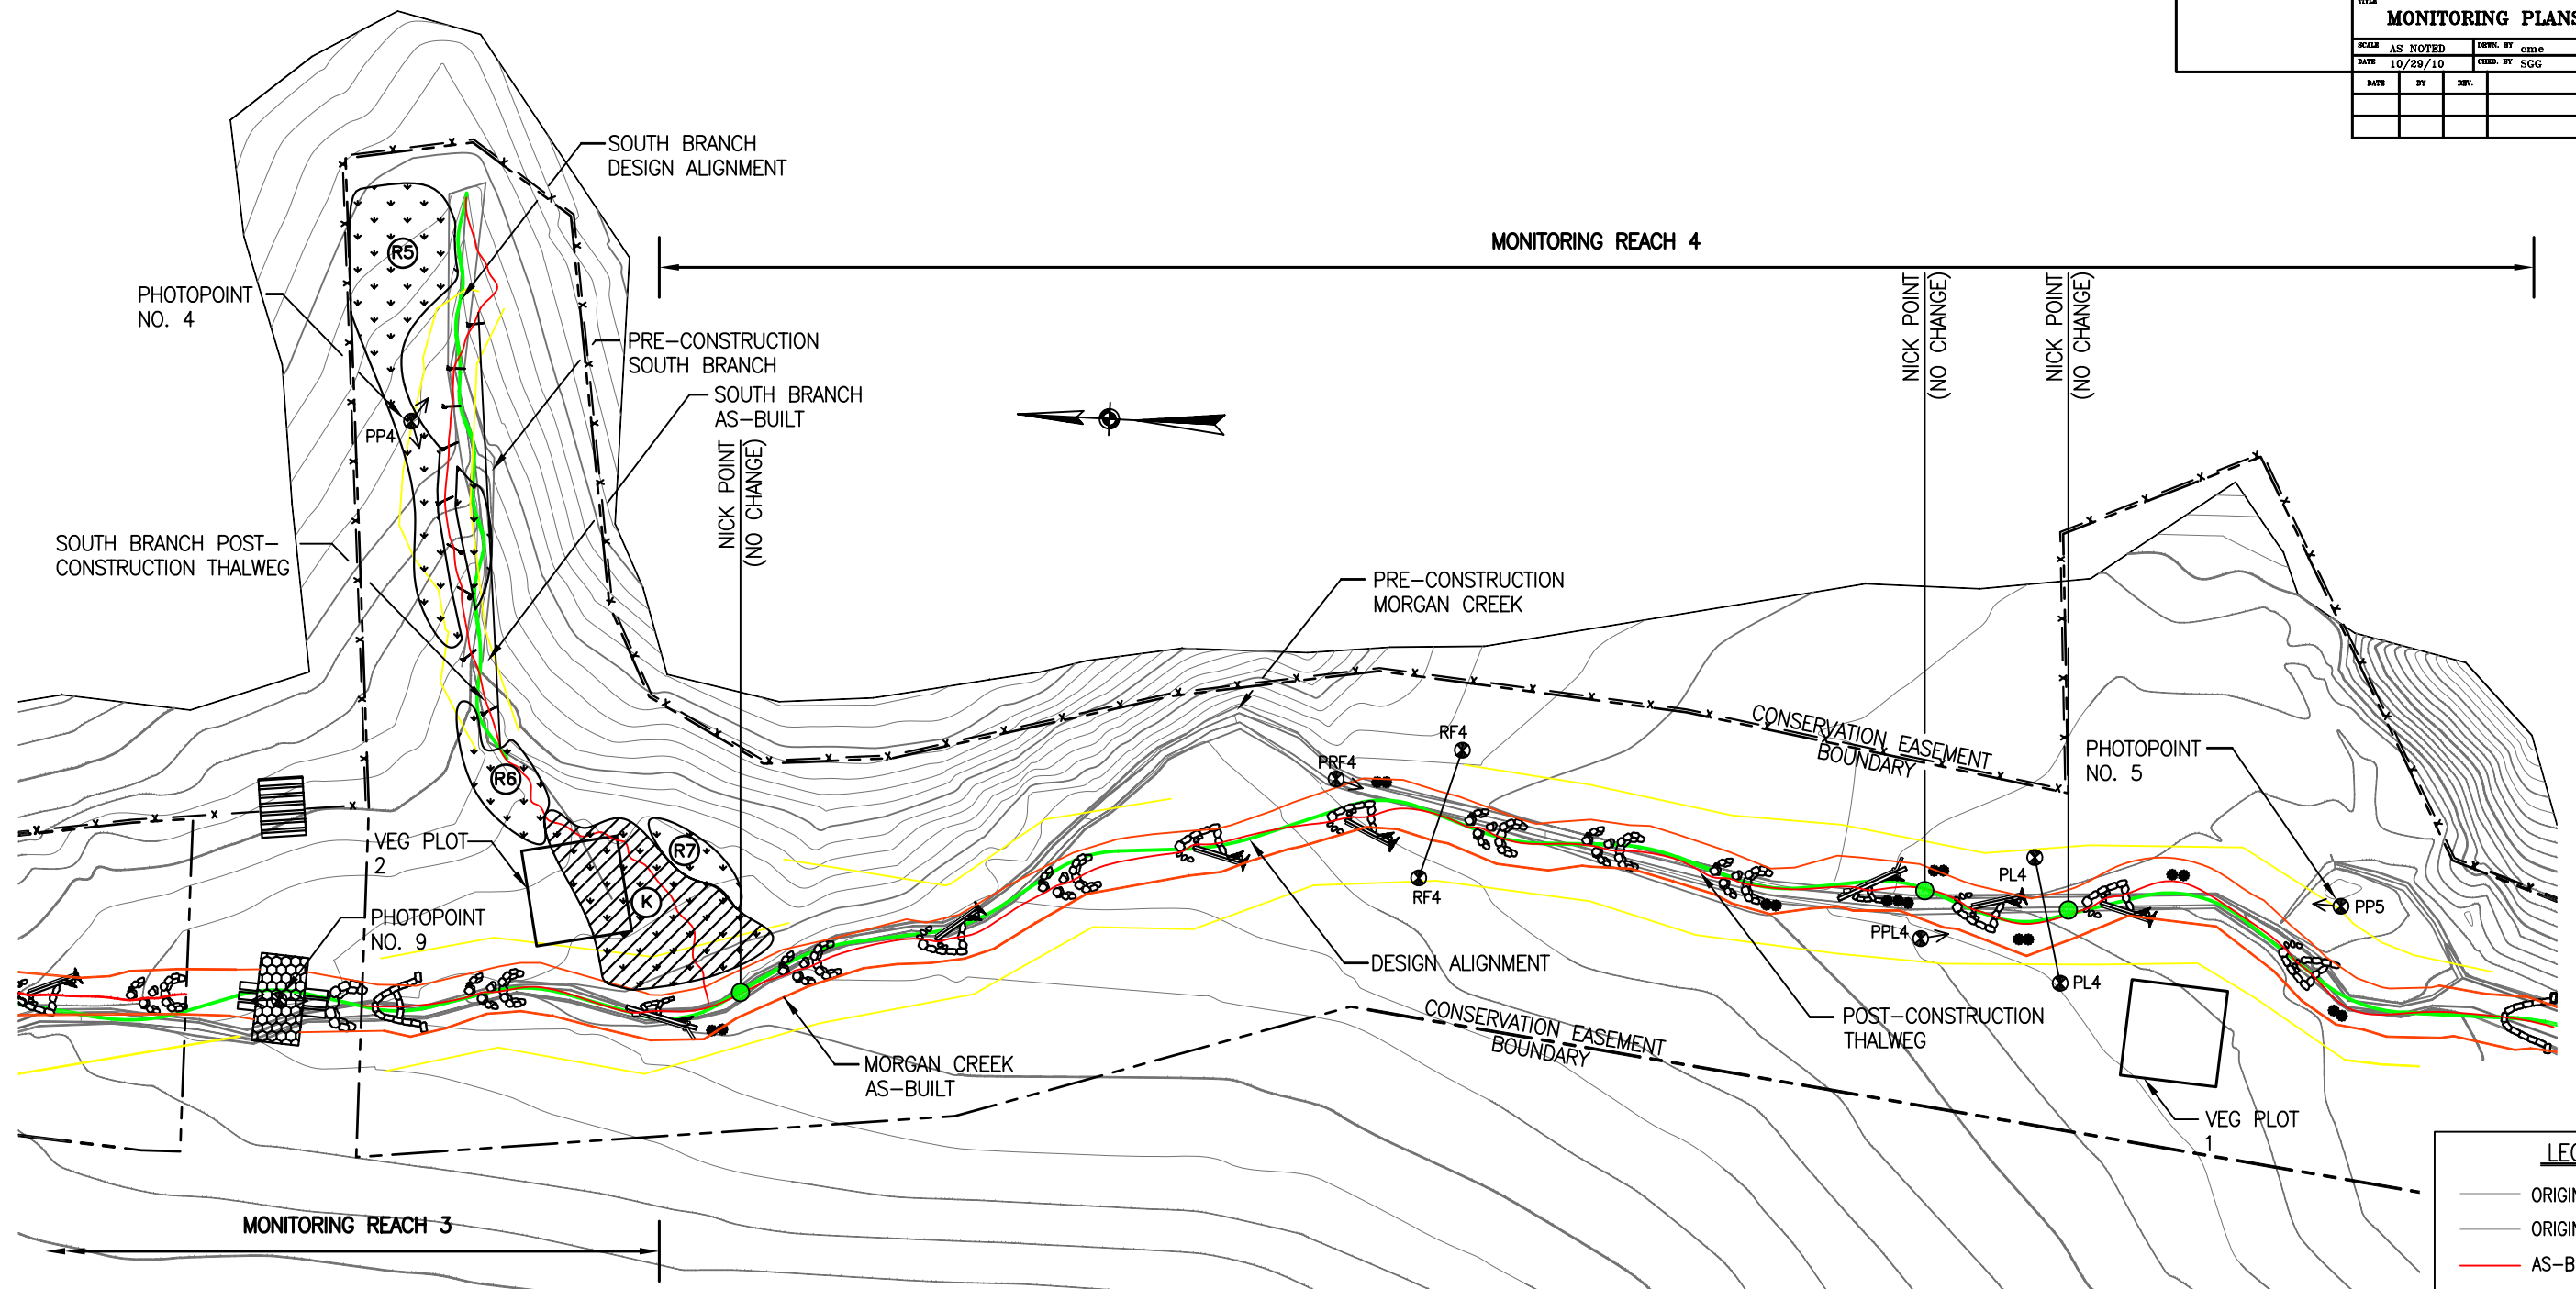


POINT NO.	POINT DESCRIPTION	NORTHING (FT)	EASTING (FT)	ELEVATION (FT)
PP4	PHOTOPOINT NO. 4	727502.10	826516.81	2552.50
PRF 4	PHOTOPOINT RIFFLE	727181.40	826411.45	2522.36
RF4 LT	RIFFLE X.S.	727138.95	826423.48	2522.86
RF4 RT	RIFFLE X.S.	727151.52	826379.28	2522.90
PPL 4	PHOTOPOINT POOL	-	-	-
PL4 LT	POOL X.S.	726942.40	826397.15	2515.67
PL4 RT	POOL X.S.	726931.51	826354.84	2515.99
PP5	PHOTOPOINT NO. 5	726837.41	826385.98	2514.40
PP9	PHOTOPOINT NO. 9	727536.86	826317.72	-



**LEGEND**

- ORIGINAL CHANNEL
- ORIGINAL CONTOUR
- AS-BUILT THALWEG
- AS-BUILT BANK
- AS-BUILT F/P
- DESIGN CENTERLINE
- WETLAND RESTORATION
- ▨ WETLAND ENHANCEMENT
- ⊗ ROCK STRUCTURE
- ⊥ LOG STRUCTURE
- ⊗ IRON ROD
- ⊗ GAUGE
- LOW CONCERN
- MODERATE CONCERN
- HIGH CONCERN




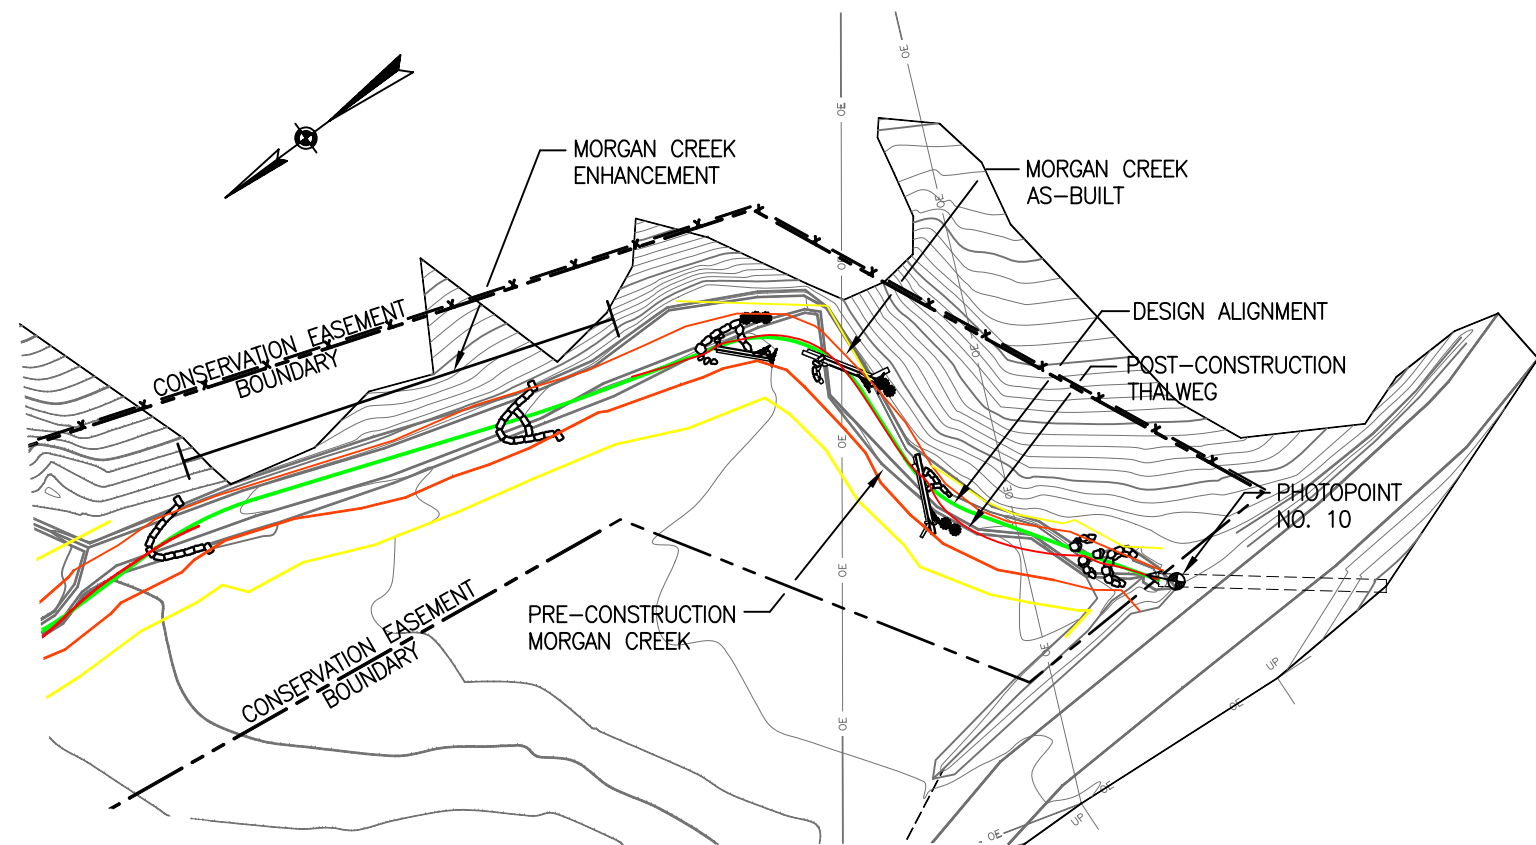


**LEGEND**

	ORIGINAL CHANNEL
	ORIGINAL CONTOUR
	AS-BUILT THALWEG
	AS-BUILT BANK
	AS-BUILT F/P
	DESIGN CENTERLINE
	WETLAND RESTORATION
	WETLAND ENHANCEMENT
	ROCK STRUCTURE
	LOG STRUCTURE
	IRON ROD
	GAUGE
	LOW CONCERN
	MODERATE CONCERN
	HIGH CONCERN


PP10	PHOTOPOINT NO. 10	726527.45	826153.34	-
------	-------------------	-----------	-----------	---







MONITORING REACH 5

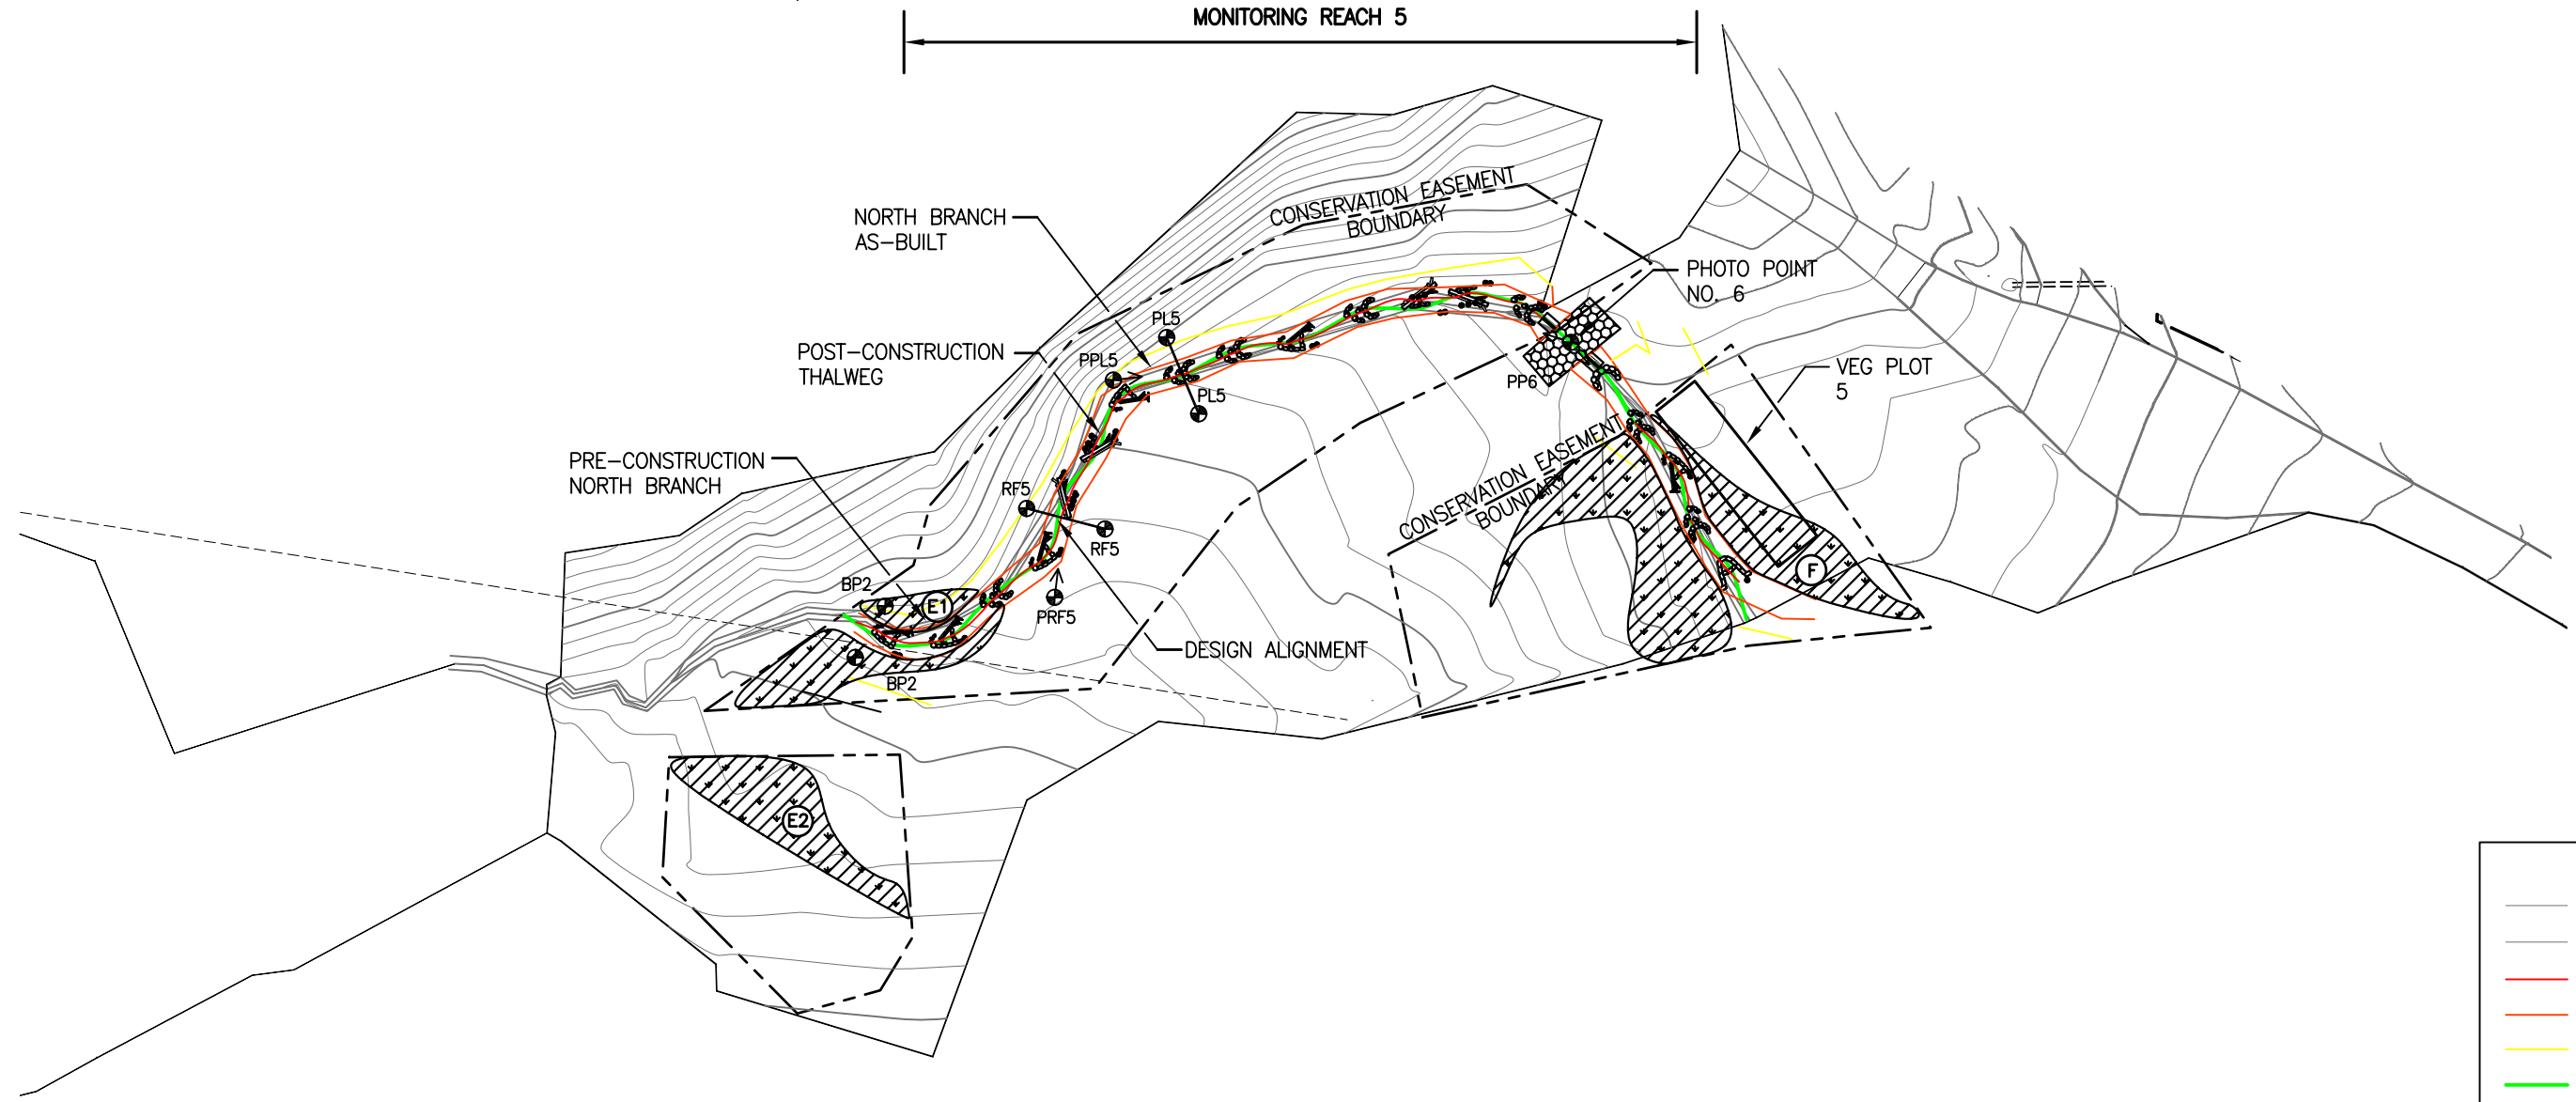

POINT NO.	POINT DESCRIPTION	NORTHING (FT)	EASTING (FT)	ELEVATION (FT)
BP2 LT	BEGIN PROFILE	729047.60	825608.04	2616.10
BP2 RT	BEGIN PROFILE	729041.62	825589.22	2617.00
PRF 5	PHOTOPOINT RIFFLE	729011.82	825651.74	2614.40
RF5 LT	RIFFLE X.S.	729039.97	825664.74	2612.59
RF5 RT	RIFFLE X.S.	729017.39	825679.44	2613.46
PPL 5	PHOTOPOINT POOL	729052.16	825714.81	2609.26
PL5 LT	POOL X.S.	729050.69	825737.44	2609.77
PL5 RT	POOL X.S.	729024.76	825728.27	2610.39
PP6	PHOTOPOINT NO. 6	728956.37	825836.00	-

**LEGEND**

- ORIGINAL CHANNEL
- ORIGINAL CONTOUR
- AS-BUILT THALWEG
- AS-BUILT BANK
- AS-BUILT F/P
- DESIGN CENTERLINE
- WETLAND RESTORATION
- WETLAND ENHANCEMENT
- ROCK STRUCTURE
- LOG STRUCTURE
- IRON ROD
- GAUGE
- LOW CONCERN
- MODERATE CONCERN
- HIGH CONCERN





**APPENDIX B**  
**VEGETATION RAW DATA**



Vegetation Plot No. 1



Year 1

Photo No. 1



Year 2

Photo No. 2

Vegetation Plot No. 2



Year 1

Photo No. 3



Year 2

Photo No. 4

Vegetation Plot No. 3



Year 1

Photo No. 5



Year 2

Photo No. 6

Vegetation Plot No. 4



Year 1

Photo No. 7



Year 2

Photo No. 8

Vegetation Plot No. 5



Year 1

Photo No. 9



Year 2

Photo No. 10

Vegetation Plot No. 6



Year 1

Photo No. 11



Year 2

Photo No. 12



Plot (continued): **Morgan-AXE-0001**

ID	Species	map char	source	X (m)	Y (m)	Dec 2009 Data			THIS YEAR'S DATA			
						ddh (mm)	Height (cm)	DBH (cm)	ddh (mm)	Height (cm)	DBH (cm)	Re-sprout

**Plot Morgan-AXE-0001** Please fill in any missing data and fix incorrect data. Vegetation Monitoring Data (VMD) Datasheet

VMD Year (1-5): 2 Date: 27 July 2010 Party: Ed Kanam Role: \_\_\_\_\_ Notes on plot: Plot Data sheet 21 Plot 30

Taxonomic Standard: \_\_\_\_\_

Taxonomic Standard DATE: \_\_\_\_\_

Latitude or UTM-N: 35.68300 Datum: NAD83/W

Longitude or UTM-E: -82.95331 UTM Zone: \_\_\_\_\_

Coordinate Accuracy (m): \_\_\_\_\_ X-Axis bearing (deg): 94

Plot Dimensions: X: 10 Y: 10  Plot has reverse orientation for X and Y axis (Y is 90 degrees to the right of X)

ID	Species Name	Map char	Source*	X 0.1m	Y 0.1m	Dec 2009 Data			THIS YEAR'S DATA						
						ddh 1mm	Height 1cm*	DBH 1cm	ddh 1mm	Height 1cm*	DBH 1cm	Re-sprout	Vigor*	Damage*	Notes
2491	Fagus grandifolia	Ⓐ	R	0.4	1.2	5	50.0						0	DEAD	
2492	Cornus amomum	Ⓐ	R	1.8	3.3	6	50.0	6	80				4		
2493	Liriodendron tulipifera	Ⓐ	R	3.0	4.0	10	90.0	9	90				2	UNKN	
2494	Platanus occidentalis	Ⓐ	R	4.5	4.0	16	130.0						0	DEAD	
2495	Platanus occidentalis	Ⓐ	R	3.0	1.8	11	115.0						0	DEAD	
2496	Cornus amomum	Ⓐ	R	5.1	0.0	7	55.0	7	70				4		
2497	Betula nigra	Ⓐ	R	<u>2.1</u>	<u>6.1</u>	13	150.0	13	170	0.4			3		
2498	Amelanchier laevis	Ⓐ	R	9.1	5.0	9	125.0	9	140	0.2			3		
2499	Cornus amomum	Ⓐ	R	9.4	0.8	13	145.0	14	150	0.3			4		
2500	Acer saccharum	Ⓐ	R	10.0	3.0	4	40.0						M		
2501	Acer saccharum	Ⓐ	R	8.7	0.6	3	25.0						M		
2502	Acer saccharum <u>Unkn. sp. #2</u>	Ⓐ	R	7.8	4.9	7	100.0	16	180	0.3			4		
2503	Hamamelis virginiana	Ⓐ	R	9.7	8.4	9	110.0	10	110				3		Horn's Nest
2504	Cornus amomum	Ⓐ	R	9.0	9.9	6	40.0	6	90				4		
2505	Quercus rubra	Ⓐ	R	7.2	7.6	11	50.0	6	60				4		
2506	Amelanchier laevis	Ⓐ	R	6.6	6.4	10	110.0	11	120				4		
2507	Carpinus caroliniana	Ⓐ	R	2.6	5.6	5	40.0	4	30			<input checked="" type="checkbox"/>	2	UNKN	
2508	Liriodendron tulipifera	Ⓐ	R	<u>2.6</u>	9.3	7	50.0						0	DEAD	
2509	Platanus occidentalis <u>Quercus rubra</u>	Ⓐ	R	0.7	6.7	10	75.0	7	90				3		

# stems: 19 New Stems, not included last year, but are obviously planted. If more space needed, use blank PWS (Planted Woody Stems) Form:

Species Name	Source*	X (m)	Y (m)	ddh 1mm	Height 1cm*	DBH 1cm	Vigor*	Damage*	Notes

\*SOURCE: Tr=Transplant, L=Live stake, B=Ball and burlap, P=Planted, Tu=Tubing, R=bare Root, M=Mechanically, U=Unknown

\*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing

\*DAMAGE: REMOVAL, CUT, MOWING, BEAVER, DEER, RODENTS, INSECTS, GAME, LIVESTOCK, OTHER/UNKNOWN

\*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m

Printed in the CVS-EEP Entry Tool ver. 2.2

Plot (continued): <b>Morgan-AXE-0001</b>				Dec 2009 Data			THIS YEAR'S DATA								
ID	Species	map char	source	X (m)	Y (m)	ddh (mm)	Height (cm)	DBH (cm)	ddh (mm)	Height (cm)	DBH (cm)	Re-sprout	Vigor*	Damage*	Notes


Natural Woody Stems - tallied by species											Explanation of cut-off & subsampling**:				
Height Cut-Off (All stems shorter than this are ignored. If >10cm, explain why to the right.):											<input type="checkbox"/> 10cm <input type="checkbox"/> 50cm <input type="checkbox"/> 100cm <input type="checkbox"/> 137cm				
Species Name	<input checked="" type="checkbox"/> c	SEEDLINGS — HEIGHT CLASSES			SAPLINGS — DBH			TREES — DBH			=10 (write DBH)				
		Sub-Seed	10 cm-50 cm	50 cm-100 cm	100 cm-137 cm	Sub-Sapl	0-1 cm	1-2.5	2.5-	5-					
<i>Quercus sp.</i>															

\*\*Required if cut-off >10cm or subsample ? 100%.      ●1   ●2   ●3   ●●4   ●●●5   ●●●●6   ●●●●●7   ●●●●●●8   ●●●●●●●9   ●●●●●●●●10      Form WS2, ver 9.1


\*SOURCE: T=Transplant, L=Live stake, B=Ball and burlap, P=Potted, Tu=Tubing, R=bare Root, M=Mechanically, U=Unknown p. 2  
 \*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing      \*DAMAGE: REMOVAL, CUT, MOWING, BEAVER, DEER, RODENTS, INSECTS, GAME, LIVESTOCK, Other/Unknown  
 ANIMAL, Human TRAMPLED, Site Too WET, Site Too DRY, FLOOD, DROUGHT, STORM, HURRICANE, DISEASED, VINE  
 Strangulation, UNKNOWN, specify other.  
 \*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m. Printed in the CYS-EEP Entry Tool ver. 2.2

Map of stems on plot Morgan-AXE-0001

X-axis: 94°



# stems: 19  
map size:  
LARGE

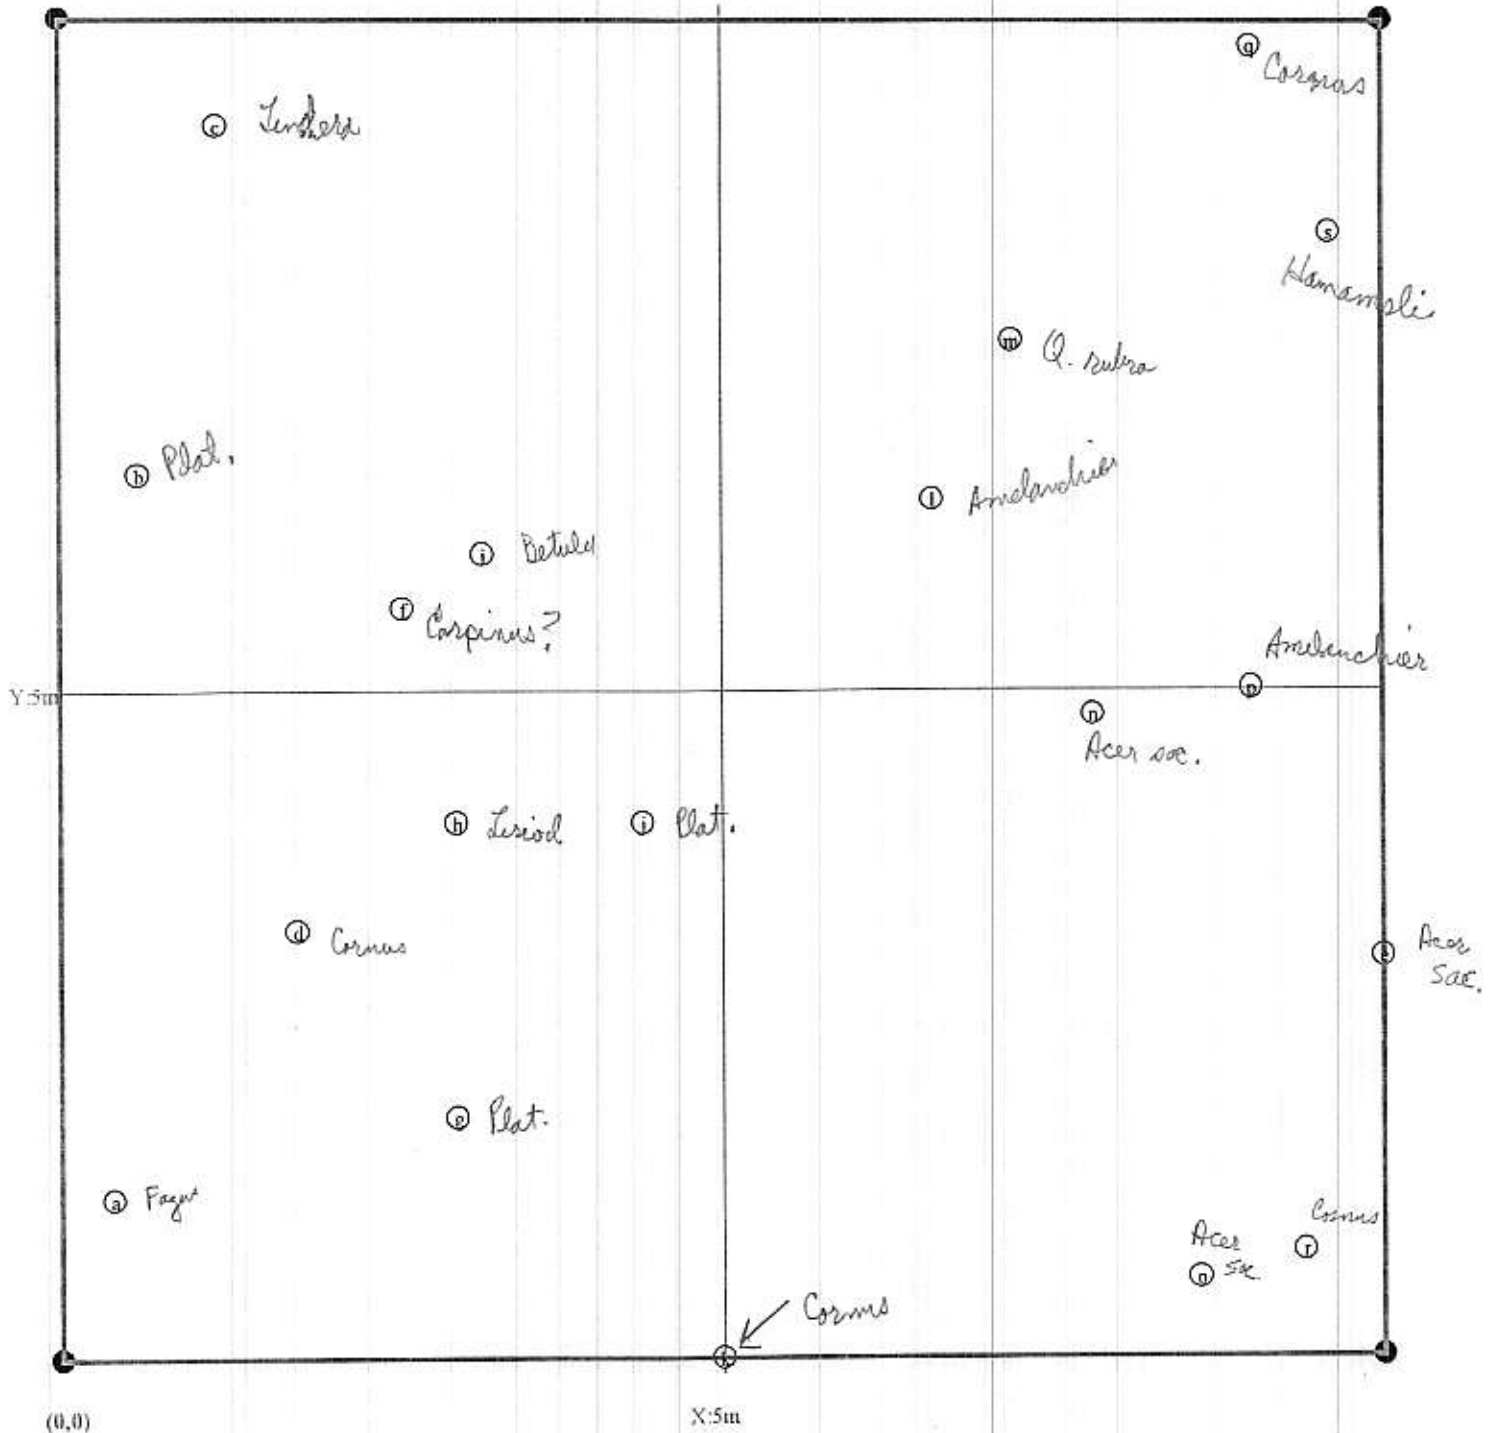

\*SOURCE: Tr=Transplant, L=Live stake, B=Ball and hurlap, P=Potted, Tu=Tubling, R=bare Root, M=Mechanically, U=Unknown

p. 3

\*VIGOR: 4=excellent, 3=good, 2=fair,  
1=unlikely to survive year, 0=dead,  
M=missing.

\*DAMAGE: REMoval, CUT, MOWing, BEAVer, DEER, RODents, INSEcts, GAME, LIVESTock, Other/Unknown  
ANIMal, Human TRAMpled, Site Too WET, Site Too DRY, FLOOD, DROUght, STORM, HURRICane, DISeased, VINE  
Strangulation, UNKNown, specify other.

\*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m.

Printed in the CVS-EEP Entry Tool ver. 2.2.

**Plot Morgan-AXE-0002**

Please fill in any missing data and fix incorrect data.

Vegetation Monitoring Data (VMD) Datasheet

VMD Year (1-5): 2 Date: 27 Jul 2010 Party: Ed Kenan Role:  Notes on plot: Data Sheet 31 Plot 32

Taxonomic Standard:

Taxonomic Standard DATE:

Latitude or UTM-N: 35.68458 Datum: NAD83/W

Longitude or UTM-E: -82.95334 UTM Zone:

Coordinate Accuracy (m):  X-Axis bearing (deg): 78

Plot Dimensions: X: 10 Y: 10  Plot has reverse orientation for X and Y axis (Y is 90 degrees to the right of X)

ID	Species Name	Map char	Source*	X 0.1m	Y 0.1m	Dec 2009 Data			THIS YEAR'S DATA						
						ddh 1mm	Height 1cm*	DBH 1cm	ddh 1mm	Height 1cm*	DBH 1cm	Re-sprout	Vigor*	Damage*	Notes
2520	Platanus occidentalis	Ⓐ	R	0.9	2.2	13	140.0	0.3	6	70		<input checked="" type="checkbox"/>	4		
2521	Hydrangea arborescens	Ⓐ	R	3.0	3.6	4	55.0		5	90		<input type="checkbox"/>	4		
2522	Cornus amomum	Ⓐ	R	4.9	2.3	14	15.0	0.4	12	160	0.4	<input type="checkbox"/>	4		
2523	Lindera benzoin	Ⓐ	R	7.1	<del>3.5</del>	6	50.0		6	50		<input type="checkbox"/>	3	DEER?	
2524	Quercus sp. rubra	Ⓜ	R	8.8	1.9	11	55.0		9	70		<input type="checkbox"/>	4		
2525	Acer saccharum (?) #1	Ⓜ	R	9.7	0.5	1	10.0		3	30		<input checked="" type="checkbox"/>	3		
2526	Hydrangea arborescens	Ⓐ	R	9.8	3.1	3	10.0		2	30		<input type="checkbox"/>	2	UNKN	
2527	Betula nigra	Ⓐ	R	7.7	8.8	13	120.0	DBH?	14	130		<input type="checkbox"/>	4		
2528	Quercus rubra	Ⓐ	R	6.3	9.1	6	50.0		4	40		<input type="checkbox"/>	3		
2529	Amelanchier laevis	Ⓐ	R	6.8	6.7	10	115.0	DBH?	10	150	0.3	<input type="checkbox"/>	4		
2530	Hamamelis virginiana	Ⓐ	R	5.0	6.7	7	60.0		7	70		<input type="checkbox"/>	4		
2531	Hamamelis virginiana	Ⓐ	R	3.7	9.4	12	80.0		10	80		<input type="checkbox"/>	4		
2532	Quercus rubra	Ⓐ	R	3.0	8.7	5	40.0		5	70		<input type="checkbox"/>	4		
2533	Hamamelis virginiana	Ⓐ	R	2.1	6.6	9	70.0		9	80		<input type="checkbox"/>	4		
2534	Quercus sp. rubra	Ⓐ	R	0.9	9.2	10	50.0		10	80		<input type="checkbox"/>	4		

# stems: 15 New Stems, not included last year, but are obviously planted. If more space needed, use blank PWS (Planted Woody Stems) Form:

Species Name	Source*	X (m)	Y (m)	ddh 1mm	Height 1cm*	DBH 1cm	Vigor*	Damage*	Notes
Hydrangea arb.		3.1	1.2	3	50		3		
Platanus occ.		0.5	7.0	4	70		3		
Betula nigra		2.1	8.1	5	60		3		

\*SOURCE: Tr=Transplant, L=Live stake, B=Ball and burlap, P=Potted, Tu=Tubing, R=bare Root, M=Mechanically, U=Unknown p. 4

\*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing

\*DAMAGE: REMOVAL, CUT, MOWING, BEAVER, DEER, RODENTS, INSECTS, GAME, LIVESTOCK, Other/Unknown ANIMAL, Human TRAMPLED, Site TOO WET, Site TOO DRY, FLOOD, DROUGHT, STORM, HURRICANE, DISEASED, VINE Strangulation, UNKNOWN, specify other.

\*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m

Printed in the CVS-EEP Entry Tool ver. 2.2

Plot (continued): **Morgan-AXE-0002**

Dec 2009 Data

THIS YEAR'S DATA

ID	Species	map char	source	X (m)	Y (m)	ddh (mm)	Height (cm)	DBH (cm)	ddh (mm)	Height (cm)	DBH (cm)	Re-sprout	Vigor*	Damage*	Notes
----	---------	----------	--------	-------	-------	----------	-------------	----------	----------	-------------	----------	-----------	--------	---------	-------


**Natural Woody Stems - tallied by species**

Explanation of cut-off & subsampling\*\*:

Height Cut-Off (All stems shorter than this are ignored. If >10cm, explain why to the right.):  10cm  50cm  100cm  137cm

Species Name	<input checked="" type="checkbox"/> c	SEEDLINGS — HEIGHT CLASSES			SAPLINGS — DBH			TREES — DBH							
		Sub-Seed	10 cm-50 cm	50 cm-100 cm	100 cm-137 cm	Sub-Sapl	0-1 cm	1-2.5	2.5-	5-	=10 (write DBH)				
<i>Prunus serratina</i>			*												
<i>Liriodendron</i>			*												

\*\*Required if cut-off >10cm or subsample? 100%.



Form WS2, ver 9.1

\*SOURCE: Tr=Transplant, L=Live stake, B=Ball and burial, P=Potted, Ty=Tubling, R=bare Root, M=Mechanically, U=Unknown

\*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing

\*DAMAGE: REMOVAL, CUT, MOWING, BEAVER, DEER, RODENTS, INSECTS, GAME, LIVESTOCK, Other/Unknown ANIMAL, Human TRAMPLED, Site Too WET, Site Too DRY, FLOOD, DROUGHT, STORM, HURRICANE, DISEASED, VINE Strangulation, UNKNOWN, specify other.


\*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m.

Map of stems on plot Morgan-AXE-0002

X-axis: 78°



# stems: 15  
map size:  
Medium

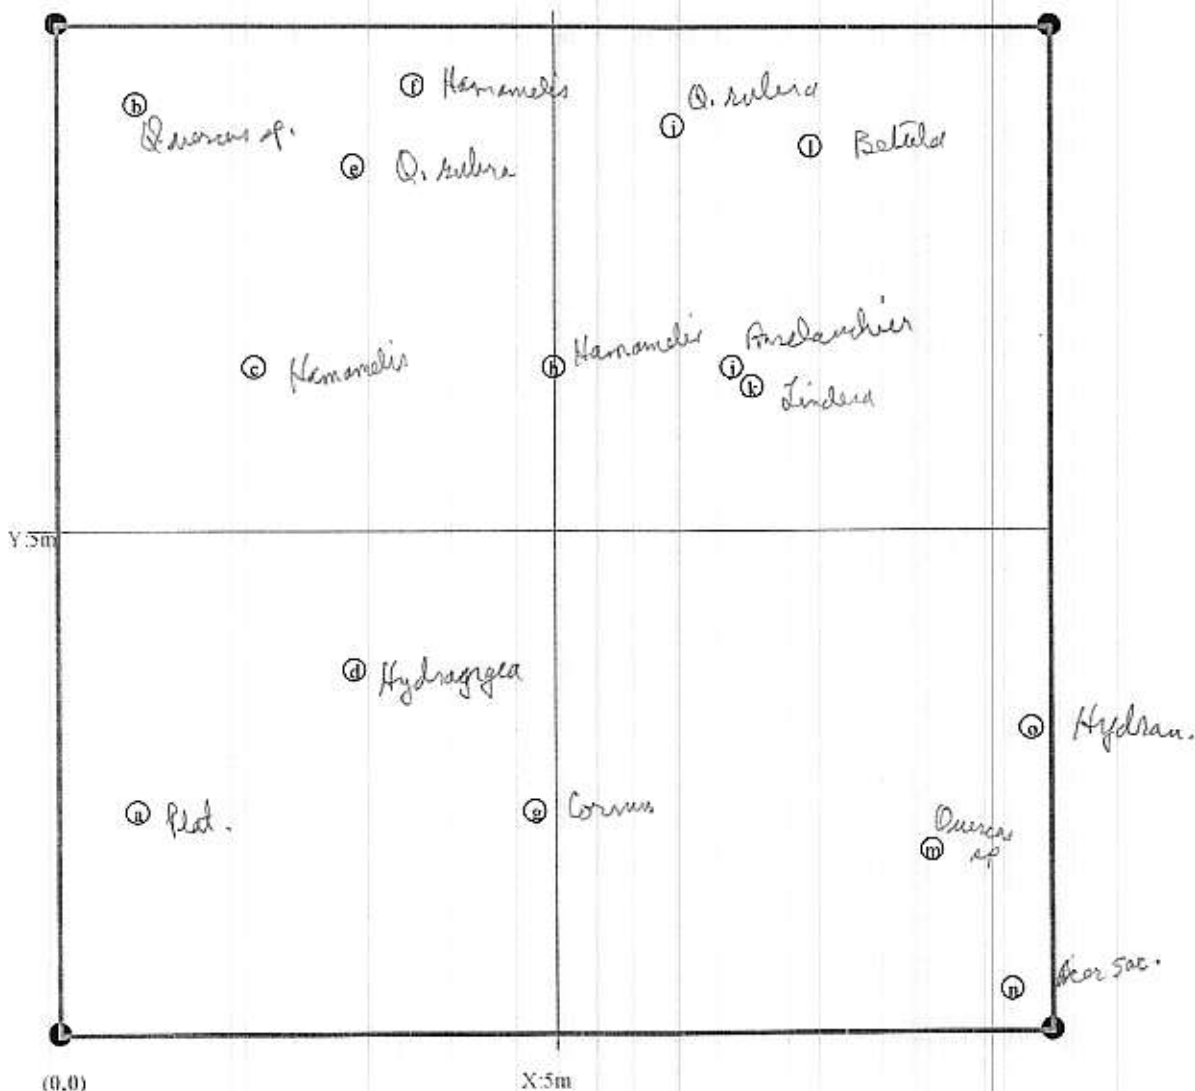

\*SOURCE: Tr=Transplant, L=Live stake, B=Bull and burlap, P=Potted, Tu=Tubling, R=bare Root, M=Mechanically, U=Unknown

p. 6

\*VIGOR: 4=excellent, 3=good, 2=fair,  
1=unlikely to survive year, 0=dead,  
M=missing

\*DAMAGE: REMoval, CUT, MOWing, BEAVer, DEER, RODents, INSEcts, GAME, LIVESTock, Other/Unknown  
ANIMAL, Human TRAMpled, Site Too WET, Site Too DRY, FLOOD, DROUght, STORM, HURRICane, DiSEased, VINE  
Strangulation, UNKNown, specify other.

\*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m

Printed in the CVS-EEP Entry Tool ver. 2.2.

**Plot Morgan-AXE-0003**

Please fill in any missing data and fix incorrect data.

Vegetation Monitoring Data (VMD) Datasheet

VMD Year (1-5): 2 Date: 27 Jul 2010 - 1 1 Party: Ed Kender Role: \_\_\_\_\_ Notes on plot: Date Sheet 27  
Plot 28

Taxonomic Standard: \_\_\_\_\_  
 Taxonomic Standard DATE: \_\_\_\_\_

Latitude or UTM-N: 35.68568 Datum: NAD83/W  
 (dec. deg. or m)  
 Longitude or UTM-E: -82.95381 UTM Zone: \_\_\_\_\_  
 Coordinate Accuracy (m): \_\_\_\_\_ X-Axis bearing (deg): 94

Plot Dimensions: X: 10 Y: 10  Plot has reverse orientation for X and Y axis (Y is 90 degrees to the right of X)

ID	Species Name	Map char	Source*	X 0.1m	Y 0.1m	Dec 2009 Data			THIS YEAR'S DATA						
						ddh 1mm	Height 1cm*	DBH 1cm	ddh 1mm	Height 1cm*	DBH 1cm	Re-sprout	Vigor*	Damage*	Notes
2535	<i>Cornus amomum</i>	⊙	R	1.3	1.9	14	150.0	0.3	16	140	0.5	<input type="checkbox"/>	4		
2536	<i>Betula nigra</i>	⊙	R	4.1	2.0	14	180.0	0.5	16	200	0.7	<input type="checkbox"/>	4		
2537	Unknown sp.	⊙	R	4.1	3.0	5	30.0					<input type="checkbox"/>	M		
no buds or identifiable features															
2538	<i>Lindera benzoin</i>	⊙	R	3.6	5.0	9	40.0		6	30		<input type="checkbox"/>	1	UNKN	
2539	<i>Cornus amomum</i>	⊙	R	0.4	2.9	8	150.0	0.4	12	160	0.4	<input type="checkbox"/>	4		
2540	<i>Lindera benzoin</i>	⊙	R	7.2	1.0	7	60.0		6	30		<input type="checkbox"/>	1	UNKN	
2541	<i>Quercus sp. rubra</i>	⊙	R	9.3	0.4	8	60.0		6	80		<input type="checkbox"/>	4		
2542	<i>Amelanchier laevis</i>	⊙	R	8.7	3.7	11	110.0	DBH?	12	130		<input type="checkbox"/>	4		
2543	<i>Hamamelis virginiana</i>	⊙	R	7.1	5.1	4	55.0		4	60		<input type="checkbox"/>	3		
2544	<i>Hamamelis virginiana</i>	⊙	R	9.9	7.5	4	40.0					<input type="checkbox"/>	M		
2545	<i>Lindera benzoin</i>	⊙	R	8.8	9.2	9	80.0		8	90		<input type="checkbox"/>	4		
2546	<i>Quercus rubra</i>	⊙	R	6.8	7.8	7	50.0		6	60		<input type="checkbox"/>	4		
2547	<i>Hamamelis virginiana</i>	⊙	R	5.1	9.9	7	20.0					<input type="checkbox"/>	M		
2548	<i>Quercus rubra</i>	⊙	R	3.4	8.8	5	40.0		3	70		<input type="checkbox"/>	3		
2549	<i>Platanus occidentalis</i>	⊙	R	0.3	8.7	15	110.0	DBH?	16	100		<input type="checkbox"/>	3		
2550	Unknown sp.	⊙	R	3.8	6.1	6	10.0					<input type="checkbox"/>	M		
no buds or identifiable features															

# stems: 16 New Stems, not included last year, but are obviously planted. If more space needed, use blank PWS (Planted Woody Stems) Form:

Species Name	Source*	X (m)	Y (m)	ddh 1mm	Height 1cm*	DBH 1cm	Vigor*	Damage*	Notes
<i>Platanus occ.</i>		3.4	7.2	4	70		3		
<i>Platanus</i>		9.8	6.2	5	80		3		

\*SOURCE: Tr=Transplant, L=Live stake, B=Ball and burlap, P=Pruned, Tu=Tubing, R=bare Root, M=Mechanically, U=Unknown  
 \*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing  
 \*DAMAGE: REMoval, CUT, MOWing, BEAVer, DEER, RODents, INsects, GAME, LIVESTock, Other/Unknown  
 ANIMAL, Human TRAMpled, Site Too WET, Site Too DRY, FLOOD, DROUght, STORM, HURRricane, DISeased, VINE  
 Strangulation, UNKNown, specify other.  
 \*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m

<b>Plot (continued): Morgan-AXE-0003</b>				Dec 2009 Data			THIS YEAR'S DATA						
ID	Species	map char	source X (m) Y (m)	ddh (mm)	Height (cm)	DBH (cm)	ddh (mm)	Height (cm)	DBH (cm)	Re-sprout	Vigor*	Damage*	Notes

Natural Woody Stems - tallied by species											Explanation of cut-off & subsampling**:	
Height Cut-Off (All stems shorter than this are ignored. If >10cm, explain why to the right.):											<input type="checkbox"/> 10cm <input type="checkbox"/> 50cm <input type="checkbox"/> 100cm <input type="checkbox"/> 137cm	
Species Name	<input checked="" type="checkbox"/> c	SEEDLINGS — HEIGHT CLASSES			SAPLINGS — DBH			TREES — DBH			=10 (write DBH)	
		Sub-Seed	10 cm-50 cm	50 cm-100 cm	100 cm-137 cm	Sub-Sapl	0-1 cm	1-2.5	2.5-	5-		

\*\*Required if cut-off >10cm or subsample ? 100%.     
 ●1   ●2   ●3   ●●4   ●●5   ●●6   ●●7   ●●8   ●●9   ●●10      Form WS2, ver 9.1

\*SOURCE: T=Transplant, L=Live stake, B=Ball and burlap, P=Potted, Tu=Tubling, R=bare Root, M=Mechanically, U=Unknown      p. 8  
 \*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing      \*DAMAGE: REMoval, CUT, MOWing, BEAVer, DEER, RODents, INSEcts, GAME, LIVESTock, Other/Unknown  
 ANIMal, Human TRAMpled, Site Too WET, Site Too DRY, FLOOD, DROUght, STORM, HURRICane, DISeased, VINE  
 Strangulation, UNKNown, specify other.  
 \*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m.      Printed in the CVS-EEP Entry Tool ver. 2.2.




Map of stems on plot Morgan-AXE-0003

X-axis: 94°



# stems: 16  
map size:  
Medium

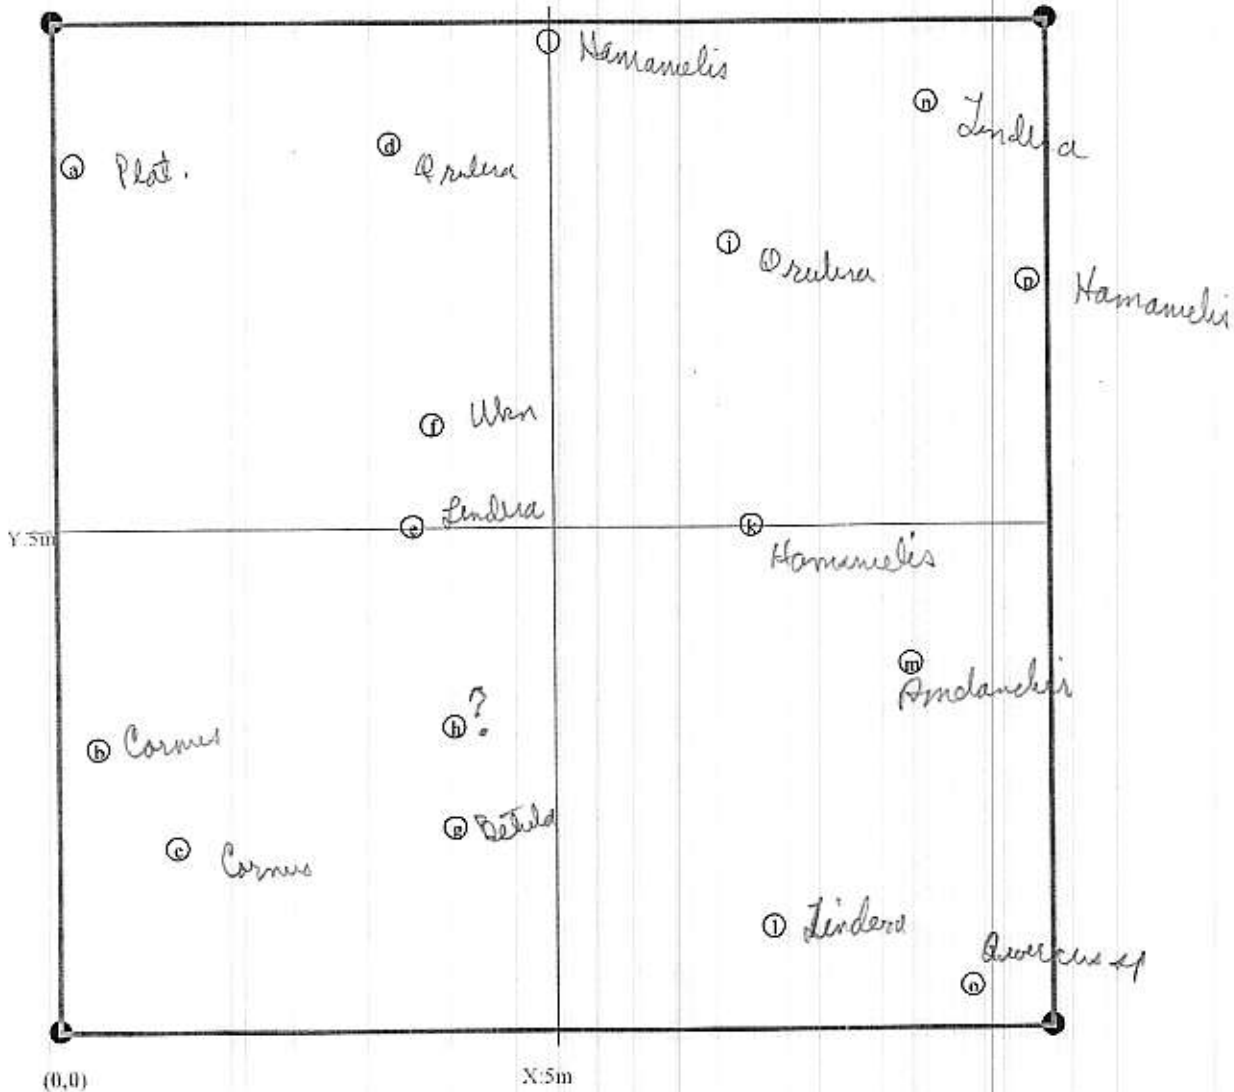

\*SOURCE: Tr=Transplant, L=Live stake, B=Ball and burlap, P=Potted, Tu=Tubing, R=bare Root, M=Mechanically, U=Unknown p. 9  
 \*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing  
 \*DAMAGE: REMoval, CUT, MOWing, BEAVer, DEER, RODents, INSEcts, GAME, LIVESTock, Other/Unknown  
 ANIMal, Human TRAMpled, Site Too WET, Site Too DRY, FLOOD, DROUGHT, STORM, HURRICane, DISeased, VINE  
 Strangulation, UNKNown, specify other.  
 \*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m

**Plot Morgan-AXE-0004**

Please fill in any missing data and fix incorrect data.

Vegetation Monitoring Data (VMD) Datasheet

VMD Year (1-5):  Date: 27 Jul 2012   Party: Ed Kenan Role: \_\_\_\_\_ Notes on plot: Data Sheet 25  
Plot 26

Taxonomic Standard: \_\_\_\_\_  
 Taxonomic Standard DATE: \_\_\_\_\_  
 Latitude or UTM-N: 35.68624 Datum: NAD83/W  
 (dec, deg, or m)  
 Longitude or UTM-E: -82.95360 UTM Zone: \_\_\_\_\_  
 Coordinate Accuracy (m): \_\_\_\_\_ X-Axis bearing (deg): 72  
 Plot Dimensions: X:  Y:   Plot has reverse orientation for X and Y axis (Y is 90 degrees to the right of X)

ID	Species Name	Map char	Source*	X 0.1m	Y 0.1m	Dec 2009 Data			THIS YEAR'S DATA						
						ddh 1 mm	Height 1cm*	DBH 1 cm	ddh 1mm	Height 1cm*	DBH 1 cm	Re-sprout	Vigor*	Damage*	Notes
2551	Platanus occidentalis	a	R	1.4	0.3	9	80.0		15	150	0.4	<input type="checkbox"/>	4		
2552	Betula nigra	d	R	2.0	2.2	16	150.0	0.4	18	190	0.5	<input type="checkbox"/>	4		
2553	Carpinus caroliniana <i>Amelanchier</i>	c	R	4.9	3.7	11	120.0	DBH?	11	150	0.2	<input type="checkbox"/>	4		
2554	Liriodendron tulipifera <i>laciniis</i>	i	R	6.2	1.0	11	90.0		11	100		<input type="checkbox"/>	4		
2555	Salix nigra <i>Aronia arbutifolia</i>	l	R	9.5	2.5	7	80.0		6	90		<input type="checkbox"/>	3		
2556	Liriodendron tulipifera	e	R	7.3	5.1	8	55.0		8	70		<input type="checkbox"/>	4		
2557	Aronia arbutifolia	b	R	5.0	6.9	6	60.0					<input type="checkbox"/>	M		
2558	Hamamelis virginiana	j	R	7.0	8.7	10	90.0		9	120		<input type="checkbox"/>	4		
2559	Quercus rubra	f	R	4.1	8.6	10	60.0		10	100		<input type="checkbox"/>	4		
2560	Salix nigra <i>Aronia arbutifolia</i>	g	R	2.4	5.2	5	60.0		5	80		<input type="checkbox"/>	3		
2561	Cornus amomum	o	R	1.7	8.2	12	130.0	DBH?	13	160	0.3	<input type="checkbox"/>	4		
2562	Sassafras albidum	h	R	1.4	9.6	3	5.0					<input type="checkbox"/>	0	DEAD	

dieback, too wet for species?

# stems: 12 New Stems, not included last year, but are obviously planted. If more space needed, use blank PWS (Planted Woody Stems) Form:

Species Name	Source*	X (m)	Y (m)	ddh 1 mm	Height 1 cm*	DBH 1 cm	Vigor*	Damage*	Notes
Platanus occ.		8.2	1.0	4	60		3		

\*SOURCE: T=Transplant, L=Live stake, B=Ball and burlap, P=Potted, Tu=Tubling, R=bare Root, M=Mechanically, U=Unknown

\*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing

\*DAMAGE: REMoval, CUT, MOWing, BEAVer, DEER, RODents, INSEcts, GAME, LIVESTock, Other/Unknown ANIMal, Human TRAMpled, Site Too WET, Site Too DRY, FLOOD, DROUght, STORM, HURRIcane, DISeased, VINE Strangulation, UNKNown, specify other.

\*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m.

Plot (continued): **Morgan-AXE-0004**

Dec 2009 Data

THIS YEAR'S DATA

ID	Species	map char	source	X (m)	Y (m)	ddh (mm)	Height (cm)	DBH (cm)	ddh (mm)	Height (cm)	DBH (cm)	Re-sprout	Vigor*	Damage*	Notes

**Natural Woody Stems - tallied by species**

Explanation of cut-off & subsampling\*\*

Height Cut-Off (All stems shorter than this are ignored. If >10cm, explain why to the right.):  10cm  50cm  100cm  137cm

Species Name	<input checked="" type="checkbox"/> Sub-c	SEEDLINGS — HEIGHT CLASSES			SAPLINGS — DBH			TREES — DBH							
		Sub-Seed	10 cm-50 cm	50 cm-100 cm	100 cm-137 cm	Sub-Sapl	0-1 cm	1-2.5	2.5-	5-	=10 (write DBH)				
<i>Fraxinus</i>				*											

\*\*Required if cut-off >10cm or subsample ? 100%.

1  2  3  4  5  6  7  8  9  10

Form WS2, ver 9.1

\*SOURCE: Tr=Transplant, L=Live stake, B=Ball and burlap, P=Potted, Tu=Tubling, R=bare Root, M=Mechanically, U=Unknown

\*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing.

\*DAMAGE: REMoval, CUT, MOWing, BEAVer, DEER, RODents, INSEcts, GAME, LIVESTock, Other/Unknown ANIMAL, Human TRAMpled, Site Too WET, Site Too DRY, FLOOD, DROUght, STORM, HURRICane, DISeased, VINE Strangulation, UNKNown, specify other.


\*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m

Map of stems on plot Morgan-AXE-0004

→ X-axis: 72°



# stems: 12  
map size:  
Medium

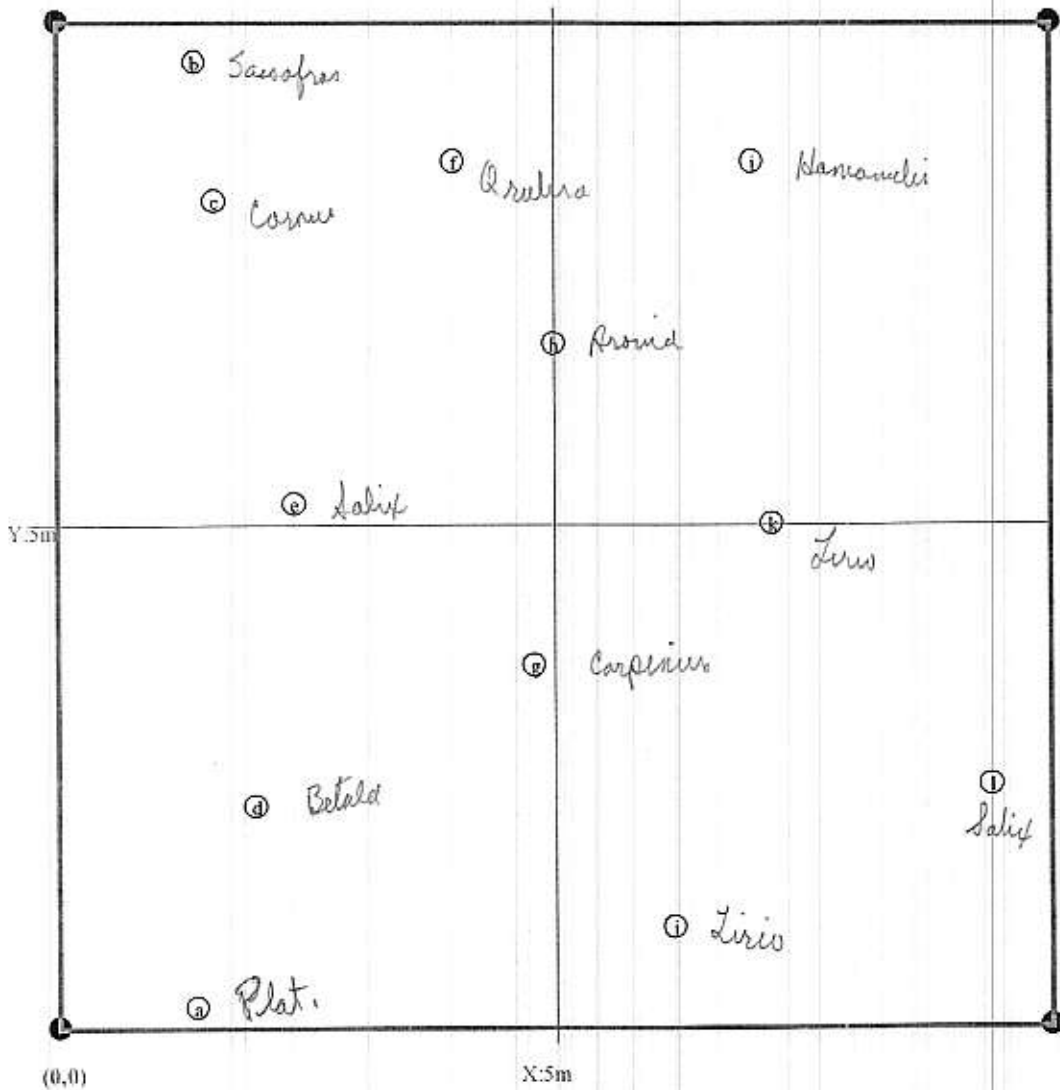

\*SOURCE: T=Transplant, L=Live stake, B=Ball and burlap, P=Potted, Tr=Tubling, R=bare Root, M=Mechanically, U=Unknown

\*VIGOR: 4=excellent, 3=good, 2=fair,  
1=unlikely to survive year, 0=dead,  
M=missing.

\*DAMAGE: REMOVAL, CUT, MOWING, BEAVER, DEER, RODENTS, INSECTS, GAME, LIVESTOCK, Other/Unknown  
ANIMAL, Human TRAMPLED, Site Too WET, Site Too DRY, FLOOD, DROUGHT, STORM, HURRICANE, DISEASED, VINE  
Strangulation, UNKNOWN, specify other.

\*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m.

**Plot Morgan-AXE-0005**

Please fill in any missing data and fix incorrect data.

Vegetation Monitoring Data (VMD) Datasheet

VMD Year (1-5):  Date: 27 Jul 2010 - 1 / 1 Party: Sid Kenan Role: \_\_\_\_\_ Notes on plot: Date Sheet 23  
Plot 24

Taxonomic Standard: \_\_\_\_\_  
 Taxonomic Standard DATE: \_\_\_\_\_  
 Latitude or UTM-N: 35.68836 Datum: NAD83/W  
 (dec. deg. or m) UTM Zone: \_\_\_\_\_  
 Longitude or UTM-E: -82.95519 UTM Zone: \_\_\_\_\_  
 Coordinate Accuracy (m): \_\_\_\_\_ X-Axis bearing (deg): (4)  
 Plot Dimensions: X: 20 Y: 5  Plot has reverse orientation for X and Y axis (Y is 90 degrees to the right of X)

ID	Species Name	Map char	Source*	X 0.1m	Y 0.1m	Dec 2009 Data			THIS YEAR'S DATA						
						ddh 1 mm	Height 1cm*	DBH 1 cm	ddh 1mm	Height 1cm*	DBH 1 cm	Re-sprout	Vigor*	Damage*	Notes
2563	Platanus occidentalis	(b)	R	2.0	3.4	7	60.0		9	100		<input type="checkbox"/>	4		
2564	<del>Salis-nigra</del> Aronia arbutifolia	(i)	R	2.8	1.0	5	55.0		5	60		<input type="checkbox"/>	3		
2565	Platanus occidentalis	(b)	R	5.9	1.0	12	140.0	0.3	14	150	0.4	<input type="checkbox"/>	4		
* 2566	Liriodendron tulipifera	(b)	R	9.7	1.1	8	80.0		7	20		<input type="checkbox"/>	*		* Moved (20cm stump)
2567	Cornus amomum	(b)	R	13.6	1.5	13	160.0	0.5	9	170	0.5	<input type="checkbox"/>	4		
2568	Platanus occidentalis	(c)	R	16.6	0.0	16	120.0	DBH?	18	150	0.4	<input type="checkbox"/>	4		
2569	Liriodendron tulipifera	(p)	R	19.3	2.7	4	50.0		4	70		<input type="checkbox"/>	3		
2570	Betula nigra	(f)	R	17.8	4.5	11	135.0	DBH?	15	150	0.3	<input type="checkbox"/>	4		
2571	Liriodendron tulipifera	(d)	R	16.4	3.0	4	30.0		5	50		<input type="checkbox"/>	3		
2572	Platanus occidentalis	(c)	R	15.3	4.7	8	55.0		10	90		<input type="checkbox"/>	4		
2573	Platanus occidentalis	(a)	R	12.4	3.5	8	75.0		10	130		<input type="checkbox"/>	4		
2574	<del>Salis-nigra</del> Aronia arbutifolia	(n)	R	7.0	3.3	9	100.0		9	120		<input type="checkbox"/>	4		
* 2575	<del>Cornus amomum</del> Unknown #10	(d)	R	5.9	4.0	7	105.0	DBH?	13	230	0.5	<input type="checkbox"/>	4		Sample taken
2576	Liriodendron tulipifera	(m)	R	5.9	5.0	8	90.0					<input type="checkbox"/>	M		
2577	<del>Salis-nigra</del> Aronia arbutifolia	(c)	R	<del>5.9</del> 3.5	<del>5.0</del> 3.2	8	70.0		5	90		<input type="checkbox"/>	4		

# stems: 15 New Stems, not included last year, but are obviously planted. If more space needed, use blank PWS (Planted Woody Stems) Form:

Species Name	Source*	X (m)	Y (m)	ddh 1 mm	Height 1 cm*	DBH 1 cm	Vigor*	Damage*	Notes

\* Stump - see map

\* sample taken

see map for moved area

\*SOURCE: Tr=Transplant, L=Live stake, B=Ball and burlap, P=Potted, Tu=Tubling, R=hare Root, M=Mechanically, U=Unknown p. 13  
 \*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing  
 \*DAMAGE: REMOVAL, CUT, MOWING, BEAVER, DEER, RODENTS, INSECTS, GAME, LIVESTOCK, Other/Unknown  
 ANIMAL, HUMAN TRAMPLED, SITE TOO WET, SITE TOO DRY, FLOOD, DROUGHT, STORM, HURRICANE, DISEASED, VINE  
 Strangulation, UNKNOWN, specify other.  
 \*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m.  
 Printed in the CVS-EEP Entry Tool ver. 2.2.

Plot (continued): <b>Morgan-AXE-0005</b>				Dec 2009 Data			THIS YEAR'S DATA								
ID	Species	map char	source	X (m)	Y (m)	ddh (mm)	Height (cm)	DBH (cm)	ddh (mm)	Height (cm)	DBH (cm)	Re- sprout	Vigor*	Damage*	Notes

**Natural Woody Stems - tallied by species**

Height Cut-Off (All stems shorter than this are ignored. If >10cm, explain why to the right.):  10cm  50cm  100cm  137cm

Explanation of cut-off & subsampling\*\*:

Species Name	<input checked="" type="checkbox"/> Sub-Seed c	SEEDLINGS — HEIGHT CLASSES				SAPLINGS — DBH			TREES — DBH					
		10 cm- 50 cm	50 cm- 100 cm	100 cm- 137 cm	Sub-Sapl	0-1 cm	1-2.5	2.5-	5-	=10 (write DBH)				

\*\*Required if cut-off >10cm or subsample ? 100%.

1  
 2  
 3  
 4  
 5  
 6  
 7  
 8  
 9  
 10

Form WS2, ver 9.1

\*SOURCE: T=Transplant, L=Live stake, B=Ball and burlap, P=Potted, Tu=Tubing, R=bare Root, M=Mechanically, U=Unknown p. 14

\*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing

\*DAMAGE: REMoval, CUT, MOWing, BEAVer, DEER, RODents, INSEcts, GAME, LIVESTock, Other/Unknown  
ANIMAL, Human TRAMpled, Site Too WET, Site Too DRY, FLOOD, DROUght, STORM, HURRICane, DISeased, VINE  
Strangulation, UNKNown, specify other.


\*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m

Printed in the CVS-EEP Entry Tool ver. 2.2.

Map of stems on plot Morgan-AXE-0005

→ X-axis: 4°

# stems: 15  
map size:  
Medium

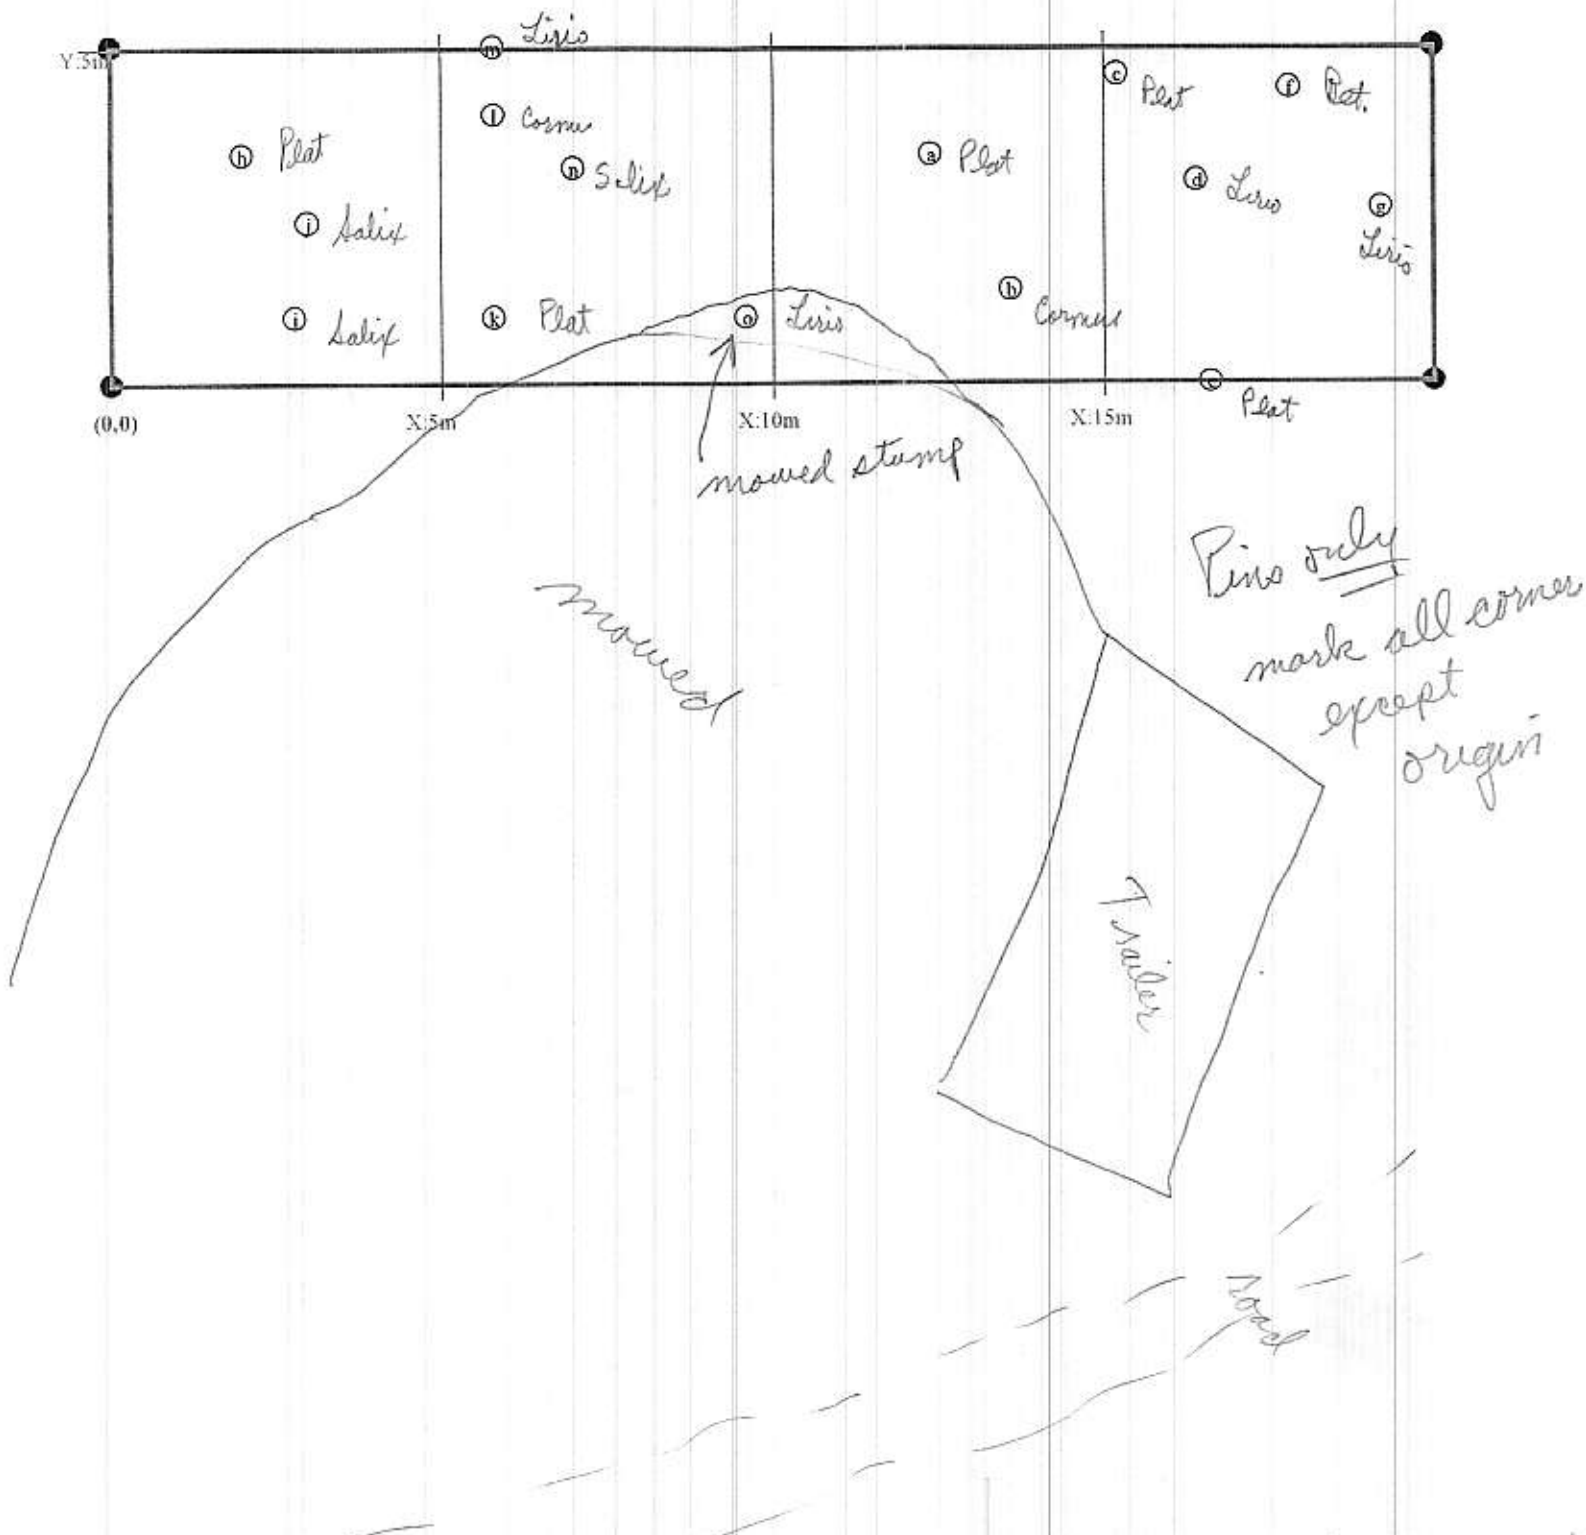

\*SOURCE: Tr=Transplant, L=Live stake, B=Ball and burlap, P=Potted, Tu=Tubling, R=hare Root, M=Mechanically, U=Unknown p. 15  
 \*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing  
 \*DAMAGE: REMoval, CUT, MOWing, BEAVer, DEER, RODents, INSEcts, GAME, LIVESTock, Other/Unknown  
 ANIMal, Human TRAMpled, Site Too DRY, FLOOD, DROught, STORM, HURRICane, DISeased, VINE  
 Strangulation, UNKNown, specify other.  
 \*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m

**Plot Morgan-AXE-0006**

Please fill in any missing data and fix incorrect data.

Vegetation Monitoring Data (VMD) Datasheet

VMD Year (1-5): 2 Date: 27 Jul 2010 / /

Taxonomic Standard: \_\_\_\_\_

Taxonomic Standard DATE: \_\_\_\_\_

Latitude or UTM-N: 35.68910 Datum: NAD83/W

Longitude or UTM-E: -82.95452 UTM Zone: \_\_\_\_\_

Coordinate Accuracy (m): \_\_\_\_\_ X-Axis bearing (deg): 69

Plot Dimensions: X: 10 Y: 10  Plot has reverse orientation for X and Y axis (Y is 90 degrees to the right of X)

Party: Ed Kenan

Role: \_\_\_\_\_

Notes on plot: Data sheet 21  
Plot 22

ID	Species Name	Map char	Source*	X 0.1m	Y 0.1m	Dec 2009 Data			THIS YEAR'S DATA						
						ddh 1 mm	Height 1 cm*	DBH 1 cm	ddh 1mm	Height 1cm*	DBH 1 cm	Re-sprout	Vigor*	Damage*	Notes
2510	Quercus rubra	(B)	R	1.7	2.2	4	35.0		<u>3</u>	<u>50</u>		<input type="checkbox"/>	<u>3</u>		
2511	Acer saccharum	(P)	R	4.1	3.9	7	50.0		<u>5</u>	<u>50</u>		<input type="checkbox"/>	<u>4</u>		
2512	Liriodendron tulipifera	(D)	R	3.9	0.8	10	80.0		<u>10</u>	<u>90</u>		<input type="checkbox"/>	<u>4</u>		
2513	Acer saccharum	(T)	R	7.6	2.7	8	20.0					<input type="checkbox"/>	<u>0</u>	<u>DEAD</u>	
2514	Acer saccharum (UNKNOWN) resprout #1	(D)	R	8.4	0.5	3	10.0		<u>4</u>	<u>60</u>		<input type="checkbox"/>	<u>3</u>		
2515	Cornus amomum (UNKNOWN) resprout #1	(B)	R	6.6	5.0	5	75.0		<u>6</u>	<u>110</u>		<input type="checkbox"/>	<u>4</u>		<u>Sample taken for J.D.</u>
2516	Liriodendron tulipifera	(P)	R	6.0	7.3	10	75.0		<u>10</u>	<u>90</u>		<input type="checkbox"/>	<u>4</u>	<u>INS</u>	
2517	Betula nigra	(P)	R	5.3	9.9	6	85.0		<u>6</u>	<u>90</u>		<input type="checkbox"/>	<u>4</u>		
2518	Betula nigra	(P)	R	2.1	9.3	15	160.0	<u>0.5</u>	<u>19</u>	<u>170</u>	<u>0.5</u>	<input type="checkbox"/>	<u>4</u>	<u>INS</u>	
2519	Amelanchier laevis	(D)	R	0.5	5.8	11	110.0	<u>DBH?</u>	<u>10</u>	<u>120</u>		<input type="checkbox"/>	<u>4</u>		

# stems: 10 New Stems, not included last year, but are obviously planted. If more space needed, use blank PWS (Planted Woody Stems) Form:

Species Name	Source*	X (m)	Y (m)	ddh 1 mm	Height 1 cm*	DBH 1 cm	Vigor*	Damage*	Notes
<u>Platanus occ.</u>		<u>0.8</u>	<u>3.3</u>	<u>5</u>	<u>60</u>		<u>3</u>		
<u>Quercus rubra</u>		<u>3.5</u>	<u>6.0</u>	<u>6</u>	<u>40</u>		<u>3</u>		

\*SOURCE: T=Transplant, L=Live stake, B=Ball and burlap, P=Potted, T= Tubing, R=bare Root, M=Mechanically, U=Unknown

\*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing.

\*DAMAGE: REMOVAL, CUT, MOWING, BEAVER, DEER, RODENTS, INSECTS, GAME, LIVESTOCK, Other/Unknown ANIMAL, Human TRAMPLED, Site TOO WET, Site TOO DRY, FLOOD, DROUGHT, STORM, HURRICANE, DISEASED, VINE Strangulation, UNKNOWN, specify other.

\*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m.



<b>Plot (continued): Morgan-AXE-0006</b>				Dec 2009 Data			THIS YEAR'S DATA								
ID	Species	map char	source	X (m)	Y (m)	ddh (mm)	Height (cm)	DBH (cm)	ddh (mm)	Height (cm)	DBH (cm)	Re-sprout	Vigor*	Damage*	Notes

Natural Woody Stems - tallied by species											Explanation of cut-off & subsampling**:				
Species Name	c	SEEDLINGS — HEIGHT CLASSES				SAPLINGS — DBH			TREES — DBH						
		Sub-Seed	10 cm-50 cm	50 cm-100 cm	100 cm-137 cm	Sub-Sapl	0-1 cm	1-2.5	2.5-	5-	=10 (write DBH)				

\*\*Required if cut-off >10cm or subsample ? 100%. ●1 ●2 ●3 ●●4 ●●●5 ●●●6 ●●●7 ●●●8 ●●●●9 ●●●●10 Form WS2, ver 9.1


\*SOURCE: Tr=Transplant, L=Live stake, B=Ball and burlap, P=Potted, T=Tufting, R=bare Root, M=Mechanically, U=Unknown p. 17  
 \*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing  
 \*DAMAGE: REMOVAL, CUT, MOWING, BEAVER, DEER, RODENTS, INSECTS, GAME, LIVESTOCK, Other/Unknown  
 ANIMAL, Human TRAMPLED, Site Too WET, Site Too DRY, FLOOD, DROUGHT, STORM, HURRICANE, DISEASED, VINE  
 Strangulation, UNKNOWN, specify other.  
 \*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m. Printed in the CVS-EEP Entry Tool ver. 2.2.

Map of stems on plot Morgan-AXE-0006

X-axis: 69°



# stems: 10  
map size:  
small

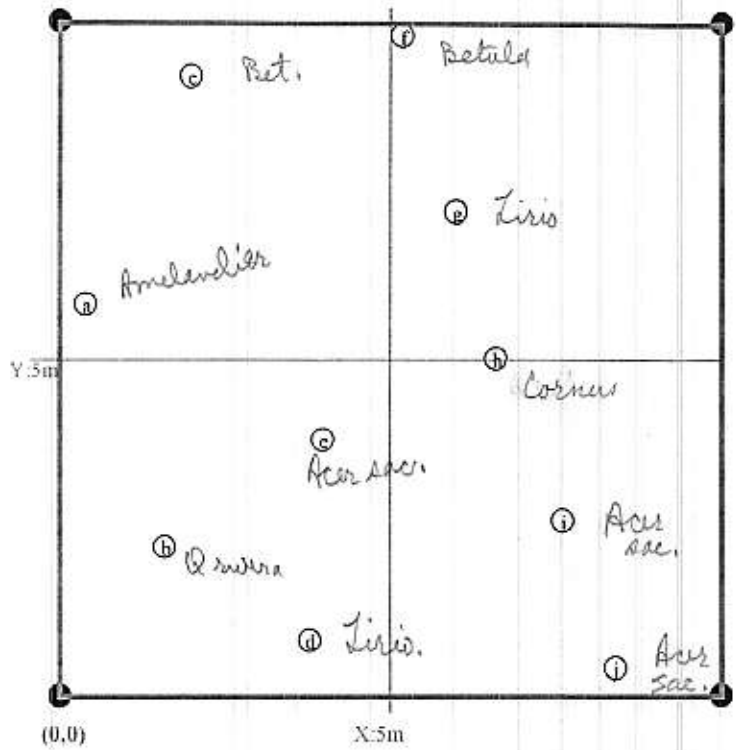

\*SOURCE: Tr=Transplant, L=Live stake, B=Ball and hurlap, P=Potted, Tu=Tubling, R=bare Root, M=Mechanically, U=Unknown p. 18  
 \*VIGOR: 4=excellent, 3=good, 2=fair, 1=unlikely to survive year, 0=dead, M=missing  
 \*DAMAGE: REMOVAL, CUT, MOWING, BEAVER, DEER, RODENTS, INSECTS, GAME, LIVESTOCK, Other/Unknown  
 ANIMAL, Human TRAMPLED, Site Too WET, Site Too DRY, FLOOD, DROUGHT, STORM, HURRICANE, DISEASED, VINE  
 Strangulation, UNKNOWN, specify other.  
 \*HEIGHT PRECISION drops to 10cm if >2.5m and 50cm if >4m. Printed in the CVS-EEP Entry Tool ver. 2.2.

(unknown #2)

Salix purpurea Basket Willow

Purple Osier

European, N. Afr.

Shrub to 10', <sup>many</sup> long erect branches

lvs oblanceolate, 1-3"; glabrous, shiny + glaucous below

finely serrulate, sometimes nearly opp

nearly or quite sessile

stipules wanting

seen wild somewhat in N. Amer

Bailey - Man of Cult. Plants, Revised Ed  
1951; 14th printing 1974

Introduced for basket-making

Viburnum opulus - (unknown #1)

narrow linear stipules

pubescent below

petioles w narrow groove + large dish-like glands

V. americanum is similar (stalked glands)

V. argenteum - large glands



**APPENDIX C**  
**GEOMORPHIC RAW DATA**



**REPRESENTATIVE PROBLEM AREA PHOTOS**







Minor piping of log hook, Morgan Cr, Sta 102+90

Year 2

10/02/10

Photo No. 13



Stabilized nick point in riffle, Morgan Cr, Sta 107+60 (No change from Year 1)

Year 2

10/02/10

Photo No. 14



Nick point formations in riffle, Morgan Cr, Sta 124+20 (Appears to be stable)  
Year 2 10/02/10 Photo No. 15



Excessive drop over structure, Morgan Cr, Sta 101+90 (Stable in Year 2)  
Year 1 10/30/09 Photo No. 16

## **PHOTO POINTS**



Photo Point 1  
Morgan Creek facing upstream



As-Built

Photo No. 17

2/3/09



Year 1

Photo No. 18

10/30/09



Year 2

Photo No. 19

10/02/10

Photo Point 1  
Morgan Creek perpendicular to stream



As-Built

Photo No. 20


2/3/09



Year 1

Photo No. 21

10/30/09

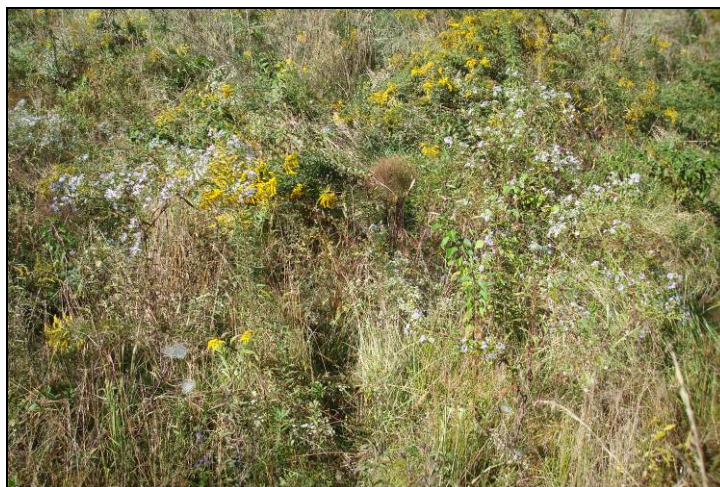

Year 2

Photo No. 22

10/02/10

Photo Point 1  
Morgan Creek facing downstream



As-Built

Photo No. 23

2/3/09



Year 1

Photo No. 24

10/30/09



Year 2

Photo No. 25

10/02/10

Photo Point 2  
Morgan Cr. / Lower North Br. confluence facing upstream



As-Built

Photo No. 26

2/3/09



Year 1

Photo No. 27

10/30/09



Year 2

Photo No. 28

10/02/10



Photo Point 3  
Middle Branch facing upstream



As-Built Photo No. 29 2/3/09



Year 1 Photo No. 30 10/30/09



Year 2 Photo No. 31 10/02/10

Photo Point 3  
Middle Branch facing downstream



As-Built

Photo No. 32

2/3/09



Year 1

Photo No. 33

10/30/09



Year 2

Photo No. 34

10/02/10

Photo Point 4  
South Branch facing upstream



As-Built

Photo No. 35

2/3/09



Year 1

Photo No. 36

10/30/09



Year 2

Photo No. 37

10/02/10

Photo Point 4  
South Branch facing downstream



As-Built

Photo No. 38

2/3/09



Year 1

Photo No. 39

10/30/09



Year 2

Photo No. 40

10/02/10

Photo Point 5  
Morgan Creek facing upstream



As-Built

Photo No. 41

2/3/09



Year 1

Photo No. 42

10/30/09



Year 2

Photo No. 43

10/02/10


Photo Point 6  
North Branch from piped crossing, facing upstream



As-Built

Photo No. 44


2/3/09

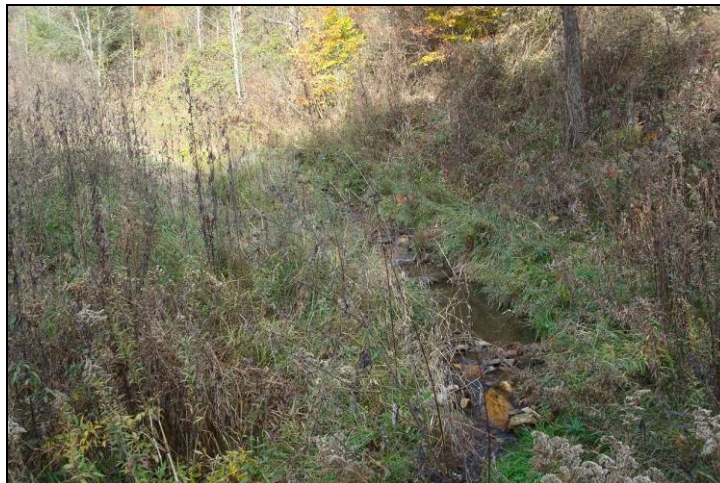

Year 1

Photo No. 45

10/30/09

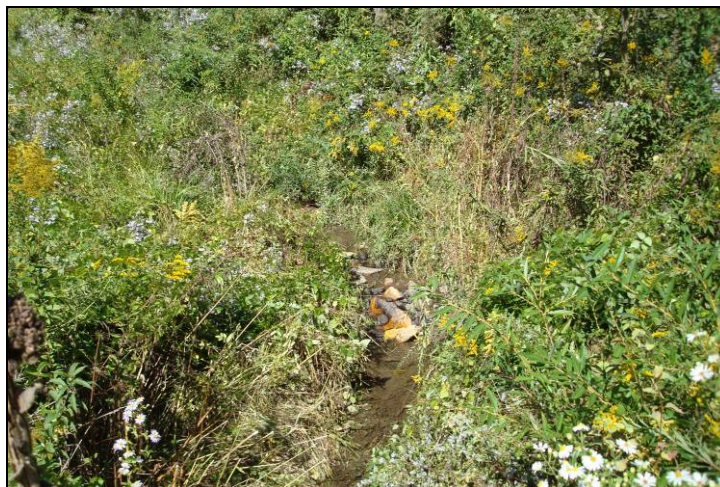

Year 2

Photo No. 46

10/02/10

Photo Point 6  
North Branch from piped crossing, facing downstream



As-Built

Photo No. 47

2/3/09



Year 1

Photo No. 48

10/30/09



Year 2

Photo No. 49

10/02/10

Photo Point 7  
Morgan Creek from U/S pipe outfall, facing downstream



As-Built

Photo No. 50

2/3/09



Year 1

Photo No. 51

10/30/09



Year 2

Photo No. 52

10/02/10



Photo Point 8  
Lower North Branch from pipe outfall, facing downstream



As-Built

Photo No. 53

2/3/09



Year 1

Photo No. 54

10/30/09



Year 2

Photo No. 55

10/02/10

Photo Point 9  
Piped crossing at easement break, facing upstream



As-Built

Photo No. 56

2/3/09



Year 1

Photo No. 57

10/30/09



Year 2

Photo No. 58

10/02/10

Photo Point 9  
Piped crossing at easement break, facing downstream



As-Built

Photo No. 59

2/3/09



Year 1

Photo No. 60

10/30/09



Year 2

Photo No. 61

10/02/10


Photo Point 10  
Morgan Creek from D/S pipe inlet, facing upstream



As-Built

Photo No. 62


2/3/09

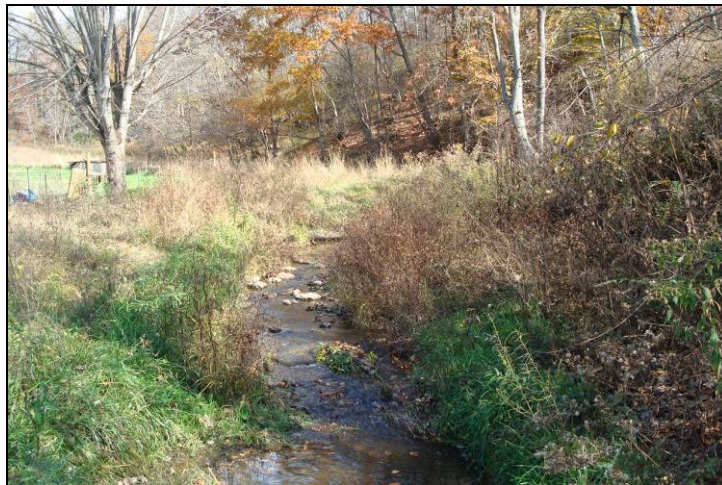

Year 1

Photo No. 63

10/30/09

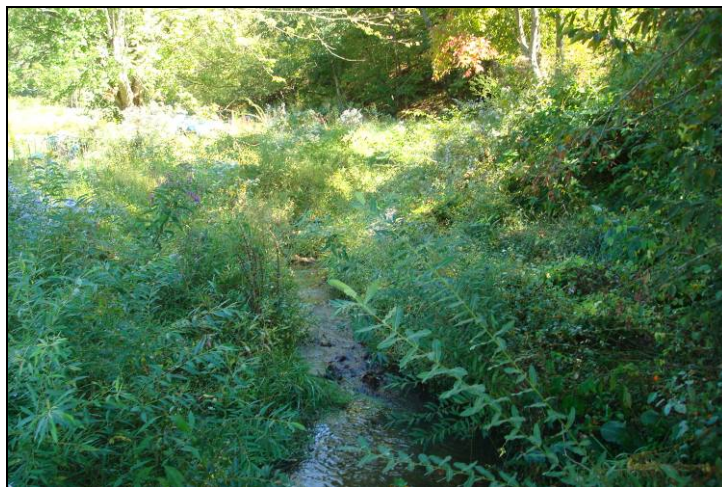

Year 2

Photo No. 64

10/02/10

## **GEOMORPHIC DATA**




### Morgan Creek Stream Restoration Site

Haywood County, NC

Profile Reach 1 - Morgan Creek


#### Profile

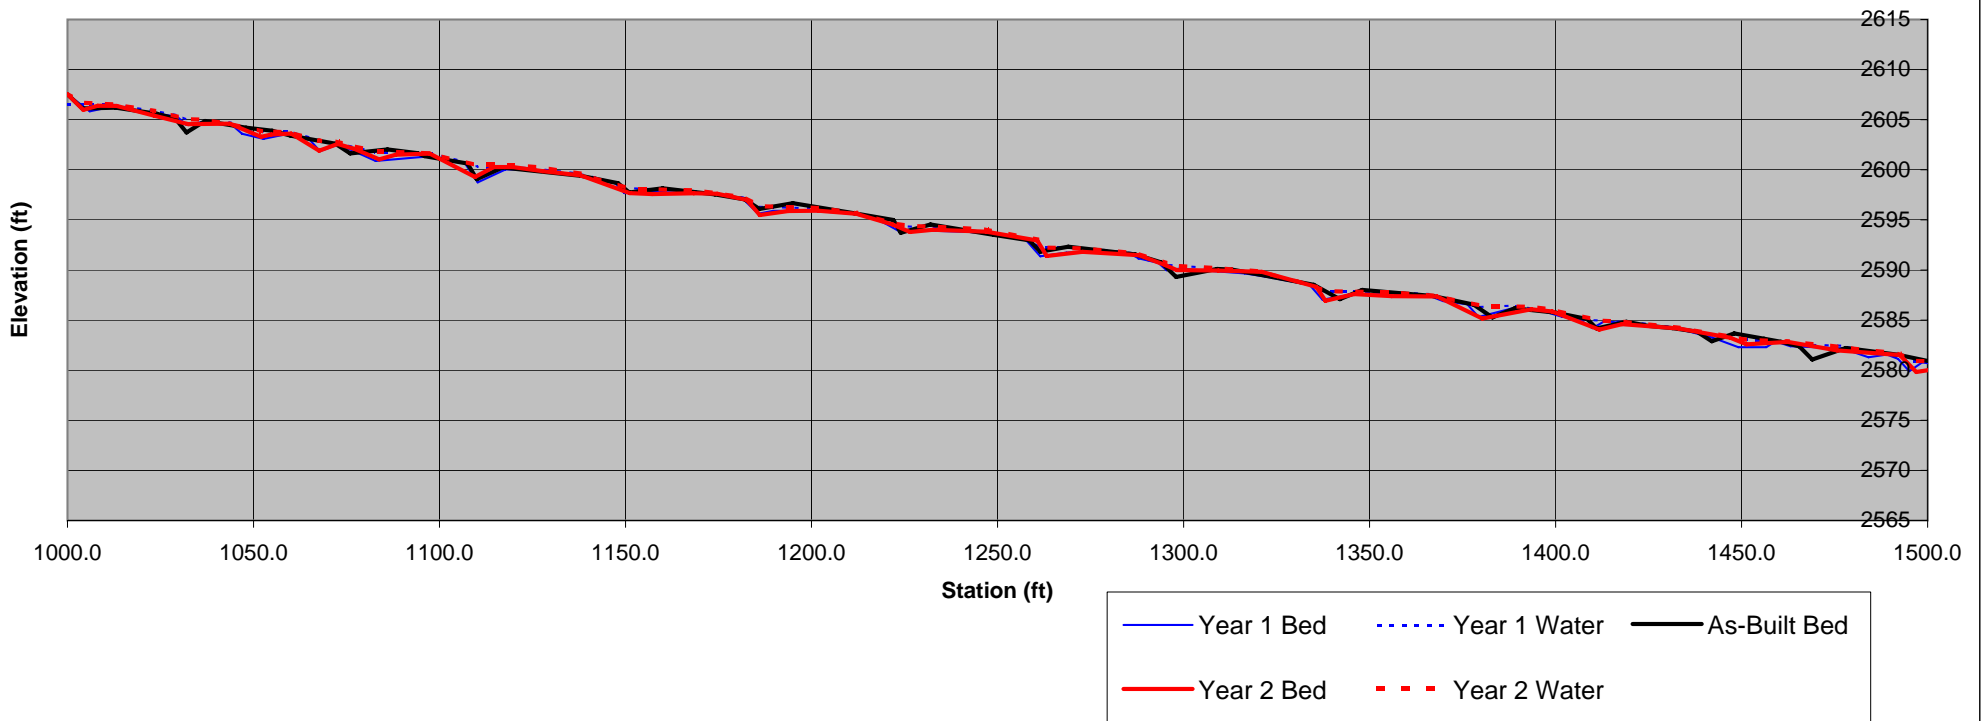

### Morgan Creek Stream Restoration Site

Haywood County, NC  
Profile Reach 1 - Morgan Creek

#### Profile

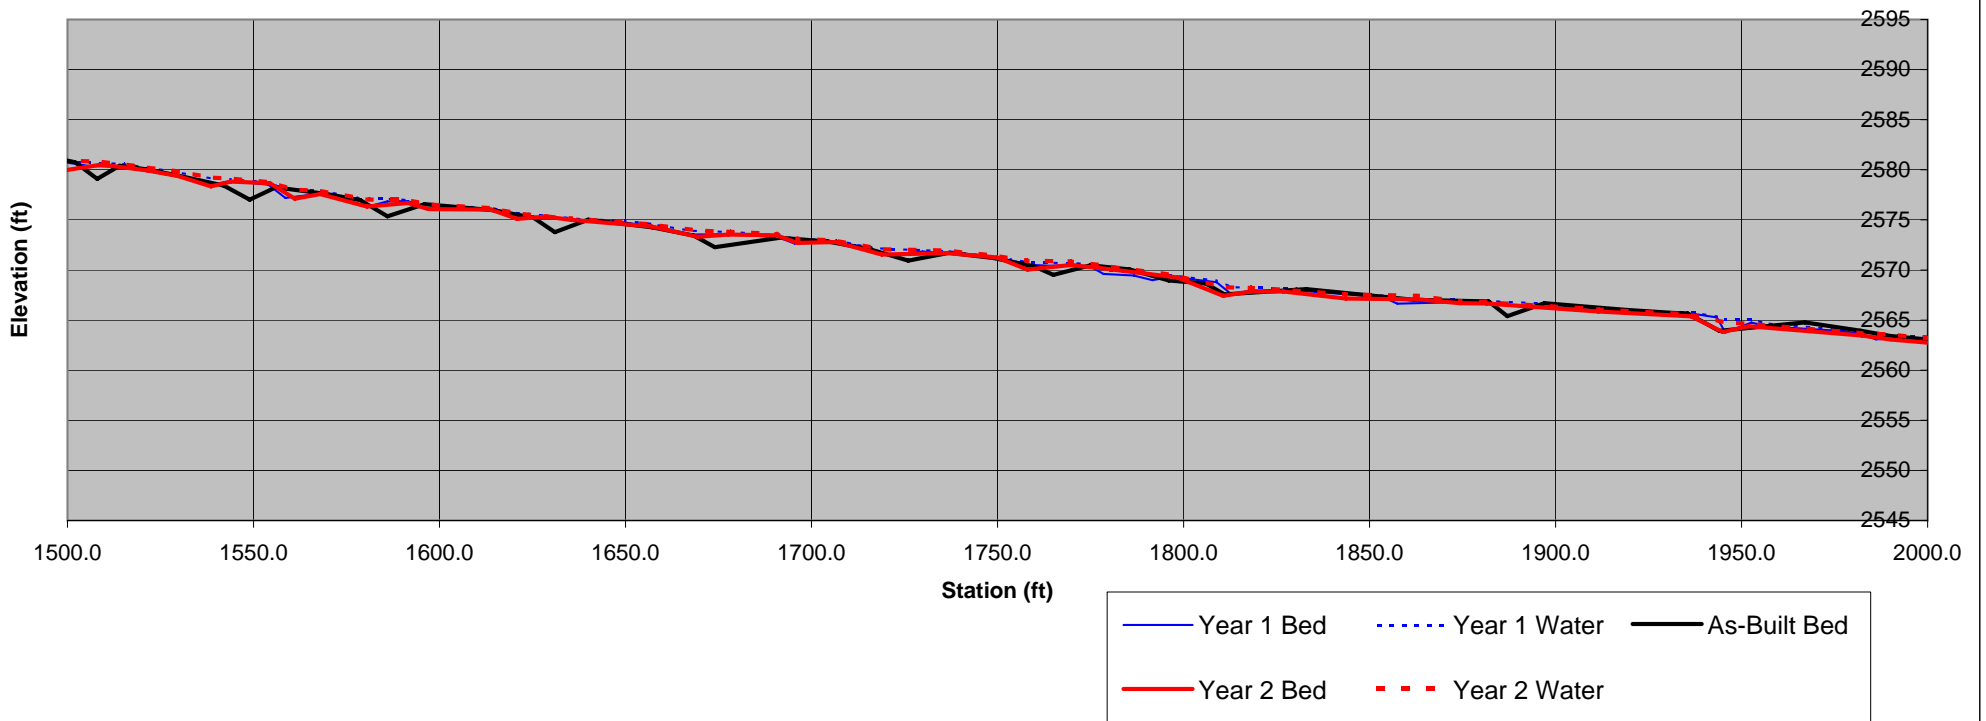




### Morgan Creek Stream Restoration Site


Haywood County, NC  
Profile Reach 1 - Morgan Creek

#### Profile

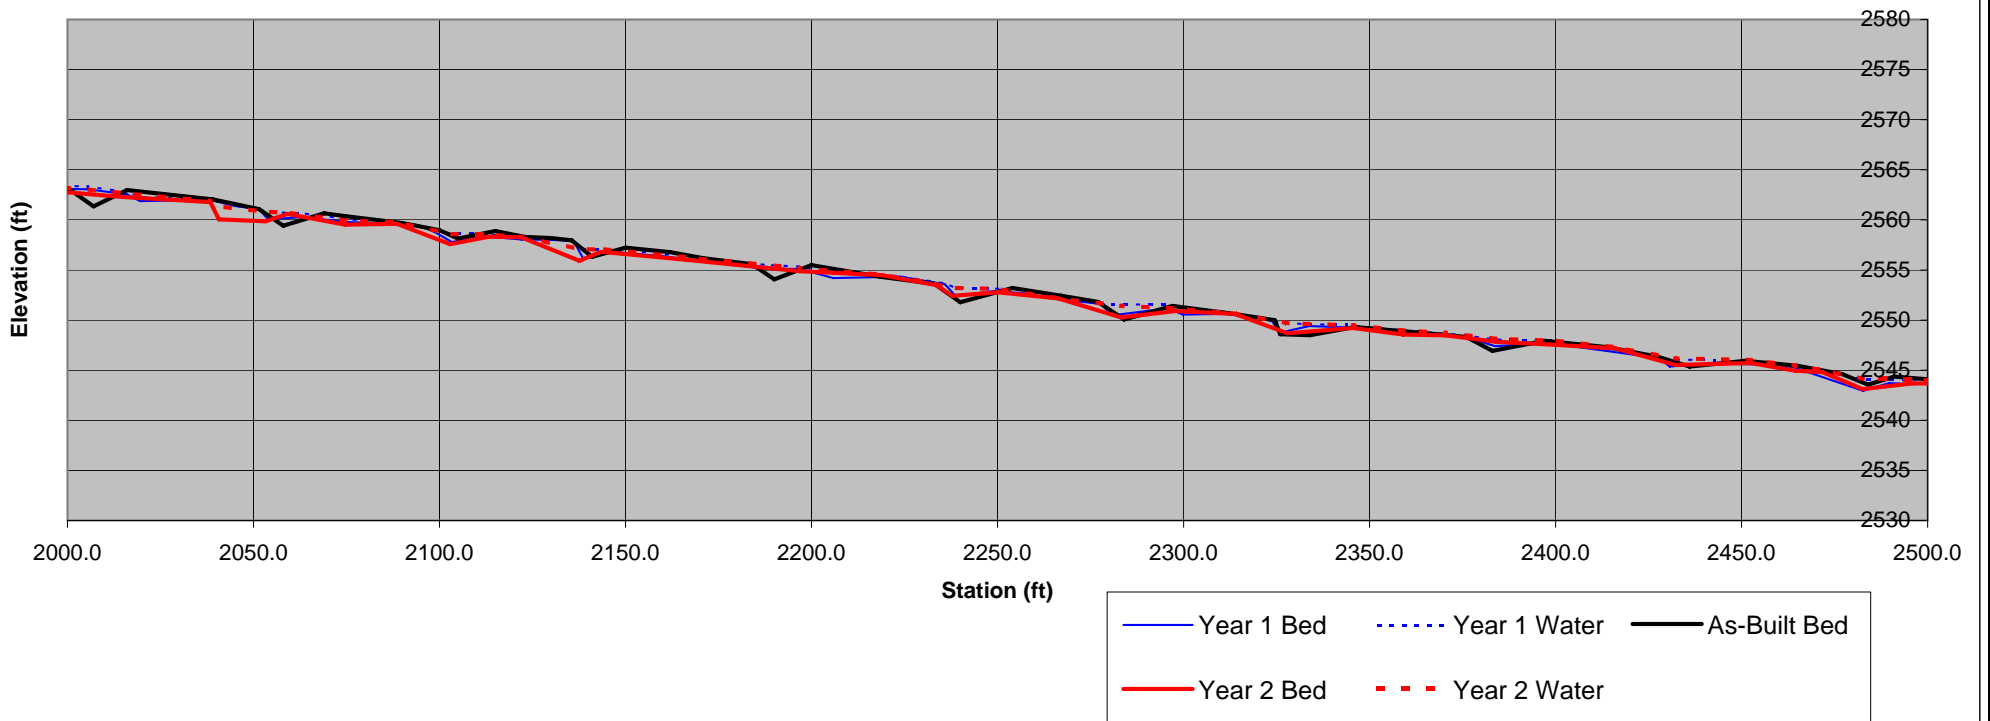


**Morgan Creek Stream Restoration Site**  
Haywood County, NC  
Profile Reach 1 - Morgan Creek

**Profile**

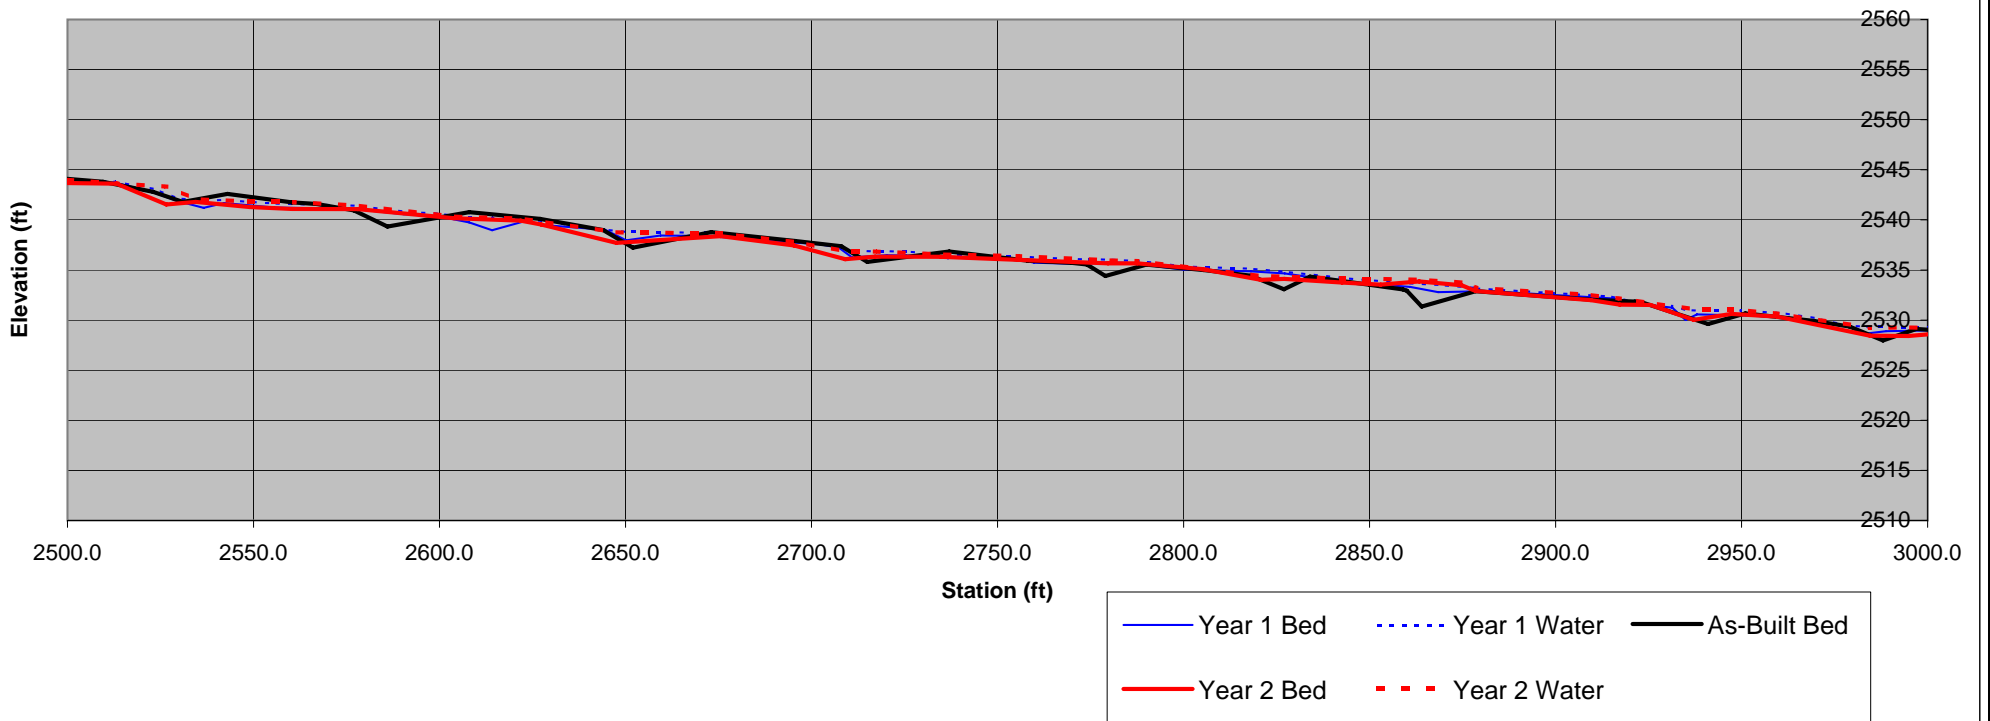

**Morgan Creek Stream Restoration Site**  
Haywood County, NC  
Profile Reach 1 - Morgan Creek


**Profile**

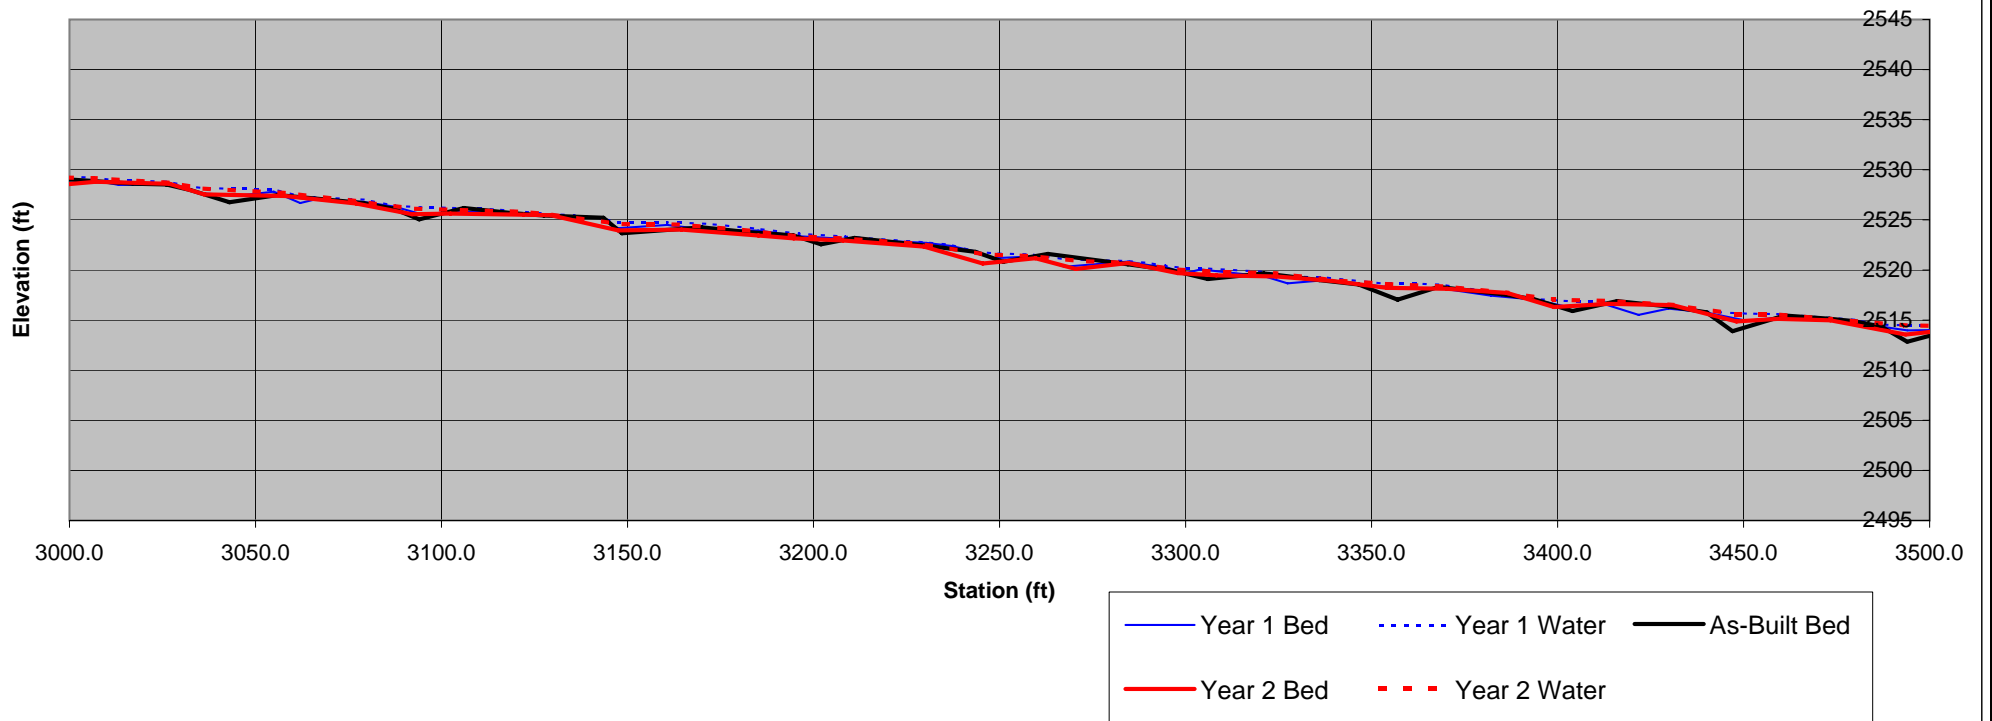

### Morgan Creek Stream Restoration Site


Haywood County, NC  
Profile Reach 1 - Morgan Creek

#### Profile

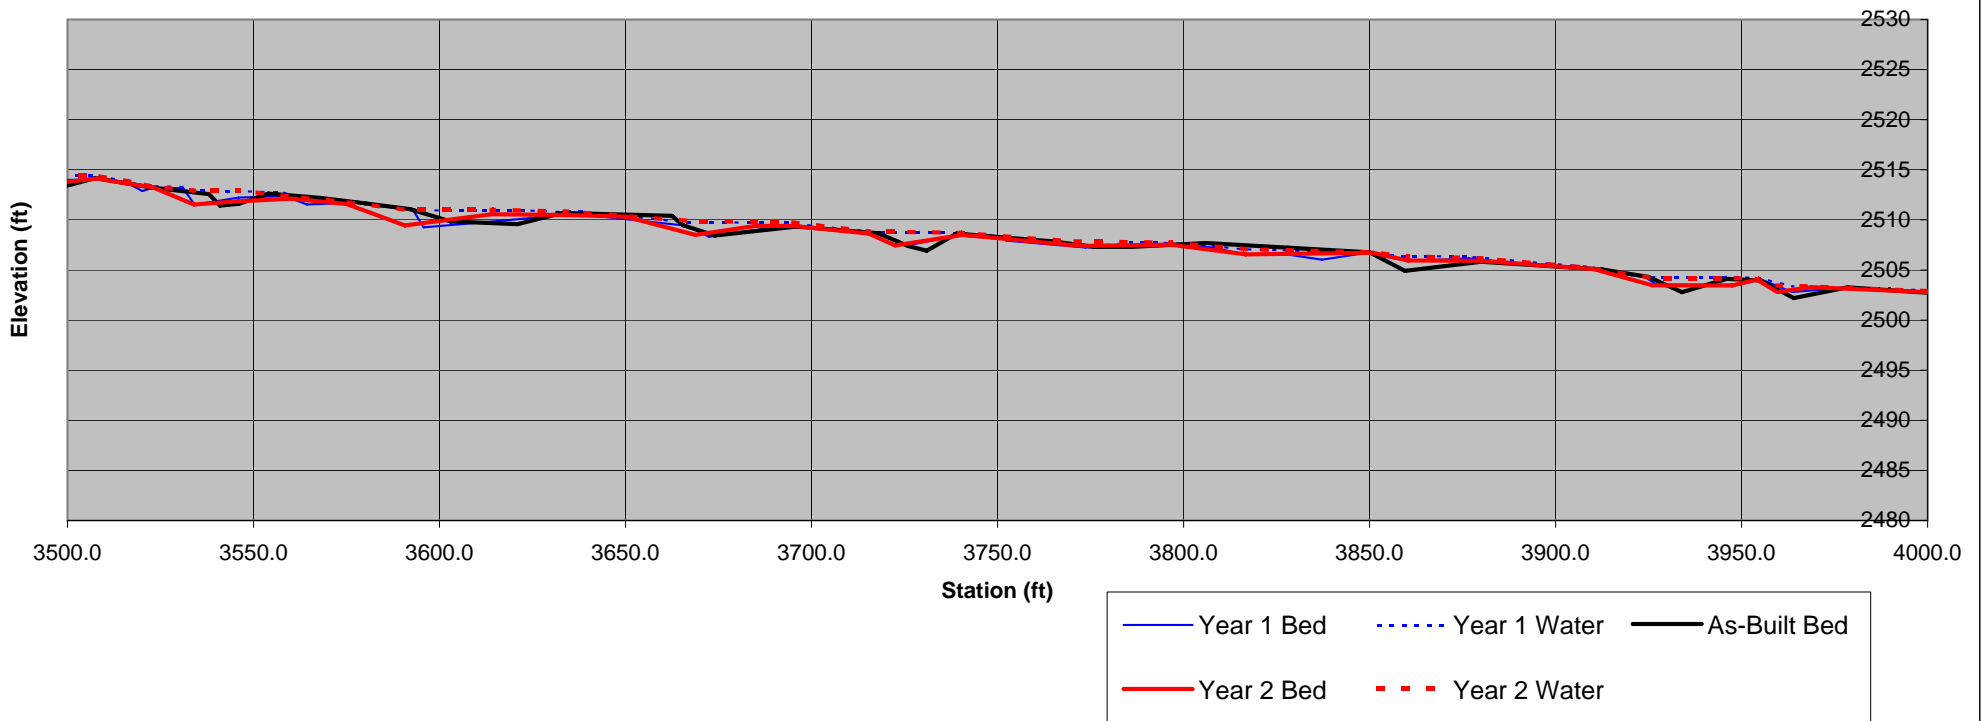

**Morgan Creek Stream Restoration Site**  
Haywood County, NC  
Profile Reach 1 - Morgan Creek

**Profile**

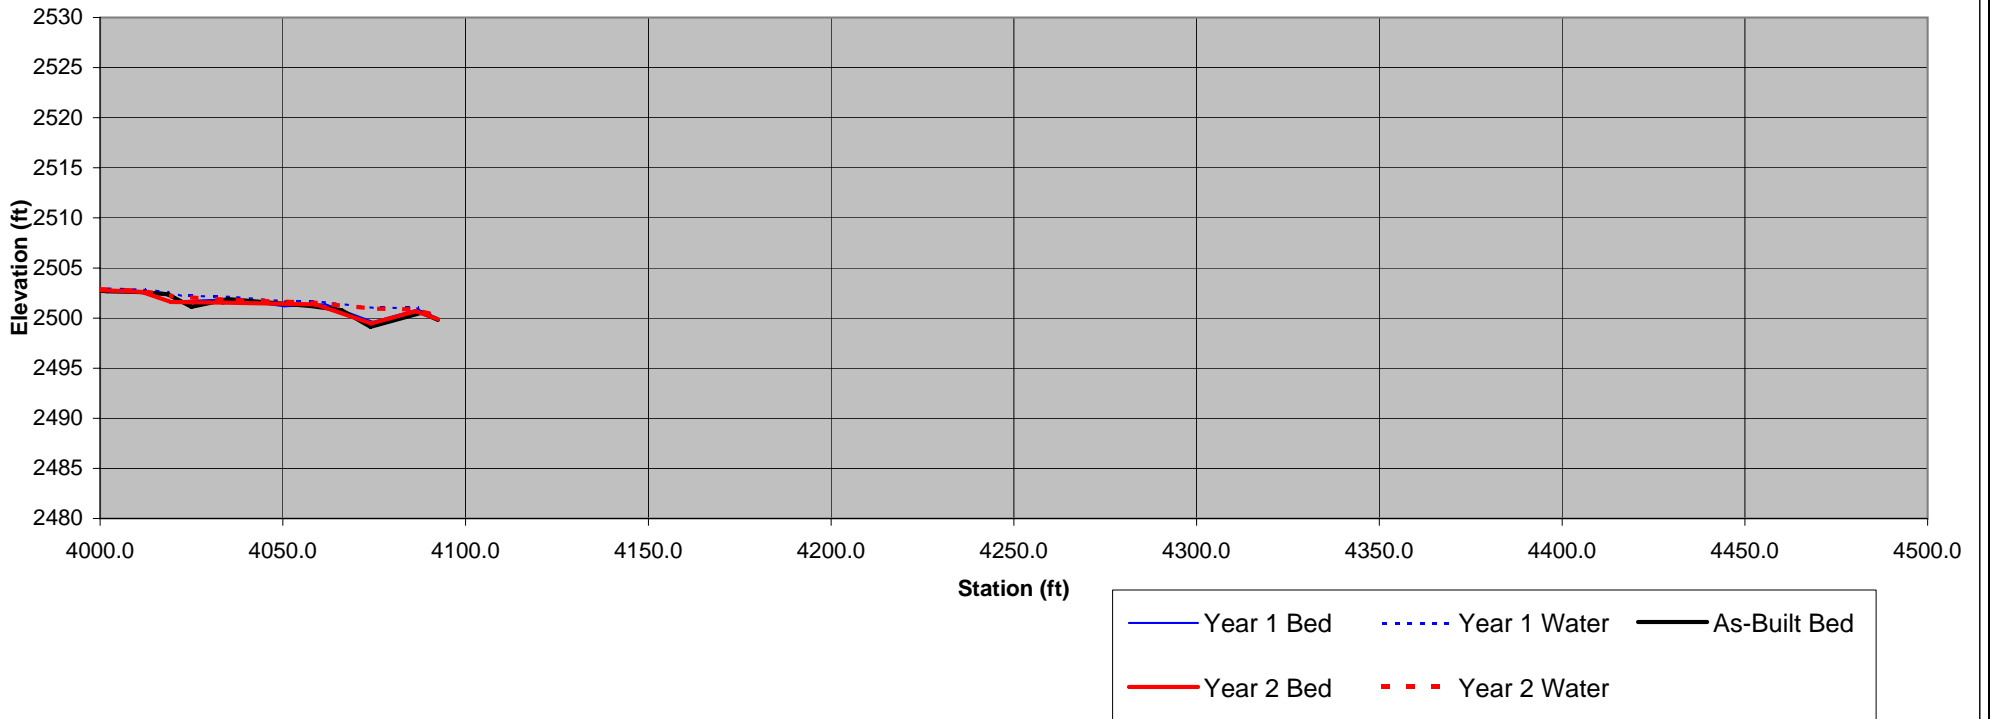

**Morgan Creek Stream Restoration Site**

Haywood County, NC

Profile Reach 1 - Morgan Creek

Year 2								
HI	Station	Bed FS	Water Depth	Bankfull FS	Description	Bed Elev.	Water Elev.	Bankfull Elev.
2613.50	1000	5.95	0.10			2607.55	2607.65	
2613.50	1004.2	7.53	0.72			2605.97	2606.69	
2613.50	1008	7.11	0.23			2606.39	2606.62	
2613.50	1013	7.13	0.13			2606.37	2606.50	
2613.50	1023	8.10	0.46			2605.40	2605.86	
2613.50	1032	8.94	0.48			2604.56	2605.04	
2613.50	1035	8.92	0.44	8.05		2604.58	2605.02	2605.45
2613.50	1043	8.90	0.01			2604.60	2604.61	
2613.50	1051.3	10.20	0.53			2603.30	2603.83	
2613.50	1054	9.98	0.30	8.92	9.00 alt bkf HOR	2603.52	2603.82	2604.58
2613.50	1059.3	9.89	0.11			2603.61	2603.72	
2613.50	1066.7	11.59	0.98			2601.91	2602.89	
2613.50	1071.6	10.93	0.25			2602.57	2602.82	
2613.50	1076	11.40	0.25			2602.10	2602.35	
2613.50	1082.6	12.46	0.76			2601.04	2601.80	
2613.50	1087	12.00	0.30	10.92	10.96 alt bkf HOR	2601.50	2601.80	2602.58
2613.50	1096	11.88	0.01			2601.62	2601.63	
2613.50	1108	14.22	1.18			2599.28	2600.46	
2613.50	1113	13.23	0.21	12.02	12.08 alt bkf GL	2600.27	2600.48	2601.48
2613.50	1118	13.22	0.18	12.06	12.10 alt bkf HOR	2600.28	2600.46	2601.44
2605.96	1126	6.10	0.35			2599.86	2600.21	
2605.96	1136	6.51	0.15			2599.45	2599.60	
2605.96	1149	8.28	0.41			2597.68	2598.09	
2605.96	1155	8.38	0.47			2597.58	2598.05	
2605.96	1166	8.31	0.30	7.21	7.25 alt bkf HOR	2597.65	2597.95	2598.75
2605.96	1172.2	8.35	0.04			2597.61	2597.65	
2605.96	1180	8.95	0.19			2597.01	2597.20	
2605.96	1183.5	10.47	0.88			2595.49	2596.37	
2605.96	1191	10.07	0.40	8.12	8.7 alt bkf HOR	2595.89	2596.29	2597.84
2605.96	1199	10.05	0.28			2595.91	2596.19	
2605.96	1209	10.35	0.10			2595.61	2595.71	
2605.96	1218.7	11.42	0.13			2594.54	2594.67	
2605.96	1223.3	12.16	0.58			2593.80	2594.38	
2605.96	1229.4	11.95	0.32	10.08	10.49 alt bkf HOR	2594.01	2594.33	2595.88
2605.96	1243.5	12.14	0.23			2593.82	2594.05	
2605.96	1257	13.01	0.08			2592.95	2593.03	
2605.96	1259.5	14.57	0.84			2591.39	2592.23	
2598.14	1269	6.33	0.35	4.39	4.65 alt bkf THL	2591.81	2592.16	2593.75
2598.14	1284	6.67	0.17			2591.47	2591.64	
2598.14	1291	7.66	0.21			2590.48	2590.69	
2598.14	1294	8.15	0.41			2589.99	2590.40	
2598.14	1305	8.20	0.25	6.43	6.46 alt bkf HOR	2589.94	2590.19	2591.71
2598.14	1316.5	8.33	0.02			2589.81	2589.83	
2598.14	1331	9.83	0.01			2588.31	2588.32	
2598.14	1333.4	11.22	0.97			2586.92	2587.89	
2598.14	1341	10.55	0.25	8.73	8.95 alt bkf HOR	2587.59	2587.84	2589.41
2598.14	1351	10.75	0.39			2587.39	2587.78	
2598.14	1363	10.78	0.05			2587.36	2587.41	
2598.14	1375	12.99	1.23			2585.15	2586.38	
2598.14	1388	12.06	0.25	10.76	10.91 alt bkf HOR	2586.08	2586.33	2587.38
2598.14	1393.5	12.28	0.17			2585.86	2586.03	
2589.82	1406	5.77	0.89			2584.05	2584.94	
2589.82	1412	5.22	0.26	3.45	3.80 alt bkf THL	2584.60	2584.86	2586.37
2589.82	1427	5.66	0.07			2584.16	2584.23	
2589.82	1440.7	6.59	0.10			2583.23	2583.33	
2589.82	1445	7.24	0.45			2582.58	2583.03	
2589.82	1456	7.00	0.05			2582.82	2582.87	
2589.82	1469	7.84	0.36	6.01	6.46 alt bkf HOR	2581.98	2582.34	2583.81
2589.82	1485.6	8.30	0.12			2581.52	2581.64	
2589.82	1490	10.00	1.10			2579.82	2580.92	
2589.82	1502	9.30	0.30	8.14	HOR	2580.52	2580.82	2581.68
2589.82	1514.1	9.88	0.30	8.68	8.74 alt bkf RF1	2579.94	2580.24	2581.14
2589.82	1522	10.44	0.45			2579.38	2579.83	
2589.82	1530.5	11.48	0.88			2578.34	2579.22	
2589.82	1535.6	10.99	0.32	9.80	9.9 alt bkf HOR	2578.83	2579.15	2580.02
2589.82	1545.6	11.16	0.08			2578.66	2578.74	
2589.82	1552	12.70	0.89			2577.12	2578.01	

**Morgan Creek Stream Restoration Site**

Haywood County, NC

Profile Reach 1 - Morgan Creek

Year 2								
HI	Station	Bed FS	Water Depth	Bankfull FS	Description	Bed Elev.	Water Elev.	Bankfull Elev.
2589.82	1558.5	12.24	0.34			2577.58	2577.92	
2589.82	1570.5	13.49	0.70			2576.33	2577.03	
2589.82	1581	13.13	0.29			2576.69	2576.98	
2589.82	1586.3	13.75	0.48	12.08		2576.07	2576.55	2577.74
2579.98	1602.3	3.95	0.14			2576.03	2576.17	
2579.98	1609	4.88	0.54			2575.10	2575.64	
2579.98	1616.4	4.65	0.03			2575.33	2575.36	
2579.98	1623	4.98	0.13	3.90	HOR	2575.00	2575.13	2576.08
2579.98	1644	5.64	0.21			2574.34	2574.55	
2579.98	1656	6.66	0.61			2573.32	2573.93	
2579.98	1664	6.44	0.29			2573.54	2573.83	
2579.98	1676.5	6.53	0.15	5.22	5.35 alt bkf NICK	2573.45	2573.60	2574.76
2579.98	1682	7.28	0.40			2572.70	2573.10	
2579.98	1692	7.19	0.15			2572.79	2572.94	
2579.98	1704	8.44	0.53			2571.54	2572.07	
2579.98	1721	8.30	0.26	7.11	HOR	2571.68	2571.94	2572.87
2579.98	1734	8.72	0.16			2571.26	2571.42	
2579.98	1742	9.94	0.86			2570.04	2570.90	
2579.98	1753	9.49	0.39	8.07	8.56 alt bkf THL	2570.49	2570.88	2571.91
2579.98	1760.5	9.77	0.29			2570.21	2570.50	
2579.98	1781	10.73	0.18			2569.25	2569.43	
2579.98	1793	12.56	0.86			2567.42	2568.28	
2572.95	1800	5.12	0.39			2567.83	2568.22	
2572.95	1808.7	5.10	0.17	3.40		2567.85	2568.02	2569.55
2572.95	1825	5.80	0.41			2567.15	2567.56	
2572.95	1843.8	5.88	0.35			2567.07	2567.42	
2572.95	1854.8	6.26	0.18	4.78	4.96 alt bkf HOR	2566.69	2566.87	2568.17
2572.95	1861.7	6.30	0.14			2566.65	2566.79	
2572.95	1890.8	7.10	0.23			2565.85	2566.08	
2572.95	1915	7.57	0.18			2565.38	2565.56	
2572.95	1923.3	9.14	0.98			2563.81	2564.79	
2572.95	1930	8.57	0.24	6.53	HOR	2564.38	2564.62	2566.42
2572.95	1959.5	9.49	0.22			2563.46	2563.68	
2572.95	1967.1	9.89	0.50			2563.06	2563.56	
2572.95	1991.6	10.68	0.39			2562.27	2562.66	
2572.95	2014	11.17	0.10			2561.78	2561.88	
2572.95	2016.2	12.90	1.30			2560.05	2561.35	
2566.73	2028.4	6.87	0.94			2559.86	2560.80	
2566.73	2034.1	6.14	0.15	4.59	HOR	2560.59	2560.74	2562.14
2566.73	2049.1	7.20	0.39	5.03	5.20 alt bkf RF2	2559.53	2559.92	2561.70
2566.73	2062.9	7.12	0.18			2559.61	2559.79	
2566.73	2077.1	9.15	1.00			2557.58	2558.58	
2566.73	2087.5	8.40	0.19	6.70	7.02 alt bkf HOR	2558.33	2558.52	2560.03
2566.73	2096	8.46	0.06			2558.27	2558.33	
2566.73	2111.5	10.81	1.15			2555.92	2557.07	
2566.73	2116.8	9.97	0.30		PL2	2556.76	2557.06	
2566.73	2117.8	9.93	0.28	7.66	8.09 alt bkf PL2	2556.80	2557.08	2559.07
2566.73	2139	10.70	0.24			2556.03	2556.27	
2566.73	2168.7	11.85	0.31			2554.88	2555.19	
2566.73	2190	12.25	0.05			2554.48	2554.53	
2558.29	2204	4.80	0.15			2553.49	2553.64	
2558.29	2208.2	5.87	0.79			2552.42	2553.21	
2558.29	2220	5.51	0.35			2552.78	2553.13	
2558.29	2235.6	6.13	0.01			2552.16	2552.17	
2558.29	2252	8.02	1.15			2550.27	2551.42	
2558.29	2266	7.38	0.25	6.02	6.16 alt bkf HOR	2550.91	2551.16	2552.27
2558.29	2281.4	7.68	0.06			2550.61	2550.67	
2558.29	2295	9.60	0.99			2548.69	2549.68	
2558.29	2312	9.08	0.27	7.71	HOR	2549.21	2549.48	2550.58
2558.29	2325	9.73	0.39			2548.56	2548.95	
2558.29	2336	9.82	0.27			2548.47	2548.74	
2558.29	2349	10.45	0.29			2547.84	2548.13	
2558.29	2365	10.77	0.41			2547.52	2547.93	
2558.29	2380	11.13	0.12			2547.16	2547.28	
2558.29	2395.5	12.77	0.65			2545.52	2546.17	
2558.29	2415	12.58	0.30	11.24	HOR	2545.71	2546.01	2547.05
2558.29	2426.5	13.34	0.49			2544.95	2545.44	

### Morgan Creek Stream Restoration Site

Haywood County, NC

Profile Reach 1 - Morgan Creek

Year 2								
HI	Station	Bed FS	Water Depth	Bankfull FS	Description	Bed Elev.	Water Elev.	Bankfull Elev.
2558.29	2433.6	13.48	0.18			2544.81	2544.99	
2558.29	2444	15.18	1.02			2543.11	2544.13	
2549.67	2457	5.98	0.42	4.02	4.16 alt bkf HOR	2543.69	2544.11	2545.65
2549.67	2473.5	6.05	0.01			2543.62	2543.63	
2549.67	2486.4	8.13	1.78			2541.54	2543.32	
2549.67	2494	7.88	0.27	5.51	5.74 alt bkf HOR	2541.79	2542.06	2544.16
2549.67	2508	8.39	0.55			2541.28	2541.83	
2549.67	2519	8.58	0.69			2541.09	2541.78	
2548.62	2519.6	7.52	0.66			2541.10	2541.76	
2548.62	2536	7.54	0.35			2541.08	2541.43	
2548.62	2561	8.45	0.15	6.52	NICK PT	2540.17	2540.32	2542.10
2548.62	2578.2	8.70	0.21			2539.92	2540.13	
2548.62	2583.5	9.07	0.28			2539.55	2539.83	
2548.62	2603	10.91	1.05			2537.71	2538.76	
2548.62	2630	10.25	0.28	8.51	8.89 alt bkf HOR	2538.37	2538.65	2540.11
2548.62	2649	11.17	0.35			2537.45	2537.80	
2548.62	2662.3	12.54	0.79			2536.08	2536.87	
2548.62	2670	12.28	0.50	10.04	10.62 alt bkf HOR	2536.34	2536.84	2538.58
2548.62	2687	12.31	0.24			2536.31	2536.55	
2548.62	2707	12.60	0.38	10.95	11.16 alt bkf THL	2536.02	2536.40	2537.67
2548.62	2730.4	12.95	0.29			2535.67	2535.96	
2541.25	2738	5.59	0.23			2535.66	2535.89	
2541.25	2754.8	6.17	0.02			2535.08	2535.10	
2541.25	2770	7.23	0.36			2534.02	2534.38	
2541.25	2776	7.14	0.24	5.69	5.76 alt bkf HOR	2534.11	2534.35	2535.56
2541.25	2791	7.50	0.36			2533.75	2534.11	
2541.25	2801	7.71	0.55			2533.54	2534.09	
2541.25	2811	7.39	0.18			2533.86	2534.04	
2541.25	2822	7.78	0.27			2533.47	2533.74	
2541.25	2825.6	8.35	0.32			2532.90	2533.22	
2541.25							2532.50	
2541.25							2532.50	
2541.25	2856.5	9.26	0.51			2531.99	2532.50	
2541.25	2864	9.71	0.60			2531.54	2532.14	
2541.25	2872	9.74	0.20			2531.51	2531.71	
2541.25	2883.2	11.23	1.06			2530.02	2531.08	
2541.25	2893	10.63	0.46	9.10	9.22 alt bkf HOR	2530.62	2531.08	2532.15
2541.25	2905	10.91	0.30			2530.34	2530.64	
2541.25	2929	12.81	0.81			2528.44	2529.25	
2541.25	2939	12.84	0.85			2528.41	2529.26	
2541.25	2950.8	12.45	0.36			2528.80	2529.16	
2541.25	2970	12.65	0.09			2528.60	2528.69	
2541.25	2979	13.70	0.57			2527.55	2528.12	
2541.25	3000	13.87	0.31			2527.38	2527.69	
2532.70	3018.5	6.07	0.25			2526.63	2526.88	
2532.70	3033	7.13	0.56			2525.57	2526.13	
2532.70	3043	7.07	0.39	5.14	HOR	2525.63	2526.02	2527.56
2532.70	3062	7.18	0.29			2525.52	2525.81	
2532.70	3069	7.23	0.08			2525.47	2525.55	
2532.70	3086.6	8.75	0.64			2523.95	2524.59	
2532.70	3103	8.66	0.48	6.73	HOR	2524.04	2524.52	2525.97
2532.70	3123	9.26	0.40			2523.44	2523.84	
2532.70	3132.2	9.54	0.24			2523.16	2523.40	
2532.70	3145	9.75	0.20	8.25	HOR	2522.95	2523.15	2524.45
2532.70	3166	10.36	0.24			2522.34	2522.58	
2532.70	3181.3	12.06	0.92			2520.64	2521.56	
2532.70	3195	11.53	0.19	9.57	10.03 alt bkf HOR	2521.17	2521.36	2523.13
2532.70	3205.5	12.60	0.82			2520.10	2520.92	
2532.70	3219	12.01	0.01			2520.69	2520.70	
2532.70	3232	13.01	0.35			2519.69	2520.04	
2532.70	3242	13.23	0.36			2519.47	2519.83	
2532.70	3257.6	13.34	0.30			2519.36	2519.66	
2526.47	3272.5	7.56	0.08			2518.91	2518.99	
2526.47	3287	8.25	0.38			2518.22	2518.60	
2526.47	3303	8.34	0.20			2518.13	2518.33	
2526.47	3319	8.76	0.01			2517.71	2517.72	
2526.47	3331.5	10.16	0.72			2516.31	2517.03	








### Morgan Creek Stream Restoration Site

Haywood County, NC

Profile Reach 2 - North Branch

#### Profile

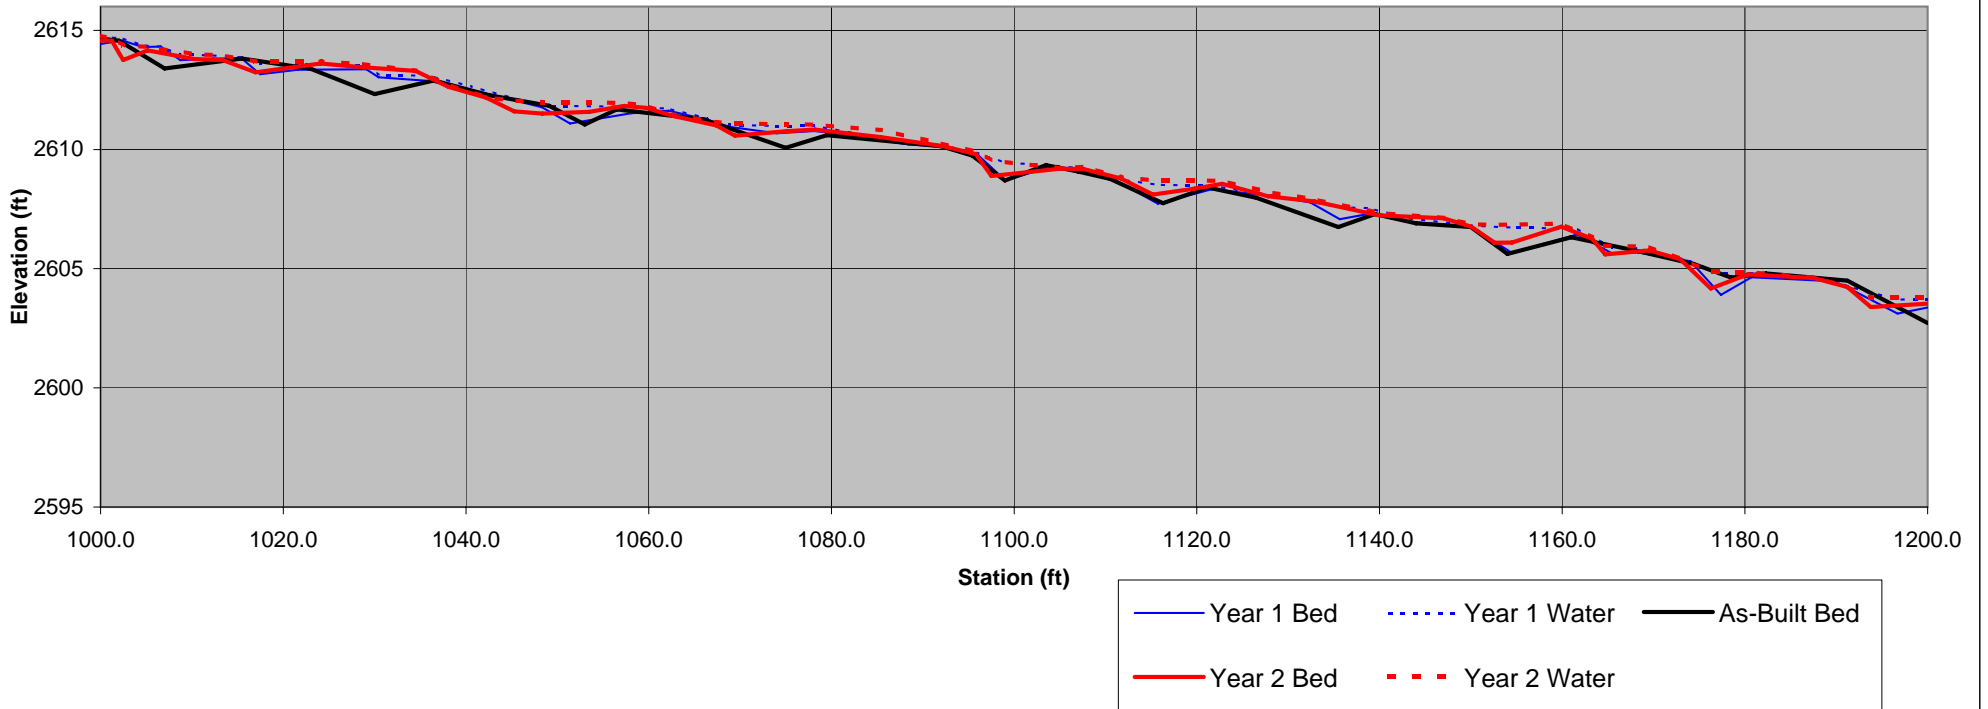




**Morgan Creek Stream Restoration Site**  
 Haywood County, NC  
 Riffle Cross Section RF1  
 Reach 1 - Morgan Creek - Sta 15+14.1



Year 2

Facing Downstream

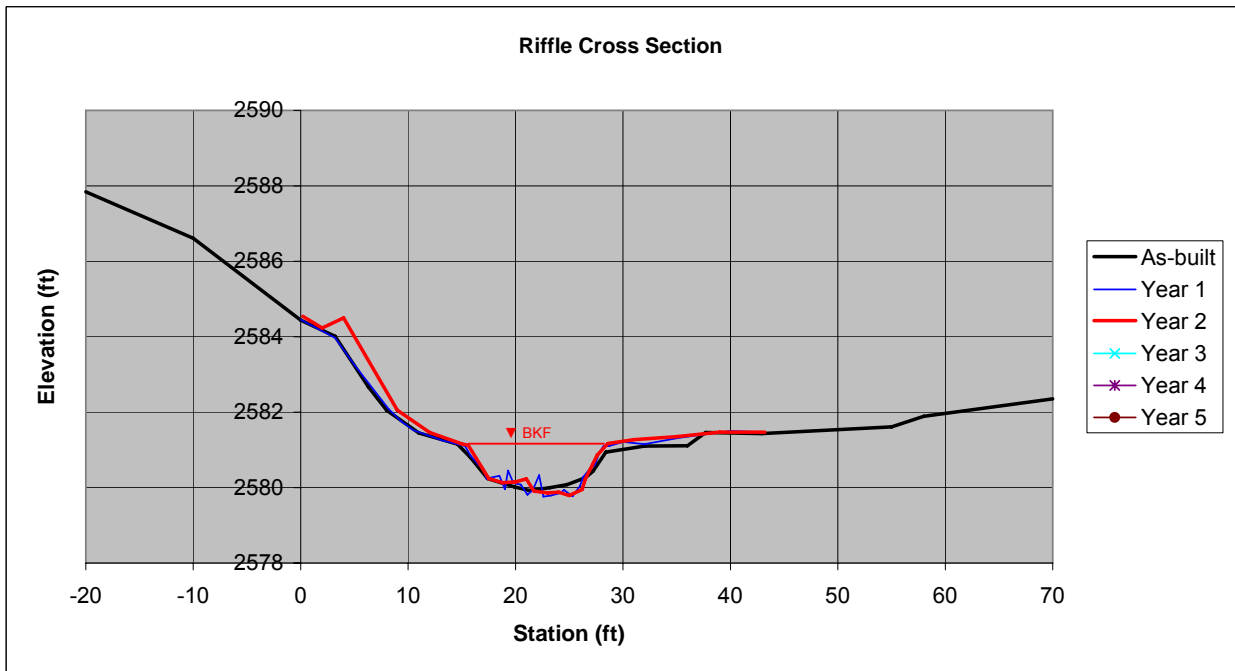

As-Built		Year 1		Year 2		Year 3		Year 4		Year 5	
Date	1/8/09	Date	10/6/09	Date	9/29/10	Date	0/0/0	Date	0/0/0	Date	0/0/0
Area	12.2	Area	11.4	Area	11.6	Area	0.0	Area	0.0	Area	0.0
Bkf W	13.8	Bkf W	12.9	Bkf W	13	Bkf W	10	Bkf W	10	Bkf W	10
Dmean	0.9	Dmean	0.9	Dmean	0.9	Dmean	0.0	Dmean	0.0	Dmean	0.0
Dmax	1.2	Dmax	1.3	Dmax	1.3	Dmax	0.0	Dmax	0.0	Dmax	0.0
W/d	15.6	W/d	14.6	W/d	14.6	W/d	0.0	W/d	0.0	W/d	0.0



**Morgan Creek Stream Restoration Site**

Haywood County, NC

Pool Cross Section PL1


Reach 1 - Morgan Creek - Sta 16+16.4



Year 2

Facing Downstream

**Pool Cross Section**

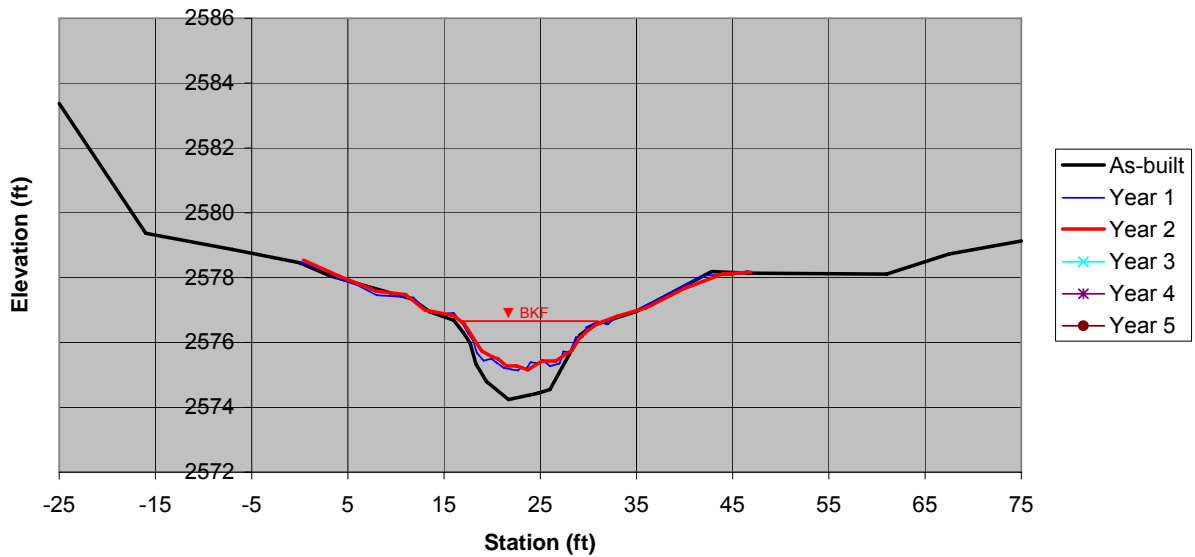

As-Built		Year 1		Year 2		Year 3		Year 4		Year 5	
Date	1/8/09	Date	10/6/09	Date	9/28/10	Date	0/0/0	Date	0/0/0	Date	0/0/0
Area	22.5	Area	13.4	Area	12.5	Area	0.0	Area	0.0	Area	0.0
Bkf W	14.4	Bkf W	14	Bkf W	13.9	Bkf W	10	Bkf W	10	Bkf W	10
Dmean	1.6	Dmean	1.0	Dmean	0.9	Dmean	0.0	Dmean	0.0	Dmean	0.0
Dmax	2.5	Dmax	1.5	Dmax	1.4	Dmax	0.0	Dmax	0.0	Dmax	0.0
W/d	9.2	W/d	14.6	W/d	15.4	W/d	0.0	W/d	0.0	W/d	0.0






### Morgan Creek Stream Restoration Site

Haywood County, NC  
 Riffle Cross Section RF2  
 Reach 1 - Morgan Creek - Sta 20+49.1



Year 2

Facing Downstream

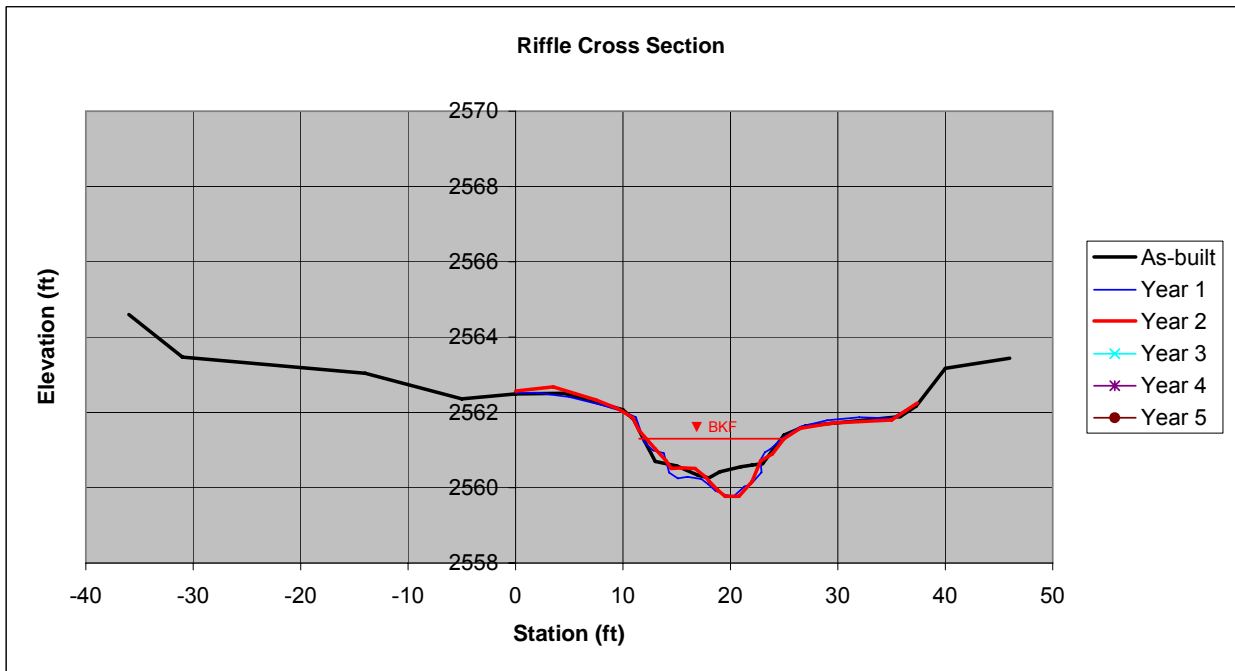

As-Built	Year 1	Year 2	Year 3	Year 4	Year 5
Date 1/8/09	Date 10/6/09	Date 9/28/10	Date 0/0/0	Date 0/0/0	Date 0/0/0
Area 10.2	Area 12.0	Area 10.8	Area 0.0	Area 0.0	Area 0.0
Bkf W 13.5	Bkf W 13.3	Bkf W 13.5	Bkf W 10	Bkf W 10	Bkf W 10
Dmean 0.8	Dmean 0.9	Dmean 0.8	Dmean 0.0	Dmean 0.0	Dmean 0.0
Dmax 1.1	Dmax 1.6	Dmax 1.5	Dmax 0.0	Dmax 0.0	Dmax 0.0
W/d 17.9	W/d 14.8	W/d 16.9	W/d 0.0	W/d 0.0	W/d 0.0

**Morgan Creek Stream Restoration Site**

Haywood County, NC

Riffle Cross Section RF2

Reach 1 - Morgan Creek - Sta 20+49.1

As-Built				Year 1				Year 2			
Station	FS/BS	Elev.	Desc.	Station	FS/BS	Elev.	Desc.	Station	FS/BS	Elev.	Desc.
BM	7.72	2562.65	RF2 IR Lt	BM	5.21	2562.41	RF2 IR Lt	BM	5.05	2562.41	IR Rt
HI		2570.37		HI		2567.62		HI		2567.46	
-36	5.77	2564.60		0	5.10	2562.52	GRND	0	4.89	2562.57	GRND
-31	6.90	2563.47		2	5.10	2562.52	GRND	3.5	4.78	2562.68	GRND
-14	7.33	2563.04		5	5.21	2562.41	GRND	7.5	5.13	2562.33	GRND
-5	8.01	2562.36		8	5.42	2562.20	GRND	9.5	5.36	2562.10	GRND
0	7.88	2562.49	GRND	10	5.59	2562.03	GRND	10.5	5.53	2561.93	GRND
4.5	7.86	2562.51		11.2	5.75	2561.87	BKF	10.9	5.60	2561.86	BKF
10	8.30	2562.07	BKF LT	12	6.42	2561.20	BNK	11.5	5.94	2561.52	BNK
11	8.56	2561.81		12.8	6.63	2560.99	BNK	13	6.43	2561.03	BNK
12	9.13	2561.24		13.8	6.70	2560.92	BNK	14	6.74	2560.72	BNK
13	9.67	2560.70		14.3	7.22	2560.40	BED	14.5	6.95	2560.51	BED
15	9.79	2560.58	EOW LT	15.1	7.37	2560.25	BED	15.5	6.93	2560.53	BED
17	10.04	2560.33		16	7.33	2560.29	BED	16.7	6.95	2560.51	BED
18	10.11	2560.26		17.3	7.39	2560.23	BED	17.7	7.18	2560.28	BED
19	9.95	2560.42		17.9	7.52	2560.10	EOW	18	7.28	2560.18	EOW
21	9.81	2560.56	EOW RT	18.6	7.70	2559.92	BED	18.8	7.52	2559.94	BED
22	9.77	2560.60		19.5	7.81	2559.81	BED	19.5	7.69	2559.77	BED
23	9.73	2560.64		20.3	7.85	2559.77	BED	20.8	7.69	2559.77	BED
25	8.97	2561.40	BKF RT	21.3	7.59	2560.03	BED	22	7.30	2560.16	EOW
27	8.73	2561.64		21.9	7.53	2560.09	EOW	22.8	6.75	2560.71	BNK
35.8	8.48	2561.89		22.9	7.21	2560.41	BANK	23.9	6.56	2560.90	BNK
37.3	8.20	2562.17	GRND	22.8	6.88	2560.74	BANK	25	6.16	2561.30	BKF
40	7.20	2563.17		23.2	6.68	2560.94	BANK	26.5	5.88	2561.58	GRND
46	6.93	2563.44		23.7	6.60	2561.02	BANK	29.5	5.74	2561.72	GRND
				24.9	6.29	2561.33	BKF	35	5.66	2561.80	GRND
				26.5	6.00	2561.62	GRND	37.4	5.21	2562.25	GRND
				29	5.83	2561.79	GRND				
				32	5.75	2561.87	GRND				
				35	5.78	2561.84	GRND				
				37.3	5.39	2562.23	GRND				

Year 3			
Station	FS/BS	Elev.	Desc.
BM	0.00	100.00	IR Lt
HI		100.00	

Year 4			
Station	FS/BS	Elev.	Desc.
BM	0.00	100.00	IR Lt
HI		100.00	

Year 5			
Station	FS/BS	Elev.	Desc.
BM	0.00	100.00	IR Lt
HI		100.00	

### Morgan Creek Stream Restoration Site

Haywood County, NC

Pool Cross Section PL2


Reach 1 - Morgan Creek - Sta 21+17.8



Year 2

Facing Downstream

#### Pool Cross Section

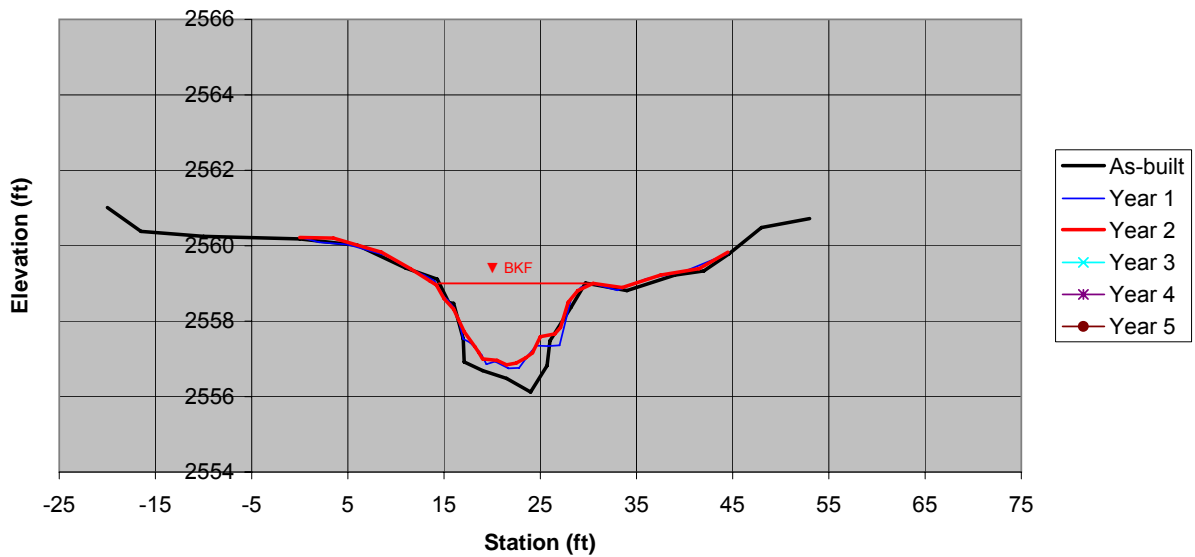

As-Built		Year 1		Year 2		Year 3		Year 4		Year 5	
Date	1/8/09	Date	10/6/09	Date	9/28/10	Date	0/0/0	Date	0/0/0	Date	0/0/0
Area	26.5	Area	21.8	Area	20.2	Area	0.0	Area	0.0	Area	0.0
Bkf W	15.4	Bkf W	15.2	Bkf W	16.3	Bkf W	10	Bkf W	10	Bkf W	10
Dmean	1.7	Dmean	1.4	Dmean	1.2	Dmean	0.0	Dmean	0.0	Dmean	0.0
Dmax	2.9	Dmax	2.2	Dmax	2.1	Dmax	0.0	Dmax	0.0	Dmax	0.0
W/d	9.0	W/d	10.6	W/d	13.2	W/d	0.0	W/d	0.0	W/d	0.0



### Morgan Creek Stream Restoration Site

Haywood County, NC

Riffle Cross Section RF3


Reach 1 - Morgan Creek - Sta 25+19.6



Year 2

Facing Downstream

#### Riffle Cross Section

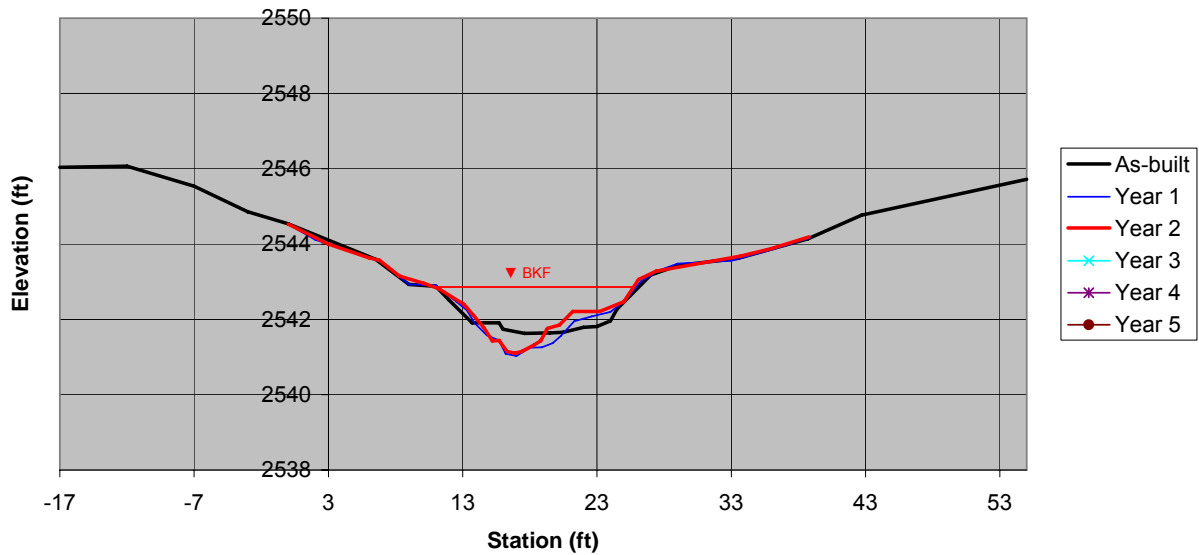

As-Built		Year 1		Year 2		Year 3		Year 4		Year 5	
Date	1/8/09	Date	10/6/09	Date	9/28/10	Date	0/0/0	Date	0/0/0	Date	0/0/0
Area	13.3	Area	15.3	Area	12.3	Area	0.0	Area	0.0	Area	0.0
Bkf W	15	Bkf W	14.6	Bkf W	14.9	Bkf W	10	Bkf W	10	Bkf W	10
Dmean	0.9	Dmean	1.0	Dmean	0.8	Dmean	0.0	Dmean	0.0	Dmean	0.0
Dmax	1.3	Dmax	1.9	Dmax	1.7	Dmax	0.0	Dmax	0.0	Dmax	0.0
W/d	16.9	W/d	14.0	W/d	18.0	W/d	0.0	W/d	0.0	W/d	0.0



### Morgan Creek Stream Restoration Site

Haywood County, NC  
Pool Cross Section PL3


Reach 1 - Morgan Creek - Sta 27+30.4



Year 2

Facing Downstream

#### Pool Cross Section

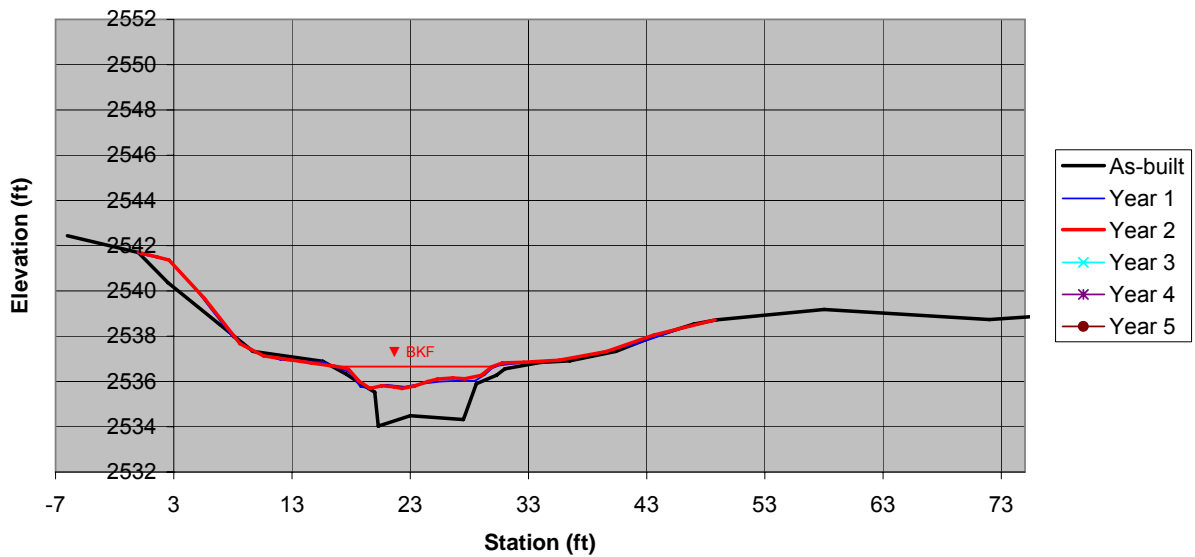

As-Built		Year 1		Year 2		Year 3		Year 4		Year 5	
Date	1/8/09	Date	10/6/09	Date	9/28/10	Date	0/0/0	Date	0/0/0	Date	0/0/0
Area	25.5	Area	11.8	Area	10.0	Area	0.0	Area	0.0	Area	0.0
Bkf W	15.4	Bkf W	14.9	Bkf W	13.4	Bkf W	10	Bkf W	10	Bkf W	10
Dmean	1.7	Dmean	0.8	Dmean	0.7	Dmean	0.0	Dmean	0.0	Dmean	0.0
Dmax	2.9	Dmax	1.2	Dmax	1.1	Dmax	0.0	Dmax	0.0	Dmax	0.0
W/d	9.3	W/d	18.7	W/d	18.0	W/d	0.0	W/d	0.0	W/d	0.0

**Morgan Creek Stream Restoration Site**

Haywood County, NC

Pool Cross Section PL3

Reach 1 - Morgan Creek - Sta 27+30.4

As-Built				Year 1				Year 2			
Station	FS/BS	Elev.	Desc.	Station	FS/BS	Elev.	Desc.	Station	FS/BS	Elev.	Desc.
BM	4.30	2541.87	PL3 IR Lt	BM	2.14	2541.87	PL3 IR Lt	BM	6.83	2538.88	IR Lt
		2546.17		HI		2544.01		HI		2545.71	
-6	3.73	2542.44		0	2.35	2541.66	GRND	0	4.00	2541.71	GRND
0	4.47	2541.70	GRND	2.6	2.65	2541.36	GRND	1.6	4.21	2541.50	GRND
2.5	5.80	2540.37		5	4.03	2539.98	GRND	2.6	4.34	2541.37	GRND
9.7	8.84	2537.33		8	6.05	2537.96	GRND	5.6	6.04	2539.67	GRND
15.6	9.28	2536.89	BKF LT	10	6.75	2537.26	GRND	8.6	8.04	2537.67	GRND
17.6	9.85	2536.32		12	7.05	2536.96	GRND	10.6	8.58	2537.13	GRND
18.8	10.26	2535.91	EOW	14	7.13	2536.88	GRND	14.6	8.89	2536.82	GRND
20	10.64	2535.53		15.6	7.13	2536.88	BKF	16.6	9.04	2536.67	GRND
20.3	12.14	2534.03		16.7	7.37	2536.64	BNK	17.4	9.09	2536.62	GRND
23	11.68	2534.49		17.7	7.56	2536.45	BNK	17.8	9.18	2536.53	BKF
27.5	11.85	2534.32		18.2	7.76	2536.25	BNK	18.7	9.71	2536.00	EOW
28.6	10.27	2535.90	EOW	18.5	8.04	2535.97	EOW	19.6	10.01	2535.70	BED
30.3	9.89	2536.28	BKF RT	18.8	8.25	2535.76	BED	20.6	9.90	2535.81	BED
31	9.61	2536.56		19.6	8.30	2535.71	BED	21.6	9.94	2535.77	BED
34	9.33	2536.84		21	8.16	2535.85	BED	22.3	10.02	2535.69	BED
36.5	9.26	2536.91		22.5	8.24	2535.77	BED	23.4	9.91	2535.80	BED
40.4	8.84	2537.33		24	8.11	2535.9	BED	24.5	9.71	2536.00	EOW
43.5	8.20	2537.97		25.6	8.01	2536	EOW	25.3	9.60	2536.11	BED
47	7.63	2538.54		27	7.98	2536.03	BED	26.6	9.55	2536.16	BED
48.9	7.45	2538.72	GRND	28.5	7.97	2536.04	BED	27.6	9.59	2536.12	BED
58	6.99	2539.18		29.3	7.72	2536.29	BNK	29	9.44	2536.27	BED
72	7.43	2538.74		29.9	7.43	2536.58	BNK	29.9	9.06	2536.65	BNK
86	6.93	2539.24		30.5	7.30	2536.71	BKF	30.8	8.89	2536.82	BKF
				31.5	7.24	2536.77	GRND	32.6	8.86	2536.85	GRND
				32.5	7.19	2536.82	GRND	35.6	8.77	2536.94	GRND
				34	7.11	2536.9	GRND	39.6	8.39	2537.32	GRND
				36	7.04	2536.97	GRND	43.6	7.66	2538.05	GRND
				39	6.73	2537.28	GRND	48.8	6.99	2538.72	GRND
				42	6.37	2537.64	GRND				
				46	5.66	2538.35	GRND				
				48.9	5.31	2538.7	GRND				

Year 3			
Station	FS/BS	Elev.	Desc.
BM	0.00	100.00	IR Lt
HI		100.00	

Year 4			
Station	FS/BS	Elev.	Desc.
BM	0.00	100.00	IR Lt
HI		100.00	

Year 5			
Station	FS/BS	Elev.	Desc.
BM	0.00	100.00	IR Lt
HI		100.00	



### Morgan Creek Stream Restoration Site


Haywood County, NC  
 Riffle Cross Section RF4  
 Reach 4 - Morgan Creek - Sta 32+57.6



Year 2

Facing Downstream

#### Riffle Cross Section

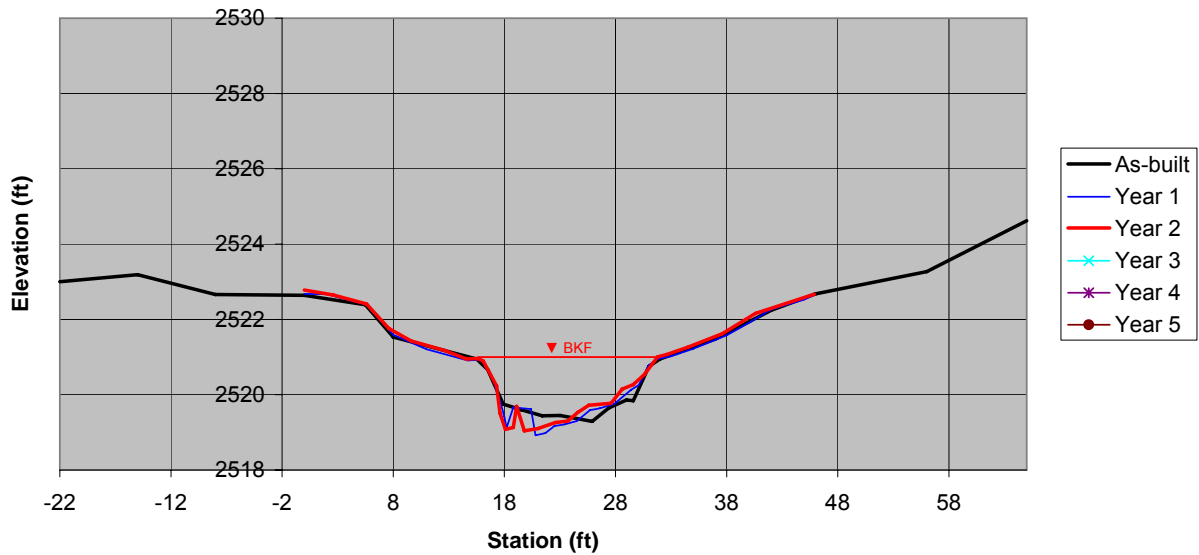

As-Built		Year 1		Year 2		Year 3		Year 4		Year 5	
Date	1/8/09	Date	10/6/09	Date	9/29/10	Date	0/0/0	Date	0/0/0	Date	0/0/0
Area	18.7	Area	19.1	Area	18.2	Area	0.0	Area	0.0	Area	0.0
Bkf W	16.5	Bkf W	15.7	Bkf W	15.7	Bkf W	10	Bkf W	10	Bkf W	10
Dmean	1.1	Dmean	1.2	Dmean	1.2	Dmean	0.0	Dmean	0.0	Dmean	0.0
Dmax	1.7	Dmax	2.0	Dmax	1.9	Dmax	0.0	Dmax	0.0	Dmax	0.0
W/d	14.5	W/d	12.9	W/d	13.5	W/d	0.0	W/d	0.0	W/d	0.0



**Morgan Creek Stream Restoration Site**

Haywood County, NC  
Pool Cross Section PL4


Reach 1 - Morgan Creek - Sta 34+76.9



Year 2

Facing Downstream

**Pool Cross Section**

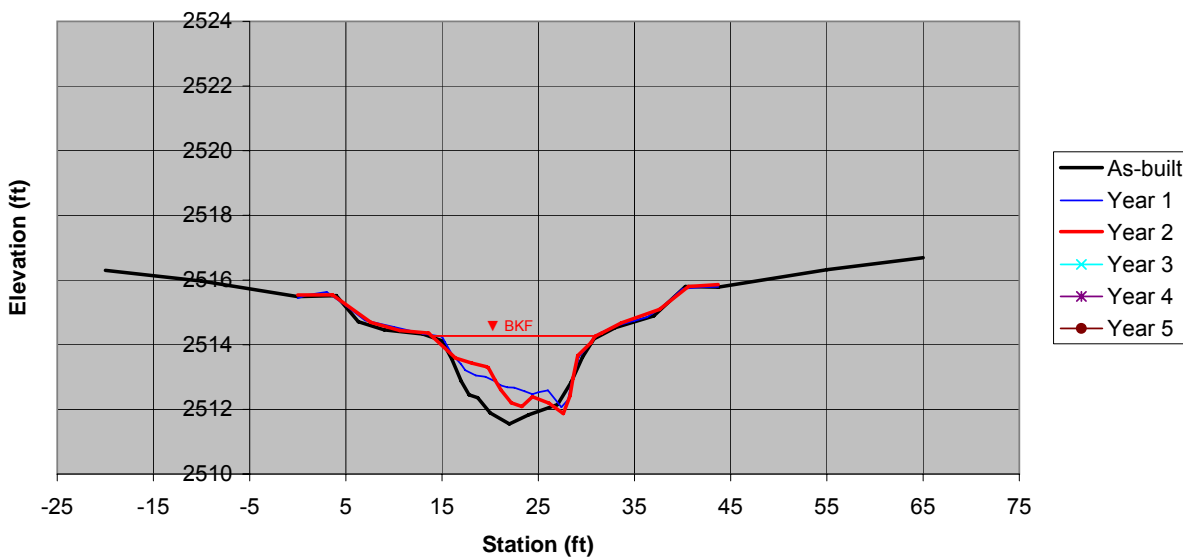

As-Built		Year 1		Year 2		Year 3		Year 4		Year 5	
Date	1/8/09	Date	10/6/09	Date	9/29/10	Date	0/0/0	Date	0/0/0	Date	0/0/0
Area	26.1	Area	18.3	Area	20.8	Area	0.0	Area	0.0	Area	0.0
Bkf W	15.8	Bkf W	15.4	Bkf W	16.9	Bkf W	10	Bkf W	10	Bkf W	10
Dmean	1.7	Dmean	1.2	Dmean	1.2	Dmean	0.0	Dmean	0.0	Dmean	0.0
Dmax	2.6	Dmax	2.1	Dmax	2.4	Dmax	0.0	Dmax	0.0	Dmax	0.0
W/d	9.5	W/d	13.0	W/d	13.7	W/d	0.0	W/d	0.0	W/d	0.0



**Morgan Creek Stream Restoration Site**

Haywood County, NC


Riffle Cross Section RF5

Reach 2 - North Branch - Sta 10+83.0



Year 2

Facing Downstream

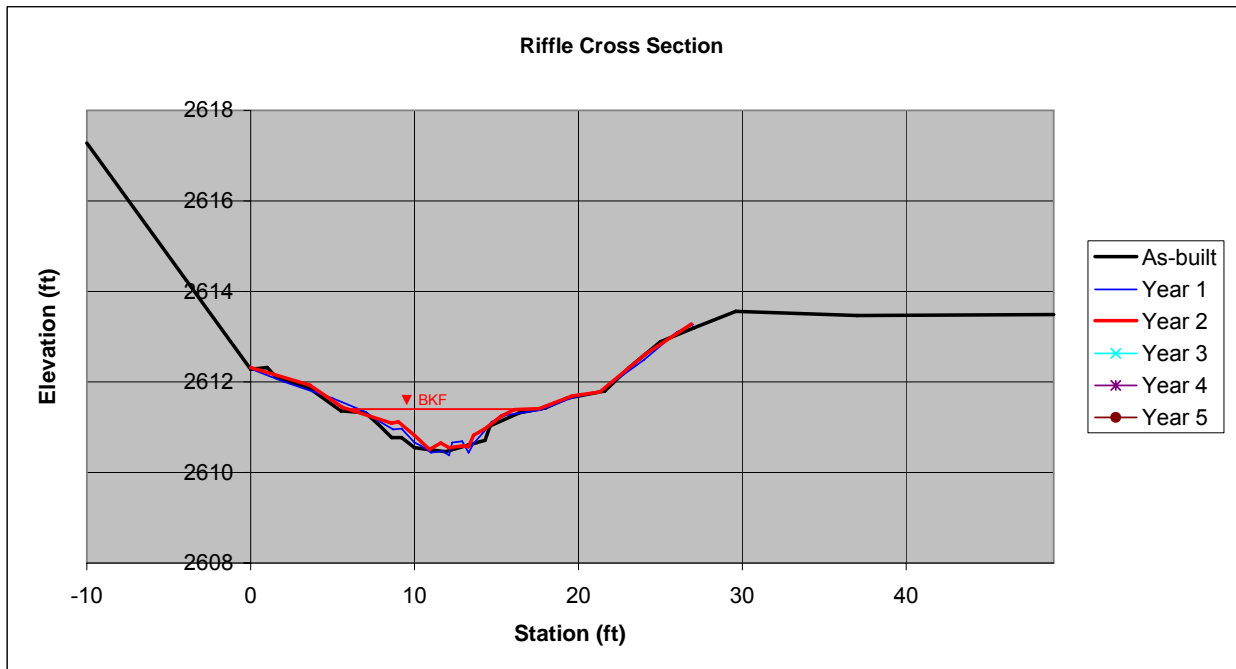

As-Built		Year 1		Year 2		Year 3		Year 4		Year 5	
Date	1/8/09	Date	10/6/09	Date	9/29/10	Date	0/0/0	Date	0/0/0	Date	0/0/0
Area	5.0	Area	4.5	Area	3.9	Area	0.0	Area	0.0	Area	0.0
Bkf W	9.4	Bkf W	8.6	Bkf W	7.1	Bkf W	10	Bkf W	10	Bkf W	10
Dmean	0.5	Dmean	0.5	Dmean	0.6	Dmean	0.0	Dmean	0.0	Dmean	0.0
Dmax	0.9	Dmax	1.0	Dmax	0.9	Dmax	0.0	Dmax	0.0	Dmax	0.0
W/d	17.7	W/d	16.5	W/d	12.9	W/d	0.0	W/d	0.0	W/d	0.0



**Morgan Creek Stream Restoration Site**

Haywood County, NC


Pool Cross Section PL5

Reach 2 -North Branch - Sta 11+51.4



Year 2

Facing Downstream

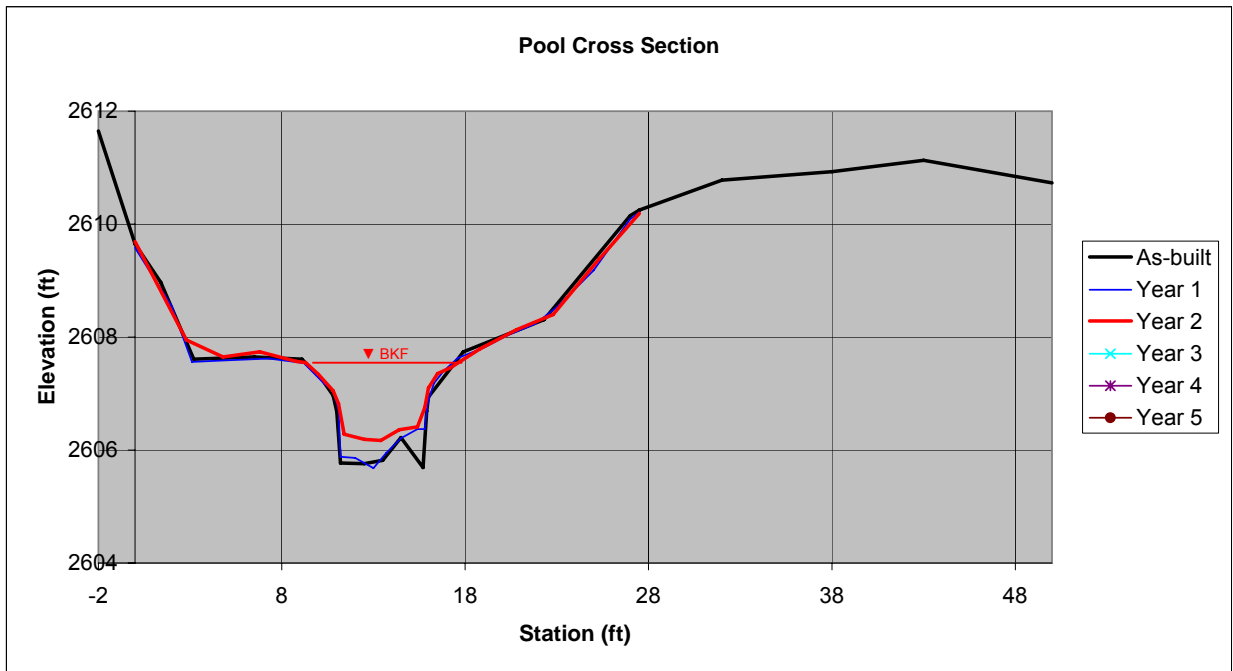

As-Built		Year 1		Year 2		Year 3		Year 4		Year 5	
Date	1/8/09	Date	10/6/09	Date	9/29/10	Date	0/0/0	Date	0/0/0	Date	0/0/0
Area	9.6	Area	8.7	Area	6.7	Area	0.0	Area	0.0	Area	0.0
Bkf W	8.8	Bkf W	8.4	Bkf W	7.9	Bkf W	10	Bkf W	10	Bkf W	10
Dmean	1.1	Dmean	1.0	Dmean	0.9	Dmean	0.0	Dmean	0.0	Dmean	0.0
Dmax	1.9	Dmax	1.9	Dmax	1.4	Dmax	0.0	Dmax	0.0	Dmax	0.0
W/d	8.1	W/d	8.1	W/d	9.3	W/d	0.0	W/d	0.0	W/d	0.0






**Pebble Count Weighted by Channel Feature**

Percent Riffle:	<b>40.4</b>	Percent Run:	<b>17.2</b>
Percent Pool:	<b>25.3</b>	Percent Glide:	<b>17.2</b>

Pebble Count,

Material	Size Range (mm)	weighted	#
silt/clay	0	0.062	9.1
very fine sand	0.062	0.13	0.0
fine sand	0.13	0.25	1.0
medium sand	0.25	0.5	1.0
coarse sand	0.5	1	5.1
very coarse sand	1	2	10.1
very fine gravel	2	4	0.0
fine gravel	4	6	3.0
fine gravel	6	8	3.0
medium gravel	8	11	1.0
medium gravel	11	16	7.1
coarse gravel	16	22	11.1
coarse gravel	22	32	7.1
very coarse gravel	32	45	6.1
very coarse gravel	45	64	7.1
small cobble	64	90	2.0
medium cobble	90	128	6.1
large cobble	128	180	9.1
very large cobble	180	256	4.0
small boulder	256	362	0.0
small boulder	362	512	1.0
medium boulder	512	1024	0.0
large boulder	1024	2048	0.0
very large boulder	2048	4096	0.0

Morgan Creek Stream Restoration Site  
 Haywood County, NC  
 Morgan Creek: Reach 1  
 Note: **Reach Data 1** 10%

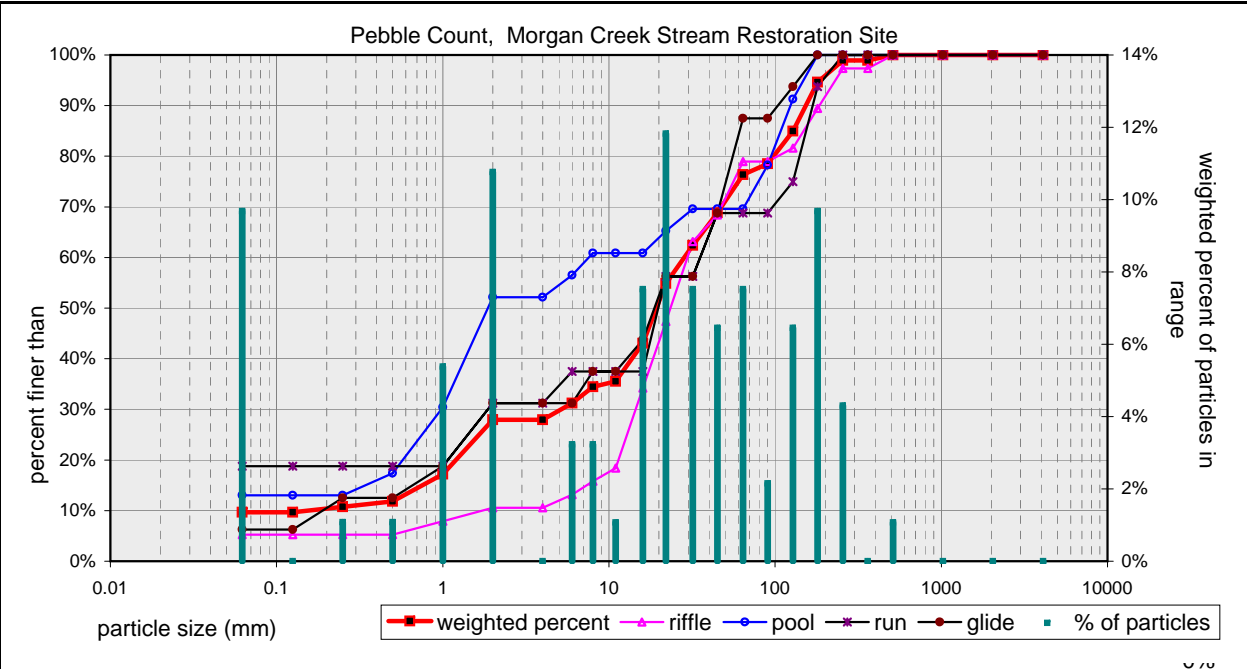

weighted particle count:	94.0
--------------------------	------


bedrock	6.1
clay hardpan	0.0
detritus/wood	0.0
artificial	0.0

weighted total count:	100.1
-----------------------	-------

based on sediment particles only	size percent less than (mm)						particle size distribution gradation		
	D16	D35	D50	D65	D84	D95	geo mean	std dev	
	0.855	9.49	19.3	37	122	186	14.4	10.2	11.9

based on total count	percent by substrate type								
	silt/clay	sand	gravel	cobble	boulder	bedrock	hardpan	wood/det	artificial
	9%	17%	45%	21%	1%	6%	0%	0%	0%

Pebble Count of Channel Reach			
Material	Size Range (mm)		Count
silt/clay	0	0.062	11
very fine sand	0.062	0.13	
fine sand	0.13	0.25	2
medium sand	0.25	0.5	2
coarse sand	0.5	1	
very coarse sand	1	2	7
very fine gravel	2	4	1
fine gravel	4	6	5
fine gravel	6	8	2
medium gravel	8	11	3
medium gravel	11	16	13
coarse gravel	16	22	10
coarse gravel	22	32	5
very coarse gravel	32	45	
very coarse gravel	45	64	5
small cobble	64	90	6
medium cobble	90	128	12
large cobble	128	180	11
very large cobble	180	256	2
small boulder	256	362	1
small boulder	362	512	
medium boulder	512	1024	
large boulder	1024	2048	
very large boulder	2048	4096	
total particle count:			98
bedrock			3
clay hardpan			
detritus/wood			
artificial			
total count:			101

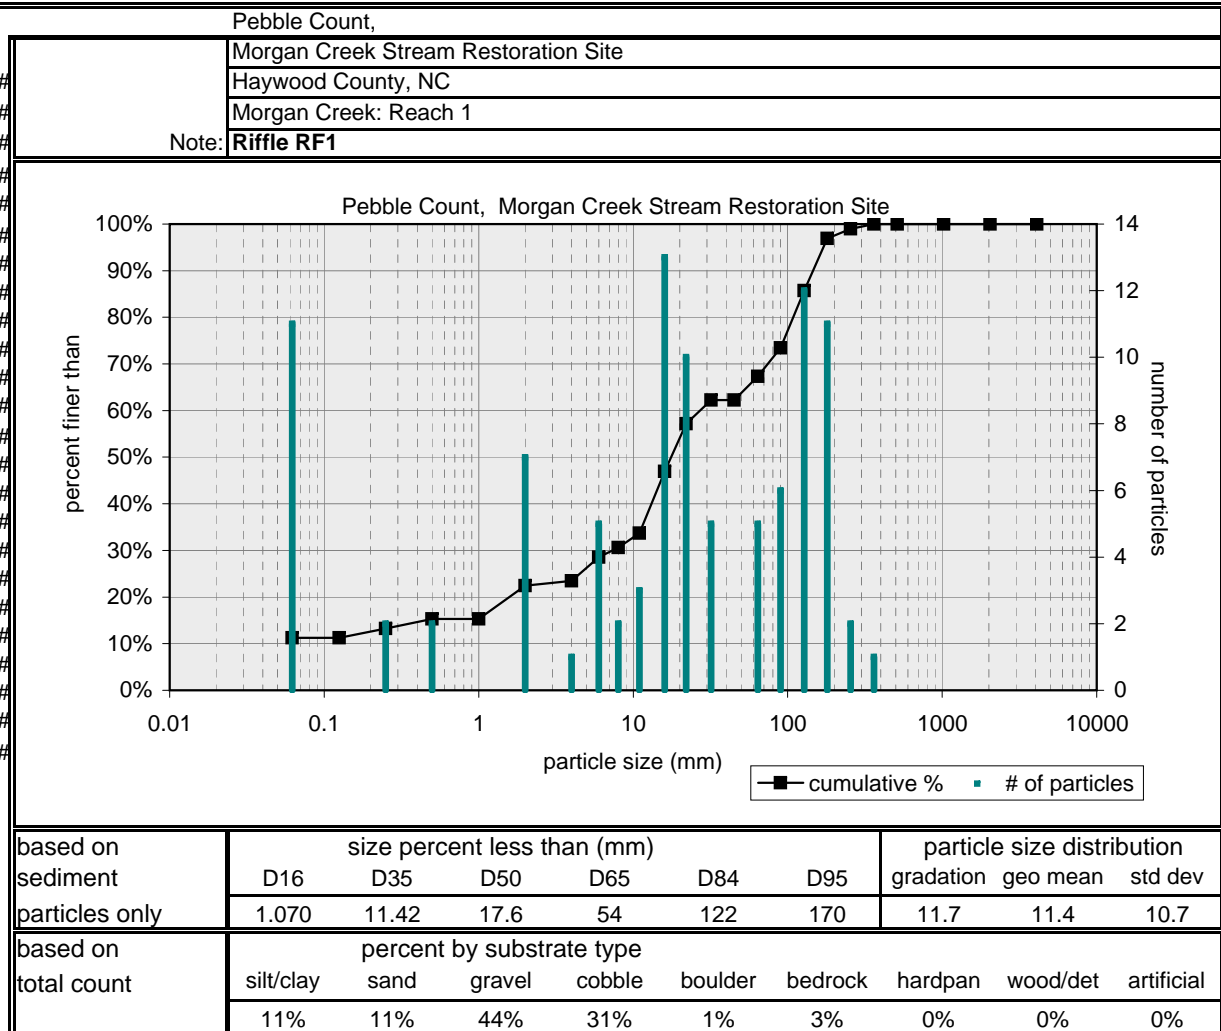


**Pebble Count Weighted by Channel Feature**

Percent Riffle:	<b>44.8</b>	Percent Run:	<b>22.9</b>
Percent Pool:	<b>23.8</b>	Percent Glide:	<b>8.6</b>

Pebble Count,

Material	Size Range (mm)	weighted	#
silt/clay	0	0.062	2.9
very fine sand	0.062	0.13	1.0
fine sand	0.13	0.25	1.9
medium sand	0.25	0.5	1.9
coarse sand	0.5	1	1.0
very coarse sand	1	2	9.5
very fine gravel	2	4	0.0
fine gravel	4	6	2.9
fine gravel	6	8	4.8
medium gravel	8	11	4.8
medium gravel	11	16	5.7
coarse gravel	16	22	9.5
coarse gravel	22	32	4.8
very coarse gravel	32	45	7.6
very coarse gravel	45	64	9.5
small cobble	64	90	5.7
medium cobble	90	128	9.5
large cobble	128	180	6.7
very large cobble	180	256	2.9
small boulder	256	362	1.9
small boulder	362	512	0.0
medium boulder	512	1024	0.0
large boulder	1024	2048	0.0
very large boulder	2048	4096	0.0

Morgan Creek Stream Restoration Site  
 Haywood County, NC  
 Morgan Creek: Reach 1  
 Note: **Reach Data 2** 3%

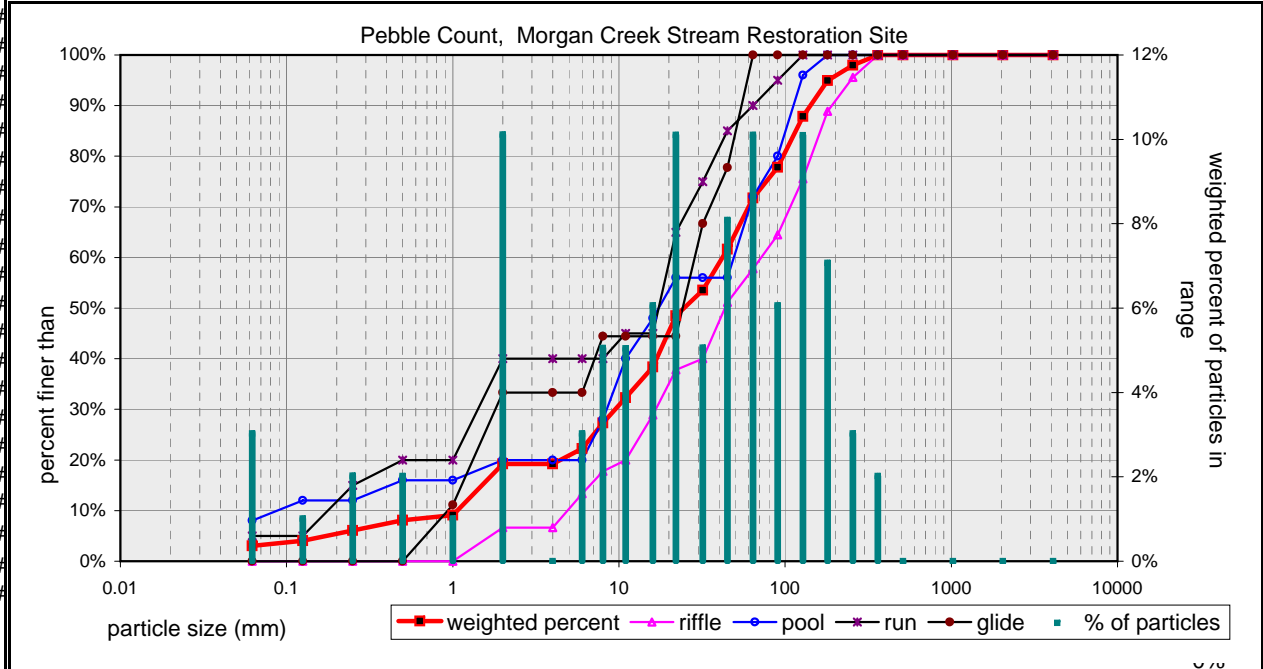

weighted particle count: 94.4


bedrock		5.7
clay hardpan		0.0
detritus/wood		0.0
artificial		0.0


weighted total count: 100.1

based on sediment particles only	size percent less than (mm)						particle size distribution gradation		
	D16	D35	D50	D65	D84	D95	geo mean	std dev	
	1.606	12.98	24.6	51	112	181	9.9	13.4	8.3


based on total count	percent by substrate type									
	silt/clay	sand	gravel	cobble	boulder	bedrock	hardpan	wood/det	artificial	
	3%	15%	50%	25%	2%	6%	0%	0%	0%	

Pebble Count of Channel Reach			
Material	Size Range (mm)		Count
silt/clay	0	0.062	3
very fine sand	0.062	0.13	
fine sand	0.13	0.25	
medium sand	0.25	0.5	2
coarse sand	0.5	1	4
very coarse sand	1	2	21
very fine gravel	2	4	
fine gravel	4	6	2
fine gravel	6	8	3
medium gravel	8	11	2
medium gravel	11	16	6
coarse gravel	16	22	3
coarse gravel	22	32	10
very coarse gravel	32	45	8
very coarse gravel	45	64	11
small cobble	64	90	6
medium cobble	90	128	7
large cobble	128	180	5
very large cobble	180	256	6
small boulder	256	362	2
small boulder	362	512	
medium boulder	512	1024	
large boulder	1024	2048	
very large boulder	2048	4096	
total particle count:			101
bedrock			1
clay hardpan			
detritus/wood			
artificial			
total count:			102

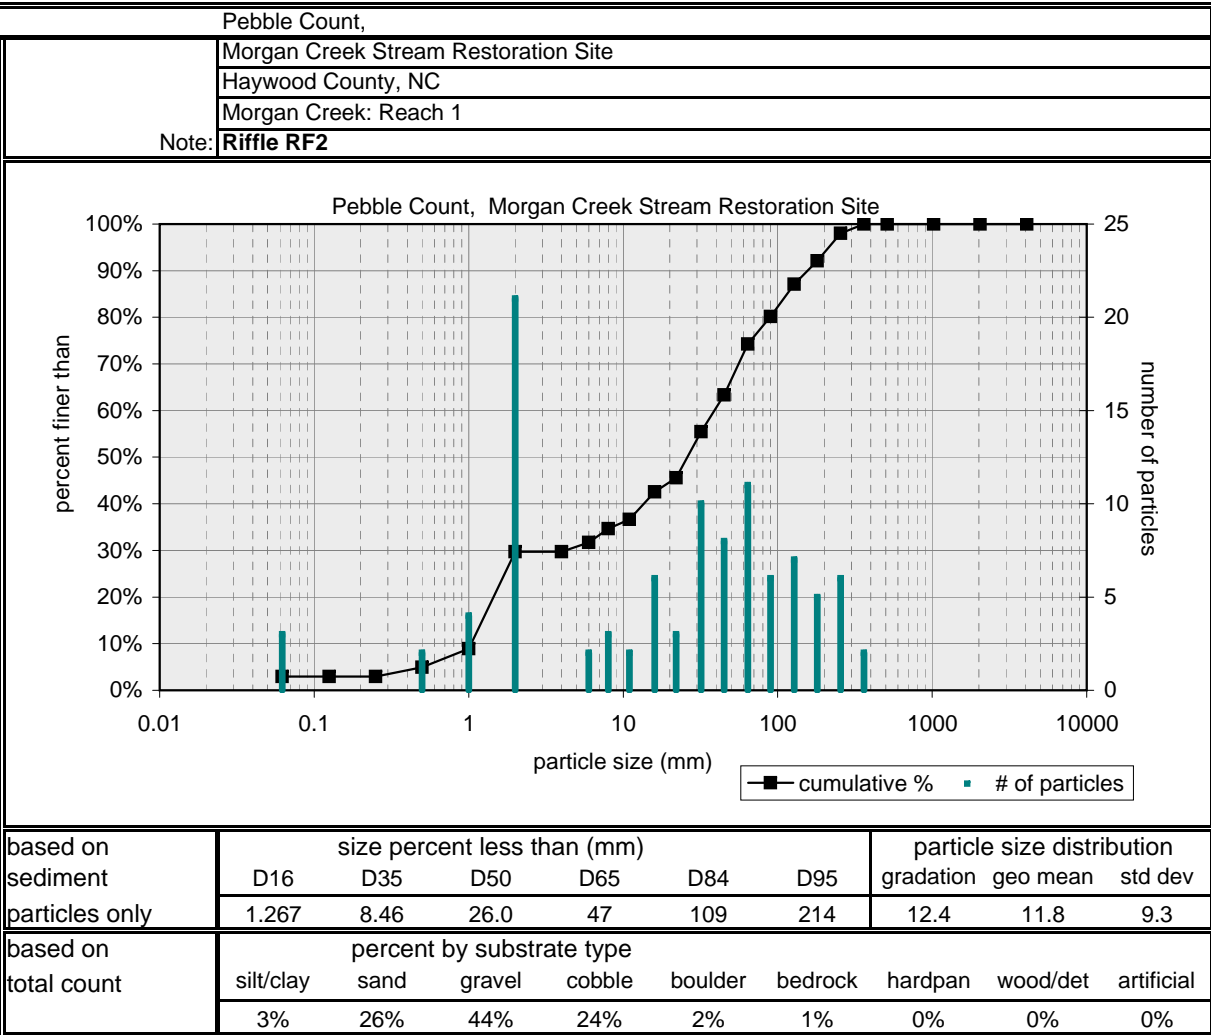

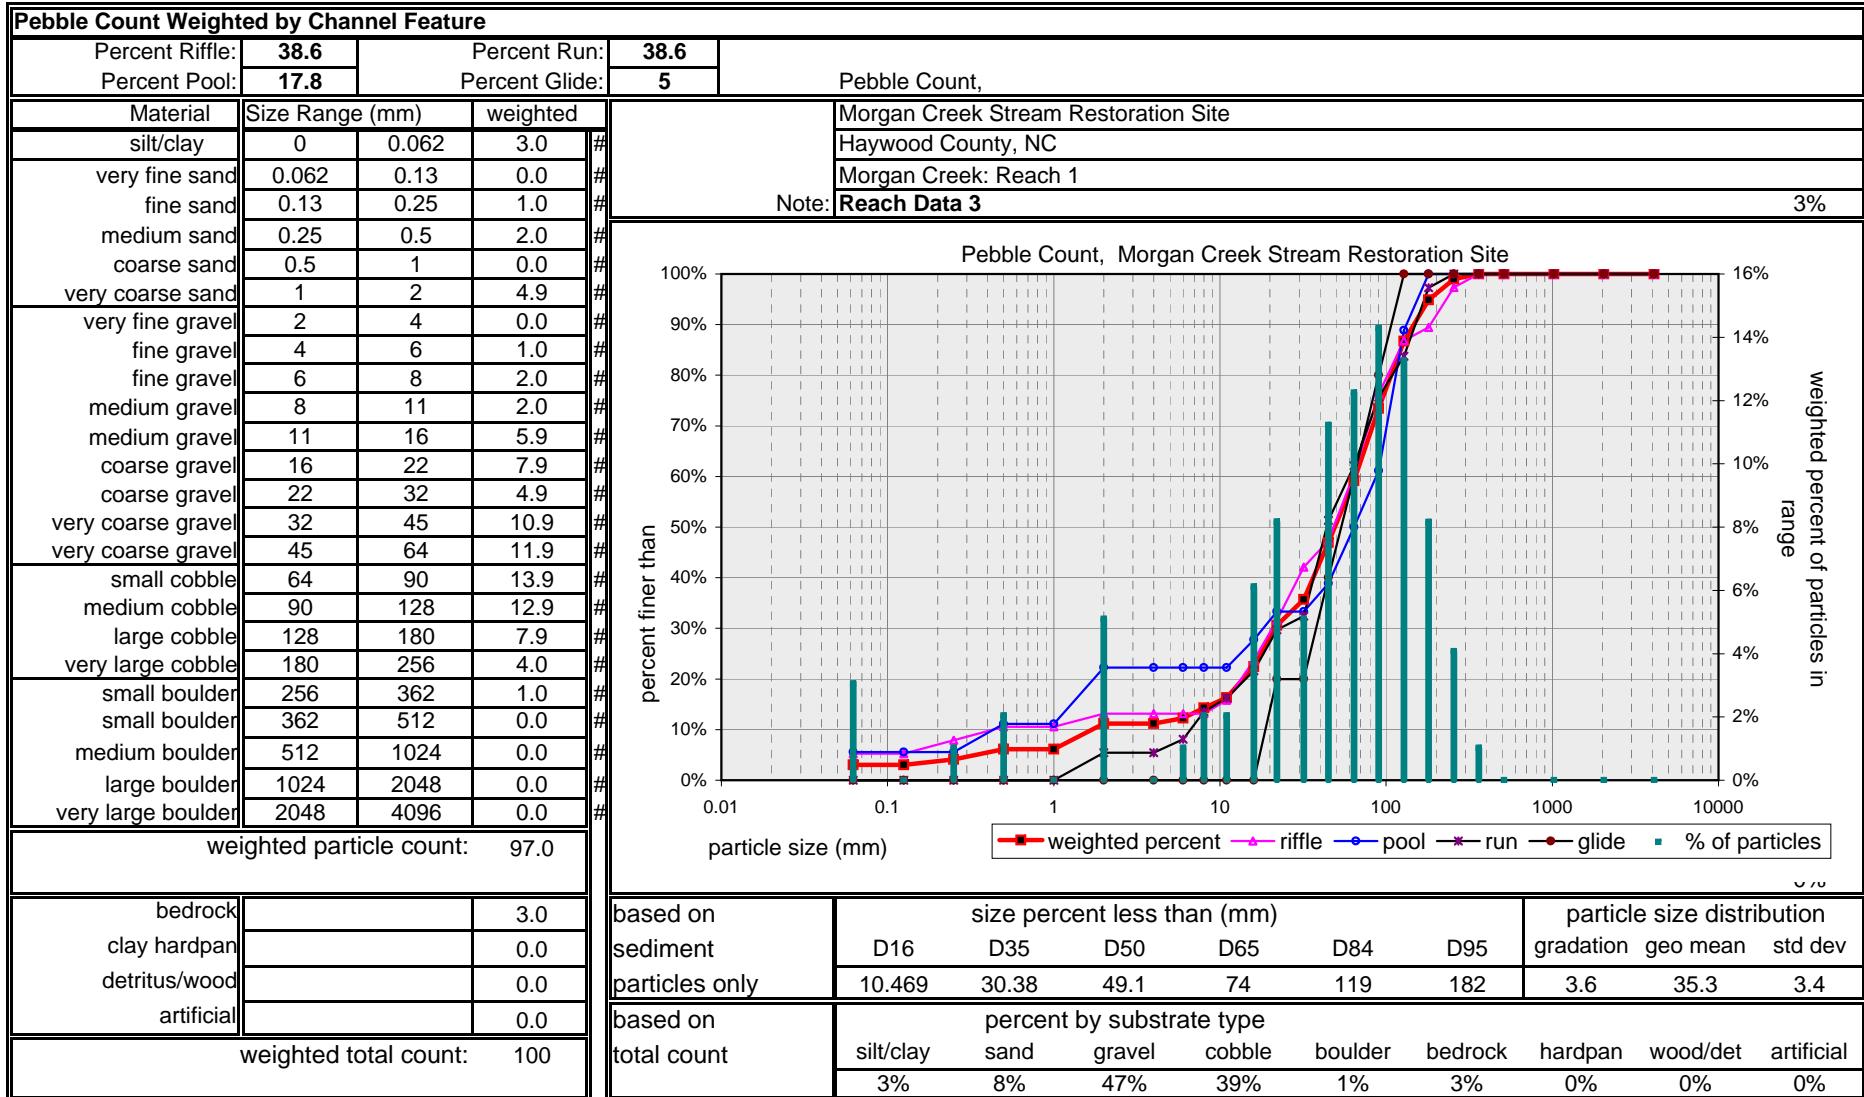

Pebble Count of Channel Reach			
Material	Size Range (mm)		Count
silt/clay	0	0.062	4
very fine sand	0.062	0.13	0
fine sand	0.13	0.25	1
medium sand	0.25	0.5	2
coarse sand	0.5	1	2
very coarse sand	1	2	10
very fine gravel	2	4	0
fine gravel	4	6	1
fine gravel	6	8	1
medium gravel	8	11	5
medium gravel	11	16	3
coarse gravel	16	22	4
coarse gravel	22	32	10
very coarse gravel	32	45	11
very coarse gravel	45	64	14
small cobble	64	90	11
medium cobble	90	128	10
large cobble	128	180	4
very large cobble	180	256	3
small boulder	256	362	3
small boulder	362	512	
medium boulder	512	1024	
large boulder	1024	2048	
very large boulder	2048	4096	
total particle count:			99
bedrock			5
clay hardpan			
detritus/wood			
artificial			
total count:			104

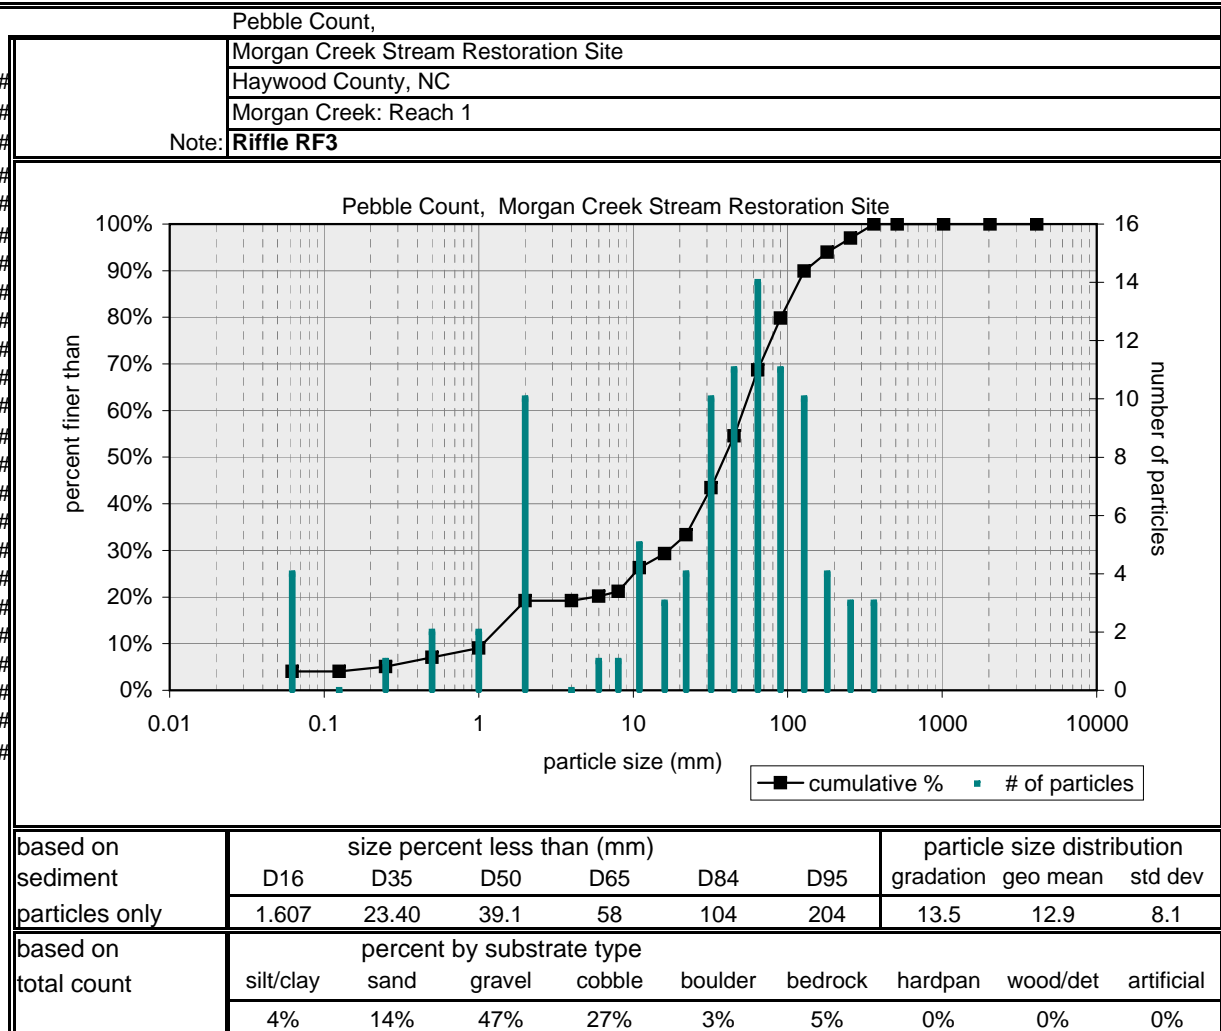


**Pebble Count Weighted by Channel Feature**

Percent Riffle:	<b>43.9</b>	Percent Run:	<b>14.3</b>
Percent Pool:	<b>23.6</b>	Percent Glide:	<b>18.4</b>

Pebble Count,

Material	Size Range (mm)	weighted	#
silt/clay	0	0.062	7.2
very fine sand	0.062	0.13	0.0
fine sand	0.13	0.25	0.0
medium sand	0.25	0.5	1.0
coarse sand	0.5	1	3.1
very coarse sand	1	2	9.2
very fine gravel	2	4	0.0
fine gravel	4	6	3.1
fine gravel	6	8	1.0
medium gravel	8	11	3.1
medium gravel	11	16	6.1
coarse gravel	16	22	10.2
coarse gravel	22	32	12.3
very coarse gravel	32	45	7.2
very coarse gravel	45	64	16.4
small cobble	64	90	2.0
medium cobble	90	128	5.1
large cobble	128	180	6.1
very large cobble	180	256	1.0
small boulder	256	362	0.0
small boulder	362	512	0.0
medium boulder	512	1024	0.0
large boulder	1024	2048	0.0
very large boulder	2048	4096	0.0

Morgan Creek Stream Restoration Site  
 Haywood County, NC  
 Morgan Creek: Reach 1  
 Note: **Reach Data 4** 8%

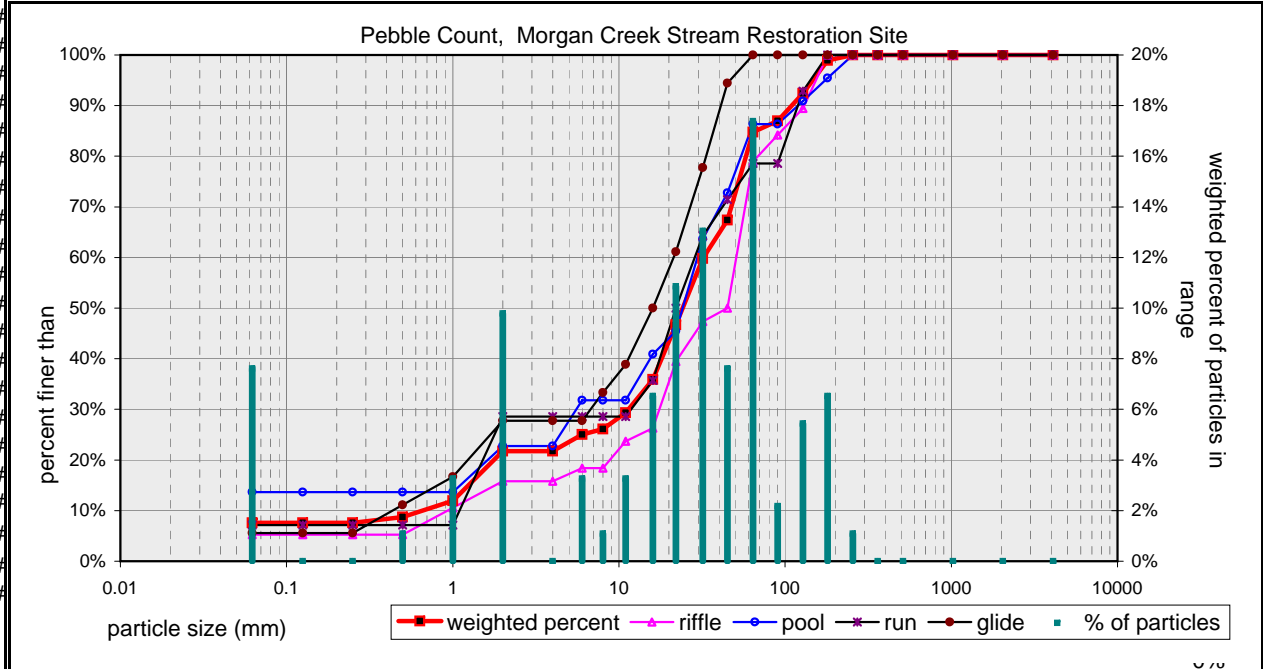

weighted particle count:	94.1
--------------------------	------


bedrock	6.1
clay hardpan	0.0
detritus/wood	0.0
artificial	0.0

weighted total count:	100.2
-----------------------	-------


based on sediment particles only	size percent less than (mm)						particle size distribution gradation		
	D16	D35	D50	D65	D84	D95	geo mean	std dev	
	1.331	15.21	24.2	40	63	147	10.4	9.2	6.9

based on total count	percent by substrate type									
	silt/clay	sand	gravel	cobble	boulder	bedrock	hardpan	wood/det	artificial	
	7%	13%	59%	14%	0%	6%	0%	0%	0%	


Pebble Count of Channel Reach			
Material	Size Range (mm)		Count
silt/clay	0	0.062	5
very fine sand	0.062	0.13	1
fine sand	0.13	0.25	2
medium sand	0.25	0.5	4
coarse sand	0.5	1	3
very coarse sand	1	2	1
very fine gravel	2	4	4
fine gravel	4	6	8
fine gravel	6	8	2
medium gravel	8	11	2
medium gravel	11	16	5
coarse gravel	16	22	6
coarse gravel	22	32	11
very coarse gravel	32	45	12
very coarse gravel	45	64	21
small cobble	64	90	11
medium cobble	90	128	5
large cobble	128	180	4
very large cobble	180	256	1
small boulder	256	362	1
small boulder	362	512	1
medium boulder	512	1024	1
large boulder	1024	2048	1
very large boulder	2048	4096	1
total particle count:			99
bedrock			0
clay hardpan			
detritus/wood			
artificial			
total count:			99

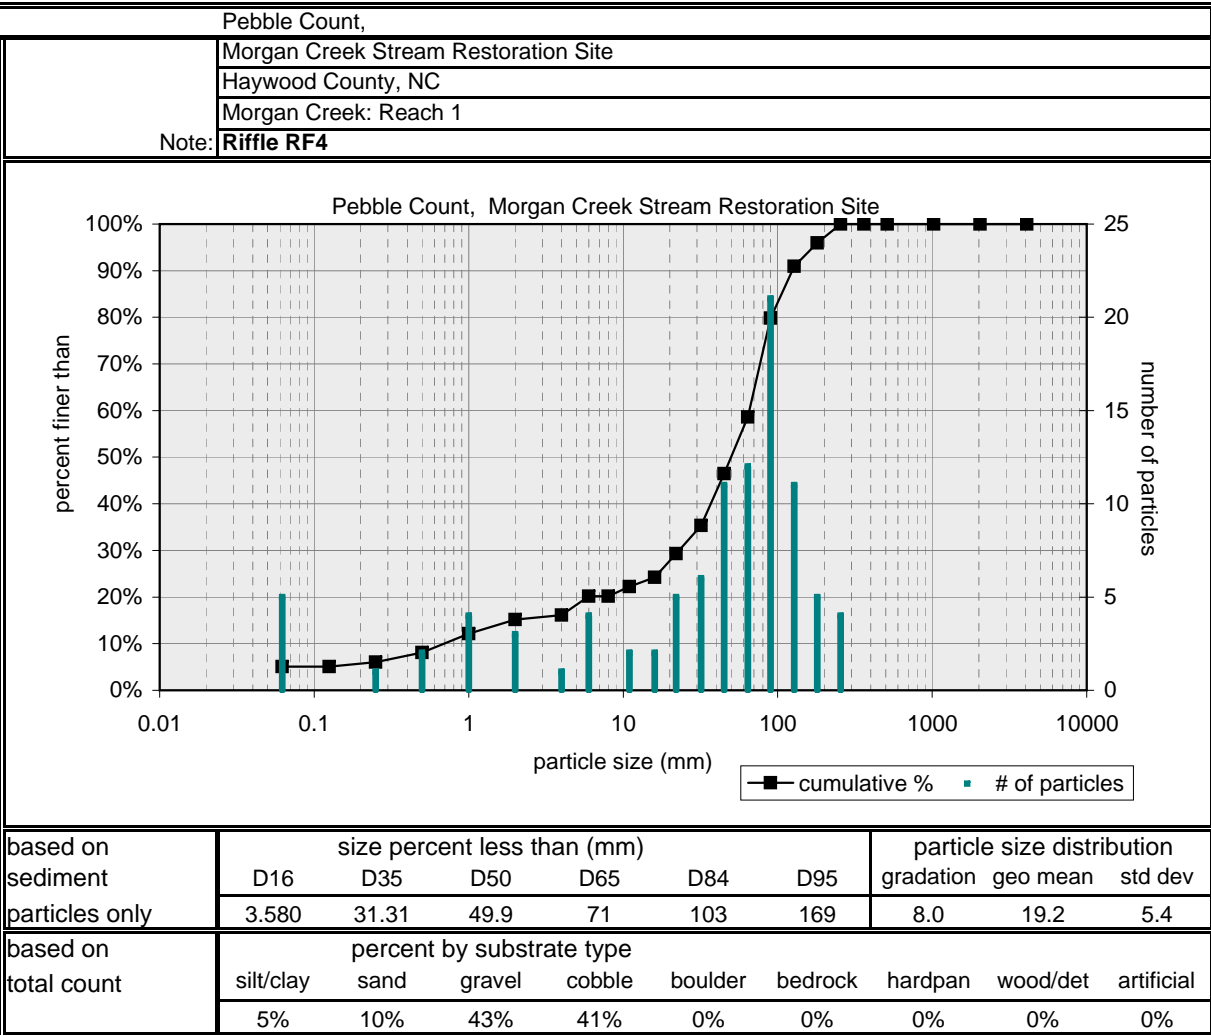



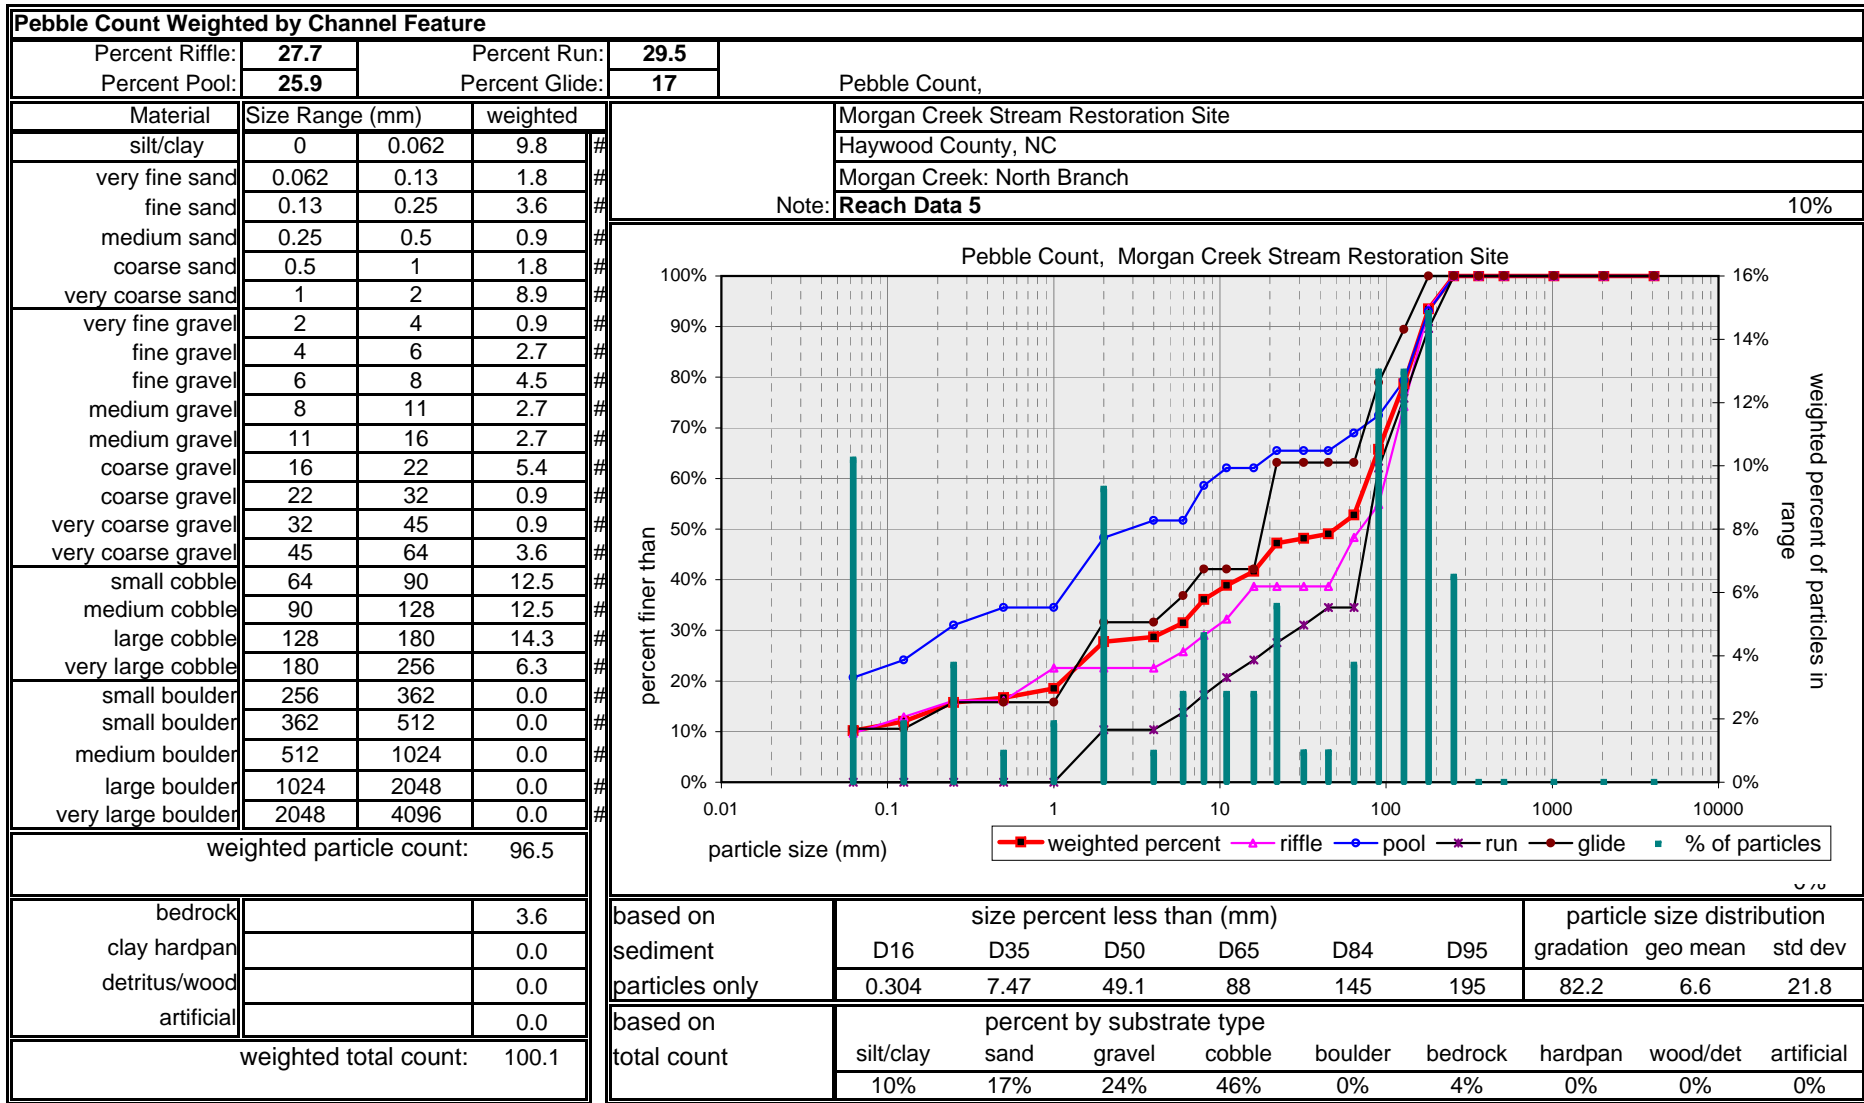


Pebble Count of Channel Reach			
Material	Size Range (mm)		Count
silt/clay	0	0.062	14
very fine sand	0.062	0.13	
fine sand	0.13	0.25	
medium sand	0.25	0.5	2
coarse sand	0.5	1	1
very coarse sand	1	2	7
very fine gravel	2	4	5
fine gravel	4	6	1
fine gravel	6	8	2
medium gravel	8	11	3
medium gravel	11	16	5
coarse gravel	16	22	3
coarse gravel	22	32	4
very coarse gravel	32	45	3
very coarse gravel	45	64	7
small cobble	64	90	5
medium cobble	90	128	19
large cobble	128	180	11
very large cobble	180	256	11
small boulder	256	362	2
small boulder	362	512	
medium boulder	512	1024	
large boulder	1024	2048	
very large boulder	2048	4096	
total particle count:			105
bedrock			1
clay hardpan			
detritus/wood			
artificial			
total count:			106

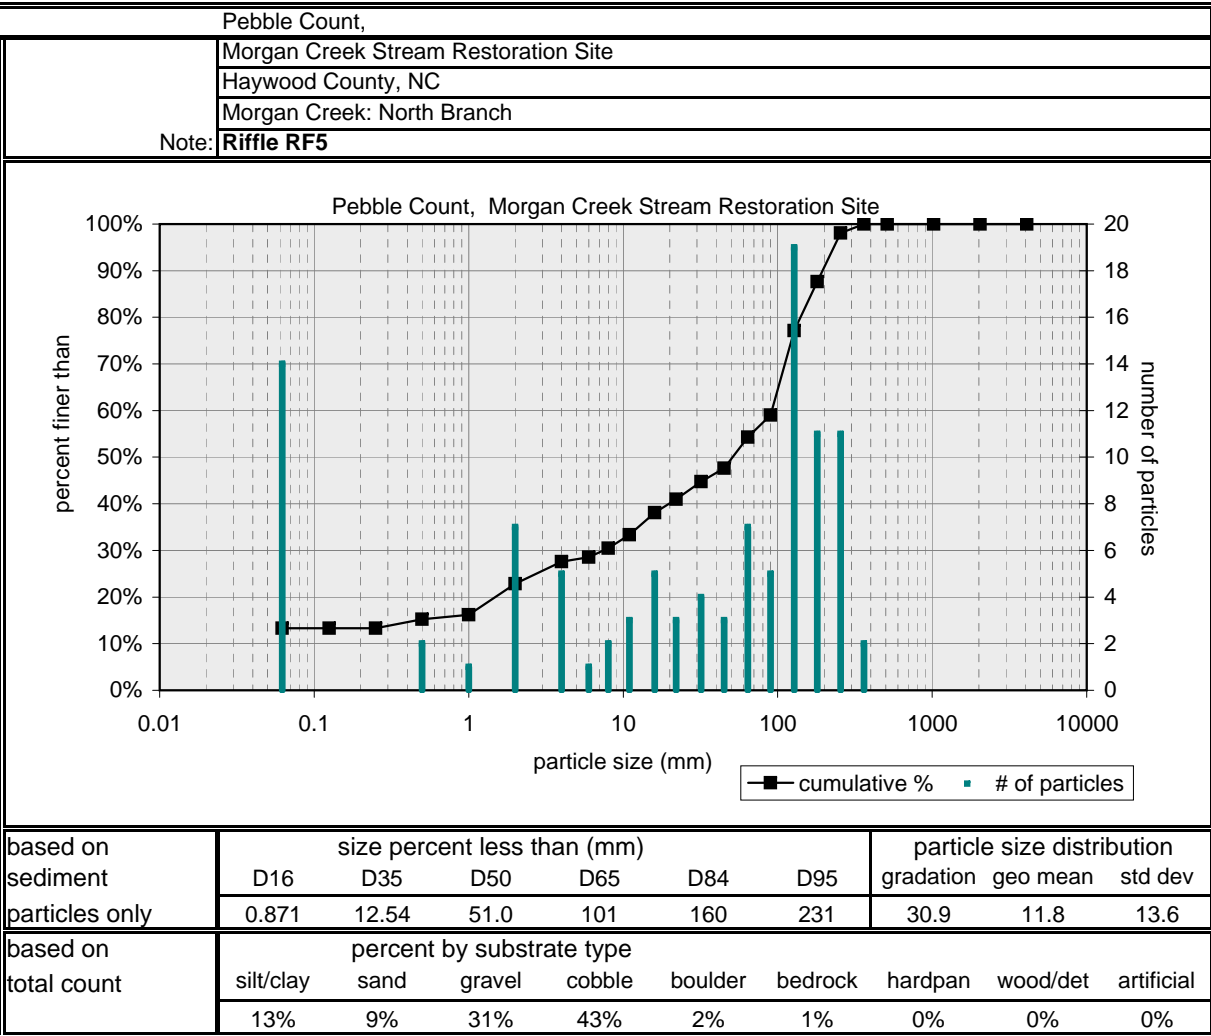

**APPENDIX D**  
**WETLAND RAW DATA**




# GW1 2010

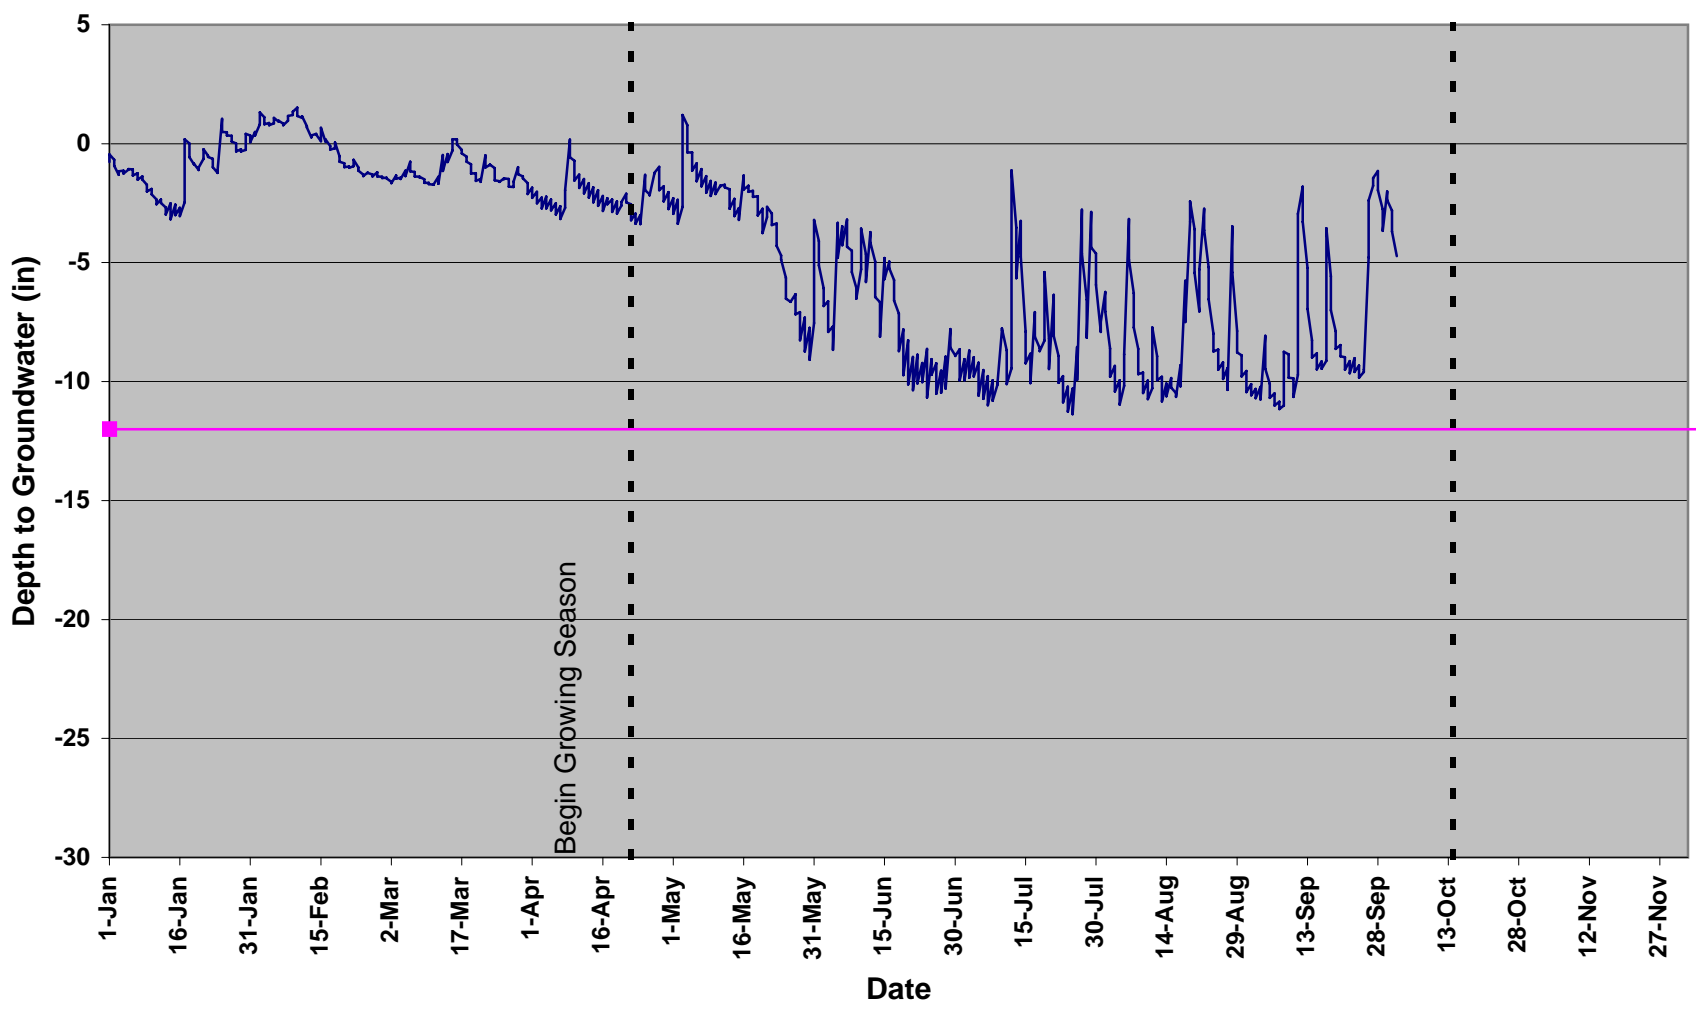


— Groundwater Level — Threshold Depth

# GW2 2010

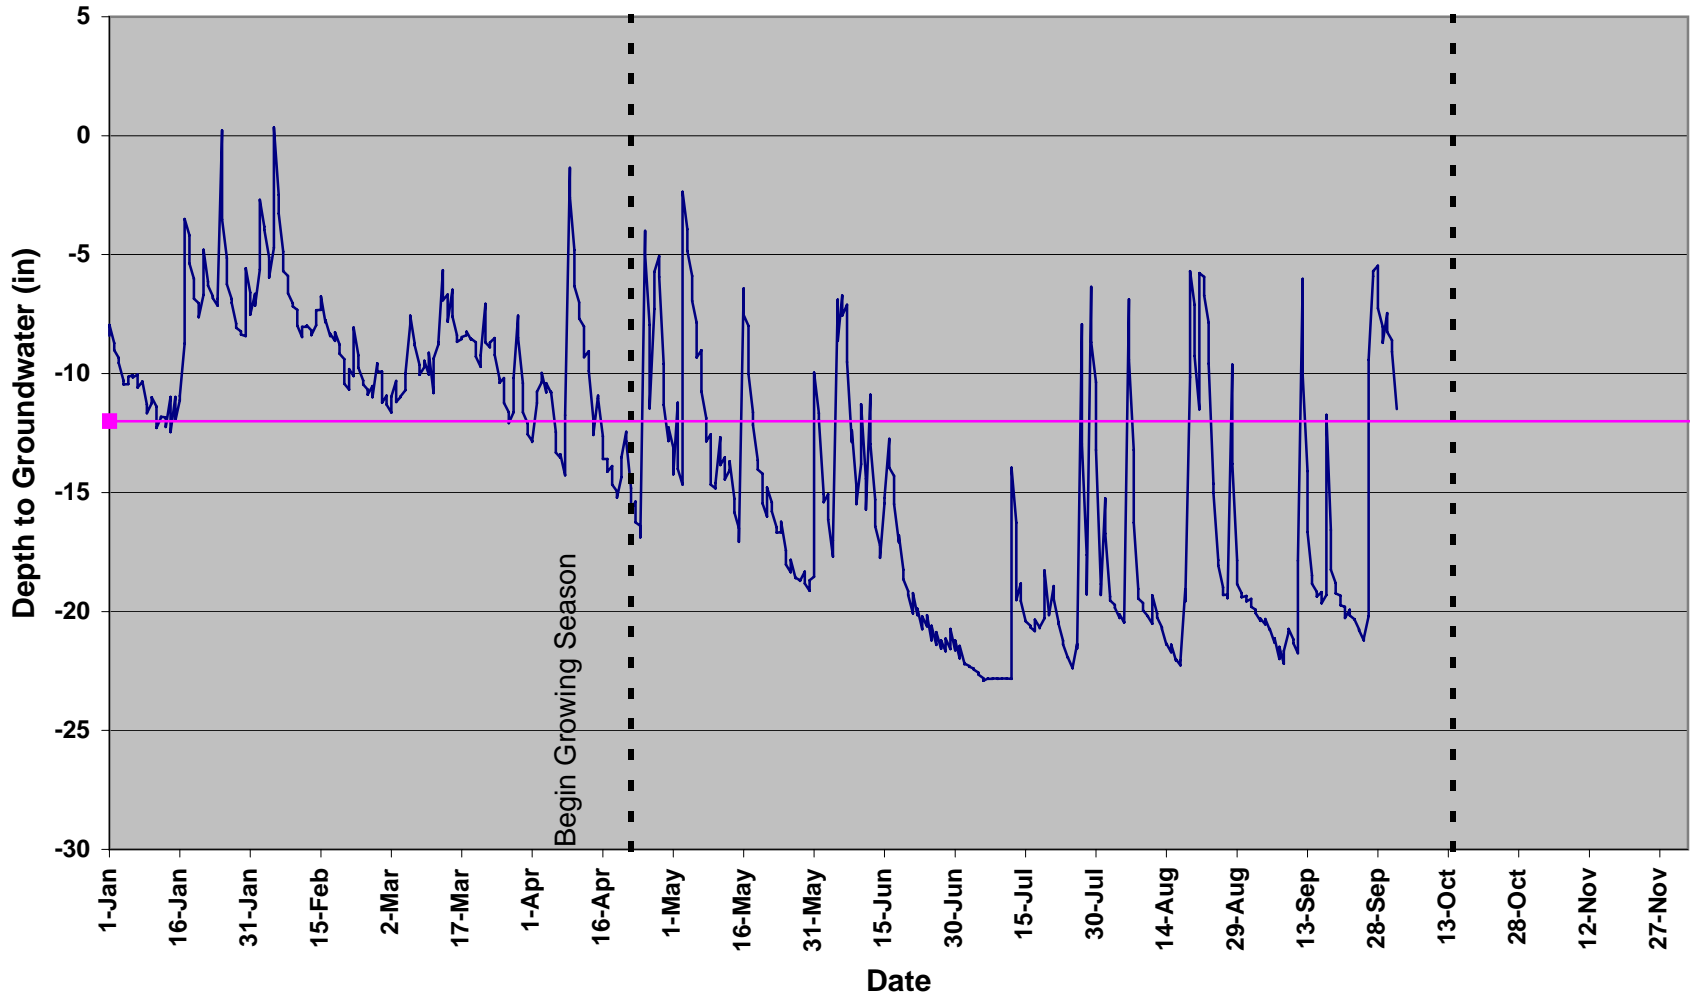

— Groundwater Level — Threshold Depth

# GW3 2010

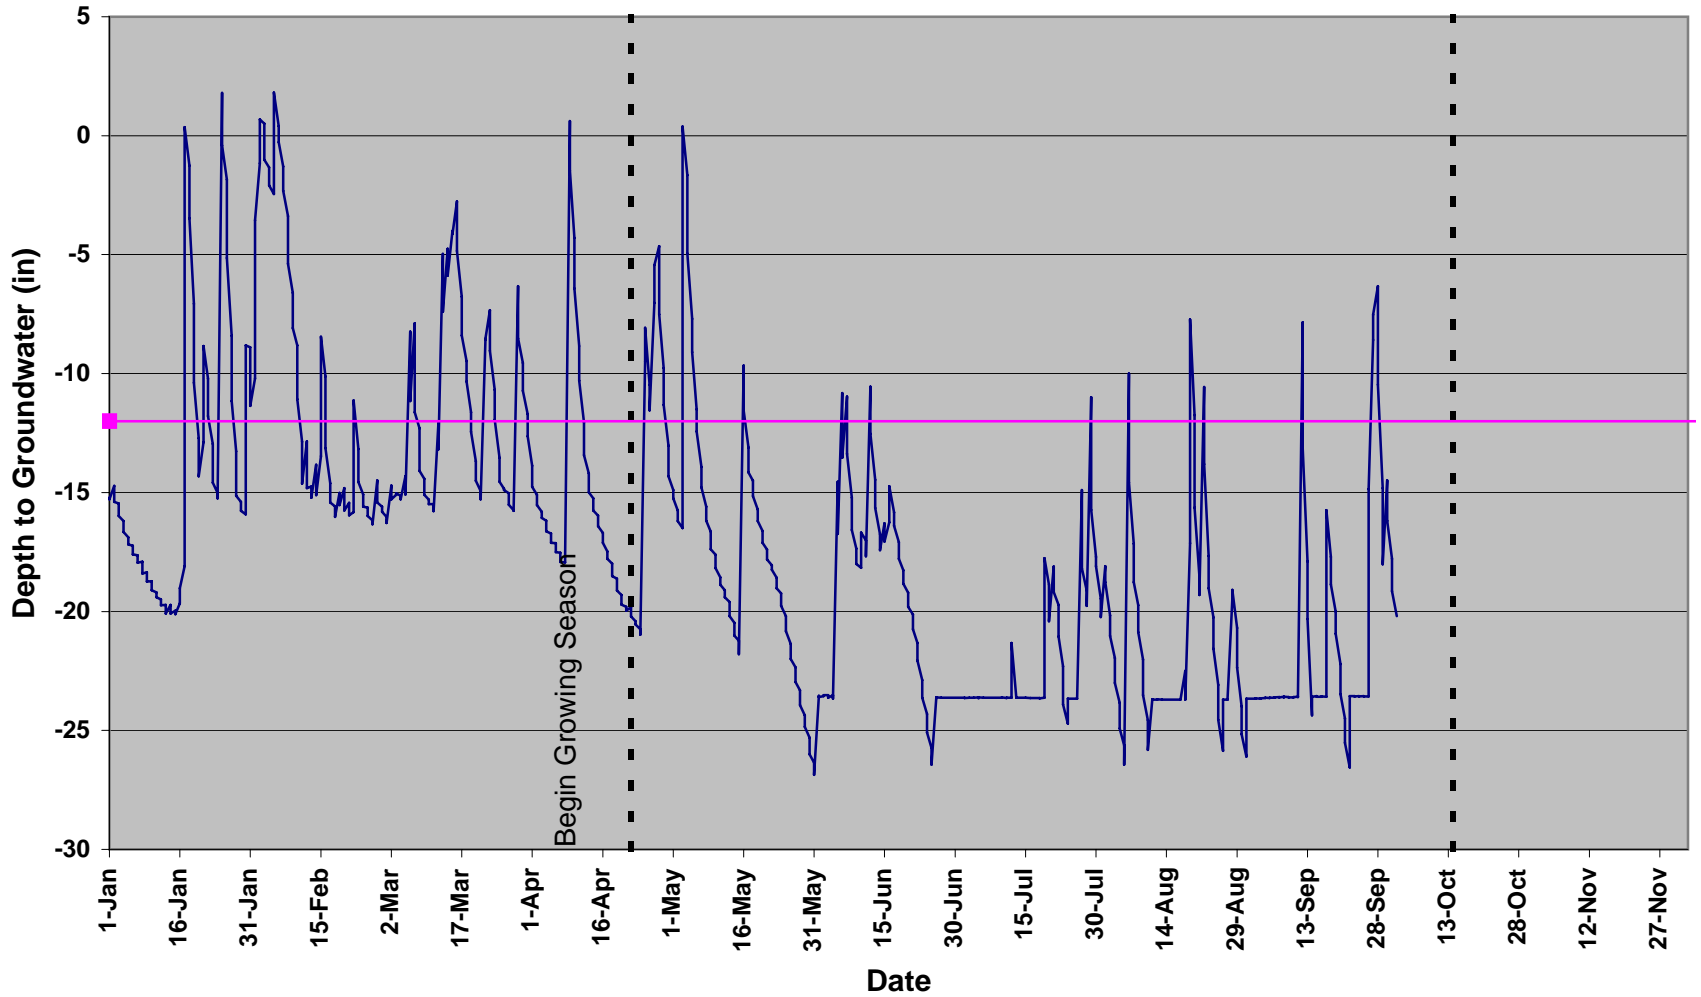

— Groundwater Level — Threshold Depth