

FINAL
YEAR 2 (2017) ANNUAL
MONITORING REPORT

**NEIGHBORS BRANCH/WALTON CRAWLEY BRANCH
STREAM & WETLAND RESTORATION SITE**

NCDMS Project No. 92872
Contract No. D09023S
USACE Action ID No. SAW-2009-917 & NCDWR Project No. 10-0122
SCO No. 08-07308-01
McDowell County, North Carolina

Data Collection: May-November 2017
Submission: December 2017



PREPARED FOR:

N.C. DEPARTMENT OF ENVIRONMENTAL QUALITY
DIVISION OF MITIGATION SERVICES
1601 MAIL SERVICE CENTER
RALEIGH, NORTH CAROLINA 27699-1601

FINAL
YEAR 2 (2017) ANNUAL
MONITORING REPORT

**NEIGHBORS BRANCH/WALTON CRAWLEY BRANCH
STREAM & WETLAND RESTORATION SITE**


NCDMS Project No. 92872
Contract No. D09023S
USACE Action ID No. SAW-2009-917 & NCDWR Project No. 10-0122
SCO No. 08-07308-01
McDowell County, North Carolina

Data Collection: May-November 2017
Submission: December 2017



PREPARED BY:

AXIOM ENVIRONMENTAL, INC.
218 SNOW AVENUE
RALEIGH, NORTH CAROLINA 27603





Axiom Environmental, Inc.

218 Snow Avenue, Raleigh, NC 27603 919-215-1693

December 5, 2017

Mr. Matthew Reid
North Carolina Department of Environmental Quality
Division of Mitigation Services
5 Ravenscroft Drive, #102
Asheville, North Carolina 28801

RE: Neighbors Branch/ Walton Crawley Branch Monitoring (DMS Project # 92879, Contract # D09023S)
Final Year 2 (2017) Annual Monitoring Report

12-004.21

Dear Matthew:

Axiom Environmental, Inc. (AXE) is pleased to provide you with three hard copies and one cd of electronic files for the Final Neighbors Branch/ Walton Crawley Branch Year 2 (2017) Annual Monitoring Report. We received your comments via email on December 4, 2017 and have addressed them as follows.

- Wetland Hydrology: Report indicates that Gauge 1 malfunctioned during the growing season. Has the gauge been replaced or repaired? Please add a statement in this section stating the corrective action and that the gauge is functioning correctly.
The wetland hydrology discussion was updated to read as follows: "Gauge 1 malfunctioned for 6 days (July 29 to August 3, 2017) during the growing season. It is unclear why the gauge was not taking measurements during this time, but it appeared to be functioning properly before and after the malfunction, and it was checked and reset at the time of the next data download. The gauge had no more issues for the remainder of the growing season. Based on precipitation data as well as data from Gauge 2, it is expected that this gauge would have continued to be saturated/inundated during this 6 day period."
- Table 2: Under Year 2 Monitoring, please add two lines of additional data with dates. One for vegetation monitoring and one for geomorphology monitoring. The IRT would like to know when data is being collected for the monitoring years. Please do this for all future monitoring report submissions.
These rows were added to Table 2, and these will be added for all future monitoring report submissions.
- Cross-sections and Table 11a: Please calculate BHR for cross-sections. If the BHR has been calculated, please increase the significant digits to 3 places to account for rounding and to show small changes over the course of monitoring (Ex: 1.0 changed to 1.002 or similar).
The bank height ratio was recalculated for all cross-sections, and since no cross-sections have exhibited any stream bed elevation change during the monitoring period, all cross-sections have a bank height ratio of 1.0. This indicates minimal geomorphic change and good cross-sectional stability across the site.
- In the future, please use a date stamp on photos. The IRT has requested this be included with all photos.
All Axiom staff have been notified to use a time-stamp on all future monitoring photos.
- As Axiom had done in the past, please include a response to the comment letter and how/where the comments were addressed. Please insert this letter directly behind the cover page and before the table of contents in the final deliverables. The IRT has requested that we include this letter with the final deliverables. The response letter will need to be included with all future monitoring deliverables.
This letter has been inserted into the report between the cover page and table of contents.



Please let us know if you have any questions or comments regarding any component of this submittal. Thank you for the opportunity to continue to assist the Division of Mitigation Services with this important project.

Sincerely,
AXIOM ENVIRONMENTAL, INC.

A handwritten signature in blue ink, appearing to read 'Kenan R. Jernigan', is written over a light blue horizontal line.

Kenan R. Jernigan
Project Scientist

Attachments: 3 hard copies Year 2 (2017) Neighbors Branch/ Walton Crawley Branch Annual Monitoring Report
1 CD containing digital support files

TABLE OF CONTENTS

1.0	PROJECT SUMMARY	1
2.0	METHODS	4
3.0	REFERENCES	6

APPENDICES

APPENDIX A. SITE LOCATION MAP AND BACKGROUND TABLES

- Figure 1. Site Location
- Table 1. Project Components and Mitigation Units
- Table 2. Project Activity and Reporting History
- Table 3. Project Contacts Table
- Table 4. Project Attributes Table

APPENDIX B. VISUAL ASSESSMENT DATA

- Figures 2, 2A-2B. Current Conditions Plan View
- Figures 3, 3A-3B. Project Assets
- Tables 5A-5E. Visual Stream Morphology Stability Assessment
- Table 6. Vegetation Condition Assessment
- Stream Fixed Station Photo Points
- Vegetation Plot Photographs

APPENDIX C. VEGETATION DATA

- Table 7. Vegetation Plot Success Summary
- Table 8. CVS Vegetation Plot Metadata
- Table 9. Total Planted Stems by Plot and Species

APPENDIX D. STREAM MEASUREMENT AND GEOMORPHOLOGY DATA

- Cross-section Plots
- Longitudinal Profile Plots
- Substrate Plots
- Tables 10A-10B. Baseline Morphology and Hydraulic Summary
- Tables 11A-11D. Morphology and Hydraulic Monitoring Summary

APPENDIX E. HYDROLOGY DATA

- Table 12. Verification of Bankfull Events
- Table 13. Wetland Hydrology Criteria Attainment Summary
- Figure E1. 30-70 Percentile Graph for Rainfall
- Groundwater Gauge Graphs

1.0 PROJECT SUMMARY

The North Carolina Division of Mitigation Services (NCDMS) has established the Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site (Site). The primary goals of the project focused on improving water quality and long term stability by reducing nutrient loading from the on-site cattle and horse operation, reducing excess sedimentation input from Site channel banks and contributing non-jurisdictional tributaries/drainages, reducing excess sedimentation from Site access roads and deteriorated crossings, increasing the attenuation of floodwater flows, reintroducing natural watershed flows to Walton Crawley Branch by removing a pond and restoring the channel through its natural valley, and restoring and enhancing aquatic and riparian habitat. Long term stability will be evidenced by channels maintaining stable inverts and banks over an extended period of time.

These goals were accomplished through the following objectives.

- Reduce point (i.e. cattle/horses directly accessing the channel) and non-point source (i.e. stormwater runoff through pastures) pollution associated with an on-site cattle and horse operation by installing exclusionary fencing along the stream and riparian buffer, and by providing a vegetative buffer on stream banks and adjacent floodplains to treat nutrient enriched surface runoff from adjacent pastureland.
- Stabilize degraded portions of on-site streams, eroding ephemeral/stormwater channels, and existing maintained dirt roads to reduce sediment inputs. Stabilization methods included:
 - Restoring a stable dimension, pattern, and profile to selected sections of channels to ensure the channel will transport and attenuate watershed flows and sediment loads without aggrading or degrading.
 - Stabilize selected channel banks by excavating bankfull benches, placing stream structures to reduce shearing forces on outside meander bends, and planting native vegetative species to provide soil stability.
 - Stabilize ephemeral/stormwater channels by planting native vegetation along eroded banks and floodplain and constructing stabilization weirs through the channel valley to lower facet slopes and decrease erosion.
 - Place gravel along existing degraded soil roads that are situated adjacent to Site streams.
- Reintroduce natural watershed flows to Walton Crawley Branch by restoring the channel through the low point of the natural valley and removing a dam that impedes natural down valley flows.
- Improve aquatic habitat by enhancing stream bed variability, providing shading/covered areas within the stream channel, and introducing woody debris in the form of rootwads, log vanes, and log sills.
- Enhance fish passage within Neighbors Branch and Walton Crawley Creek. This was accomplished by eliminating a pond and restoring the stream through the natural valley and by restoring Neighbors Branch and replacing an existing perched culvert to allow fish passage upstream.
- Enhance riparian wildlife habitat by:
 - Fencing cattle out of existing wetlands and planting impacted wetlands with native vegetative species. Wetlands were also restored by raising Site stream inverts to allow groundwater tables to rise throughout the affected valleys.
 - Fencing livestock out of existing and restored riparian buffers as well as installing alternative watering devices that will ensure livestock have sufficient watering areas. This is detailed further in the Farm Management Plans completed for the Site by NCDMS.
 - Vegetating the existing fescue dominated riparian buffers with native trees, shrubs, herbs, and grasses. Forest vegetation species were selected by studying a Reference Forest Ecosystem located on-site and reviewing Montane Alluvial Forest species listed in

Classification of the Natural Communities of North Carolina: Third Approximation (Schafale and Weakley 1990).

- Creating wildlife corridors through agricultural lands which have significantly dissected the landscape. The corridors will provide connectivity to a diversity of habitats including mature forest, early successional forest, stream-side forest, riparian wetlands, and uplands.

The Site is located approximately six miles southeast of the town of Marion (Figure 1, Appendix B). The Site is situated due southwest of the intersection of Deer Park Road and Harmony Grove Road in McDowell County, North Carolina and is located within the United States Geological Survey (USGS) Hydrologic Unit and Targeted Local Watershed 03050101040010 (North Carolina Division of Water Quality Subbasin 03-08-30) of the Catawba River Basin and will service USGS 8-digit Cataloging Unit 03050101.

The contributing watersheds are characterized primarily by forest land (approximately 84 percent of the total area) with pasture at the lower elevations (approximately 10 percent of the total area) and low-density residential development scattered along the outer fringes of the watershed. Impervious surfaces appear to account for approximately one percent of the watershed land surface. Prior to Site construction, riparian vegetation had been removed, stream channels were manipulated, and hoof shear from livestock on stream banks and floodplain soils was responsible for degraded water quality and unstable channel characteristics (stream entrenchment, erosion, and bank collapse).

Project mitigation efforts resulted in the following:

- Restore 2456 linear feet of Site streams
- Enhance (Level I) 202 linear feet of Site streams
- Enhance (Level II) 1863 linear feet of Site streams
- Preserve 3139 linear feet of Site streams
- Restore 0.52 acre of existing hydric soils to riparian wetlands
- Enhance 1.62 acres of riparian wetlands
- Preserve 1.29 acres of riparian wetlands

The Muddy Creek Restoration Partnership (Partnership) was formed in 1998 to address impacts to the Muddy Creek Watershed. The Partnership completed the *Muddy Creek Watershed Restoration Initiative Feasibility Report and Restoration Plan* (Watershed Plan) for the Muddy Creek Watershed in December of 2003 (MCRP 2003). Since 2004 NCDMS has informally participated in the Partnership by implementing priority projects named by the partnership and adopted the 2003 report as part of its Local Watershed Plan (LWP). The NCDMS's *Upper Catawba River Basin Restoration Priorities* (2009) identifies North Muddy Creek as a Targeted Local Watershed (TLW). The Site is located within the North Muddy Creek Watershed. In 2008 NCDMS contracted with a consulting firm to conduct outreach programs with landowners and identify additional project sites in the Muddy Creek Watershed.

The primary goals identified by the Partnership's Watershed Plan include the following.

1. Restore the Watershed to its Full Intended Use
2. Restore Riparian Buffers
3. Enhance Open Space Preservation
4. Improve Water Quality
5. Restore Physical Habitat
6. Establish a Trout Fishery

The Watershed Plan listed the following components of watershed restoration to be expected:

1. Natural Channel Design Stream Restoration
2. Riparian Reforestation
3. Livestock Exclusion
4. Riparian Forest Preservation

These four components were included within the *Neighbors Branch/Walton Crawley Branch Site Mitigation Plan* (NCDMS 2013). The project restored the watershed to its full intended use by restoring a stream, floodplain, and riparian wetland ecosystem through stream and wetland restoration, enhancement, and preservation. The project restored riparian buffers through revegetation of buffer zones with native riparian and wetland species along all Site streams. The project enhanced open space preservation by placing Site streams, wetlands, and their buffers into a permanent conservation easement. The overall Site helps improve water quality by reducing sedimentation in on-Site streams and planted a vegetated riparian buffer that filters nutrients from adjacent pasturelands. Additionally, exclusionary fencing and alternate watering devices removed livestock from accessing on-site channels and riparian buffers. The project restored and enhanced physical habitat for both aquatic and terrestrial species by planting native vegetation along stream banks and riparian buffers, creating wildlife corridors through a dissected landscape, and restoring bedform variability to Site streams. The stabilization of streams and buffers in the project area enhanced water quality in downstream receiving waters, which should help in the re-establishment of the watershed's ability to host trout and enhance their ability to propagate.

Site design was completed on March 7, 2013. Site construction and planting were completed in December 2015. Completed project activities, reporting history, completion dates, project contacts, and project attributes are summarized in Tables 1-4 (Appendix A).

Stream Success Criteria: Success criteria for stream restoration will include 1) successful classification of the reach as a functioning stream system (Rosgen 1996) and 2) channel variables indicative of a stable stream system.

Collected data will be utilized to determine the success in restoring stream channel stability. Specifically, the width-to-depth ratio and bank-height ratios should be indicative of a stable or moderately unstable channel with minimal changes in cross-sectional area, channel width, and/or bank erosion along the monitoring reach. In addition, channel abandonment and/or shoot cutoffs must not occur and sinuosity values must remain relatively constant. Visual assessment of instream structures will be conducted to determine if failure has occurred. Failure of a structure may be indicated by collapse of the structure, undermining of the structure, abandonment of the channel around the structure, and/or stream flow beneath the structure.

Stream Dimension: General maintenance of a stable cross-section and hydrologic access to the floodplain features over the course of the monitoring period will generally represent success in dimensional stability. Some changes in dimension (such as lowering of bankfull width) should be expected. Riffle cross-sections should generally maintain a bank-height ratio approaching 1.0, with some variation in this ratio naturally occurring. Pool cross-sections naturally adjust based on recent flows and time between flows, therefore more leeway on pool cross-section geometry is expected.

Stream Pattern and Profile: The profile should not demonstrate significant trends towards degradation or aggradation over a significant portion of a reach. Additionally, bed form variables should remain noticeably intact and consistent with original design parameters that were based off

of reference conditions. Pattern features should show little adjustment over the standard 5-year monitoring period and will be monitored to ensure adjustment is minor prior to close out.

Substrate: Substrate measurements should indicate the progression towards or the maintenance of the known distributions from the design phase.

Sediment Transport: There should be an absence of any significant trend in the aggradational or depositional potential of the channel.

Hydraulics: A minimum of two bankfull events must be documented within the standard 5-year monitoring period. The two bankfull events shall occur within separate years.

Vegetation Success Criteria: Success criteria have been established to verify that the vegetation component supports community elements necessary for forest development. Success criteria are dependent upon the density and growth of characteristic forest species. An average density of 320 stems per acre of planted stems must be surviving in the first three monitoring years. Subsequently, 290 planted stems per acre must be surviving in year 4 and 260 planted stems per acre in year 5.

Wetland Hydrology Success Criteria: Target hydrological characteristics include saturation or inundation for 5 to 12.5 percent of the growing season, during average climatic conditions. During growing seasons with atypical climatic conditions, groundwater gauges in reference wetlands may dictate threshold hydrology success criteria (75 percent of reference). These areas are expected to support hydrophytic vegetation. If wetland parameters are marginal as indicated by vegetation and/or hydrology monitoring, a jurisdictional determination will be performed.

2.0 METHODS

Monitoring of restoration efforts will be performed for five years, or until success criteria are fulfilled. Monitoring is proposed for the stream channel, vegetation, and wetland hydrology. In general, the restoration success criteria, and required remediation actions, are based on the *Stream Mitigation Guidelines* (USACE et al. 2003). Monitoring features are described below and are depicted on Figures 2A-B (Appendix B).

Streams

The restored stream reaches are proposed to be monitored for geometric activity as follows.

- 1750 linear feet of stream profile
- 5 riffle cross-sections
- 3 pool cross-section

The data will be presented in graphic and tabular format. Data to be presented will include 1) cross-sectional area, 2) bankfull width, 3) average depth, 4) maximum depth, 5) width-to-depth ratio, 6) meander wavelength, 7) belt-width, 8) water surface slope, and 9) sinuosity. Substrate analysis will be evaluated through pebble counts at five cross sections and data presented as a D50 for stream classification and tracking purposes. The stream will subsequently be classified according to stream geometry and substrate (Rosgen 1996). Significant changes in channel morphology will be tracked and reported by comparing data in each successive monitoring year. Annual photographs will include 43 fixed station photographs (Appendix B). In addition, the Site contains two stream crest gauges to assist with documentation of

bankfull events. One bankfull event has been documented to date during monitoring year 2 (2017) making a total of two documented bankfull events (Table 12, Appendix E).

Early in Year 1 (2016), several structures were damaged by significant storm events that occurred shortly after Site construction. Warranty repair work was completed in October 2016 to address these issues. The repaired structures appeared stable during Year 2 (2017). They will be monitored throughout the remainder of the monitoring contract to determine if the repair work sufficiently resolved the issues and if any additional repairs will be required. Currently, stream measurements are meeting success criteria.

Vegetation

Restoration monitoring procedures for vegetation will monitor plant survival and species diversity. Planted areas within the Site include approximately 12.3 acres. After planting of the area was completed, eight vegetation plots were installed and monitored at the Site; annual monitoring results can be found in Appendix C. Annual measurements of vegetation will consist of 8 CVS vegetation plots.

A photographic record of plant growth should be included in each annual monitoring report; current monitoring photographs are included in Appendix B. During the first year, vegetation will receive a cursory, visual evaluation on a periodic basis to ascertain the degree of overtopping of planted elements by nuisance species. Subsequently, quantitative sampling of vegetation will be performed as outlined in the *CVS-EEP Protocol for Recording Vegetation, Version 4.2* (Lee et al. 2008) in September of the first monitoring year and annually between June 1 and September 30 for the remainder of the monitoring period until vegetation success criteria are achieved.

Year 2 stem count measurements indicate planted stem densities are well above the required 320 stems per acre. Planted stem density across the Site is 440 planted stems per acre (Table 9, Appendix C). In addition, all eight individual CVS plots met success criteria based on planted stems alone (Table 7, Appendix C). Therefore, the Site is currently meeting vegetation success criteria.

Wetland Hydrology

Two groundwater monitoring gauges were installed to take measurements after hydrological modifications were performed at the Site. Hydrological sampling will occur quarterly throughout the growing season (March 26 to November 5). Approximate locations of gauges are depicted on Figure 2A (Appendix B) and hydrology data can be found in Appendix E.


Both gauges were saturated or inundated for well over 12.5 percent of the growing season. The groundwater level at both gauges remained within 12 inches of the surface for the entire growing season (225 days). Gauge 1 malfunctioned for 6 days (July 29 to August 3, 2017) during the growing season. It is unclear why the gauge was not taking measurements during this time, but it appeared to be functioning properly before and after the malfunction, and it was checked and reset at the time of the next data download. The gauge had no more issues for the remainder of the growing season. Based on precipitation data as well as data from Gauge 2, it is expected that this gauge would have continued to be saturated/inundated during this 6 day period. Wetland hydrology is currently meeting success criteria.

3.0 REFERENCES


- Lee, M.T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2008. CVS-EEP Protocol for Recording Vegetation. Version 4.2. North Carolina Department of Environment and Natural Resources, Ecosystem Enhancement Program. Raleigh, North Carolina.
- Muddy Creek Restoration Partners (MCRP), 2003. Feasibility Report and Restoration Plan for the Muddy Creek Watershed.
- North Carolina Division of Mitigation Services (NCDMS). 2013. Neighbor Branch/Walton Crawley Branch Stream and Wetland Mitigation Site Mitigation Plan. North Carolina Department of Environment and Natural Resources, Ecosystem Enhancement Program. Raleigh, North Carolina.
- North Carolina Ecosystem Enhancement Program (NCEEP). 2009. Upper Catawba River Basin Restoration Priorities 2009 (online). Available: http://www.nceep.net/services/restplans/Upper_Catawba_RBRP_2009.pdf [March 12, 2009]. North Carolina Department of Environment and Natural Resources, Raleigh, North Carolina.
- Rosgen D. 1996. Applied River Morphology. Wildland Hydrology. Pagosa Springs, Colorado.
- Schafale, M.P. and A.S. Weakley. 1990. Classification of the Natural Communities of North Carolina: Third Approximation. North Carolina Natural Heritage Program, Division of Parks and Recreation, North Carolina Department of Environment, Health, and Natural Resources. Raleigh, North Carolina.
- United States Army Corps of Engineers (USACE), United States Environmental Protection Agency (USEPA), North Carolina Wildlife Resources Commission (NCWRC), Natural Resources Conservation Service (NRCS), and North Carolina Division of Water Quality (NCDWQ). 2003. Stream Mitigation Guidelines. State of North Carolina.
- Weather Underground. 2017. Station KFQD at Bostic, North Carolina (online). Available: www.wunderground.com/history/airport/KFQD/ [November 27, 2017]. Weather Underground.

Appendix A.
Site Location Map and Background Tables


- Figure 1. Site Location
Table 1. Project Mitigation Components
Table 2. Project Activity and Reporting History
Table 3. Project Contacts Table
Table 4. Project Attributes Table

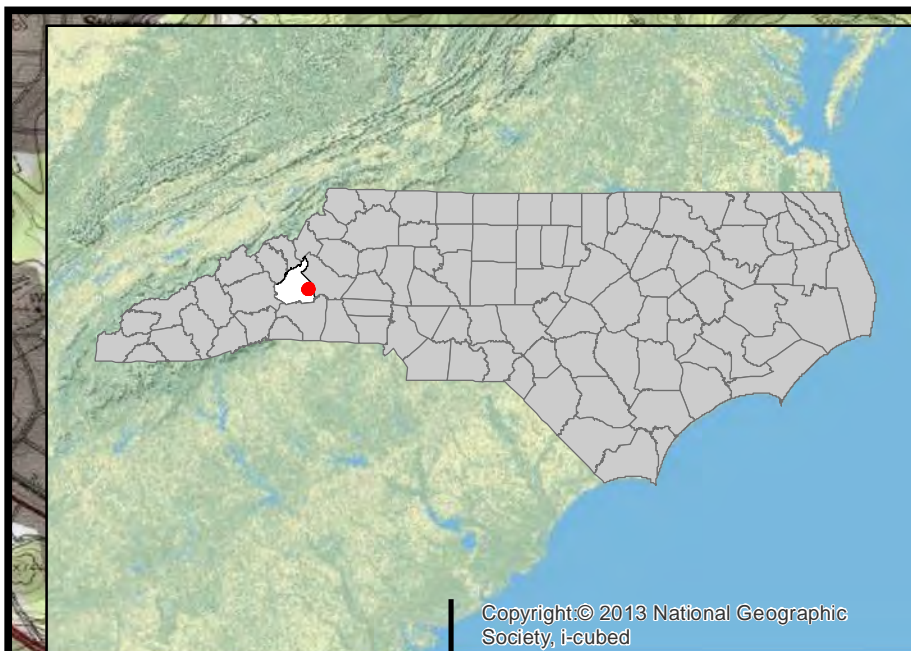

Copyright © 2013 National Geographic Society, i-cubed

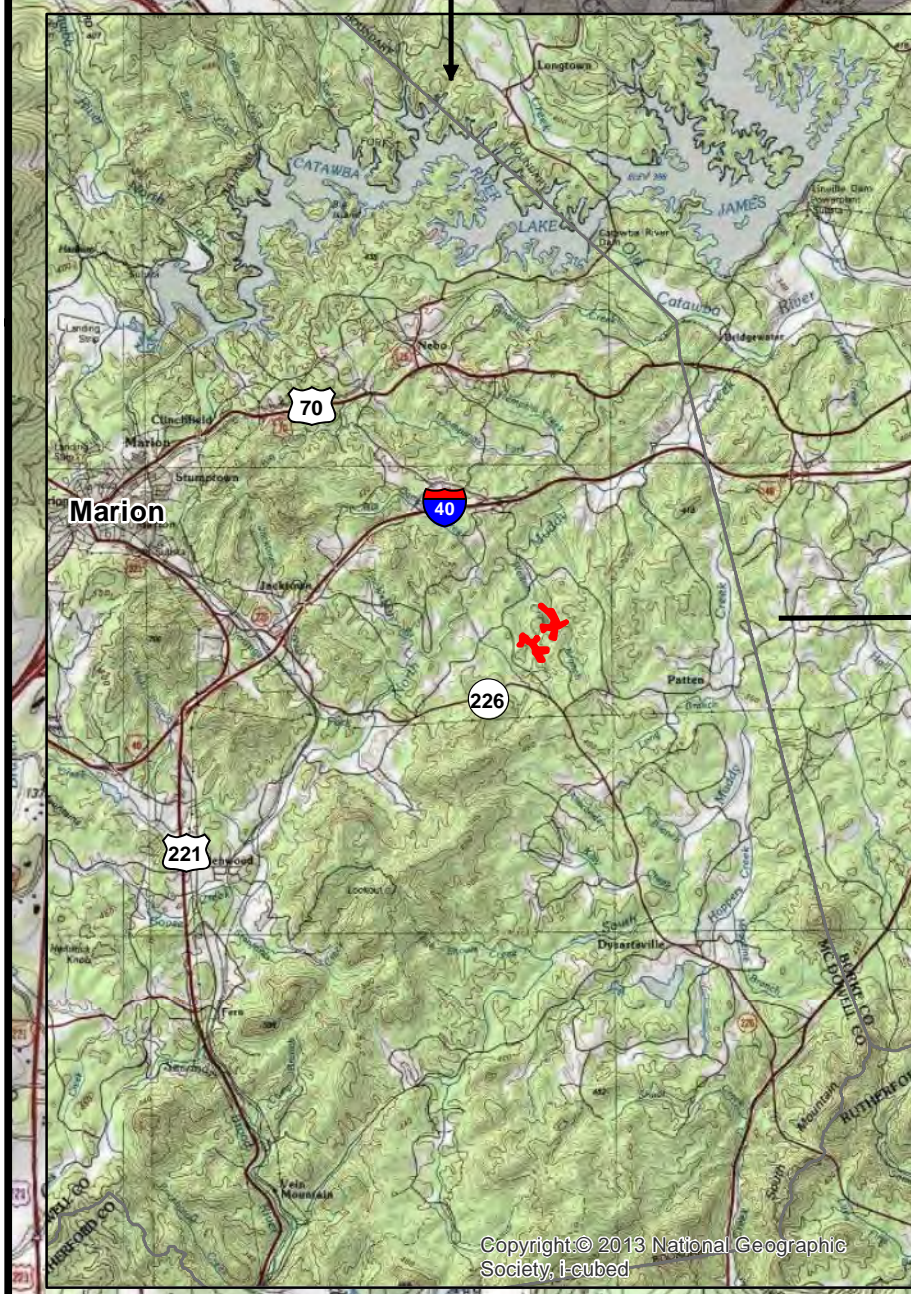

Copyright © 2013 National Geographic Society, i-cubed

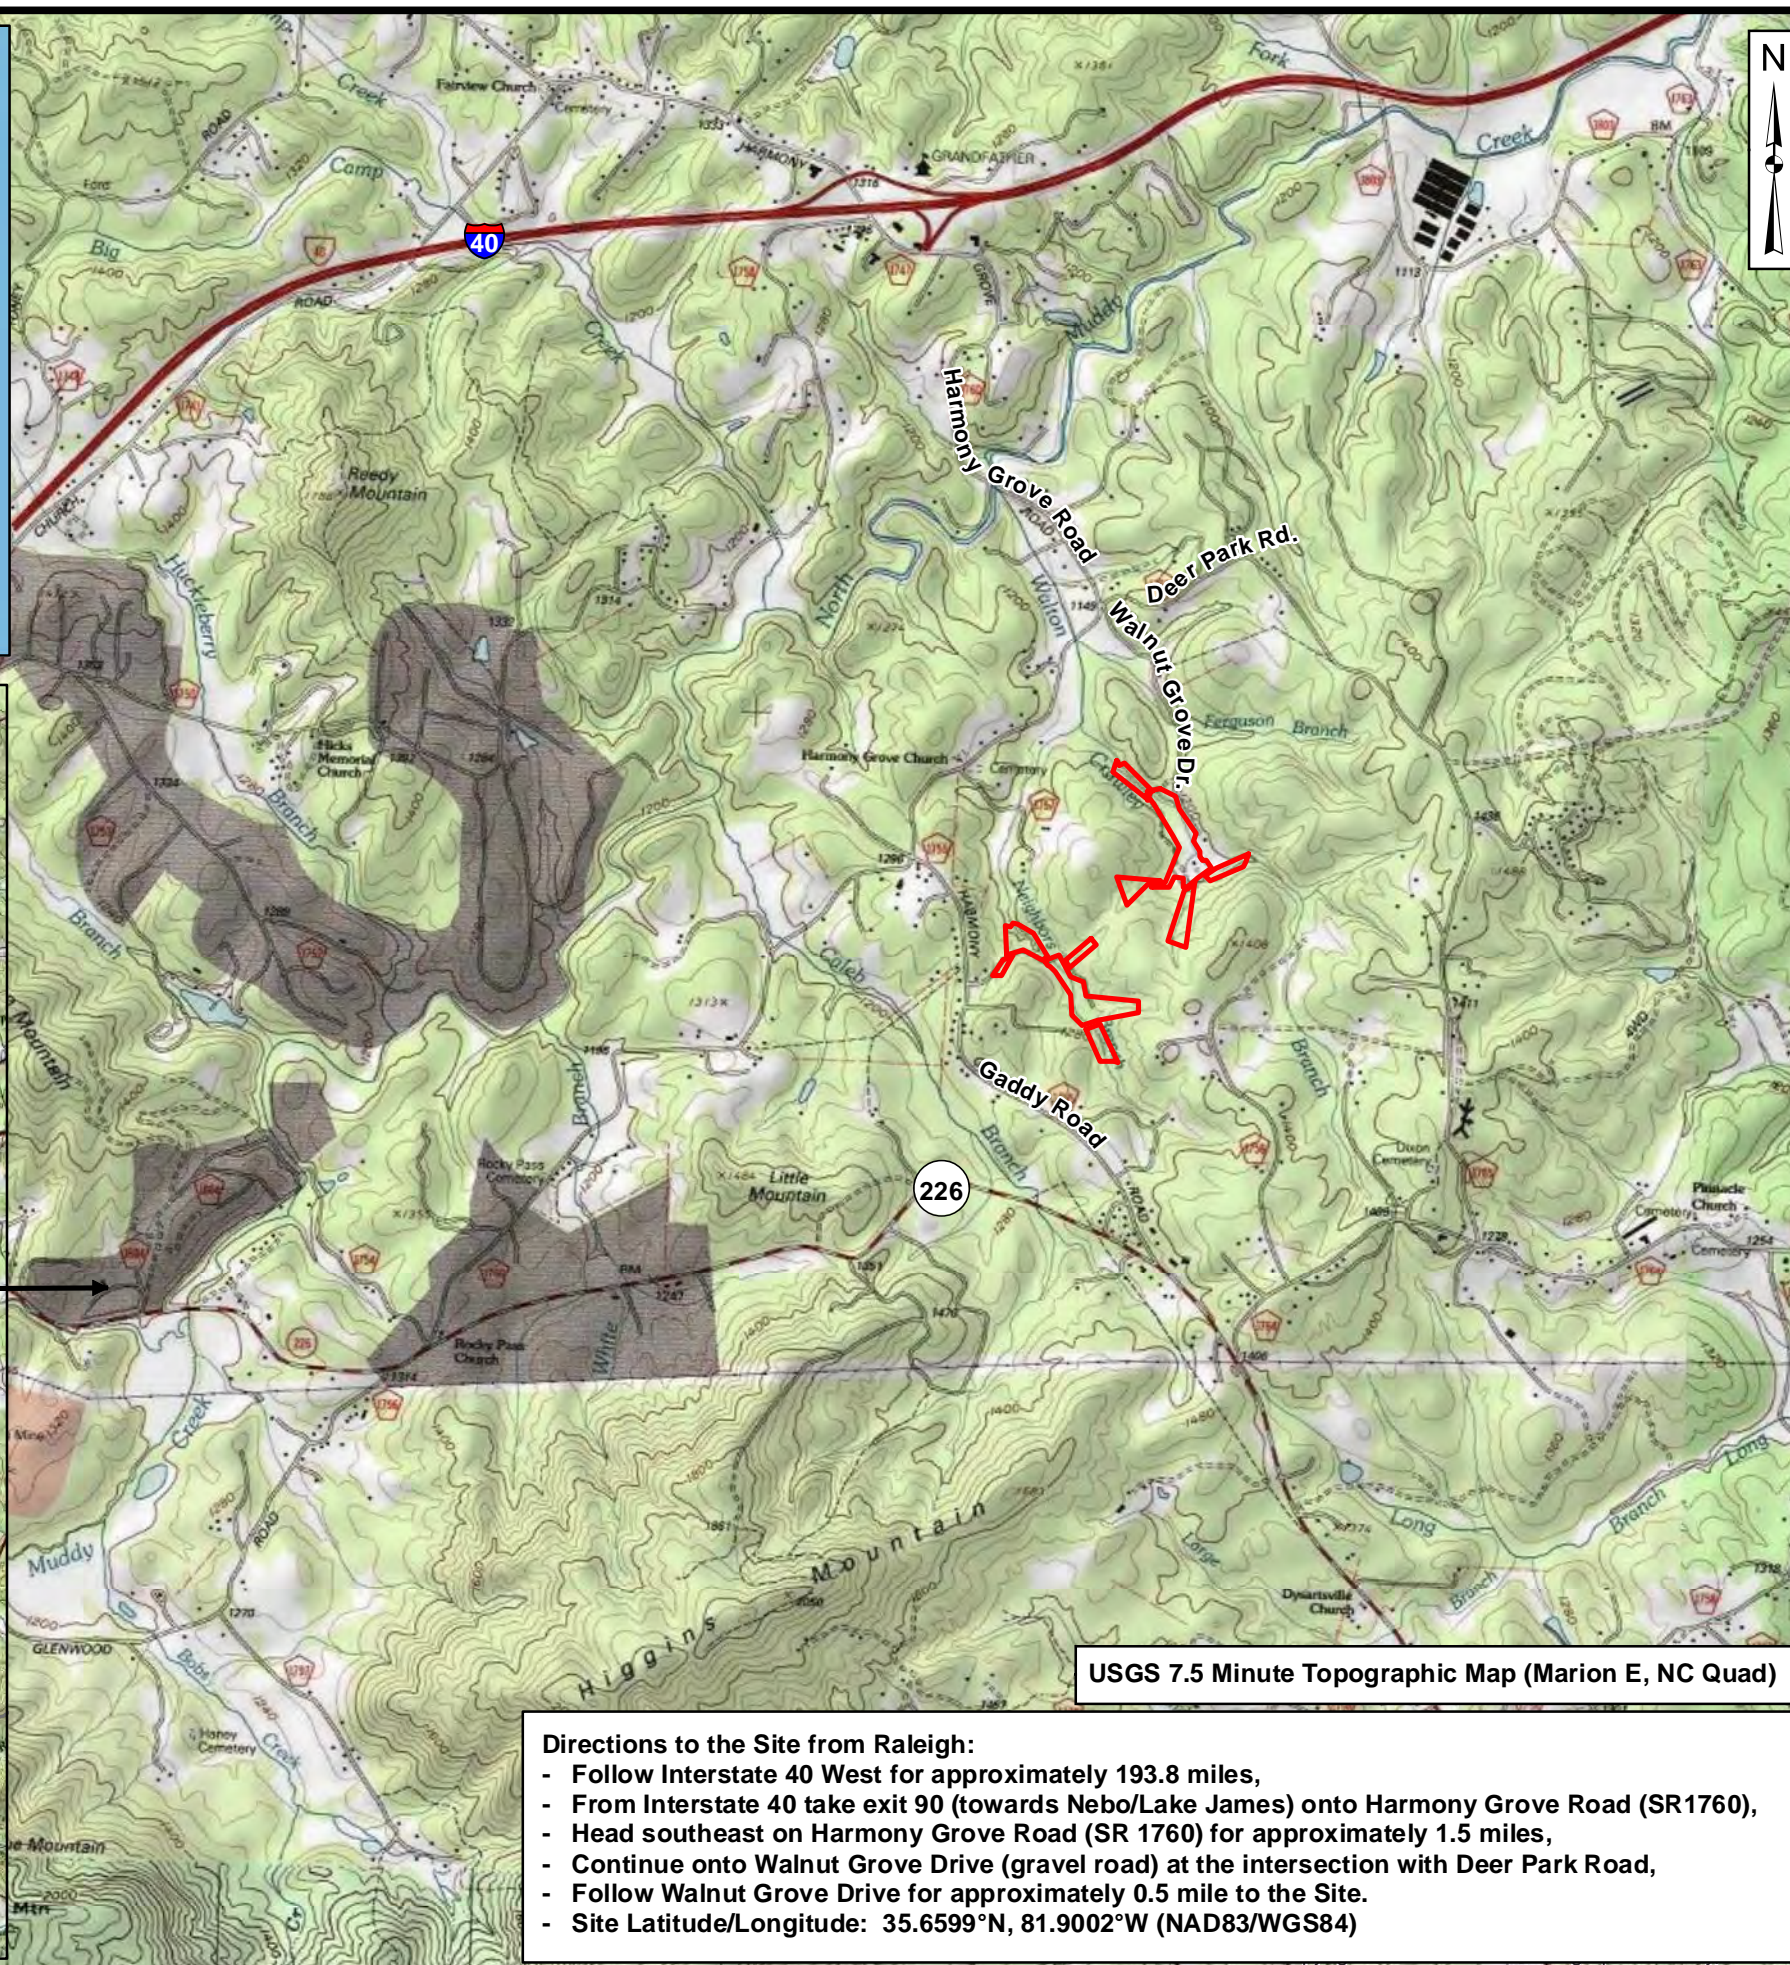

Prepared for:
NC Department of Environmental Quality
 Division of Mitigation Services

Project:
**Neighbors Branch/
 Walton Crawley
 Branch Stream
 and Wetland
 Restoration Site**

**DMS Project
 # 92872**

McDowell County, NC

Title:
Site Location

Drawn by: KRJ

Date: JUN 2016

Scale: 1:30000

Project No.: 12-004.21

USGS 7.5 Minute Topographic Map (Marion E, NC Quad)

Directions to the Site from Raleigh:

- Follow Interstate 40 West for approximately 193.8 miles,
- From Interstate 40 take exit 90 (towards Nebo/Lake James) onto Harmony Grove Road (SR1760),
- Head southeast on Harmony Grove Road (SR 1760) for approximately 1.5 miles,
- Continue onto Walnut Grove Drive (gravel road) at the intersection with Deer Park Road,
- Follow Walnut Grove Drive for approximately 0.5 mile to the Site.
- Site Latitude/Longitude: 35.6599°N, 81.9002°W (NAD83/WGS84)

**FIGURE
 1**

Table 1. Project Components and Mitigation Credits

Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site/ DMS Number 92872

Mitigation Credit Summations							
Stream	Riparian Wetland	Nonriparian Wetland	Buffer			Nitrogen Offset	Phosphorous Offset
3964	1.59	---	---			---	---
Projects Components							
Project Component –or–Reach ID	Stationing	Existing Footage or Acreage	Restoration Footage or Acreage	Restoration Level/Equivalent	Mitigation Ratio	Mitigation Credits	Comment
Walton Crawley	15+40 – 27+36 (09+37 – 21+68)	2498	1196 1231-35 = 1196	Restoration (PI)	1:1	1196	Channel returned to natural valley. The easement break at the road crossing has been removed from credit summation. Removed 35 feet from credit calculations for road crossing.
Walton Crawley	29+11 – 29+23		12	Enhance I	1.5:1	8	Bank grading and stabilization.
Walton Crawley	27+36 – 29+11 29+23 – 29+90		242	Enhance II	2.5:1	97	Fence cattle out of easement area and remove invasive plants. The easement break at 29+90 has been removed from credit summation.
Walton Crawley	10+00 – 15+40 29+90 – 35+01		1051	Preservation	5:1	210	The easement break has been removed from credit summation.
UT 1 Walton Crawley As-built Plan Stationing	18+13 – 20+01 (10+00 – 11+88)	872	188 188	Restoration (PI)	1:1	188	Restore channel through existing pond and reconnect to Walton Crawley.
UT 1 Walton Crawley	14+83 – 18+13		330	Enhance II	2.5:1	132	Fence cattle out of easement area and remove invasive plants.
UT 1 Walton Crawley	10+00 – 14+83		483	Preservation	5:1	97	The easement break has been removed from credit summation.
UT 2 Walton Crawley As-built Plan Stationing	10+00 – 13+83 (10+00 – 13+83) 16+36 – 18+02 (10+00 – 11+66)	600	549 549	Restoration (PI)	1:1	549	Channel routed to the center of the valley, away from toe of slope.
UT 2 Walton Crawley	13+83 – 16+36		253	Enhance II	2.5:1	101	Fence cattle out of easement area and remove invasive plants.
Neighbors Branch As-built Plan Stationing	24+74 – 29+97 (09+93 – 15+52)	2262	523 559 – 36 = 523	Restoration (PI)	1:1	523	Channel routed through low point of valley and invert raised from perched culvert. The easement break at the road crossing has been removed from credit summation. Removed 36 feet from credit calculations for road crossing.
Neighbors Branch	18+89 – 19+09		20	Enhance I	1.5:1	13	Place channel structure and stabilize bank. The easement break has been removed from credit summation.

Neighbors Branch	18+69 – 18+89 19+09 – 24+74 29+97 – 33+39		927	Enhance II	2.5:1	371	Fence cattle out of easement area and matt, seed, and plant vegetation on scoured banks.
Neighbors Branch	09+67 – 18+69		902	Preservation	5:1	180	The easement break has been removed from credit summation.
UT 1 Neighbors Branch As-built Plan Stationing	10+56 – 10+95 11+50 – 12+81 (10+06 – 10+44 10+77 – 12+09)	281	170 170	Enhance I	1.5:1	113	Bank grading and stabilization.
UT 1 Neighbors Branch	10+00 – 10+56 10+95 – 11+50		111	Enhance II	2.5:1	44	Fence cattle out of easement area and plant vegetation.
UT 3 Neighbors Branch	11+72 – 18+75	703	703	Preservation	5:1	141	---
Riparian Wetland	---	0.0	0.52	Restoration	1:1	0.52	Restore hydrology to hydric soils adjacent to Neighbors Branch.
Riparian Wetland	---	1.62	1.62	Enhancement	2:1	0.81	Plant native vegetation on impacted wetlands and fence cattle.
Riparian Wetland	---	1.29	1.29	Preservation	5:1	0.26	---
Length and Area Summations							
Restoration Level	Stream (linear footage)	Riparian Wetland (acreage)		Nonriparian Wetland (acreage)	Buffer (square feet)	Upland (acres)	
		Riverine	Non-Riverine				
Restoration	2,456	0.52		--			
Enhancement (Level I)	202	1.62		--			
Enhancement (Level II)	1,863	--		--			
Preservation	3,139	1.29		--			
Totals	7,660	3.43		--			
Mitigation Units	3,964 SMUs	1.59 Riparian WMUs		0.00 Nonriparian WMUs			
BMP Elements							
Element	Location		Purpose/Function		Notes		

Table 2. Project Activity and Reporting History
Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site / DMS Number 92872

Activity or Deliverable	Data Collection Complete	Completion or Delivery
Project Institution		
Mitigation Plan	April 2009	March 7, 2013
Permits Issued		
Final Design – Construction Plans		April 2014
Construction	--	December 2015
Temporary S&E Mix applied to Entire Project Site	--	December 2015
Permanent Seed Mix applied to the Entire Project Site	--	December 2015
Bare Root; Containerized; and B&B Plantings for the Entire Project Site	--	December 2015
Baseline Monitoring Document (Year 0 Monitoring Baseline)	April 2016	July 2016
Repair	--	October 2016
Year 1 Monitoring	November 2016	January 2017
Year 2 Monitoring	November 2017	December 2017
Year 2 Vegetation Monitoring	August 30, 2017	--
Year 2 Geomorphology Monitoring	February 22, 2017	--
Year 3 Monitoring		
Year 4 Monitoring		
Year 5 Monitoring		

Table 3. Project Contact Table
Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site / DMS Number 92872

Designer	Florence & Hutcheson Engineering (Now HDR) 5121 Kingdom Way, Suite 100 Raleigh, NC 27607 Kevin Williams (919) 851-6066
Construction Plans and Sediment and Erosion Control Plans	Florence & Hutcheson Engineering (Now HDR) 5121 Kingdom Way, Suite 100 Raleigh, NC 27607 Kevin Williams (919) 851-6066
Construction Contractor	Carolina Environmental Contracting, Inc. Mount Airy, NC (336) 320-3849
Planting Contractor	Keller Environmental 7291 Haymarket Lane Raleigh, NC 27615 Jay Keller (919) 749-8259
As-built Surveyor	Turner Land Surveying, PLLC 3719 Benson Drive Raleigh, NC 27609 Elisabeth Turner (919) 827-0745
Baseline Data Collection	Axiom Environmental, Inc. 218 Snow Avenue Raleigh, NC 27603 Grant Lewis (919) 215-1693


Table 4. Project Baseline Information and Attributes**Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site / DMS Number 92872**

Project Information						
Project name	Neighbors Branch/Walton Crawley Branch Mitigation Site					
Project county	McDowell County, North Carolina					
Project area (Acres)	33.4					
Project coordinates (lat/long)	35.6599°N, 81.9002°W					
Project Watershed Summary Information						
Physiographic region	Blue Ridge					
Project river basin	Catawba River Basin					
USGS hydrologic unit (8 digit)	03050101					
NCDWQ Sub-basin	03-08-30					
Project drainage area (acres)	678					
% Drainage area impervious	< 1%					
CGIA land use classification	----					
Reach Summary Information						
Parameters	Walton Crawley Branch	UTs to Walton Crawley Branch		Neighbors Branch	UTs to Neighbors Branch	
		UT 1	UT 2		UT 1	UT 3
Length of reach (linear feet)	2529	1001	802	2339	281	875
Valley classification	VIII	II	II	VIII	II	II
Drainage area (acres)	458	29	20	220	13	15
NCDWQ stream identification score	18.5	25	25	33.5	23.5	16.5
NCDWQ water quality classification	C	C	C	C	C	C
Morphological description (stream type)	B4/5c-G4/5	E5	E5-G5	E5/4-G5/4	E5/4	E5
Design Rosgen stream type	C4	E/C5	E/C5	C4	E5/4	E5
Evolutionary trend						
Design approach (P1, P2, P3, E, etc.)	PI, EI, EII, & P	PI, EII, & P	PI & EII	PI, EI, EII, & P	EI & EII	P
Underlying mapped soils	Elsinboro, Evard, Hayesville	Evard	Evard, Hayesville	Hayesville, Iotla	Evard	Hayesville
Drainage class	Well	Well	Well	Well / SW Poorly	Well	Well
Soil hydric status	Nonhydric	Nonhydric	Nonhydric	Nonhydric / Hydric	Nonhydric	Nonhydric
Slope	0.0340	0.0380	0.0545	0.0260	0.0820	0.0656
FEMA classification	Not Mapped	Not Mapped	Not Mapped	Not Mapped	Not Mapped	Not Mapped
Native vegetation community	Forest / Pasture	Forest	Forest	Forest / Pasture	Forest	Forest
% Composition of exotic invasive spp.	<5	<5	<5	<5	<5	<5

Wetland Summary Information						
Parameters	Walton Crawley Branch	UTs to Walton Crawley Branch		Neighbors Branch	UTs to Neighbors Branch	
		UT 1	UT 2		UT 1	UT 3
Size of wetland (acres)	0.95	0.37	N/A	1.88	0.23	N/A
Wetland type	Riparian Riverine	Riparian Riverine	N/A	Riparian Riverine	Riparian Riverine	N/A
Mapped soil series	Wehadkee	Wehadkee	N/A	Wehadkee	Wehadkee	N/A
Drainage class	poorly	poorly	N/A	poorly	poorly	N/A
Soil hydric status	hydric	hydric	N/A	hydric	hydric	N/A
Source of hydrology	Overbank and springs	Overbank and springs	N/A	Overbank and springs	Overbank and springs	N/A
Hydrologic impairment	Cleared	Invasives	N/A	Drained/ Cleared/ Invasives	Invasives	N/A
Native vegetation community	Forest / Pasture	Forest	N/A	Forest / Pasture	Forest	N/A
% Composition of exotic invasive spp.	<5	<5	N/A	<5	<5	N/A
Regulatory Considerations						
Regulation	Applicable?	Resolved?		Supporting Documentation		
Waters of the US – Section 404	Yes	Yes		SAW-2009-917		
Waters of the US – Section 401	Yes	Yes		SAW-2009-917		
Endangered Species Act	Yes	Yes		No Effect – CE Document		
Historic Preservation Act	Yes	Yes		CE Document		
Coastal Zone Management Act (CZMA/CAMA)	No	NA		NA		
FEMA Floodplain Compliance	No	NA		NA		
Essential Fisheries Habitat	No	NA		NA		

Appendix B
Visual Assessment Data

Figures 2, 2A-2B. Current Conditions Plan View
Figures 3, 3A-3B. Project Assets
Tables 5A-5E. Visual Stream Morphology Stability Assessment
Table 6. Vegetation Condition Assessment
Stream Fixed Station Photo Points
Vegetation Plot Photos

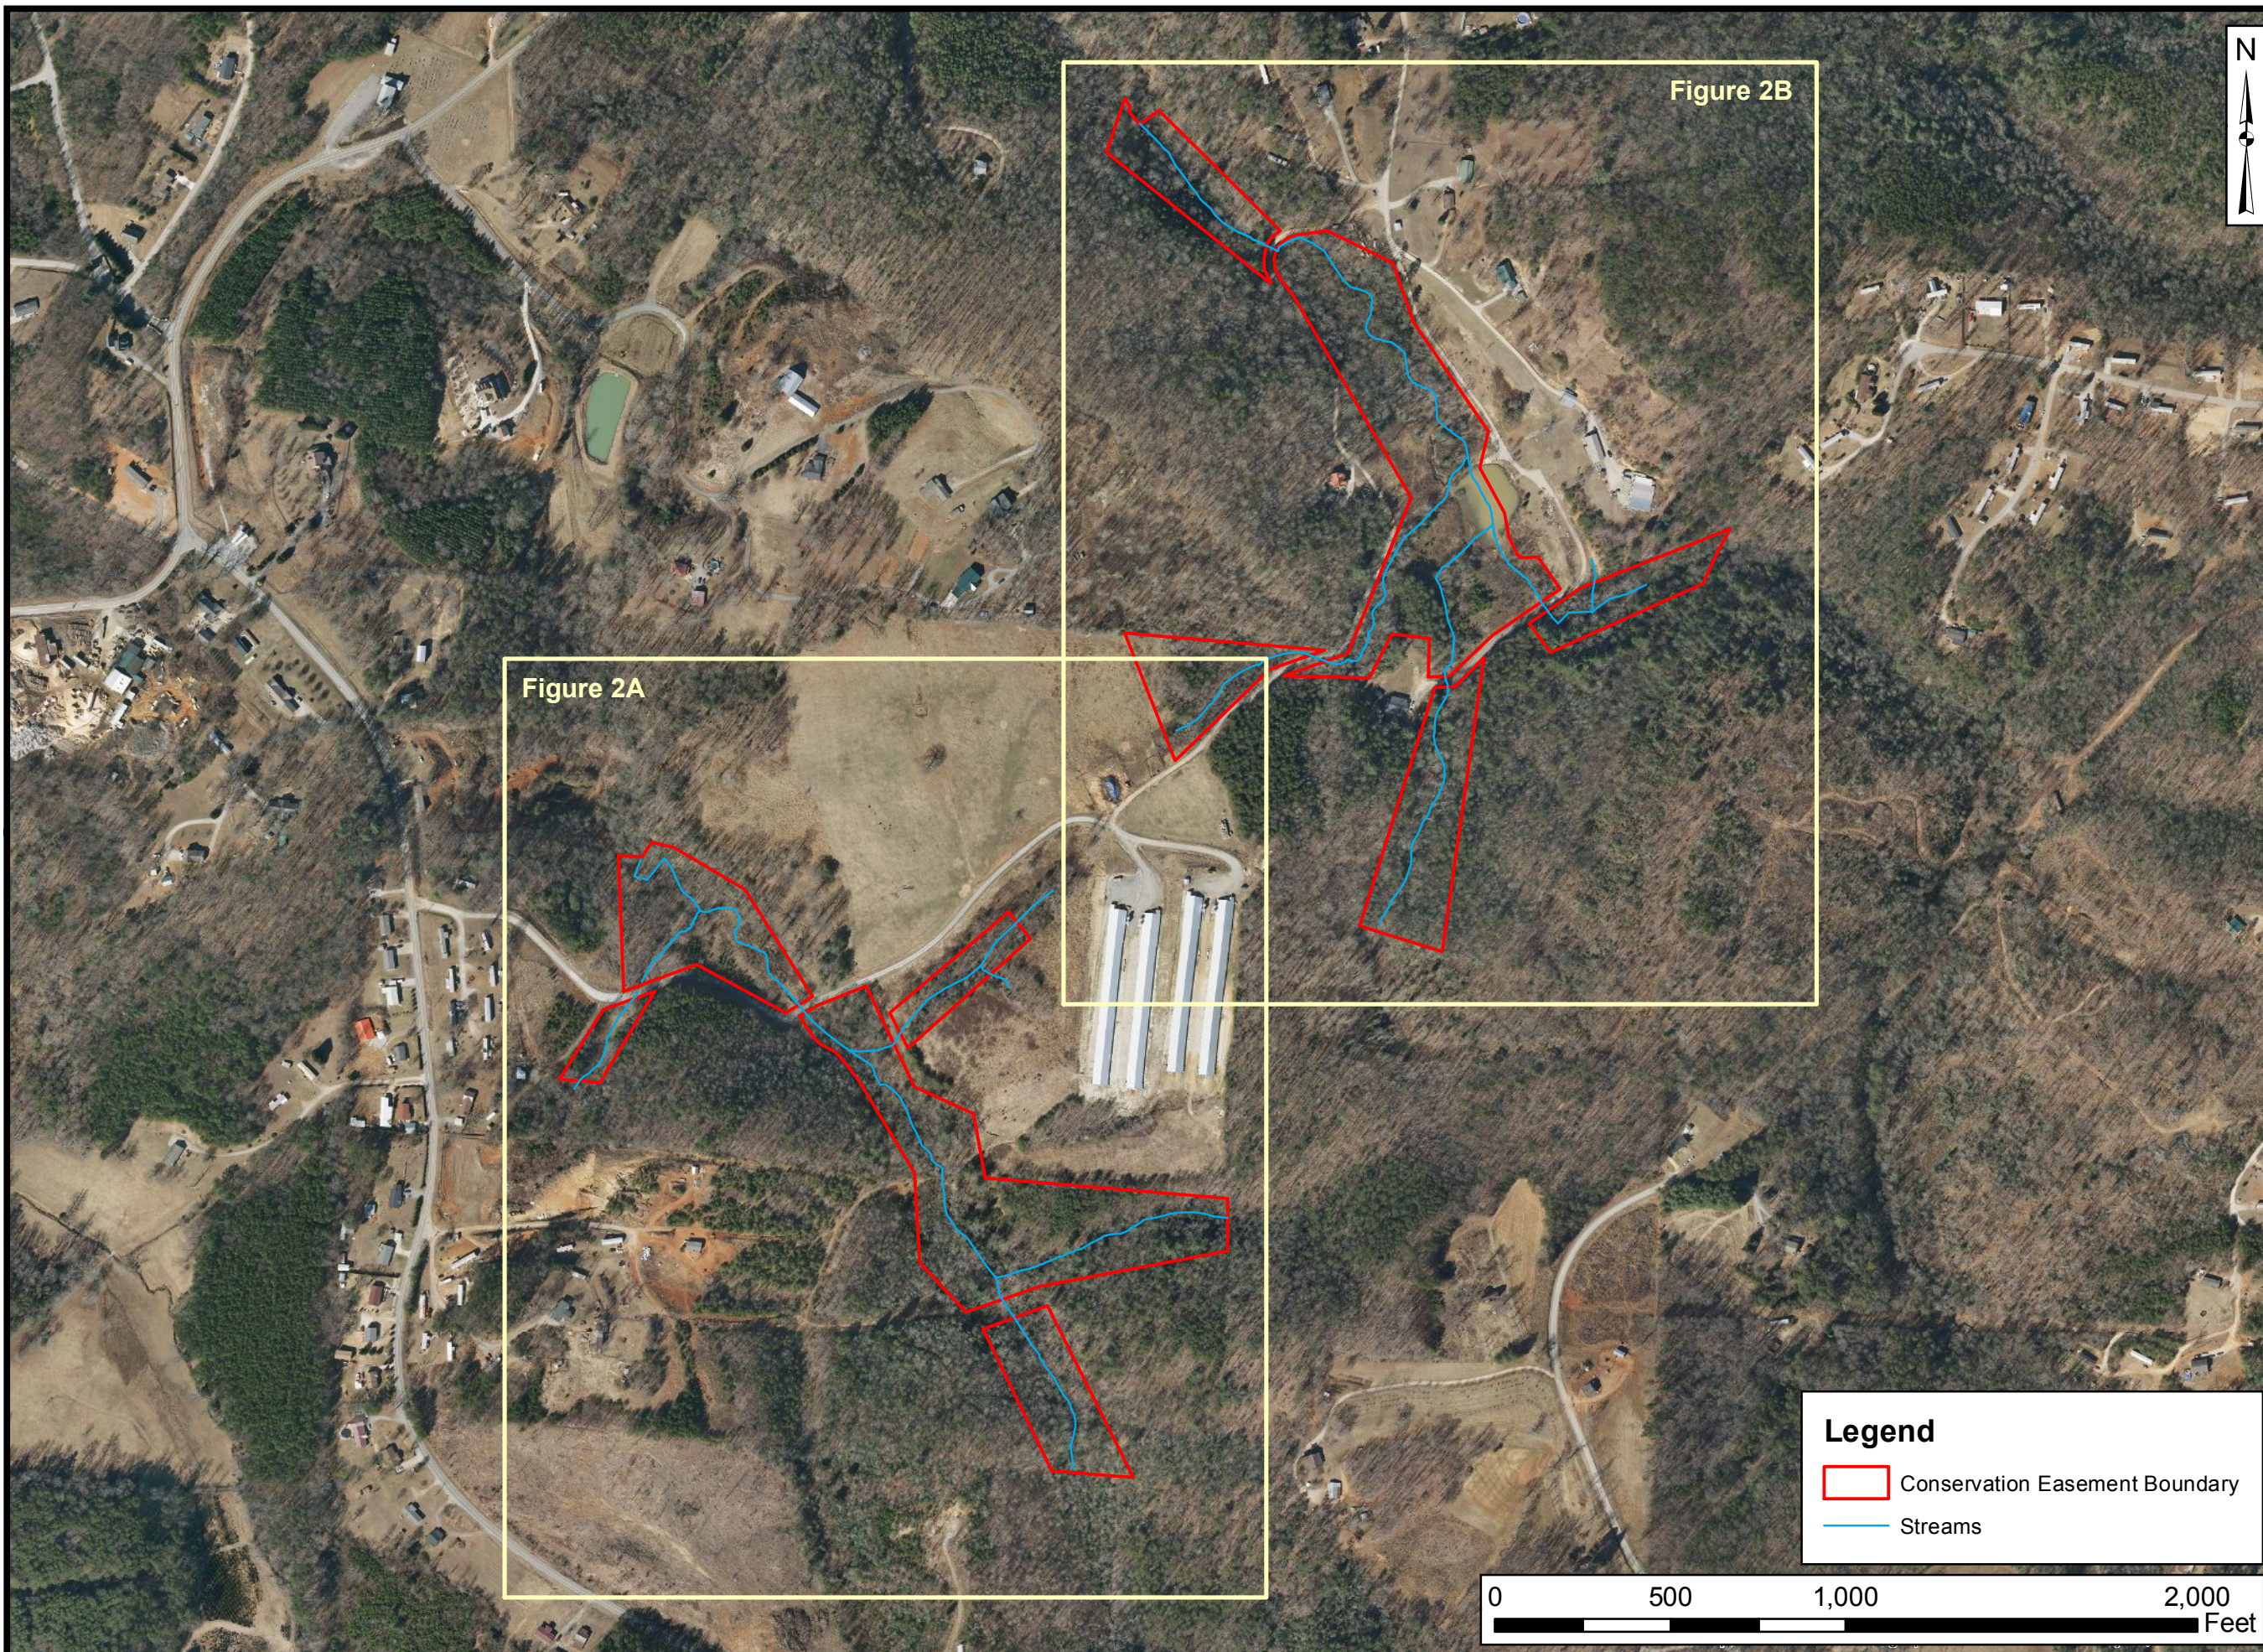

Prepared for:
**NC Department of
 Environmental
 Quality**
**Division of
 Mitigation
 Services**

Project:
**Neighbors Branch/
 Walton Crawley
 Branch Stream
 and Wetland
 Restoration Site**
**DMS Project
 # 92872**

McDowell County, NC



Title:
**Current Conditions
 Plan View**

Drawn by: KRJ

Date: NOV 2017

Scale: 1:5500

Project No.: 12-004.21


Legend
 Conservation Easement Boundary
 Streams

0 500 1,000 2,000
 Feet

FIGURE
2

Legend

- Conservation Easement Boundary
- Streams
- Structures
- Wetland Restoration - 0.52 ac
- Wetland Enhancement - 0.30 ac
- Wetland Preservation - 1.29 ac
- Stream Monitoring Reach
- Cross-Sections
- Groundwater Gauges
- ★ Photo Point Locations
- Crest Gauge
- CVS Plots Meeting Success Criteria During MY2 (2017)



Prepared for:
NC Department of Environmental Quality
Division of Mitigation Services

Project:
**Neighbors Branch/
 Walton Crawley
 Branch Stream
 and Wetland
 Restoration Site**

**DMS Project
 # 92872**

McDowell County, NC

Title:
**Current Conditions
 Plan View**



Drawn by: KRJ


Date: NOV 2017

Scale: 1:2400

Project No.: 12-004.21

FIGURE
2A

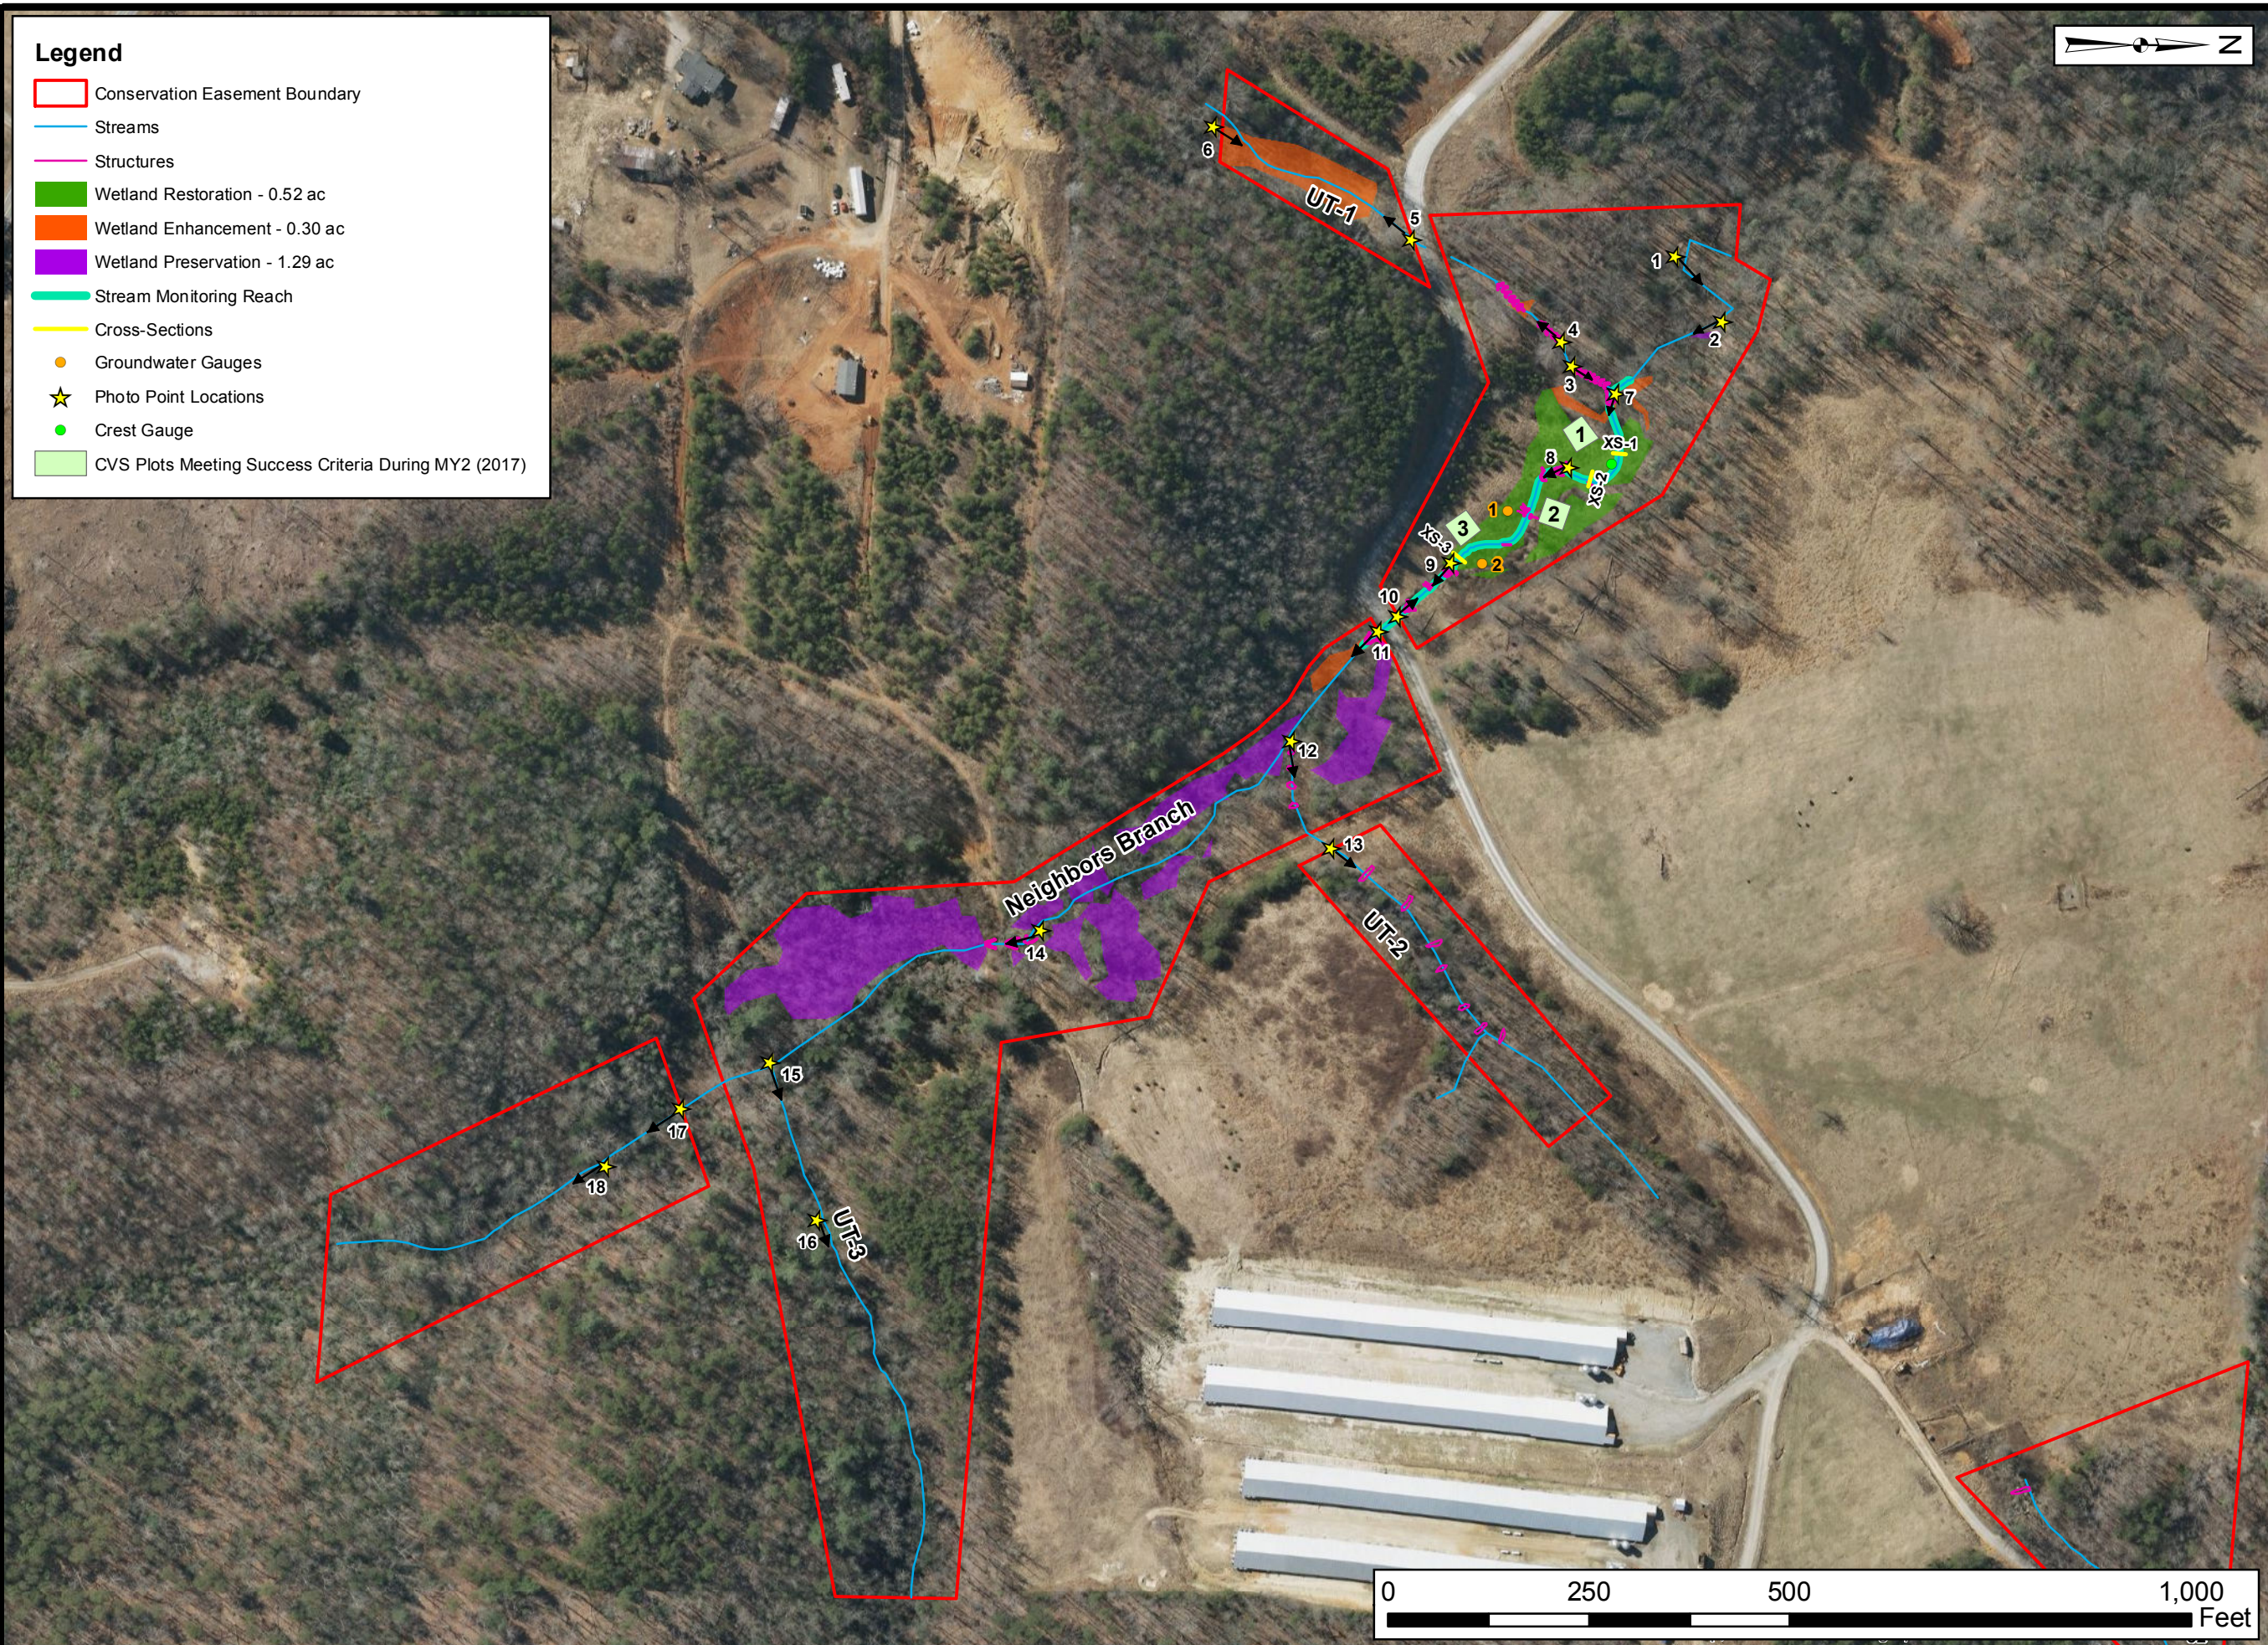

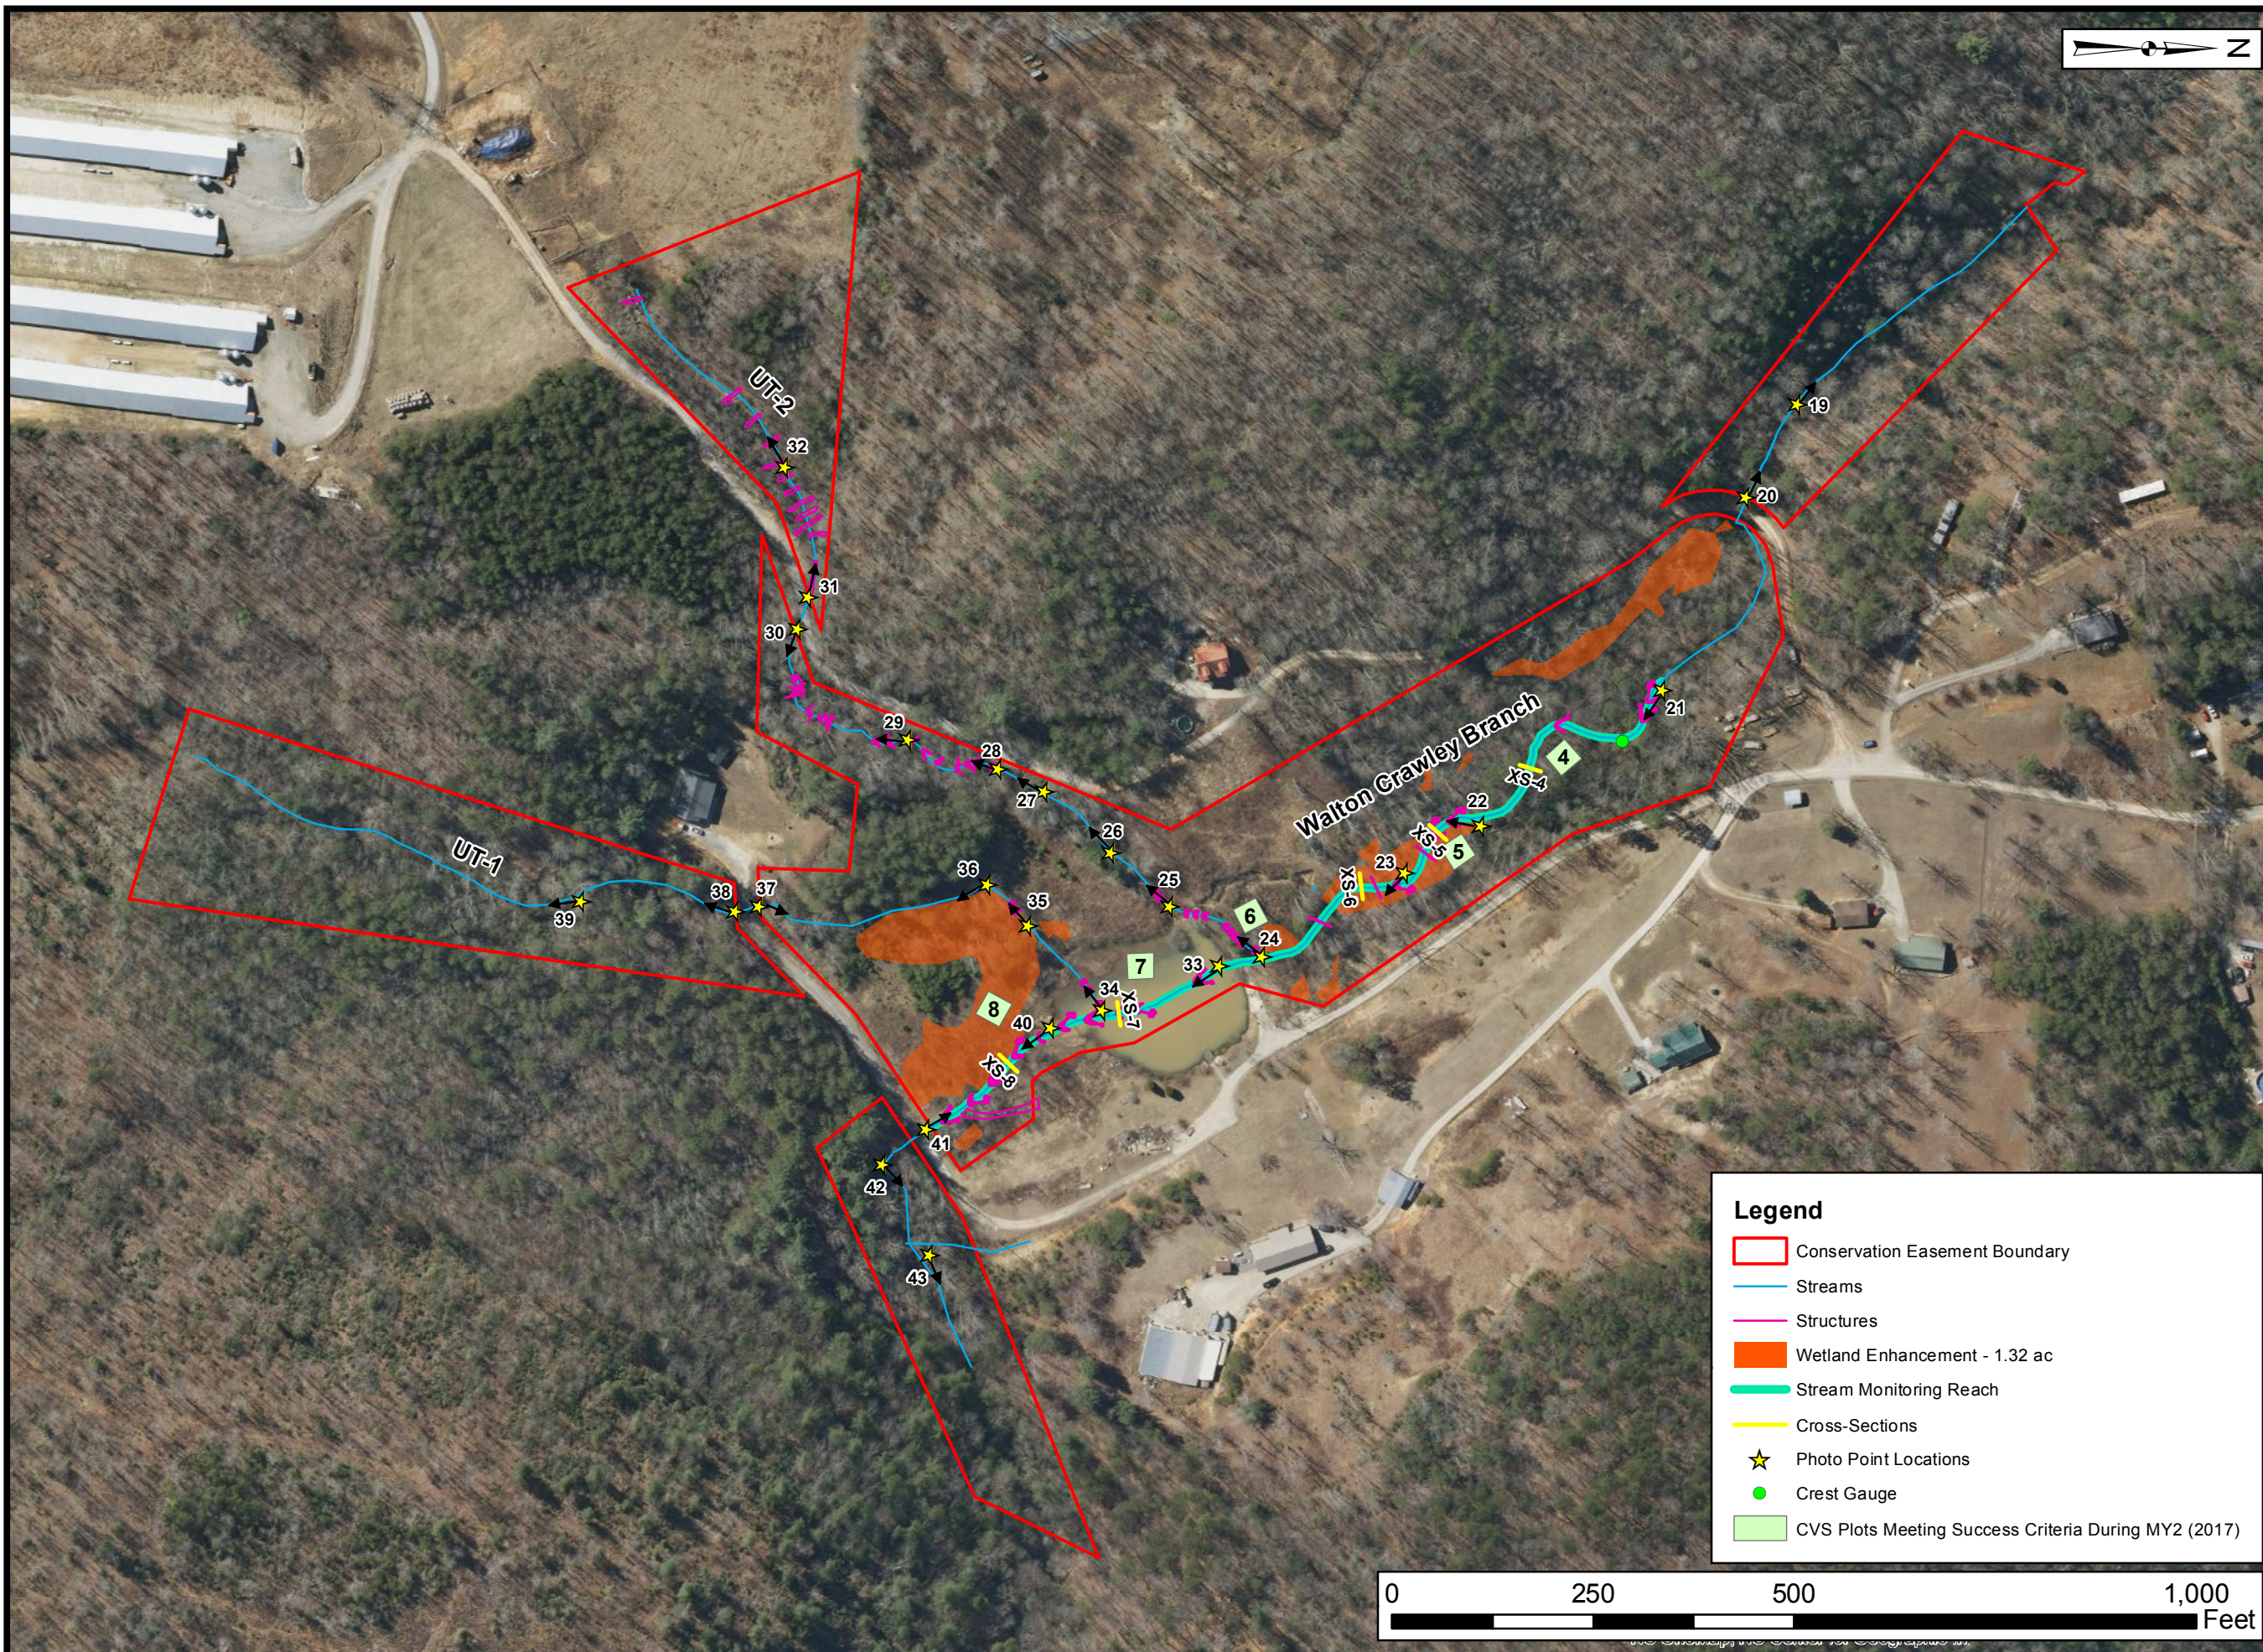

Prepared for:
NC Department of Environmental Quality
 Division of Mitigation Services

Project:
**Neighbors Branch/
 Walton Crawley
 Branch Stream
 and Wetland
 Restoration Site**

**DMS Project
 # 92872**
 McDowell County, NC

Title:
**Current Conditions
 Plan View**

Drawn by: KRJ

Date: NOV 2017


Scale: 1:2400

Project No.: 12-004.21

Legend

- Conservation Easement Boundary
- Streams
- Structures
- Wetland Enhancement - 1.32 ac
- Stream Monitoring Reach
- Cross-Sections
- ★ Photo Point Locations
- Crest Gauge
- CVS Plots Meeting Success Criteria During MY2 (2017)

FIGURE
2B

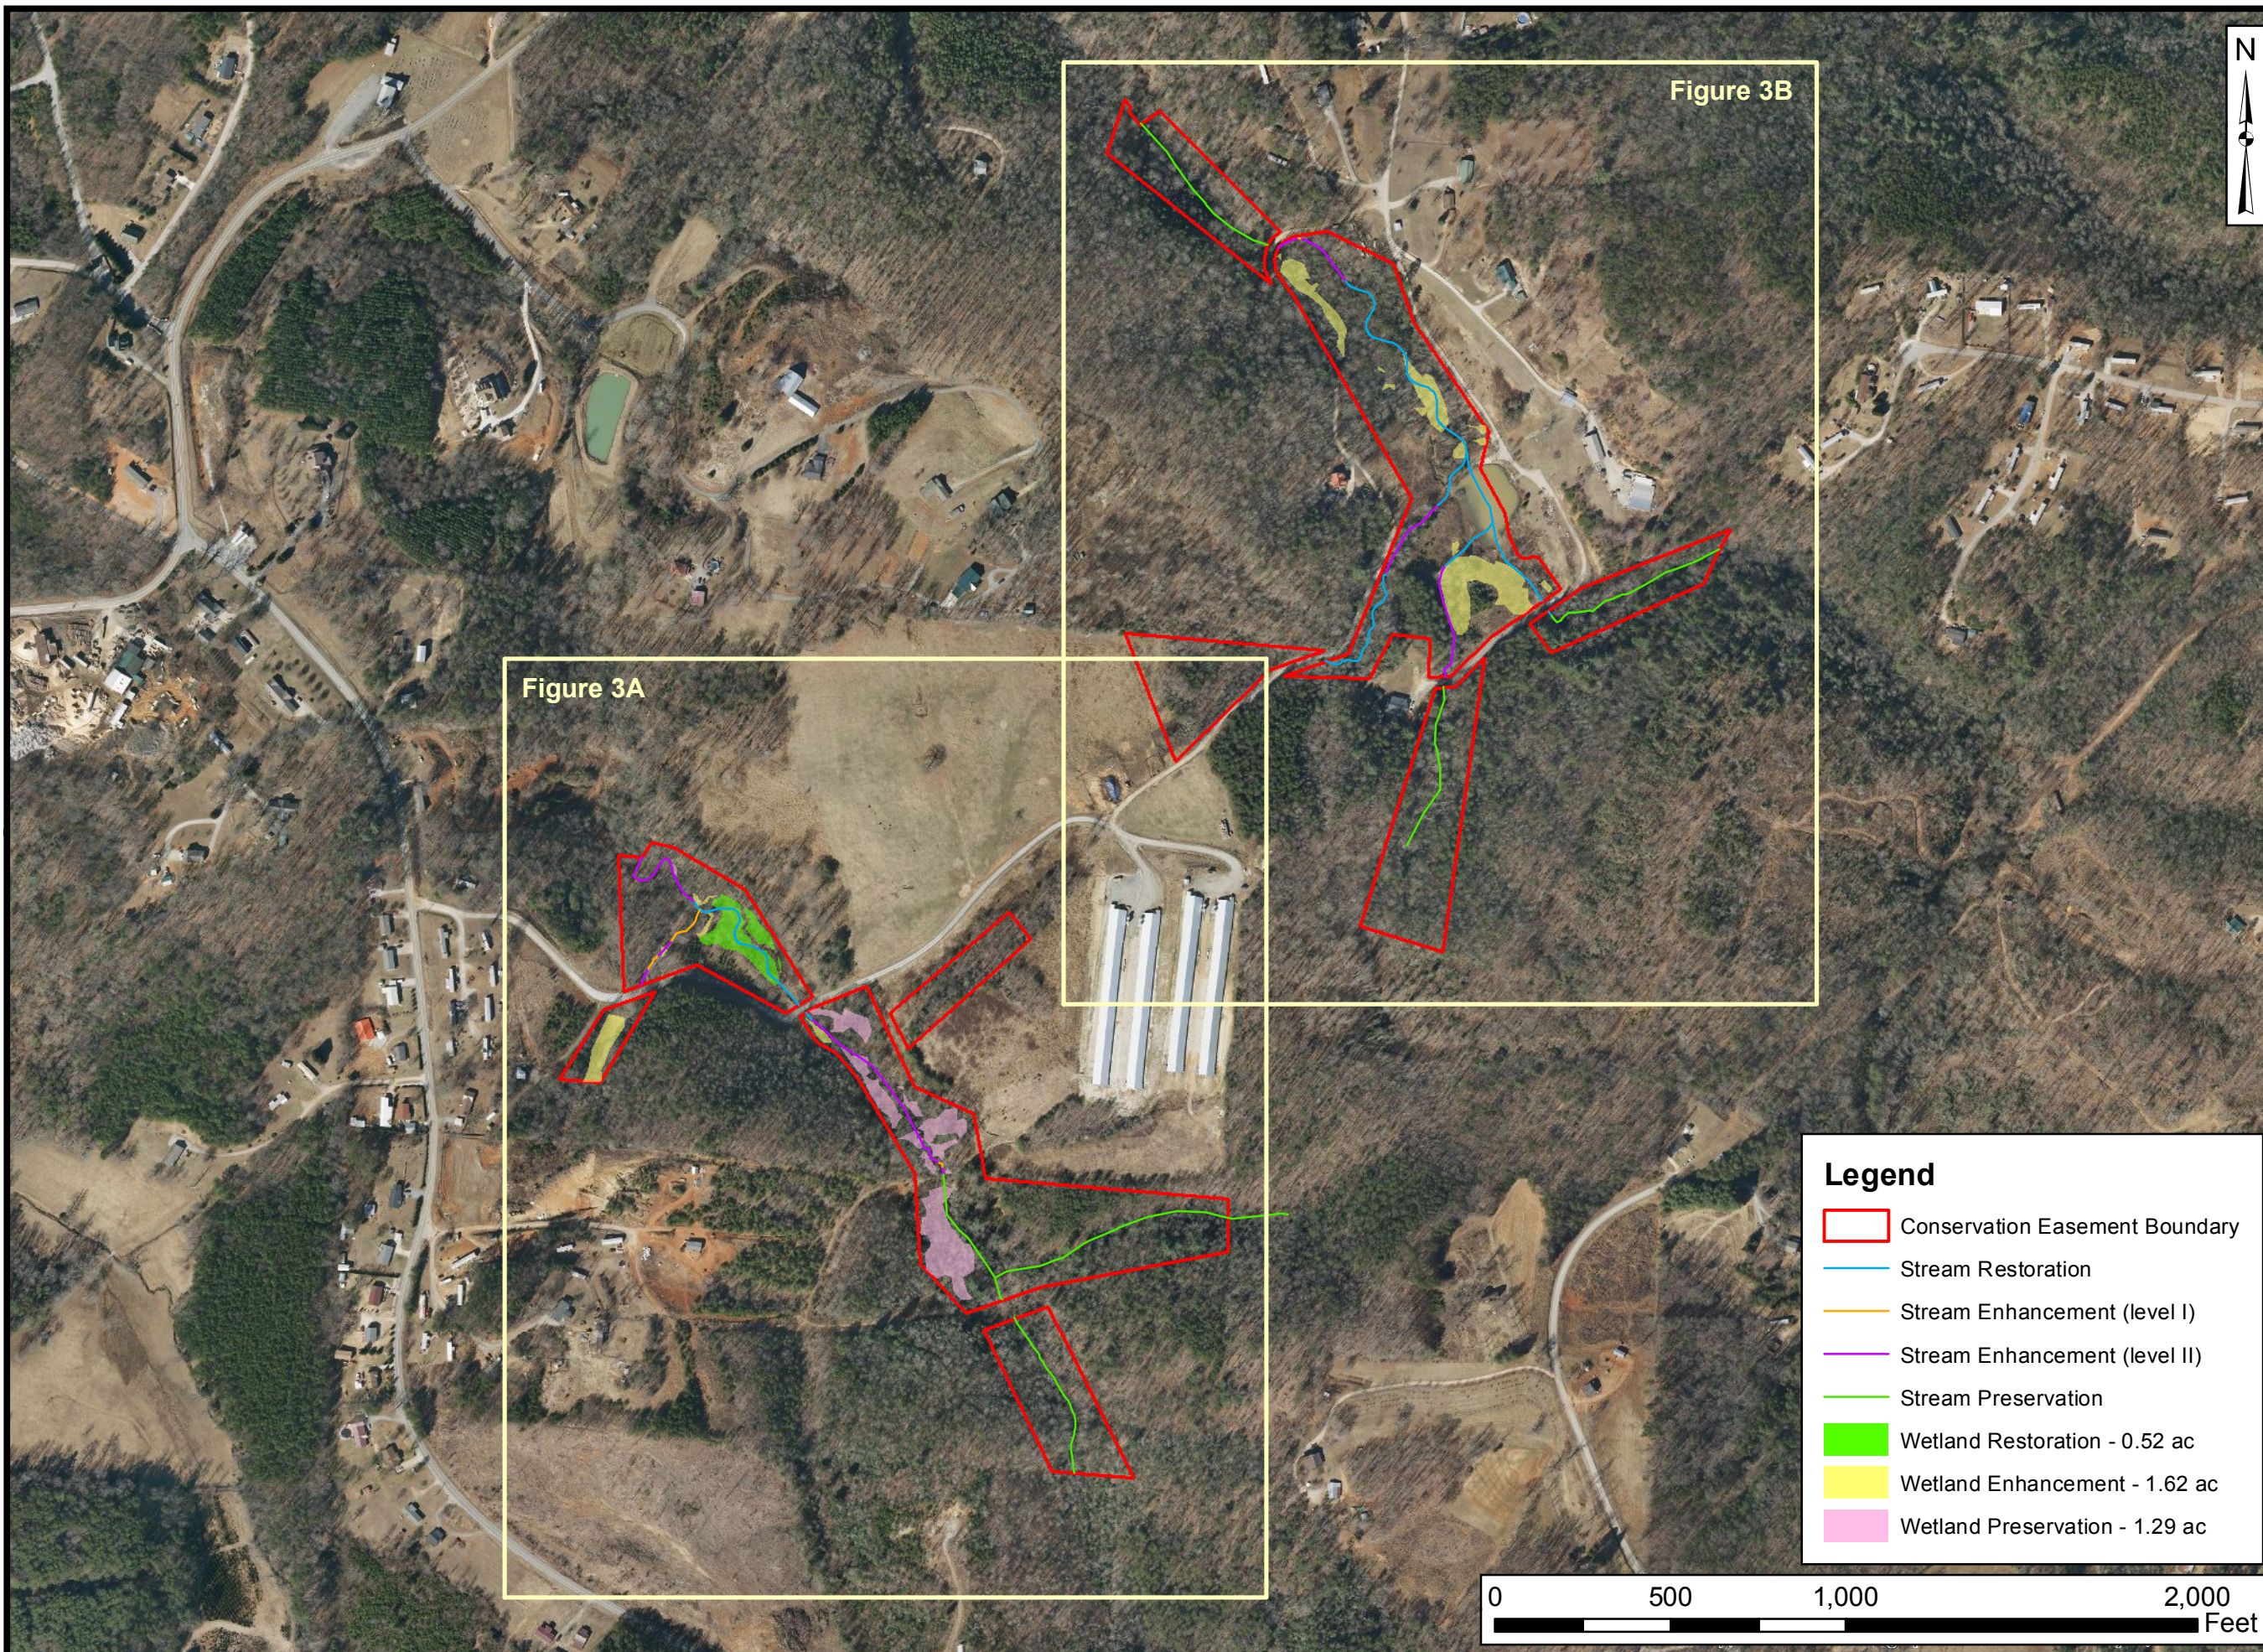

Prepared for:
**NC Department of
 Environmental
 Quality**
**Division of
 Mitigation
 Services**

Project:
**Neighbors Branch/
 Walton Crawley
 Branch Stream
 and Wetland
 Restoration Site**
**DMS Project
 # 92872**

McDowell County, NC

Title:
Project Assets









Drawn by: **KRJ**

Date: **JUL 2016**

Scale: **1:5500**

Project No.: **12-004.21**

Legend

	Conservation Easement Boundary
	Stream Restoration
	Stream Enhancement (level I)
	Stream Enhancement (level II)
	Stream Preservation
	Wetland Restoration - 0.52 ac
	Wetland Enhancement - 1.62 ac
	Wetland Preservation - 1.29 ac





FIGURE
3

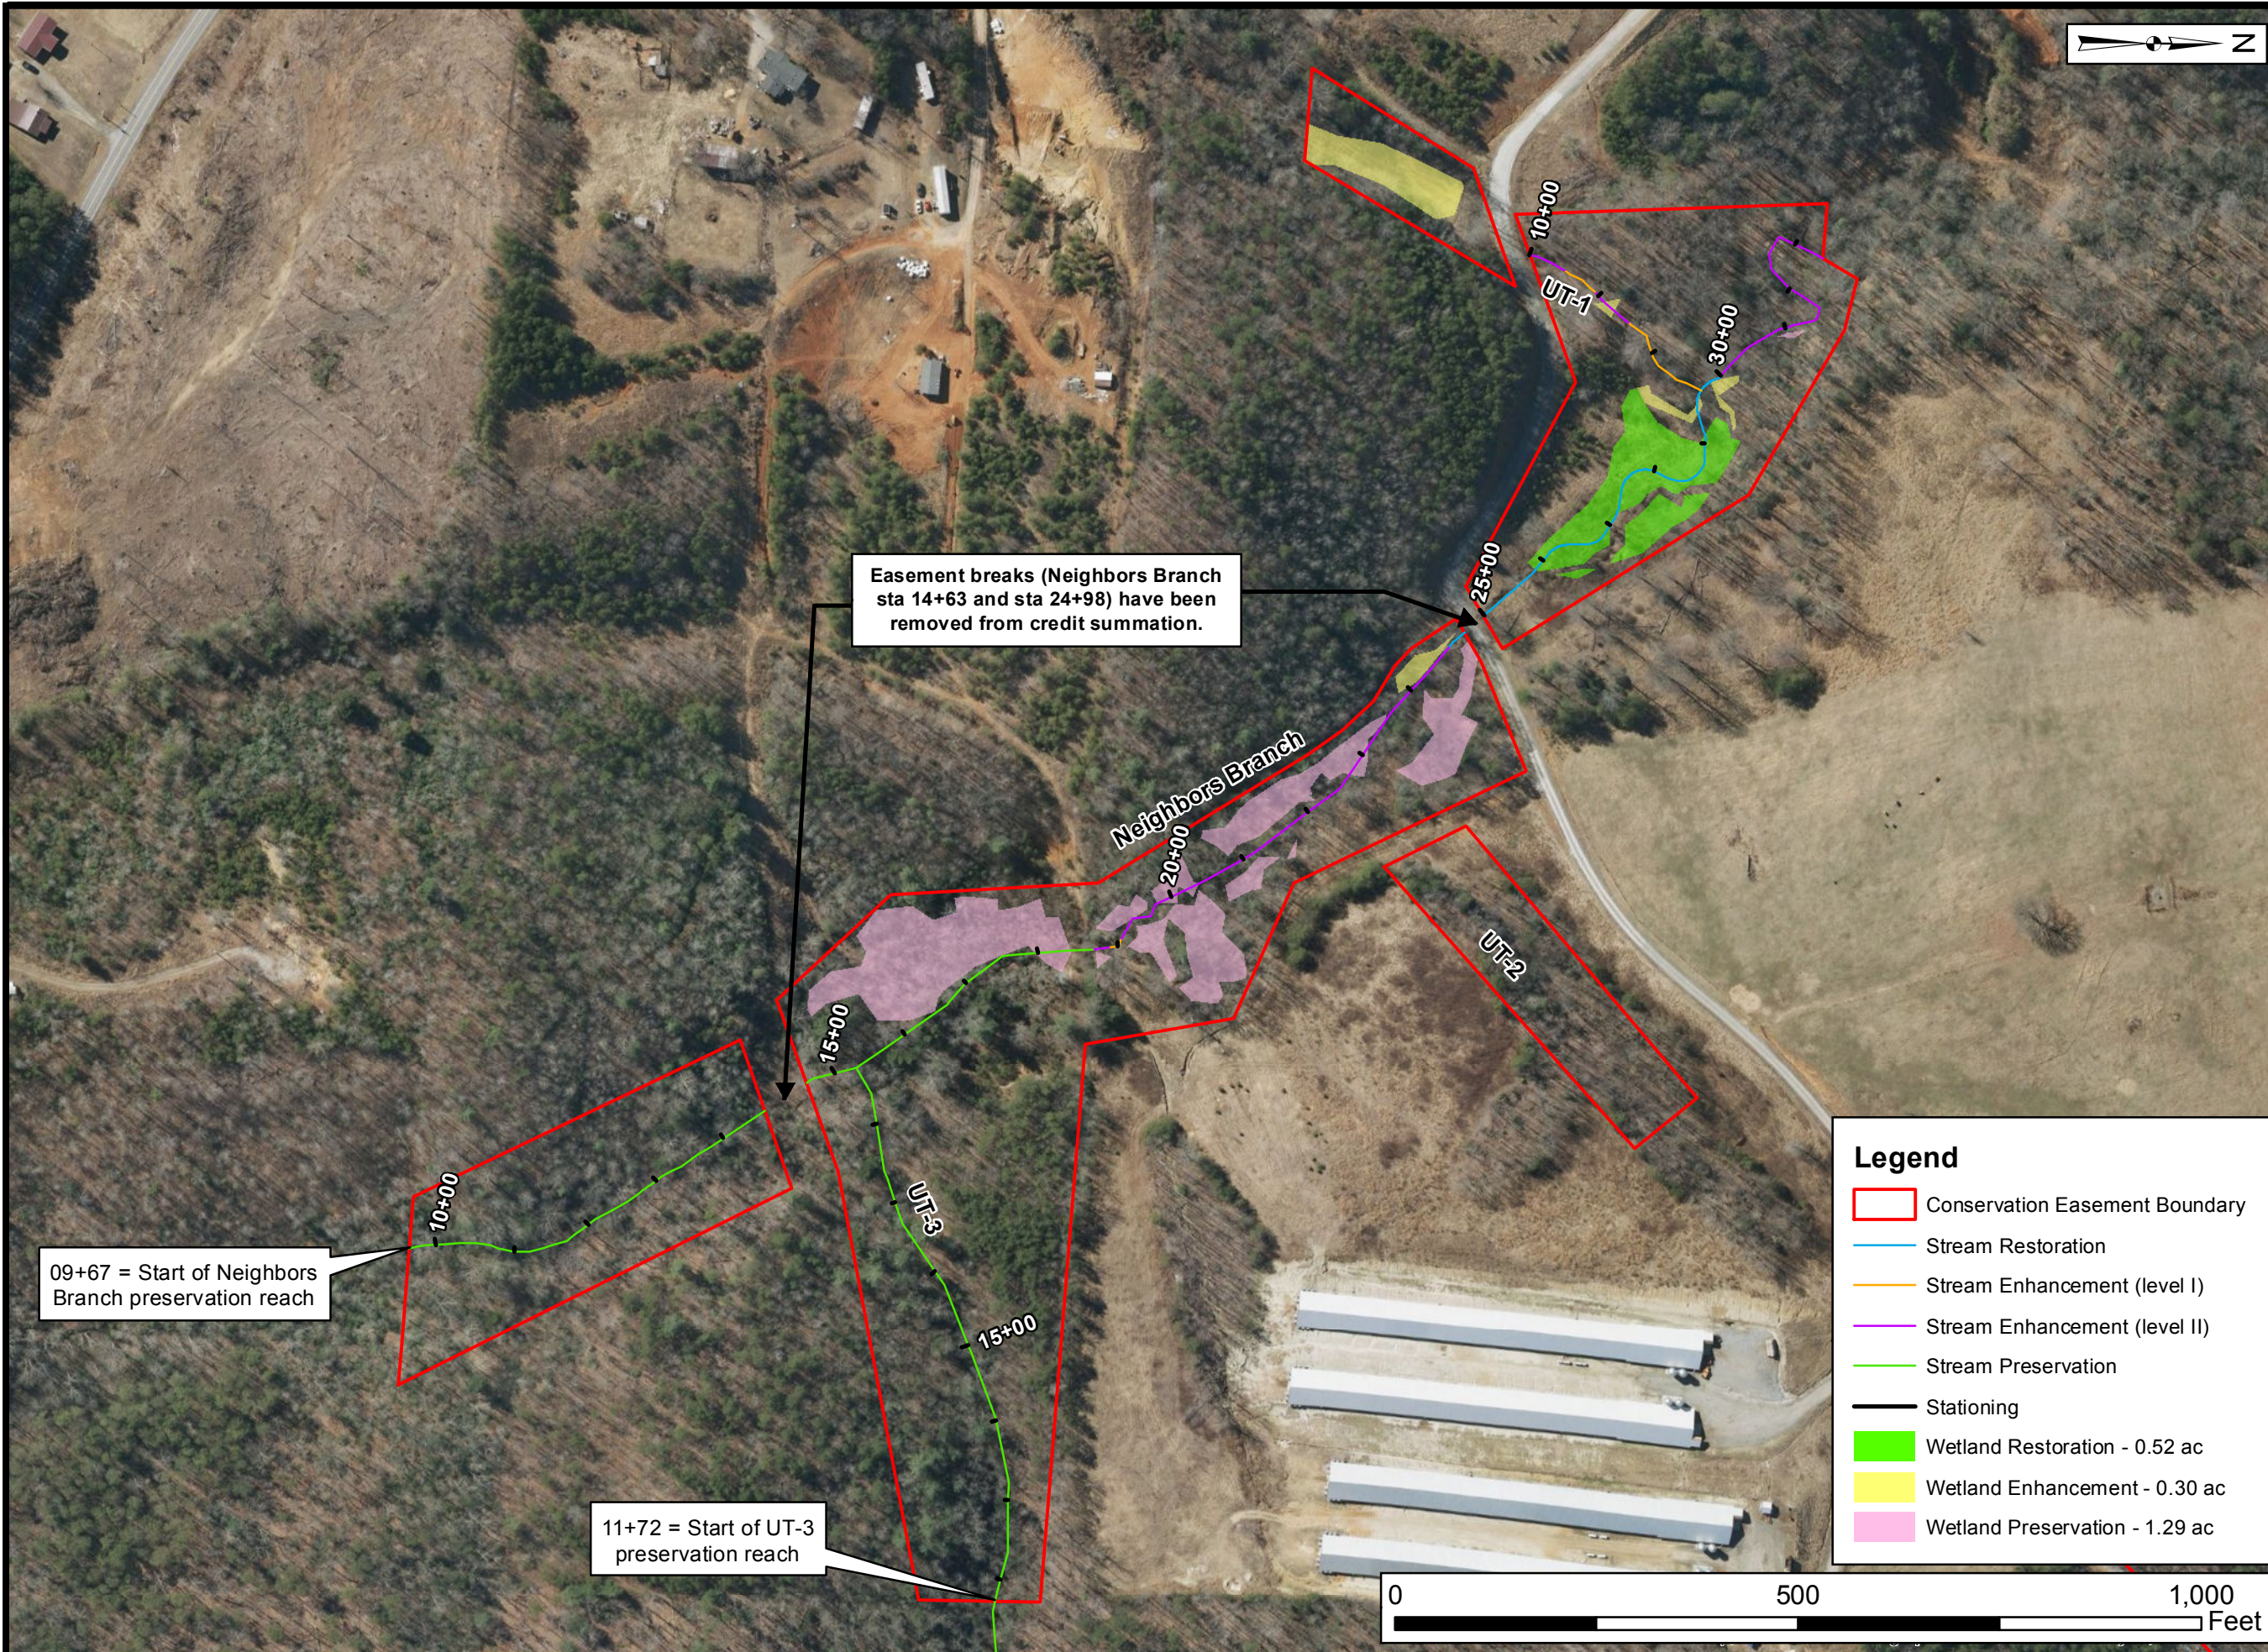

Prepared for:
NC Department of Environmental Quality
 Division of Mitigation Services

Project:
Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site
DMS Project # 92872

McDowell County, NC

Title:
Project Assets

Drawn by: KRJ


Date: JUL 2016

Scale: 1:2400

Project No.: 12-004.21

- Legend**
- Conservation Easement Boundary
 - Stream Restoration
 - Stream Enhancement (level I)
 - Stream Enhancement (level II)
 - Stream Preservation
 - Stationing
 - Wetland Restoration - 0.52 ac
 - Wetland Enhancement - 0.30 ac
 - Wetland Preservation - 1.29 ac

FIGURE 3A

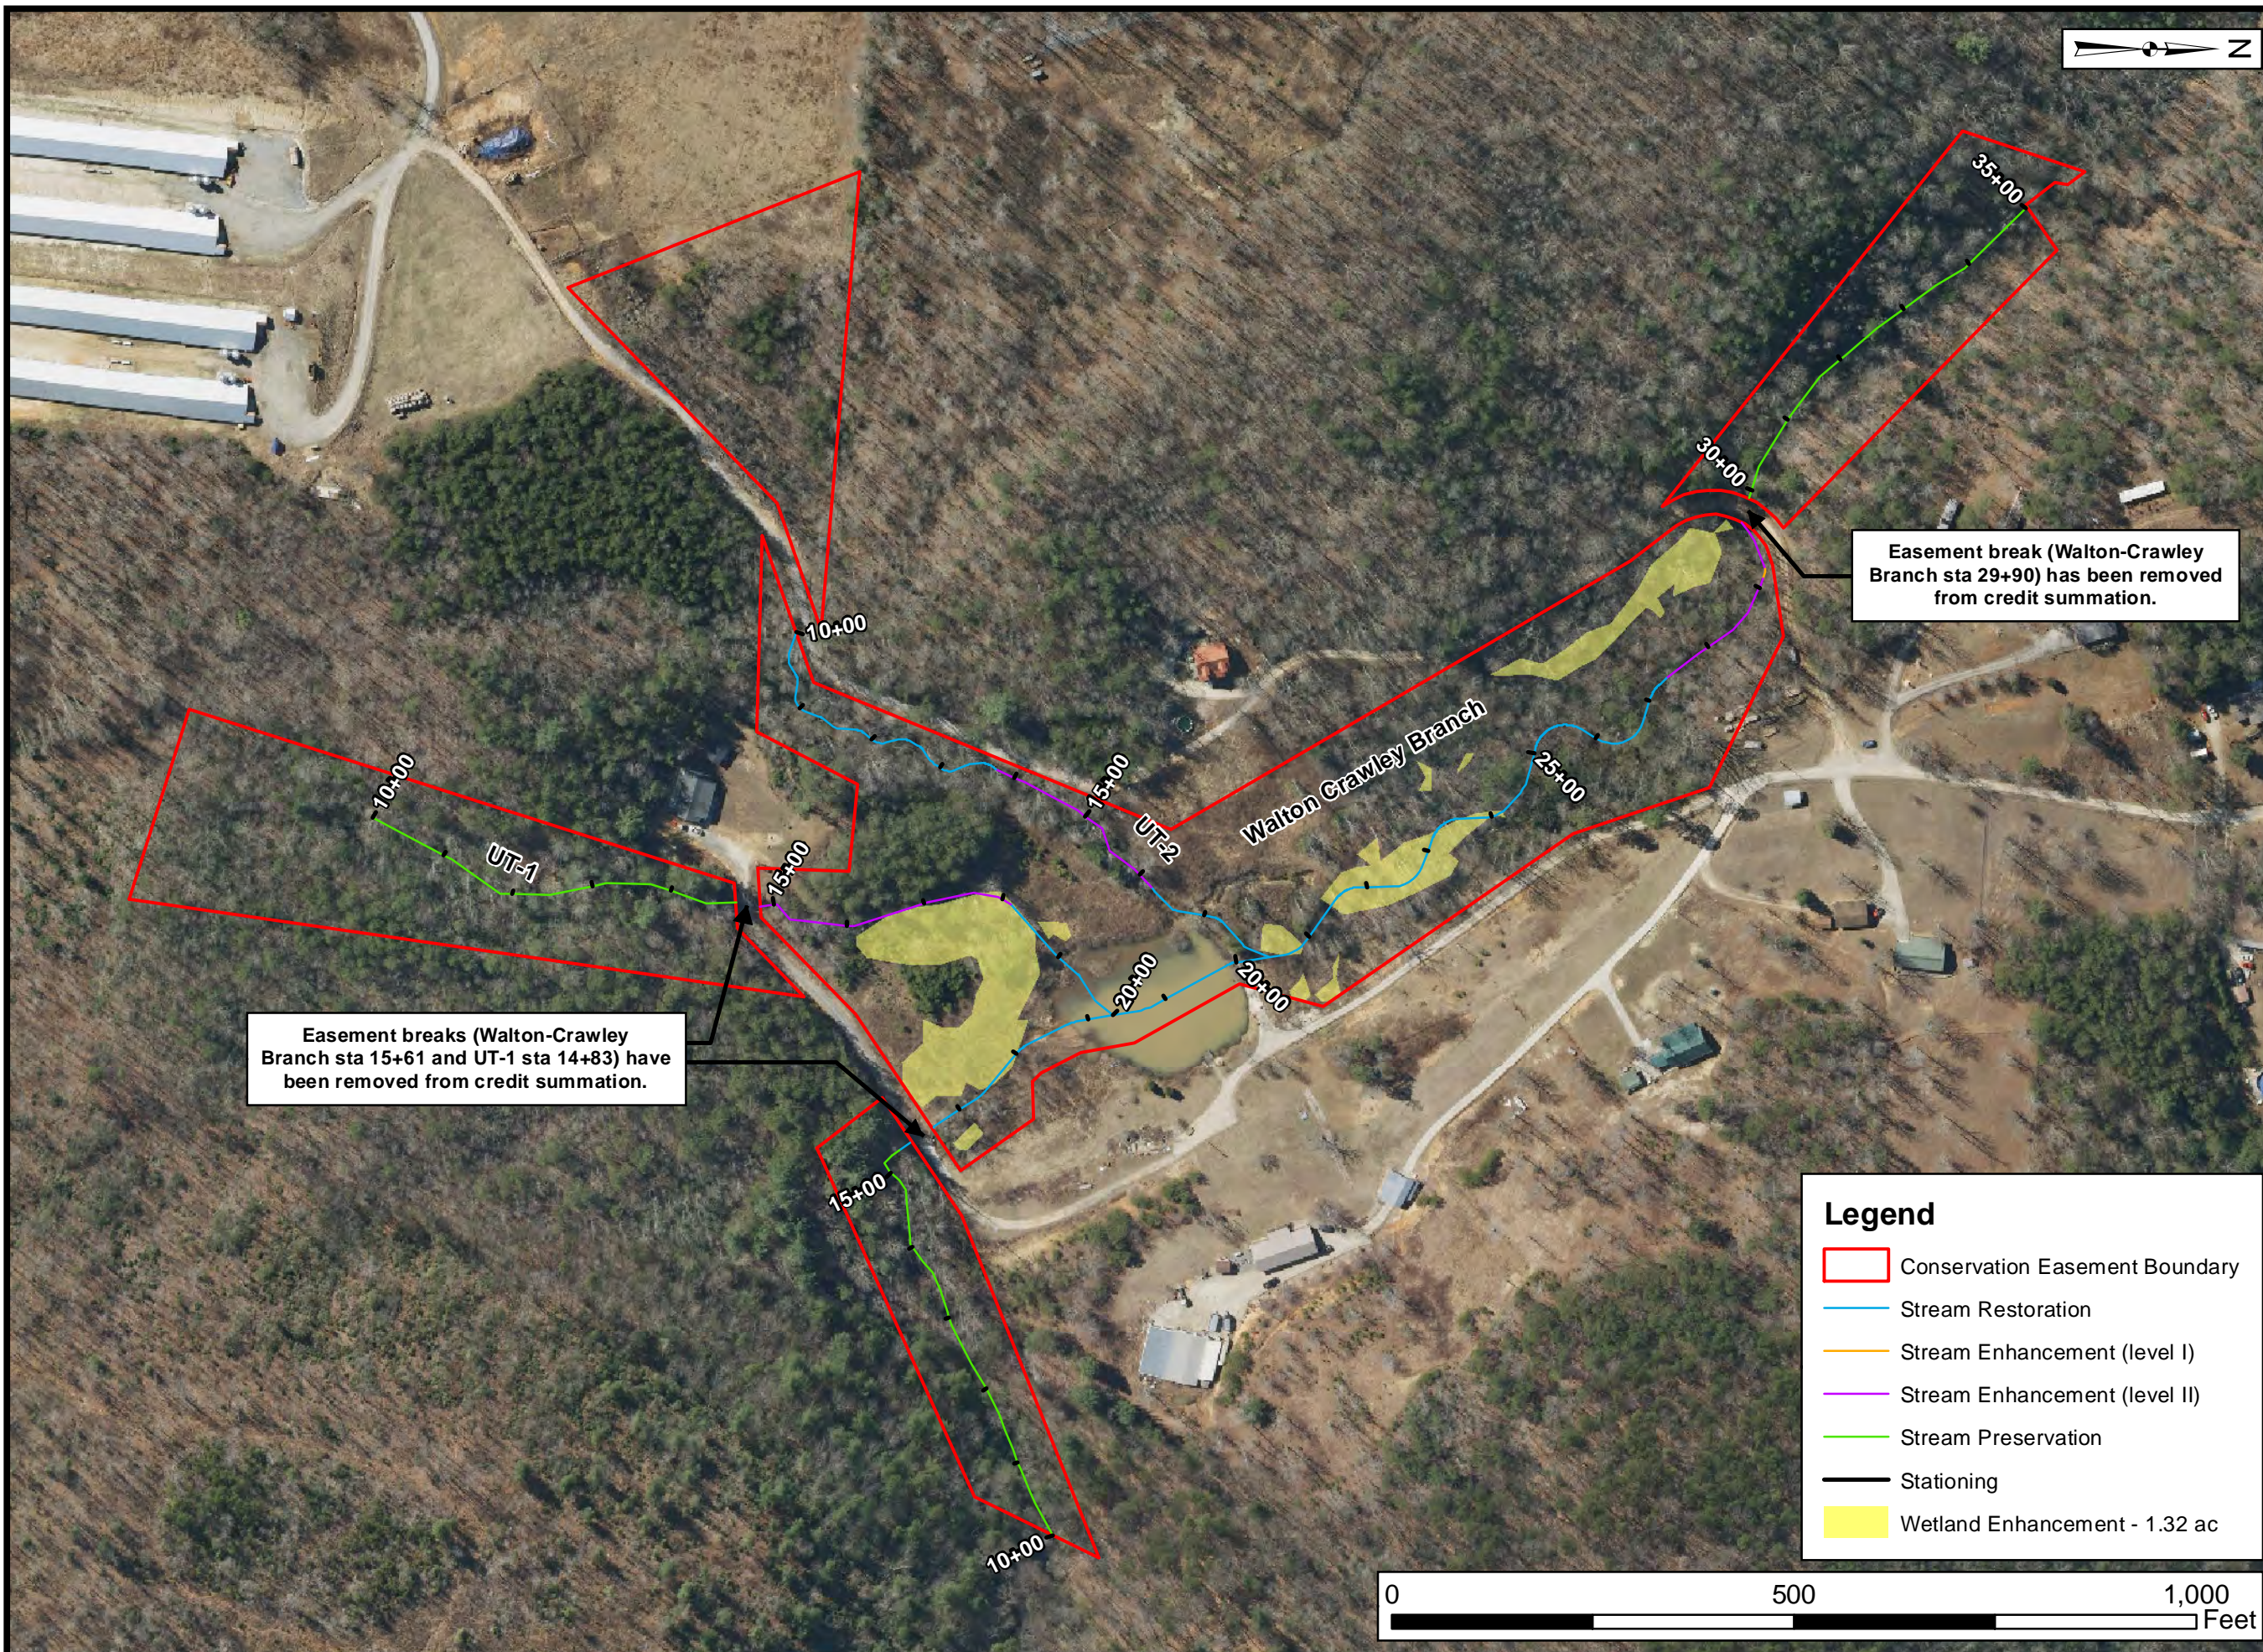

Prepared for:
NC Department of Environmental Quality
 Division of Mitigation Services

Project:
**Neighbors Branch/
 Walton Crawley
 Branch Stream
 and Wetland
 Restoration Site**

**DMS Project
 # 92872**
 McDowell County, NC

Title:
Project Assets

Drawn by: KRJ
 Date: JUL 2016
 Scale: 1:2400
 Project No.: 12-004.21

Legend

- Conservation Easement Boundary
- Stream Restoration
- Stream Enhancement (level I)
- Stream Enhancement (level II)
- Stream Preservation
- Stationing
- Wetland Enhancement - 1.32 ac

FIGURE
3B

Table 5A
 Reach ID
 Assessed Length

Visual Stream Morphology Stability Assessment
 Walton Crawley Branch
 1450

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			100%
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	26	26			100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6)	25	25			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	25	25			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	25	25			100%			
2. Thalweg centering at downstream of meander (Glide)		25	25			100%				
Totals					0	0	100%	0	0	100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%			100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%			100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%			100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	24	24			100%			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	24	24			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	24	24			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	24	24			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	24	24			100%			

Table 5B
 Reach ID
 Assessed Length

Visual Stream Morphology Stability Assessment
 UT1 to Walton Crawley Branch
 518

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	8	8			100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6)	7	7			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	7	7			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	7	7			100%			
2. Thalweg centering at downstream of meander (Glide)		7	7			100%				
Totals					0	0	100%	0	0	100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%			100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%			100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%			100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	10	10			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	10	10			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	10	10			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	10	10			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	10	10			100%			

Table 5C
 Reach ID
 Assessed Length

Visual Stream Morphology Stability Assessment
 UT2 to Walton Crawley Branch
 802

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended		Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)				0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting				0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	12	12				100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6)	11	11				100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	11	11				100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	11	11				100%			
2. Thalweg centering at downstream of meander (Glide)		11	11				100%				
Totals						0	0	100%	0	0	100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion				0	0	100%			100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.				0	0	100%			100%
	3. Mass Wasting	Bank slumping, calving, or collapse				0	0	100%			100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	12	12				100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	12	12				100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	12	12				100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	12	12				100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	12	12				100%			

Table 5D
 Reach ID
 Assessed Length

Visual Stream Morphology Stability Assessment
 Neighbors Branch
 1470

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	22	22			100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6)	21	21			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	21	21			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	21	21			100%			
2. Thalweg centering at downstream of meander (Glide)		21	21			100%				
Totals					0	0	100%	0	0	100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%			100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%			100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%			100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	16	16			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	16	16			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	16	16			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	16	16			100%			
	4. Habitat	Pool forming structures maintaining - Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	16	16			100%			

Table 5E
 Reach ID
 Assessed Length

Visual Stream Morphology Stability Assessment
 UT1 to Neighbors Branch
 281

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			100%
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	20	20			100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6)	19	19			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	19	19			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	19	19			100%			
2. Thalweg centering at downstream of meander (Glide)		19	19			100%				
Totals					0	0	100%	0	0	100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%			100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%			100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%			100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	20	20			100%			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	20	20			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	20	20			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	20	20			100%			
	4. Habitat	Pool forming structures maintaining - Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	20	20			100%			

Table 6

Vegetation Condition Assessment

Neighbors Branch/Walton Crawley Branch Mitigation Project

Planted Acreage¹

11.78

Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	None	0.1 acres	none	0	0.00	0.0%
2. Low Stem Density Areas	None	0.1 acres	none	0	0.00	0.0%
2B. Low Planted Stem Density Areas	None	0.1 acres	none	0	0.00	0.0%
Total				0	0.00	0.0%
3. Areas of Poor Growth Rates or Vigor	None	0.25 acres	N/A	0	0.00	0.0%
Cumulative Total				0	0.00	0.0%

Easement Acreage²

33.4

Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage
4. Invasive Areas of Concern ⁴	None	1000 SF	none	0	0.00	0.0%
5. Easement Encroachment Areas ³	None	none	none	0	0.00	0.0%

¹ = Enter the planted acreage within the easement. This number is calculated as the easement acreage minus any existing mature tree stands that were not subject to supplemental planting of the understory, the channel acreage, crossings or any other elements not directly planted as part of the project effort.

² = The acreage within the easement boundaries.

³ = Encroachment may occur within or outside of planted areas and will therefore be calculated against the overall easement acreage. In the event a polygon is cataloged into items 1, 2 or 3 in the table and is the result of encroachment, the associated acreage should be tallied in the relevant item (i.e., item 1,2 or 3) as well as a parallel tally in item 5.

⁴ = Invasives may occur in or out of planted areas, but still within the easement and will therefore be calculated against the overall easement acreage. Invasives of concern/interest are listed below. The list of high concern species are those with the potential to directly outcompete native, young, woody stems in the short-term (e.g. monitoring period or shortly thereafter) or affect the community structure for existing, more established tree/shrub stands over timeframes that are slightly longer (e.g. 1-2 decades). The low/moderate concern group are those species that generally do not have this capacity over the timeframes discussed and therefore are not expected to be mapped with regularity, but can be mapped, if in the judgement of the observer their coverage, density or distribution is suppressing the viability, density, or growth of planted woody stems. Decisions as to whether remediation will be needed are based on the integration of risk factors by DMS such as species present, their coverage, distribution relative to native biomass, and the practicality of treatment. For example, even modest amounts of Kudzu or Japanese Knotweed early in the projects history will warrant control, but potentially large coverages of Microstegium in the herb layer will not likely trigger control because of the limited capacities to impact tree/shrub layers within the timeframes discussed and the potential impacts of treating extensive amounts of ground cover. Those species with the "watch list" designator in gray shade are of interest as well, but have yet to be observed across the state with any frequency. Those in *red italics* are of particular interest given their extreme risk/threat level for mapping as points where isolated specimens are found, particularly early in a projects monitoring history. However, areas of discreet, dense patches will of course be mapped as polygons. The symbology scheme below was one that was found to be helpful for symbolizing invasives polygons, particularly for situations where the condition for an area is somewhere between isolated specimens and dense, discreet patches. In any case, the point or polygon/area feature can be symbolized to describe things like high or low concern and species can be listed as a map inset, in legend items if the number of species are limited or in the narrative section of the executive summary.

**Neighbors Branch/Walton Crawley Branch
Fixed Station Photographs
August 2017**



Photo Point 1 –
Neighbors Branch



Photo Point 2 –
Neighbors Branch



Photo Point 3 – UT-1
to Neighbors Branch



Photo Point 4 – UT-1
to Neighbors Branch



Photo Point 5 – UT-1
to Neighbors Branch



Photo Point 6 – UT-1
to Neighbors Branch

**Neighbors Branch/Walton Crawley Branch
Fixed Station Photographs
August 2017
(continued)**



Photo Point 7 –
Neighbors Branch

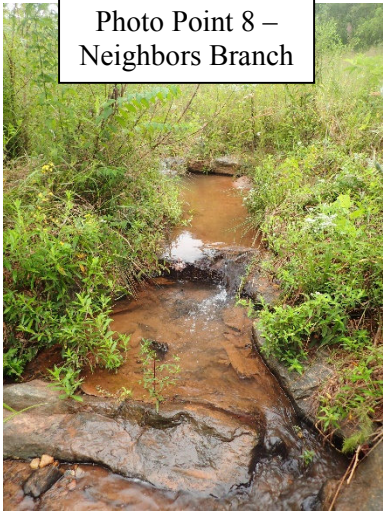


Photo Point 8 –
Neighbors Branch



Photo Point 9 –
Neighbors Branch



Photo Point 10 –
Neighbors Branch

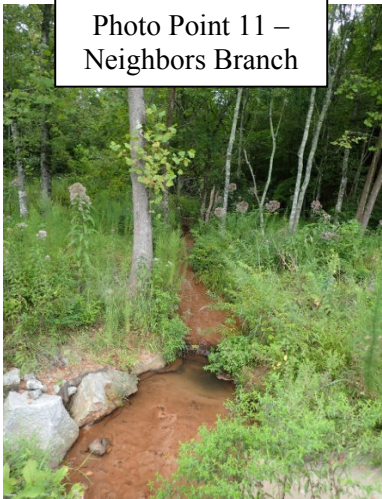


Photo Point 11 –
Neighbors Branch

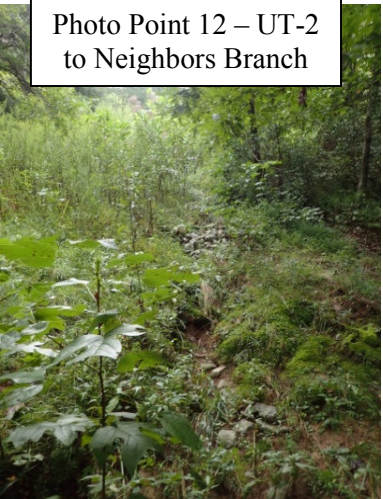


Photo Point 12 – UT-2
to Neighbors Branch

**Neighbors Branch/Walton Crawley Branch
Fixed Station Photographs
August 2017
(continued)**



Photo Point 13 – UT-2
to Neighbors Branch

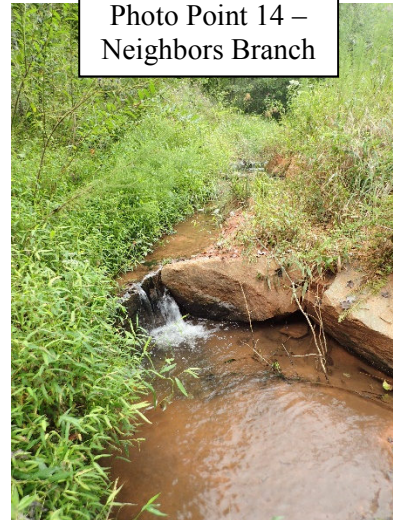


Photo Point 14 –
Neighbors Branch



Photo Point 15 – UT-3
to Neighbors Branch



Photo Point 16 – UT-3
to Neighbors Branch



Photo Point 17 –
Neighbors Branch



Photo Point 18 –
Neighbors Branch

**Neighbors Branch/Walton Crawley Branch
Fixed Station Photographs
August 2017
(continued)**

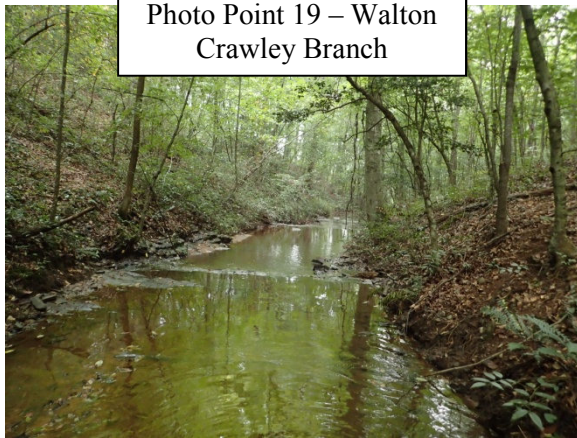


Photo Point 19 – Walton
Crawley Branch

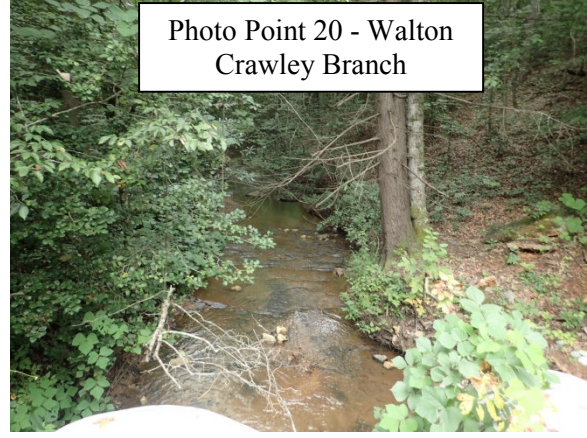


Photo Point 20 - Walton
Crawley Branch

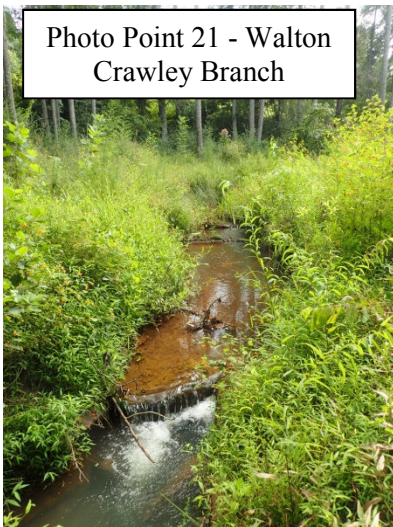


Photo Point 21 - Walton
Crawley Branch

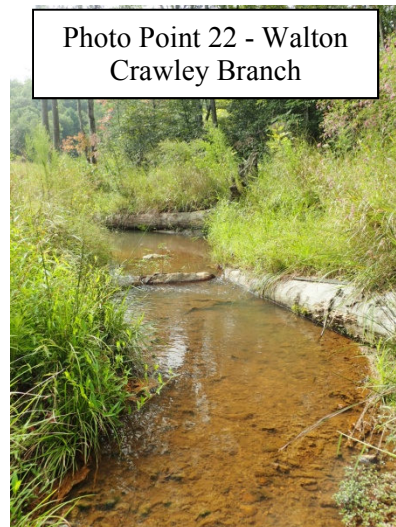


Photo Point 22 - Walton
Crawley Branch

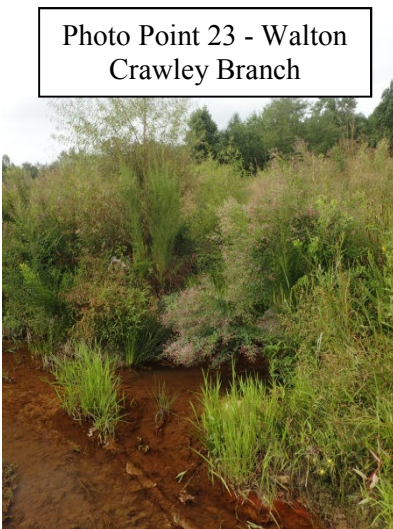


Photo Point 23 - Walton
Crawley Branch

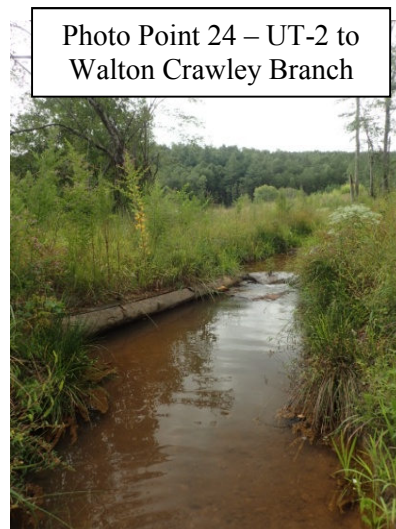


Photo Point 24 – UT-2 to
Walton Crawley Branch

**Neighbors Branch/Walton Crawley Branch
Fixed Station Photographs
August 2017
(continued)**

Photo Point 25 – UT-2 to
Walton Crawley Branch

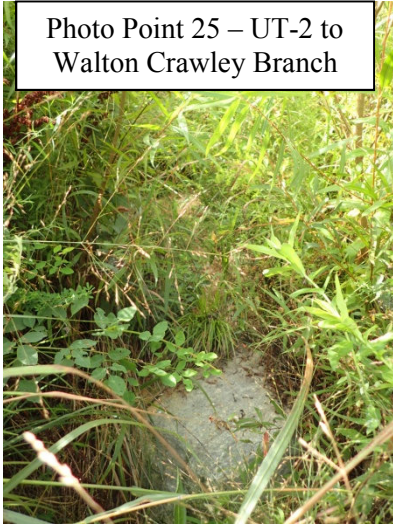


Photo Point 26 – UT-2 to
Walton Crawley Branch

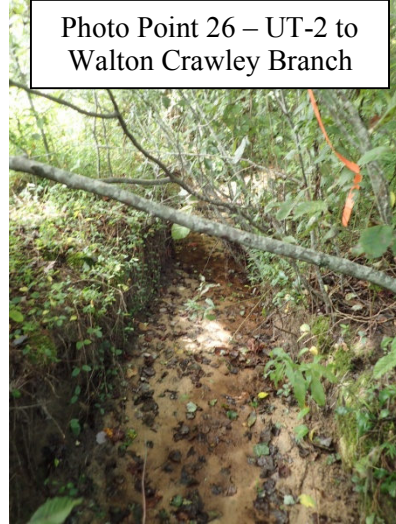


Photo Point 27 – UT-2 to
Walton Crawley Branch

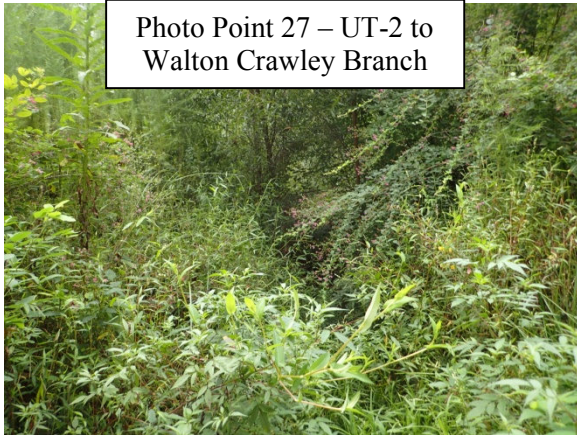


Photo Point 28 – UT-2 to
Walton Crawley Branch



Photo Point 29 – UT-2 to
Walton Crawley Branch


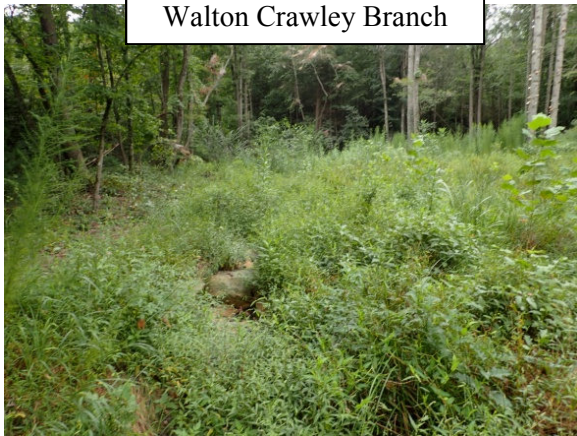


Photo Point 30 – UT-2 to
Walton Crawley Branch

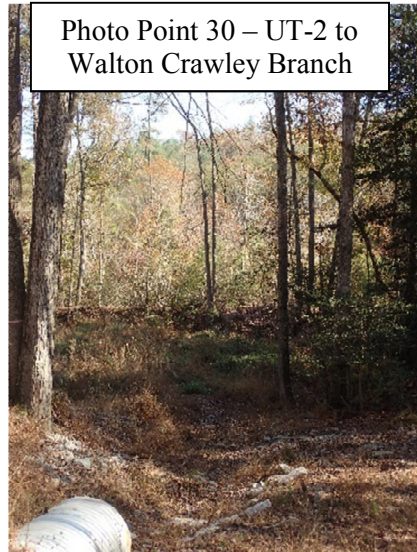

**Neighbors Branch/Walton Crawley Branch
Fixed Station Photographs
August 2017
(continued)**

Photo Point 31 – UT-2 to
Walton Crawley Branch

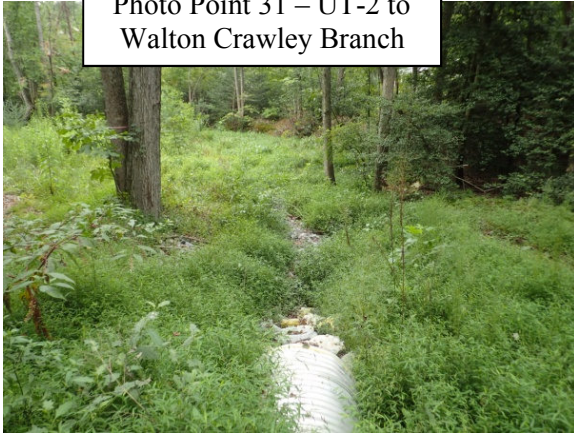


Photo Point 32 – UT-2 to
Walton Crawley Branch

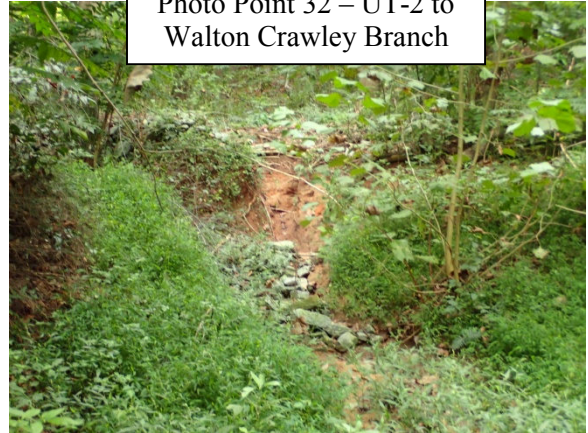


Photo Point 33 - Walton
Crawley Branch




Photo Point 34 – UT-1 to
Walton Crawley Branch



Photo Point 35 – UT-1 to
Walton Crawley Branch



Photo Point 36 – UT-1 to
Walton Crawley Branch

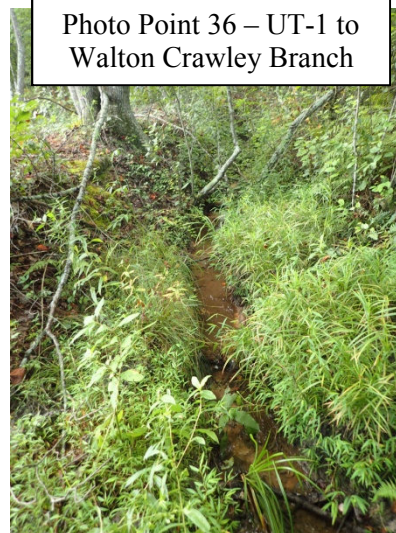

Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site
Baseline Fixed Station Photographs
Taken August 2017
(continued)

Photo Point 37 – UT-1 to
Walton Crawley Branch

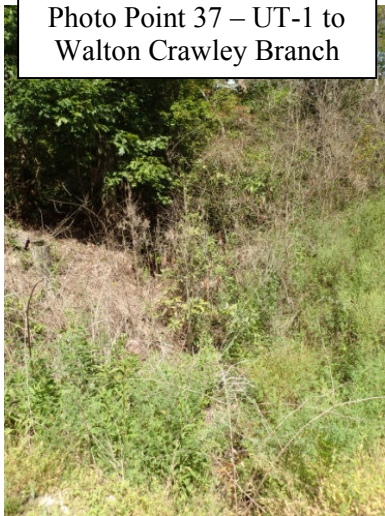


Photo Point 38 – UT-1 to
Walton Crawley Branch

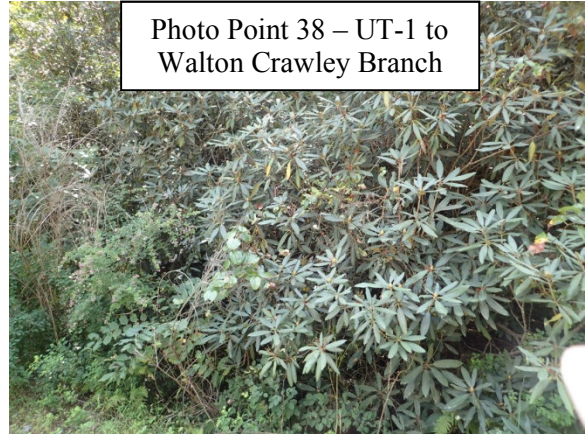


Photo Point 39 – UT-1 to
Walton Crawley Branch

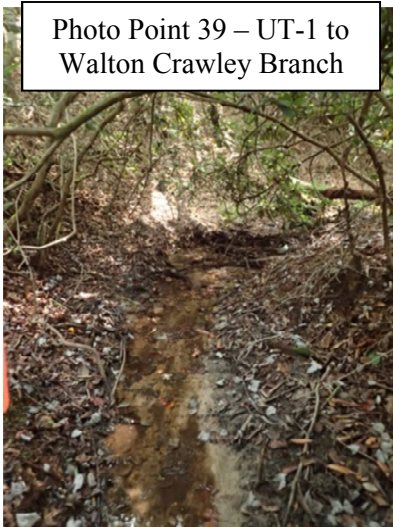


Photo Point 40 - Walton
Crawley Branch

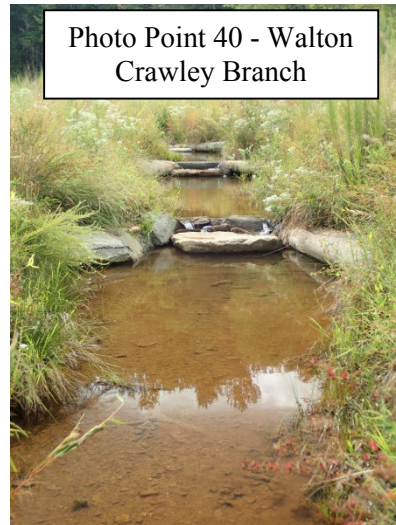


Photo Point 41 - Walton
Crawley Branch


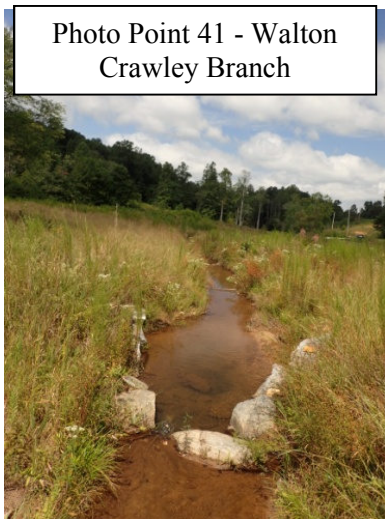


Photo Point 42 - Walton
Crawley Branch





**Neighbors Branch/Walton Crawley Branch
Fixed Station Photographs
August 2017
(continued)**

Photo Point 43 - Walton
Crawley Branch

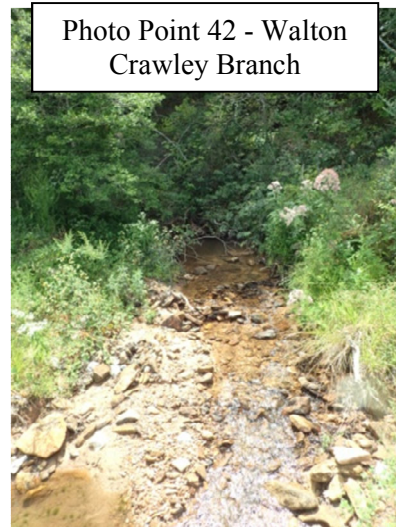

**Neighbors Branch/Walton Crawley Branch
Vegetation Monitoring Photographs Taken August 2017**

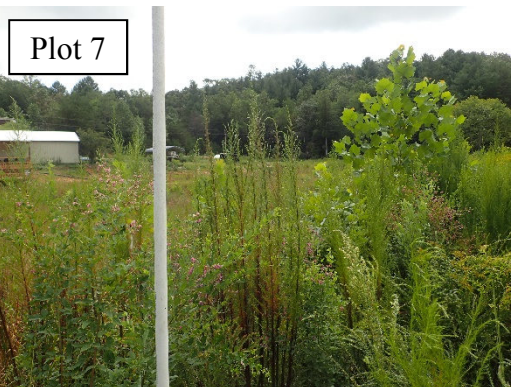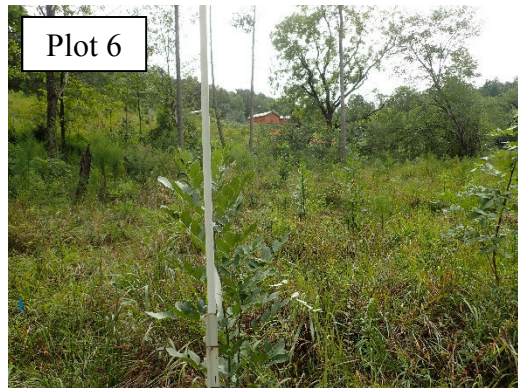

Appendix C.
Vegetation Data

Table 7. Vegetation Plot Success Summary

Table 8. CVS Vegetation Plot Metadata

Table 9. Total Planted Stems by Plot and Species

Table 7. Vegetation Plot Success Summary

Vegetation Plot ID	Vegetation Survival Threshold Met?	Tract Mean
1	Yes	100%
2	Yes	
3	Yes	
4	Yes	
5	Yes	
6	Yes	
7	Yes	
8	Yes	

Table 8. CVS Vegetation Plot Metadata

Report Prepared By	Phillip Perkinson
Date Prepared	9/1/2017 11:09
database name	Axiom-NeighborsWaltonCrawleyBranch-2017-A-v2.3.1.mdb
database location	S:\Business\Projects\12\12-004 EEP Monitoring\12-004.21 Neighbors Bob\Neighbors Branch and Walton Crawley Branch\2017 MY-02\CVS
computer name	PHILLIP-PC
file size	58728448
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
ALL Stems by Plot and spp	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
PROJECT SUMMARY-----	
Project Code	92872
project Name	Neighbors Branch/ Walton Crawley Branch
River Basin	Catawba
length(ft)	
stream-to-edge width (ft)	
Required Plots (calculated)	
Sampled Plots	8

Table 9. Total and Planted Stems by Plot and Species
DMS Project Code 92872. Project Name: Neighbors Branch/ Walton Crawley Branch

Scientific Name	Common Name	Species Type	Current Plot Data (MY2 2017)																								Annual Means											
			92872-01-0001			92872-01-0002			92872-01-0003			92872-01-0004			92872-01-0005			92872-01-0006			92872-01-0007			92872-01-0008			MY2 (2017)			MY1 (2016)			MY0 (2016)					
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
Acer rubrum	red maple	Tree	3	3	3				1	1	1	5	5	5	1	1	1													10	10	10	11	11	11	6	6	17
Betula nigra	river birch	Tree				1	1	1	4	4	4	4	4	4							2	2	2	1	1	1	12	12	12	15	15	15	16	16	16			
Cornus amomum	silky dogwood	Shrub																												1	1	1	1	1	1			
Diospyros virginiana	common persimmon	Tree													1	1	1			3	2	2	2	2	2	2	5	5	8	1	1	1	1	1	1			
Fraxinus pennsylvanica	green ash	Tree							4	4	4	1	1	1	6	6	6	5	5	5	2	2	2	1	1	1	19	19	19	24	24	24	31	31	31			
Liriodendron tulipifera	tuliptree	Tree			1									6	1	1	1										1	1	8			3						
Nyssa	tupelo	Tree										1	1	1													1	1	1	1	1	1						
Nyssa sylvatica	blackgum	Tree				1	1	1	1	1	1																2	2	2	3	3	3	6	6	6			
Platanus occidentalis	American sycamore	Tree	8	8	26	6	6	22	4	4	4			1							4	4	4	2	2	2	24	24	59	28	28	81	29	29	29			
Quercus	oak	Tree																												1	1	1						
Quercus nigra	water oak	Tree													1	1	1	4	4	4	1	1	1				6	6	6	2	2	2	4	4	4			
Quercus phellos	willow oak	Tree	1	1	1							1	1	1							1	1	1	2	2	2	5	5	5	12	12	12	12	12	12			
Quercus rubra	northern red oak	Tree																						2	2	2	2	2	2	1	1	1	1	1	1			
Salix nigra	black willow	Tree						6																					6			3			10			
Sambucus canadensis	Common Elderberry	Shrub						2																					2			4						
Stem count			12	12	31	8	8	32	14	14	14	12	12	19	10	10	10	9	9	12	12	12	12	10	10	10	87	87	140	100	100	159	107	107	132			
size (ares)			1			1			1			1			1			1			1			1			8			8			8					
size (ACRES)			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.20			0.20			0.20					
Species count			3	3	4	3	3	5	5	5	5	5	5	7	5	5	5	2	2	3	6	6	6	6	6	6	11	11	13	12	12	14	10	10	12			
Stems per ACRE			485.6	485.6	1255	323.7	323.7	1295	566.6	566.6	566.6	485.6	485.6	768.9	404.7	404.7	404.7	364.2	364.2	485.6	485.6	485.6	485.6	404.7	404.7	404.7	440.1	440.1	708.2	505.9	505.9	804.3	541.3	541.3	667.7			

Color for Density
Exceeds requirements by 10%
Exceeds requirements, but by less than 10%
Fails to meet requirements, by less than 10%
Fails to meet requirements by more than 10%

PnoLS = Planted excluding livestakes
P-all = Planting including livestakes
T = All planted and natural recruits including livestakes
T includes natural recruits

Appendix D.
Stream Measurements and Geomorphology Data

Cross Section Plots
Longitudinal Profile Plots
Substrate Plots

Tables 10A-10B. Baseline Stream Data Summary
Tables 11A-11D. Monitoring Data-Dimensional Data Summary


Site	Neighbors Br./Walton Crawley Br.
Project Number:	92872
XS ID	XS - 1, Riffle
Reach	Neighbors Branch
Date:	2/22/2017
Field Crew:	Perkinson, Keith

Station	Elevation
0.00	1199.98
2.46	1199.99
3.93	1199.66
5.17	1199.44
5.94	1199.24
6.43	1198.73
7.20	1198.59
7.89	1198.40
8.50	1198.19
9.11	1198.33
9.64	1198.42
10.47	1198.72
10.78	1199.17
11.35	1199.31
12.47	1199.73
14.4	1200.00
17.2	1200.10

SUMMARY DATA	
Bankfull Elevation:	1200.0
Bankfull Cross-Sectional Area:	9.5
Bankfull Width:	11.9
Flood Prone Area Elevation:	1201.8
Flood Prone Width:	100.0
Max Depth at Bankfull:	1.8
Mean Depth at Bankfull:	0.8
W / D Ratio:	14.9
Entrenchment Ratio:	8.4
Bank Height Ratio:	1.0



Stream Type	E
--------------------	---

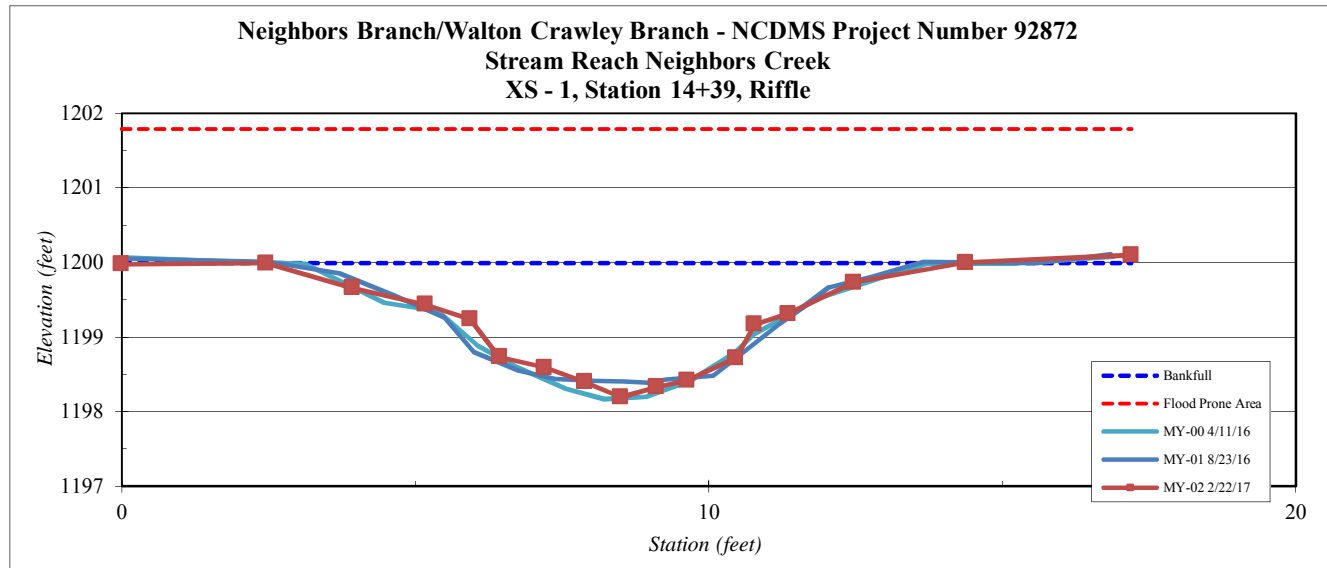

Site	Neighbors Br./Walton Crawley Br.
Project Number:	92872
XS ID	XS - 2, Pool
Reach	Neighbors Branch
Date:	2/22/2017
Field Crew:	Perkinson, Keith




XS 2 Looking Upstream

Station	Elevation
0.0	1200.7
2.9	1200.5
4.7	1200.4
6.1	1200.0
7.2	1199.7
7.9	1199.3
8.1	1198.0
9.2	1197.9
10.1	1197.7
10.8	1197.4
11.7	1197.3
12.1	1197.4
13.4	1200.2
15.3	1200.3
16.9	1200.5
17.9	1200.9
19.9	1201.1

SUMMARY DATA	
Bankfull Elevation:	1200.3
Bankfull Cross-Sectional Area:	14.0
Bankfull Width:	9.7
Flood Prone Area Elevation:	NA
Flood Prone Width:	NA
Max Depth at Bankfull:	3.0
Mean Depth at Bankfull:	1.4
W / D Ratio:	NA
Entrenchment Ratio:	NA
Bank Height Ratio:	1.0

Stream Type	E
--------------------	---

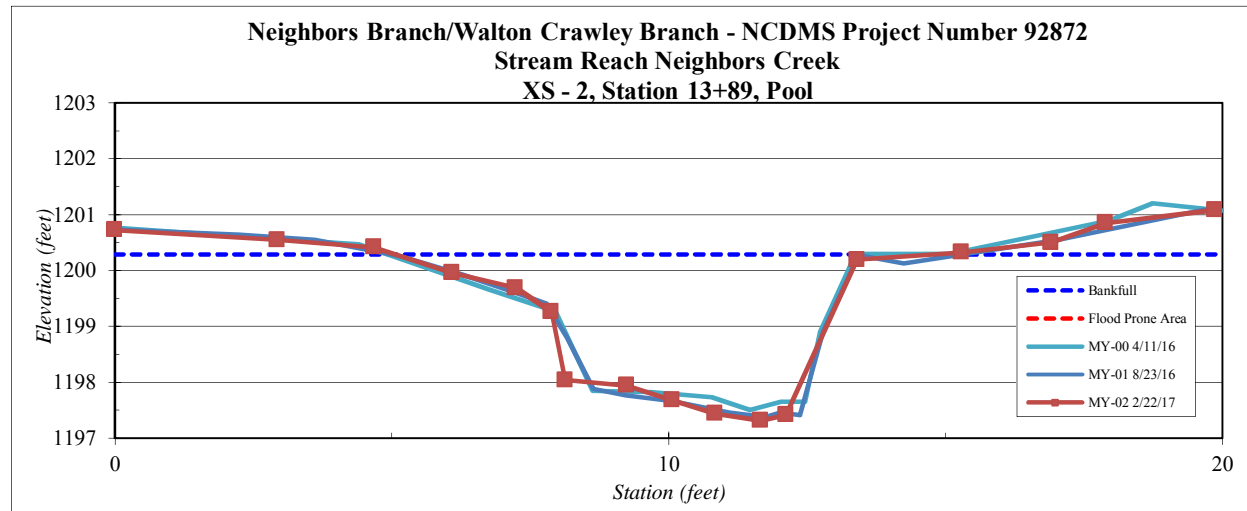


Site	Neighbors Br./Walton Crawley Br.
Project Number:	92872
XS ID	XS - 3, Riffle
Reach	Neighbors Branch
Date:	2/22/2017
Field Crew:	Perkinson, Keith



Station	Elevation
0.00	1205.85
2.84	1205.80
4.47	1205.44
5.49	1205.02
6.92	1204.53
7.67	1204.40
8.68	1203.78
9.82	1203.59
10.44	1203.50
11.25	1203.65
11.84	1203.81
12.35	1204.17
13.56	1204.65
14.36	1205.15
15.62	1205.48
17.6	1205.29
19.3	1205.16

SUMMARY DATA	
Bankfull Elevation:	1205.1
Bankfull Cross-Sectional Area:	8.1
Bankfull Width:	8.9
Flood Prone Area Elevation:	1206.7
Flood Prone Width:	100.0
Max Depth at Bankfull:	1.6
Mean Depth at Bankfull:	0.9
W / D Ratio:	9.8
Entrenchment Ratio:	11.2
Bank Height Ratio:	1.0

Stream Type	E
-------------	---

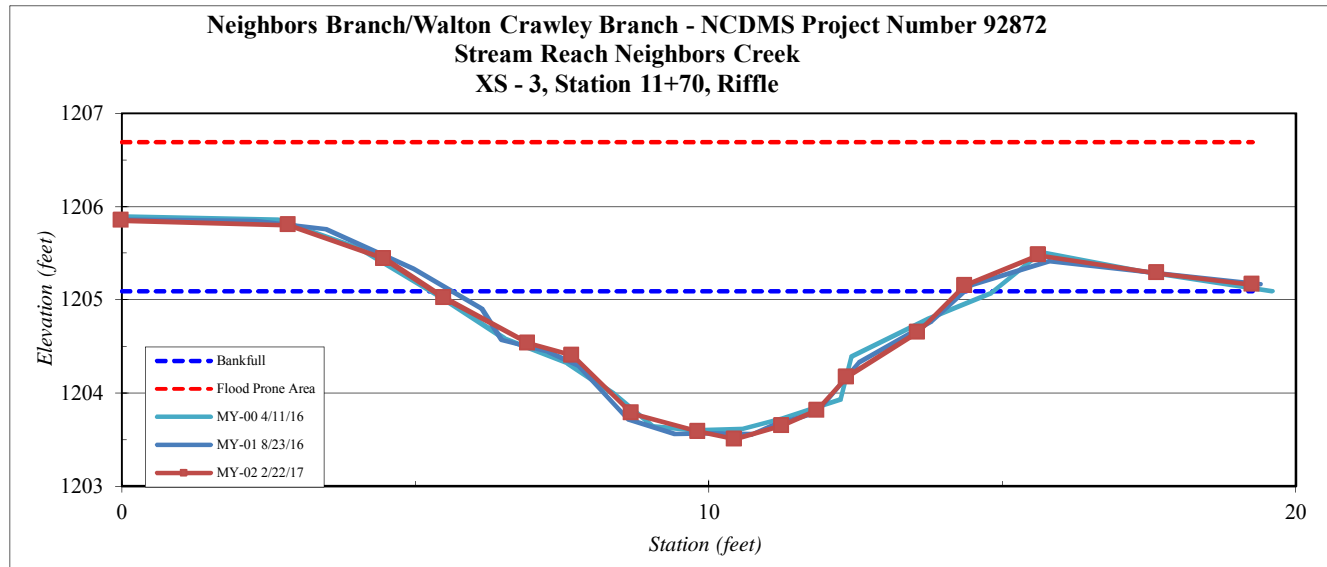

Site	Neighbors Br./Walton Crawley Br.
Project Number:	92872
XS ID	XS - 4, Riffle
Reach	Walton Crawley Branch
Date:	2/22/2017
Field Crew:	Perkinson, Keith




XS 4 Looking Upstream

Stream Type	E
--------------------	---

SUMMARY DATA	
Bankfull Elevation:	1166.7
Bankfull Cross-Sectional Area:	17.9
Bankfull Width:	13.0
Flood Prone Area Elevation:	1168.7
Flood Prone Width:	100.0
Max Depth at Bankfull:	2.0
Mean Depth at Bankfull:	1.4
W / D Ratio:	9.4
Entrenchment Ratio:	7.7
Bank Height Ratio:	1.0

Station	Elevation
-0.10	1167.11
3.30	1166.96
5.21	1166.73
6.22	1166.74
6.83	1166.70
7.80	1166.10
8.33	1165.80
9.14	1165.39
9.65	1165.07
10.80	1165.02
12.35	1164.92
13.23	1164.92
14.81	1164.79
15.88	1164.63
16.63	1164.67
17.4	1164.74
18.3	1166.00
19.5	1166.48
20.7	1167.10
21.6	1167.23
23.4	1167.16
25.7	1167.10
27.5	1167.11

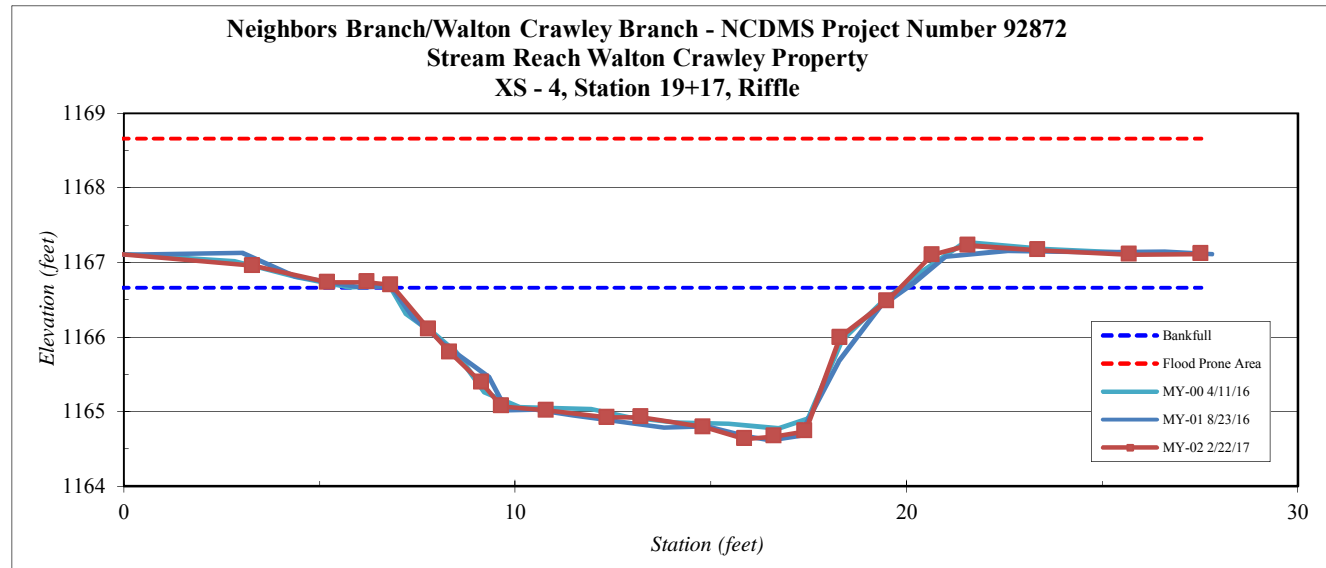

Site	Neighbors Br./Walton Crawley Br.
Project Number:	92872
XS ID	XS - 5, Pool
Reach	Walton Crawley Branch
Date:	2/22/2017
Field Crew:	Perkinson, Keith


Station	Elevation
0.0	1168.7
3.1	1168.7
4.8	1168.4
7.8	1167.7
8.4	1164.5
9.8	1164.5
11.1	1164.4
11.9	1164.0
13.4	1163.6
14.8	1164.0
15.9	1164.3
16.9	1164.7
19.6	1167.7
20.8	1168.0
25.5	1167.8
28.6	1167.9

SUMMARY DATA	
Bankfull Elevation:	1167.7
Bankfull Cross-Sectional Area:	35.1
Bankfull Width:	11.9
Flood Prone Area Elevation:	NA
Flood Prone Width:	NA
Max Depth at Bankfull:	4.1
Mean Depth at Bankfull:	2.9
W / D Ratio:	NA
Entrenchment Ratio:	NA
Bank Height Ratio:	1.0



XS 5 Looking Upstream

Stream Type	E
--------------------	---

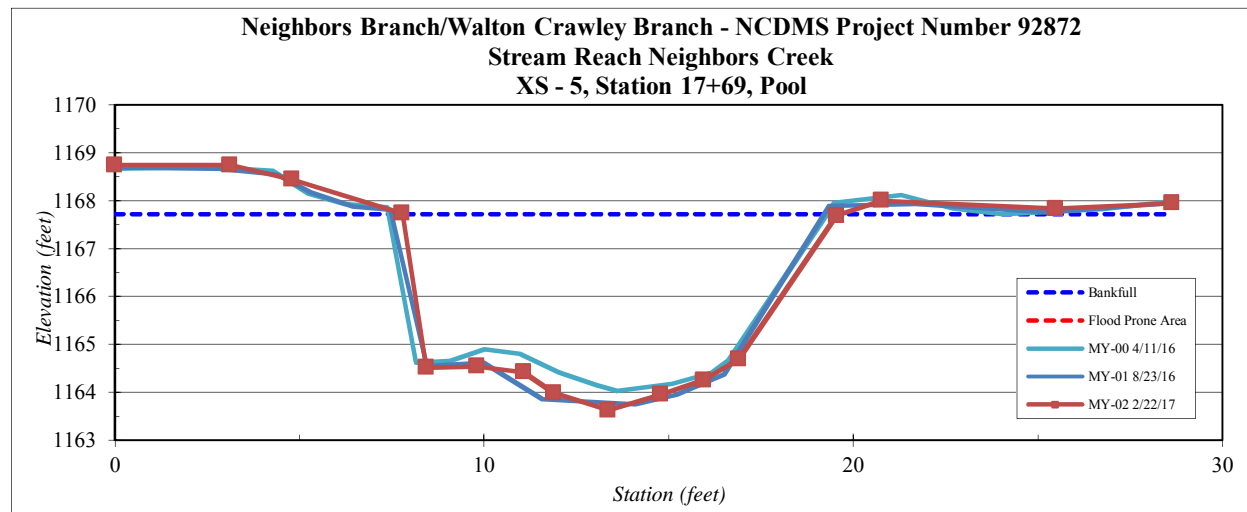

Site	Neighbors Br./Walton Crawley Br.
Project Number:	92872
XS ID	XS - 6, Riffle
Reach	Walton Crawley Branch
Date:	2/22/2017
Field Crew:	Perkinson, Keith




XS 6 Looking Upstream

Stream Type	E
--------------------	---

SUMMARY DATA	
Bankfull Elevation:	1170.0
Bankfull Cross-Sectional Area:	20.2
Bankfull Width:	14.2
Flood Prone Area Elevation:	1172.0
Flood Prone Width:	100.0
Max Depth at Bankfull:	2.0
Mean Depth at Bankfull:	1.4
W / D Ratio:	10.0
Entrenchment Ratio:	7.0
Bank Height Ratio:	1.0

Station	Elevation
0.00	1170.77
2.98	1170.48
7.13	1170.28
9.14	1170.30
10.62	1169.52
11.69	1168.62
12.75	1168.09
13.99	1168.14
14.66	1168.21
15.77	1168.21
17.00	1168.28
18.38	1168.10
19.23	1168.10
19.95	1168.23
21.17	1168.00
21.6	1168.83
22.6	1169.33
23.7	1169.87
24.3	1170.18
26.3	1170.16
29.3	1170.03
32.9	1170.11

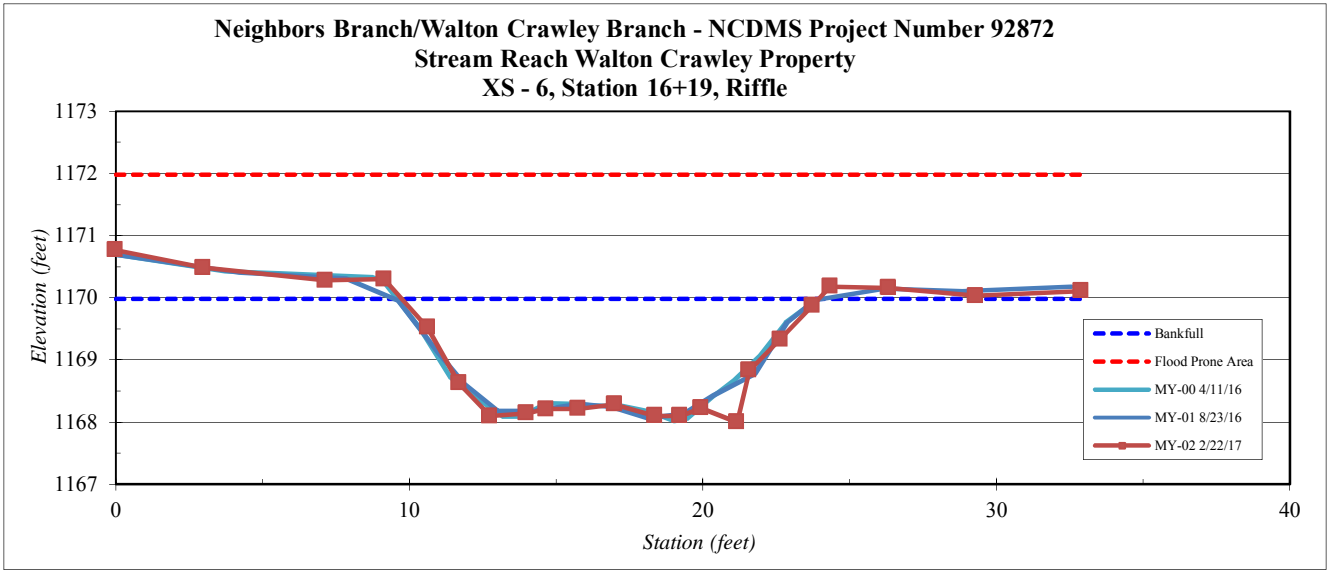

Site	Neighbors Br./Walton Crawley Br.
Project Number:	92872
XS ID	XS - 7, Pool
Reach	Walton Crawley Branch
Date:	2/22/2017
Field Crew:	Perkinson, Keith


Station	Elevation
0.0	1175.3
3.4	1175.1
6.1	1174.8
8.6	1174.2
9.2	1171.9
10.1	1171.7
10.9	1171.5
12.1	1171.5
14.1	1171.2
15.0	1171.0
16.2	1171.2
17.6	1171.2
18.6	1171.1
20.0	1171.1
21.0	1174.4
24.8	1175.3
29.0	1175.4

SUMMARY DATA	
Bankfull Elevation:	1174.3
Bankfull Cross-Sectional Area:	34.1
Bankfull Width:	12.6
Flood Prone Area Elevation:	NA
Flood Prone Width:	NA
Max Depth at Bankfull:	3.3
Mean Depth at Bankfull:	2.7
W / D Ratio:	NA
Entrenchment Ratio:	NA
Bank Height Ratio:	1.0



XS 7 Looking Upstream

Stream Type	E
-------------	---

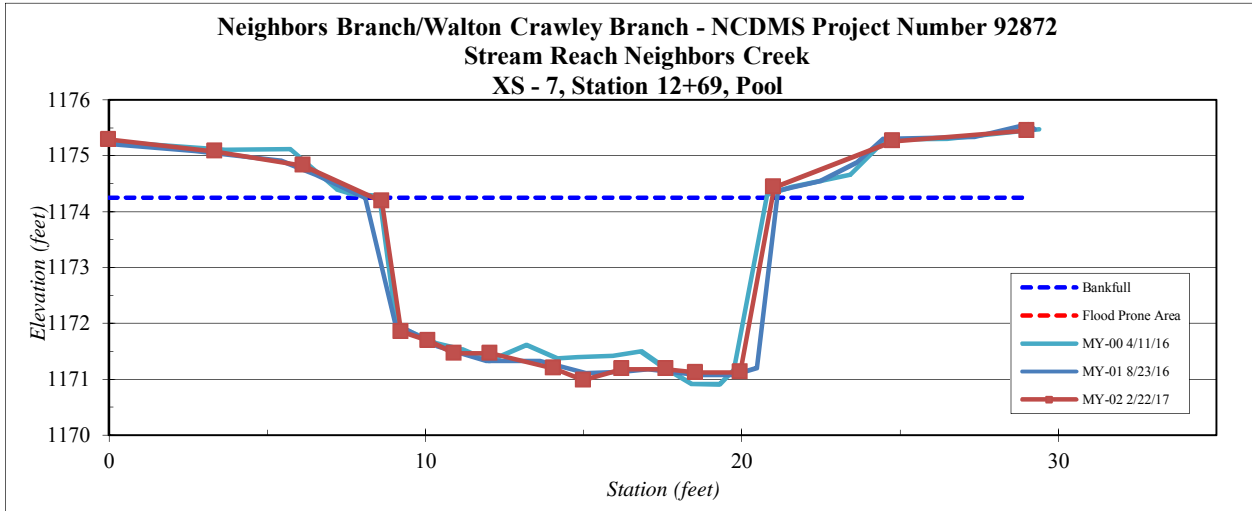


Site	Neighbors Br./Walton Crawley Br.
Project Number:	92872
XS ID	XS - 8, Riffle
Reach	Walton Crawley Branch
Date:	2/22/2017
Field Crew:	Perkinson, Keith



Stream Type	E
--------------------	---

Station	Elevation
0.00	1179.27
4.85	1179.20
7.14	1179.18
9.24	1178.31
10.44	1177.84
11.32	1177.77
12.16	1177.35
13.04	1177.34
14.44	1177.07
15.54	1177.22
17.23	1177.21
18.27	1177.20
19.54	1177.19
20.26	1177.18
21.68	1177.25
22.3	1177.50
23.2	1177.78
24.5	1179.14
25.1	1179.38
27.0	1179.47
30.0	1179.43
32.4	1179.48

SUMMARY DATA	
Bankfull Elevation:	1179.2
Bankfull Cross-Sectional Area:	27.0
Bankfull Width:	17.4
Flood Prone Area Elevation:	1181.3
Flood Prone Width:	100.0
Max Depth at Bankfull:	2.1
Mean Depth at Bankfull:	1.6
W / D Ratio:	11.2
Entrenchment Ratio:	5.7
Bank Height Ratio:	1.0

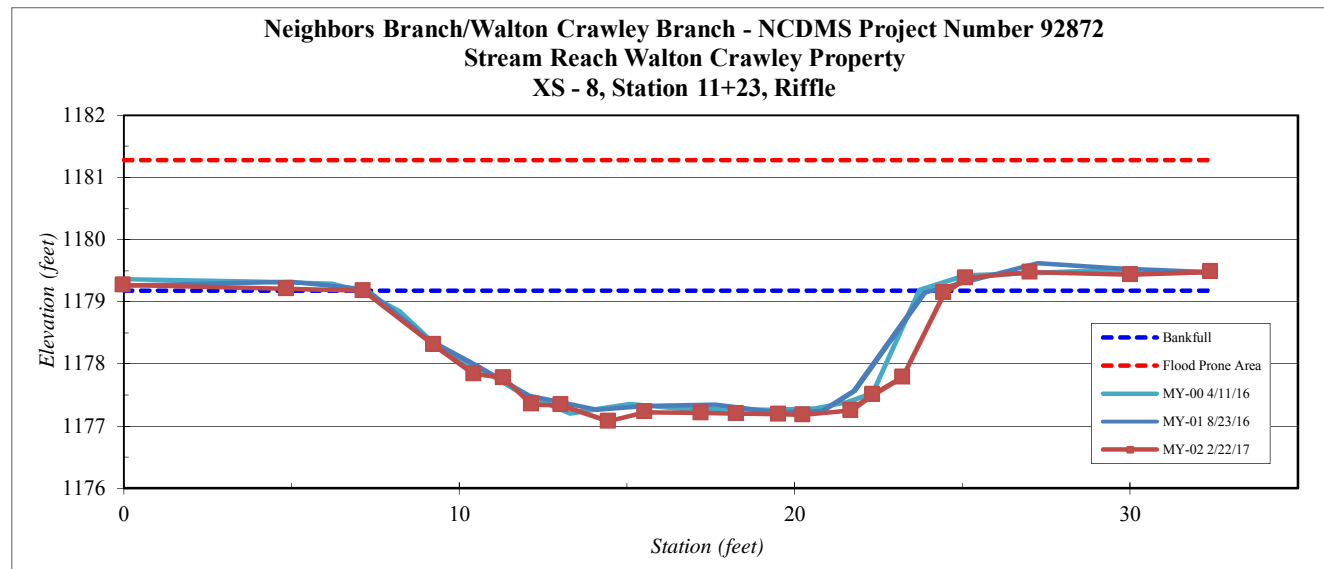


Project Name Neighbors Branch/Walton Crawley Branch - Profile
Reach Walton Crawley Branch, Station 10+00 - 22+00
Feature Profile
Date 2/22/17
Crew Perkinson, Keith

2016 Year 0 Monitoring \Survey			2016 Year 1 Monitoring \Survey			2017 Year 2 Monitoring \Survey			2018 Year 3 Monitoring \Survey			2019 Year 4 Monitoring \Survey		
Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation
2147.7	1163.1	1163.3	2147.7	1163.1	1163.4	2146.6	1163.2	1163.3						
2136.7	1162.8	1163.4	2127.6	1163.2	1163.6	2135.8	1162.8	1163.3						
2132.5	1162.2	1163.3	2123.9	1162.7	1163.6	2132.9	1162.6	1163.2						
2128.3	1162.5	1163.3	2121.6	1163.4	1163.7	2127.3	1162.7	1163.3						
2122.8	1162.4	1163.5	2114.1	1163.3	1163.9	2125.3	1163.1	1163.5						
2119.2	1163.5	1163.7	2109.9	1163.0	1163.9	2122.6	1162.7	1163.5						
2115.3	1162.8	1163.7	2101.0	1162.9	1163.9	2120.6	1162.8	1163.6						
2104.0	1162.9	1163.8	2094.9	1162.8	1163.8	2119.4	1163.6	1163.7						
2091.7	1162.9	1163.8	2088.3	1163.7	1164.1	2111.5	1163.4	1163.8						
2085.1	1163.6	1163.9	2060.8	1163.9	1164.4	2103.9	1162.9	1163.7						
2057.2	1163.7	1164.3	2048.0	1164.0	1164.4	2092.7	1162.7	1163.8						
2031.9	1164.0	1164.5	2015.6	1164.3	1164.8	2085.5	1163.7	1163.9						
2026.5	1163.7	1164.6	2007.5	1163.1	1164.8	2058.9	1164.0	1164.3						
2007.1	1163.0	1164.6	1999.5	1163.1	1164.8	2037.4	1164.1	1164.5						
1997.2	1162.7	1164.6	1993.9	1164.5	1165.0	2013.4	1164.3	1164.7						
1991.6	1164.6	1165.0	1986.7	1164.2	1165.0	2005.8	1163.1	1164.7						
1981.9	1164.0	1164.9	1972.6	1164.1	1165.0	1996.8	1163.2	1164.7						
1969.8	1164.1	1164.9	1954.3	1163.7	1165.1	1991.4	1164.7	1164.9						
1966.1	1164.3	1164.9	1953.1	1165.4	1165.6	1983.0	1164.1	1164.9						
1961.1	1164.0	1165.0	1916.9	1165.1	1165.6	1969.1	1164.2	1165.0						
1957.7	1164.1	1164.9	1903.5	1164.9	1165.6	1965.6	1164.6	1164.9						
1951.6	1163.6	1165.0	1895.6	1164.5	1165.6	1960.0	1164.2	1164.9						
1950.3	1165.3	1165.4	1881.5	1164.5	1165.6	1951.5	1163.8	1164.9						
1916.9	1164.9	1165.5	1870.0	1164.6	1165.6	1950.2	1165.4	1165.5						
1892.2	1164.8	1165.5	1864.9	1165.4	1165.8	1901.2	1164.9	1165.5						
1886.9	1164.5	1165.5	1856.2	1165.5	1165.9	1893.4	1164.5	1165.5						
1875.7	1164.2	1165.5	1851.4	1165.2	1165.9	1881.7	1164.5	1165.5						
1866.4	1164.5	1165.5	1835.0	1165.3	1166.0	1873.3	1164.4	1165.5						

	2016	2016	2017	2018	2019
Avg. Water Surface Slope	0.0145	0.0143	0.0146		
Riffle Length	24	24	25		
Avg. Riffle Slope	0.0032	0.0055	0.0030		
Pool Length	25	23	22		
Pool to Pool Spacing	43	42	41		

Walton Crawley Branch Year 2 (2017) Profile - Station 10+00 to 22+00

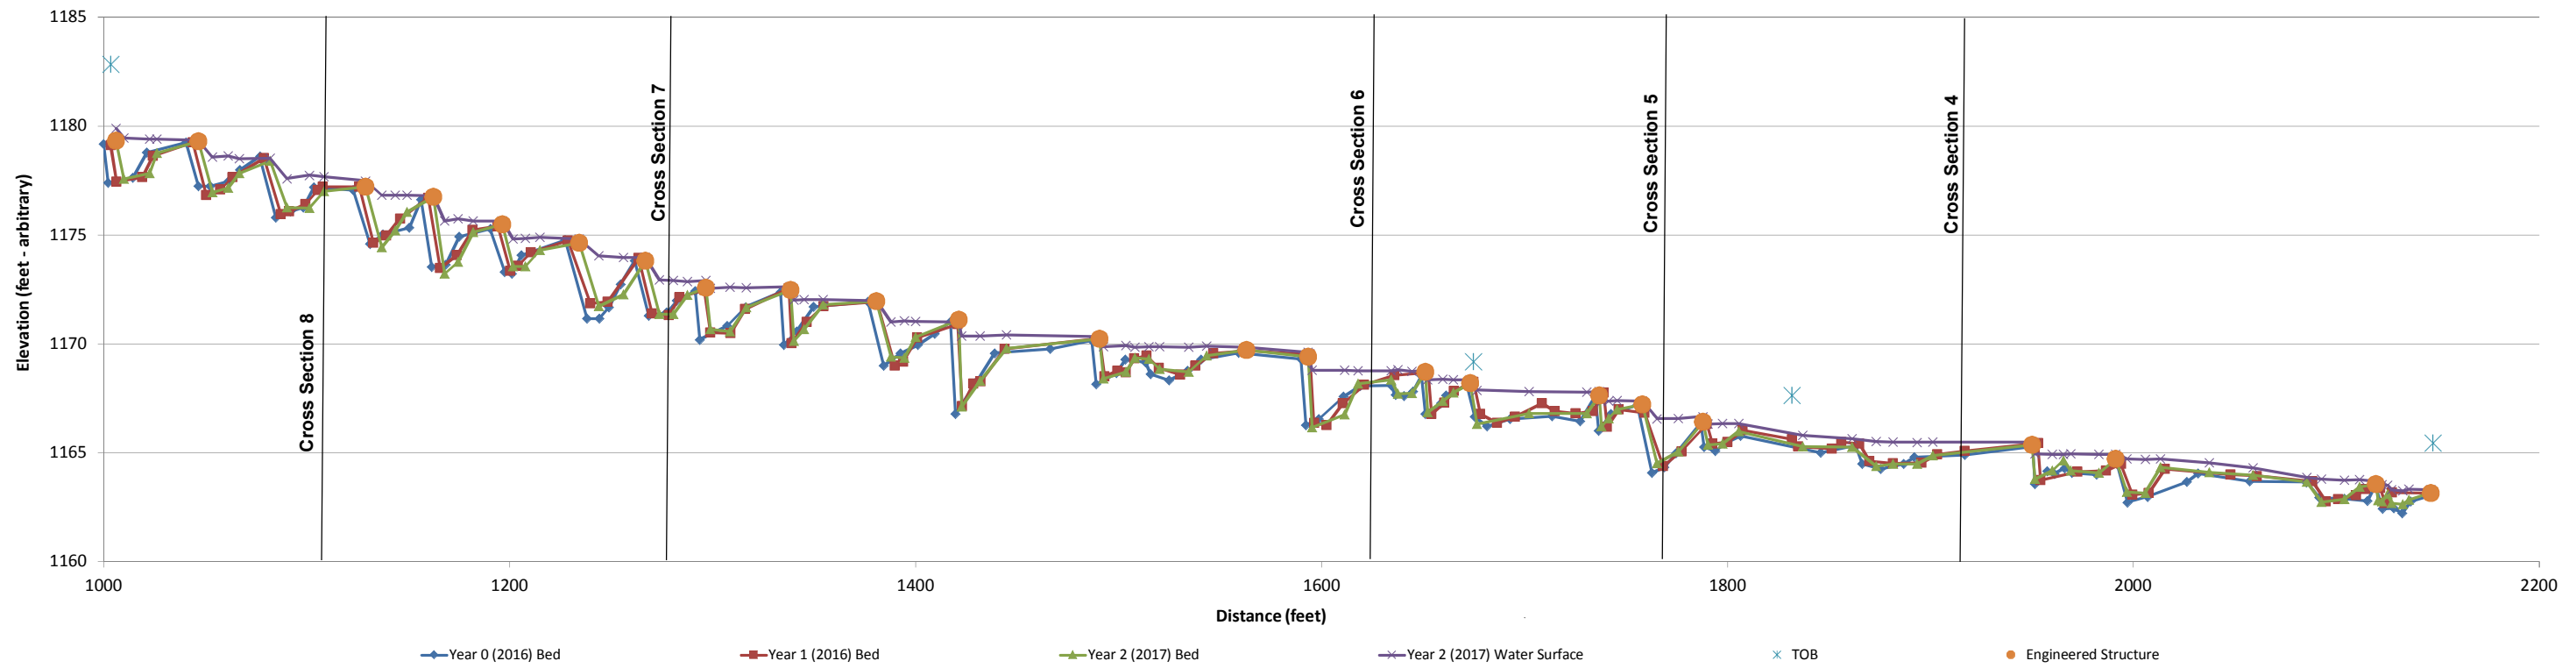


Project Name Neighbors Branch/Walton Crawley Branch - Profile
Reach Neighbors Branch, Station 10+00 - 16+00
Feature Profile
Date 2/22/17
Crew Perkinson, Keith

2016 Year 0 Monitoring \Survey			2016 Year 1 Monitoring \Survey			2017 Year 2 Monitoring \Survey			2018 Year 3 Monitoring \Survey			2019 Year 4 Monitoring \Survey		
Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation
1541.4	1196.4	1196.4	1541.4	1196.4	1196.4	1535.4	1197.0	1196.9						
1536.2	1194.9	1196.4	1537.7	1194.8	1196.4	1524.5	1196.2	1196.9						
1534.4	1196.7	1196.9	1534.6	1196.8	1196.9	1516.8	1195.5	1196.9						
1526.1	1196.4	1196.9	1527.5	1196.5	1196.9	1510.4	1196.2	1196.9						
1519.8	1195.5	1196.9	1521.1	1195.9	1196.9	1508.3	1198.2	1198.2						
1515.2	1195.4	1196.9	1510.1	1195.9	1197.0	1478.7	1197.9	1198.3						
1508.9	1196.2	1197.0	1507.9	1198.1	1198.3	1473.5	1197.6	1198.3						
1506.7	1198.0	1198.2	1488.4	1198.2	1198.3	1465.3	1197.4	1198.4						
1475.6	1198.0	1198.3	1475.6	1197.9	1198.3	1460.7	1197.0	1198.3						
1473.9	1197.5	1198.3	1470.3	1197.8	1198.3	1458.8	1198.9	1198.9						
1467.1	1197.5	1198.3	1460.0	1196.9	1198.3	1439.4	1198.5	1198.9						
1459.3	1196.8	1198.4	1458.2	1198.8	1199.0	1421.4	1198.7	1199.0						
1457.8	1198.8	1198.9	1434.3	1198.4	1199.0	1408.3	1198.6	1199.0						
1439.1	1198.5	1199.0	1429.2	1198.5	1199.0	1392.8	1198.6	1199.0						
1421.5	1198.5	1199.0	1399.7	1198.5	1199.1	1389.8	1197.8	1199.0						
1410.0	1198.7	1199.0	1395.0	1198.2	1199.1	1386.0	1197.5	1199.0						
1393.1	1198.4	1199.1	1390.1	1197.8	1199.1	1384.4	1199.6	1199.7						
1388.5	1197.7	1199.0	1386.0	1197.4	1199.1	1367.0	1199.4	1199.7						
1384.7	1197.4	1199.0	1384.5	1199.7	1199.7	1352.5	1199.8	1199.9						
1383.2	1199.5	1199.7	1369.3	1199.2	1199.8	1348.0	1199.4	1199.9						
1364.9	1199.3	1199.8	1353.1	1199.7	1199.9	1339.4	1199.4	1200.1						
1357.6	1199.5	1199.9	1346.9	1199.2	1200.0	1338.2	1200.6	1200.7						
1353.4	1199.0	1199.9	1339.7	1199.7	1200.2	1327.7	1200.3	1200.6						
1344.8	1199.2	1199.9	1338.2	1200.6	1200.7	1323.7	1198.8	1200.6						
1337.5	1199.3	1200.3	1330.0	1200.2	1200.7	1320.3	1198.7	1200.7						
1336.4	1200.5	1200.7	1326.7	1199.4	1200.8	1316.8	1201.5	1201.5						
1324.7	1200.1	1200.7	1320.8	1198.6	1200.7	1293.6	1201.4	1201.6						
1319.9	1198.2	1200.7	1318.9	1201.4	1201.5	1269.0	1201.5	1201.9						



	2016	2016	2017	2018	2019
Avg. Water Surface Slope	0.0222	0.0220	0.0221		
Riffle Length	28	26	31		
Avg. Riffle Slope	0.0043	0.0046	0.0041		
Pool Length	12	15	12		
Pool to Pool Spacing	36	34	38		

Neighbors Branch Year 2 (2017) Profile - Station 10+00 to 16+00

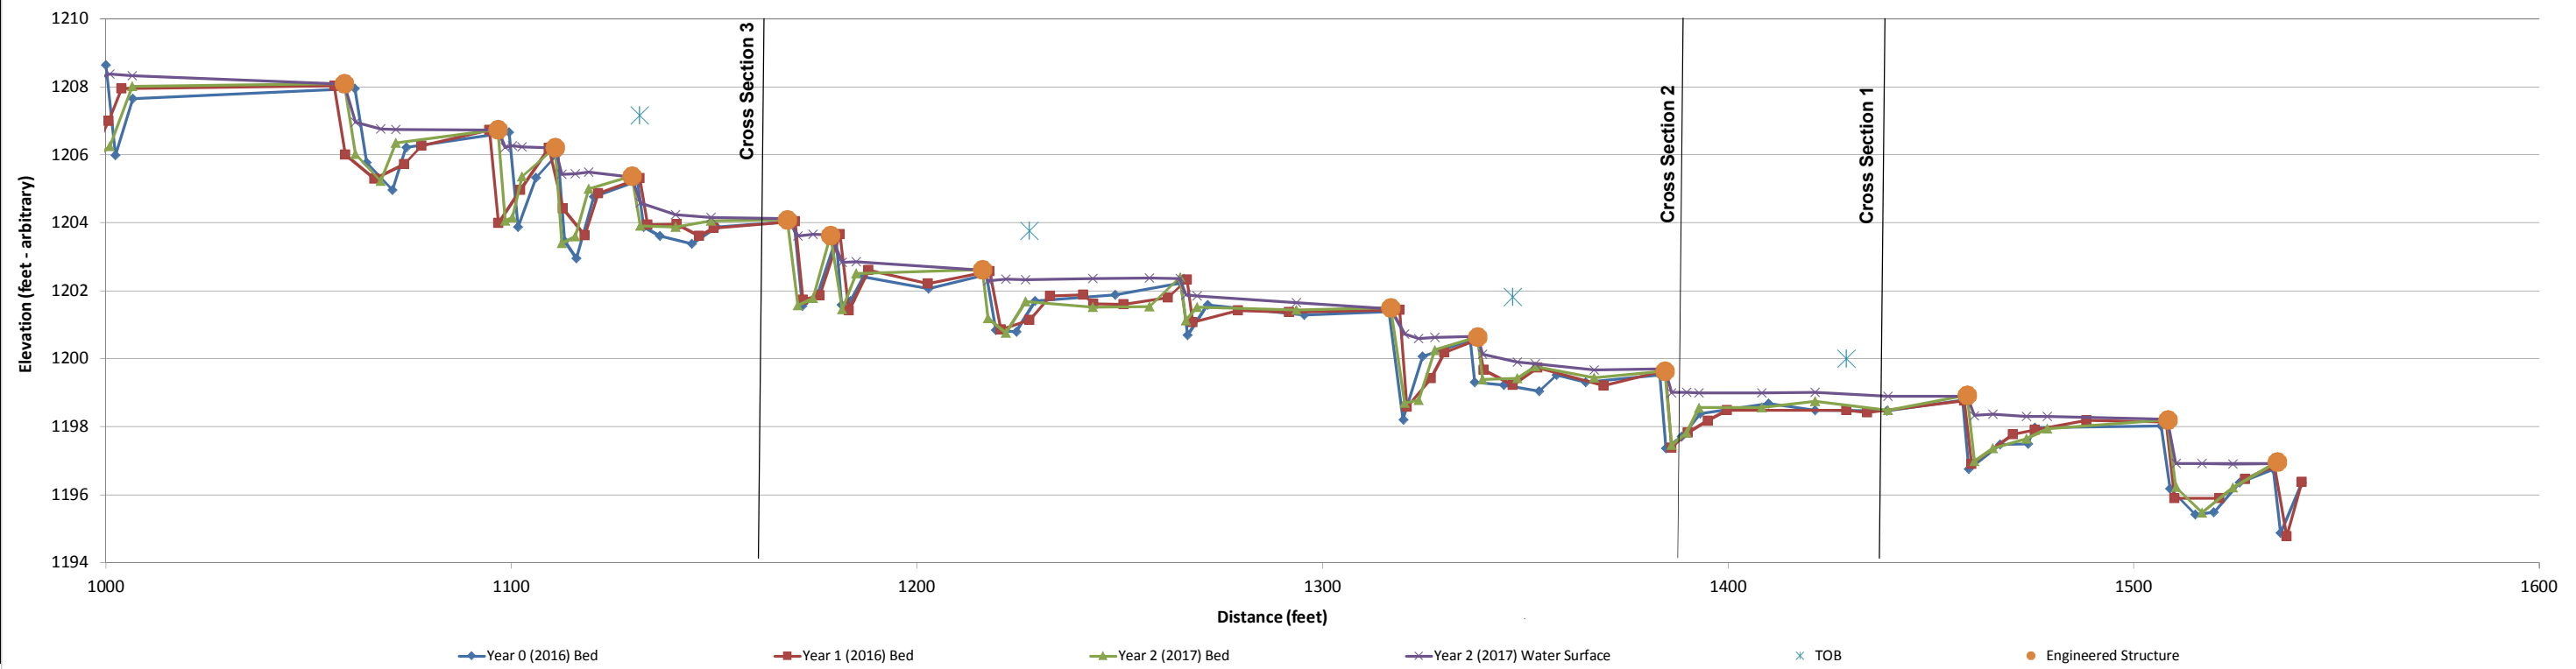



Project Name: Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site					
Cross-Section: 1					
Feature: Riffle					
		2017			
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	2	6%	36%
	very fine sand	0.125	2	6%	44%
Sand	fine sand	0.250	1	3%	48%
	medium sand	0.50	3	9%	48%
	coarse sand	1.00	4	11%	56%
	very coarse sand	2.0	1	3%	60%
Gravel	very fine gravel	4.0	1	3%	68%
	fine gravel	5.7	1	3%	72%
	fine gravel	8.0	0	0%	84%
	medium gravel	11.3	4	11%	92%
	medium gravel	16.0	2	6%	92%
	course gravel	22.3	5	14%	96%
	course gravel	32.0	3	9%	96%
	very coarse gravel	45	3	9%	96%
Cobble	very coarse gravel	64	1	3%	100%
	small cobble	90	0	0%	100%
	medium cobble	128	1	3%	100%
	large cobble	180	1	3%	100%
Boulder	very large cobble	256	0	0%	100%
	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
Bedrock	large boulder	2048	0	0%	100%
	bedrock	40096	0	0%	100%
TOTAL % of whole count			35	100%	100%

Summary Data	
D50	9.8
D84	33
D95	98

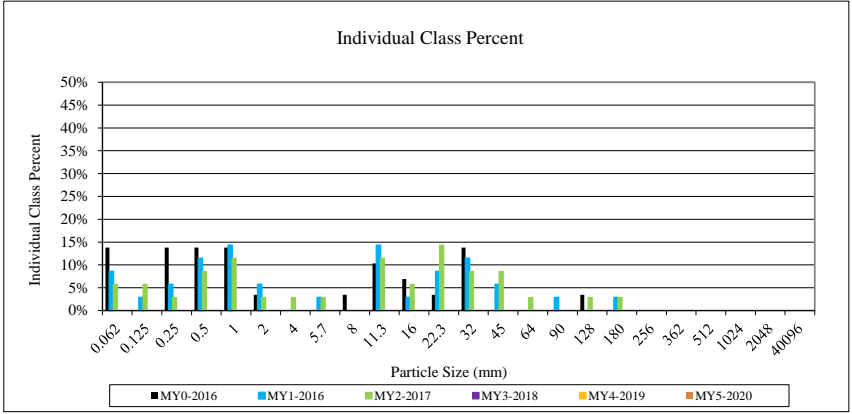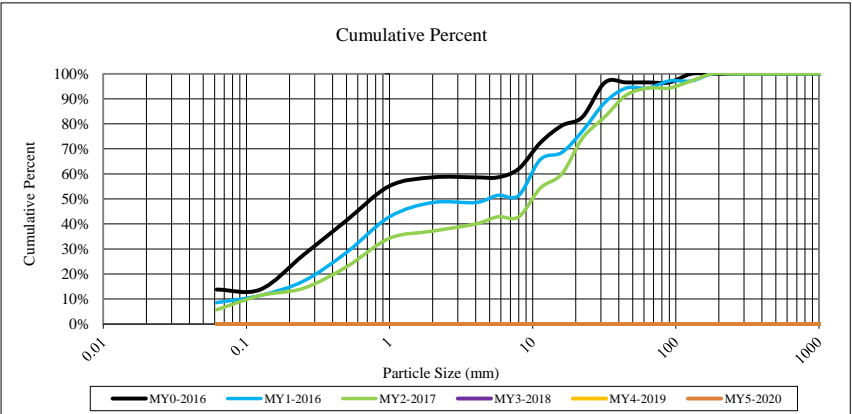

Project Name: Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site						
Cross-Section: 3						
Feature: Riffle						
			2017			
Description	Material	Size (mm)	Total #	Item %	Cum %	
Silt/Clay	silt/clay	0.062	1	3%	33%	
	very fine sand	0.125	2	5%	43%	
Sand	fine sand	0.250	2	5%	48%	
	medium sand	0.50	4	10%	52%	
	coarse sand	1.00	6	15%	62%	
	very coarse sand	2.0	6	15%	67%	
	very fine gravel	4.0	3	8%	67%	
Gravel	fine gravel	5.7	1	3%	67%	
	fine gravel	8.0	1	3%	71%	
	medium gravel	11.3	0	0%	76%	
	medium gravel	16.0	4	10%	86%	
	course gravel	22.3	1	3%	90%	
	course gravel	32.0	1	3%	95%	
	very coarse gravel	45	3	8%	95%	
	very coarse gravel	64	4	10%	95%	
	Cobble	small cobble	90	1	3%	100%
		medium cobble	128	0	0%	100%
large cobble		180	0	0%	100%	
very large cobble		256	0	0%	100%	
Boulder		small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%	
	medium boulder	1024	0	0%	100%	
	large boulder	2048	0	0%	100%	
Bedrock	bedrock	40096	0	0%	100%	
TOTAL % of whole count			40	100%	100%	

Summary Data	
D50	1.8
D84	38
D95	59

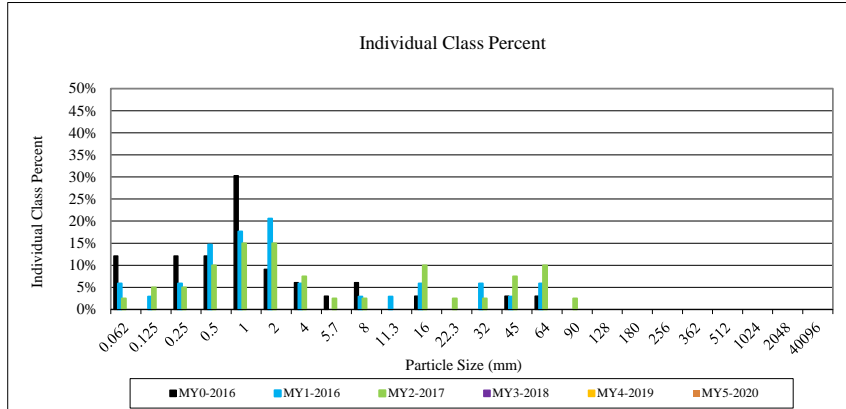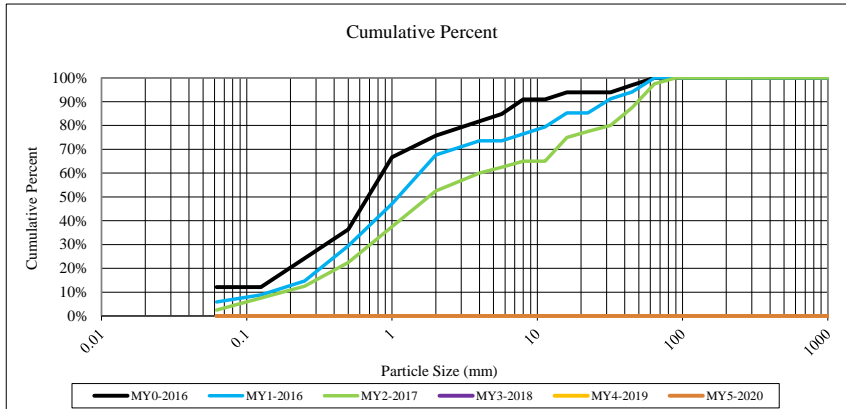

Project Name: Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site



Cross-Section: 4

Feature: Riffle

Description	Material	Size (mm)	2017		
			Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	3	9%	24%
Sand	very fine sand	0.125	1	3%	32%
	fine sand	0.250	2	6%	44%
	medium sand	0.50	6	17%	48%
	coarse sand	1.00	6	17%	56%
	very coarse sand	2.0	3	9%	60%
Gravel	very fine gravel	4.0	1	3%	68%
	fine gravel	5.7	3	9%	72%
	fine gravel	8.0	2	6%	80%
	medium gravel	11.3	0	0%	80%
	medium gravel	16.0	1	3%	84%
	course gravel	22.3	4	11%	96%
	course gravel	32.0	2	6%	96%
	very coarse gravel	45	1	3%	96%
	very coarse gravel	64	0	0%	100%
	Cobble	small cobble	90	0	0%
medium cobble		128	0	0%	100%
large cobble		180	0	0%	100%
very large cobble		256	0	0%	100%
Boulder		small boulder	362	0	0%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
	Bedrock	bedrock	40096	0	0%
TOTAL % of whole count			35	100%	100%

Summary Data

D50	0.9
D84	18
D95	28

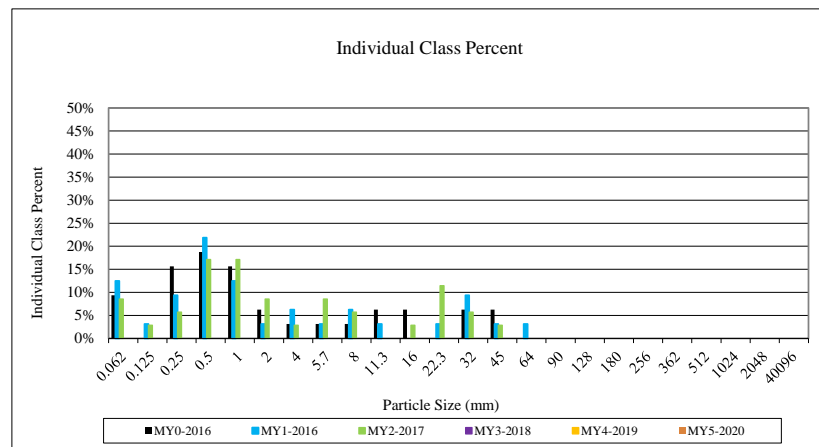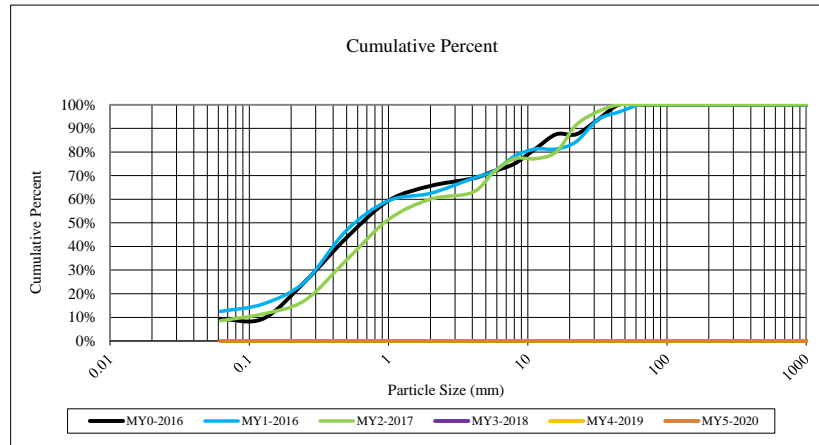

Project Name: Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site



Cross-Section: 6

Feature: Riffle

Description	Material	Size (mm)	2017		
			Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	1	3%	68%
Sand	very fine sand	0.125	2	6%	72%
	fine sand	0.250	1	3%	84%
	medium sand	0.50	0	0%	84%
	coarse sand	1.00	4	11%	88%
	very coarse sand	2.0	3	9%	92%
Gravel	very fine gravel	4.0	2	6%	100%
	fine gravel	5.7	1	3%	100%
	fine gravel	8.0	4	11%	100%
	medium gravel	11.3	1	3%	100%
	medium gravel	16.0	3	9%	100%
	course gravel	22.3	2	6%	100%
	course gravel	32.0	6	17%	100%
	very coarse gravel	45	3	9%	100%
	very coarse gravel	64	1	3%	100%
	very coarse gravel	90	1	3%	100%
Cobble	small cobble	90	1	3%	100%
	medium cobble	128	0	0%	100%
	large cobble	180	0	0%	100%
	very large cobble	256	0	0%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
Bedrock	bedrock	40096	0	0%	100%
TOTAL % of whole count			35	100%	100%

Summary Data

D50	7.7
D84	31
D95	49

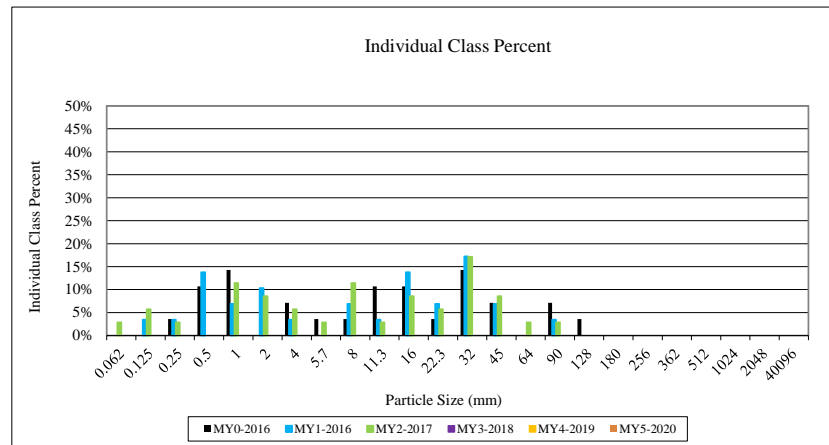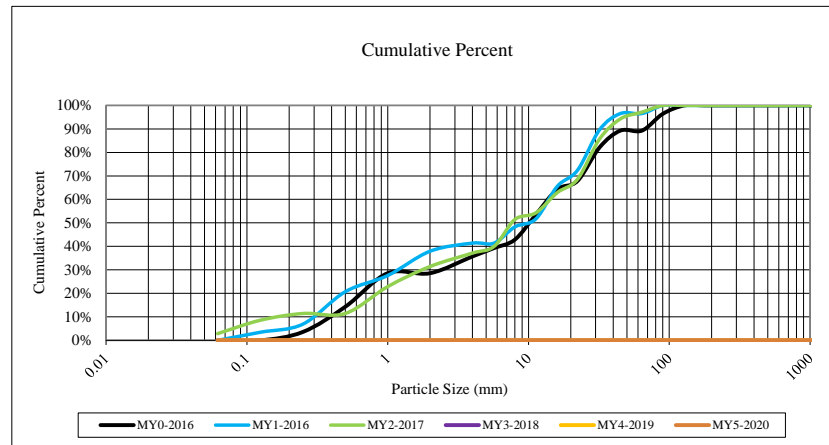

Project Name: Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site

Cross-Section: 8

Feature: Riffle

Description	Material	Size (mm)	2017		
			Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	0	0%	68%
Sand	very fine sand	0.125	0	0%	72%
	fine sand	0.250	0	0%	84%
	medium sand	0.50	2	6%	84%
	coarse sand	1.00	2	6%	88%
	very coarse sand	2.0	4	11%	92%
Gravel	very fine gravel	4.0	1	3%	100%
	fine gravel	5.7	1	3%	100%
	fine gravel	8.0	2	6%	100%
	medium gravel	11.3	0	0%	100%
	medium gravel	16.0	3	9%	100%
	course gravel	22.3	3	9%	100%
	course gravel	32.0	7	20%	100%
	very coarse gravel	45	2	6%	100%
	very coarse gravel	64	3	9%	100%
	very coarse gravel	90	3	9%	100%
Cobble	small cobble	90	3	9%	100%
	medium cobble	128	1	3%	100%
	large cobble	180	1	3%	100%
	very large cobble	256	0	0%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
Bedrock	bedrock	40096	0	0%	100%
TOTAL % of whole count			35	100%	100%

Summary Data

D50	20.9
D84	60
D95	98

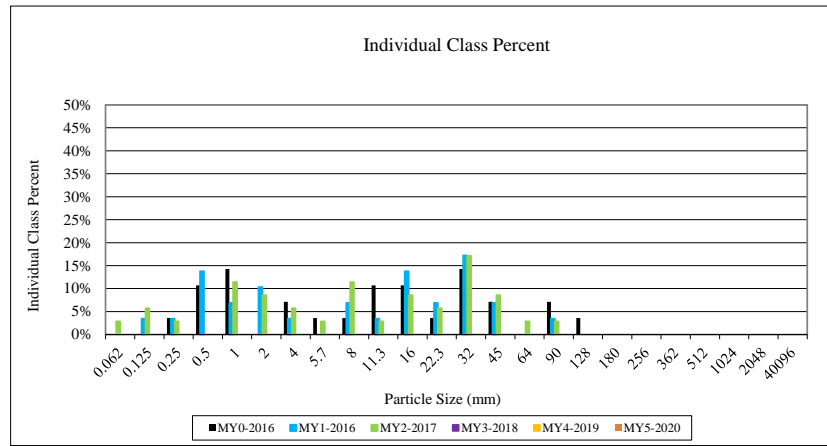
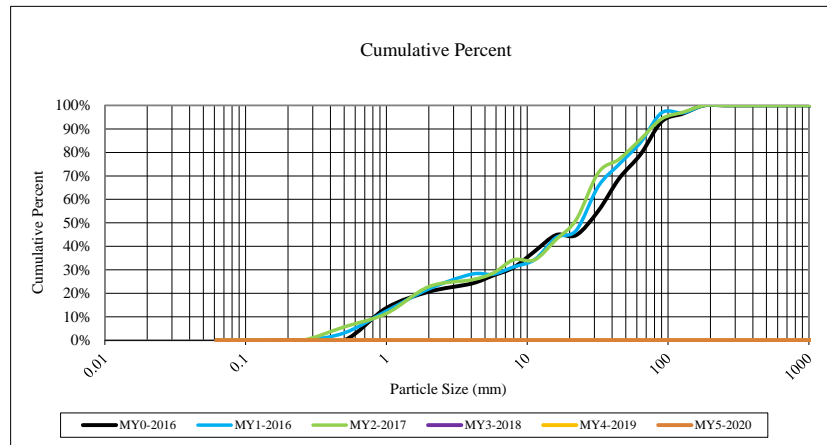


Table 10a. Baseline Stream Data Summary (Neighbors Creek)
Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site - NCDMS Project Number 92872

Parameter	Gauge	Regional Curve			Pre-Existing Condition (Neighbors Cr)					Reference Reach(es) Data					Design (Neighbors Cr)			Monitoring Baseline (Neighbors Cr)						
		LL	UL	Eq.	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	Min	Max	Med	Min	Mean	Med	Max	SD	n	
Dimension and Substrate - Riffle Only																								
BF Width (ft)					5.4			5.9			12.7						11.0	9.6		11.1	12.5	2		
Floodprone Width (ft)					7.4			17.1			150						70			100		2		
BF Mean Depth (ft)					0.9			1.1			0.9						0.8	0.8		0.8	0.8	2		
BF Max Depth (ft)					1.2			1.5			1.2						1.1	1.5		1.7	1.8	2		
BF Cross Sectional Area (ft ²)					4.9			6.5			11.4						8.3	8.0		9.0	9.9	2		
Width/Depth Ratio					5.3			5.8			14.1						14.0	12.0		13.8	15.6	2		
Entrenchment Ratio					1.4			2.9			11.8						6.4	8.0		9.2	10.4	2		
Bank Height Ratio					1.6			2.6			1.0						1.0			1.0		2		
Profile																								
Riffle length (ft)																			5.4	28.3	25.5	64.7	18.2	13
Riffle slope (ft/ft)					0.025			0.035			0.0344						0.0120	0.0000	0.0043	0.0022	0.0121	0.0046	13	
Pool length (ft)																			6.5	11.9	10.4	21.3	5.2	15
Pool Max depth (ft)					1.7			1.8			2.2						2.0	2.8		2.8	2.8	1		
Pool spacing (ft)					16.4			99.2		38.8			64.7		33.0	56.1			7.0	36.1	37.9	74.7	19.8	15
Pattern																								
Channel Beltwidth (ft)					8			22		30.5			32		27.5	66			27.5			66	2	
Radius of Curvature (ft)					5			22		14.5			20		22	44			22			44	2	
Rc:Bankfull width (ft/ft)					0.9			1.5		1.1			1.6		2	4			2			4	2	
Meander Wavelength (ft)					30			128		95			98		44	110			44			110	2	
Meander Width ratio					1.5			4.1		2.4			2.5		4	10			4			10	2	
Transport parameters																								
Reach Shear Stress (competency) lbs/ft ²																								
Max part size (mm) mobilized at bankfull																								
Stream Power (transport capacity) W/m ²																								
Additional Reach Parameters																								
Rosgen Classification					G5/4 - E5/4					C					C			E/C						
Bankfull Velocity (fps)					3.86 - 5.09																			
Bankfull Discharge (cfs)					25																			
Valley Length (ft)					----					----														
Channel Thalweg Length (ft)					----					----					----			541						
Sinuosity					1.01 - 1.21					1.22					1.18			1.18						
Water Surface Slope (ft/ft)					0.019 - 0.0204					0.0205					0.008			0.0222						
BF slope (ft/ft)					----					----					----			----						
Bankfull Floodplain Area (acres)					----					----					----			----						
% of Reach with Eroding Banks					----					----					----			----						
Channel Stability or Habitat Metric					----					----					----			----						
Biological or Other					----					----					----			----						

Table 10b. Baseline Stream Data Summary (Walton Crawley Property)
Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site - NCDMS Project Number 92872

Parameter	Gauge	Regional Curve			Pre-Existing Condition (WC Property)					Reference Reach(es) Data					Design (WC Property)			Monitoring Baseline (WC Property)					
		LL	UL	Eq.	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	Min	Max	Med	Min	Mean	Med	Max	SD	n
Dimension and Substrate - Riffle Only																							
BF Width (ft)					7.9			9.4			12.7						15.5	13.2		14.3	16.8	3	
Floodprone Width (ft)					12.9			16.8			150				55	90				100		3	
BF Mean Depth (ft)					0.8			0.9			0.9						1.1	1.3		1.4	1.5	3	
BF Max Depth (ft)					0.9			1.1			1.2						1.4	1.9		2.0	2.0	3	
BF Cross Sectional Area (ft ²)					6.2			8.4			11.4						16.6	17.6		19.4	25.0	3	
Width/Depth Ratio					10.2			10.4			14.1						14.0	10.2		10.2	11.2	3	
Entrenchment Ratio					1.6			1.8			11.8						4.5	6.0		7.0	7.6	3	
Bank Height Ratio					1.0			2.8			1.0						1.0			1.0		3	
Profile																							
Riffle length (ft)																		6.7	23.9	16.2	58.1	18	20
Riffle slope (ft/ft)					0.024			0.030			0.0344						0.0077	0.0000	0.0032	0.0018	0.0113	0.0036	20
Pool length (ft)																		7.9	24.8	24.8	63.1	10.8	27
Pool Max depth (ft)					1.9			2.1			2.2						2.4	1.3		1.4	1.5	2	
Pool spacing (ft)					6.0			40.8		38.8			64.7		15.5	79.2		14.9	42.5	36.4	93.6	21.3	27
Pattern																							
Channel Beltwidth (ft)					16			25		30.5			32		38.8	93		38.8			93	2	
Radius of Curvature (ft)					5			14		14.5			20		31	62		31			62	2	
Rc:Bankfull width (ft/ft)					0.5			1.5		1.1			1.6		2	4		2			4	2	
Meander Wavelength (ft)					103			121		95			98		77.5	155		77.5			155	2	
Meander Width ratio					11			12.9		2.4			2.5		5	10		5			10	2	
Transport parameters																							
Reach Shear Stress (competency) lbs/ft ²																							
Max part size (mm) mobilized at bankfull																							
Stream Power (transport capacity) W/m ²																							
Additional Reach Parameters																							
Rosgen Classification					B/G					C					C			E/C					
Bankfull Velocity (fps)					3.9-7.5																		
Bankfull Discharge (cfs)					24-63																		
Valley Length (ft)					----					----													
Channel Thalweg Length (ft)					----					----					----			1148					
Sinuosity					1.01-1.2					1.22					1.1			1.1					
Water Surface Slope (ft/ft)					0.0135-0.0340					0.0205					0.0045			0.0145					
BF slope (ft/ft)					----					----					----			----					
Bankfull Floodplain Area (acres)					----					----					----			----					
% of Reach with Eroding Banks					----					----					----			----					
Channel Stability or Habitat Metric					----					----					----			----					
Biological or Other					----					----					----			----					

Table 11a. Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters - Cross Sections)

Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site - NCDMS Project Number 92872

Parameter	Cross Section 1 (Neighbors Branch)							Cross Section 2 (Neighbors Branch)							Cross Section 3 (Neighbors Branch)						
	Riffle							Pool							Riffle						
Dimension	MY0	MY1	MY2	MY3	MY4	MY5	MY5+	MY0	MY1	MY2	MY3	MY4	MY5	MY5+	MY0	MY1	MY2	MY3	MY4	MY5	MY5+
BF Width (ft)	12.5	11.1	11.9					8.5	10.4	9.7					9.6	8.7	8.9				
Floodprone Width (ft) (approx)	100.0	100.0	100.0					NA	NA	NA					100.0	100.0	100.0				
BF Mean Depth (ft)	0.8	0.9	0.8					1.6	1.4	1.4					0.8	0.9	0.9				
BF Max Depth (ft)	1.8	1.6	1.8					2.8	2.9	3.0					1.5	1.5	1.6				
BF Cross Sectional Area (ft ²)	9.9	9.6	9.5					13.6	14.1	14.0					8.0	8.1	8.1				
Width/Depth Ratio	15.8	12.8	14.9					NA	NA	NA					11.5	9.3	9.8				
Entrenchment Ratio	8.0	9.0	8.4					NA	NA	NA					10.4	11.5	11.2				
Bank Height Ratio	1.0	1.0	1.0					1.0	1.0	1.0					1.0	1.0	1.0				
d50 (mm)	0.8	4.9	9.8					----	----	----					0.7	1.1	1.8				

Table 11b. Monitoring Data - Stream Reach Data Summary

Neighbors Branch/Walton Crawley Branch Stream and Wetland Restoration Site - NCDMS Project Number 92872

Parameter	Baseline (Neighbors Branch)							MY-1 (Neighbors Branch)					MY-2 (Neighbors Branch)					MY-3 (Neighbors Branch)					MY-4 (Neighbors Branch)					MY-5 (Neighbors Branch)									
	Min	Mean	Med	Max	SD	n		Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
Dimension and Substrate - Riffle Only																																					
BF Width (ft)	9.6		11.1	12.5		2		8.7		9.9	11.1		2	8.9		10.4	11.9		2																		
Floodprone Width (ft)			100			2				100		2			100		2																				
BF Mean Depth (ft)	0.8		0.8	0.8		2		0.9		0.9	0.9		2	0.8		0.9	0.9		2																		
BF Max Depth (ft)	1.5		1.7	1.8		2		1.5		1.6	1.6		2	1.6		1.7	1.8		2																		
BF Cross Sectional Area (ft ²)	8.0		9.0	9.9		2		8.1		8.9	9.6		2	8.1		8.8	9.5		2																		
Width/Depth Ratio	12.0		13.8	15.6		2		9.7		11.0	12.3		2	9.9		12.4	14.9		2																		
Entrenchment Ratio	8.0		9.2	10.4		2		9.0		10.3	11.5		2	8.4		9.8	11.2		2																		
Bank Height Ratio			1.0			2				1.0		2			1.0		2																				
Profile																																					
Riffle length (ft)	5.4	28.3	25.5	64.7	18.2	13		7.2	26.2	24.9	58.5	17.6	12	8	31	30	66	18	12																		
Riffle slope (ft/ft)	0.0000	0.0043	0.0022	0.0121	0.0046	13		0.0000	0.0046	0.0035	0.0157	0.0046	12	0.0000	0.0041	0.0028	0.0143	0.0042	12																		
Pool length (ft)	7	12	10	21	5	15		7	15	15	26	5	16	4	12	11	27	6	14																		
Pool Max depth (ft)	2.8		2.8	2.8		1		2.9		2.9	2.9		1	3.0		3.0	3.0		1																		
Pool spacing (ft)	7	36	38	75	20	15		7	34	32	74	19	16	11	38	38	74	19	14																		
Pattern																																					
Channel Beltwidth (ft)	27.5			66		2																															
Radius of Curvature (ft)	22			44		2																															
Rc:Bankfull width (ft/ft)	2			4		2																															
Meander Wavelength (ft)	44			110		2																															
Meander Width ratio	4			10		2																															
Additional Reach Parameters																																					
Rosgen Classification	E/C-type							E/C-type					E/C-type																								
Channel Thalweg Length (ft)	541							547					538																								
Sinuosity	1.18							1.18					1.18																								
Water Surface Slope (Channel) (ft/ft)	0.0222							0.022					0.0221																								
BF slope (ft/ft)	----							----					----																								
Ri%/RU%P%G%/S%																																					
SC%/SA%/G%/C%/B%BE%																																					
d16/d35/d50/d84/d95																																					
% of Reach with Eroding Banks	0							0					0																								
Channel Stability or Habitat Metric																																					
Biological or Other																																					

**Appendix E.
Hydrology Data**

Table 12. Verification of Bankfull Events
Table 13. Wetland Hydrology Criteria Attainment Summary
Figure E1. 30-70 Percentile Graph for Rainfall
Groundwater Gauge Graphs

**Table 12. Verification of Bankfull Events
Neighbors Branch/Walton Crawley Branch Site (DMS Project Number 92872)**

Date of Data Collection	Date of Occurrence	Method	Photo (if available)
August 19, 2016	July 4, 2016	Crest gauge data indicates a bankfull event after approximately 1.88 inches of rain documented* in one day.	---
May 18, 2017	April 23, 2017	Crest gauge data indicates a bankfull event after approximately 1.76 inches of rain documented* in one day.	---

*Weather Underground 2017


**Table 13. Wetland Hydrology Criteria Attainment Summary
Neighbors Branch/Walton Crawley Branch Site (DMS Project Number 92872)**

Gauge	Success Criteria Achieved/Max Consecutive Days During Growing Season (Percentage)				
	Year 1 (2016)	Year 2 (2017)	Year 3 (2018)	Year 4 (2019)	Year 5 (2020)
1	Yes/208 Days (92.4%)	Yes/225 Days* (100%)			
2	Yes/164 Days (72.9%)	Yes/225 Days (100%)			


*Gauge 1 malfunctioned for 6 days (July 29 to August 3, 2017); however, based on precipitation data as well as data from Gauge 2, it is expected that this gauge would have continued to be saturated/inundated during this 6 day period.

Figure E1: Neighbors Branch/Walton Crawley Branch 30-70 Percentile Graph for Rainfall

Data from WETS Station : MARION, NC 5340

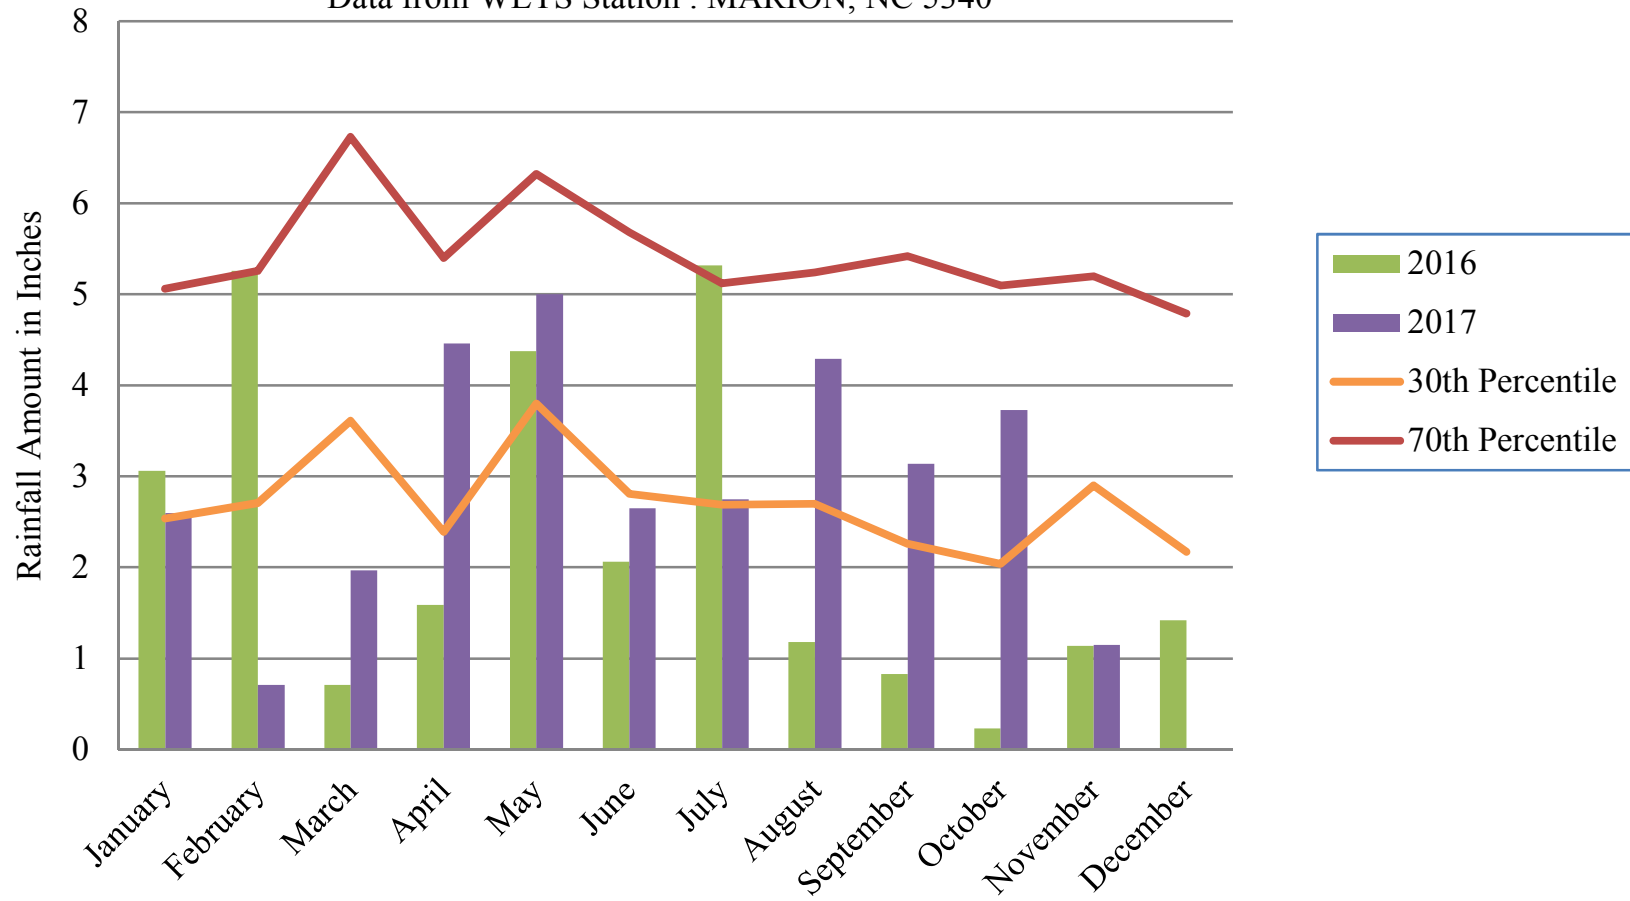

Neighbors Branch Groundwater Gauge 1 Year 2 (2017 Data)

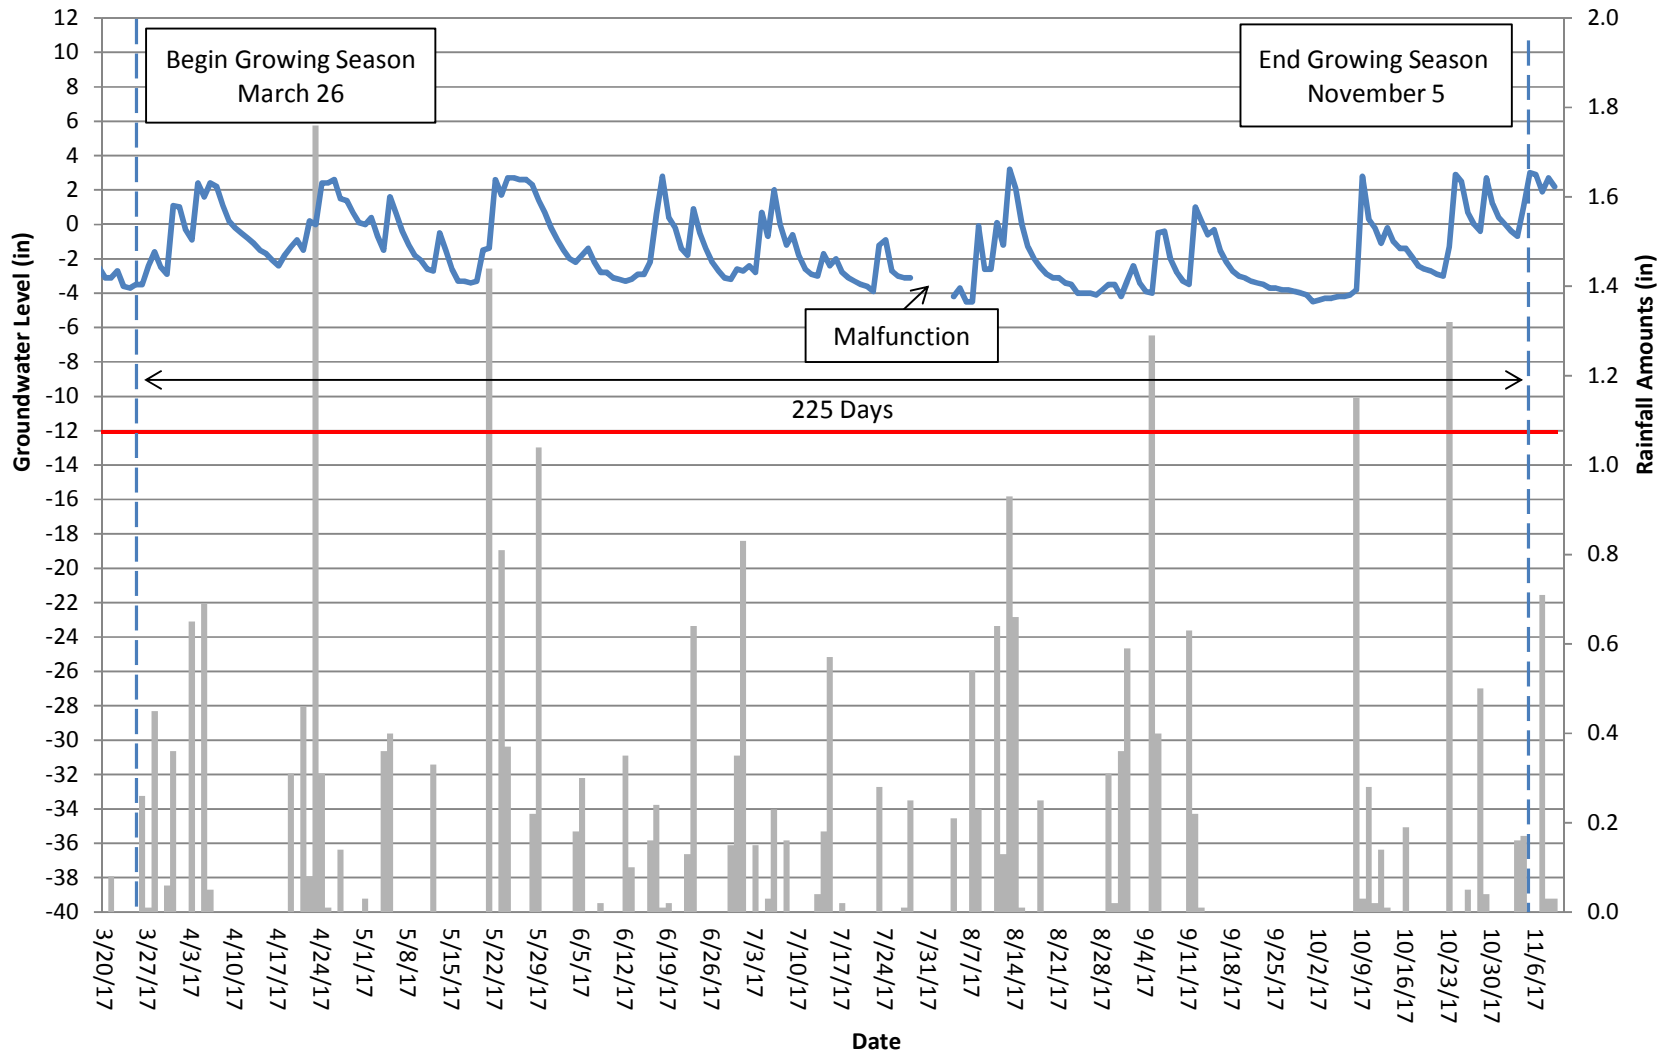

Neighbors Branch Groundwater Gauge 2 Year 2 (2017 Data)

