

Annual Monitoring Report

Monitoring Year 7 of 7

FINAL

Poplin Ridge Stream Restoration Project

NCDMS Contract No.: 004672

NCDMS Project No.: 95359

USACE Permit Action ID: SAW-2012-01079

DWR Project No.: 13-1087

Union County, NC

Data Collected: June and October 2021

Date Submitted: December 2021



Submitted to:

North Carolina Division of Mitigation Services

NCDEQ-DMS, 1652 Mail Service Center Raleigh NC 27699-1652



3600 Glenwood Avenue, Suite 100
Raleigh, NC 27612

Corporate Headquarters
6575 West Loop South, Suite 300
Bellaire, TX 77401
Main: 713.520.5400

December 21, 2021

Paul Wiesner
NC DEQ Division of Mitigation Services
5 Ravenscroft Drive, Suite 102
Asheville, NC 28801

RE: Poplin Ridge Stream Restoration Site: MY7 Monitoring Report (NCDMS ID 95359)

Listed below are comments provided by DMS on November 5, 2021 regarding the Poplin Ridge Stream Restoration Site: Year 7 Monitoring Report and RES' responses.

On October 28, 2021, the Division of Mitigation Services (DMS) received the DRAFT Monitoring Year 7/ closeout report for the Poplin Ridge Stream Restoration Project from Resource Environmental Solutions, LLC (RES). The report establishes the year 7 monitoring and proposed closeout conditions at the site. Anticipated mitigation on the site includes 3,697 linear feet of stream Restoration; 3,305 linear feet of stream Enhancement (Level I); 953 linear feet of stream Enhancement (Level II); and 1,192 linear feet of stream Preservation for a total of 6,107.866 Stream Mitigation Units (SMUs) (R) and 238.400 Stream Mitigation Units (SMUs) (RE). The following are our comments on the DRAFT report:

Section 1.4.1 Vegetation: RES should also inspect and complete invasive treatment along reach UT1-B as invasives (mainly Chinese Privet) were noted along this reach during a 9/30/2021 DMS site visit.

[RES completed invasive treatments in this area but will also complete follow up treatments prior to closeout. This has been added to Section 1.4.1.](#)

Section 1.4.1 Vegetation: The report notes; *"In December 2020, RES inspected the entire easement boundary and replaced all missing easement signage."* During a 9/30/21 site visit, DMS observed multiple t-posts were either missing or knocked down and other areas where the signage was less than the current standard of every 200 ft. As requested in the 10/19/21 email from DMS, RES will need to walk around the entire conservation easement boundary and ensure that each corner is marked and witnessed as required. A PLS should be utilized if any easement corners are identified as missing or damaged. This effort will need to be completed prior to DEQ stewardship acceptance and project closeout. Please update the report text accordingly.

[This section has been updated.](#)



Section 1.4.1 Vegetation: The report notes; *"There was one easement encroachment observed along UT1-2 that will be repaired this winter."* Based on a review of the CCPV maps and a preliminary review of the site on 9/30/21, there are potentially three (3) areas of encroachment along UT1-2. The entire conservation easement should be evaluated to confirm that no additional areas of encroachment or scalloping remain. In all areas where farming practices have encroached into the conservation easement through scalloping, the project would benefit from the addition of 10 ft. conduit poles and additional marking.

Please review and update the report text accordingly. The report text should also indicate how the project encroachment will be resolved so it does not continue (landowner meetings, additional signage, additional plantings, 10-foot conduit poles, etc.). Please also show the encroachment areas on the CCPV map and map legend so it is clear they are encroachment areas in MY7.

[This section and the CCPV has been updated.](#)

Section 1.4.1 Vegetation: *"Planted stem densities among the plots ranged from 243 to 890 planted stems per acre with a mean of stems per acre across all plots."* Please review and include the mean.
[Done.](#)

Section 1.4.2 Stream Geomorphology: *"RES will continue to monitor these areas during future visits to assess the stability of the channel and the need for any repair." "Bank pin array data will continue to be collected and analyzed in future monitoring years to monitor bank erosion trends."* Please review and revise these statements as 2021 is the final year of monitoring and RES is proposing project closure in 2022.

[Done.](#)

Section 1.4.3 Stream Hydrology: This section reports a significant number of bankfull events over the monitoring term. Does RES consider this a project issue or future concern? Please consider and briefly discuss in the report text.

[RES does not believe this is a project issue. The streams were designed to allow for frequent floodplain access and despite the significant number of bankfull events the streams have remained stable. This has been added to the report.](#)

Section 1.4.3 Stream Hydrology: The report text notes stream flow results on UT2-A. Please show this flow gauge on the applicable CCPV map (Figure 2-6). This should also be updated in the MY7 digital support files (shapefiles).

[Done.](#)

Table 5: Please include the date that the project was visually assessed at the top of the table. This was an IRT request at the 2021 credit release meeting. The Visual Stream Morphology Stability Assessment reports that 100% of the project is stable and performing as intended. Please review and confirm that this is correct or minor areas are beneath the mapping threshold. This has been a previous IRT question on projects reporting 100% at MY7/ project closeout.

[Confirmed.](#)



Table 6: Please include the date that the project was visually assessed at the top of the table. This was an IRT request at the 2021 credit release meeting. Once the comments above are reviewed, please update the invasive areas of concern and encroachment areas of concern. The encroachment areas of concern is currently reported at 0% which does not appear correct based on the DMS 9/30/21 site visit and CCPV maps provided. Please update as necessary.

Done.

MY7 2021 Project Station Photos: Please provide dates for all project photos. If exact dates cannot be provided, please include the month and year for each photo. Please also QA/QC the photos and captions. As an example, the photos provided in the draft MY7 report for Stations 4, 5, 6, and 7 are the identical photos provided in the MY6 (2020) report. Photo station 10 is the same as Veg plot 1 and no stream is visually evident. Please review and update accordingly.

Dates have provided for the photos. Photo stations that were missed in 2021 have photos from 2020 in their place. Photo station 10 is installed looking at the buffer area near VP1 not at the stream.

Appendix C: Please include the Poplin Ridge Closeout Vegetation Table in the revised report. Please QA/QC the table to confirm it is consistent with Table 7, Table 9 and previous monitoring years for the project.

Done.

Cross Section #30: The cross section shows approx. bankfull below or at the bottom of the stream bed. Please review and confirm that cross section #30 is correct.

This was a typo and has been corrected in the report.

Table 15: This table is labeled 2020 rainfall summary. Please provide the 2021 (MY7) Rainfall Summary and confirm that the MY7 rainfall data provided is accurate.

This was 2021 rainfall data. The table was mislabeled in the report. This has been corrected.

Appendix E – Flow Gauge Graph: DMS recommends showing the start and end points of the 139 days of consecutive flow reported.

Done.

Digital Support File Comments:

- The flow gauge located at UT2-A does not appear in the CCPV. Please display this feature.

The flow gauge has been added to the CCPV.

- Please review the cross section data included throughout the report. There are instances where data between the report and the submitted excel workbooks are conflicting and where the data are not consistent across report tables. For example, cross section 28 has a reported BHR of 1.1, but in the BHR workbook the calculated value is 0.3.

Done.



- Additionally, in the BHR workbook the bankfull elevation that achieves the MY0 cross sectional area for cross section 28 was calculated before excluding points outside of the main channel. The points outside of the main channel were also not excluded for cross section 4, and this may occur elsewhere. Note that failing to exclude these points will affect multiple parameters (e.g. BHR, cross sectional area, etc.), so please review and ensure these points are excluded for both the BHR and LTOB workbooks.

Done.

- Also note that when comparing the cross section 28 figure and table to Table 11a, it appears that the cross sectional areas are inconsistent. This may be caused by a mix up of data between cross sections 28 and 29. Please review and QA/QC all cross sections to confirm that they are reported accurately in the revised report.

Done.

Prepared by:



3600 Glenwood Avenue, Suite 100
Raleigh, North Carolina 27612

Contents

1.0	Project Summary	3
1.1.	Goals and Objectives	3
1.2.	Success Criteria.....	3
1.3.	Project Setting and Background.....	4
1.4.	Project Performance.....	5
2.0	Methods.....	7
3.0	References.....	7

Appendices

Appendix A. General Tables and Figures

Table 1. Project Components and Mitigation Credits
Table 2. Project Activity and Reporting History
Table 3. Project Contacts
Table 4. Project Information
Figure 1. Vicinity Map

Appendix B. Visual Assessment Data

Figures 2. Current Conditions Plan View Maps
Table 5. Visual Stream Morphology Stability Assessment
Table 6. Vegetation Condition Assessment
2021 Photo Station Photos

Appendix C. Vegetation Plot Data

Table 7. Vegetation Plot Mitigation Success Summary
Table 8. CVS Vegetation Metadata
Table 9. Total Planted Stem Counts
Stems Per Plot Across All Years
Vegetation Plot Photos

Appendix D. Stream Geomorphology Data

Table 10. Baseline Stream Data Summary
Table 11. Dimensional Morphology Summary
Cross Section Plots
Table 12. Pebble Count Data Summary
Charts 1-11. MY7 Stream Reach Substrate Composition Charts
Table 13. Poplin Ridge Bank Pin Array Summary

Appendix E. Hydrology Data

Table 14. Verification of Bankfull Events and Stream Flow Events
Table 15. 2021 Rainfall Summary
MY7 2021 Poplin Ridge UT2-A Flow Chart

Appendix F. Poplin Ridge 2020 Monitoring Adaptive Management

2020 Poplin Ridge Adaptive Management Work Completed Memo
Poplin Ridge MY5 2019 IRT Credit Release Site Visit Memo

1.0 PROJECT SUMMARY

1.1. Goals and Objectives

The project goals address stressors identified in the TLW, and include the following:

- Nutrient removal,
- Sediment removal,
- Reducing runoff from animal operations,
- Filtration of runoff, and
- Improved aquatic and terrestrial habitat.

The project goals will be addressed through the following project objectives:

- Establishing riparian buffer areas adjacent to CAFOs.
- Converting active farm fields to forested buffers,
- Stabilization of eroding stream banks,
- Reduction in streambank slope,
- Restoration of riparian buffer bottomland hardwood habitats, and
- Construction of in-stream structures designed to improve bedform diversity and trap detritus.

1.2. Success Criteria

The success criteria for the Poplin Ridge Stream Restoration Site follows accepted and approved success criteria presented in the USACE Stream Mitigation Guidelines and subsequent NCDMS and agency guidance. Specific success criteria components are presented below.

1.2.1. Stream Restoration

Bankfull Events - Two bankfull flow events must be documented within the seven-year monitoring period. The two bankfull events must occur in separate years. Otherwise, stream monitoring will continue until two bankfull events have been documented in separate years. Bankfull events will be documented using crest gauges, auto-logging crest gauges, photographs, and visual assessments for evidence of debris wrack lines.

Cross-Sections - There should be little change in as-built cross-section. If changes do take place, they should be evaluated to determine if they represent a movement toward a less stable condition, or minor changes that represent an increase in stability.

Bank Pin Arrays - Bank pin arrays will be used as a supplemental method to monitor erosion on selected meander bends. Bank pin exposure will be recorded at each monitoring event.

Digital Image Stations- Digital images will be used to subjectively evaluate channel aggradation or degradation, bank erosion, success of riparian vegetation, and effectiveness of erosion control measures. Longitudinal images should indicate the absence of developing bars within the channel or an excessive increase in channel depth. Lateral images should not indicate excessive erosion or continuing degradation of banks over time. A series of images over time should indicate successional maturation of riparian vegetation.

1.2.2. Vegetation

Interim measures of vegetative success for the site will be the survival of at least 320 three-year-old trees per acre at the end of Year 3 and 260 five-year old trees per acre at the end of Year-5. The final vegetative success criteria will be the survival of 210 trees per acre at the end of Year 7.

1.3. Project Setting and Background

The Poplin Ridge Stream Restoration Site (Site) encompasses approximately 27.17 acres, of which 4.69 acres are wooded and the remaining 22.48 acres are agricultural fields and pastures. The western and eastern systems, UT1 and UT2 respectively, consist of unnamed tributaries to the East Fork of Stewarts Creek. UT1 is divided into seven reaches and UT2 is divided into five reaches. The Site is located within the Yadkin River Watershed (NCDWR sub basin 03-07-14 and HUC 03040105070050) in Union County, North Carolina, approximately six miles north of Monroe. The Site is located within the Stewarts Creek Watershed, a NCDMS targeted local watershed.

Following 2016 monitoring the NCIRT requested a review of the differential between the Approved Mitigation Plan and Baseline Monitoring Report. The table below details the discrepancies by reach. The primary cause of increased baseline SMUs is survey methodology (thalweg vs. centerline). The Mitigation Plan lengths were based on centerline. Also, UT2-4 had a large decrease in SMUs due to loss of land control. RES has reverted back to the Mitigation Plan (Proposed) SMUs.

Reach	Mitigation Type	Proposed Length (LF)*	Mitigation Ratio	Proposed SMUs	Baseline SMUs
UT1-1	Preservation	572	5:1	114	114
UT1-1	Enhancement I	566	1.5:1	377	377
UT1-2	P1 Restoration	1,171	1:1	1,171	1,178
UT1-3	P1 Restoration	901	1:1	901	893
UT1-4	Enhancement I	1,210	1.5:1	807	815
UT1-A	Enhancement I	217	1.5:1	145	144
UT1-B	Preservation	620	5:1	124	124
UT1-B	Enhancement I	455	1.5:1	303	303
UT1-C	Enhancement I	857	1.5:1	571	586
UT2-1	Enhancement II	490	2.5:1	196	196
UT2-2	P1 Restoration	847	1:1	847	847
UT2-3	P1 Restoration	521	1.5:1	347	347
UT2-4*	P1 Restoration	257	1:1	257	257
UT2-A	Enhancement II	463	2.5:1	185	184
Total		9,147		6,346	6,365

*Reach was shortened due to loss of land control.

**The contracted amount of credits for this Site was 6,944 SMUs

On July 11, 2018, the IRT, DMS, and RES had a site visit to discuss credit release at Poplin Ridge. It was determined that credits from UT2-1, UT2-2, and UT2-A associated with the drained pond bottom would be withheld (812.2 SMUs). Additionally, it was requested that RES submits a Remedial Action Plan to address the issues in the drained pond bottom and that a flow gauge is to be installed on UT2-A to document at least intermittent flow. RES repaired this reach in September 2019 and added the flow gauge to UT2-A. NCIRT, NCDMS, and RES, had a site visit to review the pond bottom repairs in June 2020. Flow, bed and bank, and riffle/pool sequences were observed throughout the pond repair reach. NCIRT did not note any issue

with releasing MY6 credits. The adaptive management work and site visit are further detailed in **Appendix F**.

1.4. Project Performance

Monitoring Year 7 (MY7) data was collected throughout 2021 with the final field visit in October. Year 7 monitoring activities included visual assessment of all reaches and the surrounding easement, 17 permanent photo stations, 13 permanent vegetation monitoring plots, four pond bottom repair cross sections, and one pond bottom repair random vegetation plot. The Site has met all stream and vegetation success criteria and is recommended for closeout.

Summary information and data related to the occurrence of items such as beaver activity or easement encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report (formerly the Mitigation Plan) and in the Mitigation Plan (formerly the Restoration Plan) documents available on NCDMS' website (<https://deq.nc.gov/about/divisions/mitigation-services/dms-projects>). All raw data supporting the tables and figures in the appendices is available from NCDMS upon request.

1.4.1. Vegetation

Visual assessment of the site indicates that herbaceous vegetation has become well established on-site. The invasive species treatments were performed in October and November 2020 and then again in November 2021. Treatments focused in the resprouting areas along UT1-1, UT1-B, and UT2-1. Follow up treatments will be performed prior to closeout. In September 2021, DMS visited the site and observed multiple damaged easement markers and three areas of encroachment. The areas of encroachment are minor along UT1-2 and shown on **Figure 2**. The larger of the three areas was repaired in November 2021 with t-posts and horse tape and the other two areas will be repaired the same way before closeout. RES replanted the MY6 low stem density area in the pond bottom in January 2021. The replanting consisted of six-foot willow poles and silky dogwood livestakes. Encroachment and invasive treatment areas are included in **Table 6** and **Figure 2** for reference during the closeout site visit.

Monitoring of 13 permanent vegetation plots and 1 random vegetation plot was completed in October 2021. Summary tables and photographs associated with MY7 monitoring can be found in **Appendix C**. MY7 monitoring data indicates that all vegetation monitoring plots met the MY7 interim success criteria of 210 planted stems per acre. Planted stem densities among the plots ranged from 243 to 890 planted stems per acre with a mean of 584 stems per acre across all plots. When volunteer stems are included, densities ranged between 364 and 890 total stems per acre with a mean of 624 stems per acre across all plots. A total of 17 plant species were documented within the monitoring plots. The average planted stem height in plots was 14.2 feet. The data from the random vegetation plot in the pond bottom repair area showed 445 stems per acre with an average planted stem height of 8.8 feet. This plot only documented black willows, however, other species observed in the pond bottom included: cottonwood, willow oak, sycamore, water oak, and river birch.

1.4.2. Stream Geomorphology

Visual assessment of the stream channel was performed in order to document signs of instability, such as eroding banks, structural instability, or excessive sedimentation. Small areas of bank scour, bed aggradation, and bed degradation were reported as problem areas in previous years but are no longer problem areas in MY7.

Geomorphic data for MY7 was collected during June 2021. Cross-section plots and summary tables related to stream morphology are located in **Appendix D**. Geomorphic data collection for XS 3-29 was not performed in MY6 per the approved Mitigation Plan. The MY7 stream morphology data indicate that, in general, the stream is stable. A few small changes were noted in the cross-section dimensions; however, these are relatively minor and do not exceed expected adjustments in channel form. Starting in MY5, baseline cross sectional area was used to determine bankfull for riffle dimensions. No riffle cross sections documented a BHR over 1.2.

Bank pin arrays indicate that no erosion occurred during MY7.

Substrate monitoring was performed during MY7. Pebble count D_{50} fell into the coarse gravel range for UT1-1, medium gravel for UT1-2, medium gravel for UT1-3, medium gravel for UT1-4, very fine gravel for UT1-A, coarse gravel for UT1-B, coarse gravel for UT1-C, very fine sand for UT2-3, medium gravel for UT2-A, and coarse gravel for UT2-4.

Overall, documented shifts in stream morphology for the repair reach show that a defined channel is continuing to form and maintain. The project has met success criteria regarding stable dimension as well as substrate and sediment transport.

1.4.3.Stream Hydrology

Since project completion in April 2015, 23 bankfull events have been recorded on UT1-2, 66 on UT1-4, and 56 on UT2-3. MY7 bankfull events were identified by transducer gauge readings. RES does not believe the significant number of bankfull events is a project issue. The streams were designed to allow for frequent floodplain access and the streams have remained stable throughout the seven years of monitoring. Stream hydrology issues were identified and discussed with the NCIRT during a site visit in July 2018. RES installed a flow gauge downstream of XS-3 on UT2-A in January 2019. The flow gauge recorded 139 consecutive days of flow and 142 total days of flow in MY7.

1.4.4.Adaptive Management

During a site visit with NCIRT and NCDMS at the Poplin Ridge Site in July 2018, several problem areas were identified. Per the request of NCIRT, RES provided an Adaptive Management Plan to the IRT August 2019. The work proposed in the Adaptive Management Plan was completed in September 2019. The construction was completed as designed. The pond bottom was planted in April 2020 and January 2021. Additionally, RES installed the flow gauge discussed in the Adaptive Management Plan, in January 2019.

In response to problem areas identified in the Poplin Ridge Stream Restoration Site Year 5 Monitoring Report and the 2019 Adaptive Management Plan, RES completed adaptive management work in fall 2019 and spring 2020. In September 2019, RES regraded and installed structures on UT2-2 through the pond bottom (including the lower portion of UT2-A) and replanted the pond bottom and other low stem density areas in April 2020. RES also installed monitoring devices in the pond bottom. The devices include Cross Sections 30 and 31 and two random vegetation plots. The cross sections and random plot in the pond bottom monitored since MY5 and were measured again during MY7 monitoring. The results are attached.

2.0 METHODS

Visual assessment of the project was performed at the beginning and end of the monitoring year. Permanent photo station photos were also collected during the morphologic and vegetation data collection events. Additionally, photos were taken of vegetation or stream problem areas not revealed in the permanent photo station images.

Geomorphic measurements (MY0, MY1, MY2, MY3, MY5, MY7) were taken during low flow conditions using a Topcon GTS-312 Total Station. Three-dimensional coordinates associated with each cross-section data were collected in the field and geo-referenced (NAD83 State Plane feet FIPS 3200). Morphological data was limited to 29 cross-sections. Survey data were imported into CAD, ArcGIS, and Excel for data processing and analysis. Channel substrate was characterized using a Wolman Pebble Count as outlined in Harrelson et al. (1994) and processed using Microsoft Excel.

Vegetation success is being monitored at 13 permanent monitoring plots. Vegetation monitoring follows the CVS-EEP Level 2 Protocol for Recording Vegetation, version 4.2 (Lee et al. 2008) and includes analysis of species composition and density of planted specimens. Data is processed using the CVS data entry tool. In the field, the four corners of each plot were permanently marked with rebar and photos of each plot are taken from the origin each monitoring year.

Precipitation data was collected using an Onset HOBO Data Logging Rain Gauge. Bankfull events were documented with manual crest gauges, which were installed within each of the following reaches - UT1-2, UT1-4, and UT2-3. Crest gauge data was downloaded during quarterly site visits. The flow gauge is a pressure transducer located in a pool. Flow data is calculated by detecting pool water elevations greater than the elevation of the downstream riffle.

3.0 REFERENCES

- Environmental Banc & Exchange. 2014. Poplin Ridge Stream Restoration Project Final Mitigation Plan. North Carolina Ecosystems Enhancement Program, Raleigh.
- Lee, M.T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2008. CVS-EEP Protocol for Recording Vegetation. Version 4.2. <http://cvs.bio.unc.edu/methods.htm>; accessed November 2008.
- Rosgen, D. 1996. Applied River Morphology. Wildland Hydrology. Pagosa Springs, Colorado.

Appendix A
General Tables and Figures

**Table 1. Project Components and Mitigation Credits
Poplin Ridge Stream Restoration Project**

Mitigation Credits									
Type	Stream*		Riparian Wetland		Non-riparian Wetland		Buffer	Nitrogen	Phosphorous
	R	RE	R	RE	R	RE		Nutrient Offset	Nutrient Offset
Totals	6107.87	238.40	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Project Components									
Project Component -or- Reach ID	As-Built		Existing		Approach (PI, PII etc.)	Restoration - or- Restoration Equivalent	Restoration Footage or Acreage	Mitigation Ratio	SMUs
	Stationing/Location (LF)		Footage/Acreage						
UT1-1	1+20 to 6+92		572		Preservation	RE	572	1 : 5	114
UT1-1	6+92 to 12+58		566		EI	R	566	1 : 1.5	377
UT1-2	12+58 to 24+96		1,284		PI	R	1,171	1 : 1	1,171
UT1-3	24+96 to 34+50		833		PI	R	901	1 : 1	901
UT1-4	34+50 to 46+73		1,252		EI	R	1,210	1 : 1.5	807
UT1-A	0+73 to 2+89		197		EI	R	217	1 : 1.5	145
UT1-B	0+09 to 6+29		620		Preservation	RE	620	1 : 5	124
UT1-B	6+90 to 11+45		512		EI	R	455	1 : 1.5	303
UT1-C	1+21 to 10+01		883		EI	R	857	1 : 1.5	571
UT2-1	0+00 to 4+90		490		EII	R	490	1 : 2.5	196
UT2-2	4+90 to 13+97		875		PI	R	847	1 : 1	847
UT2-3	13+97 to 19+18		495		PI	R	521	1 : 1.5	347
UT2-4	19+18 to 22+07		270		PI	R	257	1 : 1	257
UT2-A	0+45 to 5+06		365		EII	R	463	1 : 2.5	185
Component Summation									
Restoration Level	Stream	Riparian Wetland		Non-riparian Wetland		Buffer	Upland		
	(linear feet)	(acres)		(acres)		(square feet)	(acres)		
		Riverine	Non-Riverine						
Restoration	3,697								
Enhancement I	3,305								
Enhancement II	953								
Creation									
Preservation	1,192								
High Quality									
Preservation									
BMP Elements									
Element	Location	Purpose/Function				Notes			
---	---	---				---			
---	---	---				---			
---	---	---				---			
BMP Elements									
BR = Bioretention Cell; SF = Sand Filter; SW = Stormwater Wetland; WDP = Wet Detention Pond; DDP = Dry Detention Pond; FS = Filter Strip; S = Grassed Swale; LS = Level Spreader; NI = Natural Infiltration Area; FB = Forested Buffer									

**Table 2. Project Activity and Reporting History
Poplin Ridge Stream Restoration Project**

Activity or Report	Data Collection Complete	Completion or Delivery
Mitigation Plan	NA	Jul-14
Final Design – Construction Plans	NA	Oct-14
Construction Completed	Apr-15	Apr-15
Site Planting Completed	Apr-15	Apr-15
Baseline Monitoring Document (Year 0 Monitoring – baseline)	Apr-15	Jul-15
Year 1 Monitoring	Dec-15	Jan-16
Year 2 Monitoring	Sep-16	Oct-16
Invasive Species Treatment	NA	Aug-17
Year 3 Monitoring	Stream: Sep-17	Nov-17
	Vegetation: Sep-17	
Invasive Species Treatment and Supplemental Planting	NA	Feb-18
Invasive Species Treatment	NA	June-18
Invasive Species Treatment	NA	Aug-18
Year 4 Monitoring	Vegetation: Sep-18	Feb-19
Beaver Dam Removal	NA	Sept-19
Stream Adaptive Management (UT2-2 Pond Bottom)	NA	Sept-19
Year 5 Monitoring	Stream: June/July-19	Jan-20
	Vegetation: Aug-19	
Supplemental Planting	NA	Apr-20
Invasive Species Treatment	NA	Oct-20
Invasive Species Treatment	NA	Nov-20
Year 6 Monitoring	Vegetation: Nov-20	Dec-20
Invasive Species Treatment	NA	Dec-20
Pond Supplemental Planting	NA	Jan-21
Invasive Species Treatment and Encroachment Repair	NA	Dec-21
Year 7 Monitoring	Stream: June-21	Oct-21
	Vegetation: Oct-21	
Invasive Species Treatment and Encroachment Repair	NA	Jan-22

**Table 3. Project Contacts Table
Poplin Ridge Stream Restoration Project**

Designer	WK Dickson and Co., Inc. 720 Corporate Center Drive Raleigh, NC 27607 (919) 782-0495 Frasier Mullen, PE
Construction Contractor	Wright Contracting PO Box 545 Siler City, NC 27344 (919) 663-0810 Joseph Wright
Planting Contractor	Resource Environmental Solutions, LLC 3600 Glenwood Avenue, Suite 100 Raleigh, NC 27612 (919) 209-1061 David Godley
Seeding Contractor	Wright Contracting PO Box 545 Siler City, NC 27344 (919) 663-0810 Joseph Wright
Seed Mix Sources	Green Resource
Nursery Stock Suppliers	Arbogen, NC Forestry Services Nursery
Full Delivery Provider	Resource Environmental Solutions, LLC 3600 Glenwood Avenue, Suite 100 Raleigh, NC 27612
Project Manager:	Brad Breslow
Monitoring Performers (MY0)	Resource Environmental Solutions, LLC 3600 Glenwood Avenue, Suite 100 Raleigh, NC 27612 (919) 209-1061
Project Manager:	Brian Hockett, PLS
Monitoring Performers (MY1-MY2) 2015-2016	Equinox 37 Haywood Street, Suite 100 Asheville, NC 28801
Project Manager:	Drew Alderman (828) 253-6856
Monitoring Performers (MY3+) 2017+	Resource Environmental Solutions, LLC 3600 Glenwood Avenue, Suite 100 Raleigh, NC 27612 (919) 741-6268
Project Manager:	Ryan Medric

Table 4. Project Information Poplin Ridge Stream Restoration Project						
Project Name	Poplin Ridge Stream Restoration Project					
County	Union					
Project Area (acres)	27.17					
Project Coordinates (latitude and longitude)	UT1: 35° 03' 15.97" N 80° 34' 21.64" W					
	UT2: 35° 03' 17.99" N 80° 33' 46.77" W					
Project Watershed Summary Information						
Physiographic Province	Piedmont					
River Basin	Yadkin					
USGS Hydrologic Unit 8-digit	3040105					
USGS Hydrologic Unit 14-digit	03040105070050					
DWQ Sub-basin	03-07-14					
Project Drainage Area (acres)	UT1: 1.14 square miles (728 acres)					
	UT2: 1.35 square miles (861 acres)					
Project Drainage Area Percentage of Impervious Area	UT1: 8%					
	UT2: 5%					
CGIA Land Use Classification	developed (open space, low density, med. density, high density), cultivated crops, pasture/hay, deciduous forest, evergreen forest					
Reach Summary Information						
Parameters	UT1-R1	UT1-R2	UT1-R3	UT1-R4	UT1-A	UT1-B
Length of reach (linear feet)	1,138	1,178	893	1,223	216	1,075
Valley Classification	VIII	VIII	VIII	VIII	VIII	VIII
Drainage area (acres)	136	248	384	728	88	120
NCDWQ stream identification score	35	22.5	30	31	35	35
NCDWQ Water Quality Classification	WS-III	WS-III	WS-III	WS-III	WS-III	WS-III
Morphological Description (stream type)	E4	E4	E4	C4	E4	E4/C4
Evolutionary trend	Stage I	Stage II	Stage II	Stage V	Stage I	Stage I/III
Underlying mapped soils	CmB	CmB, TbB2	CmB, TbB2	ChA	CmB	CmB
Drainage class	mod. well	mod. well; well	mod. well; well	somewhat poorly	mod. well	mod. well
Soil Hydric status	Not Hydric	Not Hydric	Not Hydric	Partially Hydric	Not Hydric	Not hydric
Slope	0.48%	0.70%	0.40%	0.50%	1.20%	1.80%
FEMA classification	N/A	N/A	N/A	Zone AE	N/A	N/A
Native vegetation community	mixed hardwood forest, cultivated	cultivated	cultivated	cultivated	cultivated	mixed hardwood forest, cultivated
Percent composition of exotic invasive vegetation	10%	0%	0%	0%	5%	15%

Table 4 Cont'd. Project Information Poplin Ridge Stream Restoration Project						
Reach Summary Information						
Parameters	UT1-C	UT2-R1	UT2-R2	UT2-R3	UT2-R4	UT2-A
Length of reach (linear feet)	880	490	847	521	257	461
Valley Classification	VIII	VIII	VIII	VIII	VIII	VIII
Drainage area (acres)	250	631	726	792	861	49
NCDWQ stream identification score	35	33.5	33.5	22.5	33.5	33.5
NCDWQ Water Quality Classification	WS-III	WS-III	WS-III	WS-III	WS-III	WS-III
Morphological Description (stream type)	E4	C4c	N/A	E4	E4	C4
Evolutionary trend	Stage IV	Stage VI	N/A	Stage II	Stage II	Stage IV
Underlying mapped soils	TbB2	ChA	ChA	ChA, BaB	ChA	ChA, CmA
Drainage class	well	somewhat poorly	somewhat poorly	somewhat poorly; well	somewhat poorly	somewhat poorly; mod. well
Soil Hydric status	Not Hydric	Partially Hydric	Partially Hydric	Partially Hydric	Partially Hydric	Not Hydric
Slope	0.80%	0.27%	0.10%	0.57%	0.31%	1.30%
FEMA classification	N/A	Zone AE	Zone AE	Zone AE	Zone AE	N/A
Native vegetation community	cultivated	woody cover, cultivated	cultivated	cultivated	cultivated	cultivated
Percent composition of exotic invasive vegetation	0%	20%	0%	0%	0%	0%
Regulatory Considerations						
Regulation	Applicable?	Resolved?	Supporting Documentation			
Waters of the United States - Section 404	Yes	Yes	SAW-2012-01079			
Waters of the United States - Section 401	Yes	Yes	DWR# 13-1087			
Endangered Species Act	Yes	Yes	USFWS (Corr. Letter)			
Historic Preservation Act	Yes	Yes	SHPO (Corr. Letter)			
Coastal Zone Management Act (CZMA)/Coastal Area Management Act (CAMA)	No	N/A	N/A			
FEMA Floodplain Compliance	Yes	Yes	EEP Floodplain Requirements Checklist			
Essential Fisheries Habitat	No	N/A	N/A			

Driving Directions: To access the site from the city of Monroe, travel west on West Roosevelt Boulevard, then turn north onto Secrest Shortcut Road. To access UT1, travel 3.6 miles on Secrest Shortcut Road, then turn right onto a gravel farm road and drive approximately 0.6 miles. To access UT2, travel north on Secrest Shortcut Road for 2.8 miles, then turn right onto Roanoke Church Road. After 0.8 miles, turn left onto a gravel farm road. This private road will split just past the pond on the left. At the split stay to the left and travel approximately 800 feet to access the downstream end of UT2.

The subject project site is an environmental restoration site of the NCDMS and encompassed by a recorded conservation easement, but is bordered by land with private ownership. Accessing the site may require traversing areas near or along the easement boundary and therefore access to the general public is not permitted.


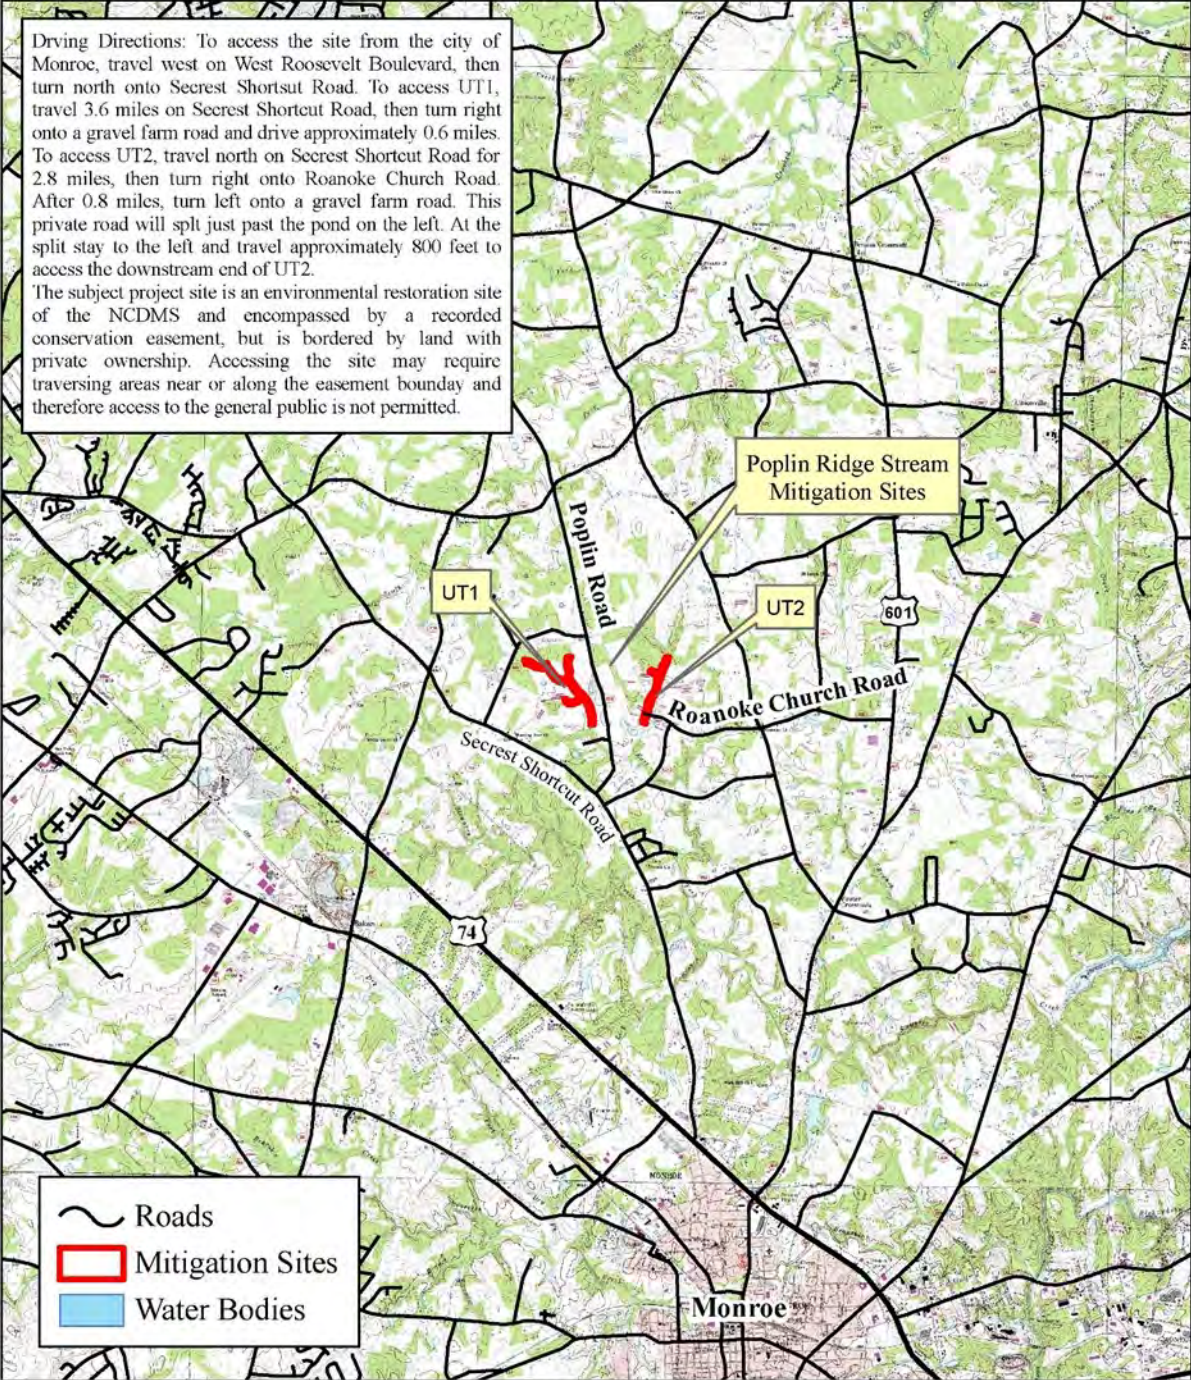


Figure 1
Poplin Ridge Mitigation Site
Project Vicinity Map



Appendix B
Visual Assessment Data

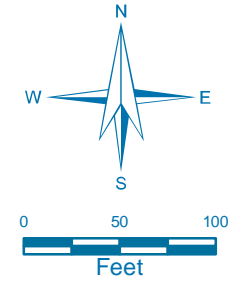


Figure 2
1
Poplin Ridge Stream Restoration Project
MY7 2021
Current Conditions
Plan View

Date: 12/21/2021 Drawn by: RTM


1 inch = 100 feet

LEGEND

- Conservation Easement
- Fixed VP >210 stems/acre
- Random VP >210 stems/acre
- Invasive Treatment
- Encroachment Repair
- Cross Section
- BMP
- Enhancement I
- Enhancement II
- Preservation
- Restoration
- Stream Structure
- Crest Gauge
- Flow Gauge
- Rain Gauge
- Photo Station
- Top of Bank

Vegetation Condition Assessment

		Target Community		
		Present	Marginal	Absent
Invasive Species	Absent			
	Present			

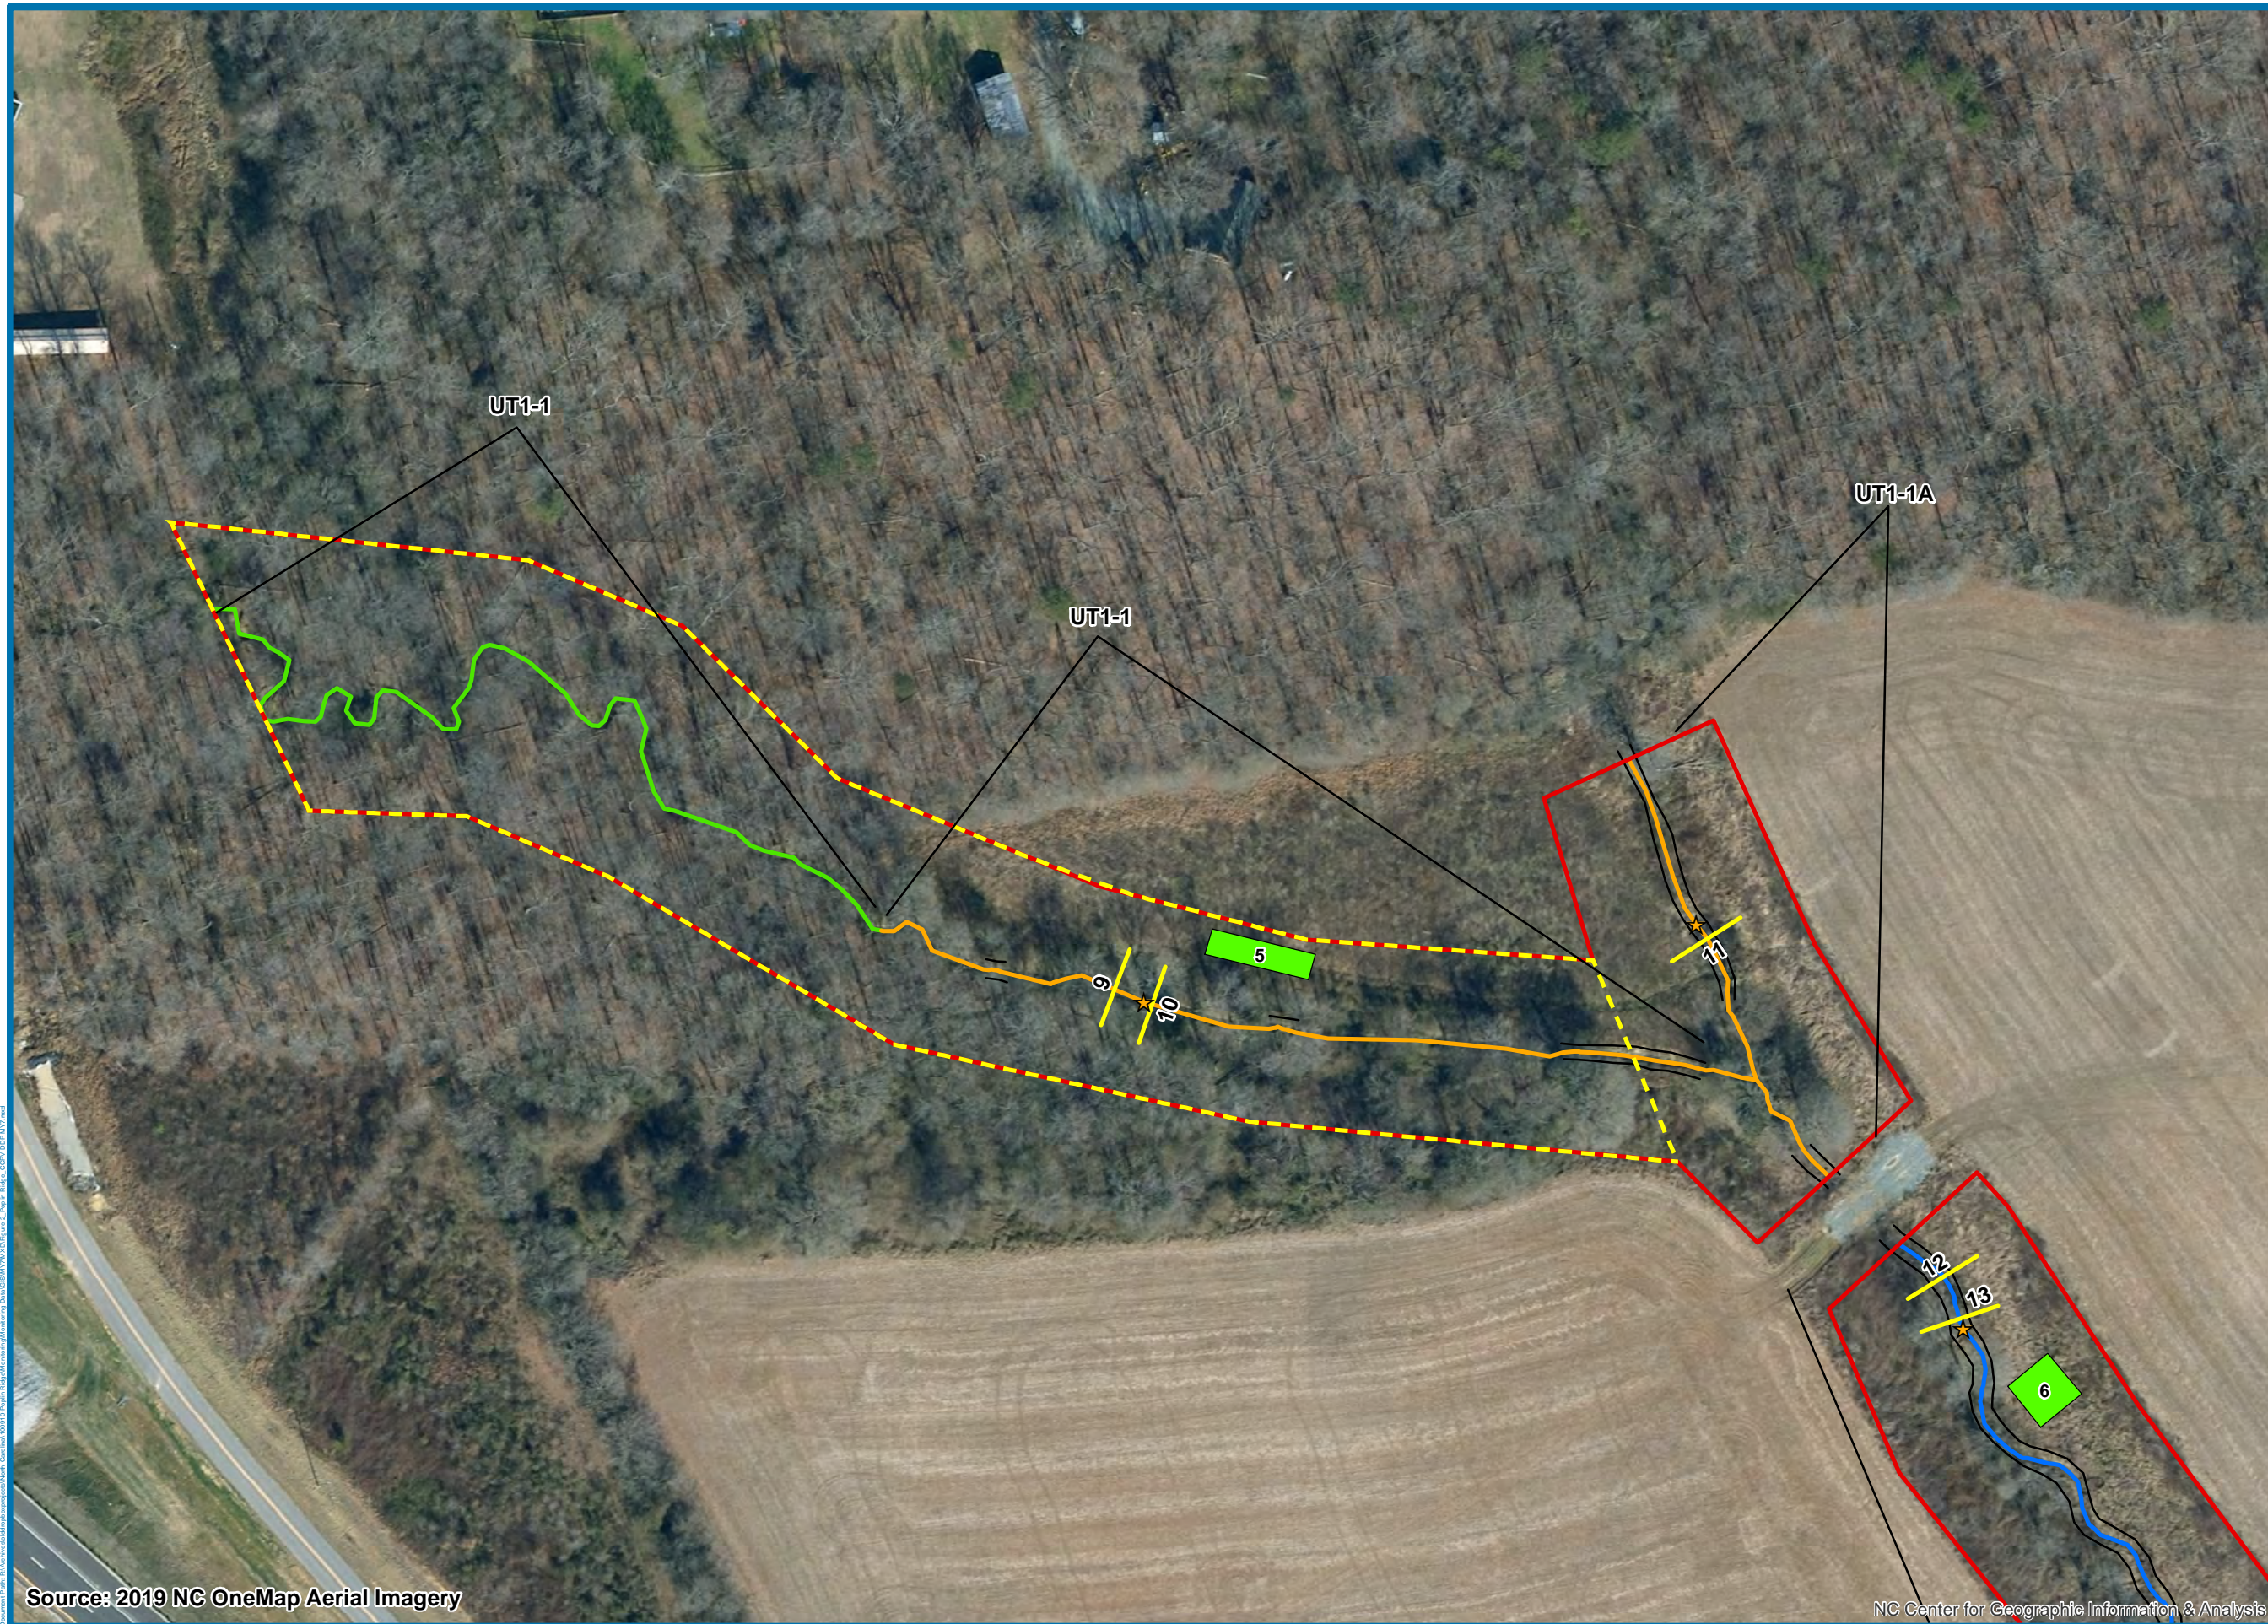

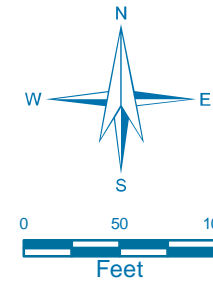


Figure 2
2
Poplin Ridge Stream Restoration Project
MY7 2021
Current Conditions
Plan View

Date: 12/21/2021 Drawn by: RTM

1 inch = 100 feet

LEGEND

- ▭ Conservation Easement
- ▭ Fixed VP >210 stems/acre
- ▭ Random VP >210 stems/acre
- ▭ Invasive Treatment
- ▭ Encroachment Repair
- ▭ Cross Section
- BMP
- ▭ Enhancement I
- ▭ Enhancement II
- ▭ Preservation
- ▭ Restoration
- ▭ Stream Structure
- ⊕ Crest Gauge
- ⊕ Flow Gauge
- ⊕ Rain Gauge
- ★ Photo Station
- Top of Bank

Vegetation Condition Assessment

Invasive Species	Target Community		
	No Fill	Present	Marginal Absent
Absent			
Present			



Source: 2019 NC OneMap Aerial Imagery

NC Center for Geographic Information & Analysis

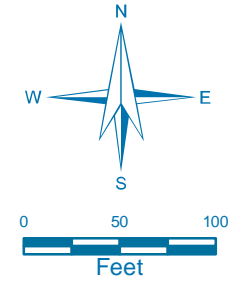


Figure 2
3
Poplin Ridge Stream Restoration Project
MY7 2021
Current Conditions
Plan View

Date: 12/21/2021 Drawn by: RTM

1 inch = 100 feet

LEGEND

- ▭ Conservation Easement
- ▭ Fixed VP >210 stems/acre
- ▭ Random VP >210 stems/acre
- ▭ Invasive Treatment
- Encroachment Repair
- Cross Section
- BMP
- Enhancement I
- Enhancement II
- Preservation
- Restoration
- Stream Structure
- ⊕ Crest Gauge
- ⊕ Flow Gauge
- ⊕ Rain Gauge
- ★ Photo Station
- Top of Bank

Vegetation Condition Assessment

Invasive Species	Target Community		
	Present	Marginal	Absent
Absent	No Fill		
Present			



Source: 2019 NC OneMap Aerial Imagery

NC Center for Geographic Information & Analysis

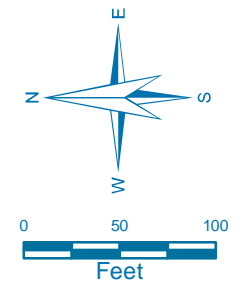


Figure 2
4
**Poplin Ridge Stream
Restoration Project
MY7 2021**
**Current Conditions
Plan View**

Date: 12/21/2021 Drawn by: RTM

1 inch = 100 feet

LEGEND

- Conservation Easement
- Fixed VP >210 stems/acre
- Random VP >210 stems/acre
- Invasive Treatment
- Encroachment Repair
- Cross Section
- BMP
- Enhancement I
- Enhancement II
- Preservation
- Restoration
- Stream Structure
- + Crest Gauge
- + Flow Gauge
- + Rain Gauge
- ★ Photo Station
- Top of Bank

Vegetation Condition Assessment

Invasive Species	Target Community		
	No Fill	Present	Marginal Absent
Absent			
Present			



Source: 2019 NC OneMap Aerial Imagery

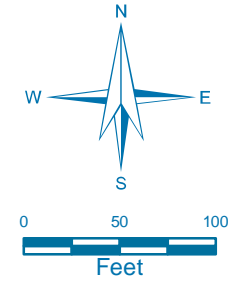


Figure 2
5
Poplin Ridge Stream Restoration Project
MY7 2021
Current Conditions
Plan View

Date: 12/21/2021 Drawn by: RTM


1 inch = 100 feet

LEGEND

- ▭ Conservation Easement
- ▭ Fixed VP >210 stems/acre
- ▭ Random VP >210 stems/acre
- ▭ Invasive Treatment
- ▭ Encroachment Repair
- ▬ Cross Section
- - BMP
- ▬ Enhancement I
- ▬ Enhancement II
- ▬ Preservation
- ▬ Restoration
- ▬ Stream Structure
- ⊕ Crest Gauge
- ⊕ Flow Gauge
- ⊕ Rain Gauge
- ★ Photo Station
- ▬ Top of Bank

Vegetation Condition Assessment

Invasive Species	Target Community		
	No Fill	Present	Marginal Absent
Absent			
Present			

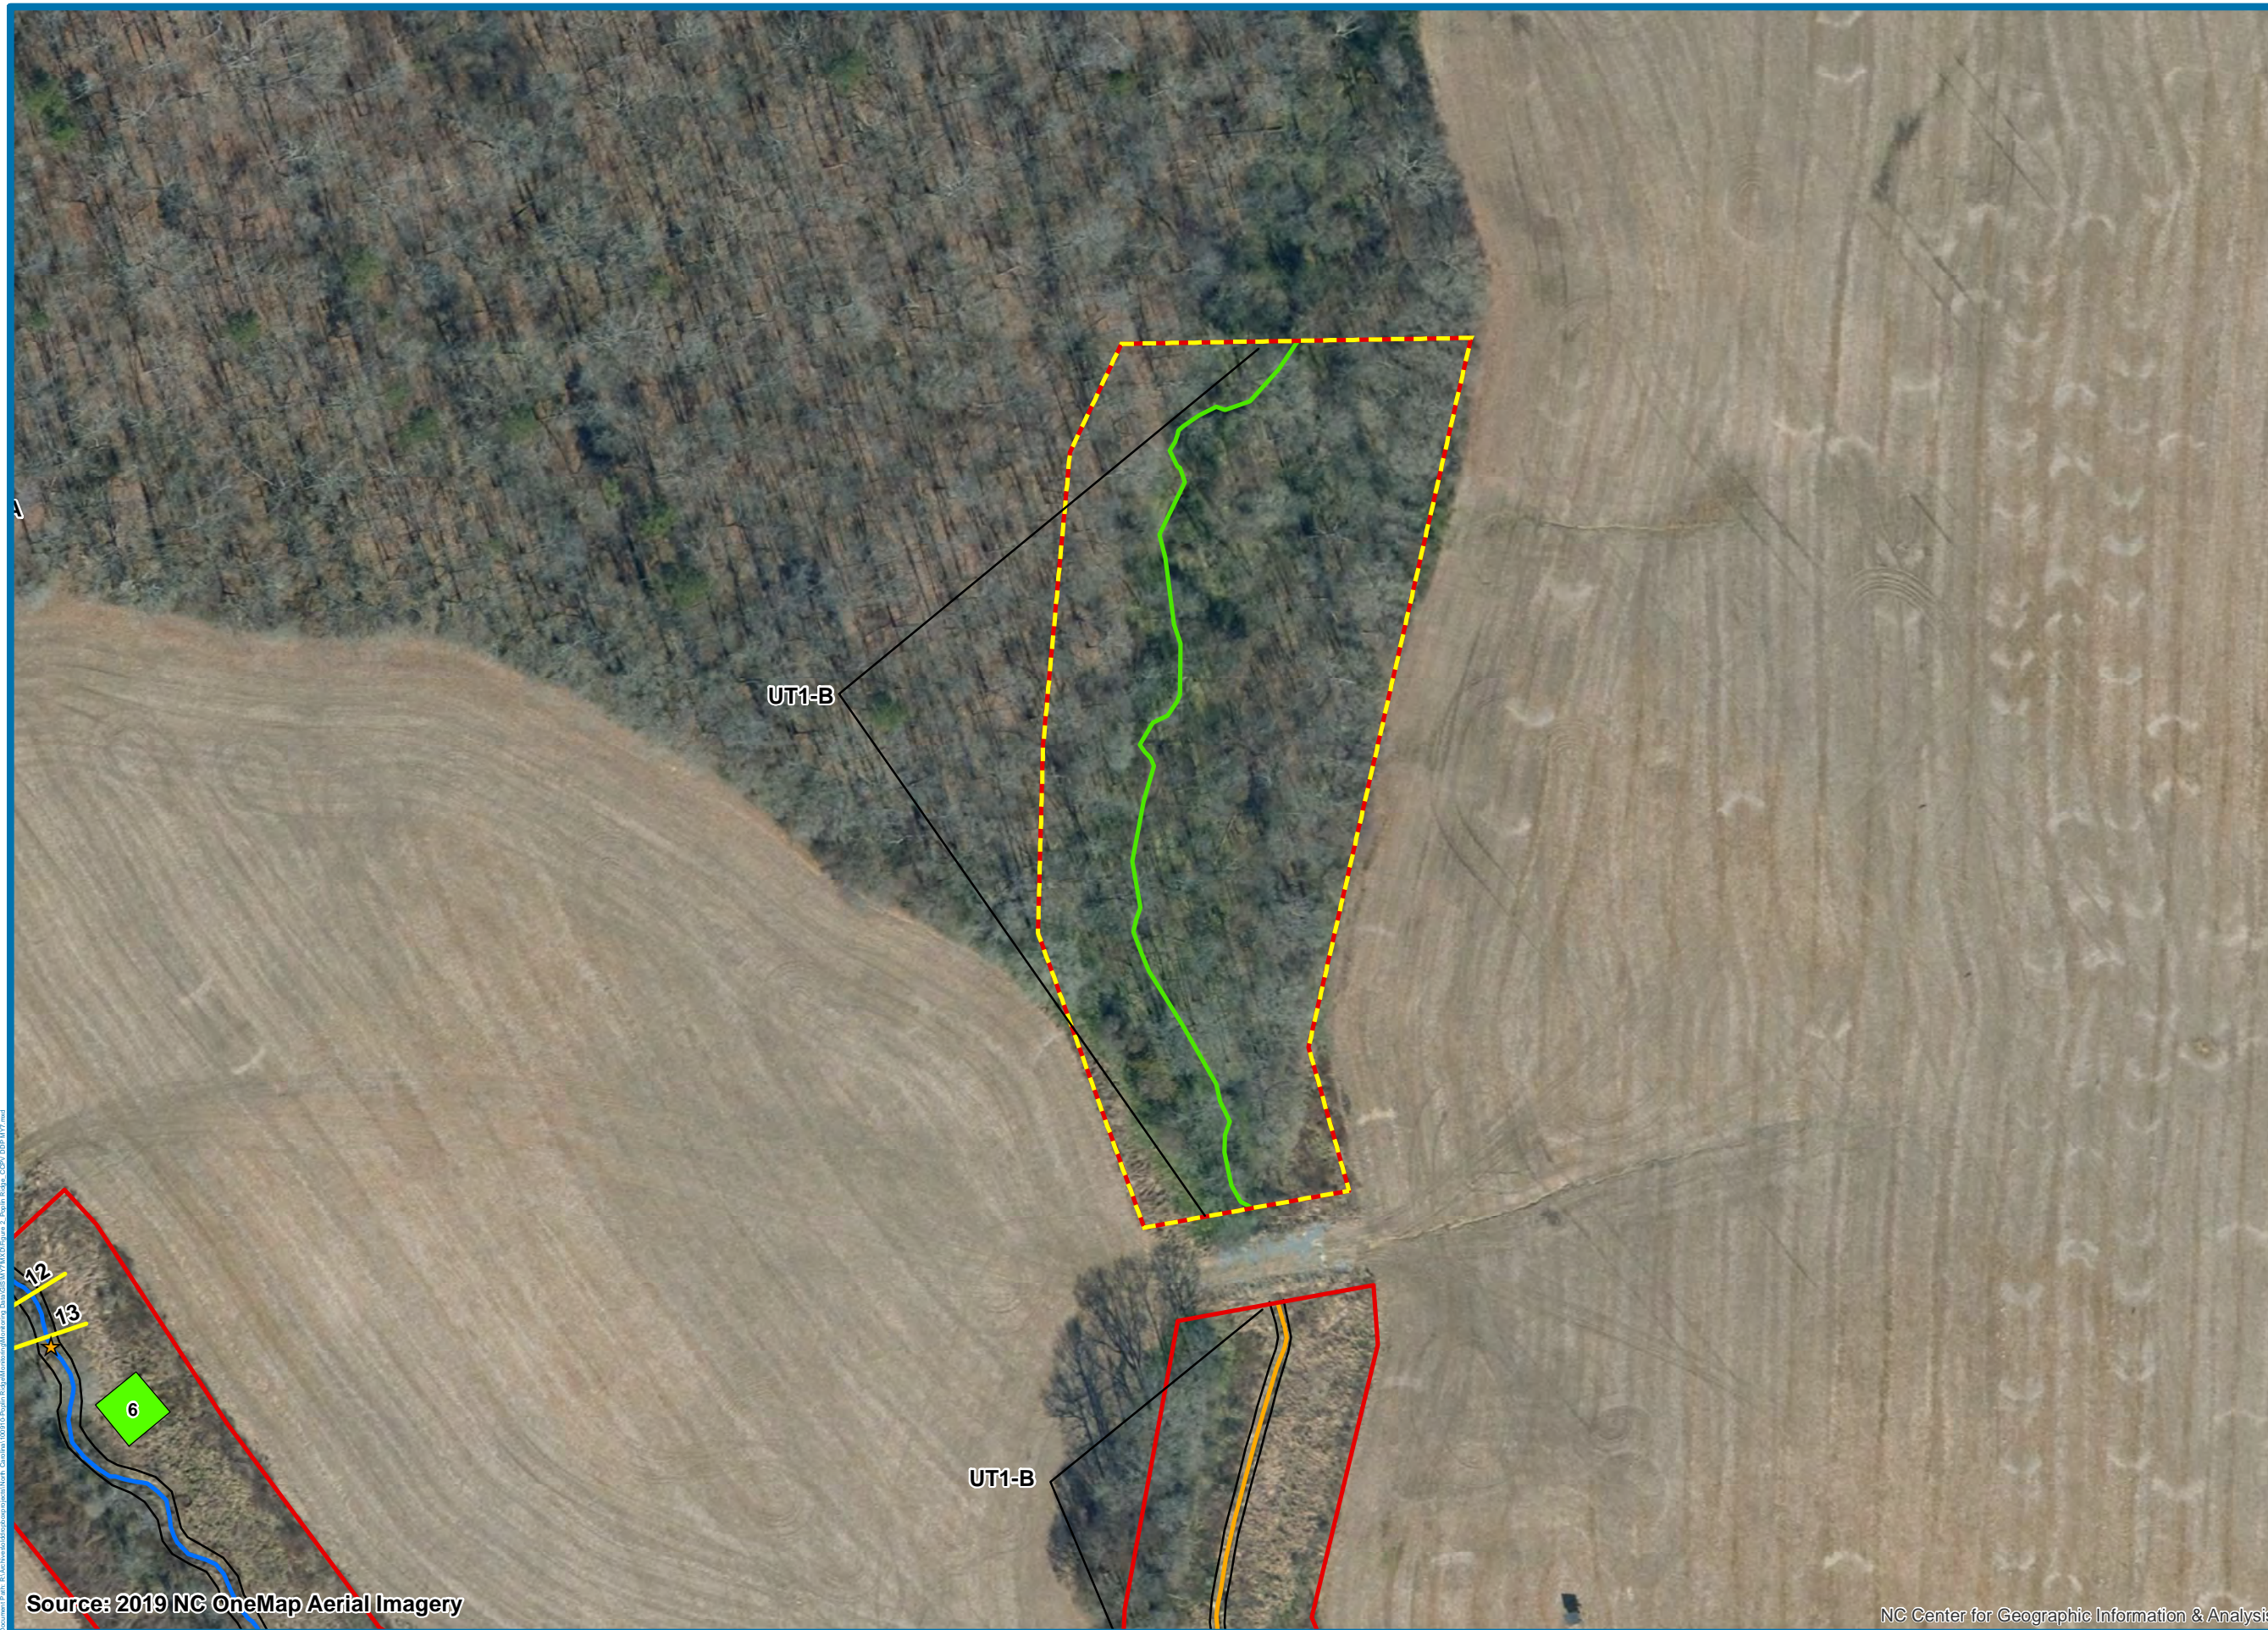

Source: 2019 NC OneMap Aerial Imagery

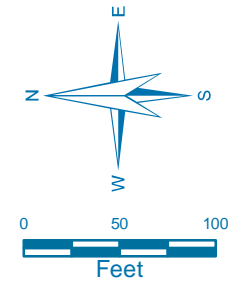


Figure 2
6
Poplin Ridge Stream Restoration Project
MY7 2021
Current Conditions
Plan View

Date: 12/21/2021 Drawn by: RTM

1 inch = 100 feet

LEGEND

- ▭ Conservation Easement
- ▭ Fixed VP >210 stems/acre
- ▭ Random VP >210 stems/acre
- ▭ Invasive Treatment
- ▭ Encroachment Repair
- ▬ Cross Section
- - BMP
- ▬ Enhancement I
- ▬ Enhancement II
- ▬ Preservation
- ▬ Restoration
- ▬ Stream Structure
- ⊕ Crest Gauge
- ⊕ Flow Gauge
- ⊕ Rain Gauge
- ★ Photo Station
- ▬ Top of Bank

Vegetation Condition Assessment

		Target Community		
		Present	Marginal	Absent
Invasive Species	Absent	No Fill	No Fill	No Fill
	Present	No Fill	No Fill	No Fill



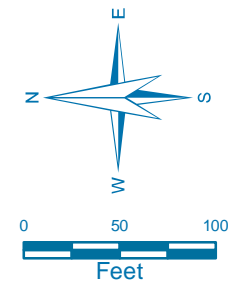


Figure 2
7
Poplin Ridge Stream Restoration Project
MY7 2021
Current Conditions
Plan View

Date: 12/21/2021 Drawn by: RTM

1 inch = 100 feet

LEGEND

- ▭ Conservation Easement
- ▭ Fixed VP >210 stems/acre
- ▭ Random VP >210 stems/acre
- ▭ Invasive Treatment
- Encroachment Repair
- Cross Section
- - BMP
- Enhancement I
- Enhancement II
- Preservation
- Restoration
- Stream Structure
- ⊕ Crest Gauge
- ⊕ Flow Gauge
- ⊕ Rain Gauge
- ★ Photo Station
- Top of Bank

Vegetation Condition Assessment

		Target Community		
		Present	Marginal	Absent
Invasive Species	Absent	No Fill	▭	▭
	Present	▭	▭	▭



**Table 5. Visual Stream Morphology Stability Assessment
 Poplin Ridge Stream Restoration Site - UT1-1 - Enhancement I
 Assessed Length 566 feet | Assessed Date (All Reaches) 10/13/2021**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation	
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%				
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%				
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	-	-							-
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	-	-						-
	4. Thalweg Position	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	-	-							-
		1. Thalweg centering at upstream of meander bend (Run).	-	-							-
		2. Thalweg centering at downstream of meander bend (Glide).	-	-							-
	2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0				100%
2. Undercut		Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A	
3. Mass Wasting		Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A	
Totals					0	0	100%	N/A	N/A	N/A	
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	3	3				100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	3	3				100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	3	3				100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does NOT exceed 15%.	3	3				100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	3	3				100%			

**Table 5 cont'd. Visual Stream Morphology Stability Assessment
Poplin Ridge Stream Restoration Site - UT1-2 - P1 Restoration
Assessed Length 1,178 feet**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	26	26		100%				
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6).	25	25		100%				
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	25	25		100%				
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	25	25		100%				
		2. Thalweg centering at downstream of meander bend (Glide).	25	25		100%				
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			1	8	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
	Totals				0	0	100%	N/A	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	3	3		100%				
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	3	3		100%				
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	3	3		100%				
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	3	3		100%				
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio \geq 1.6. Rootwads/logs providing some cover at base-flow.	3	3		100%				

**Table 5 cont'd. Visual Stream Morphology Stability Assessment
Poplin Ridge Stream Restoration Site - UT1-3 - P1 Restoration
Assessed Length 893 feet**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	18	18			100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6).	18	18			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	18	18			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	18	18			100%			
		2. Thalweg centering at downstream of meander bend (Glide).	18	18			100%			
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
	Totals					0	0	100%	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	3	3			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	3	3			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	3	3			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	3	3			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio \geq 1.6. Rootwads/logs providing some cover at base-flow.	3	3			100%			

**Table 5 cont'd. Visual Stream Morphology Stability Assessment
Poplin Ridge Stream Restoration Site - UT1-4 - Enhancement I
Assessed Length 1,223 feet**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	-	-			-			
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	-	-					
	4. Thalweg Position	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	-	-			-			
		1. Thalweg centering at upstream of meander bend (Run).	-	-			-			
	2. Thalweg centering at downstream of meander bend (Glide).	-	-			-				
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
	Totals					0	0	100%	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	N/A	N/A			N/A			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	N/A	N/A			N/A			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	N/A	N/A			N/A			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	N/A	N/A			N/A			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	N/A	N/A			N/A			

**Table 5 cont'd. Visual Stream Morphology Stability Assessment
Poplin Ridge Stream Restoration Site - UT1-A - Enhancement I
Assessed Length 216 feet**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	-	-			-			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	-	-			-			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	-	-			-			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	-	-			-			
		2. Thalweg centering at downstream of meander bend (Glide).	-	-			-			
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
	Totals					0	0	100%	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	N/A	N/A			N/A			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	N/A	N/A			N/A			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	N/A	N/A			N/A			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	N/A	N/A			N/A			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	N/A	N/A			N/A			

**Table 5 cont'd. Visual Stream Morphology Stability Assessment
Poplin Ridge Stream Restoration Site - UT1-B - Enhancement I
Assessed Length 455 feet**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation	
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%				
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%				
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	11	11							100%
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	11	11						100%
	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).		11	11							100%
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	11	11							100%
		2. Thalweg centering at downstream of meander bend (Glide).	11	11							100%
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%	
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A	
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A	
	Totals					0	0	100%	N/A	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	1	1				100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	1	1				100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	1	1				100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	1	1				100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	1	1				100%			

**Table 5 cont'd. Visual Stream Morphology Stability Assessment
Poplin Ridge Stream Restoration Site - UT1-C - Enhancement I
Assessed Length 880 feet**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	14	14			100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	13	13			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	13	13			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	13	13			100%			
		2. Thalweg centering at downstream of meander bend (Glide).	13	13			100%			
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
	Totals					0	0	100%	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	2	2			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	2	2			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	2	2			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	2	2			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	2	2			100%			

**Table 5 cont'd. Visual Stream Morphology Stability Assessment
Poplin Ridge Stream Restoration Site - UT2-1 - Enhancement II
Assessed Length 490 feet**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	-	-			-			
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	-	-					
	4. Thalweg Position	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	-	-			-			
		1. Thalweg centering at upstream of meander bend (Run).	-	-			-			
	2. Thalweg centering at downstream of meander bend (Glide).	-	-			-				
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
	Totals					0	0	100%	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	2	2			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	2	2			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	2	2			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does NOT exceed 15%.	2	2			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	2	2			100%			

**Table 5 cont'd. Visual Stream Morphology Stability Assessment
Poplin Ridge Stream Restoration Site - UT2-2 - P1 Restoration
Assessed Length 847 feet**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	5	5			100%			
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	5	5					
	4. Thalweg Position	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	5	5			100%			
		1. Thalweg centering at upstream of meander bend (Run).	5	5			100%			
	2. Thalweg centering at downstream of meander bend (Glide).	5	5			100%				
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
	Totals					0	0	100%	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	2	2			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	2	2			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	2	2			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	2	2			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	2	2			100%			

**Table 5 cont'd. Visual Stream Morphology Stability Assessment
Poplin Ridge Stream Restoration Site - UT2-3 - P1 Restoration
Assessed Length 521 feet**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	8	8		100%				
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6).	8	8		100%				
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	8	8		100%				
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	8	8		100%				
		2. Thalweg centering at downstream of meander bend (Glide).	8	8		100%				
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
	Totals					0	0	100%	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	3	3		100%				
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	3	3		100%				
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	3	3		100%				
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	3	3		100%				
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio \geq 1.6. Rootwads/logs providing some cover at base-flow.	3	3		100%				

**Table 5 cont'd. Visual Stream Morphology Stability Assessment
Poplin Ridge Stream Restoration Site - UT2-4 - P1 Restoration
Assessed Length 257 feet**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation	
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%				
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%				
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	4	4							100%
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	5	5						100%
	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).		5	5							100%
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	5	5							100%
		2. Thalweg centering at downstream of meander bend (Glide).	5	5							100%
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%	
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A	
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A	
	Totals					0	0	100%	N/A	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	N/A	N/A				N/A			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	N/A	N/A				N/A			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	N/A	N/A				N/A			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	N/A	N/A				N/A			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	N/A	N/A				N/A			

**Table 5 cont'd. Visual Stream Morphology Stability Assessment
Poplin Ridge Stream Restoration Site - UT2-A - Enhancement II
Assessed Length 461 feet**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation		
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%					
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%					
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	10	10			100%					
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	13			13				100%	
	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).		13	13			100%					
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	13	13			100%					
		2. Thalweg centering at downstream of meander bend (Glide).	13	13			100%					
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.					0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.					0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A		
	Totals				0	0	100%	N/A	N/A	N/A		
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	5	5			100%					
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	5	5			100%					
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	5	5			100%					
	3. Bank Protection	Bank erosion within the structures extent of influence does NOT exceed 15%.	5	5			100%					
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	5	5			100%					

**Table 6. Vegetation Condition Assessment
Poplin Ridge Stream Restoration Site**

Planted Acreage : 22.5						Assessment Date: 12/1/2021					
Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage						
1. Bare Areas	Very limited cover of both woody and herbaceous material.	N/A	0	0.00	0%						
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	N/A	0	0.00	0%						
			Totals	0	0.00	0%					
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	N/A	0	0.00	0%						
			Cumulative Totals	0	0.00	0%					
Easement Acreage : 27.1											
Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage						
4. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale).	Yellow Dash	3	6.45	24%						
5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	Blue Simple Hatch	3	0.08	0%						

N/A - Item does not apply.

Monitoring Year 7 – 2021 Photo Station Photos



**Project Reach UT1-1 – Permanent Photo Station 1
Station 8+53 – Looking Upstream – 6/3/2021**



**Project Reach UT1-2 – Permanent Photo Station 2
Station 14+58 – Looking Upstream – 6/3/2021**



Project Reach UT1-2 – Permanent Photo Station 3
Station 21+50 – Looking Downstream – 10/13/2021



Project Reach UT1-3 – Permanent Photo Station 4
Station 26+50 – Looking Upstream at Crossing – 11/10/2020



Project Reach UT1-3 – Permanent Photo Station 5
Station 27+50 – Looking Downstream – 11/10/2020



Project Reach UT1-4 – Permanent Photo Station 6
Station 47+20 – Looking Upstream – 11/10/2020



Project Reach UT1-A - Permanent Photo Station 7
Station 2+00 – Looking Downstream – 6/2/2021



Project Reach UT1-B – Permanent Photo Station 8
Station 9+86 – Looking Downstream



Project Reach UT1-C – Permanent Photo Station 9
Station 2+50 – Looking Upstream – 10/13/2021



Project Reach UT2-1 – Permanent Photo Station 10
Station 4+50 – Looking Upstream – 10/13/2021



Project Reach UT2-2– Permanent Photo Station 11
Station 11+00 – Looking Upstream at Pond Bottom – 2/1/2021



Project Reach UT2-2 – Permanent Photo Station 12
Station 11+00 – Looking Downstream – 6/3/2021



Project Reach UT2-2 – Permanent Photo Station 13
Station 7+59 – Looking Upstream – 6/3/2021



Project Reach UT2-3 – Permanent Photo Station 14
Station 13+83 – Looking Downstream – 6/3/2021



Project Reach UT2-4 – Permanent Photo Station 15
Station 20+39 – Looking Downstream – 6/3/2021



Project Reach UT2-A – Permanent Photo Station 16
Station 1+22 – Looking Downstream – 6/3/2021



Project Reach UT2-A – Permanent Photo Station 17
Station 2+62 – Looking Downstream – 6/3/2021

Appendix C
Vegetation Plot Data

Table 7. MY7 Vegetation Plot Criteria Attainment

Plot #	Planted Stems/Acre	Volunteer Stems/Acre	Total Stems/Acre	Success Criteria Met?	Average Planted Stem Height (ft)
1	445	162	607	Yes	21.5
2	364	81	445	Yes	14.6
3	648	0	648	Yes	17.2
4	890	0	890	Yes	17.3
5	890	0	890	Yes	12.6
6	728	81	809	Yes	12.3
7	688	0	688	Yes	17.9
8	688	0	688	Yes	9.8
9	445	81	526	Yes	7.5
10	243	121	364	Yes	7.4
11	607	40	648	Yes	10.1
12	405	0	405	Yes	21.4
13	688	0	688	Yes	14.3
R1	445	0	445	Yes	8.8
Project Avg	584	40	624	Yes	14

Table 8. CVS Vegetation Plot Metadata Poplin Ridge Stream Restoration Site	
Report Prepared By	Ryan Medric
Date Prepared	11/13/2020 0:00
database name	Poplin Ridge 95359 2020 MY6 CVS Vegetation.mdb
database location	
computer name	
file size	
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
ALL Stems by Plot and spp	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
PROJECT SUMMARY-----	
Project Code	95359
project Name	Poplin Ridge Stream Restoration Project
Description	
River Basin	Yadkin-Pee Dee
length(ft)	
stream-to-edge width (ft)	
area (sq m)	
Required Plots (calculated)	
Sampled Plots	13

Poplin Ridge (95359)

Stems Per Plot Across All Years

Plot	MY7 - 2021			MY6 - 2020			MY5 - 2019			MY4 - 2018			MY3 - 2017			MY2 - 2016			MY1 - 2015			MY0 - 2015		
	Planted Stems	Total Stems	Total Stems/Ac	Planted Stems	Total Stems	Total Stems/Ac	Planted Stems	Total Stems	Total Stems/Ac	Planted Stems	Total Stems	Total Stems/Ac	Planted Stems	Total Stems	Total Stems/Ac	Planted Stems	Total Stems	Total Stems/Ac	Planted Stems	Total Stems	Total Stems/Ac	Planted Stems	Total Stems	Total Stems/Ac
1	11	15	607	15	22	890	16	22	890	17	22	890	19	26	1052	21	25	1012	21	21	850	27	27	1093
2	9	11	445	9	9	364	8	9	364	8	9	364	2	3	121	2	3	121	3	3	121	20	20	809
3	16	16	648	16	18	728	16	18	728	16	17	688	17	18	728	17	20	809	17	18	728	25	25	1012
4	22	22	890	22	27	1093	23	26	1052	24	25	1012	27	28	1133	27	43	1740	27	28	1133	27	27	1093
5	22	22	890	22	37	1497	23	39	1578	26	39	1578	26	160	6475	27	262	10603	27	45	1821	32	32	1295
6	18	20	809	19	19	769	19	20	809	19	19	769	20	20	809	22	22	890	22	22	890	26	26	1052
7	17	17	688	17	17	688	20	20	809	20	21	850	20	20	809	20	33	1335	20	20	809	26	26	1052
8	17	17	688	17	30	1214	16	16	647	16	16	647	7	16	647	10	10	405	10	10	405	22	22	890
9	11	13	526	11	11	445	3	3	121	3	3	121	4	4	162	7	7	283	9	9	364	24	24	971
10	6	9	364	6	6	243	1	1	40	1	4	162	1	2	81	0	3	121	0	4	162	23	23	931
11	15	16	647	15	18	728	13	15	607	13	13	526	15	17	688	17	17	688	18	18	728	30	30	1214
12	10	10	405	10	10	405	11	12	486	11	11	445	12	12	486	14	14	567	15	18	728	24	24	971
13	17	17	688	17	17	688	16	16	647	17	17	688	21	24	971	25	25	1012	24	26	1052	34	34	1376

Monitoring Year 7 – 2021 Vegetation Plot Photos
10/13/2021



Poplin Ridge - Vegetation Monitoring Plot 1



Poplin Ridge - Vegetation Monitoring Plot 2



Poplin Ridge - Vegetation Monitoring Plot 3



Poplin Ridge - Vegetation Monitoring Plot 4



Poplin Ridge - Vegetation Monitoring Plot 5



Poplin Ridge - Vegetation Monitoring Plot 6



Poplin Ridge - Vegetation Monitoring Plot 7



Poplin Ridge - Vegetation Monitoring Plot 8



Poplin Ridge - Vegetation Monitoring Plot 9



Poplin Ridge - Vegetation Monitoring Plot 10



Poplin Ridge - Vegetation Monitoring Plot 11



Poplin Ridge - Vegetation Monitoring Plot 12



Poplin Ridge - Vegetation Monitoring Plot 13



Poplin Ridge – Random Vegetation Monitoring Plot 1

Appendix D
Stream Geomorphology Data

Table 10 Cont'd - Morphological Parameters Summary (Reach UT2)

Project Name/Number: Poplin Ridge Stream Restoration Project

Feature	Reference Reach		Existing					Design				As-Built MY0				
			UT2-R1	UT2-R2	UT2-R3	UT2-R4	UT2-A	UT1-R2		UT1-R3/R4		UT1-R2		UT1-R3/R4		
			Enh. II	Rest.	Rest.	Rest.	Enh. II	Rest.		Rest.		Rest.		Rest.		
	Riffle	Pool	Riffle	Pond	Riffle	Riffle	Riffle	Riffle	Pool	Riffle	Pool	Riffle	Pool	Riffle	Pool	
Drainage Area (ac)	426	426	634	723	742	864	51	723		864		723		864		
NC Regional Curve Discharge (cfs)	69							100		113		100		113		
Design/Approx. Bankfull Discharge (cfs)	50		---	---	---	---	---	52		70		52		70		
Dimension																
BF Width (ft)	13.7	15.0	25.6	---	16.2	12.1	6.1	17.2	18.6	18.2	19.6	21	19.6	17.4	21.1	
Floodprone Width (ft)	>50	NA	>50	---	>50	>50	>50	>50	NA	>50	NA	>50	>50	>50	>50	
BF Cross Sectional Area (ft ²)	18.1	23.4	19.6	---	22.4	12.6	3.0	31.5	42	34.8	47.6	26.5	32.6	30.8	34.4	
BF Mean Depth (ft)	1.4	1.6	0.8	---	1.4	1.0	0.5	1.8	2.3	1.9	2.4	1.3	1.7	1.8	1.6	
BF Max Depth (ft)	1.7	2.7	1.7	---	2.6	1.6	1.2	2.5	3.5	2.6	3.8	2.2	3.1	2.5	3.5	
Width/Depth Ratio	9.8	9.6	33.5	---	11.8	11.6	12.2	9.4	8.2	9.5	8.1	16.6	11.7	9.8	12.9	
Entrenchment Ratio	>2.2	NA	>2.2	---	>2.2	>2.2	>2.2	>2.2	NA	>2.2	NA	>2.2	>2.2	>2.2	>2.2	
Wetted Perimeter (ft)	14.9	16.8	26.2	---	17.9	13.1	7.0	18.5	20.3	19.5	21.5	21.7	21.2	18.5	22.9	
Hydraulic Radius (ft)	1.2	1.4	0.7	---	1.3	1.0	0.4	1.7	2.1	1.8	2.2	1.2	1.5	1.7	1.5	
Substrate																
D16 (mm)	2.8		0.062	---	0.062	1.5	0.062	1.5		1.5		0.062		0.062		
D50 (mm)	11.0		0.062	---	0.062	7.8	0.062	7.8		7.8		0.062		28		
D84 (mm)	16.0		0.72	---	4.8	15.0	0.57	15		15		24		61		
Pattern																
	Min	Max	Med	---	---	---	---	---	Min	Max	Min	Max	Min	Max	Min	Max
Channel Beltwidth (ft)	26	56	37	---	---	---	---	---	55	83	58	87	67	101	56	84
Radius of Curvature (ft)	13	103	41	---	---	---	---	---	26	130	27	138	32	160	26	132
Radius of Curvature Ratio	1.0	7.6	3.0	---	---	---	---	---	1.5	7.6	1.5	7.6	1.5	7.6	1.5	7.6
Meander Wavelength (ft)	49	66	60	---	---	---	---	---	55	83	58	87	67	101	56	84
Meander Width Ratio	1.9	4.1	2.7	---	---	---	---	---	3.2	4.8	3.2	4.8	3.2	4.8	3.2	4.8
Profile																
	Min	Max	Med	---	---	---	---	---	Min	Max	Min	Max	Min	Max	Min	Max
Riffle Length (ft)	6	18	9	---	---	---	---	---	8	23	8	24	9.0	25.0	8.2	26.5
Riffle Slope (%)	1.1	3.4	2.3	---	---	---	---	---	1.1	3.4	1.1	3.4	1.1	3.6	1.2	3.8
Run Length (ft)	7	15	8	---	---	---	---	---	9	19	9	20	11.0	17.0	10.2	21.0
Run Slope (%)	4.8	11.5	8.2	---	---	---	---	---	4.8	11.5	4.8	11.5	4.2	12.0	3.8	11.2
Glide Length (ft)	5	13	9	---	---	---	---	---	6	16	7	17	6.2	18.2	7.5	16.3
Glide Slope (%)	4.8	9.2	7.0	---	---	---	---	---	4.8	9.2	4.8	9.2	5.1	9.6	4.8	9.1
Pool Length (ft)	5	42	15	---	---	---	---	---	6	53	7	56	7.8	47.0	8.5	60.0
Pool Slope (%)	---	---	---	---	---	---	---	---	---	---	---	---	3.5	10.0	4.1	10.1
Pool-to-Pool Spacing (ft)	18.0	64.0	30.0	---	---	---	---	---	23	81	24	85	18.0	90.0	20.5	92.0
Additional Reach Parameters																
Valley Length (ft)	279		410	641	779	1,015	427	---		---		785		710		
Channel Length (ft)	318		443	641	781	1,032	437	---		---		847		778		
Sinuosity	1.14		1.1	1.0	1.0	1.0	1.0	1.1		1.1		1.08		1.1		
Water Surface Slope (ft/ft)	0.0048		NA	NA	NA	0.0027	NA	---		---		---		---		
Channel Slope (ft/ft)	0.0047		0.0027	0.001	0.0057	0.0031	0.013	0.0029		0.0028		0.0061		0.002		
Rosgen Classification	E4		C5c	NA	E5	E4	C5	E4		E4		E4		E4		

**Table 11a. - Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters – Cross Sections)
Poplin Ridge Stream Restoration Project**

	Cross Section 1 (Run) Reach UT2-2*							Cross Section 2 (Run) Reach UT2-2*							Cross Section 3 (Riffle) Reach UT2-A							Cross Section 4 (Riffle) Reach UT2-A							Cross Section 5 (Run) Reach UT2-3						
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1 ¹	MY2	MY3	MY5	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	577.24	577.24	577.24	577.24	578.14	577.9	577.8	577.10	577.10	577.10	577.10	577.99	577.7	577.7	586.40	586.40	586.40	586.40	586.85	587.1		585.00	585.00	585.00	585.00	585.39	585.7		576.32	576.32	576.32	576.32	576.75	576.8	
Bankfull Width (ft) ¹	3.2	5.5	5.2	4.3	10.8	5.5	4.3	3.0	5.6	5.3	3.9	8.0	6.3	6.5	8.2	8.0	7.5	7.5	10.7	8.2		11.0	8.8	7.5	8.5	16.7	9.5		21.0	19.3	18.0	17.1	28.3	20.4	
Floodprone Width (ft) ¹	>17.2	>17.2	>17.2	26.2	52.4	65.6	63.3	>15.2	>15.2	>15.2	11.2	66.2	78.8	74.9	>50.0	>50.0	>50.0	44.0	>50.5	>50.4		>44.4	>44.4	>50.0	39.8	>49.8	>50.2		>50	>50	>50	>50	>50.5	>50.3	
Bankfull Mean Depth (ft)	0.5	0.7	0.6	0.3	---	---	---	0.4	0.5	0.4	0.1	---	---	---	1.0	0.8	0.8	0.6	---	---		0.7	0.6	0.8	0.5	---	---		1.3	1.3	1.3	1.1	---	---	
Bankfull Max Depth (ft) ²	0.9	1.4	1.1	0.5	0.8	1.5	1.8	0.6	1.3	0.8	0.3	1.1	2.2	2.0	1.7	1.5	1.3	1.2	1.1	1.2		1.3	1.1	1.3	1.1	1.0	1.2		2.2	2.2	2.4	1.8	2.0	2.1	
Low Bank Elevation (ft)	-	-	-	-	578.14	577.9	578.0	-	-	-	-	577.99	578.3	578.2	-	-	-	-	586.39	586.7		-	-	-	-	584.95	585.4		-	-	-	-	576.39	576.4	
Bankfull Cross Sectional Area (ft ²) ²	0.6	3.7	3.3	1.1	4.2	4.1	5.6	1.1	2.7	2.2	0.5	5.8	10.3	9.7	7.9	6.7	5.7	4.7	7.9	5.2		7.4	5.0	5.7	4.1	3.0	4.6		26.5	25.2	22.9	19.0	17.9	18.4	
Bankfull Width/Depth Ratio	6.4	8.2	8.1	16.7	---	---	---	7.9	11.5	12.5	28.8	---	---	---	8.5	9.5	9.9	11.9	---	---		16.4	15.6	9.9	17.4	---	---		16.6	14.9	14.2	15.5	---	---	
Bankfull Entrenchment Ratio ¹	>2.2	>3.1	>3.3	6.0	4.8	14.2	14.8	>2.2	>2.7	>2.9	2.9	8.3	14.5	11.5	>2.2	>6.3	>6.7	5.9	>4.7	>6.1		>2.2	>5.0	>6.7	4.7	3.0	>5.3		>2.2	>2.6	>2.8	>2.9	>1.8	>2.1	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.3	1.0	1.0	1.1	1.0	1.0	1.0	2.0	1.0	1.3	1.3	1.0	1.0	1.0	1.1	0.7	0.8		1.0	1.0	1.0	1.1	0.7	0.8		1.0	1.0	1.0	0.9	0.8	0.8	
	Cross Section 6 (Pool) Reach UT2-3							Cross Section 7 (Pool) Reach UT2-4							Cross Section 8 (Riffle) Reach UT2-4							Cross Section 9 (Riffle) Reach UT1-1							Cross Section 10 (Pool) Reach UT1-1						
Dimension	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1 ¹	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	576.48	576.48	576.48	576.48	576.99	577.2		575.00	575.00	575.00	575.00	575.17	575.2		575.01	575.01	575.01	575.01	575.34	575.3		602.06	602.06	602.06	602.06	602.07	602.2		602.28	602.28	602.28	602.28	602.37	602.4	
Bankfull Width (ft) ¹	19.6	19.1	19.4	18.7	22.3	16.6		21.1	18.7	18.5	18.8	19.5	18.1		17.4	17.1	16.9	17.2	16.2	16.4		11.7	11.4	11.4	11.6	14.2	11.4		15.2	14.7	14.6	15.5	16.9	16.1	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.1	N/A		>50.0	>50.0	>50.0	>50.0	>50	N/A		>50.0	>50.0	>50.0	>50.0	>50.2	>50.1		>50.0	>50.0	>50.0	>50.0	>48.7	>45.4		>50	>50	>50	>50	>50.0	N/A	
Bankfull Mean Depth (ft)	1.7	1.6	1.6	1.4	---	---		1.6	1.7	1.7	1.6	---	---		1.8	1.7	1.7	1.6	---	---		1.1	1.1	1.1	1.1	---	---		1.4	1.3	1.3	1.3	---	---	
Bankfull Max Depth (ft) ²	3.1	3.0	3.0	2.8	2.1	2.2		3.5	3.4	3.4	3.2	3.6	3.5		2.5	2.4	2.5	2.3	2.8	2.8		1.8	1.8	1.8	1.8	1.6	1.4		2.6	2.5	2.5	2.6	1.5	1.9	
Low Bank Elevation (ft)	-	-	-	-	576.14	576.2		-	-	-	-	575.26	575.2		-	-	-	-	575.41	575.4		-	-	-	-	601.93	602.0		-	-	-	-	601.18	601.7	
Bankfull Cross Sectional Area (ft ²) ²	32.6	30.0	30.5	25.6	17.0	16.1		34.4	32.0	31.6	31.0	36.0	33.7		30.8	28.4	28.5	26.7	32.0	33.5		13.0	12.1	12.4	12.3	11.4	10.7		21.0	19.8	19.7	20.2	7.6	12.7	
Bankfull Width/Depth Ratio	11.7	12.2	12.3	13.7	---	---		12.9	10.9	10.9	11.4	---	---		9.8	10.3	10.0	11.0	---	---		10.4	10.7	10.4	10.9	---	---		11.1	10.9	10.9	11.9	---	---	
Bankfull Entrenchment Ratio ¹	>2.2	>2.6	>2.6	N/A	N/A	N/A		>2.2	>2.7	>2.7	N/A	N/A	N/A		>2.2	>2.9	>3.0	>2.9	>3.1	>3.0		>2.2	>4.4	>4.4	>4.3	>3.4	>4.0		>2.2	>3.4	>3.4	N/A	N/A	N/A	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	N/A		1.0	1.0	1.0	N/A	N/A	N/A		1.0	1.0	1.0	1.1	1.0	1.1		1.0	1.0	1.0	1.0	0.9	0.9		1.0	1.0	1.0	N/A	N/A	N/A	
	Cross Section 11 (Riffle) Reach UT1-A							Cross Section 12 (Pool) Reach UT1-2							Cross Section 13 (Riffle) Reach UT1-2							Cross Section 14 (Pool) Reach UT1-2							Cross Section 15 (Riffle) Reach UT1-2						
Dimension	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	599.06	599.06	599.06	599.06	599.13	599.1		596.26	596.26	596.26	596.26	596.61	597.0		595.97	595.97	595.97	595.97	596.09	596.1		591.21	591.21	591.21	591.21	591.22	591.3		591.48	591.48	591.48	591.48	591.64	591.7	
Bankfull Width (ft) ¹	10.0	10.2	10.0	9.6	11.0	10.6		17.4	17.4	17.6	17.4	22.7	12.3		12.5	12.2	12.3	12.6	14.1	12.4		12.3	12.0	11.5	12.1	12.5	9.6		13.4	12.9	12.9	13.2	13.4	12.7	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.1	>50.2		>50.0	>50.0	>50.0	>50.0	>50.4	N/A		>50.0	>50.0	>50.0	>50.0	>50.2	>50.9		>50.0	>50.0	>50.0	>50.0	>50.2	N/A		>50	>50	>50	>50	>49.8	>49.9	
Bankfull Mean Depth (ft)	1.0	1.0	1.0	1.1	---	---		1.4	1.3	1.2	1.1	---	---		1.2	1.2	1.2	1.2	---	---		1.1	1.0	1.0	1.0	---	---		1.4	1.3	1.3	1.3	---	---	
Bankfull Max Depth (ft) ²	1.7	1.6	1.6	1.6	1.7	1.5		2.5	2.4	2.5	2.2	2.5	1.8		1.9	1.9	2.0	2.2	2.5	3.0		2.2	2.0	2.0	2.1	1.6	1.5		2.3	2.2	2.2	2.1	2.3	2.1	
Low Bank Elevation (ft)	-	-	-	-	599.12	599.0		-	-	-	-	596.44	595.9		-	-	-	-	596.00	596.2		-	-	-	-	590.71	590.8		-	-	-	-	591.64	591.5	
Bankfull Cross Sectional Area (ft ²) ²	10.5	10.1	10.1	10.1	10.5	9.0		24.4	21.8	21.8	19.9	20.8	11.7		15.6	14.4	14.6	14.8	14.4	16.7		13.9	11.9	11.5	12.6	8.4	8.6		19.0	17.3	17.2	17.0	19.1	16.4	
Bankfull Width/Depth Ratio	9.6	10.3	10.0	9.1	---	---		12.4	13.9	14.2	15.2	---	---		10.0	10.4	10.3	10.7	---	---		10.9	12.1	11.6	11.5	---	---		9.4	9.7	9.7	10.3	---	---	
Bankfull Entrenchment Ratio ¹	>2.2	>4.9	>5.0	>5.2	>4.6	4.8		>2.2	>2.9	>2.8	N/A	N/A	N/A		>2.2	>4.1	>4.1	>4.0	>3.6	4.1		>2.2	>4.2	>4.3	N/A	N/A	N/A		>2.2	>3.9	>3.9	>3.8	>3.7	>3.9	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	0.9	1.0	0.9		1.0	1.0	1.0	N/A	N/A	N/A		1.0	1.0	1.0	1.0	1.0	1.0		1.0	1.0	1.0	N/A	N/A	N/A		1.0	1.0	1.0	1.0	1.0	0.9	

¹Calculations updated to show corrected values

Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull elevation. These changes reflect the 2018 guidance that arose from the mitigation technical workgroup consisting of DMS, the IRT, and industry mitigation providers.

*Reach UT2-2 was reconstructed in September 2019

**Table 11a. Cont'd - Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters – Cross Sections)
Poplin Ridge Stream Restoration Project**

	Cross Section 16 (Riffle) Reach UT1-B							Cross Section 17 (Pool) Reach UT1-B							Cross Section 18 (Pool) Reach UT1-3							Cross Section 19 (Riffle) Reach UT1-3							Cross Section 20 (Riffle) Reach UT1-3						
Dimension	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	591.84	591.84	591.84	591.84	592.04	592.0		590.93	590.93	590.93	590.93	591.07	591.1		588.03	588.03	588.03	588.03	588.30	588.4		588.19	588.19	588.19	588.19	588.38	588.4		586.15	586.15	586.15	586.15	586.33	588.4	
Bankfull Width (ft) ¹	11.7	10.8	10.5	11.1	13.6	12.7		14.2	13.1	13.2	13.2	14.4	10.3		14.5	14.3	13.9	14.2	16.2	14.1		15.2	15.1	14.9	15.4	23.1	15.5		15.5	16.1	15.2	15.1	16.0	16.9	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.0	>50.3		>50.0	>50.0	>50.0	>50.0	>50.0	N/A		>50.0	>50.0	>50.0	>50.0	>50.6	N/A		>50.0	>50.0	>50.0	>50.0	>50.2	>50.2		>50.0	>50.0	>50.0	>50.0	>50.2	>50.2	
Bankfull Mean Depth (ft)	1.1	1.0	1.1	1.0	---	---		0.7	0.6	0.7	0.7	---	---		1.5	1.4	1.4	1.4	---	---		1.5	1.4	1.4	1.4	---	---		1.4	1.3	1.3	1.3	---	---	
Bankfull Max Depth (ft) ²	1.8	1.7	1.7	1.7	1.9	1.9		1.4	1.3	1.4	1.6	1.5	1.5		2.6	2.6	2.5	2.6	2.7	2.4		2.4	2.1	2.2	2.1	2.1	2.0		2.1	2.1	2.1	2.1	2.3	2.2	
Low Bank Elevation (ft)	-	-	-	-	591.95	592.0		-	-	-	-	590.81	590.8		-	-	-	-	588.20	588.1		-	-	-	-	588.23	588.3		-	-	-	-	586.36	586.3	
Bankfull Cross Sectional Area (ft ²)	12.3	11.2	11.1	10.8	11.2	11.8		10.2	8.5	9.2	9.6	7.1	6.8		21.5	19.6	19.7	19.3	19.7	17.1		23.0	21.8	21.3	21.0	20.3	20.5		21.9	20.9	20.0	19.6	22.4	19.7	
Bankfull Width/Depth Ratio	11.2	10.4	9.9	11.3	---	---		19.7	20.2	19.1	18.3	---	---		9.8	10.4	9.9	10.5	---	---		10.1	10.5	10.5	11.2	---	---		11.0	12.4	11.6	11.6	---	---	
Bankfull Entrenchment Ratio ¹	>2.2	>4.6	>4.8	>4.5	>3.7	4.0		>2.2	>3.8	>3.8	N/A	N/A	N/A		>2.2	>3.5	>3.6	N/A	N/A	N/A		>2.2	>3.3	>3.3	>3.3	>2.2	>3.2		>2.2	>3.1	>3.3	>3.3	>3.1	>3.0	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.1	1.0	1.0		1.0	1.0	1.0	N/A	N/A	N/A		1.0	1.0	1.0	N/A	N/A	N/A		1.0	1.0	1.0	1.0	0.9	0.9		1.0	1.0	1.0	1.1	1.0	0.9	
	Cross Section 21 (Pool) Reach UT1-3							Cross Section 22 (Riffle) Reach UT1-C							Cross Section 23 (Pool) Reach UT1-C							Cross Section 24 (Riffle) Reach UT1-C							Cross Section 25 (Pool) Reach UT1-C						
Dimension	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	585.60	585.60	585.60	585.60	585.82	585.8		592.04	592.04	592.04	592.04	592.33	592.3		591.80	591.80	591.80	591.80	592.04	592.1		586.30	586.30	586.30	586.30	586.69	586.7		585.80	585.80	585.80	585.80	586.15	586.1	
Bankfull Width (ft) ¹	15.8	15.0	15.2	15.0	17.2	16.6		13.2	12.5	12.5	12.4	15.2	14.2		14.6	14.0	13.9	13.7	15.0	9.7		14.2	13.8	14.0	14.0	15.1	11.1		12.0	11.1	11.2	10.5	12.2	8.3	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.2	N/A		>50.0	>50.0	>50.0	>50.0	>50.2	>50.2		>50.0	>50.0	>50.0	>50.0	>50.2	N/A		>46.6	>46.6	>46.6	38.0	>50.0	>50.0		>50.0	>50.0	>50.0	>50.0	>50.2	N/A	
Bankfull Mean Depth (ft)	1.4	1.3	1.3	1.3	---	---		1.3	1.1	1.1	1.0	---	---		1.3	1.1	1.0	1.0	---	---		1.0	0.9	0.9	0.8	---	---		1.3	1.3	1.3	1.3	---	---	
Bankfull Max Depth (ft) ²	2.5	2.4	2.6	2.7	3.1	3.2		1.9	1.6	1.7	1.7	1.1	1.3		2.1	1.9	2.0	2.2	1.6	1.9		1.7	1.6	1.6	1.6	0.9	1.5		2.3	2.1	2.1	2.1	1.5	1.7	
Low Bank Elevation (ft)	-	-	-	-	585.95	586.0		-	-	-	-	591.27	591.5		-	-	-	-	591.07	591.4		-	-	-	-	585.71	586.3		-	-	-	-	585.48	585.7	
Bankfull Cross Sectional Area (ft ²)	21.4	19.1	19.4	19.3	23.7	25.7		16.8	13.6	14.2	12.5	5.4	7.8		19.1	14.8	14.2	14.3	8.8	12.4		14.0	12.2	12.4	10.8	3.8	9.3		15.5	14.3	14.5	14.1	9.2	11.8	
Bankfull Width/Depth Ratio	11.7	11.8	11.8	11.7	---	---		10.4	11.5	10.9	12.3	---	---		11.1	13.3	13.5	13.2	---	---		14.3	15.6	15.7	18.1	---	---		9.4	8.6	8.7	7.8	---	---	
Bankfull Entrenchment Ratio ¹	>2.2	>3.3	>3.3	N/A	N/A	N/A		>2.2	>4.0	>4.0	>4.0	>3.3	>3.5		>2.2	>3.6	>3.6	N/A	N/A	N/A		>2.2	>3.4	>3.3	2.7	>3.3	>4.5		>2.2	>4.5	>4.5	N/A	N/A	N/A	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	N/A		1.0	1.0	1.0	0.9	0.5	1.1		1.0	1.0	1.0	N/A	N/A	N/A		1.0	1.0	1.0	1.5	0.5	0.8		1.0	1.0	1.0	N/A	N/A	N/A	
	Cross Section 26 (Pool) Reach UT1-4							Cross Section 27 (Riffle) Reach UT1-4							Cross Section 28 (Riffle) Reach UT1-4							Cross Section 29 (Pool) Reach UT1-4							Cross Section 30 (Riffle) Reach UT2-2*						
Dimension	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY7	MY+	Base	MY1	MY2	MY3	MY5	MY6	MY7
Bankfull Elevation (ft) - Based on AB-XSA ¹	581.70	581.70	581.70	581.70	581.62	582.0		582.15	582.15	582.15	582.15	582.52	582.4		579.70	579.70	579.70	579.70	579.91	580.0		579.80	579.80	579.80	579.80	580.04	580.03		-	-	-	-	578.55	578.7	578.7
Bankfull Width (ft) ¹	14.8	14.1	13.0	11.2	10.3	14.1		16.5	15.9	15.6	15.4	17.6	16.8		15.9	15.4	15.3	15.0	16.0	15.5		20.3	20.8	20.0	19.4	21.7	21.6		-	-	-	-	8.7	8.1	9.2
Floodprone Width (ft) ¹	>47.0	>47.0	>47.0	>50.0	>50.3	N/A		>50.0	>50.0	>50.0	>50.0	>50.0	>50.1		>50.0	>50.0	>50.0	>50.0	>50.4	>50.5		>50.0	>50.0	>50.0	>50.0	>42.7	N/A		-	-	-	-	30.7	40.3	33.4
Bankfull Mean Depth (ft)	1.2	1.2	1.3	1.6	---	---		1.3	1.2	1.1	1.0	---	---		1.5	1.4	1.4	1.3	---	---		1.6	1.4	1.4	1.5	---	---		-	-	-	-	---	---	---
Bankfull Max Depth (ft) ²	2.1	2.1	2.2	2.3	2.4	2.1		2.1	1.9	1.9	1.8	2.6	2.9		2.6	2.5	2.5	2.5	3.0	2.9		3.1	2.9	2.9	3.0	2.7	2.5		-	-	-	-	0.5	0.8	0.5
Low Bank Elevation (ft)	-	-	-	-	581.69	582.3		-	-	-	-	582.19	582.3		-	-	-	-	580.10	578.1		-	-	-	-	579.60	579.3		-	-	-	-	578.55	578.9	578.8
Bankfull Cross Sectional Area (ft ²)	17.6	16.2	17.2	18.2	18.4	21.5		21.5	18.3	17.8	15.6	16.2	19.5		24.2	21.7	21.9	20.0	27.4	29.0		33.2	30.0	28.9	29.2	24.6	20.7		-	-	-	-	3.1	4.9	3.8
Bankfull Width/Depth Ratio	12.5	12.3	9.7	6.9	---	---		12.7	13.8	13.6	15.1	---	---		10.4	10.9	10.8	11.2	---	---		12.5	14.4	13.9	12.9	---	---		-	-	-	-	---	---	---
Bankfull Entrenchment Ratio ¹	>2.2	>3.3	>3.6	N/A	N/A	N/A		>2.2	>3.1	>3.2	>3.3	>2.8	>3.0		>2.2	>3.3	>3.3	>3.3	>3.2	>3.3		>2.2	>2.4	>2.5	N/A	N/A	N/A		-	-	-	-	3.5	6.2	3.6
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	N/A		1.0	1.0	1.0	1.1	0.9	1.0		1.0	1.0	1.0	1.1	1.1	1.1		1.0	1.0	1.0	N/A	N/A	N/A		-	-	-	-	1.0	1.3	1.2
	Cross Section 31 (Pool) Reach UT2-2*																																		
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7																												
Bankfull Elevation (ft) - Based on AB-XSA ¹	-	-	-	-	578.37	578.0	578.1																												
Bankfull Width (ft) ¹	-	-	-	-	9.7	8.5	9.9																												
Floodprone Width (ft) ¹	-	-	-	-	48.3	46.3	44.9																												
Bankfull Mean Depth (ft)	-	-	-	-	---	---	---																												
Bankfull Max Depth (ft) ²	-	-	-	-	1.5	2.3	1.8																												
Low Bank Elevation (ft)	-	-	-	-	578.37	578.7	578.6																												
Bankfull Cross Sectional Area (ft ²)	-	-	-	-	8.8	16.5	14.0																												
Bankfull Width/Depth Ratio	-	-	-	-	---	---	---																												
Bankfull Entrenchment Ratio ¹	-	-	-	-	N/A	NA	N/A																												
Bankfull Bank Height Ratio ¹	-	-	-	-	N/A	NA	N/A																												

Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull elevation. These changes reflect the 2018 guidance that arose from the mitigation technical workgroup consisting of DMS, the IRT, and industry mitigation providers.


*Reach UT2-2 was reconstructed in September 2019



Upstream



Downstream

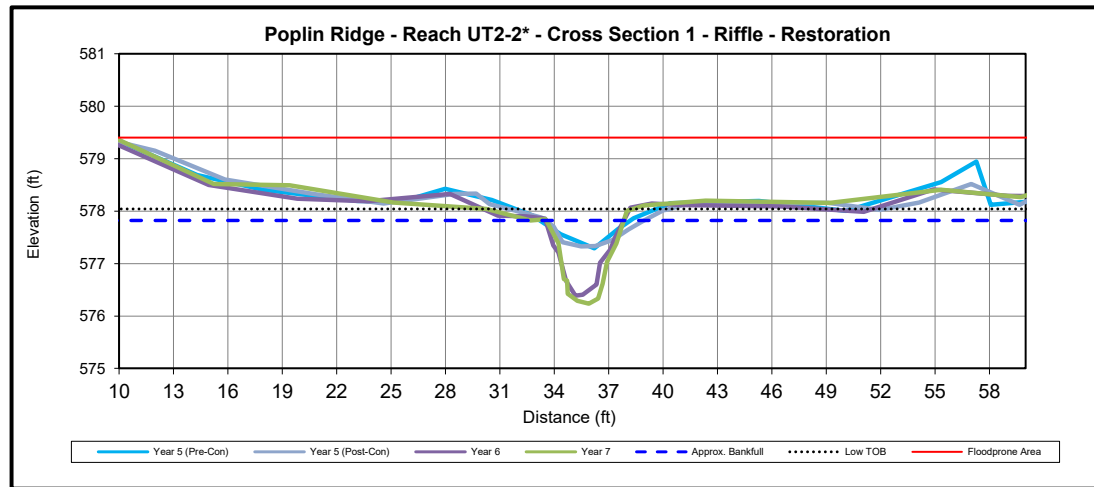

Dimension	Cross Section 1							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	577.24	577.24	577.24	577.24	578.14	577.93	577.8	
Bankfull Width (ft) ¹	3.2	5.5	5.2	4.3	10.8	5.5	4.3	
Floodprone Width (ft) ¹	>17.2	>17.2	>17.2	26.2	52.4	65.6	63.3	
Bankfull Mean Depth (ft)	0.5	0.7	0.6	0.3	---	---	---	
Bankfull Max Depth (ft) ²	0.9	1.4	1.1	0.5	0.8	1.5	1.8	
Low Bank Elevation (ft)	-	-	-	-	578.14	577.91	578.0	
Bankfull Cross Sectional Area (ft ²) ²	0.6	3.7	3.3	1.1	4.2	4.1	5.6	
Bankfull Width/Depth Ratio	6.4	8.2	8.1	16.7	---	---	---	
Bankfull Entrenchment Ratio ³	>2.2	>3.1	>3.3	6.0	4.8	14.2	14.8	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.3	1.0	1.0	1.1	

Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.


*Reach UT2-2 was reconstructed in September 2019



Upstream



Downstream

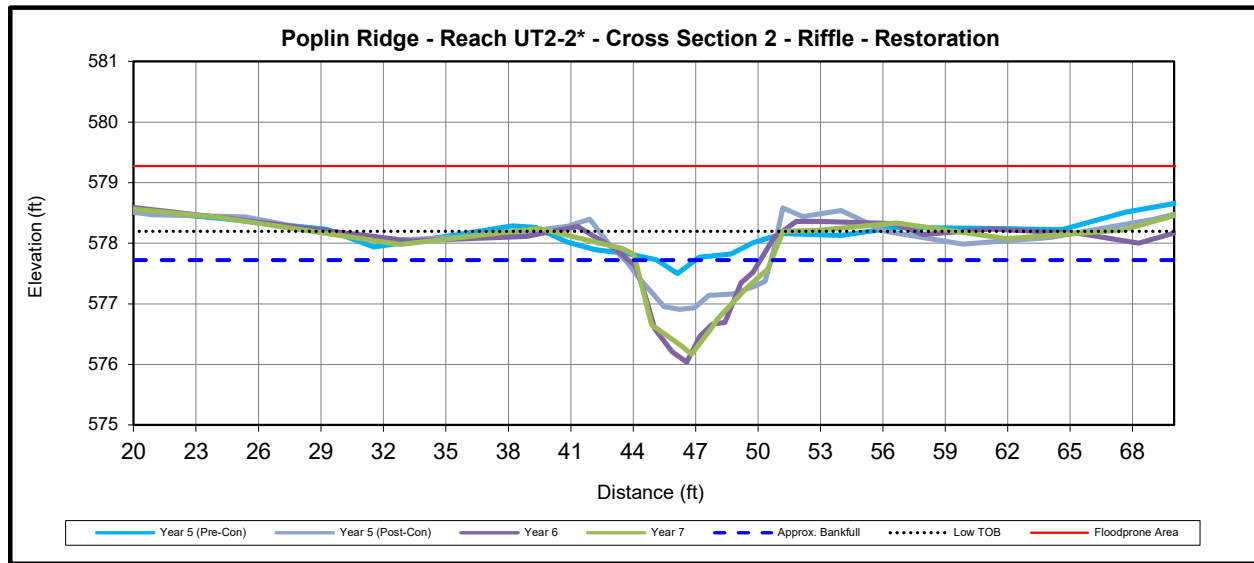

Dimension	Cross Section 2							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	577.10	577.10	577.10	577.10	577.99	577.72	577.7	
Bankfull Width (ft) ¹	3.0	5.6	5.3	3.9	8.0	6.3	6.5	
Floodprone Width (ft) ¹	>15.2	>15.2	>15.2	11.2	66.2	78.8	74.9	
Bankfull Mean Depth (ft)	0.4	0.5	0.4	0.1	---	---	---	
Bankfull Max Depth (ft) ²	0.6	1.3	0.8	0.3	1.1	2.2	2.0	
Low Bank Elevation (ft)	-	-	-	-	577.99	578.28	578.2	
Bankfull Cross Sectional Area (ft ²) ²	1.1	2.7	2.2	0.5	5.8	10.3	9.3	
Bankfull Width/Depth Ratio	7.9	11.5	12.5	28.8	---	---	---	
Bankfull Entrenchment Ratio ¹	>2.2	>2.7	>2.9	2.9	8.3	14.5	11.5	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	2.0	1.0	1.3	1.3	

Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.


*Reach UT2-2 was reconstructed in September 2019



Upstream



Downstream

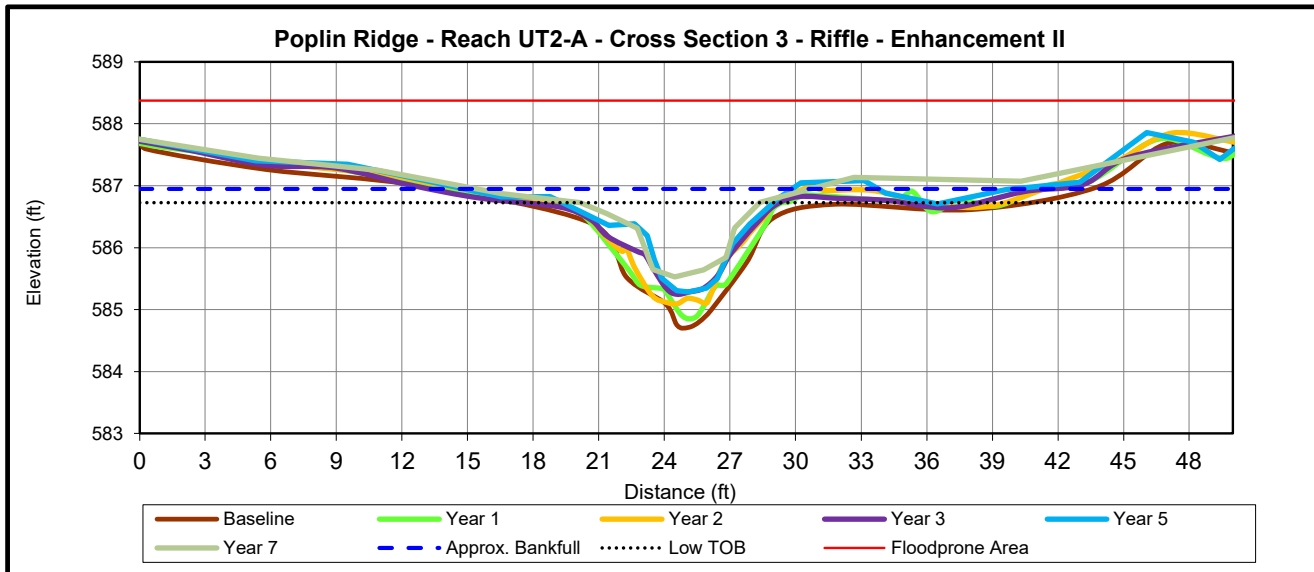

	Cross Section 3 (Riffle)							
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA¹	586.40	586.40	586.40	586.40	586.85	NA	587.1	
Bankfull Width (ft) ¹	8.2	8.0	7.5	7.5	10.7	NA	8.2	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	44.0	>50.5	NA	>50.4	
Bankfull Mean Depth (ft)	1.0	0.8	0.8	0.6	---	NA	---	
Bankfull Max Depth (ft) ²	1.7	1.5	1.3	1.2	1.1	NA	1.2	
Low Bank Elevation (ft)	-	-	-	-	586.39	NA	586.7	
Bankfull Cross Sectional Area (ft ²) ²	7.9	6.7	5.7	4.7	7.9	NA	5.2	
Bankfull Width/Depth Ratio	8.5	9.5	9.9	11.9	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>6.3	>6.7	5.9	>4.7	NA	>6.1	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.1	0.7	NA	0.8	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull



Upstream



Downstream

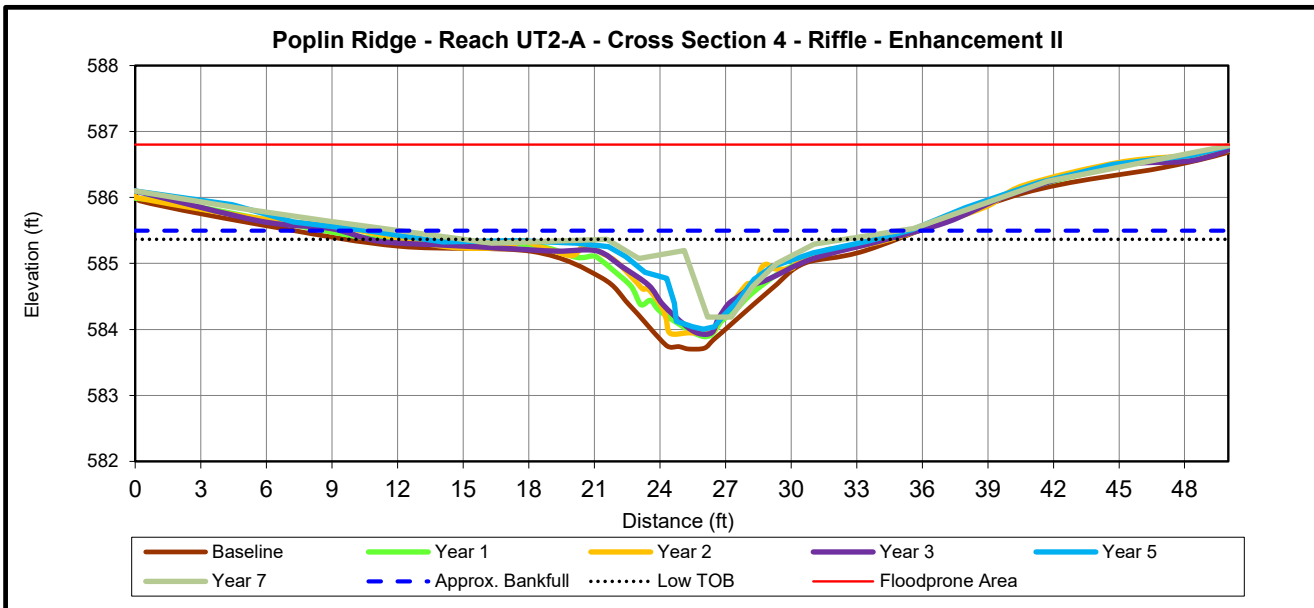

	Cross Section 4 (Riffle)							
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA¹	585.00	585.00	585.00	585.00	585.39	NA	585.7	
Bankfull Width (ft) ¹	11.0	8.8	7.5	8.5	16.7	NA	9.5	
Floodprone Width (ft) ¹	>44.4	>44.4	>50.0	39.8	>49.8	NA	>50.2	
Bankfull Mean Depth (ft)	0.7	0.6	0.8	0.5	---	NA	---	
Bankfull Max Depth (ft) ²	1.3	1.1	1.3	1.1	1.0	NA	1.2	
Low Bank Elevation (ft)	-	-	-	-	584.95	NA	585.4	
Bankfull Cross Sectional Area (ft ²) ²	7.4	5.0	5.7	4.1	3.0	NA	4.6	
Bankfull Width/Depth Ratio	16.4	15.6	9.9	17.4	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>5.0	>6.7	4.7	3.0	NA	>5.3	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.1	0.7	NA	0.8	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

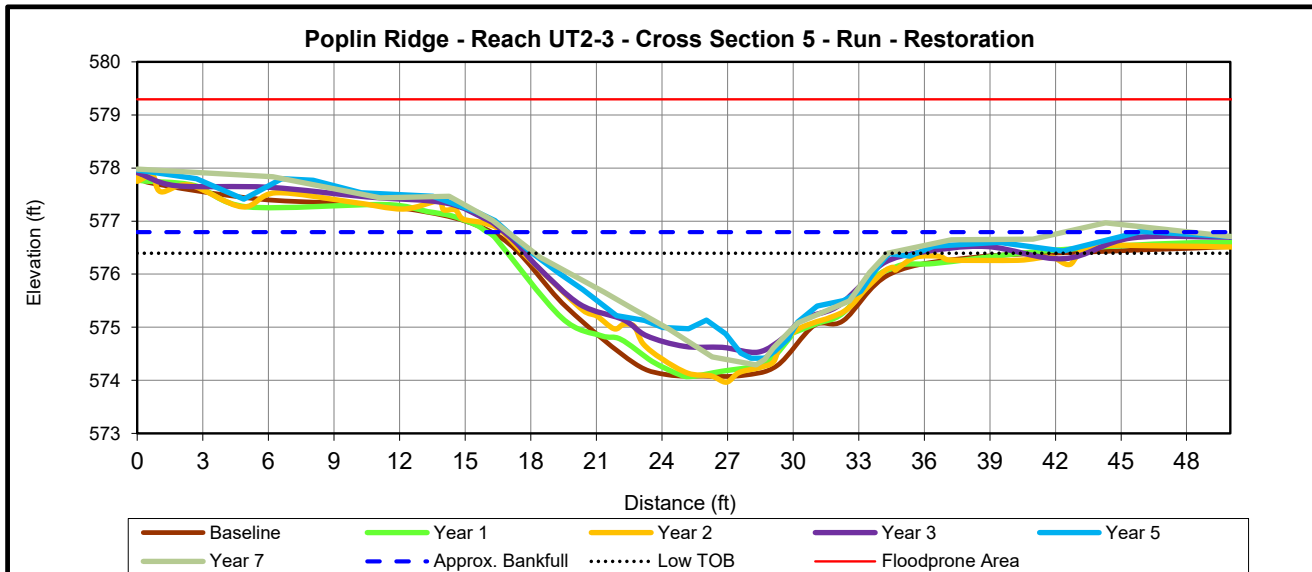

	Cross Section 5 (Run)							
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	576.32	576.32	576.32	576.32	576.75	NA	576.8	
Bankfull Width (ft) ¹	21.0	19.3	18.0	17.1	28.3	NA	20.4	
Floodprone Width (ft) ¹	>50	>50	>50	>50	>50.5	NA	>50.3	
Bankfull Mean Depth (ft)	1.3	1.3	1.3	1.1	---	NA	---	
Bankfull Max Depth (ft) ²	2.2	2.2	2.4	1.8	2.0	NA	2.1	
Low Bank Elevation (ft)	-	-	-	-	576.39	NA	576.4	
Bankfull Cross Sectional Area (ft ²) ²	26.5	25.2	22.9	19.0	17.9	NA	18.4	
Bankfull Width/Depth Ratio	16.6	14.9	14.2	15.5	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>2.6	>2.8	>2.9	>1.8	NA	>2.1	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	0.9	0.8	NA	0.8	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

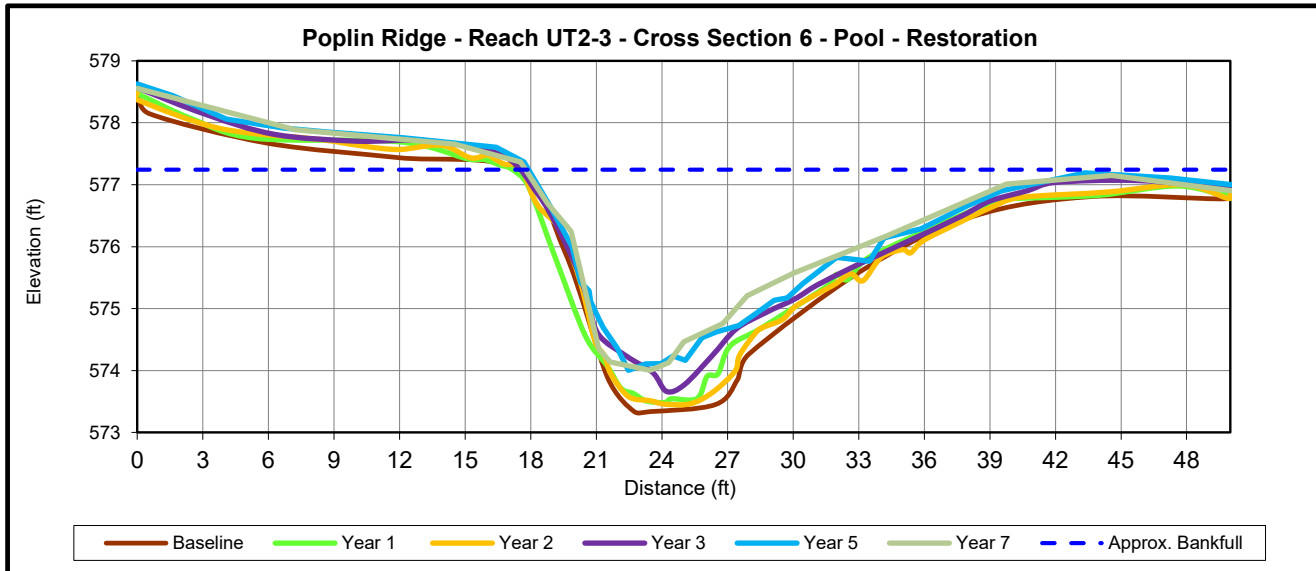

	Cross Section 6 (Pool)							
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA¹	576.48	576.48	576.48	576.48	576.99	NA	577.2	
Bankfull Width (ft) ¹	19.6	19.1	19.4	18.7	22.3	NA	16.6	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.1	NA	N/A	
Bankfull Mean Depth (ft)	1.7	1.6	1.6	1.4	---	NA	---	
Bankfull Max Depth (ft) ²	3.1	3.0	3.0	2.8	2.1	NA	2.2	
Low Bank Elevation (ft)	-	-	-	-	576.14	NA	576.2	
Bankfull Cross Sectional Area (ft ²) ²	32.6	30.0	30.5	25.6	17.0	NA	16.1	
Bankfull Width/Depth Ratio	11.7	12.2	12.3	13.7	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>2.6	>2.6	N/A	N/A	NA	N/A	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	NA	N/A	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

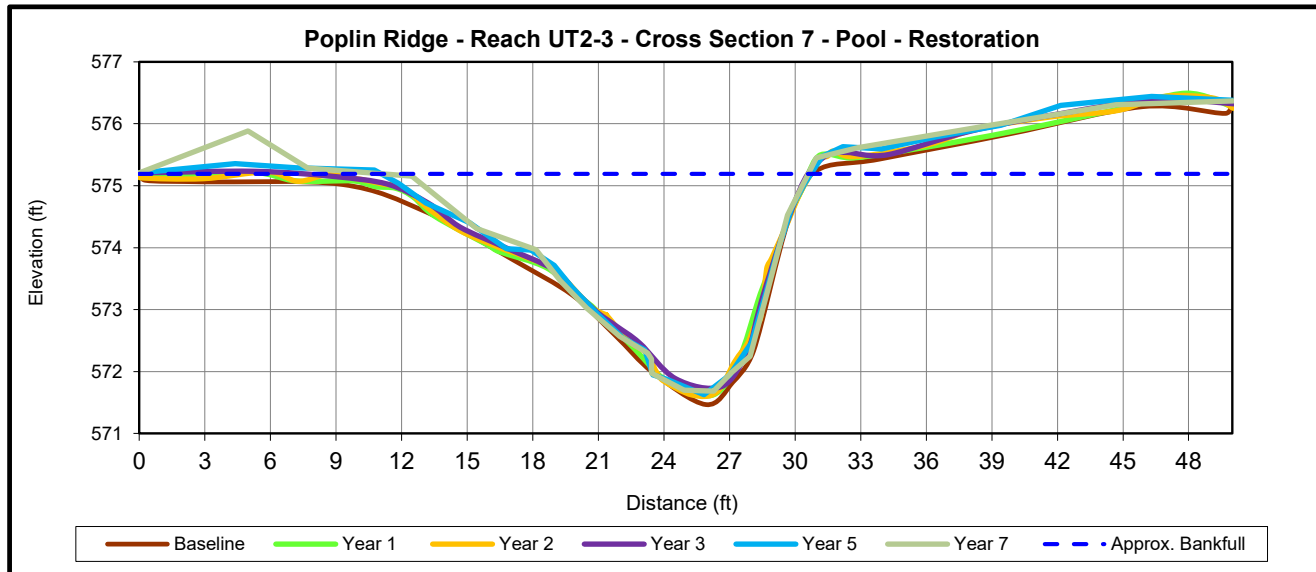

	Cross Section 7 (Pool)							
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA¹	575.00	575.00	575.00	575.00	575.17	NA	575.2	
Bankfull Width (ft) ¹	21.1	18.7	18.5	18.8	19.5	NA	18.1	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50	NA	N/A	
Bankfull Mean Depth (ft)	1.6	1.7	1.7	1.6	---	NA	---	
Bankfull Max Depth (ft) ²	3.5	3.4	3.4	3.2	3.6	NA	3.5	
Low Bank Elevation (ft)	-	-	-	-	575.26	NA	575.2	
Bankfull Cross Sectional Area (ft ²) ²	34.4	32.0	31.6	31.0	36.0	NA	33.7	
Bankfull Width/Depth Ratio	12.9	10.9	10.9	11.4	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>2.7	>2.7	N/A	N/A	NA	N/A	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	NA	N/A	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

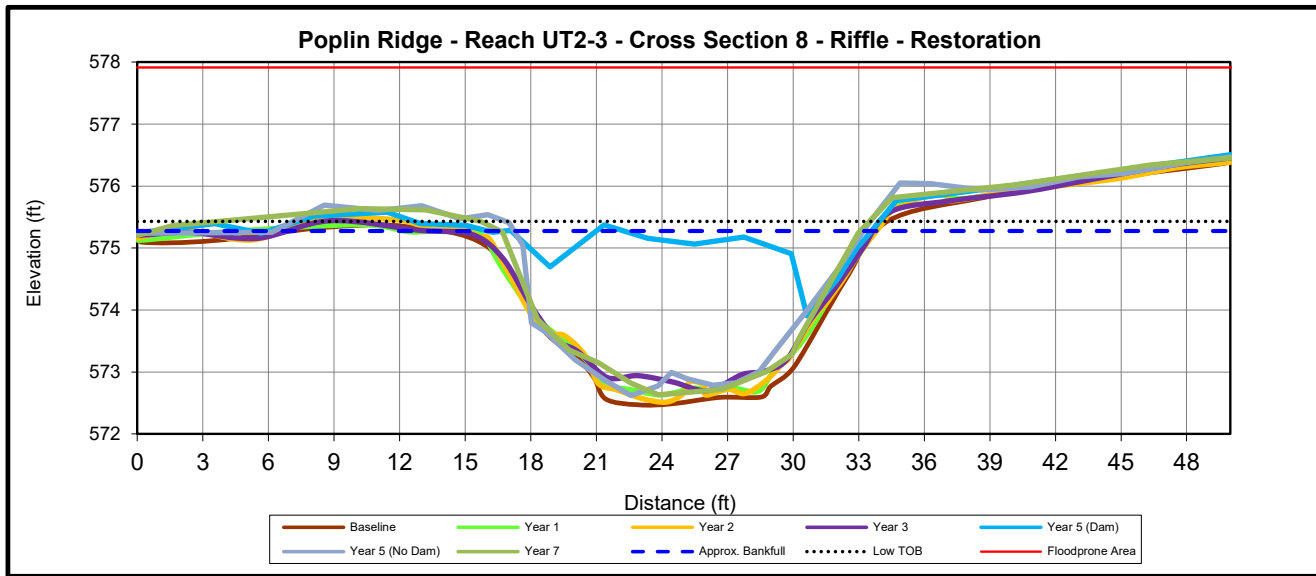

	Cross Section 8 (Riffle)							
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA¹	575.01	575.01	575.01	575.01	575.34	NA	575.3	
Bankfull Width (ft) ¹	17.4	17.1	16.9	17.2	16.2	NA	16.4	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.2	NA	>50.1	
Bankfull Mean Depth (ft)	1.8	1.7	1.7	1.6	---	NA	---	
Bankfull Max Depth (ft) ²	2.5	2.4	2.5	2.3	2.8	NA	2.8	
Low Bank Elevation (ft)	-	-	-	-	575.41	NA	575.4	
Bankfull Cross Sectional Area (ft ²) ²	30.8	28.4	28.5	26.7	32.0	NA	33.5	
Bankfull Width/Depth Ratio	9.8	10.3	10.0	11.0	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>2.9	>3.0	>2.9	>3.1	NA	>3.0	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.1	1.0	NA	1.1	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

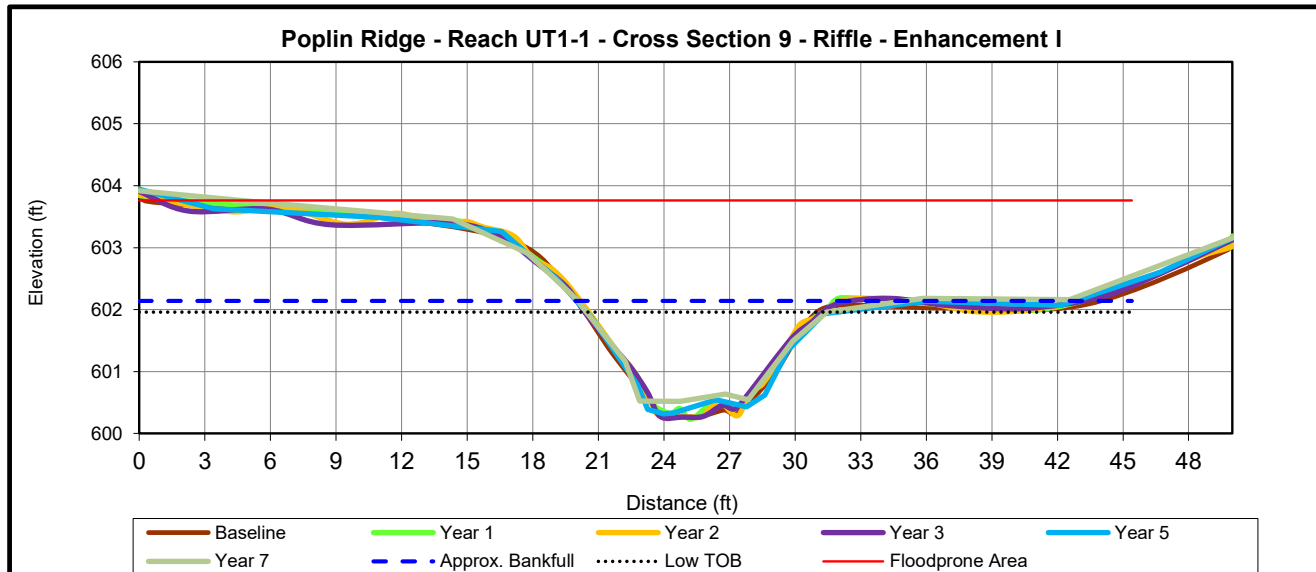

Dimension	Cross Section 9 (Riffle)							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	602.06	602.06	602.06	602.06	602.07	NA	602.2	
Bankfull Width (ft) ¹	11.7	11.4	11.4	11.6	14.2	NA	11.4	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>48.7	NA	>45.4	
Bankfull Mean Depth (ft)	1.1	1.1	1.1	1.1	---	NA	---	
Bankfull Max Depth (ft) ²	1.8	1.8	1.8	1.8	1.6	NA	1.4	
Low Bank Elevation (ft)	-	-	-	-	601.93	NA	602.0	
Bankfull Cross Sectional Area (ft ²) ²	13.0	12.1	12.4	12.3	11.4	NA	10.7	
Bankfull Width/Depth Ratio	10.4	10.7	10.4	10.9	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>4.4	>4.4	>4.3	>3.4	NA	>4.0	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.0	0.9	NA	0.9	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

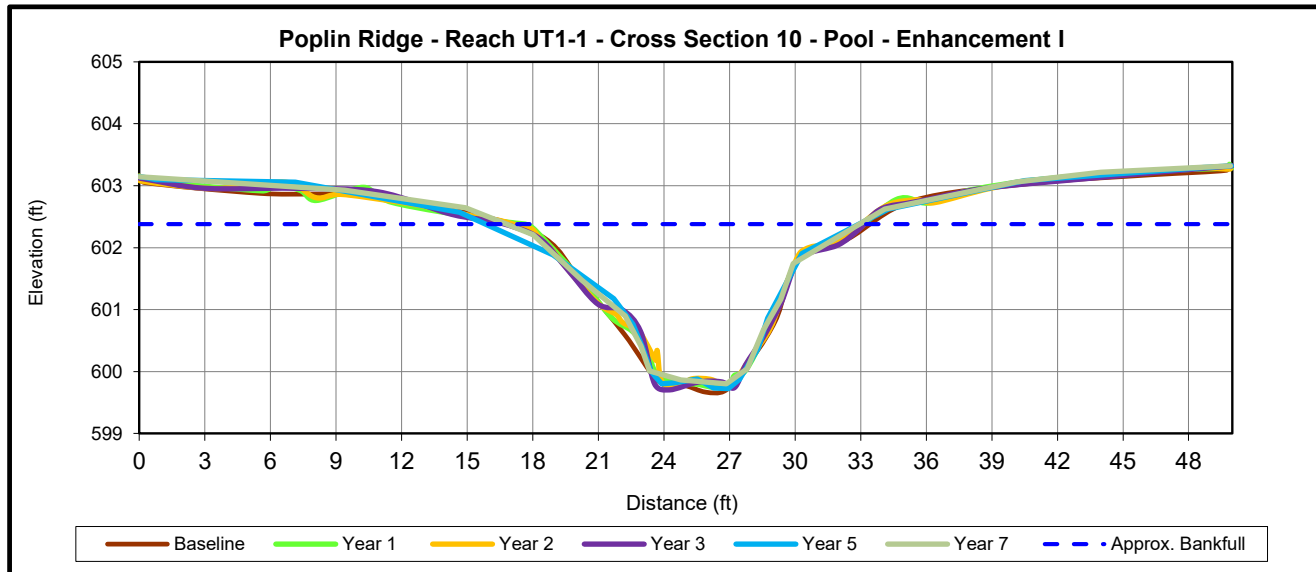

Dimension	Cross Section 10 (Pool)							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	602.28	602.28	602.28	602.28	602.37	NA	602.4	
Bankfull Width (ft) ¹	15.2	14.7	14.6	15.5	16.9	NA	16.1	
Floodprone Width (ft) ¹	>50	>50	>50	>50	>50.0	NA	N/A	
Bankfull Mean Depth (ft)	1.4	1.3	1.3	1.3	---	NA	---	
Bankfull Max Depth (ft) ²	2.6	2.5	2.5	2.6	1.5	NA	1.9	
Low Bank Elevation (ft)	-	-	-	-	601.18	NA	601.7	
Bankfull Cross Sectional Area (ft ²) ²	21.0	19.8	19.7	20.2	7.6	NA	12.7	
Bankfull Width/Depth Ratio	11.1	10.9	10.9	11.9	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>3.4	>3.4	N/A	N/A	NA	N/A	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	NA	N/A	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

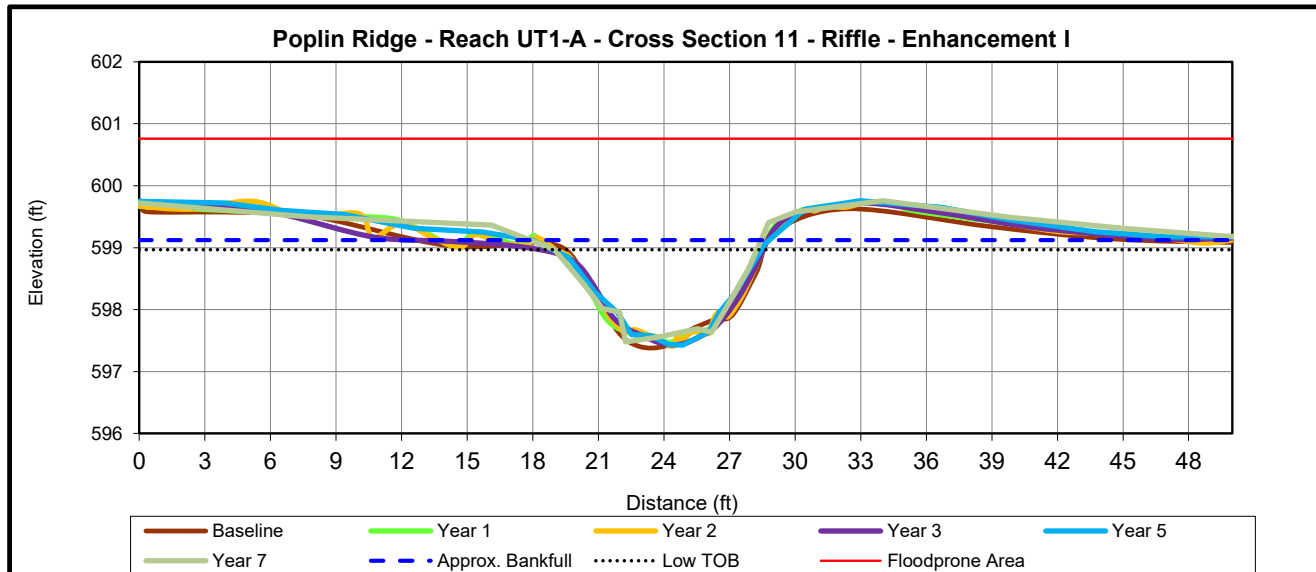

	Cross Section 11 (Riffle)							
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA¹	599.06	599.06	599.06	599.06	599.13	NA	599.1	
Bankfull Width (ft) ¹	10.0	10.2	10.0	9.6	11.0	NA	10.6	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.1	NA	>50.2	
Bankfull Mean Depth (ft)	1.0	1.0	1.0	1.1	---	NA	---	
Bankfull Max Depth (ft) ²	1.7	1.6	1.6	1.6	1.7	NA	1.5	
Low Bank Elevation (ft)	-	-	-	-	599.12	NA	599.0	
Bankfull Cross Sectional Area (ft ²) ²	10.5	10.1	10.1	10.1	10.5	NA	9.0	
Bankfull Width/Depth Ratio	9.6	10.3	10.0	9.1	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>4.9	>5.0	>5.2	>4.6	NA	4.8	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	0.9	1.0	NA	0.9	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

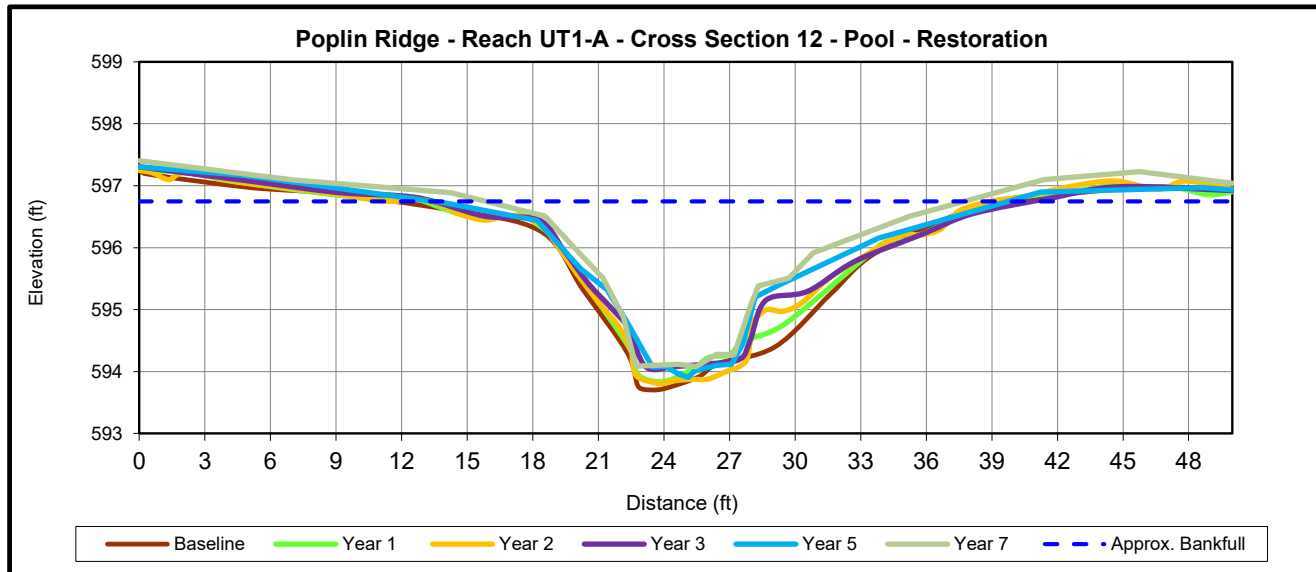

Dimension	Cross Section 12 (Pool)							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	596.26	596.26	596.26	596.26	596.61	NA	597.0	
Bankfull Width (ft) ¹	17.4	17.4	17.6	17.4	22.7	NA	12.3	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.4	NA	N/A	
Bankfull Mean Depth (ft)	1.4	1.3	1.2	1.1	---	NA	---	
Bankfull Max Depth (ft) ²	2.5	2.4	2.5	2.2	2.5	NA	1.8	
Low Bank Elevation (ft)	-	-	-	-	596.44	NA	595.9	
Bankfull Cross Sectional Area (ft ²) ²	24.4	21.8	21.8	19.9	20.8	NA	11.7	
Bankfull Width/Depth Ratio	12.4	13.9	14.2	15.2	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>2.9	>2.8	N/A	N/A	NA	N/A	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	NA	N/A	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

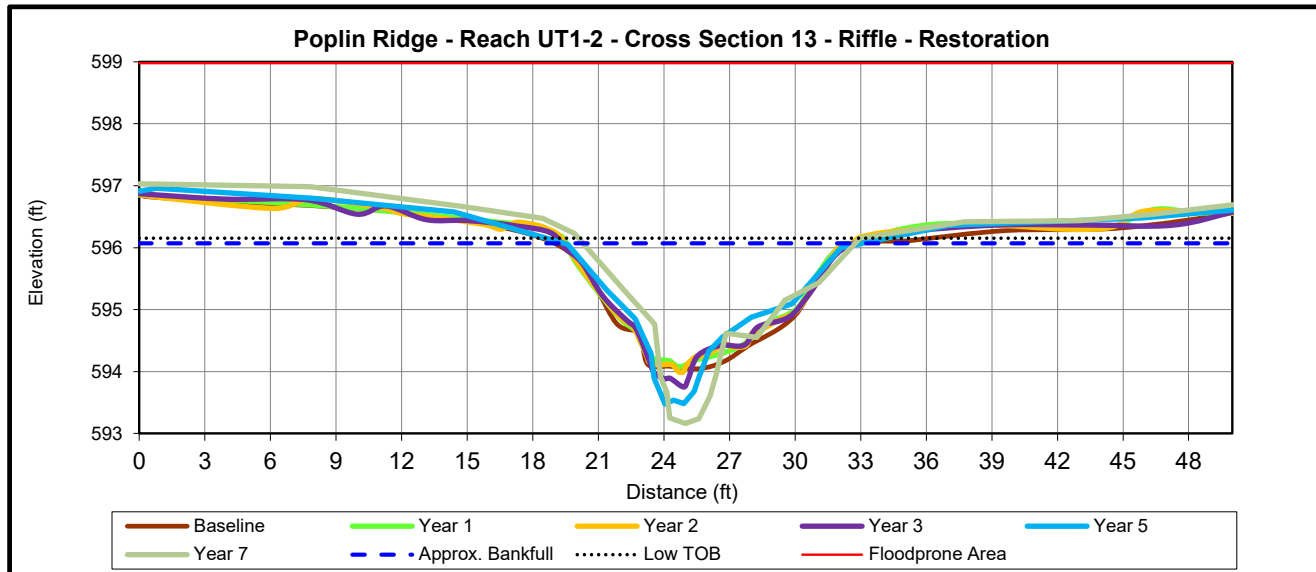

	Cross Section 13 (Riffle)							
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA¹	595.97	595.97	595.97	595.97	596.09	NA	596.1	
Bankfull Width (ft) ¹	12.5	12.2	12.3	12.6	14.1	NA	12.4	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.2	NA	>50.9	
Bankfull Mean Depth (ft)	1.2	1.2	1.2	1.2	---	NA	---	
Bankfull Max Depth (ft) ²	1.9	1.9	2.0	2.2	2.5	NA	3.0	
Low Bank Elevation (ft)	-	-	-	-	596.00	NA	596.2	
Bankfull Cross Sectional Area (ft ²) ²	15.6	14.4	14.6	14.8	14.4	NA	16.7	
Bankfull Width/Depth Ratio	10.0	10.4	10.3	10.7	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>4.1	>4.1	>4.0	>3.6	NA	4.1	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.0	1.0	NA	1.0	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

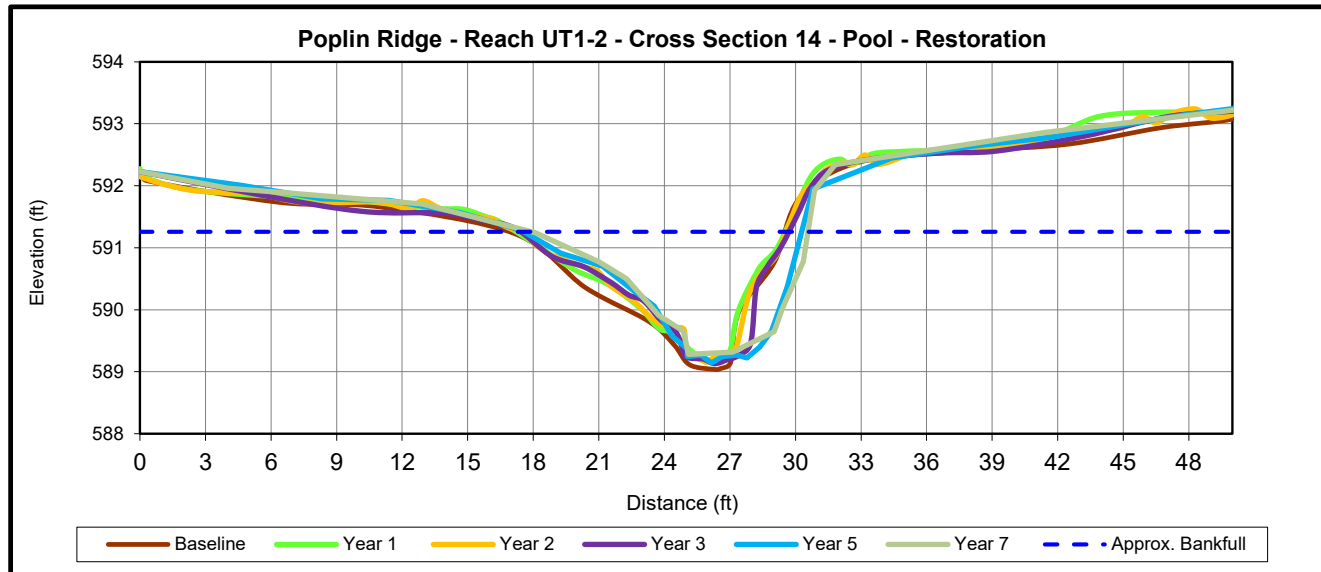

Dimension	Cross Section 14 (Pool)							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	591.21	591.21	591.21	591.21	591.22	NA	591.3	
Bankfull Width (ft) ¹	12.3	12.0	11.5	12.1	12.5	NA	9.6	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.2	NA	N/A	
Bankfull Mean Depth (ft)	1.1	1.0	1.0	1.0	---	NA	---	
Bankfull Max Depth (ft) ²	2.2	2.0	2.0	2.1	1.6	NA	1.5	
Low Bank Elevation (ft)	-	-	-	-	590.71	NA	590.8	
Bankfull Cross Sectional Area (ft ²) ²	13.9	11.9	11.5	12.6	8.4	NA	8.6	
Bankfull Width/Depth Ratio	10.9	12.1	11.6	11.5	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>4.2	>4.3	N/A	N/A	NA	N/A	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	NA	N/A	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

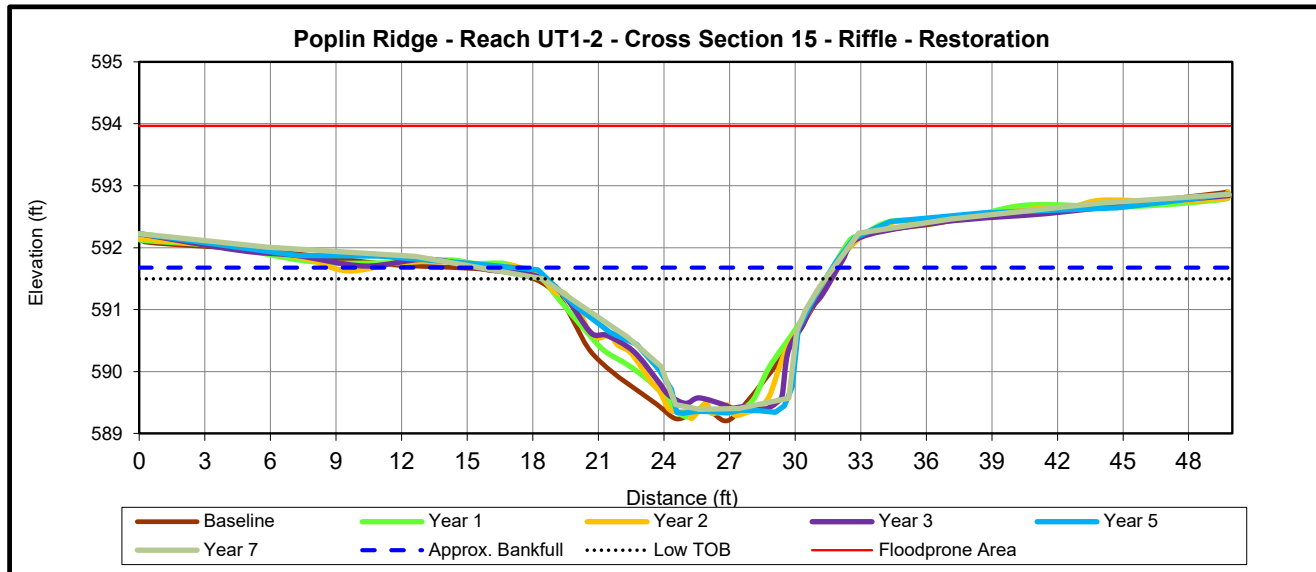

	Cross Section 15 (Riffle)							
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA¹	591.48	591.48	591.48	591.48	591.64	NA	591.7	
Bankfull Width (ft) ¹	13.4	12.9	12.9	13.2	13.4	NA	12.7	
Floodprone Width (ft) ¹	>50	>50	>50	>50	>49.8	NA	>49.9	
Bankfull Mean Depth (ft)	1.4	1.3	1.3	1.3	---	NA	---	
Bankfull Max Depth (ft) ²	2.3	2.2	2.2	2.1	2.3	NA	2.1	
Low Bank Elevation (ft)	-	-	-	-	591.64	NA	591.5	
Bankfull Cross Sectional Area (ft ²) ²	19.0	17.3	17.2	17.0	19.1	NA	16.4	
Bankfull Width/Depth Ratio	9.4	9.7	9.7	10.3	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>3.9	>3.9	>3.8	>3.7	NA	>3.9	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.0	1.0	NA	0.9	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

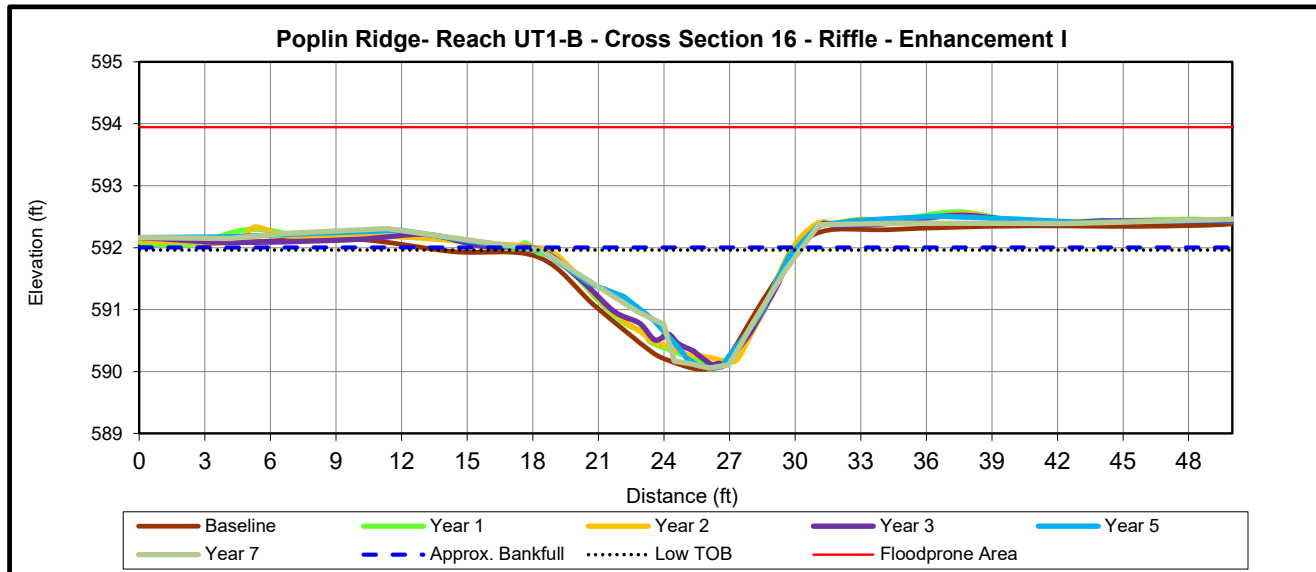

Dimension	Cross Section 16 (Riffle)							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	591.84	591.84	591.84	591.84	592.04	NA	592.0	
Bankfull Width (ft) ¹	11.7	10.8	10.5	11.1	13.6	NA	12.7	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.0	NA	>50.3	
Bankfull Mean Depth (ft)	1.1	1.0	1.1	1.0	---	NA	---	
Bankfull Max Depth (ft) ²	1.8	1.7	1.7	1.7	1.9	NA	1.9	
Low Bank Elevation (ft)	-	-	-	-	591.95	NA	592.0	
Bankfull Cross Sectional Area (ft ²) ²	12.3	11.2	11.1	10.8	11.2	NA	11.8	
Bankfull Width/Depth Ratio	11.2	10.4	9.9	11.3	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>4.6	>4.8	>4.5	>3.7	NA	4.0	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.1	1.0	NA	1.0	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

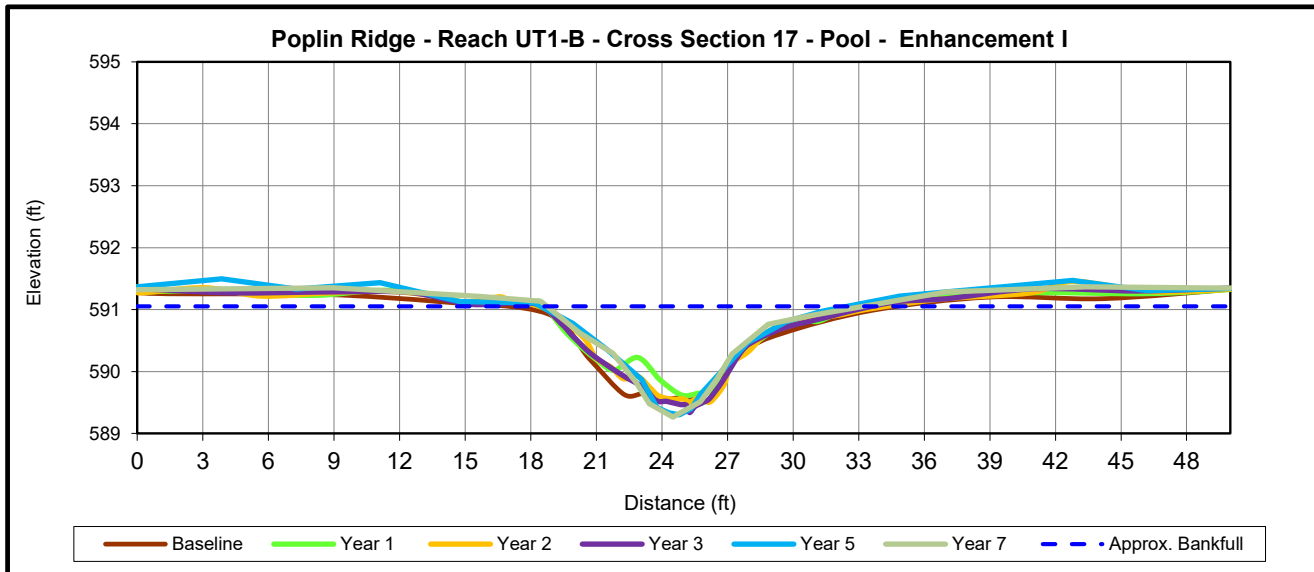

Dimension	Cross Section 17 (Pool)							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	590.93	590.93	590.93	590.93	591.07	NA	591.1	
Bankfull Width (ft) ¹	14.2	13.1	13.2	13.2	14.4	NA	10.3	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.0	NA	N/A	
Bankfull Mean Depth (ft)	0.7	0.6	0.7	0.7	---	NA	---	
Bankfull Max Depth (ft) ²	1.4	1.3	1.4	1.6	1.5	NA	1.5	
Low Bank Elevation (ft)	-	-	-	-	590.81	NA	590.8	
Bankfull Cross Sectional Area (ft ²) ²	10.2	8.5	9.2	9.6	7.1	NA	6.8	
Bankfull Width/Depth Ratio	19.7	20.2	19.1	18.3	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>3.8	>3.8	N/A	N/A	NA	N/A	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	NA	N/A	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

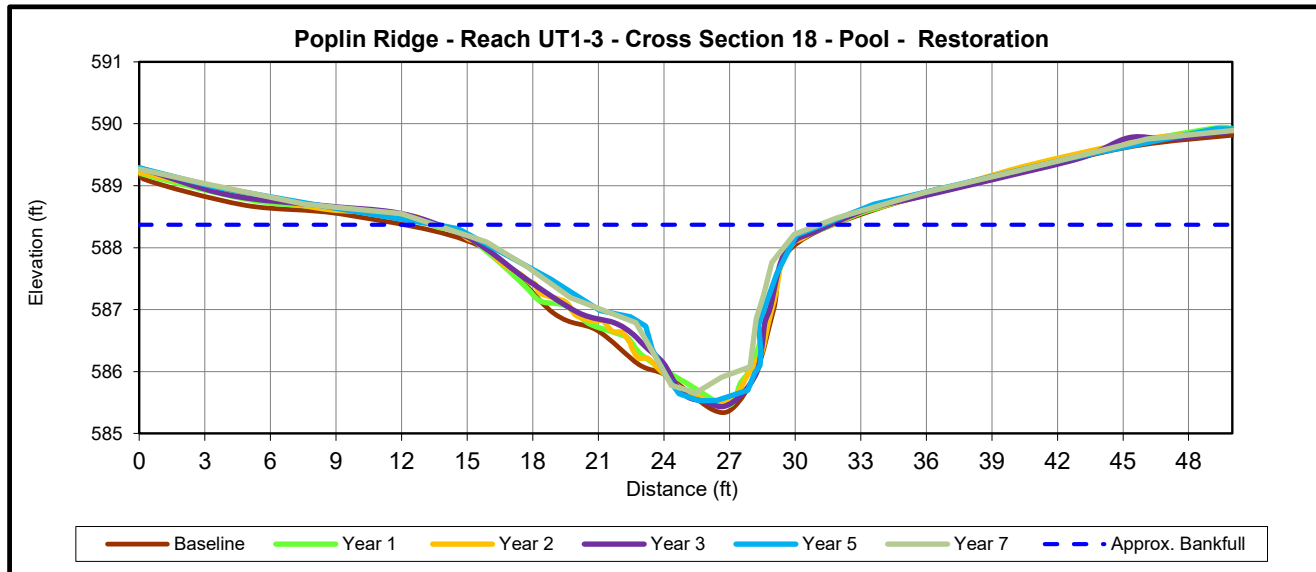

Dimension	Cross Section 18 (Pool)							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA ¹	588.03	588.03	588.03	588.03	588.30	NA	588.4	
Bankfull Width (ft) ¹	14.5	14.3	13.9	14.2	16.2	NA	14.1	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.6	NA	N/A	
Bankfull Mean Depth (ft)	1.5	1.4	1.4	1.4	---	NA	---	
Bankfull Max Depth (ft) ²	2.6	2.6	2.5	2.6	2.7	NA	2.4	
Low Bank Elevation (ft)	-	-	-	-	588.20	NA	588.1	
Bankfull Cross Sectional Area (ft ²) ²	21.5	19.6	19.7	19.3	19.7	NA	17.1	
Bankfull Width/Depth Ratio	9.8	10.4	9.9	10.5	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>3.5	>3.6	N/A	N/A	NA	N/A	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	NA	N/A	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

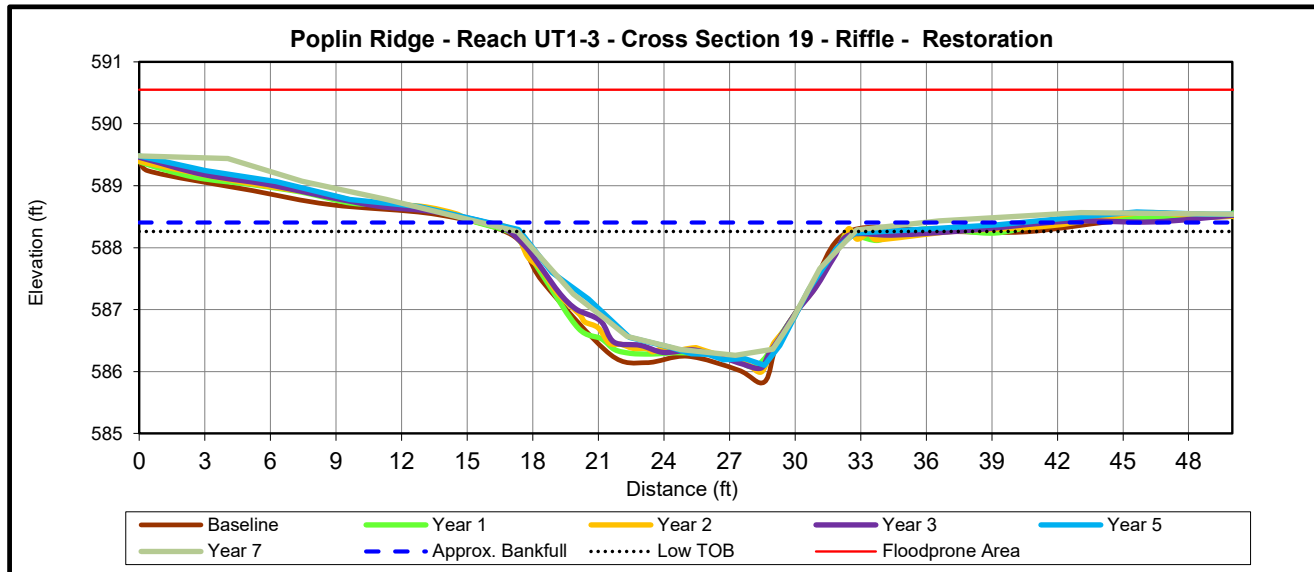

	Cross Section 19 (Riffle)							
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA¹	588.19	588.19	588.19	588.19	588.38	NA	588.4	
Bankfull Width (ft) ¹	15.2	15.1	14.9	15.4	23.1	NA	15.5	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.2	NA	>50.2	
Bankfull Mean Depth (ft)	1.5	1.4	1.4	1.4	---	NA	---	
Bankfull Max Depth (ft) ²	2.4	2.1	2.2	2.1	2.1	NA	2.0	
Low Bank Elevation (ft)	-	-	-	-	588.23	NA	588.3	
Bankfull Cross Sectional Area (ft ²) ²	23.0	21.8	21.3	21.0	20.3	NA	20.5	
Bankfull Width/Depth Ratio	10.1	10.5	10.5	11.2	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>3.3	>3.3	>3.3	>2.2	NA	>3.2	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.0	0.9	NA	0.9	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

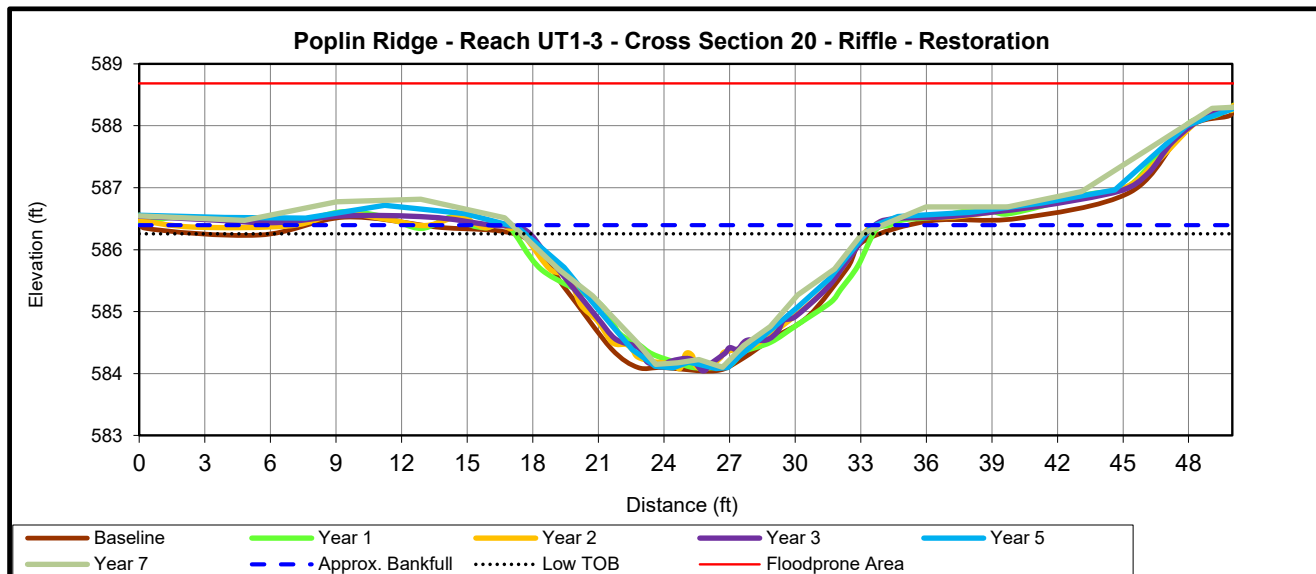

Cross Section 20 (Riffle)								
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
Bankfull Elevation (ft) - Based on AB-XSA¹	586.15	586.15	586.15	586.15	586.33	NA	588.4	
Bankfull Width (ft) ¹	15.5	16.1	15.2	15.1	16.0	NA	16.9	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.2	NA	>50.2	
Bankfull Mean Depth (ft)	1.4	1.3	1.3	1.3	---	NA	---	
Bankfull Max Depth (ft) ²	2.1	2.1	2.1	2.1	2.3	NA	2.2	
Low Bank Elevation (ft)	-	-	-	-	586.36	NA	586.3	
Bankfull Cross Sectional Area (ft ²) ²	21.9	20.9	20.0	19.6	22.4	NA	19.7	
Bankfull Width/Depth Ratio	11.0	12.4	11.6	11.6	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>3.1	>3.3	>3.3	>3.1	NA	>3.0	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.1	1.0	NA	0.9	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

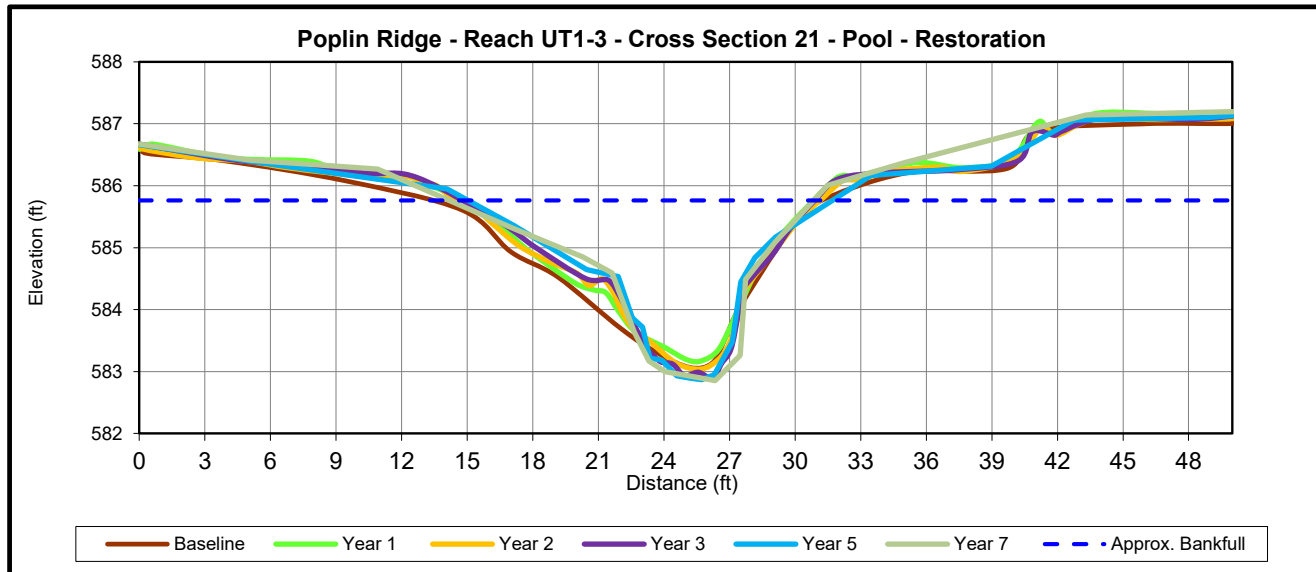

		Cross Section 21 (Pool)							
Dimension		Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
	XSA¹	585.60	585.60	585.60	585.60	585.82	NA	585.8	
	Bankfull Width (ft) ¹	15.8	15.0	15.2	15.0	17.2	NA	16.6	
	Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.2	NA	N/A	
	Bankfull Mean Depth (ft)	1.4	1.3	1.3	1.3	---	NA	---	
	Bankfull Max Depth (ft) ²	2.5	2.4	2.6	2.7	3.1	NA	3.2	
	Low Bank Elevation (ft)	-	-	-	-	585.95	NA	586.0	
	Bankfull Cross Sectional Area (ft ²) ²	21.4	19.1	19.4	19.3	23.7	NA	25.7	
	Bankfull Width/Depth Ratio	11.7	11.8	11.8	11.7	---	NA	---	
	Bankfull Entrenchment Ratio ¹	>2.2	>3.3	>3.3	N/A	N/A	NA	N/A	
	Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	NA	N/A	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

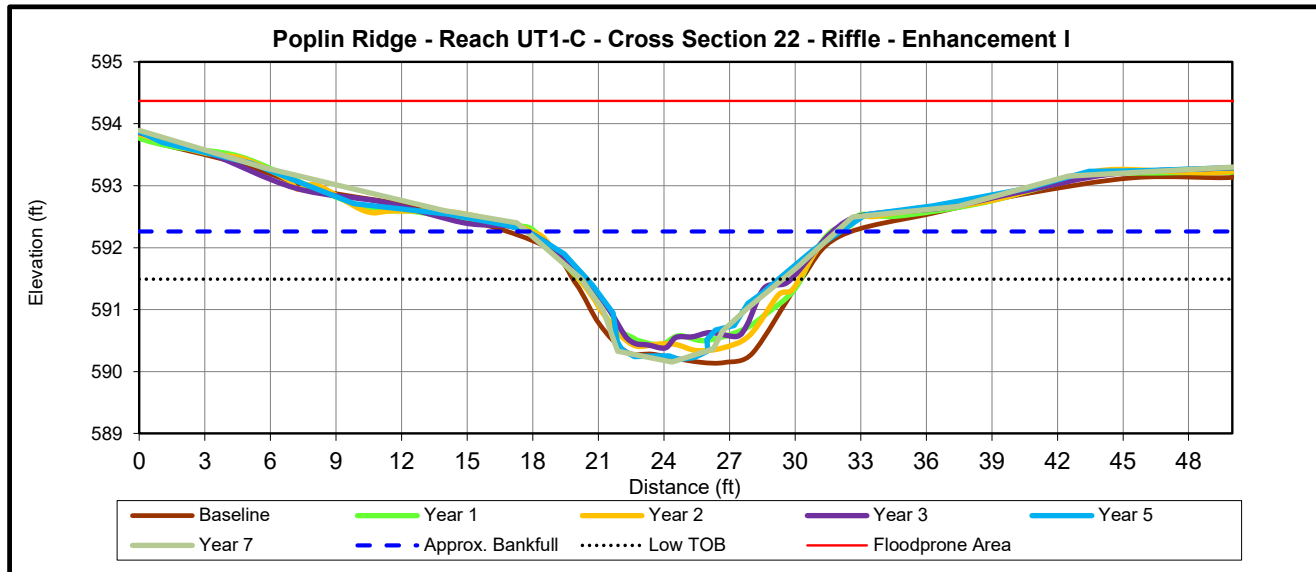

Cross Section 22 (Riffle)								
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
XSA ¹	592.04	592.04	592.04	592.04	592.33	NA	592.3	
Bankfull Width (ft) ¹	13.2	12.5	12.5	12.4	15.2	NA	14.2	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.2	NA	>50.2	
Bankfull Mean Depth (ft)	1.3	1.1	1.1	1.0	---	NA	---	
Bankfull Max Depth (ft) ²	1.9	1.6	1.7	1.7	1.1	NA	1.3	
Low Bank Elevation (ft)	-	-	-	-	591.27	NA	591.5	
Bankfull Cross Sectional Area (ft ²) ²	16.8	13.6	14.2	12.5	5.4	NA	7.8	
Bankfull Width/Depth Ratio	10.4	11.5	10.9	12.3	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>4.0	>4.0	>4.0	>3.3	NA	>3.5	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	0.9	0.5	NA	1.1	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

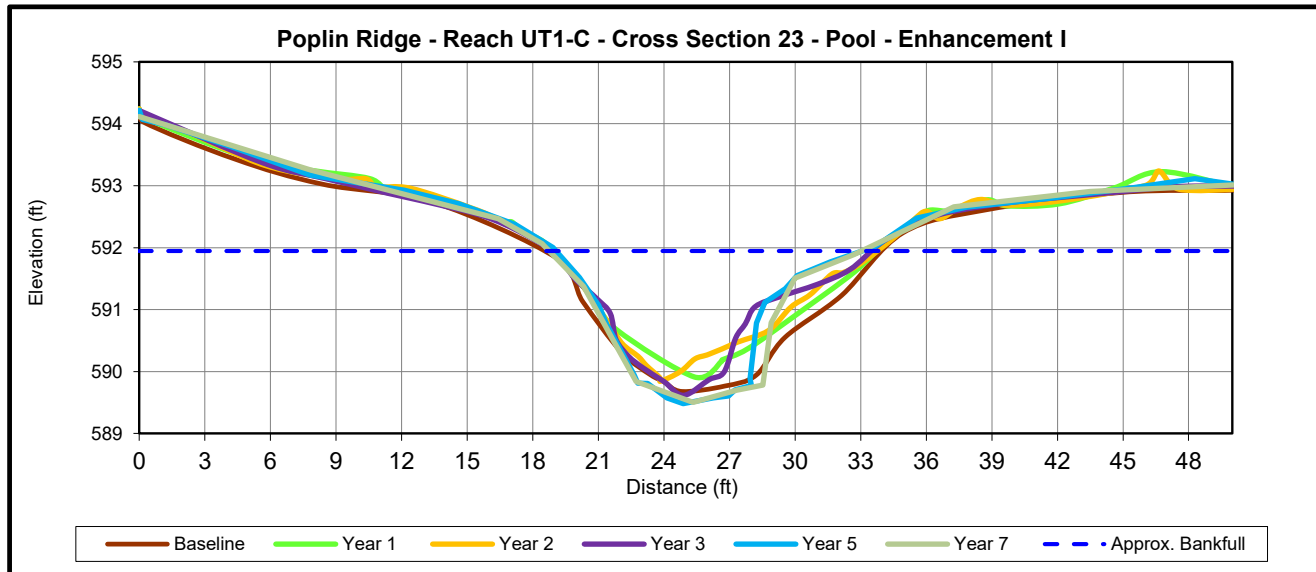

		Cross Section 23 (Pool)							
Dimension		Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
	XSA¹	591.80	591.80	591.80	591.80	592.04	NA	592.1	
	Bankfull Width (ft) ¹	14.6	14.0	13.9	13.7	15.0	NA	9.7	
	Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.2	NA	N/A	
	Bankfull Mean Depth (ft)	1.3	1.1	1.0	1.0	---	NA	---	
	Bankfull Max Depth (ft) ²	2.1	1.9	2.0	2.2	1.6	NA	1.9	
	Low Bank Elevation (ft)	-	-	-	-	591.07	NA	591.4	
	Bankfull Cross Sectional Area (ft ²) ²	19.1	14.8	14.2	14.3	8.8	NA	12.4	
	Bankfull Width/Depth Ratio	11.1	13.3	13.5	13.2	---	NA	---	
	Bankfull Entrenchment Ratio ¹	>2.2	>3.6	>3.6	N/A	N/A	NA	N/A	
	Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	NA	N/A	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

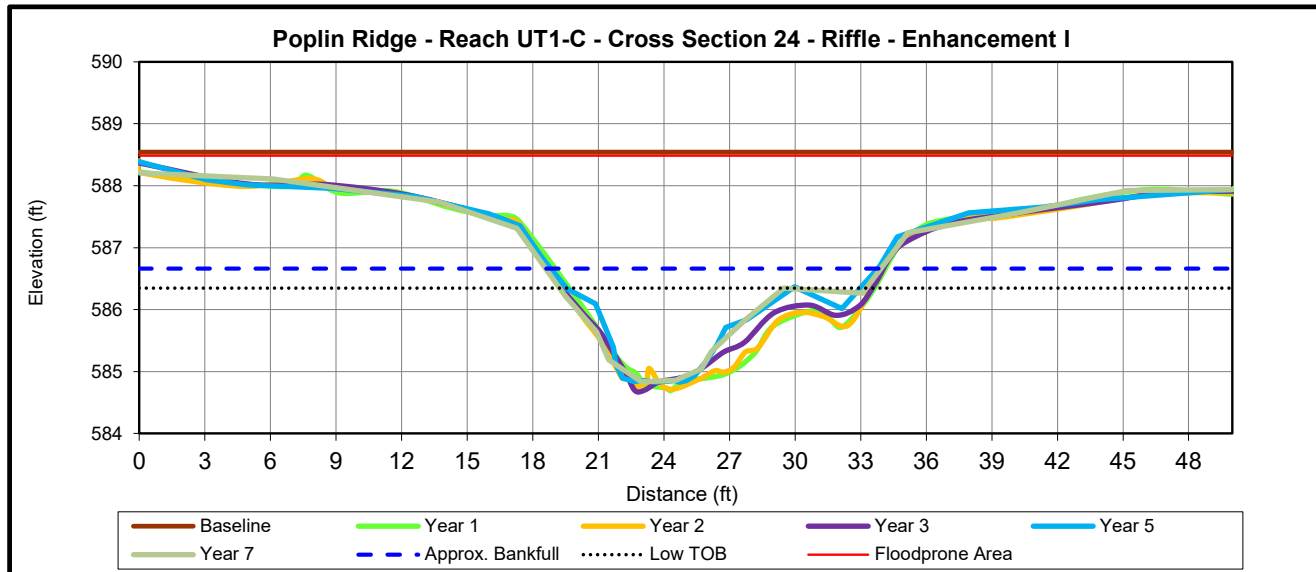

		Cross Section 24 (Riffle)							
Dimension		Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
	XSA¹	586.30	586.30	586.30	586.30	586.69	NA	586.7	
	Bankfull Width (ft) ¹	14.2	13.8	14.0	14.0	15.1	NA	11.1	
	Floodprone Width (ft) ¹	>46.6	>46.6	>46.6	38.0	>50.0	NA	>50.0	
	Bankfull Mean Depth (ft)	1.0	0.9	0.9	0.8	---	NA	---	
	Bankfull Max Depth (ft) ²	1.7	1.6	1.6	1.6	0.9	NA	1.5	
	Low Bank Elevation (ft)	-	-	-	-	585.71	NA	586.3	
	Bankfull Cross Sectional Area (ft ²) ²	14.0	12.2	12.4	10.8	3.8	NA	9.3	
	Bankfull Width/Depth Ratio	14.3	15.6	15.7	18.1	---	NA	---	
	Bankfull Entrenchment Ratio ¹	>2.2	>3.4	>3.3	2.7	>3.3	NA	>4.5	
	Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.5	0.5	NA	0.8	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

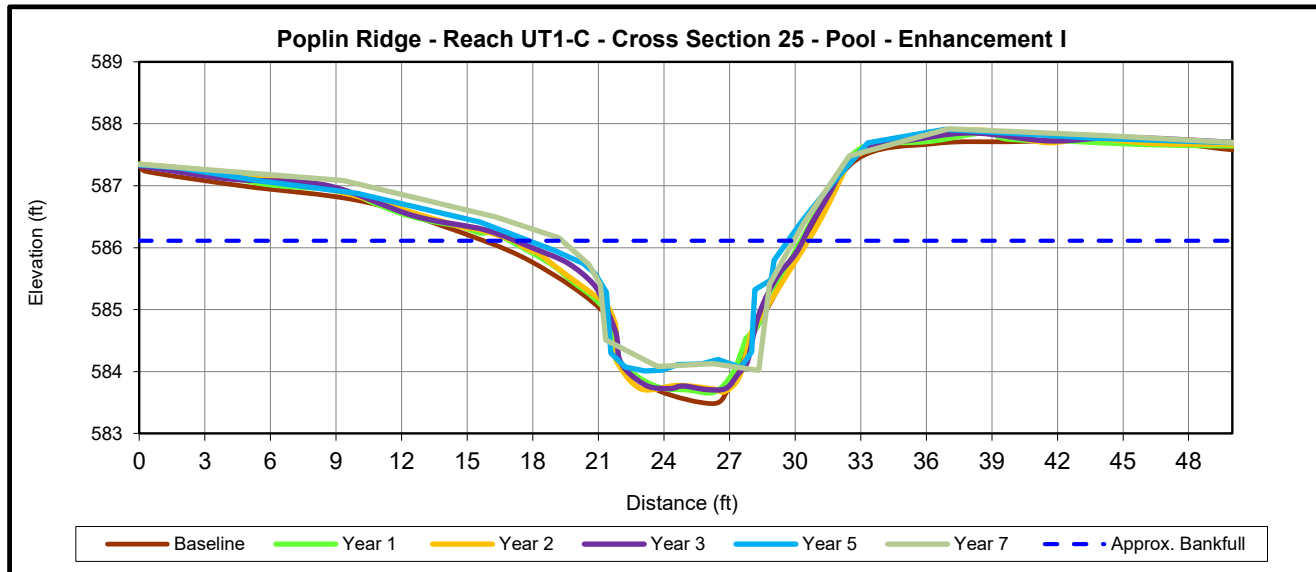

		Cross Section 25 (Pool)							
Dimension		Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
	XSA ¹	585.80	585.80	585.80	585.80	586.15	NA	586.1	
	Bankfull Width (ft) ¹	12.0	11.1	11.2	10.5	12.2	NA	8.3	
	Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.2	NA	N/A	
	Bankfull Mean Depth (ft)	1.3	1.3	1.3	1.3	---	NA	---	
	Bankfull Max Depth (ft) ²	2.3	2.1	2.1	2.1	1.5	NA	1.7	
	Low Bank Elevation (ft)	-	-	-	-	585.48	NA	585.7	
	Bankfull Cross Sectional Area (ft ²) ²	15.5	14.3	14.5	14.1	9.2	NA	11.8	
	Bankfull Width/Depth Ratio	9.4	8.6	8.7	7.8	---	NA	---	
	Bankfull Entrenchment Ratio ¹	>2.2	>4.5	>4.5	N/A	N/A	NA	N/A	
	Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	NA	N/A	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

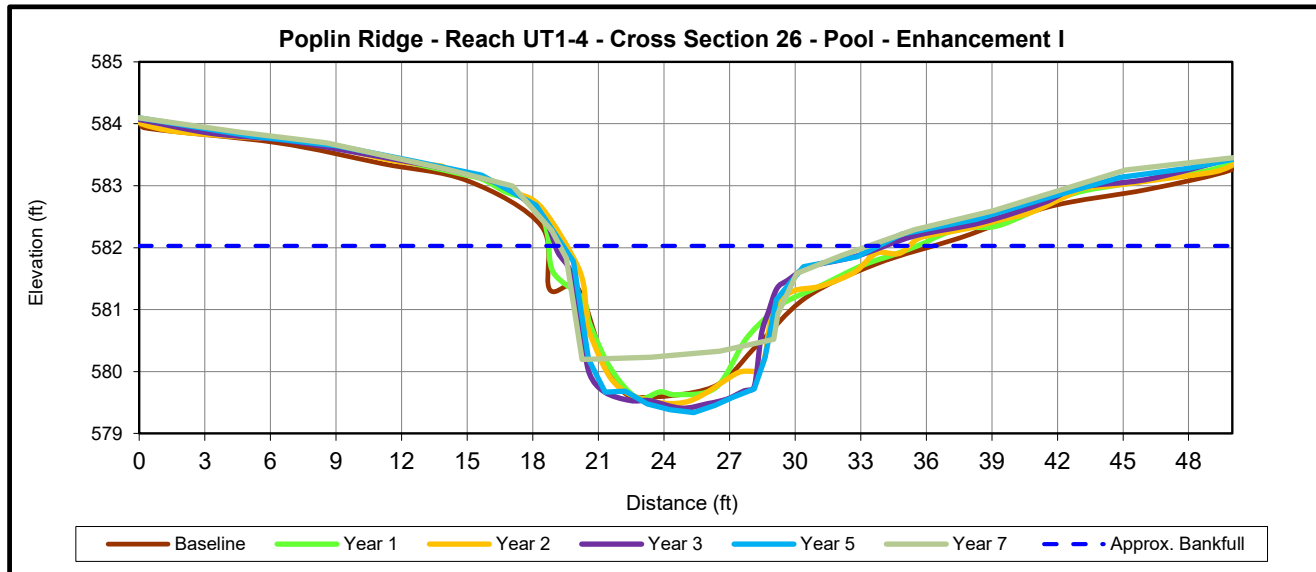


Dimension	Cross Section 26 (Pool)							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
XSA ¹	581.70	581.70	581.70	581.70	581.62	NA	582.0	
Bankfull Width (ft) ¹	14.8	14.1	13.0	11.2	10.3	NA	14.1	
Floodprone Width (ft) ¹	>47.0	>47.0	>47.0	>50.0	>50.3	NA	N/A	
Bankfull Mean Depth (ft)	1.2	1.2	1.3	1.6	---	NA	---	
Bankfull Max Depth (ft) ²	2.1	2.1	2.2	2.3	2.4	NA	2.1	
Low Bank Elevation (ft)	-	-	-	-	581.69	NA	582.3	
Bankfull Cross Sectional Area (ft ²) ²	17.6	16.2	17.2	18.2	18.4	NA	21.5	
Bankfull Width/Depth Ratio	12.5	12.3	9.7	6.9	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>3.3	>3.6	N/A	N/A	NA	N/A	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	NA	N/A	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream

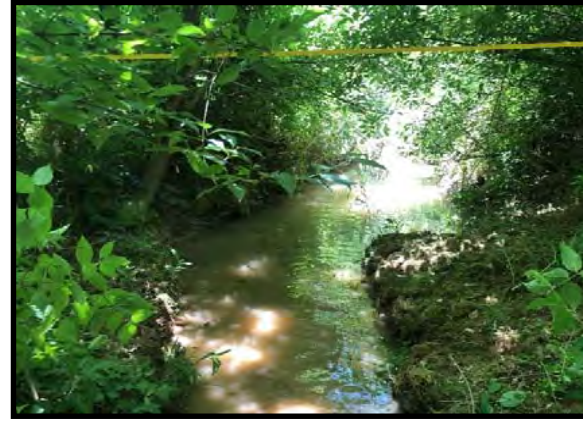

Downstream

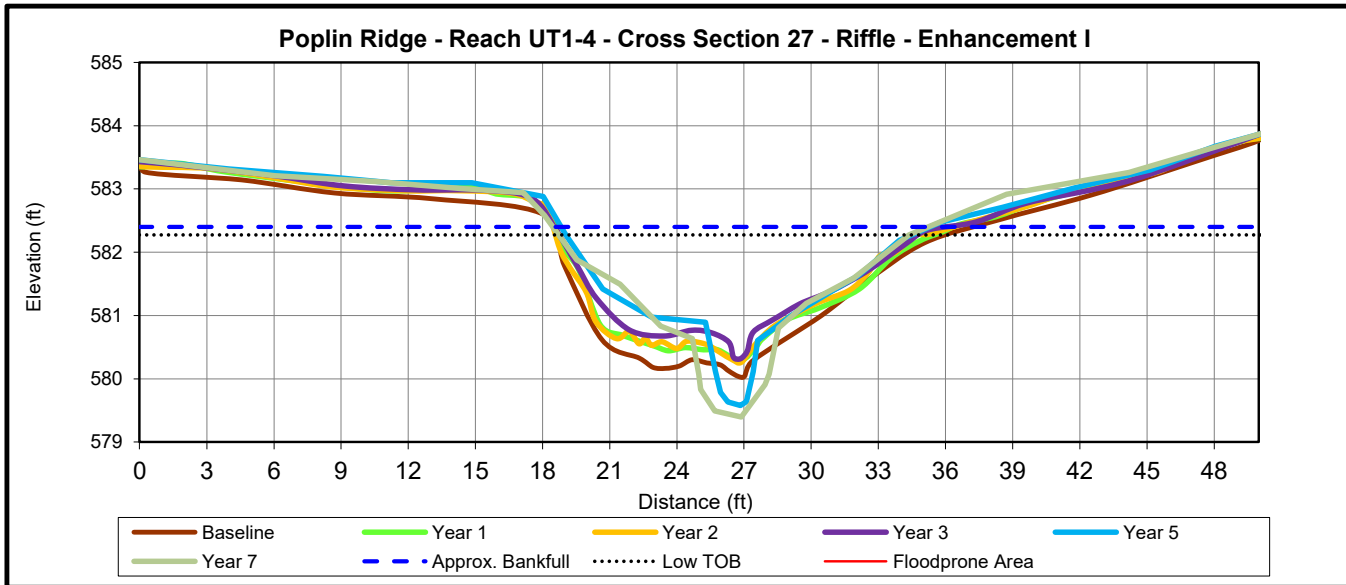

	Cross Section 27 (Riffle)							
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
XSA ¹	582.15	582.15	582.15	582.15	582.52	NA	582.4	
Bankfull Width (ft) ¹	16.5	15.9	15.6	15.4	17.6	NA	16.8	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.0	NA	>50.1	
Bankfull Mean Depth (ft)	1.3	1.2	1.1	1.0	---	NA	---	
Bankfull Max Depth (ft) ²	2.1	1.9	1.9	1.8	2.6	NA	2.9	
Low Bank Elevation (ft)	-	-	-	-	582.19	NA	582.3	
Bankfull Cross Sectional Area (ft ²) ²	21.5	18.3	17.8	15.6	16.2	NA	19.5	
Bankfull Width/Depth Ratio	12.7	13.8	13.6	15.1	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>3.1	>3.2	>3.3	>2.8	NA	>3.0	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.1	0.9	NA	1.0	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

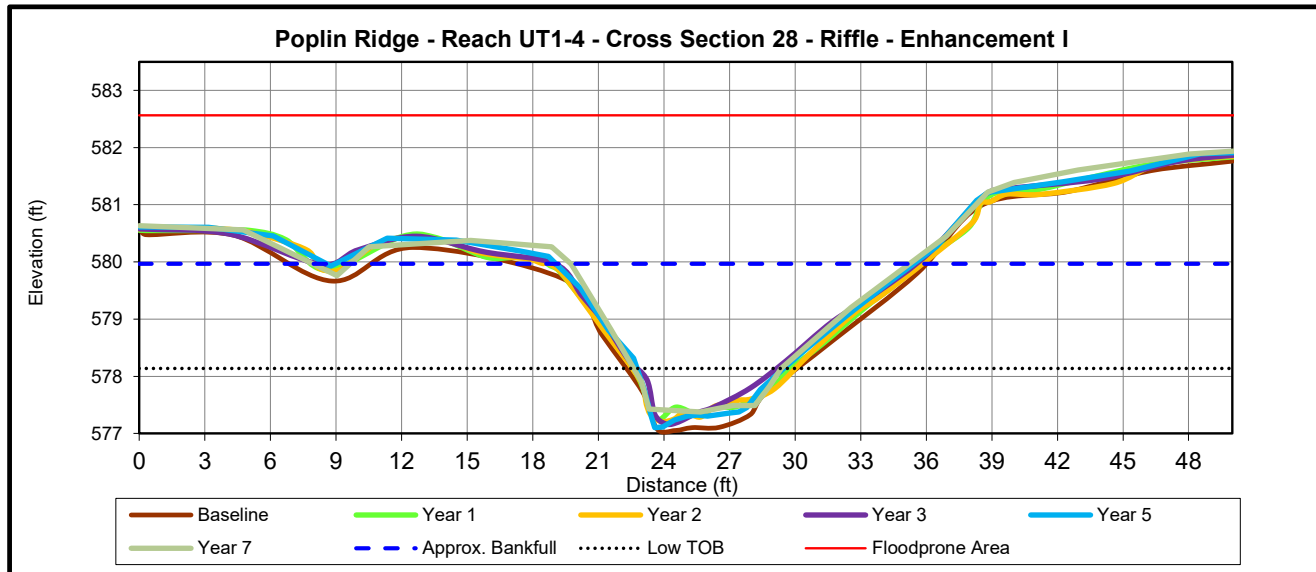

Dimension	Cross Section 28 (Riffle)							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
XSA ¹	579.70	579.70	579.70	579.70	579.91	NA	580.0	
Bankfull Width (ft) ¹	15.9	15.4	15.3	15.0	16.0	NA	15.5	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>50.4	NA	>50.5	
Bankfull Mean Depth (ft)	1.5	1.4	1.4	1.3	---	NA	---	
Bankfull Max Depth (ft) ²	2.6	2.5	2.5	2.5	3.0	NA	2.9	
Low Bank Elevation (ft)	-	-	-	-	580.10	NA	578.1	
Bankfull Cross Sectional Area (ft ²) ²	24.2	21.7	21.9	20.0	27.4	NA	29.0	
Bankfull Width/Depth Ratio	10.4	10.9	10.8	11.2	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>3.3	>3.3	>3.3	>3.2	NA	>3.3	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	1.1	1.1	NA	1.1	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

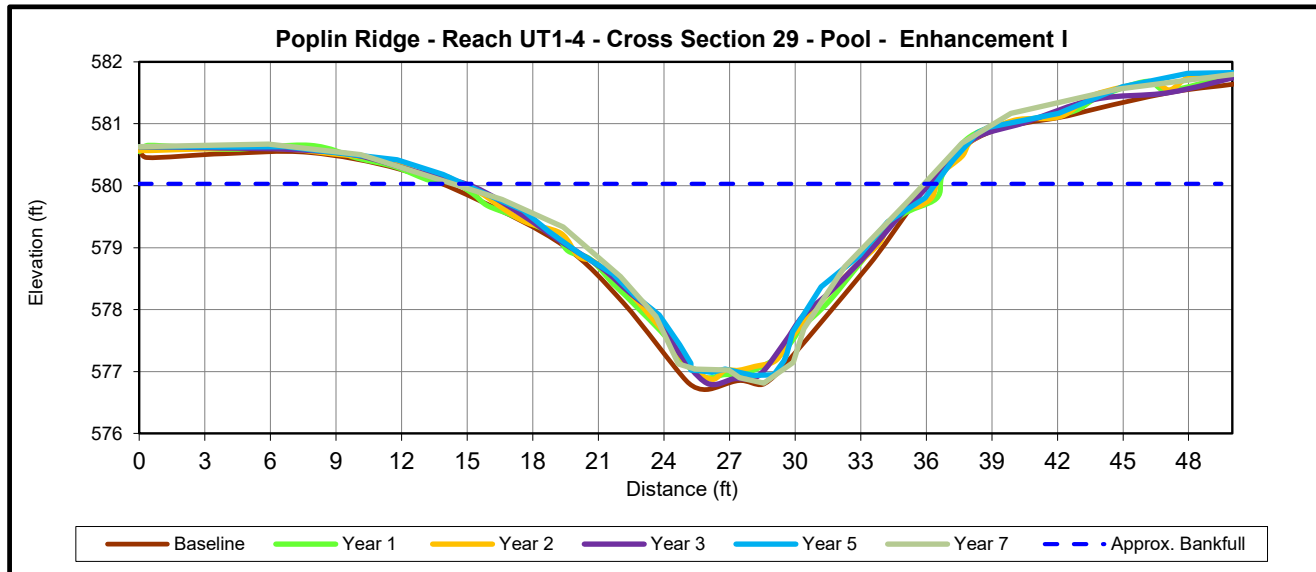

Dimension	Cross Section 29 (Pool)							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
XSA ¹	579.80	579.80	579.80	579.80	580.04	NA	580.0	
Bankfull Width (ft) ¹	20.3	20.8	20.0	19.4	21.7	NA	21.6	
Floodprone Width (ft) ¹	>50.0	>50.0	>50.0	>50.0	>42.7	NA	N/A	
Bankfull Mean Depth (ft)	1.6	1.4	1.4	1.5	---	NA	---	
Bankfull Max Depth (ft) ²	3.1	2.9	2.9	3.0	2.7	NA	2.5	
Low Bank Elevation (ft)	-	-	-	-	579.60	NA	579.3	
Bankfull Cross Sectional Area (ft ²) ²	33.2	30.0	28.9	29.2	24.6	NA	20.7	
Bankfull Width/Depth Ratio	12.5	14.4	13.9	12.9	---	NA	---	
Bankfull Entrenchment Ratio ¹	>2.2	>2.4	>2.5	N/A	N/A	NA	N/A	
Bankfull Bank Height Ratio ¹	1.0	1.0	1.0	N/A	N/A	NA	N/A	


Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.



Upstream



Downstream

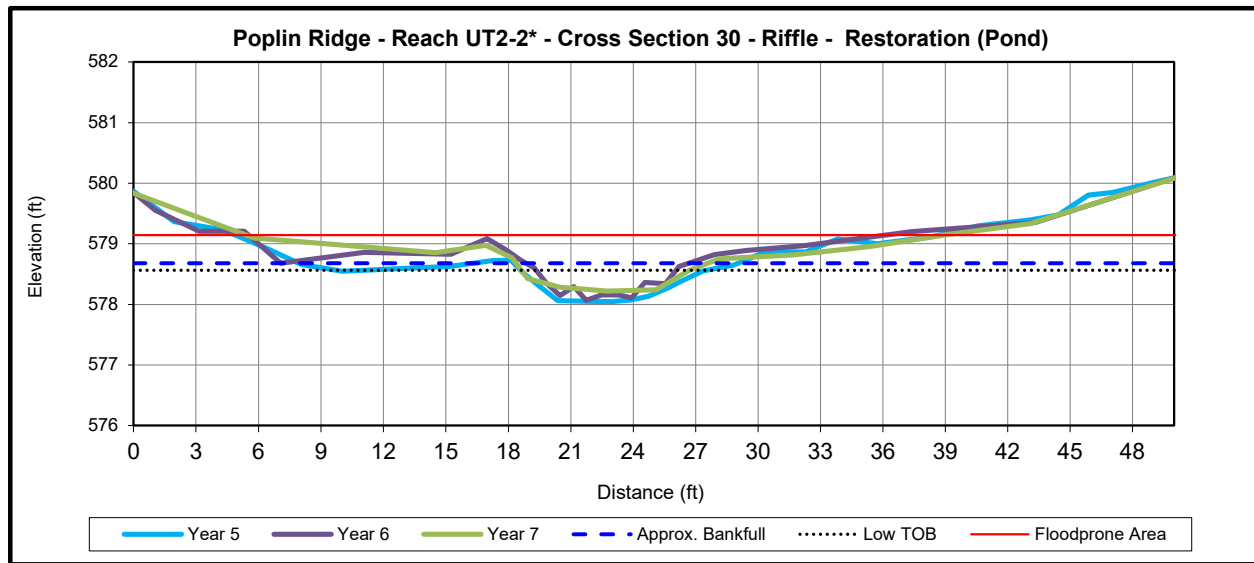

Dimension	Cross Section 30 (Riffle)							
	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
XSA ¹	-	-	-	-	578.55	578.70	578.7	
Bankfull Width (ft) ¹	-	-	-	-	8.7	8.10	9.2	
Floodprone Width (ft) ¹	-	-	-	-	30.7	40.27	33.4	
Bankfull Mean Depth (ft)	-	-	-	-	---	---	---	
Bankfull Max Depth (ft) ²	-	-	-	-	0.5	0.80	0.5	
Low Bank Elevation (ft)	-	-	-	-	578.55	578.89	578.8	
Bankfull Cross Sectional Area (ft ²) ²	-	-	-	-	3.1	4.90	3.8	
Bankfull Width/Depth Ratio	-	-	-	-	---	---	---	
Bankfull Entrenchment Ratio ¹	-	-	-	-	3.5	6.20	3.6	
Bankfull Bank Height Ratio ¹	-	-	-	-	1.0	1.30	1.2	

Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.


*Reach UT2-2 was reconstructed in September 2019



Upstream



Downstream

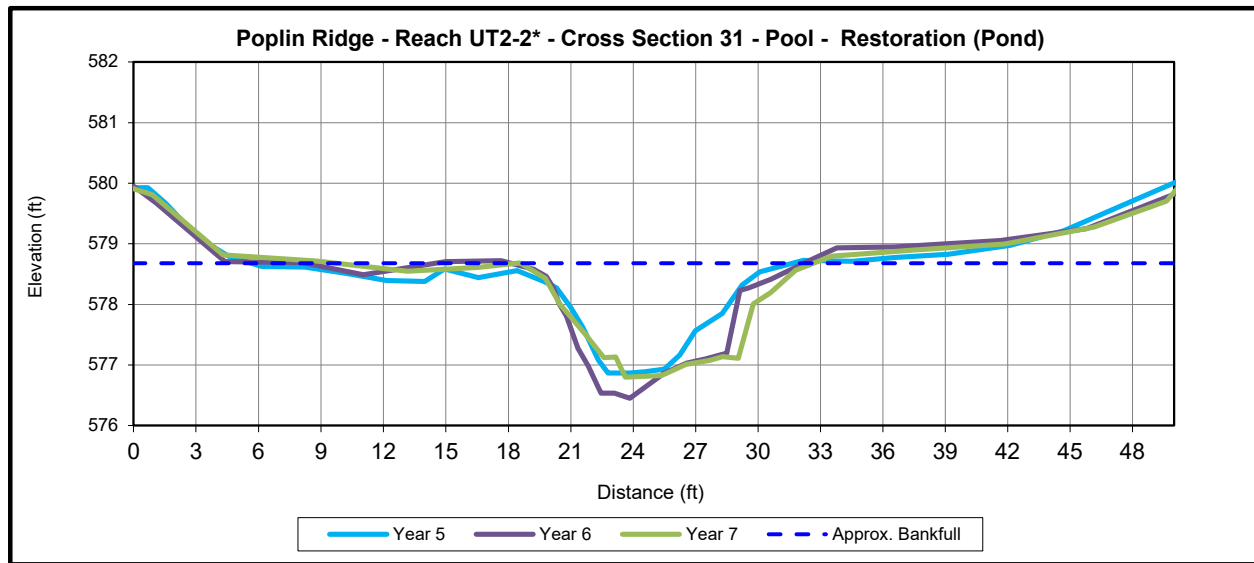

	Cross Section 31 (Pool)							
Dimension	Base	MY1	MY2	MY3	MY5	MY6	MY7	MY+
XSA ¹	-	-	-	-	578.37	578.00	578.1	
Bankfull Width (ft) ¹	-	-	-	-	9.7	8.5	9.9	
Floodprone Width (ft) ¹	-	-	-	-	48.3	46.3	44.9	
Bankfull Mean Depth (ft)	-	-	-	-	---	---	---	
Bankfull Max Depth (ft) ²	-	-	-	-	1.5	2.3	1.8	
Low Bank Elevation (ft)	-	-	-	-	578.37	578.72	578.6	
Bankfull Cross Sectional Area (ft ²) ²	-	-	-	-	8.8	16.5	14.0	
Bankfull Width/Depth Ratio	-	-	-	-	---	---	---	
Bankfull Entrenchment Ratio ¹	-	-	-	-	N/A	NA	N/A	
Bankfull Bank Height Ratio ¹	-	-	-	-	N/A	NA	N/A	

Note: Starting in MY5, the parameters denoted with ¹ were calculated using the as-built cross sectional area as the basis for adjusting the bankfull elevation and the parameters denoted with ² were calculated using the current years low top of bank as the bankfull.

*Reach UT2-2 was reconstructed in September 2019

Table 12. Pebble Count Data Summary

Stream Reach	MY1 - 2015		MY2 - 2016		MY3 - 2017		MY4 - 2018		MY5 - 2019		MY6 - 2020		MY7 - 2021	
	Pebble Count		Pebble Count		Pebble Count		Pebble Count		Pebble Count		Pebble Count		Pebble Count	
	D ₅₀ (mm)	D ₈₄ (mm)	D ₅₀ (mm)	D ₈₄ (mm)	D ₅₀ (mm)	D ₈₄ (mm)	D ₅₀ (mm)	D ₈₄ (mm)	D ₅₀ (mm)	D ₈₄ (mm)	D ₅₀ (mm)	D ₈₄ (mm)	D ₅₀ (mm)	D ₈₄ (mm)
UT1-1	13	43	5.2	26	48	76			24	43			19	73
UT1-1A	0.15	0.64	0.2	26	0.062	32			11	57			2.5	64
UT1-B	23	42	4.9	22	27	59			20	35			15	59
UT1-C	9.6	24	3.5	24	9.6	51.5			14.5	25			16.5	71.5
UT1-2	0.7	12.3	4.6	25.8	7.5	26.8			10.9	20			11.05	23.35
UT1-3	23.5	62.5	7.9	29.5	16.7	80.5			19.5	33.5			9.4	34
UT1-4	4	15.5	4.2	11.8	27.1	44			10.3	35			8.2	22
UT2-A	0.062	0.6	0.6	6.1	6.5	14			9	15			10.75	68.5
UT2-3	0.062	6.4	1.4	11	0.062	12			0.062	0.062			0.062	0.062
UT2-4	0.062	42	0.062	24	28	79			*	*			17	51

Charts 1-11. MY7 Stream Reach Substrate Composition Charts

Chart 1.

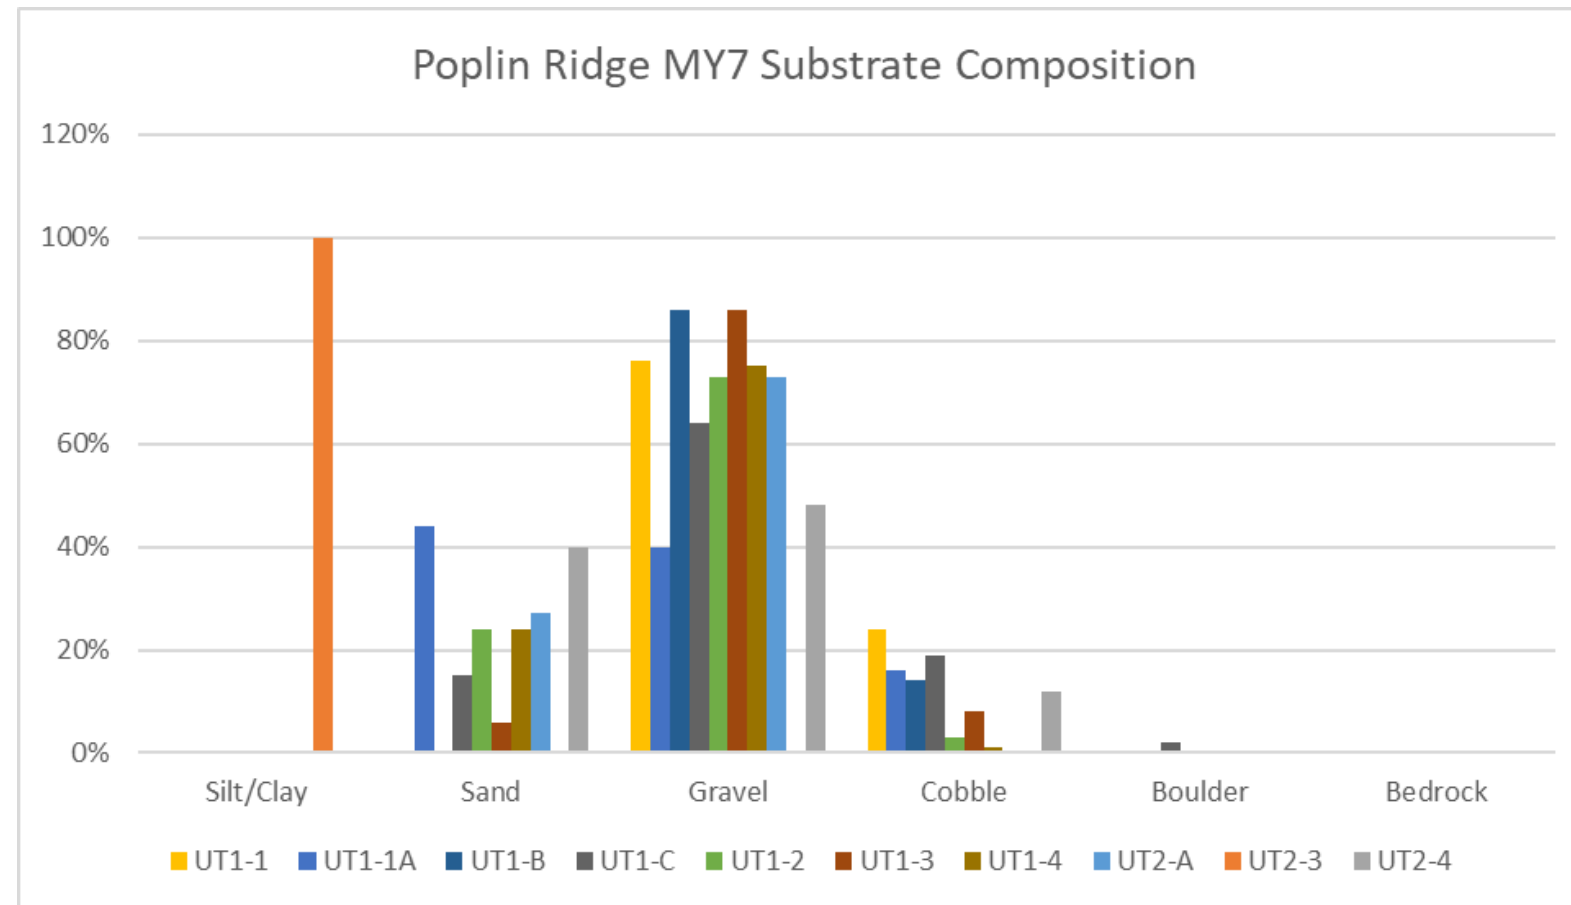


Chart 2.

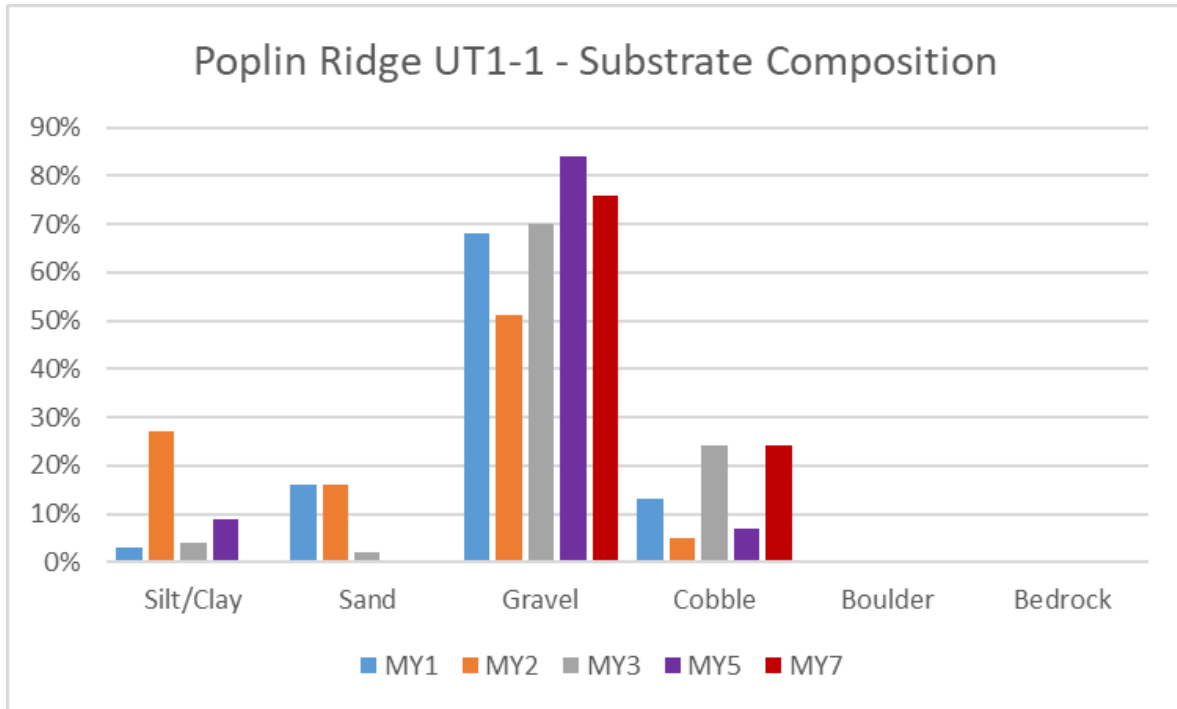


Chart 3.

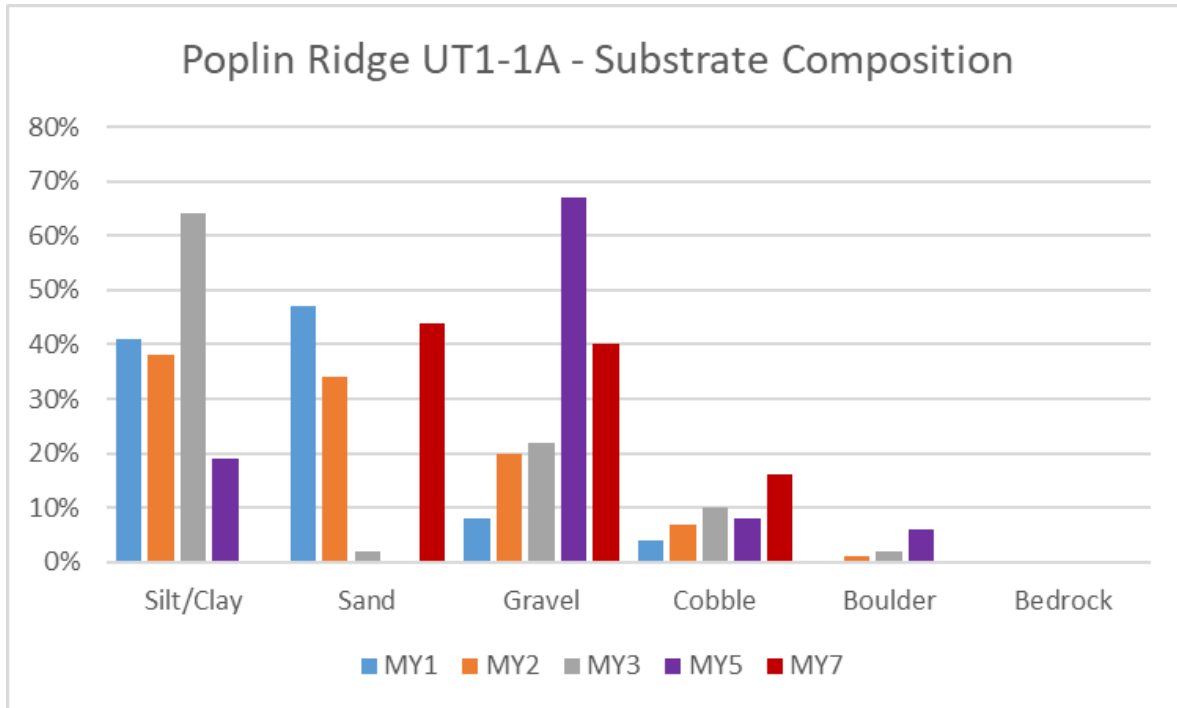


Chart 4.

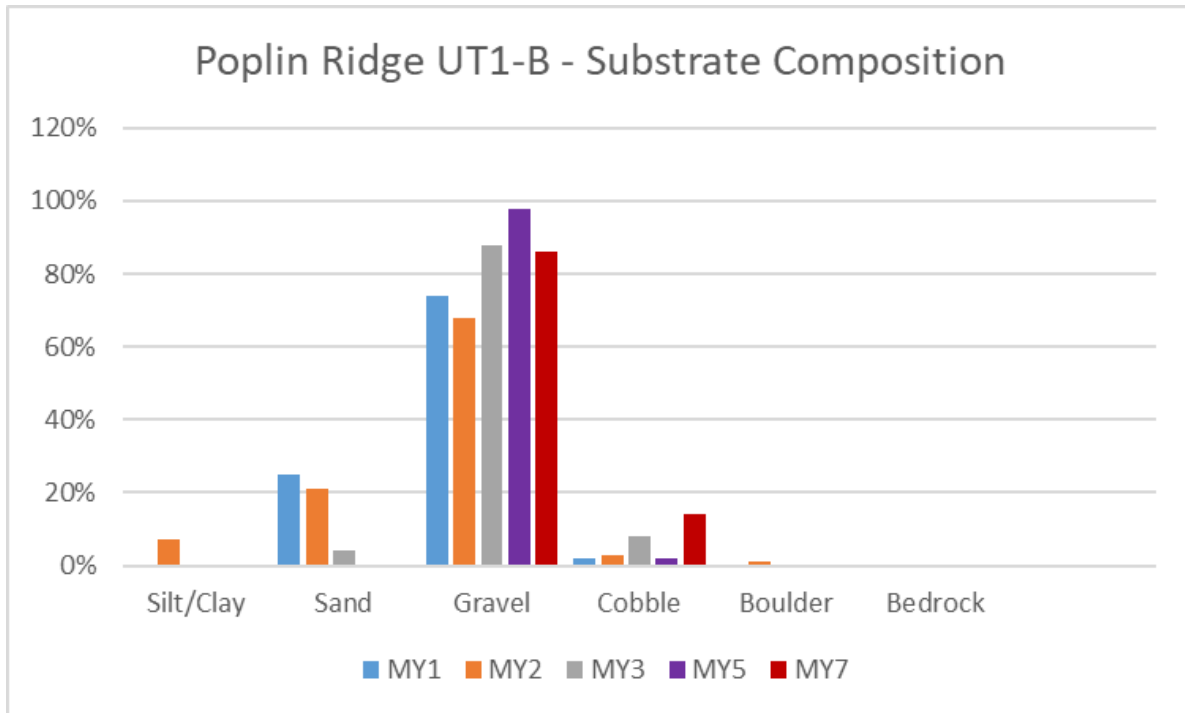
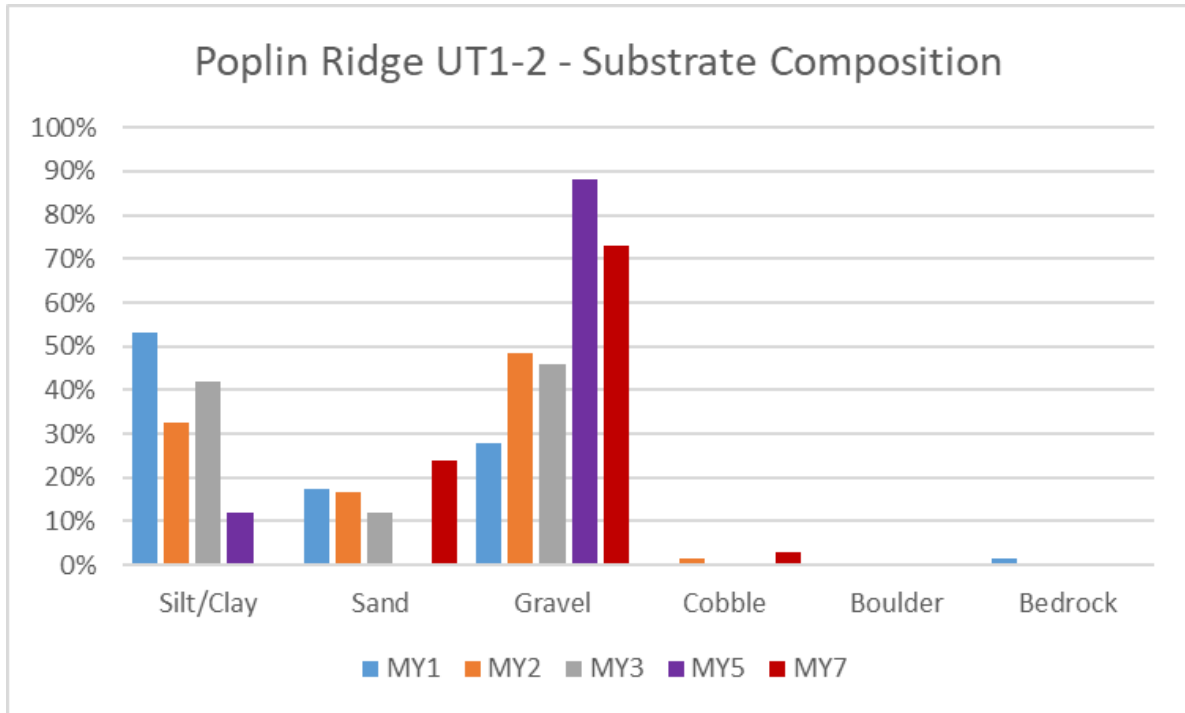


Chart 6.

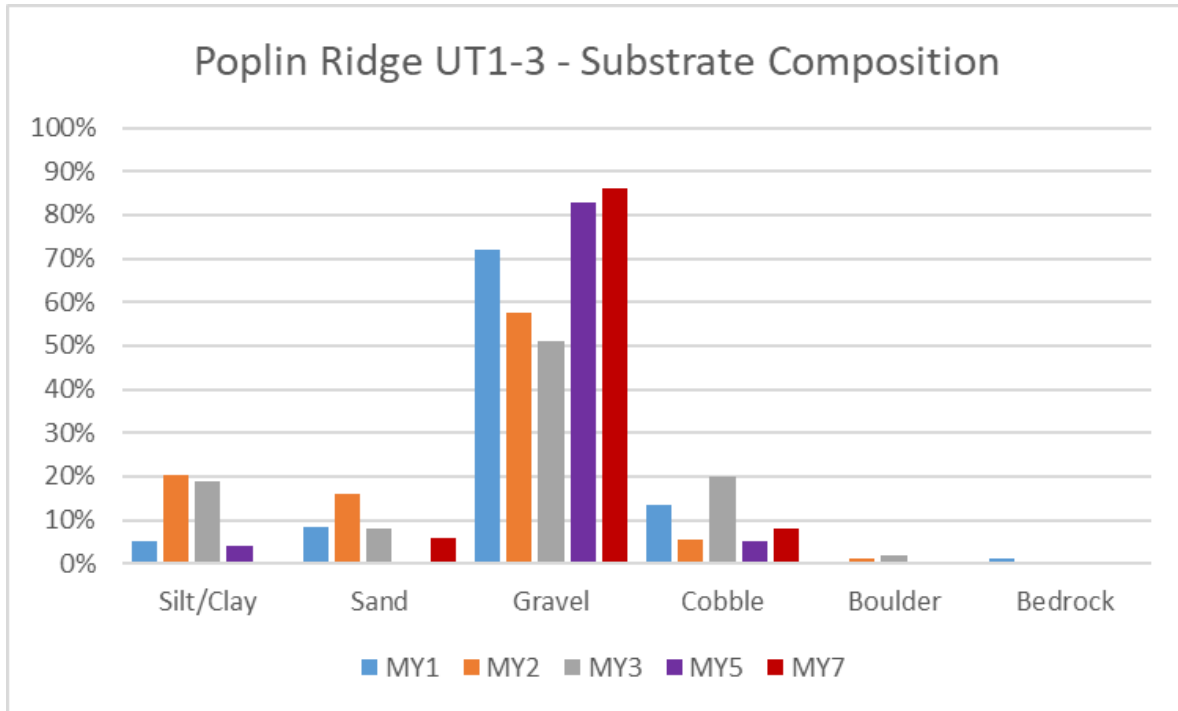


Chart 7.

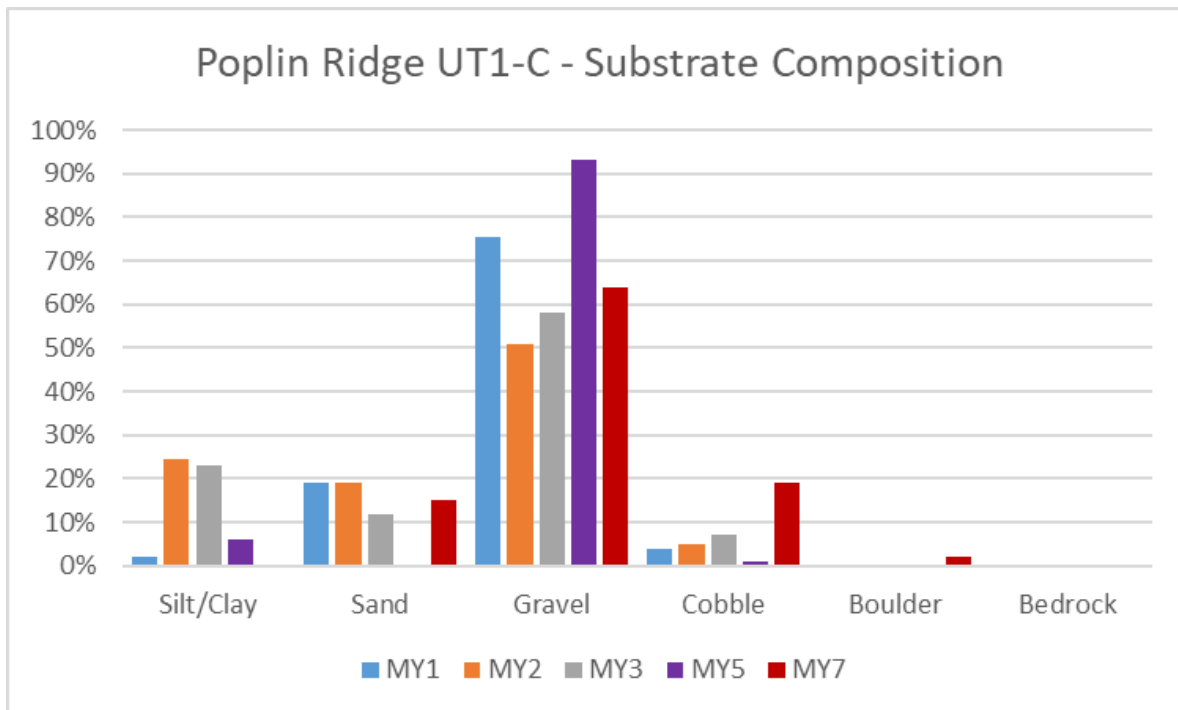


Chart 8.

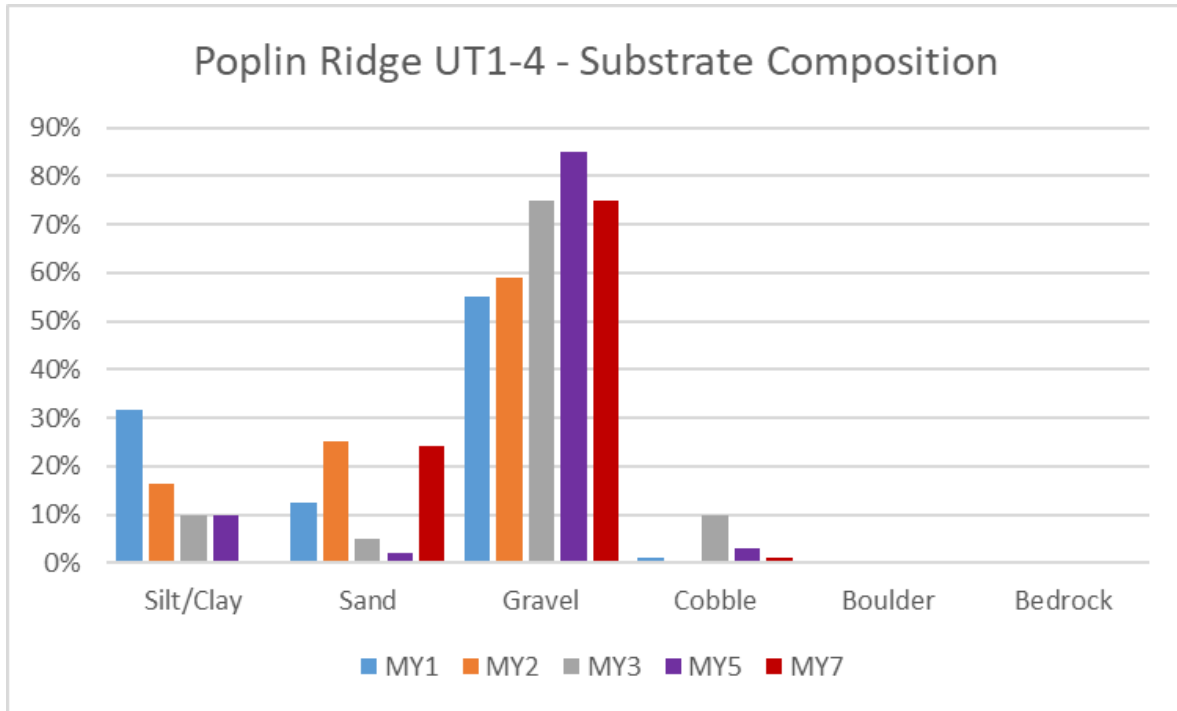


Chart 9.

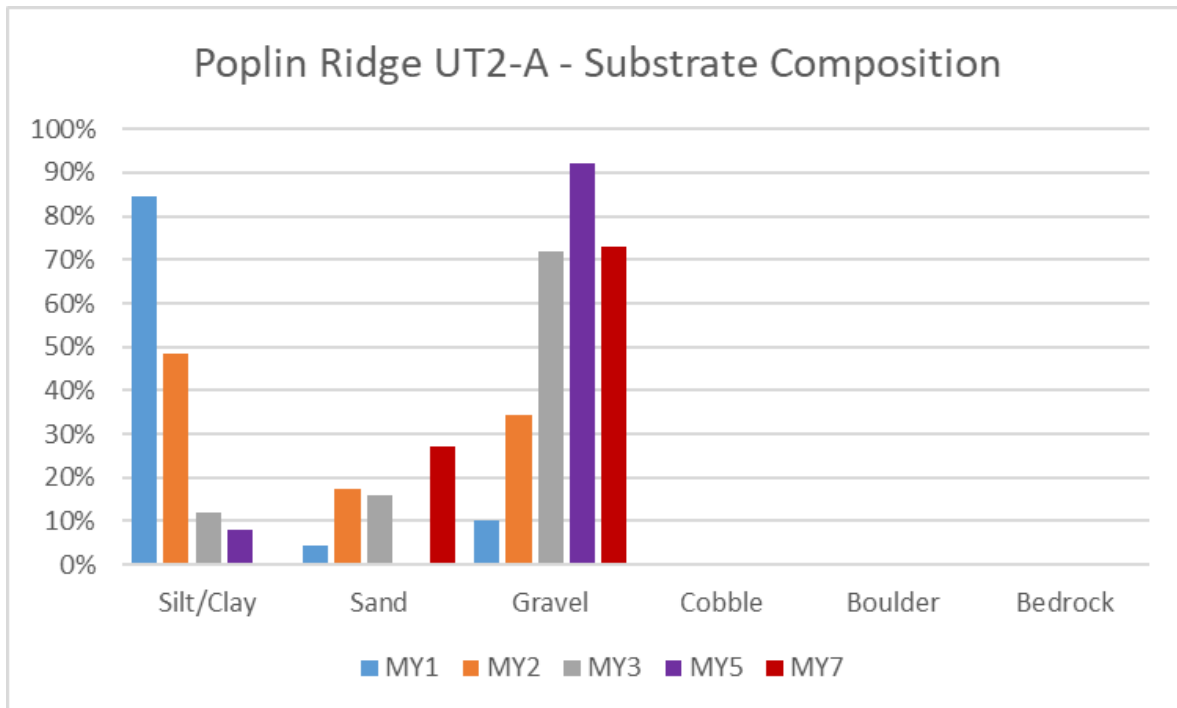


Chart 10.

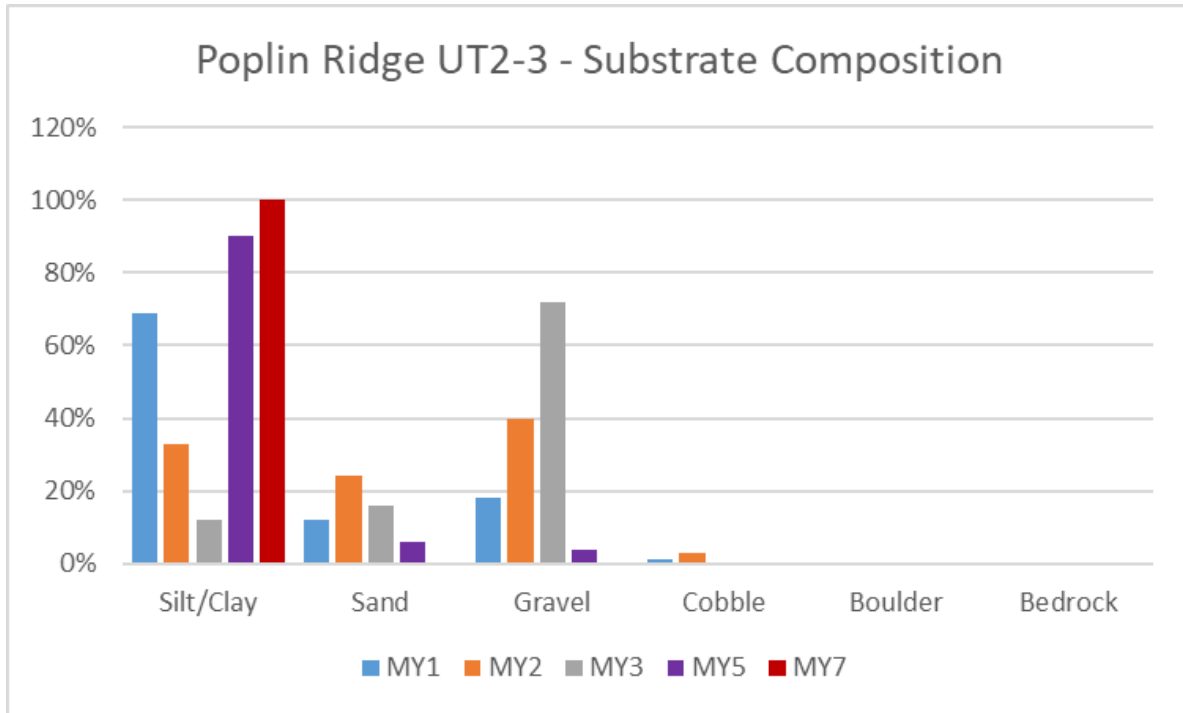


Chart 11.

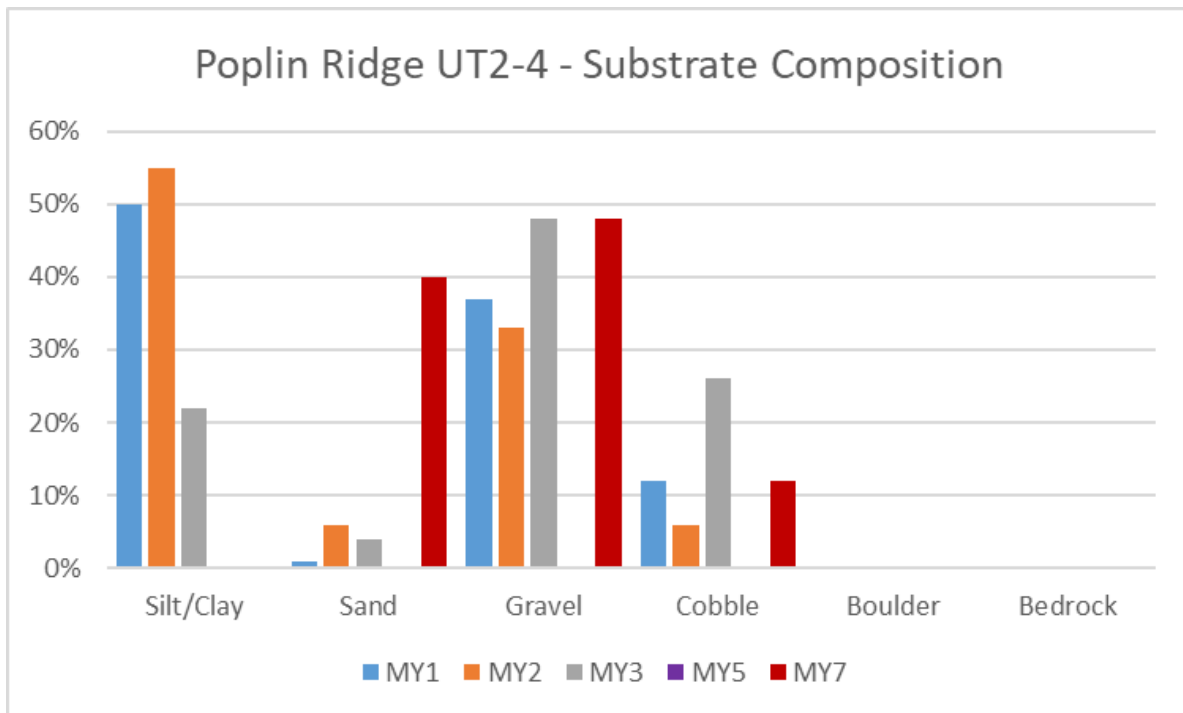


Table 13. Poplin Ridge Bank Pin Array Summary

Bank Pin Location	Position	Year 1 Reading (mm)	Year 2 Reading (mm)	Year 3 Reading (mm)	Year 5 Reading (mm)	Year 7 Reading (mm)
Reach UT2-2	Upper	0.0	0.0	0.0	0.0	0.0
	Middle	0.0	0.0	0.0	0.0	0.0
	Lower	0.0	0.0	0.0	0.0	0.0
Reach UT2-3	Upper	0.0	0.0	0.0	0.0	0.0
	Middle	0.0	0.0	0.0	0.0	0.0
	Lower	0.0	0.0	0.0	0.0	0.0
Reach UT1-2	Upper	0.0	44.5	0.0	0.0	0.0
	Middle	0.0	0.0	0.0	0.0	0.0
	Lower	0.0	0.0	0.0	0.0	0.0
Reach UT1-3	Upper	44.5	0.0	0.0	0.0	0.0
	Middle	92.3	0.0	0.0	0.0	0.0
	Lower	31.8	0.0	0.0	0.0	0.0
Reach UT1-C	Upper	0.0	35.6	0.0	0.0	0.0
	Middle	0.0	0.0	0.0	0.0	0.0
	Lower	139.7	0.0	0.0	0.0	0.0
Reach UT1-4	Upper	0.0	31.8	0.0	0.0	0.0
	Middle	0.0	0.0	0.0	0.0	0.0
	Lower	108.0	0.0	0.0	0.0	0.0

Appendix E

Hydrology Data

Table 14. Verification of Bankfull Events and Stream Flow Events



Year	Number of Bankfull Events	Maximum Bankfull Height (ft)
CG1 UT1-2		
MY1	1	0.50
MY2	0	N/A
MY3	4	0.49
MY4	1	0.95
MY5	0	N/A
MY6	13	2.22
MY7	4	0.46
CG2 UT1-4		
MY1	2	2.00
MY2	5	0.80
MY3	4	2.60
MY4	14	4.86
MY5	4	1.65
MY6	22	4.59
MY7	15	2.59
CG3 UT2-3		
MY1	2	4.30
MY2	5	2.00
MY3	3	2.83
MY4	6	3.70
MY5	13	1.98
MY6	16	5.17
MY7	11	1.04

Year	Consecutive Flow Days	Total Flow Days	Number of Flow Events	Consecutive Flow Day Date Range
FG UT2-A				
MY5	93	155	6	---
MY6	135	307	3	---
MY7	139	142	2	1/1/2021 - 5/19/2021

Table 15. 2021 Rainfall Summary

Month	Average	Normal Limits		Monroe Station Precipitation
		30 Percent	70 Percent	
January	4.07	2.74	4.87	3.87
February	3.49	2.39	4.17	4.59
March	4.45	3.10	5.29	2.23
April	3.07	1.82	3.72	0.62
May	3.47	2.22	4.18	1.77
June	4.57	2.91	5.50	4.84
July	4.50	2.90	5.42	2.33
August	4.71	2.78	5.18	3.39
September	4.24	2.02	5.18	2.09
October	3.81	2.00	4.57	0.41
November	3.33	1.90	4.05	---
December	3.85	2.56	4.62	---
Total	47.56	29.34	56.75	26.14
Above Normal Limits	Below Normal Limits			

MY7 2021 Poplin Ridge UT2-A Flow Gauge

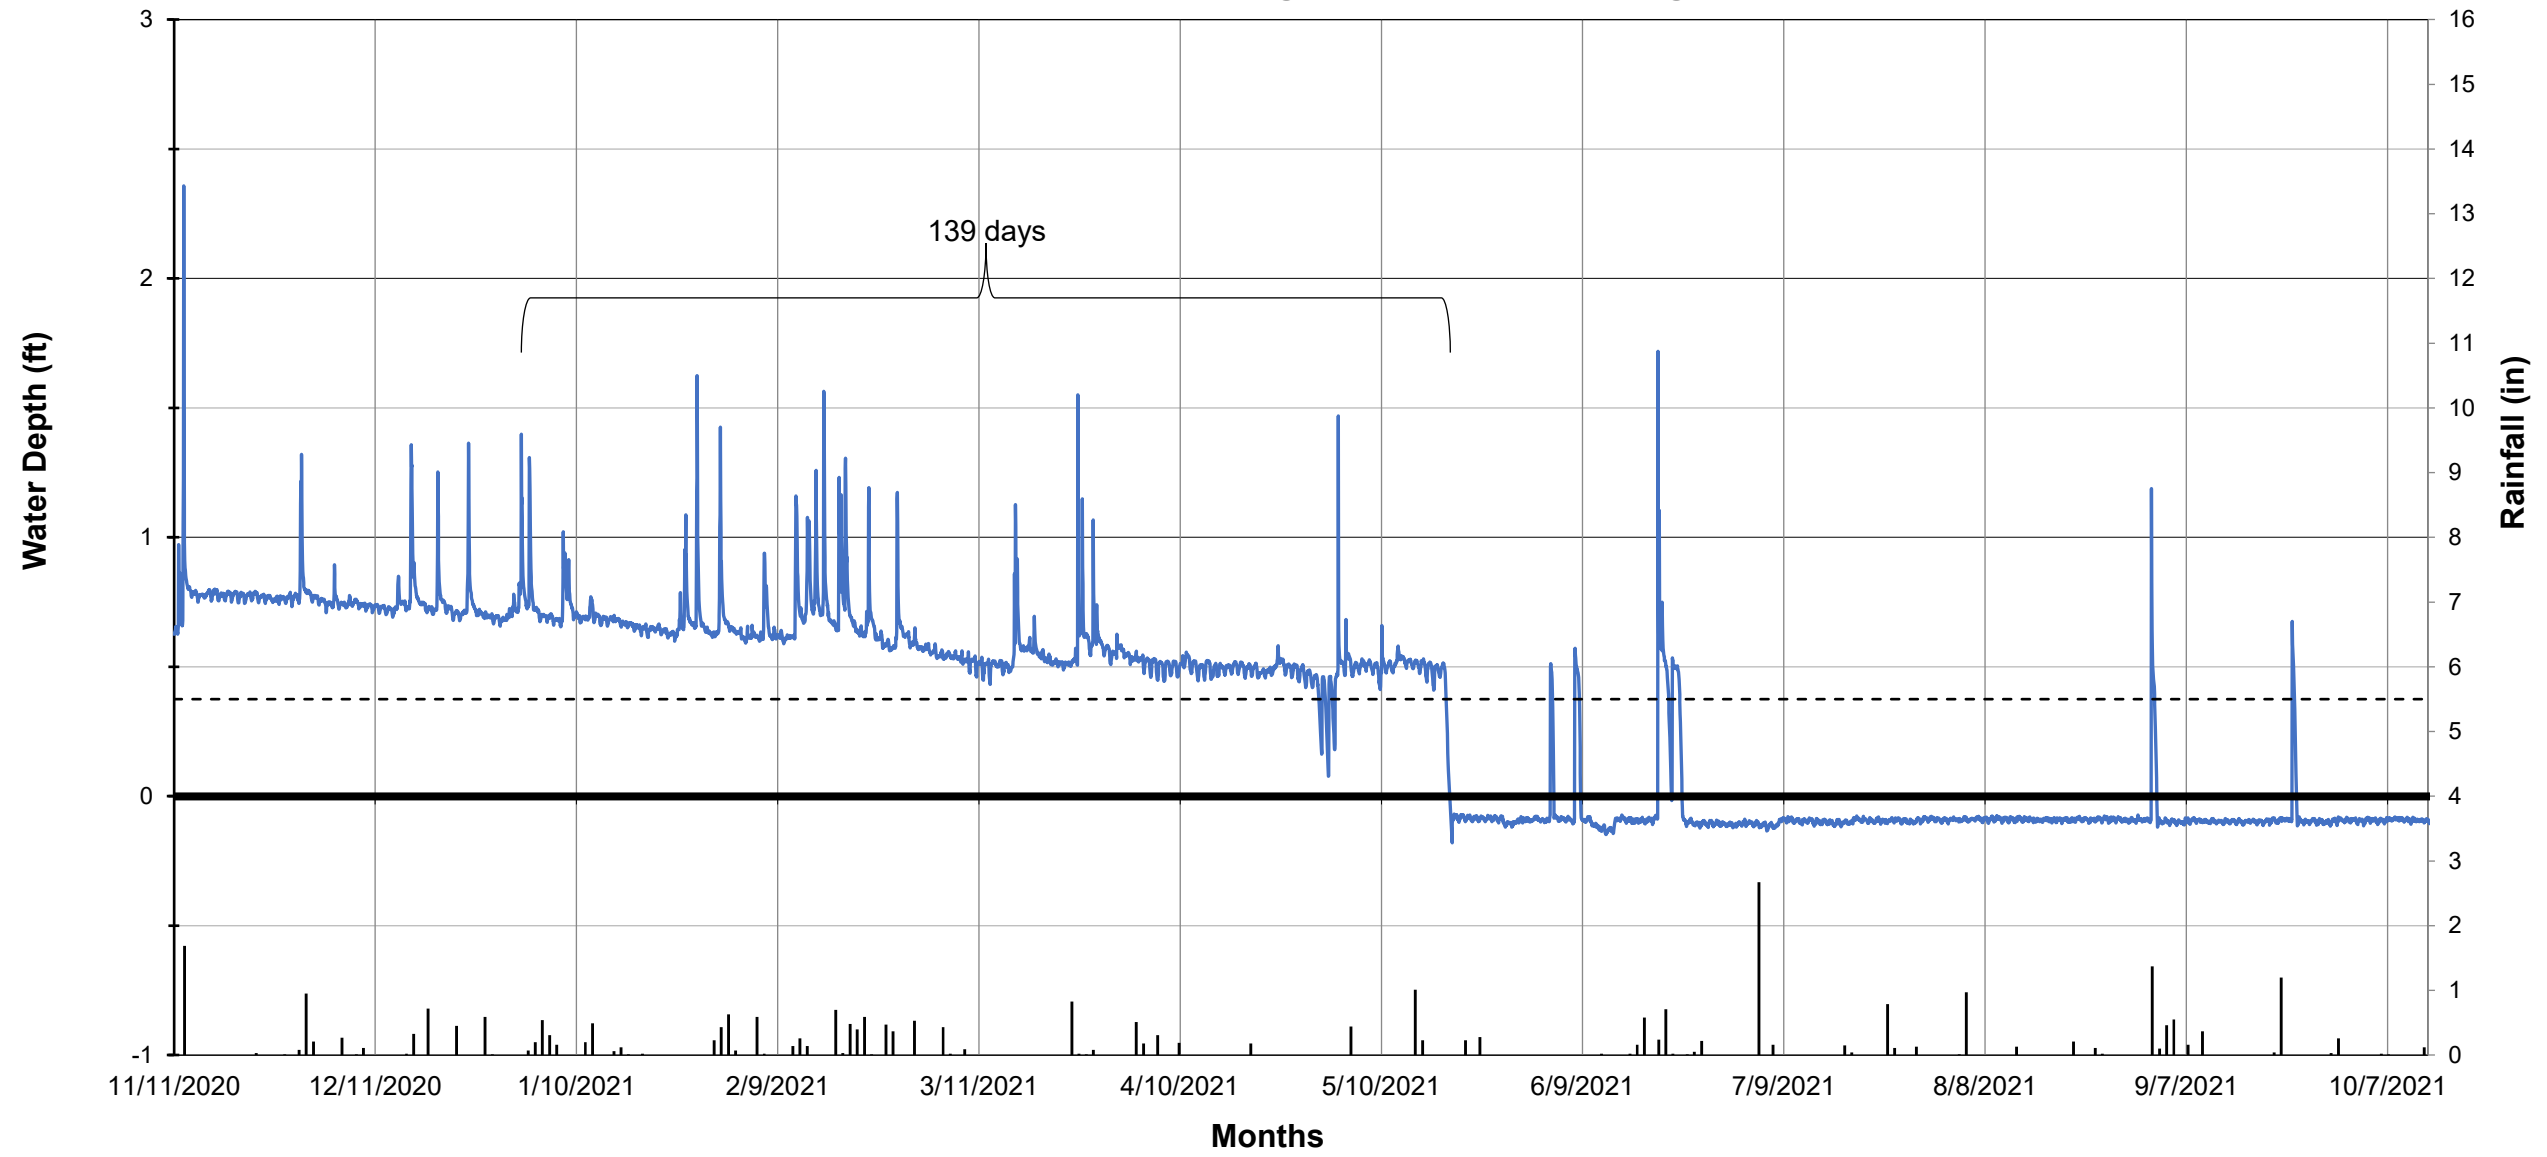

Appendix F
Poplin Ridge 2020 Monitoring Adaptive Management



3600 Glenwood Avenue, Suite 100
Raleigh, NC 27612

Corporate Headquarters
6575 West Loop South, Suite 300
Bellaire, TX 77401
Main: 713.520.5400

April 15, 2020

Paul Wiesner
NCDEQ – DMS
5 Ravenscroft Drive
Asheville, NC 28801

RE: Poplin Ridge Stream Restoration Site – 2020 Monitoring Adaptive Management Work Completed

Mr. Wiesner,

In response to problem areas identified in the Poplin Ridge Stream Restoration Site Year 5 Monitoring Report and the 2019 Adaptive Management Plan, RES completed adaptive management work in fall 2019 and spring 2020. The work included regrading and installing structures on UT2-2 through the pond bottom (including the lower portion of UT2-A) and replanting the pond bottom and other low stem density areas. RES also installed monitoring devices in the pond bottom. The devices include Cross Sections 30 and 31 and a random vegetation plot. The cross section data was included in the MY5 report and will be surveyed again in MY6 and MY7. The random vegetation plot was measured right after planting in April 2020 and results are attached. The random plot will also be measured again during MY6 and MY7 monitoring. More information about the adaptive management work is detailed below:

Stream Work on UT2-2 and Lower UT2-A

Dates: August and September 2019

Method: Dimension/Profile Grading and Structure Installation as proposed in the 2019 Adaptive Management Plan. Installed structures are shown on the attached map.

Reach Length: +/- 500 linear feet



Constructed riffle looking upstream



Newly replaced log sill at the top of the reach (Area 1 from AMP) looking upstream



Lower UT2-A in the pond bottom looking upstream

UT2-2 Bank Livestaking

Date: April 6, 2020

Reach Length: +/- 500 linear feet

of Livestakes: 800

Species: Black willow, Buttonbush, and Cottonwood



Livestakes on UT2-2 looking upstream



UT2-2 Container Tree Planting and Floodplain Livestaking

Date: April 6, 2020

Planting Area: +/- 0.50 acres

Stems/Acre: 1,060

of Container Trees: 30

Species: Water Oak and Willow Oak

of Livestakes: 500

Species: Black willow, Buttonbush, and Cottonwood



Random Vegetation Plot looking downstream

Low Stem Density Area Container Tree Planting in and around VP9 and VP10

Date: April 6, 2020

Method: Planted container trees in areas shown as low stem density areas in MY5 vegetation plot data.

Planting Area: +/- 0.25 acres

Stems/Acre: 280


of Container Trees: 70

Species: Water Oak and Willow Oak

A map displaying the locations of the items mentioned above and the random plot data is attached.

Thank you,

Ryan Medic | Ecologist

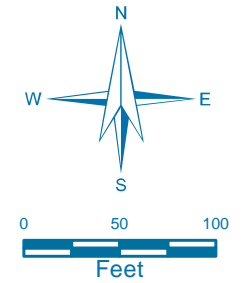

Poplin Ridge Stream Restoration Project

MY6 2020

Adaptive Management

Date: 4/15/2020

Drawn by: RTM


1 inch = 100 feet

LEGEND

- Conservation Easement
- Vegetation Plot**
- >320 stems/acre
- <320 stems/acre
- Supplemental Planting
- Random Plot (April 2020)
- New Structure
- Structure
- Cross Section
- BMP
- Enhancement I
- Enhancement II
- Preservation
- Restoration
- Crest Gauge
- Flow Gauge
- Rain Gauge
- ★ Photo Station
- Top of Bank


Vegetation Condition Assessment

		Target Community		
		Present	Marginal	Absent
Invasive Species	Absent	No Fill	No Fill	No Fill
	Present	No Fill	No Fill	No Fill

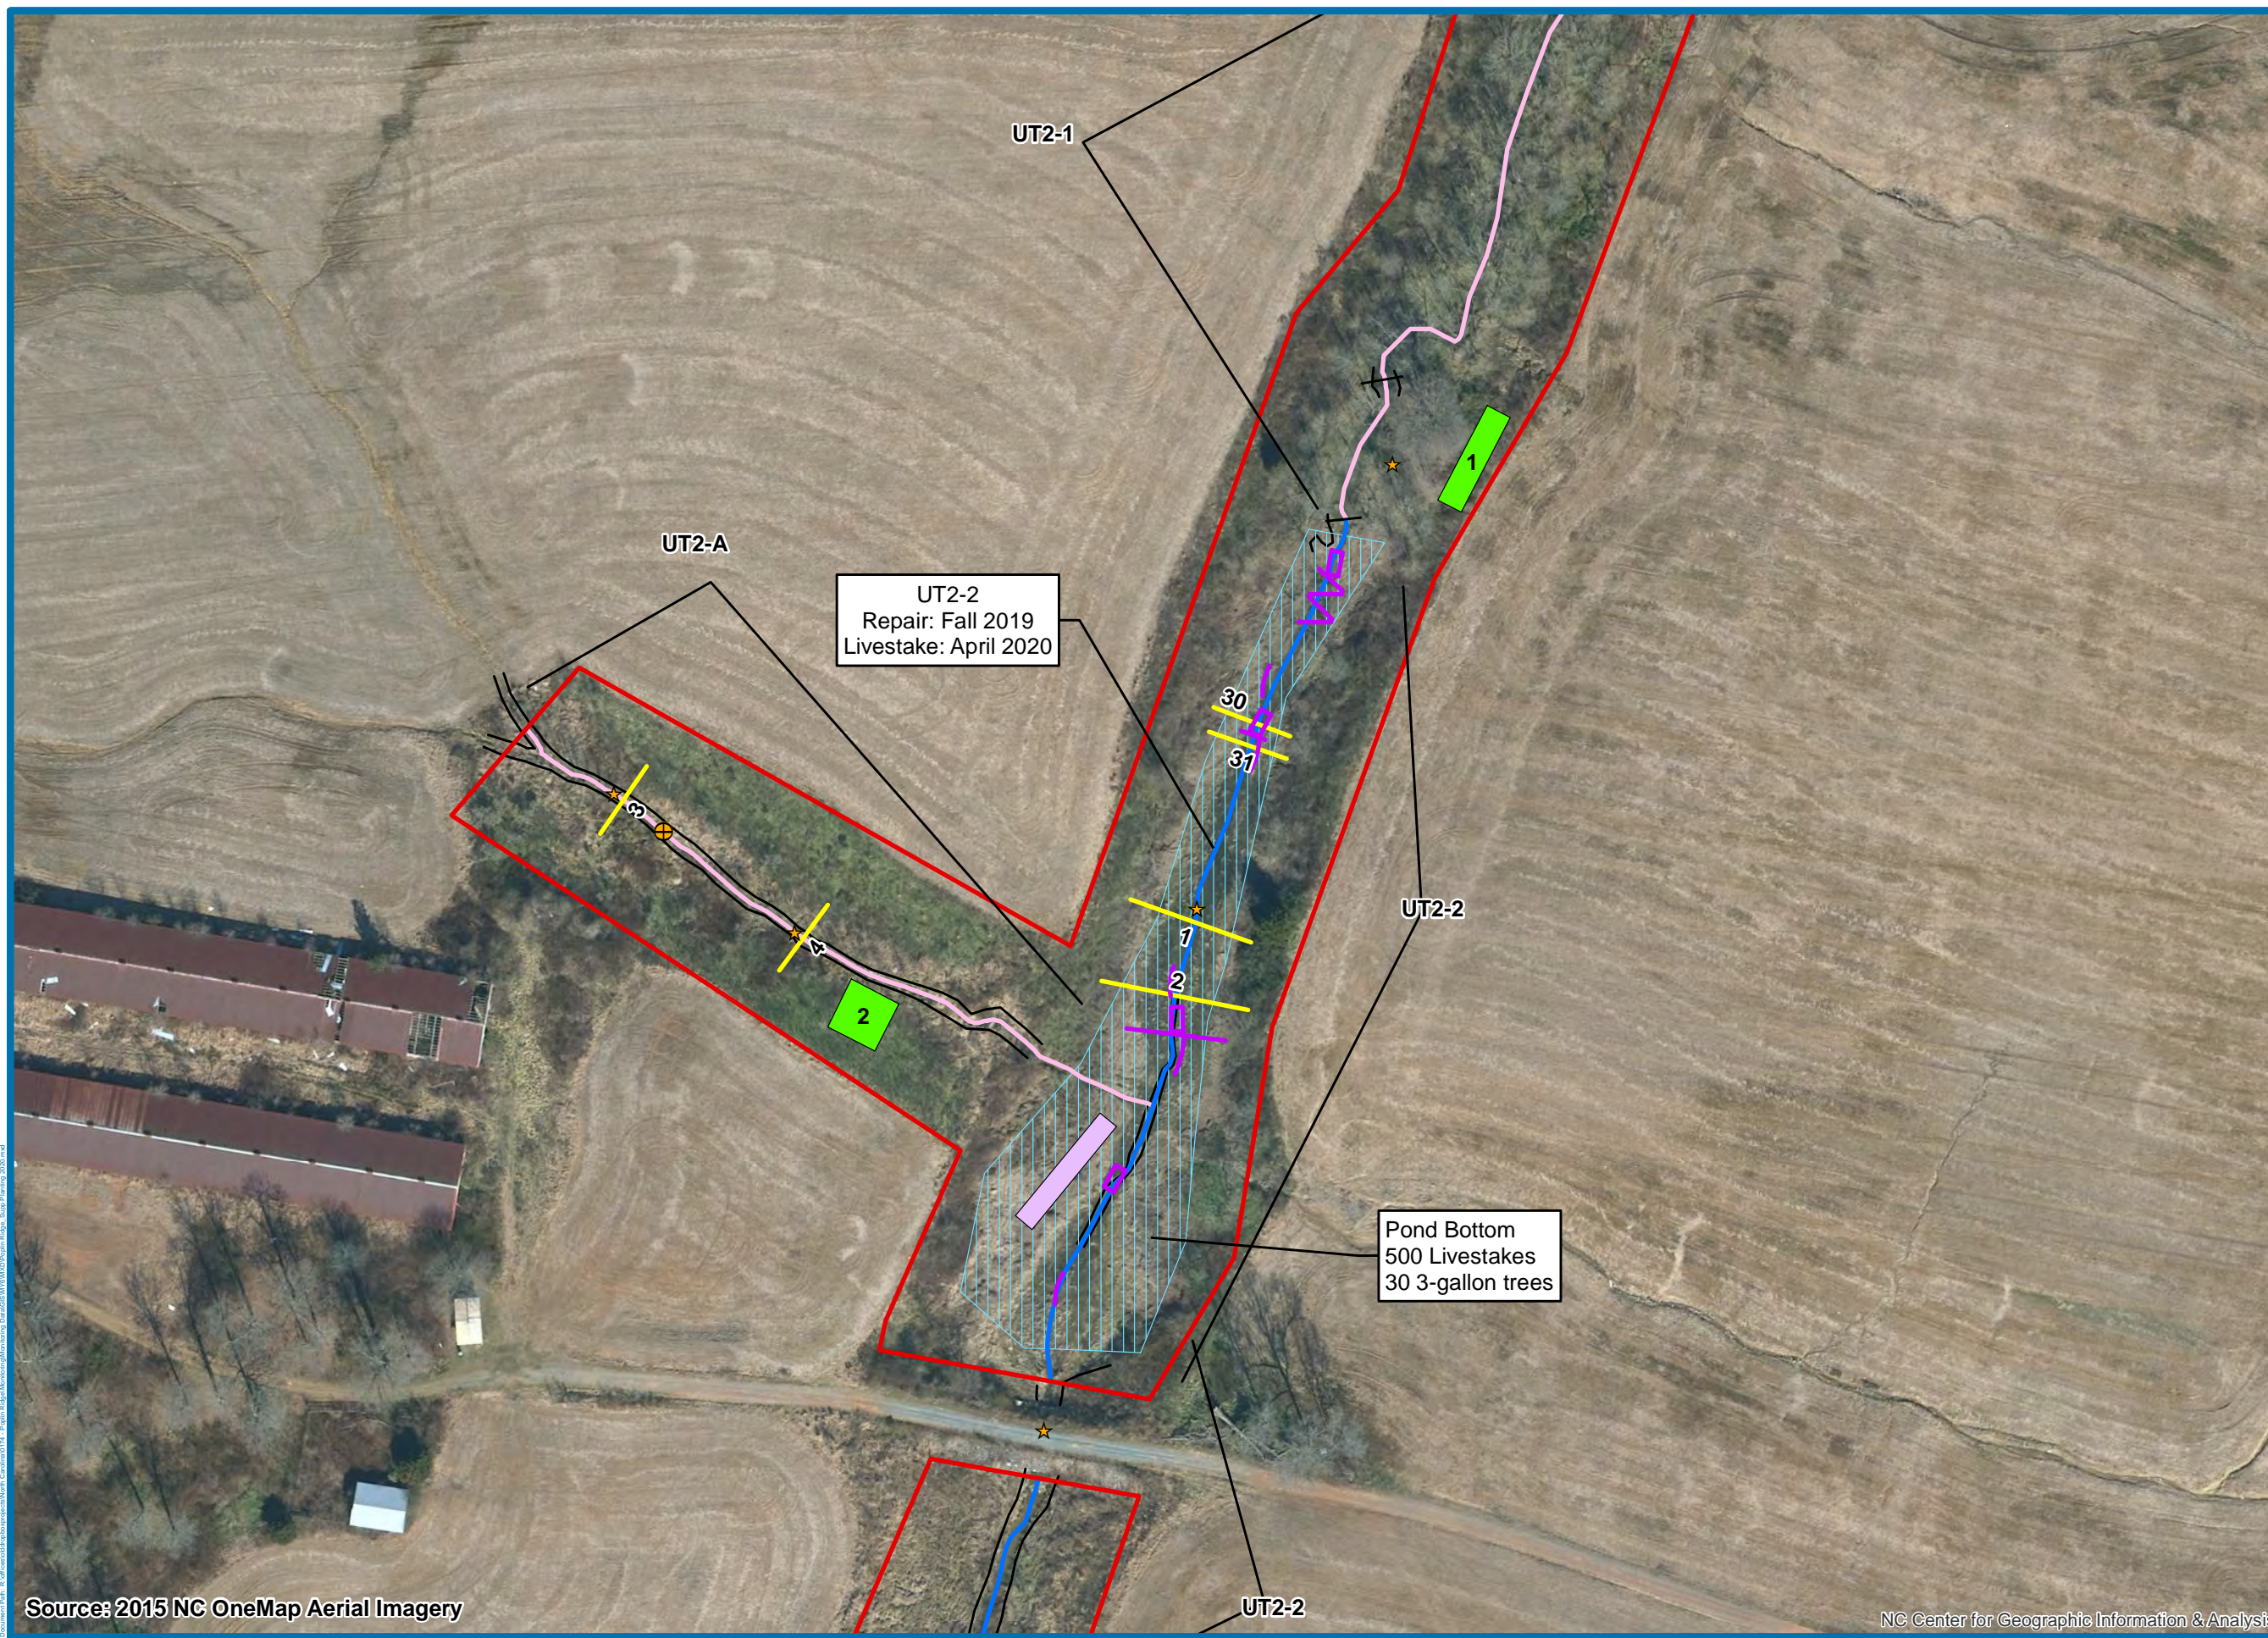

Source: 2015 NC OneMap Aerial Imagery

NC Center for Geographic Information & Analysis

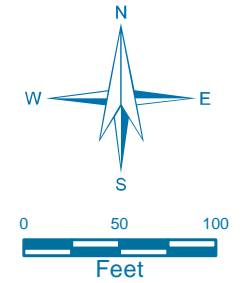

Poplin Ridge Stream Restoration Project

MY6 2020

Adaptive Management

Date: 4/13/2020

Drawn by: RTM


1 inch = 100 feet

LEGEND

- ▭ Conservation Easement
- Vegetation Plot**
- >320 stems/acre
- <320 stems/acre
- Supplemental Planting
- Cross Section
- BMP
- Enhancement I
- Enhancement II
- Preservation
- Restoration
- Stream Structure
- ⊕ Crest Gauge
- ⊕ Flow Gauge
- ⊕ Rain Gauge
- ★ Photo Station
- Top of Bank

Vegetation Condition Assessment

Invasive Species	Target Community		
	Present	Marginal	Absent
Absent	No Fill		
Present			

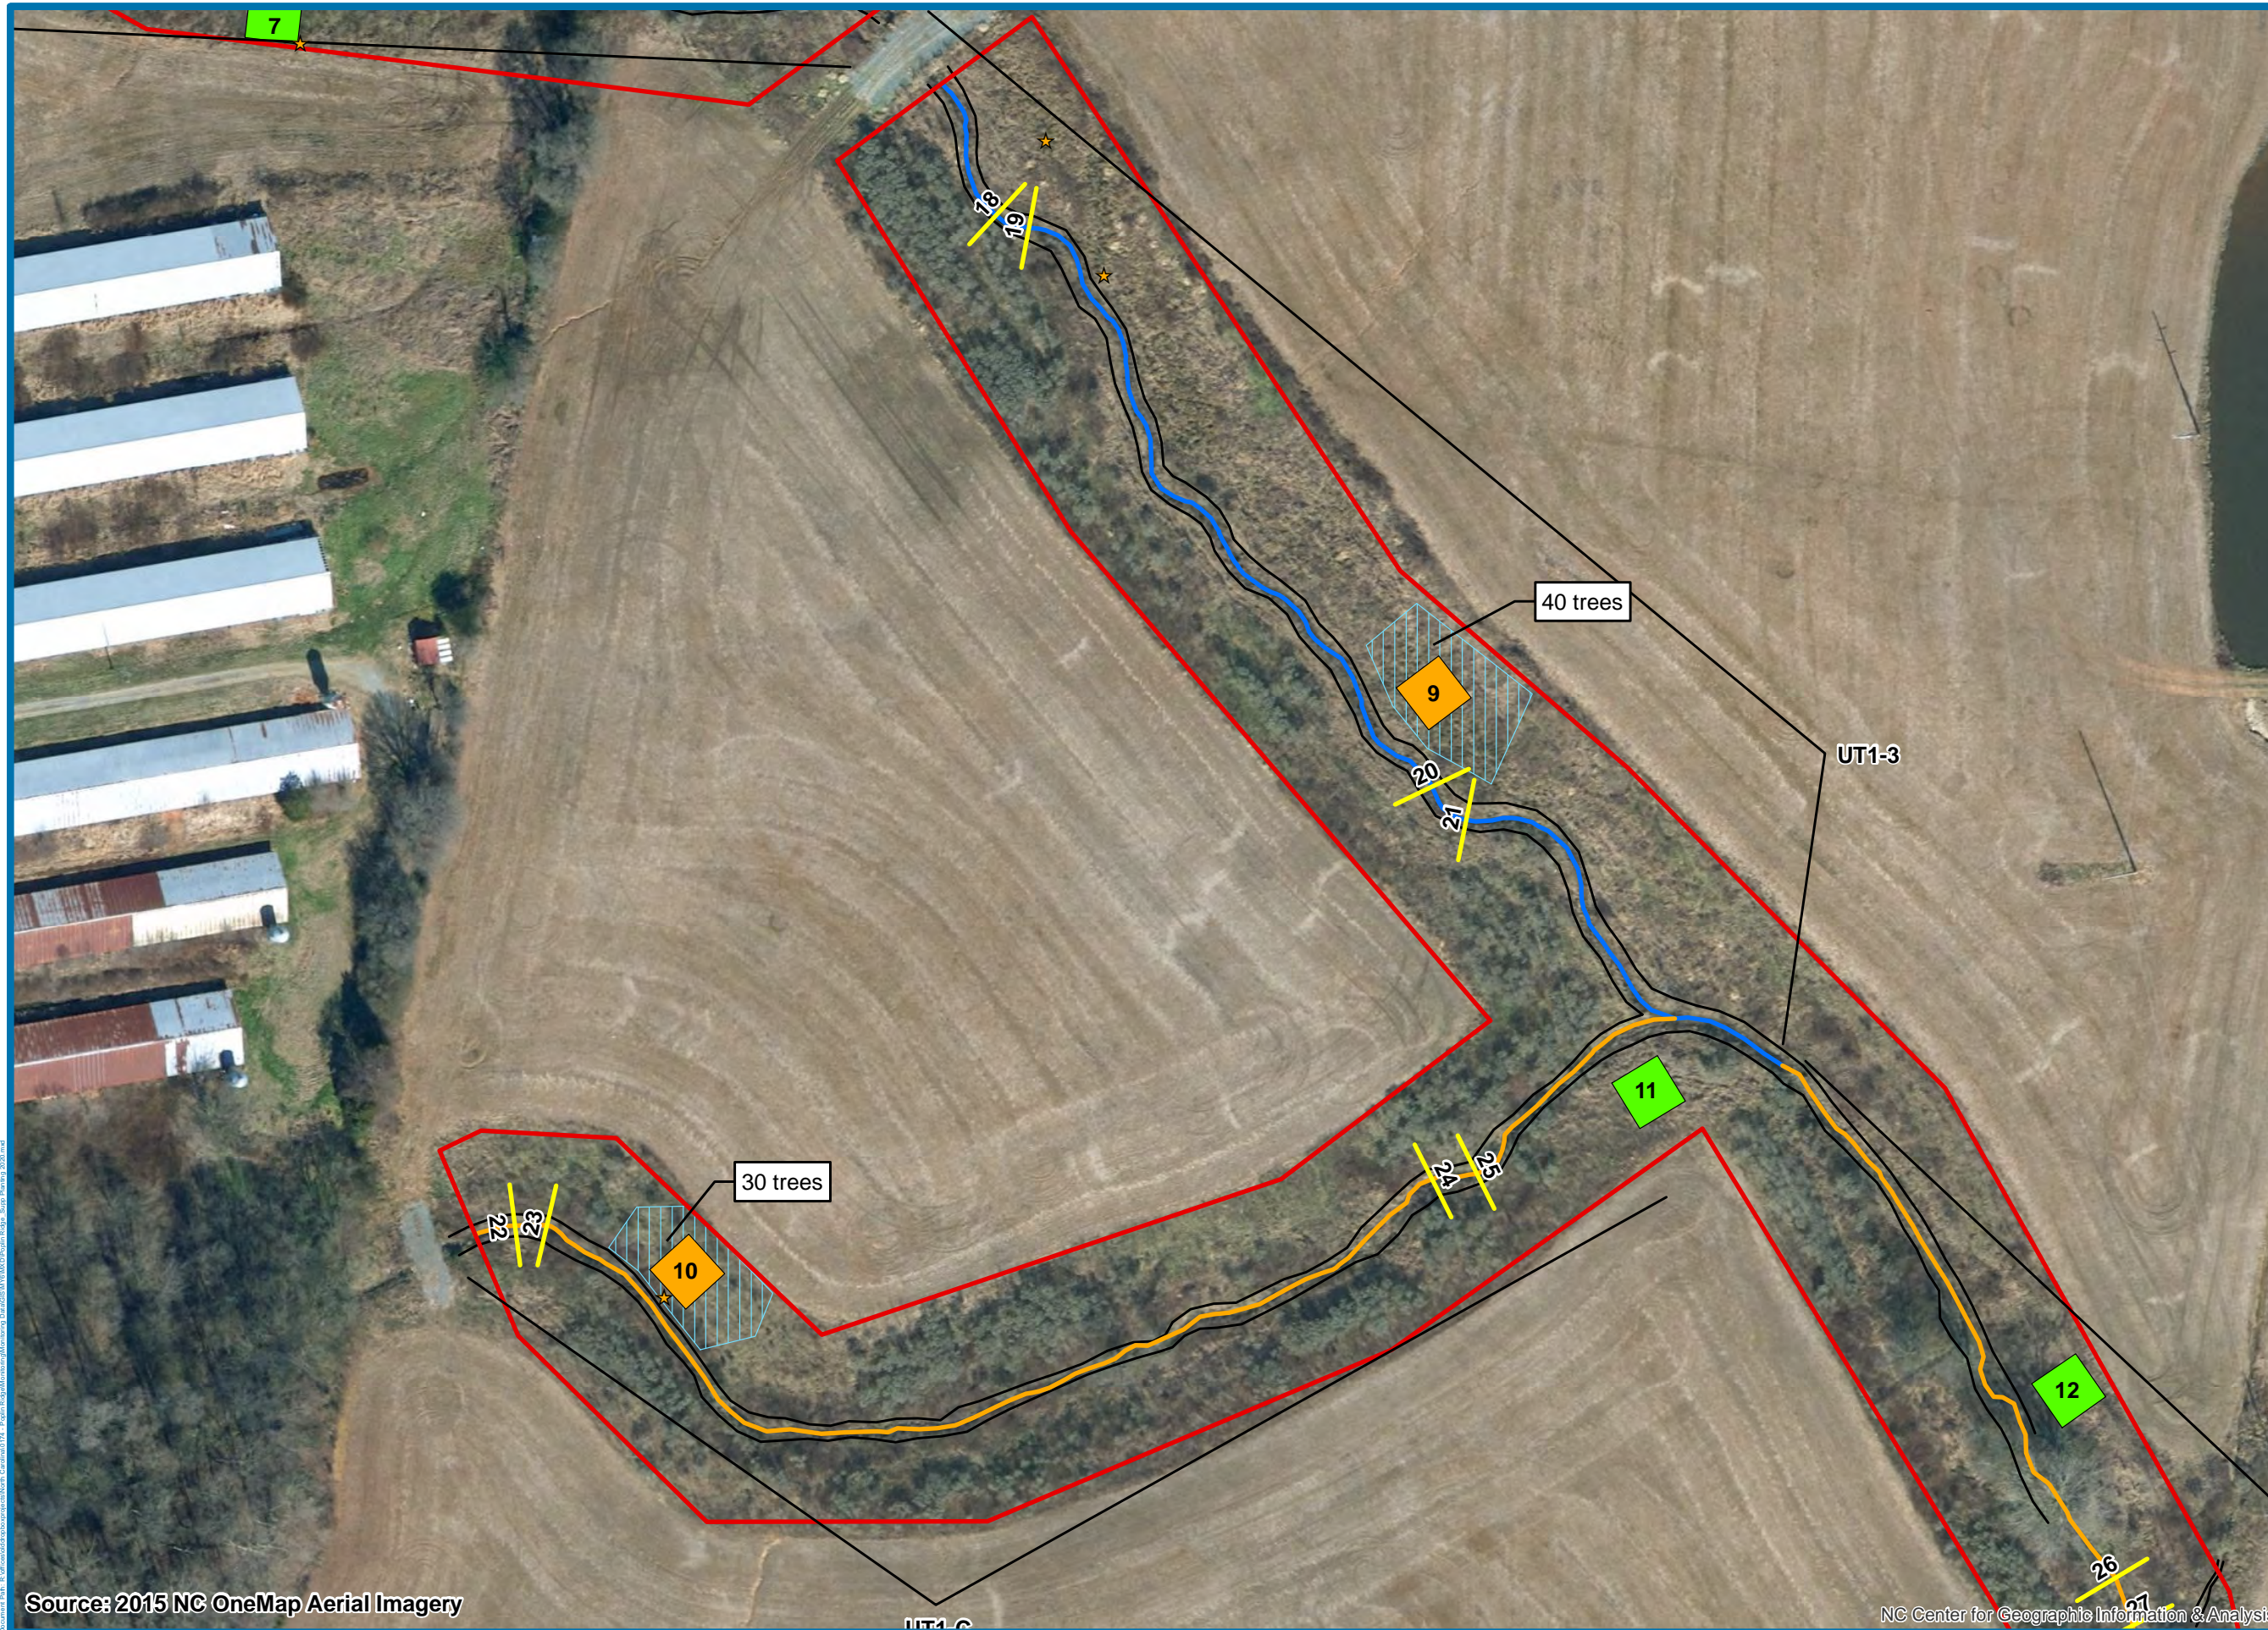

Source: 2015 NC OneMap Aerial Imagery

NC Center for Geographic Information & Analysis

April 2020 Random Vegetation Plot

Random Plot 1		
#	Common Name	Height (cm)
1	Cottonwood	36
2	Cottonwood	25
3	Cottonwood	37
4	Cottonwood	35
5	Cottonwood	32
6	Black Willow	60
7	Cottonwood	58
8	Black Willow	28
9	Black Willow	66
10	Water Oak	128
11	Cottonwood	22
12	Cottonwood	30
13	Cottonwood	40
14	Black Willow	69
15	Black Willow	66
16	Black Willow	60
17	Black Willow	38
18	Cottonwood	35
19	Buttonbush	38
20	Buttonbush	35
21	Willow Oak	150
22	Black Willow	38
23	Buttonbush	66
24	Willow Oak	162
25	Black Willow	65
26	Cottonwood	40
27	Cottonwood	23
28	Willow Oak	174
Stems/Acre	1133	
Average Height (cm)	59	
Average Height (ft)	1.9	
Plot Size (m)	25 x 4	

MEMORANDUM



3600 Glenwood Avenue, Suite 100

Raleigh, North Carolina 27612

919.209.1052 tel.

919.829.9913 fax

TO: Paul Wiesner - DMS

FROM: Ryan Medric - RES

DATE: 6/11/2020

RE: Poplin Ridge MY5 (2019) IRT Credit Release Site Visit

Attendees:

IRT: Mac Haupt (NCDWR), Erin Davis (NCDWR)

DMS: Paul Wiesner

RES: Brad Breslow, Ryan Medric

Site Visit Date: June 3, 2020

The IRT, DMS, and RES conducted a site visit at the Poplin Ridge Stream Restoration Site to discuss the Monitoring Year 5 (2019) credit release. The main topics of discussion were the pond reach repair and supplemental plantings that were completed in October 2019 and April 2020 respectively. Details are bulleted below:

- Flow, bed and bank, and riffle/pool sequences were observed throughout the pond reach repair section (including Reach UT2-A). The IRT noted a small head cut forming in the middle of the reach and commented that they would have liked to see more sills installed. RES will observe this area and will report any issues in the MY6 (2020) report.
- Live stakes were observed sprouting along the banks and in the floodplain as well as the presence of the container trees that were planted. The IRT, however, felt that the area was not planted sufficiently. RES replied that the pond was planted at a stem density of 1,060 stems per acre and it was hard to see most of the livestakes due to the herbaceous layer being matted down from a recent storm. RES will conduct a random vegetation transect in the pond bottom this fall (as proposed in the Adaptive Management Plan) and will plant more three-gallon container trees next winter if necessary. RES will also take photos of this pond reach repair area at the end of the 2020 growing season and will include the photos and a synopsis of the repair and vegetation in the MY6 (2020) report.
- The IRT observed aquatic vegetation growing in the riffles of UT2-2 and UT2-3; however, in-stream vegetation was not to a level where it was accumulating sediment or impeding flow. The IRT did not feel it was necessary for RES to treat in-stream vegetation on the reach unless it becomes more prevalent over the course of this growing season. RES and DMS believe that the in-stream vegetation observed will shade out over time.
- The IRT reminded RES to make sure the easement is properly marked due to a few small areas of easement scalloping and missing/damaged signage observed during the site visit. RES agreed to repair any easement scalloping/encroachment and agreed to ensure all required easement marking and signage are updated and present by the end of MY6. DMS agreed to conduct a site visit to confirm this work is complete before any payment is made for MY6 (2020) monitoring.

- Privet treatment was observed to be successful along UT2-1. Privet treatments will be administered throughout the remainder of the monitoring period within the conservation easement.
- The full IRT was not able to attend the meeting, however, DWR staff did not note any issue with releasing the 2019 project credit as proposed by DMS. DWR staff indicated that they would send their site visit notes to the USACE IRT chair for review.