

St. Clair Creek Restoration Project Year 6 Final Monitoring Report

Beaufort County, North Carolina

DMS Project ID No. 95015

DWR Project #13-0739, Beaufort County

USACE Action ID: 2008-02655

Tar-Pamlico River Basin: 03020104-040040



Project Info:

Monitoring Year: 6 of 7

Year of Data Collection: 2019

Year of Completed Construction: 2014

Submission Date: February 2020

Submitted To:

NC DEQ – Division of Mitigation Services

1652 Mail Service Center

Raleigh, NC 27699

NC DEQ Contract ID No. 003986

Mitigation Project Name St. Clair Creek
 DMS ID 95015
 River Basin Tar-Pamlico
 Cataloging Unit 03020104

County Beaufort
 Date Project Instituted 7/18/2011
 Date Prepared 6/26/2019


USACE Action ID 2008-02655
 NCDWR Permit No 2013-0739

Credit Release Milestone	Stream Credits						Wetland Credits							
	Scheduled Releases (Stream)	Warm	Cool	Cold	Anticipated Release Year (Stream)	Actual Release Date (Stream)	Scheduled Releases (Forested)	Riparian Riverine	Riparian Non riverine	Non-riparian	Scheduled Releases (Coastal)	Coastal	Anticipated Release Year (Wetland)	Actual Release Year (Wetland)
Potential Credits (Mitigation Plan)		3,274.000							2.800					
Potential Credits (As-Built Survey)		3,274.000						2.800						
1 (Site Establishment)	N/A	N/A			N/A	N/A	N/A		N/A		N/A		N/A	N/A
2 (Year 0 / As-Built)	30%	982.200			2014	7/21/2014	30%		0.840		N/A		2014	7/21/2014
3 (Year 1 Monitoring)	10%	327.400			2015	4/23/2015	10%		0.280		N/A		2015	4/23/2015
4 (Year 2 Monitoring)*	5%	163.700			2016	7/8/2016	10%		0.280		N/A		2016	7/8/2016
Unreleased stream credits from Year 2 Monitoring	5%	163.700			2016	4/3/2017								
5 (Year 3 Monitoring)	10%	327.400			2017	4/3/2017	15%		0.420		N/A		2017	6/24/2019
6 (Year 4 Monitoring)	5%	163.700			2018	4/25/2018	5%		0.140		N/A		2018	6/24/2019
7 (Year 5 Monitoring) - NOT RELEASED	10%	327.400			2019		15%		0.420		N/A		2019	6/24/2019
8 (Year 6 Monitoring)	5%				2020		5%				N/A		2020	
9 (Year 7 Monitoring)	10%				2021		10%				N/A		2021	
Stream Bankfull Standard	10%	327.400			2018	4/25/2018	N/A				N/A			
Total Credits Released to Date		2,455.500							2.380					

NOTES:

- 7/8/2016: IRT approved the release of half of the potential stream credits (scheduled release was 10% of the total stream credits) for Monitoring Year 2.
- 4/3/17: IRT withheld the release of the wetland credits for Monitoring Year 3.
- 4/25/2018: IRT withheld the release of the wetland credits for Monitoring Year 4.
- 6/24/2019: IRT approved release of wetland credits for Monitoring Years 3, 4, and 5. Due to concerns on the upper section of UT 2, the IRT withheld the release of Monitoring Year 5 stream credits.

CONTINGENCIES:

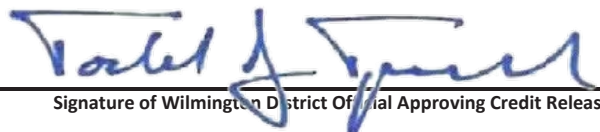

Signature of Wilmington District Official Approving Credit Release

27 Sept 2019

Date

- 1 - For DMS, no credits are released during the first milestone
- 2 - For DMS projects, the second credit release milestone occurs automatically when the as-built report (baseline monitoring report) has been made available to the NCIRT by posting it to the NCEEP Portal, provided the following criteria have been met:
 - 1) Approval of the final Mitigation Plan
 - 2) Recordation of the preservation mechanism, as well as a title opinion acceptable to the USACE covering the property
 - 3) Completion of all physical and biological improvements to the mitigation site pursuant to the mitigation plan
 - 4) Receipt of necessary DA permit authorization or written DA approval for projects where DA permit issuance is not required
- 3 - A 10% reserve of credits is to be held back until the bankfull event performance standard has been met

St. Clair Creek Restoration Project Year 6 Final Monitoring Report

Beaufort County, North Carolina

DMS Project ID No. 95015

Tar-Pamlico River Basin: 03020104-040040

Report Prepared and Submitted by Michael Baker International

NC Professional Engineering License # F-1084



February 5, 2020

Jeremiah Dow
Project Manager
NCDEQ Division of Mitigation Services
1652 Mail Service Center
Raleigh, NC 27699-1652

Subject: Task 12: Response Letter to DMS review comments regarding the Draft Year 6 Monitoring Report for the St. Clair Creek Restoration Project (DMS #95015)
Beaufort County, North Carolina, Cape Fear Basin – CU#03020104, Baker No. 125116

Mr. Dow,

As per your request, please find enclosed one hardcopy of the Final Year 6 Monitoring Report for the St. Clair Creek Restoration Project located in Beaufort County, NC. The final digital documents will be sent via a secure ftp link. Our responses to your review comments received on February 5, 2020 are provided below:

1. Appendix A

a. Table 1: Based on the May 16, 2019 credit release site visit the upper 466 LF of UT2 are considered credits at risk. Please revise Table 1 to show UT2 credits as 1,667 SMU and beside the number, in red, please put 466 LF (example: 1,667 SMU / **466 SMU**). Add a footnote that identifies red text as credits at risk. Please do the same with the total SMUs at the top of the table (2,808 SMU / **466 SMU**) referencing the same footnote. Please note that this puts Baker at 192 SMUs below contract.

Response: Baker has revised the table as requested.

If you have any questions or require additional information, please feel free to contact me at 919-481-5731 or via email at Scott.King@mbakerintl.com.

Sincerely,



Scott King, LSS, PWS

TABLE OF CONTENTS

1.0 EXECUTIVE SUMMARY	1
2.0 METHODOLOGY	3
2.1 <i>Stream Assessment – Reaches UT2 and UT3</i>	3
2.1.1 Hydrology	3
2.1.2 Photographic Documentation	3
2.2 <i>Wetland Assessment</i>	4
2.2.1 Wetlands Modifications Review	4
2.3 <i>Vegetation Assessment</i>	5
2.3.1 Vegetation Concerns	5
3.0 REFERENCES	5

APPENDICES

Appendix A	<i>Project Vicinity Map and Background Tables and Files</i>
	Figure 1 Vicinity Map and Directions
	Table 1 Project Components and Mitigation Credits
	Table 2 Project Activity and Reporting History
	Table 3 Project Contacts Table
	Table 4 Project Attribute Table
	Site Viability for Buffer Mitigation memo (1/7/16)
	IRT Field Meeting Minutes (5/16/19)
Appendix B	<i>Visual Assessment Data</i>
	Figure 2 Current Condition Plan View (CCPV)
	Table 5a Visual Stream Morphology Stability Assessment
	Table 5b Stream Problem Areas (SPAs)
	Table 6a Vegetation Condition Assessment
	Table 6b Vegetation Problem Areas (VPAs)
	Stream Photo Points
	Vegetation Plot Photos
	Hydrology Monitoring Stations
Appendix C	<i>Vegetation Plot Data</i>
	Table 7 Vegetation Plot Criteria Attainment
	Table 8 CVS Vegetation Metadata
	Table 9a CVS Stem Count of Planted Stems by Plot and Species
	Table 9b Stem Count for All Species (Planted and Volunteer) Arranged by Plot
	Table 9c Yearly Density by Plot
	Table 9d Vegetation Summary and Totals

Appendix D *Hydrologic Data*

Table	10	Wetland Restoration Well Success
Figure	3	Wetland Gauge Graphs
Table	11	Flow Gauge Success
Figure	4	Flow Gauge Graphs
Figure	5	St. Clair Creek Observed Rainfall versus Historic Average

1.0 EXECUTIVE SUMMARY

Michael Baker Engineering, Inc. (Baker) restored 3,274 linear feet of perennial and intermittent headwater stream, 2.8 acres of riparian wetlands, and planted 17.5 acres of native riparian vegetation within the entire conservation easement along two unnamed tributaries (UT2 and UT3) to St. Clair Creek in Beaufort County, North Carolina (NC) (Figure 1). The St. Clair Creek Restoration Project (Site) is located in Beaufort County, approximately five miles east of the Town of Bath. The Site is located in the NC Division of Water Resources (NCDWR) subbasin 03-03-07 and the NC Department of Environmental Quality (NC DEQ) Division of Mitigation Services (DMS) Targeted Local Watershed (TLW) 03020104-040040 of the Tar-Pamlico River Basin. The project involved the restoration of a Coastal Plain Headwater Small Stream Swamp system (Schafale and Weakley 1990) from impairments within the project area due to past agricultural conversion and silviculture.

The primary restoration goals of the project were to improve ecological functions to the impaired areas within the Tar-Pamlico River Basin as described below:

- Create geomorphically stable conditions along the unnamed tributaries across the project,
- Implement agricultural BMPs to reduce nonpoint source inputs to the downstream estuary,
- Protect and improve water quality by reducing nutrient and sediment inputs,
- Restore stream and wetland hydrology by connecting historic flow paths and promoting natural flood processes, and
- Restore and protect riparian buffer functions and corridor habitat in perpetuity by establishing a permanent conservation easement.

To accomplish these goals, the following objectives were identified:

- Restore existing channelized streams by restoring the relic headwater valley and allowing diffuse flow, providing the streams access to their floodplains,
- Increase aquatic habitat value by allowing natural microtopography to form,
- Plant native species riparian buffer vegetation within the headwater valley and floodplain areas, and within the wetland areas, protected by a permanent conservation easement, to increase stormwater runoff filtering capacity, decrease erosion, and shade the stream to decrease water temperature,
- Improve aquatic and terrestrial habitat through improved substrate and in-stream cover, addition of woody debris, and reduction of water temperature, and
- Control invasive species vegetation within the project area and if necessary continue treatments during the monitoring period.

During Year 6 monitoring, the planted acreage performance categories were functioning at 100 percent with no bare areas or low stem density areas to report. The average density of total planted stems, based on data collected from the nine monitoring plots during Year 6 monitoring, is 594 stems per acre. Thus, the Year 6 data demonstrate that the Site is on track to meet the final success criteria of 210 stems per acres by Year 7.

During the previous Year 5 monitoring, *Pinus taeda* (loblolly pine) saplings were heavily thinned throughout the buffer on UT2, in particular in the middle and upper sections, as noted during the IRT site visit on 5/16/19. However, During Year 6 monitoring, new, rapidly growing loblolly pine seedlings and short saplings were again found scattered throughout the riparian buffer of the UT2 area. It should be noted that the pines do not

appear to be suppressing planted species survival or growth as vegetation density appears strong throughout the project, even in areas with pine presence. Nevertheless, these pines will again be treated and heavily thinned during 2020 using hand/power tools and/or chemical applications. The project will continue to be closely observed for pine growth throughout the remaining monitoring period.

Year 6 wetland groundwater monitoring demonstrated that all 8 of the groundwater monitoring wells located along UT2 and UT3 met the success criteria by recording water levels within 12 inches of the ground surface for a consecutive period greater than 12% of the growing season (33 days for the Site). The Year 6 hydroperiods ranged from 12.4% to 21.6%, with an average of 13.9%. The majority of the wells passed the success criteria early in the year, just after the growing season began. All wetland restoration well data and reference well data collected during Year 6 monitoring are located in Appendix D.

Additionally, there are two groundwater monitoring wells (SCAW9 and SCAW10) installed on 3/16/17 in areas located outside the project's currently approved mitigation plan wetland restoration areas. They did not meet the 12% hydroperiod success criteria, though SCAW9 only missed by one day and certainly appears quite wet. Please note these areas are not being requested for any credits of any kind at this time. Given the project's past challenging history regarding the meeting of wetland well success criteria, Baker is simply conducting exploratory monitoring in *potential* future wetland restoration areas. The three potential areas total 1.1 acres and are all located outside the 50 ft buffer from the stream channel but within the conservation easement (see Figure 2 in Appendix B). Baker is not presenting this information here for formal approval or acceptance, but to simply inform DMS and the IRT of all project activity.

On-site flow through the restored headwater valleys of UT2 and UT3 was recorded in 2019 through the use of seven installed pressure transducers as flow gauges. Each one met the success criteria in Year 6 by recording a consecutive flow event of 30 days or longer in 2019. Of note, Flow gauge SCFL#4 located at the top of UT2 met the success criteria, recording its longest single duration flow event of 38 days in February and March. This is of particular significance as flow in the upper portion of UT2 and the results of Flow Gauge #4 have been the subject of IRT concern in the past. The flow gauge success summary Table 11 and all individual flow gauge graphs are found in Appendix D.

In addition, currently contracted riparian buffer credits have been included as part of the project as referenced by the "Site Viability for Buffer Mitigation" memo from Karen Higgins (NCDWR) dated 1/7/16 and included as an asset in this report (as found in Appendix A). As part of the St. Clair Creek Restoration project, Riparian Buffer credits in excess of the contracted 6.8 acres (296,208 square feet) will be provided. Monitoring for success of riparian buffers will continue to follow the existing vegetation monitoring protocol and success criteria as stated in the approved mitigation plan for stream and wetland vegetation success. Only vegetation plots 1-6 are located within the approved buffer credit areas and no additional vegetation monitoring plots are required to monitor buffer success as these existing plots serve to monitor the success of the vegetation of the headwater coastal plain stream and the associated riparian buffer. The Year 6 monitoring results demonstrate that the site has met the success criteria requirements for Riparian Buffer credits in each of vegetation plots 1-6 as described in the buffer memo, and with an overall average density of 499 stems/acre.

Summary information/data related to the Site and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report Appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report and in the Mitigation Plan available on the North Carolina Division of Mitigation Services (NCDMS) website. All raw data supporting the tables and figures in the Appendices are available from NCDMS upon request.

2.0 METHODOLOGY

The seven-year monitoring plan for the Site includes criteria to evaluate the success of the stream, wetland and vegetation components of the project. The methodology and report template used to evaluate these components adheres to the NCDMS monitoring guidance document dated 11/7/11, which will continue to serve as the template for subsequent monitoring years. The specific locations of monitoring features, such as vegetation plots, flow gauges and wells are shown on the CCPV sheets found in Appendix B.

The growing season for the Beaufort County ends on December 6th, and the final well and flow data were collected on 12/9/19. The visual site assessment data contained in Appendix B were also collected in December 2019 as noted.

2.1 Stream Assessment – Reaches UT2 and UT3

The UT2 and UT3 mitigation approach involved the restoration of historic flow patterns and flooding functions in a multi-thread headwater stream system, monitoring efforts will focus on visual observations to document stability and the use of water level monitoring gauges to document saturation and flooding functions. The methods used and any related success criteria are described below for each parameter. Monitoring efforts focus on visual observations and in-channel flow gauges/pressure transducers to document stream success.

As-built Stream survey data was collected to a minimum of Class C Vertical and Class A Horizontal Accuracy using Leica TS06 Total Station and was georeferenced to the NAD83 State Plane Coordinate System, FIPS3200 in US Survey Feet, which was derived from the As-built Survey. This survey system collects point data with an accuracy of less than one tenth of a foot.

2.1.1 Hydrology

Total observed area rainfall for the previous 12-month period from December 2018 through November 2019 was 47.1 inches, as compared to the Beaufort County WETS table for the same period of 50.0 inches annually, an annual deficit of 2.9 inches (see Figure 5 in Appendix D). The site received less precipitation than average for much of the late spring, eventually resulting in Stage D0 drought conditions for much of the summer (<https://www.ncdrought.org/>).

Four automated flow gauges (pressure transducers) were originally installed in the UT2 channel along with two flow gauges installed in the UT3 channel. The gauges were installed approximately 500 feet apart within the restored systems to document flow duration. Additionally, a fifth flow gauge (SCFL#7) was installed approximately halfway between SCFL#4 and SCFL#3 on 6/6/18 in the upper portion of UT2. As stated in the mitigation plan, annual success criteria are considered to have been met if 30 consecutive days of flow were observed at any point during the monitoring year, with two such 30-day flow events having been documented in separate monitoring years. The individual flow gauge graphs and the flow gauge success summary Table 11 are all located in Appendix D.

2.1.2 Photographic Documentation

The reaches were photographed longitudinally beginning at the downstream end of both reaches, moving upstream to the beginning of each reach. Photographs were taken looking upstream at delineated locations throughout the restored stream valley. Points were close enough together to provide an overall view of the reach lengths and valley crenulations. Photographs of the stream photo points, wetland wells, and flow gauges are all located in Appendix B.

2.2 Wetland Assessment

Wetland monitoring is conducted using eight automated groundwater-monitoring stations that are installed within the UT-2 and UT-3 wetland restoration areas, as well as two additional reference wells installed in the downstream portion of the UT-3 wetland restoration area. Installation of these groundwater monitoring stations follow Corps of Engineers Wetlands Research Program Technical Note VN-rs-4.1 (USACE 1997) and the water table monitoring standards follow Technical Note ERDC TN-WRAP-05-2 (USACE 2005).

The automated loggers are programmed to collect data to document groundwater levels in the restored wetland areas. The success criteria for wetland hydrology are considered to have been met when the site has groundwater within 12 inches of the soil surface for a consecutive number of days equal to a minimum of 12% of the growing season. For Beaufort County, the growing season is from February 28 to December 6 (282 days), so 12% is a minimum of 33.8 consecutive days for the Site.

It should also be noted that while the success criteria stated in the mitigation plan for wetland hydroperiod is 12%, the 10/24/16 Wilmington District Stream and Wetland Compensatory Mitigation Update document states that for the Tomotley soils series (which is mapped on the project site) the wetland hydroperiod range is 10% to 12%.

Additionally, during Year 6 monitoring, the on-site wetland reference well SCAWREF2, which is on the downstream portion of UT3, recorded a hydroperiod of 21.6% of the growing season. The other on-site reference well SCAWREF1 failed early in monitoring Year 5. It was not replaced as there is still a remaining reference well on-site installed in a similar location, and all previous monitoring years' data showed very similar results between the two wells. Thus, reliable reference well data is still being collected for the project. It should be noted that these reference wells are located further down valley than the monitoring wells and are much more heavily influenced by backwater from St. Clair Creek. All wetland restoration well data and reference well data collected during Year 6 monitoring are located in Appendix D.

Two more groundwater monitoring wells (SCAW9 and SCAW10) were installed on 3/16/17 in areas located outside the project's currently approved mitigation plan wetland restoration areas (see Figure 2 in Appendix B). Please note these areas are not being requested for any credits of any kind at this time. Given the project's challenging history regarding the meeting of wetland well success criteria, Baker is simply conducting exploratory monitoring in potential future wetland restoration areas. The three potential areas total 1.1 acres and are all located outside the 50 ft buffer from the stream channel but within the conservation easement. Baker is not presenting this information here for formal approval or acceptance, but simply wished to inform DMS and the IRT of all project activity.

2.2.1 Wetlands Modifications Review

A brief summary of previous wetlands modifications is presented here as a review of relevant project history. A more detailed description of this work was presented in the Year 3 report.

In the fall of 2015, the restoration site landowner cut a network of drainage ditches adjacent to the easement boundaries of both UT2 and UT3 with the intent to drain water away from his nearby pine plantation. The work was implemented without the knowledge of Baker and was discovered in the fall of 2015 during monitoring activities. To help remedy the situation, Baker oversaw three areas of drainage modifications to the project in March of 2016: 1) Three French drains were installed under the farm road along the northern portion of UT2 and were linked to wide, shallow swales cut into the buffer to reconnect water flow from the adjacent landowner's field that routinely ponded water behind the road. 2) The drainage ditch running parallel to the easement boundary along the western portion of UT2 was filled, and three wide, shallow swales were cut to connect the existing drainages within the

pine plantation to the project wetlands and buffer. 3) The drainage ditch running parallel to the easement boundary along the western edge of UT3 was filled, and a shallow swale was cut to connect drainage from the pine plantation into an existing shallow depression located within the existing wetland.

It was observed during the Year 6 monitoring that diffuse flow does now move through all of the installed swales, and all remain stable and vegetated. Additional groundwater monitoring wells 5-8 were installed in April of 2016 specifically to observe the wetland restoration areas potentially affected by these modifications. The locations of this previous work are provided in Figure 2 located in Appendix B.

2.3 Vegetation Assessment

In order to determine if the criteria are achieved, vegetation-monitoring quadrants were installed and are monitored across the restoration site in accordance with the CVS-NCDMS Protocol for Recording Vegetation, Version 4.1 (Lee 2007) and the CVS-NCDMS data entry tool v 2.3.1 (CVS 2012). The vegetation monitoring plots are a minimum of 2 percent of the planted portion of the Site with nine plots established randomly within the Site's planted riparian buffer areas per Monitoring Levels 1 and 2. The sizes of individual quadrants are 100 square meters for woody tree species.

Complete Year 6 vegetation assessment information is provided in Appendix C.

2.3.1 Vegetation Concerns

During Year 6 monitoring, *Pinus taeda* (loblolly pine) seedlings and short saplings were found scattered throughout the riparian buffer of the UT2 restoration area. It should be noted that the pines do not appear to be suppressing planted species survival or growth as vegetation density appears strong throughout the project, even in areas with pine presence. However, these pines will be treated and thinned during 2020 using hand/power tools and/or chemical applications. The entire project will continue to be closely observed for pine growth throughout the remaining monitoring period.

3.0 REFERENCES

Carolina Vegetation Survey (CVS) and NC Division of Mitigation Services (DMS). CVS-DMS Data Entry Tool v. 2.3.1. University of North Carolina, Raleigh, NC. 2012.

Lee, M., Peet R., Roberts, S., Wentworth, T. 2007. CVS-DMS Protocol for Recording Vegetation, Version 4.1.

North Carolina Division of Mitigation Services (DMS). 2011. Monitoring Requirements and Performance Standards for Stream and/or Wetland Mitigation. November 7, 2011.

Schafale, M. P., and A. S. Weakley. 1990. Classification of the natural communities of North Carolina, Third Approximation. North Carolina Natural Heritage Program. Division of Parks and Recreation, NC DEQ. Raleigh, NC.


United States Army Corps of Engineers. 1997. Corps of Engineers Wetlands Research Program. Technical Note VN-rs-4.1. Environmental Laboratory. U.S. Army Engineer Waterways Experiment Station. Vicksburg, MS.

_____. 2005. "Technical Standard for Water-Table Monitoring of Potential Wetland Sites," WRAP Technical Notes Collection (ERDC TN-WRAP-05-2), U.S. Army Engineer Research and Development Center. Vicksburg, MS.

Appendix A

Project Vicinity Map and Background Tables and Files

The subject project site is an environmental restoration site of the NCDEQ Division of Mitigation Services (DMS) and is encompassed by a recorded conservation easement, but is bordered by land under private ownership. Accessing the site may require traversing areas near or along the easement boundary and therefore access by the general public is not permitted. Access by authorized personnel of state and federal agencies or their designees/contractors involved in the development, oversight and stewardship of the restoration site is permitted within the terms and timeframes of their defined roles. Any intended site visitation or activity by any person outside of these previously sanctioned roles and activities requires prior coordination with DMS.

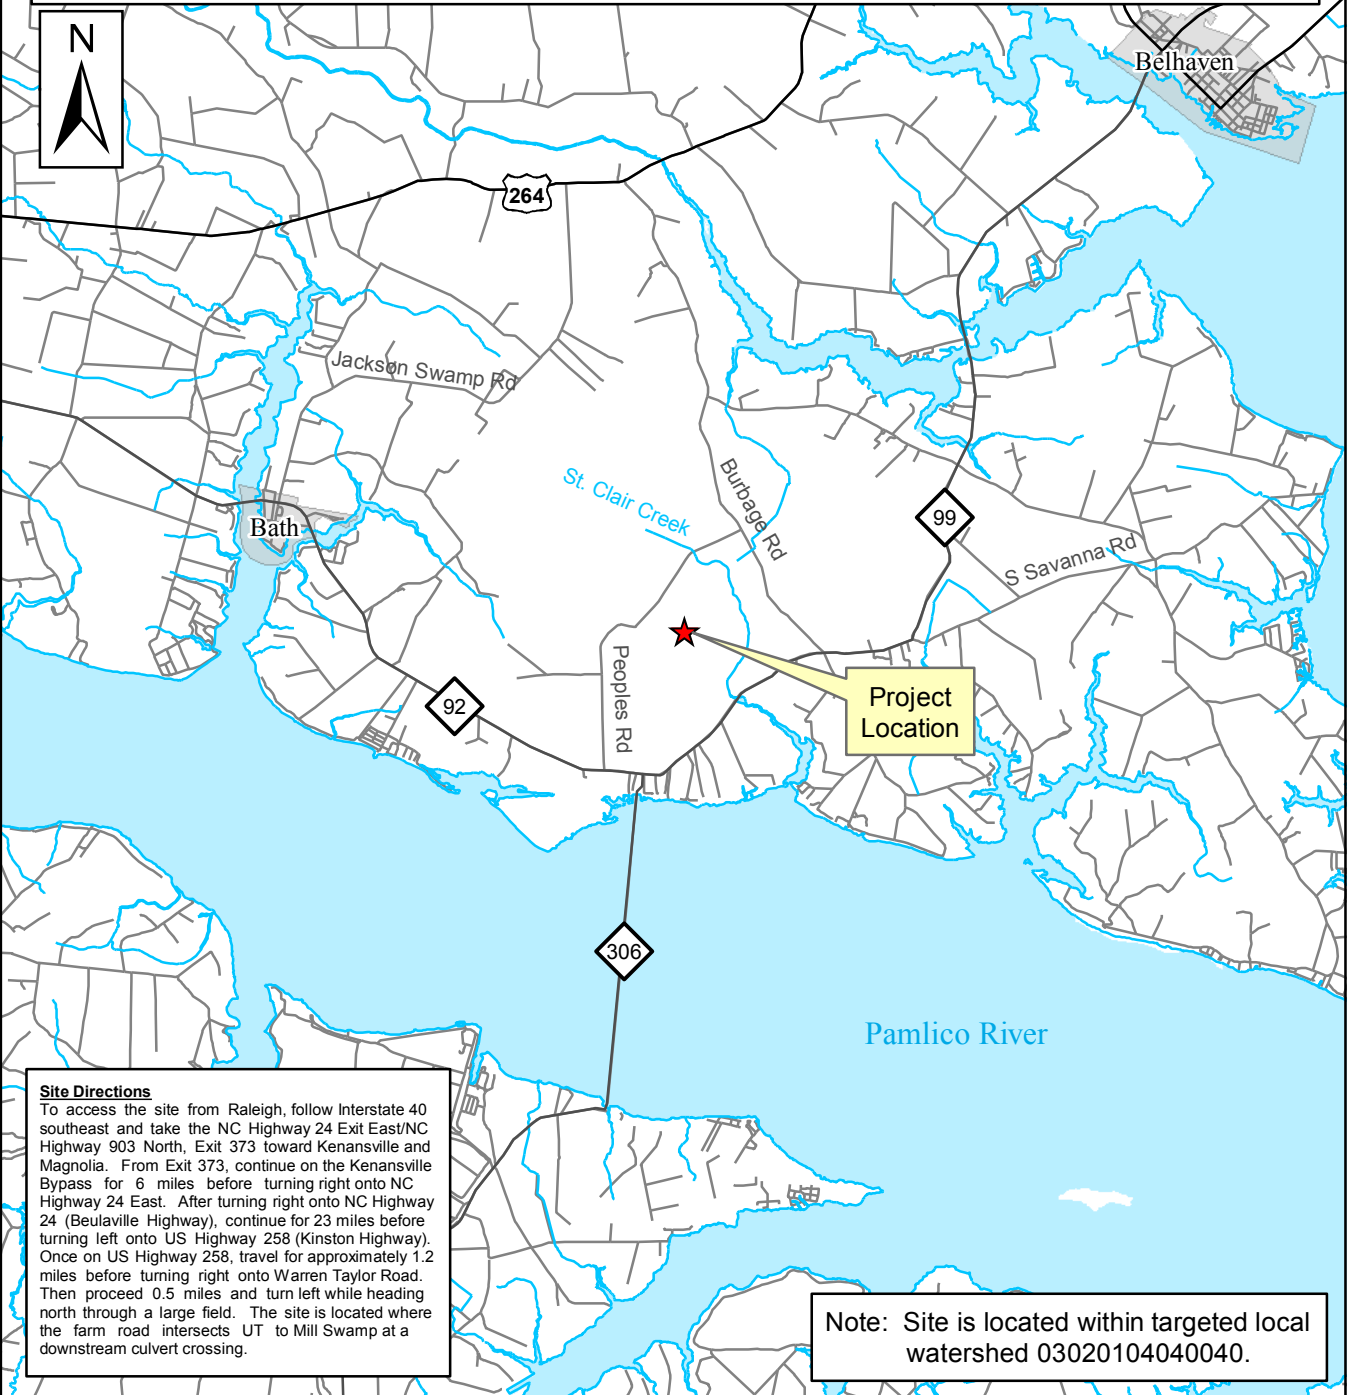


Project Location

Site Directions
 To access the site from Raleigh, follow Interstate 40 southeast and take the NC Highway 24 Exit East/NC Highway 903 North, Exit 373 toward Kenansville and Magnolia. From Exit 373, continue on the Kenansville Bypass for 6 miles before turning right onto NC Highway 24 East. After turning right onto NC Highway 24 (Beulaville Highway), continue for 23 miles before turning left onto US Highway 258 (Kinston Highway). Once on US Highway 258, travel for approximately 1.2 miles before turning right onto Warren Taylor Road. Then proceed 0.5 miles and turn left while heading north through a large field. The site is located where the farm road intersects UT to Mill Swamp at a downstream culvert crossing.

Note: Site is located within targeted local watershed 03020104040040.



Beaufort County

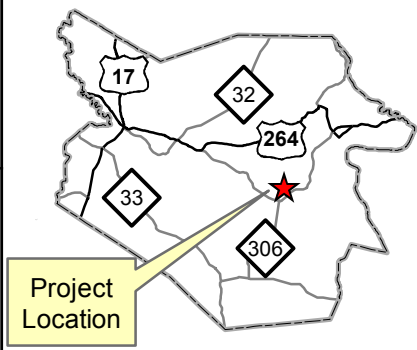

Project Location

Figure 1
Project Vicinity Map
St. Clair Creek Restoration Site

NCDEQ -
 Division of Mitigation Services

Michael Baker

INTERNATIONAL




Table 1. Project Components and Mitigation Credits								
St. Clair Creek Restoration Project: DMS Project No ID. 95015								
Mitigation Credits								
	Stream	Riparian Wetland		Non-riparian Wetland		Buffer	Nitrogen Nutrient Offset	Phosphorus Nutrient Offset
Type	R	R	RE					
Totals	2,808 SMU / 466 SMU*	2.8 WMU	0			363,577 BMU		
Project Components								
Project Component or Reach ID	Stationing/ Location	Existing Footage/ Acreage		Approach	Restoration/ Restoration Equivalent	Restoration Footage or Acreage	Mitigation Ratio	
UT2 Stream	12+64 – 34+00	2,660 LF		Headwater Restoration	1,667 SMU / 466 SMU*	2,133 LF	1:1	
UT3 Stream	10+66 – 22+82	1,075 LF		Headwater Restoration	1,141 SMU	1,141 LF	1:1	
UT2 Wetland	See plan sheets	0.0 AC		Restoration	1.1 WMU	1.1 WMU	1:1	
UT3 Wetland	See plan sheets	0.0 AC		Restoration	1.7 WMU	1.7 WMU	1:1	
UT2 Buffer	12+64 – 34+00	NA		Restoration	363,577 BMU	8.3 AC	1:1	
Component Summation								
Restoration Level	Stream (LF)	Riparian Wetland (AC)		Non-riparian Wetland (AC)	Buffer (ft ²) / (AC)	Upland (AC)		
		Riverine	Non-Riverine					
Restoration	3,274	2.8						
Enhancement I								
Enhancement II								
Creation								
Preservation								
High Quality Preservation								
Buffer Zone A: 0-50 ft					226002 / 5.2			
Buffer Zone B: 51-100 ft					137575 / 3.1			
BMP Elements								
Element	Location	Purpose/Function		Notes				
BMP Elements: BR= Bioretention Cell; SF= Sand Filter; SW= Stormwater Wetland; WDP= Wet Detention Pond; DDP= Dry Detention Pond; FS= Filter Strip; S= Grassed Swale; LS= Level Spreader; NI=Natural Infiltration Area								

*The SMU credits shown here differ from those presented in previous monitoring reports. They have been reduced by 466 SMU that have been deemed potentially at-risk in the uppermost section of Reach UT2.

Table 2. Project Activity and Reporting History			
St. Clair Creek Restoration Project: DMS Project No ID. 95015			
Activity or Report	Scheduled Completion	Data Collection Complete	Actual Completion or Delivery
Mitigation Plan Prepared	N/A	N/A	Jul-13
Mitigation Plan Amended	N/A	N/A	Sep-13
Mitigation Plan Approved	N/A	N/A	Oct-13
Final Design – (at least 90% complete)	N/A	N/A	Nov-13
Construction Begins	N/A	N/A	Dec-13
Temporary S&E mix applied to entire project area	N/A	N/A	N/A
Permanent seed mix applied to entire project area	N/A	N/A	Mar-14
Planting of live stakes	N/A	N/A	N/A
Planting of bare root trees	N/A	N/A	Apr-14
End of Construction	N/A	N/A	Apr-14
Survey of As-built conditions (Year 0 Monitoring-baseline)	N/A	May-14	Jun-14
Year 1 Monitoring	Nov-14	Dec-14	Dec-14
Year 2 Monitoring	Nov-15	Nov-15	Mar-16
Year 3 Monitoring	Nov-16	Dec-16	Jan-17
Year 4 Monitoring	Nov-17	Dec-17	Jan-18
Year 5 Monitoring	Nov-18	Jan-19	Jan-19
Year 6 Monitoring	Nov-19	Dec-19	Jan-20
Year 7 Monitoring	Nov-20	N/A	N/A

Table 3. Project Contacts Table	
St. Clair Creek Restoration Project: DMS Project ID No. 95015	
Designer	
Michael Baker International	8000 Regency Parkway, Suite 600 Cary, NC 27518 <u>Contact:</u> Katie McKeithan, Tel. 919-481-5703
Construction Contractor	
River Works, Inc.	114 W. Main St. Clayton, NC 27520 <u>Contact:</u> Stephen Carroll, Telephone: 919-428-8368
Planting Contractor	
River Works, Inc.	114 W. Main St. Clayton, NC 27520 <u>Contact:</u> Stephen Carroll, Telephone: 919-428-8368
Seeding Contractor	
River Works, Inc.	114 W. Main St. Clayton, NC 27520 <u>Contact:</u> Stephen Carroll, Telephone: 919-428-8368
Seed Mix Sources	Green Resources, Tel. 336-855-6363
Nursery Stock Suppliers	Mellow Marsh Farm, 919-742-1200 ArborGen, 843-528-3204 Superior Tree, 850-971-5159
Monitoring Performers	
Michael Baker International	8000 Regency Parkway, Suite 600 Cary, NC 27518 <u>Contact:</u>
Stream Monitoring Point of Contact	Scott King, Tel. 919-481-5731
Vegetation Monitoring Point of Contact	Scott King, Tel. 919-481-5731
Wetland Monitoring Point of Contact	Scott King, Tel. 919-481-5731

Table 4. Project Attributes			
St. Clair Creek Restoration Project: DMS Project ID No. 95015			
Project Information			
Project Name	St. Clair Creek Restoration Project		
County	Beaufort		
Project Area (acres)	17.5		
Project Coordinates (latitude and longitude)	35.452835 N, -76.76726215 W		
Watershed Summary Information			
Physiographic Province	Outer Coastal Plain		
River Basin	Tar-Pamlico		
USGS Hydrologic Unit 8-digit and 14-digit	03020104 / 03020104040040		
DWQ Sub-basin	03 03 07		
Project Drainage Area (AC)	89 (UT2), 30 (UT3)		
Project Drainage Area Percentage of Impervious Area	<1%		
CGIA Land Use Classification	3.02, Passively Managed Forest Stands, 2.01.01.07, Annual Row Crop Rotation;		
Stream Reach Summary Information			
Parameters	Reach UT2		Reach UT3
Length of Reach (LF)	2,133 (proposed) 2,660 (existing)		1,141 (proposed) 1,075 (existing)
Valley Classification (Rosgen)	X		X
Drainage Area (AC)	89		30
NCDWQ Stream Identification Score	36		20
NCDWQ Water Quality Classification	C; Sw, NSW		C; Sw, NSW
Morphological Description (Rosgen stream type)*	Channelized Headwater System (Perennial)		Channelized Headwater System (Intermittent)
Evolutionary Trend **	Restored G		Restored G
Underlying Mapped Soils	To, Hy, Ro		To, At
Drainage Class	Very poorly drained, poorly drained		Poorly drained, somewhat poorly drained
Soil Hydric Status	Hydric		Hydric
Average Channel Slope (ft/ft)	0.0006		0.0009
FEMA Classification	SFHA, AE		SFHA, AE
Native Vegetation Community	Coastal Plain Small Stream Swamp		Coastal Plain Small Stream Swamp
Percent Composition of Exotic/Invasive Vegetation	<5%		<5%
Wetland Summary Information			
Parameters	Wetland Along UT2		
Size of Wetland (AC)	1.1		
Wetland Type	Riparian Riverine		
Mapped Soil Series	To – Tomotley fine sandy loam		
Drainage Class	Poorly drained		
Soil Hydric Status	Hydric		
Source of Hydrology	Groundwater		
Hydrologic Impairment	Disconnected floodplain from ditches, lowered water table		
Native Vegetation Community	Coastal Plain Small Stream Swamp		
Percent Composition of Exotic/Invasive Vegetation	<5%		
Parameters	Wetland Along UT3		
Size of Wetland (AC)	1.7		
Wetland Type	Riparian Riverine		
Mapped Soil Series	To – Tomotley fine sandy loam		
Drainage Class	Poorly drained		
Soil Hydric Status	Hydric		
Source of Hydrology	Groundwater		
Hydrologic Impairment	Disconnected floodplain from ditches, lowered water table		
Native Vegetation Community	Coastal Plain Small Stream Swamp		
Percent Composition of Exotic/Invasive Vegetation	<5%		
Regulatory Considerations			
Regulation	Applicable	Resolved	Supporting Documentation**
Waters of the United States – Section 404	Yes	Yes	(Appendix B)
Waters of the United States – Section 401	Yes	Yes	(Appendix B)
Endangered Species Act	No	N/A	Categorical Exclusion (Appendix B)
Historic Preservation Act	No	N/A	Categorical Exclusion (Appendix B)
Coastal Zone Management Act (CZMA)/ Coastal Area Management Act (CAMA)	No	N/A	Categorical Exclusion (Appendix B)
FEMA Floodplain Compliance	Yes	Yes	(Appendix B)
Essential Fisheries Habitat	No	N/A	Categorical Exclusion (Appendix B)
Notes:			
* Due to its channelized nature, the stream would most appropriately be classified as a Rosgen G stream type but use of this classification system on this channel is questionable due to its highly altered state. ** Supporting documentation is including in the approved Final Mitigation Plan.			



PAT MCCRORY

Governor

DONALD R. VAN DER VAART

Secretary

S. JAY ZIMMERMAN

Director

January 7, 2016

Kristin Miguez
DEQ-Division of Mitigation Services
1652 Mail Service Center
Raleigh, NC 27699-1652
(via electronic mail)

DWR# 2013-0739

Re: Site Viability for Buffer Mitigation – St. Clair Creek Headwater Stream Site
off Peoples Road, Bath, NC
Beaufort County

Dear Ms. Miguez,

On October 5, 2015, Katie Merritt, with the Division of Water Resources (DWR), received a request from Jake Byers with Michael Baker Engineering, for a site visit at the St. Clair Creek Restoration Site located off Peoples Road in Bath, NC to determine the potential for Tar-Pamlico Neuse riparian buffer mitigation. On December 3, 2015, Ms. Merritt performed a site assessment of the subject site. Karen Higgins and Mac Haupt with the DWR along with you and Mr. Byers were also present. If approved, mitigating this site could provide riparian buffer mitigation credits within the 8-digit Hydrologic Unit Code 03020104 of the Tar-Pamlico River Basin and as allowed under 15A NCAC 02B .0295 (f).

Ms. Merritt's evaluation of the site as an alternative buffer mitigation option for buffer mitigation pursuant to Rule 15A NCAC 02B .0295 (o) (1) and (2) (effective November 1, 2015) is provided below:

UT2

- UT2 was approved as part of a Coastal Headwater Stream Mitigation Site (DWR# 2013-0739) by the IRT in 2013 and is in its second year of monitoring. A copy of the approved mitigation plan has been provided to the DWR.
- Preliminary site conditions along with the onsite visit in December 2015 suggests that the entire area along UT2 (0-100') is viable for riparian restoration and suitable for buffer mitigation credit at 1:1. Preliminary photos and documentation have been provided to the DWR.
- The buffer must be measured perpendicular to the length of the valley being restored. Approximately 8.35 acres (363,577 ft²) have been planted and restored. A copy of the proposed restoration site has been provided to DWR.
- An agricultural ditch is present within the proposed riparian restoration and isn't planned to be removed. The presence of this ditch does not comply with the diffuse flow requirement of Rule .0295. However, DMS can apply Clarification Memo #2008-019 to

this project in order to calculate the deduction of buffer credit where diffuse flow cannot be attained.

- According to the St. Clair Creek Restoration Project Year 1 Monitoring Report submitted in April 2015, all 6 vegetative monitoring plots within the riparian areas are meeting the success criteria identified in Rule .0295. A copy of the Year 1 Monitoring Report has been provided to the DWR.
- A conservation easement of the proposed area, dated June 24th, 2013 has been provided to the DWR and is more accurately described as CE-1 and containing 11.55 acres, more or less. The easement document is located in the Beaufort County Register of Deeds, Book 1821, Pages 53-64.

A map showing the project site and the buffer mitigation areas assessed is provided and signed by Ms. Merritt on January 6, 2016. DWR did not assess this site for viability of nutrient offset and therefore only buffer mitigation is approved. DMS shall provide an annual monitoring report to Ms. Merritt for review and approval each year for four more years and until the performance standards have been met. The performance standards for buffer mitigation under Rule .0295 are the following:

(n) (2) (B) - A minimum of four native hardwood tree species or four native hardwood tree and native shrub species, where no one species is greater than 50 percent of the stems.

(o) (2) -All success criteria specified in the approval of the stream mitigation site by the Division shall be met.

Please provide an As-Built survey verifying the acreage proposed for buffer mitigation credit and a buffer credit ledger for this site to Ms. Merritt within 30 days from receipt of this letter. If you have any questions regarding this correspondence contact Katie Merritt at (919)-807-6371.

Sincerely,



Karen Higgins, Supervisor
401 and Buffer Permitting Unit

KAH/km

Attachments: Site Aerial Map, DWR Clarification Memo #2008-019

cc:File Copy (Katie Merritt)

Conservation Easement

Vegetation Plots

Coastal Headwater Stream Design

Buffer Zone A: 0-50 ft (226,002 ft² or 5.2 ac; 1:1 ratio = 226,002 BMUs)
Buffer Zone B: 51-100 ft (137,575 ft² or 3.1 ac; 1:1 ratio = 137,575 BMUs)

UT2

Ditch/non-diffuse flow

Wetland Area
1.1 acres

Not for buffer credit

Kym
1/6/2015

Aerial Photo Date: 2012

NC OneMap, NC Center for Geographic Information and Analysis, NC 911 Board

Michael Baker
INTERNATIONAL

[Empty box]

[Empty box]

Buffer Asset Map
St. Clair Creek Site
Beaufort County, NC



Michael F. Easley
Governor

William G. Ross, Jr., Secretary
Department of Environment and Natural Resources

Coleen, H. Sullins, Director
Division of Water Quality

August 19, 2008
Buffer Interpretation/Clarification #2008-019

MEMORANDUM

RE: The Division of Water Quality's (DWQ's) stance on whether diffuse flow of stormwater through the newly restored buffers on mitigation sites should be a requirement. Diffuse flow is a requirement for buffer restoration or enhancement in the Neuse River Basin Buffer Rule 15A NCAC 02B.0242(9)(d)(iii), the Tar-Pamlico River Basin Buffer Rule 15A NCAC 02B.0260(9)(d)(iii), and the Catawba River Basin Buffer Rule 15A NCAC 02B.0244 (9)(d)(iii).

Diffuse flow is a requirement for all sites in a buffered basin for buffer mitigation and for for sites providing nutrient offset credit as well.


Current Policy: According to the Mitigation rules in the Neuse, Tar-Pamlico and Catawba buffer rules, a grading plan must be provided for buffer mitigation sites. In addition, those rules state that "The site shall be graded in a manner to ensure diffuse flow through the riparian buffer".

Problem: The question has been raised as to whether stormwater carried by lateral ditches that enter buffered streams should provide diffuse flow prior to that stormwater entering the restored buffers.

Solution: The Neuse, Tar-Pamlico and Catawba buffer rules with respect to buffer mitigation sites contain a very clear requirement that states that diffuse flow of stormwater must be maintained through the buffer. Unless otherwise approved by DWQ, all buffer mitigation sites must provide diffuse flow of stormwater from ditches and similar conveyances through the restored buffer.

Where such diffuse flow cannot be attained and where DWQ agrees that such treatment is not possible, deduction of buffer credit will be calculated as follows:

SCENARIO 1

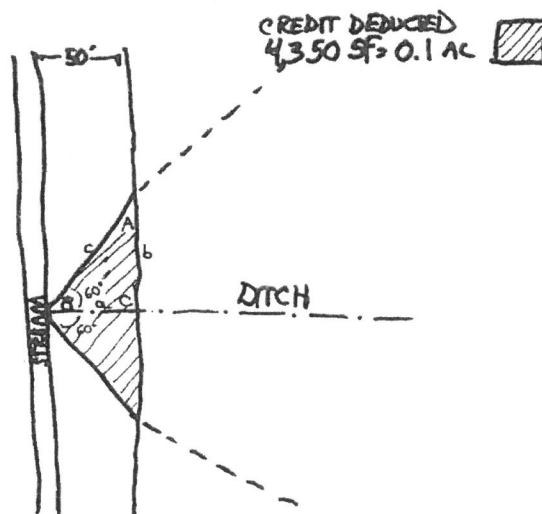

A, B and C are angles. a, b, and c are distances (lengths)

DWQ believes that using an immediate drainage area extending at a 60-degree angle from the point of discharge to the stream is a reasonable approach to the issue of determining the area which is not draining through the restored buffer. To calculate the area of buffer being "short-circuited" by the ditch, the area of the right triangles shown in the figure above must be determined.

$$\begin{aligned} a &= 50' \\ A &= 30^\circ \\ B &= 60^\circ \end{aligned}$$

$$\begin{aligned} b &= a \cot A \\ b &= 50 (1.732) \\ b &= 86.6' (87') \end{aligned}$$


The area to be excluded from credit would be the area of the two right triangles:

$$\begin{aligned} \text{Area} &= (a \times b)/2 \\ \text{Area} &= (50 \text{ feet} \times 87\text{feet})/2 \\ \text{Area} &= 2,175 \text{ SF} \end{aligned}$$

Total deducted area = $2,175 \times 2 = 4,350$ SF or 0.1 acres.


The example shown above assumes a buffer width of 50 feet from the top of bank (riparian buffer mitigation site). For nutrient offset sites, credit can be generated out to 200 feet from the top of bank. The policy applies to sites with larger buffers as follows:

SCENARIO 2

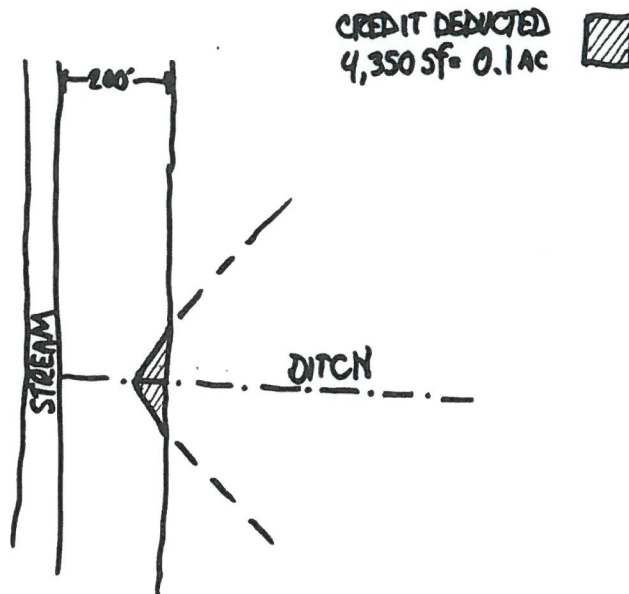


If a ditch leading to a buffered stream is buffered, then no credit is deducted from the stream buffer. If the upstream origin of the ditch is within the buffer, no credit is deducted. If the upstream origin of the ditch is not buffered (e.g. if the ditch begins upstream offsite), the credit deduction is applied to the most upstream portion of the ditch on the property.

SCENARIO 3

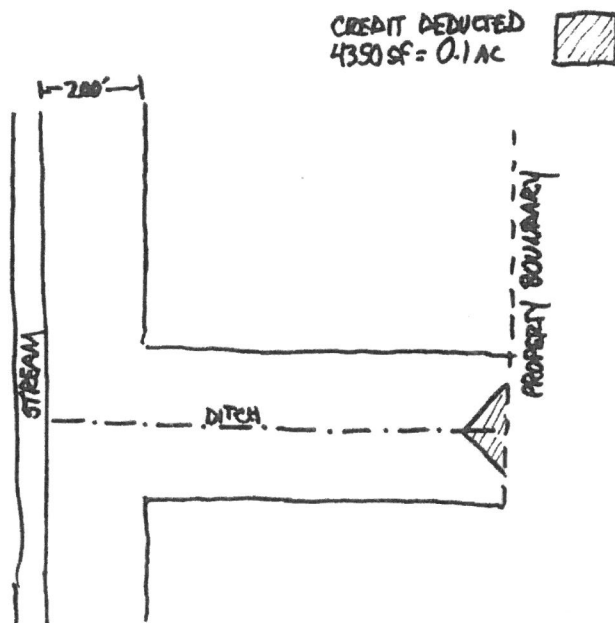


Where a network of interconnecting ditches occurs on a site, and all of the ditches are buffered, the only credit deduction would be at the point where an unbuffered ditch enters the project:

SCENARIO 4

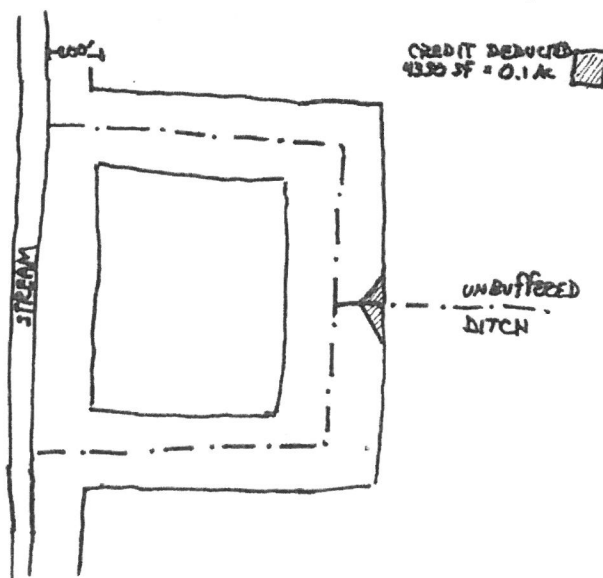

Where a natural stream enters the project site, no deduction of credit will occur. Also, when a natural stream or a modified natural stream flow into a buffered stream, no deduction of credit will occur. The modified natural stream must be subject to the buffer rules, and must be verified to be a modified natural stream (as opposed to a ditch) through an on-site determination by DWQ personnel.

SCENARIO 5

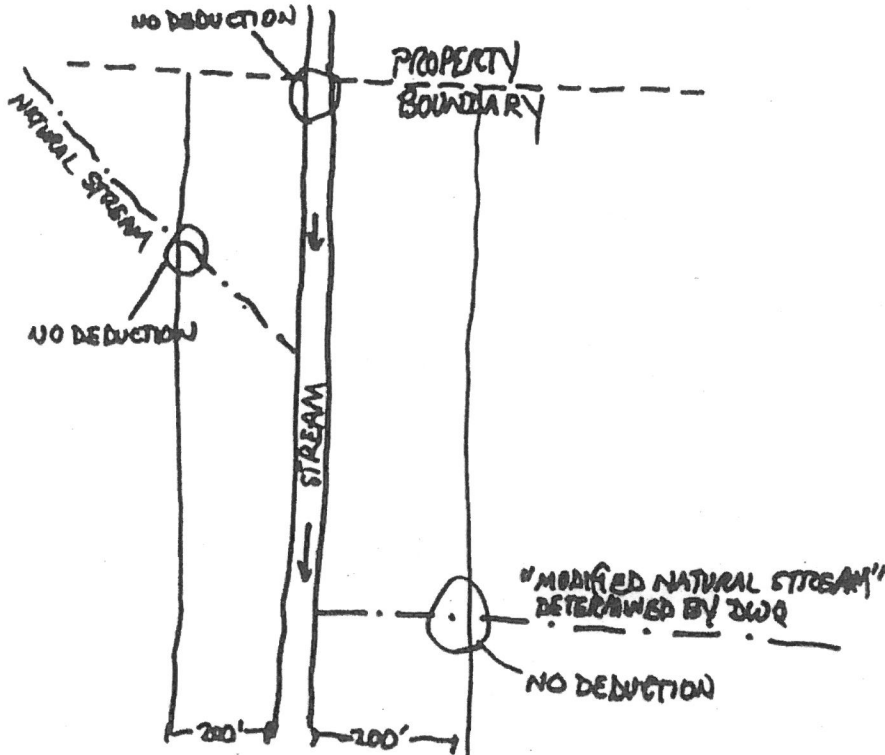

For any additional questions or clarifications on this issue, please contact Eric Kulz or Amy Chapman at (919) 733-1786.

Signature: Matt Matthews Date: 8/19/2008

Signature: Pat Ross Date: 8/19/2008

Meeting Minutes

St. Clair RESTORATION PROJECT

DMS Project ID. 95015
DWR Project# 13-0739, Beaufort County
USACE Action ID: 2008-02655
Tar-Parmlico River Basin: 03020104-040040

Date Prepared:	May 20, 2019
Meeting Date, Time, Location:	May 16, 2019, 10:30 am On-site (Beaufort County, NC)
Attendees:	USACE – Kim Browning DMS – Jeff Schaffer, Jeremiah Dow, Melanie Allen DWR – Erin Davis WRC – Travis Wilson, Maria Dunn Baker – Drew Powers, Katie McKeithan
Subject:	Credit release site walkover with IRT
Recorded By:	Drew Powers

An on-site meeting was held on May 16th, 2019 at 10:30 am to discuss St.Clair Restoration Project (Full Delivery) in Beaufort County, NC. The purposes of this meeting were to:

1. Discuss credits to be released and to get ready for project closeout; and
2. Identify and discuss potential concerns/issues based on field observations.

General recent weather conditions have been hot and dry in the area.

UT2

The group met at the entrance of the path leading to the site off Peoples Road in Bath, NC. A general site overview and map orientation was provided and discussed. The group then started walking into the site near monitoring well 5 where Melanie and Erin took a soil sample within the wetland boundary. The soils showed mottling and developing hydric features. The group walked upstream.

Both Kim and Erin questioned if the site had previous supplemental planting due to the height of some of the trees they encountered. Katie replied that there had been supplemental planting (40 containerized plants were installed in early 2019). Erin mentioned that the vigor of the trees looked good for the most part and noticed an effort to control the pine tree population. Kim mentioned, with the surrounding pine tree population, that the elimination of all pine trees is inevitable but was glad to see that efforts have been made. Another soil sample was taken near monitoring well 2. Melanie and Erin both were more pleased with the results of this sample as it showed more distinct hydric indicators.

The group continued up UT2 towards flow gauge 3. As a group, we inspected the stream area looking at signs of water, flow, veg, and overall conditions of the stream. The stream was dry but had evidence of water and the group all agreed that water flows in this area. Katie shared all the flow gauges have already met 30 days of continuous flow this year (2019) and the Mitigation Plan's success criteria calls for two years with 30 consecutive days to be accepted. At this time the group separated and headed up to the main area of concern flow gauges 4 and 7. Along the way, Jeff referenced the coastal headwater streams guidance and how bed and bank formation is not the design for this Rosgen DA stream type. Kim seemed to recall the Mitigation Plan stating that and agreed with the design. She said she was more concerned with the flow of the water and amount of water that was moving through the system. Jeff mentioned that he has visited the site on many occasions and it typically has wet channel conditions with water up to his ankles. As the group made it to flow gauge 7 they noticed a small hole in the ground about 1" in diameter about 6" downstream of the gauge, that some believed could be tampering with the results. Both Kim and Travis questioned our results of 84 consecutive days as of March 26th this year considering how different flow gauge 7 and 3 were from each other. Travis mentioned that it might be appropriate to check the gauges and confirm that the gauges are reading properly. The group then headed to flow gauge 4 still looking at veg and channel condition. Melanie and Erin took another soil sample right by the gauge and confirmed the hydric soils and could see a difference in the wetland soils compared to the stream soils. Out of curiosity Erin took a soil sample on the floodplain outside of the swale. This confirmed that these soils were upland and much different than both the stream and wetlands previous. This concluded the UT2 portion of the walk through and the group decided to continue to UT3.

UT3

The group congregated at the top of UT3 at monitoring well 8 to orient themselves with the map and discuss the area. Erin mentioned that the veg looked good and could notice pine and sweetgum removal. Maria and Travis began looking at the ditches in the easement and outside the easement while Jeremiah, Erin, and Melanie took a soil sample by monitoring well 7. The soils were dry but showed good hydric indicators throughout the soil. After this the group fast tracked to the culverts at the bottom of UT3 to look for flow and culvert placement. On the way, Erin asked Drew if invasive have been treated and he replied that no invasive species have been an issue on this site. Once the group got to the culvert they made their way in the stream towards flow gauge 5. Kim saw no issues with the gauge or stream and Travis was fine with the culverts. This concluded the UT3 walk through.

This concluded the walkover and below are a few notes that were discussed back at the vehicles before departure.

Erin summarized soils:

- soils look better than expected, seeing hydric indicators except near veg plot 5 which was showing mottling and developing hydric indicators.
- dark surface soil
- wetlands were a sandy/loam and the reach turned silt
- stream soils differed from the wetland and upland soils

Travis commented:

- flow gauges should be checked for proper installation and maintenance to make sure they are accurately matching the onsite evidence of flow

Kim's summary:

- USACE will be looking for a stream JD at close out. UT3 looks OK; however, the upper section of UT2 is questionable.
- Ditch manipulations from the adjacent ag fields (currently drained and being maintenance) may not be helping the site.
- Vegetation along UT3 does not look like a wetland with evidence of black berry and ant hills. Soils do appear to be wetting.
- Some of the vegetation onsite is a little short. There is a strong pine seed source, but Michael Baker has worked on the population on-site.
- Release:
 - o At risk at top of UT2, recommend holding.
 - o Wetlands held at MY 3 and 4, OK with releasing this year.
 - o Melanie will make a recommendation for release.

This represents Baker Engineering's best interpretation of the meeting discussions. If anyone should find any information contained in these meeting notes to be in error and/or incomplete based on individual comments or conversations, please notify me with corrections/additions as soon as possible.

Most sincerely,



Andrew Powers
Michael Baker Engineering, Inc.
8000 Regency Parkway, Suite 600
Cary, NC 27518
Phone: 919-481-5732
Email: Andrew.Powers@mbakerintl.com

Appendix B

Visual Assessment Data


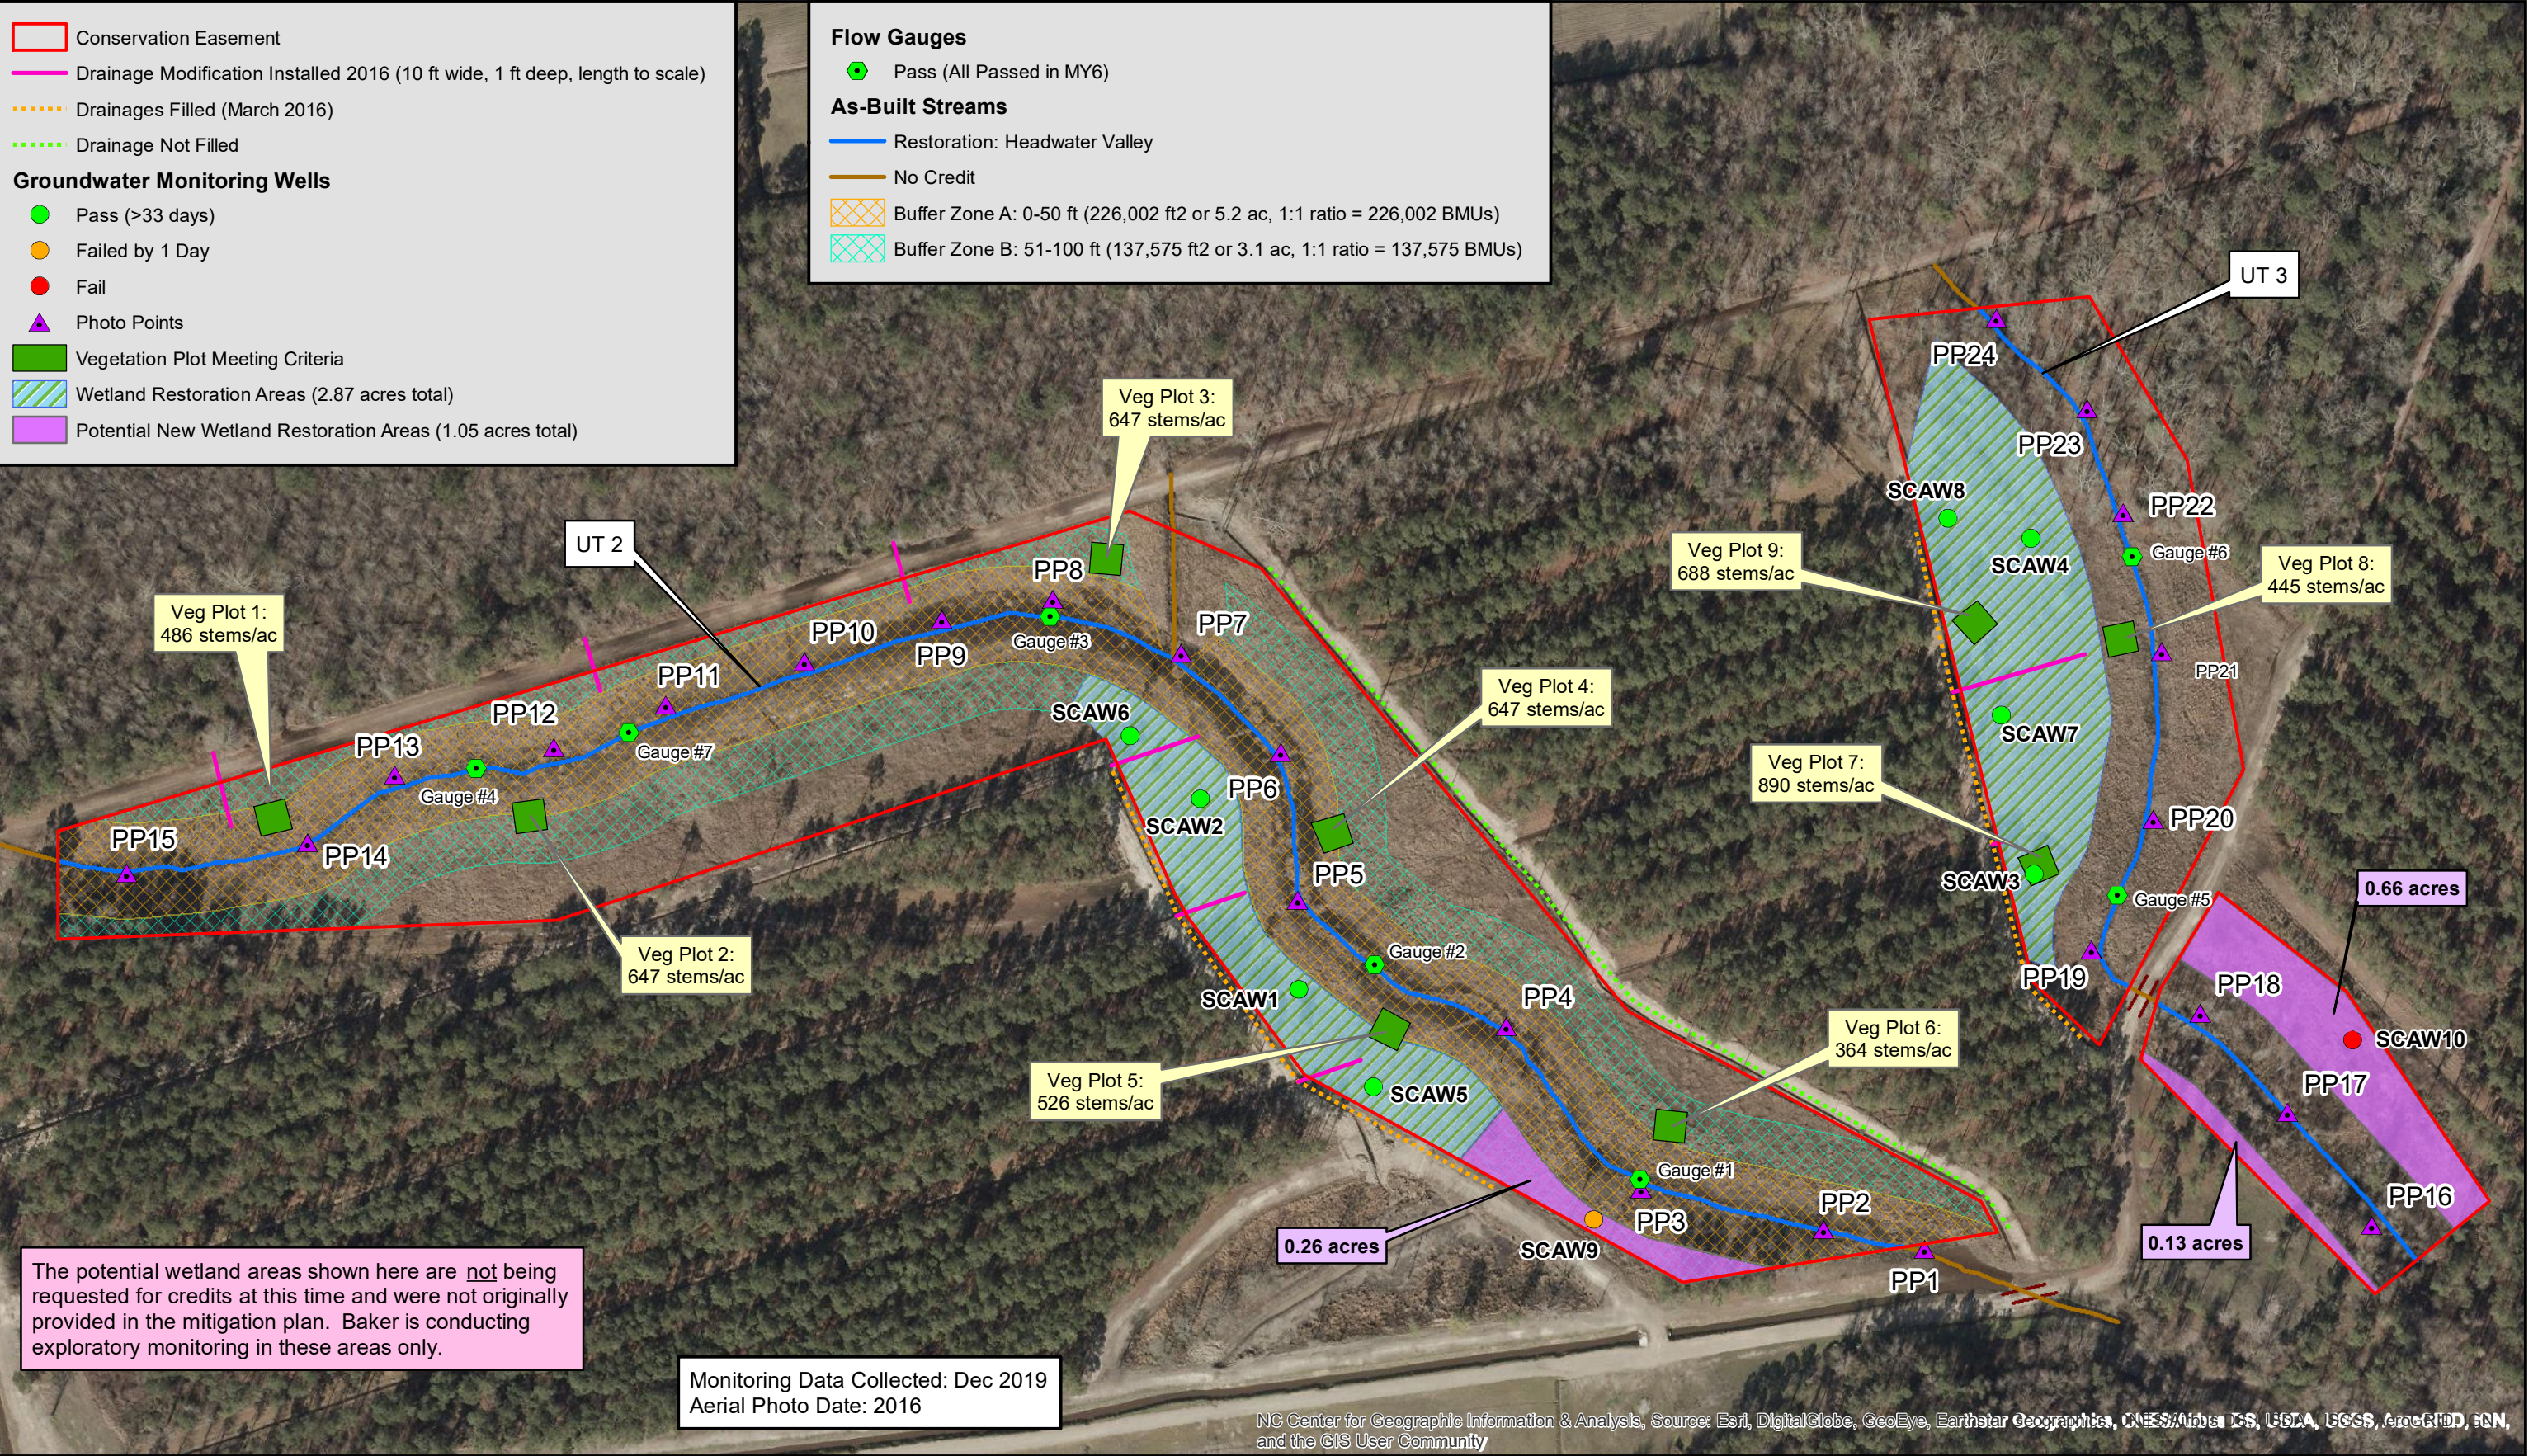


Figure 2
Current Conditions Plan View: MY6
St. Clair Creek Site
Beaufort County, NC

Table 5a. Visual Stream Morphology Stability Assessment										
St. Clair Creek Restoration Project: DMS Project ID No. 95015										
Reach ID: UT2										
Assessed Length (LF): 2,133										
Major Channel Category	Channel Sub-Category	Metric	Number Stable (Performing as Intended)	Total Number per As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Veg.	Footage with Stabilizing Woody Veg.	Adjusted % for Stabilizing Woody Veg.
1. Bed	1. Vertical Stability	1. Aggradation			0	0	100%			
		2. Degradation			0	0	100%			
	2. Riffle Condition	1. Texture Substrate	NA	NA						
	3. Meander Pool Condition	1. Depth	NA	NA						
		2. Length	NA	NA						
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	NA	NA						
		2. Thalweg centering at downstream of meander bend (Glide)	NA	NA						
3. Thalweg centering along valley		Yes	2,133 LF							
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	2,133	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely			0	0	100%	0	2,133	100%
	3. Mass Wasting	Banks slumping, caving or collapse			0	0	100%	0	2,133	100%
		Totals				0	0	100%	0	2,133
3. Engineering Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs	NA	NA						
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	NA	NA						
	2a. Piping	Structures lacking any substantial flow underneath sill or arms	NA	NA						
	3. Bank Position	Bank erosion within the structures extent of influence does not exceed 15%	NA	NA						
	4. Habitat	Pool forming structures maintaining - Max Pool Depth	NA	NA						

Table 5a. Visual Stream Morphology Stability Assessment										
St. Clair Creek Restoration Project: DMS Project ID No. 95015										
Reach ID: UT3										
Assessed Length (LF): 1,141										
Major Channel Category	Channel Sub-Category	Metric	Number Stable (Performing as Intended)	Total Number per As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Veg.	Footage with Stabilizing Woody Veg.	Adjusted % for Stabilizing Woody Veg.
1. Bed	1. Vertical Stability	1. Aggradation			0	0	100%			
		2. Degradation			0	0	100%			
	2. Riffle Condition	1. Texture Substrate	NA	NA						
		1. Depth	NA	NA						
	3. Meander Pool Condition	2. Length	NA	NA						
		4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	NA	NA					
	2. Thalweg centering at downstream of meander bend (Glide)		NA	NA						
3. Thalweg centering along valley	Yes		1,141 LF							
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	1,141	100%
		Banks undercut/overhanging to the extent that mass wasting appears likely			0	0	100%	0	1,141	100%
		Banks slumping, caving or collapse			0	0	100%	0	1,141	100%
	Totals			0	0	100%	0	1,141	100%	
3. Engineering Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs	NA	NA						
		Grade control structures exhibiting maintenance of grade across the sill	NA	NA						
	2a. Piping	Structures lacking any substantial flow underneath sill or arms	NA	NA						
		Bank erosion within the structures extent of influence does not exceed 15%	NA	NA						
	4. Habitat	Pool forming structures maintaining - Max Pool Depth	NA	NA						

Table 5b. Stream Problem Areas			
St. Clair Creek Restoration Project: DMS Project ID No. 95015			
Feature Issue	Station Number	Suspected Cause	Photo Number
None Observed	--	--	--

Table 6a. Vegetation Conditions Assessment						
St. Clair Creek Restoration Project: DMS Project ID No. 95015						
Reach ID: UT2						
Planted Acreage: 11.6						
Vegetation Category	Defintions	Mapping Threshold (acres)	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover both woody and herbaceous material.	0.1	NA	0	0.00	0.0%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4 or 5 stem count criteria.	0.1	NA	0	0.00	0.0%
				Total	0	0.00
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems or a size class that are obviously small given the monitoring year.	0.25	NA	0	0.00	0.0%
				Cumulative Total	0	0.00
Easement Acreage:						
Vegetation Category	Defintions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
5. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale)	1000 ft ²	NA	0	0.00	0.0%
6. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale)	none	NA	0	0.00	0.0%

Table 6a. Vegetation Conditions Assessment						
St. Clair Restoration Project: EEP Project ID No. 95015						
Reach ID: UT3						
Planted Acreage: 5.9						
Vegetation Category	Defintions	Mapping Threshold (acres)	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover both woody and herbaceous material.	0.1	NA	0	0.00	0.0%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4 or 5 stem count criteria.	0.1	NA	0	0.00	0.0%
				Total	0	0.00
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems or a size class that are obviously small given the monitoring year.	0.25	NA	0	0.00	0.0%
				Cumulative Total	0	0.00
Easement Acreage:						
Vegetation Category	Defintions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
4. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale)	1000 ft ²	NA	0	0.00	0.0%
5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale)	none	NA	0	0.00	0.0%

Table 6b. Vegetation Problem Areas			
St. Clair Creek Restoration Project: DMS Project ID No. 95015			
Feature Issue	Station Number	Suspected Cause	Resolution
Loblolly Pine (<i>Pinus taeda</i>)	Scattered throughout buffer on UT-2	Post-restoration seed source	Will be treated in 2020 with power tools and/or chemical application.

St. Clair Restoration Site: Stream Photo Points (12/09/19)



Photo Point 1 – UT2



Photo Point 2 – UT2



Photo Point 3 – UT2



Photo Point 4 – UT2



Photo Point 5 – UT2



Photo Point 6 – UT2

St. Clair Restoration Site: Stream Photo Points (12/09/19)



Photo Point 7 – UT2



Photo Point 8 – UT2



Photo Point 9 – UT2



Photo Point 10 – UT2



Photo Point 11 – UT2



Photo Point 12 – UT2

St. Clair Restoration Site: Stream Photo Points (12/09/19)



Photo Point 13 – UT2



Photo Point 14 – UT2



Photo Point 15 – UT2



Photo Point 16 – UT3



Photo Point 17 – UT3



Photo Point 18 – UT3

St. Clair Restoration Site: Stream Photo Points (12/09/19)



Photo Point 19 – UT3



Photo Point 20 – UT3



Photo Point 21 – UT3



Photo Point 22 – UT3



Photo Point 23 – UT3



Photo Point 24 – UT3

St. Clair Restoration Site: Stream Photo Points (12/09/19)



Flow Hydrology at Photo Point 12



Flow Hydrology at Photo Point 13



Flow Hydrology at Photo Point 14



Flow Hydrology at Photo Point 15



Flow Hydrology at Photo Point 20




Flow Hydrology at Photo Point 21

St. Clair Restoration Site: Vegetation Plot Photos (12/5/19)



Vegetation Plot 1

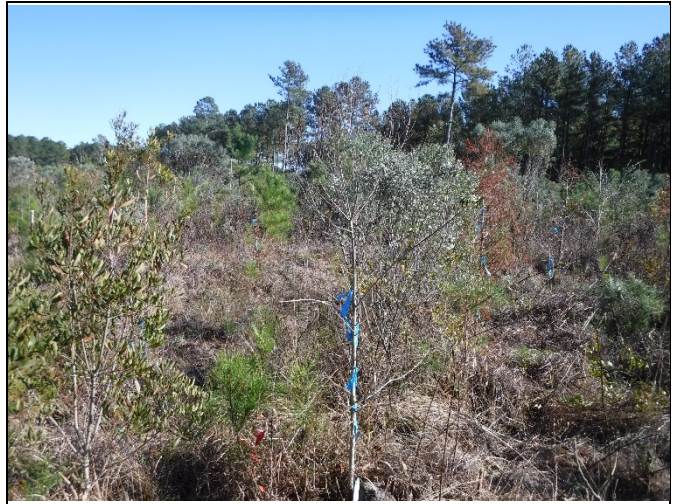


Vegetation Plot 2



Vegetation Plot 3



Vegetation Plot 4

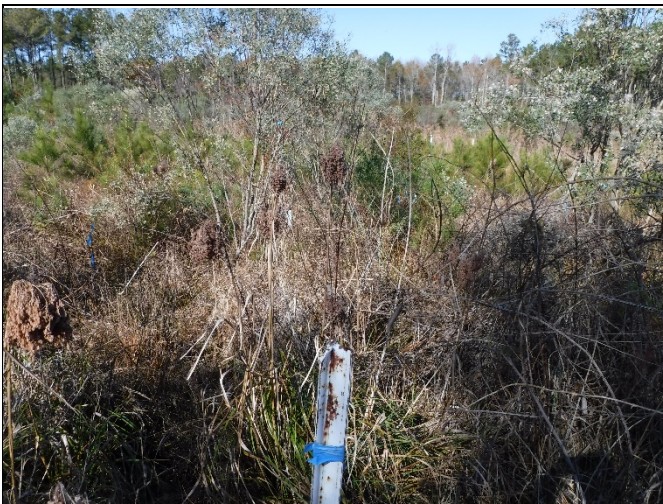

Vegetation Plot 5



Vegetation Plot 6

St. Clair Restoration Site: Vegetation Plot Photos (12/5/19)



Vegetation Plot 7



Vegetation Plot 8



Vegetation Plot 9

St. Clair Restoration Site: Hydrology Monitoring Stations (12/9/19)



Auto Well – SCAW1



Auto Well – SCAW2



Auto Well – SCAW3



Auto Well – SCAW4



Supplemental Auto Well – SCAW5



Supplemental Auto Well – SCAW6

St. Clair Restoration Site: Hydrology Monitoring Stations (12/9/19)



Supplemental Auto Well – SCAW7



Supplemental Auto Well – SCAW8



Supplemental Auto Well – SCAW9



Supplemental Auto Well – SCAW10




Reference Auto Well – SCREF2

St. Clair Restoration Site: Hydrology Monitoring Stations (12/9/19)




Flow Logger (UT2) – SCFL1

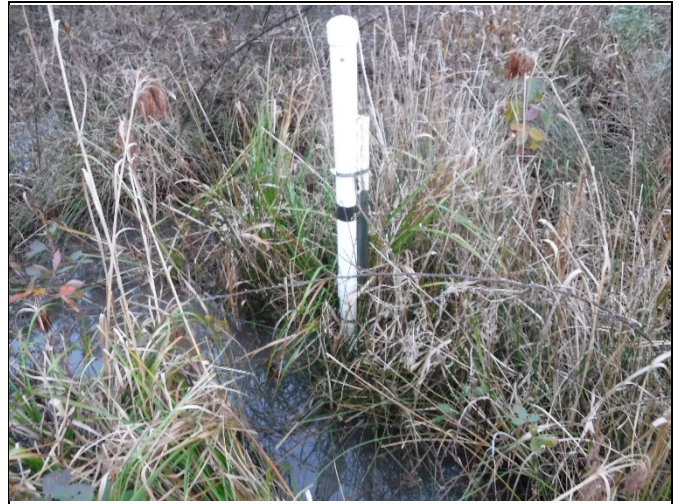


Flow Logger (UT2) – SCFL2



Flow Logger (UT2) – SCFL3

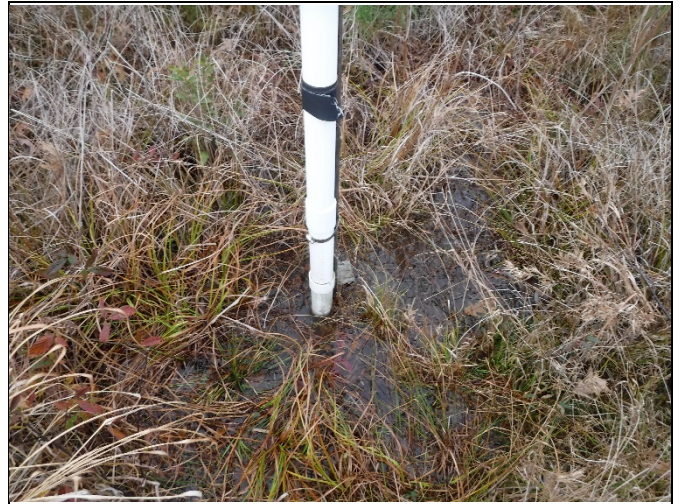

Flow Logger (UT2) – SCFL4

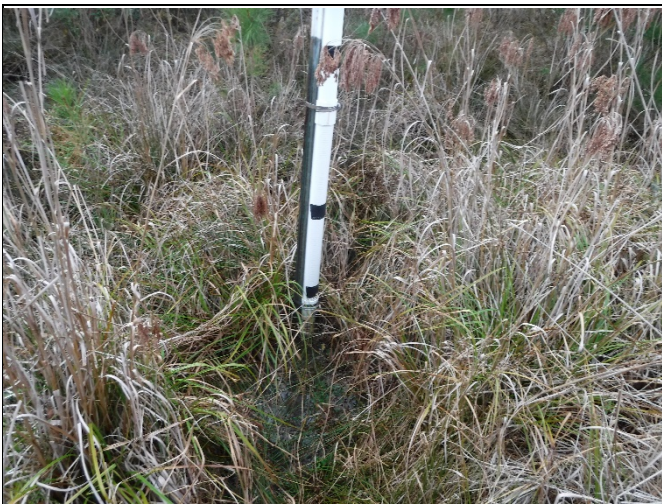


Flow Logger (UT3) – SCFL5



Flow Logger (UT3) – SCFL6

St. Clair Restoration Site: Hydrology Monitoring Stations (12/9/19)

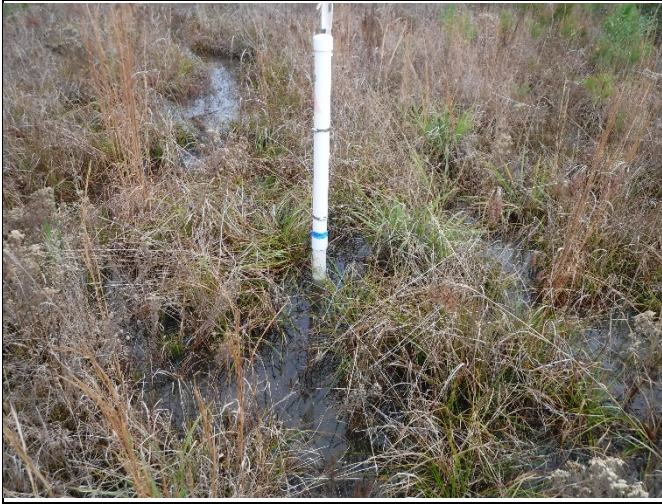

Flow Logger (UT2) – SCFL7

Appendix C

Vegetation Plot Data

Table 7. Vegetation Plot Criteria Attainment			
St. Clair Creek Restoration Project: DMS Project ID No. 95015			
Plot ID	Vegetation Survival Threshold Met?	MY6 Planted Density / As-built Planted Stem Density*	Tract Mean
1	Y	486/728	594
2	Y	647/648	
3	Y	647/688	
4	Y	647/728	
5	Y	526/688	
6	Y	364/486	
7	Y	890/1,174	
8	Y	445/728	
9	Y	688/769	
<p>Note: *MY6 Planted Density / As-built Planted Stem Density - reflects the changes in stem density based on the current total density of planted stems as compared to the original planted stem density from the As-built conditions.</p>			

Table 8. CVS Vegetation Metadata	
St. Clair Creek Restoration Project: DMS Project ID No. 95015	
Report Prepared By	Andrew Powers
Date Prepared	12/16/2019 12:30
database name	MichaelBaker_MY6_2019_StClair_95015.mdb
database location	R:\125116\Monitoring\Post Restoration\Veg Plots\Year 6_2019
computer name	CARYLAPOWERS1
file size	48103424
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
ALL Stems by Plot and spp	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
PROJECT SUMMARY-----	
Project Code	95015
project Name	St Clair Creek Restoration Project
Description	
River Basin	Tar-Pamlico
length(ft)	
stream-to-edge width (ft)	
area (sq m)	
Required Plots (calculated)	
Sampled Plots	9

Table 9a. CVS Stem Count of Planted Stems by Plot and Species
St. Clair Creek Restoration Project: DMS Project ID No. 95015

Comment	Species	Species Type	Common Name	Total Planted Stems	# Plots	Avg# stems	plot 95015-01-0001-year:4	plot 95015-01-0002-year:4	plot 95015-01-0003-year:4	plot 95015-01-0004-year:4	plot 95015-01-0005-year:4	plot 95015-01-0006-year:4	plot 95015-01-0007-year:4	plot 95015-01-0008-year:4	plot 95015-01-0009-year:4	
	<i>Aronia arbutifolia</i>	Shrub	Red Chokeberry	5	2	2.5		4								1
	<i>Carpinus caroliniana</i>	Shrub Tree	American hornbeam	4	3	1.33		1						1		2
	<i>Clethra alnifolia</i>	Shrub	coastal sweetpepperbush	1	1	1	1									
	<i>Fraxinus pennsylvanica</i>	Tree	green ash	5	4	1.25	2			1				1		1
	<i>Morella cerifera</i>	Shrub Tree	wax myrtle	2	2	1						1			1	
	<i>Nyssa sylvatica</i>	Tree	blackgum	7	3	2.33		1						4	2	
	<i>Persea palustris</i>	Tree	swamp bay	6	2	3									2	4
	<i>Quercus laurifolia</i>	Tree	laurel oak	9	3	3	1		3			5				
	<i>Quercus lyrata</i>	Tree	overcup oak	14	7	2	4	2	1			2		2	1	2
	<i>Quercus michauxii</i>	Tree	swamp chestnut oak	27	6	4.5	1	4		4	5	5	8			
	<i>Quercus phellos</i>	Tree	willow oak	10	5	2			5	1	1	1	2			
	<i>Taxodium distichum</i>	Tree	bald cypress	16	4	4		4	3	8			1			
	<i>Ulmus americana</i>	Tree	American elm	19	6	3.17	1		4	2			1	4		7
	<i>Vaccinium corymbosum</i>	Shrub	highbush blueberry	3	2	1.5	1									2
	<i>Viburnum dentatum</i>	Shrub Tree	southern arrowwood	4	2	2	1									3
Totals:	15	15	15	132			12	16	16	16	13	9	22	11	17	

Table 9b. Stem Count for All Species (Planted and Volunteer) Arranged by Plot
St. Clair Creek Restoration Project: DMS Project ID No. 95015

Botanical Name	Common Name	Plots									
		1	2	3	4	5	6	7	8	9	
Tree Species											
<i>Fraxinus pennsylvanica</i>	green ash	2			1			1		1	
<i>Liquidambar styraciflua</i>	sweetgum				1		1			1	
<i>Nyssa sylvatica</i>	swamp tupelo		1					4	2		
<i>Pinus taeda</i>	loblolly pine	3	1		1	2	1	2		2	
<i>Quercus laurifolia</i>	laurel oak	1		3		5					
<i>Quercus lyrata</i>	overcup oak	6	2	1		2		2	1	2	
<i>Quercus michauxii</i>	swamp chestnut oak	1	4		4	5	7	8			
<i>Quercus phellos</i>	willow oak	1		5	1	1	1	2			
<i>Quercus rubra</i>	red oak				1						
<i>Taxodium distichum</i>	bald cypress		4	3	8		1				
<i>Ulmus americana</i>	American elm	1		4	2		1	4		7	
Shrub Species											
<i>Aronia arbutifolia</i>	Red Chokeberry		4							1	
<i>Baccharis halimifolia</i>	salt myrtle	1	1			2	1	1	1		
<i>Carpinus caroliniana</i>	American hornbeam		1					1		2	
<i>Clethra alnifolia</i>	coastal sweetpepperbush	1									
<i>Morella cerifera</i>	wax myrtle						2		1		
<i>Persea palustris</i>	swamp bay								2	4	
<i>Vaccinium corymbosum</i>	highbush blueberry	1							2		
<i>Viburnum dentatum</i>	southern arrowwood	1							3		
										Average Stems Per Acre	
Stems Per Plot (December 2019)		19	18	16	19	17	15	25	12	20	
Total Stems/Acre Year 6 (December 2019)		769	728	648	769	688	607	1012	486	809	724
Total Stems/Acre Year 5 (December 2018)		809	688	728	647	607	445	1012	486	809	692
Total Stems/Acre Year 4 (October 2017)		1052	1052	809	850	769	405	1133	680	728	831
Total Stems/Acre Year 3 (December 2016)		567	648	648	648	526	364	850	526	688	607
Total Stems/Acre Year 2 (November 2015)		607	648	648	648	526	405	1012	607	688	643
Total Stems/Acre Year 1 (December 2014)		688	648	648	648	648	445	1052	648	728	683
Total Stems/ Acre for Year 0 As-Built (Baseline Data)		728	648	688	728	688	486	1174	728	769	737

Table 9d. Vegetation Summary and Totals
 St. Clair Creek Restoration Project: DMS Project ID No. 95015

**St Clair Creek Restoration Project (#95015)
 Year 6 (16-Dec-2019)**

Vegetation Plot Summary Information

Plot #	Riparian Buffer Stems ¹	Stream/ Wetland Stems ²	Live Stakes	Invasives	Volunteers ³	Total ⁴	Unknown Growth Form
1	9	12	0	0	7	19	0
2	12	16	0	0	2	18	0
3	16	16	0	0	0	16	0
4	16	16	0	0	3	19	0
5	13	13	0	0	4	17	0
6	8	9	0	0	6	15	0
7	n/a	22	0	0	3	25	0
8	n/a	11	0	0	1	12	0
9	n/a	17	0	0	3	20	0

Wetland/Stream Vegetation Totals

(per acre)

Plot #	Stream/ Wetland Stems ²	Volunteers ³	Total ⁴	Success Criteria Met?
1	486	283	769	Yes
2	647	81	728	Yes
3	647	0	648	Yes
4	647	121	769	Yes
5	526	162	688	Yes
6	364	243	607	Yes
7	890	121	1012	Yes
8	445	41	486	Yes
9	688	121	809	Yes
Project Avg	594	130	724	Yes

Riparian Buffer Vegetation Totals

(per acre)

Plot #	Riparian Buffer Stems ¹	Success Criteria Met?
1	364	Yes
2	486	Yes
3	647	Yes
4	647	Yes
5	526	Yes
6	324	Yes
7*	n/a	n/a
8*	n/a	n/a
9*	n/a	n/a
Project Avg	499	Yes

*These plots are not located in areas receiving riparian buffer credits

Stem Class	Characteristics	Color for Density
¹ Buffer Stems	Native planted hardwood stems including trees and native shrub species. No pines. No vines.	Exceeds requirements by 10%
² Stream/ Wetland Stems	Native planted woody stems. Includes shrubs, does NOT include live stakes. No vines	Exceeds requirements, but by less than 10%
³ Volunteers	Native woody stems. Not planted. No vines.	
⁴ Total	Planted + volunteer native woody stems. Includes live stakes. Excl. exotics. Excl. vines.	

Appendix D

Hydrologic Data

Table 10. Wetland Restoration Area Well Success
St. Clair Creek Restoration Project: Project ID No. 95015

Well ID	Percentage of Consecutive Days <12 inches from Ground Surface ¹						Most Consecutive Days Meeting Criteria ²						Percentage of Cumulative Days <12 inches from Ground Surface						Cumulative Days Meeting Criteria ³					
	Year 1 (2014)	Year 2 (2015)	Year 3 (2016)	Year 4 (2017)	Year 5 (2018)	Year 6 (2019)	Year 1 (2014)	Year 2 (2015)	Year 3 (2016)	Year 4 (2017)	Year 5 (2018)	Year 6 (2019)	Year 1 (2014)	Year 2 (2015)	Year 3 (2016)	Year 4 (2017)	Year 5 (2018)	Year 6 (2019)	Year 1 (2014)	Year 2 (2015)	Year 3 (2016)	Year 4 (2017)	Year 5 (2018)	Year 6 (2019)
Wetland Monitoring Wells (Installed September 2013)																								
SCAW1	1.0	12.3	13.1	33.7	23.0	13.1	3	35	37	95	65	37	8.5	39.3	61.7	68.1	68.1	40.1	24	111	174	192	192	113
SCAW2	3.8	3.3	9.2	10.6	13.1	12.8	11	9	26	30	37	36	30.6	16.1	19.9	51.1	59.9	41.1	86	46	56	144	169	116
SCAW3	2.3	13.4	9.6	11.0	13.1	12.4	7	38	27	31	37	35	9.4	37.5	44.3	26.2	47.2	33.0	27	106	125	74	133	93
SCAW4	7.8	12.3	6.0	11.0	22.3	13.1	22	35	17	31	63	37	17.3	20.3	35.8	25.9	57.8	25.5	49	57	101	73	163	72
Supplemental Wetland Monitoring Wells (Installed April 2016)**																								
SCAW5*	--	--	12.8	11.3	23.4	21.6	--	--	36	32	66	61	--	--	46.8	69.9	68.1	47.9	--	--	132	197	192	135
SCAW6*	--	--	3.9	10.3	12.4	12.8	--	--	11	29	35	36	--	--	19.9	32.6	53.9	33.0	--	--	56	92	152	93
SCAW7*	--	--	9.6	11.3	22.3	13.1	--	--	27	32	63	37	--	--	33.0	38.3	55.0	27.3	--	--	93	108	155	77
SCAW8*	--	--	4.6	11.3	12.8	12.4	--	--	13	32	36	35	--	--	22.0	23.8	50.0	19.1	--	--	62	67	141	54
Supplemental Wetland Monitoring Wells (Installed March 2017)**																								
SCAW9*	--	--	--	9.9	12.1	11.0	--	--	--	28	34	31	--	--	--	45.4	55.0	36.2	--	--	--	128	155	102
SCAW10*	--	--	--	9.9	12.4	8.2	--	--	--	28	35	23	--	--	--	28.7	36.5	20.9	--	--	--	81	103	59
Reference Wells (Installed September 2013)																								
SCAWREF1	24.8	57.9	40.9	41.1	--	--	70	163	115	116	--	--	46.4	93.7	77.9	70.1	--	--	131	264	220	198	--	--
SCAWREF2	27.0	60.1	43.8	40.9	38.2	21.6	66	170	124	115	108	61	44.5	94.1	76.9	67.1	66.5	26.6	126	257	217	189	188	75

¹Indicates the percentage of the single greatest consecutive number of days within the monitored growing season with a water table 12 inches or less from the soil surface.

²Indicates the single greatest consecutive number of days within the monitored growing season with a water table 12 inches or less from the soil surface.

³Indicates the total number of days within the monitored growing season with a water table 12 inches or less from the soil surface.


Growing season for Beaufort County is from February 28 to December 6 and is **282** days long. 12% of the growing season is **33.8** days.

Note: The hydric Tomotley soil series present in the wetlands on site is listed as having an average hydroperiod of between **10-12%** in the IRT monitoring guidance document issued Oct. 2016


HIGHLIGHTED indicates wells that *did not* meet the success criteria for the most consecutive number of days within the monitored Year 6 growing season with a water 12 inches or less from the soil surface. For Year 6 wetland monitoring, all eight wells located in currently credited wetland areas exhibited hydroperiods greater than 12% during the 2019 growing season.

*To gather additional well data in the wetland restoration area, In-Situ groundwater monitoring dataloggers SCAW5 - SCAW 8 were installed in April 2016, several weeks after the growing season had begun. Two additional In-Situ groundwater monitoring dataloggers SCAW9 and SCAW10 were installed in March 2017, just over two weeks past the start of the growing season in 2017.


Figure 3. Wetland Gauge Graphs

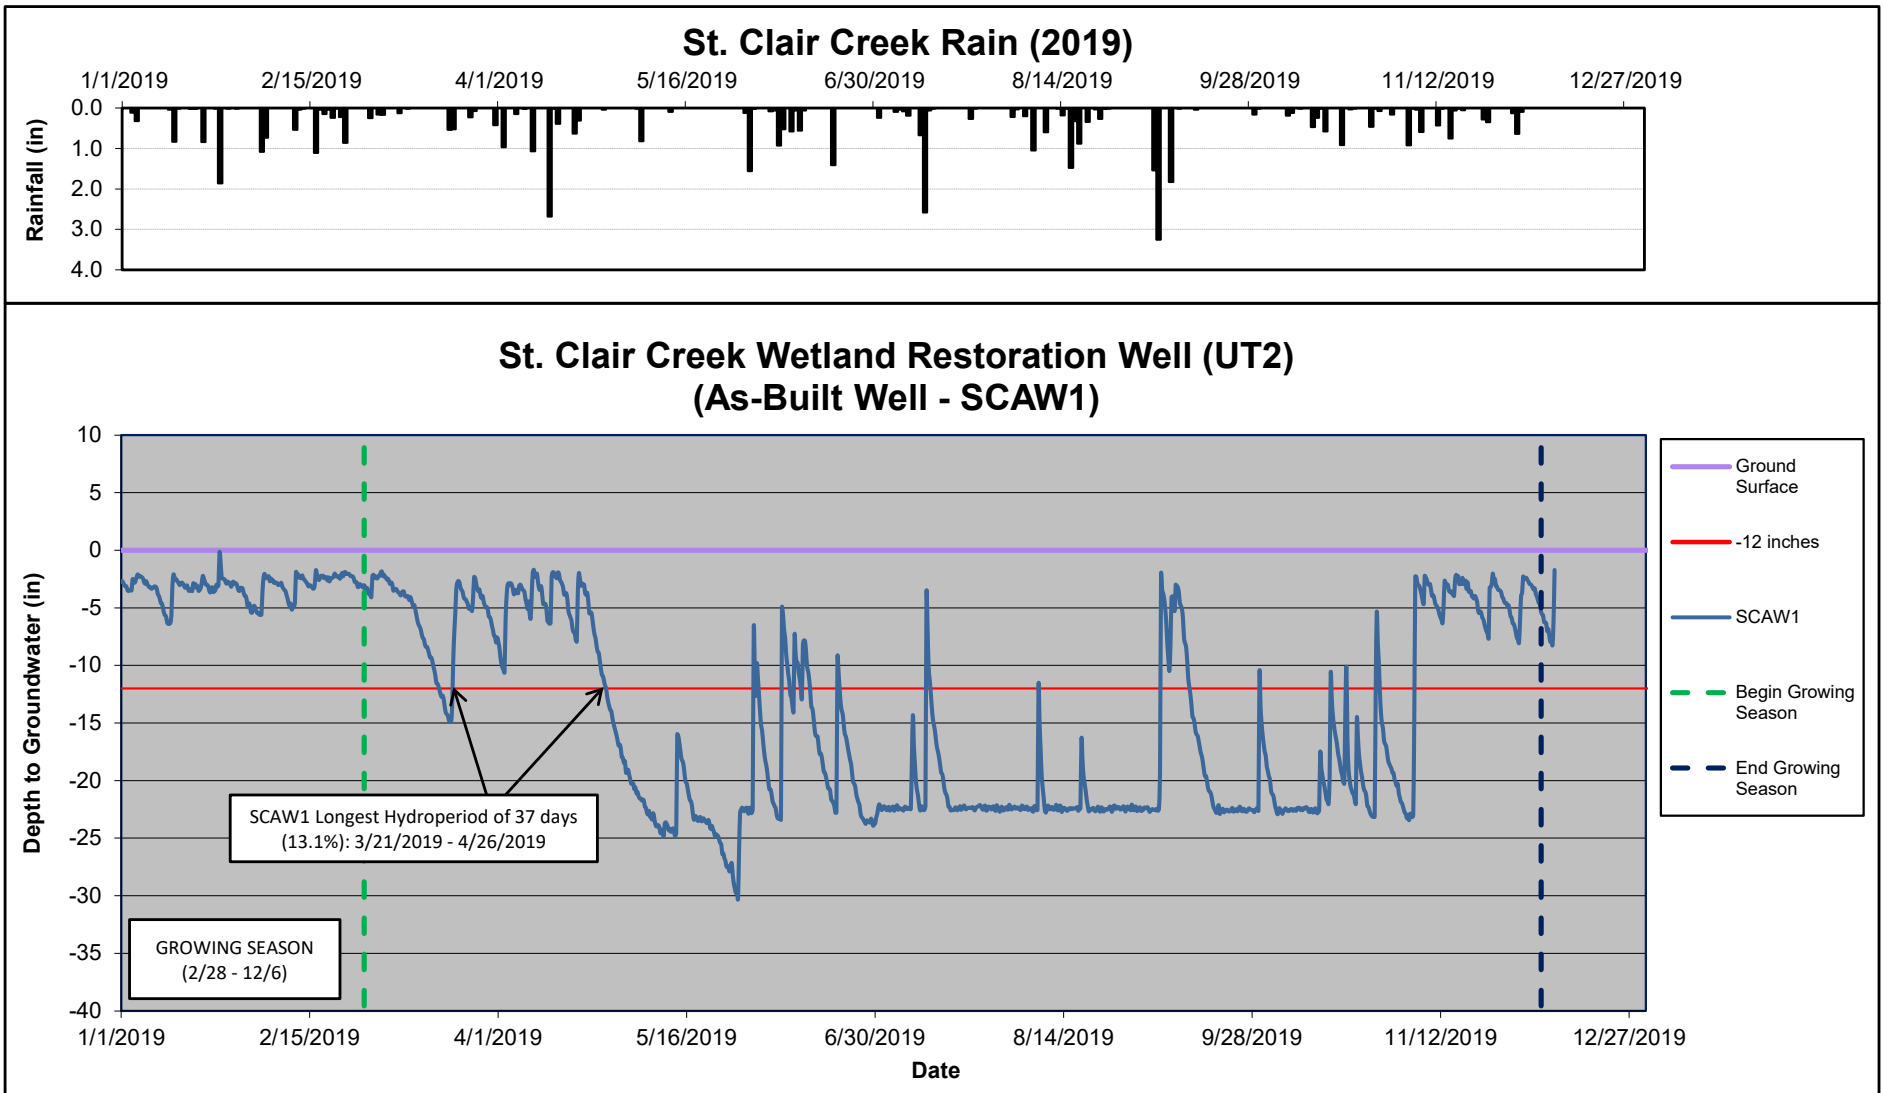


St. Clair Creek Rain (2019)

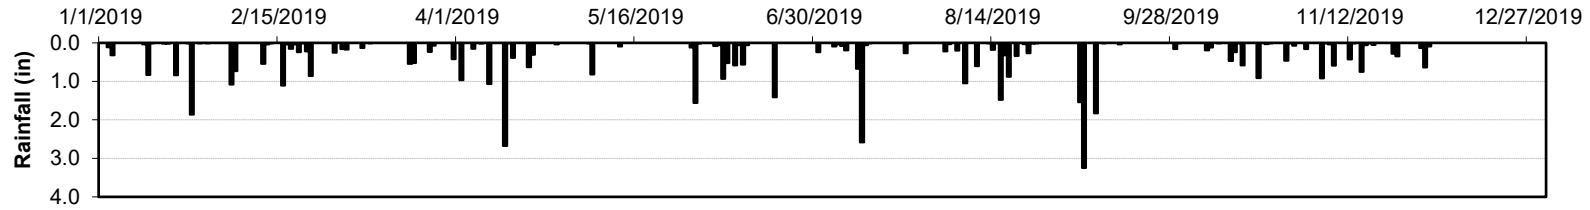


St. Clair Creek Wetland Restoration Well (UT2) (As-Built Well - SCAW2)

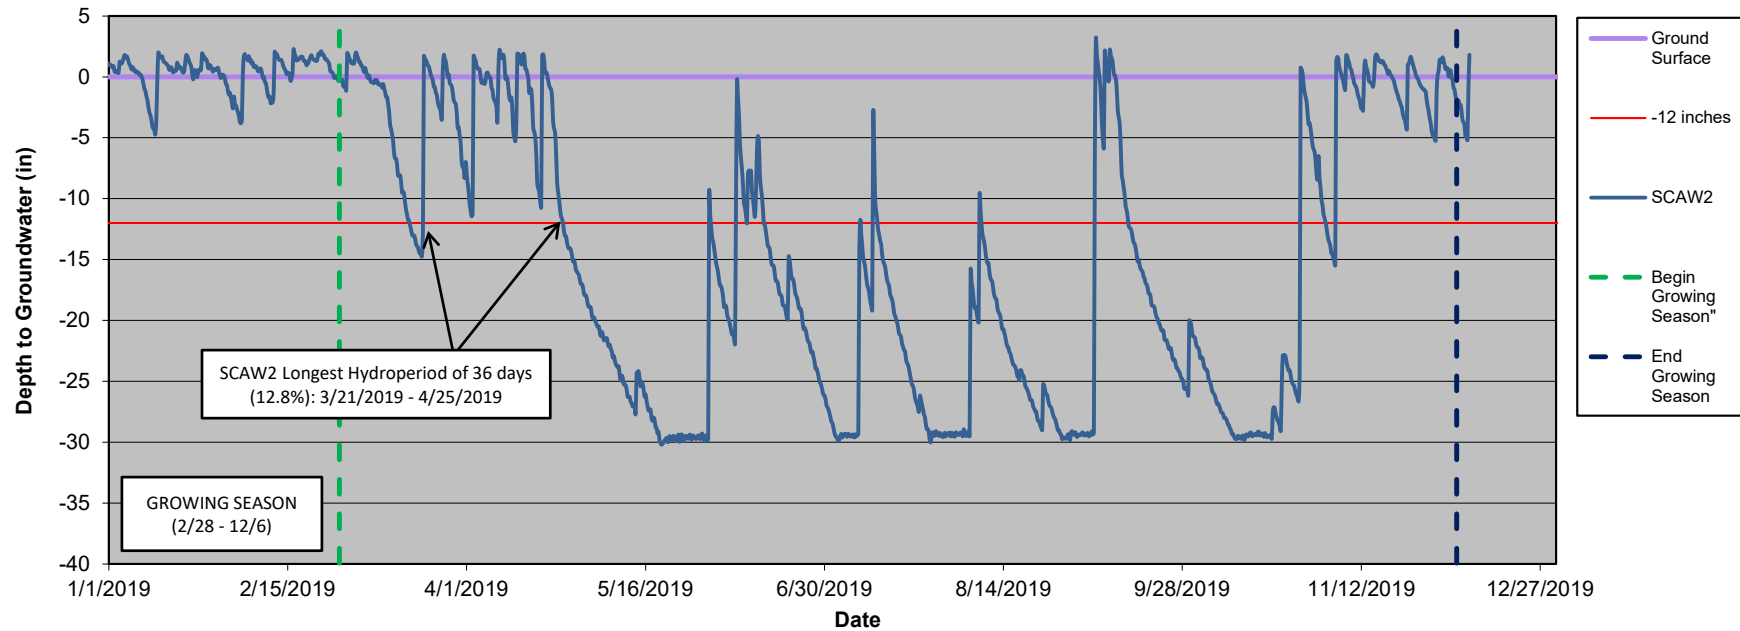


St. Clair Creek Rain (2019)

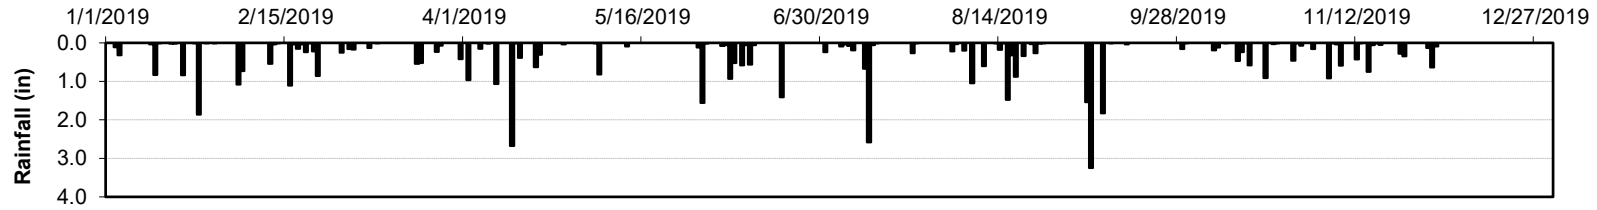


St. Clair Creek Wetland Restoration Well (UT3) (As-Built Well - SCAW3)

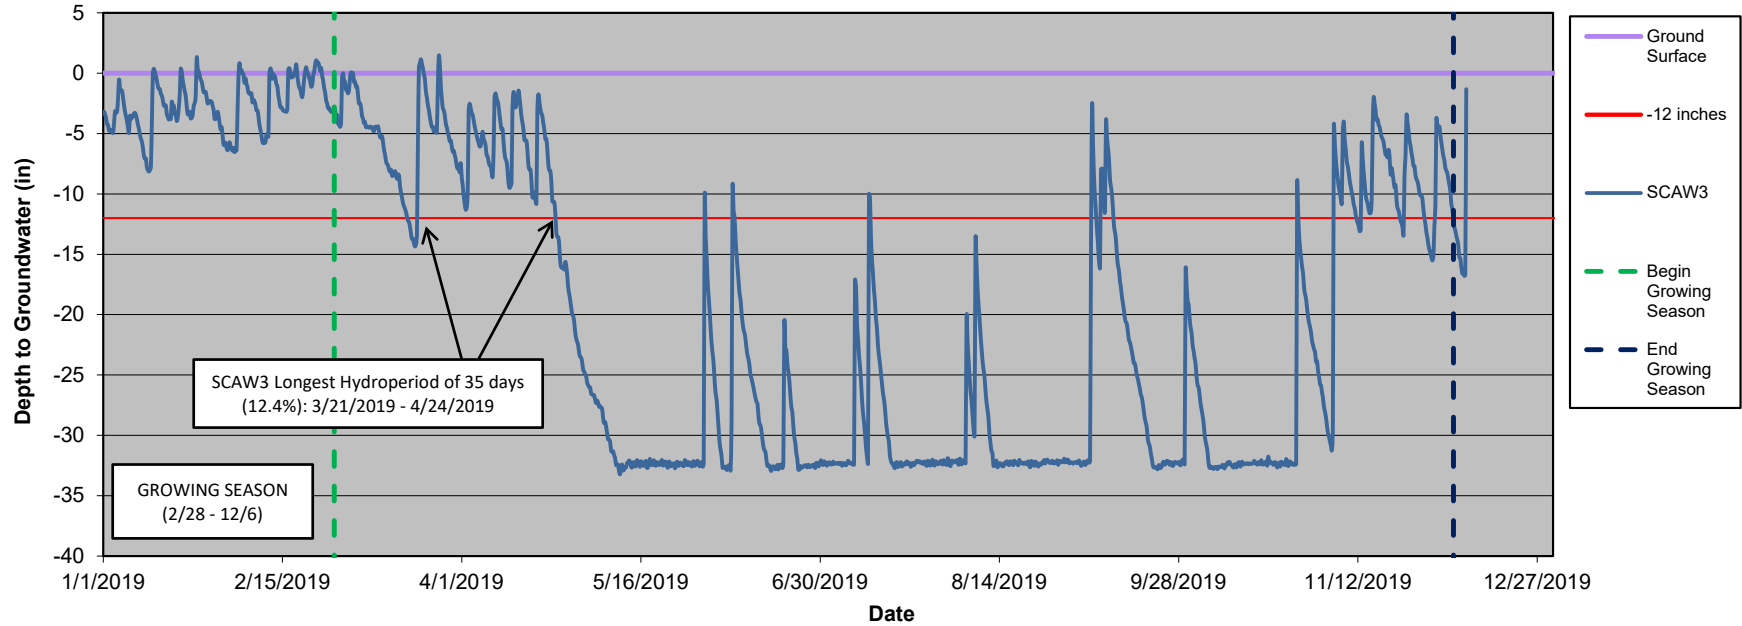


St. Clair Creek Rain (2019)

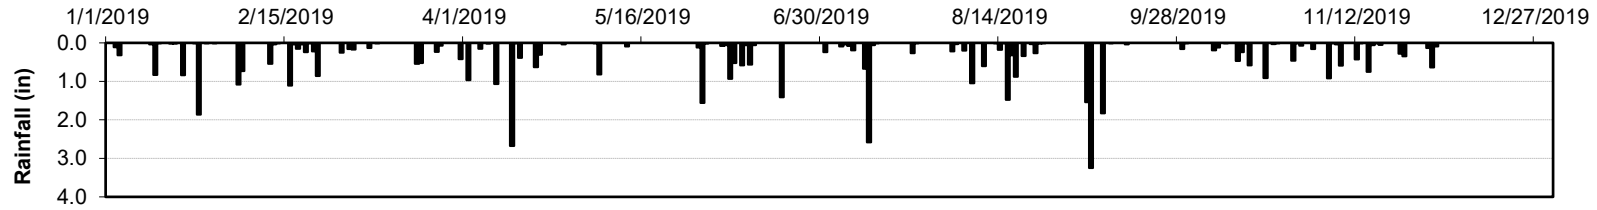


St. Clair Creek Wetland Restoration Well (UT3) (As-Built Well - SCAW4)

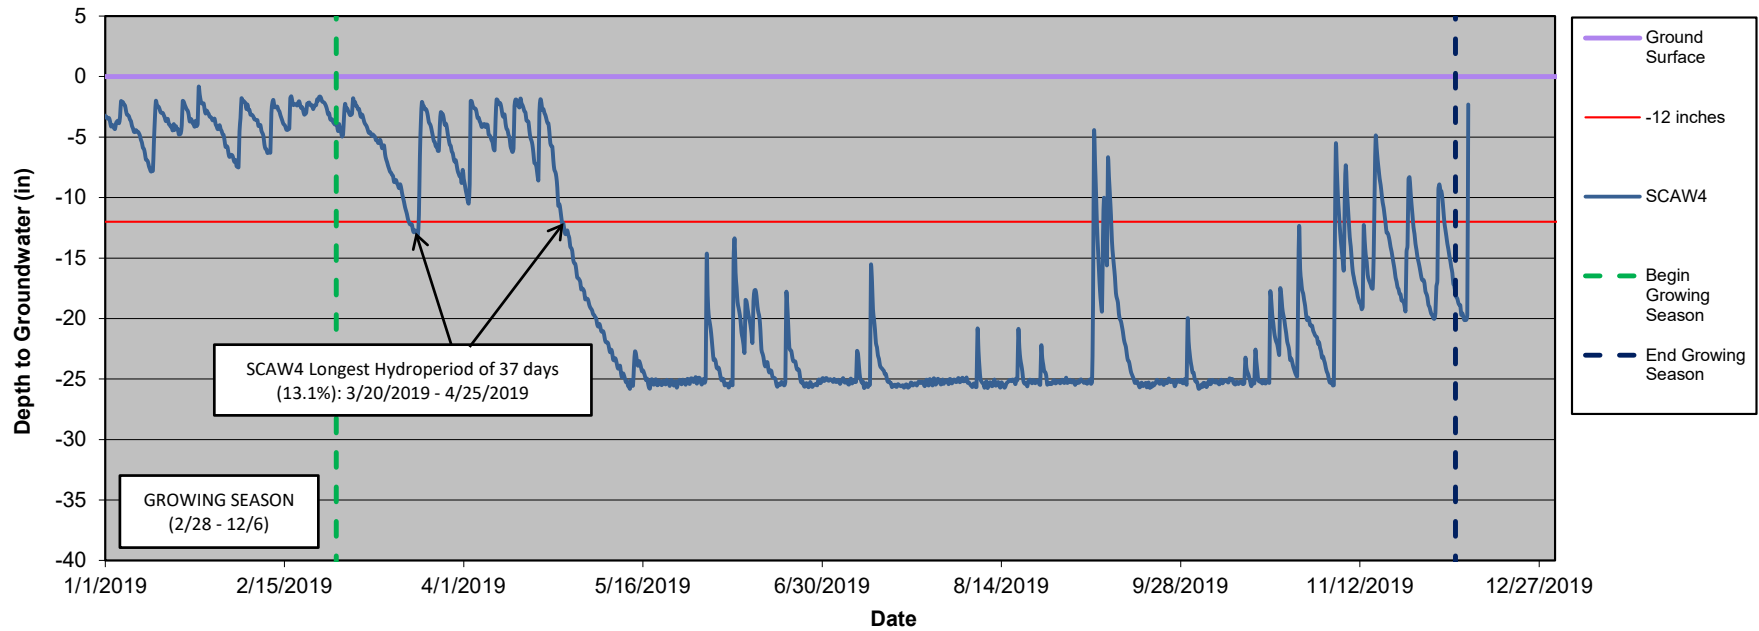


St. Clair Creek Rain (2019)

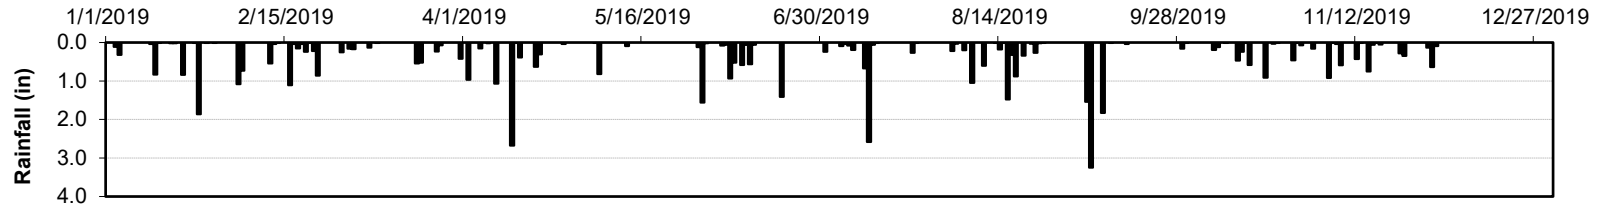


St. Clair Creek Wetland Restoration Well (UT2) (Supplemental Well - SCAW5)

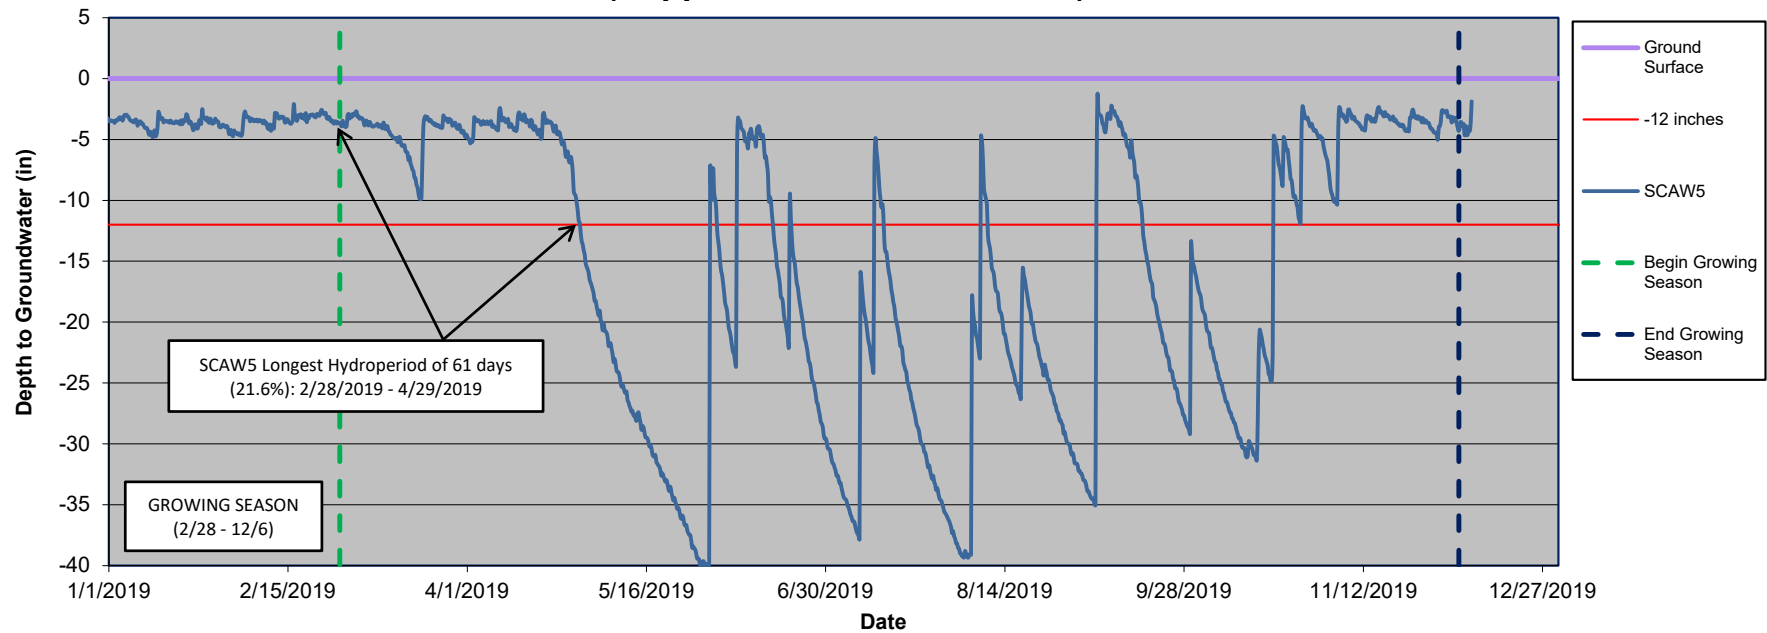


St. Clair Creek Rain (2019)

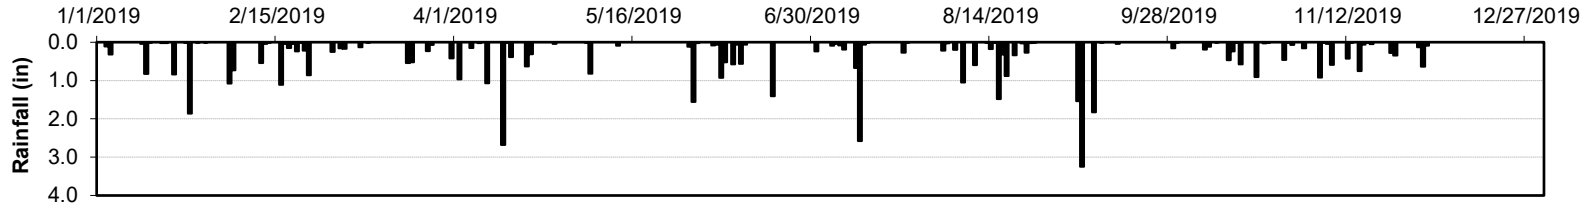


St. Clair Creek Wetland Restoration Well (UT2) (Supplemental Well - SCAW6)

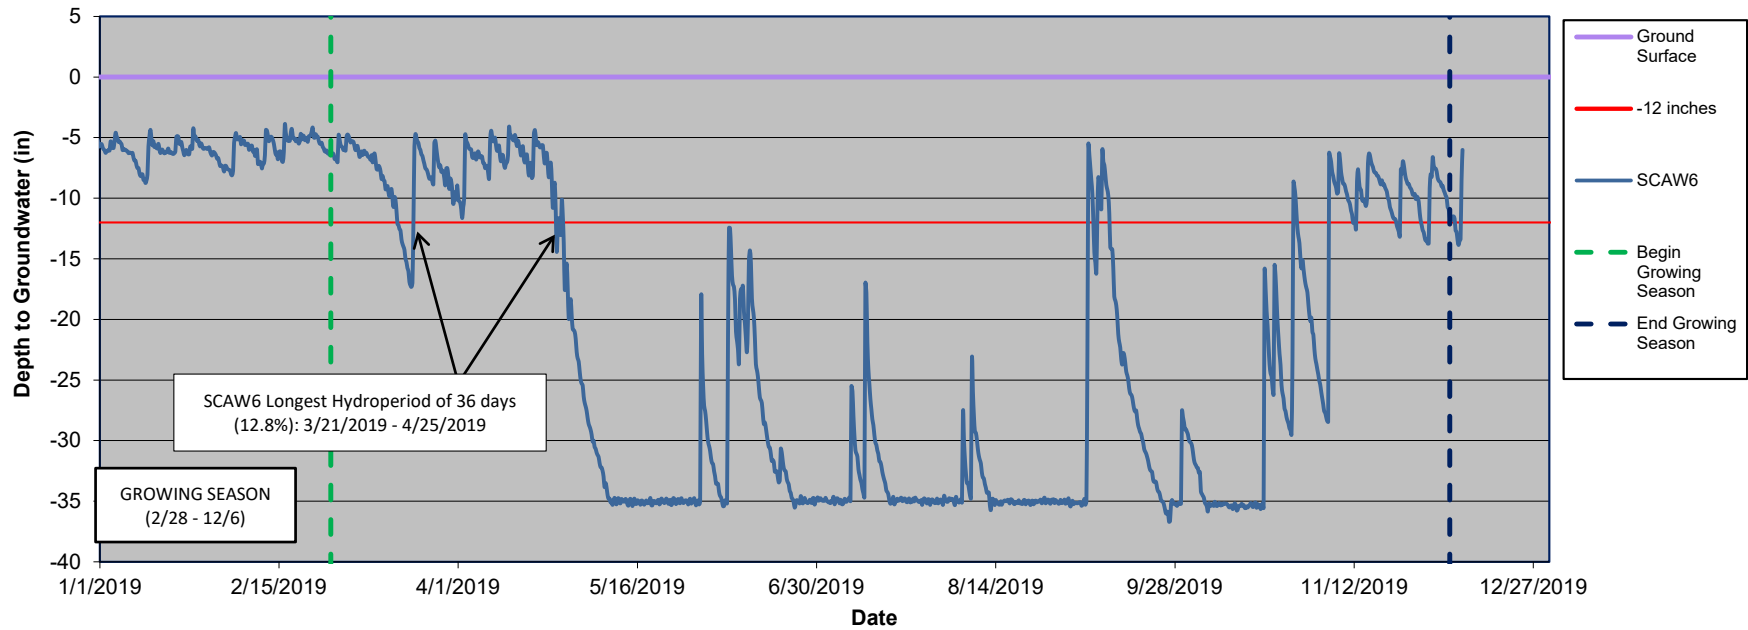


St. Clair Creek Rain (2019)

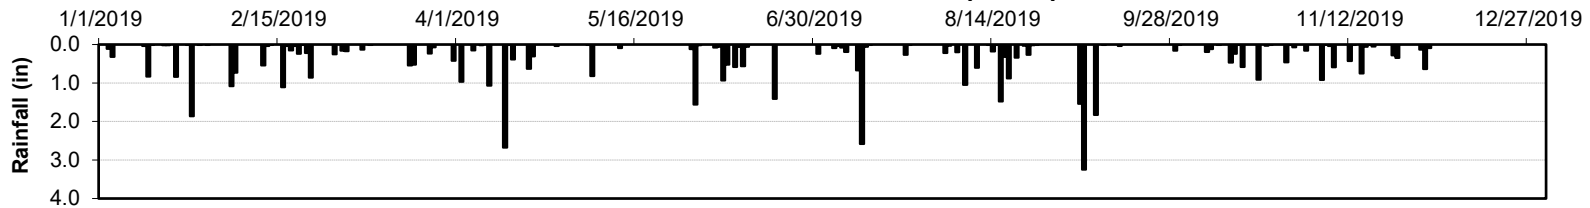


St. Clair Creek Wetland Restoration Well (UT3) (Supplemental Well - SCAW7)

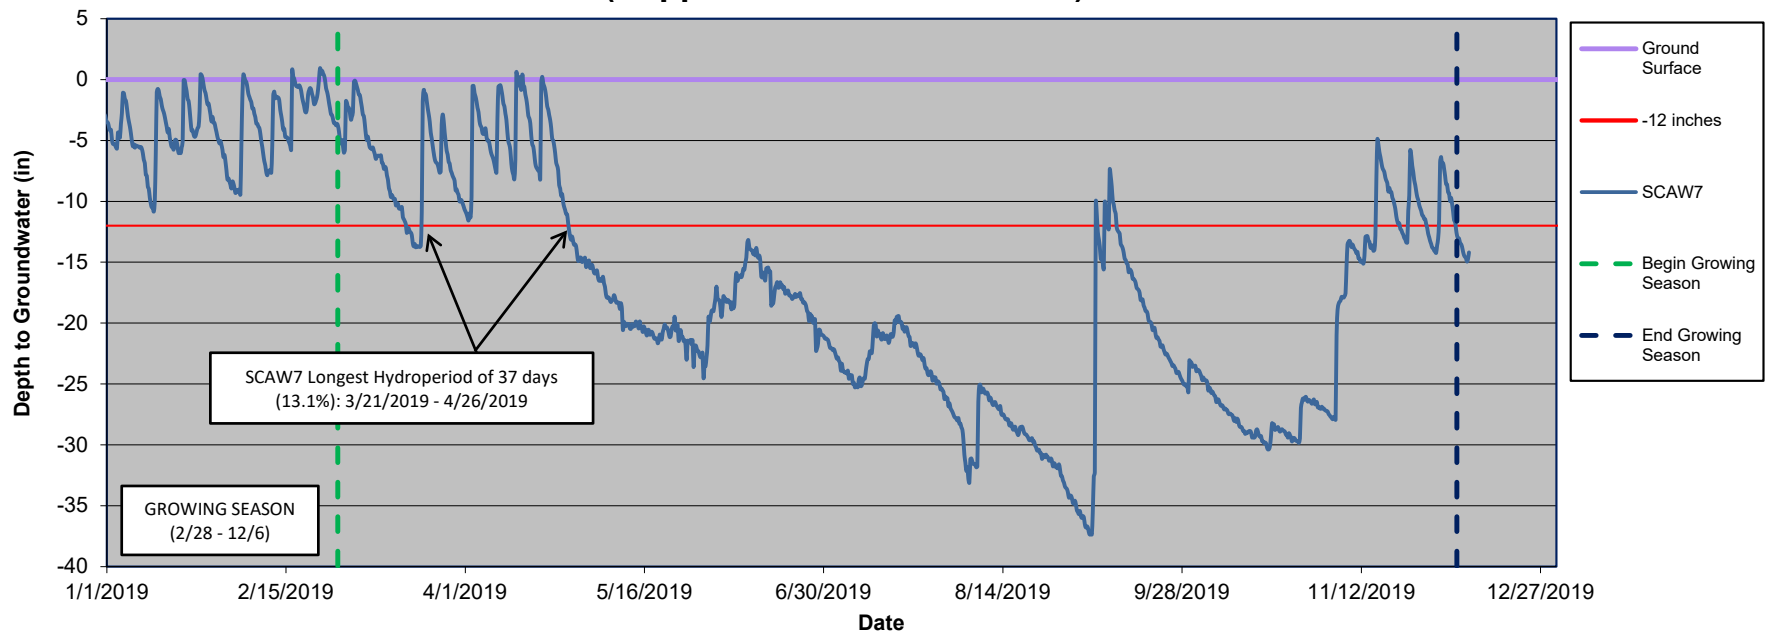


St. Clair Creek Rain (2019)

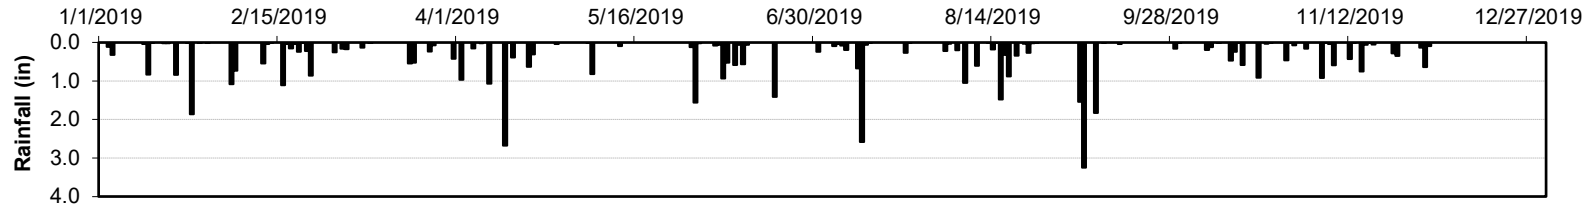


St. Clair Creek Wetland Restoration Well (UT3) (Supplemental Well - SCAW8)

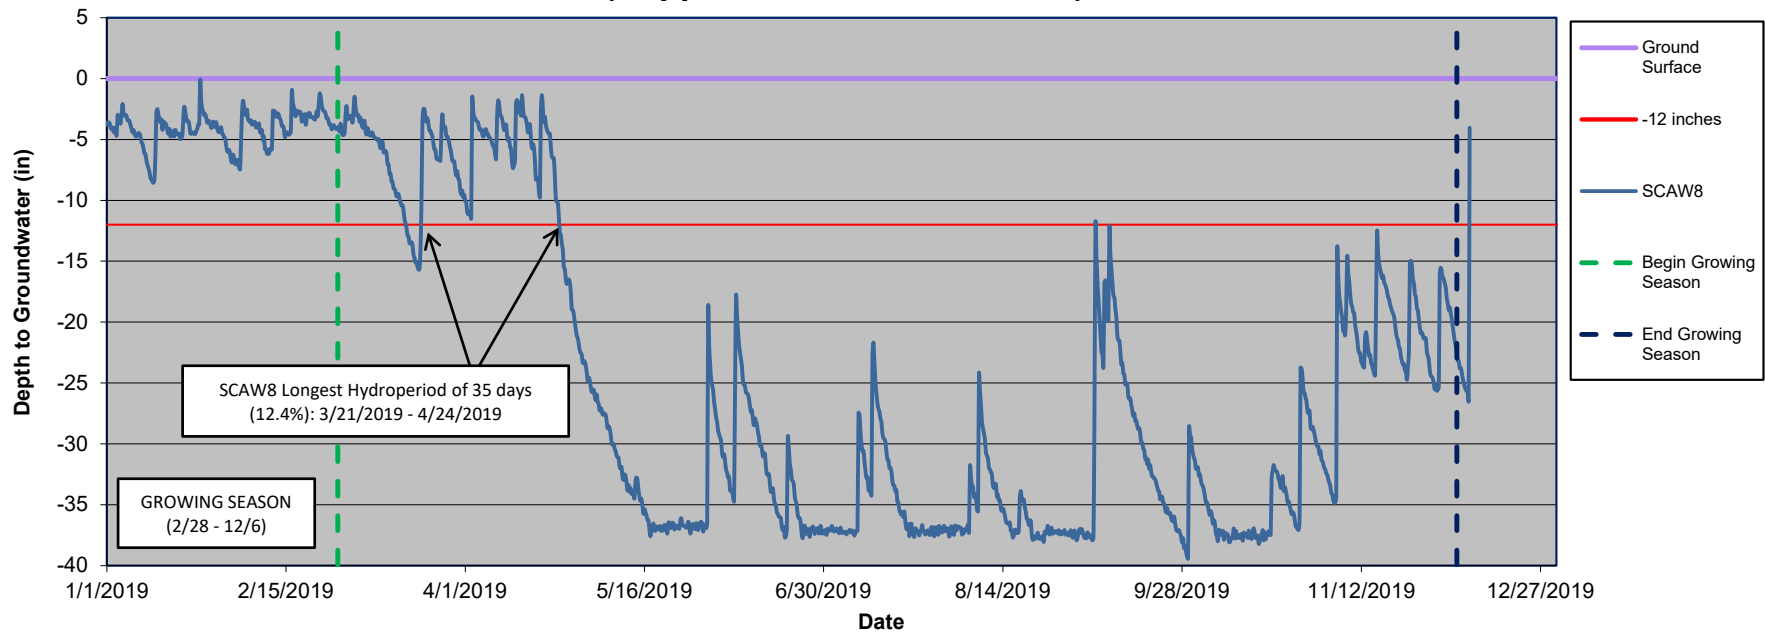


St. Clair Creek Rain (2019)

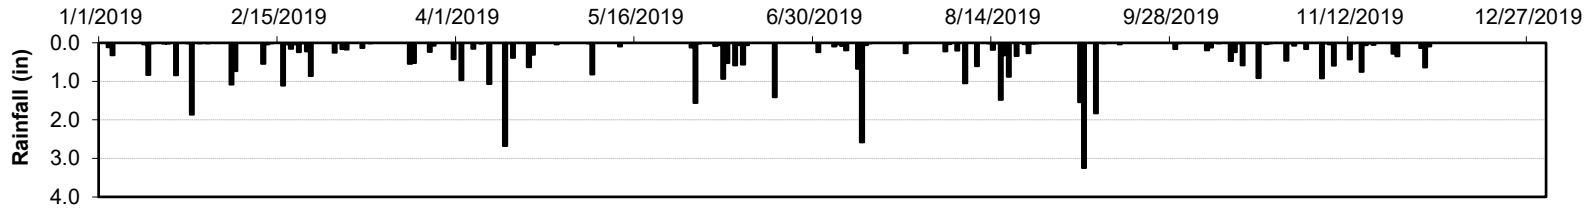


St. Clair Creek Wetland Restoration Well (UT2) (Supplemental Well - SCAW9)

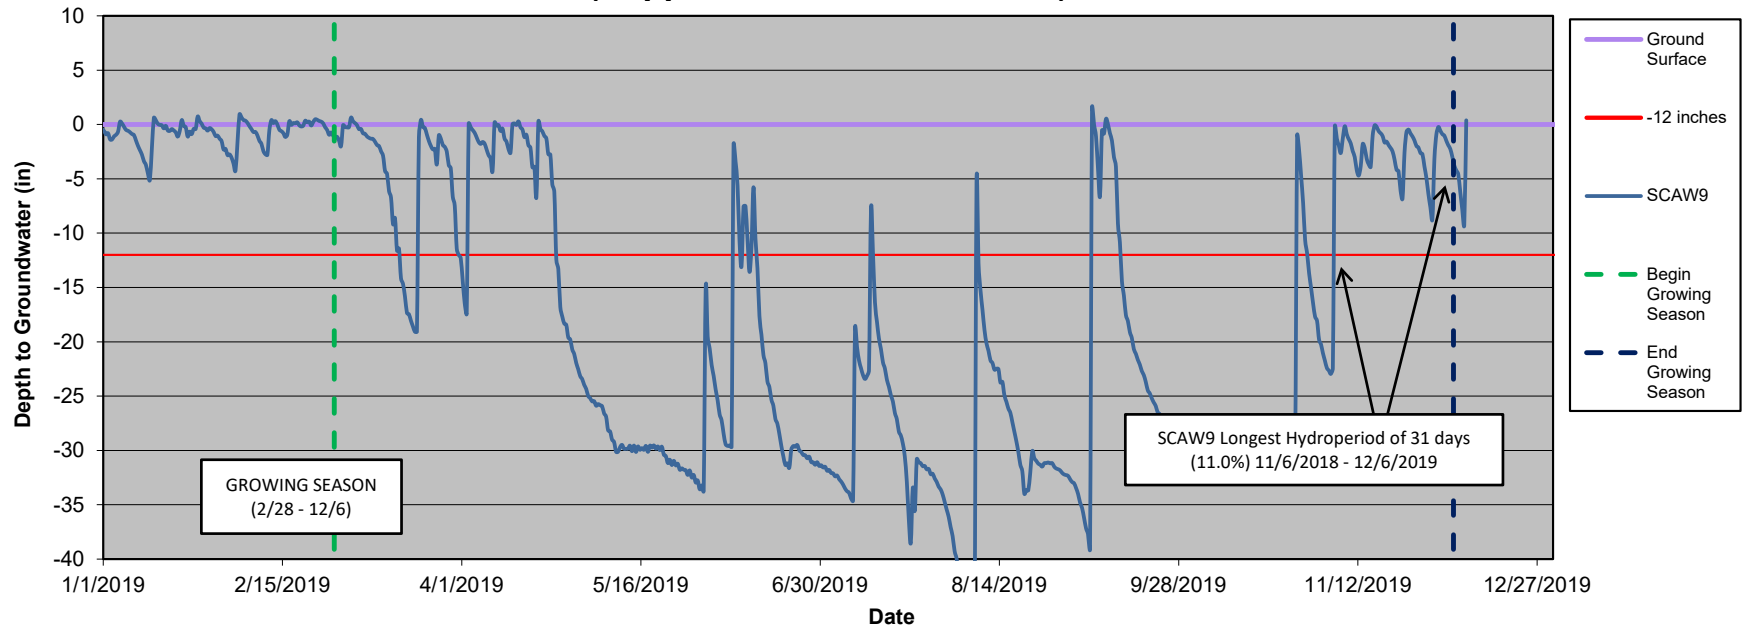


St. Clair Creek Rain (2019)

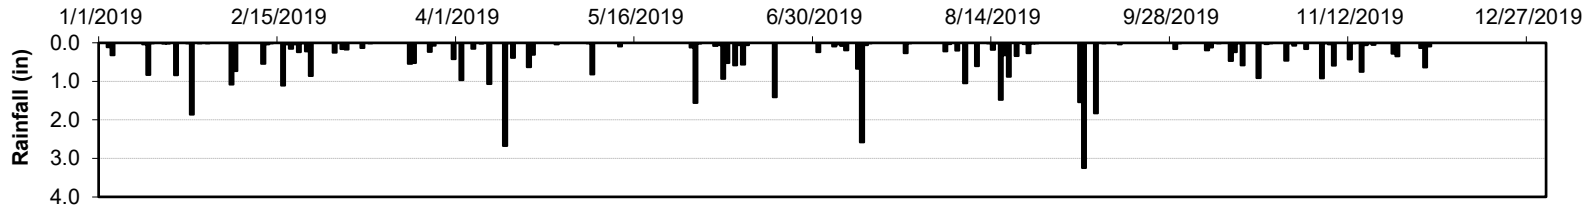

St. Clair Creek Wetland Restoration Well (UT3) (Supplemental Well - SCAW10)

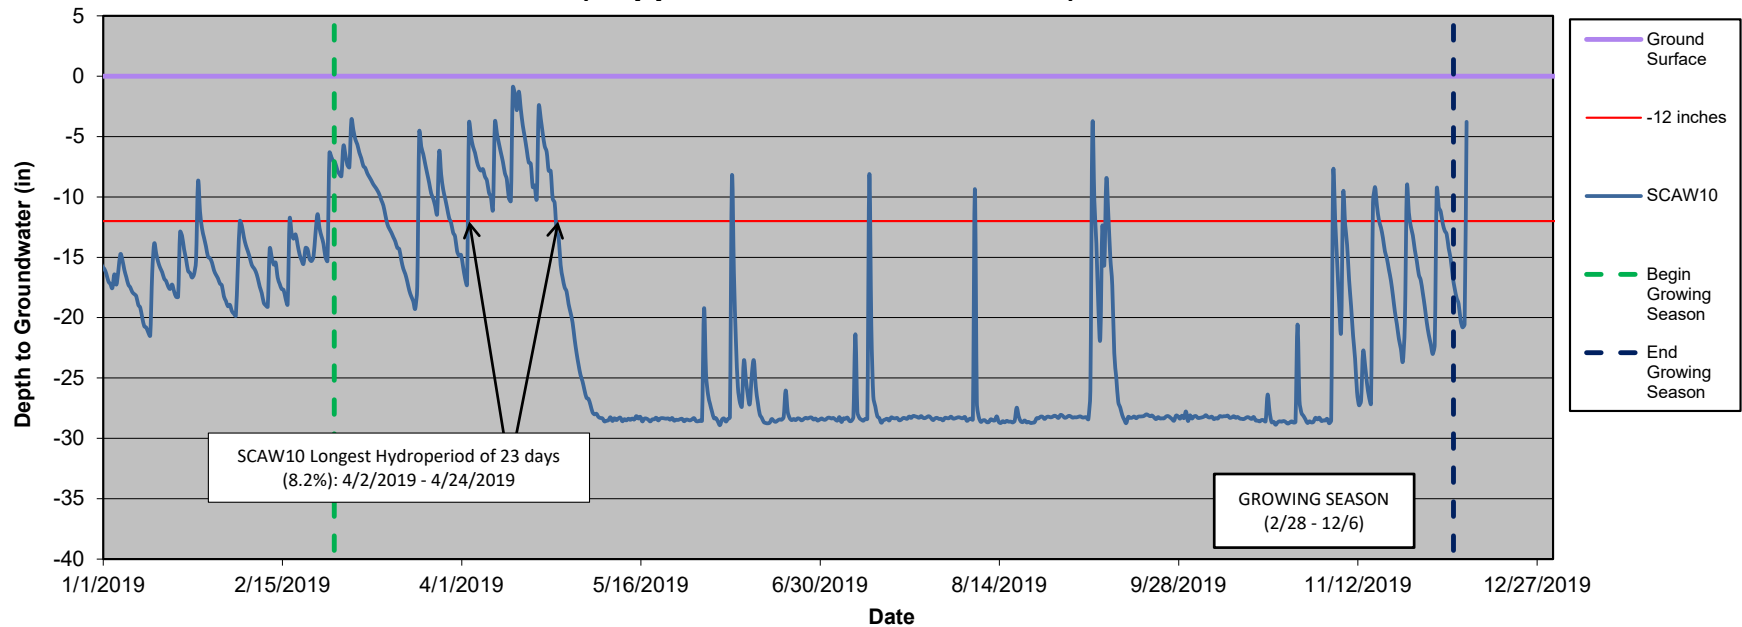

St. Clair Creek Rain (2019)

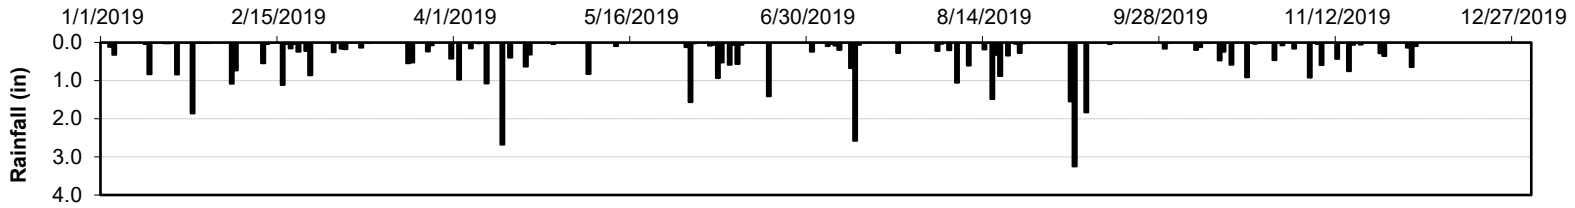

St. Clair Creek Wetland Reference Well (UT3) (REF2)


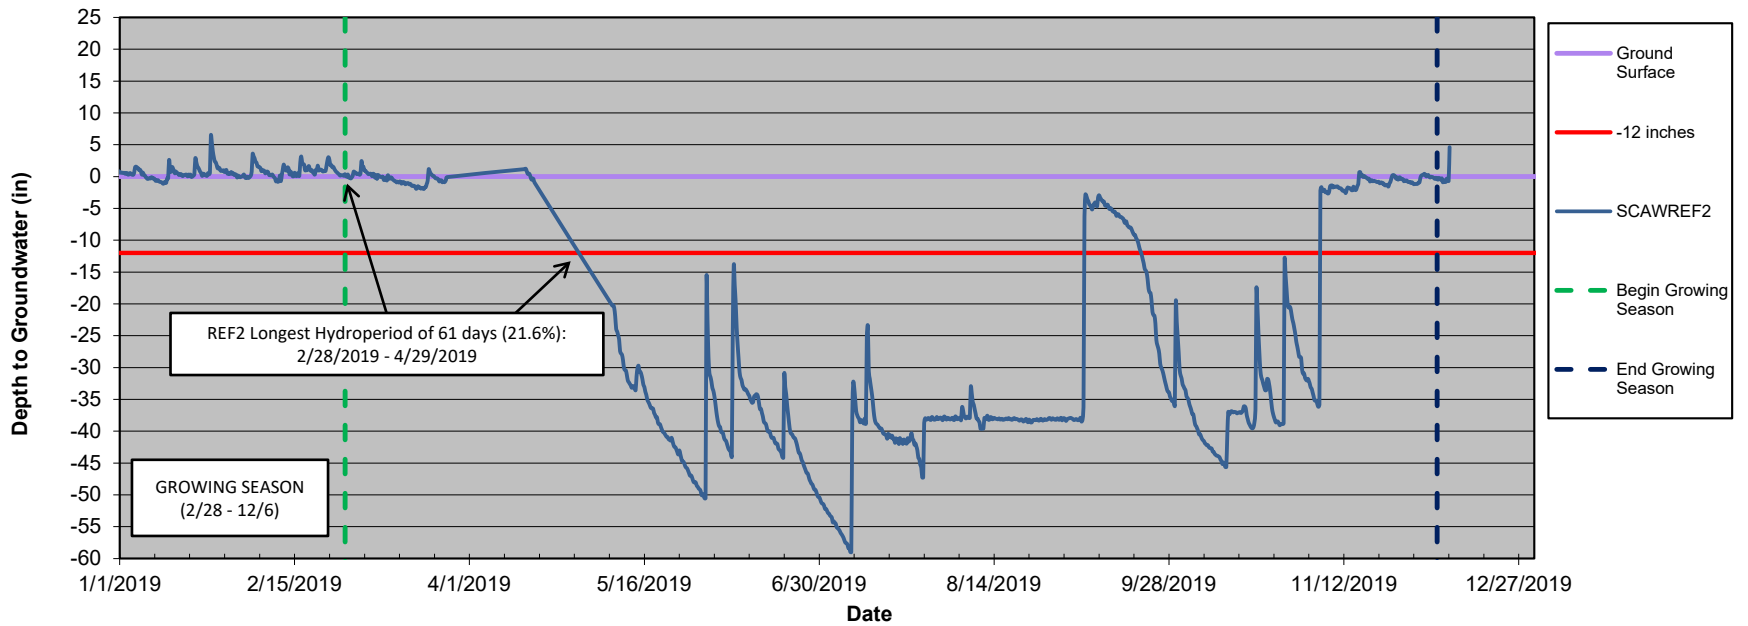



Table 11. Flow Gauge Success														
St. Clair Restoration Project: DMS Project ID No. 95019														
Flow Gauge ID	Most Consecutive Days Meeting Criteria ¹							Cumulative Days Meeting Criteria ²						
	Year 1 (2014)	Year 2 (2015)	Year 3 (2016)	Year 4 (2017)	Year 5 (2018)	Year 6 (2019)	Year 7 (2020)	Year 1 (2014)	Year 2 (2015)	Year 3 (2016)	Year 4 (2017)	Year 5 (2018)	Year 6 (2019)	Year 7 (2020)
UT2 Flow Gauges (Installed March 21, 2014)														
SCFL1	71	43	83	63	152	224		-	206	224	328	363	342	
SCFL2	64	43	84	60	121	121		-	201	232	204	270	214	
SCFL3	61	25	86	35	63	120		-	174	203	287	328	271	
SCFL4	24	17	46	29*	20	38		-	118	124	86	146	85	
UT3 Flow Gauges (Installed July 17, 2015)														
SCFL5	57	44	62	30	57	74		NA	174	162	79	214	327	
SCFL6	5	42	62	30	35	40		NA	116	180	191	214	103	
UT2 Flow Gauge (Installed June 6, 2018)³														
SCFL7	NA	NA	NA	NA	60	117		NA	NA	NA	NA	162	167	
Notes:														
¹ Indicates the single greatest number of consecutive days within the monitoring year where flow was measured.														
² Indicates the number of total number of days within the monitoring year where flow was measured.														
*SCFL4 also recorded a 28-day consecutive flow event in 2017, in addition to the 29-day flow event shown above.														
³ SCFL7 was installed June 6th 2018 to gather additional flow data for upper UT2.														
Success Criteria per St. Clair Creek Mitigation Plan: Two surface water flow events (when flow duration occurs for a minimum of 30 days) must be documented within a five-year monitoring period; otherwise, monitoring will continue for seven years or until two flow events have been documented in separate years. The automated gauges should document the occurrence of extended periods of shallow surface ponding, indicative of flow.														
Surface water flow is estimated to have occurred when the pressure transducer reading is equal to or above 0.25 inches.														

Figure 4. Flow Gauge Graphs

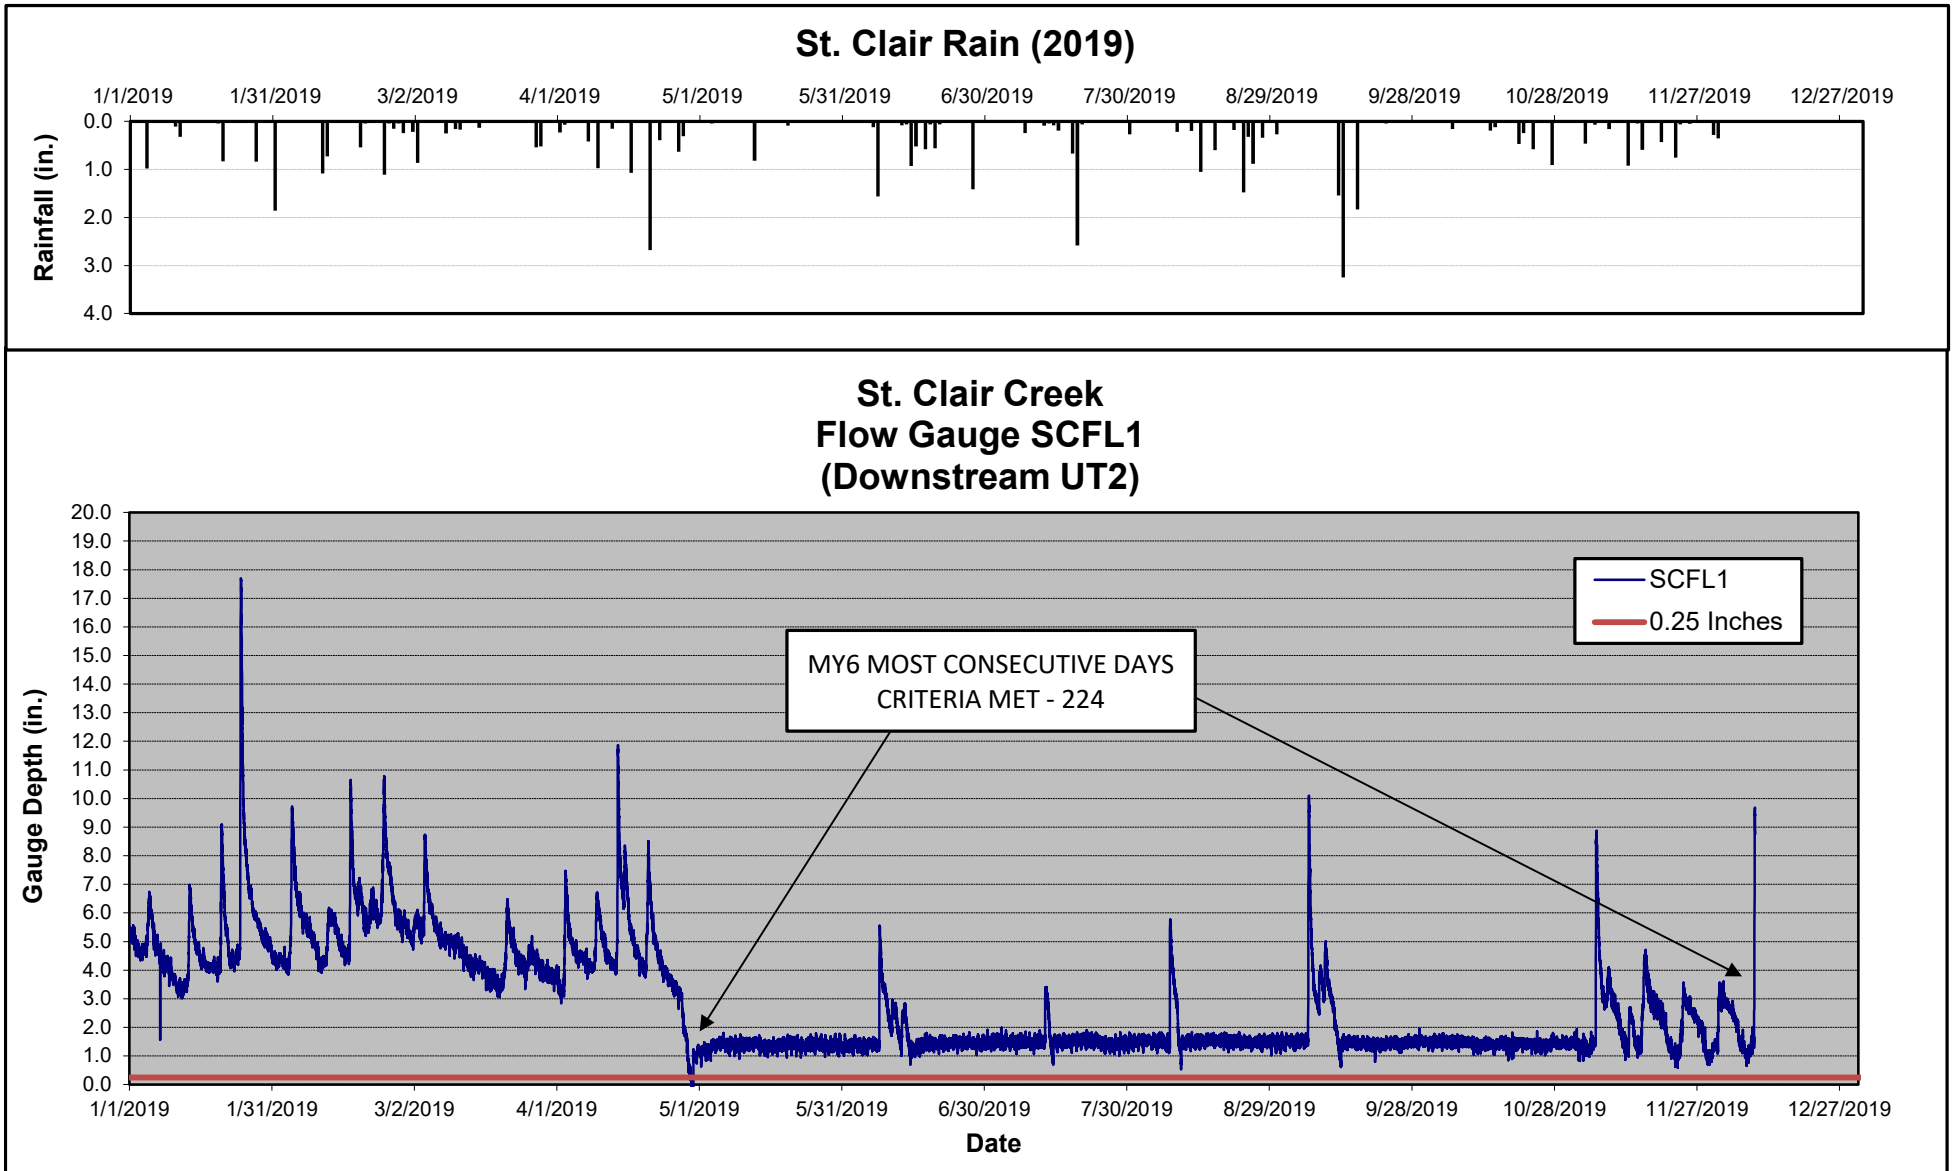


*0.25 inches denotes level at which flow occurs along the UT2 valley thalweg

St. Clair Rain (2019)

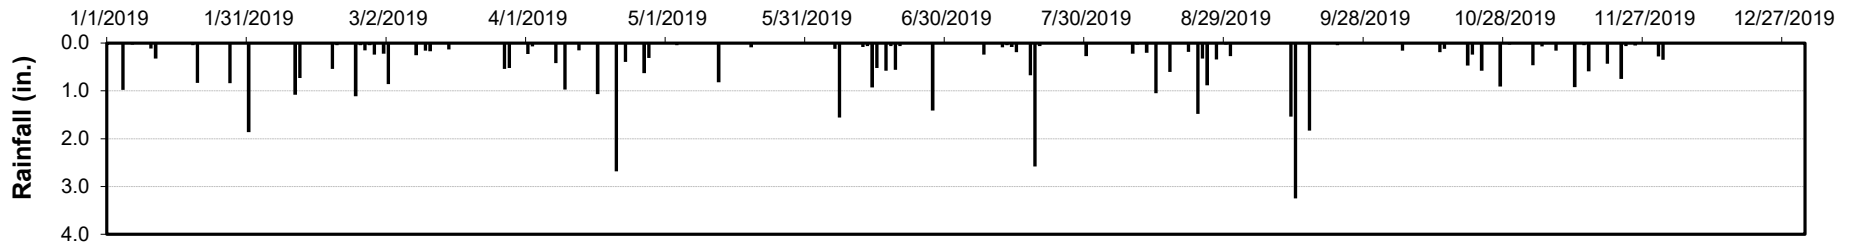


St. Clair Creek Flow Gauge SCFL2 (Downstream UT2)

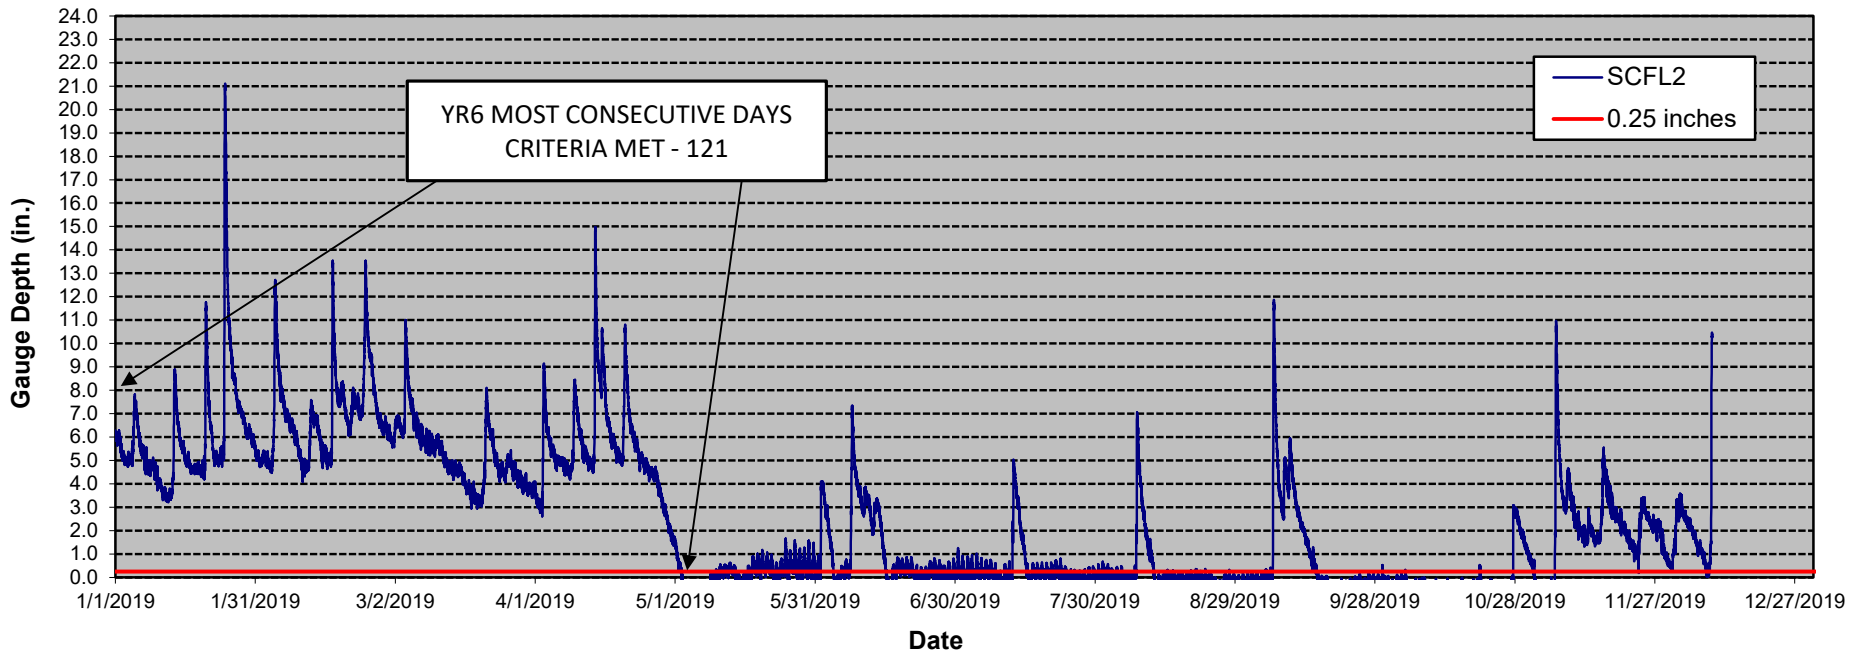


*0.25 inches denotes level at which flow occurs along the UT2 valley thalweg

St. Clair Rain (2019)

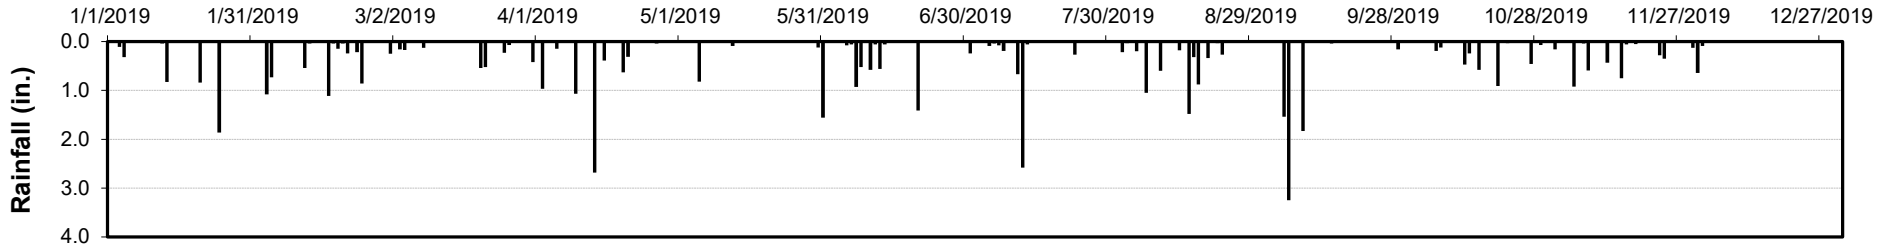


St. Clair Creek Flow Gauge SCFL3 (Upstream UT2)

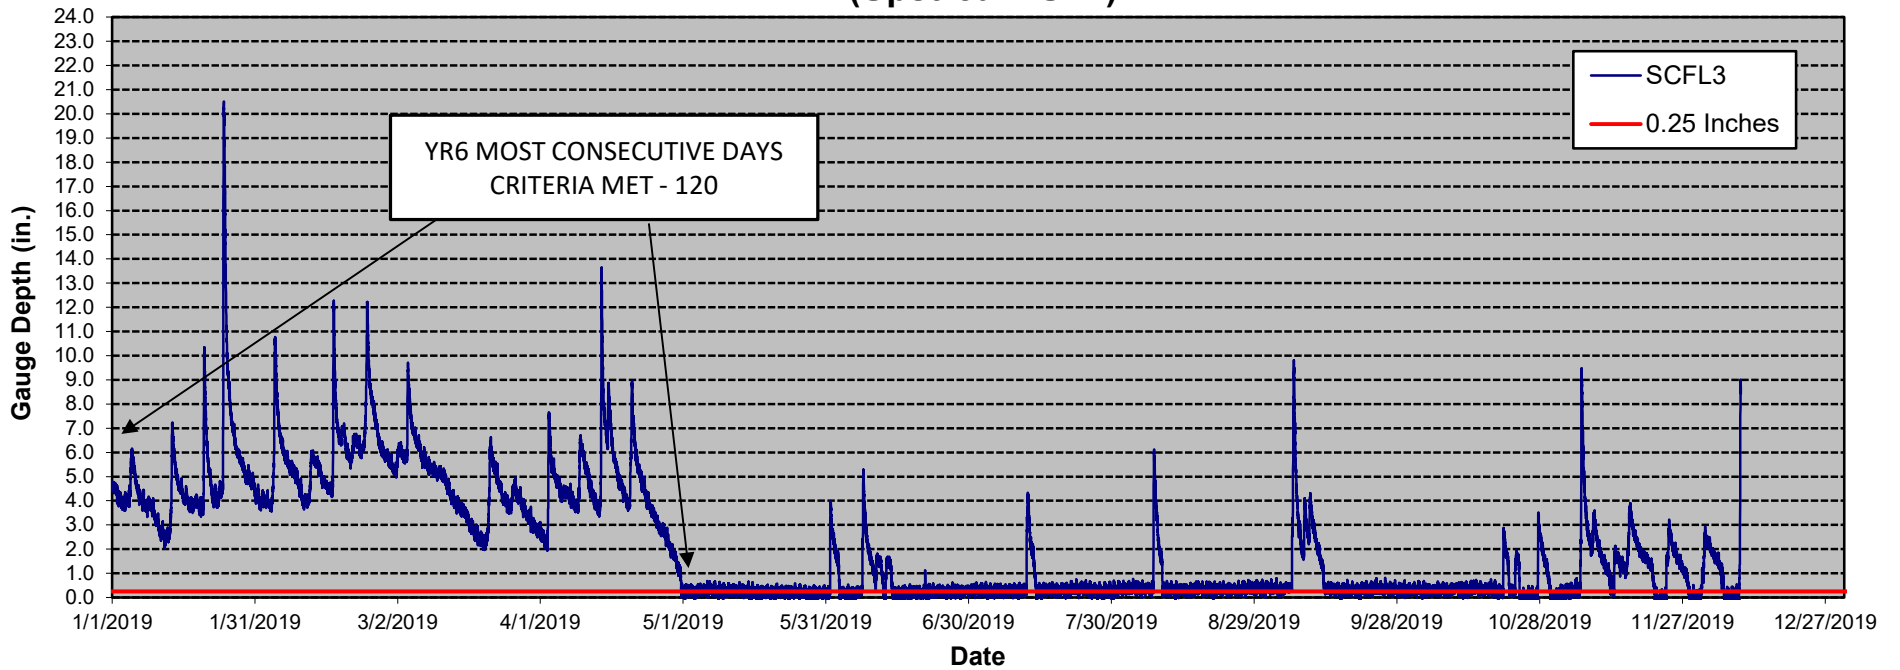


*0.25 inches denotes level at which flow occurs along the UT2 valley thalweg

St. Clair Rain (2019)

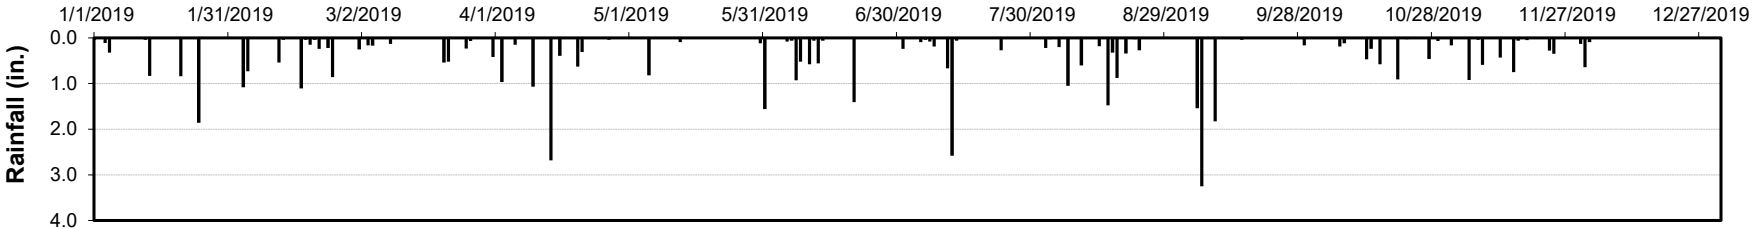


St. Clair Creek Flow Gauge SCFL4 (Upstream UT2)

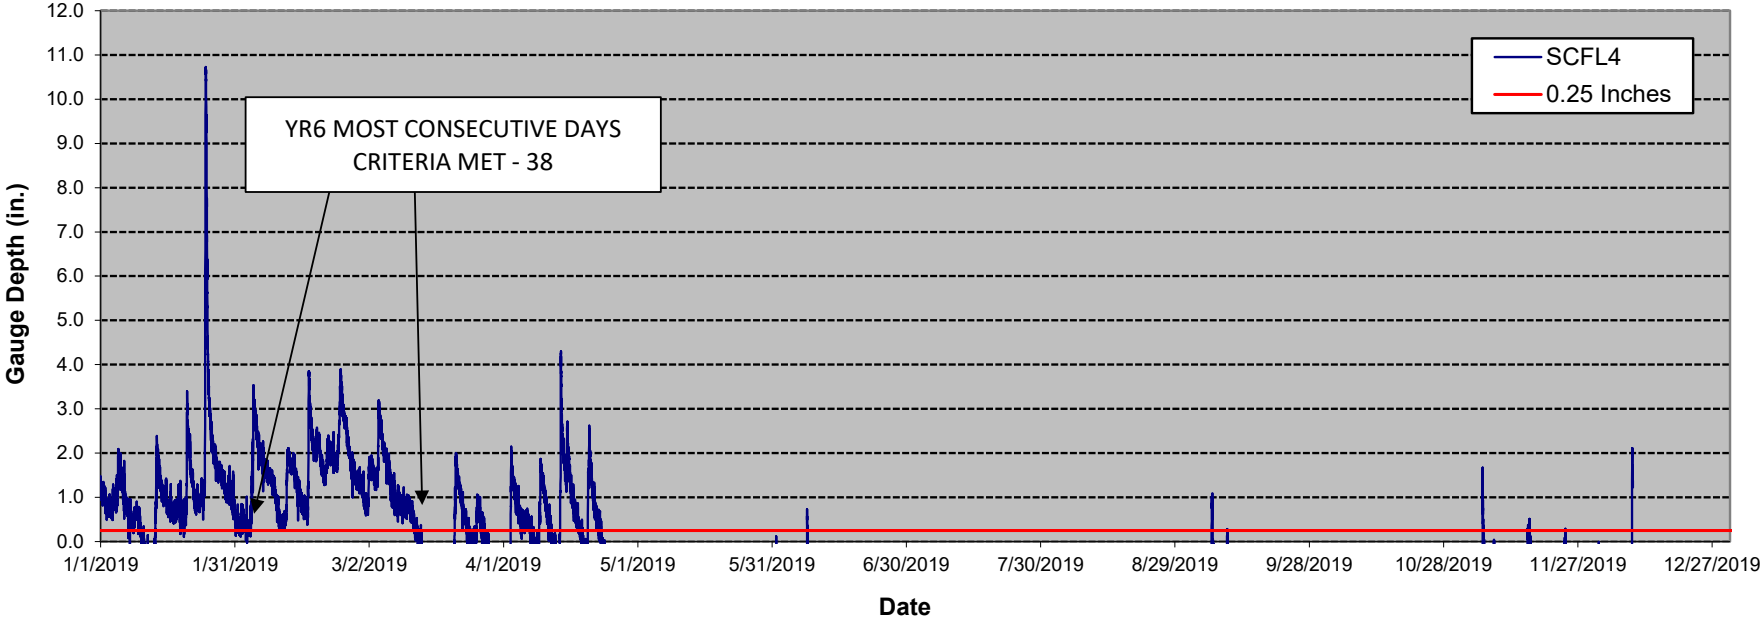


*0.25 inches denotes level at which flow occurs along the UT2 valley thalweg

St. Clair Rain (2019)

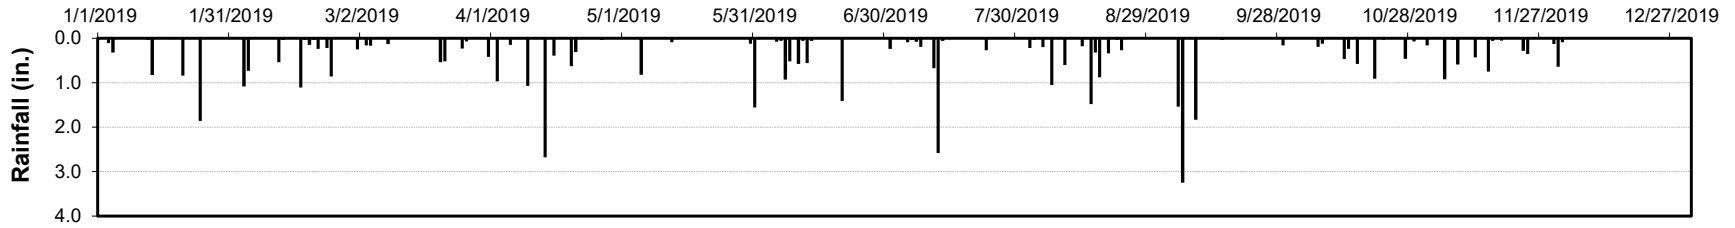


St. Clair Creek Flow Gauge SCFL5 (Downstream UT3)

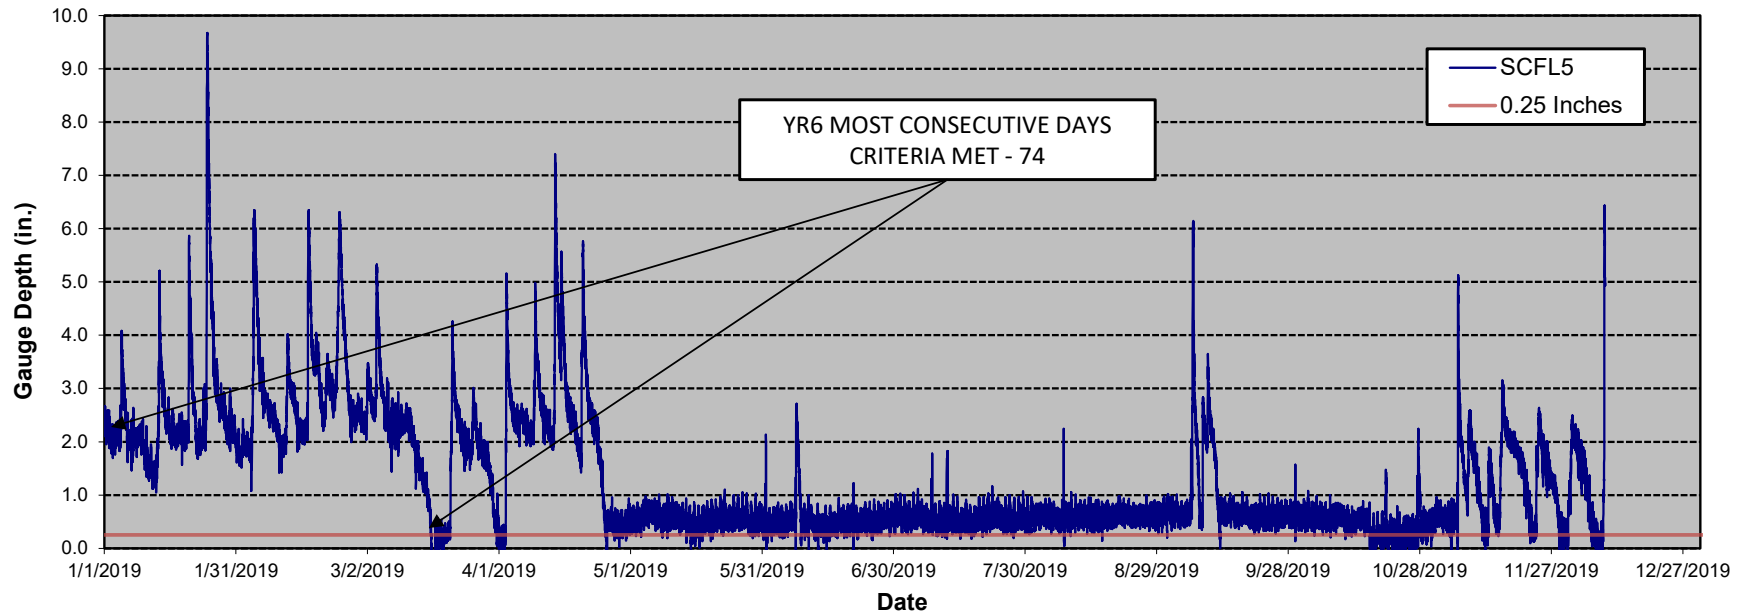


*0.25 inches denotes level at which flow occurs along the UT3 valley thalweg

St. Clair Rain (2019)

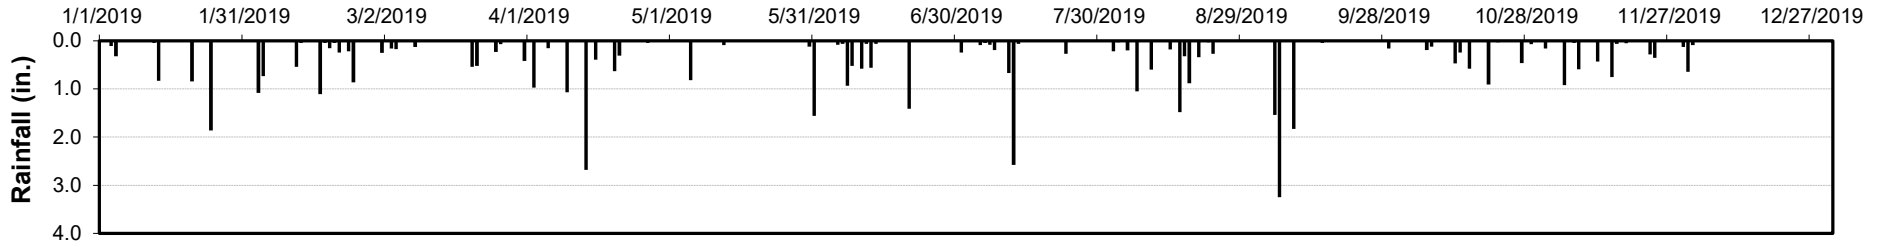


St. Clair Creek Flow Gauge SCFL6 (Upstream UT3)

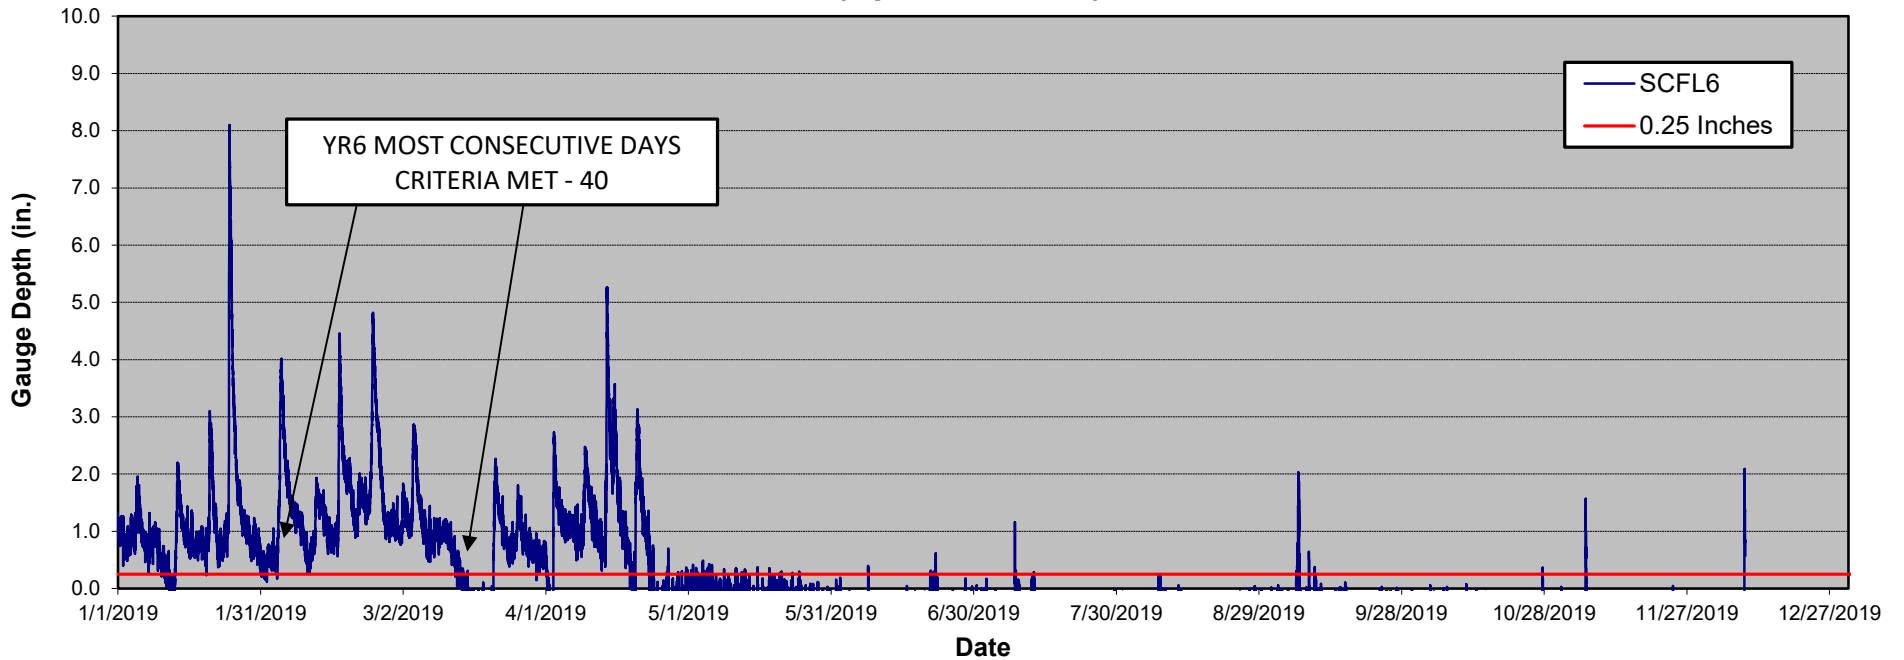


*0.25 inches denotes level at which flow occurs along the UT3 valley thalweg

St. Clair Rain (2019)

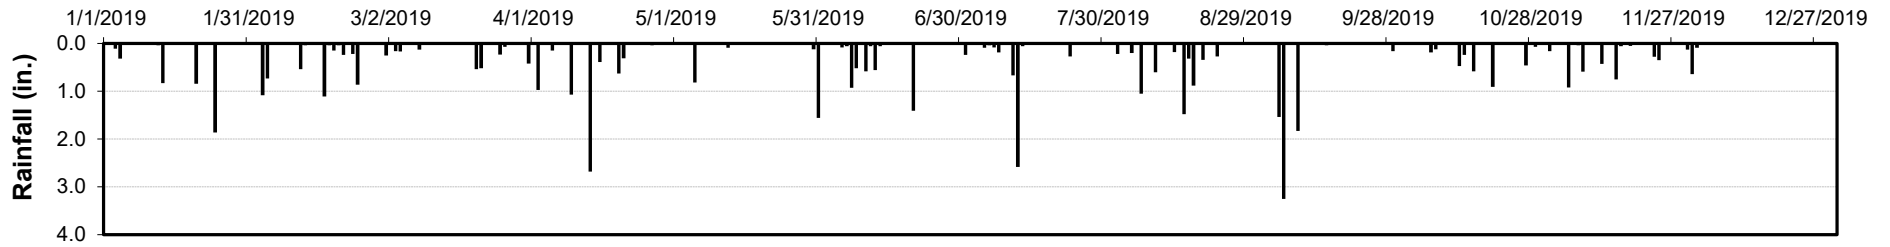


St. Clair Creek Flow Gauge SCFL7 (Upstream UT2)

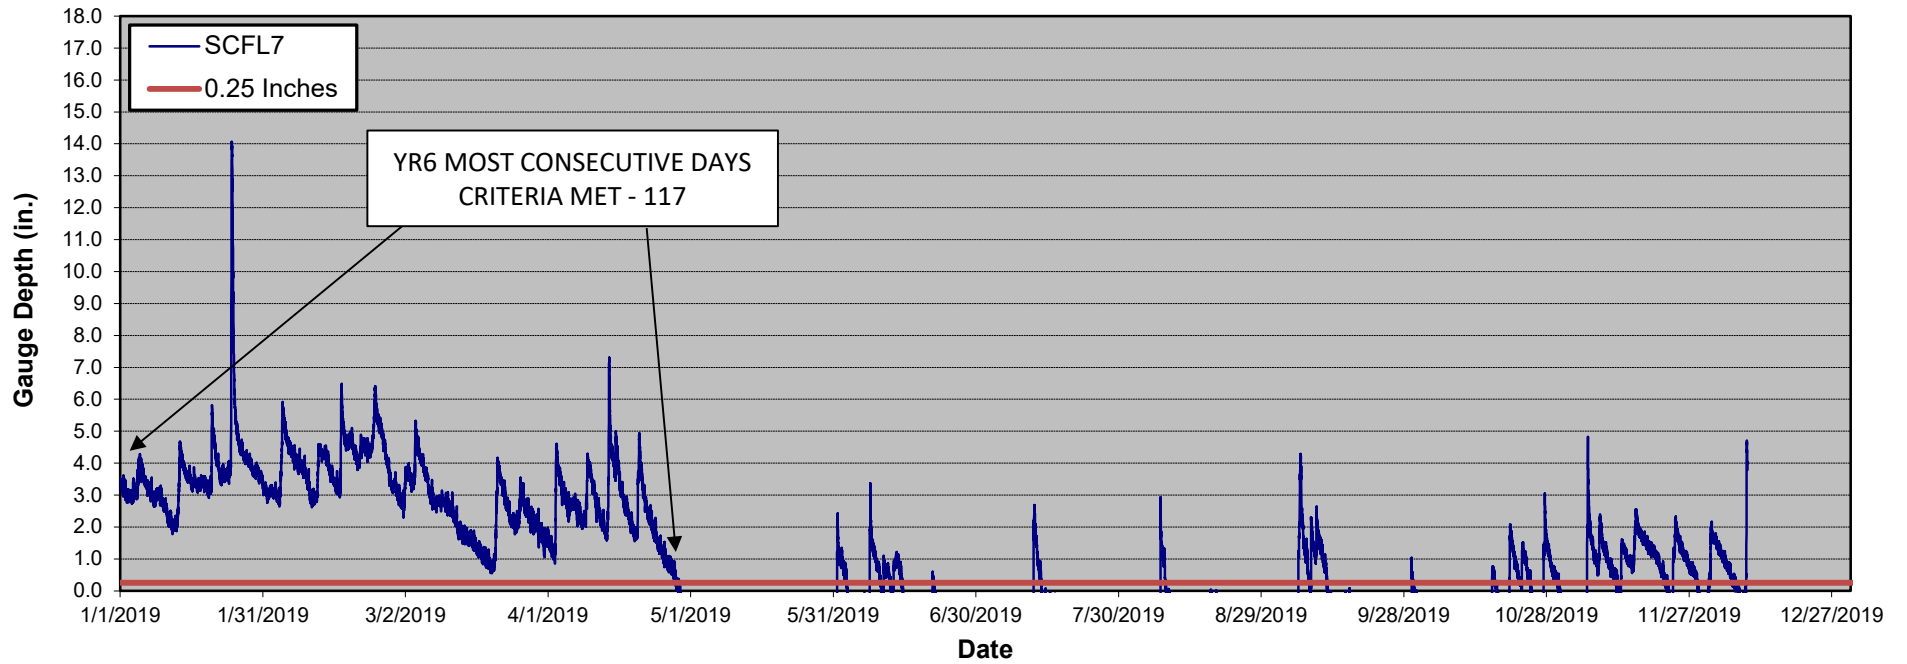


*0.25 inches denotes level at which flow occurs along the UT2 valley thalweg

**Figure 5. Observed Rainfall versus Historic Average
St. Clair Restoration Project (DMS No. 95015) MY6 2019**

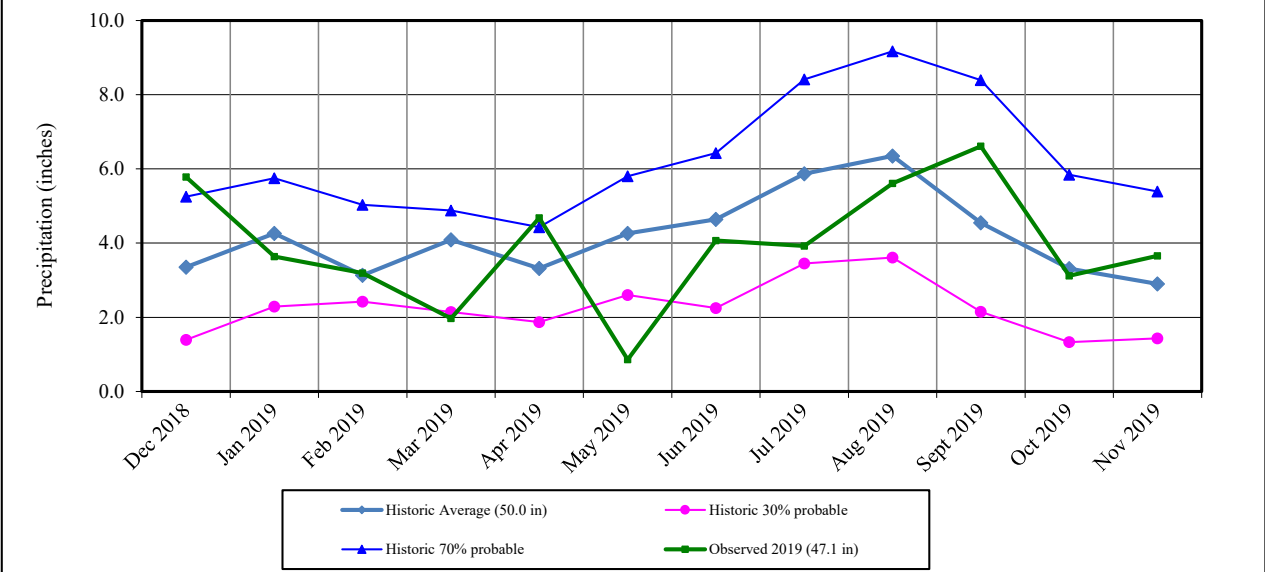

Note: Beaufort County historic average rainfall is 50.0 in, while observed previous 12 months rainfall total recorded onsite was 47.4 in, for a deficit of 2.9 in.

Beaufort County Drought Data:

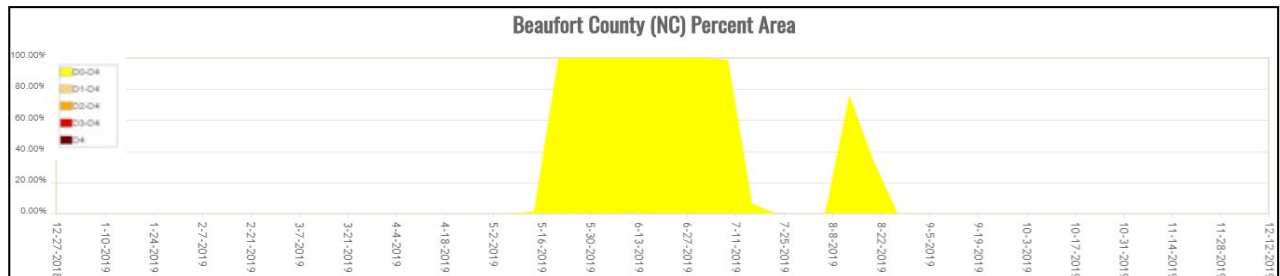

<https://droughtmonitor.unl.edu/Data/Timeseries.aspx>