

**UT Bear Creek (Phillips)  
Stream Restoration Monitoring Report  
EEP Project # 92719  
Monitoring Year 03**



Submitted to:



NCDENR-EEP, 1652 Mail Service Center, Raleigh, NC 27699-1652

**Data Collection: 2011  
Construction Completed: 2006  
Submitted: December 2011**

## **Monitoring Firm**



**Landmark Center II, Suite 220  
4601 Six Forks Road  
Raleigh, NC 27609  
Phone: (919) 278-2514  
Fax: (919) 783-9266**

**Project Contact: Adam Spiller  
Email: [adam.spiller@kci.com](mailto:adam.spiller@kci.com)  
KCI Project No: 12071067C\_BC11**

## **Design Firm**

**Environmental Services, Inc.  
524 South New Hope Road  
Raleigh, NC 27610  
Phone (919) 212-1760**

## TABLE OF CONTENTS

<b>1.0</b>	<b>EXECUTIVE SUMMARY / PROJECT ABSTRACT .....</b>	<b>1</b>
<b>2.0</b>	<b>METHODOLOGY .....</b>	<b>2</b>
<b>3.0</b>	<b>REFERENCES .....</b>	<b>2</b>

### APPENDIX A – Project Vicinity Map and Background Tables

Figure 1.	Site Vicinity Map.....	4
Table 1a. and b.	Project Restoration Components.....	5
Table 2.	Project Activity and Reporting History .....	6
Table 3.	Project Contacts Table .....	6
Table 4.	Project Attribute Table.....	7

### APPENDIX B – Visual Assessment Data

Figure 2.	Current Condition Plan View.....	9
Table 5a. and b.	Visual Stream Morphology Stability Assessment Table .....	11
Table 6.	Vegetation Condition Assessment Table .....	13
Stream Station Photos .....		14
Vegetation Monitoring Plot Photos.....		21

### APPENDIX C – Vegetation Plot Data

Table 7.	Vegetation Plot Mitigation Success Summary Table .....	26
Table 8.	CVS Vegetation Metadata Table .....	27
Table 9.	CVS Stem Count Total and Planted by Plot and Species .....	28

### APPENDIX D – Hydrologic Data

Table 10.	Verification of Bankfull Events .....	30
-----------	---------------------------------------	----

## 1.0 EXECUTIVE SUMMARY / PROJECT ABSTRACT

In 2002, the North Carolina Department of Transportation identified the Unnamed Tributary (UT) to Bear Creek Site (Phillips) in Chatham County, North Carolina as a potential stream restoration project. The 1.7-square mile watershed is located within the USGS 8-digit HUC 03030003 and the NCDWQ Sub-basin 03-06-12 of the Cape Fear River Basin. The project restored approximately 2,378 linear feet of channel - 1,921 feet on UT Bear Creek and 457 feet on unnamed tributary 2 (UT2) - and enhanced an additional 935 feet of channel on UT2. The NCDOT completed project construction in 2006, after which the project was transferred to the North Carolina Ecosystem Enhancement Program (EEP). Project goals and objectives are listed below:

### Project Goals:

- Improve water quality.
- Improve riparian and in-stream habitat

### Project Objectives:

- Excluding cattle from the stream channels.
- Increasing channel stability.
- Restoring dimension, pattern, and profile to UT Bear Creek and UT 2.

The riparian buffer was planted with five different species of bare root trees and two different species of live stakes. Seven vegetation monitoring plots were established in 2009, the first year of monitoring. These plots were set up following the Carolina Vegetation Survey (CVS) vegetation monitoring protocol. Based on the seven monitoring plots, the third-year monitoring counted an average of 399 planted stems/acre across the site. Plot 7 is the only plot that has a planted stem density less than the year three success criterion of 320 stems/acre and the year five success criteria of 260 stems/acre. This plot has 202 planted stems/acre and 931 total stems/acre, including volunteers. The site's average stem density including volunteers is 1,497 stems/acre with all of the vegetation plots having densities above 320 stems/acre. There are a few areas, mostly along UT 2, with low planted stem densities. These areas have been mapped on the Current Condition Plan View (CCPV). Three prominent exotic invasive species are found within the project buffer are Chinese privet (*Ligustrum sinense*), Japanese honeysuckle (*Lonicera japonica*), and microstegium (*Microstegium vimineum*), with the privet being especially thick in certain areas. The areas of privet have been mapped on the CCPV.

There are two hydrologic features on the site. The first, UT Bear Creek, has been restored by altering the dimension, pattern, and profile and is controlled vertically by numerous bedrock outcrops and cross vanes. The second feature is UT 2 and it has been divided into two reaches, UT 2A, which was enhanced, and UT 2B, which was restored. UT 2A is a straight channel that begins at Station 30+00. This reach already had banks stabilized by the mature trees that line both sides of the channel for the length of the reach. This reach was enhanced by planting native vegetation in the riparian buffer beyond the top of bank. UT 2B begins where UT 2A ends at the ford crossing at Station 39+75. This reach was restored by changing the dimension, pattern and profile of the channel from the ford to the confluence with UT Bear Creek.

During the third-year monitoring the site was also examined for stream stability and potential problem areas. UT Bear Creek is predominantly stable throughout the project. There is one area of floodplain erosion that has been noted in previous reports and is still active. Also noted in last year's monitoring report and still present is a beaver dam downstream of the site that is creating backwater conditions in the lower portions of UT Bear Creek up through the ford crossing at Station 25+30 and the downstream portion of UT 2. UT 2 is also predominantly stable, with one area of erosion at the cross vane at Station 39+75 and two areas of bed degradation at the bottom of the reach.

Summary information/data related to the occurrence of items such as beaver or encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly the Restoration Plan) documents available on the EEP's website. All raw data supporting the tables and figures in the appendices are available from EEP upon request.

## **2.0 METHODOLOGY**

The Level 2 CVS-EEP protocol (<http://cvs.bio.unc.edu/methods.htm>) was used to collect vegetation data from UT Bear Creek.

## **3.0 REFERENCES**


Lee, M.T., R. K. Peet, S. D. Roberts, and T. R. Wentworth. 2006. CVS-EEP Protocol for Recording Vegetation, Version 4.0 (<http://cvs.bio.unc.edu/methods.htm>)

Weakley, A.S. 2006. Flora of the Carolinas, Virginia, Georgia, and Surrounding Areas. ([http://www.herbarium.unc.edu/FloraArchives/WeakleyFlora\\_2006-Jan.pdf](http://www.herbarium.unc.edu/FloraArchives/WeakleyFlora_2006-Jan.pdf))


# **Appendix A**

## **Project Vicinity Map and Background Tables**

**DIRECTIONS TO UT BEAR CREEK SITE:**  
From Raleigh, take US 440 West towards US 1 South. Take the exit for 64 East, then take 15/501 South towards Pittsboro. At the circle take a right onto West St. Then take a left onto NC 902. After going through the community of Bear Creek, take a right onto Edwards Hill Church Rd. The site is on the eastern side of the road. Enter the site through gate.

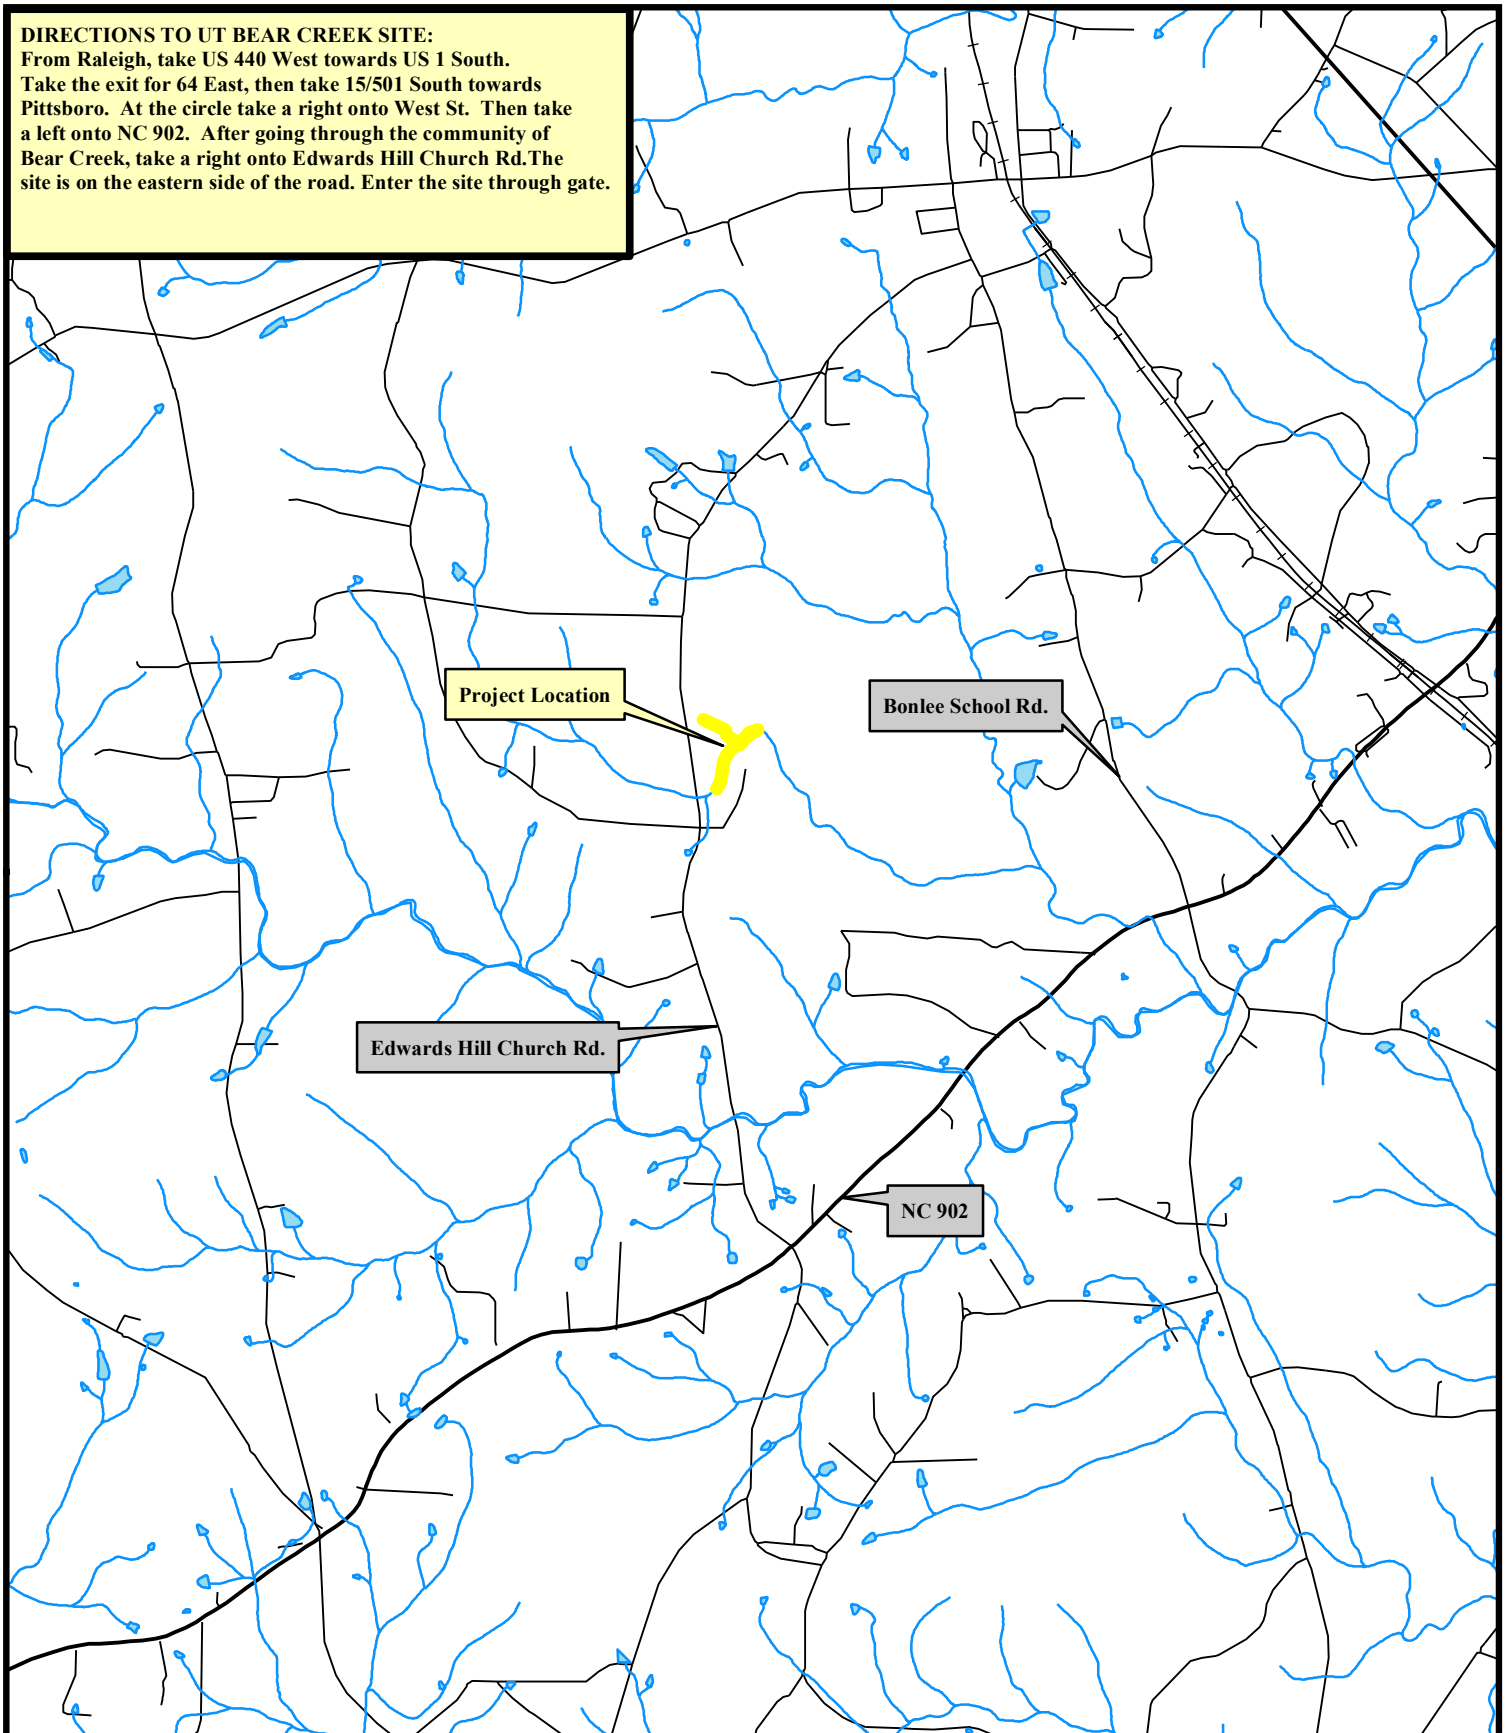

**Figure 1. Site Vicinity Map**  
**UT Bear Creek, Chatham County, EEP Project # 92719**



<b>Table 1a. Project Components</b>								
<b>Project Number and Name: 92719 - UT Bear Creek (Phillips)</b>								
<b>Project Component or Reach ID</b>	<b>Existing Feet/Acres</b>	<b>Restoration Level</b>	<b>Approach</b>	<b>Footage or Acreage</b>	<b>Stationing</b>	<b>Buffer Acres</b>	<b>BMP Elements</b>	<b>Comment</b>
UT Bear Creek	1,926	R	P2	1,942	10+00 - 29+77			Linear footage does not include stream length in easement exceptions
UT2A	935	EII	-	900	30+00 - 39+75			Linear footage does not include stream length in easement exceptions
UT2B	420	R	P2	457	39+75 - 44+32			

<b>Table 1b. Component Summations</b>							
<b>Project Number and Name: 92719 - UT Bear Creek (Phillips)</b>							
<b>Restoration Level</b>	<b>Stream (lf)</b>	<b>Riparian Wetland (Ac)</b>		<b>Non-Riparian (Ac)</b>	<b>Upland (Ac)</b>	<b>Buffer (Ac)</b>	<b>BMP</b>
		<b>Riverine</b>	<b>Non-Riverine</b>				
Restoration	2,399						
Enhancement							
Enhancement I							
Enhancement II	900						
Creation							
Preservation							
HQ Preservation							
<b>Totals</b>	<b>3,299</b>						
<b>MU Totals</b>	<b>2,759</b>						



<b>Table 2. Project Activity and Reporting History</b>		
<b>Project Number and Name: 92719 - UT Bear Creek (Phillips)</b>		
<b>Elapsed Time Since Grading Complete: 5 yr</b>		
<b>Elapsed Time Since Planting Complete: 5 yr</b>		
<b>Number of Reporting Years: 3</b>		
<b>Activity or Report</b>	<b>Data Collection Complete</b>	<b>Actual Completion or Delivery</b>
Concept Plan		2002
Restoration Plan		Jun 03
Final Design - 90%		
Construction		2006
As-Built Survey		Mar 06
Live Stake Planting		
Riparian Buffer Planting		
Year 1 Monitoring	Oct 09	Dec 09
Year 2 Monitoring	Oct 10	Dec 10
Year 3 Monitoring	Oct 11	Dec 11

<b>Table 3. Project Contacts Table</b>	
<b>Project Number and Name: 92719 - UT Bear Creek (Phillips)</b>	
<b>Design Firm</b>	Environmental Services, Inc. 524 South New Hope Road Raleigh, North Carolina 27610 Contact: Mr. Ron Spears Phone: (919) 212-1760
<b>Construction Contractor</b>	Unknown
<b>Planting Contractor</b>	Unknown
<b>Monitoring Performers</b>	
<b>MY-01-03</b>	KCI Associates of NC Landmark Center II, Suite 220 4601 Six Forks Rd. Raleigh, NC 27609 Contact: Mr. Adam Spiller Phone: (919) 278-2514 Fax: (919) 783-9266

<b>Table 4. Project Attribute Table</b>			
<b>Project Number and Name: 92719 - UT Bear Creek (Phillips)</b>			
Project County	Chatham County		
Physiographic Region	Piedmont		
Ecoregion	Carolina Slate Belt		
Project River Basin	Cape Fear		
USGS HUC for Project (14 digit)	03030003070050		
NCDWQ Sub-basin for Project	03-06-12		
Within extent of EEP Watershed Plan?	U		
WRC Class (Warm, Cool, Cold)	Warm		
% of project easement demarcated	100%		
Beaver activity observed during design phase?	Yes		
<b>Restoration Component Attribute Table</b>			
	UT Bear Creek	UT 2	
Drainage Area	1.7 sq. mi.	0.15 sq. mi.	
Stream Order	Second	First	
Restored length (feet)	1,921	457	
Perennial or Intermittent	Perennial	Perennial	
Watershed Type (Rural, Urban, Developing, etc.)	Rural		
Watershed LULC Distribution			
Urban	U		
Ag-Row Crop	U		
Ag-Livestock	U		
Forested	U		
Water/Wetlands	U		
Watershed impervious cover (%)	<10%		
NCDWQ AU/Index Number	U		
NCDWQ Classification	C (UT Bear Creek)		
303d listed?	No		
Upstream of a 303d listed segment?	No		
Reasons for 303d Listing or Stressor	-		
Total acreage of easement	11.9		
Total vegetated acreage within the easement	11.9		
Total planted acreage as part of the restoration	11.0		
Rosgen Classification of pre-existing	-	-	
Rosgen Classification of As-built	C4/5	C4/5	
Valley Type	U	U	
Valley Slope	U	U	
Valley side slope range (e.g. 2-3%)	U	U	
Valley toe slope range (e.g. 2-3%)	U	U	
Trout waters designation	No		
Species of concern, endangered etc.? (Y/N)	No		
Dominant soil series and characteristics			
Series	Cid-Lignum Complex		
Depth Clay%	-	-	
K	-	-	
T	-	-	

"N/A" is for items that do not apply.

"-" is for items that are unavailable.

"U" is for items that are unknown.

# **Appendix B**

## **Visual Assessment Data**



**LEGEND**

- EASEMENT BOUNDARY .....
- DESIGNED STATIONED CENTERLINE AND TOP OF BANK .....
- OLD STREAM CENTERLINE .....
- PHOTO POINT .....
- ROCK CROSS VANE & J-HOOK .....
- ROOTWAD .....

**PROJECT CONDITION**

- STREAM BED DEGRADATION .....
- BANK EROSION .....
- VEG PLOT ABOVE 320 TOTAL PLANTED STEMS/ACRE .....
- VEG PLOT BELOW 320 TOTAL PLANTED STEMS/ACRE .....
- LOW PLANTED STEM DENSITY .....
- INVASIVE SPECIES .....
- VEG PLOT TOTAL / PLANTED STEM DENSITY .....
- STRUCTURE PIPING .....
- STRUCTURE NOT PROTECTING BANKS .....

IMAGE SOURCE: NC 2010 STATEWIDE ORTHOIMAGERY

NOTE: ALL MAPPED INVASIVE SPECIES ARE CHINESE PRIVET (LIGUSTRUM SINENSE)


REV.	DATE	DESCRIPTION	APPROVED



**KCI**  
ASSOCIATES OF NC  
ENGINEERS • PLANNERS • SCIENTISTS  
4801 SIX FORKS ROAD  
RALEIGH, NORTH CAROLINA 27609

UT BEAR CREEK (PHILLIPS)  
CHATHAM COUNTY, NORTH CAROLINA  
EEP PROJECT NUMBER 92719 - MY03  
REACH: UT BEAR CREEK

DATE: NOV 2011  
SCALE: 1" = 100'  
CURRENT  
CONDITION  
PLAN VIEW  
SHEET 1 OF 2

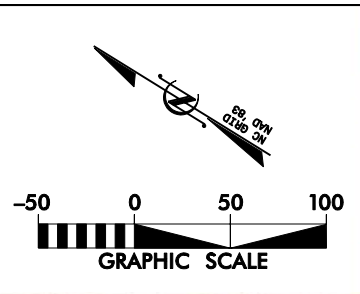

### LEGEND

- EASEMENT BOUNDARY .....
- DESIGNED STATIONED CENTERLINE AND TOP OF BANK .....
- OLD STREAM CENTERLINE .....
- PHOTO POINT .....
- ROCK CROSS VANE & J-HOOK .....
- ROOTWAD .....

### PROJECT CONDITION

- STREAM BED DEGRADATION .....
- BANK EROSION .....
- VEG PLOT ABOVE 320 TOTAL PLANTED STEMS/ACRE .....
- VEG PLOT BELOW 320 TOTAL PLANTED STEMS/ACRE .....
- LOW PLANTED STEM DENSITY .....
- INVASIVE SPECIES .....
- VEG PLOT TOTAL / PLANTED STEM DENSITY ..... **890/423**
- STRUCTURE PIPING ..... **P**
- STRUCTURE NOT PROTECTING BANKS ..... **B**

NOTE: ALL MAPPED INVASIVE SPECIES ARE CHINESE PRIVET (LIGUSTRUM SINENSE)

REV.	DATE	DESCRIPTION	APPROVED



UT BEAR CREEK (PHILLIPS)  
 CHATHAM COUNTY, NORTH CAROLINA  
 EEP PROJECT NUMBER 92719 - MY03  
 REACHES: UT-2A AND UT-2B BEAR CREEK

DATE: NOV 2011  
 SCALE: 1" = 100'  
 CURRENT CONDITION PLAN VIEW  
 SHEET 2 OF 2

Table 5a. Visual Stream Morphology Stability Assessment										
Project Number and Name: 92719 - UT Bear Creek										
Assessed Length 1,921			Reach - UT Bear Creek							
Major Channel Category	Channel Category	Sub-Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	2. Riffle Condition*	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate					N/A			
	3. Meander Pool Condition*	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq 1.6$ )					N/A			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)					N/A			
	4. Thalweg Position*	1. Thalweg centering at upstream of meander bend (Run)					N/A			
2. Thalweg centering at downstream of meander (Glide)						N/A				
<b>Totals</b>					0	0	100%	0	0	100%
2. Bank	1. Scoured/ Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <b>NOT</b> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%
<b>Totals</b>					0	0	100%	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	9	9			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	6	6			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	9	9			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	9	9			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio $\geq 1.6$ Rootwads/logs providing some cover at base-flow.	9	9			100%			

\* A longitudinal profile is not a component of monitoring UT Bear Creek. The visual assessment found a diverse bed morphology with pools and riffles that are strongly influenced by bedrock. The bottom portion of the site lacked morphological features because of backwater conditions caused by a downstream beaver dam.

Table 5b. Visual Stream Morphology Stability Assessment										
Project Number and Name: 92719 - UT Bear Creek										
Assessed Length 457										
Reach - UT 2B										
Major Channel Category	Channel Category	Sub-Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>A</u> ggradation - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>D</u> egradation - Evidence of downcutting			2	50	89%			
	2. Riffle Condition*	1. <u>T</u> exture/Substrate - Riffle maintains coarser substrate				N/A				
	3. Meander Pool Condition*	1. <u>D</u> epth Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq 1.6$ )				N/A				
		2. <u>L</u> ength appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)				N/A				
4. Thalweg Position*	1. Thalweg centering at upstream of meander bend (Run)			N/A						
		2. Thalweg centering at downstream of meander (Glide)			N/A					
2. Bank	1. Scoured/ Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			1	22	98%	0	0	98%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <b>NOT</b> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%
<b>Totals</b>					1	22	98%	0	0	98%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	3	4			75%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	4	4			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or ams.	3	4			75%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	3	4			75%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio $\geq 1.6$ Rootwads/logs providing some cover at base-flow.	3	3			100%			

\* A longitudinal profile is not a monitoring component for this tributary. During the visual assessment the only water in the channel was from the UT Bear Creek backwater, which made the evaluation of bed features difficult.

<b>Table 6. Vegetation Condition Assessment</b>						
<b>Project Number and Name: 92719 - UT Bear Creek (Phillips)</b>						
<b>Planted Acreage 11.0</b>			<b>Easement Acreage 11.9</b>			
<b>Vegetation Category</b>	<b>Definitions</b>	<b>Mapping Threshold</b>	<b>CCPV Depiction</b>	<b>Number of Polygons</b>	<b>Combined Acreage</b>	<b>% of Planted Acreage</b>
<b>1. Bare Areas</b>	Very limited cover of both woody and herbaceous material.	0.1 acres	Pattern and Color	0	0.00	0.0%
<b>2. Low Stem Density Areas</b>	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1 acres	Pattern and Color	6	0.62	5.6%
<b>Total</b>				6	0.62	5.6%
<b>3. Areas of Poor Growth Rates or Vigor</b>	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 acres	Pattern and Color	0	0.00	0.0%
<b>Cumulative Total</b>				6	0.62	5.6%
<b>4. Invasive Areas of Concern</b>	Areas or points (if too small to render as polygons at map scale).	1000 SF	Pattern and Color	13	0.62	5.2%
<b>5. Easement Encroachment Areas</b>	Areas or points (if too small to render as polygons at map scale).	none	Pattern and Color	0	0.00	0.0%



## Stream Station Photos



PP#1 – MY01 – 11/17/09



PP#1 – MY03 – 11/18/2011



PP#2d – MY01 – 11/17/09



PP#2d – MY03 – 11/18/2011



PP#2u – MY01 – 11/17/09



PP#2u – MY03 – 11/18/2011



PP#3d – MY01 – 11/17/09



PP#3d – MY03 – 11/18/2011



PP#3u – MY01 – 11/17/09



PP#3u – MY03 – 11/18/2011



PP#4d – MY01 – 11/17/09



PP#4d – MY03 – 11/18/2011



PP#4u – MY01 – 11/17/09



PP#4u – MY03 – 11/18/2011



PP#5d – MY01 – 11/17/09



PP#5d – MY03 – 11/18/2011



PP#5u – MY01 – 11/17/09



PP#5u – MY03 – 11/18/2011



PP#6 – MY01 – 11/17/09



PP#6 – MY03 – 11/18/2011



PP #7d – MY01 – 11/17/09



PP#7d – MY03 – 11/18/2011



PP#7u – MY01 – 11/17/09



PP#7u – MY03 – 11/18/2011



PP#8d- MY01 - 11/17/09



PP#8d - MY03 - 11/18/2011



PP#8u - MY01 - 11/17/09



PP#8u - MY03 - 11/18/2011



PP#9d - MY01 - 11/17/09



PP#9d - MY03 - 11/18/2011



PP#9u – MY01 – 11/17/09



PP#9u – MY03 – 11/18/2011



PP#10d – MY01 – 11/17/09



PP#10d – MY03 – 11/18/2011



PP#10u – MY01 – 11/17/09



PP#10u – MY03 – 11/18/2011



PP#11 – MY01 – 11/17/09



PP#11 – MY03 – 11/18/2011

## Vegetation Monitoring Plot Photos



Vegetation Plot 1: 8/16/11 – MY-03



Vegetation Plot 2: 8/16/11 – MY-03





Vegetation Plot 3: 8/16/11 – MY-03



Vegetation Plot 4: 8/16/11 – MY-03



Vegetation Plot 5: 8/16/11 – MY-03



Vegetation Plot 6: 8/16/11 – MY-03



Vegetation Plot 7: 8/16/11 – MY-03

# **Appendix C**

## **Vegetation Plot Data**

**Table 7. Vegetation Plot Mitigation Success Summary Table**  
**Project Number and Name: 92719 - UT Bear Creek (Phillips)**

<b>Vegetation Plot ID</b>	<b>Monitoring Year 03 Planted Stem Density (stems/acre)</b>	<b>Vegetation Survival Threshold Met?</b>
1	364	Yes
2	364	Yes
3	324	Yes
4	405	Yes
5	526	Yes
6	607	Yes
7	202	No

<b>Table 8. CVS Vegetation Plot Metadata</b>	
<b>Project Number and Name: 92719 - UT Bear Creek (Phillips)</b>	
<b>Report Prepared By</b>	April Helms
<b>Date Prepared</b>	12/5/2011 9:42
<b>database name</b>	KCI-2011-A.mdb
<b>database location</b>	M:\2007\12071067_2007 EEP OPEN END\Veg_database
<b>computer name</b>	12-CV76KF1
<b>file size</b>	59768832
<b>DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----</b>	
<b>Metadata</b>	Description of database file, the report worksheets, and a summary of project(s) and project data.
<b>Proj, planted</b>	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
<b>Proj, total stems</b>	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
<b>Plots</b>	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
<b>Vigor</b>	Frequency distribution of vigor classes for stems for all plots.
<b>Vigor by Spp</b>	Frequency distribution of vigor classes listed by species.
<b>Damage</b>	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
<b>Damage by Spp</b>	Damage values tallied by type for each species.
<b>Damage by Plot</b>	Damage values tallied by type for each plot.
<b>Planted Stems by Plot and Spp</b>	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
<b>ALL Stems by Plot and spp</b>	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
<b>PROJECT SUMMARY-----</b>	
<b>Project Code</b>	92719
<b>Project Name</b>	UT Bear Creek (Phillips)
<b>Description</b>	Stream Restoration and Enhancement in Chatham County, NC.
<b>River Basin</b>	Cape Fear
<b>length(ft)</b>	3,313
<b>stream-to-edge width (ft)</b>	40
<b>area (sq m)</b>	22294
<b>Required Plots (calculated)</b>	7
<b>Sampled Plots</b>	7



# **Appendix D**

## **Hydrologic Data**



**Table 10. Verification of Bankfull Events**  
**Project Number and Name: 92719 - UT Bear Creek (Phillips)**

<b>Date of Data Collection</b>	<b>Date of Occurrence</b>	<b>Method</b>	<b>Photo Number</b>
11/17/2009	11/13/2009	Site visit to evaluate indicators of stage after storm events	N/A
10/8/2010	9/30/2010	Site visit to evaluate indicators of stage after storm	N/A
8/16/2011	unknown	Crest gauge	N/A