

UT to Clarke Creek Annual Final Monitoring Report

EEP # 92500
DENR Contract # 005363
USACE Action ID # SAW-2010-00471
DWR Project # 11-0409
SCO # 09-07763-01
DLR (Land Quality) Project # MECK-2012-034

Monitoring Report Year 1 of 5
Mecklenburg County, North Carolina



Submitted to:



1601 Mail Service Center
Raleigh, NC 27699-1601

Data Collection: September 2014
Report Submission: November 2014

Submitted by:



1025 Wade Avenue
Raleigh, NC 27605

UT to Clarke Creek Stream and Wetland Restoration
EEP Project #92500

Monitoring Report Year 1 of 5
Mecklenburg County, North Carolina

TABLE OF CONTENTS

Executive Summary 1
1.0 Project Summary..... 2
 1.1 Project Setting and Background..... 2
 1.2 Project Goals and Objectives 2
 1.3 Success Criteria..... 3
 1.3.1 Stream Morphology and Channel Stability..... 3
 1.3.2 Wetlands 3
 1.3.3 Vegetation..... 4
 1.4 Project History, Contacts, and Attribute Data..... 4
2.0 Methodology 5
3.0 References..... 5

APPENDICES

APPENDIX A: BACKGROUND TABLES

- Table 1a – Project Components
- Table 1b – Component Summations
- Table 2 – Project Activity and Reporting History
- Table 3 – Project Contacts
- Table 4 – Project Attributes

APPENDIX B: VISUAL ASSESSMENT DATA

- Figure 1 – Vicinity Map
- Figure 2A-D – Current Condition Plan View
- Figure 3 – Components Map
- Table 5a – Visual Stream Morphology Stability Assessment – UT to Clarke Creek
- Table 5b – Visual Stream Morphology Stability Assessment – UT1
- Table 6 – Vegetation Condition Assessment
- Photos – Permanent Photo Points
- Photos – Vegetation Plots

APPENDIX C: VEGETATION PLOT DATA

- Table 7 – Vegetation Plot Mitigation Success Summary
- Table 8 – CVS Vegetation Metadata
- Table 9 – CVS Planted and Total Stem Counts (Stems and Species by Plot with Annual Means)

APPENDIX D: STREAM SURVEY DATA

Year 1 Cross-Sections

Year 1 Longitudinal Profiles

Year 1 Pebble Count Plots

Table 10a – Baseline Stream Data Summary – UT to Clarke Creek

Table 10b – Baseline Stream Data Summary – UT1

Table 11a – Monitoring Data – Dimensional Morphology Summary (Dimensional Parameters – Cross Sections)

Table 11b – Monitoring Data – Stream Reach Data Summary – UT to Clarke Creek

Table 11c – Monitoring Data – Stream Reach Data Summary – UT1

APPENDIX E: HYDROLOGIC DATA

Table 12 – Verification of Bankfull Events

Figure 4 – Monthly Rainfall Data

Figures 5-12 – Precipitation and Water Level Plots for Each Gauge

Table 13 – Wetland Hydrology Criteria Attainment

EXECUTIVE SUMMARY

The UT Clarke Creek is located in Mecklenburg County, North Carolina near the Town of Huntersville. The property parcel is owned by Mecklenburg County and is referred to as Clark's Creek Nature Preserve. The project consisted of approximately 4,594 linear feet of existing streams on the site within the USGS cataloging unit Yadkin 03040105. The project site was assessed in the Upper Rocky River Local Watershed Plan (LWP) that was prepared for EEP by MACTEC in 2004. The LWP identified the major stressors in the watershed: stream bank erosion, lack of adequate forested buffer, stream channelization, agricultural impacts, land use changes, sedimentation, point source in-stream impacts, nutrients, and fecal coliform bacteria.

Restoration goals for this project include:

- Reduce sediment stressors caused by stream bank erosion and shear stress along the reach
- Improve stream bank stability and sediment transport efficiency
- Provide for uplift in water quality functions and nutrient filtration
- Provide for greater overall stream and wetland habitat complexity and quality
- Improve and maintain riparian buffer habitat

The project objectives include:

- Implement a sustainable, reference-based, rehabilitation of the project reaches' dimension to support sediment transport equilibrium.
- Provide a sustainable and functional bankfull floodplain feature and reslope banks at a more stable slope.
- Strategically install stream structures and plantings designed to maintain lateral stability and habitat to the stream channel.
- Install, augment, and maintain appropriate vegetative riparian buffer and riverine wetland community types with sufficient density and vigor to support native vegetation. The buffer should have a minimum width of 50 feet (ft) on each side of project streams and consist of a mix of native species representative of a bottomland hardwood forest.
- Restore and/or enhance the natural hydrology, vegetation, and soil composition in adjacent wetlands.

This report documents the completion of the restoration construction activities and presents year 1 monitoring data for the post-construction monitoring period. Table 1 (Appendix A) summarizes site conditions before and after restoration, as well as the conditions predicted in the previously approved Mitigation Plan.

1.0 PROJECT SUMMARY

1.1 Project Setting and Background

The UT Clarke Creek stream and wetland restoration project is located in Mecklenburg County, North Carolina, in the Yadkin-Pee Dee River Basin (USGS cataloging unit 03040105), DWR Subbasin 30711 (Figure 1). The project lies within Clark's Creek Nature Preserve, a 57.2 acre property owned by Mecklenburg County. The project restored 3,106 linear feet of stream and preserved 1,464 linear feet of stream and restored or preserved 1.549 acres of wetlands (Table 1). Prior to construction, the project site had problems with channelization, bank instability, and a limited riparian buffer zone. Areas of mass wasting, bank slumping, incision, and sediment deposition were evident in all reaches. Backwater effects from beaver dams also caused aggradation and habitat loss. The project aimed to reduce the major stressors identified in the Upper Rocky River Local Watershed Plan (LWP) which include stream bank erosion, lack of adequate forested buffer, stream channelization, and sedimentation.

1.2 Project Goals and Objectives

The goals and objectives of this project focus on improving water quality and restoring physical habitat. These goals and objectives are stated in the UT Clarke Creek Mitigation Plan (2011).

Goals:

1. Reduce sediment stressors caused by stream bank erosion and shear stress along the reach
2. Improve stream bank stability and sediment transport efficiency
3. Provide for uplift in water quality functions and nutrient filtration
4. Provide for greater overall stream and wetland habitat complexity and quality
5. Improve and maintain riparian buffer habitat

Objectives:

1. Implement a sustainable, reference-based, rehabilitation of the project reaches' dimension to support sediment transport equilibrium
2. Provide a sustainable and functional bankfull floodplain feature and reslope banks at a more stable slope
3. Strategically install stream structures and plantings designed to maintain lateral stability and habitat to the stream channel
4. Install, augment, and maintain appropriate vegetative riparian buffer and riverine wetland community types with sufficient density and vigor to support native vegetation. The buffer should have a minimum width of 50 feet on each side of project streams and consist of a mix of native species representative of a bottomland hardwood forest.
5. Restore and/or enhance the natural hydrology, vegetation, and soil composition in adjacent wetlands

1.3 Success Criteria

The following success criteria are provided from the NCEEP *Mitigation Plan Document Guidance* and the Army Corps of Engineers (ACOE) (2003).

1.3.1 Stream Morphology and Channel Stability

Restored or enhanced streams should demonstrate morphological stability to be considered successful. Any deviations will be evaluated to determine whether changes are indicative of instability. Stability will be based on permanent cross sections, longitudinal profile, substrate analysis, sediment transport, and evidence of bankfull events.

Both reaches' profiles and cross sections adjusted minimally from the baseline conditions. The channels access the floodplain and evidence of bankfull events were observed during Year 1 monitoring. This evidence includes the presence of wracklines, sediment deposits, and a crest gauge reading of 20" above bankfull on UT1 and 15.5" above bankfull on UT to Clarke Creek.

On UT to Clarke Creek, one area of notable bare bank was noted between Stations 4+84 and 5+24. This area was lacking significant woody and herbaceous vegetation. Vegetation was also found growing in the channel between Station 1+75 and 2+34. This vegetation trapped smaller particles in cross section 9 which lead to the smaller particle size collected for the pebble count. Cross section 1A had a similar particle size to baseline data.

Reach UT1 had one area of bare bank between Stations 4+78 to 5+37. This area was lacking significant woody and herbaceous vegetation. Three instances of vegetation in the channel were noted between Stations 1+12 to 1+69, 1+96 to 2+66, and 5+70 to 6+00. This vegetation trapped smaller particles in cross sections 4 and 5 leading to smaller particle sizes collected for the pebble counts. Particle size in cross section 6 increased from baseline data, while cross section 8 had a decrease in particle size.

1.3.2 Wetlands

Wetland hydrology attainment will be monitored in accordance to the ACOE (2003) standards. The target wetland hydrological success criterion is saturation or inundation for at least 12.5 percent of the growing season in the lower landscape (floodplain) positions. To achieve the hydrologic success criterion, groundwater levels must be within 12 inches of the ground surface for 29 consecutive days, which is 12.5 percent of the March 22 to November 11 (232 days) growing season. Eight Ecotone Water Level Loggers were established within the wetland restoration, creation, and preservation areas to monitor groundwater levels during the growing season. Wells 3, 5, 6, and 8 were placed within the wetland boundaries to provide hydrologic data for the restored and enhanced wetland areas. Wells 2, 4, and 7 were placed outside the wetland boundaries to confirm the upland boundaries of the same wetlands. Well 1 was placed within the wetland preservation to provide reference conditions for the restored and enhanced wetlands in the project.

Wells 1, 3, 5, 6, and 7 met the hydrology success criteria for monitoring year 1. Wells 2 and 8 did not meet the success criteria. Although well 8 is within Wetland D, it was installed along the wetland line. This could explain why it did not meet the hydrology criteria.

1.3.3 Vegetation

Planted vegetation will be monitored for five years in accordance with the guidelines and procedures developed by the Carolina Vegetation Survey-NCEEP Level 2 Protocol (Lee et al., 2006). To achieve vegetative success criteria, the average number of planted stems per acre must exceed or meet 320 stems/acre after the third year of monitoring, 288 stems/acre after four years, and 260 stems/acre after the fifth year of project monitoring. The monitoring year 1 stem counts are located in Tables 7 and 9 in Appendix C. Currently, only plot 7 is meeting the interim measures of success. Vegetation throughout the reach appears to be growing at acceptable rates. Carolina Silvics will be completing a supplemental planting effort in the 2014-2015 dormant season throughout the project site.

Summary information/data related to the occurrence of items such as beaver or encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting documentation formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly the Restoration Plan) documents available on EEP's website. All raw data supporting the tables and figures in the appendices is available from EEP upon request.

1.4 Project History, Contacts, and Attribute Data

The UT to Clarke Creek Stream and Wetland Restoration site was designed by JJG, North State Environmental constructed the site, and it will be monitored by SEPI Engineering & Construction. Tables 2, 3, and 4 in Appendix A provide detailed information regarding the Project Activity and Reporting History, Project Contacts, and Project Baseline Information and Attributes.

1.4.1 Construction Deviations

The as-built plan sheets/record drawings depict several engineered instream structures that were not located during baseline monitoring. It was determined the structures were not installed due to constraints that arose during construction, and the record drawings were not updated with that information.

2.0 METHODOLOGY

The following methods were utilized during the year 1 monitoring for data collection and post-processing:

- Geomorphic topographic data collections were performed in the field using a survey grade GPS such that each survey point has three-dimensional coordinates, and is georeferenced (NAD83-State Plane Feet – FIPS3200).
- Longitudinal stationing was developed using the as-built survey thalweg as a baseline.
- The Modified-Wolman pebble count particle size distribution protocol was utilized.
- The CVS Level 2 methodology was utilized for the vegetation plot data collection.

3.0 REFERENCES

Jordan, Jones, and Goulding, Inc. Mitigation Plan: UT Clarke Creek Stream and Wetland Restoration, 2011.

Mactec Engineering and Consulting, Inc. November 30, 2004. *Watershed Management Plan and Recommendations, Lower Yadkin/Upper Rocky River Basin, Local Watershed Planning (Phase II), Cabarrus, Iredell, Rowan and Mecklenburg Counties, North Carolina*. Prepared for North Carolina Ecosystem Enhancement Program.

NCDWQ. 2008B. *Yadkin – Pee Dee River Basin Plan*. 553 pages.

NC Ecosystem Enhancement Program. As-built Baseline Monitoring Report Format, Data Requirements, and Content Guidance, 2014.

Radford, Albert. 1968. *Manual of Vascular Flora of the Carolinas*. The University of North Carolina Press, Chapel Hill. 596 p.

Rosgen, D L. 1996. *Applied River Morphology*. Wildland Hydrology Books, Pagosa Springs, CO.

U. S. Army Corps of Engineers. 1987. *Wetland Delineation Manual* (Technical Report Y-87-1), Washington, DC.

U. S. Army Corps of Engineers. 2003. *Stream Mitigation Guidelines*. USACOE, USEPA, NCWRC, NCDENR-DWQ.

Appendix A
Background Tables

**Table 1a. Project Components
UT Clarke Creek/EEP Project #92500**

Project Component or Reach ID	Existing Feet/Acres	Restoration Level	Approach	Footage or Acreage	Stationing	Mitigation Ratio	Mitigation Units	BMP Elements	Comment
UT Clarke Creek	1507 lf	E1	P 2/3	1507 lf	00+00 – 15+87	1.5:1	1004.7		Creating bankfull bench, regrading bank slopes, installing structures, planting native vegetation
UT1	723 lf	E1	P 2/3	741 lf	00+00 – 07+48, 07+65 – 07+78	1.5:1	494.0		Creating bankfull bench, regrading bank slopes, installing structures, planting native vegetation
UT1	17 lf	E1	P 2/3	17 lf	07+48 – 07+65	3:1	5.7		Creating bankfull bench, regrading bank slopes, installing structures, planting native vegetation in sewer easement
UT2	308 lf	E2	P 4	308 lf	04+22 – 05+99, 07+16 – 08+47	2.5:1	123.2		Planting of native vegetation, removal of invasive species
UT3	100 lf	E1	P 2/3	84 lf	00+00 – 00+56, 00+72 – 01+03	1.5:1	56.0		Creating bankfull bench, regrading bank slopes, installing structures, planting native vegetation
UT3	16 lf	E1	P 2/3	16 lf	00+56 – 00+72	3:1	5.3		Creating bankfull bench, regrading bank slopes, installing structures, planting native vegetation in sewer easement
UT4	373 lf	E1	P 2/3	363 lf	01+92 – 05+65	1.5:1	242		Creating bankfull bench, regrading bank slopes, installing structures, planting native vegetation
UT5	119 lf	E1	P 2/3	119 lf	03+56 – 04+75	1.5:1	79.3		Creating bankfull bench, regrading bank slopes, installing structures, planting native vegetation
UT6	1464 lf	P	-	1464 lf	00+00 – 14+64	5:1	292.8		Designated as Preservation
Wetland A	0.085 ac	R		0.0*		0	0		Restoring aerial extent of riparian wetland adjacent to stream
Wetland B	0.134 ac	P		0.134 ac		5:1	0.027		Designated as Preservation
Wetland C	0.057 ac	E		0.057 ac		2:1	0.029		Includes improving hydrology and vegetation to enhance the riparian wetland adjacent to stream
Wetland D	0.070 ac	R		1.020 ac		1:1	1.02		Restoring aerial extent of riparian wetland adjacent to stream
Wetland E	0.109 ac	E		0.109 ac		2:1	0.055		Includes improving hydrology and vegetation to enhance the riparian wetland adjacent to stream
Wetland E	0.109 ac	C		0.137 ac		3:1	0.046		Includes improving hydrology and vegetation to enhance the riparian wetland adjacent to stream

*One segment of WL A will be incorporated into the enhancement of UT2. The remainder of WL A will be incorporated into the restoration of WL D

**Table 1b. Component Summations
UT Clarke Creek/EEP Project #92500**

Restoration Level	Stream (lf)	Riparian Wetland (Ac)		Non-Ripar (Ac)	Upland (Ac)	Buffer (Ac)	BMP
		Riverine	Non-Riverine				
Restoration		1.02					
Enhancement		0.166					
Enhancement I	2,847						
Enhancement II	308						
Creation		0.137					
Preservation	1,464	0.134					
HQ Preservation							
		1.457	0				
Totals (Feet/Acres)	4,619	1.457					
MU Totals	2,303	1.18					

 Non-Applicable

**Table 2. Project Activity and Reporting History
UT Clarke Creek/EEP Project #92500**

Elapsed Time Since grading complete: 1 year 4 months
Elapsed Time Since planting complete: 9 months
Number of reporting Years: 1


Activity or Deliverable	Data Collection Complete	Completion or Delivery
Institution Date	NA	Sept-2008
404 permit date	NA	Jan-2012
Restoration Plan	Sept-2010	Feb-2011
Final Design – Construction Plans	NA	July-2012
Construction	NA	July-2013
Containerized, bare root and B&B plantings	NA	Feb-2014
Mitigation Plan / As-built (Year 0 Monitoring – baseline)	Mar-2014	June-2014
Year 1 Monitoring	Sept-2014	Nov-2014
Year 2 Monitoring		
Year 3 Monitoring		
Year 4 Monitoring		
Year 5 Monitoring		

**Table 3. Project Contacts Table
UT to Clarke Creek/ EEP Project #92500**


Designer	Jordan, Jones, and Goulding, Inc. 309 E. Morehead Street, Suite 110, Charlotte, NC 28202
Primary project design POC	Matthew M. Clabaugh, PE
Construction Contractor	North State Environmental 2889 Lowery Street, Winston-Salem, NC 27101
Construction contractor POC	Michael Anderson, (336) 245-1253
Survey Contractor	NorthState Environmental 2889 Lowery Street, Winston-Salem, NC 27101
Survey contractor POC	David Keith Alley, PLS
Planting Contractor	Carolina Silvics 908 Indian Trail Road, Edenton, NC 27932
Planting contractor POC	
Seeding Contractor	Canady's Landscaping & Erosion 256 Fairview Acres Road, Lexington, NC 27295
Contractor point of contact	Craig Canady, (336) 236-1182
Seed Mix Sources	
Nursery Stock Suppliers	
Monitoring Performers	SEPI Engineering & Construction 1025 Wade Avenue, Raleigh, NC 27605
Stream Monitoring POC	Philip Beach, PWS (919) 789-9977
Vegetation Monitoring POC	Kim Hamlin (919) 789-9977
Wetland Monitoring POC	Philip Beach, PWS (919) 789-9977

Table 4. Project Attribute Table			
UT to Clarke Creek/EEP Project #92500			
Project County	Mecklenburg		
Physiographic Region	Piedmont		
Ecoregion	Southern Outer Piedmont belt		
Project River Basin	Yadkin-Pee Dee		
USGS HUC for Project (14 digit)	03040105010040		
NCDWQ Sub-basin for Project	03-07-11		
Within extent of EEP Watershed Plan?	Upper Rocky River LWP		
WRC Hab Class (Warm, Cool, Cold)	Warm		
% of project easement fenced or demarcated	100%		
Beaver activity observed during design phase?	Yes		
Restoration Component Attribute Table			
	UT Clarke Creek	UT1	
Drainage area	1.08	0.46	
Stream order	2	1	
Restored length (feet)	1507	758	
Perennial or Intermittent	Perennial	Perennial	
Watershed type (Rural, Urban, Developing etc.)	Rural		
Watershed LULC Distribution (e.g.)			
Residential	94.60%		
Ag-Row Crop	-		
Ag-Livestock	-		
Forested	-		
Etc.	5.40%		
Watershed impervious cover (%)	16.50%		
NCDWQ AU/Index number	13-17-5-2		
NCDWQ classification	C		
303d listed?	No		
Upstream of a 303d listed segment?	Yes		
Reasons for 303d listing or stressor	5, Ecological/biological integrity		
Total acreage of easement	57.2		
Total vegetated acreage within the easement	57.2		
Total planted acreage as part of the restoration	57.2		
Rosgen classification of pre-existing	E4	B4c	B4c
Rosgen classification of As-built	N/A		
Valley type	VIII		
Valley slope	-		
Valley side slope range (e.g. 2-3.%)	-		
Valley toe slope range (e.g. 2-3.%)	-		
Cowardin classification	N/A		
Trout waters designation	No		
Species of concern, endangered etc.? (Y/N)	No		
Dominant soil series and characteristics	Mo, MeD, EnD		
Series	Monacan, Mecklenburg, Enon		
Depth	-		
Clay%	-		
K	-		
T	-		

Appendix B
Visual Assessment Data

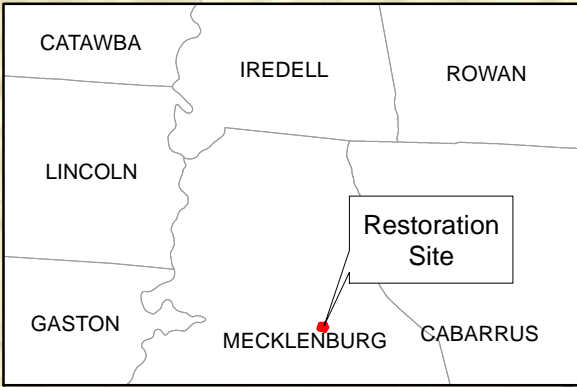

Directions to the Site: Take I-40 to I-85 S. Take exit 45B to W WT Harris Blvd and continue for 2.4 miles. Then turn right onto David Cox Rd, right onto W Sugar Creek Rd which turns into Browne Rd. Turn left at the light onto Hucks Rd and continue for a little over one mile. The access to the site is a gravel road on the right.

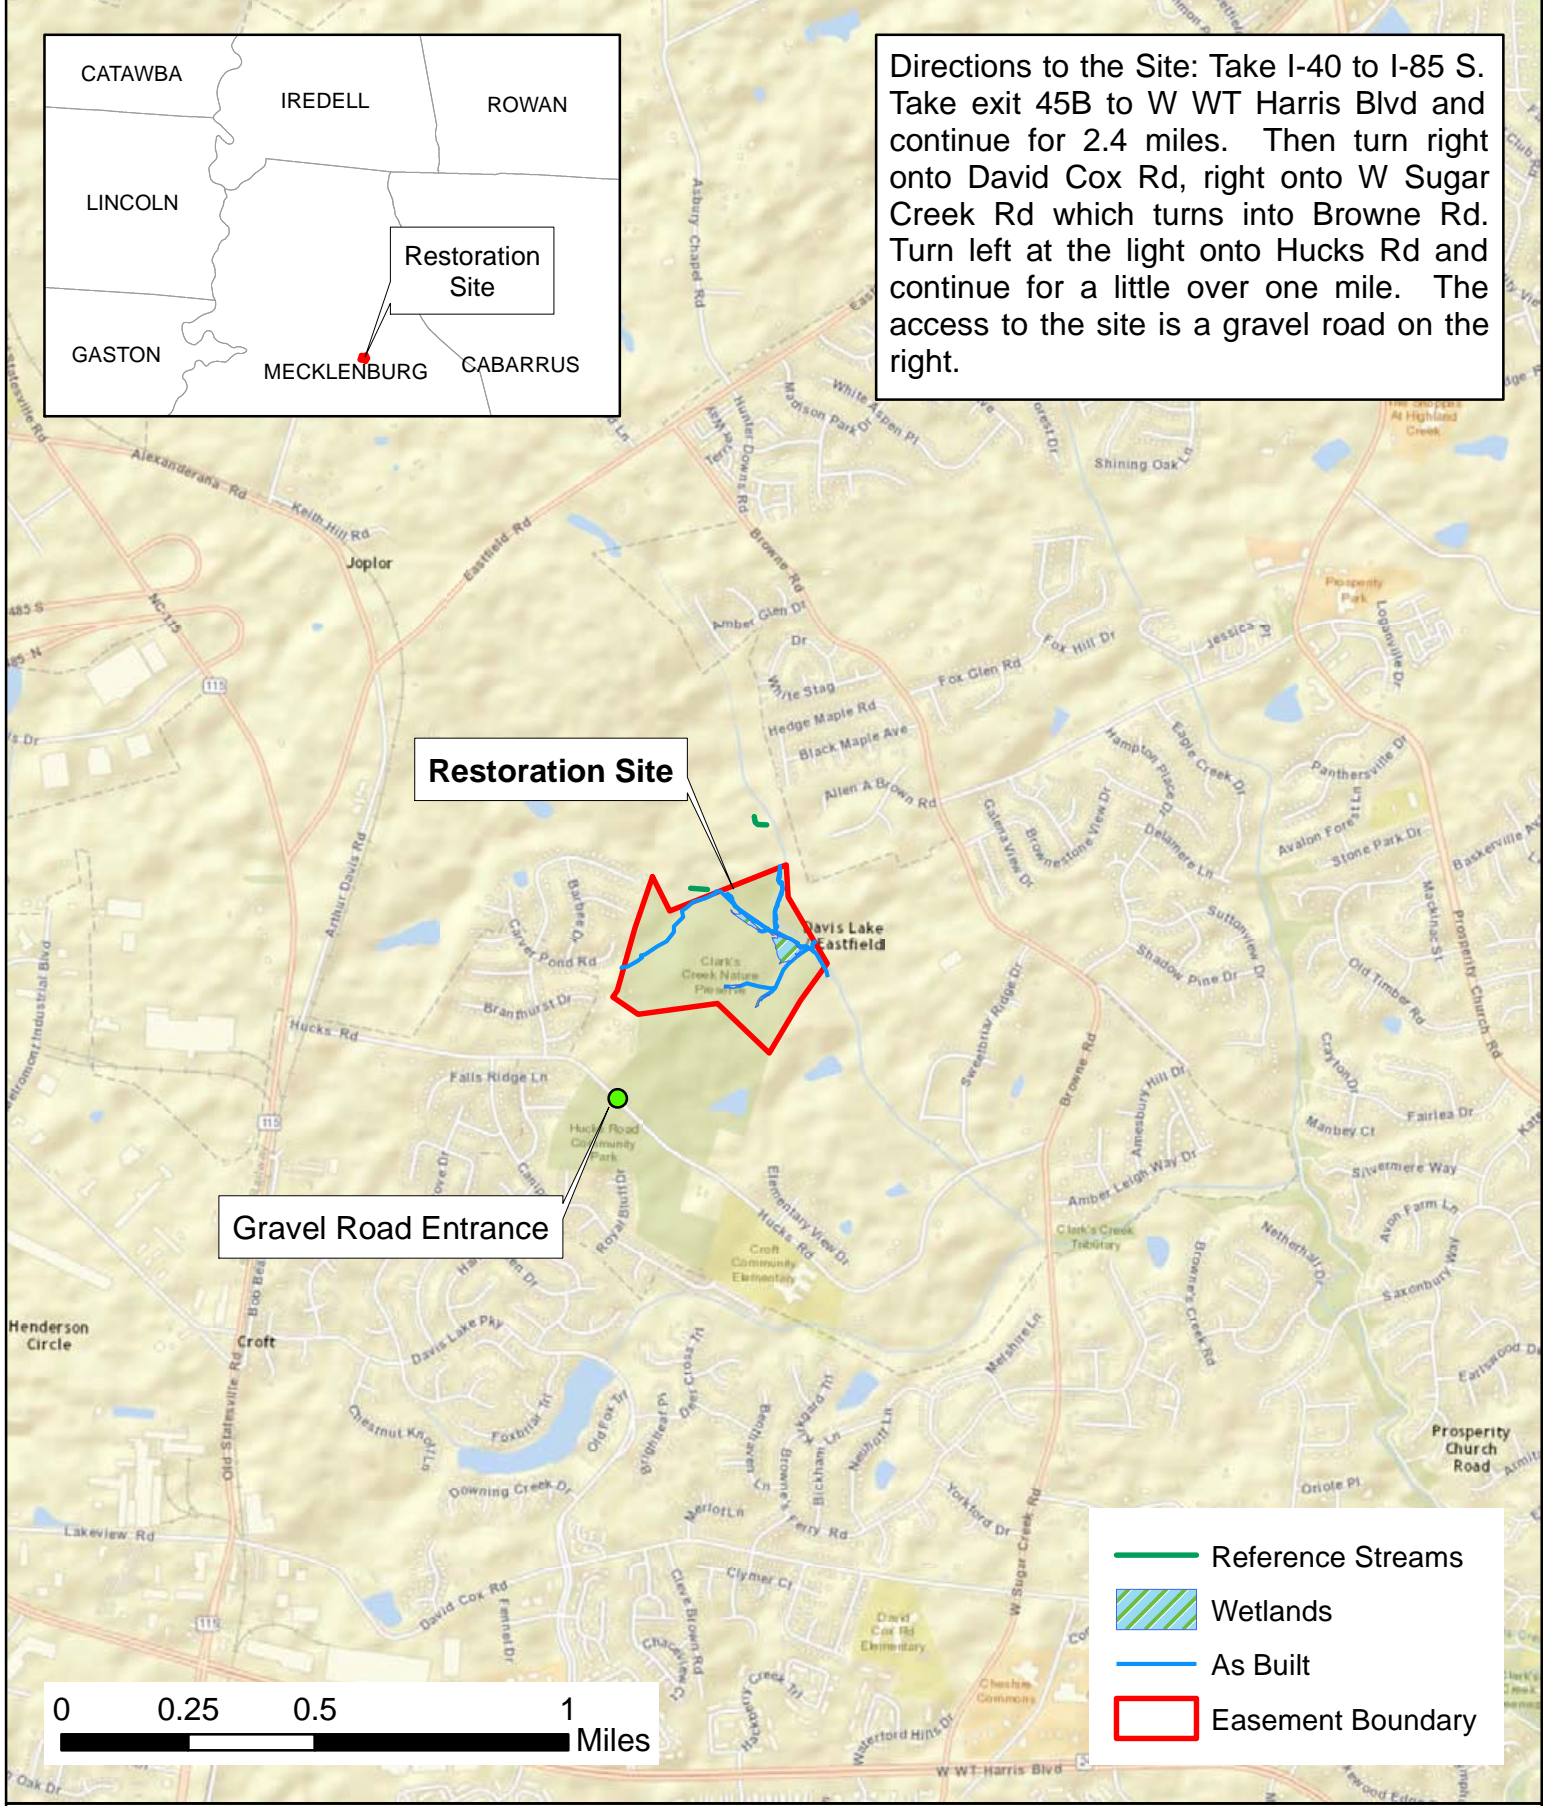

Prepared For



Restoration Site Vicinity

UT to Clarke Creek


Monitoring Year 1



November 2014





Mecklenburg County, NC

Project # 92500

Figure 1

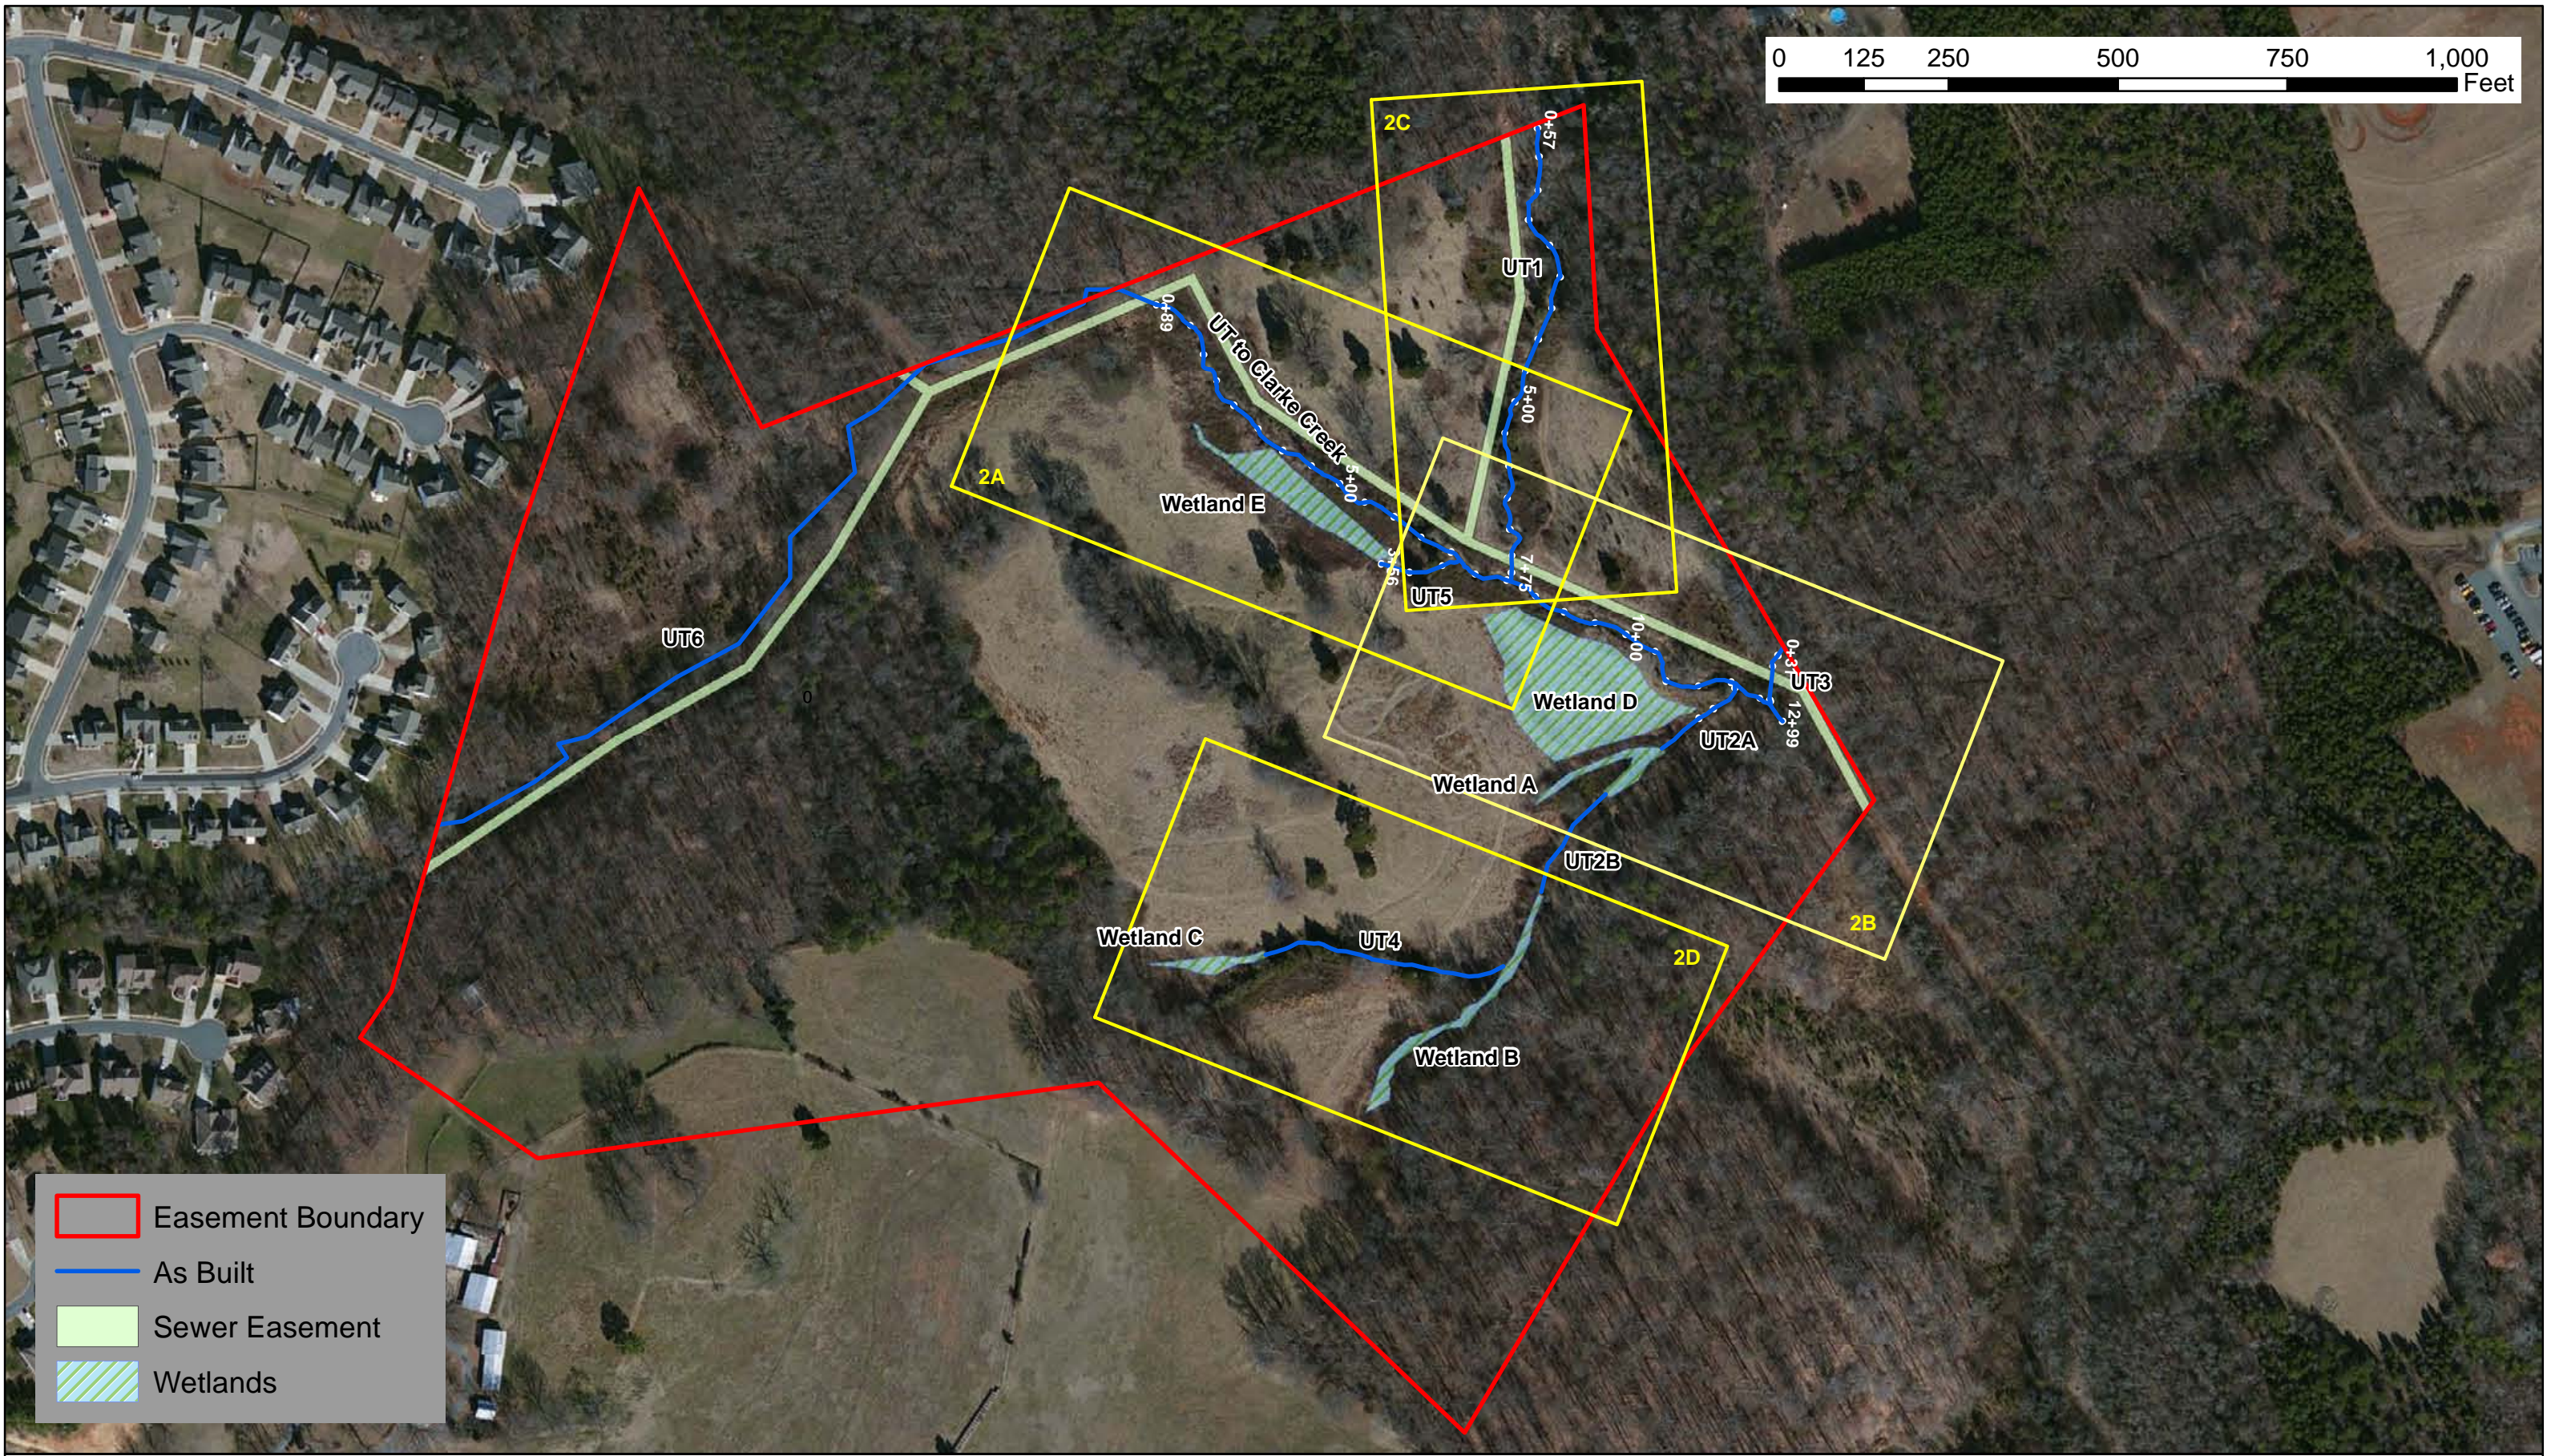




-  Easement Boundary
-  As Built
-  Sewer Easement
-  Wetlands




UT to Clarke Creek Monitoring Year 1



Current Conditions Plan View - Index Map


November 2014 Project # 92500 Figure 2 Mecklenburg County, NC



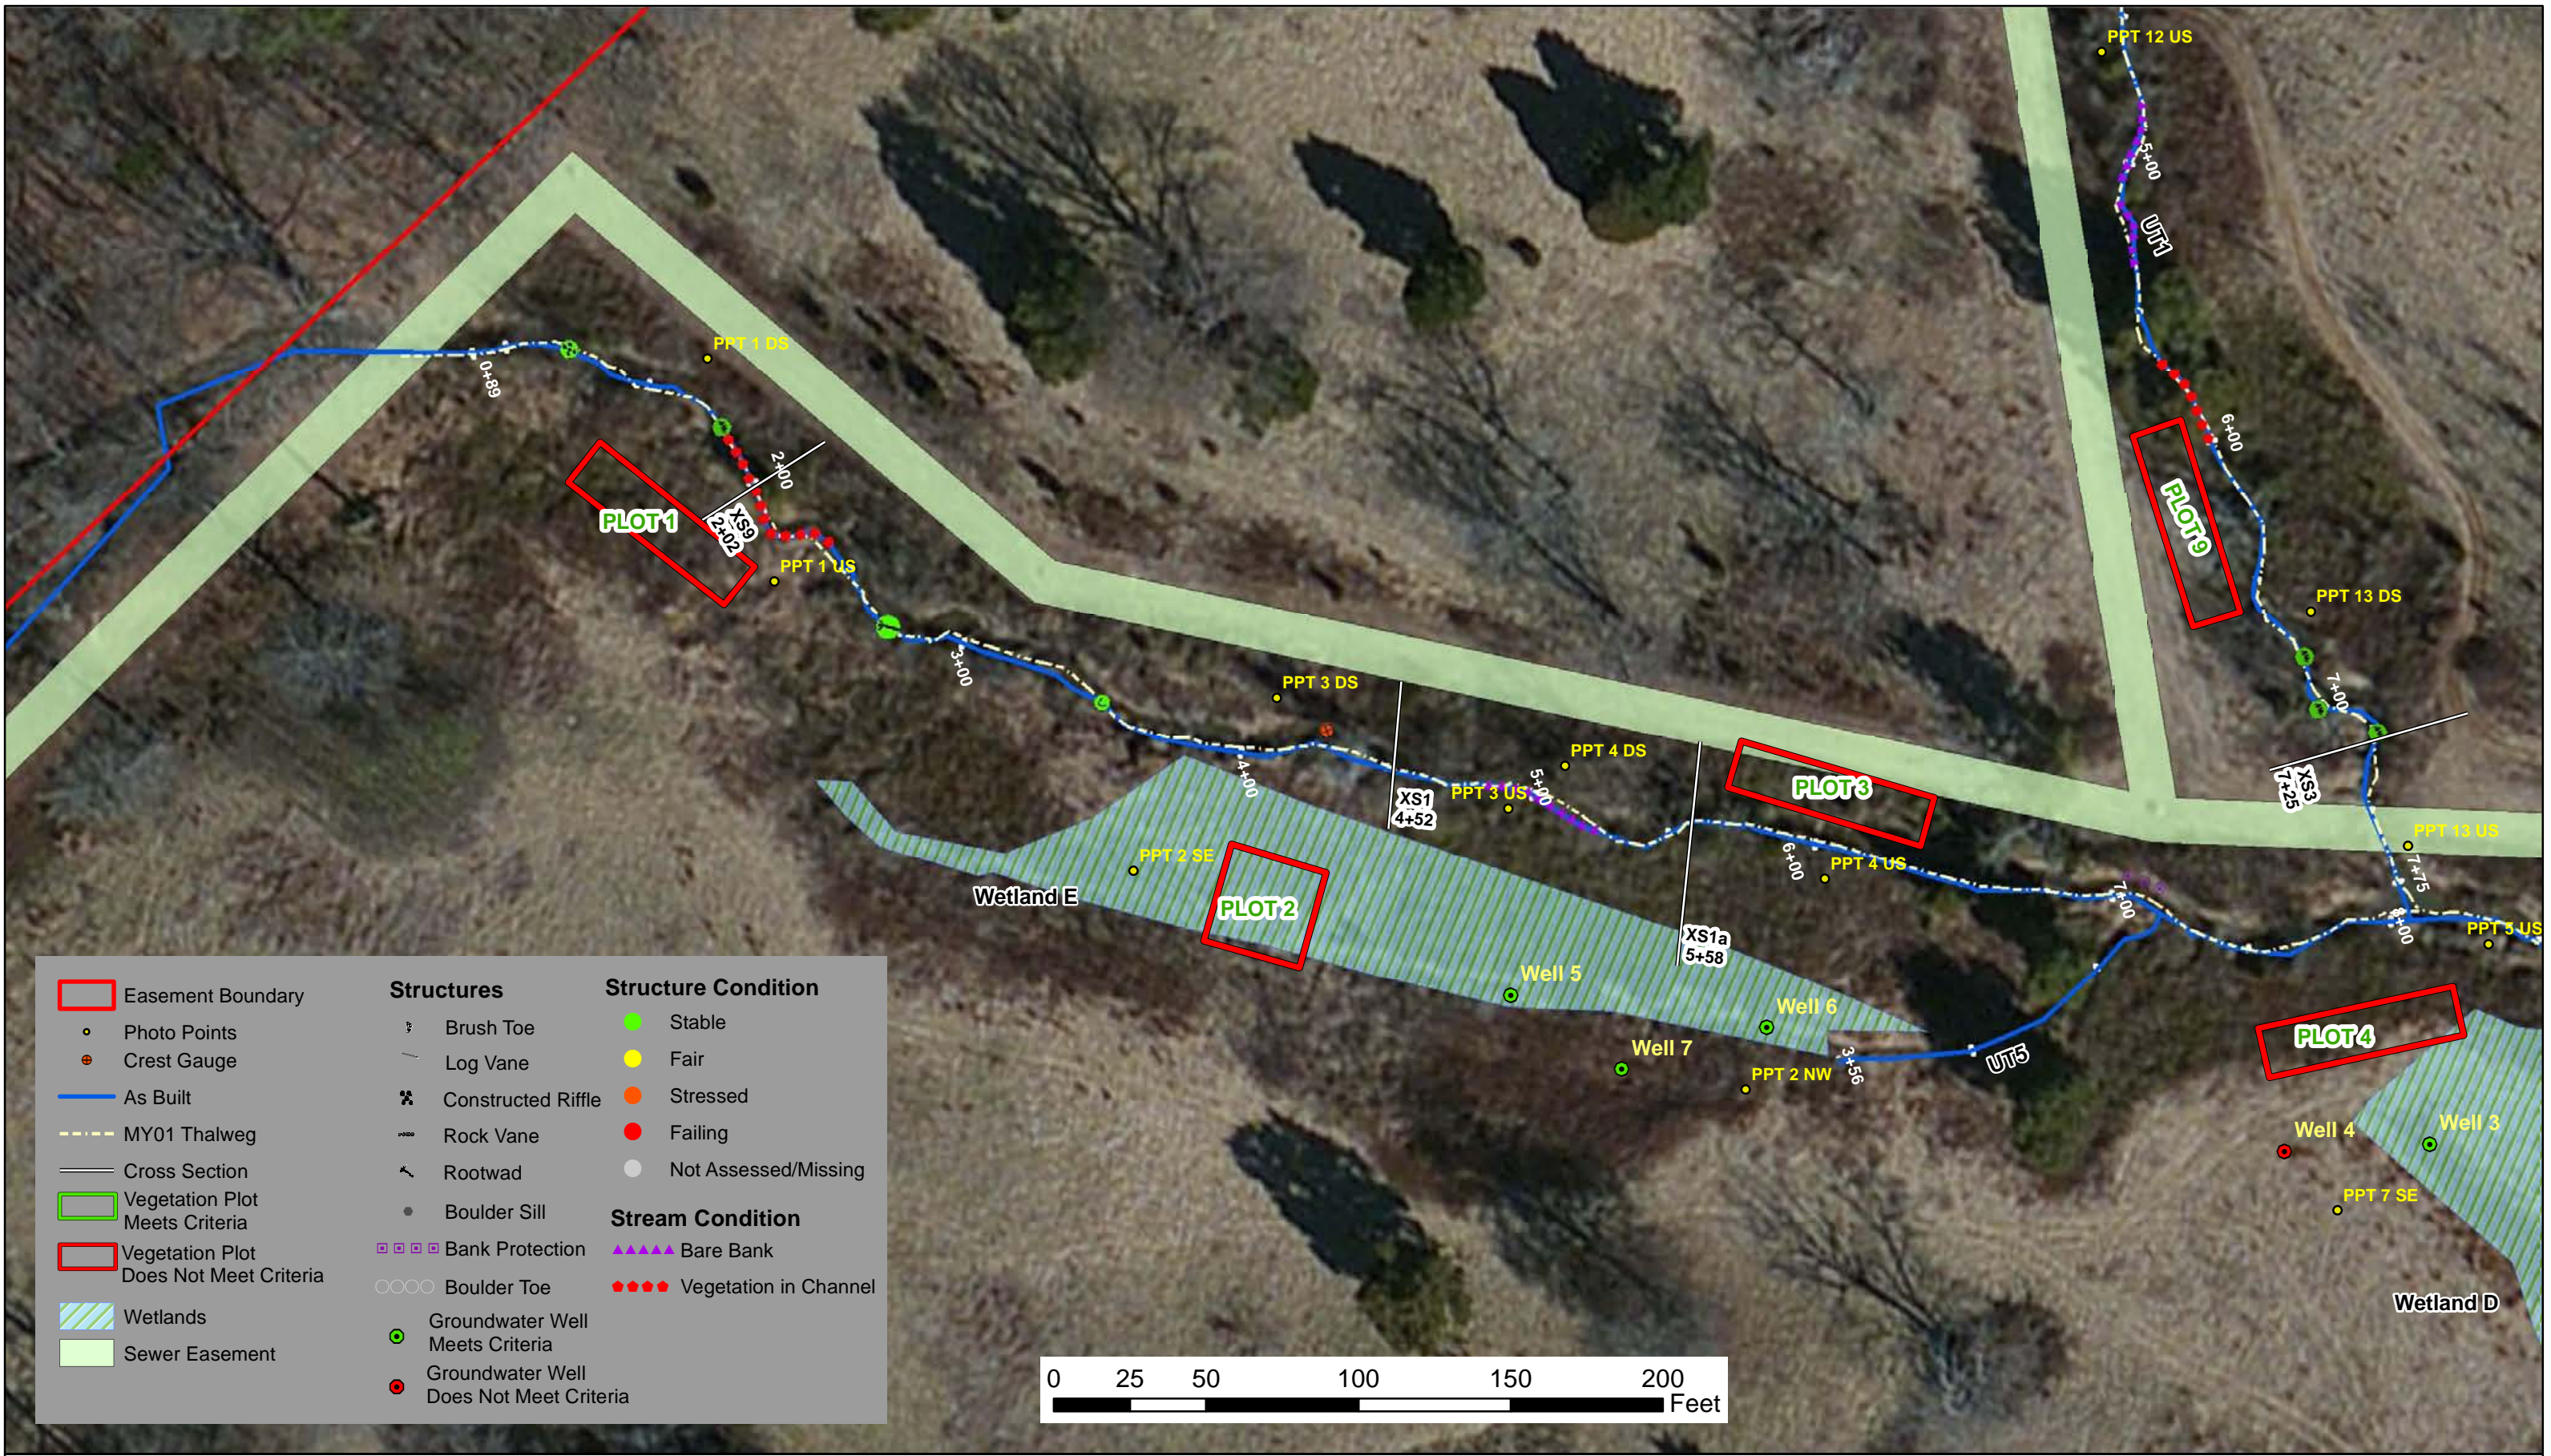



Easement Boundary	Structures	Structure Condition
Photo Points	Brush Toe	Stable
Crest Gauge	Log Vane	Fair
As Built	Constructed Riffle	Stressed
MY01 Thalweg	Rock Vane	Failing
Cross Section	Rootwad	Not Assessed/Missing
Vegetation Plot Meets Criteria	Boulder Sill	Stream Condition
Vegetation Plot Does Not Meet Criteria	Bank Protection	Bare Bank
Wetlands	Boulder Toe	Vegetation in Channel
Sewer Easement	Groundwater Well Meets Criteria	
	Groundwater Well Does Not Meet Criteria	








Easement Boundary	Structures	Structure Condition
Photo Points	Brush Toe	Stable
Crest Gauge	Log Vane	Fair
As Built	Constructed Riffle	Stressed
MY01 Thalweg	Rock Vane	Failing
Cross Section	Rootwad	Not Assessed/Missing
Vegetation Plot Meets Criteria	Boulder Sill	Stream Condition
Vegetation Plot Does Not Meet Criteria	Bank Protection	Bare Bank
Wetlands	Boulder Toe	Vegetation in Channel
Sewer Easement	Groundwater Well Meets Criteria	
	Groundwater Well Does Not Meet Criteria	



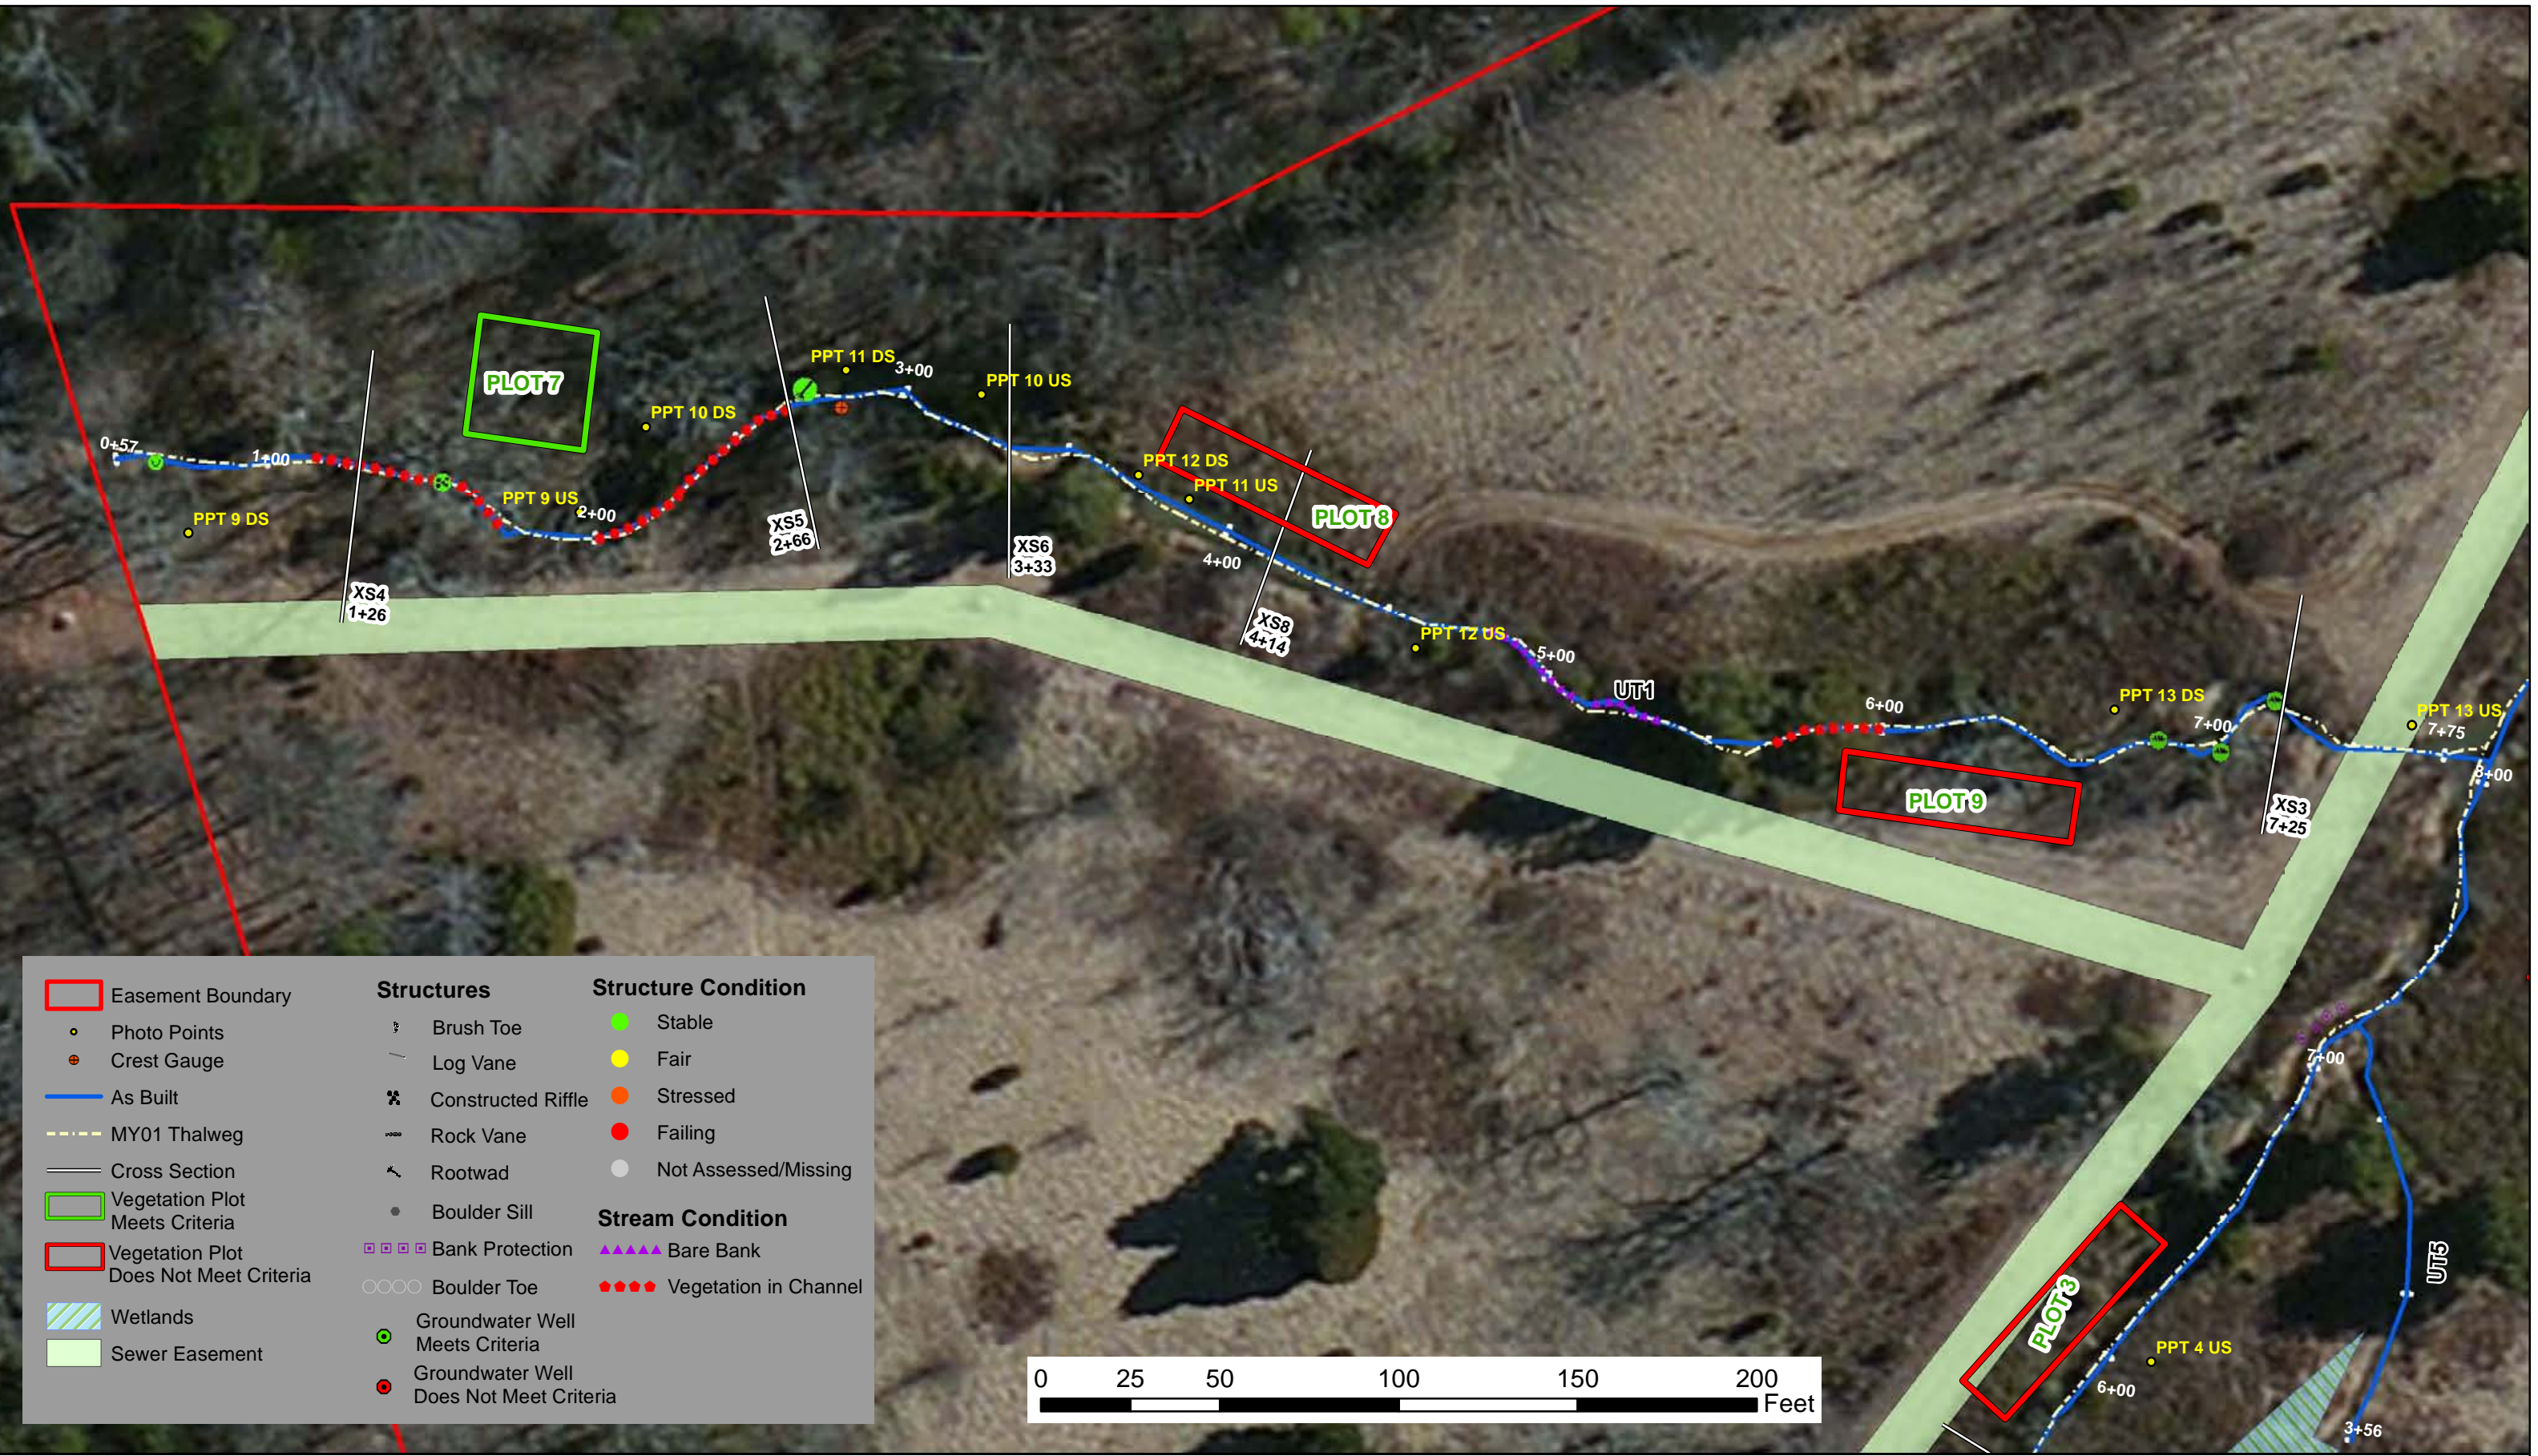




Easement Boundary	Structures	Structure Condition
Photo Points	Brush Toe	Stable
Crest Gauge	Log Vane	Fair
As Built	Constructed Riffle	Stressed
MY01 Thalweg	Rock Vane	Failing
Cross Section	Rootwad	Not Assessed/Missing
Vegetation Plot Meets Criteria	Boulder Sill	Stream Condition
Vegetation Plot Does Not Meet Criteria	Bank Protection	Bare Bank
Wetlands	Boulder Toe	Vegetation in Channel
Sewer Easement	Groundwater Well Meets Criteria	
	Groundwater Well Does Not Meet Criteria	





Easement Boundary	Structures	Structure Condition
Photo Points	Brush Toe	Stable
Crest Gauge	Log Vane	Fair
As Built	Constructed Riffle	Stressed
MY01 Thalweg	Rock Vane	Failing
Cross Section	Rootwad	Not Assessed/Missing
Vegetation Plot Meets Criteria	Boulder Sill	Stream Condition
Vegetation Plot Does Not Meet Criteria	Bank Protection	Bare Bank
Wetlands	Boulder Toe	Vegetation in Channel
Sewer Easement	Groundwater Well Meets Criteria	
	Groundwater Well Does Not Meet Criteria	



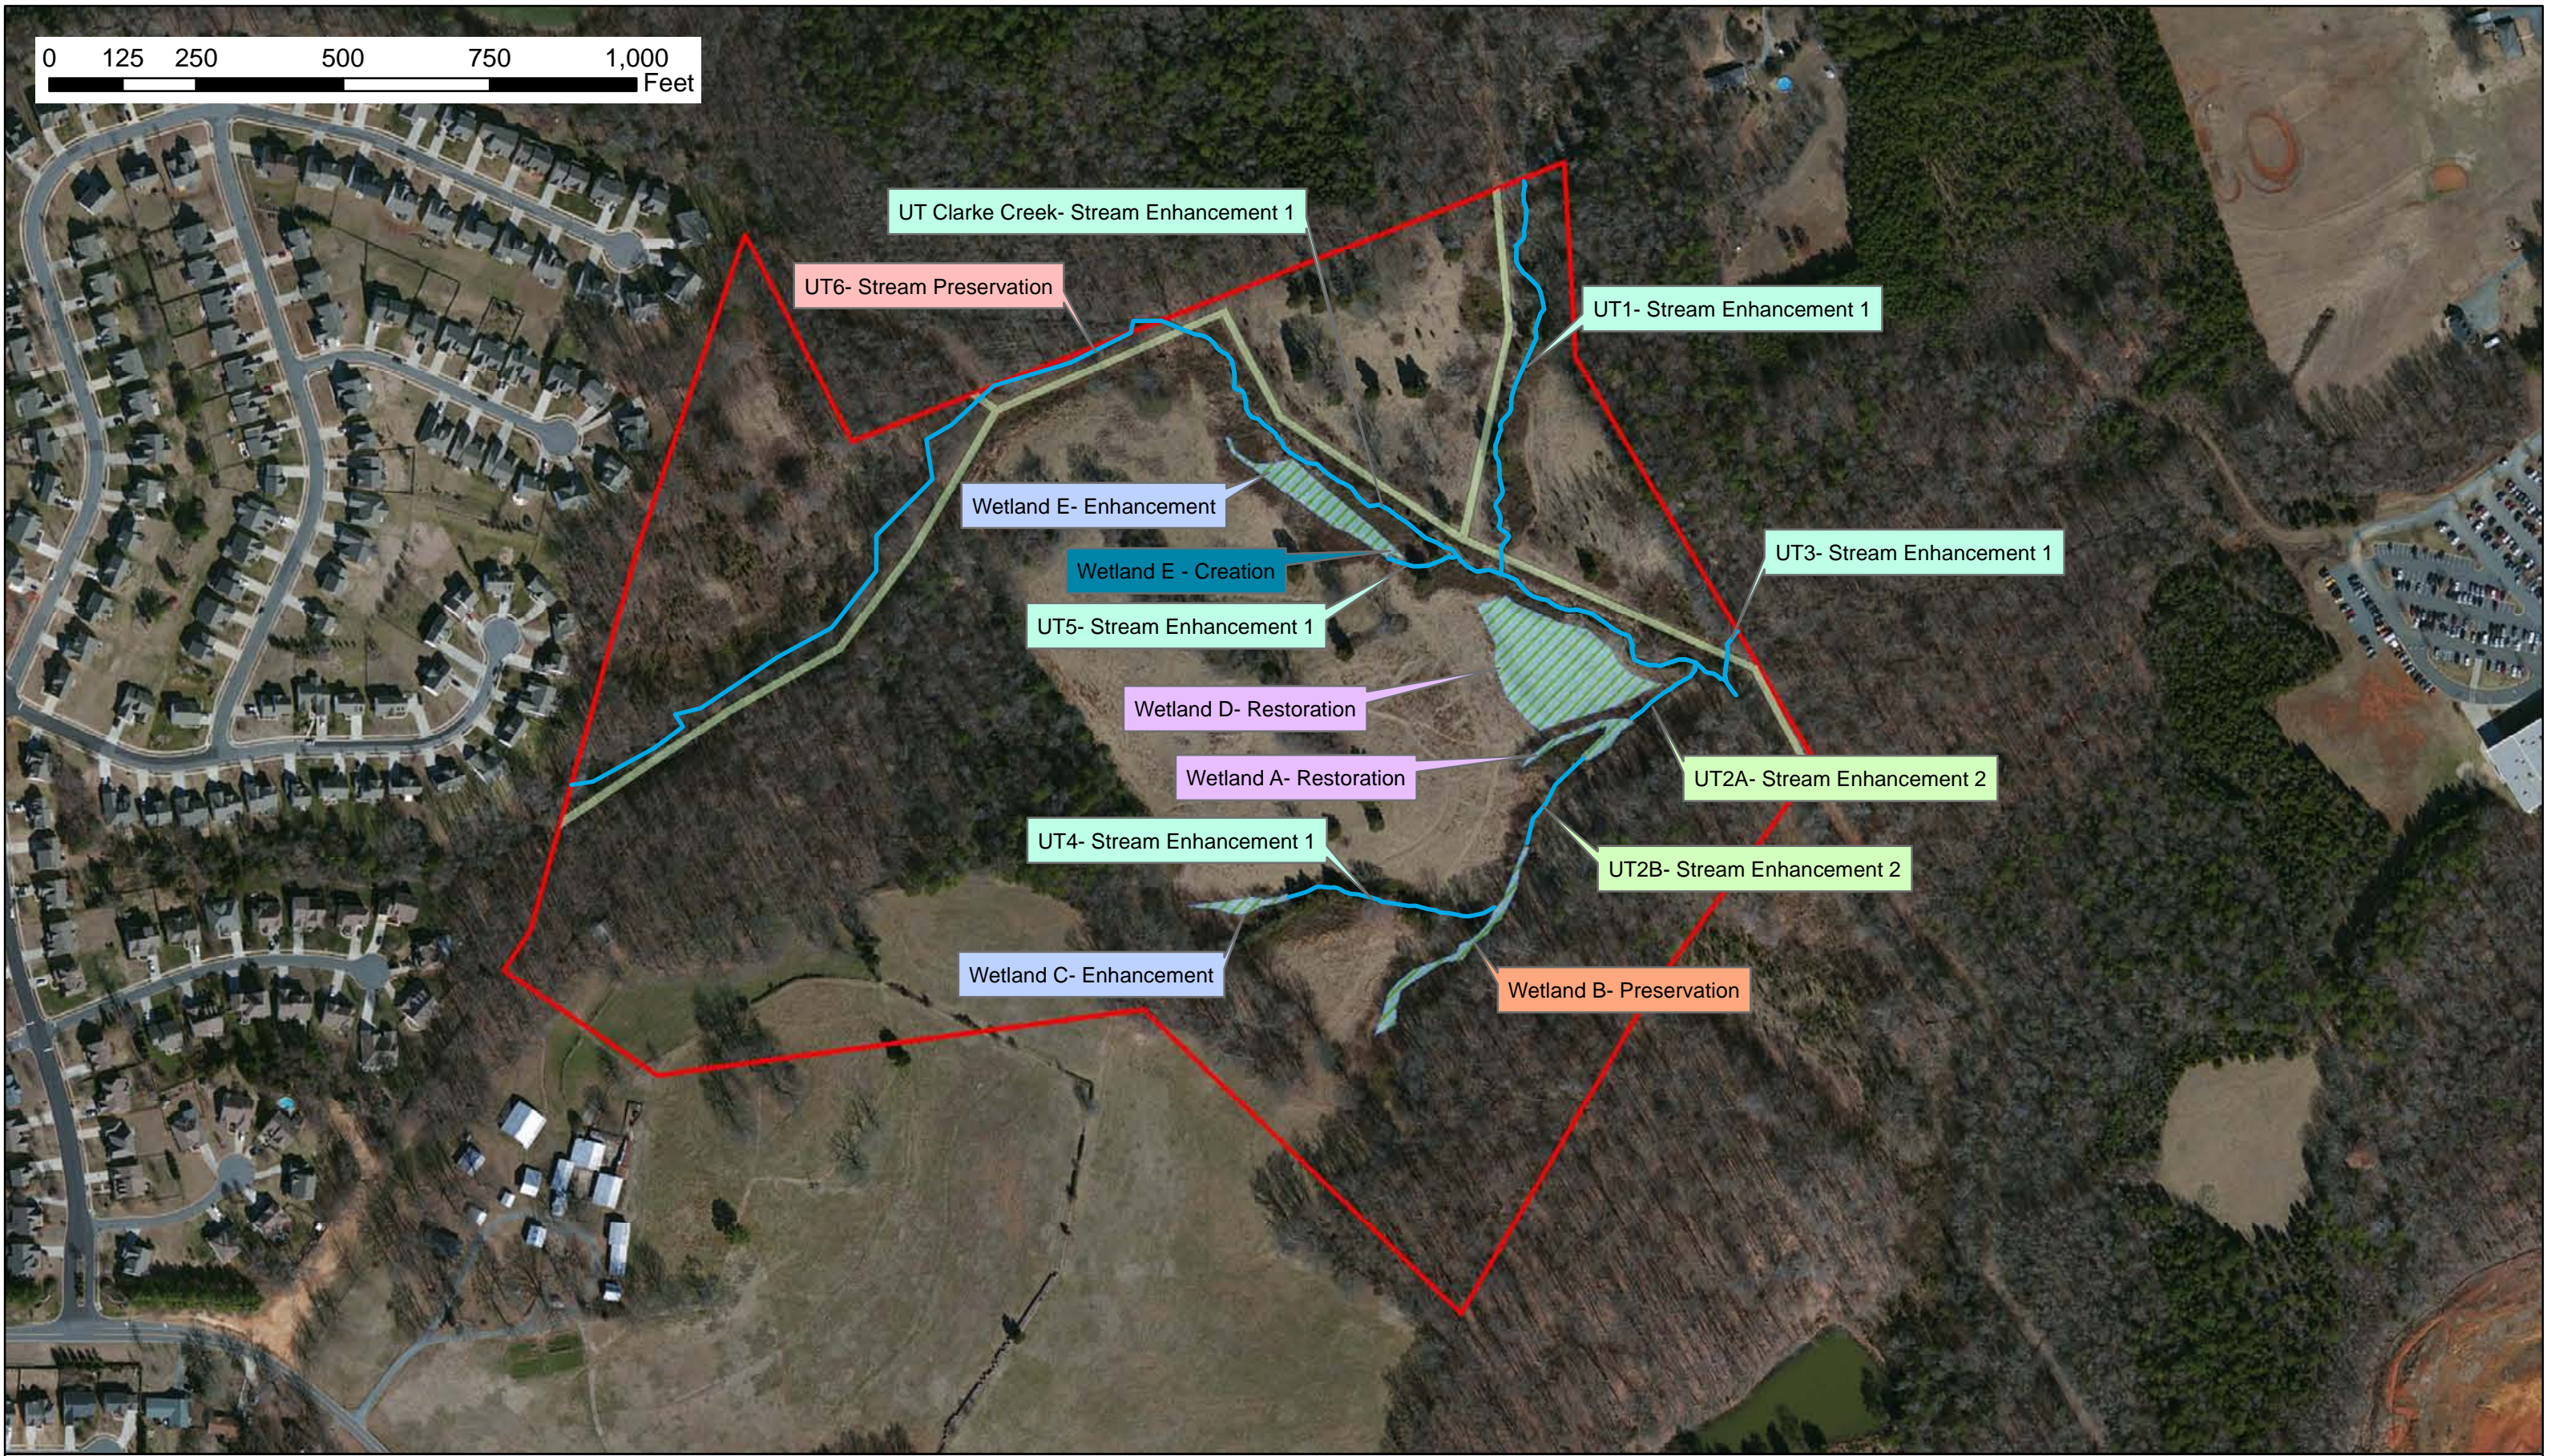

Prepared For



UT to Clarke Creek Monitoring Year 1 Components Map

November 2014

Project # 92500

Figure 3

Mecklenburg County, NC

Prepared By




Table 5a
 Reach ID
 Assessed Length

Visual Stream Morphology Stability Assessment
 UT to Clarke Creek
 1507

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	10	10			100%			
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6)	10	10					
	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)		10	10			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	10	10			100%			
2. Thalweg centering at downstream of meander (Glide)		10	10			100%				
Totals										
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			1	40	99%	3	75	101%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	2	60	102%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%
Totals										
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	7	7			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	1	1			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	8	8			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	7	8			88%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	2	2			100%			

Table 5b
 Reach ID
 Assessed Length

Visual Stream Morphology Stability Assessment
 UT1
 758

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	5	5			100%			
		3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6)	6	6					
	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)		6	6			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	6	6			100%			
		2. Thalweg centering at downstream of meander (Glide)	6	6			100%			
Totals										
2. Bank	1. <u>Scoured/Eroding</u>	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			1	59	96%	3	75	101%
	2. <u>Undercut</u>	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	2	60	104%
	3. <u>Mass Wasting</u>	Bank slumping, calving, or collapse			0	0	100%	0	0	100%
Totals										
3. Engineered Structures	1. <u>Overall Integrity</u>	Structures physically intact with no dislodged boulders or logs.	7	7			100%			
	2. <u>Grade Control</u>	Grade control structures exhibiting maintenance of grade across the sill.	1	1			100%			
	2a. <u>Piping</u>	Structures lacking any substantial flow underneath sills or arms.	8	8			100%			
	3. <u>Bank Protection</u>	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	8	8			100%			
	4. <u>Habitat</u>	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	2	2			100%			

Table 6 **Vegetation Condition Assessment**

Planted Acreage¹

13

Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	0.1 acres	Pattern and Color	0	0.00	0.0%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1 acres	Pattern and Color	0	0.00	0.0%
Total				0	0.00	0.0%
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 acres	Pattern and Color	0	0.00	0.0%
Cumulative Total				0	0.00	0.0%

Easement Acreage²

57.2

Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage
4. Invasive Areas of Concern ⁴	Areas or points (if too small to render as polygons at map scale).	1000 SF	Pattern and Color	0	0.00	0.0%
5. Easement Encroachment Areas ³	Areas or points (if too small to render as polygons at map scale).	none	Pattern and Color	0	0.00	0.0%



Photo Station 1 Downstream-XS9 (MY1)



Photo Station 1 Upstream-XS 9 (MY1)



Photo Station 2 Northeast-Wetland E (MY1)



Photo Station 2 Southeast-Wetland E (MY1)



Photo Station 3 Downstream-XS1 (MY1)



Photo Station 3 Upstream-XS1 (MY1)



Photo Station 4 Downstream-XS1A (MY1)



Photo Station 4 Upstream-XS1A (MY1)



Photo Station 5 Upstream-Confluence (MY1)



Photo Station 6 Downstream-XS2 (MY1)



Photo Station 6 Upstream-XS2 (MY1)



Photo Station 7 Northwest- Wetland D (MY1)



Photo Station 7 Southeast-Wetland D (MY1)



Photo Station 8 Downstream-UT2 (MY1)



Photo Station 8 South-Wetland A (MY1)



Photo Station 9 Downstream-XS4 (MY1)



Photo Station 9 Upstream-XS4 (MY1)



Photo Station 10 Downstream-XS5 (MY1)



Photo Station 10 Upstream-XS5 (MY1)



Photo Station 11 Downstream-XS6 (MY1)



Photo Station 11 Upstream-XS6 (MY1)



Photo Station 12 Downstream-XS8 (MY1)



Photo Station 12 Upstream-XS8 (MY1)



Photo Station 13 Downstream-XS3 (MY1)



Photo Station 13 Upstream-XS3 (MY1)



Photo Station 14 North-Wetland B (MY1)



Photo Station 14 South-Wetland B (MY1)



Vegetation Plot 1 – 5m x 20m (Year 1 of 5)



Vegetation Plot 2 – 10m x 10m (Year 1 of 5)



Vegetation Plot 3 – 5m x 20m (Year 1 of 5)



Vegetation Plot 4 – 5m x 20m (Year 1 of 5)



Vegetation Plot 5 – 5m x 20m (Year 1 of 5)



Vegetation Plot 6 – 5m x 20m (Year 1 of 5)



Vegetation Plot 7 – 10m x 10m (Year 1 of 5)



Vegetation Plot 8 – 5m x 20m (Year 1 of 5)



Vegetation Plot 9 – 5m x 20m (Year 1 of 5)

Appendix C
Vegetation Plot Data

Table 7. Vegetation Plot Mitigation Success Summary
UT to Clarke Creek / EEP Project #92500
Year 1 of 5

Plot #	Stems/Acre	Success Criteria Met?
1	161.9	No
2	202.3	No
3	283.3	No
4	121.4	No
5	202.3	No
6	161.9	No
7	364.2	Yes
8	242.8	No
9	202.3	No

**Table 8 - CVS Vegetation Metadata
UT Clarke Creek / EEP Project #92500**

Report Prepared By	Kim Hamlin
Date Prepared	11/21/2014 16:55
database name	UT_Clarke_Creek_92500_MY1_2014.mdb G:\Environmental\NCEEP Ut Clark Creek WMS\MY01\AnnualMonitoringReport\UT_Clarke_Creek_92500_MY1_2014 (DRAFT)\Support Files\3 - Vegetation Plot
database location	Data
computer name	W93
file size	66662400

DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----

Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
ALL Stems by Plot and spp	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.

PROJECT SUMMARY-----

Project Code	92500
project Name	UT Clarke Creek
Description	Stream and Wetland Restoration
River Basin	Yadkin-Pee Dee
length(ft)	
stream-to-edge width (ft)	
area (sq m)	
Required Plots (calculated)	
Sampled Plots	9

Appendix D
Stream Survey Data

Station	Elevation
0	748.53
0.33	748.26
11.39	747.61
18.84	747.05
23.8	747.01
25.58	746.36
27.03	746.11
30.14	746.32
31.35	746.77
34.04	747.37
35.11	747.58
38.16	747.75
42.42	747.86
45.82	748.07
47.17	748.21


Reach	UT to Clarke Creek
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-9, Riffle, 2+02
Drainage Area (Sq Mi)	1.08
Date	9/18/2014
Observers	P. Beach, K. Hamlin

SUMMARY DATA	
Baseline Bankfull Datum, ft	746.79
Bankfull Cross Sectional Area, ft ²	2.48
Bankfull Width, ft	6.35
Max Depth at Bankfull, ft	0.68
Mean Depth at Bankfull, ft	0.39
Width/Depth Ratio	16.26
Flood Prone Width, ft	21.5
Flood Prone Area Elevation	747.47
Entrenchment Ratio	3.39
Bank Height Ratio	0.97



Stream Type E4

Sta. 2+02 Looking Downstream

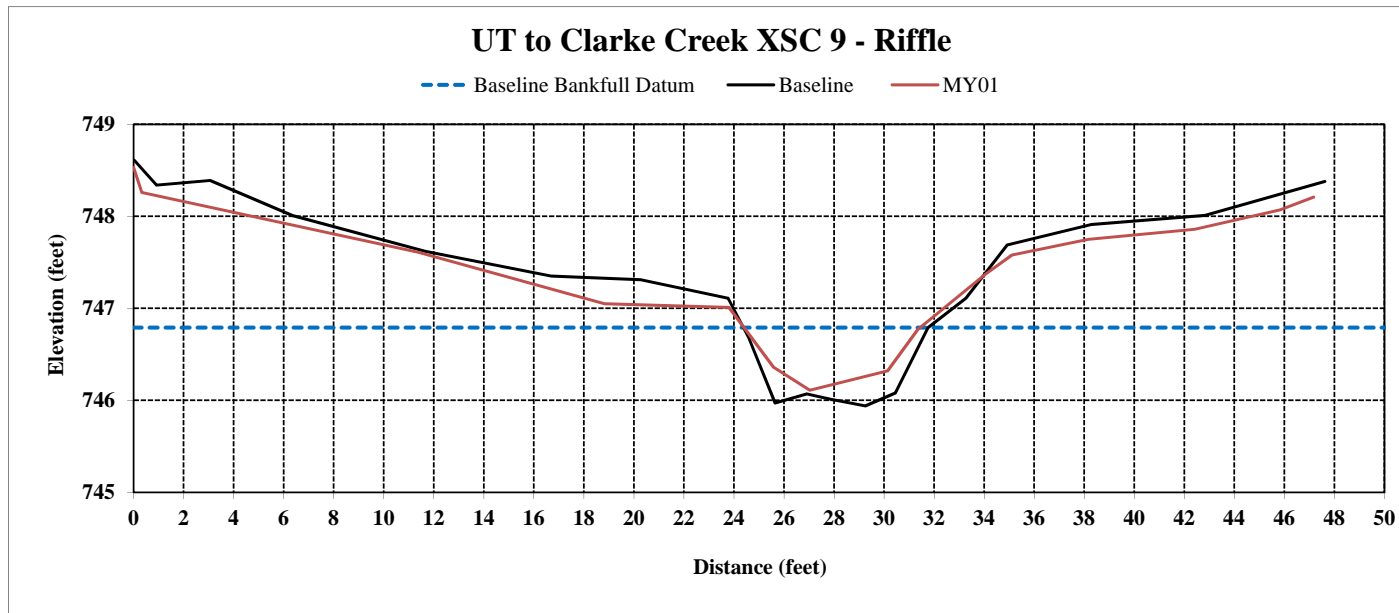

Station	Elevation
0.12	746.31
1.62	746.18
8.09	745.53
16.86	744.76
21.91	744.87
24.38	744.61
25.3	744.31
26.31	744.01
27.18	743.18
28.83	743.03
31.86	743.36
32.82	744.6
34.41	745.02
36.62	745.19
43.13	745.61
48	746.13


Reach	UT to Clarke Creek
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-1, Riffle, 4+52
Drainage Area (Sq Mi)	1.08
Date	9/18/2014
Observers	P. Beach, K. Hamlin

SUMMARY DATA	
Baseline Bankfull Datum, ft	744.21
Bankfull Cross Sectional Area, ft ²	4.59
Bankfull Width, ft	6.90
Max Depth at Bankfull, ft	1.17
Mean Depth at Bankfull, ft	0.67
Width/Depth Ratio	10.37
Flood Prone Width, ft	29.50
Flood Prone Area Elevation	745.37
Entrenchment Ratio	4.28
Bank Height Ratio	0.84



Stream Type E4

Sta. 4+52 Looking Downstream

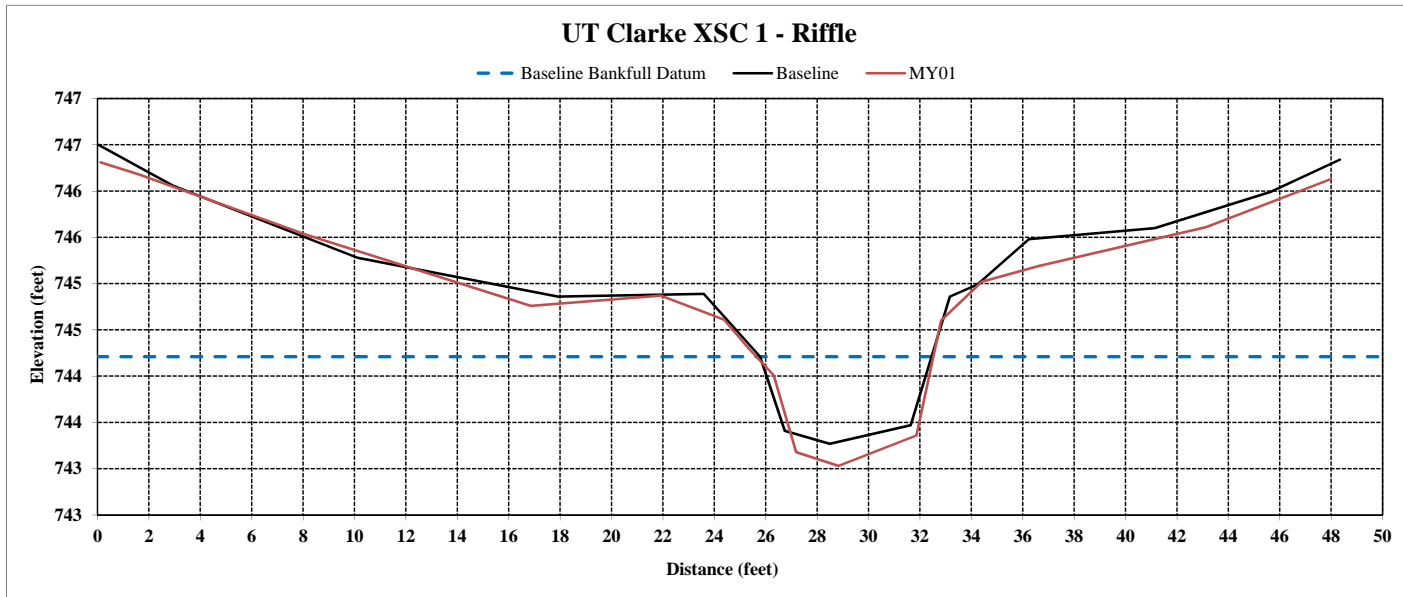

Station	Elevation
0	745.99
1.42	745.76
7.21	744.22
12.49	743.77
16.81	743.22
19.37	743.26
20.51	743.02
22.21	742.15
24.09	741.01
25.73	740.48
26.61	741.56
28.8	741.37
30.34	742.81
31.55	743.04
33.43	742.92
35.53	742.82
38.33	743.28
39.51	743.87
43.93	743.88
49.75	744.38
58.21	745.23
64.94	745.71
68.04	745.73
73.75	745.44


Reach	UT to Clarke Creek
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-1A, Pool, 5+58
Drainage Area (Sq Mi)	1.08
Date	9/18/2014
Observers	P. Beach, K. Hamlin

SUMMARY DATA	
Baseline Bankfull Datum, ft	742.39
Bankfull Cross Sectional Area, ft ²	5.96
Bankfull Width, ft	8.00
Max Depth at Bankfull, ft	1.91
Mean Depth at Bankfull, ft	0.75
Width/Depth Ratio	10.74
Flood Prone Width, ft	41.79
Flood Prone Area Elevation	744.30
Entrenchment Ratio	5.22
Bank Height Ratio	1.22



Stream Type E4

Sta. 5+58 Looking Downstream

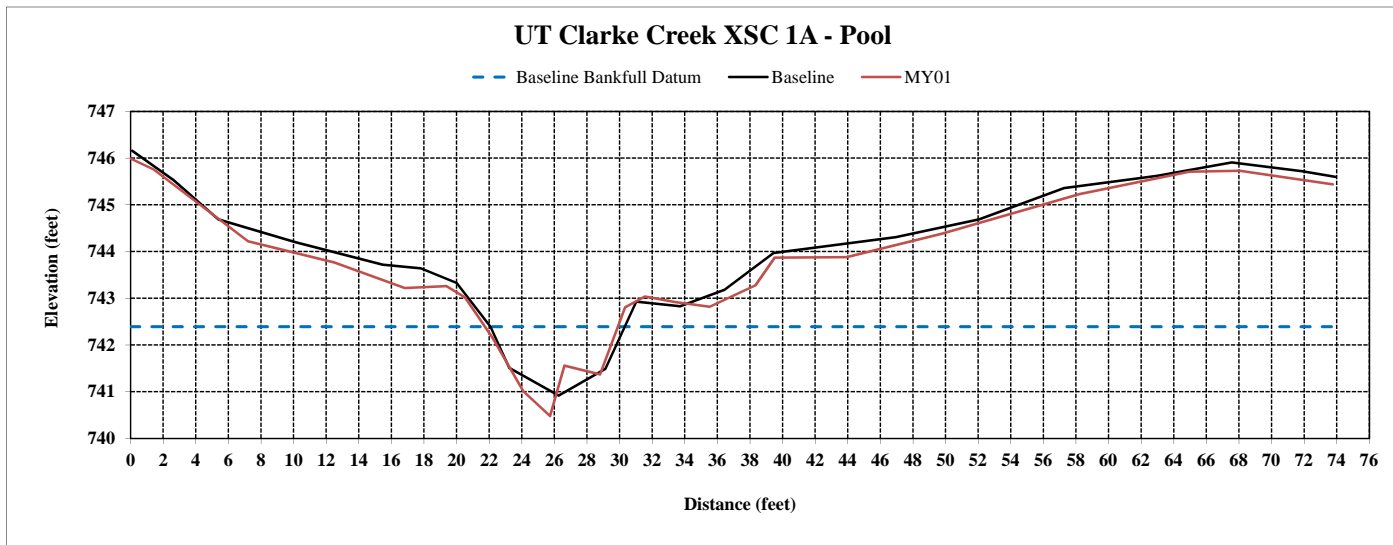

Station	Elevation
0	743.50
0.78	743.28
5.53	742.22
9.05	741.16
13.69	740.49
18.71	739.95
22.39	739.62
26.26	739.96
28.21	739.45
29.36	739.11
30.73	737.70
33.69	737.01
37.49	737.83
39.18	739.96
46.15	740.28
49.4	740.73
53.85	742.32
56.63	742.95


Reach	UT to Clarke Creek
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-2, Riffle, 9+33
Drainage Area (Sq Mi)	1.08
Date	9/18/2014
Observers	P. Beach, K. Hamlin

SUMMARY DATA	
Baseline Bankfull Datum, ft	739.37
Bankfull Cross Sectional Area, ft²	13.66
Bankfull Width, ft	10.70
Max Depth at Bankfull, ft	2.36
Mean Depth at Bankfull, ft	1.28
Width/Depth Ratio	8.38
Flood Prone Width, ft	45.00
Flood Prone Area Elevation	741.73
Entrenchment Ratio	4.21
Bank Height Ratio	0.89



Stream Type E4

Sta. 9+33 Looking Downstream

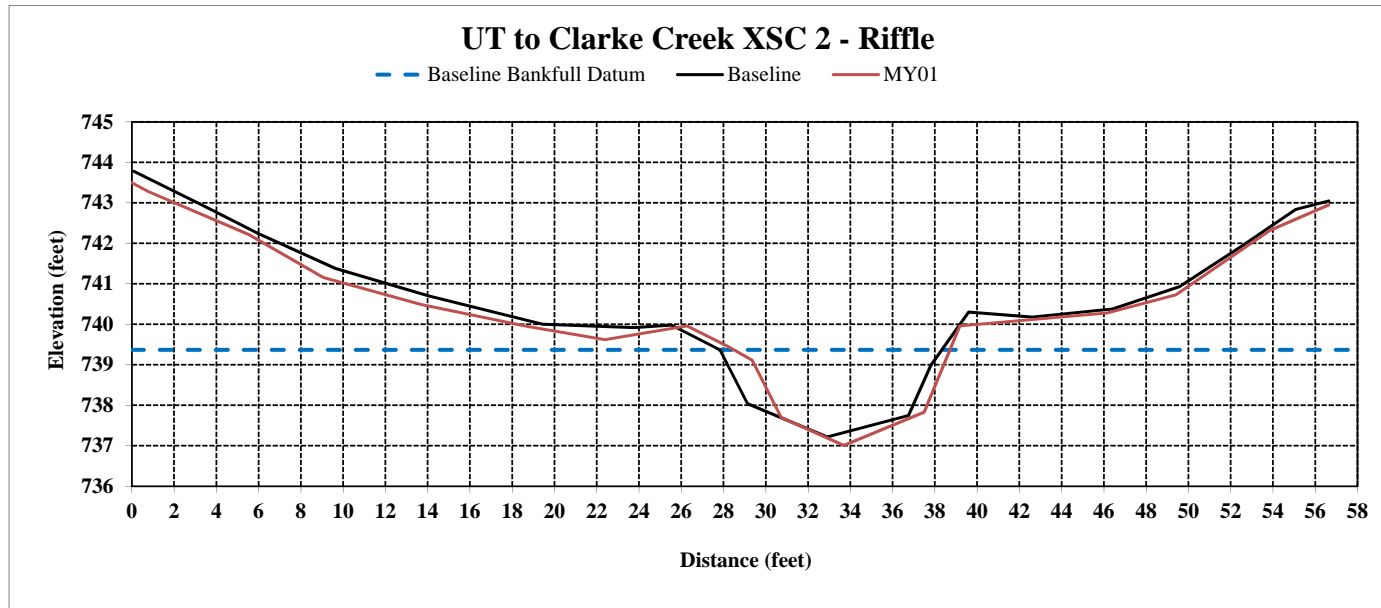

Station	Elevation
0	760.22
5.27	748.35
5.93	748.31
17.78	747.36
21.82	747.07
25.71	747.83
28.36	746.57
29.65	745.89
31.42	745.32
35.1	745.37
37.54	745.53
39.58	745.95
39.91	745.77
42.37	746.04
46.22	746.23
47.51	746.16
64.18	748.03
68.57	749.01
75.55	748.78
78.55	748.81


Reach	UT1
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-4, Riffle, 1+26
Drainage Area (Sq Mi)	0.46
Date	9/18/2014
Observers	P. Beach, K. Hamlin

SUMMARY DATA	
Baseline Bankfull Datum, ft	745.96
Bankfull Cross Sectional Area, ft ²	3.95
Bankfull Width, ft	9.93
Max Depth at Bankfull, ft	0.64
Mean Depth at Bankfull, ft	0.40
Width/Depth Ratio	24.96
Flood Prone Width, ft	22.81
Flood Prone Area Elevation	746.6
Entrenchment Ratio	2.30
Bank Height Ratio	0.98



Stream Type B4c

Sta. 1+26 Looking Downstream

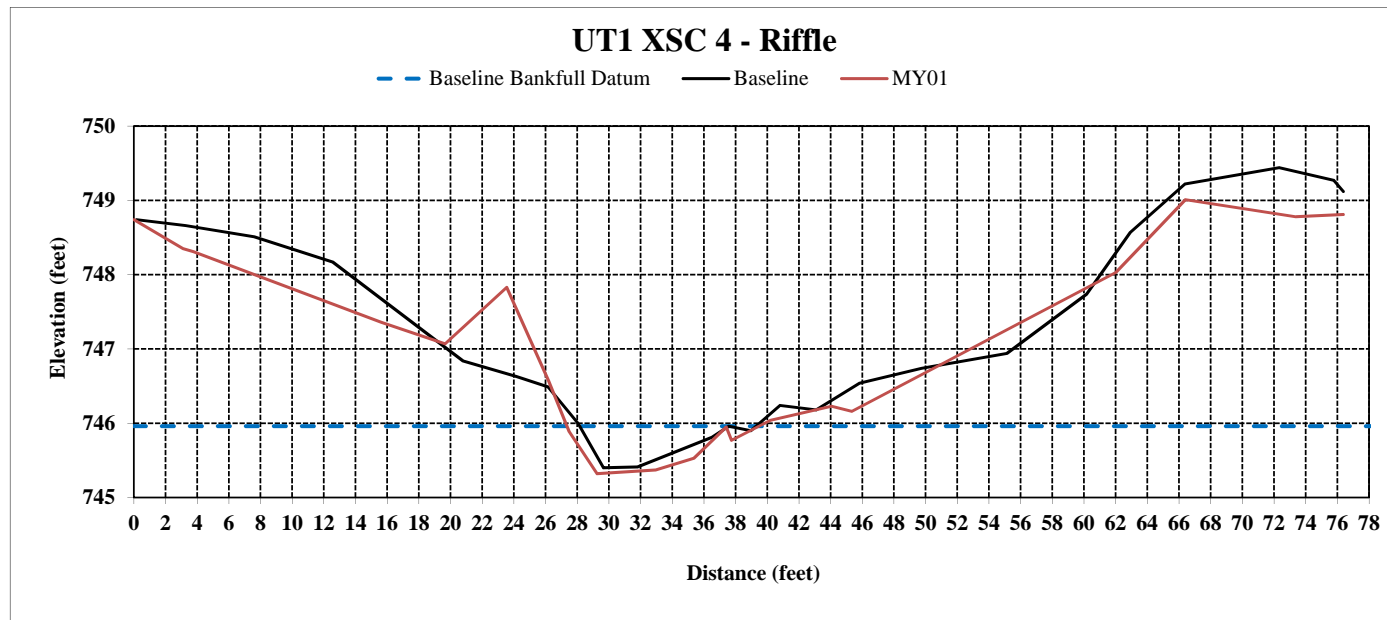

Station	Elevation
0.03	750.14
4.5	749.30
6.52	748.27
7.63	747.89
8.99	747.41
15.57	746.65
20.57	745.77
25.26	745.36
26.32	745.00
27.65	744.17
29.47	743.49
31.62	743.94
32.24	744.30
33.17	744.44
34.73	745.22
36.5	745.65
38.36	745.85
39.72	745.59
49.47	746.05
59.63	746.84
66.56	747.1
71.5	747.46


Reach	UT1
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-5, Pool, 2+66
Drainage Area (Sq Mi)	0.46
Date	9/18/2014
Observers	P. Beach, K. Hamlin

SUMMARY DATA	
Baseline Bankfull Datum, ft	745.90
Bankfull Cross Sectional Area, ft ²	5.98
Bankfull Width, ft	7.88
Max Depth at Bankfull, ft	1.51
Mean Depth at Bankfull, ft	0.76
Width/Depth Ratio	10.38
Flood Prone Width, ft	40
Flood Prone Area Elevation	746.51
Entrenchment Ratio	5.08
Bank Height Ratio	1



Stream Type B4c

Sta. 2+66 Looking Downstream

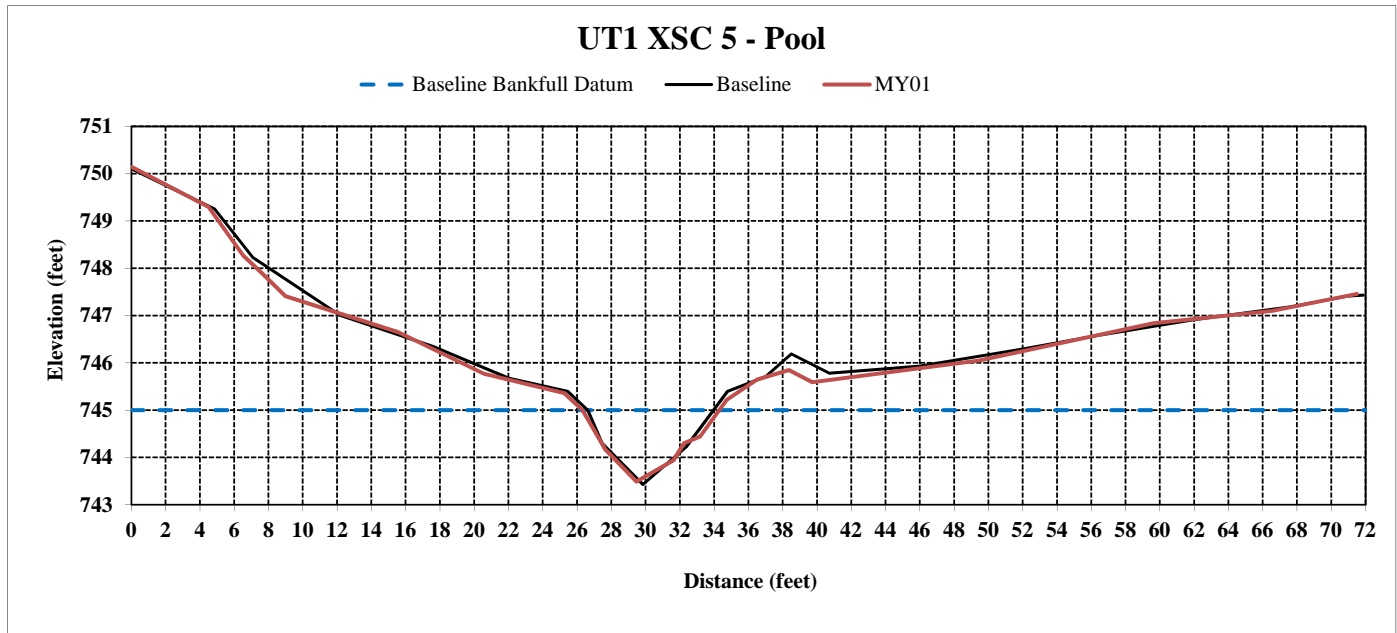

Station	Elevation
0.04	750.13
2.97	749.62
4.98	748.61
6.62	748.16
14.38	747.14
18.58	746.47
27.95	745.85
30.85	745.38
32.29	745.21
32.98	744.83
33.97	744.19
35.2	743.79
36.71	744.17
37.58	744.71
39.8	745.40
41.65	745.44
49.05	746.2
56.25	747.01
59.56	747.19
70.63	747.54


Reach	UT1
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-6, Riffle, 3+33
Drainage Area (Sq Mi)	0.46
Date	9/18/2014
Observers	P. Beach, K. Hamlin

SUMMARY DATA	
Baseline Bankfull Datum, ft	744.63
Bankfull Cross Sectional Area, ft ²	2.48
Bankfull Width, ft	5.29
Max Depth at Bankfull, ft	0.84
Mean Depth at Bankfull, ft	0.47
Width/Depth Ratio	11.28
Flood Prone Width, ft	11.3
Flood Prone Area Elevation	745.47
Entrenchment Ratio	2.14
Bank Height Ratio	1.09



Stream Type B4c

Sta. 3+33 Looking Downstream

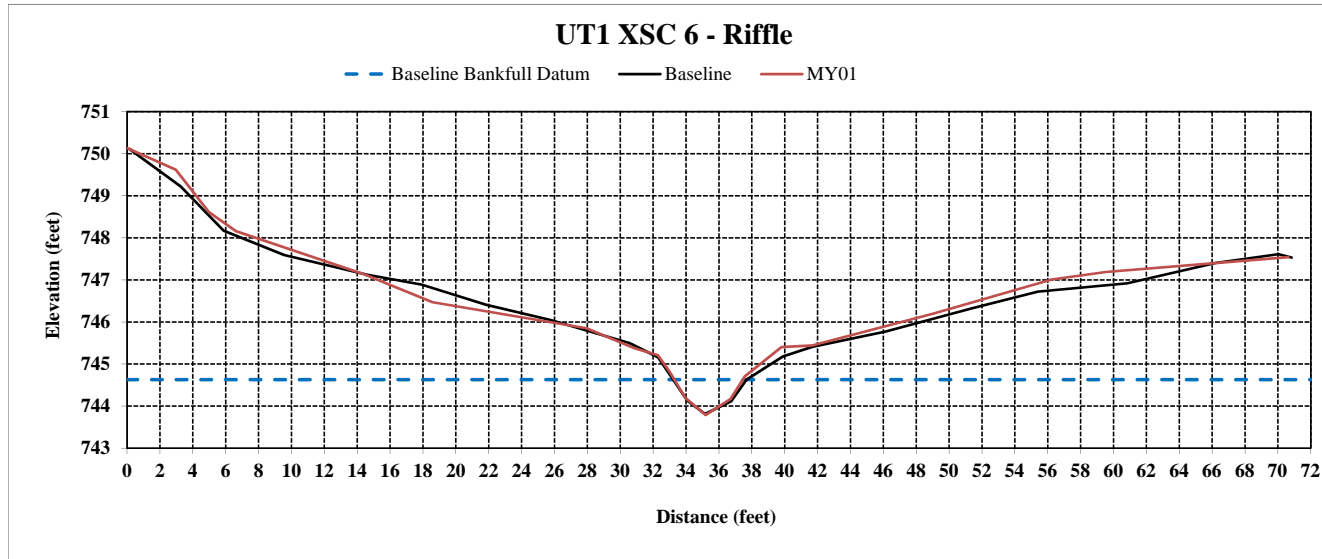

Station	Elevation
0.45	750.72
1.74	750.28
5.88	748.38
8.21	747.78
15.3	746.93
21.09	746.36
24.09	746.07
26.85	745.54
27.69	745.10
29.92	743.99
32.06	743.80
36.05	744.12
36.5	744.81
38.02	745.16
40.69	745.41
46.94	745.83
57.32	746.86


Reach	UT1
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-8, Riffle, 4+14
Drainage Area (Sq Mi)	0.46
Date	9/18/2014
Observers	P. Beach, K. Hamlin

SUMMARY DATA	
Baseline Bankfull Datum, ft	744.70
Bankfull Cross Sectional Area, ft ²	6.4
Bankfull Width, ft	8
Max Depth at Bankfull, ft	0.9
Mean Depth at Bankfull, ft	0.80
Width/Depth Ratio	10.00
Flood Prone Width, ft	16.15
Flood Prone Area Elevation	745.6
Entrenchment Ratio	2.02
Bank Height Ratio	1.12



Stream Type B4c

Sta. 4+14 Looking Downstream

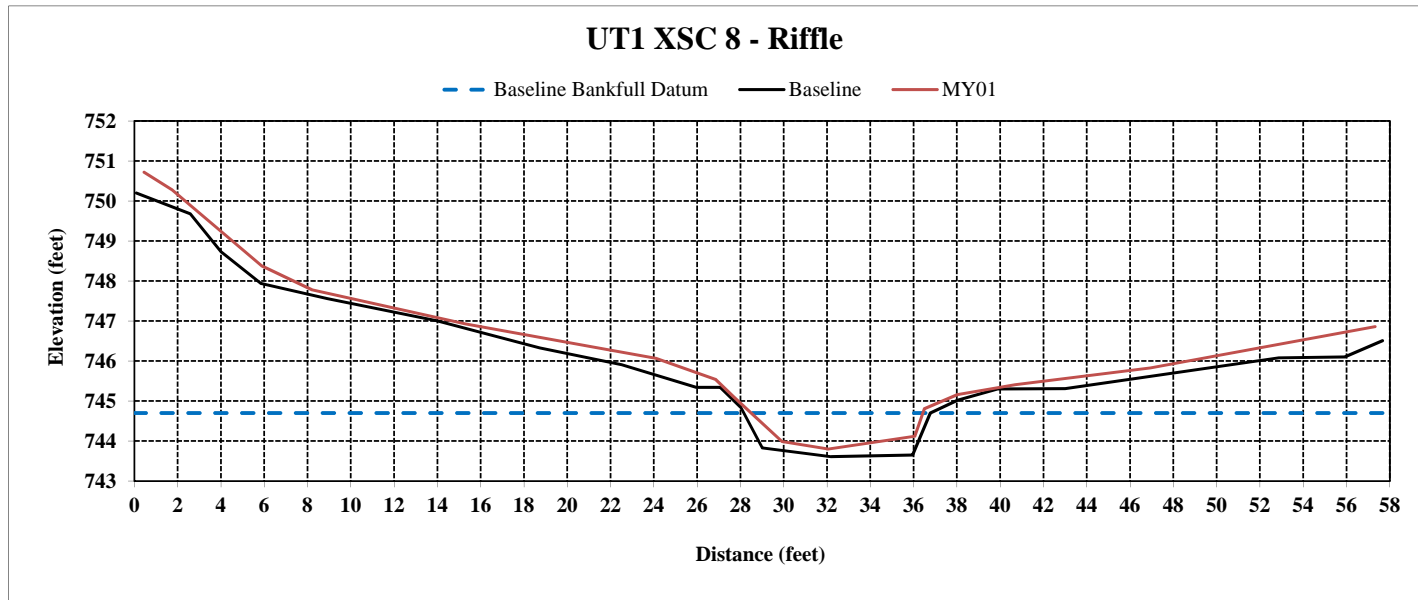

Station	Elevation
0.2	744.43
2.73	743.39
6.55	742.62
7.77	742.39
10.21	742.23
19.36	741.61
23.75	741.65
24.58	740.93
26.97	739.49
31.69	738.90
34.23	739.79
35.35	741.31
39.8	741.65
53.76	742.06
60.24	742.73
64.25	743.27
66.21	743.98
67.04	744.05


Reach	UT1
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-3, Pool, 7+25
Drainage Area (Sq Mi)	0.46
Date	9/18/2014
Observers	P. Beach, K. Hamlin

SUMMARY DATA	
Baseline Bankfull Datum, ft	741.07
Bankfull Cross Sectional Area, ft²	14.57
Bankfull Width, ft	10.42
Max Depth at Bankfull, ft	2.17
Mean Depth at Bankfull, ft	1.40
Width/Depth Ratio	7.45
Flood Prone Width, ft	60.80
Flood Prone Area Elevation	743.24
Entrenchment Ratio	5.83
Bank Height Ratio	1.11




Stream Type B4c


Sta. 7+25 Looking Downstream

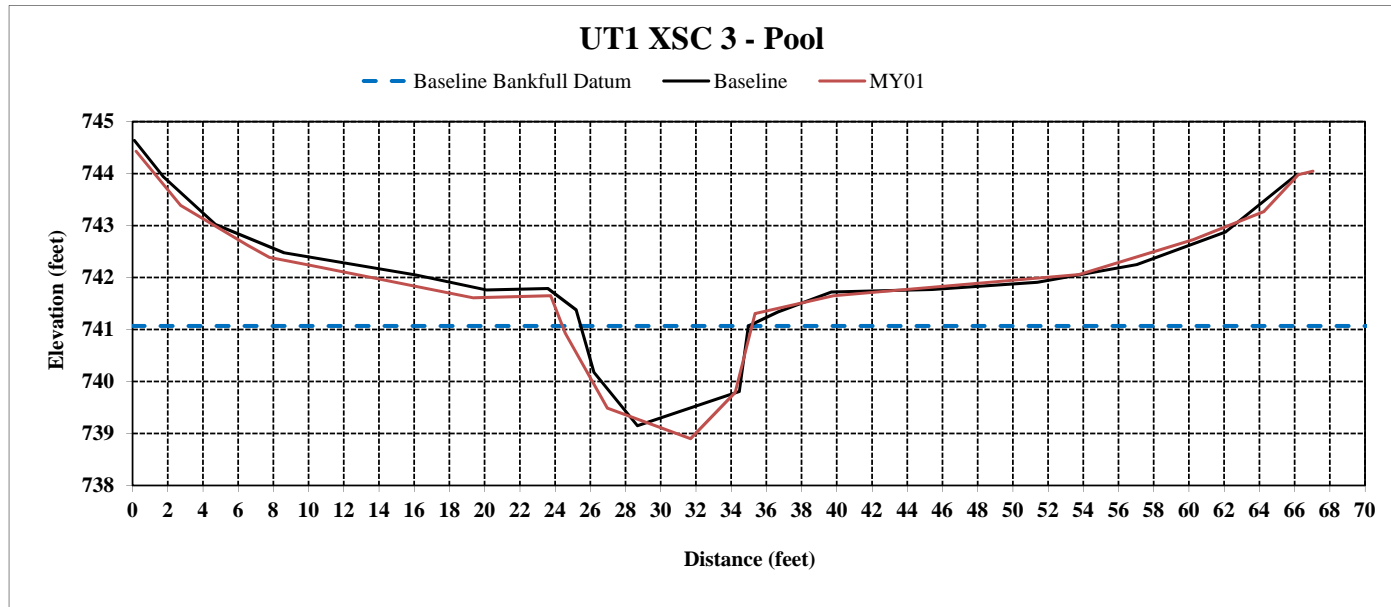

Longitudinal Profile - UT to Clarke Creek

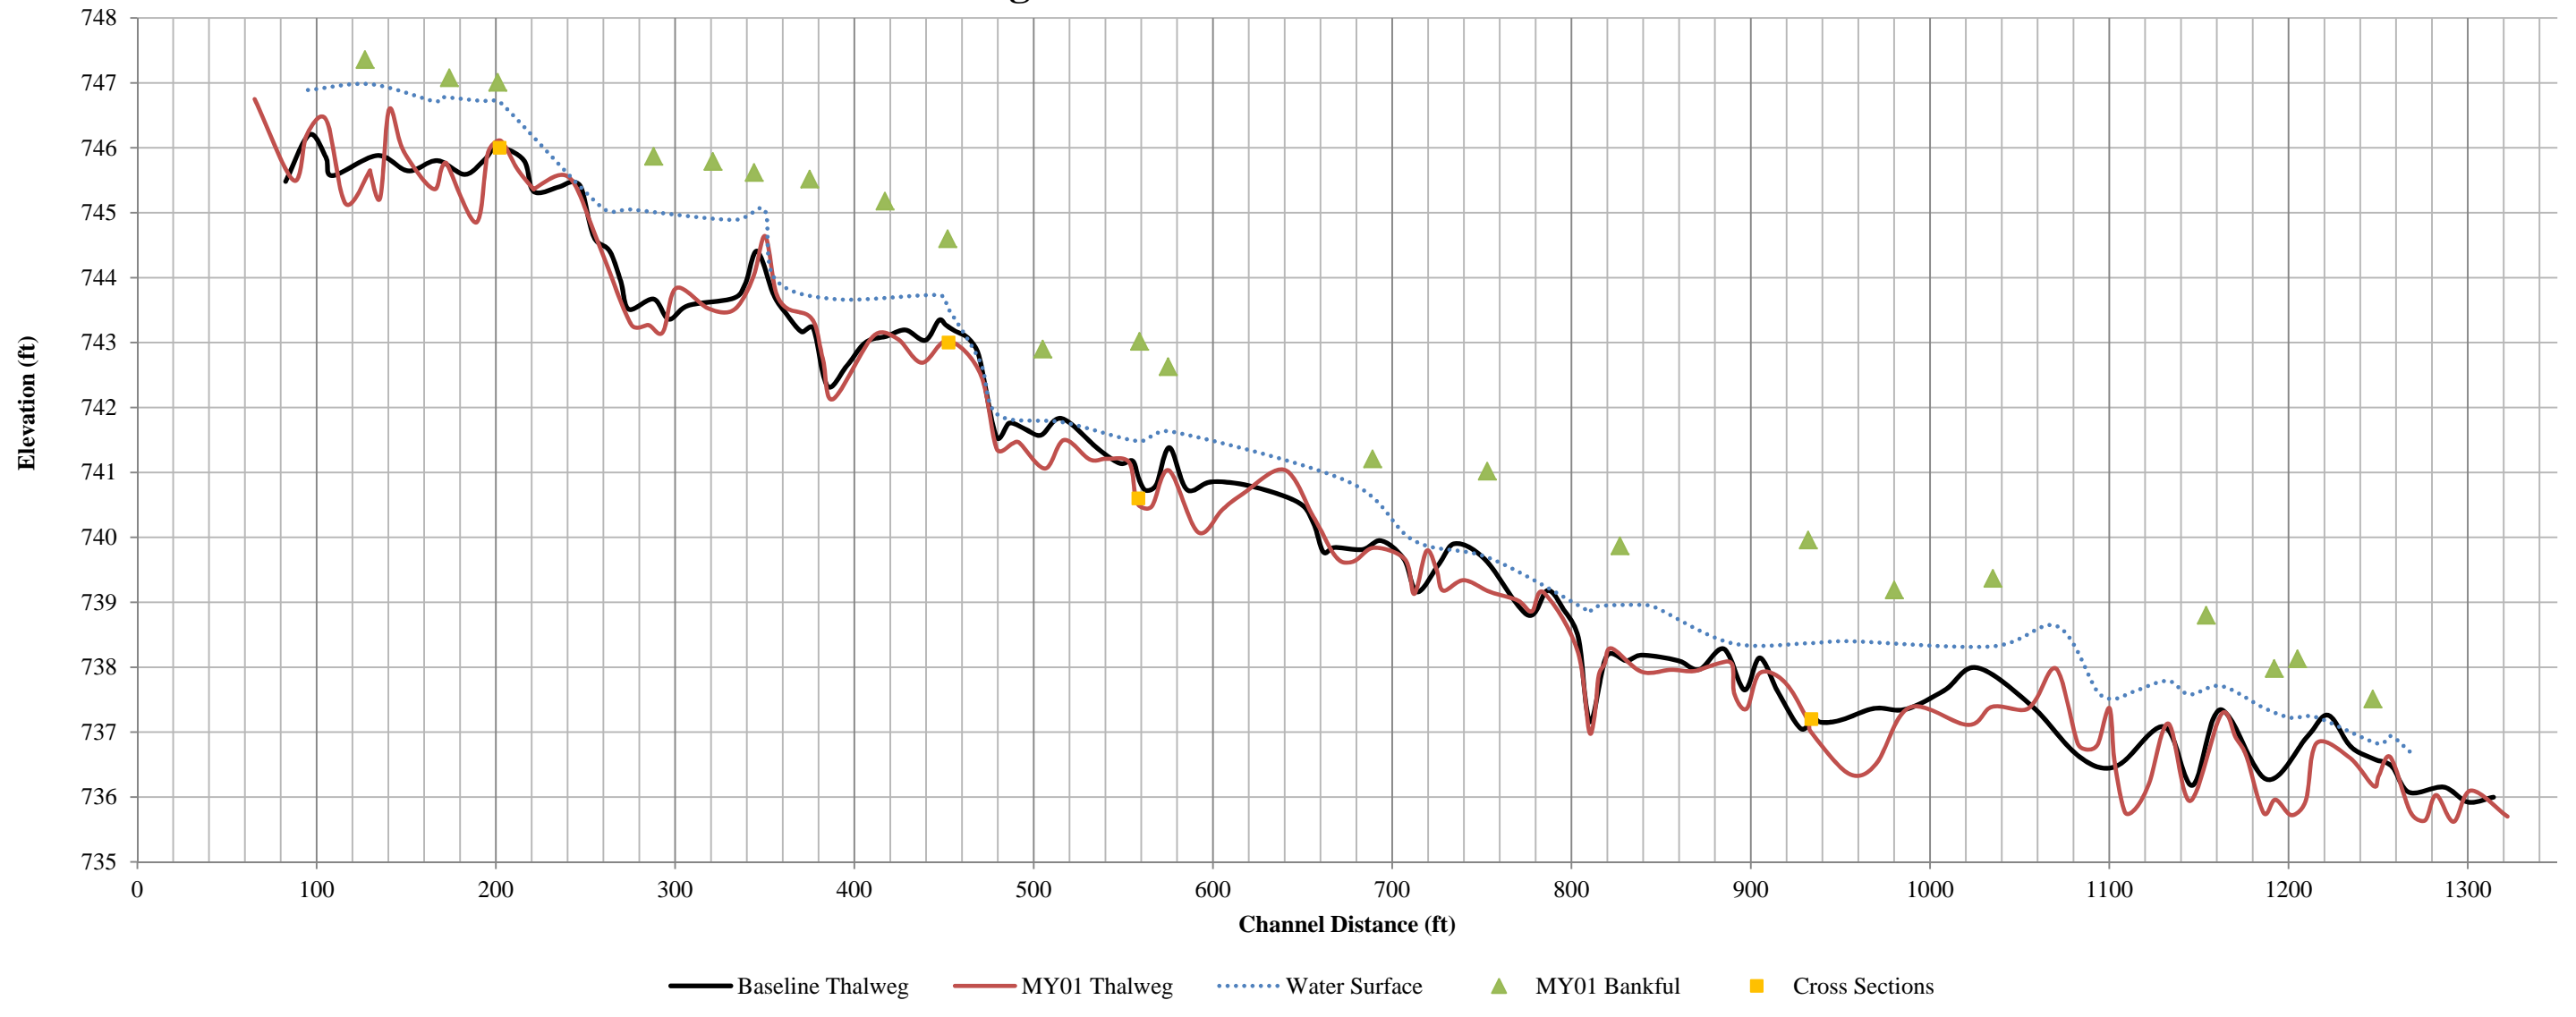

Longitudinal Profile - UT 1

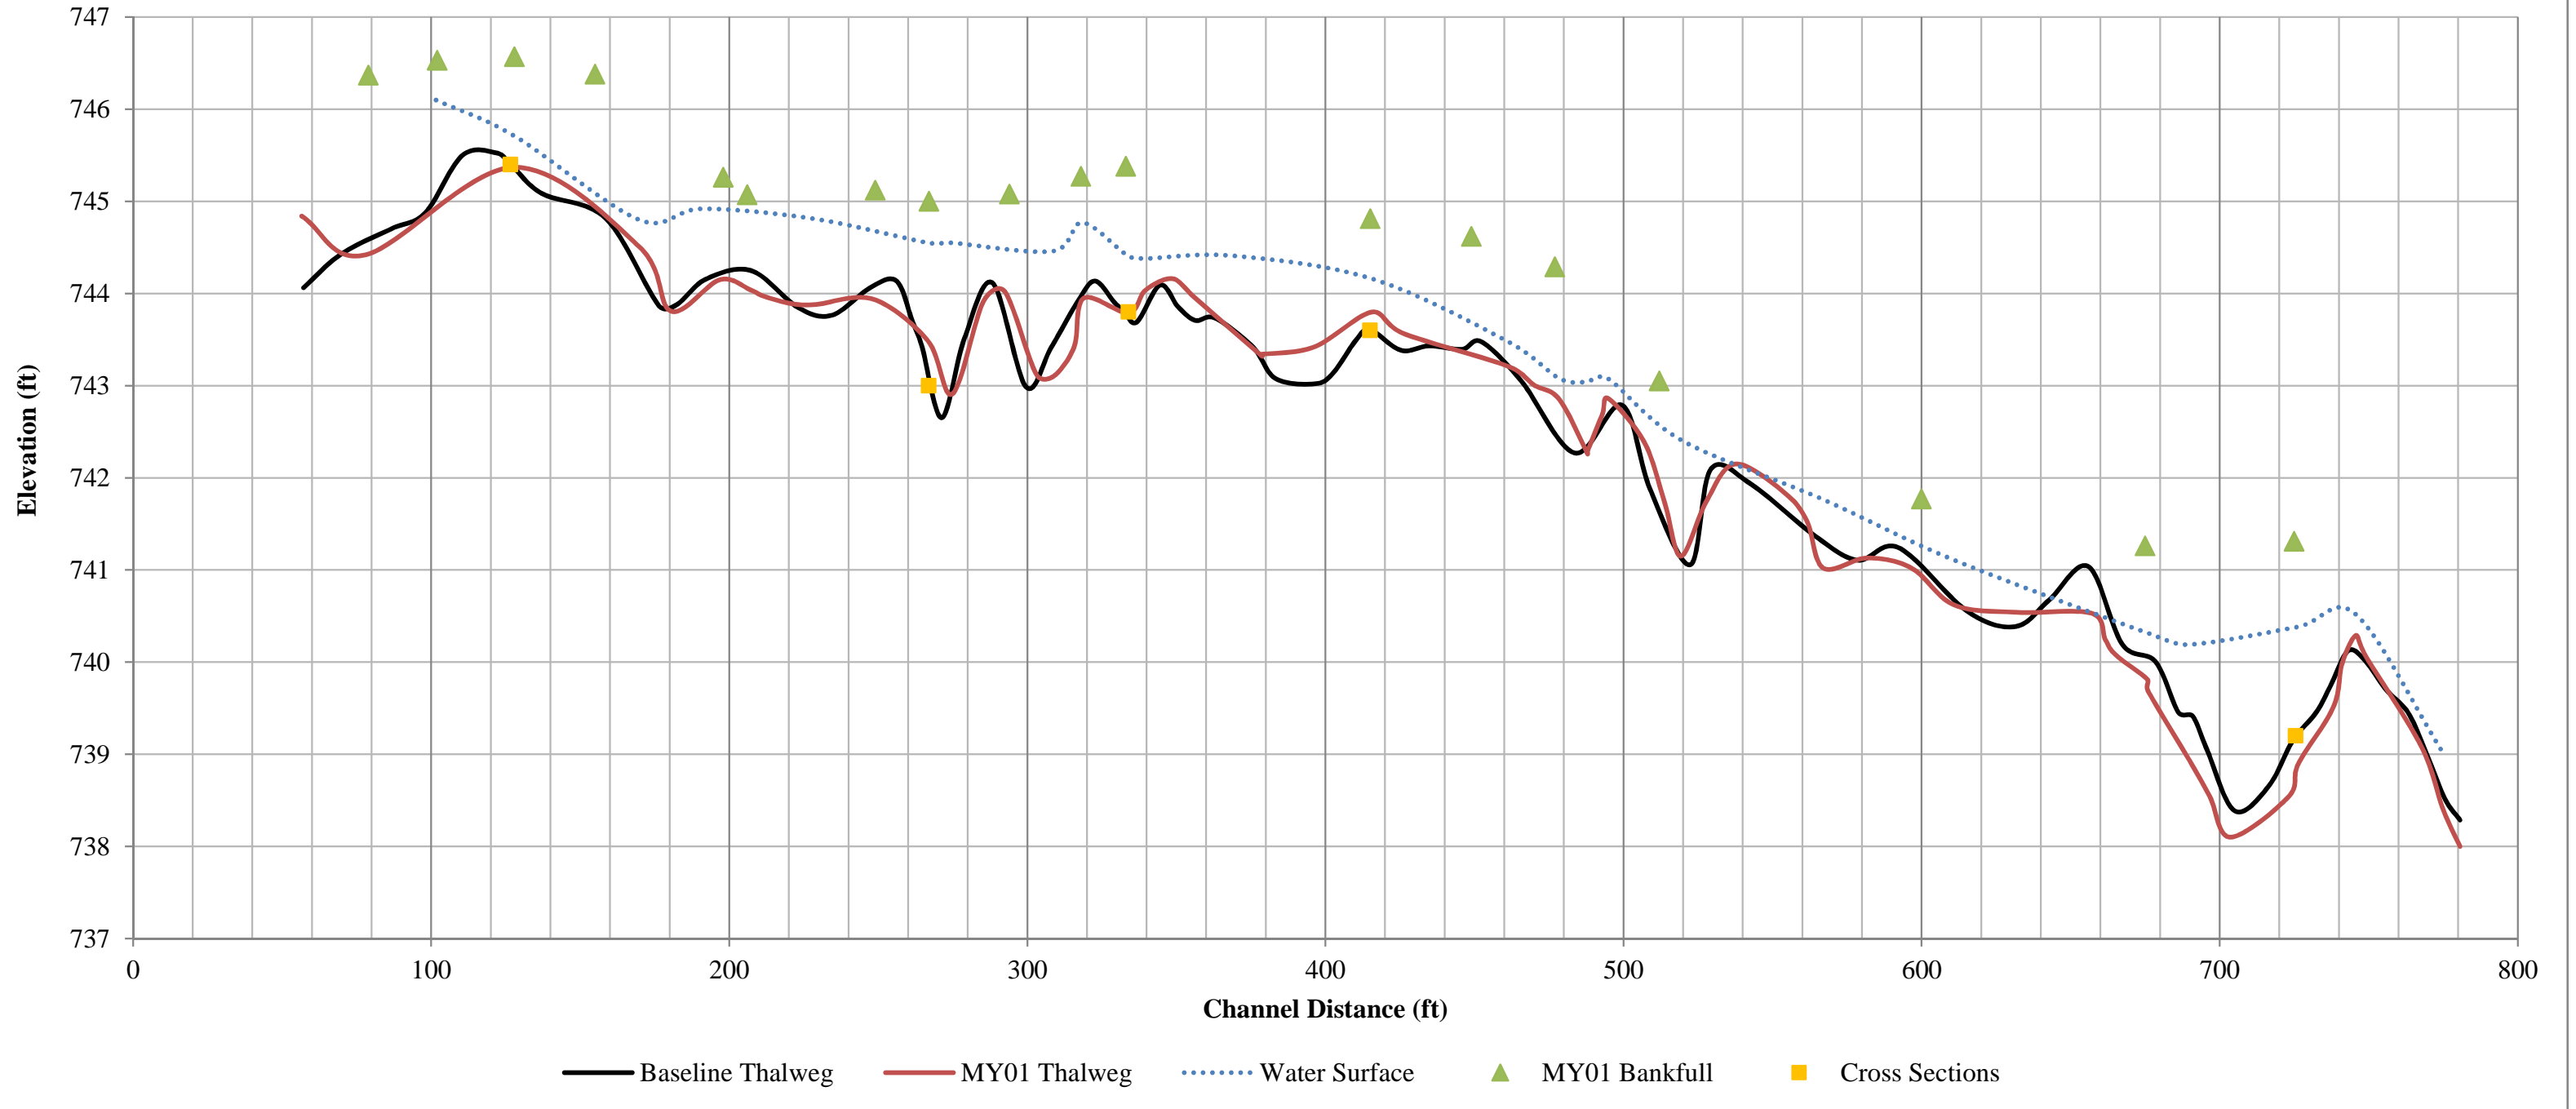


UT to Clarke Creek - US of XS9 - Riffle Pebble Count

Location: STA 2+02


Inches	Particle	Millimeters		Count	% Total	% Cum.
	Silt/Clay	<0.062	S A N D	7	7	7
	Very Fine	0.062-0.125		0	0	7
	Fine	0.125-0.25		0	0	7
	Medium	0.25-0.50		0	0	7
	Coarse	0.50-1.0		50	50	57
0.04-0.08	Very Coarse	1.0-2		0	0	57
0.08-0.16	Very Fine	2-4	G R A V E L	4	4	61
0.16-0.22	Fine	4-5.7		8	8	69
0.22-0.31	Fine	5.7-8		5	5	74
0.31-0.44	Medium	8-11.3		13	13	87
0.44-0.63	Medium	11.3-16		8	8	95
0.63-0.89	Coarse	16-22.6		4	4	99
0.89-1.26	Coarse	22.6-32		1	1	100
1.26-1.77	Very Coarse	32-45		0	0	100
1.77-2.5	Very Coarse	45-64		0	0	100
2.5-3.5	Small	64-90		C O B B L E	0	0
3.5-5.0	Small	90-128	0		0	100
5.0-7.1	Medium	128-180	0		0	100
7.1-10.1	Large	180-256	0		0	100
10.1-14.3	Small	256-362	B O U L D E R	0	0	100
14.3-20	Small	362-512		0	0	100
20-40	Medium	512-1024		0	0	100
40-80	Large	1024-2048		0	0	100
	Bedrock	Bedrock	Bedrock	0	0	100
Total Counted				100		

Summary Data	
D50	0.6
D84	11
D95	16

**Individual Class Percent
Pebble Count - US of XSC9 - Riffle**

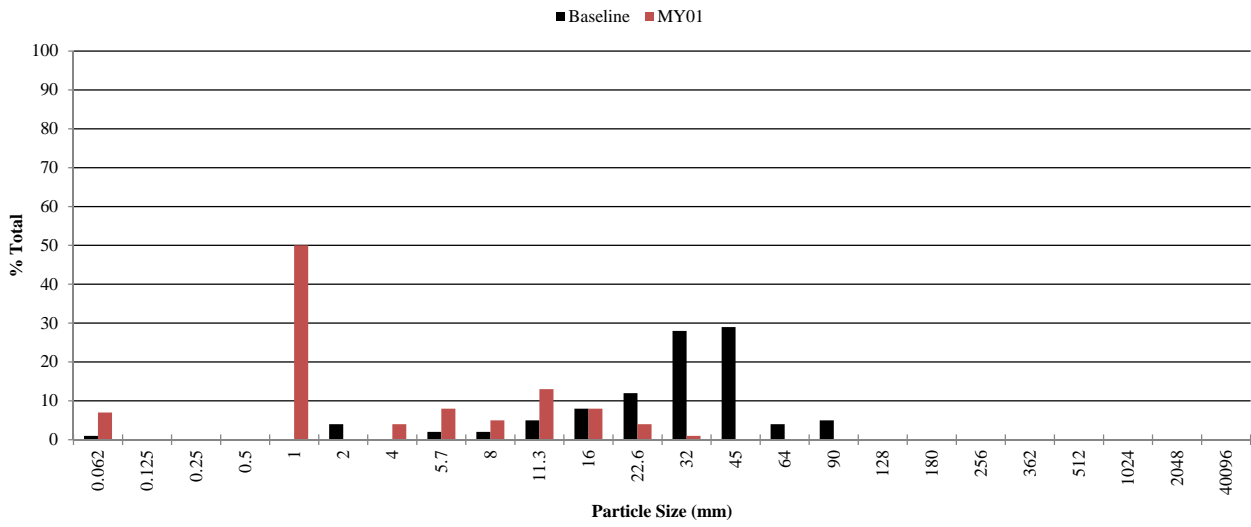

**Cumulative Percent
Pebble Count - US of XSC9 - Riffle**

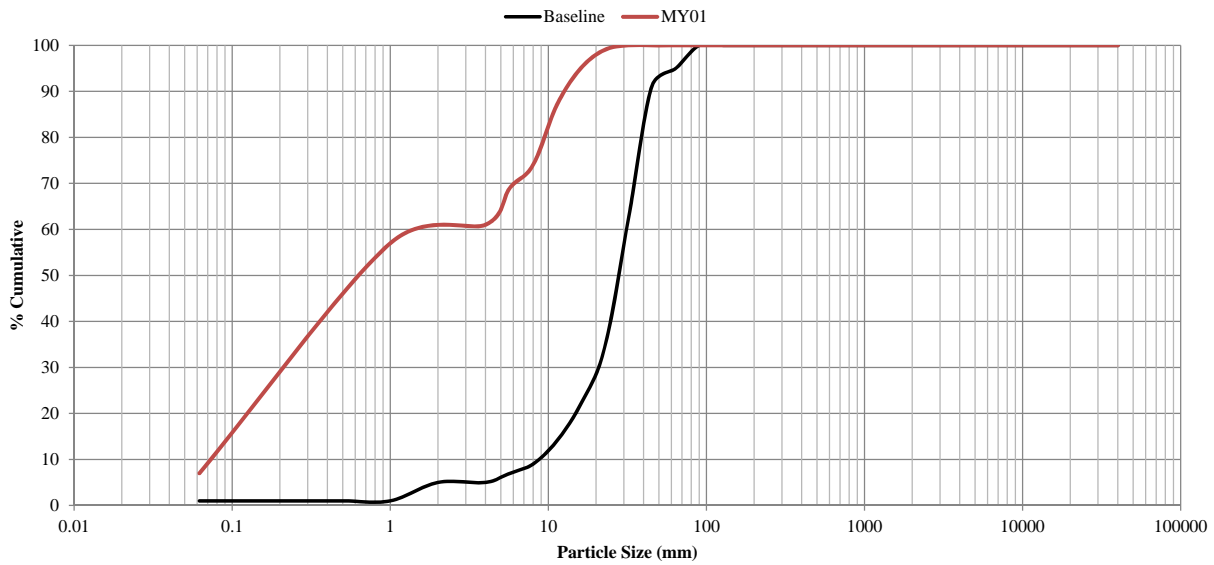


UT to Clarke Creek - XS1A - Riffle Pebble Count

Location: STA 5+58


Inches	Particle	Millimeters		Count	% Total	% Cum.
	Silt/Clay	<0.062	S A N D	1	1	1
	Very Fine	0.062-0.125		0	0	1
	Fine	0.125-0.25		0	0	1
	Medium	0.25-0.50		0	0	1
	Coarse	0.50-1.0		20	20	21
0.04-0.08	Very Coarse	1.0-2		0	0	21
0.08-0.16	Very Fine	2-4	G R A V E L	1	1	22
0.16-0.22	Fine	4-5.7		3	3	25
0.22-0.31	Fine	5.7-8		3	3	28
0.31-0.44	Medium	8-11.3		8	8	36
0.44-0.63	Medium	11.3-16		11	11	47
0.63-0.89	Coarse	16-22.6		13	13	60
0.89-1.26	Coarse	22.6-32		6	6	66
1.26-1.77	Very Coarse	32-45		7	7	73
1.77-2.5	Very Coarse	45-64		3	3	76
2.5-3.5	Small	64-90	C O B B L E	3	3	79
3.5-5.0	Small	90-128		0	0	79
5.0-7.1	Medium	128-180		0	0	79
7.1-10.1	Large	180-256		0	0	79
10.1-14.3	Small	256-362	B O U L D E R	0	0	79
14.3-20	Small	362-512		0	0	79
20-40	Medium	512-1024		0	0	79
40-80	Large	1024-2048		0	0	79
	Bedrock	Bedrock	Bedrock	21	21	100
Total Counted				100		

Summary Data	
D50	18
D84	400
D95	6000

**Individual Class Percent
Pebble Count - XSC1A - Riffle**

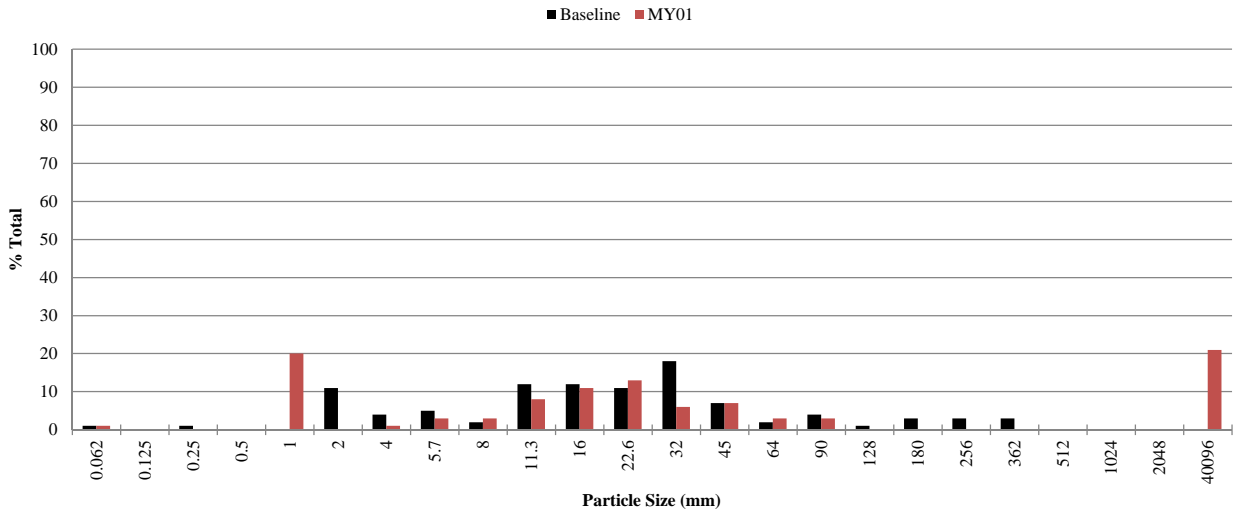

**Cumulative Percent
Pebble Count - XSC1A - Riffle**

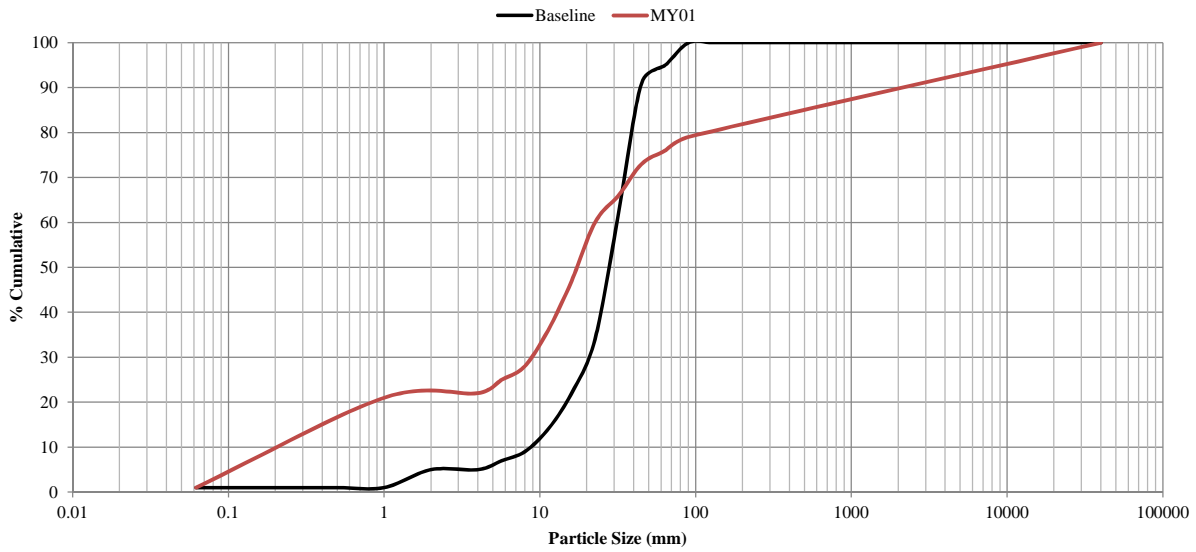


UT to Clarke Creek - US of Confluence with UT1 - Riffle Pebble Count

Location: STA 7+50


Inches	Particle	Millimeters		Count	% Total	% Cum.
	Silt/Clay	<0.062	S A N D	0	0	0
	Very Fine	0.062-0.125		0	0	0
	Fine	0.125-0.25		0	0	0
	Medium	0.25-0.50		0	0	0
	Coarse	0.50-1.0		14	14	14
0.04-0.08	Very Coarse	1.0-2		0	0	14
0.08-0.16	Very Fine	2-4	G R A V E L	1	1	15
0.16-0.22	Fine	4-5.7		7	7	22
0.22-0.31	Fine	5.7-8		8	8	30
0.31-0.44	Medium	8-11.3		22	22	52
0.44-0.63	Medium	11.3-16		10	10	62
0.63-0.89	Coarse	16-22.6		13	13	75
0.89-1.26	Coarse	22.6-32		4	4	79
1.26-1.77	Very Coarse	32-45		7	7	86
1.77-2.5	Very Coarse	45-64		0	0	86
2.5-3.5	Small	64-90	C O B B L E	0	0	86
3.5-5.0	Small	90-128		2	2	88
5.0-7.1	Medium	128-180		0	0	88
7.1-10.1	Large	180-256		0	0	88
10.1-14.3	Small	256-362	B O U L D E R	0	0	88
14.3-20	Small	362-512		0	0	88
20-40	Medium	512-1024		0	0	88
40-80	Large	1024-2048		0	0	88
	Bedrock	Bedrock	Bedrock	12	12	100
Total Counted				100		

Summary Data	
D50	11
D84	43
D95	10000

**Individual Class Percent
Pebble Count - US of Confluence with UT1 - Riffle**

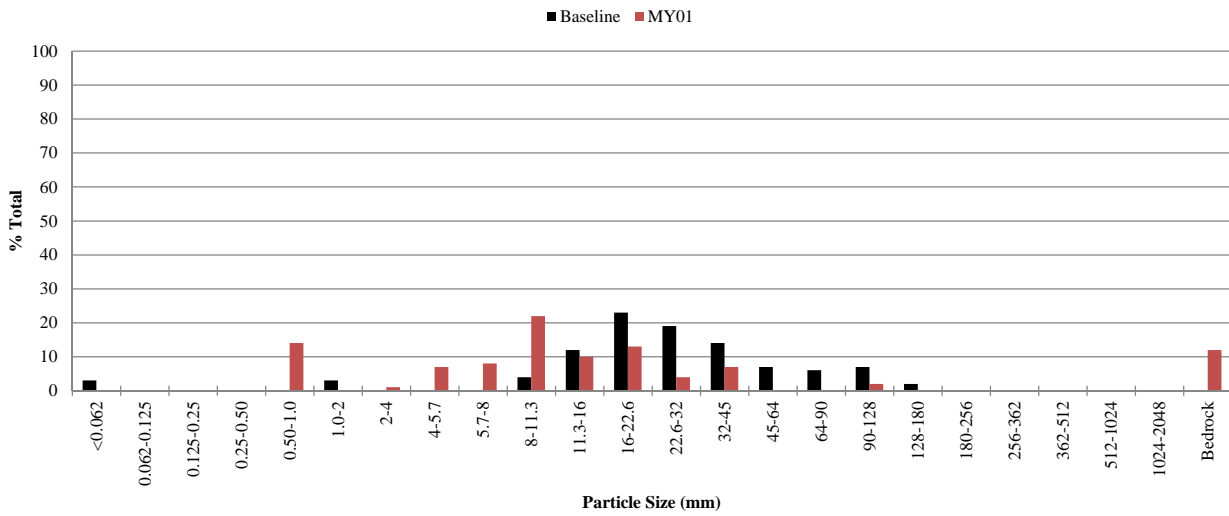

**Cumulative Percent
Pebble Count - US of Confluence with UT1 - Riffle**

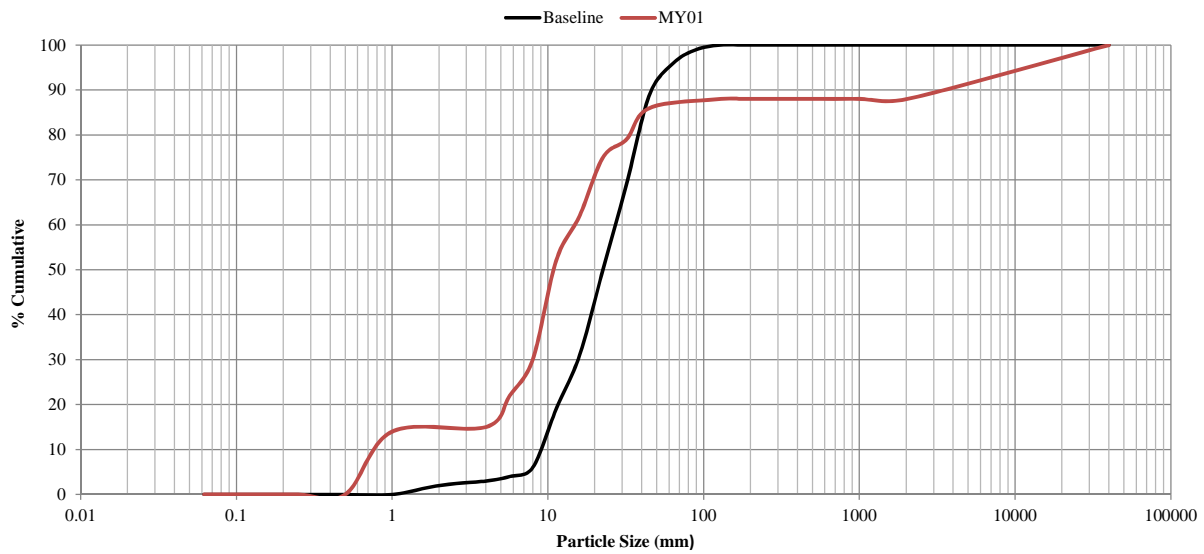


UT to Clarke Creek - DS of Confluence with 2B - Riffle Pebble Count

Location: STA 12+00


Inches	Particle	Millimeters		Count	% Total	% Cum.
	Silt/Clay	<0.062	S A N D	0	0	0
	Very Fine	0.062-0.125		0	0	0
	Fine	0.125-0.25		0	0	0
	Medium	0.25-0.50		0	0	0
	Coarse	0.50-1.0		1	1	1
0.04-0.08	Very Coarse	1.0-2		1	1	2
0.08-0.16	Very Fine	2-4	G R A V E L	0	0	2
0.16-0.22	Fine	4-5.7		0	0	2
0.22-0.31	Fine	5.7-8		2	2	4
0.31-0.44	Medium	8-11.3		6	6	10
0.44-0.63	Medium	11.3-16		5	5	15
0.63-0.89	Coarse	16-22.6		3	3	18
0.89-1.26	Coarse	22.6-32		16	16	34
1.26-1.77	Very Coarse	32-45		8	8	42
1.77-2.5	Very Coarse	45-64		12	12	54
2.5-3.5	Small	64-90	C O B B L E	21	21	75
3.5-5.0	Small	90-128		15	15	90
5.0-7.1	Medium	128-180		3	3	93
7.1-10.1	Large	180-256		0	0	93
10.1-14.3	Small	256-362	B O U L D E R	1	1	94
14.3-20	Small	362-512		0	0	94
20-40	Medium	512-1024		0	0	94
40-80	Large	1024-2048		0	0	94
	Bedrock	Bedrock	Bedrock	6	6	100
Total Counted				100		

Summary Data	
D50	60
D84	105
D95	362

**Individual Class Percent
Pebble Count - DS of Confluence with 2B - Riffle**

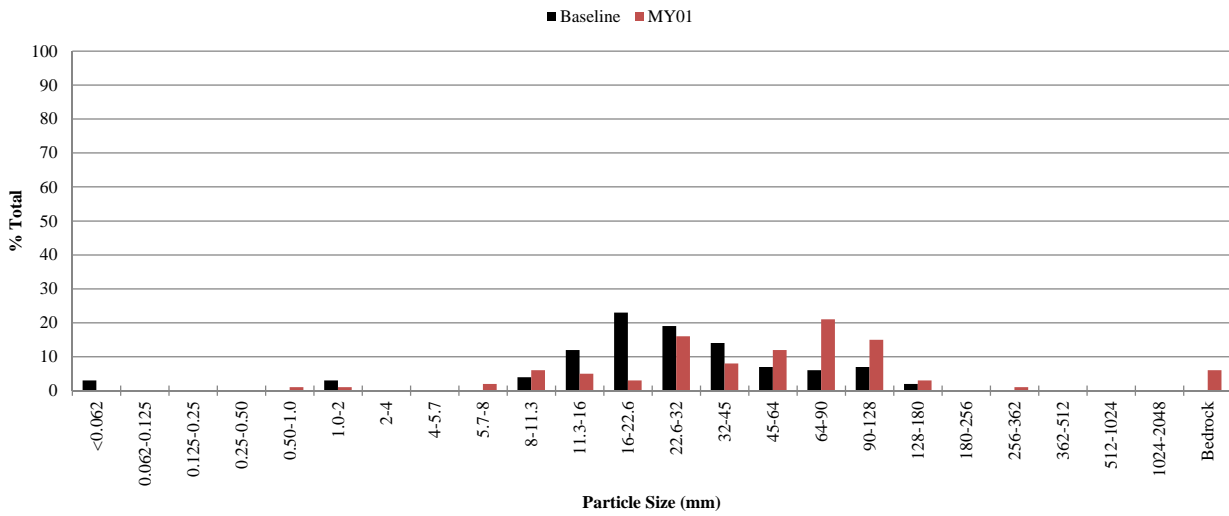

**Cumulative Percent
Pebble Count - DS of Confluence with 2B - Riffle**

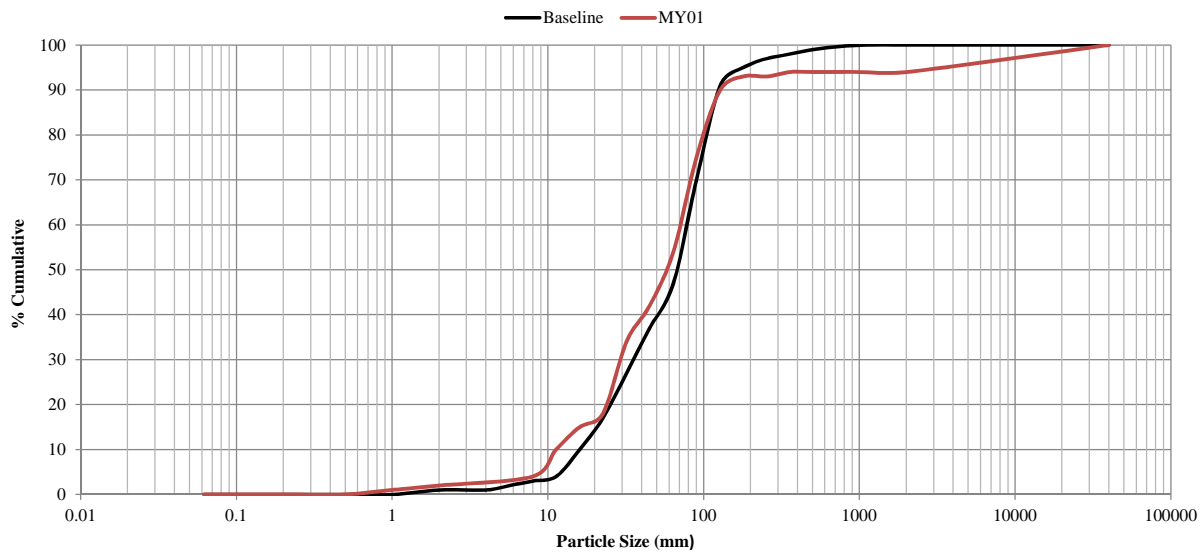


UT to Clarke Creek - Reach: UT1 - XS4 - Riffle Pebble Count

Location: STA 1+29


Inches	Particle	Millimeters		Count	% Total	% Cum.
	Silt/Clay	<0.062	S A N D	10	10	10
	Very Fine	0.062-0.125		0	0	10
	Fine	0.125-0.25		0	0	10
	Medium	0.25-0.50		0	0	10
	Coarse	0.50-1.0		12	12	22
0.04-0.08	Very Coarse	1.0-2		24	24	46
0.08-0.16	Very Fine	2-4	G R A V E L	7	7	53
0.16-0.22	Fine	4-5.7		8	8	61
0.22-0.31	Fine	5.7-8		5	5	66
0.31-0.44	Medium	8-11.3		3	3	69
0.44-0.63	Medium	11.3-16		6	6	75
0.63-0.89	Coarse	16-22.6		8	8	83
0.89-1.26	Coarse	22.6-32		11	11	94
1.26-1.77	Very Coarse	32-45		3	3	97
1.77-2.5	Very Coarse	45-64		1	1	98
2.5-3.5	Small	64-90	C O B B L E	1	1	99
3.5-5.0	Small	90-128		0	0	99
5.0-7.1	Medium	128-180		1	1	100
7.1-10.1	Large	180-256		0	0	100
10.1-14.3	Small	256-362	B O U L D E R	0	0	100
14.3-20	Small	362-512		0	0	100
20-40	Medium	512-1024		0	0	100
40-80	Large	1024-2048		0	0	100
	Bedrock	Bedrock	Bedrock	0	0	100
Total Counted				100		

Summary Data	
D50	2.5
D84	23
D95	32

**Individual Class Percent
Pebble Count - XSC4 - Riffle**

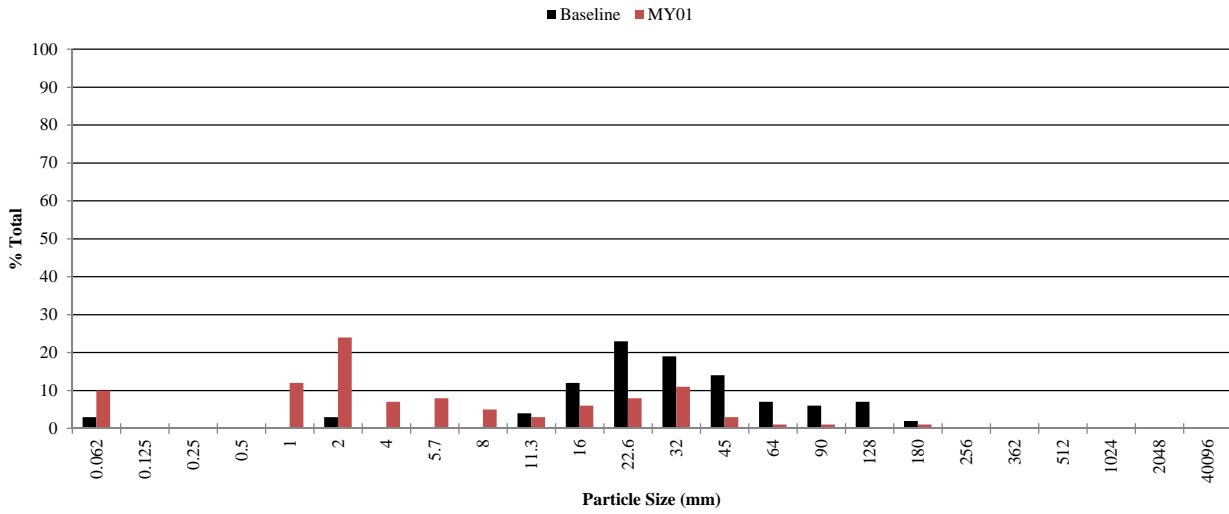

**Cumulative Percent
Pebble Count - XSC4 - Riffle**

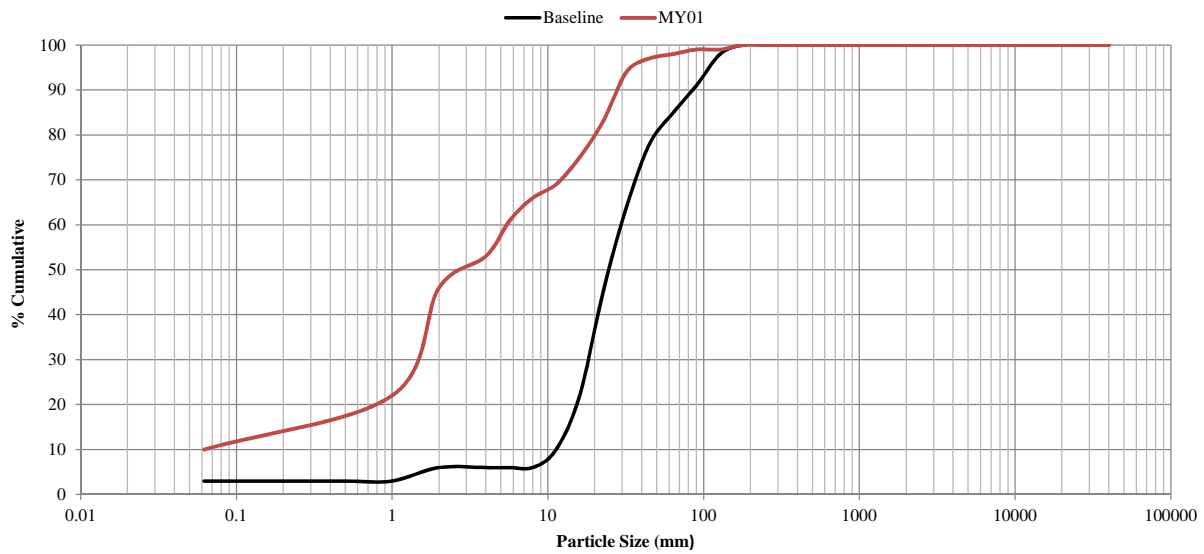


UT to Clarke Creek - Reach: UT1 - XS5 - Riffle Pebble Count

Location: STA 2+69


Inches	Particle	Millimeters		Count	% Total	% Cum.
	Silt/Clay	<0.062	S A N D	67	67	67
	Very Fine	0.062-0.125		0	0	67
	Fine	0.125-0.25		0	0	67
	Medium	0.25-0.50		0	0	67
	Coarse	0.50-1.0		7	7	74
0.04-0.08	Very Coarse	1.0-2		4	4	78
0.08-0.16	Very Fine	2-4	G R A V E L	4	4	82
0.16-0.22	Fine	4-5.7		4	4	86
0.22-0.31	Fine	5.7-8		5	5	91
0.31-0.44	Medium	8-11.3		5	5	96
0.44-0.63	Medium	11.3-16		2	2	98
0.63-0.89	Coarse	16-22.6		1	1	99
0.89-1.26	Coarse	22.6-32		1	1	100
1.26-1.77	Very Coarse	32-45		0	0	100
1.77-2.5	Very Coarse	45-64		0	0	100
2.5-3.5	Small	64-90	C O B B L E	0	0	100
3.5-5.0	Small	90-128		0	0	100
5.0-7.1	Medium	128-180		0	0	100
7.1-10.1	Large	180-256		0	0	100
10.1-14.3	Small	256-362	B O U L D E R	0	0	100
14.3-20	Small	362-512		0	0	100
20-40	Medium	512-1024		0	0	100
40-80	Large	1024-2048		0	0	100
	Bedrock	Bedrock	Bedrock	0	0	100
Total Counted				100		

Summary Data	
D50	0.15
D84	5
D95	10

**Individual Class Percent
Pebble Count - XSC5 - Riffle**

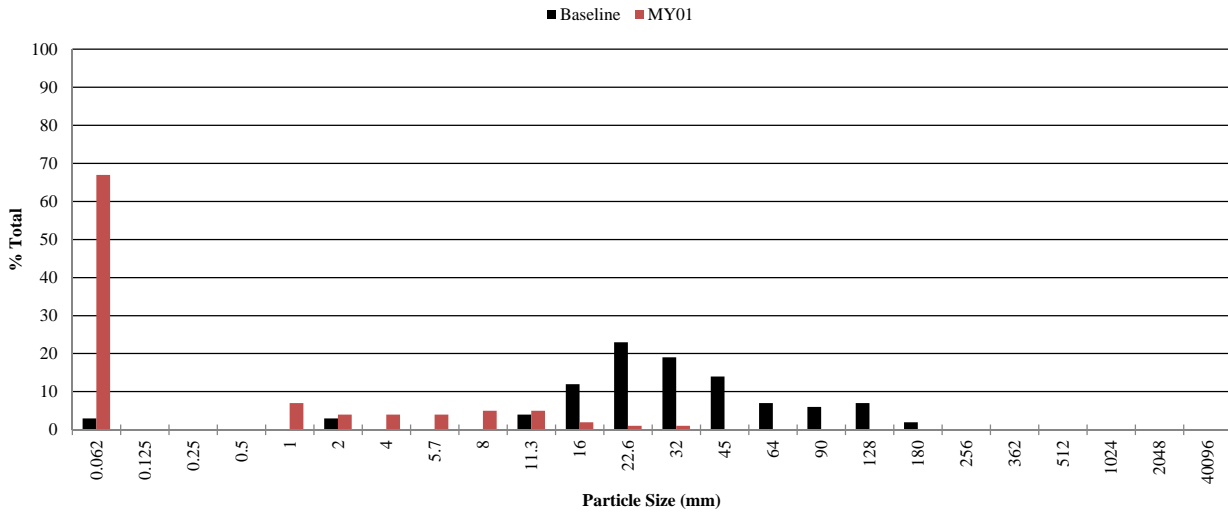

**Cumulative Percent
Pebble Count - XSC5 - Riffle**

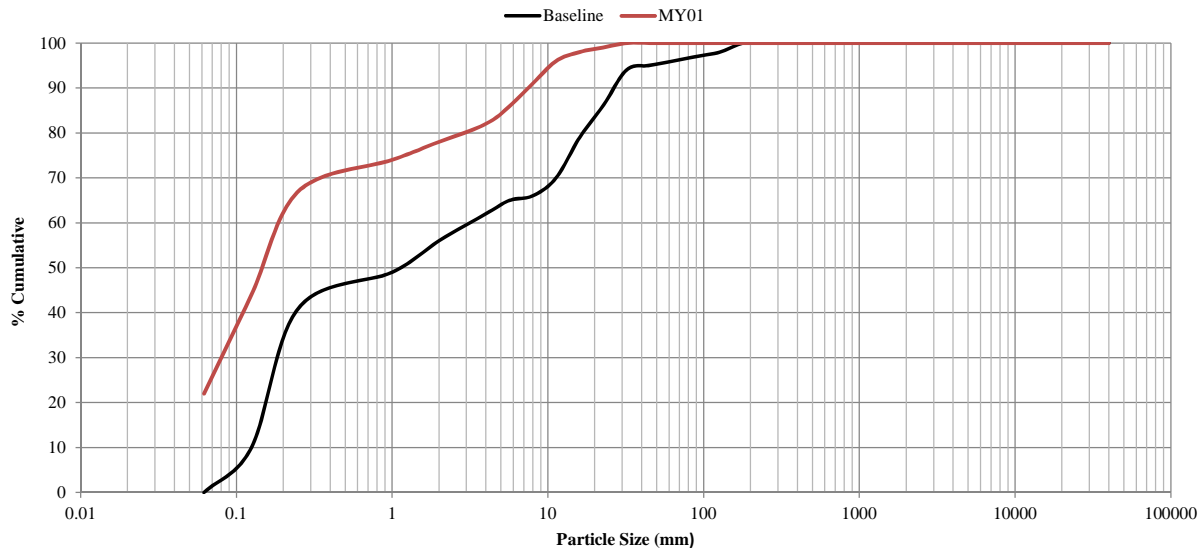


UT to Clarke Creek - Reach: UT1 - DS of XS6 - Riffle Pebble Count

Location: STA 3+34


Inches	Particle	Millimeters		Count	% Total	% Cum.
	Silt/Clay	<0.062	S A N D	1	1	1
	Very Fine	0.062-0.125		0	0	1
	Fine	0.125-0.25		0	0	1
	Medium	0.25-0.50		0	0	1
	Coarse	0.50-1.0		0	0	1
0.04-0.08	Very Coarse	1.0-2		2	2	3
0.08-0.16	Very Fine	2-4	G R A V E L	1	1	4
0.16-0.22	Fine	4-5.7		1	1	5
0.22-0.31	Fine	5.7-8		0	0	5
0.31-0.44	Medium	8-11.3		2	2	7
0.44-0.63	Medium	11.3-16		0	0	7
0.63-0.89	Coarse	16-22.6		1	1	8
0.89-1.26	Coarse	22.6-32		13	13	21
1.26-1.77	Very Coarse	32-45		16	16	37
1.77-2.5	Very Coarse	45-64		24	24	61
2.5-3.5	Small	64-90	C O B B L E	17	17	78
3.5-5.0	Small	90-128		13	13	91
5.0-7.1	Medium	128-180		8	8	99
7.1-10.1	Large	180-256		1	1	100
10.1-14.3	Small	256-362	B O U L D E R	0	0	100
14.3-20	Small	362-512		0	0	100
20-40	Medium	512-1024		0	0	100
40-80	Large	1024-2048		0	0	100
	Bedrock	Bedrock	Bedrock	0	0	100
Total Counted				100		

Summary Data	
D50	55
D84	100
D95	150

**Individual Class Percent
Pebble Count - DS of XSC6 - Riffle**

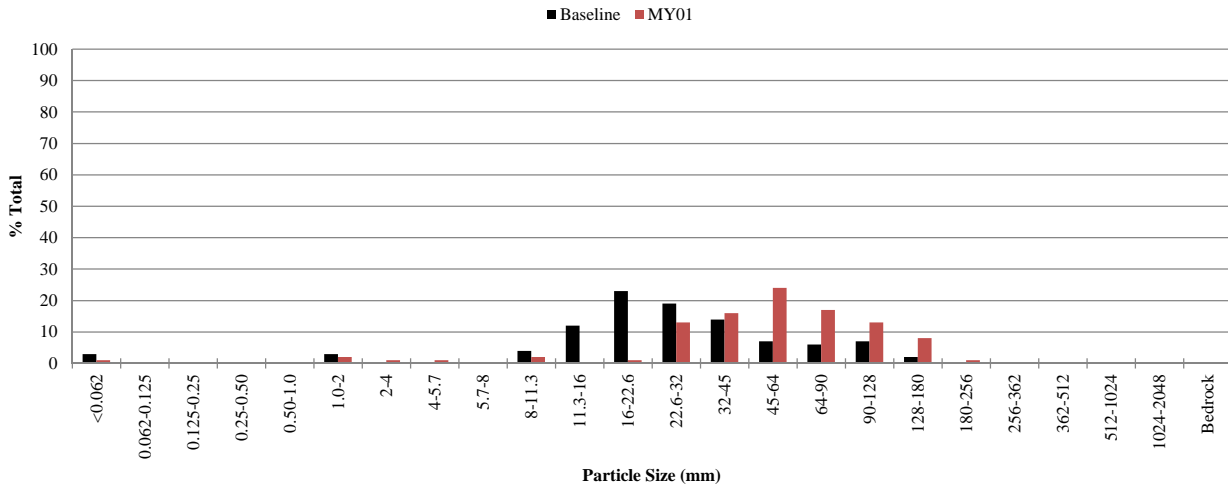

**Cumulative Percent
Pebble Count - DS of XSC6 - Riffle**

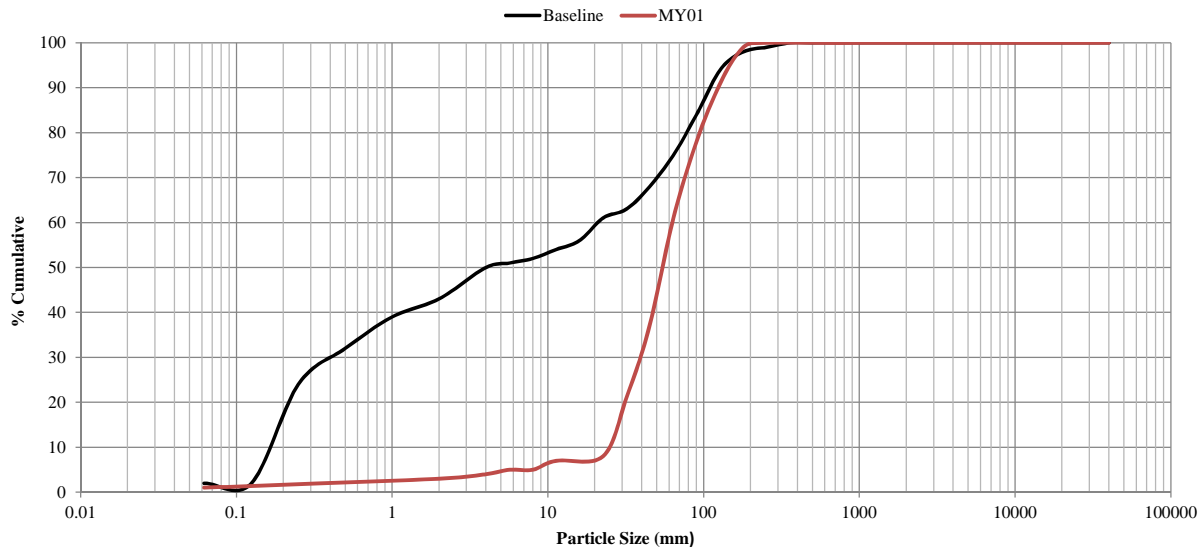

UT to Clarke Creek - Reach: UT1 - XS8 - Riffle Pebble Count

Location: STA 4+14

Inches	Particle	Millimeters		Count	% Total	% Cum.
	Silt/Clay	<0.062	S A N D	52	52	52
	Very Fine	0.062-0.125		0	0	52
	Fine	0.125-0.25		0	0	52
	Medium	0.25-0.50		0	0	52
	Coarse	0.50-1.0		24	24	76
0.04-0.08	Very Coarse	1.0-2		0	0	76
0.08-0.16	Very Fine	2-4	G R A V E L	4	4	80
0.16-0.22	Fine	4-5.7		3	3	83
0.22-0.31	Fine	5.7-8		2	2	85
0.31-0.44	Medium	8-11.3		4	4	89
0.44-0.63	Medium	11.3-16		2	2	91
0.63-0.89	Coarse	16-22.6		3	3	94
0.89-1.26	Coarse	22.6-32		0	0	94
1.26-1.77	Very Coarse	32-45		0	0	94
1.77-2.5	Very Coarse	45-64		0	0	94
2.5-3.5	Small	64-90	C O B B L E	1	1	95
3.5-5.0	Small	90-128		2	2	97
5.0-7.1	Medium	128-180		0	0	97
7.1-10.1	Large	180-256		0	0	97
10.1-14.3	Small	256-362	B O U L D E R	0	0	97
14.3-20	Small	362-512		1	1	98
20-40	Medium	512-1024		1	1	99
40-80	Large	1024-2048		0	0	99
	Bedrock	Bedrock	Bedrock	1	1	100
Total Counted				100		

Summary Data	
D50	0.125
D84	7
D95	90

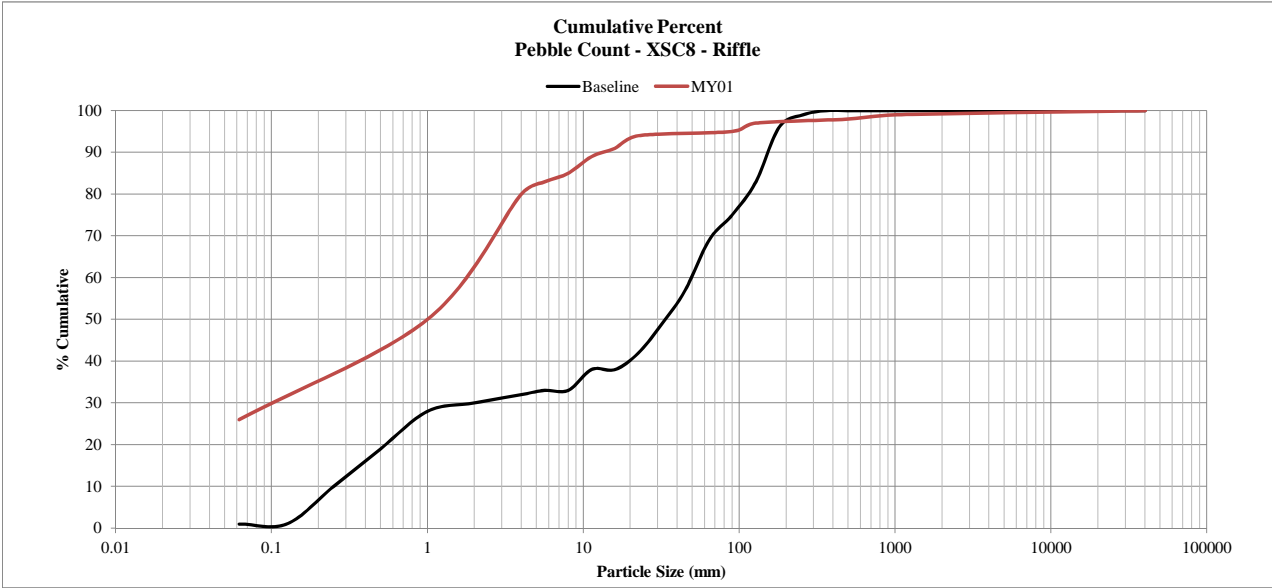
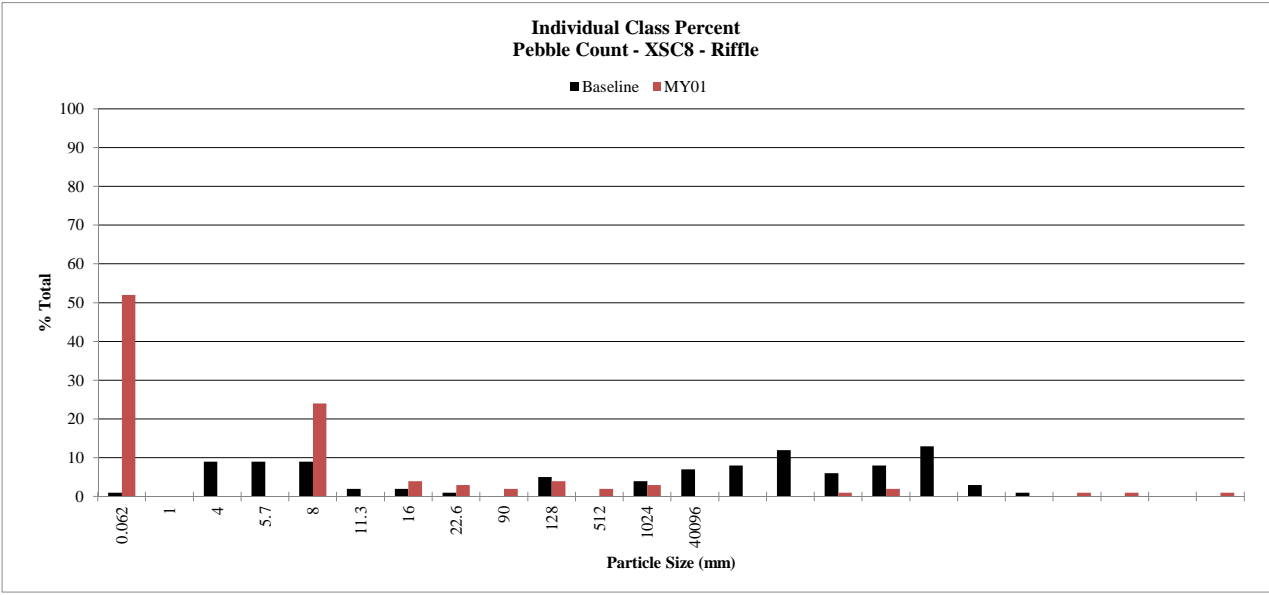


Table 10a. Baseline Stream Data Summary
 UT to Clarke Creek/EEP #92500 - UT Clarke Creek (1507 feet)

Parameter	Gauge ²	Regional Curve			Pre-Existing Condition					Reference Reach(es) Data					Design			Monitoring Baseline							
		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n
Dimension and Substrate - Riffle Only																									
Bankfull Width (ft)		7	30	3	11.38			12.62			8.26			10.93			10.57		12.2	6.72	7.95	7.17	9.97	-	3
Floodprone Width (ft)					36.14			49.08			11.69			19.17			54.63		63.43	18.7	25.23	22.4	34.6	-	3
Bankfull Mean Depth (ft)		1	2.5	1.17	1.77			1.83			1.02			1.98			1.22		1.46	0.39	0.9	0.76	1.55	-	3
¹ Bankfull Max Depth (ft)											1.57			2.05			1.89		2.21	0.85	1.313	0.94	2.15	-	3
Bankfull Cross Sectional Area (ft ²)		5	40	8.47	20.88			22.29			8.42			17.17			12.89		17.86	2.8	7.803	5.11	15.5	-	3
Width/Depth Ratio					6.22			7.13			6.96			8.1			8.36		8.66	6.41	11.2	8.84	18.36	-	3
Entrenchment Ratio					2.86			4.31			1.41			1.86			5.17		5.2	2.61	3.137	3.33	3.47	-	3
¹ Bank Height Ratio					1.43			1.48			1.86			2.22			1		1	0.82	0.897	0.87	1	-	3
Profile																									
Riffle Length (ft)																				8.89	19.21	13.85	54.02	13.73	10
Riffle Slope (ft/ft)																				0.008	0.026	0.021	0.073	0.019	10
Pool Length (ft)																				14.37	42.2	34.77	84.52	26.2	10
Pool Max depth (ft)																				0.698	2.027	2.141	3.445	0.793	10
Pool Spacing (ft)																				34.82	82.81	83.19	151.6	36.88	9
Pattern																									
Channel Beltwidth (ft)																				14	14.8	14.5	15.9	-	3
Radius of Curvature (ft)																				10.4	16.17	16.9	21.2	-	3
Rc:Bankfull width (ft/ft)																				1.5	2	2	2.5	-	3
Meander Wavelength (ft)																				67.3	80.1	70	103	-	3
Meander Width Ratio																				1.9	4.6	2.0	9.8	-	3
Transport parameters																									
Reach Shear Stress (competency) lb/ft ²								0.74												0.74				-	
Max part size (mm) mobilized at bankfull								1												0.41				-	
Stream Power (transport capacity) W/m ²								-												-				-	
Additional Reach Parameters																									
Rosgen Classification								E4					B4c						E4				E4		
Bankfull Velocity (fps)		-	-	-				5.03												4.4-4.9				-	
Bankfull Discharge (cfs)		25	300	26.78				110.8					28							54.6-63.4					
Valley length (ft)								1612					200										1612		
Channel Thalweg length (ft)								1507					-							-			1507		
Sinuosity (ft)								1.07					-							-			1.07		
Water Surface Slope (Channel) (ft/ft)								0.0075					-							0.0083			0.0089		
BF slope (ft/ft)								0.0083					-							-			0.0092		
³ Bankfull Floodplain Area (acres)								-					-							-			-		
⁴ % of Reach with Eroding Banks								-					-							-			-		
Channel Stability or Habitat Metric								-					-							-			-		
Biological or Other								-					-							-			-		

Shaded cells indicate that these will typically not be filled in.
 1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile. 2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).
 3. Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.
 4 = Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data; 5. Of value/needed only if the n exceeds 3

Table 10b. Baseline Stream Data Summary
 UT to Clarke Creek/EEP #92500 - UT 1 (758 feet)

Parameter	Gauge ²	Regional Curve			Pre-Existing Condition					Reference Reach(es) Data					Design			Monitoring Baseline							
		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n
Dimension and Substrate - Riffle Only																									
Bankfull Width (ft)		6	11	2.07	9.08			11.26			7.09			11.96			10.6		10.77	7.18	8.44	8.60	9.40	0.93	4
Floodprone Width (ft)					19.5			20.02			13.18			39.46			49.4		93.72	11.30	25.48	16.40	57.80	21.83	4
Bankfull Mean Depth (ft)		6	11	0.89	1.51			1.7			0.78			1.33			1.1		1.28	0.37	0.87	0.84	1.43	0.46	4
¹ Bankfull Max Depth (ft)					1.83			2.45			1.11			1.82			1.6		2.14	0.56	1.10	0.96	1.92	0.59	4
Bankfull Cross Sectional Area (ft ²)		6	12	4.73	15.46			17.01			8.69			13.75			11.84		13.54	3.14	7.57	6.84	13.45	4.67	4
Width/Depth Ratio					5.34			7.46			5.81			15.33			8.28		9.79	6.57	12.23	9.83	22.69	7.23	4
Entrenchment Ratio					1.73			2.2			1.85			3.8			4.59		8.84	1.57	2.88	1.90	6.15	2.20	4
¹ Bank Height Ratio					1.34			1.56			1.53			1.6			1		1	0.73	0.93	1.00	1.00	0.14	4
Profile																									
Riffle Length (ft)																				4.82	9.83	8.81	18.46	5.27	5
Riffle Slope (ft/ft)																				0.008	0.023	0.025	0.036	0.011	5
Pool Length (ft)																				22.7	29.14	27.48	39.29	7.208	5
Pool Max depth (ft)																				0.944	1.956	1.857	3.012	0.777	5
Pool Spacing (ft)																				73.48	108.4	116.9	126.4	24.56	4
Pattern																									
Channel Beltwidth (ft)																				13.7	15.7	13.8	19.8	-	3
Radius of Curvature (ft)																				21.9	32.6	34.7	41.1	-	3
Rc:Bankfull width (ft/ft)																				2.5	3.9	3.6	5.6	-	3
Meander Wavelength (ft)																				41.5	64.1	46	105	-	3
Meander Width Ratio																				1.46	1.78	1.59	2.3	-	3
Transport parameters																									
Reach Shear Stress (competency) lb/ft ²								0.88											0.59						
Max part size (mm) mobilized at bankfull								0.75											4.27						
Stream Power (transport capacity) W/m ²								-											-						
Additional Reach Parameters																									
Rosgen Classification								B4c					B4c						B4c					B4c	
Bankfull Velocity (fps)		-	-	-				4.11											3.6-4.0					-	
Bankfull Discharge (cfs)		10	200	14.48				64											42.2-53.4						
Valley length (ft)								657					150											657	
Channel Thalweg length (ft)								723					-						-					758	
Sinuosity (ft)								1.1					-						-					1.15	
Water Surface Slope (Channel) (ft/ft)								0.009					-						0.0077					0.0089	
BF slope (ft/ft)								0.009					-						0.009					0.0083	
³ Bankfull Floodplain Area (acres)								-					-						-					-	
⁴ % of Reach with Eroding Banks								-					-						-					-	
Channel Stability or Habitat Metric								-					-						-					-	
Biological or Other								-					-						-					-	

Shaded cells indicate that these will typically not be filled in.
 1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile. 2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).
 3. Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.
 4 = Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data; 5. Of value/needed only if the n exceeds 3

Table 11a. Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters – Cross Sections)

UT to Clarke Creek/EEP #92500 Segment/Reach: UT to Clarke Creek (1507', XS1, 1A, 2, 9) and UT1 (758', XS 3, 4, 5, 6, 8)

Based on fixed baseline bankfull elevation ¹	Cross Section 1 (Riffle)							Cross Section 1A (Pool)							Cross Section 2 (Riffle)							Cross Section 9 (Riffle)															
	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+		
Record elevation (datum) used	744.2	744.2						742.4	742.4						739.37	739.4							746.7	746.7													
Bankfull Width (ft)	6.7	6.9						9.02	8						9.97	10.7							7.17	6.35													
Floodprone Width (ft)	22.4	29.5						25.6	41.79						34.6	45							18.7	21.5													
Bankfull Mean Depth (ft)	0.76	0.67						0.2	0.75						1.55	1.28							0.39	0.39													
Bankfull Max Depth (ft)	0.94	1.17						1.47	1.91						2.15	2.36							0.85	0.68													
Bankfull Cross Sectional Area (ft ²)	5.11	4.59						1.78	5.96						15.5	13.66							2.8	2.48													
Bankfull Width/Depth Ratio	8.84	10.37						45.71	10.74						6.41	8.38							18.36	16.26													
Bankfull Entrenchment Ratio	3.33	4.28						2.84	5.22						3.47	4.21							2.61	3.39													
Bankfull Bank Height Ratio	1	0.84						1	1.22						0.82	0.89							0.87	0.97													
Cross Sectional Area between end pins (ft ²)	65.6	60.5						145.9	142.8						187.2	179							52.1	52.4													
d50 (mm)	-	-						17	18						-	-							28	0.6													
Based on fixed baseline bankfull elevation ¹	Cross Section 3 (Pool)							Cross Section 4 (Riffle)							Cross Section 5 (Pool)							Cross Section 6 (Pool)							Cross Section 8 (Riffle)								
	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+		
Record elevation (datum) used	741.1	741.1						745.8	745.8						745.9	745.9							744.6	744.6							744.7	744.7					
Bankfull Width (ft)	9.78	10.42						8.4	9.93						8.18	7.88							7.18	5.29							8.75	8					
Floodprone Width (ft)	57.8	60.8						13.3	22.81						40	40							11.3	11.3							19.5	16.15					
Bankfull Mean Depth (ft)	1.66	1.4						0.37	0.4						0.84	0.76							0.64	0.47							1.04	0.8					
Bankfull Max Depth (ft)	1.92	2.17						0.56	0.64						1.57	1.51							0.82	0.84							1.09	0.9					
Bankfull Cross Sectional Area (ft ²)	16.24	14.57						3.14	3.95						6.9	5.98							4.59	2.48							9.09	6.4					
Bankfull Width/Depth Ratio	5.89	7.45						22.69	24.96						9.7	10.38							11.23	11.28							8.42	10					
Bankfull Entrenchment Ratio	5.91	5.83						1.58	2.3						4.89	5.08							1.57	2.14							2.22	2.02					
Bankfull Bank Height Ratio	1	1.11						0.73	0.98						1	1							1	1.09							1	1.12					
Cross Sectional Area between end pins (ft ²)	170.9	174						100.5	115.9						258.1	258.8							247.5	230.5							231.5	229.9					
d50 (mm)	-	-						24	2.5						0.5	0.15							4	55							24	0.125					

Exhibit Table 11b. Monitoring Data - Stream Reach Data Summary
 UT to Clarke Creek/EEP #92500 - UT to Clarke Creek (1507 lf)

Parameter	Baseline						MY-1						MY-2						MY-3						MY-4						MY-5					
	Min	Mean	Med	Max	SD ¹	n	Min	Mean	Med	Max	SD ¹	n	Min	Mean	Med	Max	SD ¹	n	Min	Mean	Med	Max	SD ¹	n	Min	Mean	Med	Max	SD ¹	n	Min	Mean	Med	Max	SD ¹	n
Dimension and Substrate - Riffle only																																				
Bankfull Width (ft)	6.72	7.953	7.17	9.97	-	3	6.35	7.98	6.9	10.7	-	3																								
Floodprone Width (ft)	18.7	25.23	22.4	34.6	-	3	21.5	32	29.5	45	-	3																								
Bankfull Mean Depth (ft)	0.39	0.9	0.76	1.55	-	3	0.39	0.78	0.67	1.28	-	3																								
¹ Bankfull Max Depth (ft)	0.85	1.313	0.94	2.15	-	3	0.68	1.40	1.17	2.36	-	3																								
Bankfull Cross Sectional Area (ft ²)	2.8	7.803	5.11	15.5	-	3	2.48	6.91	4.59	13.66	-	3																								
Width/Depth Ratio	6.41	11.2	8.84	18.36	-	3	8.38	11.67	10.37	16.26	-	3																								
Entrenchment Ratio	2.61	3.137	3.33	3.47	-	3	3.39	3.96	4.21	4.28	-	3																								
¹ Bank Height Ratio	0.82	0.897	0.87	1	-	3	0.84	0.90	0.89	0.97	-	3																								
Profile																																				
Riffle Length (ft)	4.82	9.826	8.81	18.46	5.272	5	26.31	57.23	65.37	82.74	24.05	5																								
Riffle Slope (ft/ft)	0.008	0.023	0.025	0.036	0.011	5	0.003	0.02	0.01	0.049	0.02	5																								
Pool Length (ft)	22.7	29.14	27.48	39.29	7.208	5	15.31	38.0	41.1	55.2	14.79	5																								
Pool Max depth (ft)	0.944	1.956	1.857	3.012	0.777	5	2.58	3.1	2.98	3.78	0.49	5																								
Pool Spacing (ft)	73.48	108.4	116.9	126.4	24.56	4	94.9	165.4	174.2	218.3	56.67	4																								
Pattern																																				
Channel Beltwidth (ft)	14	14.8	14.5	15.9	-	3																														
Radius of Curvature (ft)	10.4	16.17	16.9	21.2	-	3																														
Rc:Bankfull width (ft/ft)	1.5	2	2	2.5	-	3																														
Meander Wavelength (ft)	67.3	80.1	70	103	-	3																														
Meander Width Ratio	1.9	4.6	2.0	9.8	-	3																														
Additional Reach Parameters																																				
Rosgen Classification			E4						E4																											
Channel Thalweg length (ft)			1507						1507																											
Sinuosity (ft)			1.07						1.07																											
Water Surface Slope (Channel) (ft/ft)			0.0089						0.0091																											
BF slope (ft/ft)			0.0092						0.009																											
³ Ri% / Ru% / P% / G% / S%	-	-	-	-	-	-	-	-	-	-	-	-																								
³ SC% / Sa% / G% / C% / B% / Be%																																				
³ d16 / d35 / d50 / d84 / d95 /																																				
² % of Reach with Eroding Banks			-						-																											
Channel Stability or Habitat Metric			-						-																											
Biological or Other			-						-																											

Pattern data will not typically be collected unless visual data, dimensional data or profile data indicate significant shifts from baseline

Exhibit Table 11c. Monitoring Data - Stream Reach Data Summary
 UT to Clarke Creek/EEP #92500 - UT1 (758 lf)

Parameter	Baseline						MY-1						MY-2						MY-3						MY-4						MY-5					
	Min	Mean	Med	Max	SD ¹	n	Min	Mean	Med	Max	SD ¹	n	Min	Mean	Med	Max	SD ¹	n	Min	Mean	Med	Max	SD ¹	n	Min	Mean	Med	Max	SD ¹	n	Min	Mean	Med	Max	SD ¹	n
Dimension and Substrate - Riffle only																																				
Bankfull Width (ft)	7.18	8.443	8.595	9.4	0.932	4	8	8.965	8.965	9.93	-	2																								
Floodprone Width (ft)	11.3	25.48	16.4	57.8	21.83	4	16.15	19.48	19.48	22.81	-	2																								
Bankfull Mean Depth (ft)	0.37	0.87	0.84	1.43	0.464	4	0.4	0.6	0.6	0.8	-	2																								
¹ Bankfull Max Depth (ft)	0.56	1.098	0.955	1.92	0.589	4	0.64	0.77	0.77	0.9	-	2																								
Bankfull Cross Sectional Area (ft ²)	3.14	7.568	6.84	13.45	4.669	4	3.95	5.175	5.175	6.4	-	2																								
Width/Depth Ratio	6.57	12.23	9.825	22.69	7.233	4	10	17.48	17.48	24.96	-	2																								
Entrenchment Ratio	1.57	2.88	1.9	6.15	2.201	4	2.02	2.16	2.16	2.3	-	2																								
¹ Bank Height Ratio	0.73	0.933	1	1	0.135	4	0.98	1.05	1.05	1.12	-	2																								
Profile																																				
Riffle Length (ft)	4.82	9.826	8.81	18.46	5.272	5	16.49	44.86	42	78.79	22.87	5																								
Riffle Slope (ft/ft)	0.008	0.023	0.025	0.036	0.011	5	0.004	0.01	0.013	0.02	0.01	5																								
Pool Length (ft)	22.7	29.14	27.48	39.29	7.208	5	14.39	32.24	20.83	59	20.07	5																								
Pool Max depth (ft)	0.944	1.956	1.857	3.012	0.777	5	1.01	2.01	2.03	3.57	1.02	5																								
Pool Spacing (ft)	73.48	108.4	116.9	126.4	24.56	4	31.28	107.2	106.5	184.4	62.5	4																								
Pattern																																				
Channel Beltwidth (ft)	13.7	15.7	13.8	19.8	-	3																														
Radius of Curvature (ft)	21.9	32.6	34.7	41.1	-	3																														
Rc:Bankfull width (ft/ft)	2.5	3.9	3.6	5.6	-	3																														
Meander Wavelength (ft)	41.5	64.1	46	105	-	3																														
Meander Width Ratio	1.46	1.78	1.59	2.3	-	3																														
Additional Reach Parameters																																				
Rosgen Classification				B4c						B4c																										
Channel Thalweg length (ft)				758						758																										
Sinuosity (ft)				1.15						1.15																										
Water Surface Slope (Channel) (ft/ft)				0.0089						0.0095																										
BF slope (ft/ft)				0.0083						0.0082																										
³ Ri% / Ru% / P% / G% / S%	-	-	-	-	-	-	-	-	-	-	-	-																								
³ SC% / Sa% / G% / C% / B% / Be%																																				
³ d16 / d35 / d50 / d84 / d95 /																																				
² % of Reach with Eroding Banks				-						-																										
Channel Stability or Habitat Metric				-						-																										
Biological or Other				-						-																										

Pattern data will not typically be collected unless visual data, dimensional data or profile data indicate significant shifts from baseline

Appendix E
Hydrologic Data

**Table 12. Verification of Bankfull Events
UT to Clarke Creek - EEP Project #92500**


Date of Data Collection	Date of Occurrence	Method	Photo
2/19/2014	2/19/2014	Visual observation of wrack lines	See photo from Baseline Monitoring Report
9/18/2014	Between 2/19/2014 and 9/18/2014	Crest Gauge Reading*: 20" above bankfull (UT1) and 15.5" above bankfull (UT Clarke Creek); Visual observation of wrack lines	See below

*Crest gauge reading taken from bankfull height




Wrack lines along UT to Clarke Creek

Figure 4 - Monthly Rainfall Data
UT Clarke Creek / EEP Project #92500

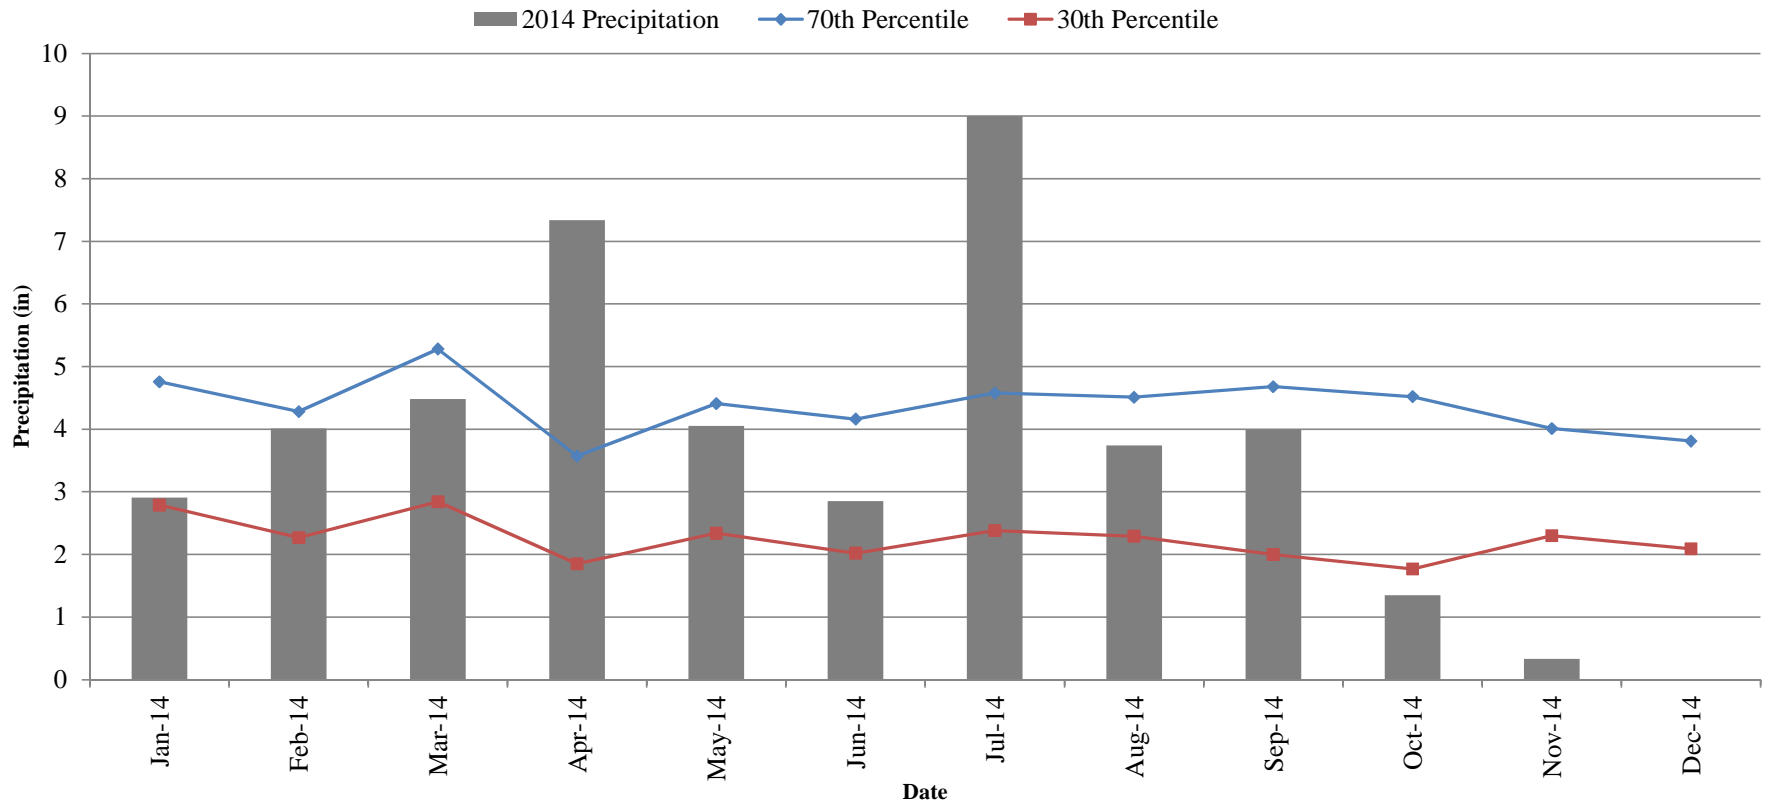


UT to Clarke Creek Hydrology Monitoring
Groundwater Gauge 1 - 2014
WM0000136A5C22


Precipitation (in) Depth to Groundwater (in) Required Depth

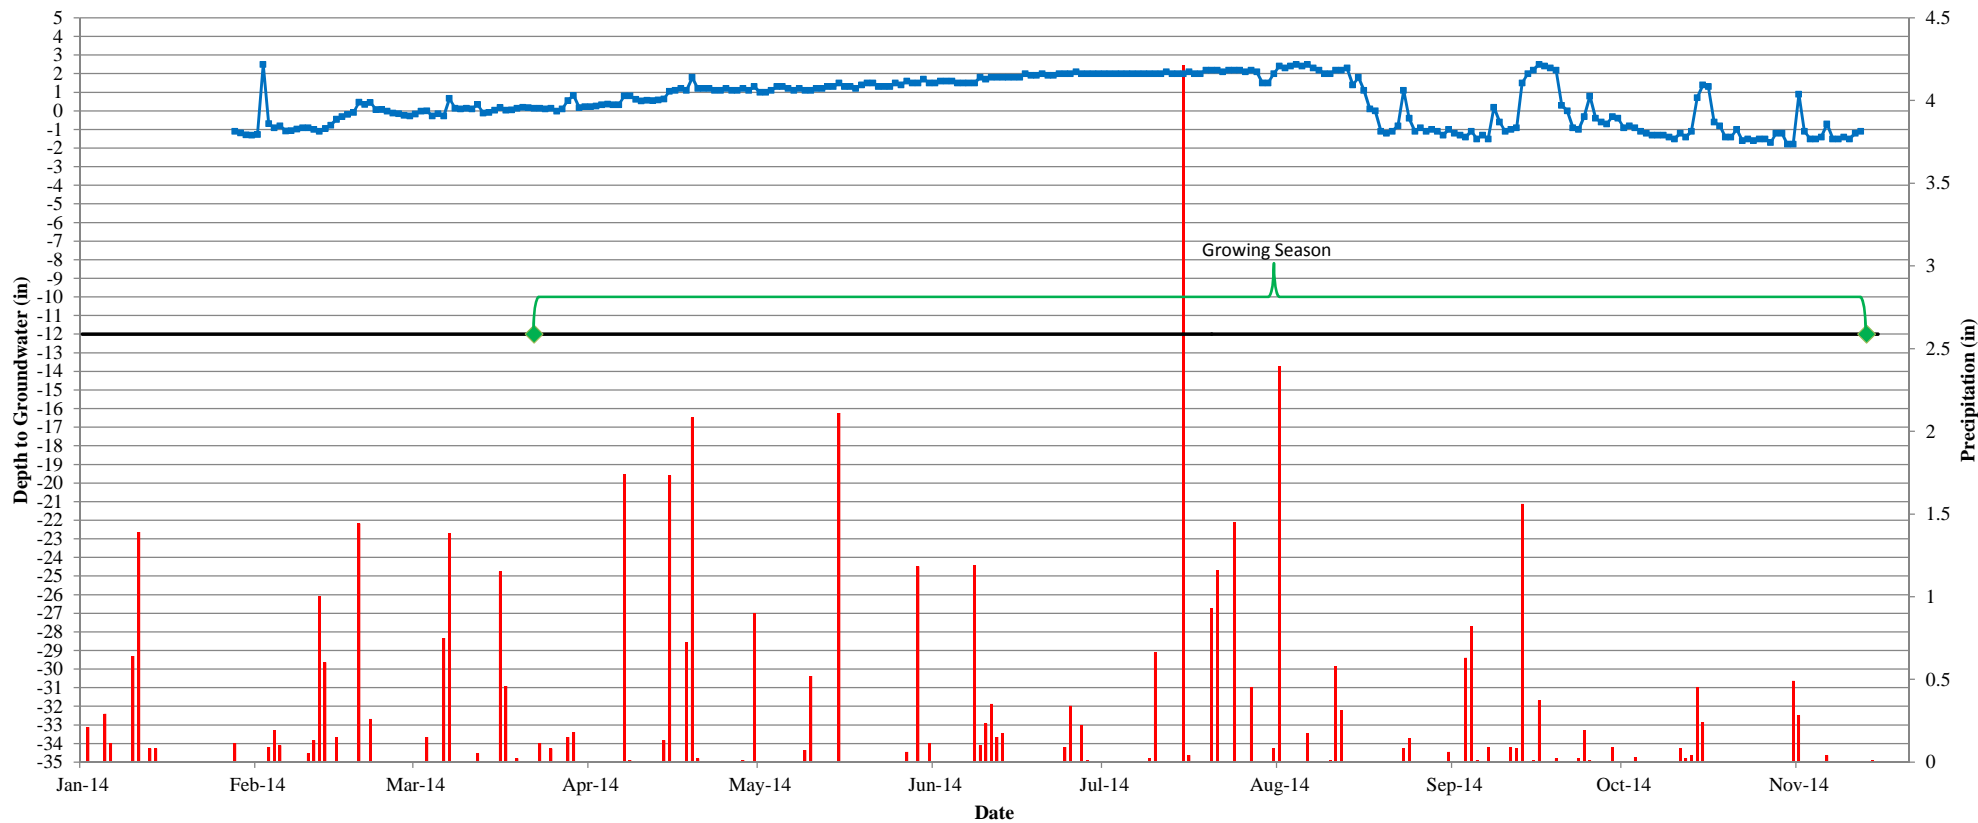


UT to Clarke Creek Hydrology Monitoring
Groundwater Gauge 2 - 2014
WM00001130F789

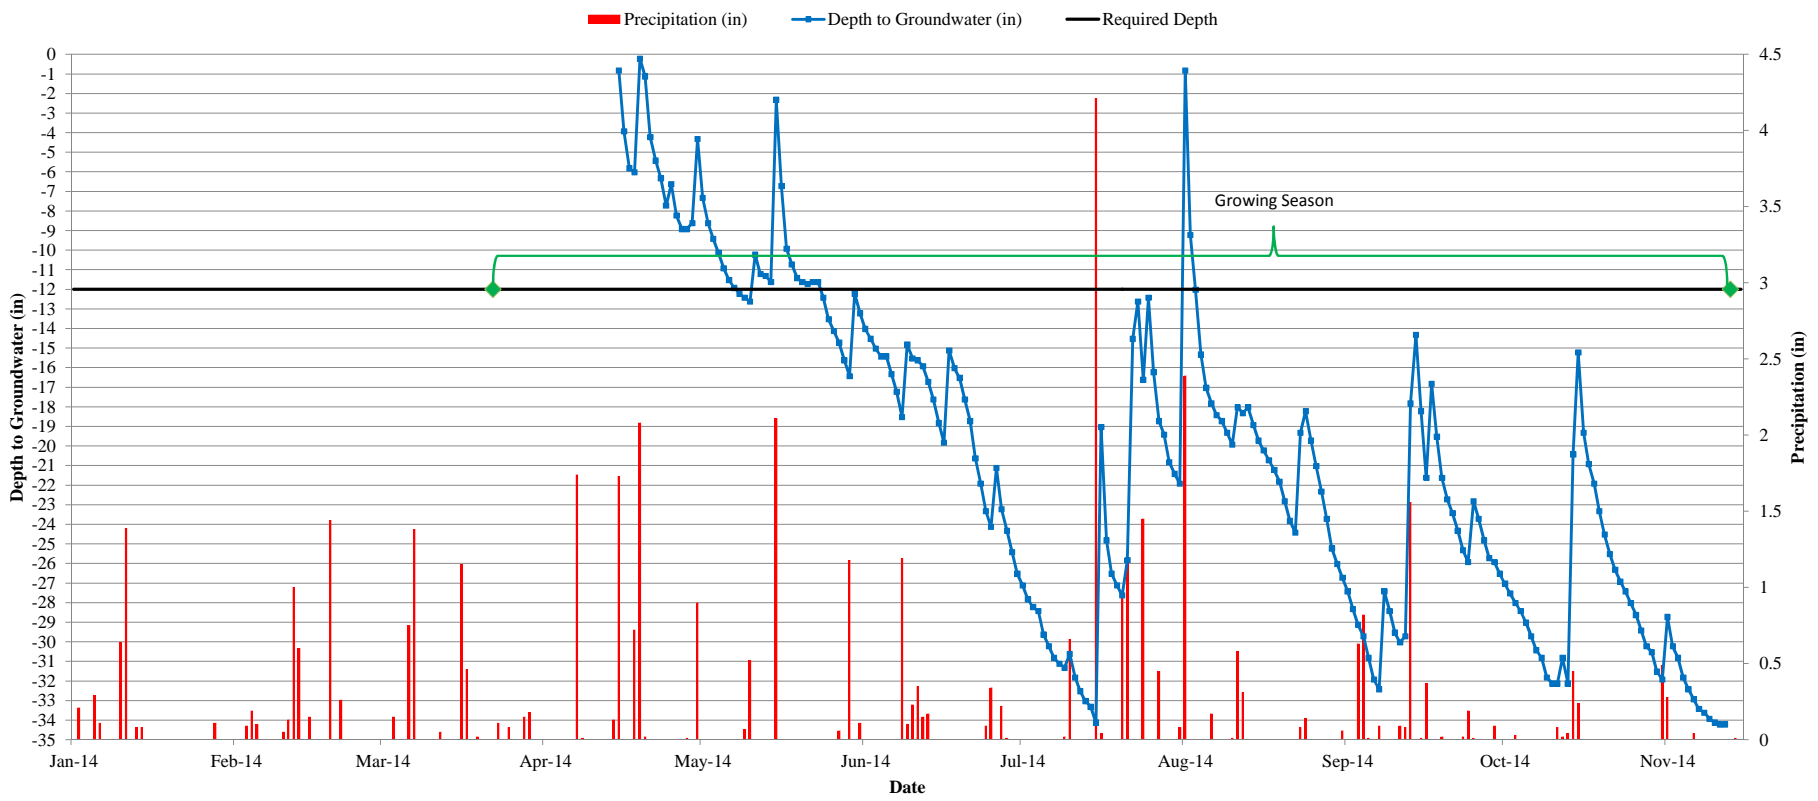


UT to Clarke Creek Hydrology Monitoring
Groundwater Gauge 3 - 2014
WM0000136B1C42

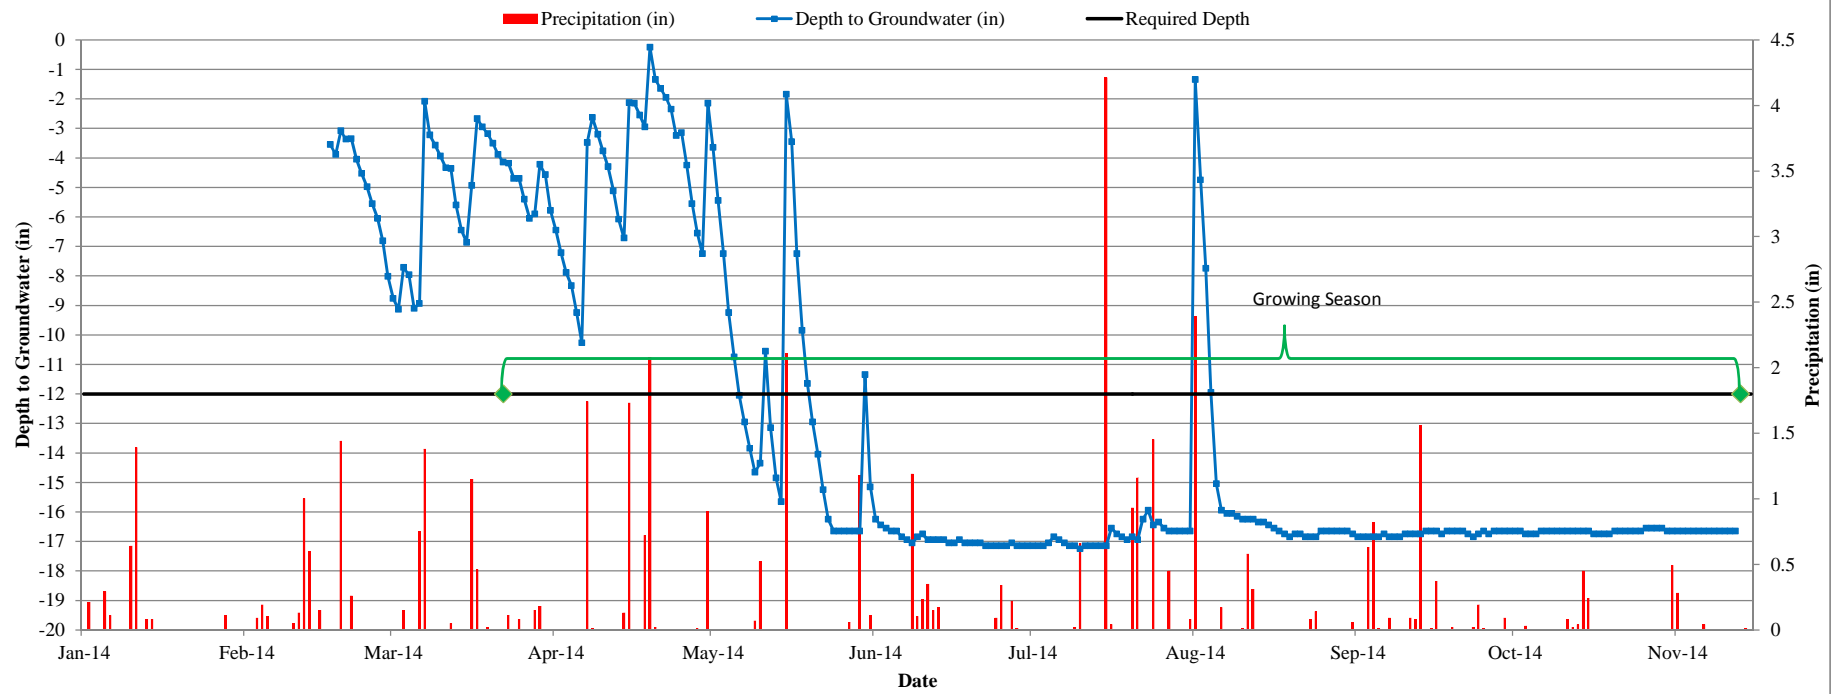

UT to Clarke Creek Hydrology Monitoring
Groundwater Gauge 4 - 2014
WM000011312519

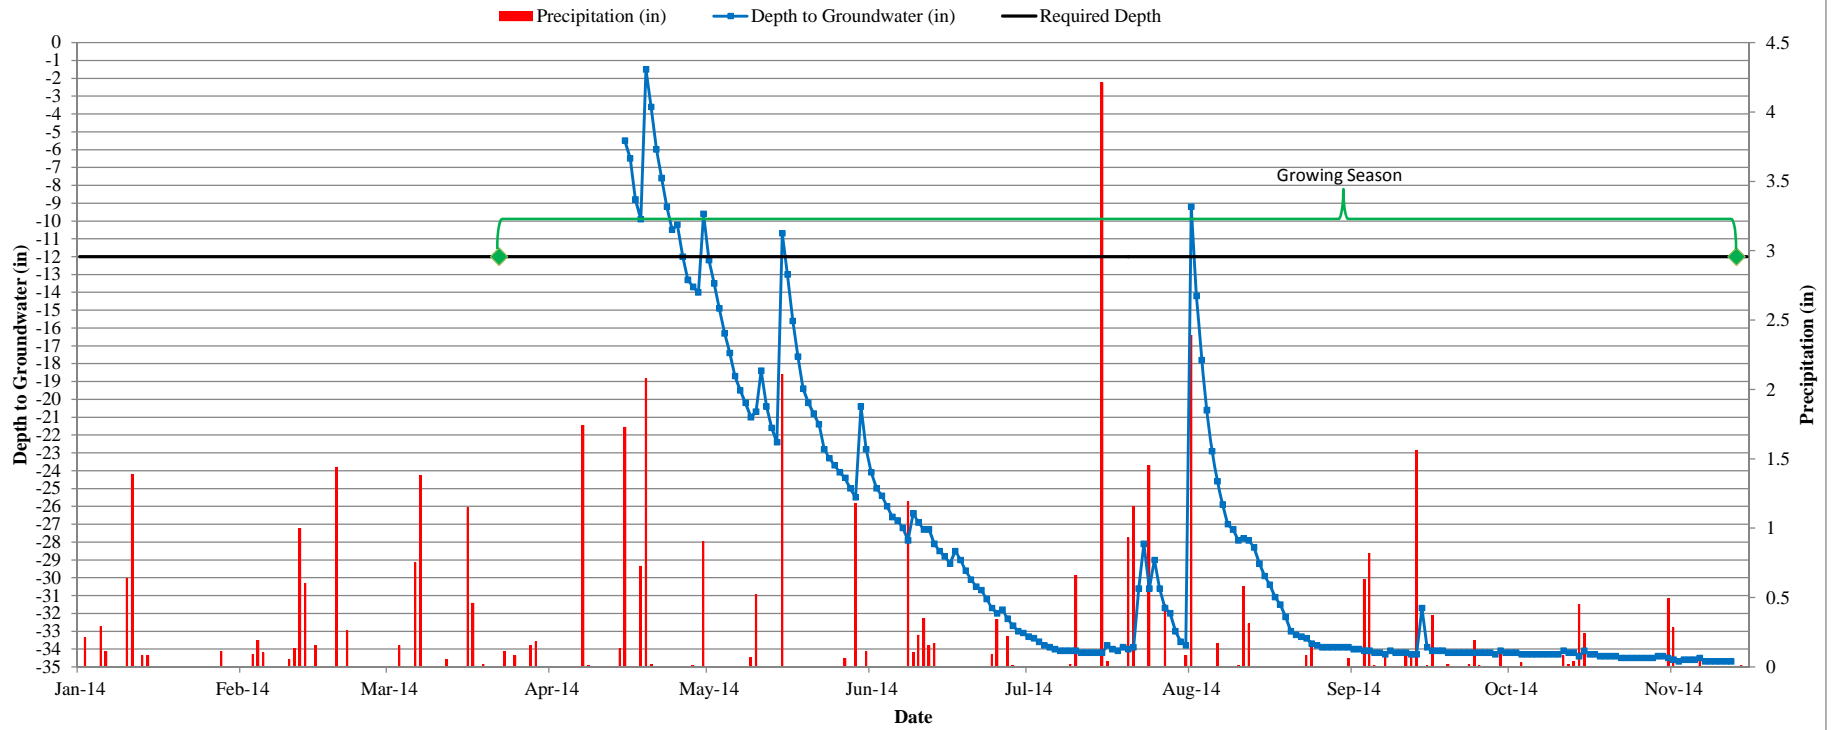


UT to Clarke Creek Hydrology Monitoring
Groundwater Gauge 5 - 2014
WM000013D4D149

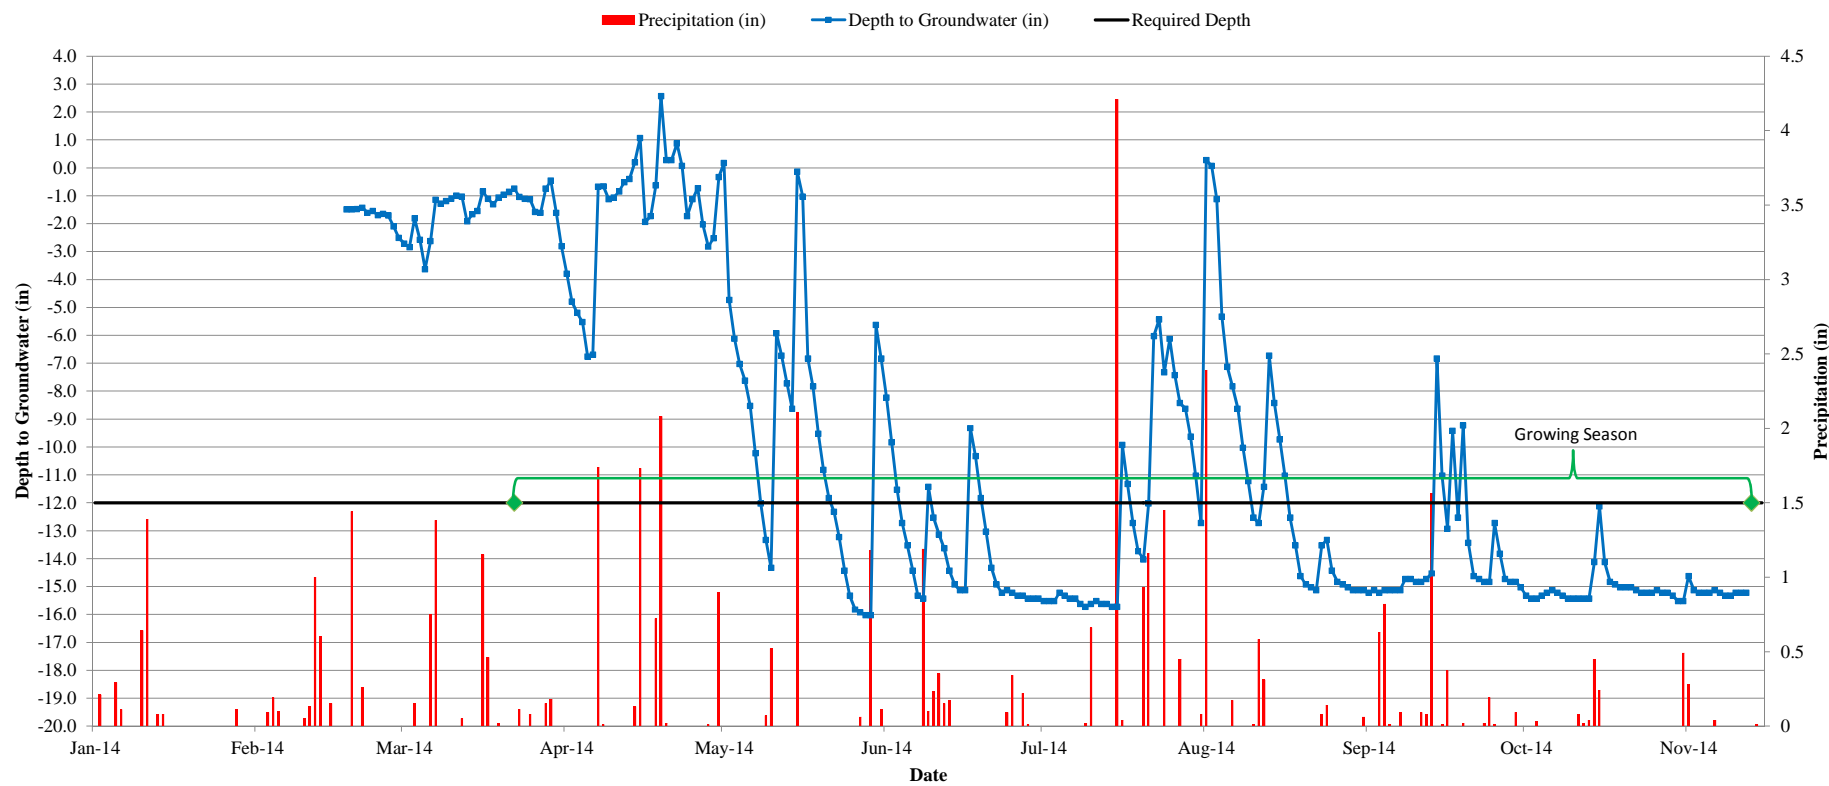


UT to Clarke Creek Hydrology Monitoring
Groundwater Gauge 6 - 2014
WM0000138B838E

Precipitation (in) Depth to Groundwater (in) Required Depth

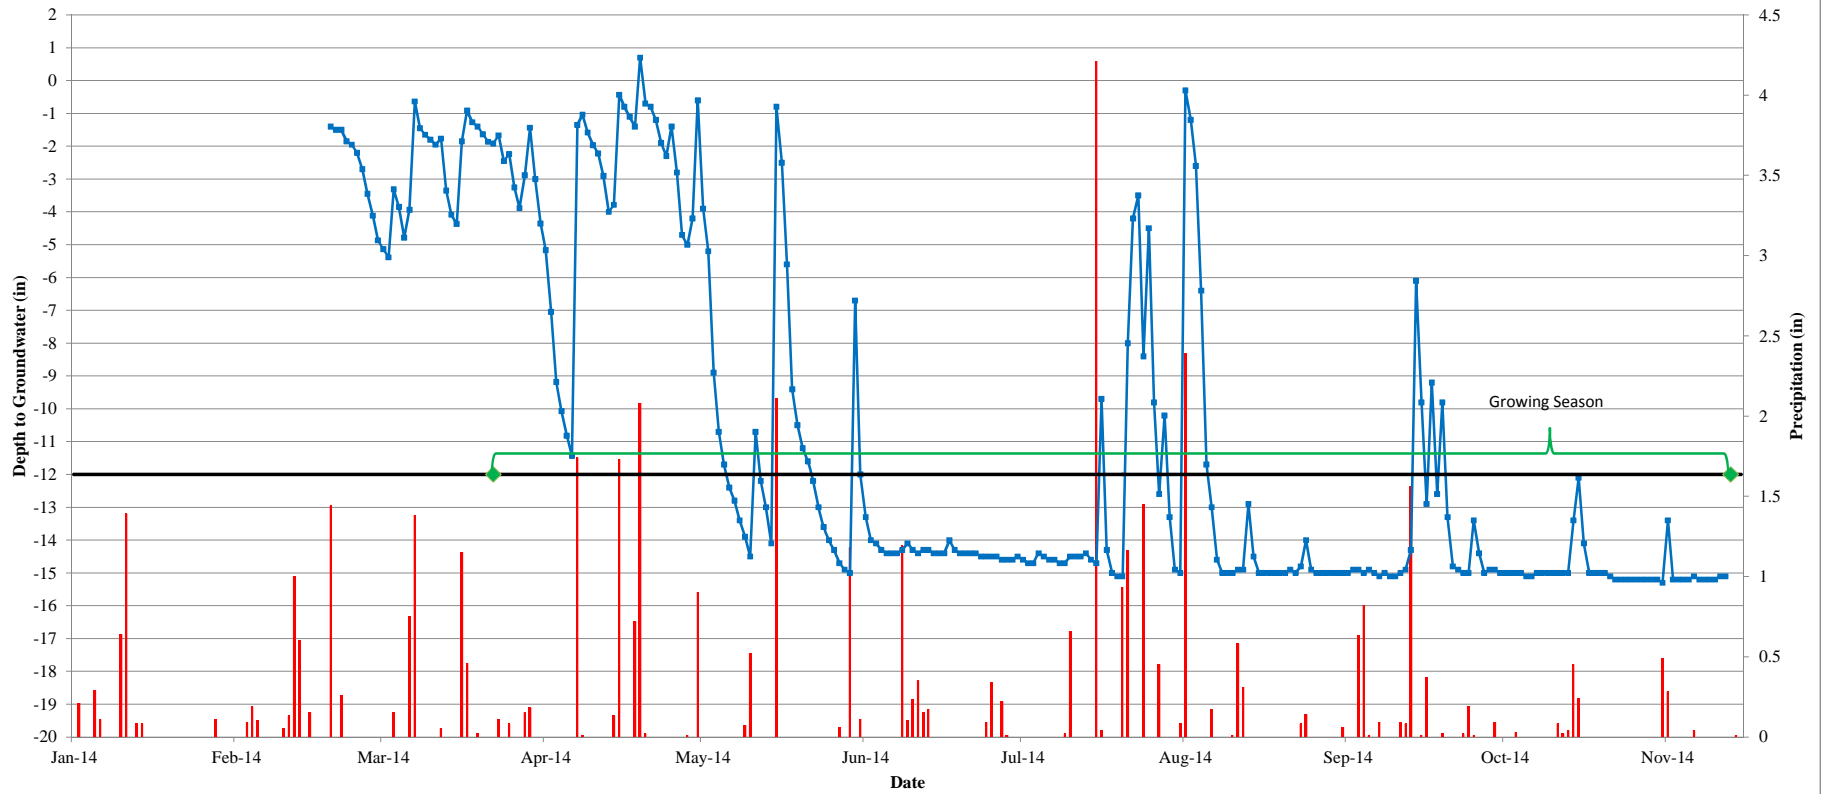

UT to Clarke Creek Hydrology Monitoring
Groundwater Gauge 7 - 2014
WM00001315052C

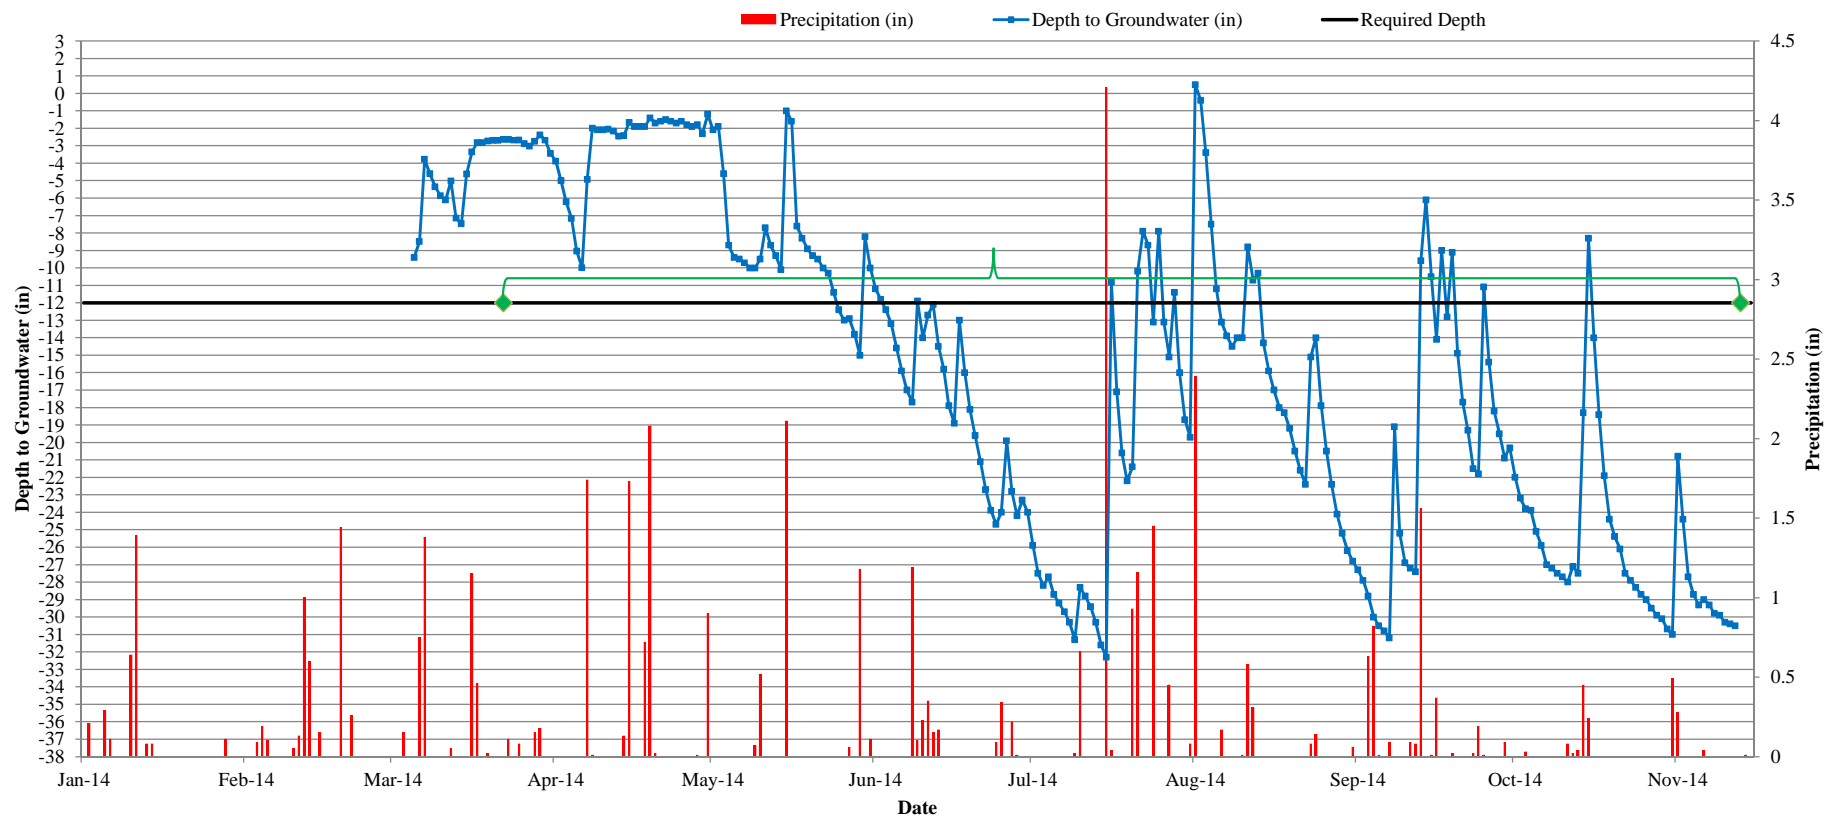

**UT to Clarke Creek Hydrology Monitoring
Groundwater Gauge 8 - 2014
WM000013D4B678**

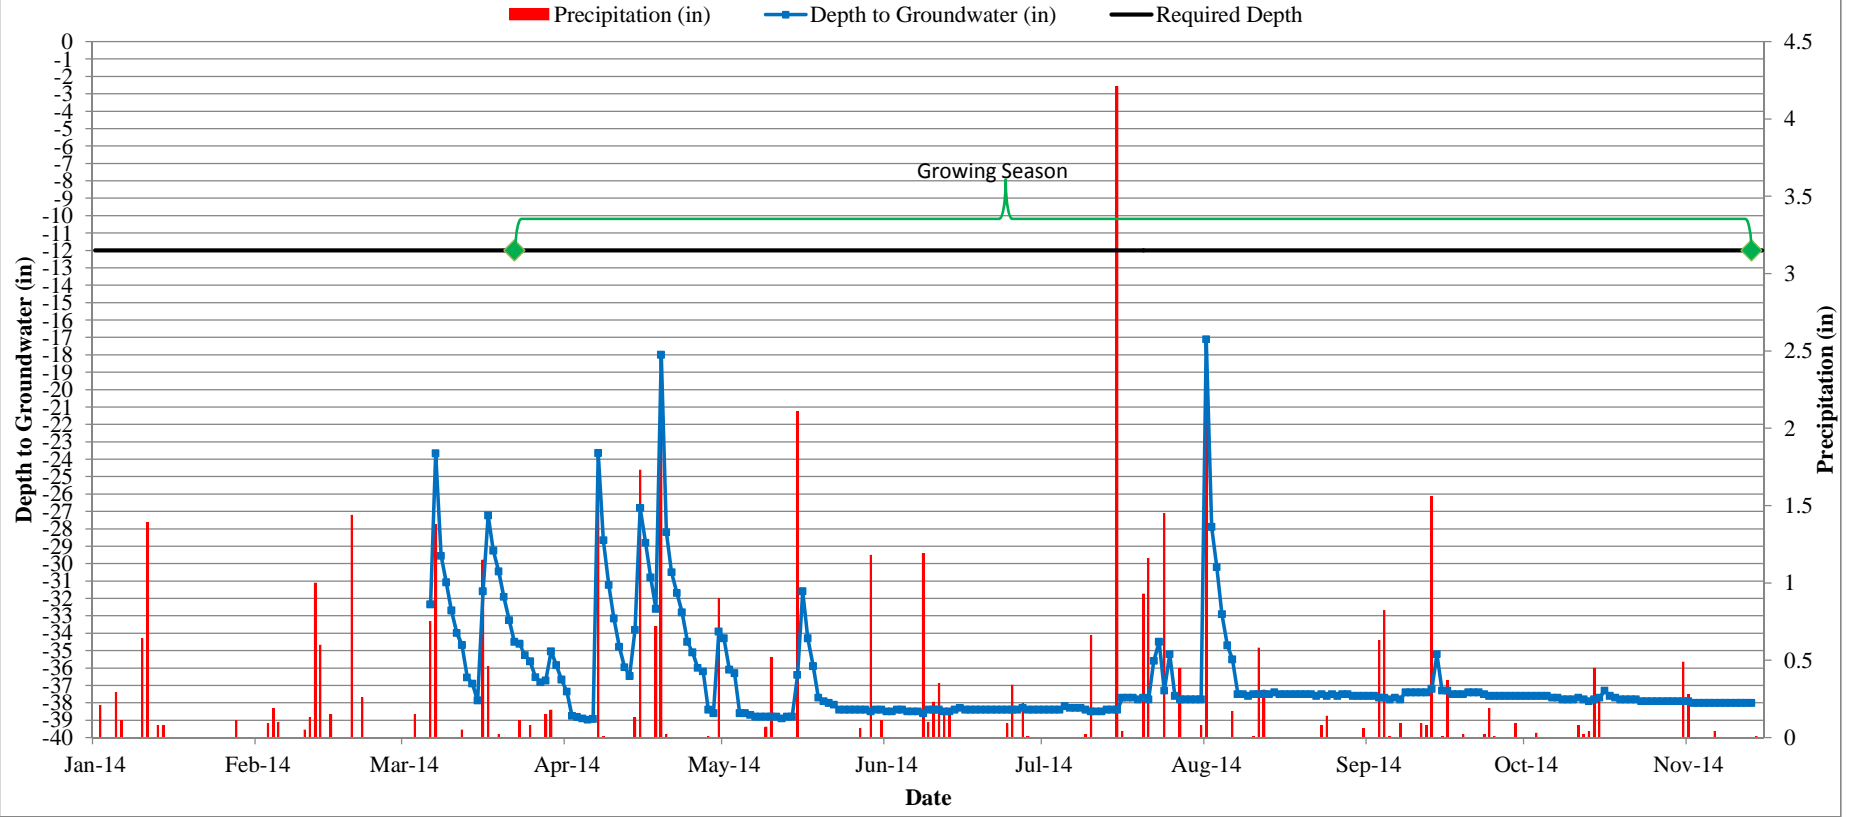


Table 13. Wetland Gauge Attainment Data

Gauge	Success Criteria Achieved/Max Consecutive Days During Growing Season (Percentage)				
	Year 1 (2014)	Year 2 (2015)	Year 3 (2016)	Year 4 (2017)	Year 5 (2018)
1	Yes/236 days (78%)				
2	No/23 days (10%)				
3	Yes/45 days (19%)				
4	No/12 days (5%)				
5	Yes/47 days (20%)				
6	Yes/45 days (19%)				
7	Yes/64 days (27%)				
8	No/0 days (0%)				