

UT to JUMPING RUN CREEK STREAM & WETLAND
RESTORATION
MONITORING REPORT (YEAR 1 OF 5)

Cumberland County, North Carolina
EEP Project Number 92345



Prepared for:
North Carolina Ecosystem Enhancement Program
1652 Mail Service Center
Raleigh, NC 27699-1652



Status of Plan: Final
Construction Completed: 2010
Data Collected: 2010
Submission Date: March 2011

Prepared by:



Stantec

Stantec Consulting Services Inc
801 Jones Franklin Road, Suite 300
Raleigh, NC 27606

Table of Contents

1.0 Executive Summary / Project Abstract 1

2.0 Methodology 3

 2.1 Morphologic Parameters and Channel Stability 3

 2.1.1 Dimension 3

 2.1.2 Pattern and Profile 3

 2.1.3 Substrate 3

 2.2 Vegetation 3

 2.3 HYDROLOGY 4

 2.3.1 Streams 4

 2.3.2 Wetlands 4

3.0 References 5

4.0 Appendices 7

 Appendix A Project Vicinity Map and Background Tables

 Figure 1 – Vicinity Map and Directions

 Table 1a.b. – Project Restoration Components

 Table 2 – Project Activity and Reporting History

 Table 3 – Project Contacts

 Table 4 – Project Attribute

 Appendix B Visual Assessment Data

 Figure 2 – Current Condition Plan View (4 Sheets)

 Table 5 – Visual Stream Morphology Stability Assessment

 Table 6 – Vegetation Condition Assessment

 Form – Headwater Stream Visual Assessment Form

 Photos – Stream Stations (B1-B11)

 Photos – Vegetation Plots (B12-B40)

 Appendix C Vegetation Plot Data

 Table 7 – Vegetation Plot Mitigation Success Summary

 Table 8 – CVS Vegetation Metadata

 Table 9 – CVS Stem Count Total and Planted by Plot and Species

 Appendix D Stream Survey Data

 Figures 3a-j – Cross-Sections with Annual Overlays

 Figure 4 – Longitudinal Profiles with Annual Overlays

 Table 10a.b. – Baseline – Stream Data Summary

 Table 11a. – Monitoring – Cross-section Morphology Data

 Table 11b. – Monitoring – Stream Reach Morphology Data

 Appendix E Hydrologic Data

 Table 12 – Verification of Bankfull Events

 Figure 5 – Monthly Rainfall Data

 Figures 6a-p – Precipitation and Water Level Plots

 Table 13 – Wetland hydrology Criteria Attainment

This page intentionally left blank for two-sided printing.

1.0 Executive Summary / Project Abstract

The overall goal of the UT to Jumping Run Creek Restoration Project was to restore a Coastal Plain headwater stream and wetlands, a Coastal Plain Small Stream Swamp, and nonriparian wetlands. The objectives of the project were to restore wetland hydrology to small stream swamp wetlands, restore stream stability and improve aquatic habitats, restore historic flow paths and flooding processes, improve floodplain functionality, establish native vegetation within the permanent conservation easement and investigate the ecological benefits of installing larger containerized trees in select smaller designated areas.

The Monitoring Year 1 [MY1] stem counts within each of the vegetative monitoring plots are included in Tables 7 and 9 in Appendix C. Eleven of the plots have over 320 stems per acre (the success criteria for MY1) while six of the plots have less than 320 stems per acre. There were no problem areas large enough to be delineated or mapped. Although it was noted in the field that small areas of flooding, dry conditions, and *Typha latifolia* need to be monitored during future visits as they could pose a threat to vegetation survival in the future.

The upstream braided reach (UT1A) is stable and appears to be functioning as designed. There are signs that water is flowing through the multiple braids and collecting in the shallow pool areas. The UT to Jumping Run single thread restoration reach (UT1B) was observed to be in generally stable condition. Over the approximately 3600 linear feet of channel restoration, the channel's profile and cross-section has only adjusted minimally from baseline conditions. The channel has good connection to its floodplain and vegetation seems to be establishing on the banks. A small area of aggradation and an exposed structure were observed in the field. Currently, neither are substantial and are not predicted to cause issues. Both areas will be monitored during future field visits to document any changes. The downstream most 125 linear feet of UT1B are in backwater from the downstream water surface elevation. The water level in this area was at or near bankfull stage, even though much of the upstream channel was dry. The enhancement reach UT1C appears to be stable, with bank pin surveys showing no aggradation or degradation. Two beaver dams were confirmed onsite in the forested portion of reach UT1c. The dams have since been removed.

The reference well met the success criteria, with three periods of consecutive days of saturation within 12 inches of the ground surface (63, 62, and 44 days respectively). This 169 day period comprises 75% of the growing season. Additionally, thirteen of the groundwater monitoring wells onsite met the success criteria. Two wells did not meet the success criteria, but did show brief hydroperiods when the water table was within 12 inches of the ground surface. Monthly precipitation totals for 2010 fell between the 30th and 70th percentiles during the growing season in August. For the months of April, June, October, and November precipitation fell below the 30th percentile. For the months of March, July, and September precipitation fell above the 70th percentile.

Summary information and data related to the occurrence of items such as beaver or encroachment, and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in

these reports can be found in the mitigation and restoration plan documents available on EEP's website. All raw data supporting the tables and figures in the appendices is available from EEP upon request.

2.0 Methodology

Channel stability, vegetation survival, and viability of wetland function were monitored on the project site. Post-restoration monitoring will be conducted for a minimum of five years or until the success criteria are met following the completion of construction to document project success. The Monitoring Year 1 survey was completed using survey grade GPS on September 1, 2010.

2.1 MORPHOLOGIC PARAMETERS AND CHANNEL STABILITY

2.1.1 Dimension

Reaches UT1A and UT1C involved restoration techniques to restore historic flow patterns and flooding functions. Monitoring efforts for reaches UT1A and UT1C will focus on visual documentation of stability. Dimensional characteristics obtained from cross-sectional surveying of 10 permanent cross-sections on UT1B were compared to baseline conditions. All monitored cross-sections should fall within the quantitative parameters defined for channels of the design stream type. Natural variability is expected, however the system should not experience trends toward excessive increasing bank erosion, channel degradation, or channel aggradation.

2.1.2 Pattern and Profile

The entire longitudinal profile of reach UT1B was surveyed (3,661 lf). Stationing from the as-built survey was used. The longitudinal profiles should show that the bedform features are remaining stable. The pools should remain deep with flat water surface slopes, and the riffles should remain steeper and shallower than the pools.

2.1.3 Substrate

Since the streams throughout the project site are dominated by sand-size particles, pebble count procedures would not show a significant change in bed material size or distribution over the monitoring period; therefore, as per NCEEP, bed material analyses will not be undertaken for this project.

2.2 VEGETATION

The Carolina Vegetation Survey (CVS) Level 1 methodology was utilized to sample vegetation in September of 2010. Twelve 100m² plots have been established throughout the project site. In each plot, two plot corners have been permanently located with conduit or rebar. As per the as-built and baseline monitoring report, the vegetative success criteria are based on the US Army Corps of Engineers Stream Mitigation Guidelines (USACE, 2003). The final vegetative success criteria will be the survival of 260 5-year old planted trees per acre at the end of the year 5 monitoring period. Interim measures of vegetation planting success will be the survival of at least 320 planted trees per acre at the end of the 3-year monitoring period and 280 planted trees per acre at the end of the 4-year monitoring period.

2.3 HYDROLOGY

2.3.1 Streams

One crest gauge has been installed onsite and is located just downstream from groundwater gauge 8. Each visit to the site will include documentation of the highest stage for the monitoring interval and a reset of the device. Other indications of bankfull flow including the presence of wrack lines, sediment, or flooding will also be recorded and documented photographically. Refer to Figure 2 in Appendix B for the location of the crest gauge. The headwater stream reach (Reach UT1A) will be visually assessed during each monitoring visit to evaluate indicators that the braided channel is exhibiting flow. A visual assessment form was created for this purpose by NCEEP and is included in Appendix B.

2.3.2 Wetlands

Fifteen automated groundwater monitoring gauges have been installed across the project area to document the hydrologic conditions of the site. Refer to Figure 2 in Appendix B for the location of the groundwater monitoring gauges. Eleven wells have been installed in the riparian areas and four have been installed in the non-riparian areas of the site. Groundwater gauges will be downloaded on at least a bi-monthly basis during the growing season. A reference well is located in the existing wetlands onsite in the northeast corner of the property and is depicted on Figure 2 in Appendix A.

3.0 References

Lee, Michael T., R. K. Peet, S. D. Roberts, and T. R. Wentworth. 2008. CVS-EEP Protocol for Recording Vegetation, Version 4.2 (<http://cvs.bio.unc.edu/methods.htm>)

NCEEP. 2010. Procedural Guidance and Content Requirements for EEP Monitoring Reports. North Carolina Department of Environment and Natural Resources, Ecosystem Enhancement Program. Raleigh, NC. Version 1.3, January 15, 2010.

NCEEP. 2008. Mitigation Plan Document – Format Data Requirements, and Content Guidelines. North Carolina Department of Environment and Natural Resources, Ecosystem Enhancement Program. Raleigh, NC. Version 2.0, March 27, 2008.

Rosgen, D. 1996. Applied River Morphology. Wildland Hydrology, Pagosa Springs, CO.

Schafale, M.P. and A.S. Weakley, 1990. Classification of the Natural Communities of North Carolina, Third Approximation. North Carolina Natural Heritage Program, Division of Parks and Recreation, NCDEHNR, Raleigh, North Carolina.

United States Army Corps of Engineers – Wilmington District, North Carolina Division of Water Quality, United States Environmental Protection Agency – Region IV, Natural Resources Conservation Service, North Carolina Wildlife Resources Commission. 2003. Stream Mitigation Guidelines.

This page intentionally left blank for two-sided printing.

4.0 Appendices

Appendix A – Project Vicinity Map and Background Tables

Appendix B – Visual Assessment Data

Appendix C – Vegetation Plot Data


Appendix D – Stream Survey Data

Appendix E – Hydrologic Data

This page intentionally left blank for two-sided printing.

Appendix A. Project Vicinity Map and Background Tables

Figure 1	– Vicinity Map and Directions
Table 1a.b.	– Project Restoration Components
Table 2	– Project Activity and Reporting History
Table 3	– Project Contacts
Table 4	– Project Attribute

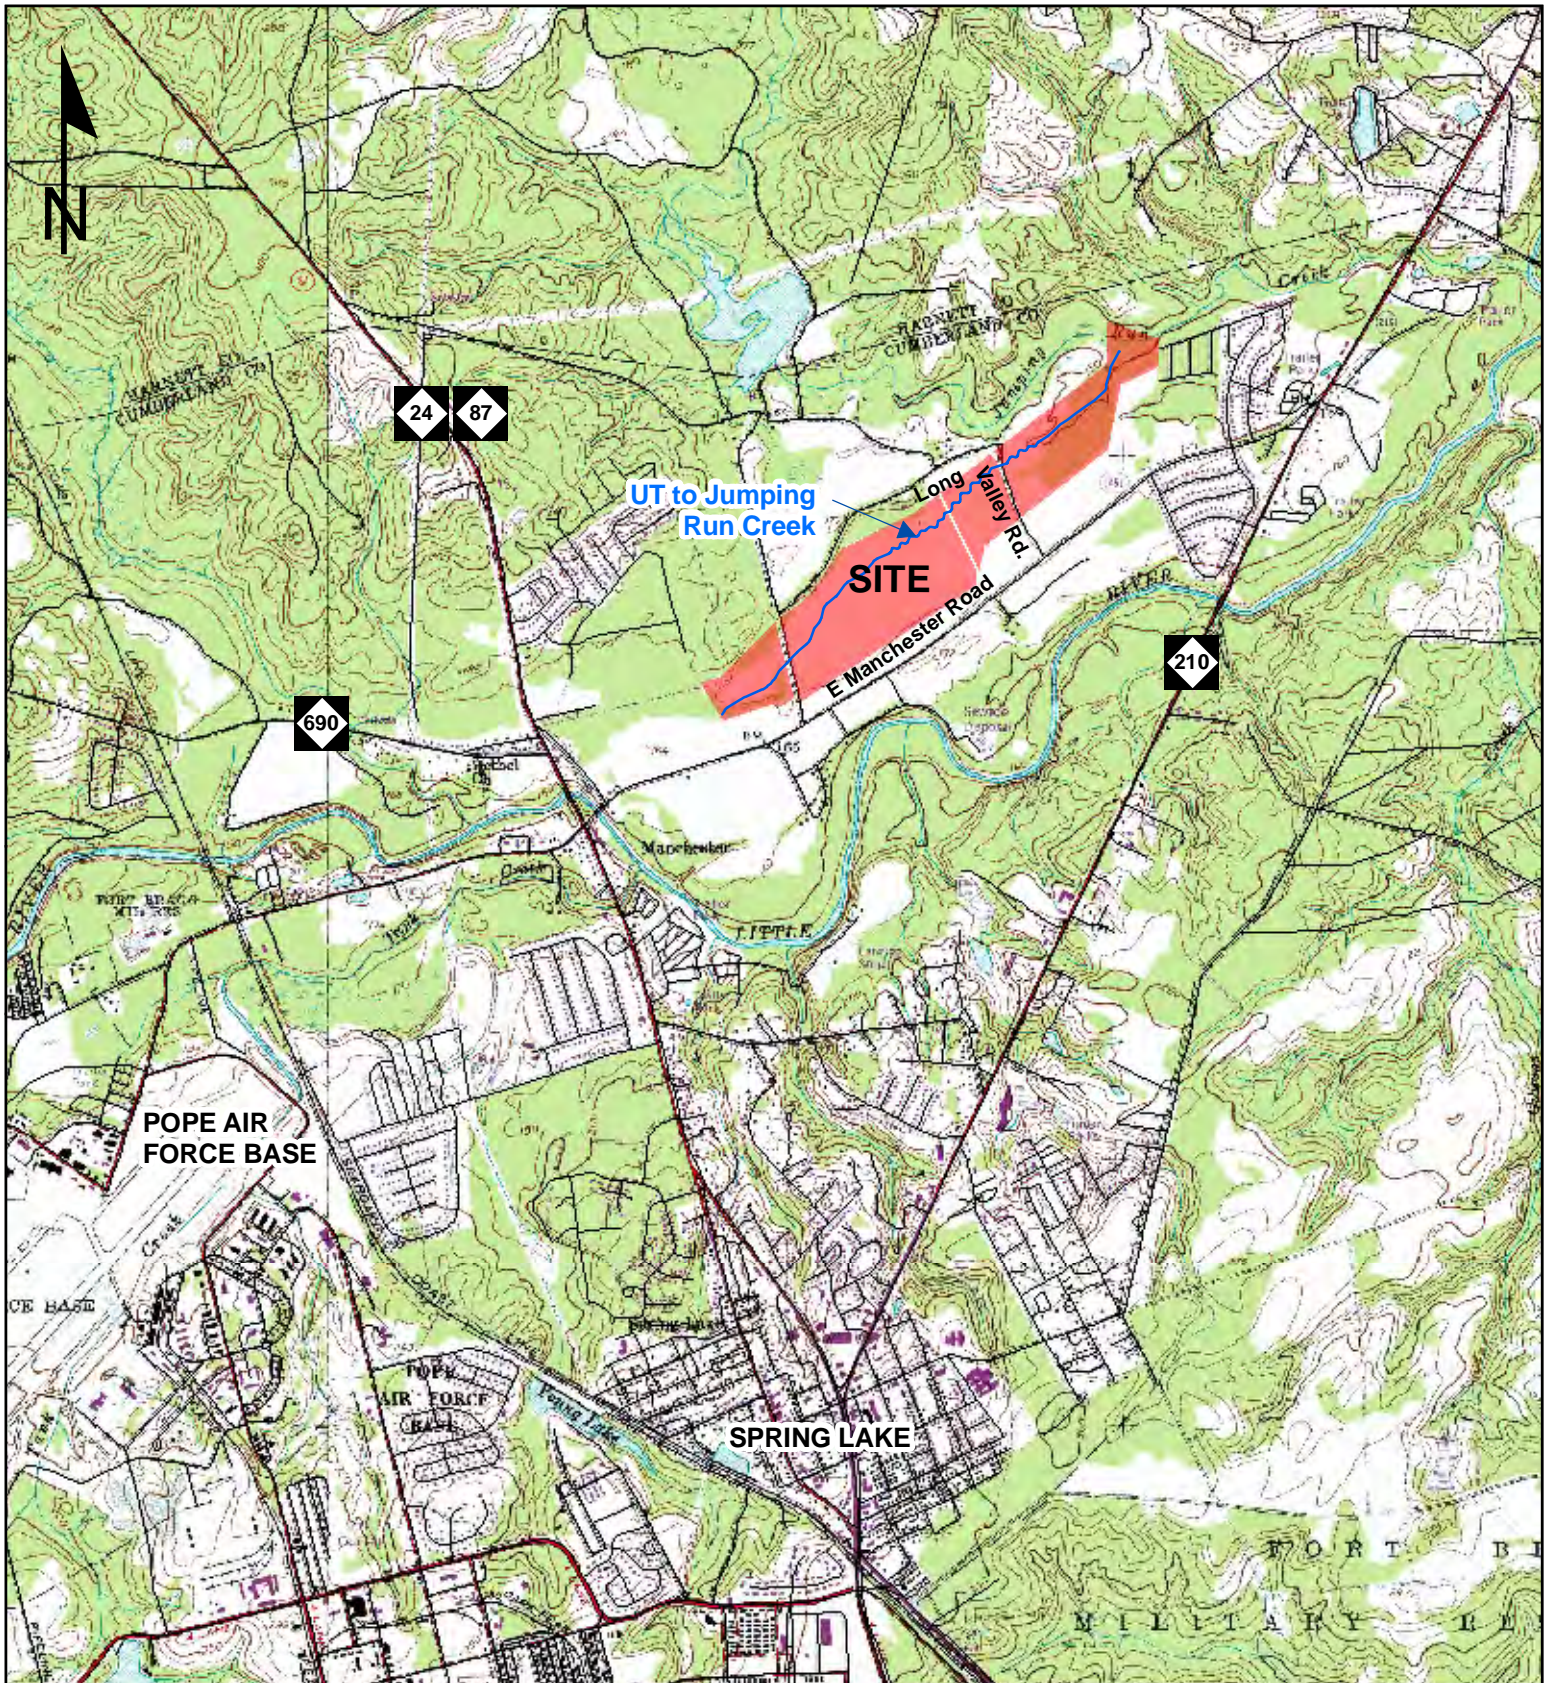

Directions to the site: From Raleigh, head south on US 1. In Sanford take the NC 87 S / US 421 S / N Horner Blvd exit and turn right at the end of the exit ramp to go south through Sanford. In approximately 5 miles, veer right to stay on NC 87 at the NC 87 / US 421 split. Approximately 1.6 miles past the Cumberland County line turn left onto East Manchester Road. Go another 1.6 miles and turn left on Long Valley Road to access the site. Gate access can be obtained from NC State Parks (Janet Pearson 910-692-2167)



Stantec

Figure 1. Vicinity Map

UT to Jumping Run Creek
Stream and Wetland Restoration Project
EEP #: 92345
Cumberland County, North Carolina




Table 1a. Project Components									
UT Jumping Run Creek Restoration Project/EEP Project No. 92345									
Project Component or Reach ID	Existing Feet/Acres	Restoration Level	Approach	Footage or Acreage	Stationing	Mitigation Ratio	Mitigation Units	BMP Elements ¹	Comment
UT1A	9,026 lf	R	CP Headwater	3,657*	10+00 to 47+29	1:1	3,657		Restoration consists of filling the channelized portions of stream and restoring valley topography. The system will be allowed to form on its own, either as a single or braided channel headwater stream within the valley (DA stream type).
UT1B		R	PI	3,661	47+29 to 82+19	1:1	3,661		Restoration follows a Rosgen Priority Level I approach. A new meandering channel was constructed across the abandoned floodplain. The old stream channel and drainage ditches were filled.
UT1C	1,935 lf	E	EI	1,935	82+19 to 101+54	1.5:1	1,290		Stream enhancement is proposed for the area of existing forest on the eastern side of the project. Flows from the restoration reaches were routed into the existing channel that currently flows through this wooded area, with minimal disturbance to the existing vegetation. The existing channel is relatively stable, and restoring the historic stream flow would enhance the functions of the stream reach.
Riparian Wetland Restoration - field areas along UT1A and UT1B	n/a	R		78.7	~10+00 to 82+39	1:1	78.7		Restoration of wetland hydrology to drained areas of hydric soil. Drainage ditches were filled, microtopography reintroduced, planting of native wetland vegetation, and overbank flooding regimes restored.
Riparian Wetland Enhancement - along UT1a and UT1B (existing jurisdictional wetland pockets)	3.4 ac	E		3.4	~16+00 to 60+00	2:1	1.7		Existing jurisdictional wetlands within the farm fields enhanced by raising the local water table, restoring an overbank flooding regime, and planting of native wetland vegetation.
Non-riparian Wetland Restoration	n/a	R		17.3	~24+00 to 91+00	1:1	17.3		Existing drained hydric soil areas within the farm fields restored by raising the local water table and planting of native wetland vegetation.

*Footage is based on valley length for this braided system

1 = BR = Bioretention Cell; SF = Sand Filter; SW = Stormwater Wetland; WDP = Wet Detention Pond; DDP = Dry Detention Pond;

FS = Filter Strip; Grassed Swale = S; LS = Level Spreader; NI = Natural Infiltration Area, O = Other

CF = Cattle Fencing; WS = Watering System; CH = Livestock Housing

Table 1b. Component Summations							
UT Jumping Run Creek Restoration Project/EEP Project No. 92345							
Restoration Level	Stream (lf)	Riparian Wetland (Ac)		Non-Ripar (Ac)	Upland (Ac)	Buffer (Ac)	BMP
		Riverine	Non-Riverine				
Restoration	7318	78.7		17.3			
Enhancement		3.4					
Enhancement I	1935						
Enhancement II							
Creation							
Preservation					125.9		
HQ Preservation							
Totals (Feet/Acres)	9253	82.1		17.3			
MU Totals	8608	80.4		17.3			

Non-Applicable

Table 2. Project Activity and Reporting History		
UT Jumping Run Creek Restoration Project/EEP Project No. 92345		
Elapsed Time Since Grading Complete:	6 months	
Elapsed Time Since Planting Complete:	5 months	
Number of Reporting Years¹:	1	
	Data Collection	Completion or
Activity or Deliverable	Complete	Delivery
Mitigation Plan	Nov 2007	July 2008
Final Design – Construction Plans	n/a	March 2009
Construction	n/a	April 2010
Seeding	n/a	March 2010
Planting	n/a	April 2010
As-built (Year 0 Monitoring – baseline)	May 2010	Dec 2010
Year 1 Monitoring	Sept 2010	Dec 2010
Year 2 Monitoring	n/a	n/a
Year 3 Monitoring	n/a	n/a
Year 4 Monitoring	n/a	n/a
Year 5 Monitoring	n/a	n/a

¹ = Equals the number of reports or data points produced excluding the baseline


Table 3. Project Contacts Table	
UT Jumping Run Creek Restoration Project/EEP Project No. 92345	
Designer	Michael Baker Engineering, Inc.
	8000 Regency Pkwy, Ste 200, Cary, NC 27518
Primary project design POC	Kayne Van Stell (919)463-5488
Construction Contractor	Backwater Environmental
	P.O. Box 1654, Pittsboro, NC 27312
Construction contractor POC	Wes Newell (919) 523-4375
Survey Contractor	Turner Land Surveying, PLLC
	3201 Glenridge Drive, Rlaiegh, NC 27604
Survey contractor POC	L Turner (919) 875-1378
Planting Contractor	Carolina Silvics, Inc.
	Indian Trail Rd, Endenton, NC 27932
Planting contractor POC	Mary-Margaret McKinney (252) 482-8491
Seeding Contractor	Unknown
	Unknown
Contractor point of contact	Unknown
Seed Mix Sources	Unknown
	Unknown
Nursery Stock Suppliers	ArborGen, Coastal Plain, Native Roots, Superior Trees, NCDFR
Monitoring Performers	Stantec Consulting Services, Inc.
	801 Jones Franklin Rd, Ste 300, Raleigh, NC 27606
Stream Monitoring POC	Brian Mazzochi (919) 865-7580
Vegetation Monitoring POC	Amber Coleman (919)865-7399
Wetland Monitoring POC	Amber Coleman (919)865-7399

Table 4. Project Attribute Table						
UT Jumping Run Creek Restoration Project / EEP Project No. 92345						
Project County	Cumberland					
Physiographic Region	Coastal Plain					
Ecoregion	Sandhills					
Project River Basin	Cape Fear					
USGS HUC for Project (14 digit)	03030004090010					
NCDWQ Sub-basin for Project	03-06-14					
Within extent of EEP Watershed Plan?	No					
WRC Hab Class (Warm, Cool, Cold)	Warm					
% of project easement fenced or demarcated	100%					
Beaver activity observed during design phase?	Yes					
Restoration Component Attribute Table						
	UT1A	UT1B	UT1C	RW Restoration	RW Enhancement	NRW Restoration
Drainage area	1.2 sq mi			N/A	N/A	N/A
Stream order	1	1	1	N/A	N/A	N/A
Restored length (feet)	3,729	3,490	1,935	N/A	N/A	N/A
Perennial or Intermittent	I	P	P	N/A	N/A	N/A
Watershed type (Rural, Urban, Developing etc.)	Rural	Rural	Rural	N/A	N/A	N/A
Watershed LULC Distribution (e.g.)						
Residential	25%			N/A	N/A	N/A
Ag-Livestock	45%			N/A	N/A	N/A
Forested	30%			N/A	N/A	N/A
Watershed impervious cover (%)	<5%			N/A	N/A	N/A
NCDWQ AU/Index number	N/A	N/A	N/A	N/A	N/A	N/A
NCDWQ classification	C	C	C	N/A	N/A	N/A
303d listed?	No	No	No	N/A	N/A	N/A
Upstream of a 303d listed segment?	Yes	Yes	Yes	N/A	N/A	N/A
Reasons for 303d listing or stressor	DO, FC, metals, pH			N/A	N/A	N/A
Total acreage of easement				225.3		
Total vegetated acreage within the easement				225.3		
Total planted acreage as part of the restoration				153.8		
Rosgen classification of pre-existing	F5	F5	F5	N/A	N/A	N/A
Rosgen classification of As-built	DA	C	E/C/DA	N/A	N/A	N/A
Valley type	X	X	X	N/A	N/A	N/A
Valley slope	-	0.0011	0.003	N/A	N/A	N/A
Valley side slope range (e.g. 2-3.%)	-	-	-	N/A	N/A	N/A
Valley toe slope range (e.g. 2-3.%)	-	-	-	N/A	N/A	N/A
Cowardin classification	N/A	N/A	N/A	Palustrine	Palustrine	Palustrine
Trout waters designation	N/A	N/A	N/A	N/A	N/A	N/A
Species of concern, endangered etc.? (Y/N)	No	No	No	No	No	No
Dominant soil series and characteristics						
Series	Deloss	Deloss	Deloss	Deloss	Deloss	Pactolus
Depth (to water table)	+1-1.0	+1-1.0	+1-1.0	+1-1.0	+1-1.0	1.5-3
Clay%	3-35%	3-35%	3-35%	3-35%	3-35%	2-12%
K	0.24	0.24	0.24	0.24	0.24	0.1
T	5	5	5	5	5	5

Use N/A for items that may not apply. Use “-” for items that are unavailable and “U” for items that are unknown
RW = Riparian wetland, NRW = Non-riparian wetland

Appendix B. Visual Assessment

Figure 2	– Current Condition Plan View (4 Sheets)
Table 5	– Visual Stream Morphology Stability Assessment
Table 6	– Vegetation Condition Assessment
Form	– Headwater Stream Visual Assessment Form
Photos	– Stream Stations (B1-B11)
Photos	– Vegetation Plots (B12-B40)

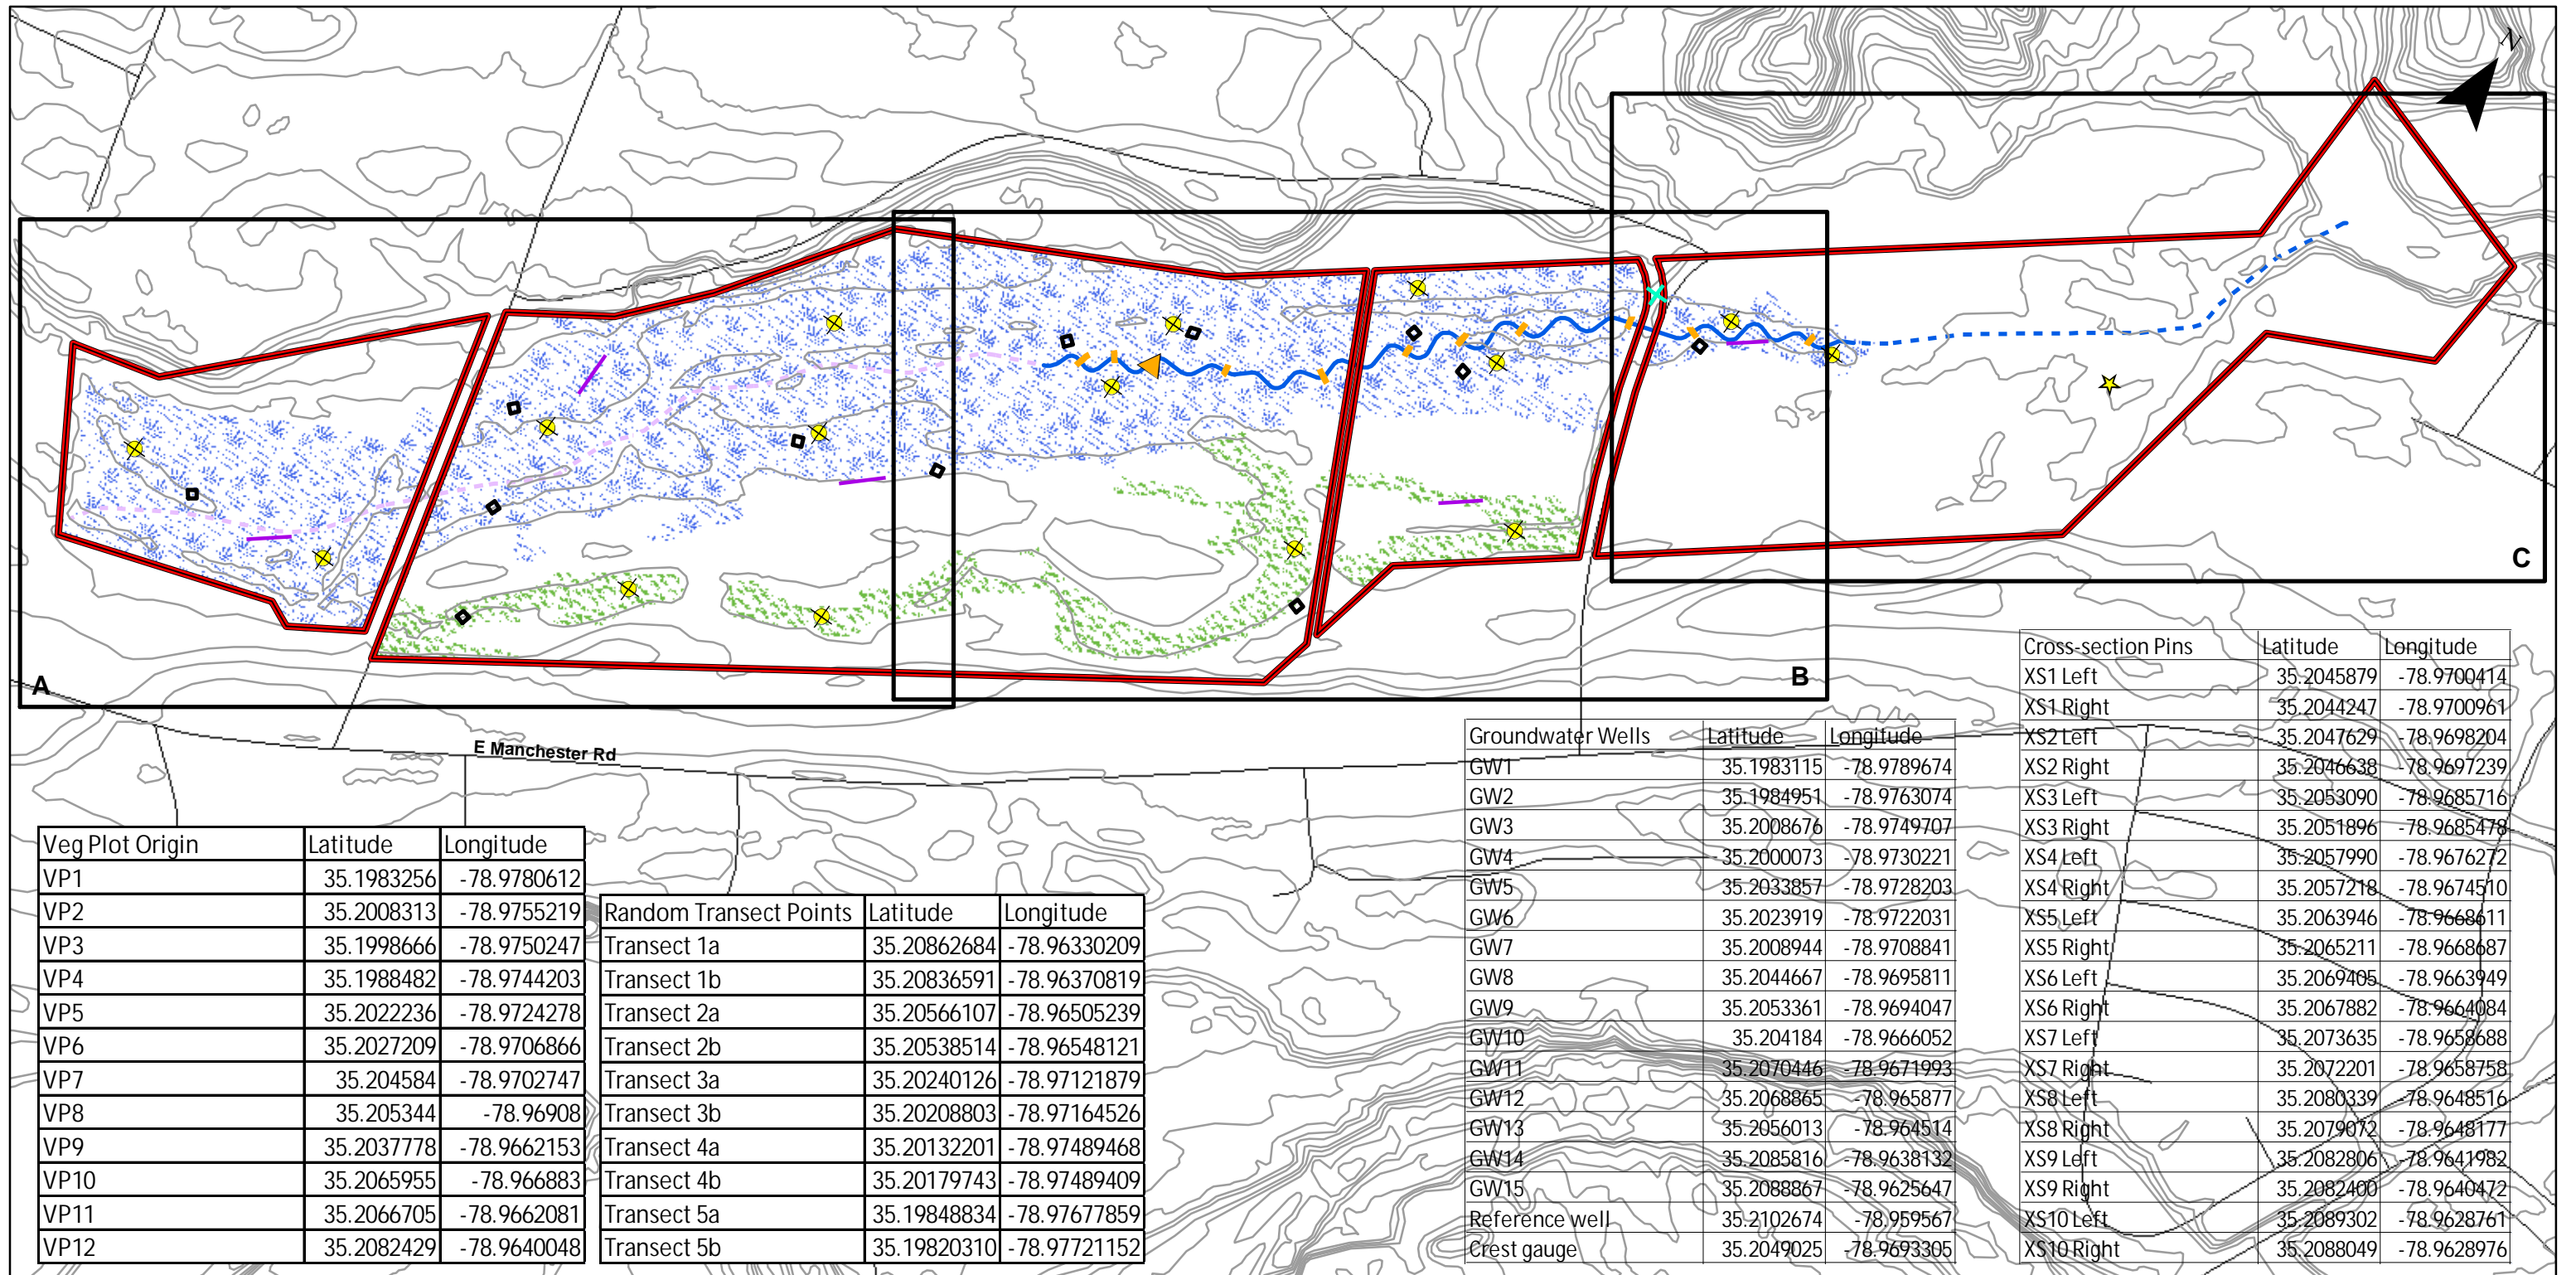

Veg Plot Origin	Latitude	Longitude
VP1	35.1983256	-78.9780612
VP2	35.2008313	-78.9755219
VP3	35.1998666	-78.9750247
VP4	35.1988482	-78.9744203
VP5	35.2022236	-78.9724278
VP6	35.2027209	-78.9706866
VP7	35.204584	-78.9702747
VP8	35.205344	-78.96908
VP9	35.2037778	-78.9662153
VP10	35.2065955	-78.966883
VP11	35.2066705	-78.9662081
VP12	35.2082429	-78.9640048

Random Transect Points	Latitude	Longitude
Transect 1a	35.20862684	-78.96330209
Transect 1b	35.20836591	-78.96370819
Transect 2a	35.20566107	-78.96505239
Transect 2b	35.20538514	-78.96548121
Transect 3a	35.20240126	-78.97121879
Transect 3b	35.20208803	-78.97164526
Transect 4a	35.20132201	-78.97489468
Transect 4b	35.20179743	-78.97489409
Transect 5a	35.19848834	-78.97677859
Transect 5b	35.19820310	-78.97721152


Groundwater Wells	Latitude	Longitude
GW1	35.1983115	-78.9789674
GW2	35.1984951	-78.9763074
GW3	35.2008676	-78.9749707
GW4	35.2000073	-78.9730221
GW5	35.2033857	-78.9728203
GW6	35.2023919	-78.9722031
GW7	35.2008944	-78.9708841
GW8	35.2044667	-78.9695811
GW9	35.2053361	-78.9694047
GW10	35.204184	-78.9666052
GW11	35.2070446	-78.9671993
GW12	35.2068865	-78.965877
GW13	35.2056013	-78.964514
GW14	35.2085816	-78.9638132
GW15	35.2088867	-78.9625647
Reference well	35.2102674	-78.959567
Crest gauge	35.2049025	-78.9693305


Cross-section Pins	Latitude	Longitude
XS1 Left	35.2045879	-78.9700414
XS1 Right	35.2044247	-78.9700961
XS2 Left	35.2047629	-78.9698204
XS2 Right	35.2046638	-78.9697239
XS3 Left	35.2053090	-78.9685716
XS3 Right	35.2051896	-78.9685478
XS4 Left	35.2057990	-78.9676272
XS4 Right	35.2057218	-78.9674510
XS5 Left	35.2063946	-78.9668611
XS5 Right	35.2065211	-78.9668687
XS6 Left	35.2069405	-78.9663949
XS6 Right	35.2067882	-78.9664084
XS7 Left	35.2073635	-78.9658688
XS7 Right	35.2072201	-78.9658758
XS8 Left	35.2080339	-78.9648516
XS8 Right	35.2079072	-78.9648177
XS9 Left	35.2082806	-78.9641982
XS9 Right	35.2082400	-78.9640472
XS10 Left	35.2089302	-78.9628761
XS10 Right	35.2088049	-78.9628976

Figure 2. Current Condition Plan View

UT to Jumping Run Creek
Stream and Wetland Restoration Project
EEP #: 92345
Cumberland County, North Carolina
December 2010

- Precipitation gage
- Crest gauge
- Groundwater wells (GW 1-15)
- Random transects (Transect 1-5)
- Reference well
- Cross-sections (XS 1-10)
- Stream centerline (UT1B)
- Vegetation Plots (VP 1-12)
- Design headwater system (UT1A)
- Stream enhancement (UT1C)
- Proposed wetland features
- Non-riparian wetland
- Easement boundary
- Riparian wetland
- 2 ft contours



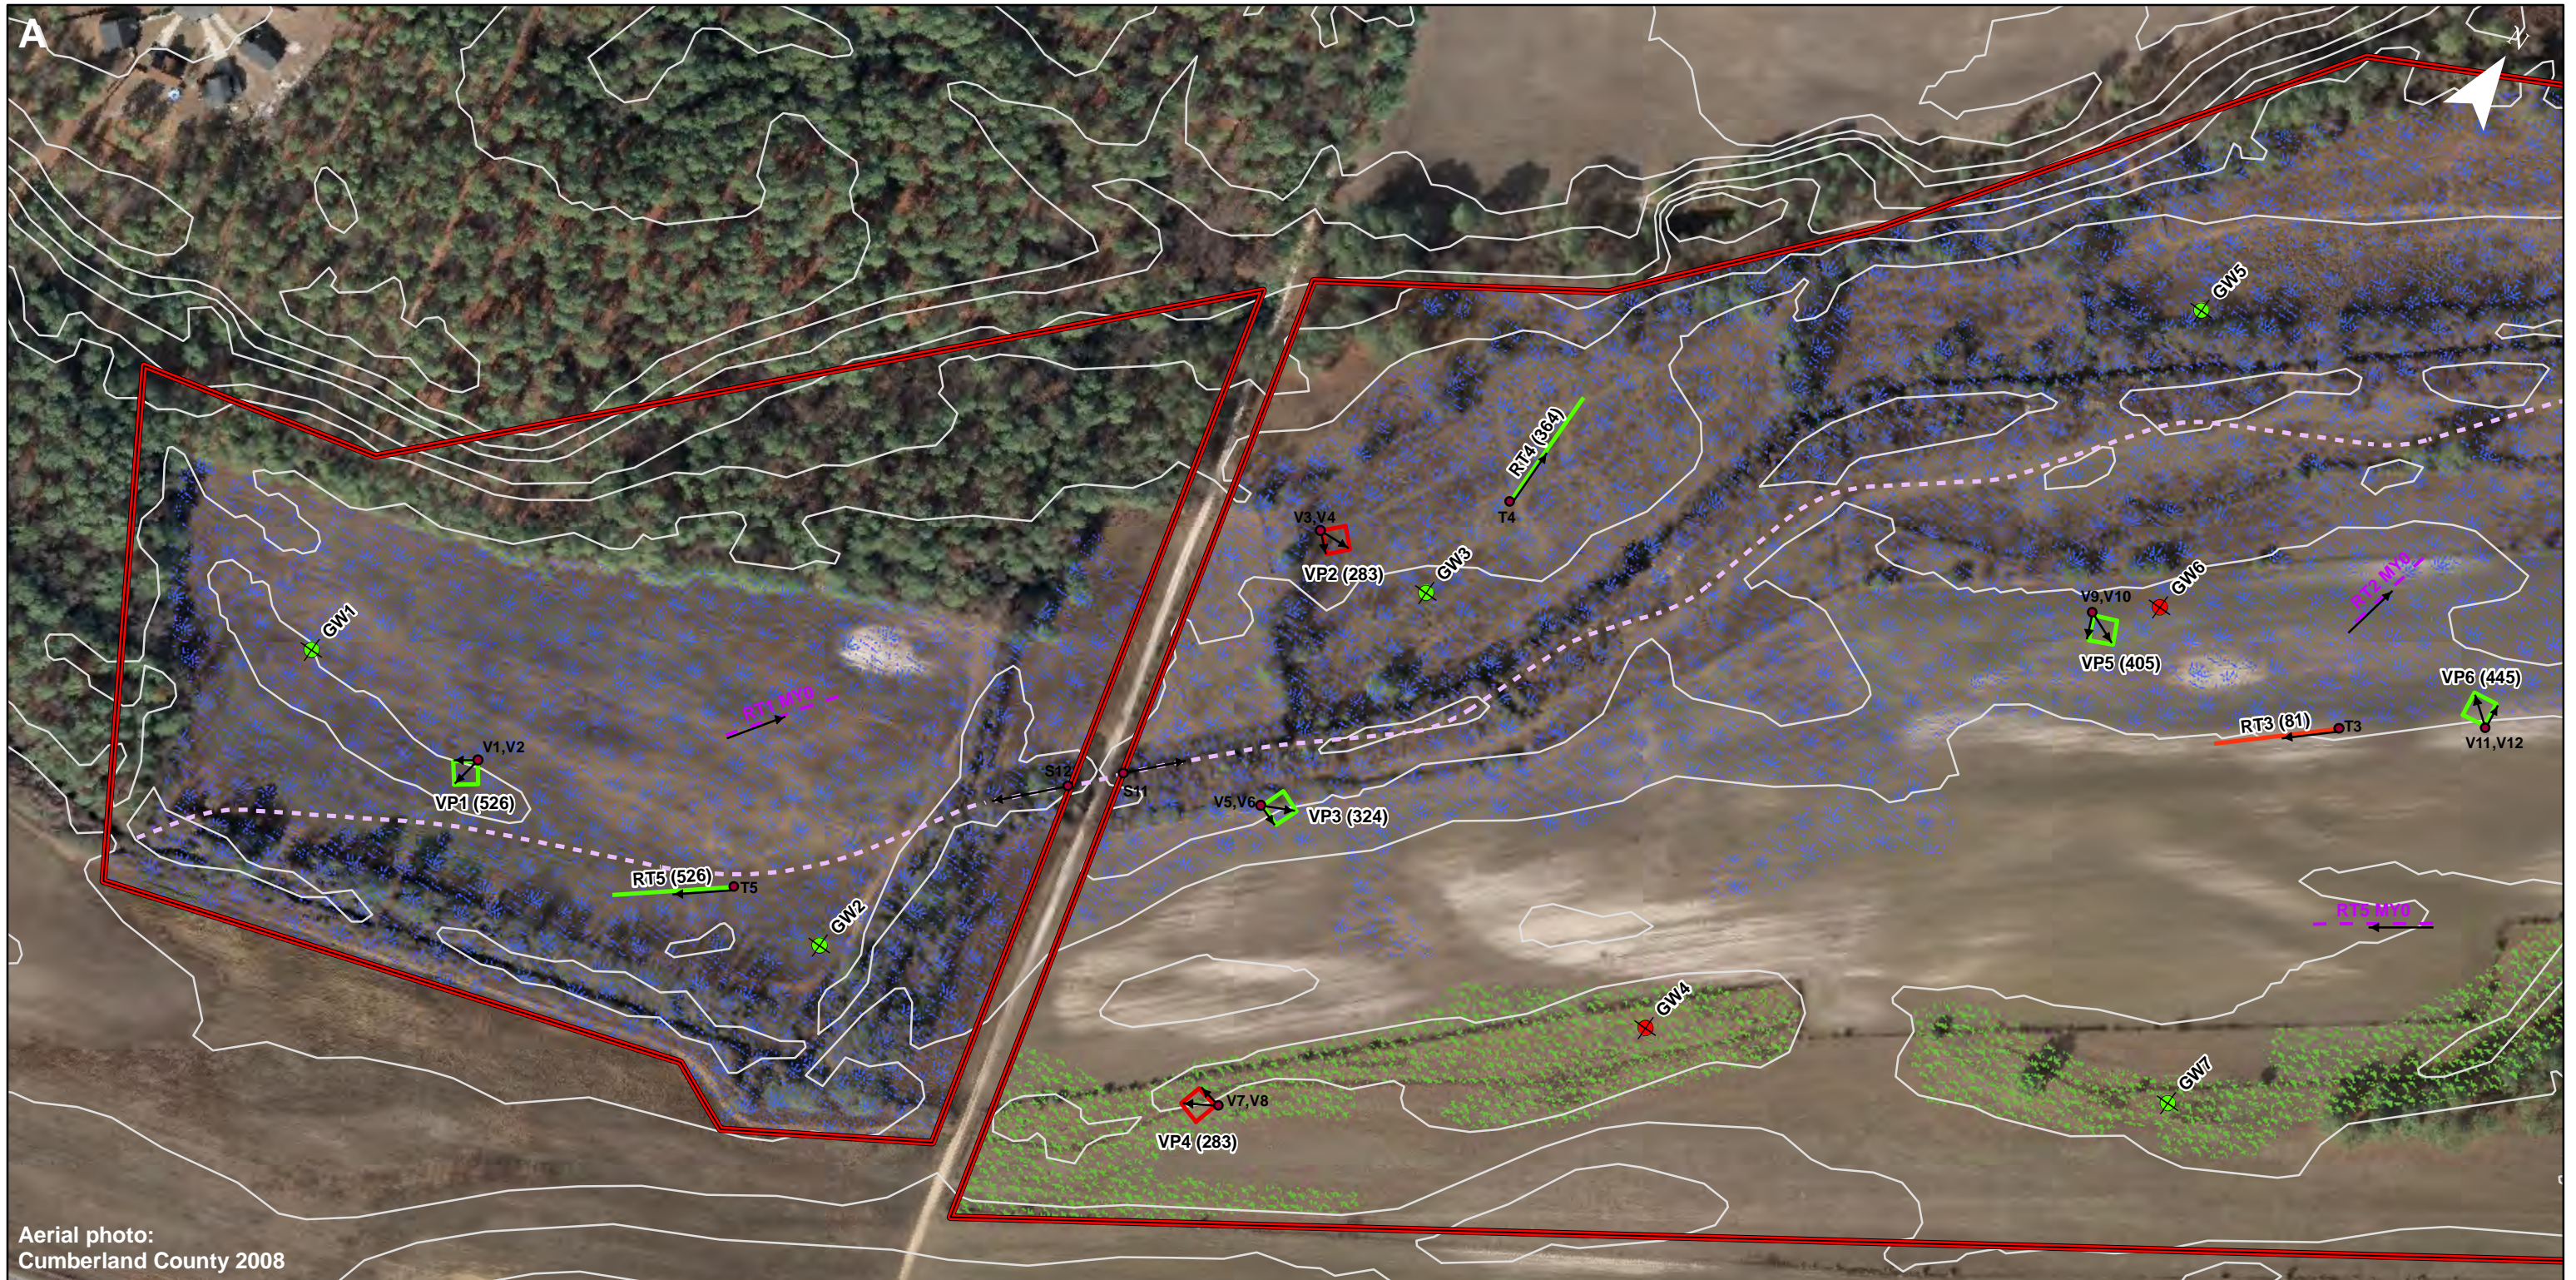

Aerial photo:
Cumberland County 2008

**Figure 2a. Current Condition
Plan View**

UT to Jumping Run Creek
Stream and Wetland Restoration Project
EEP #: 92345
Cumberland County, North Carolina
December 2010

Groundwater wells (GW 1-15)

- + Successful for MY1
- + Not successful for MY1
- ★ Reference well

Vegetation Plots (VP 1-12)

- > 320 stems/acre
- < 320 stems/acre

Random transects MY1 (RT 1-5)

- > 320 stems/acre
- < 320 stems/acre

Random Transects MY0

- Random Transects MY0

Cross-sections (XS 1-10)

- Cross-sections (XS 1-10)

TOB MY1 (UT1B)

- TOB MY1 (UT1B)

Stream centerline MY1 (UT1B)

- Stream centerline MY1 (UT1B)

Stream centerline MY0 (UT1B)

- Stream centerline MY0 (UT1B)

Design headwater system (UT1A)

- Design headwater system (UT1A)

Stream Enhancement (UT1C)

- Stream Enhancement (UT1C)

2 ft contours

- 2 ft contours

Precipitation gage

- + Precipitation gage

Crest gauge

- ▲ Crest gauge

Photo points (Veg=V, Stream=S, Transect=T)


- Photo points (Veg=V, Stream=S, Transect=T)

Proposed wetland features

- Non-riparian wetland

- Riparian wetland

- Easement boundary





Aerial photo:
Cumberland County 2008

**Figure 2b. Current Condition
Plan View**

UT to Jumping Run Creek
Stream and Wetland Restoration Project
EEP #: 92345
Cumberland County, North Carolina
December 2010

- | | | |
|---|--|---|
| <ul style="list-style-type: none"> Groundwater wells (GW 1-15) Successful for MY1 Not successful for MY1 Reference well Vegetation Plots (VP 1-12) > 320 stems/acre < 320 stems/acre Random transects MY1 (RT 1-5) > 320 stems/acre < 320 stems/acre | <ul style="list-style-type: none"> Random Transects MY0 Cross-sections (XS 1-10) TOB MY1 (UT1B) Stream centerline MY1 (UT1B) Stream centerline MY0 (UT1B) Design headwater system (UT1A) Stream Enhancement (UT1C) 2 ft contours | <ul style="list-style-type: none"> Precipitation gage Crest gauge Photo points (Veg=V, Stream=S, Transect=T) Proposed wetland features Non-riparian wetland Riparian wetland Easement boundary |
|---|--|---|

0 100 200 400
Feet





Aerial photo:
Cumberland County 2008

**Figure 2c. Current Condition
Plan View**

UT to Jumping Run Creek
Stream and Wetland Restoration Project
EEP #: 92345
Cumberland County, North Carolina
December 2010

- | | | |
|---|--|---|
| <ul style="list-style-type: none"> Groundwater wells (GW 1-15) Successful for MY1 Not successful for MY1 Reference well Vegetation Plots (VP 1-12) > 320 stems/acre < 320 stems/acre Random transects MY1 (RT 1-5) > 320 stems/acre < 320 stems/acre | <ul style="list-style-type: none"> Random Transects MY0 Cross-sections (XS 1-10) TOB MY1 (UT1B) Stream centerline MY1 (UT1B) Stream centerline MY0 (UT1B) Design headwater system (UT1A) Stream Enhancement (UT1C) 2 ft contours | <ul style="list-style-type: none"> Precipitation gage Crest gauge Photo points (Veg=V, Stream=S, Transect=T) Proposed wetland features Non-riparian wetland Riparian wetland Easement boundary |
|---|--|---|




Table 5
 Reach ID
 Assessed Length

Visual Stream Morphology Stability Assessment
 Reach UT1b
 3300

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			1	40	99%			
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	32	32		100%				
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6)	32	32		100%				
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	32	32		100%				
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	32	32		100%				
		2. Thalweg centering at downstream of meander (Glide)	32	32		100%				
Totals					0	0	100%	0	0	100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%
Totals					0	0	100%	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	75	75		100%				
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	75	75		100%				
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	75	75		100%				
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	75	75		100%				
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	75	75		100%				

Table 6. Vegetation Condition Assessment

UT to Jumping Run Creek Stream and Wetland Restoration Site/EEP Project No. 92345

Planted acreage	145					
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	0.1 acres	None	0	0	0.0%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1 acres	None	0	0	0.0%
Total				0	0	0.0%
3. Areas of Poor Growth rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 acres	None	0	0	0.0%
Cumulative Total				0	0	0.0%
Easement acreage	225.3					
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
4. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale).	1000 SF	None	0	0	0.0%
5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	none	None	0	0	0.0%

Stream Station Photos



Photo B1 – (Photo Station 1) Cross-section 1 looking downstream at Station 48+81
(9/16/2010 Year 1)



Photo B2 – (Photo Station 2) Cross-section 2 looking downstream at Station 54+30
(9/16/2010 Year 1)



Photo B3 – (Photo Station 3) Cross-section 3 looking downstream at Station 54+98
(9/16/2010 Year 1)



Photo B4 – (Photo Station S4) Cross-section 4 looking downstream at Station 59+09
(9/16/2010 Year 1)



Photo B5 – (Photo Station S5) Cross-section 5 looking downstream at Station 62+87
(9/16/2010 Year 1)



Photo B6 – (Photo Station S6) Cross-section 6 looking downstream at Station 65+44
(9/16/2010 Year 1)

Photo Station S7. Cross-section 7 at Station 68+24 (Missing)



Photo B7 – (Photo Station S8) Cross-section 8 looking downstream at Station 74+84
(9/16/2010 Year 1)



Photo B8 – (Photo Station S9) Cross-section 9 looking upstream at Station 75+30
(9/16/2010 Year 1)



Photo B9 – (Photo Station S10) Cross-section 10 looking downstream at Station 80+45
(9/16/2010 Year 1)



Photo B10 – (Photo Station S11) – Stream channel looking downstream at upper road crossing
(9/16/2010 Year 1)



Photo B11 – (Photo Station S12) Stream channel looking upstream at upper road crossing
(9/16/2010 Year 1)

Vegetation Plot Photos



Photo B12 – (Photo Station V1) Veg Plot 1 looking west (9/8/2010 Year 1)



Photo B13 – (Photo Station V2) Veg Plot 1 looking southwest (9/8/2010 Year 1)



Photo B14 - (Photo Station V3) Veg Plot 2 looking south (9/8/2010 Year 1)



Photo B15 – (Photo Station V4) Veg Plot 2 looking southeast (9/8/2010 Year 1)



Photo B16 – (Photo Station V5) Veg Plot 3 looking southeast (9/8/2010 Year 1)



Photo B17 – (Photo Station V6) Veg Plot 3 looking east (9/8/2010 Year 1)



Photo B18 – (Photo Station V7) Veg Plot 4 looking northwest (9/8/2010 Year 1)



Photo B19 – (Photo Station V8) Veg Plot 4 looking west (9/8/2010 Year 1)



Photo B20 – (Photo Station V9) Veg plot 5 looking southwest (9/8/2010 Year 1)



Photo B21 – (Photo Station V10) Veg plot 5 looking south (9/8/2010 Year 1)



Photo B22 – (Photo Station V11) Veg plot 6 looking northeast (9/8/2010 Year 1)



Photo B23 – (Photo Station V12) Veg plot 6 looking north (9/8/2010 Year 1)



Photo B24 – (Photo Station V13) Veg plot 7 looking north (9/8/2010 Year 1)



Photo B25 – (Photo Station V14) Veg plot 7 looking northwest (9/8/2010 Year 1)



Photo B26 – (Photo Station V15) Veg plot 8 looking northeast (9/8/2010 Year 1)



Photo B27 – (Photo Station V16) Veg plot 8 looking north (9/8/2010 Year 1)

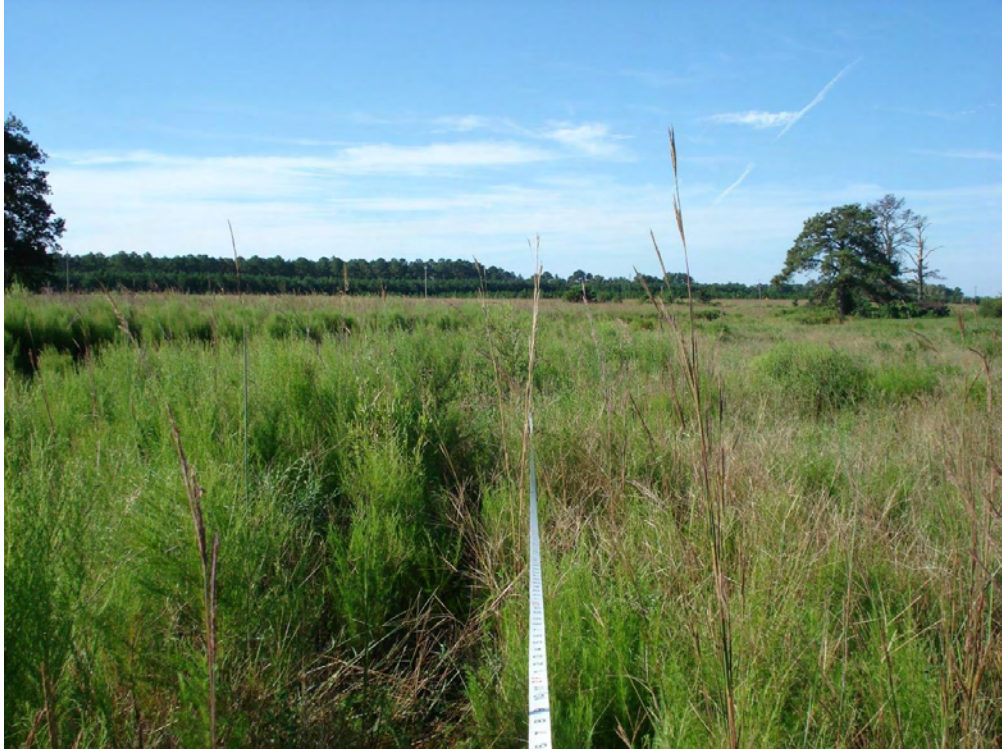


Photo B28 – (Photo Station V17) Veg plot 9 looking southwest (9/8/2010 Year 1)

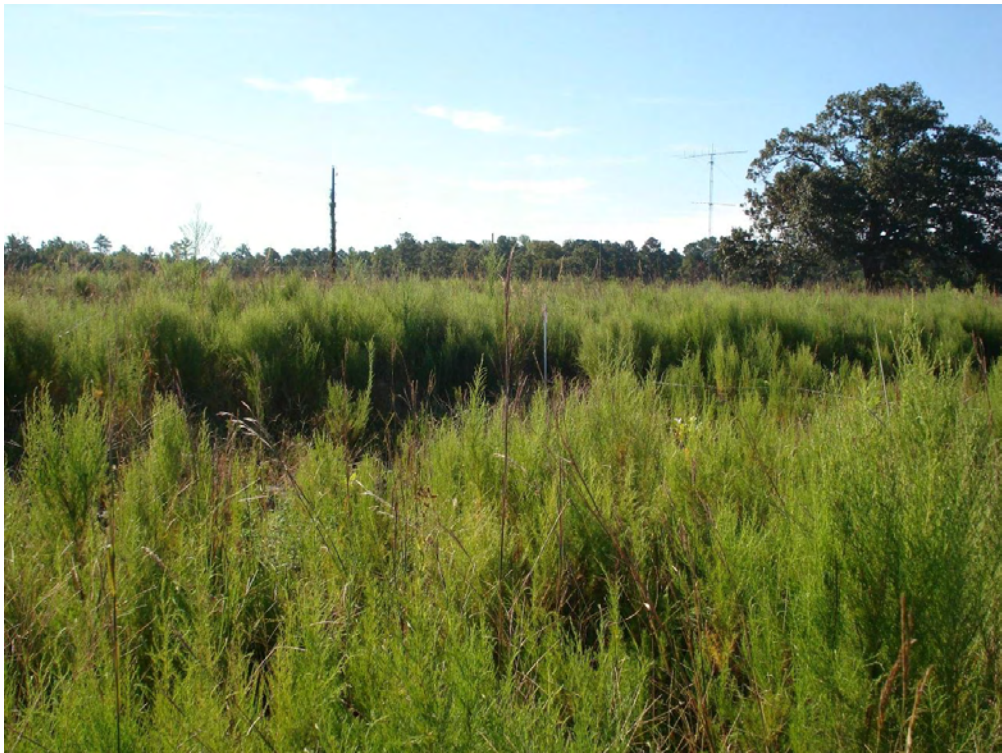


Photo B29 – (Photo Station V18) Veg plot 9 looking south (9/8/2010 Year 1)



Photo B30 – (Photo Station V19) Veg plot 10 looking northeast (9/8/2010 Year 1)



Photo B31 – (Photo Station V20) Veg plot 10 looking north (9/8/2010 Year 1)



Photo B32 – (Photo Station V21) Veg plot 11 looking southwest (9/8/2010 Year 1)



Photo B33 – (Photo Station V22) Veg plot 11 looking south (9/8/2010 Year 1)



Photo B34 – (Photo Station V23) Veg plot 12 looking southwest (9/8/2010 Year 1)



Photo B35 – (Photo Station V24) Veg plot 12 looking south (9/8/2010 Year 1)



Photo B36 – (Photo Station RT1) Random transect 1 looking east (9/8/2010 Year 1)



Photo B37 – (Photo Station RT2) Random transect 2 looking north (9/8/2010 Year 1)



Photo B38 – (Photo Station RT3) Random transect 3 looking west (9/8/2010 Year 1)



Photo B39 – (Photo Station RT4) Random transect 4 looking north (9/8/2010 Year 1)

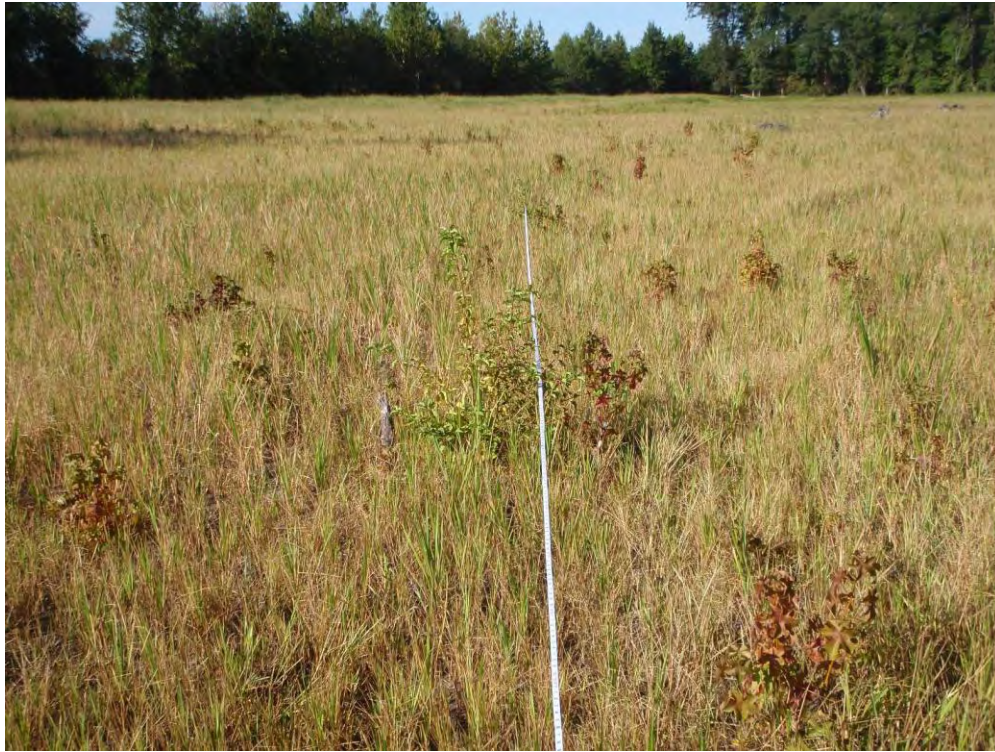


Photo B40 – (Photo Station RT5) Random transect 4 looking west (9/8/2010 Year 1)

Appendix C. Vegetation Plot Data

Table 7	– Vegetation Plot Mitigation Success Summary
Table 8	– CVS Vegetation Metadata
Table 9 a	– CVS Stem Count Total and Planted by Plot and Species
Table 9b	– Stem Count Total and Planted by Plot and Species for Random Transects

Table 7 - Vegetation Plot Mitigation Success Summary		
UT Jumping Run Creek Restoration Project / EEP Project No. 92345		
Vegetation Plot ID	Vegetation Survival Threshold Met?	Tract Mean
VP1	Y (526)	67% (337 stems/acre)
VP2	N (283)	
VP3	Y (324)	
VP4	N (283)	
VP5	Y (405)	
VP6	Y (445)	
VP7	Y (324)	
VP8	N (162)	
VP9	N (202)	
VP10	Y (364)	
VP11	Y (364)	
VP12	Y (364)	
RT1	Y (607)	
RT2	N (243)	
RT3	N (81)	
RT4	Y (364)	
RT5	Y (526)	

Table 8. CVS Vegetation Plot Metadata	
UT to Jumping Run Creek Restoration - EEP#92345	
Report Prepared By	Kristin Weidner
Date Prepared	9/29/2010 15:13
database name	Stantec_UTJRC2010_A.mdb
database location	U:\175613003\UT_Jumping_Run\project\site_data\monitoring
computer name	WEIDNERK
file size	35987456
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
PROJECT SUMMARY-----	
Project Code	92345
project Name	UT to Jumping Run Creek
Description	stream and wetland restoration
River Basin	Cape Fear
length(ft)	
stream-to-edge width (ft)	
area (sq m)	
Required Plots (calculated)	12
Sampled Plots	12

Table 9a - CVS Stem Count Total and Planted by Plot and Species																																																		
EEP Project Code 92345. Project Name: UT to Jumping Run Creek																																																		
Scientific Name	Common Name	Species Type	Current Plot Data (MY1 2010)																								Annual Means																							
			92345-01-0001			92345-01-0002			92345-02-0003			92345-02-0004			92345-02-0005			92345-02-0006			92345-02-0007			92345-02-0008			92345-02-0009			92345-02-0010			92345-02-0011			92345-02-0012			MY1 (2010)			MY0 (2010)								
			P-LS	P-all	T	P-LS	P-all	T	P-LS	P-all	T	P-LS	P-all	T	P-LS	P-all	T	P-LS	P-all	T	P-LS	P-all	T	P-LS	P-all	T	P-LS	P-all	T	P-LS	P-all	T	P-LS	P-all	T	P-LS	P-all	T	P-LS	P-all	T	P-LS	P-all	T						
Aronia arbutifolia	Red Chokeberry	Shrub		1	1									1	1																						2	2	2	2										
Chamaecyparis thyoides	Atlantic white cedar	Tree		1	1		2	2		2	2																										5	5	12	12										
Diospyros virginiana	common persimmon	Tree															4	4																		4	4	5	5											
Fraxinus pennsylvanica	green ash	Tree							1	1				6	6										4	4										11	11	11	11											
Liriodendron tulipifera	tuliptree	Tree				1	1									1	1									4	4								1	1	7	7	12	12										
Magnolia virginiana	sweetbay	Shrub Tree				3	3		2	2						1	1																					9	9	12	12									
Nyssa biflora	swamp tupelo	Tree		5	5						2	2		1	1											3	3		4	4								1	1	20	20	19	19							
Persea borbonia	redbay	Shrub Tree																																					1	1	1	1								
Persea palustris	swamp bay	Tree		1	1																																	1	1	2	2	3	3							
Pinus palustris	longleaf pine	Tree																																							1	1	5	5						
Quercus	oak	Shrub Tree		1	1							3	3		1	1																									5	5	14	14						
Quercus falcata	southern red oak	Tree					1	1									2	2																								3	3	2	2					
Quercus lyrata	overcup oak	Tree		4	4																																					1	1	7	7	4	4			
Quercus nigra	water oak	Tree																																									1	1	1	1				
Quercus phellos	willow oak	Tree							2	2		2	2																														3	3	4	4	14	14	12	12
Quercus stellata	post oak	Tree							1	1																																		1	1					
Taxodium distichum	bald cypress	Tree																3	3																									1	1	7	7	7	7	
Unknown		unknown																																											1	1				
Stem count size (ares)			0	13	13	0	7	7	0	8	8	0	7	7	0	10	10	0	11	11	0	8	8	0	4	4	0	5	5	0	9	9	0	9	9	0	9	9	0	9	9	0	100	100	0	123	123			
size (ACRES)			1			1			1			1			1			1			1			1			1			1			1			1			1			12			12					
Species count			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.30			0.30					
Stems per ACRE			0	6	6	0	4	4	0	5	5	0	3	3	0	5	5	0	5	5	0	4	4	0	1	1	0	2	2	0	4	4	0	3	3	0	6	6	0	17	17	0	17	17	0	17	17			
Stems per ACRE			0	526.1	526.1	0	283.3	283.3	0	323.7	323.7	0	283.3	283.3	0	404.7	404.7	0	445.2	445.2	0	323.7	323.7	0	161.9	161.9	0	202.3	202.3	0	364.2	364.2	0	364.2	364.2	0	364.2	364.2	0	364.2	364.2	0	337.2	337.2	0	414.8	414.8			

Table 9b. Stem Count Total and Planted by Plot and Species for Random Transects							
UT to Jumping Run Creek - EEP Project No. 92345							
Current Plot Data (MY1 2010)							
Scientific Name	Common Name	Species Type	Random Transect 1	Random Transect 2	Random Transect 3	Random Transect 4	Random Transect 5
Liriodendron tulipifera	Tuliptree	Tree	2			1	
Quercus sp	Oak	Shrub Tree		1	1		
Persea palustris	Swamp Bay	Tree				1	
Nyssa biflora	Swamp Tupelo	Tree	5			5	1
Magnolia virginiana	Sweetbay	Shrub Tree					1
Quercus lyrata	Overcup Oak	Tree				2	3
Taxodium distichum	Bald Cypress	Tree	5				
Quercus phellos	Willow Oak	Tree	1		1		
Cornus florida	Flowering Dogwood	Shrub Tree		1			
Fraxinus pennsylvanica	Green Ash	Tree		5			
Quercus nigra	Water Oak	Tree	1				4
Diospyros virginiana	Common Persimmon	Tree	1				
Chamaecyparis thyoides	Atlantic White Cedar	Tree					3
Aronia arbutifolia	Red Chokeberry	Shrub					1
Stem Count			15	7	2	9	13
size (ares)			1	1	1	1	1
size (ACRES)			0.02	0.02	0.02	0.02	0.02
Species count			6	3	2	4	6
Stems per ACRE			607.3	283.4	81.0	364.4	526.3

* Data collected 9/9/2010

Appendix D. Stream Survey Data

Figures 3a-j	– Cross-Sections with Annual Overlays
Figure 4	– Longitudinal Profiles with Annual Overlays
Table 10a.b.	– Baseline – Stream Data Summary
Table 11a.	– Monitoring – Cross-section Morphology Data
Table 11b.	– Monitoring – Stream Reach Morphology Data


River Basin	Cape Fear River
Watershed	Jumping Run Creek
XS ID	XS-1, Riffle, STA 48+81
Drainage Area(sq. mi.)	1.2
Date	9/1/2010
Field Crew	N. Jean



Sta 48+81 Looking Downstream

SUMARY DATA	MY00	MY01	MY02	MY03	MY04	MY05
Bankfull Elevation	150.47	150.46				
Bankfull Cross-Sectional Area	12.9	13.16				
Bankfull Width	15.6	15.35				
Flood Prone Area Elevation	151.78	151.74				
Flood Prone Width	200	200				
Max Depth at Bankfull	1.31	1.28				
Mean Depth at Bankfull	0.83	0.79				
W/D Ratio	18.73	19.43				
Entrenchment Ratio	12.86	13.03				
Bank Height Ratio	1.0	1.0				
Stream Type	C	C				

MY00		MY01		MY02		MY03		MY04		MY05	
Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation
22.84	150.99	22	150.91								
23.93	150.7	25.31	150.99								
31.43	150.71	37.48	150.55								
41.41	150.57	52.15	150.48								
45.73	150.42	54.23	150.15								
49.1	150.34	56.54	149.53								
51.9	150.48	58.23	149.33								
53.65	150.49	60.16	149.18								
55.09	150.11	61.78	149.32								
56.24	149.81	63.75	149.40								
57.05	149.57	66.11	149.94								
57.45	149.42	67.63	150.46								
57.86	149.26	76.4	150.30								
58.99	149.16	83.42	150.63								
60.1	149.16	83.78	150.69								
61.1	149.2	83.84	150.68								
62.24	149.18										
63.2	149.33										
64.34	149.4										
65.05	149.6										
65.61	149.71										
67.42	150.08										
68.9	150.42										
69.34	150.47										
71.02	150.46										
75.41	150.3										
79.57	150.29										
83.53	150.3										
84.44	150.7										
86.27	150.33										

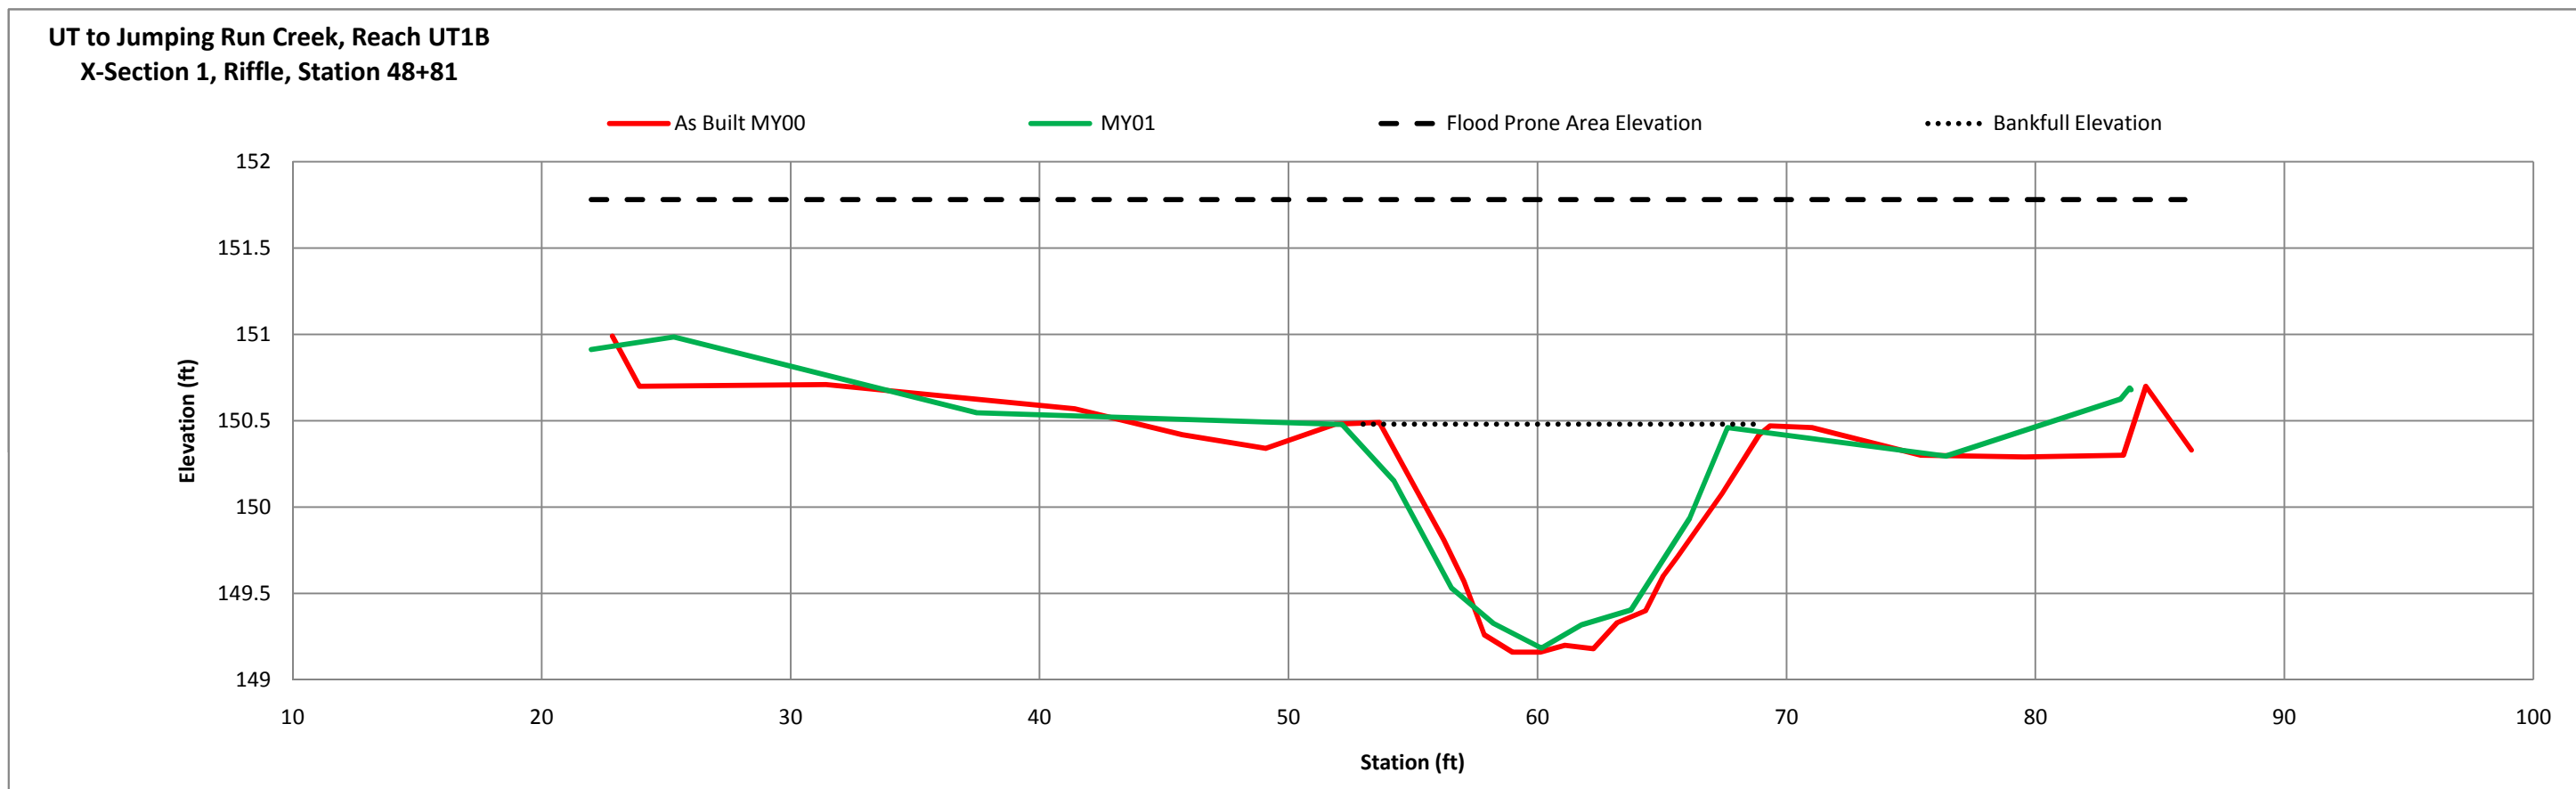

River Basin	Cape Fear River
Watershed	Jumping Run Creek
XS ID	XS-2, Pool, STA 50+30
Drainage Area(sq. mi.)	1.2
Date	9/1/2010
Field Crew	N. Jean




Sta 50+30 Looking Downstream

SUMMARY DATA	MY00	MY01	MY02	MY03	MY04	MY05
Bankfull Elevation	150.58	150.36				
Bankfull Cross-Sectional Area	21.57	17.26				
Bankfull Width	19.33	17.30				
Flood Prone Area Elevation	152.82	152.38				
Flood Prone Width	200	200				
Max Depth at Bankfull	2.25	2.02				
Mean Depth at Bankfull	1.12	1.01				
W/D Ratio	17.26	17.13				
Entrenchment Ratio	10.35	11.56				
Bank Height Ratio	1.0	1.0				
Stream Type	C	C				

MY00		MY01		MY02		MY03		MY04		MY05	
Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation
33.17	150.54	35	150.745								
34.39	150.82	44.07	150.335								
34.86	150.48	52.64	150.357								
39.92	150.45	54.34	149.992								
45	150.52	56.45	149.063								
48.41	150.6	57.95	148.337								
50.8	150.59	59.66	148.477								
50.93	150.58	61.28	148.941								
52.37	150.39	62.79	149.228								
53.59	150.12	64.76	149.363								
54.32	150.06	67.19	149.775								
55.03	149.6	69.74	150.368								
55.37	149.37	75.21	150.368								
56.04	149.08	81.48	150.79								
56.61	148.66										
56.93	148.49										
57.99	148.34										
59.16	148.49										
60.19	148.64										
61.79	148.95										
63.15	149.06										
63.76	149.29										
65.43	149.63										
67.39	149.91										
69.34	150.32										
70.67	150.67										
74.67	150.46										
78.72	150.34										
80.3	150.43										
80.56	150.84										
86.93	150.34										

**UT to Jumping Run Creek, Reach UT1B
X-Section 2, Riffle, Station 50+30**

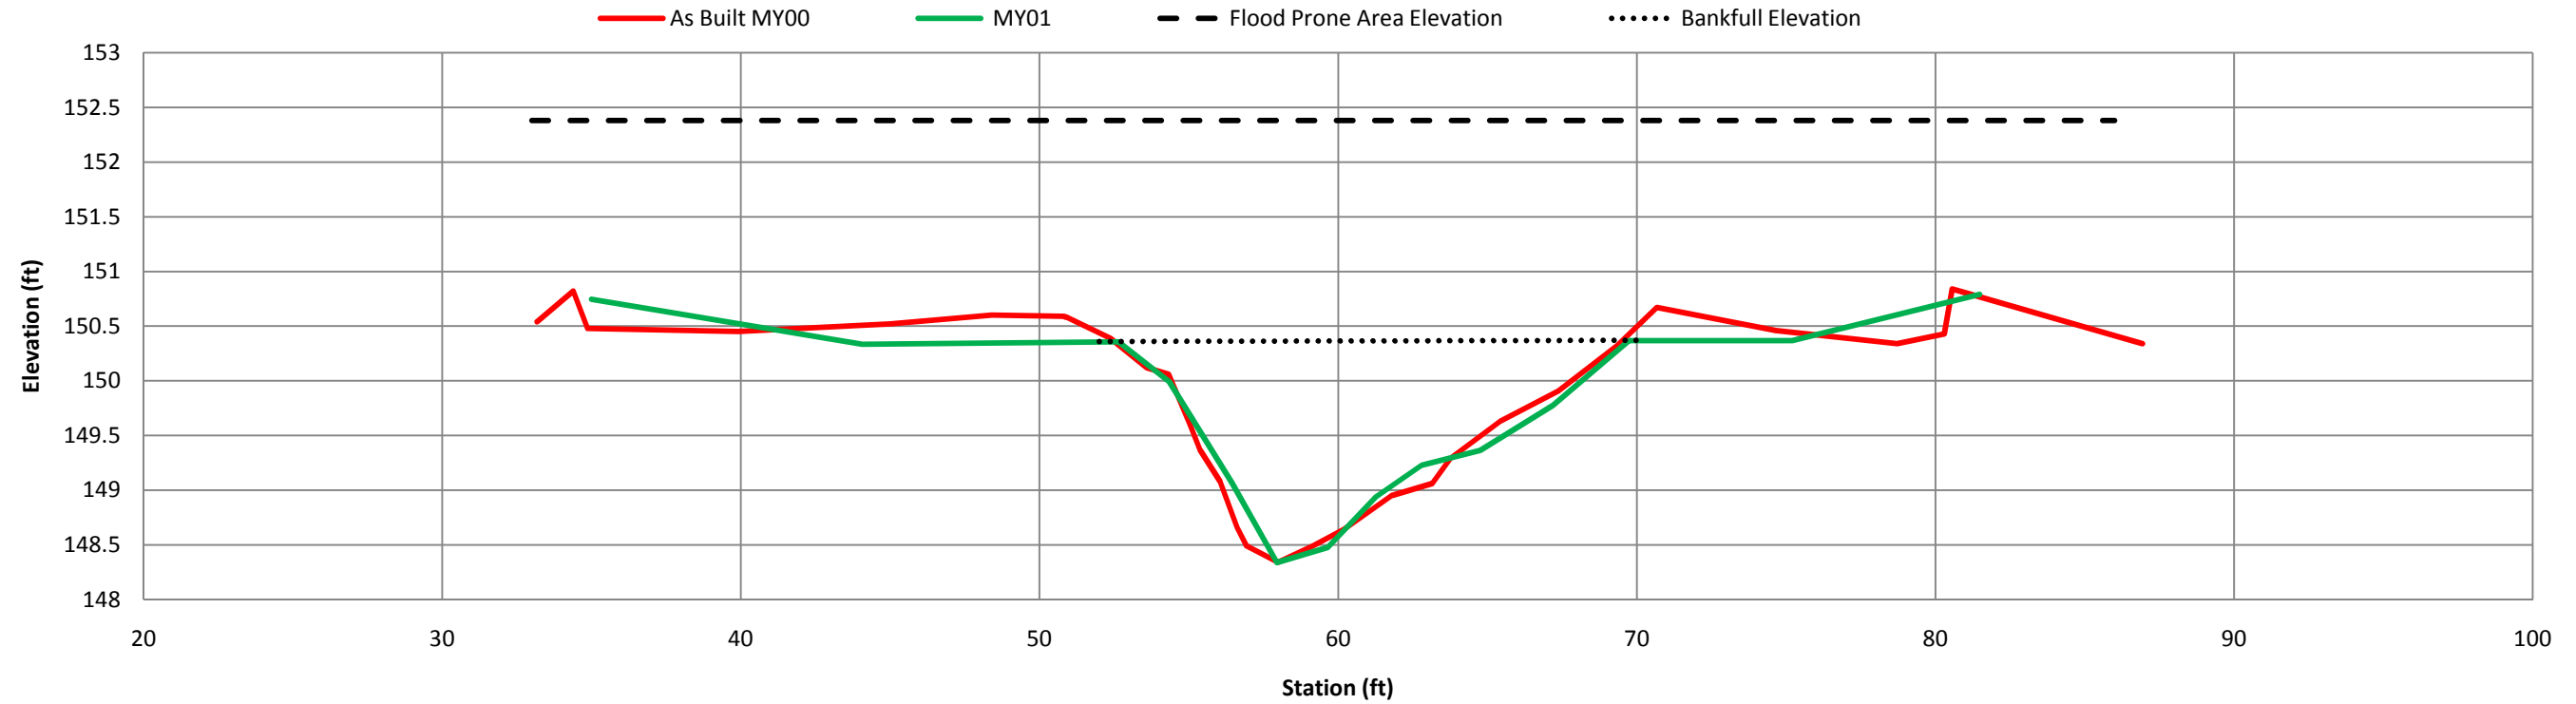


River Basin	Cape Fear River
Watershed	Jumping Run Creek
XS ID	XS-3, Riffle, STA 54+98
Drainage Area(sq. mi.)	1.2
Date	9/1/2010
Field Crew	N. Jean



Sta 54+98 Looking Downstream

SUMARY DATA	MY00	MY01	MY02	MY03	MY04	MY05
Bankfull Elevation	149.75	149.78				
Bankfull Cross-Sectional Area	11.71	13.91				
Bankfull Width	15.50	16.16				
Flood Prone Area Elevation	150.89	150.97				
Flood Prone Width	200.00	200.00				
Max Depth at Bankfull	1.14	1.19				
Mean Depth at Bankfull	0.76	0.76				
W/D Ratio	20.90	21.26				
Entrenchment Ratio	12.91	12.38				
Bank Height Ratio	1.00	1.00				
Stream Type	C	C				

MY00		MY01		MY02		MY03		MY04		MY05	
Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation
50.31	149.47	52.13	149.90								
52.37	149.88	60.01	149.64								
52.54	149.5	67.76	149.78								
57.38	149.45	69.63	149.52								
60.52	149.61	72.58	148.93								
64.53	149.63	74.88	148.61								
66.87	149.78	77.71	148.59								
68.88	149.75	79.57	148.60								
69.74	149.56	81.66	149.15								
70.98	149.31	84.67	149.99								
72.43	149.07	88.05	149.83								
73.48	148.83	94.1	149.85								
74.45	148.69	96.38	150.36								
75.49	148.65										
76.56	148.63										
77.68	148.63										
78.65	148.63										
79.71	148.61										
80.16	148.73										
80.81	148.91										
82.01	149.14										
83.76	149.51										
84.84	149.93										
85.99	149.87										
87.04	149.75										
89.46	149.86										
92.58	149.85										
95.06	149.9										
96.36	149.97										
96.38	150.37										

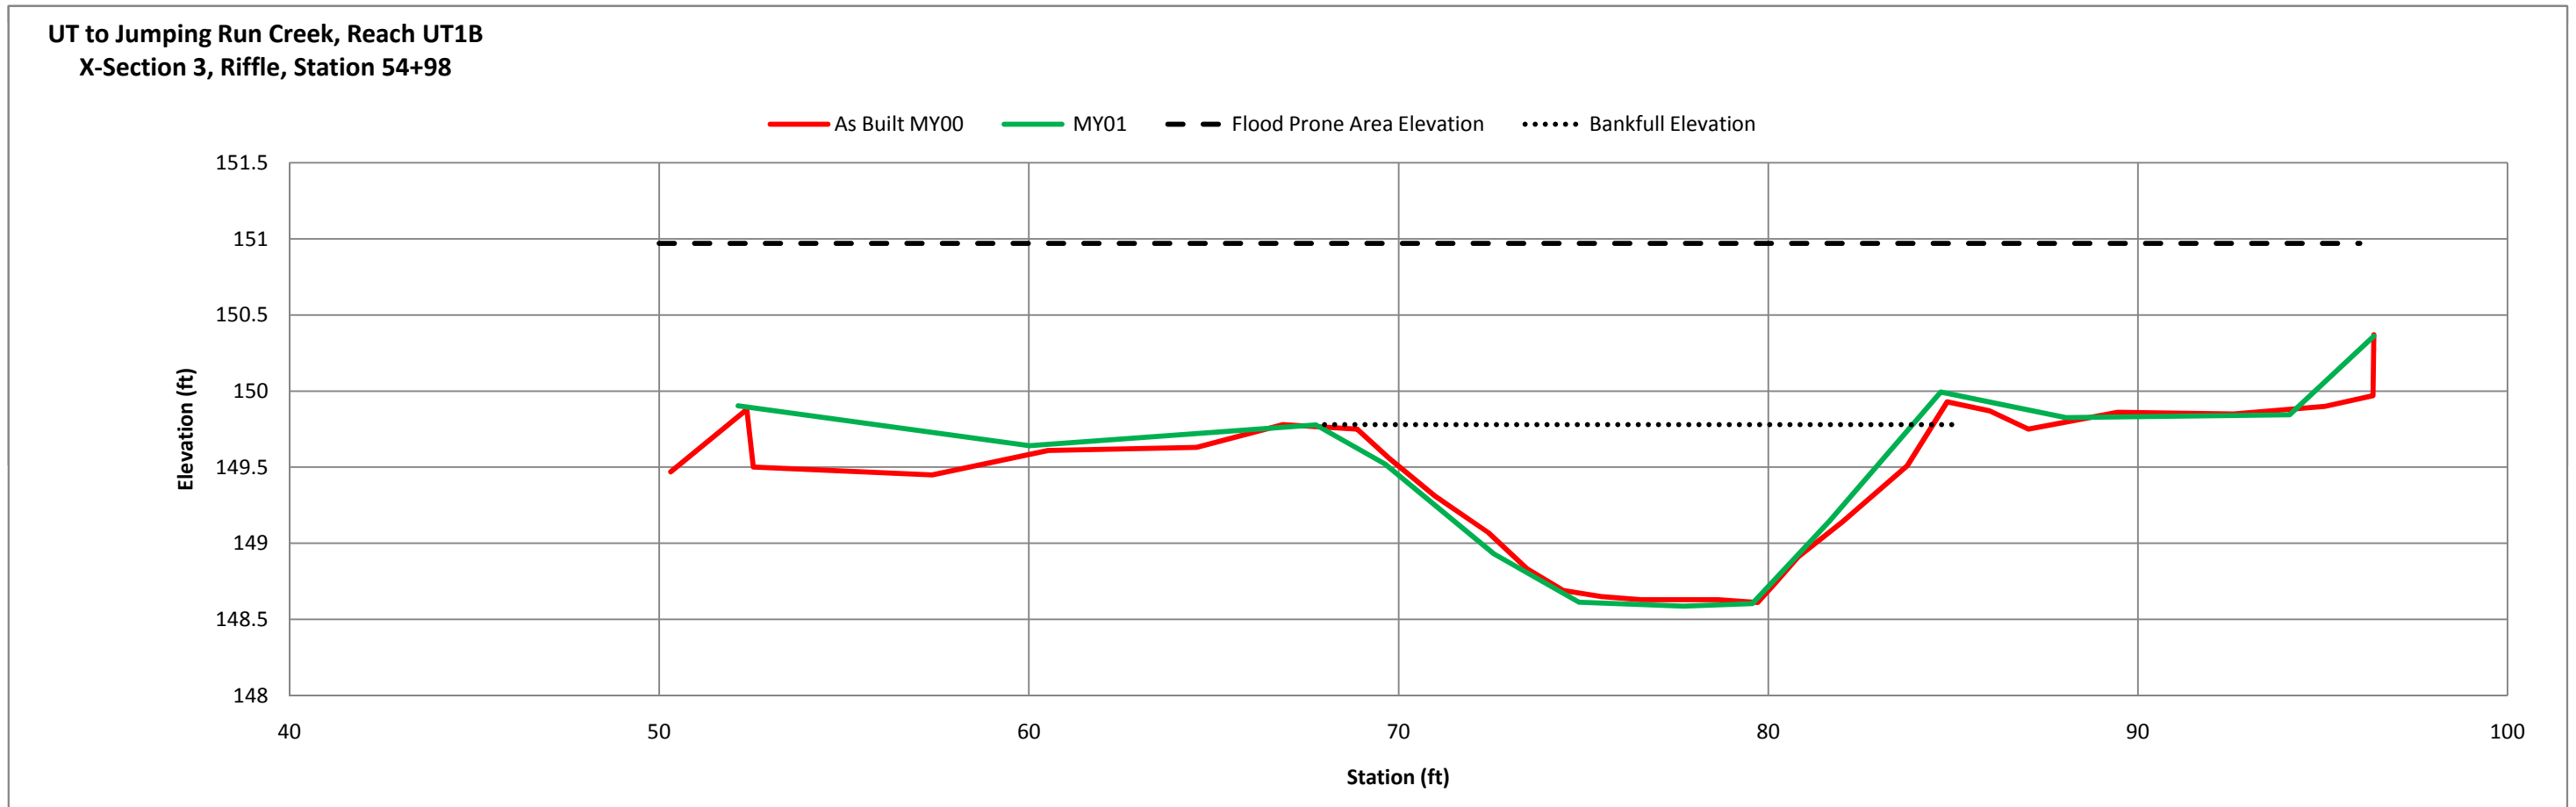

River Basin	Cape Fear River
Watershed	Jumping Run Creek
XS ID	XS-4, Pool, STA 59+09
Drainage Area(sq. mi.)	1.2
Date	9/1/2010
Field Crew	N. Jean




Sta 59+09 Looking Downstream

SUMMARY DATA	MY00	MY01	MY02	MY03	MY04	MY05
Bankfull Elevation	149.34	149.32				
Bankfull Cross-Sectional Area	22.42	20.32				
Bankfull Width	18.22	17.38				
Flood Prone Area Elevation	151.54	151.56				
Flood Prone Width	200.00	200.00				
Max Depth at Bankfull	2.20	2.24				
Mean Depth at Bankfull	1.23	1.17				
W/D Ratio	14.81	14.85				
Entrenchment Ratio	10.98	11.51				
Bank Height Ratio	1.00	1.00				
Stream Type	C	C				

MY00		MY01		MY02		MY03		MY04		MY05	
Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation
35.83	149.76	34.96	149.74								
36.19	149.5	51.33	149.49								
41.66	149.43	58.28	149.32								
47.94	149.53	62.04	148.76								
53.48	149.49	65.56	148.10								
58.28	149.36	66.97	147.69								
60.99	148.95	68	147.38								
63.04	148.61	69.12	147.08								
65.1	148.21	70.02	147.14								
67.01	147.55	71.57	147.30								
68.95	147.24	72.68	147.60								
70.73	147.14	74.11	148.39								
71.83	147.18	75.85	149.42								
73.5	147.64	84.75	149.67								
74.87	148.18	95.04	150.13								
75.08	148.39										
75.7	148.87										
76.63	149.34										
77.37	149.34										
78.21	149.38										
80.92	149.48										
84.67	149.55										
88.81	149.73										
91.55	149.57										
94.93	149.69										
95.51	150.15										
98.39	149.9										

**UT to Jumping Run Creek, Reach UT1B
X-Section 4, Pool, Station 59+09**

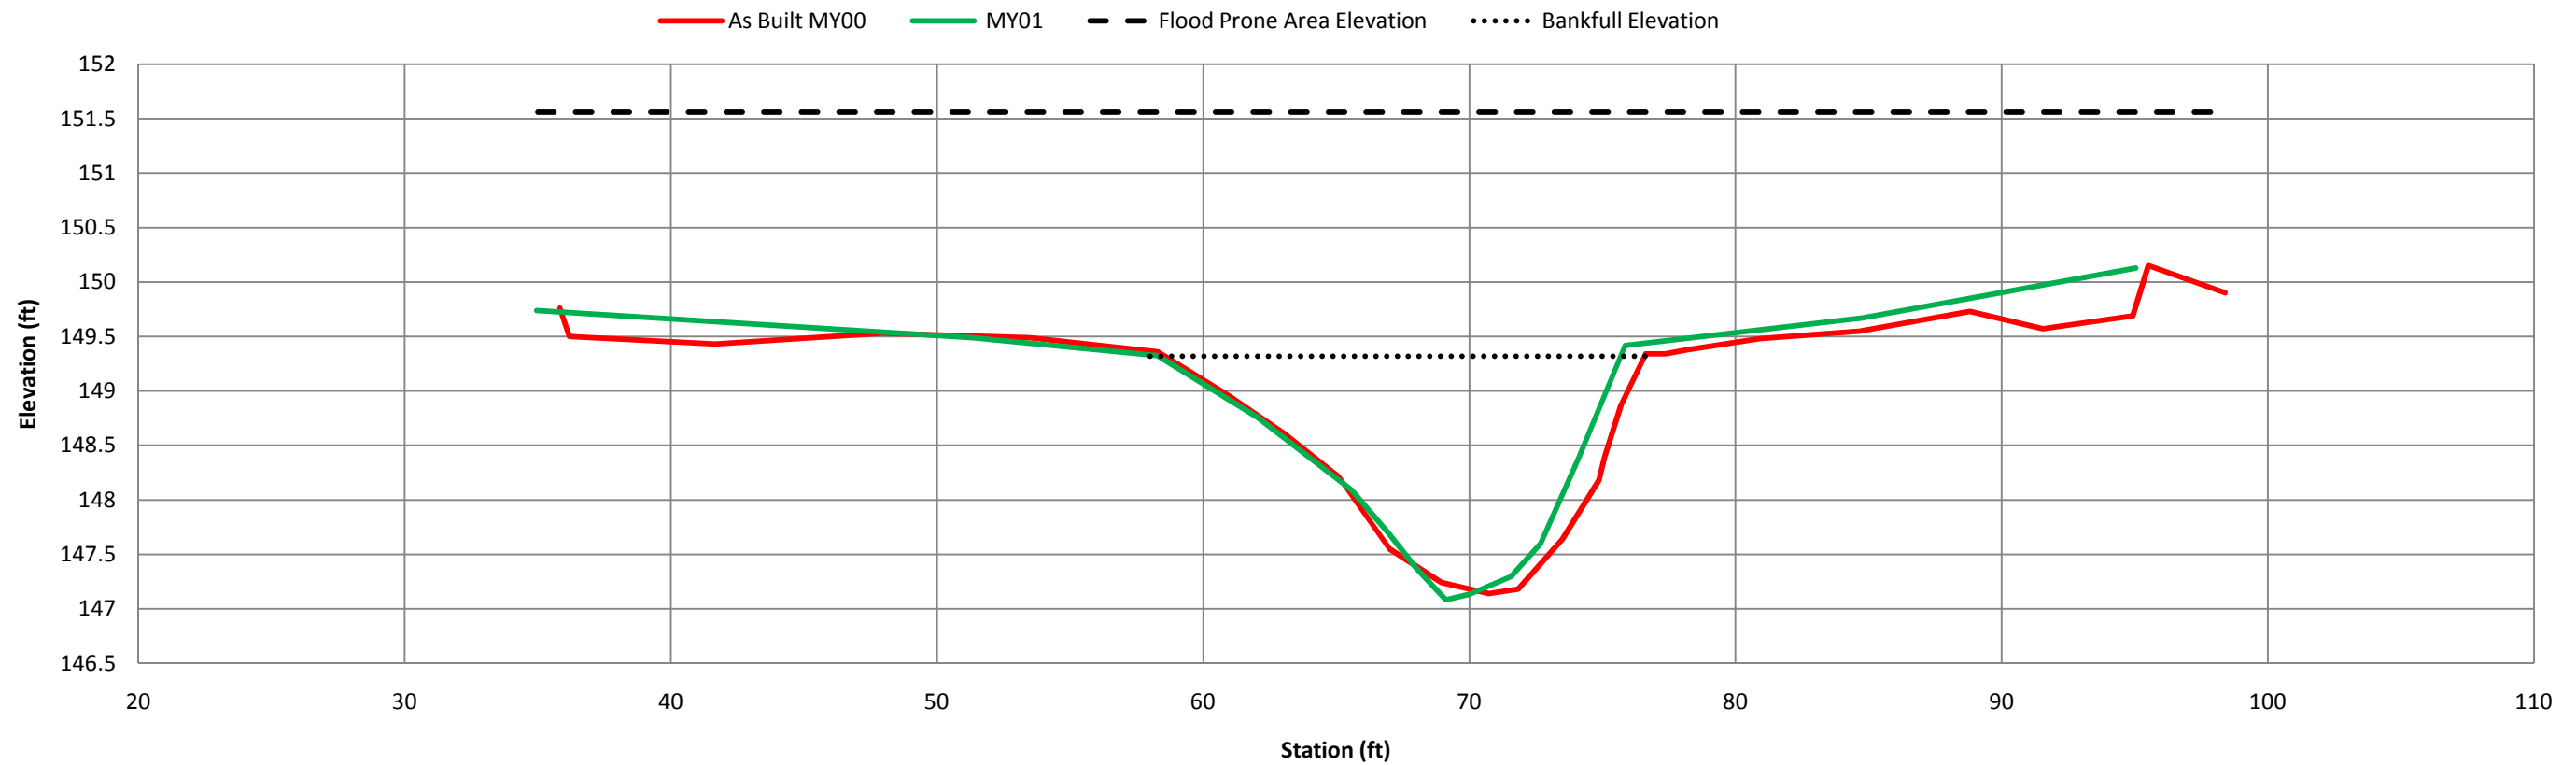

River Basin	Cape Fear River
Watershed	Jumping Run Creek
XS ID	XS-5, Riffle, STA 62+87
Drainage Area(sq. mi.)	1.2
Date	9/1/2010
Field Crew	N. Jean




Sta 62+87 Looking Downstream

MY00		MY01		MY02		MY03		MY04		MY05	
Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation
44.7	149.16	44.3	149.49								
44.93	149.48	54.94	149.19								
47.23	149.18	63.66	149.07								
53.66	149.17	65.27	148.57								
58.24	149.05	66.66	148.05								
61.29	148.97	67.6	147.86								
63.55	148.92	68.69	147.76								
64.46	149.02	69.97	147.73								
65.18	148.85	71.23	147.78								
66.49	148.3	72.51	147.84								
67.17	147.96	73.74	147.97								
68.59	147.83	75.02	148.41								
69.5	147.86	76.19	149.02								
70.23	147.7	82.42	149.1								
71.2	147.61	90.4	149.50								
72.18	147.78										
72.54	147.89										
73.5	147.94										
74.43	147.96										
74.91	148.28										
76.61	148.62										
77.27	148.88										
79.38	149										
80.42	149.01										
83.37	148.98										
87.22	149.09										
90	149.07										
91	149.13										

SUMMARY DATA	MY00	MY01	MY02	MY03	MY04	MY05
Bankfull Elevation	149.02	149.07				
Bankfull Cross-Sectional Area	11.69	11.94				
Bankfull Width	15.9	15.64				
Flood Prone Area Elevation	200+	150.41				
Flood Prone Width	200	200				
Max Depth at Bankfull	1.41	1.34				
Mean Depth at Bankfull	0.74	0.76				
W/D Ratio	21.49	20.58				
Entrenchment Ratio	12.58	12.79				
Bank Height Ratio	1	1				
Stream Type	C	C				

UT to Jumping Run Creek, Reach UT1B
X-Section 5, Riffle, Station 62+87

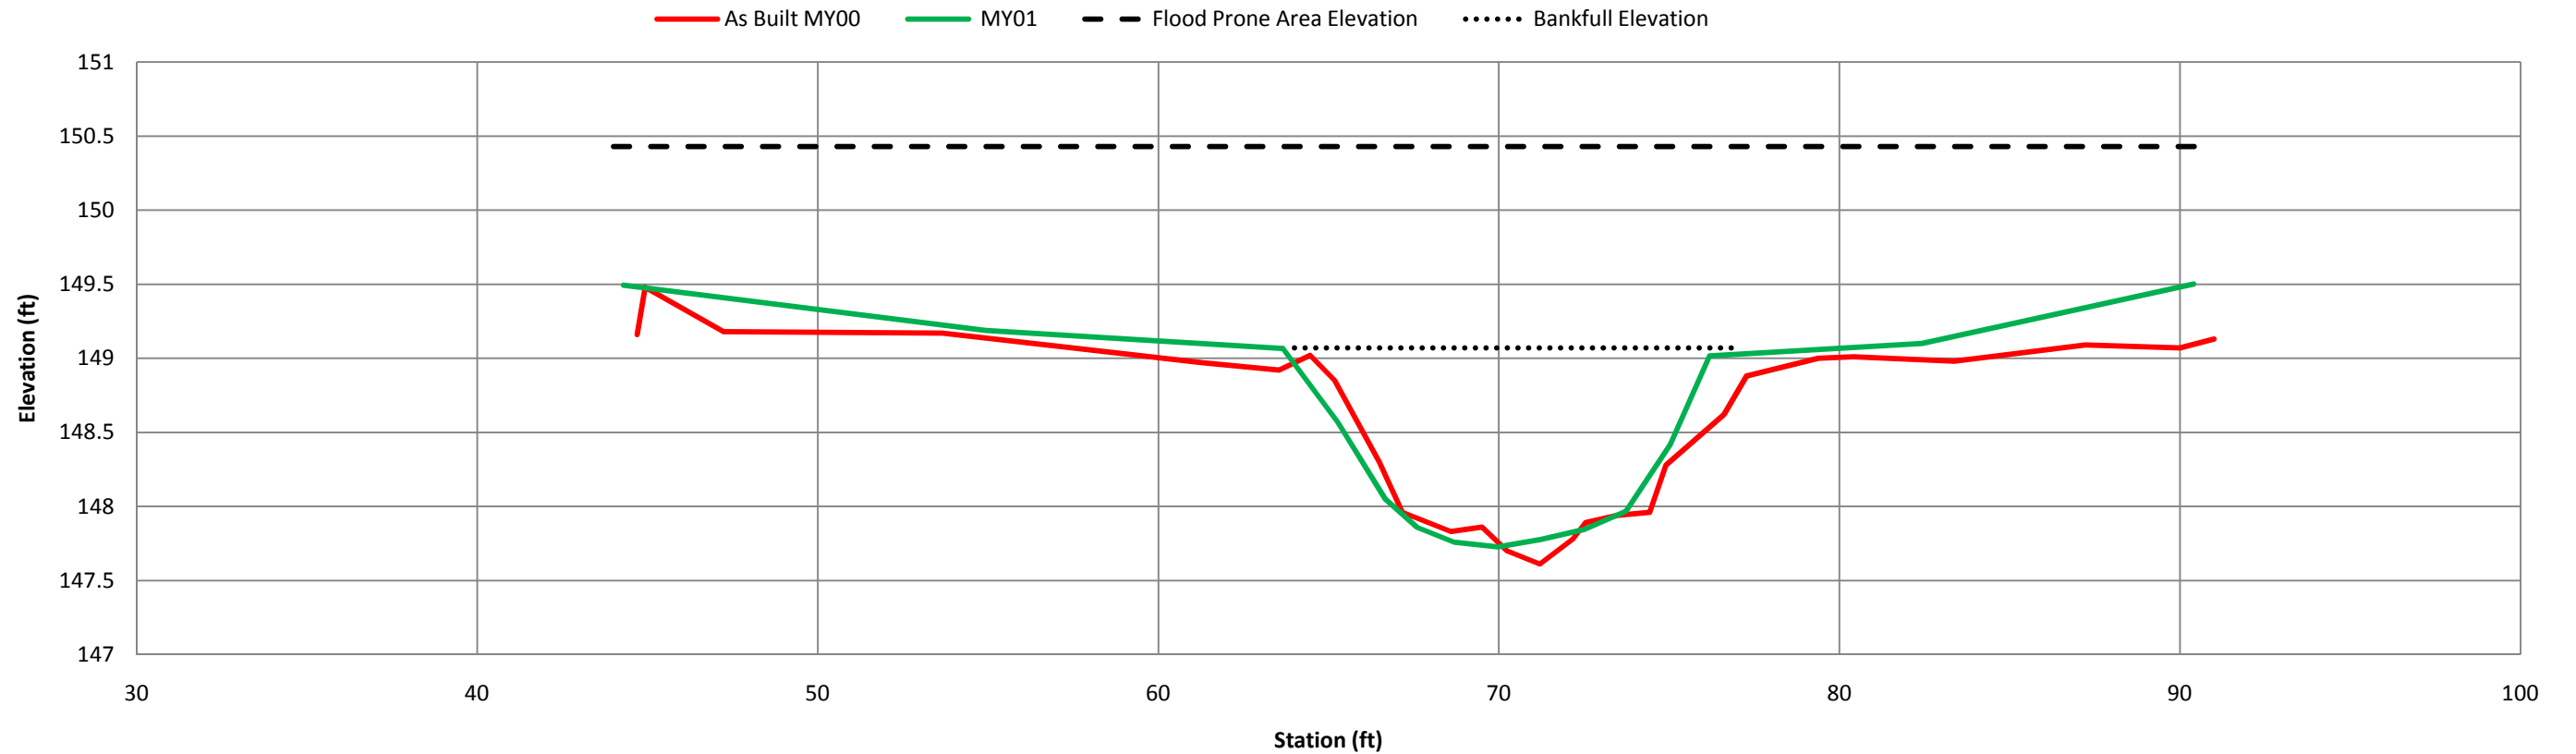

River Basin	Cape Fear River
Watershed	Jumping Run Creek
XS ID	XS-6, Riffle, STA 65+44
Drainage Area(sq. mi.)	1.2
Date	9/1/2010
Field Crew	N. Jean




Sta 65+44 Looking Downstream

SUMARY DATA	MY00	MY01	MY02	MY03	MY04	MY05
Bankfull Elevation	148.61	148.58				
Bankfull Cross-Sectional Area	14.51	13.74				
Bankfull Width	16.39	17.17				
Flood Prone Area Elevation	149.84	149.78				
Flood Prone Width	200.00	200.00				
Max Depth at Bankfull	1.23	1.20				
Mean Depth at Bankfull	0.89	0.80				
W/D Ratio	18.42	21.46				
Entrenchment Ratio	12.20	11.65				
Bank Height Ratio	1.00	1.00				
Stream Type	C	C				

MY00		MY01		MY02		MY03		MY04		MY05	
Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation
42.43	149.16	42.03	149.10								
42.74	148.68	50.83	148.53								
45.36	148.68	63.86	148.58								
49.9	148.71	65.38	147.99								
56.07	148.56	67.2	147.66								
61.78	148.52	68.38	147.40								
63.85	148.53	69.92	147.38								
64.56	148.3	71.52	147.39								
65.93	147.95	73.51	147.40								
67.33	147.65	75.16	147.44								
68.06	147.51	76.31	147.65								
69.22	147.46	78.07	148.22								
69.8	147.4	79.79	148.56								
70.94	147.39	86.78	148.65								
72.49	147.41	97.75	149.43								
73.8	147.4	97.79	149.44								
75.03	147.38										
75.98	147.49										
76.63	147.62										
77.27	147.76										
78.21	148.12										
79.28	148.4										
80.39	148.61										
82.03	148.73										
84.97	148.72										
86.87	148.6										
89.69	148.75										
95.36	148.83										
98.02	149.47										
98.17	149.11										
99.75	149.07										

UT to Jumping Run Creek, Reach UT1B
X-Section 6, Riffle, Station 65+44

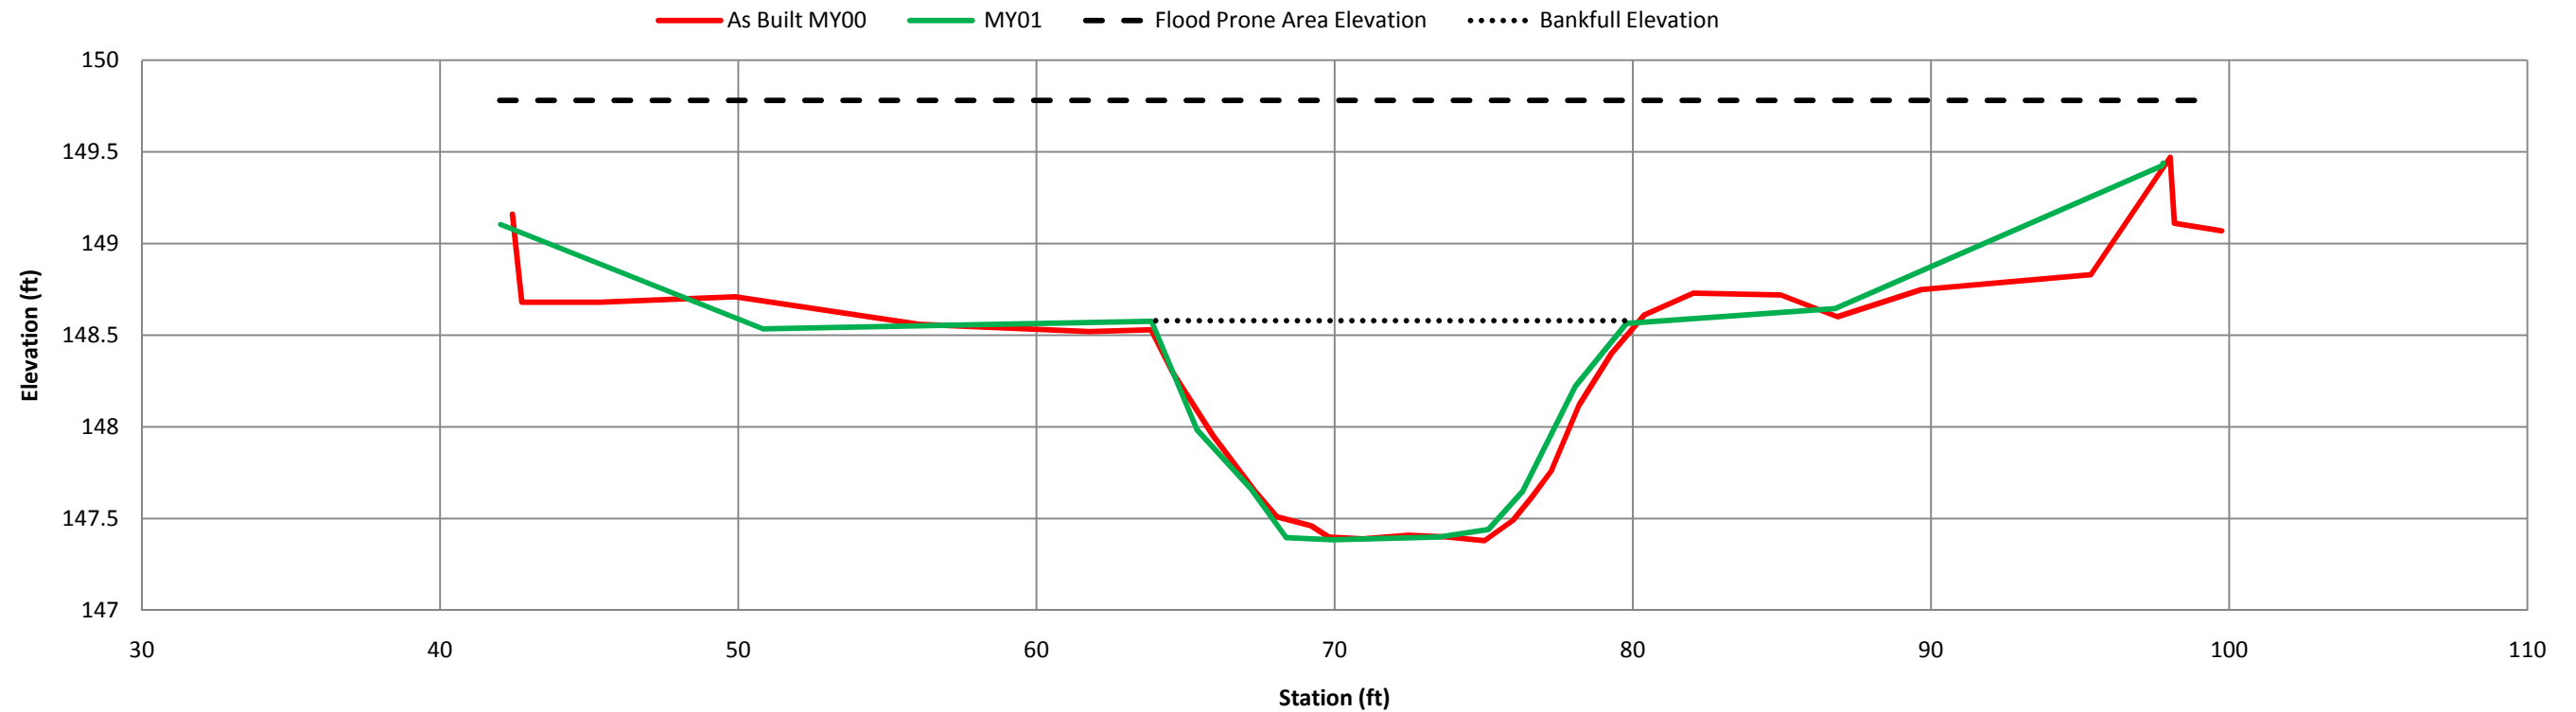

River Basin	Cape Fear River
Watershed	Jumping Run Creek
XS ID	XS-7, Riffle, STA 68+24
Drainage Area(sq. mi.)	1.2
Date	9/1/2010
Field Crew	N. Jean




Sta 68+24 Looking Downstream

MY00		MY01		MY02		MY03		MY04		MY05	
Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation
110.41	147.98	129.14	148.147								
123.54	147.92	134.38	147.767								
129.8	148.17	143.99	148.047								
129.95	147.8	147.23	148.131								
134.5	147.78	150.02	147.596								
142.25	147.96	151.39	146.983								
145.91	148.09	153.14	146.876								
148.49	148.03	154.42	146.857								
149.22	147.73	157.05	146.939								
150.88	147.25	160.12	147.624								
151.62	146.96	163.18	148.166								
152.18	146.95	174.81	148.228								
153.51	146.95	181.92	148.439								
154.78	146.91										
156.05	146.9										
157.36	146.88										
157.76	146.99										
158.39	147.04										
159.46	147.39										
161.88	147.97										
163.39	148.2										
167.73	148.19										
178.68	148.05										
181.92	148.43										

SUMMARY DATA	MY00	MY01	MY02	MY03	MY04	MY05
Bankfull Elevation	148.09	148.13				
Bankfull Cross-Sectional Area	11.77	12.18				
Bankfull Width	16.87	15.72				
Flood Prone Area Elevation	149.30	149.40				
Flood Prone Width	200.00	200.00				
Max Depth at Bankfull	1.21	1.27				
Mean Depth at Bankfull	0.70	0.77				
W/D Ratio	24.10	20.42				
Entrenchment Ratio	11.86	12.72				
Bank Height Ratio	1.00	1.00				
Stream Type	C	C				

UT to Jumping Run Creek, Reach UT1B
X-Section 7, Riffle, Station 68+24

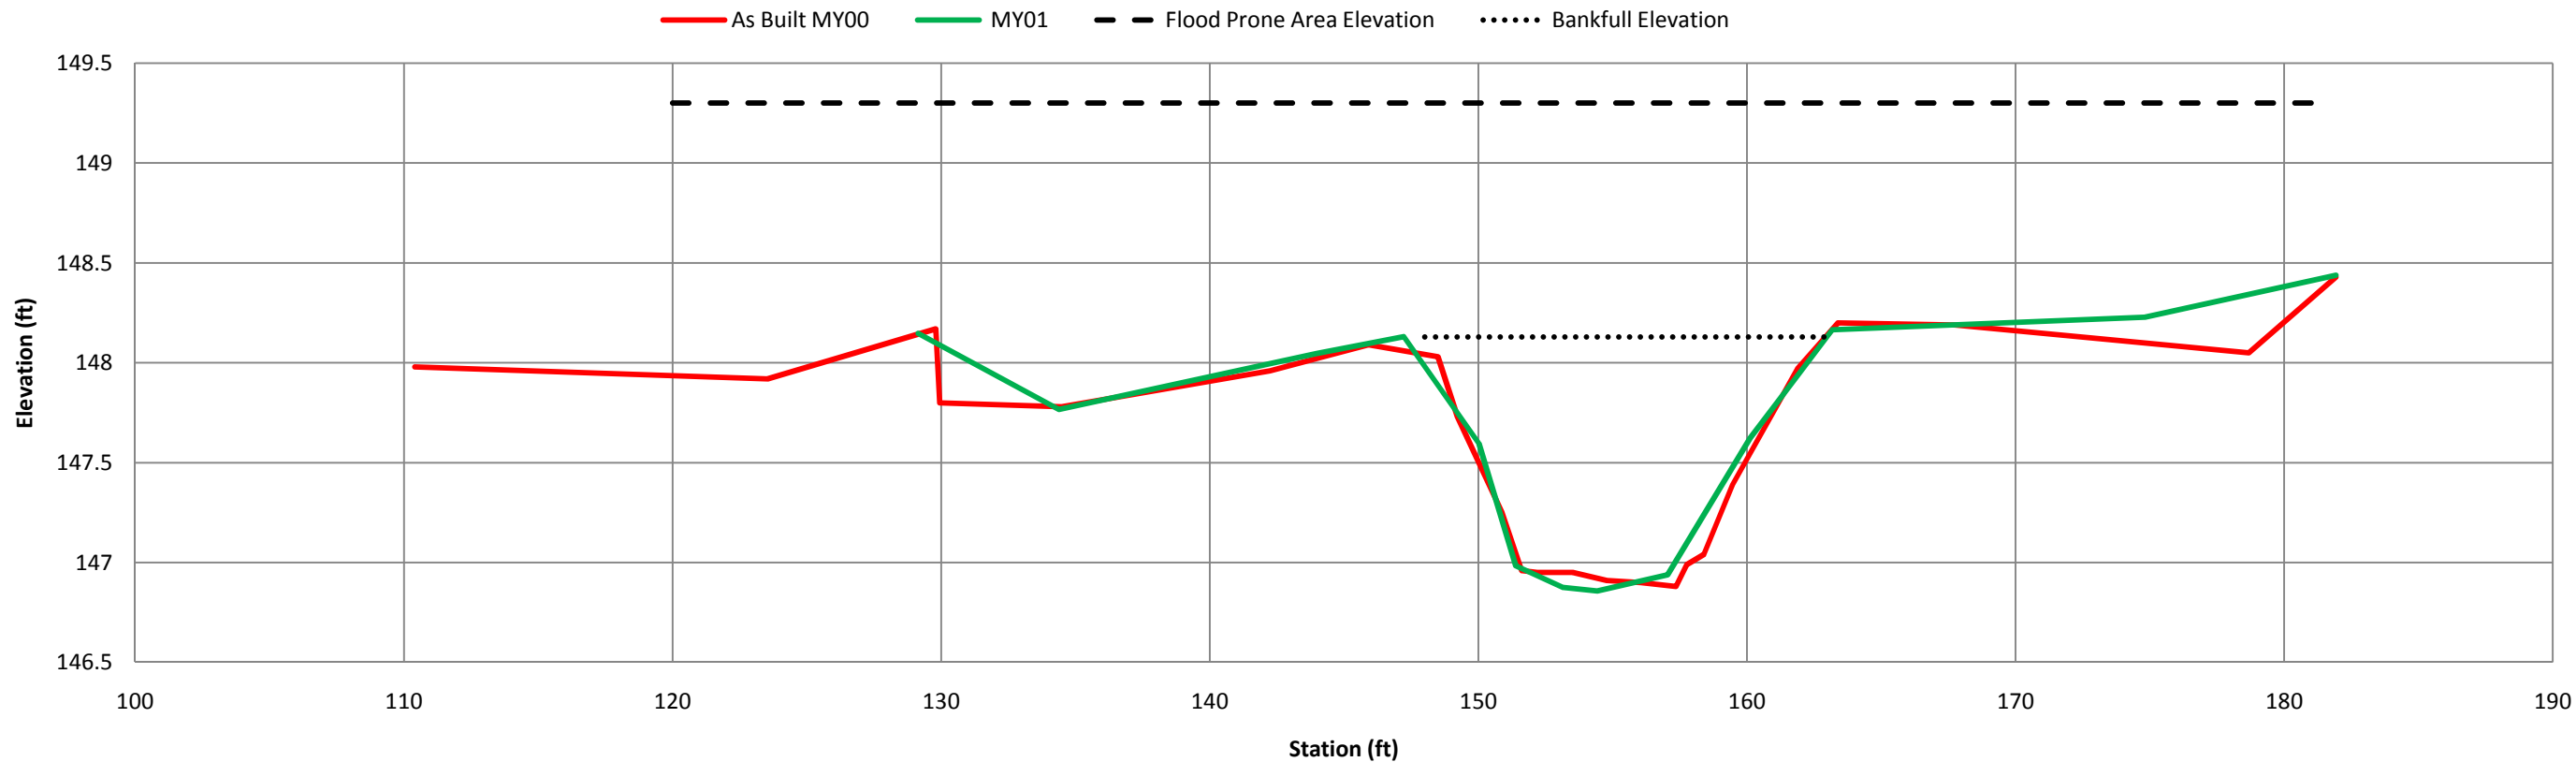

River Basin	Cape Fear River
Watershed	Jumping Run Creek
XS ID	XS-8, Riffle, STA 74+84
Drainage Area(sq. mi.)	1.2
Date	9/1/2010
Field Crew	N. Jean




Sta 74+84 Looking Downstream

SUMARY DATA	MY00	MY01	MY02	MY03	MY04	MY05
Bankfull Elevation	147.20	147.17				
Bankfull Cross-Sectional Area	10.81	11.37				
Bankfull Width	15.10	15.24				
Flood Prone Area Elevation	148.46	148.51				
Flood Prone Width	200.00	200.00				
Max Depth at Bankfull	1.26	1.34				
Mean Depth at Bankfull	0.72	0.75				
W/D Ratio	20.97	20.32				
Entrenchment Ratio	13.25	13.12				
Bank Height Ratio	1.00	1.00				
Stream Type	C	C				

MY00		MY01		MY02		MY03		MY04		MY05	
Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation
37.56	147.62	36.99	147.582								
37.71	147.15	38.83	147.186								
39.04	147.14	44.12	147.057								
43	147.13	50.75	147.167								
46.92	146.93	54.21	146.459								
50.07	147.13	56.7	145.991								
51.69	147.2	59.09	145.827								
52.45	147.18	60.88	146.027								
52.99	146.81	62.43	146.246								
55.04	146.53	63.98	147.038								
55.45	146.22	65.64	147.162								
55.99	146.12	70.44	147.228								
57.33	146.13	79.16	147.426								
58.84	146.2	84.76	147.925								
59.45	145.94										
60.26	146.07										
60.77	146.18										
61.89	146.04										
62.09	146.21										
63.17	146.19										
63.79	146.68										
65.03	147.11										
66.76	147.14										
68.47	147.08										
72.26	147.29										
78.25	147.38										
83.38	147.5										
84.76	147.91										
84.81	147.86										
85.1	147.48										

UT to Jumping Run Creek, Reach UT1B
X-Section 8, Riffle, Station 74+84

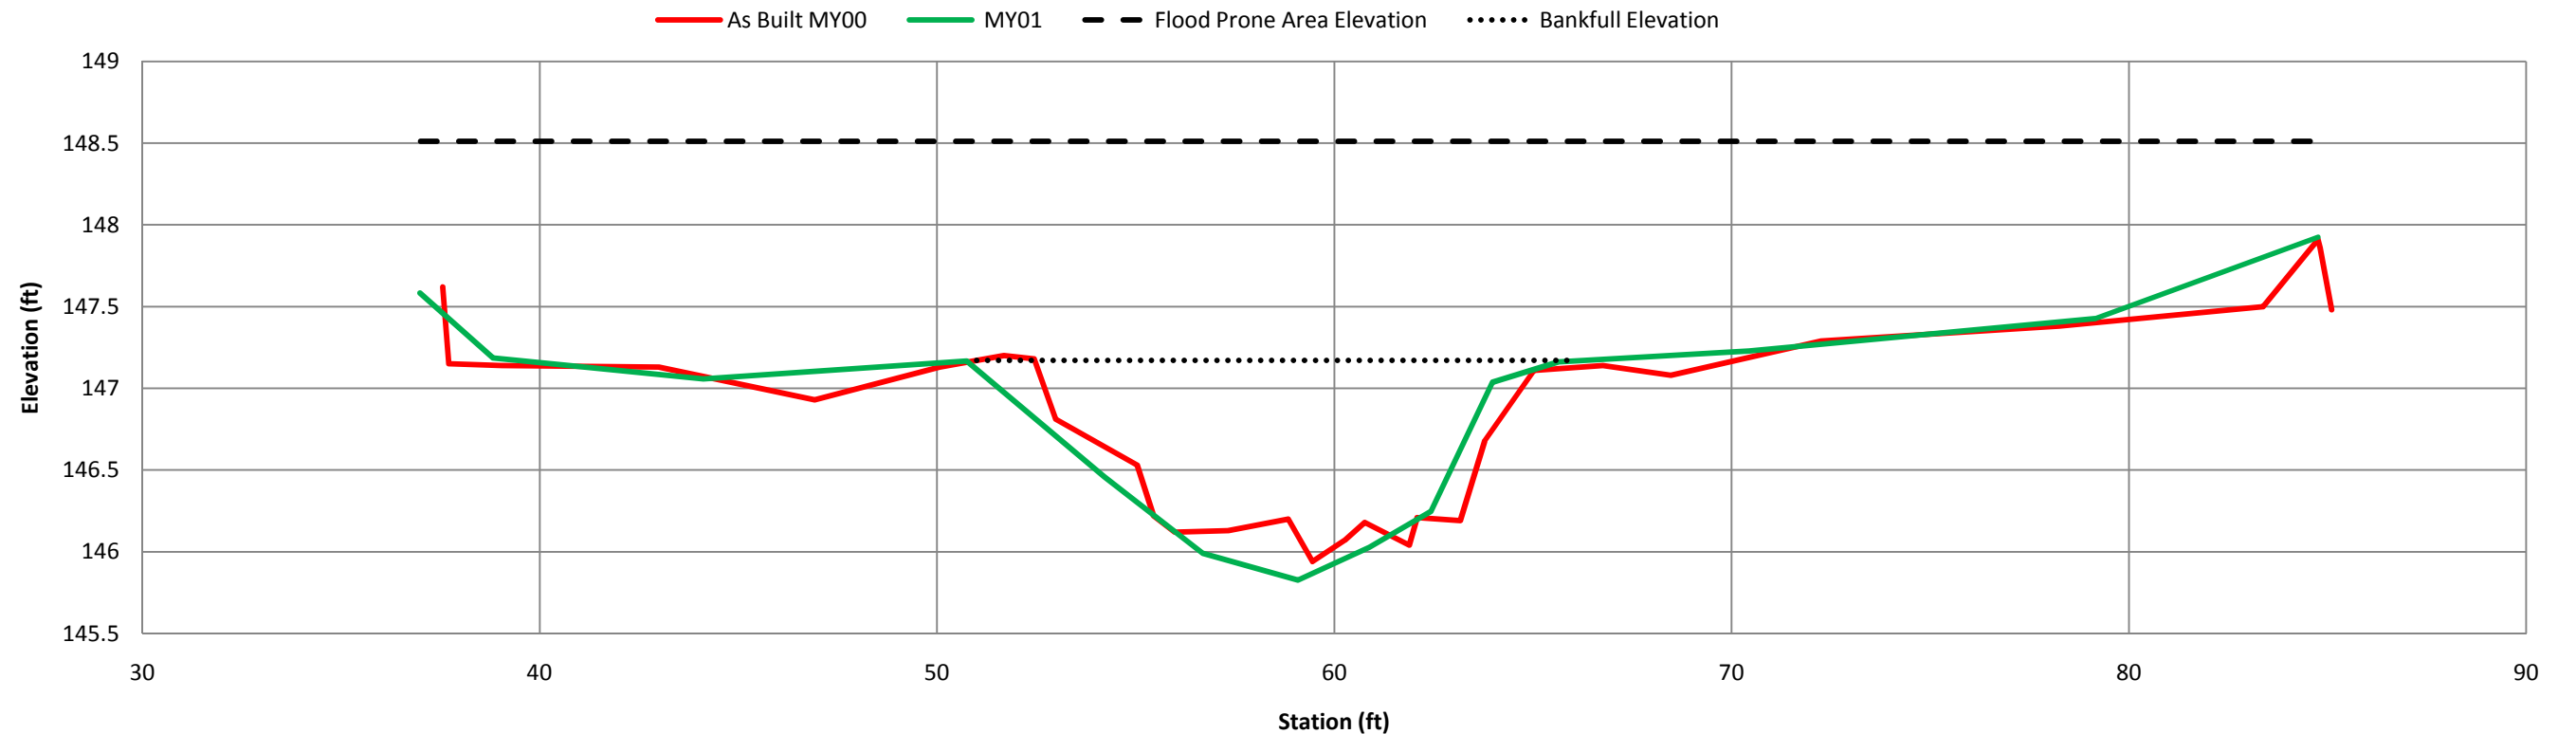

River Basin	Cape Fear River
Watershed	Jumping Run Creek
XS ID	XS-9, Pool, STA 75+30
Drainage Area(sq. mi.)	1.2
Date	9/1/2010
Field Crew	N. Jean




MY00		MY01		MY02		MY03		MY04		MY05	
Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation
45.86	147.1	54.66	147.86								
54.31	147.84	56.39	147.21								
54.32	147.83	59.3	147.27								
55.41	147.22	64.36	147.19								
59.39	147.13	68.17	146.30								
63	147.03	70.5	145.18								
66.74	146.97	72.44	144.63								
67.78	146.53	73.73	144.64								
68.5	146.07	76.28	144.71								
69.12	145.78	78.01	145.05								
69.51	145.47	80.48	145.70								
70.56	144.94	83.46	146.67								
72.81	144.72	85.82	147.08								
74.08	144.7	94.8	147.17								
75.57	144.86	102.44	147.73								
76.93	144.88										
78.23	145.13										
80.13	145.71										
80.85	145.97										
80.94	145.97										
83.22	146.56										
85.42	147.01										
86.79	146.95										
89.91	147.01										
94.51	147.04										
99.95	146.99										
101.78	147.67										
101.83	147.71										
101.85	147.66										
101.87	147.72										
104.58	147.17										

Sta 75+30 Looking Downstream

SUMMARY DATA	MY00	MY01	MY02	MY03	MY04	MY05
Bankfull Elevation	146.97	147.08				
Bankfull Cross-Sectional Area	25.96	29.08				
Bankfull Width	18.48	20.67				
Flood Prone Area Elevation	149.24	149.53				
Flood Prone Width	200.00	200.00				
Max Depth at Bankfull	2.27	2.45				
Mean Depth at Bankfull	1.40	1.41				
W/D Ratio	13.20	14.66				
Entrenchment Ratio	10.82	9.68				
Bank Height Ratio	1.00	1.00				
Stream Type	C	C				

UT to Jumping Run Creek, Reach UT1B
X-Section 9, Pool, Station 75+30

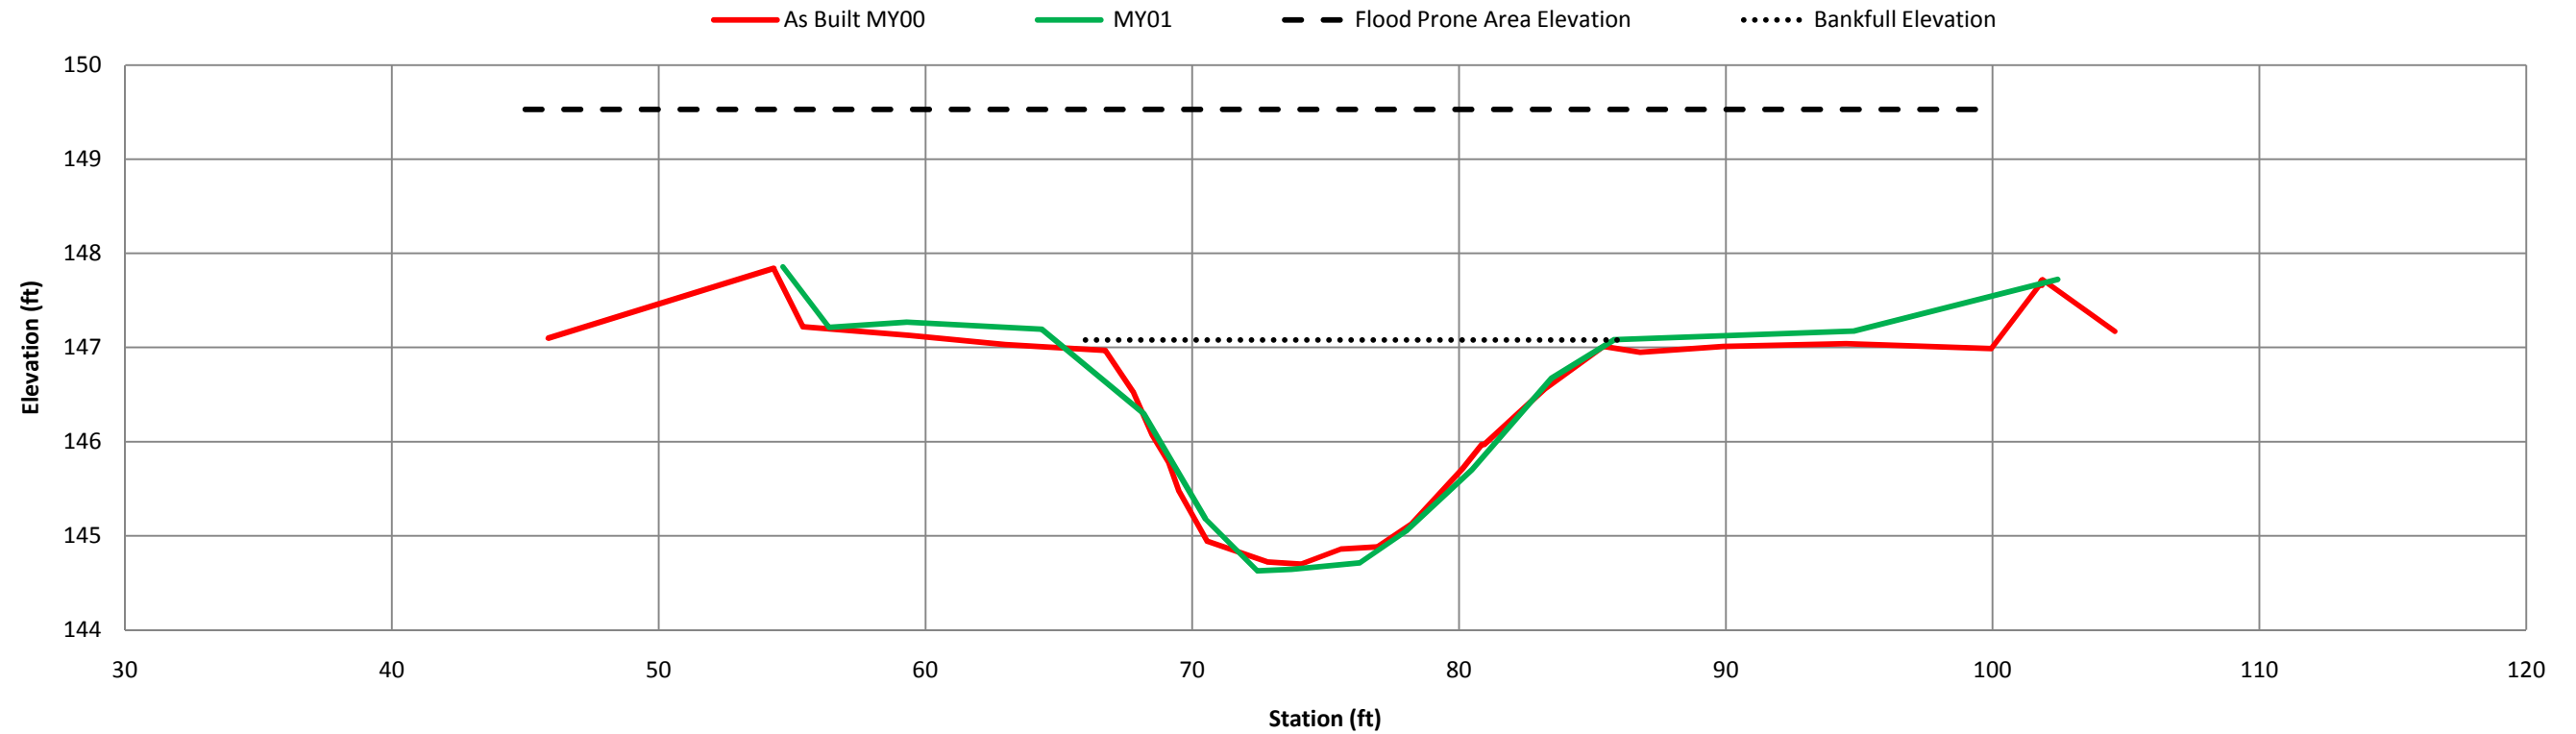


River Basin	Cape Fear River
Watershed	Jumping Run Creek
XS ID	XS-10, Riffle, STA 80+45
Drainage Area(sq. mi.)	1.2
Date	9/1/2010
Field Crew	N. Jean



Sta 80+45 Looking Downstream

MY00		MY01		MY02		MY03		MY04		MY05	
Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation	Station	Elevation
130.01	146.53	133.23	147.11								
132.86	147.07	136.23	147.07								
133.28	146.47	140.87	146.20								
134.96	146.33	148.97	145.98								
139.81	146.04	152.23	145.76								
144.59	146.04	152.97	145.35								
148.52	145.99	156.19	144.99								
150.69	145.93	158.49	144.89								
151.61	145.81	161.37	144.80								
152.74	145.49	163.33	145.51								
153.24	145.45	165.95	145.77								
154.14	145.34	170.43	145.94								
154.97	145.28	175.46	145.94								
156.22	145.05	179.48	146.73								
157.37	144.89										
158.39	144.94										
158.76	145.08										
159.62	145.19										
160.2	145.14										
161.14	145.22										
162.05	145.39										
163.22	145.64										
165.17	145.87										
166.62	145.95										
169.52	145.94										
172.89	146.13										
176.87	146.12										
178.93	146.66										
179.52	146.25										

SUMMARY DATA	MY00	MY01	MY02	MY03	MY04	MY05
Bankfull Elevation	145.87	145.76				
Bankfull Cross-Sectional Area	7.41	8.10				
Bankfull Width	14.02	13.61				
Flood Prone Area Elevation	146.85	146.72				
Flood Prone Width	103.50	41.41				
Max Depth at Bankfull	0.98	0.96				
Mean Depth at Bankfull	0.53	0.59				
W/D Ratio	26.45	23.07				
Entrenchment Ratio	7.38	3.04				
Bank Height Ratio	1.00	1.00				
Stream Type	C	C				

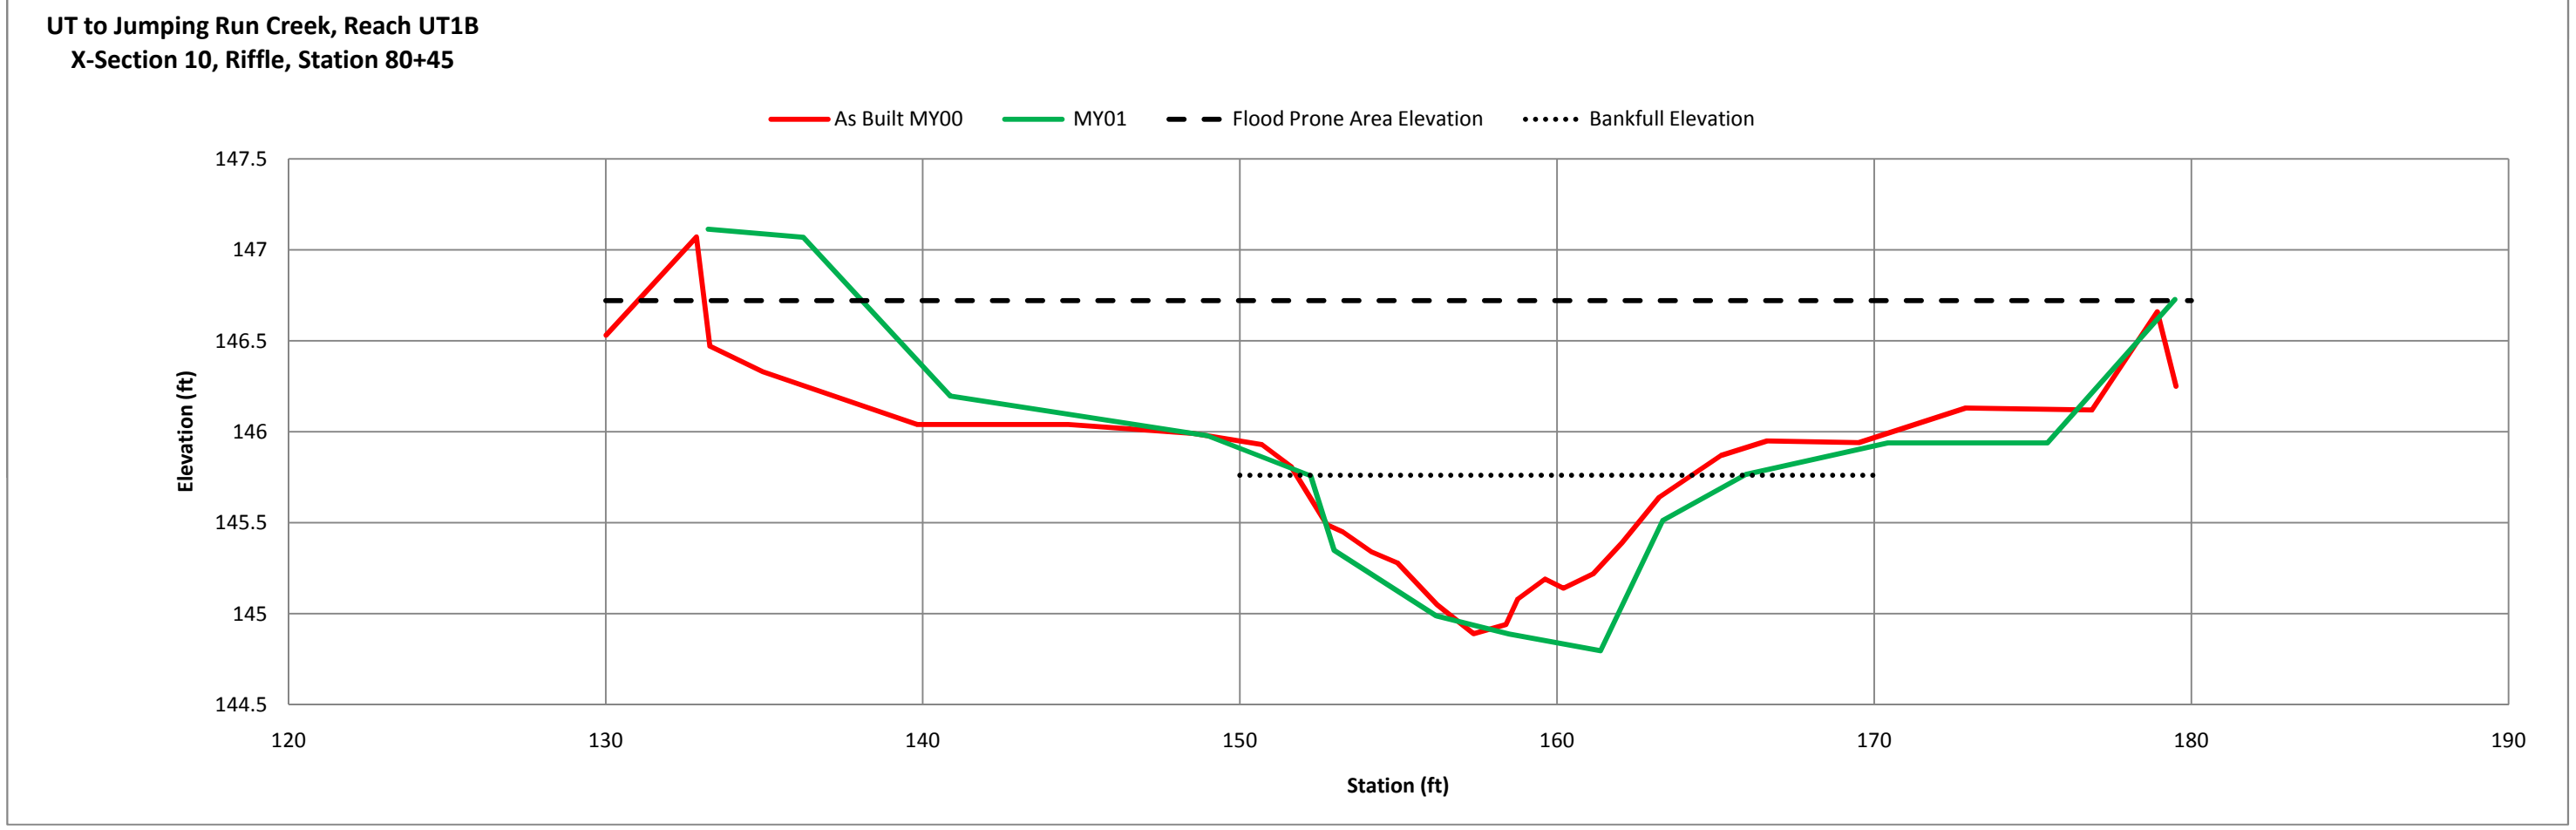

UT to Jumping Run Creek, Reach UT1B
Longitudinal Profile, Year 01, STA 47+45 to 82+10

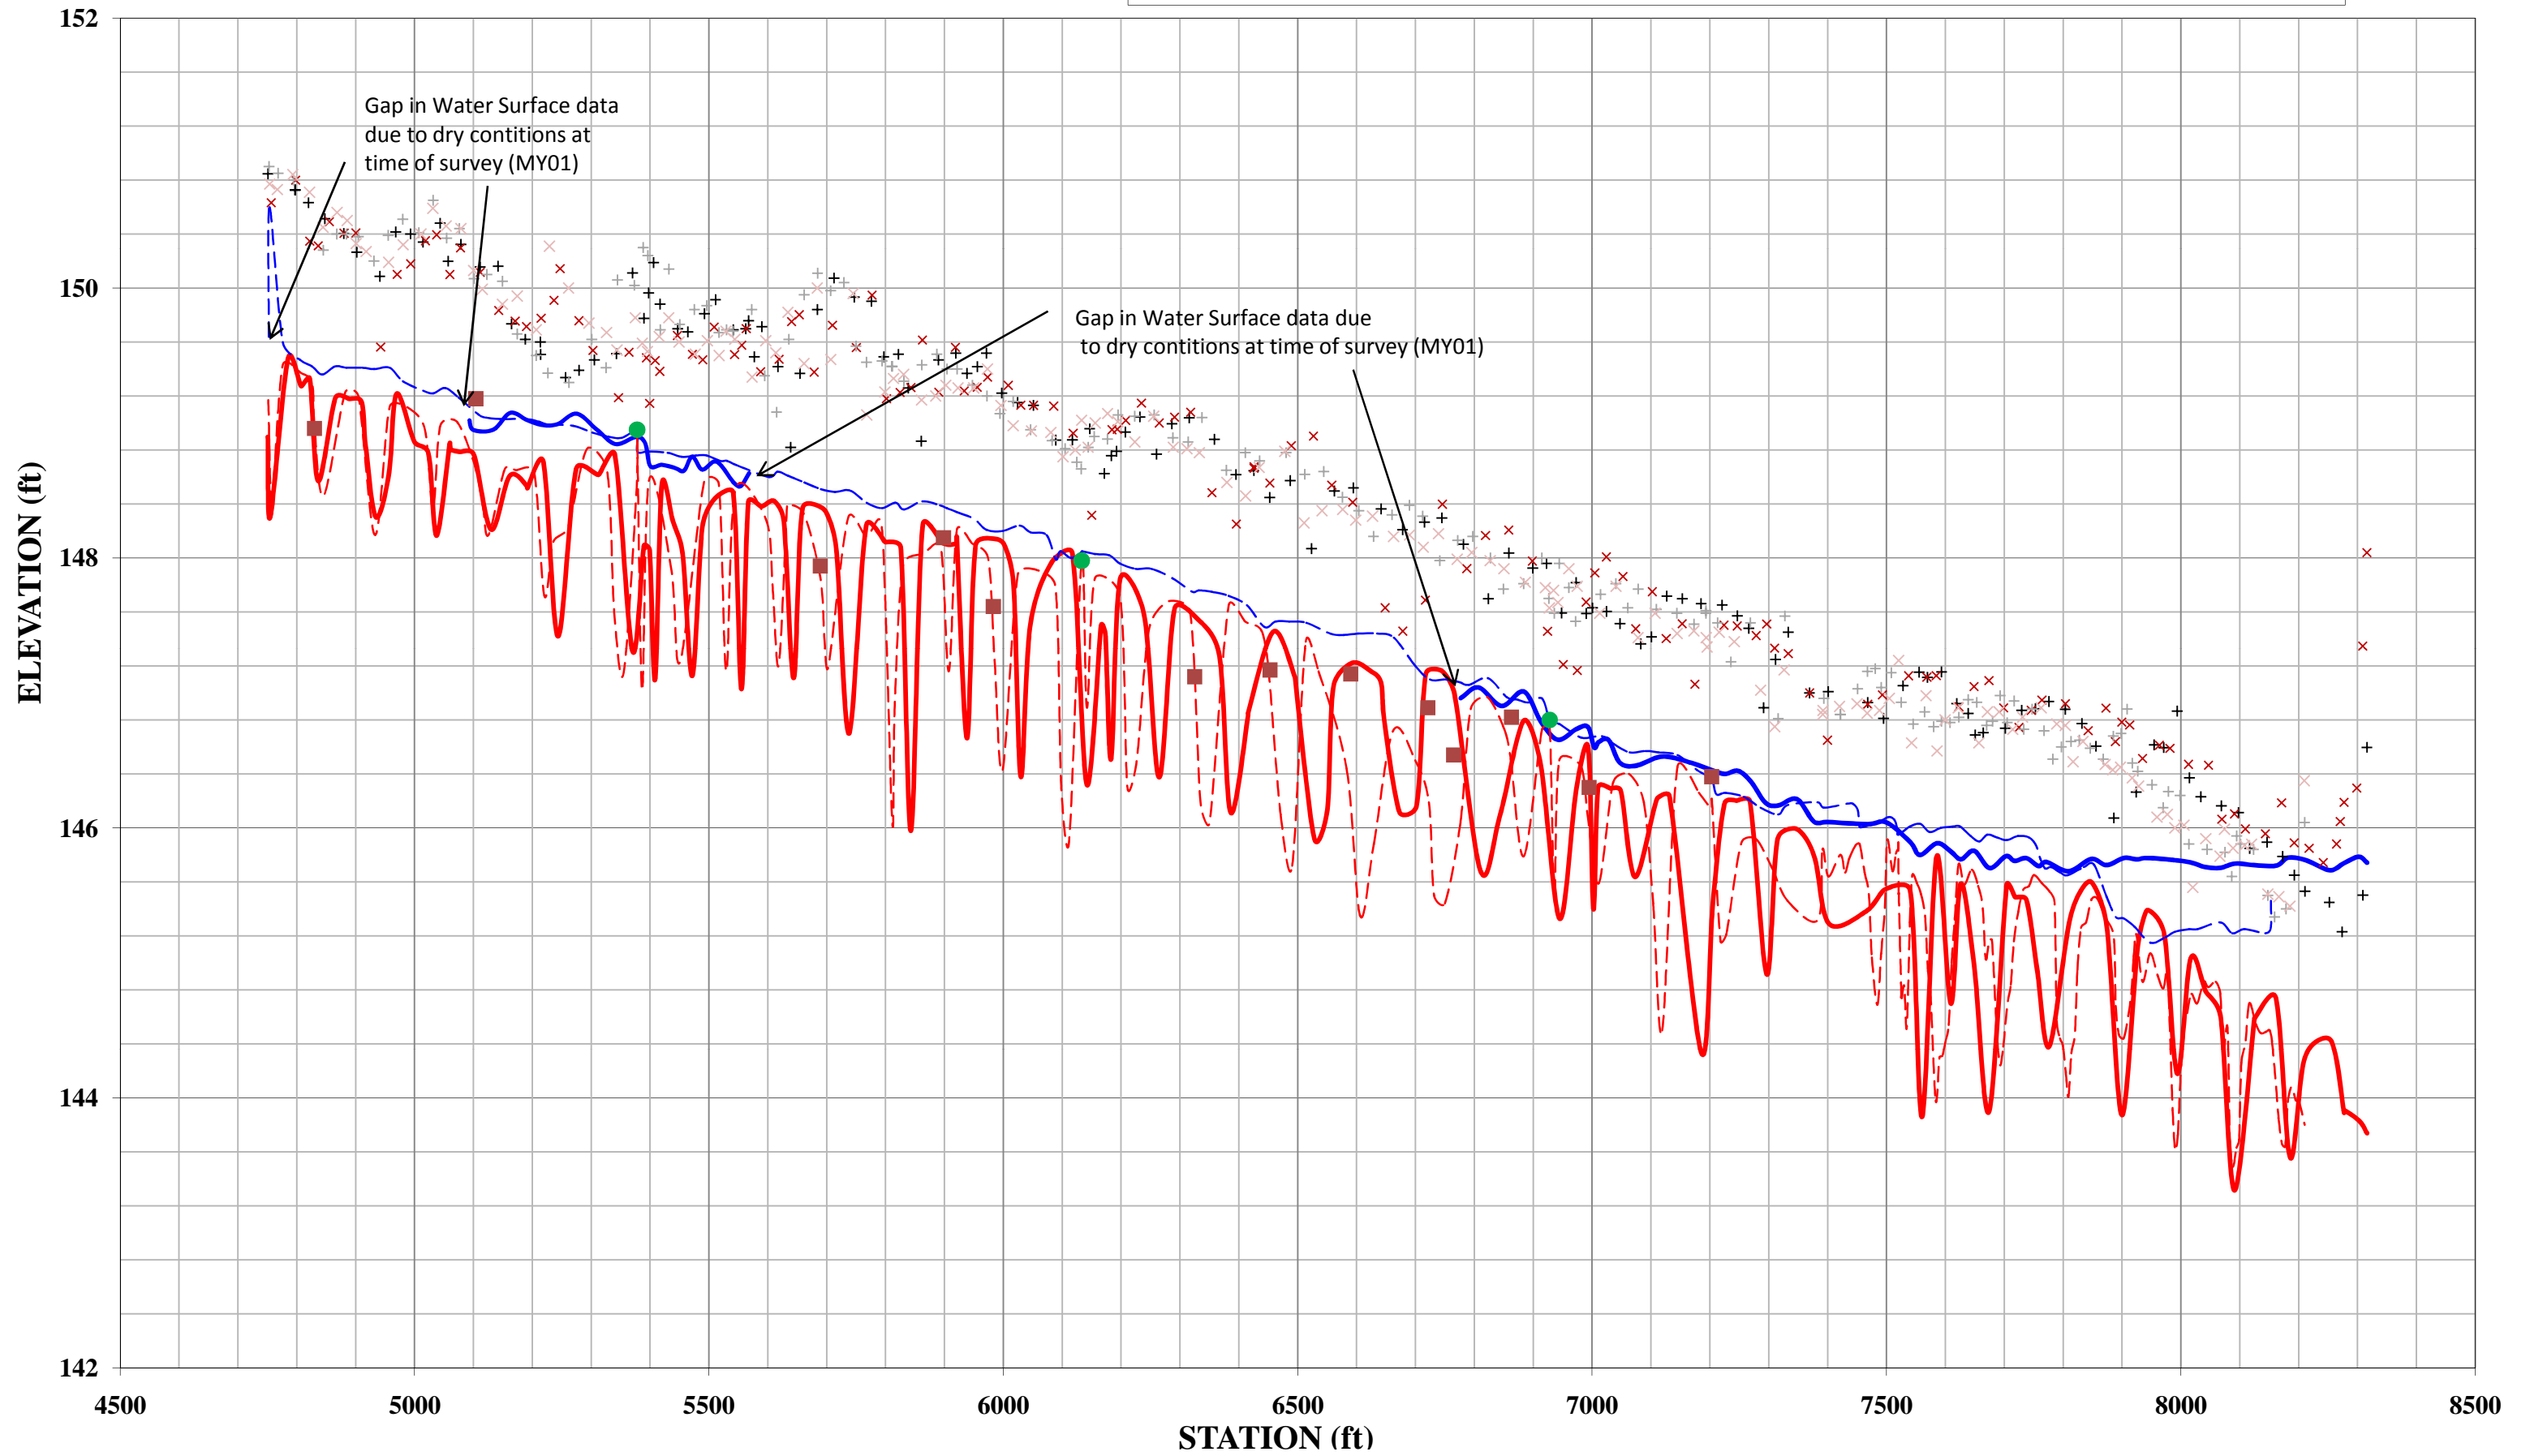
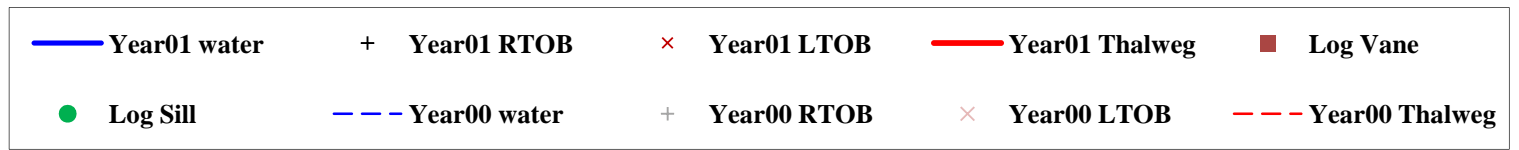


Table 10a. Baseline Stream Data Summary																										
UT to Jumping Run Creek Stream and Wetland Restoration Project / EEP No.92345 - UT1b (4500 feet)																										
Parameter	Gauge ²	Regional Curve			Pre-Existing Condition					Reference Reach(es) Data					Design				Monitoring Baseline							
Dimension and Substrate - Riffle Only		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n	
Bankfull Width (ft)					12.10	15.23	13.01	20.55	3.95	5	-	-	-	-	-	-	-	-	13.4	-	14.02	15.98	15.75	18.48	1.32	8
Floodprone Width (ft)					15.59	18.68	17.51	23.94	3.62	5	-	-	-	-	-	-	-	-	100+	-	103.50	187.94	200.00	200.00	34.12	8
Bankfull Mean Depth (ft)					0.54	0.77	0.86	0.94	0.19	5	-	-	-	-	-	-	-	-	0.9	-	0.53	0.82	0.75	1.40	0.26	8
¹ Bankfull Max Depth (ft)					0.87	1.18	1.17	1.45	0.25	5	-	-	-	-	-	-	-	-	1.1	-	0.98	1.35	1.25	2.27	0.39	8
Bankfull Cross Sectional Area (ft ²)					10.97	11.23	11.13	11.80	0.33	5	7.80	51.85	51.85	95.90	-	2	-	12.0	-	7.41	13.35	11.74	25.96	5.48	8	
Width/Depth Ratio					12.47	21.84	15.20	37.78	11.53	5	8.00	11.00	11.00	14.00	-	2	-	15.0	-	13.20	20.53	20.94	26.45	3.97	8	
Entrenchment Ratio					1.13	1.25	1.29	1.35	0.09	5	4.00	8.50	8.50	13.00	-	2	8.0	10.0	12.0	7.35	12.85	12.53	21.58	4.00	8	
¹ Bank Height Ratio					2.94	4.14	4.29	5.45	0.95	5	1.00	1.15	1.15	1.30	-	2	-	1.0	-	1	1	1	1	0	8	
Profile																										
Riffle Length (ft)					-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	31.4	49.71	48.08	78.46	11.12	32	
Riffle Slope (ft/ft)					-	-	-	-	-	-	-	-	-	-	-	-	-	0.001	0.003	0.005	2E-04	0.467	0.005	6	1.662	13
Pool Length (ft)					-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	27.7	59.89	61.4	96	18.34	30	
Pool Max depth (ft)					-	-	-	-	-	-	-	-	-	-	-	-	-	1.9	-	0.865	1.496	1.572	2.395	0.391	30	
Pool Spacing (ft)					-	-	-	-	-	-	-	-	-	-	-	-	38	61.5	85	79	106.5	104	143	17.09	29	
Pattern																										
Channel Beltwidth (ft)					-	-	-	-	-	-	-	-	-	-	-	-	38	79.0	120	40.15	70.42	69.35	96.96	13.68	26.00	
Radius of Curvature (ft)					-	-	-	-	-	-	-	-	-	-	-	-	30	40.0	50	32.49	41.47	39.95	55.87	6.35	30.00	
Rc:Bankfull width (ft/ft)					-	-	-	-	-	-	1.5	-	2.25	3	-	-	2	2.8	3.5	2.32	2.59	2.54	3.02	-	-	
Meander Wavelength (ft)					-	-	-	-	-	-	-	-	-	-	-	-	70	120	170	152.37	179.88	176.05	228.52	23.44	14.00	
Meander Width Ratio					-	-	-	-	-	-	2	-	4.15	6.3	-	-	3.5	5.8	8	2.86	4.41	4.40	5.25	-	-	
Transport parameters																										
Reach Shear Stress (competency) lb/ft ²																			0.03						0.056	
Max part size (mm) mobilized at bankfull																										
Stream Power (transport capacity) W/m ²																				0.026						0.69
Additional Reach Parameters																										
Rosgen Classification								F5																		
Bankfull Velocity (fps)																										
Bankfull Discharge (cfs)								9.4																		
Valley length (ft)																										
Channel Thalweg length (ft)								6501																		
Sinuosity (ft)								1.07																		
Water Surface Slope (Channel) (ft/ft)								0.0006																		
BF slope (ft/ft)																										
³ Bankfull Floodplain Area (acres)																										
⁴ % of Reach with Eroding Banks																										
Channel Stability or Habitat Metric																										
Biological or Other																										

Shaded cells indicate that these will typically not be filled in.

¹= The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile. ²= For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).

³. Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace rise/slope.

⁴= Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data. ⁵. Of value/needed only if the n exceeds 3.

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)																										
UT to Jumping Run Creek Stream and Wetland Restoration / EEP No. 92345 - UT1b (4500 feet)																										
Parameter	Pre-Existing Condition					Reference Reach(es) Data					Design					As-built/Baseline										
¹ Ri% / Ru% / P% / G% / S%	-	0	-	0	0																					
¹ SC% / Sa% / G% / C% / B% / Be%	0	33	67	0	0	0		0	100	0	0	0	0													
¹ d16 / d35 / d50 / d84 / d95 / d _p / d _i ^{3p} (mm)	0.14	0.26	0.5	4.4	7.3	-	30	0.3	0.4	0.5	0.9	1.2	-	-												
² Entrenchment Class <1.5 / 1.5-1.99 / 2.0-4.9 / 5.0-9.9 / >10	-	-	-	-	-			-	-	-	-	-														
³ Incision Class <1.2 / 1.2-1.49 / 1.5-1.99 / >2.0	-	-	-	-	-			-	-	-	-	-														

Shaded cells indicate that these will typically not be filled in.

¹= Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, dsp = max subpave

²= Entrenchment Class - Assign/bin the reach footage into the classes indicated and provide the percentage of the total reach footage in each class in the table. This will result from the measured cross-sections as well as visual estimates

³= Assign/bin the reach footage into the classes indicated and provide the percentage of the total reach footage in each class in the table. This will result from the measured cross-sections as well as the longitudinal profile

Footnotes 2,3 - These classes are loosely built around the Rosgen classification and hazard ranking breaks, but were adjusted slightly to make for easier assignment to somewhat coarser bins based on visual estimates in the field such that measurement of every segment for ER would not be necessary.

The intent here is to provide the reader/consumer of design and monitoring information with a good general sense of the extent of hydrologic containment in the pre-existing and the rehabilitated states as well as comparisons to the reference distributions.

ER and BHR have been addressed in prior submissions as a subsample (cross-sections as part of the design survey), however, these subsamples have often focused entirely on facilitating design without providing a thorough pre-construction distribution of these parameters, leaving the reader/consumer with a sample that is weighted heavily on the stable sections of the reach. This means that the distributions for these parameters should include data from both the cross-section surveys and the longitudinal profile and in the case of ER, visual estimates. For example, the typical longitudinal profile permits sampling of the BHR at riffles beyond those subject to cross-sections and therefore can be readily integrated and provide a more complete sample distribution for these parameters, thereby providing the distribution/coverage necessary to provide meaningful comparisons.

Table 11a. Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters – Cross Sections)

UT to Jumping Run Creek/EEP No. 92345 - UT1b (3661 feet)

	Cross Section 1 (Riffle)							Cross Section 2 (Pool)							Cross Section 3 (Riffle)							Cross Section 4 (Pool)							Cross Section 5 (Riffle)						
Based on fixed baseline bankfull elevation ¹	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+
Record elevation (datum) used	150.47	150.46						150.58	150.36						149.75	149.78						149.34	149.32						149.02	149.07					
Bankfull Width (ft)	15.60	15.35						19.33	17.03						15.50	16.16						18.22	17.38						15.90	15.64					
Floodprone Width (ft)	200+	200+						200+	200+						200+	200+						200+	200+						200+	200+					
Bankfull Mean Depth (ft)	0.83	0.79						1.12	1.01						0.76	0.76						1.23	1.17						0.74	0.76					
Bankfull Max Depth (ft)	1.31	1.28						2.25	2.02						1.14	1.19						2.20	2.24						1.41	1.34					
Bankfull Cross Sectional Area (ft ²)	12.90	13.16						21.57	17.26						11.71	13.91						22.42	20.32						11.69	11.94					
Bankfull Width/Depth Ratio	18.73	19.43						17.26	16.86						20.90	21.26						14.81	14.85						21.49	20.58					
Bankfull Entrenchment Ratio	12.86	13.03						10.35	11.74						12.91	12.38						10.98	11.51						21.58	12.79					
Bankfull Bank Height Ratio	1.00	1.00						1.00	1.00						1.00	1.00						1.00	1.00						1.00	1.00					
Cross Sectional Area between end pins (ft ²)	16.50	17.00						26.30	26.50						21.70	22.10						32.10	32.50						19.00	19.10					
d50 (mm)																																			
	Cross Section 6 (Riffle)							Cross Section 7 (Riffle)							Cross Section 8 (Riffle)							Cross Section 9 (Pool)							Cross Section 10 (Pool)						
Based on fixed baseline bankfull elevation ¹	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+
Record elevation (datum) used	148.61	148.58						148.09	148.13						147.20	147.17						146.97	147.08						145.87	145.76					
Bankfull Width (ft)	16.39	17.17						16.87	15.72						15.10	15.24						18.48	20.67						14.02	13.61					
Floodprone Width (ft)	200+	200+						200+	200+						200+	200+						200+	200+						103.50	41.41					
Bankfull Mean Depth (ft)	0.89	0.80						0.70	0.77						0.72	0.75						1.40	1.41						0.53	0.59					
Bankfull Max Depth (ft)	1.23	1.20						1.21	1.27						1.26	1.34						2.27	2.45						0.98	0.96					
Bankfull Cross Sectional Area (ft ²)	14.51	13.74						11.77	12.18						10.81	11.37						25.96	29.08						7.41	8.10					
Bankfull Width/Depth Ratio	18.42	21.46						24.10	20.42						20.97	20.32						13.20	14.66						26.45	23.07					
Bankfull Entrenchment Ratio	12.20	11.65						11.86	12.72						13.25	13.12						10.82	9.68						7.35	3.04					
Bankfull Bank Height Ratio	1.00	1.00						1.00	1.00						1.00	1.00						1.00	1.00						1.00	1.00					
Cross Sectional Area between end pins (ft ²)	24.30	24.50						13.10	13.40						17.20	17.60						40.10	42.10						85.50	86.10					
d50 (mm)																																			

¹ = Widths and depths for monitoring resurvey will be based on the baseline bankfull datum regardless of dimensional/depositional development. Input the elevation used as the datum, which should be consistent and based on the baseline datum established. If the performer has inherited the project and cannot acquire the datum used for prior years this must be discussed with EEP. If this cannot be resolved in time for a given years report submission a footnote in this should be included that states: "It is uncertain if the monitoring datum has been consistent over the monitoring history, which may influence calculated values. Additional data from a prior performer is being acquired to provide confirmation. Values will be recalculated in a future submission based on a consistent datum if determined to be necessary."

**Exhibit Table 11b. Monitoring Data - Stream Reach Data Summary
UT to Jumping Run Creek/EEP No. 92345 - UT1b (3661 feet)**

Parameter	Baseline						MY-1						MY-2						MY-3						MY-4						MY-5					
	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n
Dimension and Substrate - Riffle only																																				
Bankfull Width (ft)	14	16	15.8	18.5	1.32	8	14	16	15.8	19	1.32	8																								
Floodprone Width (ft)	104	188	200	200	34.1	8	104	188	200	200	34.12	8																								
Bankfull Mean Depth (ft)	0.53	0.82	0.75	1.4	0.26	8	0.53	0	0.75	1.4	0.26	8																								
¹ Bankfull Max Depth (ft)	0.98	1.35	1.25	2.27	0.39	8	0.98	0.83	1.27	2.28	0.39	8																								
Bankfull Cross Sectional Area (ft ²)	7.41	13.3	11.7	26	5.48	8	7.41	13.3	11.7	26	5.49	8																								
Width/Depth Ratio	13.2	20.5	20.9	26.5	3.97	8	13.2	20.5	20.9	26.5	3.96	8																								
Entrenchment Ratio	7.35	12.9	12.5	21.6	4	8	7.36	13	12.6	21.6	4.00	8																								
¹ Bank Height Ratio	1	1	1	1	0	8	1	1	1	1	0.00	8																								
Profile																																				
Riffle Length (ft)	31.4	49.7	48.1	78.5	11.1	32	31.4	49.8	48.1	78.5	11.12	32																								
Riffle Slope (ft/ft)	0	0.47	0.01	6	1.66	13	0	0.47	0.01	6	1.66	13																								
Pool Length (ft)	27.7	59.9	61.4	96	18.3	30	27.7	59.9	61.4	96	18.34	30																								
Pool Max depth (ft)	0.87	1.5	1.57	2.4	0.39	30	0.87	1.6	1.59	2.6	0.39	30																								
Pool Spacing (ft)	79	106	104	143	17.1	29	79	106	104	143	17.09	29																								
Pattern																																				
Channel Beltwidth (ft)	40.2	70.4	69.3	97	13.7	26																														
Radius of Curvature (ft)	32.5	41.5	39.9	55.9	6.35	30																														
Rc:Bankfull width (ft/ft)	2.32	2.59	2.54	3.02	-	-																														
Meander Wavelength (ft)	152	180	176	229	23.4	14																														
Meander Width Ratio	2.86	4.41	4.4	5.25	-	-																														
Additional Reach Parameters																																				
Rosgen Classification	C5						C5																													
Channel Thalweg length (ft)	3471						3471																													
Sinuosity (ft)	1.2						1.2																													
Water Surface Slope (Channel) (ft/ft)	0.00124						0.00126																													
BF slope (ft/ft)	0.00137						0.00137																													
³ Ri% / Ru% / P% / G% / S%	52	0	48	0	0		52	0	48	0	0.00																									
³ SC% / Sa% / G% / C% / B% / Be%																																				
³ d16 / d35 / d50 / d84 / d95 /																																				
² % of Reach with Eroding Banks	-						-																													
Channel Stability or Habitat Metric	-						-																													
Biological or Other	-						-																													

Pattern data will not typically be collected unless visual data, dimensional data or profile data indicate significant shifts from baseline


Shaded cells indicate that these will typically not be filled in.
 1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.
 2 = Proportion of reach exhibiting banks that are eroding based on the visual survey from visual assessment table
 3 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave

Appendix E. Hydrology Data


Table 12	– Verification of Bankfull Events
Figure 5	– Monthly Rainfall Data
Figures 6a-p	– Precipitation and Water Level Plots
Table 13	– Wetland Hydrology Criteria Attainment

Table 12 - Verification of Bankfull Events			
UT to Jumping Run Creek Stream and Wetland Restoration Project - EEP Project No. 92345			
Date of Data Collection	Date of Occurrence	Method	Photo
n/a	n/a	None Observed	n/a


UT to Jumping Run Creek 2010 30-70 Percentile Graph
Cumberland County, North Carolina

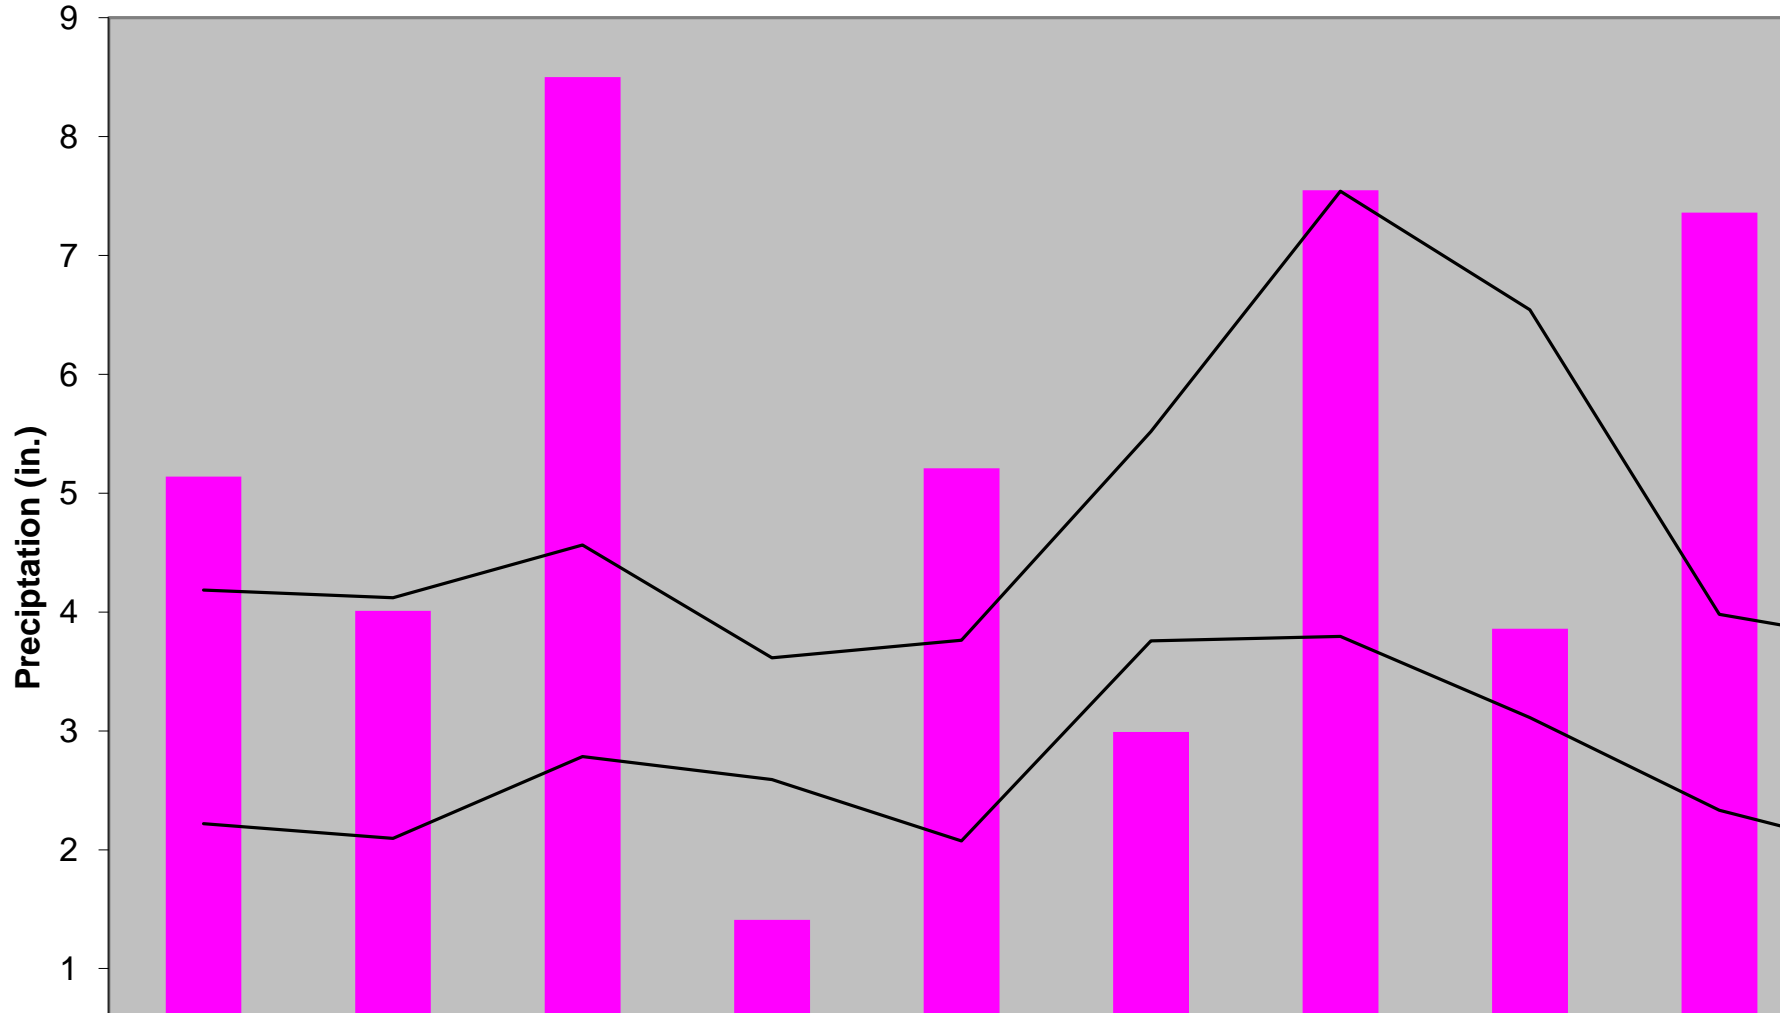


2010 Groundwater Data
Well UTJRC-1 (SN: 000009BEBD4E)
Riparian wetland

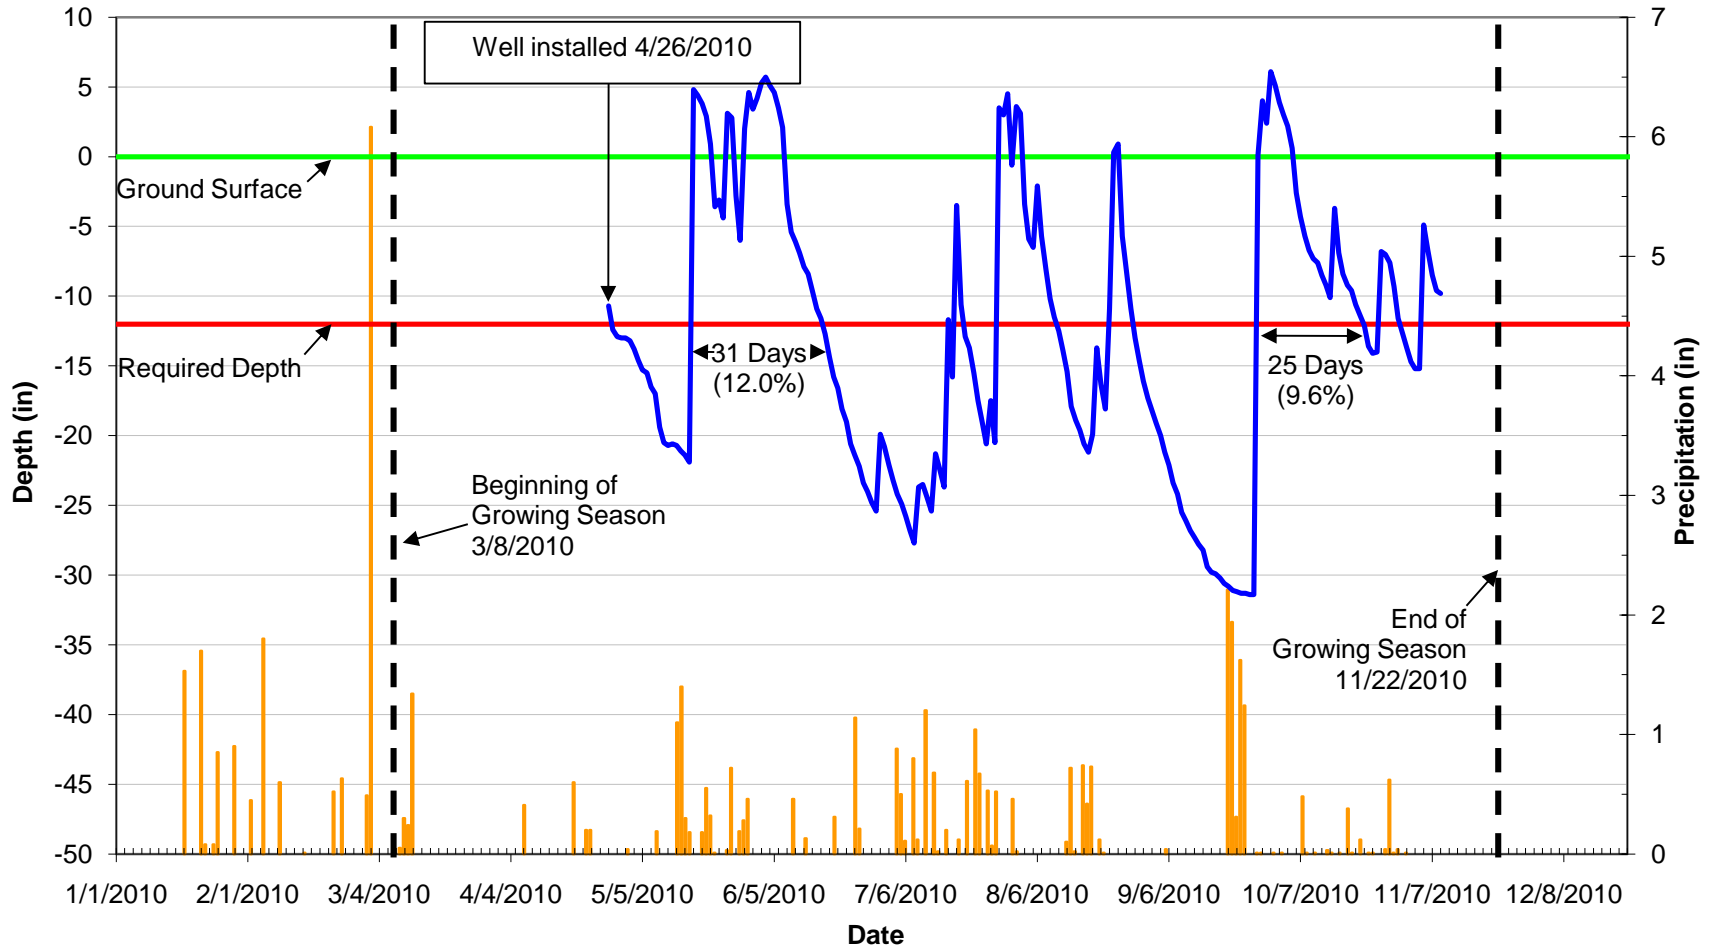


2010 Groundwater Data
Well UTJRC-2 (SN: 00000B651828)
Riparian wetland

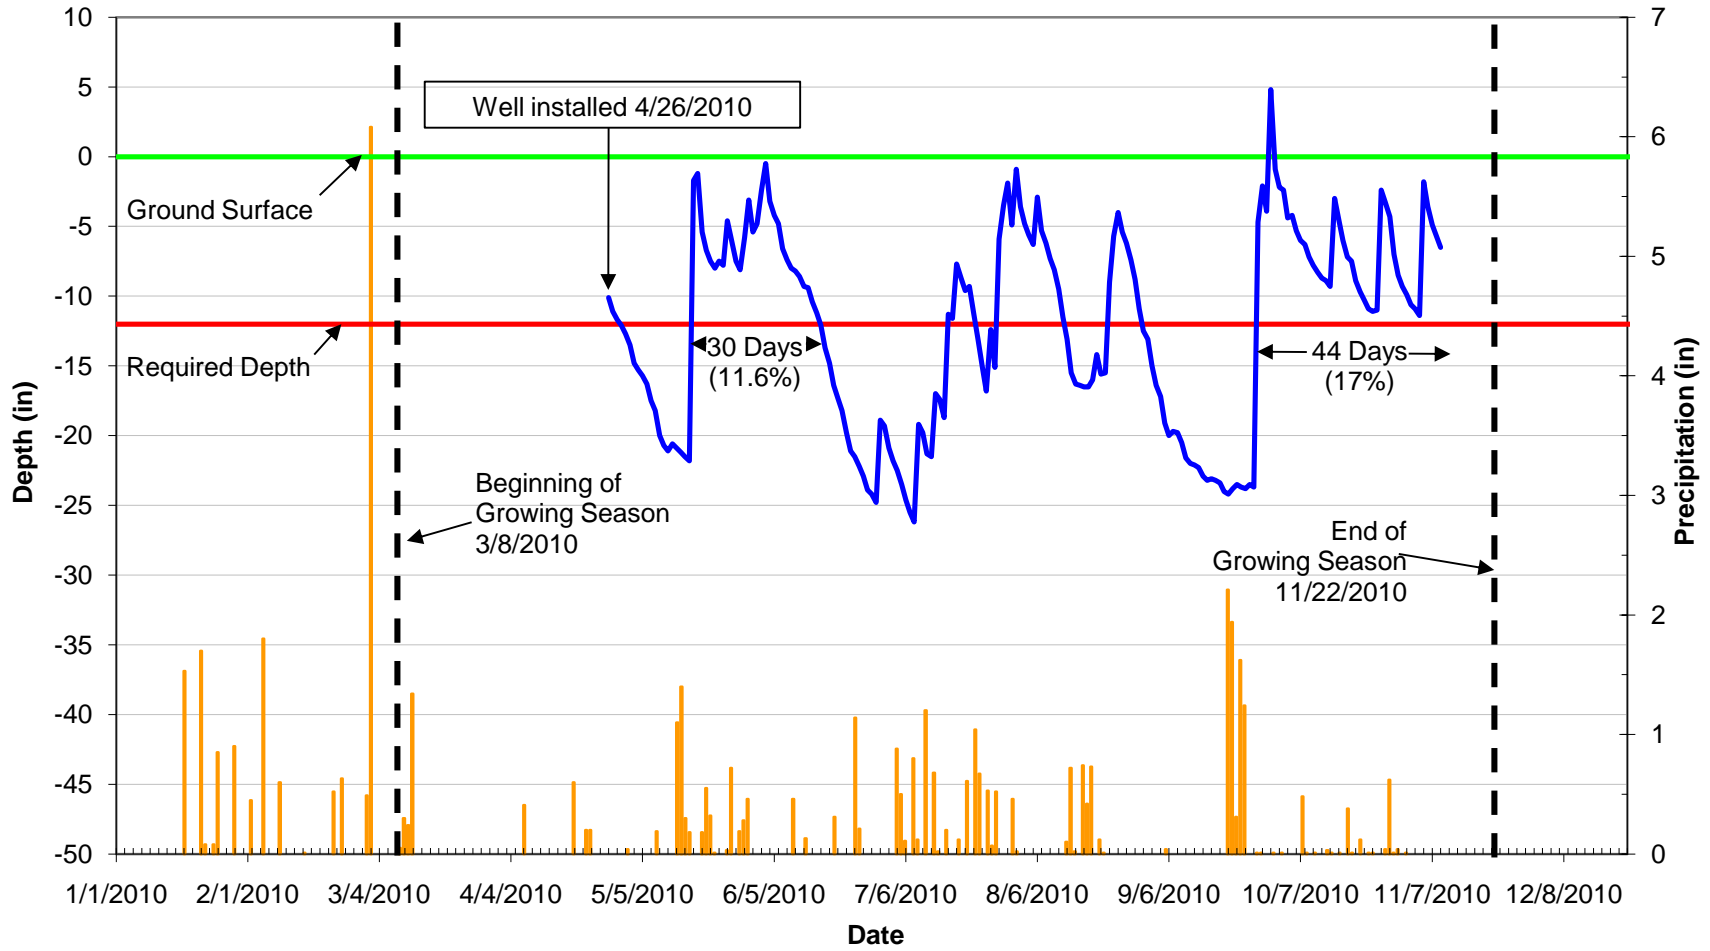


2010 Groundwater Data
Well UTJRC-3 (SN: 00000AB36333)
Riparian wetland

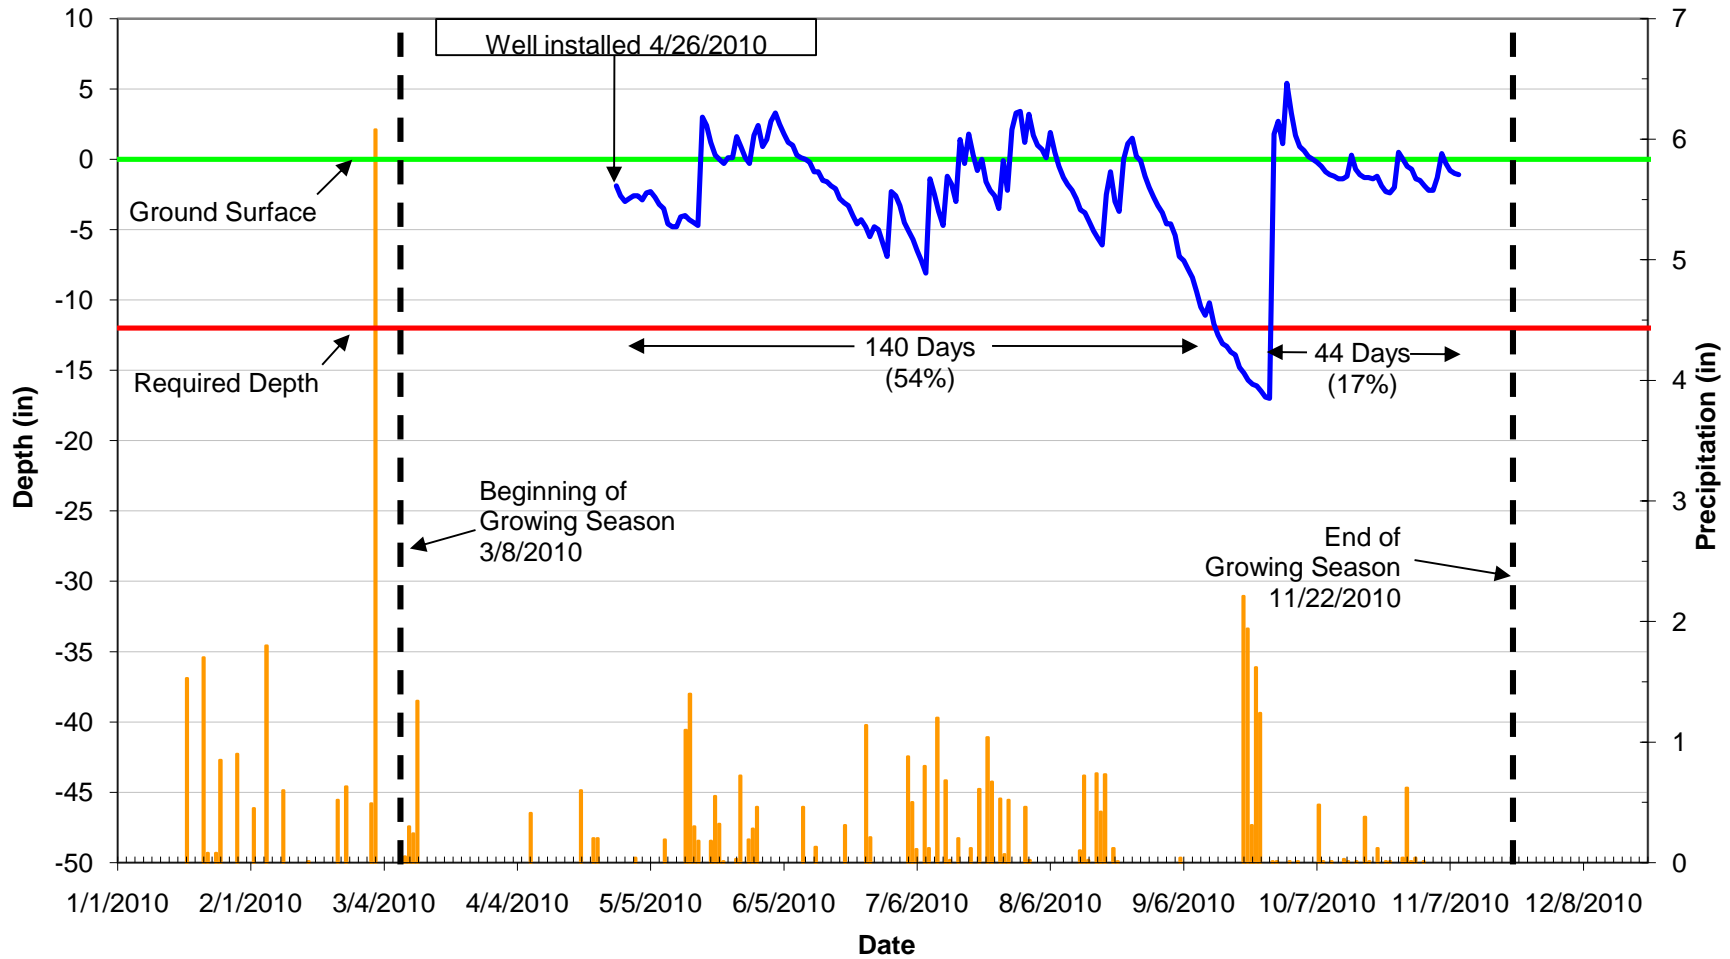


2010 Groundwater Data
Well UTJRC-4 (SN: 000011313B9E)
Non-riparian wetland

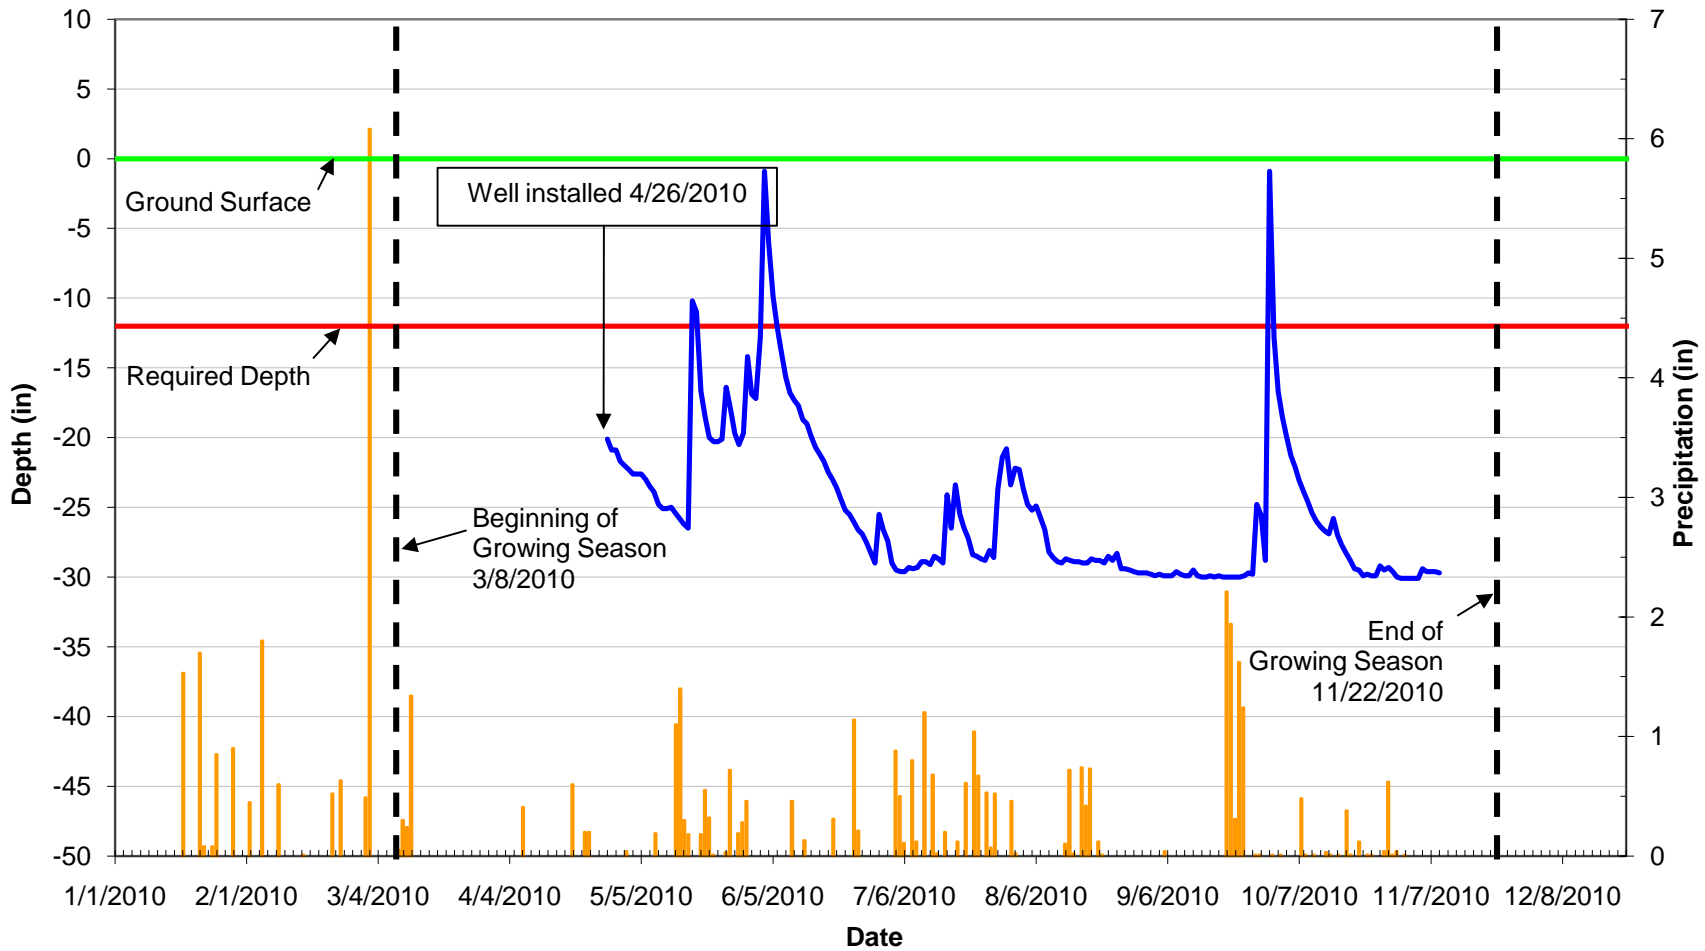


2010 Groundwater Data
Well UTJRC-5 (SN: 00000B6522F0)
Riparian wetland

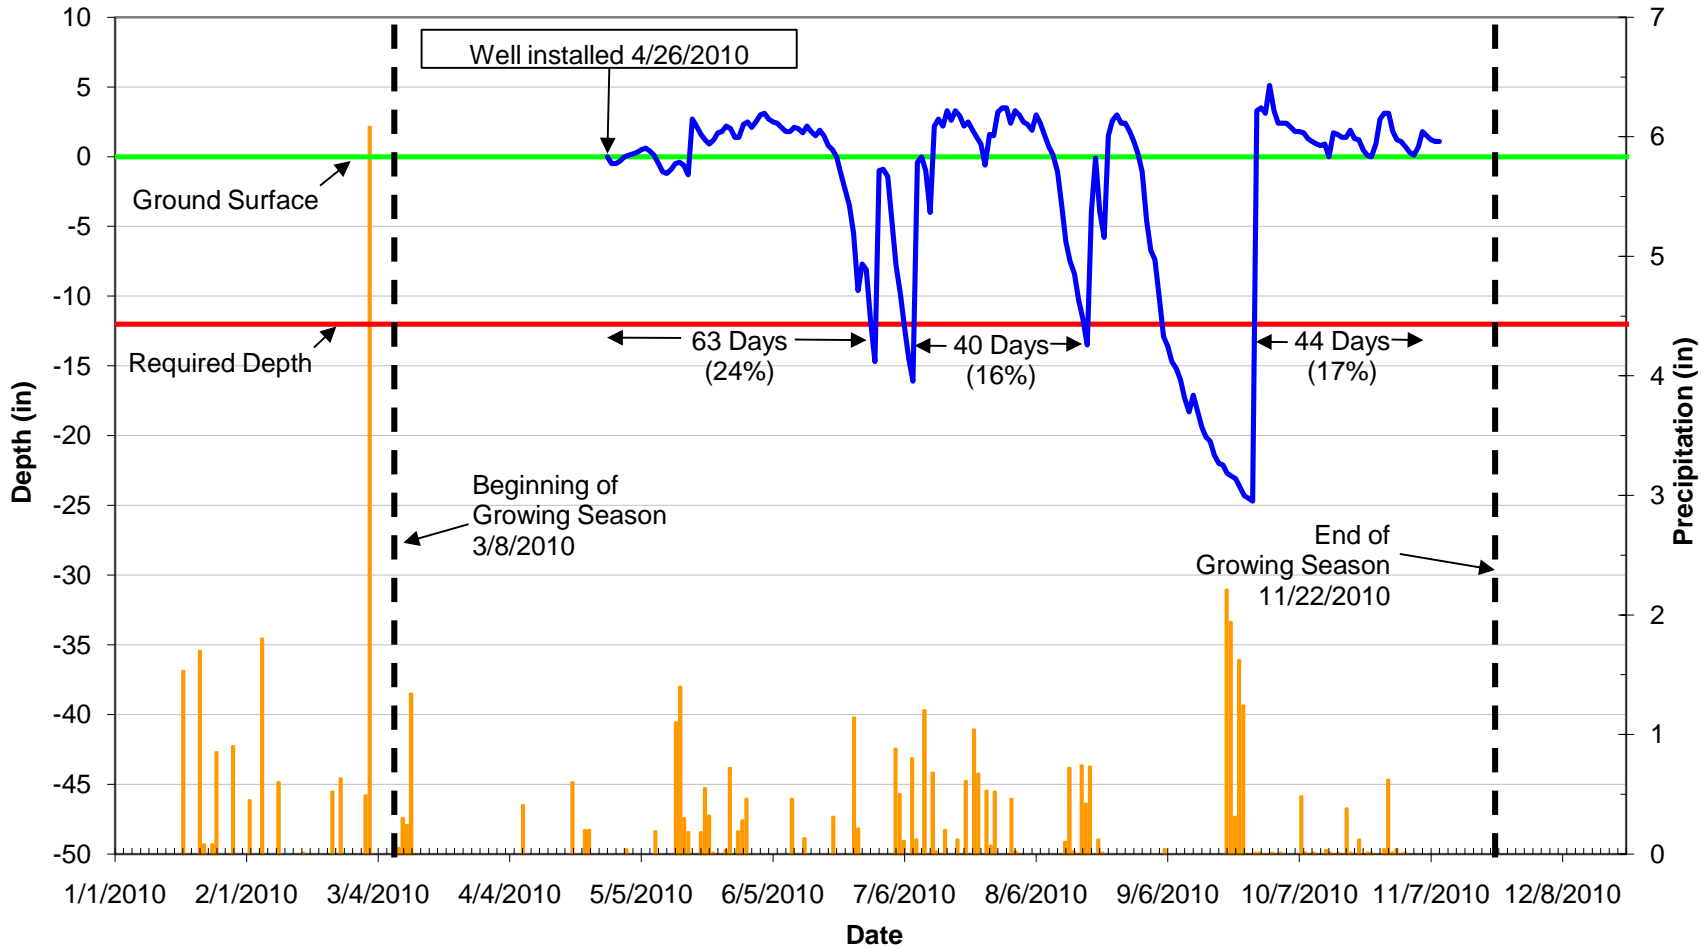


2010 Groundwater Data
Well UTJRC-6 (SN: 0000138BBE22)
Riparian wetland

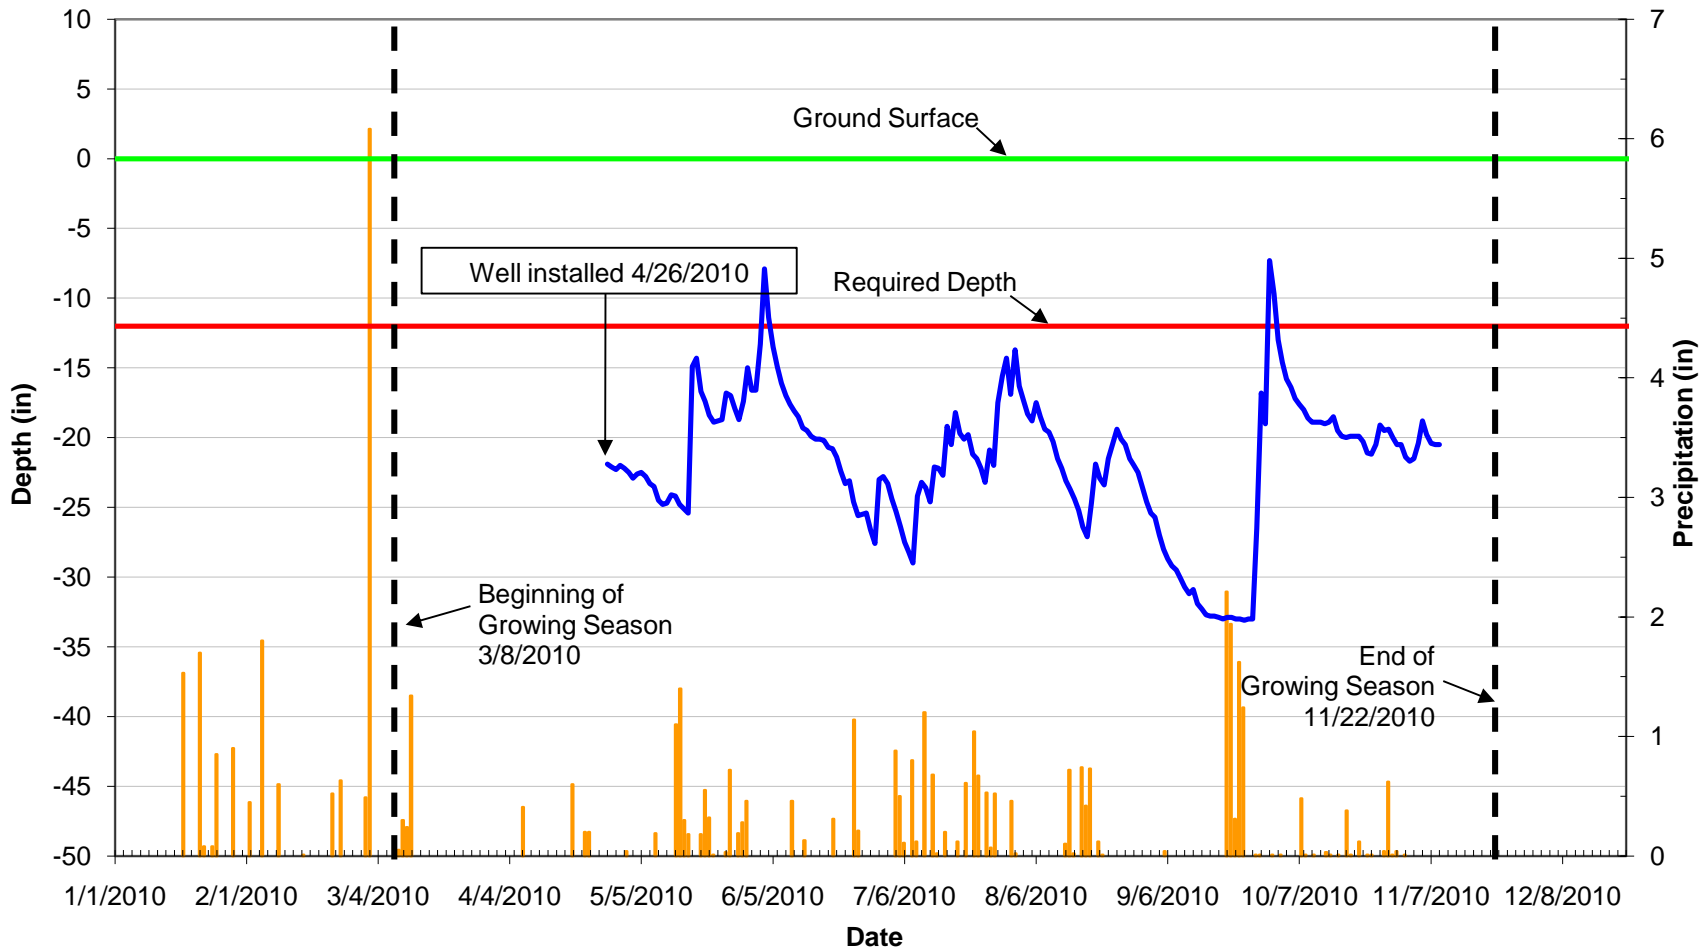


2010 Groundwater Data
Well UTJRC-7 (SN: 0000138BA53D)
Non-riparian wetland

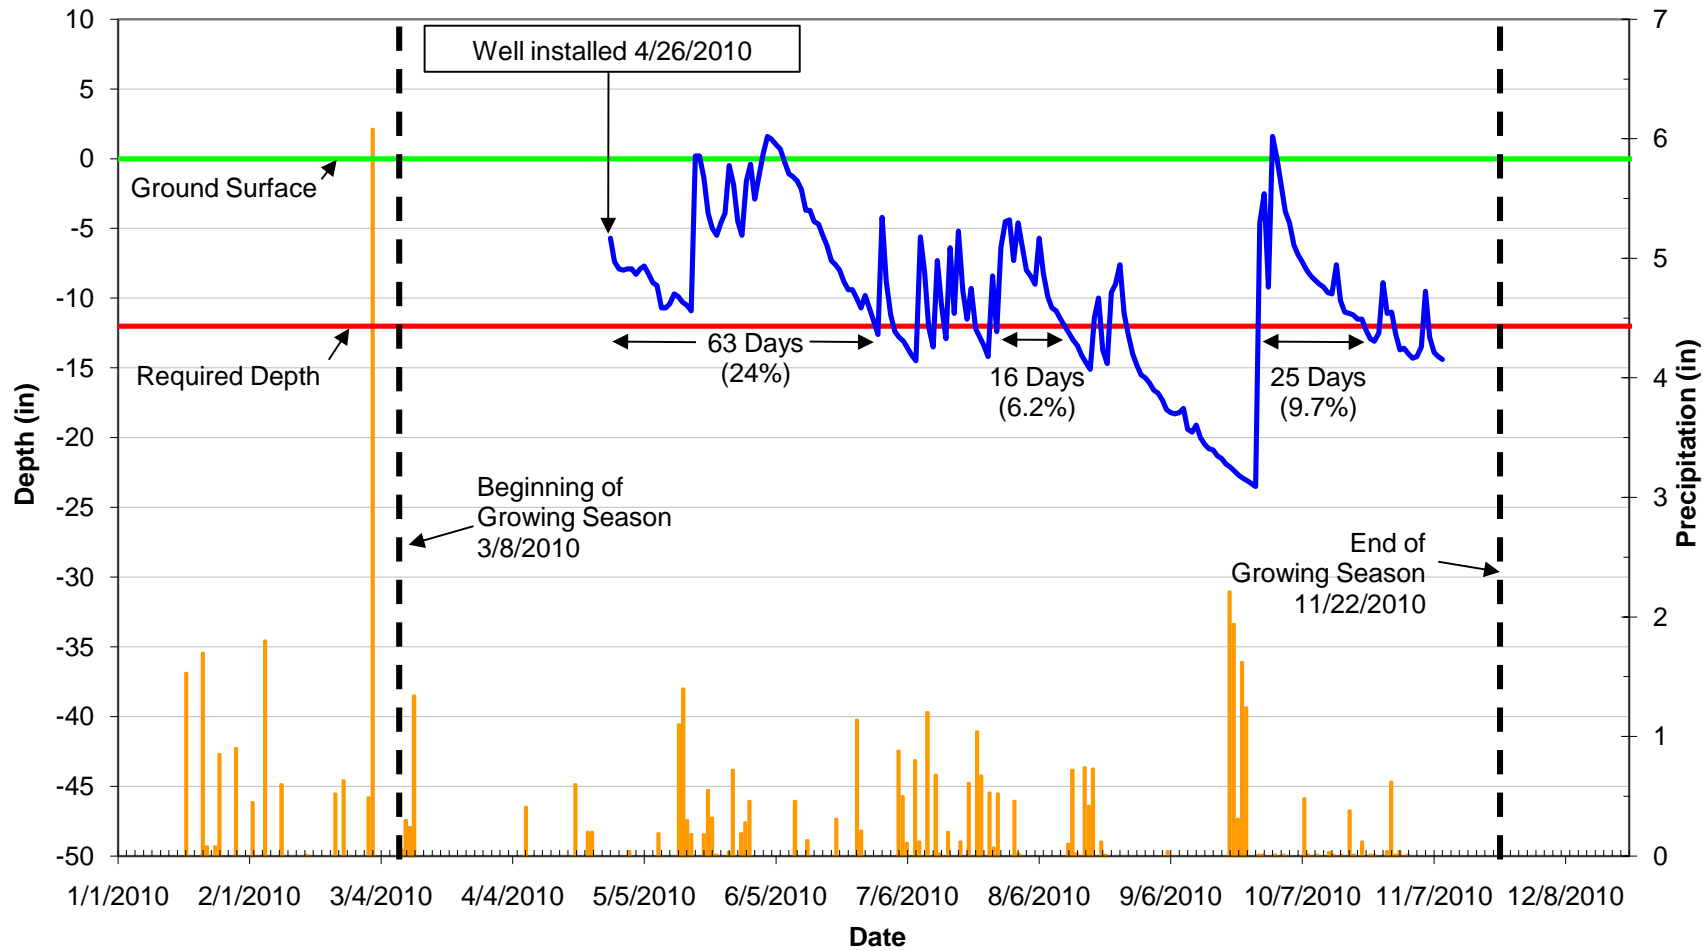


2010 Groundwater Data
Well UTJRC-8 (SN: 0000138B8501)
Riparian wetland

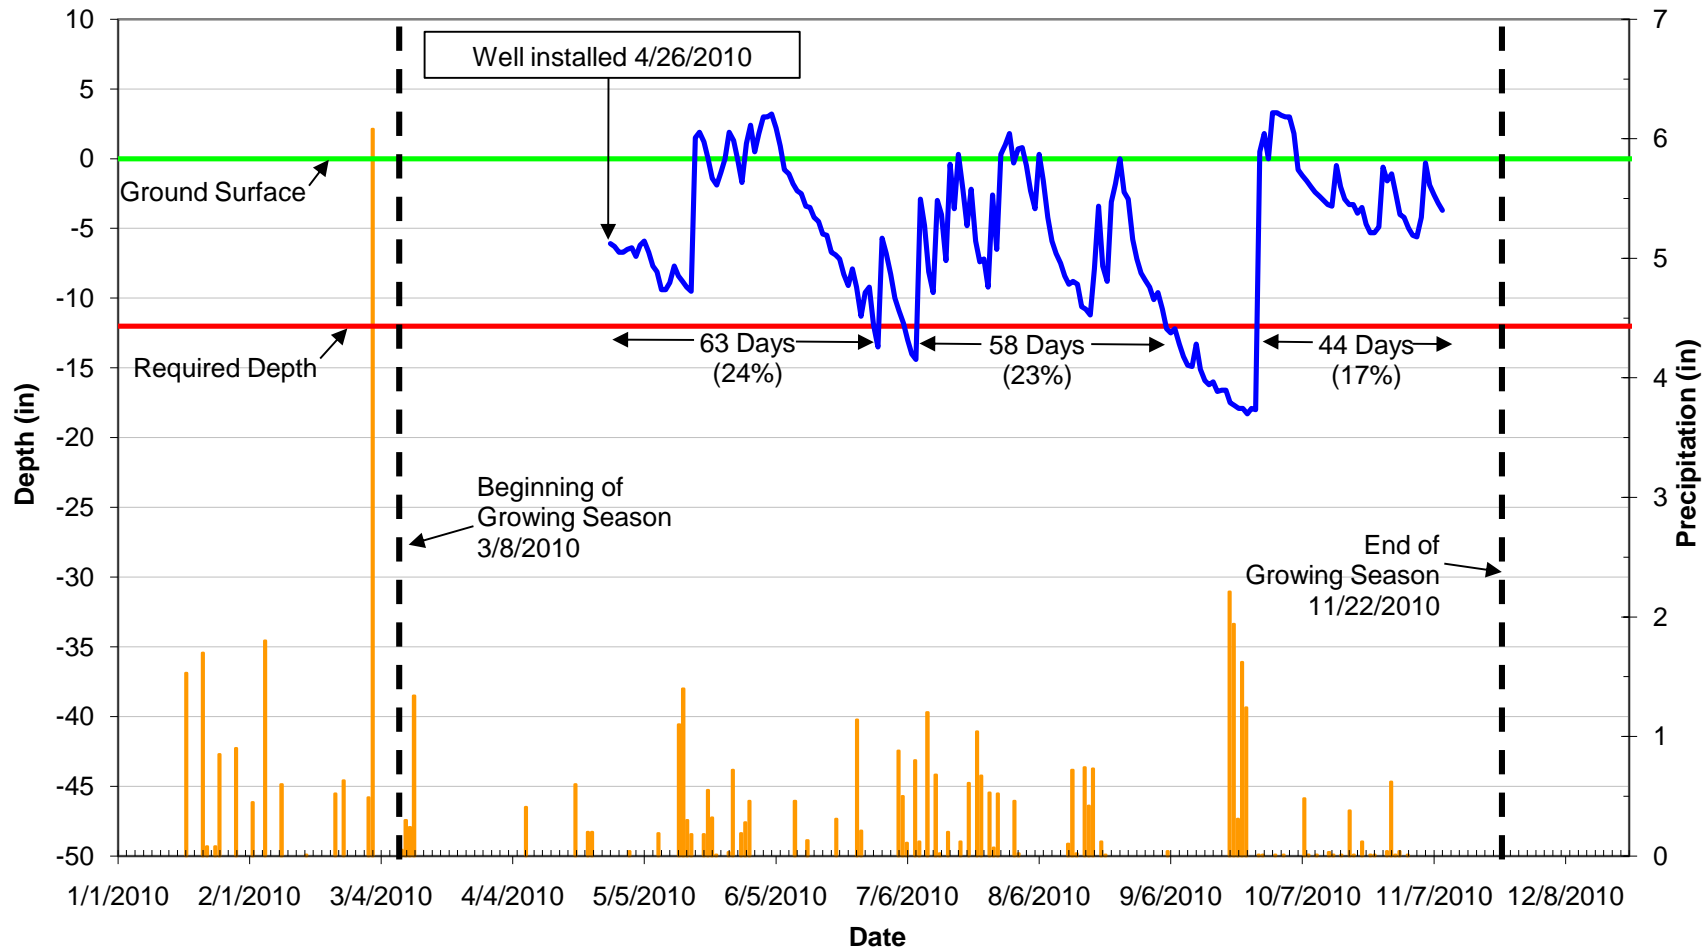


2010 Groundwater Data
Well UTJRC-9 (SN: 000009BEAC71)
Riparian wetland

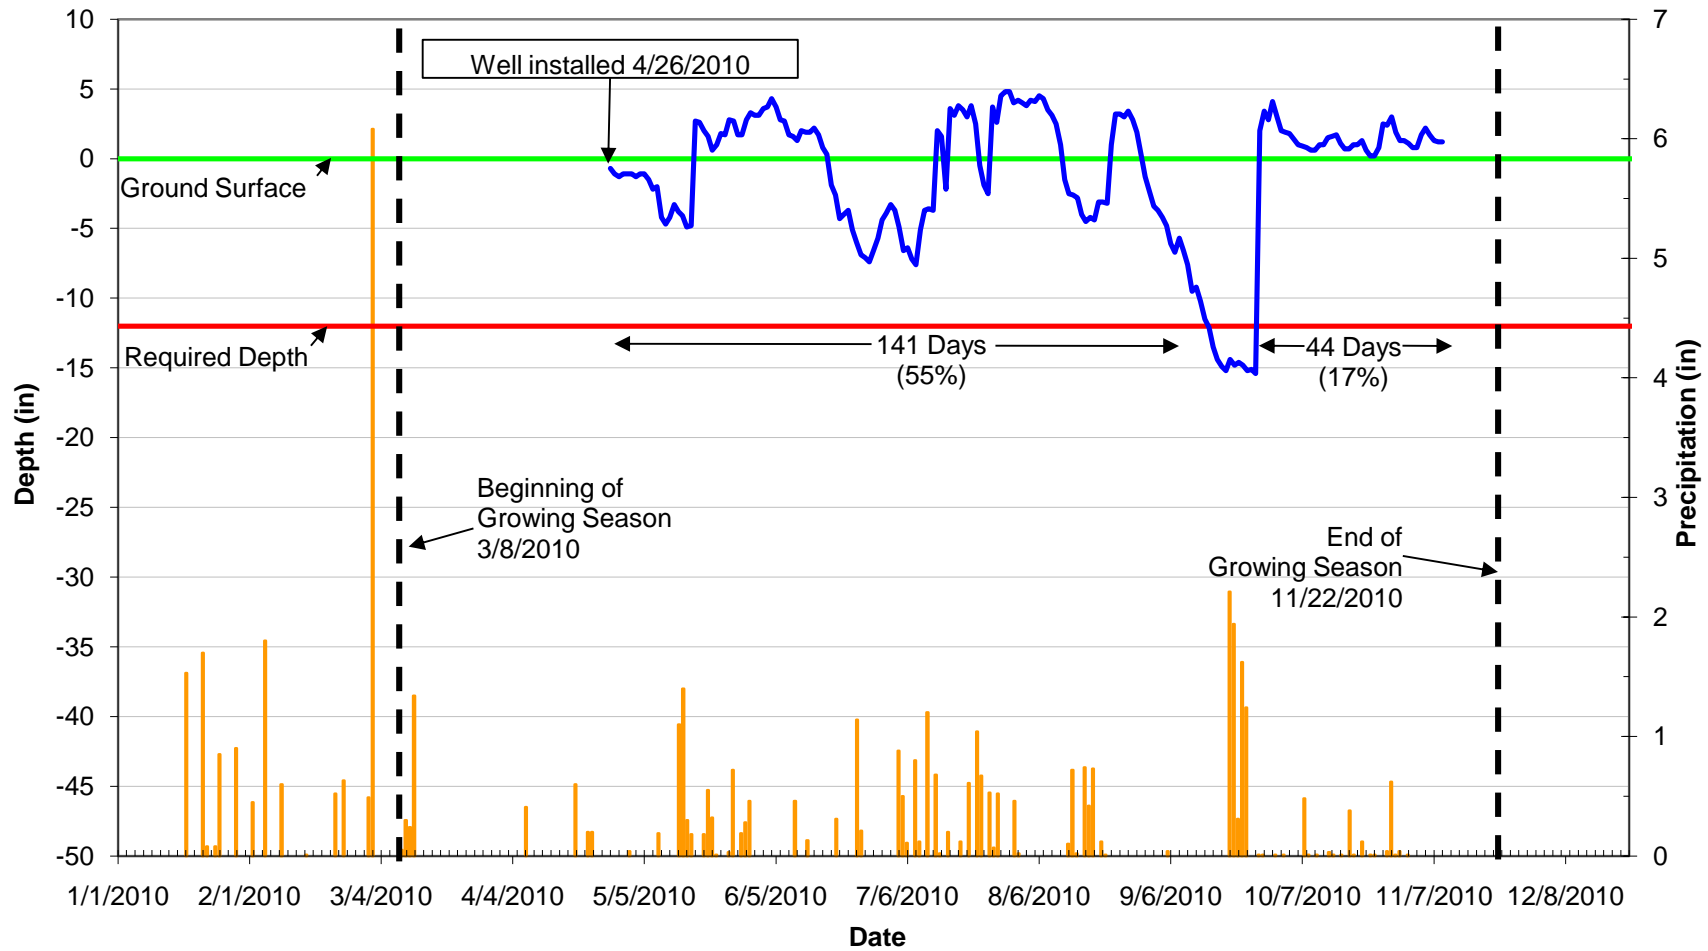


2010 Groundwater Data
Well UTJRC-10 (SN: 000009BEBDBF)
Non-riparian wetland

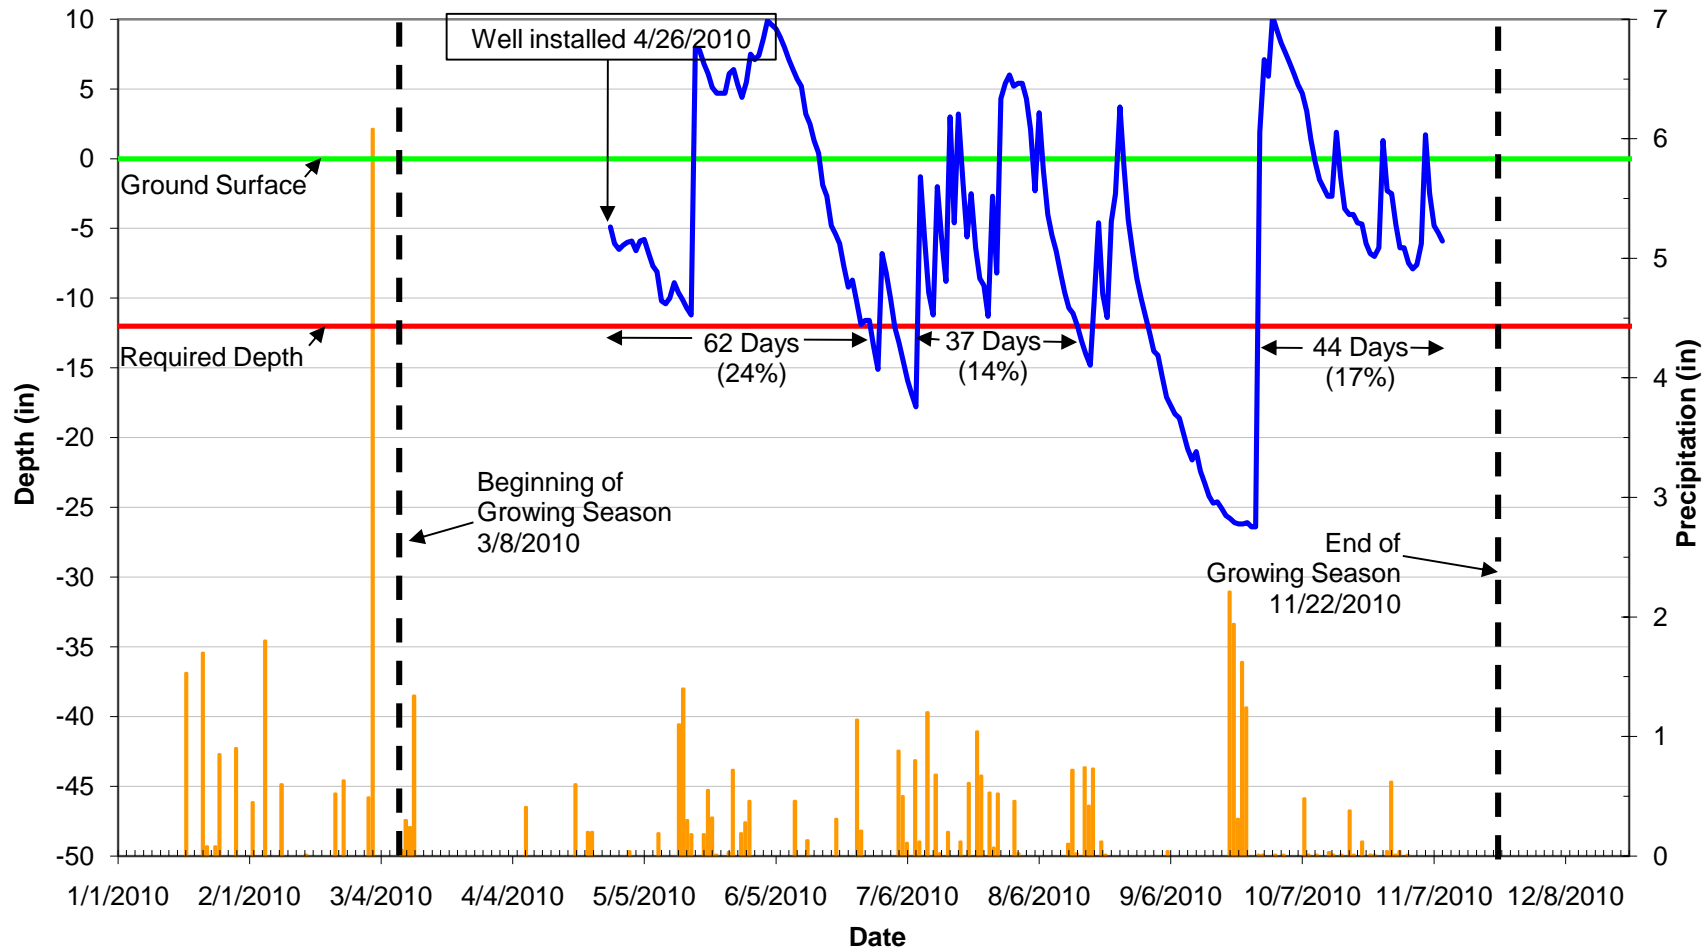


2010 Groundwater Data
Well UTJRC-11 (SN: 0000138BBAF4)
Riparian wetland

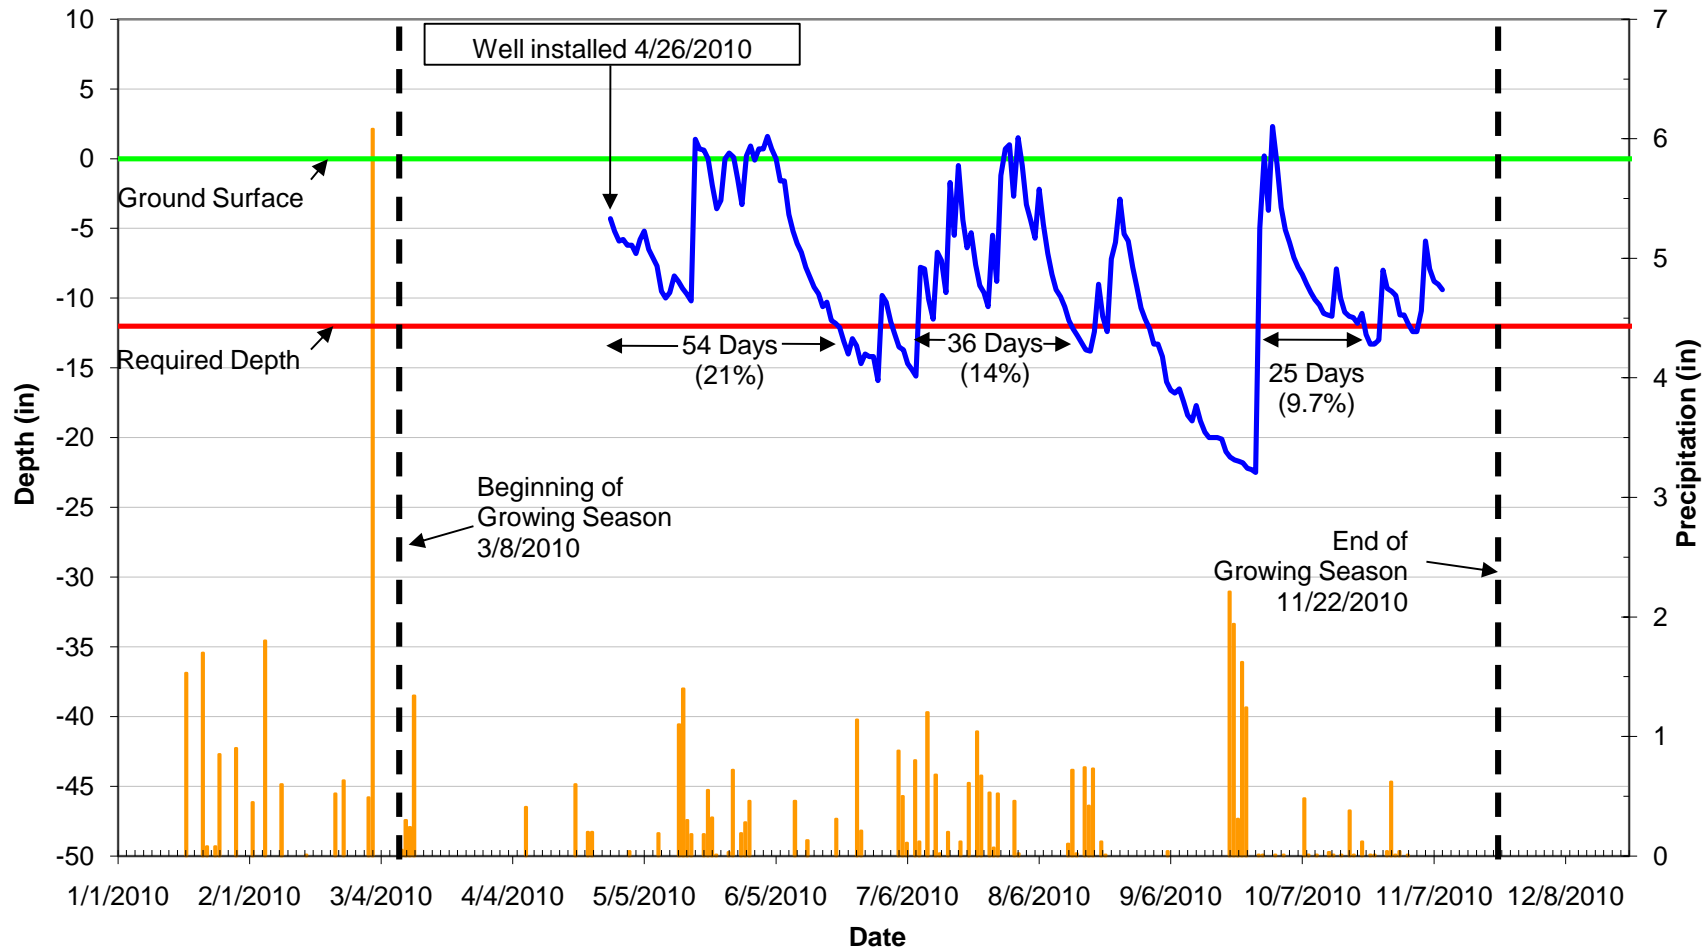


2010 Groundwater Data
Well UTJRC-12 (SN: 000011313B57)
Riparian wetland

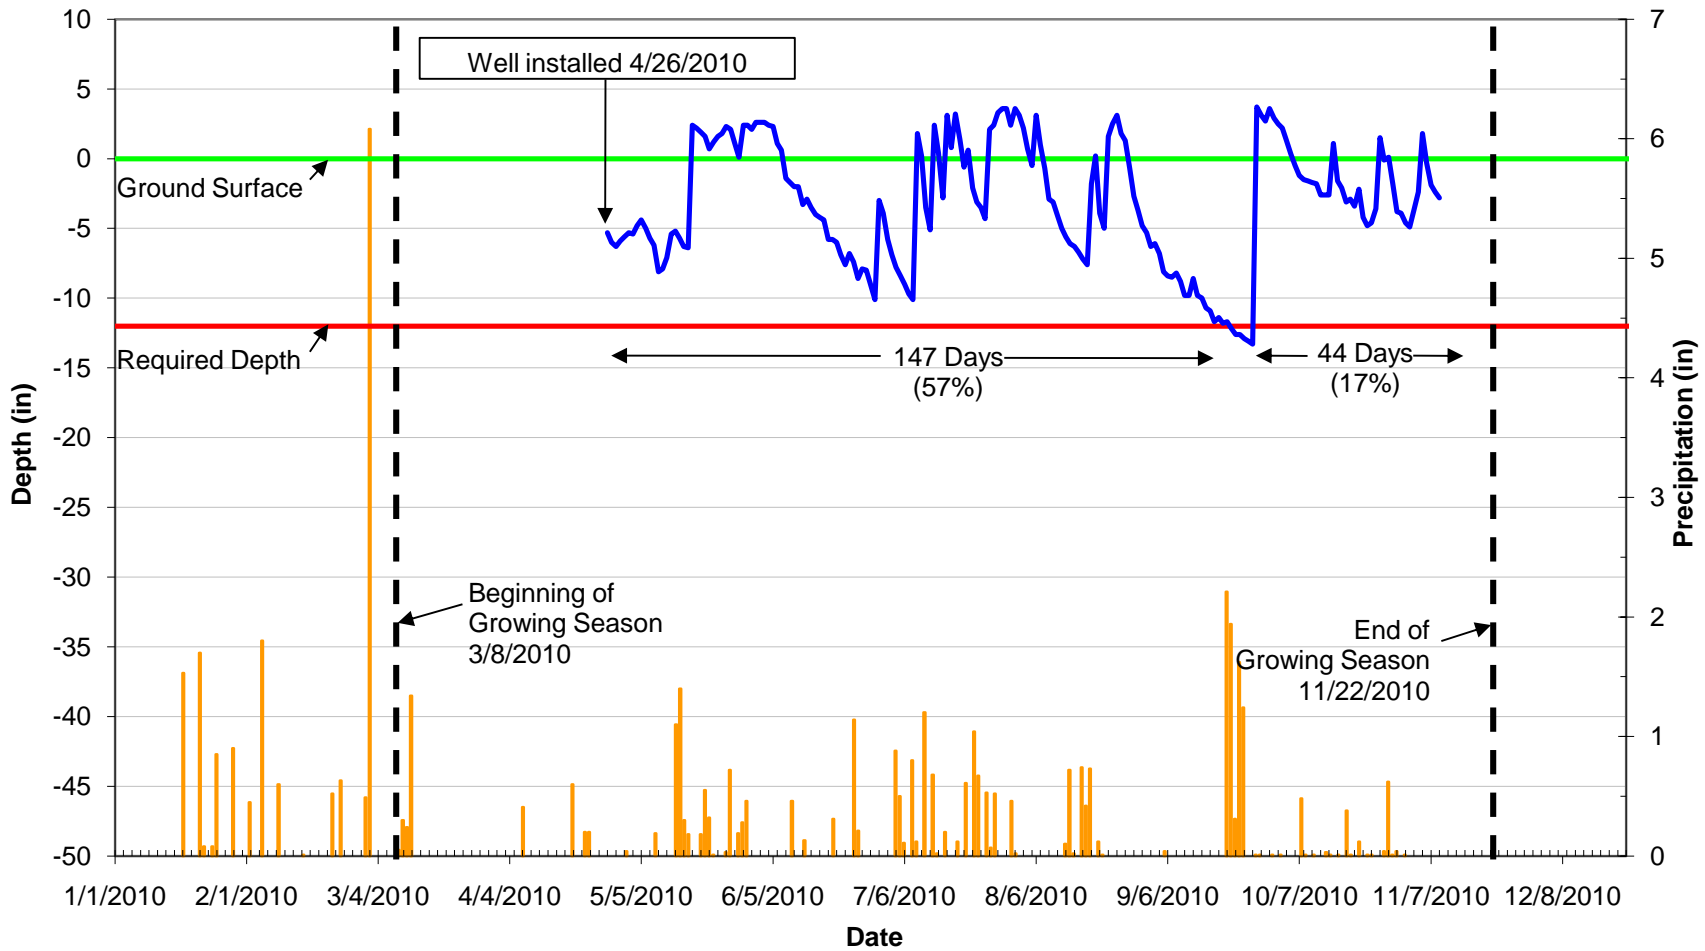


2010 Groundwater Data
Well UTJRC-13 (SN: 0000B651924)
Non-riparian wetland

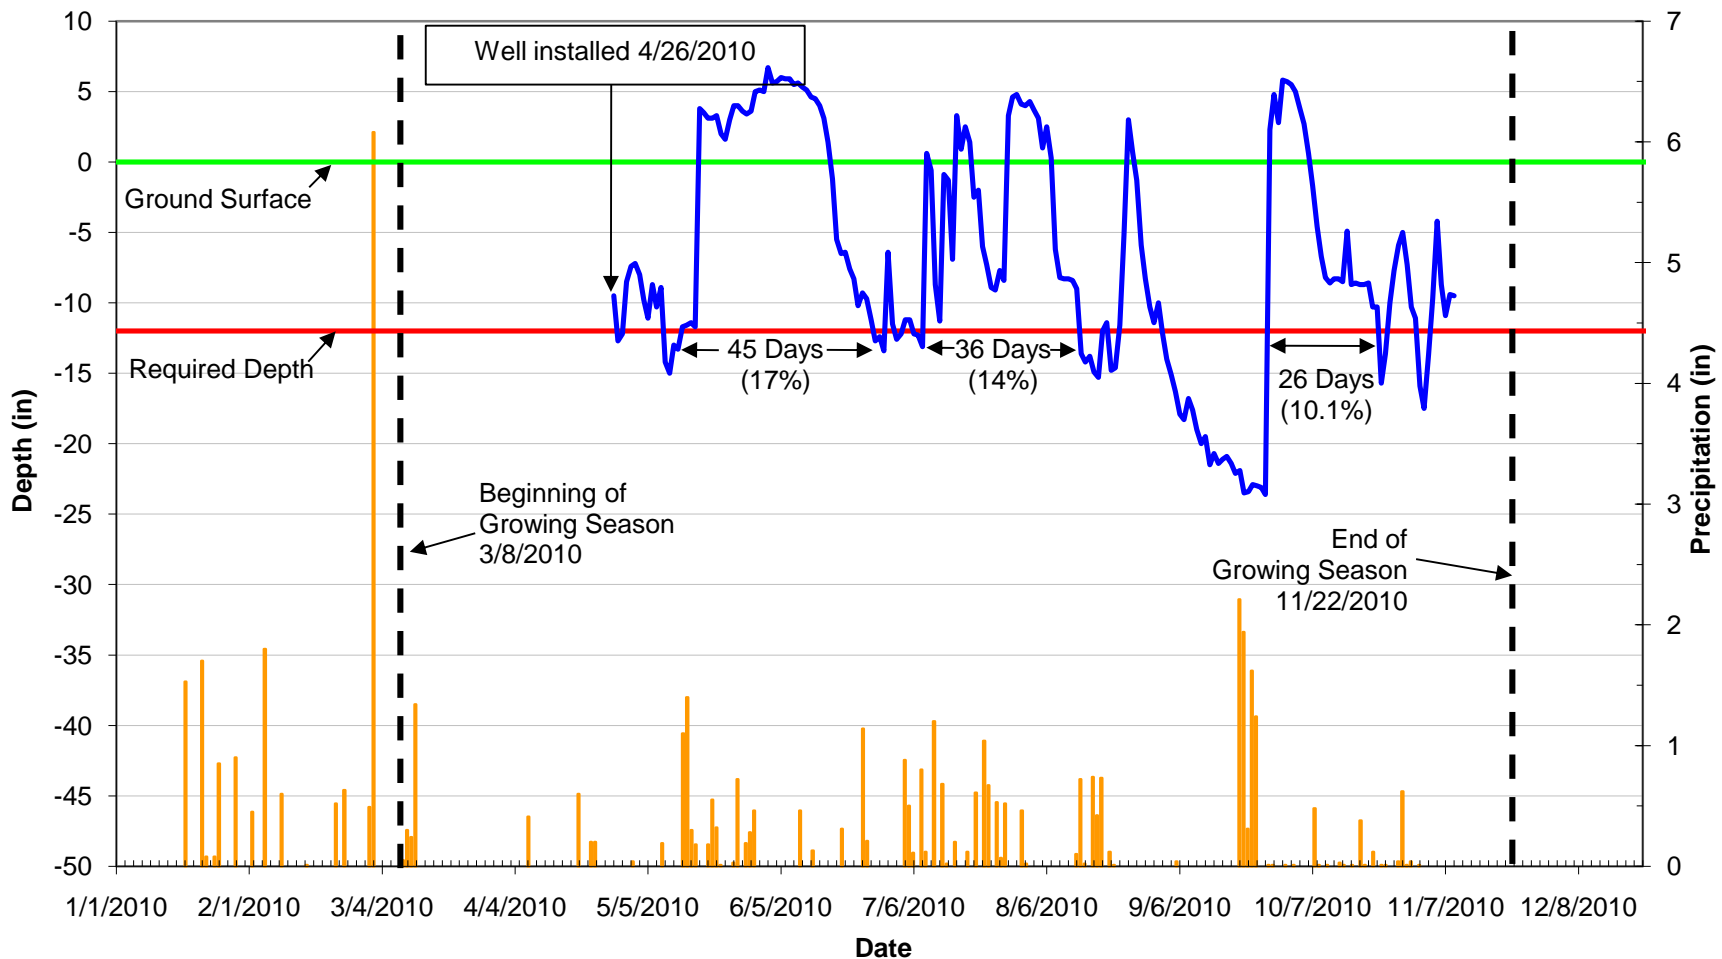


2010 Groundwater Data
Well UTJRC-14 (SN: 0000138BD91E)
Riparian wetland

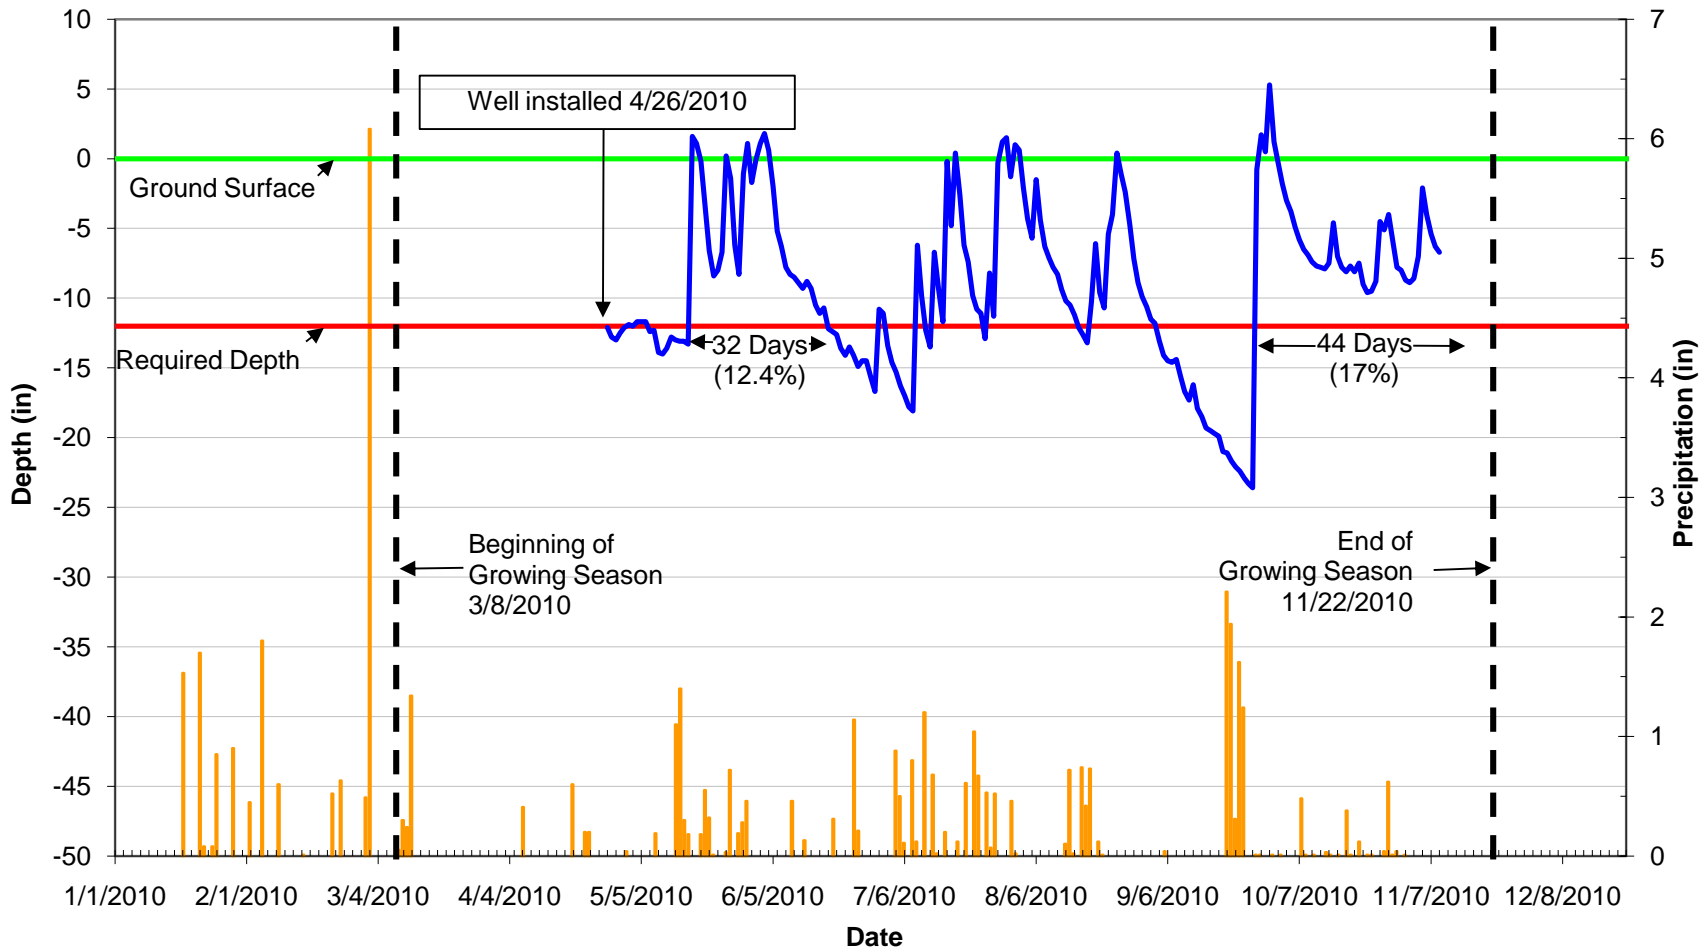

2010 Groundwater Data
Well UTJRC-15 (SN: 0000138BAA9D)
Riparian wetland

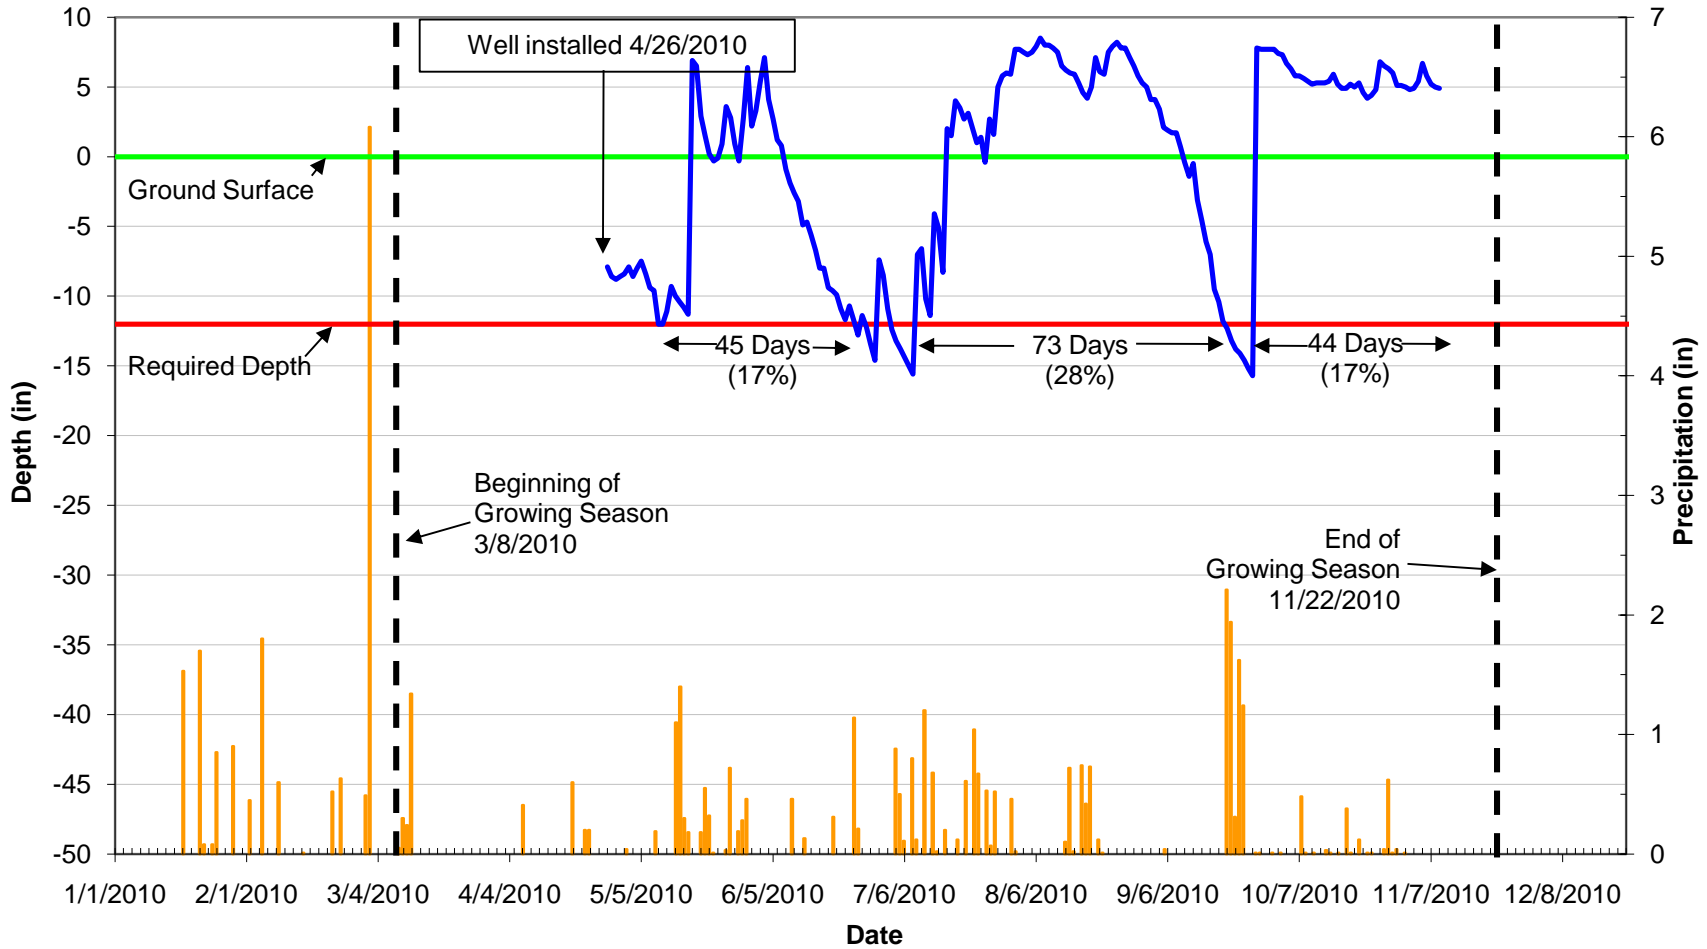

2010 Groundwater Data
Well JR-Ref (SN: 00000EBD962F)
Reference wetland

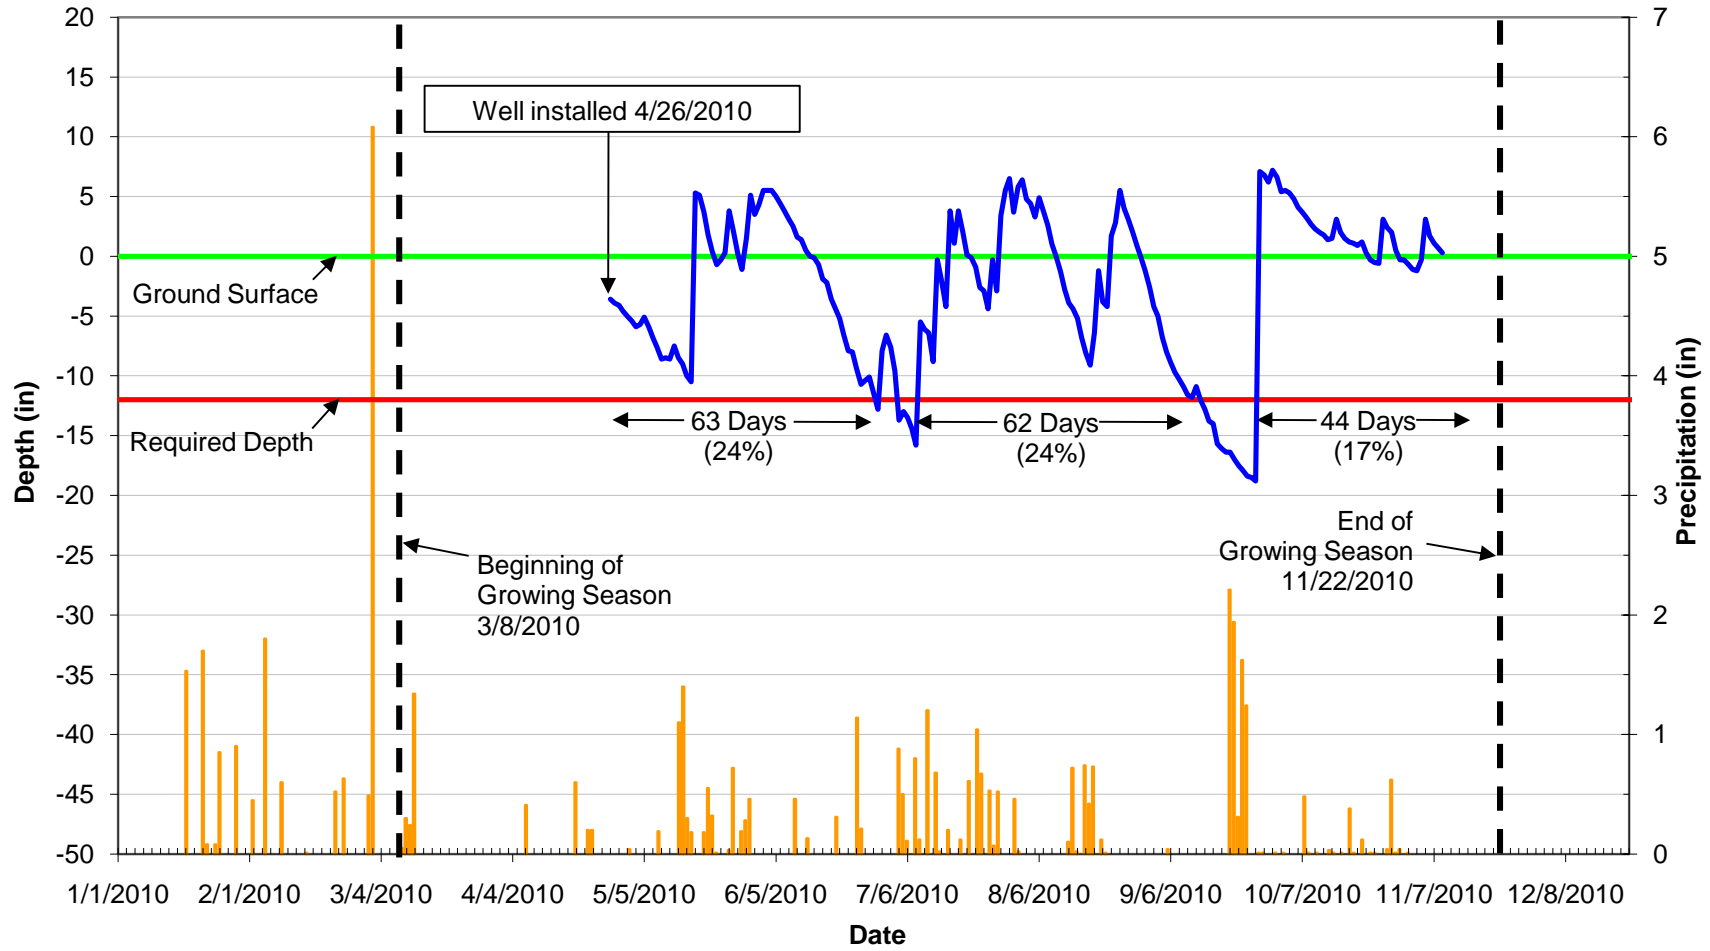

**Table 13. - Wetland gauge attainment data
 UT to Jumping Run Creek Restoration Project / EEP Project No. 92345 Summary of
 Groundwater Results for Years 1 - 5**

Wetland Type	Gauge	Success Criteria Achieved/Max Consecutive Days During Growing Season (Percentage)				
		Year 1 (2010)	Year 2 (2011)	Year 3 (2012)	Year 4 (2013)	Year 5 (2014)
Riparian	GW1	Yes/31 days (12 percent)				
Riparian	GW2	Yes/44 days (17 percent)				
Riparian	GW3	Yes/140 days (54 percent)				
Non-Riparian	GW4	No				
Riparian	GW5	Yes/63 days (24 percent)				
Riparian	GW6	No				
Non-Riparian	GW7	Yes/63 days (24 percent)				
Riparian	GW8	Yes/63 days (24 percent)				
Riparian	GW9	Yes/141 days (55 percent)				
Non-Riparian	GW10	Yes/62 days (24 percent)				
Riparian	GW11	Yes/54 days (21 percent)				
Riparian	GW12	Yes/147days (57 percent)				
Non-Riparian	GW13	Yes/45 days (17 percent)				
Riparian	GW14	Yes/44 days (17 percent)				
Riparian	GW15	Yes/73 days (28 percent)				
na	Reference	Yes/63 days (24 percent)				