

**FINAL**  
**YEAR 4 (2017) MONITORING REPORT**  
**UT TO MARTIN'S CREEK (CONTRERAS) MITIGATION PROJECT**  
Cherokee County, North Carolina  
DMS Project No. 92766 (Contract No. 005717)  
USACE Action ID No. 2010-00961/DWR Project No. 2010-00448  
SCO No. 08-07249-01

**Data Collection – March-November 2017**

Hiwassee River Basin  
Cataloging Unit 06020002170010



**SUBMITTED TO/PREPARED FOR:**

North Carolina Department of Environmental Quality  
Division of Mitigation Services  
217 West Jones Street, Suite 3000A  
Raleigh, North Carolina 27603

**December 2017**

**FINAL**  
**YEAR 4 (2017) MONITORING REPORT**  
**UT TO MARTIN'S CREEK (CONTRERAS) MITIGATION PROJECT**  
Cherokee County, North Carolina  
DMS Project No. 92766 (Contract No. 005717)  
USACE Action ID No. 2010-00961/DWR Project No. 2010-00448  
SCO No. 08-07249-01

**Data Collection – March-November 2017**

Hiwassee River Basin  
Cataloging Unit 06020002170010



**SUBMITTED TO/PREPARED FOR:**

North Carolina Department of Environmental Quality  
Division of Mitigation Services  
217 West Jones Street, Suite 3000A  
Raleigh, North Carolina 27603

**SUBMITTED BY:**



Axiom Environmental, Inc.

Axiom Environmental, Inc.  
218 Snow Avenue  
Raleigh, North Carolina 27603

**December 2017**



## ***Axiom Environmental, Inc.***

218 Snow Avenue, Raleigh, NC 27603 919-215-1693

December 5, 2017

Mr. Matthew Reid  
North Carolina Department of Environmental Quality  
Division of Mitigation Services  
5 Ravenscroft Drive, Suite 102  
Asheville, NC 28801

RE: UT to Martin's Creek (Contreras) Monitoring (DMS Project # 92633, Contract # 005717)  
Final MY4 (2017) Annual Monitoring Report

**12-004.16**

Dear Matthew:

Axiom Environmental, Inc. (AXE) is pleased to provide you with three hard copies and a CD of digital files for the Final UT to Martin's Creek (Contreras) Annual Monitoring Report. We received your comments via email on November 28, 2017 and have addressed them as follows:

**2.1 Streams:** The two areas of concern noted along UT-1 were identified during the MY3 report. Are the areas trending toward stability, unchanged or becoming worse? Please update the discussion with current site specific information. I would rather not say they are likely to fail if the structures have remained unchanged over the past monitoring year.

*The stream areas of concern discussion was revised to read as follows: "Two areas of concern were noted along UT-1 during Year 3 (2016), and both remained relatively unchanged during Year 4 (2017). One area consists of a section of log sills constructed within a riffle near station 25+00. The riffle bed material surrounding the log structures has scoured resulting in pools through this section of stream. This issue was first identified during Year 3 (2016), and it continues to appear unstable; however, it has not worsened significantly in the past year which may indicate more stability than originally assumed. An additional area of concern includes a log vane structure along the right bank of UT-1, just downstream from cross-section 7. The footer log of the structure has failed and become partially dislodged, and the downstream end of the log appears to move freely with the flow of the stream. However, it has continued to maintain grade along the upstream riffle, and it appears to be in a similar state as it was originally observed. Thus, the structure may be more stable than was reported during Year 3 (2016)."*

*It is our opinion that both structures could potentially fail given a significant (3+ inch) heavy rain event (which we have not had to date in 2017). However, the fact that the areas appear relatively unchanged this year when compared with 2016 may mean that they are more stable than we originally reported.*

**Cross Sections and Table 11:** The IRT has requested that Bank Height Ratios be calculated. Please calculate BHR for x-sections and update Table 11.

*The bank height ratio was recalculated for all cross-sections, and since no cross-sections have exhibited any stream bed elevation change during the monitoring period, all cross-sections have a bank height ratio of 1.0. This indicates minimal geomorphic change and good cross-sectional stability across the site.*



---

Please let me know if you have any questions or comments regarding any component of this submittal. Thank you for the opportunity to continue to assist the Division of Mitigation Services with this important project.

Sincerely,  
AXIOM ENVIRONMENTAL, INC.

A handwritten signature in blue ink, appearing to read 'Kenan Jernigan', is written over a light blue horizontal line.

Kenan Jernigan  
*Project Scientist*

Attachments: 3 hardcopies Final UT to Martin's Creek (Contreras) MY4 (2017) Annual Monitoring Report  
1 CD containing digital support files

## Table of Contents

1.0	PROJECT SUMMARY .....	1
2.0	METHODOLOGY .....	3
2.1	Streams .....	4
2.2	Vegetation .....	5
3.0	REFERENCES .....	6

## Appendices

### APPENDIX A. PROJECT BACKGROUND DATA AND MAPS

Figure 1. Vicinity Map

Table 1. Project Components and Mitigation Credits

Table 2. Project Activity and Reporting History

Table 3. Project Contacts Table

Table 4. Project Baseline Information and Attributes

### APPENDIX B. VISUAL ASSESSMENT DATA

Figure 2. Current Conditions Plan View

Tables 5A-5D. Visual Stream Morphology Stability Assessment

Table 6. Vegetation Condition Assessment

Stream Fixed-Station Photographs

Vegetation Monitoring Photographs

### APPENDIX C. VEGETATION PLOT DATA

Table 7. Vegetation Plot Criteria Attainment

Table 8. CVS Vegetation Plot Metadata

Table 9. Total and Planted Stems by Plot and Species

### APPENDIX D. STREAM SURVEY DATA

Cross-section Plots

Longitudinal Profile Plots

Substrate Plots

Table 10a-10f. Baseline Stream Data Summary

Table 11a-11f. Monitoring Data

### APPENDIX E. HYDROLOGY DATA

Table 12. Verification of Bankfull Events

## 1.0 PROJECT SUMMARY

The North Carolina Division of Mitigation Services (DMS) has established the UT to Martin's Creek (Contreras) Mitigation Project (Site) located in Cherokee County, just south of the town of Murphy. The Site is encompassed within 14-digit Cataloging Unit 06020002170010 of the Hiwassee River Basin (Figure 1, Appendix B and Table 4, Appendix A). Land use at the Site, prior to mitigation activities, was composed of agricultural uses, logging, grass land, single-family residences, and forested areas. Martin's Creek and its tributaries had been impaired by historical and current land management practices, which include timber harvesting, pasture, channelization, and livestock grazing. Completed project activities, reporting history, completion dates, project contacts, and project attributes are summarized in Tables 1-4 (Appendix A).

The Site is located on tributaries to Martin's Creek, which have been assigned Stream Index Number 1-49 and a Best Usage Classification of C. Site streams are listed on the NCDWQ draft 2014 and final 2012 Section 303(d) list of impaired streams due to a fair bioclassification for ecological/biological integrity and fish communities, and elevated levels of fecal coliform bacteria. The Site is located within a Targeted Local Watershed that has been identified for stream and buffer restoration opportunities (NCDMS 2008).

The Site lies within the focus area of the *Peachtree-Martins Creek Local Watershed Plan* (LWP). Goals of the LWP include working with local landowners, resource agencies, and nongovernmental groups to implement wetland and stream restoration projects that reduce sources of sediment and nutrients by restoring riparian buffers, stabilizing stream banks, and restoring natural channel geomorphology, particularly in headwater streams. The NCDMS is also placing an emphasis on projects that contribute to the restoration and protection of habitat for priority fish, mussel, snail, and crayfish species in the basin (NCDMS 2008).

The project goals will directly address stressors identified in the Peachtree-Martins Creek LWP, namely lack of riparian vegetation, channel modification, excess sediment inputs, excess nutrient inputs, and bacterial contamination as follows.

- Restore geomorphically stable stream channels within the Site;
- Restore or enhance wetlands;
- Exclude livestock from accessing project streams, wetlands, and riparian zones;
- Improve and restore hydrologic connections and achieve uplift of ecosystem functions;
- Improve water quality within the Site by reducing bank erosion, improving nutrient and sediment removal, and stabilizing stream banks;
- Restore and preserve headwater tributaries in the Peachtree-Martins Creek Watershed and the Hiwassee River; and
- Improve aquatic and terrestrial habitat by improving substrate and in-stream cover, adding woody debris, reducing water temperatures, and restoring riparian habitat.

In order to accomplish the goals of the project and contribute to the overall success of goals set forth for the greater Peachtree-Martin Creek local watershed planning area, a number of general project objectives and design objectives were identified for this project as follows.

### General Project Objectives

- Utilize natural channel design concepts to restore or enhance channel profile, pattern, and dimension to reduce bank and channel profile degradation and to allow greater floodplain connectivity to aid in the dissipation of bankfull flows.
- Reduce stream bank degradation and sediment and nutrient inputs by limiting livestock access of project tributaries to crossings agreed upon between the NCDMS and the landowner.
- Further reduce sediment and nutrient inputs and stream bank instability by restoring or enhancing native riparian vegetation along a 30-foot buffer along the project reach.
- Improve channel bedform function and diversity by installing toe wood structures and grade control structures that also function to improve riffle and scour pool habitat.

### Design Objectives

- Make important design decisions based on a geomorphic analyses of the Site, reference conditions, and hydraulic modeling.
- Consider field constraints and construction tolerances in order to produce a realistic design.
- Minimize disturbance to ecologically functional and physically stable areas and mimic the character of these areas to create a more natural design.
- Use native materials and minimize materials brought onsite to produce more favorable habitat for native flora and fauna, reduce compaction and onsite disturbance from material transport, and produce an aesthetically pleasing result.

The Site mitigation plan was completed in March 2010 with the final design and construction plans completed in November 2010 (Table 2, Appendix A). Project construction was completed between October 2012 and July 2013. The implemented mitigation is as follows (Figure 2, Appendix B and Table 1, Appendix A).

- 4952 Stream Mitigation Units
  - Restoring approximately 3330 linear feet of stream channel through construction of stable channel at the historic floodplain elevation.
  - Enhancing (level I) approximately 1319 linear feet of stream channel through cessation of current land use practices, installing grade control structures, repairing bank erosion, restoring proper channel dimension and profile, and planting with native forest vegetation.
  - Enhancing (level II) approximately 1953 linear feet of stream channel through cessation of current land use practices, removing invasive species, and planting with native forest vegetation.
- 0.15 Riparian Wetland Mitigation Units
  - Enhancing approximately 0.3 acres of riparian wetland by filling ditches/abandoned channels and supplemental planting.
- Planting a native woody riparian buffer (at least 30 feet in width) adjacent to restored/enhanced streams and wetlands within the Site.
- Protecting the Site in perpetuity with a conservation easement.

### Stream Success Criteria

Stream restoration success criteria for the Site are based on the *Stream Mitigation Guidelines* issued in April 2003 by the USACE and NCDWQ. Success criteria for stream restoration will include 1) documentation of two bankfull events, 2) little change in the channel cross-section from as-built conditions, 3) stable longitudinal profile, 4) substrate consistency, and 5) photographic evidence of stability.

### Bankfull Events

Two bankfull flow events in separate years must be documented within the 5-year monitoring period. Otherwise, stream monitoring will continue until two bankfull events have been documented in separate years.

### Cross-sections

Riffle cross-sections on the restoration and enhancement reaches should be stable and should show little change in bankfull area, maximum depth ratio, and width-to-depth ratio. Riffle cross-sections should generally fall within the parameters defined for channels of the appropriate Rosgen stream type. If any changes do occur, these changes will be evaluated to assess whether the stream channel is showing signs of instability. Indicators of instability include a vertically incising thalweg or eroding channel banks. Changes in the channel that indicate a movement toward stability or enhanced habitat include a decrease in the width-to-depth ratio in meandering channels or an increase in pool depth.

### Longitudinal Profile

Longitudinal profile data for the stream reach should show that bedform features are remaining stable. The riffles should be steeper and shallower than the pools, while the pools should be deep with flat water surface slopes. The relative percentage of riffles and pools should not change significantly from the design parameters.

### Bed Material Analysis

Substrate materials in the restoration reaches should indicate a progression towards or the maintenance of coarser materials in the riffle features and smaller particles in the pool features.

### Photo Reference Sites

Photographs will be used to evaluate channel aggradation or degradation, bank erosion, success of riparian vegetation, and effectiveness of erosion control measures subjectively. Lateral photos should not indicate excessive erosion or continuing degradation of the banks. A series of photos over time should indicate successive maturation of riparian vegetation.

### Vegetation Success Criteria

Success criteria have been established to verify that the vegetation component supports community elements necessary for forest development. Success criteria for this project includes an average density of 320 planted stems per acre must be surviving in the first three monitoring years. Subsequently, 290 planted stems per acre must be surviving in year 4, and 260 planted stems per acre in year 5.

Summary information/data related to the occurrence of items such as beaver or encroachment and statistics related to performance of various project and monitoring elements can be found in tables and figures within this report's appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly the Restoration Plan) documents available on the NC Division of Mitigation Services (NCDMS) website. All raw data supporting the tables and figures in the appendices are available from NCDMS upon request.

## **2.0 METHODOLOGY**

Monitoring of the Site's restoration efforts will be performed until agreed upon success criteria are fulfilled. Monitoring is proposed for the stream channel, riparian vegetation, and hydrology for a period of five years (Figure 2, Appendix B). Monitoring reports of collected data will be submitted no later than December of each monitoring year.



## 2.1 Streams

Post-restoration monitoring will be conducted for five years following the completion of construction to evaluate the effectiveness of the restoration practices. Measurements were taken using a Topcon GTS 303 total station and Recon data collector. The raw total station file was processed using Carlson Survey Software into a Computer Aided Design (CAD) file. Coordinates were exported as a text/ASCII file to Microsoft Excel for processing and presentation of data, and are not georeferenced. Pebble counts were completed using the modified Wolman method (Rosgen 1993). Monitored stream parameters include stream dimension (cross-sections), pattern (longitudinal survey), profile (profile survey), and photographic documentation. Baseline stream data can be found in Appendix D.

Two areas of concern were noted along UT-1 during Year 3 (2016), and both remained relatively unchanged during Year 4 (2017). One area consists of a section of log sills constructed within a riffle near station 25+00. The riffle bed material surrounding the log structures has scoured resulting in pools through this section of stream. This issue was first identified during Year 3 (2016), and it continues to appear unstable; however, it has not worsened significantly in the past year which may indicate more stability than originally assumed. An additional area of concern includes a log vane structure along the right bank of UT-1, just downstream from cross-section 7. The footer log of the structure has failed and become partially dislodged, and the downstream end of the log appears to move freely with the flow of the stream. However, it has continued to maintain grade along the upstream riffle, and it appears to be in a similar state as it was originally observed. Thus, the structure may be more stable than was reported during Year 3 (2016). These areas of concern will be closely monitored during the remainder of the monitoring period. Stream areas of concern are depicted on Figure 2 and quantified in Table 5A (Appendix B).

Due to the observation of several beaver dams during Year 3 (2016) monitoring, NCDMS contracted APHIS to monitor and eliminate beaver activity on the Site. In September 2016, all dams were removed and several beaver were trapped. APHIS will continue to monitor the Site and eliminate any beaver activity as necessary. No beaver activity was observed during Year 4 (2017) monitoring.

### Bankfull Events

The occurrence of bankfull events within the monitoring period will be documented by the use of a crest gauge and photographs. One crest gauge was installed to record the highest watermark between site visits, and the gauge will be checked each Site visit to determine if a bankfull event has occurred (Figure 2, Appendix B). Photographs will be used to document the occurrence of debris lines and sediment deposition on the floodplain during monitoring site visits.

One bankfull event was documented during monitoring year 4 (2017) for a total of 13 bankfull events during years 1 (2014) through 4 (2017).

### Cross-sections

A total of 14 permanent cross-sections, 10 riffle and 4 pool, were established and will be used to evaluate stream dimension; locations are depicted on Figure 2 (Appendix B). Because riffle cross-sections are critical in determining bankfull design parameters, the number of riffle cross-sections established will generally outnumber pool cross-sections. Each cross-section will be marked on both banks with permanent pins to establish the exact transect used. A common benchmark will be used for cross-sections and consistently used to facilitate easy comparison of year-to-year data. The annual cross-section survey will include points measured at all breaks in slope, including top of bank, bankfull, inner berm, edge of water, and thalweg, if the features are present. Riffle cross sections will be classified using the Rosgen Stream Classification System.

No indicators of instability were observed during year 4 (2017) monitoring; therefore, stream dimension measurements are currently meeting success criteria.

### Longitudinal Profile

After Site construction, approximately 4640 linear feet of longitudinal profile was completed to document baseline conditions. Longitudinal profile will be resurveyed annually for the duration of the five-year monitoring period. Measurements include thalweg, water surface, bankfull, and top of low bank. Each of these measurements will be taken at the head of each channel unit (e.g., riffle, pool) and at the maximum pool depth. The survey will be tied to a permanent benchmark.

Minimal indicators of bedform instability were observed during year 4 (2017) monitoring; therefore, stream longitudinal profile measurements are currently meeting success criteria.

### Bed Material Analysis

Pebble counts will be conducted annually on one permanent riffle cross-section (100-counts) at the time cross-section and longitudinal surveys are performed during the five year monitoring period. These samples will reveal changes in sediment gradation over time as the stream adjusts to upstream sediment loads.

Year 4 (2017) pebble counts indicate the maintenance of coarser materials in the measured riffle feature; therefore, bed material is currently meeting success criteria.

### Photo Reference Sites

A total of 24 photographs will be used to visually document restoration success for at least five years following construction. Photographs will be taken from a height of approximately five to six feet. Photo locations will be recorded using sub-meter GPS to ensure that the same locations (and view directions) on the Site are monitored in each monitoring period.

Year 4 (2017) photo reference sites show no channel aggradation or degradation, or bank erosion. In addition, riparian vegetation is meeting success criteria based on stem counts across the Site; however, it is too early in the monitoring period to show successive maturation of riparian vegetation.

## **2.2 Vegetation**

After planting was completed, an initial evaluation was performed to verify planting methods were successful and to determine initial species composition and density. Eleven sample vegetation plots (10-meter by 10-meter) were installed and measured within the Site as per guidelines established in *CVS-DMS Protocol for Recording Vegetation, Version 4.2* (Lee et al. 2008). Vegetation plots are permanently monumented with 6-foot metal t-posts at each corner. In each sample plot, vegetation parameters to be monitored include species composition and species density. Visual observations of the percent cover of shrub and herbaceous species will also be documented by photograph. Vegetation plot information can be found in Appendix C.

Year 4 (2017) stem count measurements indicate an average of 379 planted stems per acre (excluding livestakes) across the Site; therefore, the Site is currently meeting vegetation success criteria. Nine of the eleven individual vegetation plots met success criteria based on planted stems alone; Plot 4 was one stem shy of success criteria.

Stems from the 2015 supplemental planting remain vigorous during year 4 (2017). Two particularly dense patches of multiflora rose (*Rosa multiflora*) were observed along the right bank of UT1-3 during Year 3 (2016) monitoring, and those remained during Year 4 (2017). The populations cover approximately 0.19 acres and are depicted on Figure 2 (Appendix B). Additional populations of sparse multiflora rose scattered along UT1-1 were observed during year 4 (2017), although these specific populations were below mapping thresholds.

### 3.0 REFERENCES

- Lee, M.T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2008. CVS-DMS Protocol for Recording Vegetation. Version 4.2. North Carolina Department of Environmental Quality, Division of Mitigation Services. Raleigh, North Carolina.
- North Carolina Division of Water Quality (NCDWQ). 2012. Final North Carolina Water Quality Assessment and Impaired Waters List (NC 2012 Integrated Report Category 5, 303(d) List) (online). Available: [http://portal.ncdenr.org/c/document\\_library/get\\_file?uuid=9d45b3b4-d066-4619-82e6-ea8ea0e01930&groupId=38364](http://portal.ncdenr.org/c/document_library/get_file?uuid=9d45b3b4-d066-4619-82e6-ea8ea0e01930&groupId=38364) [February 17, 2014]. North Carolina Department of Environmental Quality, Raleigh, North Carolina.
- North Carolina Division of Water Quality (NCDWQ). 2014. Draft 2014 NC 303(d) List-Category 5 Assessments Requiring TMDLs (online). Available: [http://portal.ncdenr.org/c/document\\_library/get\\_file?uuid=096fb2ff-296b-4bd8-8b88-e83bb5984be6&groupId=38364](http://portal.ncdenr.org/c/document_library/get_file?uuid=096fb2ff-296b-4bd8-8b88-e83bb5984be6&groupId=38364) [February 17, 2014]. North Carolina Department of Environmental Quality, Raleigh, North Carolina.
- North Carolina Division of Mitigation Services and Equinox Environmental Consultation and Design (NCDMS). 2007. Peachtree-Martins Creek Local Watershed Plan (Phase3), Hiwassee River Basin, Cherokee and Clay Counties, North Carolina. October 2007 Watershed Management Plan. [Online WWW]. Available URL: [http://www.hrwc.net/pmcplan/pmc\\_plan\\_executive\\_summary.pdf](http://www.hrwc.net/pmcplan/pmc_plan_executive_summary.pdf).
- North Carolina Division of Mitigation Services (NCDMS). 2014. Annual Monitoring and Closeout Reporting Format, Data Requirements, and Content Guidance, dated February 2014. NC Department of Environmental Quality. Available online at [http://portal.ncdenr.org/c/document\\_library/get\\_file?p\\_l\\_id=60409&folderId=18877169&name=D\\_LFE-86604.pdf](http://portal.ncdenr.org/c/document_library/get_file?p_l_id=60409&folderId=18877169&name=D_LFE-86604.pdf)
- North Carolina Division of Mitigation Services (NCDMS). 2010. UT to Martin's Creek (Contreras) Mitigation Plan. NC Department of Environmental Quality. Available online at <http://its.enr.state.nc.us/WebLink8/0/doc/135204/Page3.aspx>
- North Carolina Division of Mitigation Services (NCDMS). 2008. Hiwassee River Basin Restoration Priorities 2008 (online). Available: [http://portal.ncdenr.org/c/document\\_library/get\\_file?uuid=ea2df99d-3031-4c7b-87ea-79d56a3e4a1e&groupId=60329](http://portal.ncdenr.org/c/document_library/get_file?uuid=ea2df99d-3031-4c7b-87ea-79d56a3e4a1e&groupId=60329). North Carolina Department of Environmental Quality, Raleigh, North Carolina.
- Rosgen. 1993. Applied Fluvial Geomorphology, Training Manual. River Short Course, Wildland Hydrology, Pagosa Springs, CO.
- United States Army Corps of Engineers, United States Environmental Protection Agency, North Carolina Wildlife Resources Commission, North Carolina Division of Water Quality (USACE et al.). 2003. Stream Mitigation Guidelines.
- United States Geological Survey (USGS). 1974. Hydrologic Unit Map - 1974. State of North Carolina.
- Weakley, Alan S. 2012. Flora of the Southern and Mid-Atlantic States. Available online at: <http://www.herbarium.unc.edu/WeakleysFlora.pdf> [September 28, 2012]. University of North Carolina Herbarium, North Carolina Botanical Garden, University of North Carolina, Chapel Hill, North Carolina.

## APPENDIX A

### PROJECT BACKGROUND DATA AND MAPS


Figure 1. Vicinity Map

Table 1. Project Components and Mitigation Credits

Table 2. Project Activity and Reporting History

Table 3. Project Contacts Table


Table 4. Project Baseline Information and Attributes

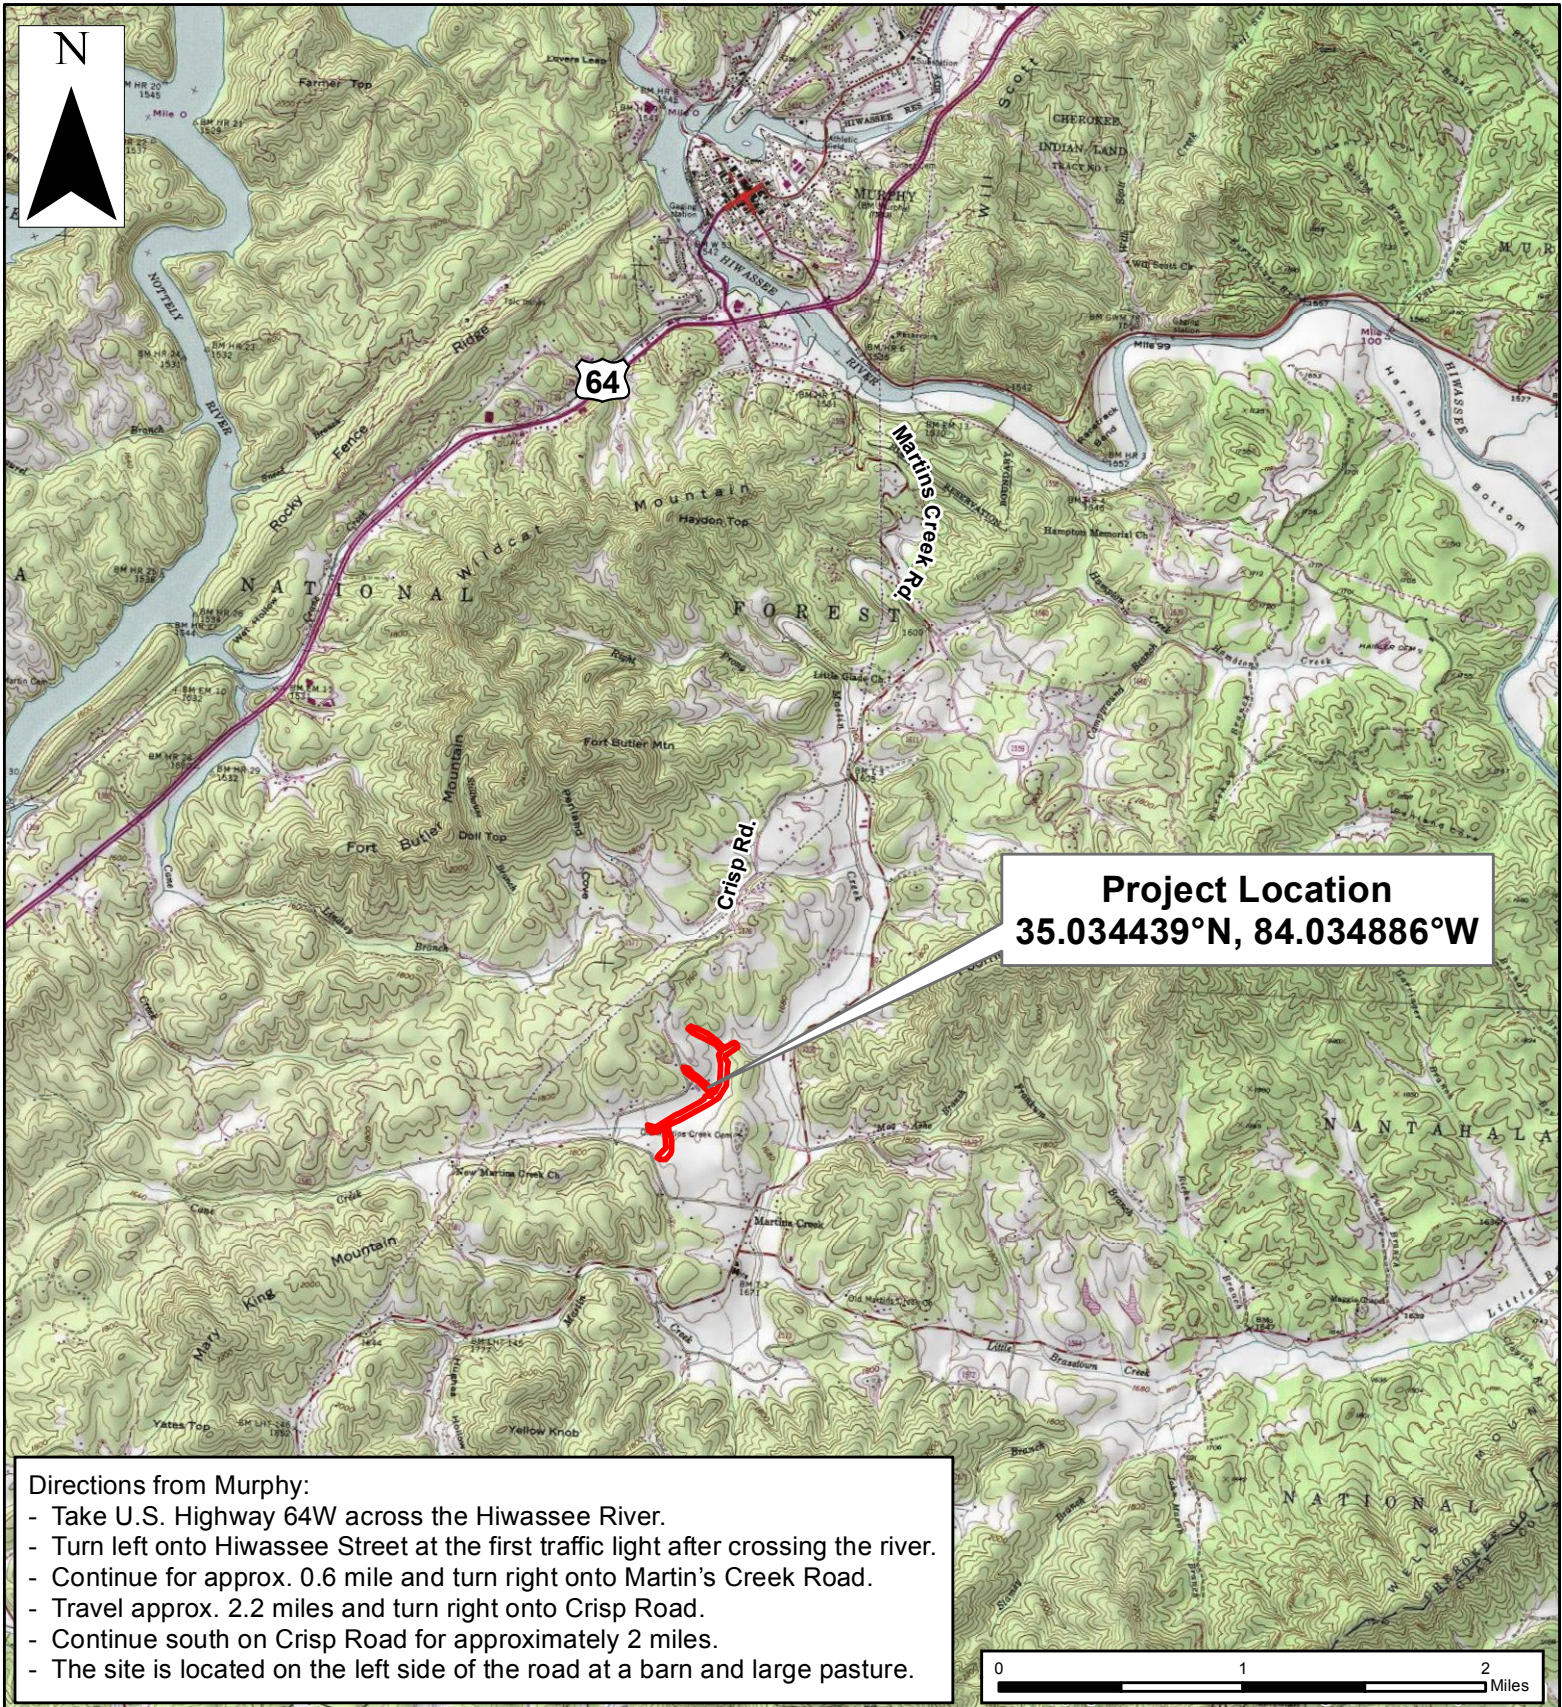


**Project Location**  
**35.034439°N, 84.034886°W**

**Directions from Murphy:**

- Take U.S. Highway 64W across the Hiwassee River.
- Turn left onto Hiwassee Street at the first traffic light after crossing the river.
- Continue for approx. 0.6 mile and turn right onto Martin's Creek Road.
- Travel approx. 2.2 miles and turn right onto Crisp Road.
- Continue south on Crisp Road for approximately 2 miles.
- The site is located on the left side of the road at a barn and large pasture.



Prepared by:  Axiom Environmental, Inc.	Prepared for: NC Department of Environmental Quality  Division of Mitigation Services
---	--

**VICINITY MAP**  
**UT TO MARTINS CREEK (CONTRERAS)**  
**DMS PROJECT NUMBER 92766**  
**Cherokee County, North Carolina**

Dwn. by: KRJ	<b>FIGURE</b>  <b>1</b>
Date: Nov. 2015	
Project: 12.004.16	

**Table 1. Project Components and Mitigation Credits  
UT to Martin's Creek (Contreras) Mitigation Site**

Mitigation Credit Summations							
Stream		Riparian Wetland			Nonriparian Wetland		
4952		0.15			--		
Project Components							
Station Range	Existing Linear Footage/Acreage	Priority Approach	Restoration/Restoration Equivalent	Restoration Linear Footage/Acreage	Mitigation Ratio	Mitigation Credits	Comment
UT1-1 Station 00+00 to 06+02	602	---	Enhance I	602-54=548	1.5:1	365.3	Forced Crossing (54 linear feet) removed from credit
UT1-1	346	---	Enhance II	346	2.5:1	138.4	
UT1-1-1	106	---	Enhance II	106	2.5:1	42.4	
UT1-2 Station 00+00 to 02+07	141	PI	Restoration	207	1:1	207	
UT1-3 Station 00+00 to 08+33	767	---	Enhance I	767-62=705	1.5:1	470	Stream under power line easement (66 linear feet) will generate half credit and piped stream crossing (62 linear feet) removed from credit.
	66			66	3:1*	22.0	
UT1-4	1099	---	Enhance II	1014-53=961	2.5:1	384.4	Stream under two power line easements (40 and 45 linear feet) will generate half credit and forced crossing (53 linear feet) removed from credit.
	40			40	5:1**	8	
	45			45	5:1**	9	
UT 1 to Martin's Creek	455	---	Enhance II	455	2.5:1	182	
UT1 to Martin's Creek Station 00+00 to 32+74	2674	PI	Restoration	3274-53-47-51 =3123	1:1	3123	Three crossings (53, 47, and 51 linear feet) removed from credit.
Wetland Enhancement	0.3	---	Enhancement	0.3	2:1	0.15	Enhancement of existing riparian wetlands characterized by removal of invasive species and supplemental planting.
Component Summation							
Restoration Level	Stream (linear footage)	Riparian Wetland (acreage)			Nonriparian Wetland (acreage)		
Restoration	3330	--			--		
Enhancement (Level I)	1319	--			--		
Enhancement (Level II)	1953	--			--		
Enhancement	--	0.3			--		
<b>Totals</b>	<b>6602</b>	<b>0.3</b>			<b>--</b>		
<b>Mitigation Units</b>	<b>4952 SMUs</b>	<b>0.15 Riparian WMUs</b>			<b>0.00 Nonriparian WMUs</b>		

\*66 linear feet of stream under the power line easement is receiving a mitigation ratio of 3:1 (half credit for enhancement [level I]).

\*\*85 linear feet of stream under two power line easements is receiving a mitigation ratio of 5:1 (half credit for enhancement [level II]).

**Table 2. Project Activity and Reporting History  
UT to Martin's Creek (Contreras) Mitigation Site**

<b>Activity or Deliverable</b>	<b>Data Collection Complete</b>	<b>Completion or Delivery</b>
Mitigation Plan	September 2009- March 2010	March 2010
Final Design – Construction Plans	March 2010- November 2010	November 2010
Construction	--	October 2012-July 2013
Temporary S&E Mix applied to Entire Project Site	--	October 2012-July 2013
Permanent Seed Mix applied to the Entire Project Site	--	October 2012-July 2013
Bare Root; Containerized; and B&B Plantings for the Entire Project Site	--	March 2014
Mitigation Plan/ As-Built (Year 0 Monitoring Baseline)	April 2014	April 2014
Invasive Species Treatment	--	July 2014
Year 1 Monitoring	October 2014	November 2014
Warranty Supplemental Planting	--	March 2015
Invasive Species Treatment	--	July 2015
Beaver/Dam Removal	--	September 2015
Year 2 Monitoring	November 2015	December 2015
Beaver/Dam Removal	--	September 2016
Year 3 Monitoring	November 2016	December 2016
Year 4 Monitoring	November 2017	December 2017
Year 5 Monitoring	--	--

**Table 3. Project Contacts Table  
Martin's Creek II Mitigation Site**

<b>Designer</b>	Michael Baker Engineering, Inc. 797 Haywood Road, Suite 201 Asheville, NC 28806 Micky Clemmons 828-350-1408
<b>Construction Plans and Sediment and Erosion Control Plans</b>	Michael Baker Engineering, Inc. 797 Haywood Road, Suite 201 Asheville, NC 28806 Micky Clemmons 828-350-1408
<b>Construction Contractor</b>	River Works, Inc. 6105 Chapel Hill Rd. Raleigh, NC 27607 919-582-3574
<b>Planting Contractor</b>	Carolina Silvics, Inc. 908 Indian Trail Road Edenton, NC 27932 (252) 482-8491
<b>As-built Surveyor</b>	Turner Land Surveying, PLLC 3201 Glenridge Drive Raleigh, NC 27604 919-875-1378
<b>Baseline Data Collection</b>	Axiom Environmental, Inc. 218 Snow Avenue Raleigh, NC 27603 Grant Lewis 919-215-1693



**Table 4. Project Attribute Table  
UT to Martin's Creek (Contreras) Mitigation Site**

Project County	Cherokee County, North Carolina									
Physiographic Region	Blue Ridge									
Ecoregion	Broad Basins									
Project River Basin	Hiwassee									
USGS HUC for Project (14 digit)	06020002170010									
NCDWQ Sub-basin for Project	04-05-02									
Planning Area	Yes – Peachtree-Martins Creek LWP									
WRC Class (Warm, Cool, Cold)	Cold									
% of easement fenced/demarcated	100% fenced to exclude livestock									
Beaver activity observed during design phase?	Yes, on UT1 below lower limits of project area									
	<b>Restoration Component Attribute Table</b>									
	UT 1-1		UT 1-1-1	UT 1-2	UT 1-3		UT 1-4		UT1 to Martin Cr	
Drainage Area	.018	.028	.004	.005	.074	.082	.023		.79	.82
Stream Order (USGS topo)	1 <sup>st</sup>	2 <sup>nd</sup>	1 <sup>st</sup>	1 <sup>st</sup>	1 <sup>st</sup>	1 <sup>st</sup>	2 <sup>nd</sup>		3 <sup>rd</sup>	3 <sup>rd</sup>
Restored Length (feet)	346	548	106	207	----	738	----	1099	3123	----
Perennial or Intermittent	I	P	I	I	I	P	I	P	P	P
Watershed Type	Rural									
Watershed impervious cover	<10%									
NCDWQ AU/Index number	1-49									
NCDWQ Classification	C		C	C	C		C		C	
303d listed?	No									
Upstream of a 303d listed	No									
Reasons for 303d listed segment	NA									
Total acreage of easement	15.63									
Total existing vegetated acreage of easement	---									
Total planted restoration acreage	~15.63									
Rosgen Classification of preexisting	B/E/Eb		E	F	G/C/B		B		G/Eb/Cb	
Rosgen Classification of As-built	B		---	C	B		B		C	
Valley type	II		II	II	II		II		II	
Valley slope	.034		---	.010	.029		---		.009	
Cowardin classification of proposed	N/A		N/A	N/A	N/A		N/A		N/A	
Trout waters designation	No									
Species of concern, endangered etc.	No									
Dominant Soil Series	Junaluska Brasstown Complex/Thurmont-Dillard Complex/Arc aqua loam		Junaluska Brasstown Complex	Arc qua loam	Thurmont-Dillard Complex		Junaluska Tsali Complex		Arc qua loam	

APPENDIX B

VISUAL ASSESSMENT DATA


Figure 2. Current Conditions Plan View (CCPV)

Tables 5A-5D. Visual Stream Morphology Stability Assessment

Table 6. Vegetation Condition Assessment

Stream Station Photographs

Vegetation Plot Photographs

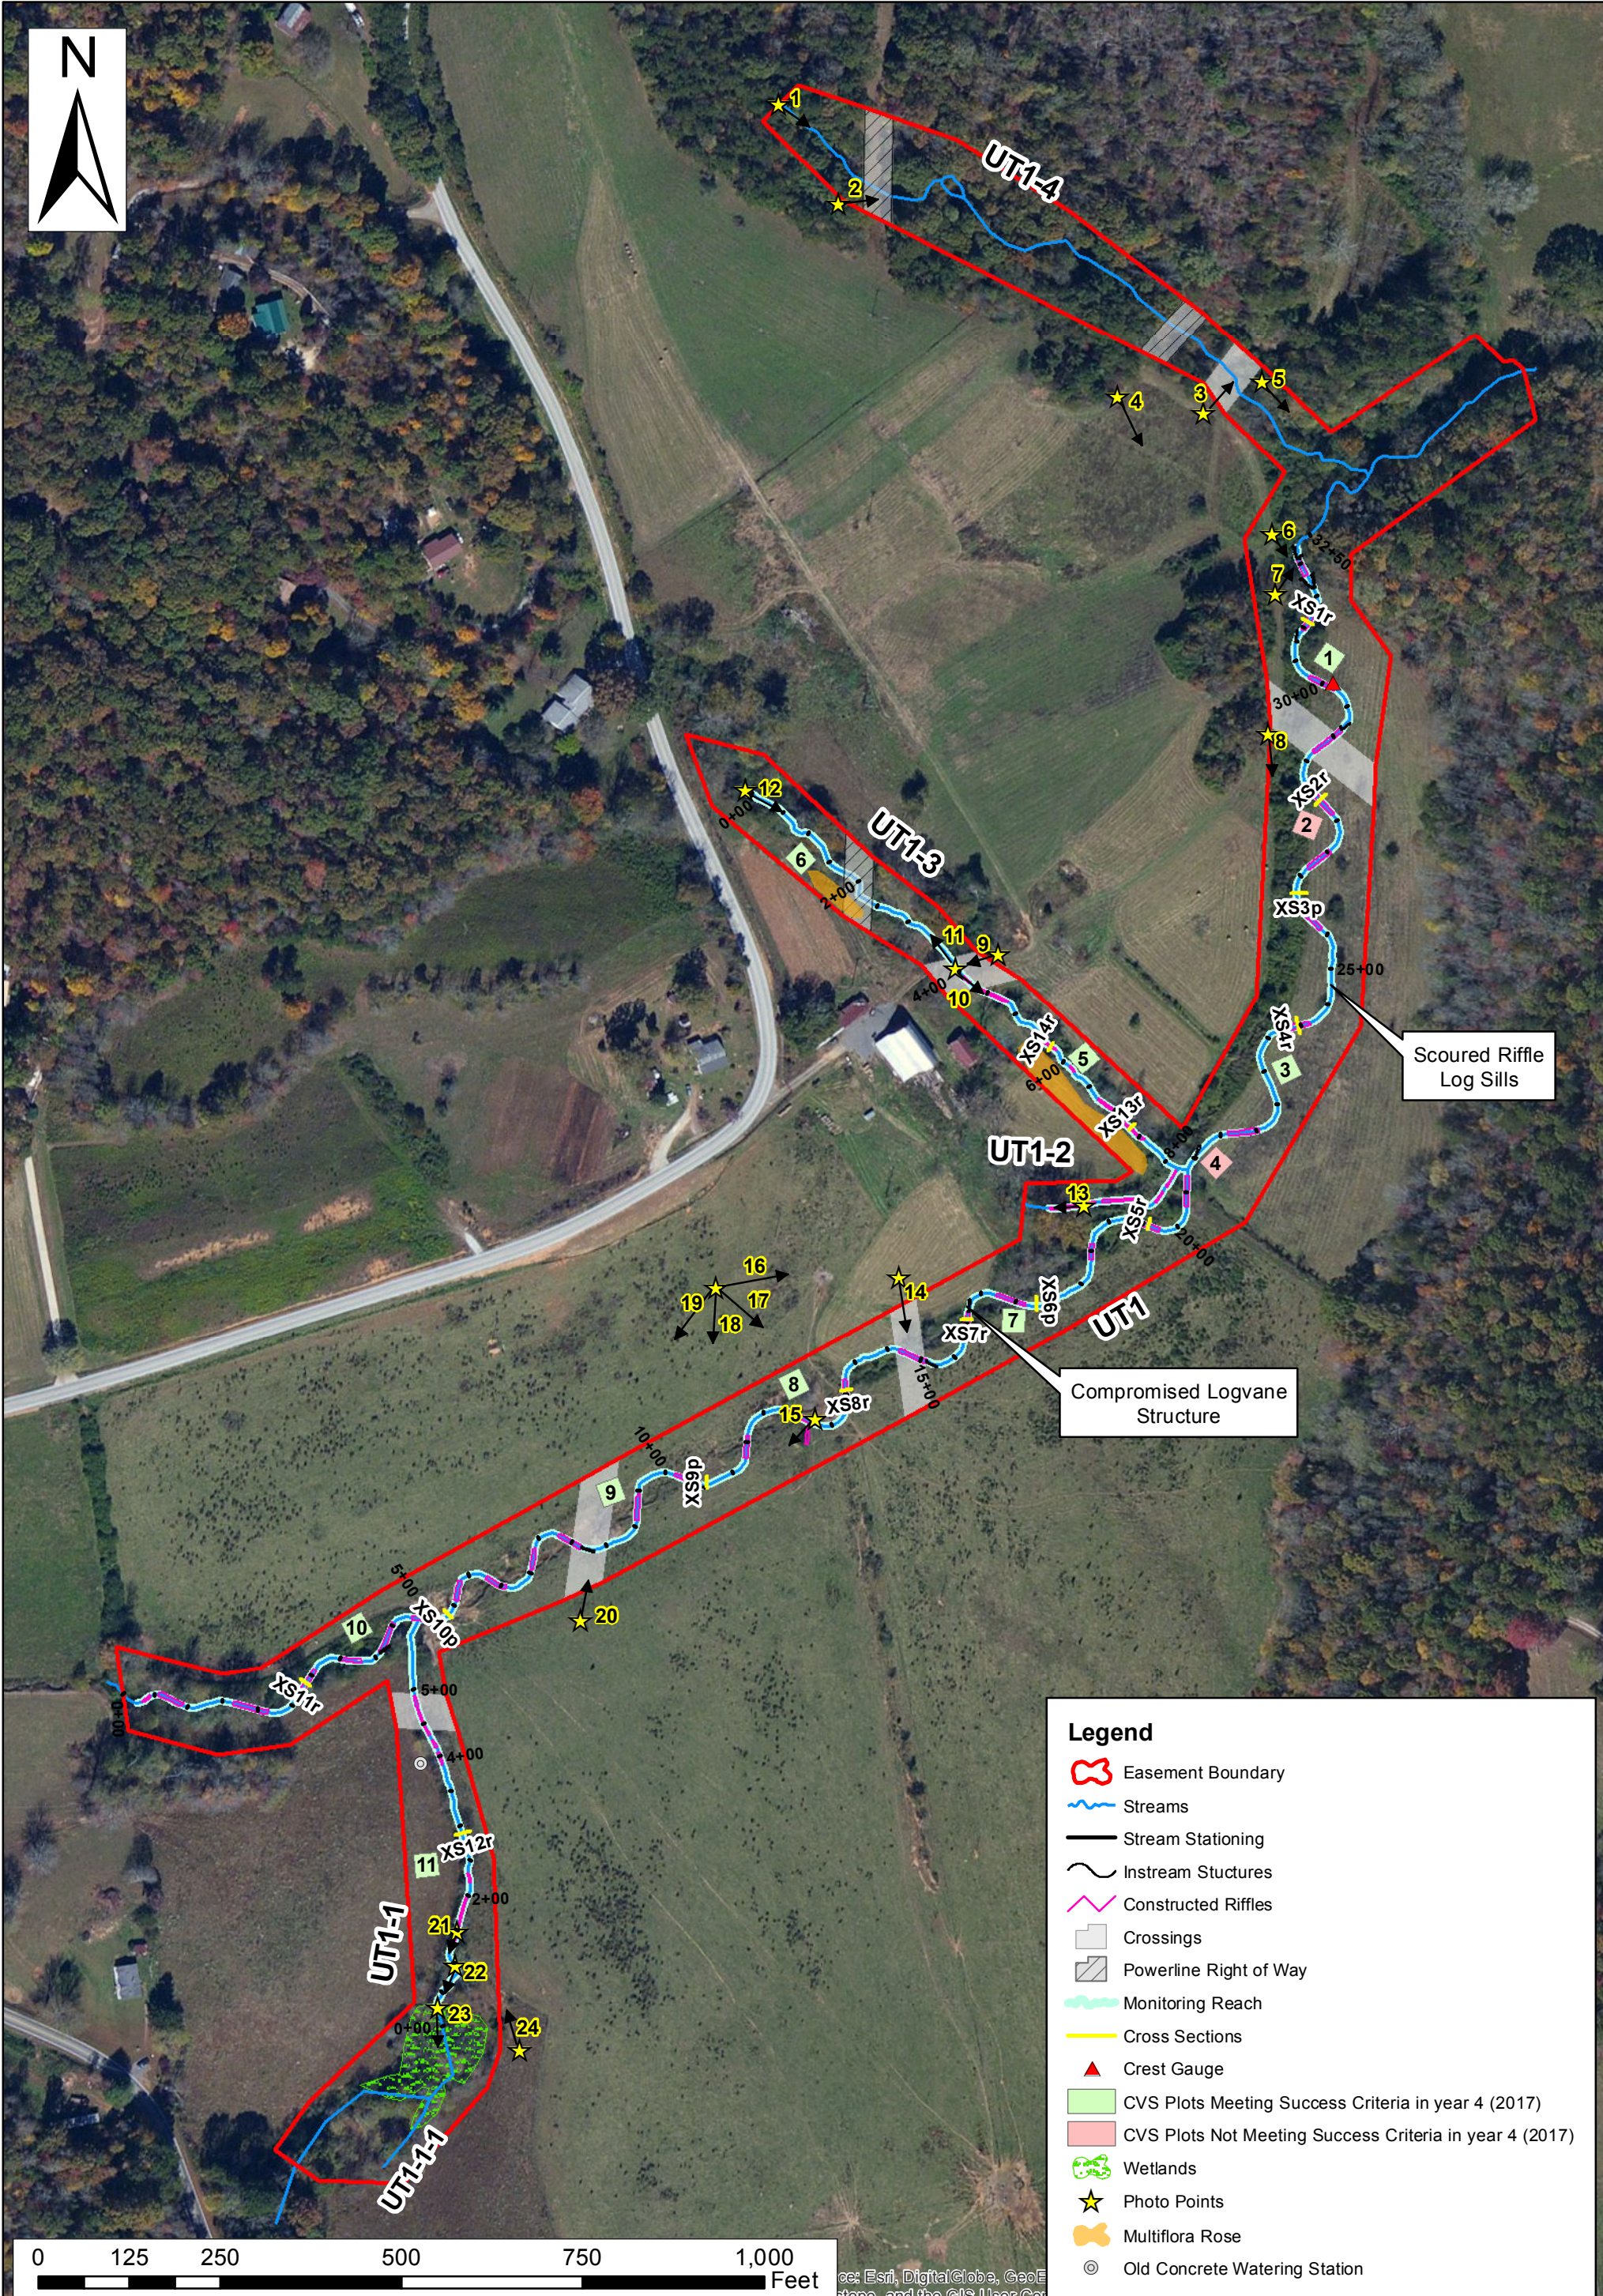

**Legend**

- Easement Boundary
- Streams
- Stream Stationing
- Instream Structures
- Constructed Riffles
- Crossings
- Powerline Right of Way
- Monitoring Reach
- Cross Sections
- Crest Gauge
- CVS Plots Meeting Success Criteria in year 4 (2017)
- CVS Plots Not Meeting Success Criteria in year 4 (2017)
- Wetlands
- Photo Points
- Multiflora Rose
- Old Concrete Watering Station



Axiom Environmental  
218 Snow Avenue  
Raleigh, NC 27603  
(919) 215-1693

Axiom Environmental, Inc.

**CURRENT CONDITIONS PLAN VIEW  
UT TO MARTINS CREEK (CONTRERAS)  
DMS PROJECT # 92766  
Cherokee County, North Carolina**

Dwn. by:	KRJ
Date:	Nov 2017
Project:	12-004.16

FIGURE  
**2**

Table 5A  
 Reach ID  
 Assessed Length

**Visual Stream Morphology Stability Assessment**  
 UT1  
 3123

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting			1	100	97%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	38	39			97%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6)	40	40			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	40	40			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	40	40			100%			
2. Thalweg centering at downstream of meander (Glide)		40	40			100%				
<b>Totals</b>					0	0	100%	0	0	100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%			100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <b>NOT</b> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%			100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%			100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	11	12			92%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	12	12			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	11	12			92%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	11	12			92%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio $\geq$ 1.6 Rootwads/logs providing some cover at base-flow.	12	12			100%			

Table 5B  
 Reach ID  
 Assessed Length

**Visual Stream Morphology Stability Assessment**  
 UT1-1  
 602

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended		Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)				0	0	100%			100%
		2. <u>Degradation</u> - Evidence of downcutting				0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	14	14				100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6)	17	17				100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	17	17				100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	17	17				100%			
2. Thalweg centering at downstream of meander (Glide)		17	17				100%				
<b>Totals</b>						0	0	100%	0	0	100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion				0	0	100%			100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <b>NOT</b> include undercuts that are modest, appear sustainable and are providing habitat.				0	0	100%			100%
	3. Mass Wasting	Bank slumping, calving, or collapse				0	0	100%			100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	13	13				100%			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	13	13				100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	13	13				100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	13	13				100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio $\geq$ 1.6 Rootwads/logs providing some cover at base-flow.	13	13				100%			

Table 5C  
 Reach ID  
 Assessed Length

**Visual Stream Morphology Stability Assessment**  
 UT1-2  
 207

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			100%
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	6	6			100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6)	5	5			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	5	5			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	5	5			100%			
2. Thalweg centering at downstream of meander (Glide)		5	5			100%				
<b>Totals</b>					0	0	100%	0	0	100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%			100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%			100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%			100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	4	4			100%			100%
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	4	4			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	4	4			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	4	4			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio $\geq$ 1.6 Rootwads/logs providing some cover at base-flow.	4	4			100%			

Table 5D  
 Reach ID  
 Assessed Length

**Visual Stream Morphology Stability Assessment**  
 UT1-3  
 803

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	23	23			100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth $\geq$ 1.6)	24	24			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	24	24			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	24	24			100%			
2. Thalweg centering at downstream of meander (Glide)		24	24			100%				
<b>Totals</b>										
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%			100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <b>NOT</b> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%			100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%			100%
<b>Totals</b>										
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	9	9			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	9	9			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	9	9			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	9	9			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio $\geq$ 1.6 Rootwads/logs providing some cover at base-flow.	9	9			100%			

**Table 6**

**Vegetation Condition Assessment**

**UT to Martins Creek (Contreras) Mitigation Project**

**Planted Acreage<sup>1</sup>**

**15.63**

Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	None	0.1 acres	none	0	0.00	0.0%
2. Low Stem Density Areas	None	0.1 acres	none	0	0.00	0.0%
2B. Low Planted Stem Density Areas	None	0.1 acres	none	0	0.00	0.0%
<b>Total</b>				0	0.00	0.0%
3. Areas of Poor Growth Rates or Vigor	None	0.25 acres	N/A	0	0.00	0.0%
<b>Cumulative Total</b>				0	0.00	0.0%

**Easement Acreage<sup>2</sup>**

**15.63**

Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage
4. Invasive Areas of Concern <sup>4</sup>	Multiflora rose	1000 SF	Orange polygon	2	0.19	1.2%
5. Easement Encroachment Areas <sup>3</sup>	None	none	none	0	0.00	0.0%

<sup>1</sup> = Enter the planted acreage within the easement. This number is calculated as the easement acreage minus any existing mature tree stands that were not subject to supplemental planting of the understory, the channel acreage, crossings or any other elements not directly planted as part of the project effort.





<sup>2</sup> = The acreage within the easement boundaries.

<sup>3</sup> = Encroachment may occur within or outside of planted areas and will therefore be calculated against the overall easement acreage. In the event a polygon is cataloged into items 1, 2 or 3 in the table and is the result of encroachment, the associated acreage should be tallied in the relevant item (i.e., item 1,2 or 3) as well as a parallel tally in item 5.

<sup>4</sup> = Invasives may occur in or out of planted areas, but still within the easement and will therefore be calculated against the overall easement acreage. Invasives of concern/interest are listed below. The list of high concern species are those with the potential to directly outcompete native, young, woody stems in the short-term (e.g. monitoring period or shortly thereafter) or affect the community structure for existing, more established tree/shrub stands over timeframes that are slightly longer (e.g. 1-2 decades). The low/moderate concern group are those species that generally do not have this capacity over the timeframes discussed and therefore are not expected to be mapped with regularity, but can be mapped, if in the judgement of the observer their coverage, density or distribution is suppressing the viability, density, or growth of planted woody stems. Decisions as to whether remediation will be needed are based on the integration of risk factors by DMS such as species present, their coverage, distribution relative to native biomass, and the practicality of treatment. For example, even modest amounts of Kudzu or Japanese Knotweed early in the projects history will warrant control, but potentially large coverages of Microstegium in the herb layer will not likely trigger control because of the limited capacities to impact tree/shrub layers within the timeframes discussed and the potential impacts of treating extensive amounts of ground cover. Those species with the "watch list" designator in gray shade are of interest as well, but have yet to be observed across the state with any frequency. Those in *red italics* are of particular interest given their extreme risk/threat level for mapping as points where isolated specimens are found, particularly early in a projects monitoring history. However, areas of discreet, dense patches will of course be mapped as polygons. The symbology scheme below was one that was found to be helpful for symbolizing invasives polygons, particularly for situations where the condition for an area is somewhere between isolated specimens and dense, discreet patches. In any case, the point or polygon/area feature can be symbolized to describe things like high or low concern and species can be listed as a map inset, in legend items if the number of species are limited or in the narrative section of the executive summary.



**UT to Martin's Creek (Contreras)  
Fixed Station Photographs  
Taken August 2017**

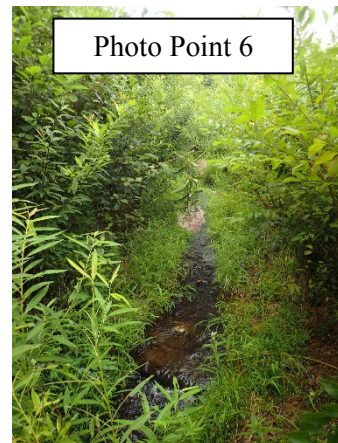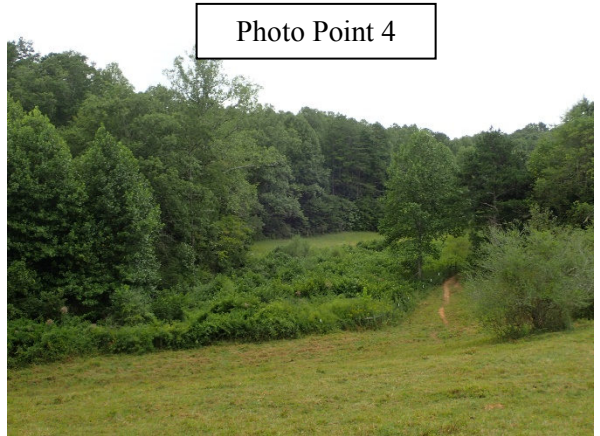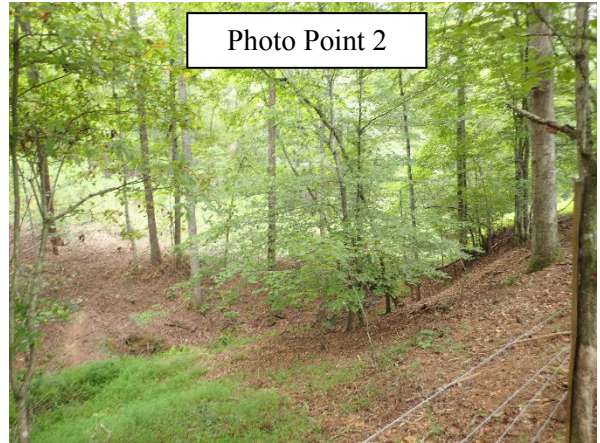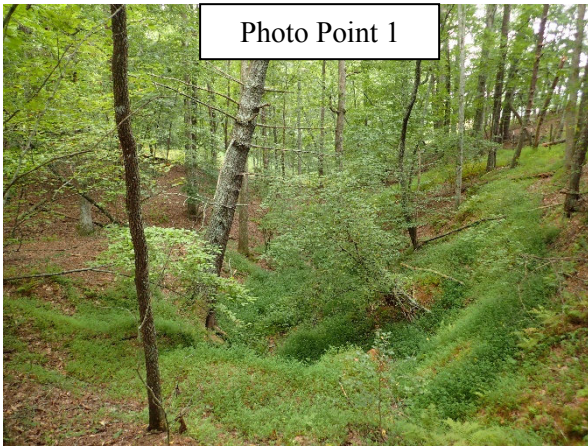

**UT to Martin's Creek (Contreras)  
Fixed Station Photographs (continued)  
Taken August 2017**

Photo Point 7



Photo Point 8

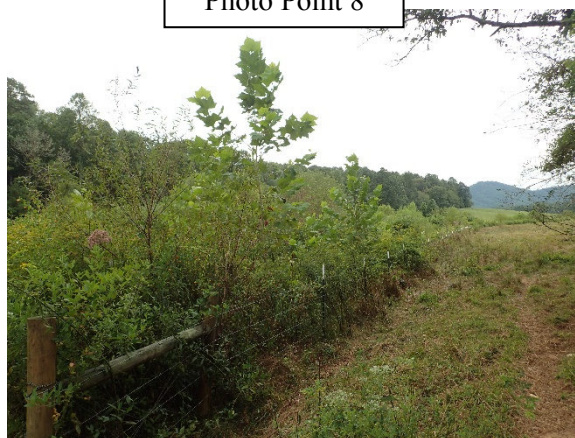


Photo Point 9



Photo Point 10

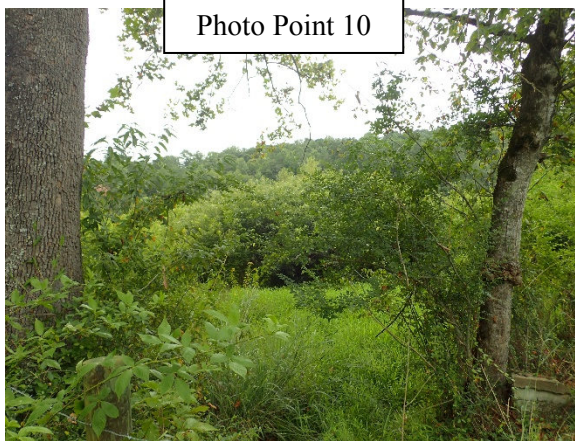


Photo Point 11



Photo Point 12



**UT to Martin's Creek (Contreras)  
Fixed Station Photographs (continued)  
Taken August 2017**

Photo Point 13

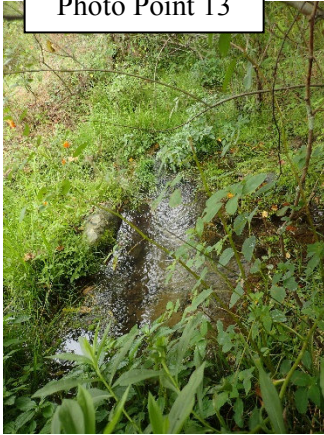


Photo Point 14



Photo Point 15

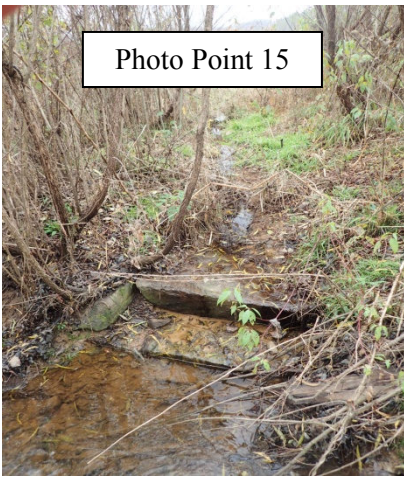


Photo Point 16



Photo Point 17



Photo Point 18



**UT to Martin's Creek (Contreras)  
Fixed Station Photographs (continued)  
Taken August 2017**

Photo Point 19



Photo Point 20



Photo Point 21




Photo Point 22



Photo Point 23



Photo Point 24

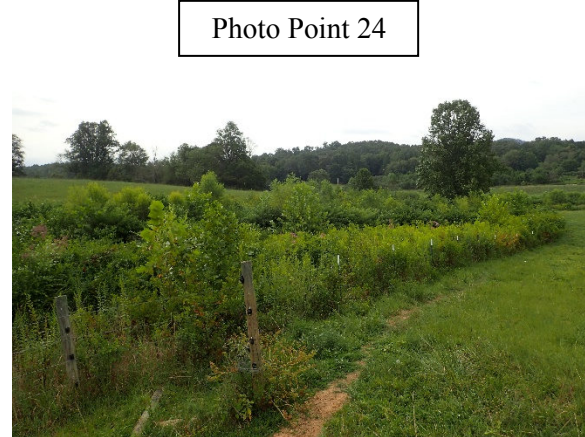

**UT to Martin's Creek (Contreras)  
Vegetation Monitoring Photographs  
Taken August 2017**



**UT to Martin's Creek (Contreras)  
Vegetation Monitoring Photographs  
Taken August 2017  
(continued)**



APPENDIX C  
VEGETATION PLOT DATA

Table 7. Vegetation Plot Criteria Attainment

Table 8. CVS Vegetation Plot Metadata

Table 9. Total and Planted Stems by Plot and Species

**Table 7. Vegetation Plot Criteria Attainment Based on Planted Stems  
 UT to Martin's Creek (Contreras) Mitigation Site (DMS Project Number 92766)**

Vegetation Plot ID	Vegetation Survival Threshold Met?	Tract Mean
1	Yes	82%
2	No	
3	Yes	
4	No	
5	Yes	
6	Yes	
7	Yes	
8	Yes	
9	Yes	
10	Yes	
11	Yes	



**Table 8. CVS Vegetation Plot Metadata  
UT to Martin's Creek (Contreras) Mitigation Site (DMS Project Number 92766)**

<b>Report Prepared By</b>	Corri Faquin
<b>Date Prepared</b>	9/1/2017 13:23
<b>database name</b>	Axiom-UTMartinsContreras-2017-A-v2.3.1.mdb
<b>database location</b>	S:\Business\Projects\12\12-004 EEP Monitoring\12-004.16 UT to Martins and Martins\UT to Martins (Contreras)\2017\CVS
<b>computer name</b>	PHILLIP-PC
<b>file size</b>	50331648
<b>DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----</b>	
<b>Metadata</b>	Description of database file, the report worksheets, and a summary of project(s) and project data.
<b>Proj, planted</b>	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
<b>Proj, total stems</b>	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
<b>Plots</b>	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
<b>Vigor</b>	Frequency distribution of vigor classes for stems for all plots.
<b>Vigor by Spp</b>	Frequency distribution of vigor classes listed by species.
<b>Damage</b>	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
<b>Damage by Spp</b>	Damage values tallied by type for each species.
<b>Damage by Plot</b>	Damage values tallied by type for each plot.
<b>Planted Stems by Plot and Spp</b>	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
<b>ALL Stems by Plot and spp</b>	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
<b>PROJECT SUMMARY-----</b>	
<b>Project Code</b>	92766
<b>project Name</b>	UT to Martin's Creek (Contreras)
<b>Description</b>	Stream Restoration
<b>River Basin</b>	Hiwassee
<b>length(ft)</b>	
<b>stream-to-edge width (ft)</b>	
<b>area (sq m)</b>	
<b>Required Plots (calculated)</b>	
<b>Sampled Plots</b>	11

**Table 9. Total and Planted Stems by Plot and Species**  
**DMS Project Code 92766. Project Name: UT to Martin's Creek (Contreras)**

Scientific Name	Common Name	Species Type	Current Plot Data (MY4 2017)																								
			92766-01-0001			92766-01-0002			92766-01-0003			92766-01-0004			92766-01-0005			92766-01-0006			92766-01-0007			92766-01-0008			
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	
Acer negundo	boxelder	Tree																									
Acer rubrum	red maple	Tree			1																						
Alnus serrulata	hazel alder	Shrub			31		5		3											15				100			
Amelanchier arborea	common serviceberry	Tree																									
Betula nigra	river birch	Tree	1	1	1												1	1	1	1	1	1					
Carpinus caroliniana	American hornbeam	Tree												4	4	4											
Carya	hickory	Tree																									
Carya alba	mockernut hickory	Tree	1	1	1				1	1	1																
Carya glabra	pignut hickory	Tree																		1	1	1					
Cornus amomum	silky dogwood	Shrub				1	1	1				1	1	1		1	1										
Cornus florida	flowering dogwood	Tree																									
Diospyros virginiana	common persimmon	Tree																									
Juglans nigra	black walnut	Tree																									
Liquidambar styraciflua	sweetgum	Tree			2																						
Liriodendron tulipifera	tuliptree	Tree												7	7	7	2	2	3	1	1	1	1	1	1		
Nyssa	tupelo	Tree																									
Nyssa sylvatica	blackgum	Tree																		1	1	1	2	2	2		
Platanus occidentalis	American sycamore	Tree	3	3	3	2	2	2	4	4	4	2	2	2	1	1	1	1	1	1	2	2	2				
Prunus serotina	black cherry	Tree																									
Pyrus calleryana	Callery pear	Exotic																									
Quercus	oak	Tree																					1	1	1		
Quercus coccinea	scarlet oak	Tree	1	1	1																						
Quercus nigra	water oak	Tree							1	1	1																
Quercus pagoda	cherrybark oak	Tree										2	2	2						1	1	1	1	1	1		
Quercus rubra	northern red oak	Tree	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	5	5	5	2	2	2	4	4	4	
Quercus shumardii	Shumard's oak	Tree							1	1	1								1	1	1			1	1	1	
Salix nigra	black willow	Tree																									
Unknown		Shrub or Tree																									
<b>Stem count</b>			8	8	42	5	5	10	9	9	12	6	6	6	13	14	14	10	10	11	9	9	24	10	10	110	
<b>size (ares)</b>			1			1			1			1			1			1			1			1			
<b>size (ACRES)</b>			0.02			0.02			0.02			0.02			0.02			0.02			0.02			0.02			
<b>Species count</b>			5	5	8	3	3	4	5	5	6	4	4	4	4	5	5	5	5	5	5	7	7	8	6	6	7
<b>Stems per ACRE</b>			323.7	323.7	1700	202.3	202.3	404.7	364.2	364.2	485.6	242.8	242.8	242.8	526.1	566.6	566.6	404.7	404.7	445.2	364.2	364.2	971.2	404.7	404.7	4452	

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%

- PnoLS = Planted excluding livestakes
- P-all = Planting including livestakes
- T = All planted and natural recruits including livestakes
- T includes natural recruits

**Table 9. Total and Planted Stems by Plot and Species (continued)**  
**DMS Project Code 92766. Project Name: UT to Martin's Creek (Contreras)**

Scientific Name	Common Name	Species Type	Current Plot Data (MY4 2017)									Annual Means															
			92766-01-0009			92766-01-0010			92766-01-0011			MY4 (2017)			MY3 (2016)			MY2 (2015)			MY1 (2014)			MY0 (2014)			
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	
Acer negundo	boxelder	Tree							1			1			1			1			1						
Acer rubrum	red maple	Tree										1			7												
Alnus serrulata	hazel alder	Shrub						4						158			119			112			81	1			
Amelanchier arborea	common serviceberry	Tree	2	2	2							2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	
Betula nigra	river birch	Tree				2	2	2				5	5	5	6	6	7	13	13	13	12	12	12	19	19	19	
Carpinus caroliniana	American hornbeam	Tree	1	1	1							5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	
Carya	hickory	Tree													2	2	3	2	2	2	3	3	3	2	2	2	
Carya alba	mockernut hickory	Tree										2	2	2	2	2	2	3	3	3	3	3	3	5	5	5	
Carya glabra	pignut hickory	Tree							3	3	3	4	4	4	5	5	5	5	5	5	5	5	5	5	5	5	
Cornus amomum	silky dogwood	Shrub										2	3	3	1	2	2	1	2	2	1	2	4		1	2	
Cornus florida	flowering dogwood	Tree													4												
Diospyros virginiana	common persimmon	Tree																							1	1	1
Juglans nigra	black walnut	Tree																								3	
Liquidambar styraciflua	sweetgum	Tree																									
Liriodendron tulipifera	tuliptree	Tree	1	1	1	1	1	1	1	1	1	14	14	15	15	15	19	17	17	18	9	9	9	7	7	7	
Nyssa	tupelo	Tree							1	1	1	1	1	1	1	1											
Nyssa sylvatica	blackgum	Tree										3	3	3	2	2	2	2	2	2							
Platanus occidentalis	American sycamore	Tree	3	3	3	3	3	3	1	1	1	22	22	22	21	21	23	20	20	20	8	8	8	10	10	10	
Prunus serotina	black cherry	Tree																									5
Pyrus calleryana	Callery pear	Exotic																									
Quercus	oak	Tree										1	1	1	5	5	5	14	14	14	16	16	16	49	49	49	
Quercus coccinea	scarlet oak	Tree	1	1	1	1	1	1				3	3	3	4	4	4	2	2	2	2	2	2				
Quercus nigra	water oak	Tree										1	1	1	1	1	1	2	2	2	1	1	1	1	1	1	1
Quercus pagoda	cherrybark oak	Tree				2	2	2	2	2	2	8	8	8	8	8	8	8	8	8	8	8	8	5	5	5	
Quercus rubra	northern red oak	Tree	2	2	2	2	2	2	4	4	4	27	27	27	28	28	28	30	30	30	23	23	23	1	1	1	
Quercus shumardii	Shumard's oak	Tree										3	3	3	5	5	5	3	3	3							
Salix nigra	black willow	Tree																									1
Unknown		Shrub or Tree																1	1	1	1	1	1				6
<b>Stem count</b>			10	10	10	11	11	19	12	12	27	103	104	285	113	114	263	130	131	270	99	100	192	113	114	123	
<b>size (ares)</b>			1			1			1			11			11			11			11			11			
<b>size (ACRES)</b>			0.02			0.02			0.02			0.27			0.27			0.27			0.27			0.27			
<b>Species count</b>			6	6	6	6	6	8	6	6	10	16	16	23	17	17	24	17	17	23	15	15	19	13	14	17	
<b>Stems per ACRE</b>			404.7	404.7	404.7	445.2	445.2	768.9	485.6	485.6	1093	378.9	382.6	1049	415.7	419.4	967.6	478.3	481.9	993.3	364.2	367.9	706.4	415.7	419.4	452.5	

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%

- PnoLS = Planted excluding livestakes
- P-all = Planting including livestakes
- T = All planted and natural recruits including livestakes
- T includes natural recruits

APPENDIX D  
STREAM SURVEY DATA

Cross-section Plots

Longitudinal Profile Plots

Substrate Plots

Tables 10a-f. Baseline Stream Data Summary

Tables 11a-f. Monitoring Data





<b>Site</b>	UT to Martins (Contreras)
<b>Project Number:</b>	92766
<b>XS ID</b>	XS - 3, Pool
<b>Reach</b>	UT 1
<b>Date:</b>	3/15/2017
<b>Field Crew:</b>	Perkinson, Keith


Station	Elevation
0.3	94.1
2.2	93.8
3.2	93.7
4.2	93.2
4.7	93.0
6.2	92.2
7.3	91.7
8.5	91.4
9.7	91.4
10.6	91.7
11.3	91.8
12.3	92.3
13.0	92.7
13.7	93.5
14.7	93.5
16.7	93.6
18.3	93.8
20.5	94.1
22.3	94.2

SUMMARY DATA	
<b>Bankfull Elevation:</b>	93.9
<b>Bankfull Cross-Sectional Area:</b>	19.7
<b>Bankfull Width:</b>	17.7
<b>Flood Prone Area Elevation:</b>	NA
<b>Flood Prone Width:</b>	NA
<b>Max Depth at Bankfull:</b>	2.5
<b>Mean Depth at Bankfull:</b>	1.1
<b>W / D Ratio:</b>	NA
<b>Entrenchment Ratio:</b>	NA
<b>Bank Height Ratio:</b>	1.0



XS 3 Looking Upstream

<b>Stream Type</b>	E
--------------------	---

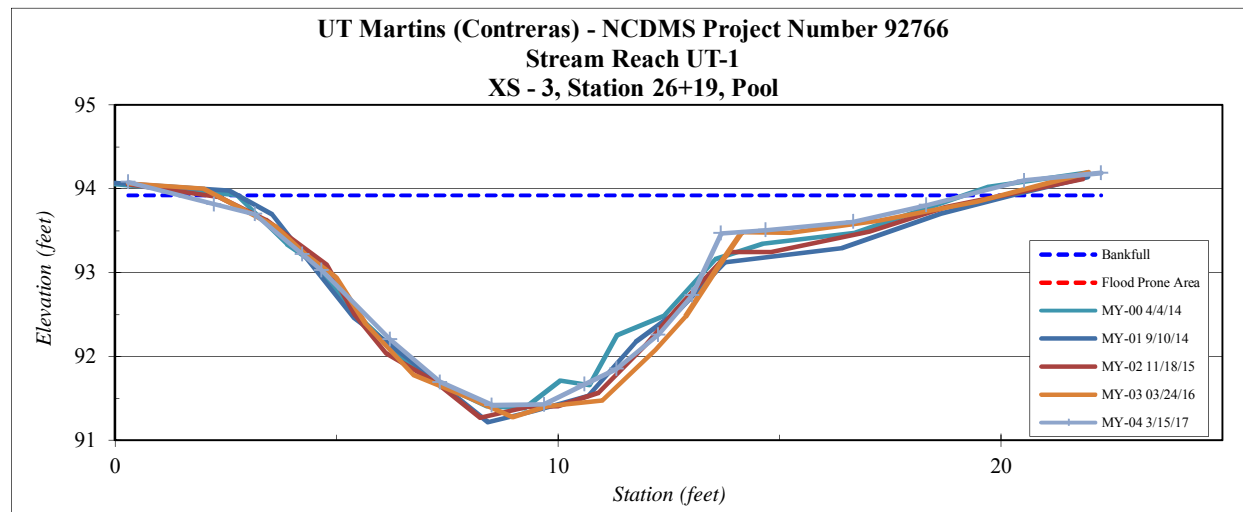

















<b>Site</b>	UT to Martins (Contreras)
<b>Project Number:</b>	92766
<b>XS ID</b>	XS - 11, Riffle
<b>Reach</b>	UT 1
<b>Date:</b>	3/15/2017
<b>Field Crew:</b>	Perkinson, Keith




XS 11 Looking Upstream

<b>Stream Type</b>	E
--------------------	---

SUMMARY DATA	
<b>Bankfull Elevation:</b>	100.4
<b>Bankfull Cross-Sectional Area:</b>	8.6
<b>Bankfull Width:</b>	11.3
<b>Flood Prone Area Elevation:</b>	102.0
<b>Flood Prone Width:</b>	50.0
<b>Max Depth at Bankfull:</b>	1.6
<b>Mean Depth at Bankfull:</b>	0.8
<b>W / D Ratio:</b>	14.8
<b>Entrenchment Ratio:</b>	4.4
<b>Bank Height Ratio:</b>	1.0

Station	Elevation
0.00	100.61
1.71	100.43
2.87	100.21
3.81	100.20
4.86	99.97
5.74	99.28
6.33	99.24
6.98	98.83
7.79	98.87
8.09	98.79
8.66	98.79
9.09	99.10
9.33	99.35
9.82	99.37
10.42	99.39
10.9	99.52
11.6	99.96
12.3	100.14
13.0	100.35
14.5	100.51
16.7	100.38

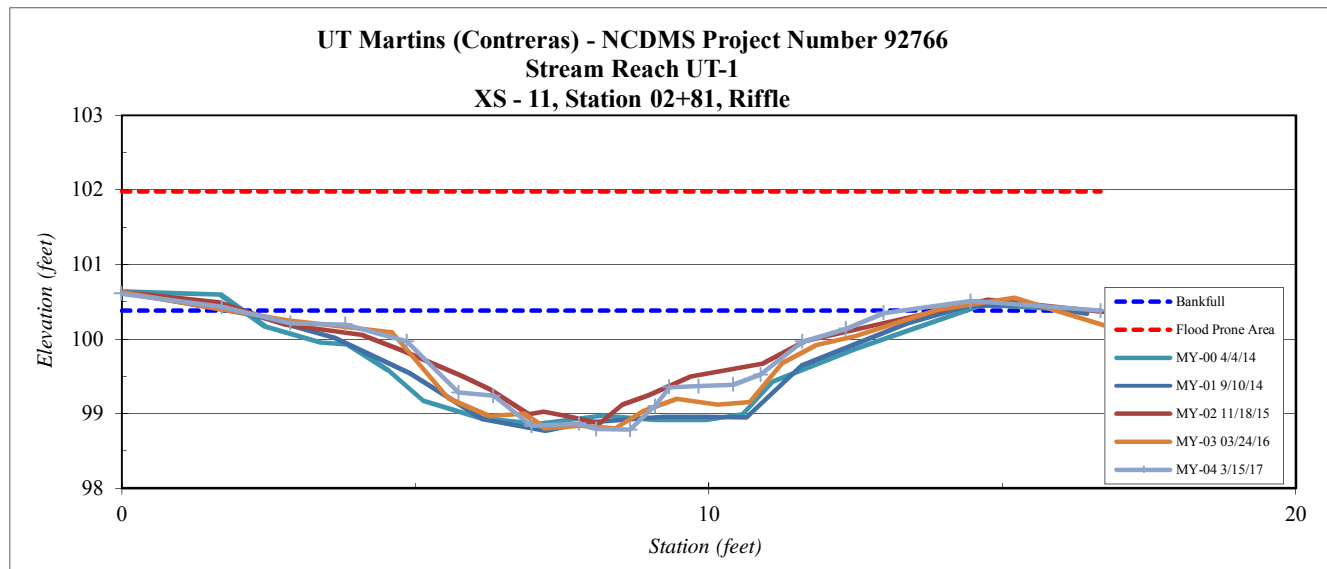










**Project Name** UT to Martins (Contreras), NC DMS Project Number 92766  
**Reach** UT 1 Station 00+00 - 10+00  
**Project Number** 92766  
**Date** 3/15/17  
**Crew** Perkinson, Keith

2014 Year 0 Monitoring \Survey			2014 Year 1 Monitoring \Survey			2015 Year 2 Monitoring \Survey			2016 Year 3 Monitoring \Survey			2017 Year 4 Monitoring \Survey		
Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation
1001.1	104.5	105.0	1008.1	104.6	105.1	1000.3	103.6	104.9	1003.6	104.2	105.0	1013.1	104.2	104.6
991.0	103.6	105.0	999.2	104.0	105.1	979.1	103.0	104.9	994.8	103.7	105.0	1000.5	103.5	104.7
967.6	103.1	105.0	975.8	103.0	105.2	950.3	103.3	105.0	974.1	102.9	104.9	980.8	103.2	104.6
941.1	103.5	105.0	961.0	103.3	105.2	944.1	104.6	105.0	952.2	102.8	105.1	963.4	102.8	104.6
936.9	104.7	105.2	951.3	102.6	105.2	908.9	105.2	105.6	944.7	103.0	105.0	954.3	103.2	104.6
899.9	105.3	105.7	940.2	104.8	105.2	897.8	104.1	105.6	935.5	104.6	105.1	948.8	104.4	104.7
894.1	104.2	105.7	903.9	105.4	105.8	877.5	104.1	105.6	900.3	105.2	105.7	912.9	105.1	105.5
875.1	104.3	105.7	896.7	104.2	105.8	873.1	105.3	105.7	892.6	104.1	105.7	903.3	104.2	105.4
863.9	105.5	105.7	887.8	104.4	105.8	868.4	104.4	105.7	877.5	104.2	105.6	887.1	104.2	105.5
860.2	104.7	105.7	875.7	104.5	105.8	864.1	104.5	105.7	867.4	104.3	105.7	879.2	104.1	105.4
854.4	104.7	105.8	866.9	105.3	105.8	861.8	105.6	105.8	864.2	105.4	105.7	875.6	105.3	105.5
851.1	105.7	105.9	863.7	104.8	105.8	857.0	104.8	105.8	860.0	104.6	105.8	862.5	105.5	105.7
847.6	104.9	105.9	857.5	104.8	105.8	852.4	104.4	105.8	854.7	104.7	105.8	855.5	104.2	105.7
842.6	104.3	105.9	855.1	105.9	106.0	851.1	105.9	106.0	851.7	105.7	106.0	852.4	105.6	105.9
840.9	106.0	106.2	843.3	105.9	106.3	844.7	105.1	106.1	846.5	104.7	106.0	845.6	105.0	105.9
835.0	105.3	106.2	835.5	105.2	106.2	824.5	104.1	106.1	842.1	104.6	106.0	835.5	103.8	105.9
823.4	103.7	106.2	817.9	104.0	106.3	816.2	106.0	106.3	841.1	106.0	106.1	825.9	104.0	105.9
815.6	103.8	106.2	809.3	106.2	106.4	778.7	106.0	106.6	831.7	105.0	106.1	818.7	106.0	106.1
806.1	106.1	106.5	771.6	106.6	106.9	773.5	105.0	106.7	824.4	103.8	106.2	781.3	106.2	106.5
769.4	106.4	106.8	766.9	105.6	106.9	745.6	104.9	106.7	815.1	103.8	106.1	773.4	105.0	106.5
762.6	105.1	106.8	742.5	105.3	106.9	737.4	106.4	106.9	807.1	106.0	106.4	751.9	104.8	106.5
748.3	104.4	106.8	733.3	105.3	106.9	710.4	106.3	107.1	769.0	106.2	106.8	743.0	104.7	106.5
732.1	105.1	106.8	726.8	106.7	106.9	688.0	105.6	107.0	761.6	105.0	106.9	735.8	106.4	106.7
725.1	106.6	107.0	703.6	106.9	107.3	667.1	105.1	107.1	738.9	105.1	106.8	715.2	106.5	106.9
701.4	106.7	107.2	694.4	106.1	107.4	661.9	107.0	107.1	730.2	104.8	106.8	703.9	105.7	106.9
686.2	105.8	107.2	679.0	105.8	107.4	627.8	107.4	108.1	723.8	106.5	106.9	681.5	105.3	106.9
669.2	105.3	107.2	655.4	105.5	107.4	618.4	106.3	108.1	702.4	106.5	107.1	665.7	104.9	106.9
655.7	104.8	107.2	651.1	107.4	107.4	597.7	105.5	108.2	694.5	105.9	107.2	660.2	107.0	107.1


	2014	2014	2015	2016	2017
Avg. Water Surface Slope	0.0069	0.0066	0.0069	0.0068	0.0068
Riffle Length	33	32	31	30	30
Avg. Riffle Slope	0.0107	0.0118	0.0117	0.0132	0.0131
Pool Length	40	42	39	40	39
Pool to Pool Spacing	66	71	64	63	66

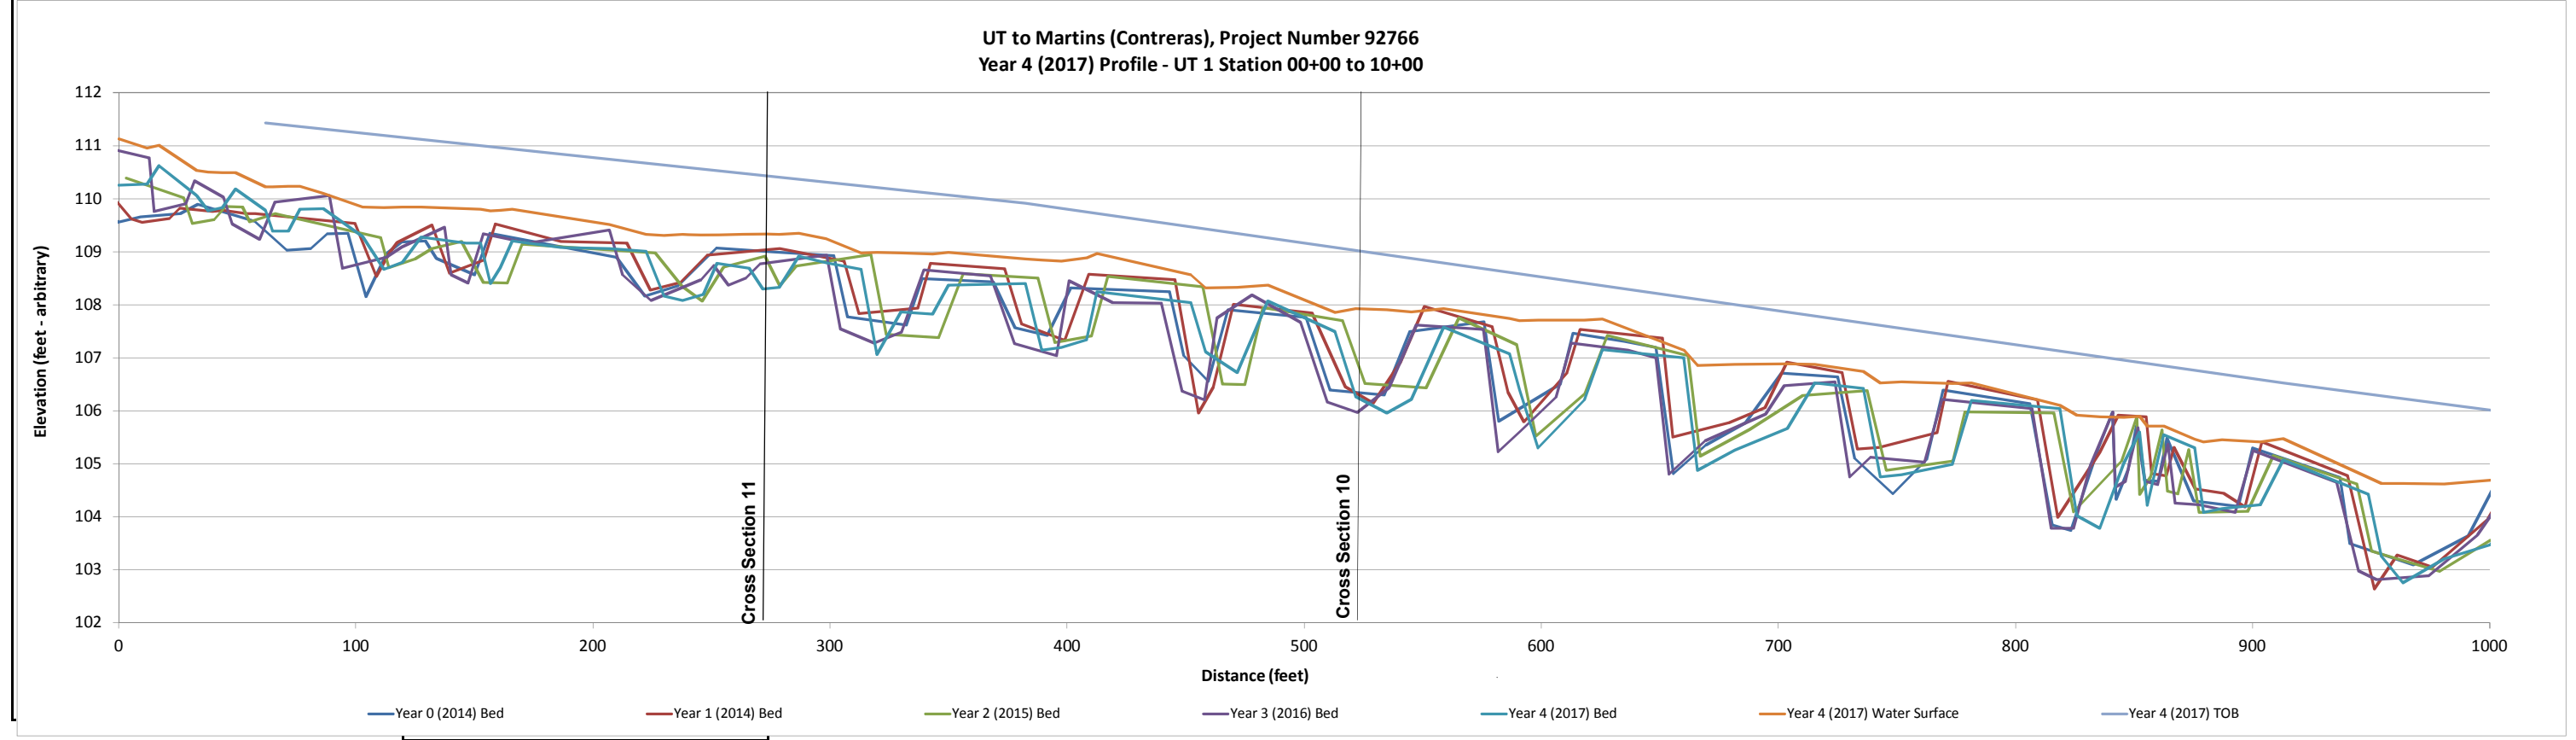

**Project Name** UT to Martins (Contreras), NC DMS Project Number 92766  
**Reach** UT 1 Station 10+00 - 20+00  
**Project Number** 92766  
**Date** 3/15/17  
**Crew** Perkinson, Keith

2014 Year 0 Monitoring \Survey			2014 Year 1 Monitoring \Survey			2015 Year 2 Monitoring \Survey			2016 Year 3 Monitoring \Survey			2017 Year 4 Monitoring \Survey		
Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation
2006.3	98.1	98.7	2005.5	97.0	98.7	2001.8	98.1	98.8	2008.5	96.8	98.7	2009.8	96.8	98.9
1999.4	97.1	98.7	1977.9	96.8	98.8	1995.2	96.9	98.8	1988.9	96.2	98.7	1982.5	96.3	98.9
1974.3	96.7	98.7	1964.2	96.6	98.7	1955.6	96.2	98.8	1965.9	96.1	98.8	1967.0	96.5	98.9
1957.1	96.7	98.7	1958.9	98.5	98.8	1949.4	98.1	98.8	1958.3	98.2	98.7	1961.2	98.3	98.9
1952.0	98.5	98.8	1934.5	98.1	99.0	1916.1	98.7	99.4	1924.0	98.2	99.1	1944.7	98.2	98.9
1937.4	98.2	98.9	1924.6	97.9	99.0	1907.8	97.3	99.3	1915.0	97.2	99.1	1933.3	98.1	98.9
1916.5	98.0	99.0	1900.2	97.5	99.0	1885.8	97.4	99.3	1882.3	97.5	99.1	1925.9	97.5	98.9
1907.4	97.5	99.0	1877.8	97.5	99.0	1850.7	96.8	99.2	1859.9	96.7	99.0	1905.0	97.4	98.9
1883.9	97.7	99.0	1856.1	97.2	99.0	1844.0	97.0	99.3	1852.6	97.2	99.1	1879.7	97.2	99.0
1865.1	97.6	99.0	1846.2	98.6	99.0	1828.1	98.8	99.2	1843.8	98.4	99.1	1859.0	97.0	99.0
1846.5	97.6	99.0	1825.9	99.1	99.4	1811.5	98.7	99.3	1820.1	98.5	99.3	1848.9	98.5	98.9
1839.6	98.6	99.0	1817.1	97.9	99.3	1804.0	97.8	99.3	1813.8	97.8	99.3	1827.7	98.7	99.1
1813.6	98.6	99.4	1794.3	98.2	99.4	1788.1	97.9	99.3	1795.5	97.8	99.4	1820.4	97.8	99.2
1809.5	98.1	99.4	1773.9	99.6	99.7	1767.3	97.9	99.3	1775.6	97.9	99.4	1798.8	98.0	99.2
1790.1	98.1	99.4	1750.2	99.7	100.1	1762.4	99.4	99.5	1772.3	99.4	99.6	1781.6	97.7	99.2
1779.6	98.9	99.5	1745.0	98.9	100.1	1737.9	99.5	99.9	1747.5	99.6	100.0	1777.3	99.4	99.5
1767.8	99.6	99.7	1736.6	98.9	100.1	1735.2	98.9	99.9	1743.5	98.7	100.0	1752.8	99.5	99.8
1754.8	99.2	99.7	1732.9	99.8	100.1	1726.3	98.6	99.9	1736.3	98.6	100.0	1747.3	98.7	99.8
1752.9	98.9	99.7	1722.8	98.6	100.1	1722.3	99.6	100.0	1733.0	99.8	100.1	1740.7	98.6	99.8
1746.3	98.8	99.7	1711.1	98.3	100.1	1713.0	98.4	100.0	1726.5	98.7	100.1	1737.5	99.7	99.9
1744.5	99.9	100.0	1702.1	99.9	100.3	1699.9	98.3	100.0	1715.2	98.2	100.1	1730.9	98.8	99.9
1739.8	99.4	100.0	1678.8	100.2	100.7	1689.8	99.8	100.2	1707.9	98.4	100.1	1720.1	98.5	99.9
1736.5	98.7	100.0	1660.8	100.5	100.9	1650.2	100.5	100.9	1700.6	99.7	100.1	1710.1	98.8	99.9
1728.7	98.8	100.1	1645.4	99.4	100.9	1644.2	99.9	100.9	1659.2	100.4	100.9	1705.6	99.5	99.9
1727.2	100.0	100.2	1628.5	99.0	100.9	1607.6	98.5	100.8	1654.1	99.8	100.9	1664.3	100.3	100.7
1717.9	98.9	100.2	1614.7	99.1	100.9	1601.4	100.6	100.9	1634.2	99.0	100.9	1649.7	99.5	100.7
1703.3	98.2	100.2	1608.8	100.6	101.0	1569.7	100.9	101.2	1622.4	98.1	101.0	1629.2	98.3	100.7
1695.9	99.8	100.4	1594.5	101.0	101.3	1562.7	99.7	101.3	1612.0	98.5	101.0	1618.2	98.4	100.7


	2014	2014	2015	2016	2017
Avg. Water Surface Slope	0.0069	0.0066	0.0069	0.0068	0.0068
Riffle Length	33	32	31	30	30
Avg. Riffle Slope	0.0107	0.0118	0.0117	0.0132	0.0131
Pool Length	40	42	39	40	39
Pool to Pool Spacing	66	71	64	63	66

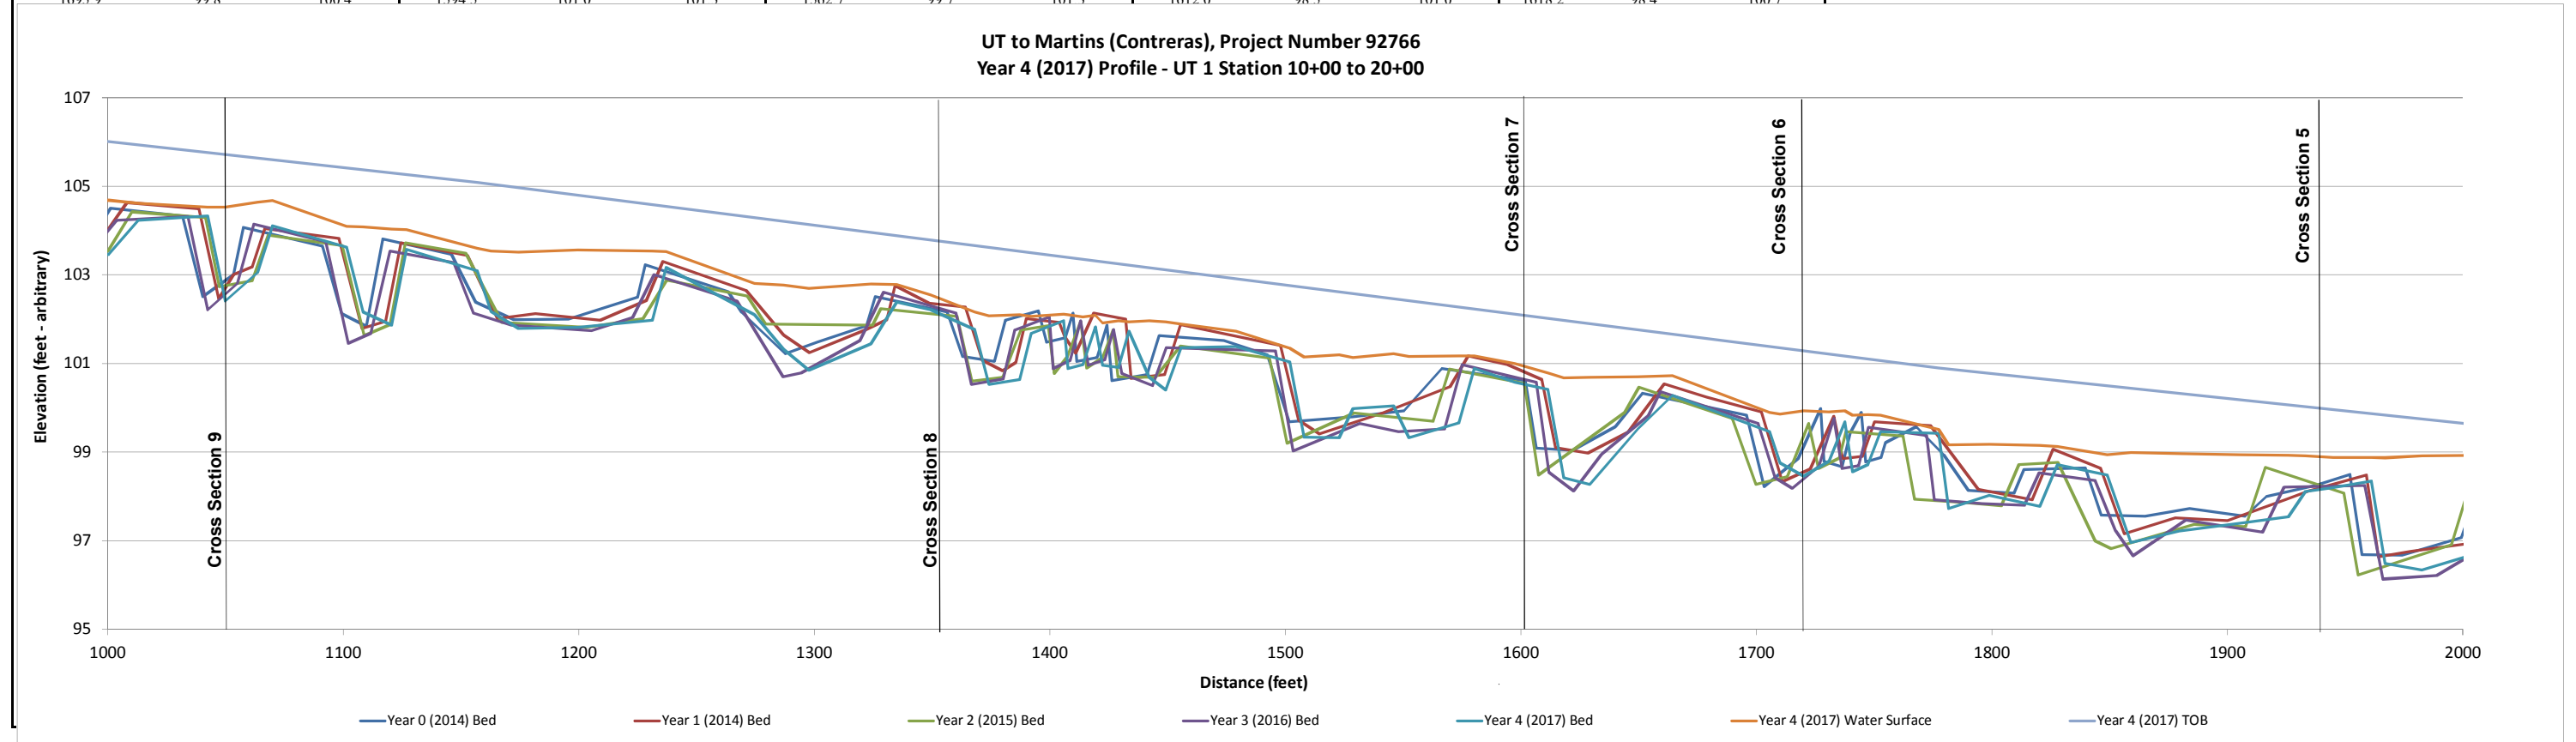

**Project Name** UT to Martins (Contreras), NC DMS Project Number 92766  
**Reach** UT 1 Station 20+00 - 32+00  
**Project Number** 92766  
**Date** 3/15/17  
**Crew** Perkinson, Keith

2014 Year 0 Monitoring \Survey			2014 Year 1 Monitoring \Survey			2015 Year 2 Monitoring \Survey			2016 Year 3 Monitoring \Survey			2017 Year 4 Monitoring \Survey		
Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation
3170.0	89.1	89.4	3174.7	89.2	89.4	3158.6	89.1	89.3	3184.6	89.0	89.1	3181.7	88.8	89.2
3145.0	89.5	89.8	3149.4	89.4	89.8	3132.7	89.5	89.7	3158.5	89.3	89.7	3157.8	89.1	89.5
3138.3	88.8	89.8	3146.4	88.9	89.8	3129.4	88.8	89.7	3153.6	88.7	89.7	3151.8	88.6	89.4
3124.6	88.8	89.8	3137.7	88.9	89.8	3112.3	89.0	89.7	3148.0	88.7	89.8	3145.6	88.7	89.5
3121.6	90.2	90.3	3128.9	89.0	89.9	3109.9	90.1	90.4	3138.3	89.3	89.8	3137.2	89.1	89.6
3113.2	88.7	90.4	3127.0	90.2	90.3	3103.3	88.7	90.2	3136.1	90.0	90.2	3133.7	90.0	90.0
3101.4	88.3	90.3	3119.8	88.8	90.4	3078.4	88.2	90.2	3129.8	88.9	90.2	3126.2	88.5	90.0
3088.0	89.2	90.4	3108.6	88.5	90.2	3074.6	90.5	90.6	3116.8	88.1	90.2	3116.3	88.0	90.1
3085.4	90.7	90.8	3094.5	88.2	90.2	3057.4	90.3	90.9	3103.6	88.2	90.2	3100.9	88.0	90.0
3066.9	90.5	91.0	3090.0	90.7	90.9	3048.9	89.6	90.9	3099.5	90.1	90.8	3097.0	90.2	90.5
3060.6	89.8	91.0	3070.6	90.5	91.0	3030.5	90.3	90.9	3081.2	90.6	90.9	3076.2	90.1	90.8
3053.7	89.7	91.1	3064.8	89.7	91.0	3028.8	91.3	91.6	3075.4	89.7	91.0	3064.3	89.7	90.7
3043.5	89.8	91.0	3055.2	89.7	91.0	3022.2	90.4	91.6	3065.6	89.5	91.0	3052.5	90.0	90.8
3040.2	91.3	91.6	3048.0	90.1	90.9	3001.7	89.9	91.6	3055.5	89.8	91.0	3049.9	91.1	91.3
3034.9	90.5	91.6	3044.2	91.0	91.6	2978.5	90.1	91.6	3053.4	91.2	91.6	3039.5	89.8	91.3
3007.6	89.9	91.6	3037.6	90.3	91.6	2969.7	91.4	91.7	3043.3	90.0	91.6	3018.4	89.6	91.4
2989.7	90.3	91.7	3014.9	89.8	91.5	3014.9	91.5	89.8	3027.9	89.7	91.6	2999.2	90.1	91.4
2983.2	91.4	91.7	2992.8	90.3	91.5	2944.0	90.9	92.0	3006.5	89.8	91.6	2994.2	91.1	91.4
2962.1	91.7	92.2	2986.1	91.1	91.8	2921.2	91.0	92.0	2998.0	91.1	91.6	2974.8	91.3	91.9
2928.5	91.6	92.1	2971.2	91.6	92.0	2916.0	91.6	92.1	2979.5	91.6	92.0	2941.4	91.2	91.9
2914.1	90.6	92.1	2932.5	91.7	92.0	2904.9	91.0	92.0	2973.0	90.9	92.1	2925.2	90.9	91.9
2902.0	89.2	92.1	2913.6	90.4	92.1	2894.5	89.9	92.1	2952.3	91.0	92.1	2915.7	89.6	91.8
2884.4	90.8	92.2	2902.2	89.0	92.1	2873.9	90.0	92.0	2943.6	91.3	92.1	2894.9	90.0	91.9
2880.3	92.1	92.6	2889.2	90.2	92.0	2868.3	92.0	92.5	2936.5	91.3	92.1	2889.0	92.0	92.3
2845.7	92.6	93.0	2883.3	92.0	92.5	2820.4	92.6	93.2	2924.4	90.3	92.1	2842.3	92.4	93.1
2833.9	92.6	93.1	2850.4	92.6	92.9	2816.1	91.8	93.2	2911.8	88.8	92.1	2837.4	91.7	93.0
2825.9	92.0	93.1	2823.5	92.2	93.1	2773.1	91.3	93.2	2897.2	90.0	92.1	2805.0	91.4	93.0
2802.7	91.7	93.2	2814.4	91.7	93.0	2764.6	92.7	93.2	2891.7	91.9	92.5	2791.9	91.1	93.0


	2014	2014	2015	2016	2017
Avg. Water Surface Slope	0.0069	0.0066	0.0069	0.0068	0.0068
Riffle Length	33	32	31	30	30
Avg. Riffle Slope	0.0107	0.0118	0.0117	0.0132	0.0131
Pool Length	40	42	39	40	39
Pool to Pool Spacing	66	71	64	63	66

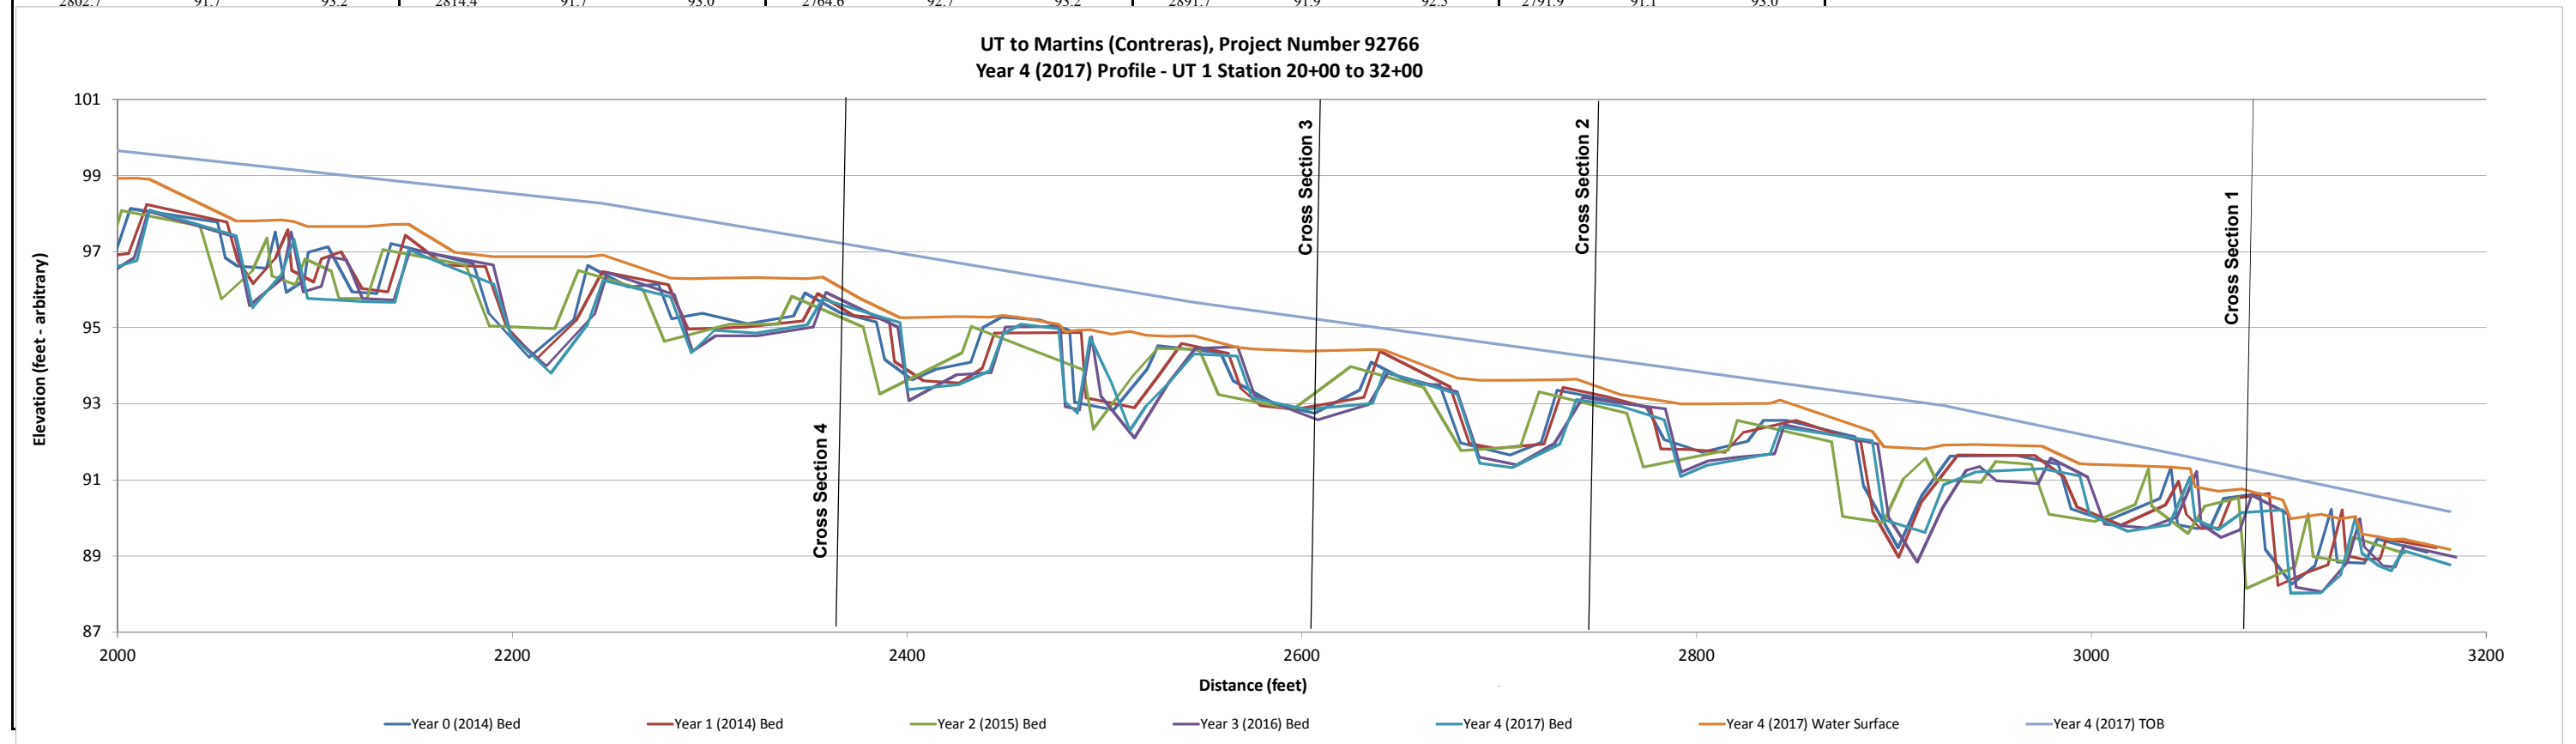

**Project Name** UT to Martins (Contreras), NC DMS Project Number 92766  
**Reach** UT 1-1 Station 00+00 - 06+00  
**Project Number** 92766  
**Date** 3/15/17  
**Crew** Perkinson, Keith

2014 Year 0 Monitoring \Survey			2014 Year 1 Monitoring \Survey			2015 Year 2 Monitoring \Survey			2016 Year 3 Monitoring \Survey			2017 Year 4 Monitoring \Survey		
Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation
597.4	107.7	108.5	593.9	108.1	108.7	594.7	108.0	108.8	594.7	108.0	108.6	595.3	107.9	108.3
591.3	108.0	108.6	584.1	108.4	108.8	583.7	108.2	109.0	580.3	108.6	108.9	578.3	108.1	108.7
581.8	107.9	108.5	580.9	107.8	108.8	581.6	107.9	109.0	577.4	107.7	108.9	574.4	107.4	108.7
579.4	107.6	108.6	572.9	107.4	108.9	572.7	107.4	109.1	571.9	107.6	108.9	572.4	107.6	108.7
575.8	107.8	108.7	570.5	108.8	109.1	571.2	108.7	109.1	571.0	108.6	109.0	571.5	108.6	109.0
574.4	108.7	108.9	558.2	108.9	109.2	556.2	108.8	109.6	555.4	108.7	109.6	553.4	109.0	109.4
559.8	108.6	109.3	554.2	108.5	109.2	553.4	108.4	109.7	553.9	108.4	109.5	539.8	108.4	109.4
557.6	108.3	109.3	550.1	108.2	109.2	550.5	108.4	109.7	550.2	108.2	109.6	533.5	109.1	109.6
554.3	108.3	109.3	547.4	109.0	109.2	548.0	108.8	109.7	548.3	108.8	109.6	515.7	109.3	109.9
550.5	108.9	109.3	540.9	108.9	109.3	541.3	109.0	109.7	533.9	109.3	109.6	505.6	109.4	110.1
544.9	108.7	109.5	537.8	108.2	109.4	539.4	108.4	109.7	522.6	109.2	110.0	503.6	109.0	110.1
542.5	108.4	109.5	534.6	108.5	109.3	535.2	108.2	109.8	505.5	109.5	110.2	499.4	109.2	110.2
538.7	108.4	109.5	533.9	109.4	109.5	534.0	109.4	109.8	502.0	108.9	110.2	497.4	109.8	110.1
538.0	109.5	109.5	504.2	109.6	110.0	505.1	109.7	110.2	499.0	109.2	110.2	479.3	110.5	110.9
518.3	109.4	110.0	502.4	109.1	109.9	501.5	108.9	110.2	496.9	109.9	110.2	467.5	110.6	110.9
507.5	109.6	109.9	499.8	109.0	109.9	498.6	109.3	110.3	466.8	110.6	111.1	447.3	111.1	111.8
504.5	109.0	110.0	496.3	109.8	110.0	496.3	109.7	110.3	444.6	111.0	111.6	430.6	111.5	111.9
501.3	109.3	109.9	458.8	110.7	111.1	459.2	110.9	111.5	429.9	111.4	111.8	426.2	110.6	111.8
499.9	110.0	110.1	440.7	111.1	111.5	429.9	111.5	112.1	427.2	110.7	111.8	423.0	110.6	111.8
482.1	110.6	110.9	429.3	111.5	111.8	429.3	111.5	112.0	423.2	110.2	111.8	411.2	112.3	112.7
467.0	110.7	111.1	425.8	110.6	111.8	422.6	110.2	112.1	421.3	112.1	112.3	409.5	111.8	112.7
451.7	111.1	111.4	422.3	110.2	111.8	420.9	112.1	112.4	411.2	112.5	112.8	404.5	112.2	112.8
432.5	111.8	111.9	420.9	112.1	112.2	410.9	112.5	112.9	409.5	111.7	112.8	403.9	113.4	113.6
428.9	110.7	111.9	410.4	112.4	112.8	408.6	111.8	112.9	404.6	112.0	112.8	385.5	113.9	114.3
425.5	110.3	111.9	408.3	111.8	112.8	404.1	112.2	112.9	403.3	113.4	113.6	383.6	113.4	114.3
423.9	112.1	112.2	404.0	112.3	112.8	402.8	113.5	113.6	385.2	113.9	114.3	379.6	114.0	114.4
413.5	112.5	112.8	402.7	113.5	113.6	384.5	114.0	114.4	383.3	113.4	114.3	377.6	115.0	115.1
412.0	111.9	112.8	384.8	114.1	114.3	383.1	113.5	114.4	380.0	113.4	114.3	365.7	115.0	115.3


	2014	2014	2015	2016	2017
Avg. Water Surface Slope	0.0383	0.0385	0.0381	0.0383	0.0388
Riffle Length	24	26	19	20	26
Avg. Riffle Slope	0.0357	0.0306	0.0392	0.0309	0.0303
Pool Length	8	9	10	8	8
Pool to Pool Spacing	32	34	27	26	33

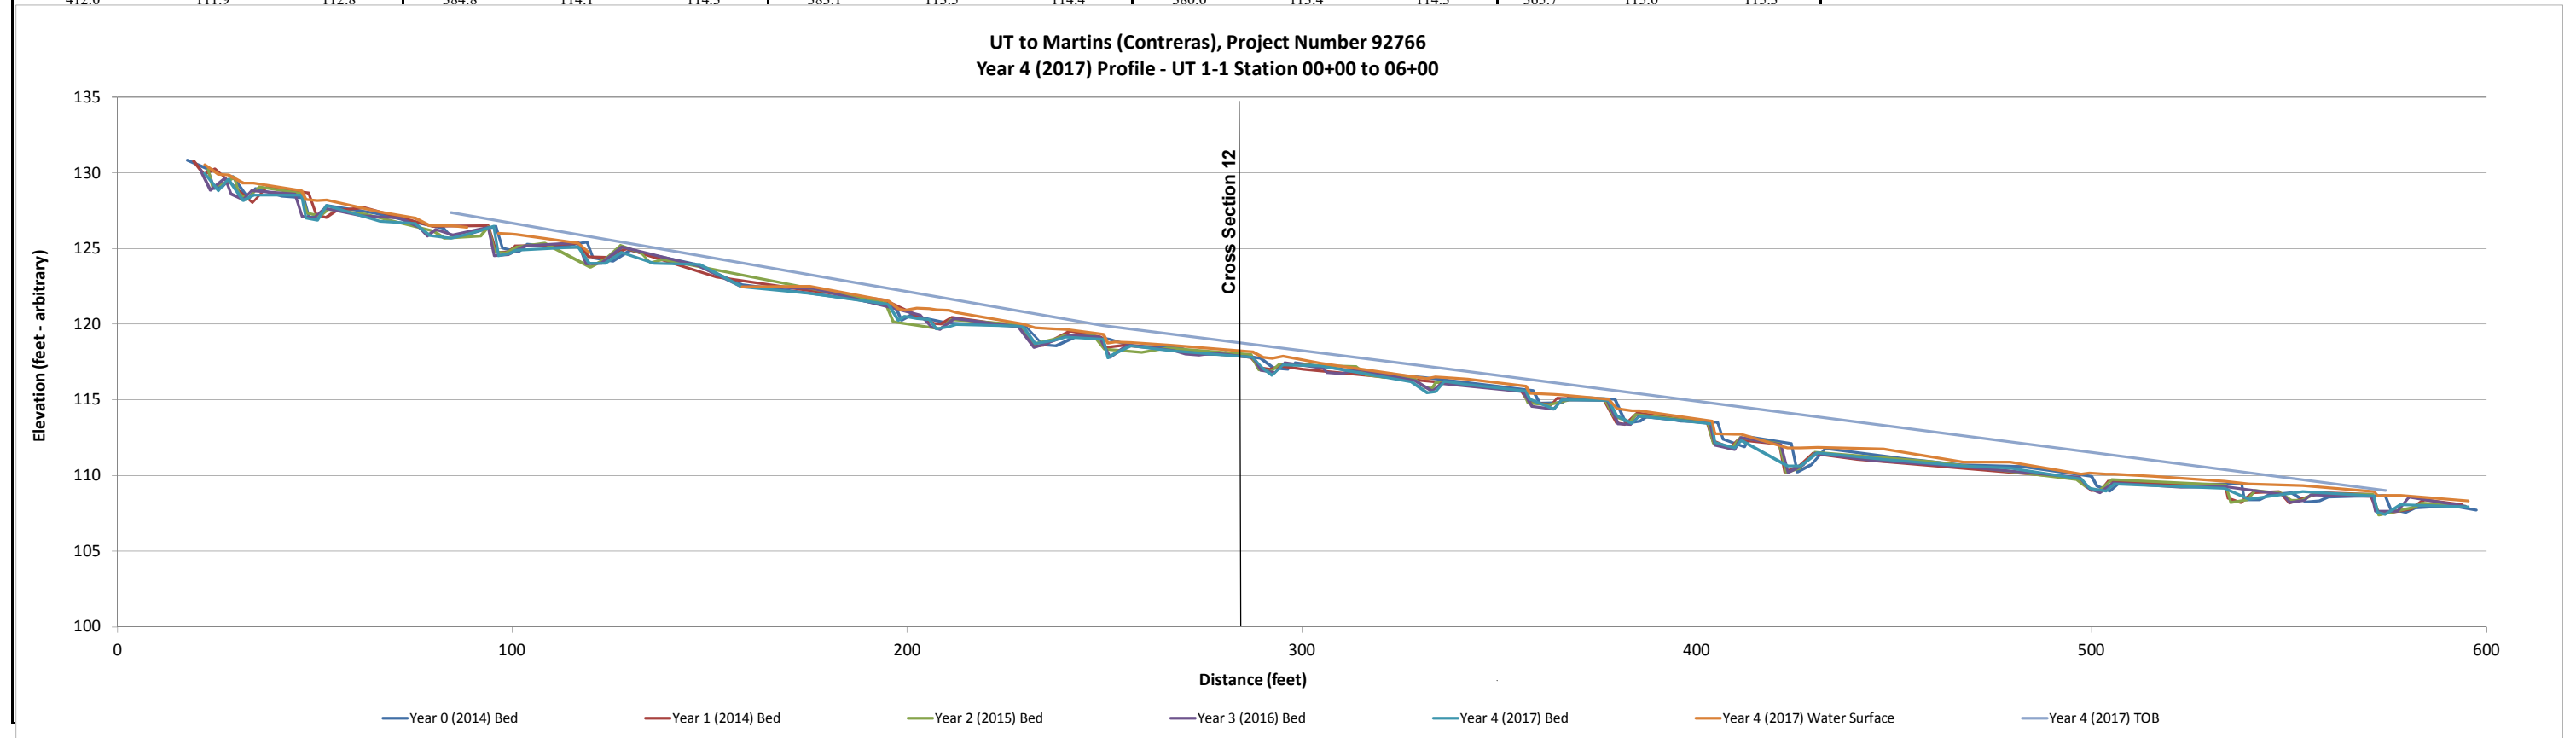

**Project Name** UT to Martins (Contreras), NC DMS Project Number 92766  
**Reach** UT 1-2 Station 00+00 - 02+00  
**Project Number** 92766  
**Date** 3/15/17  
**Crew** Perkinson, Keith

2014 Year 0 Monitoring \Survey			2014 Year 1 Monitoring \Survey			2015 Year 2 Monitoring \Survey			2016 Year 3 Monitoring \Survey			2017 Year 4 Monitoring \Survey		
Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation
191.8	92.4	93.0	191.8	92.2	92.9	190.6	92.2	93.0	188.6	92.2	92.9	192.8	92.3	93.0
180.9	92.7	93.2	182.1	92.6	93.1	187.8	92.4	93.0	166.4	92.7	93.5	190.5	92.2	93.0
168.6	92.7	93.2	163.8	92.6	93.3	186.5	92.1	93.0	159.5	91.8	93.5	186.6	92.5	93.1
163.8	92.1	93.2	159.6	91.6	93.3	184.7	92.5	93.0	155.5	91.6	93.5	181.4	92.9	93.3
157.7	91.8	93.2	155.7	91.7	93.3	168.6	92.7	93.5	152.2	92.9	93.5	175.9	93.0	93.4
155.2	92.9	93.2	153.7	92.8	93.3	160.6	92.1	93.6	135.2	92.8	93.5	165.9	93.1	93.6
145.8	92.9	93.3	137.0	92.8	93.4	155.4	91.6	93.5	131.7	91.8	93.5	161.9	92.4	93.6
137.5	92.8	93.3	133.3	92.1	93.4	152.8	92.9	93.5	126.2	91.3	93.5	155.5	91.8	93.6
134.7	91.8	93.3	126.9	91.5	93.4	135.7	92.8	93.6	122.9	92.8	93.6	137.2	92.9	93.6
128.6	91.9	93.3	121.8	92.8	93.5	132.1	91.9	93.7	115.4	93.0	93.6	132.9	92.3	93.6
126.0	92.9	93.3	116.0	92.7	93.5	125.9	91.6	93.7	111.4	91.8	93.6	126.4	91.9	93.6
117.6	92.8	93.4	112.1	91.4	93.5	122.5	92.8	93.6	106.7	91.8	93.6	121.7	93.0	93.6
114.9	91.9	93.4	107.3	91.5	93.5	115.7	93.0	93.6	105.3	93.1	93.6	116.0	93.0	93.7
109.8	92.0	93.3	105.3	93.1	93.4	113.4	91.9	93.7	89.9	93.2	93.8	113.6	92.2	93.7
108.5	93.1	93.4	79.0	93.3	93.9	106.7	91.9	93.7	67.7	93.4	94.1	108.0	91.9	93.7
92.4	93.3	93.6	59.7	93.4	94.0	105.3	93.1	93.7	57.4	93.3	94.1	106.4	93.3	93.7
74.5	93.4	93.9	56.3	92.6	94.0	74.6	93.3	94.3	55.2	92.4	94.1	95.0	93.2	93.7
61.3	93.3	93.9	54.3	92.5	94.1	58.6	93.4	94.4	53.4	92.4	94.1	83.2	93.3	94.0
58.7	92.6	93.9	53.0	93.7	94.1	56.2	92.6	94.4	52.0	93.9	94.2	58.1	93.4	94.3
56.6	92.6	93.9	37.6	93.8	94.4	54.0	92.5	94.4	26.3	94.0	94.5	56.2	92.6	94.3
55.7	93.9	94.0	13.6	94.2	94.8	52.8	93.9	94.5	5.1	94.2	94.9	53.3	93.9	94.2
38.8	93.9	94.3	6.5	94.2	94.9	24.1	94.1	94.9	-0.2	93.0	94.8	33.9	93.9	94.5
23.0	94.2	94.6	3.4	93.5	94.9	4.9	94.2	95.1	-2.0	93.3	94.8	21.3	94.0	94.7
8.4	94.3	94.7	-1.4	93.6	94.8	1.8	93.1	95.1	-3.2	94.7	94.9	5.6	94.3	94.9
5.1	93.5	94.8	-2.2	94.6	94.9	-1.2	93.2	95.1	-50.5	94.8	95.1	3.2	93.4	94.9
2.3	93.1	94.7				-2.7	94.7	95.1				-0.9	93.5	94.8
0.0	94.7	95.0				-50.1	94.7	95.3				-3.2	94.8	95.0

	2014	2014	2015	2016	2017
Avg. Water Surface Slope	0.0105	0.0102	0.0096	0.0074	0.0090
Riffle Length	29	27	30	32	30
Avg. Riffle Slope	0.0108	0.0112	0.0114	0.0093	0.0123
Pool Length	10	10	9	10	10
Pool to Pool Spacing	38	37	38	38	38

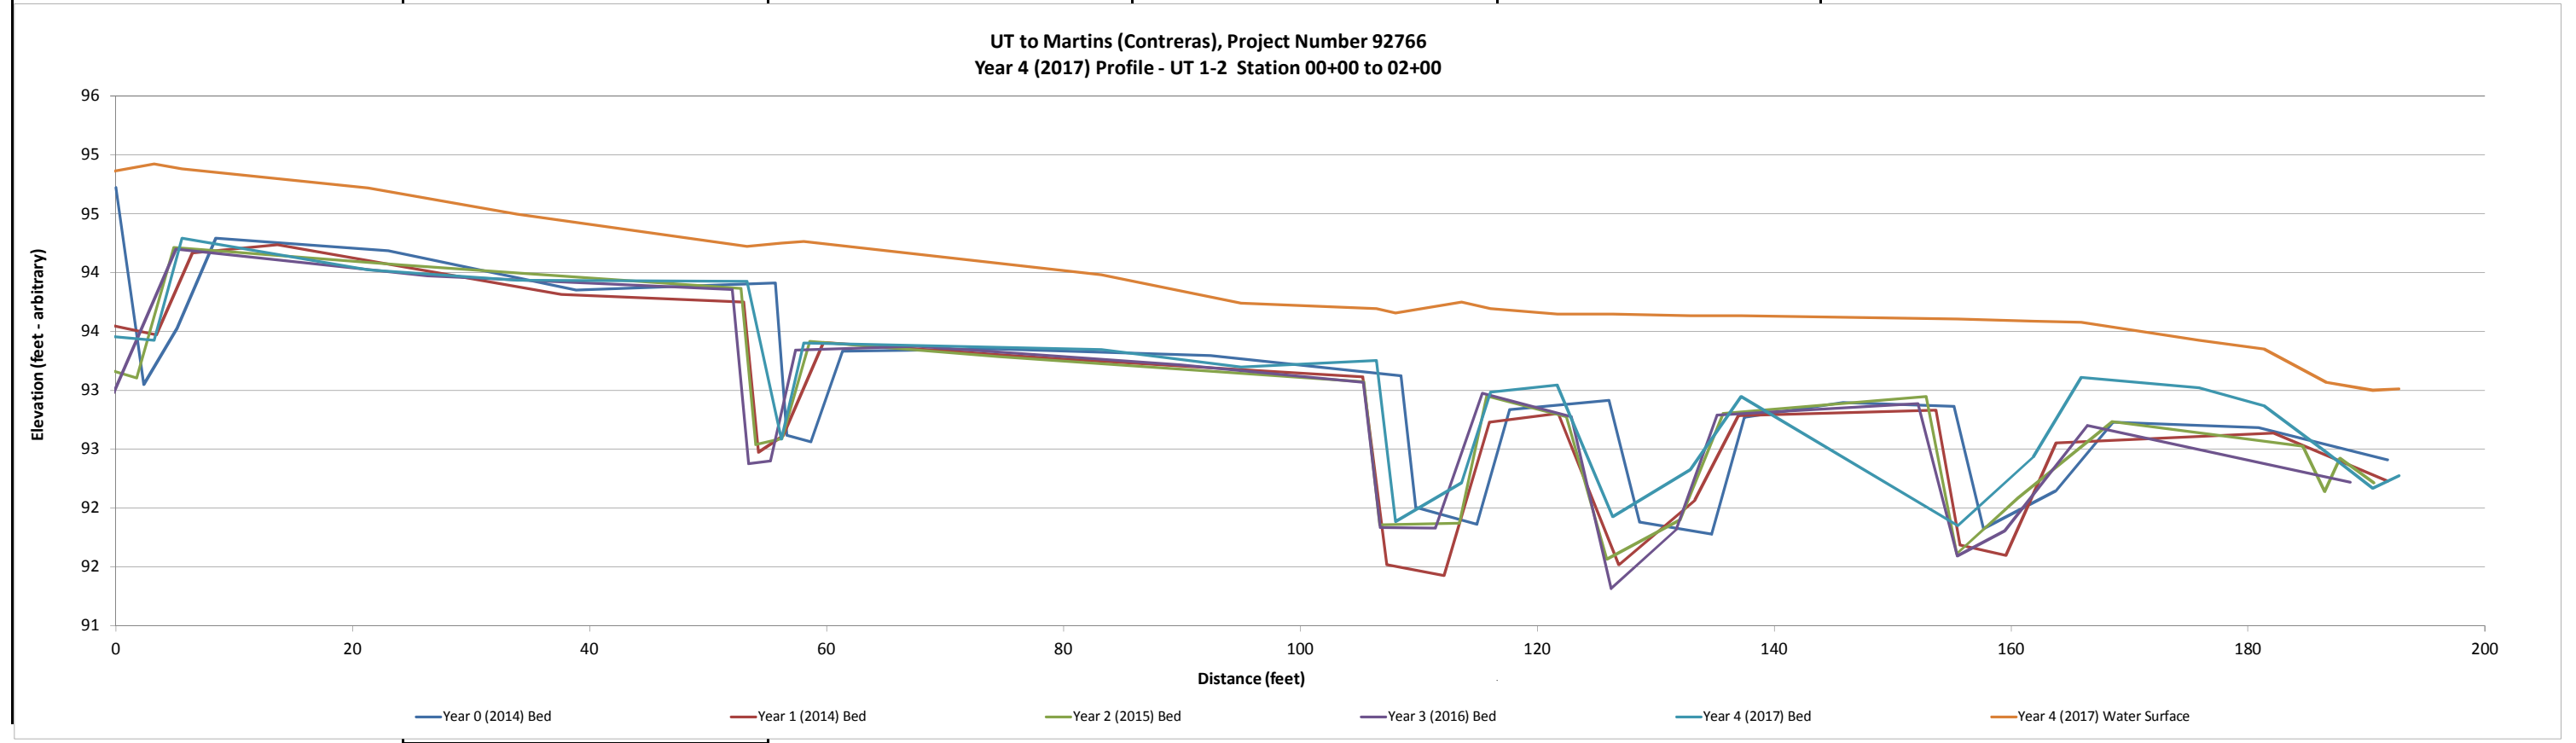


**Project Name** UT to Martins (Contreras), NC DMS Project Number 92766  
**Reach** UT 1-3 Station 00+00 - 09+00  
**Project Number** 92766  
**Date** 3/15/17  
**Crew** Perkinson, Keith

2014 Year 0 Monitoring \Survey			2014 Year 1 Monitoring \Survey			2015 Year 2 Monitoring \Survey			2016 Year 3 Monitoring \Survey			2017 Year 4 Monitoring \Survey		
Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation
822.4	92.4	92.9	823.2	92.3	92.8	822.3	92.0	92.9	828.3	91.8	92.9	823.1	92.0	92.8
807.4	92.4	93.0	808.3	92.7	93.0	799.3	92.7	93.3	816.1	92.1	92.9	817.2	92.2	92.8
789.7	92.6	93.3	793.4	92.7	93.1	797.3	92.3	93.4	803.6	92.6	93.1	815.7	92.1	92.8
775.6	92.8	93.5	781.8	93.0	93.4	792.8	92.5	93.4	801.6	91.9	93.1	811.2	91.7	92.8
757.6	93.4	93.8	769.7	93.1	93.5	789.1	93.0	93.6	796.3	91.8	93.3	803.8	92.3	92.8
754.1	93.2	93.8	756.4	93.3	93.7	779.1	93.2	93.8	794.6	92.6	93.4	788.0	92.7	93.2
752.0	93.8	93.9	754.8	93.2	93.7	775.7	92.6	93.9	784.6	93.0	93.7	777.2	93.0	93.4
727.9	94.8	95.0	752.6	93.8	93.9	772.5	92.7	94.0	771.3	93.0	93.8	774.3	92.8	93.4
707.0	95.1	95.4	738.3	94.4		763.1	93.3	94.0	761.0	93.5	94.0	766.0	92.9	93.5
681.7	95.9	96.2	729.5	94.7	95.1	741.2	94.3	94.9	758.0	93.3	94.1	763.2	93.2	93.6
665.8	96.4	97.0	715.1	94.8	95.2	715.1	94.8	95.2	723.6	93.8	94.0	742.7	94.3	
662.5	96.3	97.0	713.7	94.6	95.2	694.6	95.6	96.1	742.7	94.3	94.9	728.9	94.7	
660.1	96.2	97.0	710.2	95.1	95.3	656.6	96.7	97.5	732.3	94.6		717.5	94.8	95.2
651.4	96.4	97.1	696.1	95.2	95.6	624.8	97.1	97.9	722.1	94.8	95.6	702.2	95.3	95.6
646.9	96.7	97.2	679.2	95.9	96.2	621.7	96.4	97.9	712.6	95.0	95.7	700.5	95.1	95.6
630.3	97.0	97.4	665.1	96.6	97.0	619.0	96.7	97.9	706.1	95.2	95.8	698.1	95.2	95.6
624.0	97.2	97.5	661.4	96.3	97.0	617.6	97.8	98.1	704.0	95.1	95.8	696.2	95.7	
621.8	96.7	97.5	657.9	96.3	97.0	609.3	98.3	98.9	700.2	95.5	95.8	681.7	96.0	
618.3	96.8	97.5	653.5	96.7	97.0	605.9	97.5	98.9	677.3	96.4	96.9	680.1	95.7	96.2
617.1	97.7	97.8	624.8	97.2	97.4	602.7	97.5	98.9	675.6	96.2	96.9	678.1	95.9	96.2
607.2	98.2	98.7	622.0	96.4	97.4	600.9	99.1	99.3	674.3	96.7	97.1	676.7	96.4	
605.0	97.4	98.7	619.6	96.6	97.4	591.2	99.2	99.7	643.7	96.9	97.5	663.3	96.6	96.9
600.9	98.1	98.6	617.6	97.8		588.7	98.6	99.7	628.1	97.1	97.6	660.3	96.3	97.0
600.2	98.9	99.1	607.9	98.4	98.7	585.3	99.2	99.8	624.9	96.3	97.5	658.5	96.3	97.0
591.1	99.3	99.5	605.0	97.6	98.8	553.9	100.6	101.4	621.5	96.7	97.6	657.0	96.8	97.1
582.1	99.5	99.9	601.6	98.1	98.7	530.1	101.0	101.8	619.9	97.7	98.0	637.1	96.8	97.3
573.3	99.8	100.1	599.8	98.9		525.3	100.6	101.8	616.7	97.6	98.2	624.1	97.1	97.4
556.6	100.6	101.1	584.3	99.5	99.8	515.4	100.6	102.0	612.8	98.5	98.9	621.9	96.6	97.3

	2014	2014	2015	2016	2017
Avg. Water Surface Slope	0.0321	0.0321	0.0321	0.0317	NA*
Riffle Length	41	34	27	22	25
Avg. Riffle Slope	0.0318	0.0422	0.0413	0.0467	NA*
Pool Length	12	11	11	8	10
Pool to Pool Spacing	51	45	40	29	35



\* Insufficient water in channel to calculate slope.

UT to Martins (Contreras), Project Number 92766  
 Year 4 (2017) Profile - UT 1-3 Station 00+00 to 09+00

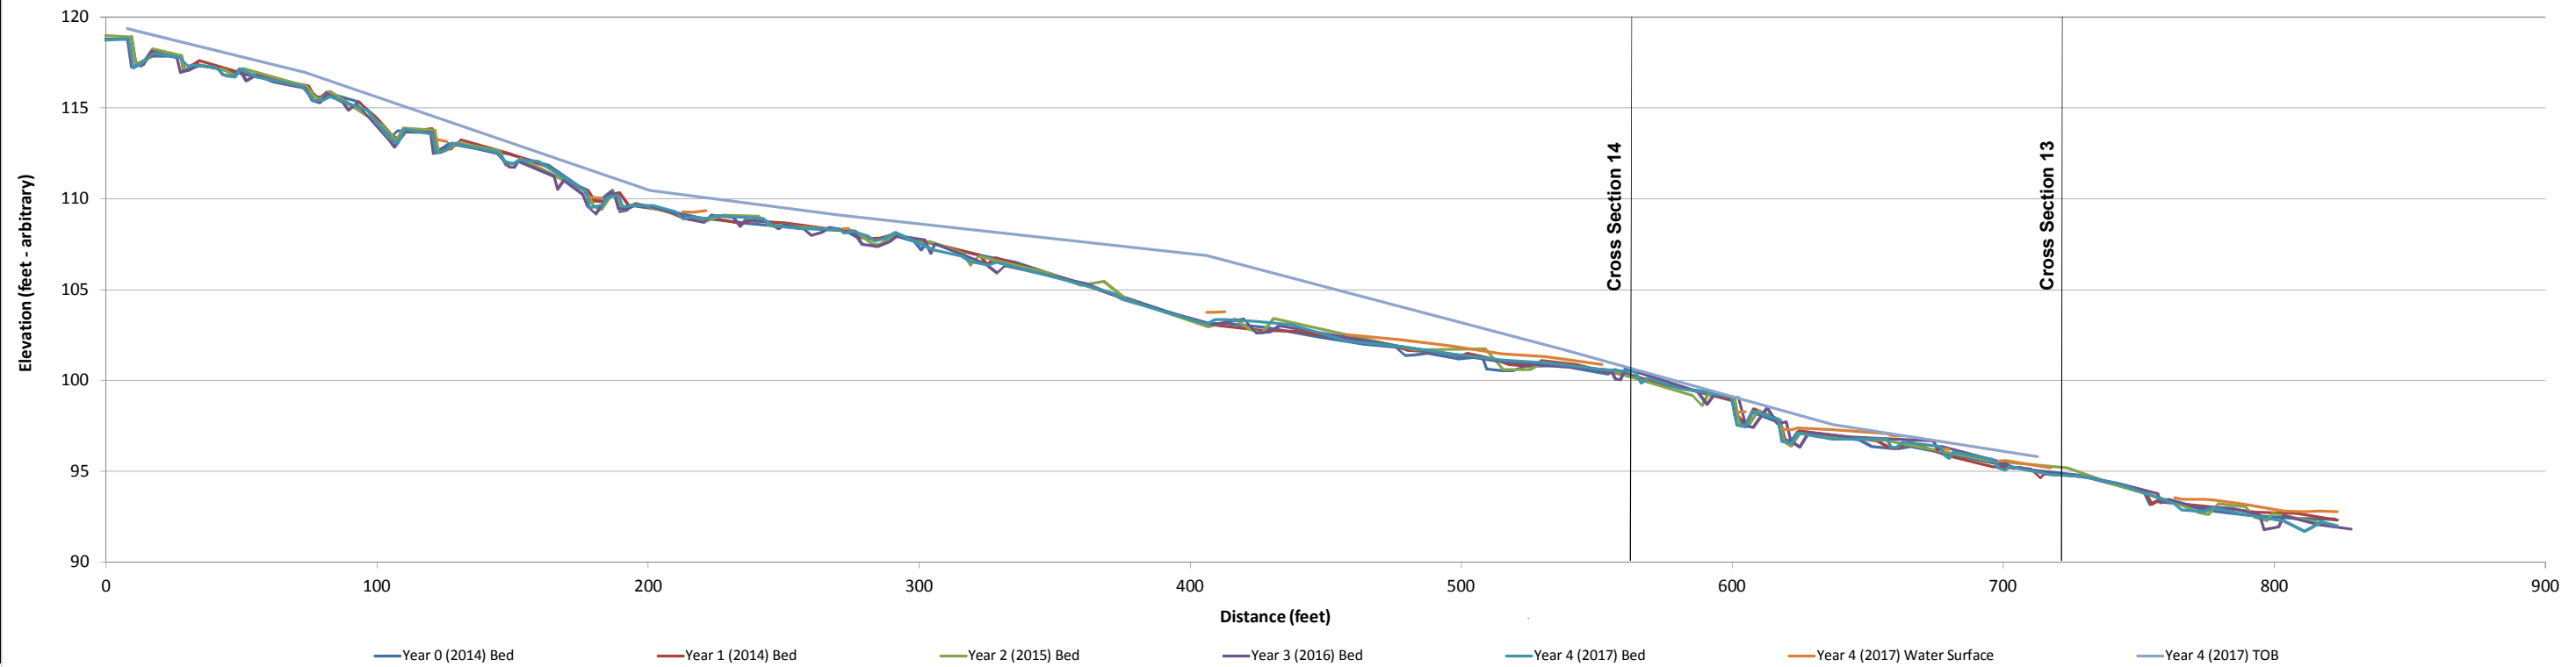



Project Name: UT to Martins Creek (Contreras)					
Cross-Section: 5					
Feature: Riffle					
		2017			
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	2	8%	8%
Sand	very fine sand	0.125	0	0%	8%
	fine sand	0.250	1	4%	12%
	medium sand	0.50	1	4%	16%
	coarse sand	1.00	2	8%	24%
	very coarse sand	2.0	1	4%	28%
Gravel	very fine gravel	4.0	0	0%	28%
	fine gravel	5.7	1	4%	32%
	fine gravel	8.0	1	4%	36%
	medium gravel	11.3	2	8%	44%
	medium gravel	16.0	2	8%	52%
	course gravel	22.3	4	16%	68%
	course gravel	32.0	2	8%	76%
	very coarse gravel	45	1	4%	80%
	very coarse gravel	64	2	8%	88%
	Cobble	small cobble	90	2	8%
medium cobble		128	0	0%	96%
large cobble		180	1	4%	100%
very large cobble		256	0	0%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
Bedrock	bedrock	40096	0	0%	100%
<b>TOTAL % of whole count</b>			25	100%	100%
Summary Data					
D16	0.5				
D35	7.44				
D50	14.6				
D84	54				
D95	86				

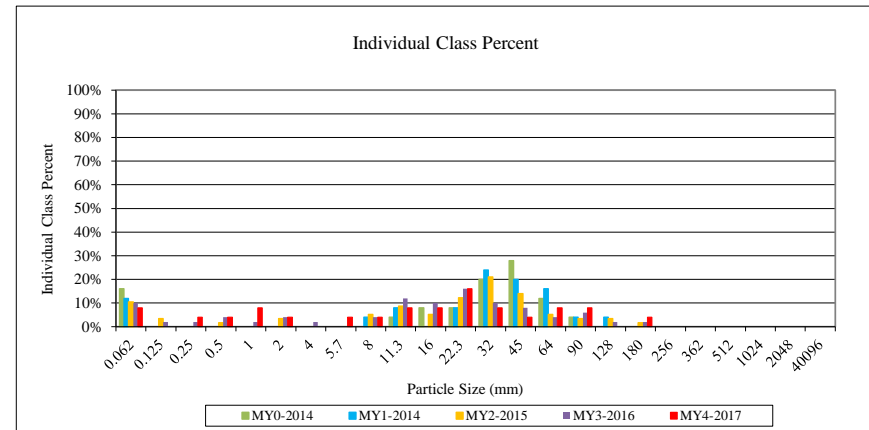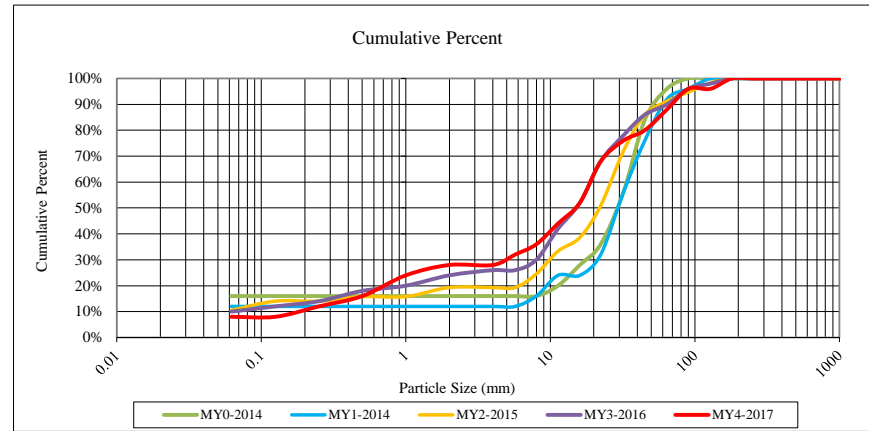

**Table 10a. Baseline Stream Data Summary (UT -1 to Martin's Creek)  
UT to Martin's Creek Mitigation Project - DMS Project Number 92766**

Parameter	Gauge	Regional Curve			Pre-Existing Condition (UT-1)					Reference Reach(es) Data					Design (UT-1)			Monitoring Baseline				
		LL	UL	Eq.	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	Min	Max	Med	Min	Mean	Med	Max	SD
<b>Dimension and Substrate - Riffle Only</b>																						
BF Width (ft)					9.2			16.9		11.7			21.7		12.5	15.0		11.7	12.3	12.2	13.8	0.7
Floodprone Width (ft)					31.0			51.0		20			410		50	100		50	71	50	100	27
BF Mean Depth (ft)					1.0			1.6		0.6			1.0		1.0	1.2		0.9	1.0	1.1	1.1	0.1
BF Max Depth (ft)					2.1			2.6		0.9			2.5		1.2	1.7		1.5	1.7	1.7	1.8	0.2
BF Cross Sectional Area (ft <sup>2</sup> )					12.8			18.8		10.2			13.1		12.5	18.0		11.5	12.7	12.8	14.7	1.2
Width/Depth Ratio					6.0			17.6		10.7			17.0		12.5	12.5		10.6	11.9	11.7	13.7	1.0
Entrenchment Ratio					>2.4			>5		1.7			32.0		3.5	7.7		4.1	5.8	5.8	8.5	2.1
Bank Height Ratio					1.1			1.7		1.0			1.0		1.0	1.0		1.0	1.0			
<b>Profile</b>																						
Riffle length (ft)																		5	33	35	55	12.2
Riffle slope (ft/ft)										0.2000			1.9000		0.0140	0.0140		0.0000	0.0107	0.0115	0.0230	0.0053
Pool length (ft)																		10.0	40.0	36.0	82.0	17.4
Pool Max depth (ft)										2.2			2.5		2.0	3.6		2.3	2.6	2.7	2.8	0.2
Pool spacing (ft)										48.0			231.0		50.0	105.0		10.0	66.0	70.0	118.0	31.0
<b>Pattern</b>																						
Channel Beltwidth (ft)										16			55		19	60		19			60	
Radius of Curvature (ft)										28			47		23	53		23			53	
Rc:Bankfull width (ft/ft)										2			3		1.8	3.5		1.8			3.5	
Meander Wavelength (ft)										70			260		87.5	180		87.5			180	
Meander Width ratio										4.4			17.6		7	12		7			12	
<b>Transport parameters</b>																						
Reach Shear Stress (competency) lbs/ft <sup>2</sup>																						
Max part size (mm) mobilized at bankfull																						
Stream Power (transport capacity) W/m <sup>2</sup>																						
<b>Additional Reach Parameters</b>																						
Rosgen Classification								Bc/Cc/E					Aa/Bc					C			E	
Bankfull Velocity (fps)								3.6 - 4.2										3.5 - 4.2				
Bankfull Discharge (cfs)								46 - 60														
Valley Length (ft)																						
Channel Thalweg Length (ft)																					3180	
Sinuosity								1.17					1.19					1.5			1.5	
Water Surface Slope (ft/ft)								0.0075					0.0333					0.0058			0.0069	
BF slope (ft/ft)																						
Bankfull Floodplain Area (acres)																						
% of Reach with Eroding Banks								----					----									
Channel Stability or Habitat Metric								----					----									
Biological or Other								----					----									

**Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)  
UT to Martin's Creek Mitigation Project - DMS Project Number 92766**

Parameter	Pre-Existing Condition					Reference Reach(es) Data					Design					Monitoring Baseline									
R1%/RU%P%G%/S%																									
SC%/SA%/G%/C%/B%BE%																									
d16/d35/d50/d84/d95	3.0	12.6	17.9	72.3	84.0																				
Entrainment Class <1.5/1.5-1.99/2.0-4.9/5.0-																									
Incision Class <1.2/1.2-1.49/1.5-1.99/>2.0																									

**Table 10c. Baseline Stream Data Summary (UT 1-1 and UT 1-2 to Martin's Creek)  
UT to Martin's Creek Mitigation Project - DMS Project Number 92766**

Parameter	Gauge	Regional Curve			Pre-Existing Condition					Reference Reach(es) Data					Design			Monitoring Baseline				
		LL	UL	Eq.	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	Min	Max	Med	Min	Mean	Med	Max	SD
<b>Dimension and Substrate - Riffle Only</b>																						
BF Width (ft)					4.5			6.7		11.7			21.7				4.5	2.9				
Floodprone Width (ft)					5.4			8.5		20			410				13.5	14				
BF Mean Depth (ft)					0.3			0.4		0.6			1.0				0.4	0.5				
BF Max Depth (ft)					0.5			1.0		0.9			2.5				0.5	0.7				
BF Cross Sectional Area (ft <sup>2</sup> )					1.5			2.4		10.2			13.1				1.7	1.4				
Width/Depth Ratio					13.2			18.9		10.7			17.0				12.0	6.0				
Entrenchment Ratio					1.2			1.6		1.7			32.0				3.0	4.8				
Bank Height Ratio					1.0			4.4		1.0			1.0				1.0	1.0				
<b>Profile</b>																						
Riffle length (ft)																	5	24	15	67	21	
Riffle slope (ft/ft)									0.2000				1.9000			0.0140	0.0000	0.0357	0.0332	0.1101	0.0245	
Pool length (ft)																	4.0	8.0	8.0	14.0	2.3	
Pool Max depth (ft)									2.2				2.5			0.8	----	----	----	----	----	
Pool spacing (ft)									48.0				231.0				32.0	6.0	32.0	23.0	78.0	22.0
<b>Pattern</b>																						
Channel Beltwidth (ft)										16			55									
Radius of Curvature (ft)										28			47				34			34		
Rc:Bankfull width (ft/ft)										2			3				7.6			7.6		
Meander Wavelength (ft)										70			260									
Meander Width ratio										4.4			17.6									
<b>Transport parameters</b>																						
Reach Shear Stress (competency) lbs/ft <sup>2</sup>																						
Max part size (mm) mobilized at bankfull																						
Stream Power (transport capacity) W/m <sup>2</sup>																						
<b>Additional Reach Parameters</b>																						
Rosgen Classification					C					Aa/Bc					C			E				
Bankfull Velocity (fps)					3.5 - 4.1										3.5 - 4.1							
Bankfull Discharge (cfs)					6.0 - 7.0																	
Valley Length (ft)																						
Channel Thalweg Length (ft)																		580				
Sinuosity					1.02 - 1.08					1.19					1.03			1.03				
Water Surface Slope (ft/ft)					0.0096 - 0.0333					0.0333					0.0096 - 0.0333			0.0383				
BF slope (ft/ft)					----					----					----			----				
Bankfull Floodplain Area (acres)					----					----					----			----				
% of Reach with Eroding Banks					----					----					----			----				
Channel Stability or Habitat Metric					----					----					----			----				
Biological or Other					----					----					----			----				

**Table 10d. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)  
UT to Martin's Creek Mitigation Project - DMS Project Number 92766**

Parameter	Pre-Existing Condition					Reference Reach(es) Data					Design					Monitoring Baseline									
Ri%/RU%P%G%/S%																									
SC%/SA%/G%/C%/B%BE%																									
d16/d35/d50/d84/d95																									
Entrainment Class <1.5/1.5-1.99/2.0-4.9/5.0-																									
Incision Class <1.2/1.2-1.49/1.5-1.99/>2.0																									





**Table 11c. Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters - Cross Sections)**

UT to Martin's Creek Mitigation Project - DMS Project Number 92766

Parameter	Cross Section 12						
	UT 1 -1 Riffle						
Dimension	MY0	MY1	MY2	MY3	MY4	MY5	MY5+
BF Width (ft)	2.9	3.2	3.6	2.9	3.8		
Floodprone Width (ft) (approx)	14.0	14.0	14.0	14.0	14.0		
BF Mean Depth (ft)	0.5	0.4	0.4	0.4	0.4		
BF Max Depth (ft)	0.7	0.6	0.7	0.6	0.7		
BF Cross Sectional Area (ft <sup>2</sup> )	1.4	1.3	1.5	1.3	1.4		
Width/Depth Ratio	6.0	7.9	8.6	6.5	10.3		
Entrenchment Ratio	4.8	4.4	3.9	4.8	3.7		
Bank Height Ratio	1.0	1.0	1.0	1.0	1.0		
d50 (mm)	----	----	----	----	----		

**Table 11d. Monitoring Data - Stream Reach Data Summary**

UT to Martin's Creek Mitigation Project - DMS Project Number 92766

Parameter	Baseline (UT 1 - 1)					MY-1 (UT 1 - 1)					MY-2 (UT 1 - 1)					MY-3 (UT 1 - 1)					MY-4 (UT 1 - 1)					MY-5 (UT 1 - 1)				
Dimension and Substrate - Riffle Only	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD
BF Width (ft)		2.9					3.2					3.6					2.9					3.8								
Floodprone Width (ft)		14					14					14					14.0					14.0								
BF Mean Depth (ft)		0.5					0.4					0.4					0.4					0.4								
BF Max Depth (ft)		0.7					0.6					0.7					0.6					0.7								
BF Cross Sectional Area (ft <sup>2</sup> )		1.4					1.3					1.5					1.3					1.4								
Width/Depth Ratio		6.0					8.0					8.9					6.5					10.3								
Entrenchment Ratio		4.8					4.4					3.9					4.8					3.7								
Bank Height Ratio		1.0					1.0					1.0					1.0					1.0								
<b>Profile - UT 1 - 1</b>																														
Riffle length (ft)	5	24	15	67	21	7	26	17	67	21	5	19	15	66	17	7	20	14	67	15	6	26	18	68	21					
Riffle slope (ft/ft)	0.0000	0.0357	0.0332	0.1101	0.0245	0.0104	0.0306	0.0308	0.0555	0.0143	0.0017	0.0392	0.0364	0.0936	0.0218	0.0026	0.0309	0.0359	0.0508	0.01	0.0000	0.0303	0.0310	0.0529	0.0136					
Pool length (ft)	4	8	8	14	2	6	9	8	17	3	5	10	8	19	4	4	8	8	13	2	4	8	7	13	2					
Pool Max depth (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----					
Pool spacing (ft)	6	32	23	78	22	6	34	24	78	21	7	27	24	75	16	6	26	23	76	15	6	34	24	94	25					
<b>Pattern</b>																														
Channel Beltwidth (ft)																														
Radius of Curvature (ft)			34																											
Rc:Bankfull width (ft/ft)			7.6																											
Meander Wavelength (ft)																														
Meander Width ratio																														
<b>Additional Reach Parameters</b>																														
Rosgen Classification		E-type					E-type					E-type					E-type													
Channel Thalweg Length (ft)		580					576					595					573					572								
Sinuosity		1.03					1.03					1.03					1.03					1.03								
Water Surface Slope (Channel) (ft/ft)		0.0383					0.0385					0.0381					0.0383					0.0388								
BF slope (ft/ft)		----					----					----					----					----								
Ri%/RU%P%G%/S%																														
SC%/SA%/G%/C%/B%BE%																														
d16/d35/d50/d84/d95																														
% of Reach with Eroding Banks		----					----					----					----					----								
Channel Stability or Habitat Metric		----					----					----					----					----								
Biological or Other		----					----					----					----					----								

**Table 11e. Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters - Cross Sections)**

UT to Martin's Creek Mitigation Project - DMS Project Number 92766

Parameter	Cross Section 13							Cross Section 14						
	UT 1 - 3 Riffle							UT 1 - 3 Riffle						
Dimension	MY0	MY1	MY2	MY3	MY4	MY5	MY5+	MY0	MY1	MY2	MY3	MY4	MY5	MY5+
BF Width (ft)	5.9	5.6	4.7	4.2	3.5			7.3	7.8	8.1	7.8	6.7		
Floodprone Width (ft) (approx)	25.0	25.0	25.0	25.0	25.0			25.0	25.0	25.0	25.0	25.0		
BF Mean Depth (ft)	0.5	0.4	0.4	0.4	0.4			0.5	0.4	0.4	0.4	0.4		
BF Max Depth (ft)	0.9	0.7	0.7	0.8	0.6			1.0	0.8	1.0	0.9	0.8		
BF Cross Sectional Area (ft <sup>2</sup> )	2.7	2.1	1.7	1.6	1.4			3.6	3.2	3.4	3.3	2.6		
Width/Depth Ratio	12.9	14.9	13.0	11.0	8.8			14.8	19.0	19.3	18.4	17.3		
Entrenchment Ratio	4.2	4.5	5.3	6.0	7.1			3.4	3.2	3.1	3.2	3.7		
Bank Height Ratio	1.0	1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0	1.0		
d50 (mm)	----	----	----	----	----			----	----	----	----	----		

**Table 11f. Monitoring Data - Stream Reach Data Summary**

UT to Martin's Creek Mitigation Project - DMS Project Number 92766

Parameter	Baseline (UT 1 - 3)					MY-1 (UT 1 - 3)					MY-2 (UT 1 - 3)					MY-3 (UT 1 - 3)					MY-4 (UT 1 - 3)					MY-5 (UT 1 - 3)					
Dimension and Substrate - Riffle Only	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	Min	Mean	Med	Max	SD	
BF Width (ft)	5.9	6.6	6.6	7.3	1	5.6	6.7	6.7	7.8	1.6	4.7	6.4	6.4	8.1	2.4	4.2	6.0	6.0	7.8	2.5	3.5	5.1	5.1	6.7	2.3						
Floodprone Width (ft)		25	25				25	25				25	25				25	25				25	25								
BF Mean Depth (ft)	0.4	0.5	0.5	0.5	0.1	0.4	0.4	0.4	0.4		0.4	0.4	0.4	0.4	0.0	0.4	0.4	0.4	0.4	0.0	0.4	0.4	0.4	0.4	0.0						
BF Max Depth (ft)	0.9	1.0	1.0	1.0	0.1	0.7	0.8	0.8	0.8	0.1	0.7	0.9	0.9	1.0	0.2	0.8	0.9	0.9	0.9	0.1	0.6	0.7	0.7	0.8	0.1						
BF Cross Sectional Area (ft <sup>2</sup> )	2.7	3.2	3.2	3.6	0.6	2.1	2.7	2.7	3.2	0.8	1.7	2.6	2.6	3.4	1.2	1.6	2.5	2.5	3.3	1.2	1.4	2.0	2.0	2.6	0.8						
Width/Depth Ratio	14.6	14.7	14.7	14.8	0.1	14.0	16.8	16.8	19.5	3.9	11.8	16.0	16.0	20.3	6.0	10.5	15.0	15.0	19.5	6.4	8.8	12.8	12.8	16.8	5.7						
Entrenchment Ratio	3.4	3.8	3.8	4.2	0.6	3.2	3.8	3.8	4.5	0.9	3.1	4.2	4.2	5.3	1.6	3.2	4.6	4.6	6.0	1.9	3.7	5.4	5.4	7.1	2.4						
Bank Height Ratio		1.0	1.0				1.0	1.0				1.0	1.0				1.0	1.0				1.0	1.0								
<b>Profile - UT 1 - 3</b>																															
Riffle length (ft)	4	41	22	173	44	4	34	30	147	35	8	27	18	138	30	2	22	12	122	27	4	25	17	151	31						
Riffle slope (ft/ft)	0.0047	0.0318	0.0326	0.0913	0.0218	0.0139	0.0422	0.0324	0.1479	0.0353	0.0185	0.0413	0.0343	0.1077	0.0243	0.0091	0.0467	0.0337	0.1575	0.04	0.0047	0.0174	0.0159	0.0331	0.0130						
Pool length (ft)	5	12	7	50	11	4	11	8	31	8	5	11	8	21	5	3	8	8	16	3	4	10	8	38	7						
Pool Max depth (ft)	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----					
Pool spacing (ft)	11	51	31	178	43	12	45	40	153	35	10	37	27	145	32	8	29	21	136	28	10	35	24	189	36						
<b>Pattern</b>																															
Channel Beltwidth (ft)																															
Radius of Curvature (ft)																															
Rc:Bankfull width (ft/ft)																															
Meander Wavelength (ft)																															
Meander Width ratio																															
<b>Additional Reach Parameters</b>																															
Rosgen Classification	C/E type					C/E type					C/E type					C/E type					C/E type										
Channel Thalweg Length (ft)	813					814					822					838					832										
Sinuosity	1.08					1.08					1.08					1.08					1.08										
Water Surface Slope (Channel) (ft/ft)	0.0321					0.0321					0.0321					0.0317					NA										
BF slope (ft/ft)	----					----					----					----					----										
Ri%/RU%P%G%/S%																															
SC%/SA%/G%/C%/B%BE%																															
d16/d35/d50/d84/d95																															
% of Reach with Eroding Banks	----					----					----					----					----										
Channel Stability or Habitat Metric	----					----					----					----					----										
Biological or Other	----					----					----					----					----										

APPENDIX E  
HYDROLOGY DATA

Table 12. Verification of Bankfull Events



**Table 12. Verification of Bankfull Events  
UT to Martin's Creek (Contreras) Mitigation Site (DMS Project Number 92766)**

<b>Date of Data Collection</b>	<b>Date of Occurrence</b>	<b>Method</b>	<b>Photo (if available)</b>
August 25, 2014	April 7, 2014	Crest gauge data indicates a bankfull event after approximately 2.4 inches of rain documented in one day at a nearby rain gauge.	---
August 25, 2014	July 1, 2014	Crest gauge data indicates a bankfull event after approximately 2.02 inches of rain was documented over two days at a nearby rain gauge.	---
August 25, 2014	August 24, 2014	Crest gauge data indicates a bankfull event after approximately 1.39 inches of rain documented over two days at a nearby rain gauge. Wrack and laid-back vegetation were also observed.	1
October 27, 2014	September 3, 2014	Crest gauge data indicates a bankfull event after approximately 1.67 inches of rain documented in one day at a nearby rain gauge.	---
October 27, 2014	October 14, 2014	Crest gauge data and wrack observed indicate a bankfull event after approximately 2.5 inches of rain documented in one day at a nearby rain gauge.	2
April 12, 2015	November 17, 2014	Crest gauge data indicates a bankfull event after approximately 1.44 inches of rain documented in one day at a nearby rain gauge.	---
July 13, 2015	June 11, 2015	Crest gauge data and laid back vegetation in the floodplain of UT1 indicate a bankfull event after approximately 1.68 inches of rain documented in one day at a nearby rain gauge.	---
July 13, 2015	June 26, 2015	Crest gauge data indicates a bankfull event after approximately 1.57 inches of rain was documented in one day at a nearby rain gauge.	3
September 11, 2015	August 19, 2015	Crest gauge data indicates a bankfull event after approximately 2.94 inches of rain was documented over three days at a nearby rain gauge.	---
November 18, 2015	September 26, 2015	Crest gauge data indicates a bankfull event after approximately 2.65 inches of rain was documented over two days at a nearby rain gauge.	---
November 18, 2015	October 3, 2015	Crest gauge data indicates a bankfull event after approximately 4.50 inches of rain was documented over three days at a nearby rain gauge.	---
August 23, 2016	June 5, 2016	Crest gauge data and wrack on the TOB of UT1 indicate a bankfull event after approximately 2.28 inches of rain documented in two days at a nearby rain gauge.	4
November 8, 2017	October 8, 2017	Crest gauge data and the observation of debris along the floodplain of UT-1 indicate a bankfull event occurred after 1.97 inches of rain was documented at a nearby rain gauge.	5, 6

Bankfull Photo 1:  
Laid-back vegetation after a  
bankfull event



Bankfull Photo 2:  
Wrack on the fence at the  
downstream crossing after a  
bankfull event




Bankfull Photo 3:  
Laid-back vegetation after a  
bankfull event



Bankfull Photo 4:  
Wrack on the TOB after a  
bankfull event



Bankfull Photo 5:  
Debris deposited along the  
TOB and floodplain

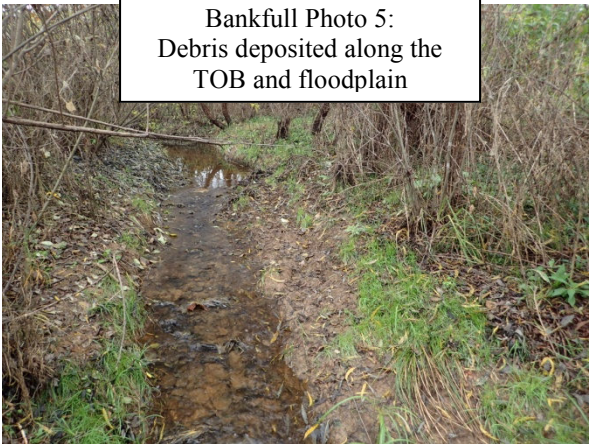

Bankfull Photo 6:  
Wrack on the TOB after a  
bankfull event

