

Year 2 Monitoring Report

**UT to Uwharrie River Stream Restoration Project
Randolph County, North Carolina
EEP Project No. 847**



Construction Completed: March 2011
Vegetation Data Collected: September 2013
Morphology Data Collected: November 2013
Submission Date: December 2013



North Carolina Department of
Environment and Natural Resources
Ecosystem Enhancement Program
1652 Mail Service Center
Raleigh, NC 27699-1652

Owner



NCDENR
Ecosystem Enhancement Program
1652 Mail Service Center
Raleigh, NC 27699-1652

EEP Project Manager: Harry Tsomides
Phone: (828) 545-7057

Monitoring Firm



Mulkey Engineers and Consultants
6750 Tryon Road
Cary, North Carolina 27518
Phone: (919) 851-1912
Fax: (919) 851-1918

Project Manager: Mark Mickley
Phone: (919) 858-1797

TABLE OF CONTENTS

1.0	Executive Summary	1
1.1	<i>Goals and Objectives</i>	1
1.2	<i>Project Background</i>	1
1.3	<i>Vegetation</i>	1
1.4	<i>Stream Stability</i>	2
1.5	<i>Note</i>	3
2.0	Methodology	3
3.0	References	4

APPENDICES

Appendix A. Project Vicinity Map and Background Tables

Figure 1	Project Vicinity Map
Table 1	Project Components and Mitigation Credits
Table 2	Project Activity and Reporting History
Table 3	Project Contacts Table
Table 4	Project Attribute Table

Appendix B. Visual Assessment Data

Figure 2	Current Condition Plan View (CCPV)
Figure 3	Current Condition Plan View (CCPV) Low Stem Density
Table 5	Visual Stream Morphology Stability Assessment
Table 6	Vegetation Condition Assessment
Photo Point Photographs	

Appendix C. Vegetation Plot Data

Table 7	Vegetation Plot Criteria Attainment
Table 8	CVS Vegetation Metadata Table
Table 9	Planted and Total Stem Counts (Species by Plot with Annual Means)
Vegetation Plot Photographs	

Appendix D. Stream Survey Data

Cross-sections with Annual Overlays	
Longitudinal Profiles with Annual Overlays	
Pebble Count Plots with Annual Overlays	
Table 10a	Baseline Stream Data Summary
Table 10b	Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydraulic Containment Parameter Distribution)
Table 11a	Monitoring Data - Dimension Morphology Summary (Dimensional Parameters - Cross-sections)
Table 11b	Monitoring Data - Stream Reach Data Summary

Appendix E. Hydrologic Data

Table 12	Verification of Bankfull Events
----------	---------------------------------

1.0 Executive Summary

The following report summarizes the vegetation establishment and stream stability for Year 2 monitoring for the UT to Uwharrie River Stream Restoration Project (Site) in Randolph County, North Carolina.

1.1 Goals and Objectives

Goals

- Improve the overall water quality by reducing the input of sediment and nutrients into the aquatic system.
- Improve the richness and diversity of the plant species within the riparian zone.
- Improve the overall wildlife habitat across the entire conservation easement,

Objectives

- Create a stable network of stream channels by altering either the dimension, pattern, or profile of each reach.
- Restore the riparian zone of each reach by reestablishing the appropriate plant community and eliminating the invasive plant species.
- Eliminate the feedlot runoff from entering the stream channels and degrading water quality.
- Protect the completed stream and habitat restoration at the Site through a perpetual conservation easement.

1.2 Project Background

The Site is located on a UT to the Uwharrie River approximately 5.0 miles southeast of the city of Thomasville and 3.2 miles southwest of the city of Trinity in Randolph County. The site is within the area bounded by Welborn Road (SR 1556) to the north, Hopewell Church Road (SR 3252) and Morris Road (SR 1557) to the east, Kennedy Road (SR 3106) to the south, and Finch Farm Road (SR 1547) to the west (Figure 1). The restoration project is located entirely on one private parcel owned by Mr. Donnie R. Sumner (Parcel ID No. 7706263620). The Ecosystem Enhancement Program (EEP) purchased 32.76 acres and established a perpetual conservation easement to protect stream restoration activities.

The Site is located in the North Carolina Division of Water Quality (NCDWQ) Sub-basin 03-07-09 of the Yadkin-Pee Dee River Basin, USGS Hydrologic Unit Code 03040103 (8-digit HUC) and Local Watershed Unit 03040103050010 (14-digit HUC). The Uwharrie River is the closest named stream to the Site. The restoration project is located with the extent of EEP's Upper Uwharrie Local Watershed Plan.

1.3 Vegetation

Stream Vegetation Success Criteria

Vegetation monitoring will be considered successful for stream mitigation credit if at least 260 stems/acre (trees and shrubs), both, volunteer and planted, are surviving at the end of five years. The interim measure of vegetative success for the site will be the survival of at least 320 3-year

old stems per acre at the end of year three of the monitoring period and 280 4-year old stems per acre at the end of year four of the monitoring period (USACE et al. 2003).

Monitoring Results

Overall stem counts were based on an average of the evaluated vegetation plots. Based on the number of stems counted toward stream mitigation credit, average densities were measured at 373 planted stems per acre (excluding livestakes) surviving in Year 2 (2013). This planted stem density showed a slight decline from Year 1, whereas the planted and volunteer stem (total) densities increased (Table 9). For the second year, the dominant species identified at the Site were planted stems of American sycamore (*Platanus occidentalis*) and white oak (*Quercus alba*).

Twelve of the seventeen individual vegetation plots met success criteria by greater than ten percent when counting planted stems alone. Five plots (Plots 2, 4, 6, 11, and 12) did not meet the success criteria when counting only planted stems (Figure 2 and Tables 7 & 9). However, three of these plots (Plots 2, 6, and 12) did meet the success criteria by counting both planted and volunteer stems.

A visual assessment was conducted during April, September, and November of 2013 to assess the vegetation at the Site. Figure 3 represents areas of low planted and volunteer stem densities within the easement. These areas comprise approximately 16 acres or almost 50% of the Site. Immediate action is recommended to ensure the proper stem densities at the Site.

Two populations of kudzu (*Pueraria lobata*) are located just inside the easement boundary at the western and eastern ends of the Site. The locations of these populations are mapped on the Current Condition Plan View (CCPV) (Figure 2). Invasive/exotic vegetation is not currently compromising the vegetative success of the site. However, due to the highly invasive nature of kudzu, immediate attention should be given to the two populations during the coming year (2014).

1.4 Stream Stability

Year 2 monitoring surveys along UT to Uwharrie occurred in November 2013. Several areas of instability were noted during longitudinal surveys and are documented on the CCPV (Figure 2). Four areas of bank erosion and scour were observed along the Main Center reach between Stations 17+00 to 27+00. Additionally, one rock vane has been compromised as a result of stream bank erosion around the vane arm and two constructed riffles are stressed within this Station range. One short section of bed degradation was observed along the SW-Trib reach between Stations 11+25 and 11+50. No areas of instability were observed during longitudinal surveys of the SE-UT or Main West.

Detailed as-built surveys were not conducted at the Site, so comparison of channel dimension and profile data between as-built and Year 1 conditions could not be conducted. The limited as-built surveys that were conducted allowed for comparison of channel pattern during the initial year. A comparison of Year 1 and Year 2 data shows no evidence of a significant change in the

channel dimension, pattern or profile. The majority of stream banks and structures throughout the Site are stable and functioning as intended.

Based on an overall visual assessment of the channel, Main Center contains all of the major problem areas on the Site. All problem areas within the extents of longitudinal surveys are depicted on the CCPV (Figure 2). Appropriate remedial action, if necessary, will be determined by EEP.

Baseline monitoring features, including two crest gauges, were installed at the Site in August 2012. One bankfull event was noted on the Main East crest gauge (Table 12).

1.5 Note

Summary information/data related to the occurrence of items such as beaver or encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly the Restoration Plan) documents available on EEP's website. All raw data supporting the tables and figures in the appendices is available from EEP upon request.

2.0 Methodology

The Year 2 Monitoring survey was completed using a Total Station. Fourteen cross-sections and 3,000 feet of longitudinal survey have been established to monitor stream conditions at the Site. Each cross-section and longitudinal survey section is marked with two rebar monuments at their beginning and ending points. The rebar has been located vertically and horizontally in NAD 83-State Plane to facilitate proper orientation and future comparison. The survey data was imported into MicroStation for verification. RIVERMorph was used to analyze the profile and cross section data. Tables and figures were created using Microsoft Excel. Reach-wide pebble counts were conducted at random riffle sections along the longitudinal survey sections of each reach. Crest gauges have been installed to monitor hydrologic success criteria at the site. In addition to longitudinal survey, project-wide stream monitoring was accomplished using visual assessment as well as photo documentation.

Vegetation monitoring was conducted according to the CVS-EEP Protocol for Recording Vegetation, Version 4.0 (Lee et al., 2008). Seventeen 100 square meter vegetation monitoring plots were established along the project reaches in September 2012. Eight plots measure ten meters by ten meters, and nine plots measure five meters by twenty meters. The four corners of each plot are marked with one-half inch steel rebar. Level 2 (planted and volunteer woody stems) data collection was performed in all plots. Each planted woody stem location (x and y), height (cm), and live stem diameter (dbh) were recorded. All planted stems were identified with pink flagging and silver tree tags indicating tree species. Vegetation was identified using Weakley (2011). Photos were taken of each vegetation plot. A qualitative visual assessment of the reaches will be performed each year. Areas lacking cover, with low planted-stem density or vigor, or areas experiencing invasive species encroachment will be identified and mapped on the CCPV.

3.0 References

- Lee, Michael, R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2008. *CVS-EEP Protocol for Recording Vegetation, Version 4.2* (<http://cvs.bio.unc.edu/methods.htm>).
- NCDENR-Ecosystem Enhancement Program. 2007. Final Restoration Plan, Unnamed Tributary to Uwharrie River Stream Restoration Project, Randolph County, North Carolina.
- NRCS (Natural Resources Conservation Service). 2012. Web Soil Survey—Randolph County. Available at: <http://websoilsurvey.nrcs.usda.gov/app/HomePage.htm>.
- Schafale, M.P., and A.S. Weakley. 1990. Classification of the natural communities of North Carolina, third approximation. N.C. Natural Heritage Program, Raleigh, NC.
- USACE. 2003. *Stream Mitigation Guidelines*. USACOE, USEPA, NCWRC, NCDENR-DWQ.
- Weakley, Alan S. 2011. Flora of the Southern and Mid-Atlantic States. University of North Carolina Herbarium, North Carolina Botanical Garden, UNC Chapel Hill. http://herbarium/unc/edu/FloraArchives/WeakleyFlora_2011-May-nav.pdf

APPENDIX A

Project Vicinity Map and Background Tables

Figure 1.	Project Vicinity Map
Table 1.	Project Components and Mitigation Credits
Table 2.	Project Activity and Reporting History
Table 3.	Project Contacts Table
Table 4.	Project Attribute Table

The subject project site is an environmental restoration site of the NCDENR Ecosystem Enhancement Program (EEP) and is encompassed by a recorded conservation easement, but is bordered by land under private ownership. Accessing the site may require traversing areas near or along the easement boundary and therefore access by the general public is not permitted. Access by authorized personnel of state and federal agencies or their designees/contractors involved in the development, oversight and stewardship of the restoration site is permitted within the terms and timeframes of their defined roles. Any intended site visitation or activity by any person outside of these previously sanctioned roles and activities requires prior coordination with EEP.




Restoration Site Access

Directions to the Project:

The project site is located approximately 5.0 miles southeast of the City of Thomasville and 3.2 miles southwest of the City of Trinity in Randolph County. The approximate center of the project site is located at 35.849838° N Latitude and 80.004514° W Longitude. From I-85 take Exit 108 and follow Hopewell Church Road (SR 3252) south for 1.7 miles. Turn right onto Morris Road (SR 1557) and follow for 0.8 miles. Turn right onto Kennedy Road (SR 3106) and follow for 600 feet to the Site entrance.

Access to the conservation easement during all phases of the project will be maintained through the landowner's gated entrance to the Site. This entrance is located at the end of landowner's private driveway off of Kennedy Road, approximately 600 ft west of Morris Road.



PROJECT VICINITY MAP
 UT TO UWHARRIE RIVER
 STREAM RESTORATION PROJECT
 EEP PROJECT #847
 RANDOLPH COUNTY, NC

Legend
 Project Boundary

FIGURE
 1

Table 1. Project Components and Mitigation Credits UT to Uwharrie River Stream Restoration Project (#847)									
Mitigation Credits									
	Stream ¹		Riparian Wetland		Non-riparian Wetland		Buffer	Nitrogen Nutrient Offset	Phosphorous Nutrient Offset
Type	R	RE	R	RE	R	RE			
Totals	6611	144		0.19					
Project Components									
Project Component -or- Reach ID	Stationing/Location		Existing Footage/Acreage	Approach (P1, PII etc.)	Restoration -or- Restoration Equivalent	Restoration Footage or Acreage	Mitigation Ratio		
NW-UT	0+00 - 3+38		355'	P3	E1	338'	1.5:1		
SW-UT	0+00 - 2+62		271'	P3	E1	262'	1.5:1		
SW Tributary	0+00 - 2+71		1440'		P	271'	5:1		
	2+71 - 15+09			P2	R	1238'	1:1		
Main West	0+00 - 2+29		1235'	P3	E1	229'	1.5:1		
	2+29 - 14+27			P2	R	1198'	1:1		
Main Center	14+27 - 29+40		1330'	P2	R	1513'	1:1		
SE-UT	-0+36 - 10+70		1020'	P2/P1	R	1106'	1:1		
N-UT	0+30 - 1+02		206'	P3	E1	72'	1.5:1		
	1+02 - 3+18			P2	R	216'	1:1		
Main East	29+40 - 36+56		1163'	P2	R	716'	1:1		
	36+56 - 41+32				P	476'	5:1		
Tributary 1	Drains to Main East		129'	P3	E2	104'	2.5:1		
Tributary 2	Drains to Main East		91'	P3	E2	59'	2.5:1		
Wetland A	Top of SW-Trib		0.65		P	0.65	5:1		
Wetland B	Adjacent to SW-Trib		0.02		P	0.02	5:1		
Wetland C	Adjacent to SE-UT		0.26		P	0.26	5:1		
Component Summation									
Restoration Level	Stream (linear feet)	Riparian Wetland (acres)		Non-riparian Wetland (acres)	Buffer (square feet)	Upland (acres)			
		Riverine	Non-Riverine						
Restoration	5986								
Enhancement									
Enhancement I	901								
Enhancement II	163								
Creation									
Preservation	747		0.93						
High Quality Preservation									
BMP Elements									
Element	Location	Purpose/Function		Notes					
BMP Elements									
BR = Bioretention Cell; SF = Sand Filter; SW = Stormwater Wetland; WDP = Wet Detention Pond; DDP = Dry Detention Pond; FS = Filter Strip; S = Grassed Swale; LS = Level Spreader; NI = Natural Infiltration Area; FB = Forested Buffer									

1 - A total of 41 linear feet of restored stream and 25 linear feet of preserved stream was subtracted from the Mitigation Credit summation to account for the three permanent stream crossings at the Site.

Table 2. Project Activity and Reporting History UT to Uwharrie River Stream Restoration Project (#847)		
Activity or Deliverable	Data Collection Complete	Completion or Delivery
Environmental Resources Technical Report	Dec-06	Mar-07
Permanent Conservation Easement Executed & Recorded	N/A	Aug-2006
Restoration Plan	N/A	Jul-07
Final Design – Construction Plans	N/A	Aug-10
Construction	N/A	Mar-11
Planting	N/A	Feb-11
Baseline Monitoring Installation	Sep-12	Dec-12
Year 1 Monitoring	Nov-12	Mar-13
Spring Assessment	Apr-13	May-13
Year 2 Monitoring	Nov-13	Dec-13

Table 3. Project Contacts Table UT to Uwharrie River Stream Enhancement Project (#847)	
Designer Primary project design POC	Mulkey Engineers and Consultants, Inc. 6750 Tryon Road Cary, NC 27518 Tom Barrett, (919) 858-1817
Construction Contractor Construction contractor POC	Vaughn Contracting, Inc. Post Office Box 796 Wadesboro, NC 28170 Tommy Vaughn, (704) 694-6450
Survey Contractor Survey contractor POC	Dixie Land Surveying, PLLC 4278 Country Club Road Wadesboro, NC 28170 Michael R. Ingram, (704) 694-5810
Planting/Seeding Contractor Planting contractor POC	Vaughn Contracting, Inc. Post Office Box 796 Wadesboro, NC 28170 Tommy Vaughn, (704) 694-6450
Seed Mix Sources	Evergreen Seed, (919) 567-1333 Southern States, (336) 625-3779
Nursery Stock Suppliers	NC Forest Service - Claridge Nursery, (919) 731-7988 Arborgen - (800) 222-1290
Monitoring Performers Stream/Vegetation Monitoring POC	Mulkey Engineers and Consultants, Inc. 6750 Tryon Road Cary, NC 27518 Mark Mickley, (919) 858-1797

Table 4. Project Attribute Table - UT to Uwharrie River Stream Enhancement Project (#847)

Project County	Randolph									
Physiographic Region	Piedmont									
Ecoregion	Carolina Slate Belt									
Project River Basin	Yadkin-Pee Dee									
USGS HUC for Project (14 digit)	3040103050010									
NCDWQ Sub-basin for Project	03-07-09									
Within extent of EEP Watershed Plan?	Upper Uwharrie Local Watershed Plan									
WRC Hab Class (Warm, Cool, Cold)	Warm									
% of project easement fenced or demarcated	100%									
Beaver activity observed during design phase?	No									
Restoration Component Attribute Table										
Reach	NW-UT	SW-UT	Main West	Main Center	Main East	SW-Trib	SE-UT	N-UT	Trib 1	Trib 2
Drainage area (ac)	537.6	256.0	819.2	915.2	1267.2	51.2	25.6	307.2	19.2	19.2
Stream order	2nd	1st	2nd	2nd	2nd/3rd	1st	1st	2nd	1st	1st
Restored length (feet)	338.0	262.0	1427.0	1513.0	1192.0	1509.0	1106.0	288.0	104.0	59.0
Perennial or Intermittent	Per	Per	Per	Per	Per	Per	Per	Per	Int	Int
Watershed type (Rural, Urban, Developing etc.)	Rural									
Watershed LULC Distribution (e.g.)										
Residential	27%									
Ag-Row Crop	2%									
Ag-Livestock	30%									
Forested	39%									
Etc.	2%									
Watershed impervious cover (%)	1%									
NCDWQ AU/Index number	13-2-(0.5)									
NCDWQ classification	WS-III									
303d listed?	No									
Upstream of a 303d listed segment?	No									
Reasons for 303d listing or stressor	N/A									
Total acreage of easement	32.8									
Total vegetated acreage within the easement	32.8									
Total planted acreage as part of the restoration	32.76									
Rosgen classification of pre-existing	E3/1	E4b	E3/4	E4	E4	E4b	G5	E4	U	U
Rosgen classification of As-built ¹	-	-	E4/1	E4	-	B4	C5b	-	-	-
Valley type	VIII	VIII	VIII	VIII	VIII	II	II	VIII	U	U
Valley slope	0.01625	0.02366	0.0134	0.0071	0.009	0.0325	0.03068	0.01228	U	U
Valley side slope range (e.g. 2-3.%)	U	U	U	U	U	U	U	U	U	U
Valley toe slope range (e.g. 2-3.%)	U	U	U	U	U	U	U	U	U	U
Cowardin classification	R5UB1	R5UB1	R5UB1	R5UB1	R5UB1	R5UB1	R5UB2	R5UB1	R4	R4
Trout waters designation	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Species of concern, endangered etc.? (Y/N)	N	N	N	N	N	N	N	N	N	N
Dominant soil series and characteristics										
Series	Mecklenburg Loam 8-15%	Mecklenburg Loam 8-15%	Mecklenburg Loam 8-15%	Riverview sandy loam 0-2%/Wilkes-poindexter-Wynott complex 15-45%	Mecklenburg Loam 8-15%	Mecklenburg Loam 8-15%	Mecklenburg Loam 8-15%/Wilkes-poindexter-Wynott complex 15-45%	Riverview sandy loam 0-2%/Mecklenburg Loam 8-15%	Mecklenburg Loam 8-15%	Mecklenburg Loam 8-15%
Depth (in)	61	61	61	42-60	61	61	42-61	60-61	61	61
Clay%	33.7	33.7	33.7	33.7	26.3	32.5	28.8	26.3	32.5	32.5
K	0.28	0.28	0.28	0.24-0.31	0.28	0.28	0.28-0.31	0.24-0.28	0.28	0.28
T	4	4	4	2-5	4	4	2-4	4-5	4	4

1 - Rosgen classifications based on MY1 survey data and are therefore not available for all reaches

N/A = Not Applicable, "U" = Unavailable, "U" = Unknown


APPENDIX B

Visual Assessment Data

Figure 2.	Current Condition Plan View (CCPV)
Figure 3.	Current Condition Plan View (CCPV) Low Stem Density
Table 5.	Visual Stream Morphology Stability Assessment
Table 6.	Vegetation Condition Assessment
Photo Point Photographs	



Image courtesy of USGS State of Michigan © 2013 Nokia © AND


PREPARED FOR 	SHEET 1 OF 5
	12/20/2013
	DRAWN: MLM REVIEWED: TBB
	PROJECT NUMBER
	MEC: 2012057.00
	NCEEP: 847










**FIGURE 2. CURRENT CONDITION PLAN VIEW
UT TO UWHARRIE RIVER STREAM RESTORATION PROJECT
RANDOLPH COUNTY, NORTH CAROLINA**

1 inch = 250 feet

GRAPHIC SCALE

0 125 250 500
Feet



LEGEND					
	Easement Boundary		As-built Centerline		Crest Gauge
	Wetlands		Year 2 Centerline		Photo Point
	Designed Centerline		Cross Section		Cross Section Pin

PREPARED BY




State of Michigan © 2013 Nokia © AND

	PREPARED FOR	SHEET 2 OF 5
		12/20/2013
		DRAWN: MLM REVIEWED: TBB
		PROJECT NUMBER
		MEC: 2012057.00
	NCEEP: 847	

**FIGURE 2. CURRENT CONDITION PLAN VIEW
UT TO UWHARRIE RIVER STREAM RESTORATION PROJECT
RANDOLPH COUNTY, NORTH CAROLINA**


1 inch = 100 feet

GRAPHIC SCALE

0 50 100 200 Feet

LEGEND			
	Easement Boundary		As-built Centerline
	Wetlands		Year 2 Centerline
	Designed Centerline		Cross Section
	Crest Gauge		Photo Point
	Cross Section Pin		

PREPARED BY

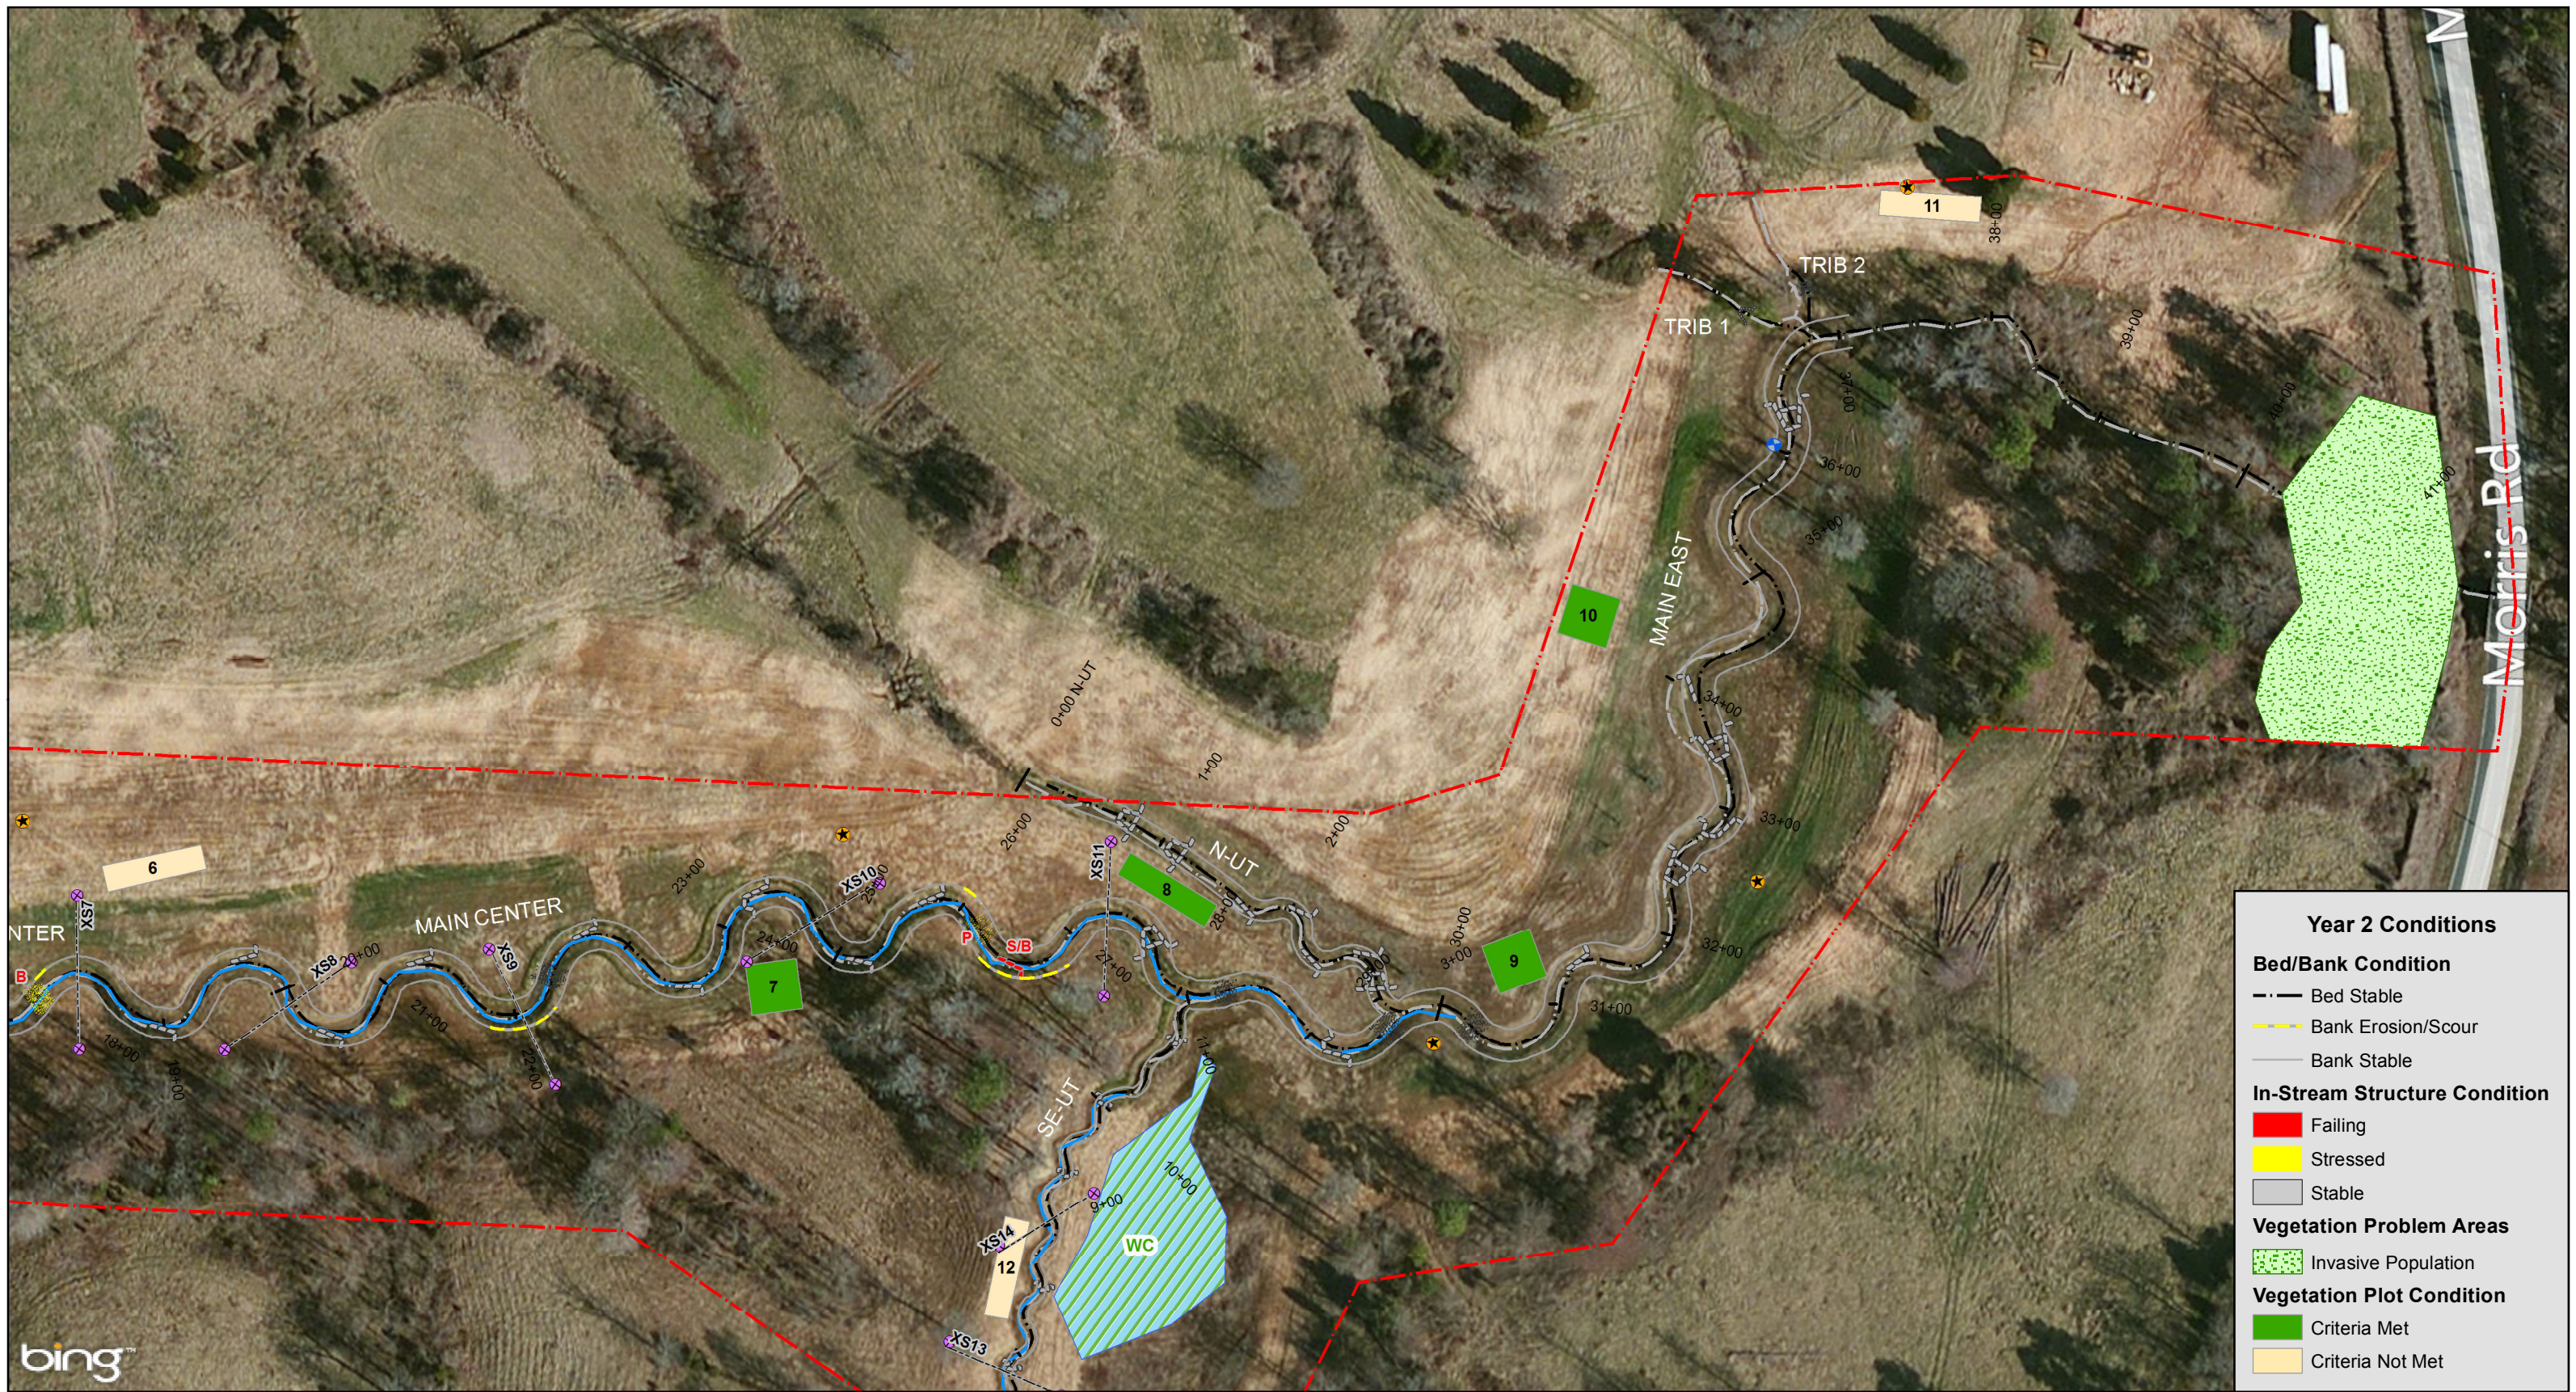

**FIGURE 2. CURRENT CONDITION PLAN VIEW
UT TO UWHARRIE RIVER STREAM RESTORATION PROJECT
RANDOLPH COUNTY, NORTH CAROLINA**

	PREPARED FOR	SHEET 3 OF 5
		12/20/2013
	DRAWN: MLM	REVIEWED: TBB
	PROJECT NUMBER	
	MEC: 2012057.00	
	NCEEP: 847	

1 inch = 100 feet

GRAPHIC SCALE

0 50 100 200 Feet

LEGEND			
	Easement Boundary		As-built Centerline
	Wetlands		Year 2 Centerline
	Designed Centerline		Cross Section
	Crest Gauge		Photo Point
	Cross Section Pin		

PREPARED BY



State of Michigan © 2013 Nokia © AND

	PREPARED FOR	SHEET 4 OF 5
		12/20/2013
		DRAWN: MLM REVIEWED: TBB
		PROJECT NUMBER
		MEC: 2012057.00
	NCEEP: 847	

**FIGURE 2. CURRENT CONDITION PLAN VIEW
UT TO UWHARRIE RIVER STREAM RESTORATION PROJECT
RANDOLPH COUNTY, NORTH CAROLINA**

1 inch = 75 feet

GRAPHIC SCALE

0 37.5 75 150 Feet

Easement Boundary	As-built Centerline	Crest Gauge
Wetlands	Year 2 Centerline	Photo Point
Designed Centerline	Cross Section	Cross Section Pin

PREPARED BY



State of Michigan © 2013 Nokia © AND

Year 2 Conditions

Bed/Bank Condition

- Bed Stable
- Bank Erosion/Scour
- Bank Stable

In-Stream Structure Condition

- Failing
- Stressed
- Stable

Vegetation Problem Areas

- Invasive Population

Vegetation Plot Condition

- Criteria Met
- Criteria Not Met

	PREPARED FOR	SHEET 5 OF 5
		12/20/2013
		DRAWN: MLM REVIEWED: TBB
		PROJECT NUMBER
		MEC: 2012057.00
	NCEEP: 847	

**FIGURE 2. CURRENT CONDITION PLAN VIEW
UT TO UWHARRIE RIVER STREAM RESTORATION PROJECT
RANDOLPH COUNTY, NORTH CAROLINA**

1 inch = 75 feet

GRAPHIC SCALE

0 37.5 75 150 Feet

LEGEND			
	Easement Boundary		As-built Centerline
	Wetlands		Year 2 Centerline
	Designed Centerline		Cross Section
	Crest Gauge		Photo Point
	Cross Section Pin		

PREPARED BY



Image courtesy of USGS © AND © 2013 Nalanda © AND

	PREPARED FOR	SHEET 1 OF 1
		12/20/2013
	DRAWN: MLM REVIEWED: TBB	
	PROJECT NUMBER	
	MEC: 2012057.00	
	NCEEP: 847	

**FIGURE 3. CURRENT CONDITION PLAN VIEW (LOW STEM DENSITY)
UT TO UWHARRIE RIVER STREAM RESTORATION PROJECT
RANDOLPH COUNTY, NORTH CAROLINA**

GRAPHIC SCALE

0 150 300 600

Feet

1 inch = 300 feet

LEGEND		
	Easement Boundary	
	Wetlands	
	Designed Centerline	
	Crest Gauge	
	Year 2 Centerline	
	Cross Section	
		Cross Section Pin

PREPARED BY	

Table 5. Visual Stream Morphology Stability Assessment - UT to Uwharrie River Stream Restoration Project (#847) - MY2 (2013)										
Main West - 235 ft										
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	¹ Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting					100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	5	5			100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth > 1.6)	5	5			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	4	4			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	5	5			100%			
2. Thalweg centering at downstream of meander (Glide)		5	5			100%				
Totals					0	0.0	100%	0	0	100%
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0.0	100%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.					100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, calving, or collapse					100%	n/a	n/a	n/a
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	4	4			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	1	1			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	4	4			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	3	3			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio > 1.6 Rootwads/logs providing some cover at base-flow.	2	2			100%			

¹ Total number derived from MY2 survey data as detailed As-built surveys were not conducted for the project

Table 5. Visual Stream Morphology Stability Assessment - UT to Uwharrie River Stream Restoration Project (#847) - MY2 (2013)
Main Center/East - 1588 ft

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	¹ Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting					100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate	28	28		100%				
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth > 1.6)	27	27		100%				
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	25	27		93%				
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	22	23		96%				
2. Thalweg centering at downstream of meander (Glide)		21	23	91%						
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			4	137.4	91%	1	10	92%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0.0	100%	n/a	n/a	n/a
Totals					4	137	91%	n/a	n/a	n/a
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	21	22			95%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	8	8			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	20	22			91%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	14	16			88%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio > 1.6 Rootwads/logs providing some cover at base-flow.	4	4			100%			

¹ Total number derived from MY2 survey data as detailed As-built surveys were not conducted for the project

Table 5. Visual Stream Morphology Stability Assessment - UT to Uwharrie River Stream Restoration Project (#847) - MY2 (2013)												
SW-Trib - 724 ft												
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	¹ Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation		
1. Bed	1. Vertical Stability (Rifle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%					
		2. <u>Degradation</u> - Evidence of downcutting					100%					
	2. Rifle Condition	1. <u>Texture/Substrate</u> - Rifle maintains coarser substrate	36	36		100%						
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth > 1.6)	15	17		88%						
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	16	17		94%						
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	25	29		86%						
2. Thalweg centering at downstream of meander (Glide)		26	29	90%								
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a		
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.					0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, calving, or collapse					0	0	100%	n/a	n/a	n/a
Totals					0	0	100%	n/a	n/a	n/a		
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	11	11			100%					
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	11	11			100%					
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	11	11			100%					
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	11	11			100%					
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio > 1.6 Rootwads/logs providing some cover at base-flow.	9	11			82%					

¹ Total number derived from MY2 survey data as detailed As-built surveys were not conducted for the project

Table 5. Visual Stream Morphology Stability Assessment - UT to Uwharrie River Stream Restoration Project (#847) - MY2 (2013)										
SE-UT - 517 ft										
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	¹ Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Rifle and Run units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting					100%			
	2. Rifle Condition	1. <u>Texture/Substrate</u> - Rifle maintains coarser substrate	26	26		100%				
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth > 1.6)	19	19		100%				
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	17	19		89%				
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run)	25	25	100%					
2. Thalweg centering at downstream of meander (Glide)		25	25	100%						
Totals					0	0	100%	n/a	n/a	n/a
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.					100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, calving, or collapse					100%	n/a	n/a	n/a
Totals					0	0	100%	n/a	n/a	n/a
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	10	10			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	10	10			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	10	10			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	10	10			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio > 1.6 Rootwads/logs providing some cover at base-flow.	10	10			100%			

¹ Total number derived from MY1 survey data as detailed As-built surveys were not conducted for the project

Table 6. Vegetation Condition Assessment - UT to Uwharrie River Stream Restoration Project (#847) - MY1 (2012)

Planted Acreage ¹ 32.76						
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	0.1 acres	Pattern and Color	0	0	0
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1 acres	Pattern and Color	5	16.1	49.1
Total						
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 acres	Pattern and Color	0	0	0
Cumulative Total						
Easement Acreage ² 32.76						
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage
4. Invasive Areas of Concern ³	Areas or points (if too small to render as polygons at map scale).	1000 sf	Pattern and Color	2	0.62	1.9
5. Easement Encroachment Areas ⁴	Areas or points (if too small to render as polygons at map scale).	none	Pattern and Color	0	0	0

1 = Enter the planted acreage within the easement. This number is calculated as the easement acreage minus any existing mature tree stands that were not subject to supplemental planting of the understory, the channel acreage, crossings or any other elements not directly planted as part of the project effort.

2 = The acreage within the easement boundaries.

3 = Invasives may occur in or out of planted areas, but still within the easement and will therefore be calculated against the overall easement acreage. Invasives of concern/interest are listed below. The list of high concern species are those with the potential to directly outcompete native, young, woody stems in the short-term (e.g. monitoring period or shortly thereafter) or affect the community structure for existing, more established tree/shrub stands over timeframes that are slightly longer (e.g. 1-2 decades). The low/moderate concern group are those species that generally do not have this capacity over the timeframes discussed and therefore are not expected to be mapped with regularity, but can be mapped, if in the judgement of the observer their coverage, density or distribution is suppressing the viability, density, or growth of planted woody stems. Decisions as to whether remediation will be needed are based on the integration of risk factors by EEP such as species present, their coverage, distribution relative to native biomass, and the practicality of treatment. For example, even modest amounts of Kudzu or Japanese Knotweed early in the projects history will warrant control, but potentially large coverages of Microstegium in the herb layer will not likely trigger control because of the limited capacities to impact tree/shrub layers within the timeframes discussed and the potential impacts of treating extensive amounts of ground cover. Those species with the "watch list" designator in gray shade are of interest as well, but have yet to be observed across the state with any frequency. Those in red italics are of particular interest given their extreme risk/threat level for mapping as points where isolated specimens are found, particularly early in a projects monitoring history. However, areas of discrete, dense patches will of course be mapped as polygons. The symbology scheme below was one that was found to be helpful for symbolizing invasives polygons, particularly for situations where the condition for an area is somewhere between isolated specimens and dense, discrete patches. In any case, the point or polygon/area feature can be symbolized to describe things like high or low concern and species can be listed as a map inset, in legend items if the number of species are limited or in the narrative section of the executive summary.

4 = Encroachment may occur within or outside of planted areas and will therefore be calculated against the overall easement acreage. In the event a polygon is cataloged into items 1, 2 or 3 in the table and is the result of encroachment, the associated acreage should be tallied in the relevant item (i.e., item 1,2 or 3) as well as a parallel tally in item 5.

PHOTO POINT PHOTOGRAPHS


Photo Point 1; Looking Downstream on Northwest Tributary




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 2; Looking Downstream on Southwest Tributary




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 3; Looking Upstream on Northwest Tributary




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 3; Looking Across NW Trib stream on southwest tributary




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 3; Looking Downstream Northwest Tributary




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 4; Looking Upstream Along Main




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 4; Looking Across Main




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 4; Looking Downstream Along Main




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 5; Looking Upstream Along Main




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 5; Looking Across Main




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 5; Looking Downstream Along Main




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 6; Looking Upstream Along Main




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 6; Looking Upstream Southwest Tributary




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 6; Looking Downstream Along Main




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 7; Looking Upstream Along Main




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 7; Looking Downstream Along Main




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 8; Looking Upstream Along Main




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 8; Looking Downstream Along Main




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 9; Looking Upstream Along Main




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 9; Looking Downstream Along Main




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 9; Looking Upstream Along North UT




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 10; Looking Upstream Along Main




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 2 Monitoring: November 2009



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 10; Looking Downstream Along Main




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 11; Looking Upstream Along Main




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 11; Looking Downstream Along Main




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 12; Looking Upstream Along Southeast Tributary




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 12; Looking Across Southeast Tributary




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 12; Looking Downstream Southeast Tributary




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 13; Looking Upstream Along Southeast Tributary




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 13; Looking Across Southeast Tributary




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 13; Looking Downstream Along Southeast Tributary




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 14; Looking Upstream Along Southwest Tributary




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 14; Looking Downstream Along Southwest Tributary




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 15; Looking Upstream Along Southwest Tributary




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

PHOTO POINT PHOTOGRAPHS


Photo Point 15; Looking Downstream Along Southwest Tributary




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

APPENDIX C

Vegetation Plot Data

Table 7.	Vegetation Plot Criteria Attainment
Table 8.	CVS Vegetation Metadata Table
Table 9.	Planted and Total Stem Counts (Species by Plot with Annual Means)
Vegetation Plot Photographs	

Table 7. Vegetation Plot Criteria Attainment - MY2 (2013) UT to Uwharrie River Stream Restoration Project (#847)					
Vegetation Plot ID	Reach ID	Method	CVS Level	Survival Threshold Met?	Tract Mean
1	NW-UT	CVS	I&II	Yes	100%
2	Main West	CVS	I&II	No	50%
3	Main West	CVS	I&II	Yes	
4	Main West	CVS	I&II	No	
5	Main West	CVS	I&II	Yes	
6	Main Center	CVS	I&II	No	67%
7	Main Center	CVS	I&II	Yes	
8	Main Center	CVS	I&II	Yes	
9	Main East	CVS	I&II	Yes	67%
10	Main East	CVS	I&II	Yes	
11	Main East	CVS	I&II	No	
12	SE-UT	CVS	I&II	No	50%
13	SE-UT	CVS	I&II	Yes	
14	SW-Trib	CVS	I&II	Yes	100%
15	SW-Trib	CVS	I&II	Yes	
16	SW-Trib	CVS	I&II	Yes	
17	SW-Trib	CVS	I&II	Yes	

Table 8. CVS Vegetation Metadata Table - UT to Uwharrie River Stream Restoration Project (#847) MY2 (2013)	
Report Prepared By	Brian Dustin
Date Prepared	12/17/2013 12:20
Database name	cvs-eep-entrytool-v2.3.1.mdb
Database location	G:\Project\2012\2012057.00\ENV\Monitoring\Monitoring Year 2\CVS
Computer name	BDUSTIN7
File size	48758784
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
ALL Stems by Plot and spp	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
PROJECT SUMMARY-----	
Project Code	847
Project Name	UT to Uwharrie River
Description	The Unnamed Tributary (UT) to Uwharrie River Stream Restoration Site (Site) is situated in the northwest corner of Randolph County, North Carolina. Specifically, the project site is located on a UT to the Uwharrie River approximately 5.0 miles southeast of Thomasville
River Basin	Yadkin-Pee Dee
Length(ft)	
Stream-to-edge width (ft)	
Area (sq m)	132736.89
Required Plots (calculated)	22
Sampled Plots	17

			Current Plot Data (MY2 2013)																																		
Scientific Name	Common Name	Species Type	Plot 1		Plot 2		Plot 3		Plot 4		Plot 5		Plot 6		Plot 7		Plot 8		Plot 9		Plot 10		Plot 11		Plot 12		Plot 13		Plot 14		Plot 15		Plot 16		Plot 17		
			P	T	P	T	P	T	P	T	P	T	P	T	P	T	P	T	P	T	P	T	P	T	P	T	P	T	P	T	P	T	P	T			
<i>Aesculus sylvatica</i>	painted buckeye	Shrub																																			
<i>Alnus serrulata</i>	hazel alder	Shrub				1																															
<i>Betula nigra</i>	river birch	Tree							1	1						6	6	3	3																1	1	
<i>Carya glabra var. glabra</i>	pignut hickory	Tree		1																																	
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub			1	1			1	1																											
<i>Cercis canadensis</i>	eastern redbud	Tree	2	2																																	
<i>Cornus amomum</i>	silky dogwood	Shrub																							1												
<i>Diospyros virginiana</i>	common persimmon	Tree										1	1	1	4																						
<i>Fraxinus americana</i>	white ash	Tree																																			
<i>Fraxinus pennsylvanica</i>	green ash	Tree							1	1	1	1			5	5	1	1																	1	1	
<i>Juglans nigra</i>	black walnut	Tree											3																								
<i>Juniperus virginiana</i>	eastern red cedar	Tree					1														1	1					1						1	1			
<i>Liquidambar styraciflua</i>	sweetgum	Tree														2				4								8									
<i>Liriodendron tulipifera</i>	tuliptree	Tree			1																																
<i>Malus angustifolia</i>	southern crabapple	Tree																																			
<i>Pinus echinata</i>	shortleaf pine	Tree					4	4				1	1									1	1														
<i>Pinus strobus</i>	eastern white pine	Tree	1	1			1	1																													
<i>Pinus taeda</i>	loblolly pine	Tree													4		2		15			1														1	
<i>Pinus virginiana</i>	Virginia pine	Tree																			2	2															
<i>Platanus occidentalis</i>	American sycamore	Tree			4	33			2	2	4	4			3	3	5	5	3	7					1	4			1						2	2	
<i>Prunus serotina</i>	black cherry	Tree																			1	1															
<i>Pyrus calleryana</i>	Callery pear	Exotic		1																																	
<i>Quercus alba</i>	white oak	Tree	4	4			3	3					3	3							3	3	4	4			5	5	4	4	5	5	2	2			
<i>Quercus falcata</i>	southern red oak	Tree	3	3																																	
<i>Quercus michauxii</i>	swamp chestnut oak	Tree								3	3				1	1	1	1	5	5																2	2
<i>Quercus nigra</i>	water oak	Tree					1	1									2	2	3	3																2	2
<i>Quercus phellos</i>	willow oak	Tree			2	2					2	2					1	1																		1	1
<i>Quercus rubra</i>	northern red oak	Tree										1	1									3	3														
<i>Salix nigra</i>	black willow	Tree																																			
<i>Sambucus canadensis</i>	common elderberry	Shrub							2																	1	1										
<i>Ulmus alata</i>	winged elm	Tree		6																	1																
	Stem count		10	17	7	38	9	10	5	7	10	10	6	9	17	29	12	14	11	35	11	12	7	7	7	12	9	12	9	18	9	11	9	9	9	10	
	Size (ares)		1		1		1		1		1		1		1		1		1		1		1		1		1		1		1		1		1		1
	Size (acres)		0.02		0.02		0.02		0.02		0.02		0.02		0.02		0.02		0.02		0.02		0.02		0.02		0.02		0.02		0.02		0.02		0.02		0.02
	Species count		4	7	3	5	4	5	4	5	4	4	4	5	6	9	5	6	3	6	6	7	2	2	4	6	5	8	4	6	4	6	6	6	6	7	
	Stems per acre		404.7	688.0	283.3	1537.8	364.2	404.7	202.3	283.3	404.7	404.7	242.8	364.2	688.0	1173.6	485.6	566.6	445.2	1416.4	445.2	485.6	283.3	283.3	283.3	485.6	364.2	485.6	364.2	728.4	364.2	445.2	364.2	364.2	404.7		

Exceeds requirements by 10%
 Exceeds requirements by less than 10%
 Fails to meet requirements by more than 10%

			Annual Means			
Scientific Name	Common Name	Species Type	MY1 (2012)		MY2 (2013)	
			P	T	P	T
<i>Aesculus sylvatica</i>	painted buckeye	Shrub		2		
<i>Alnus serrulata</i>	hazel alder	Shrub				1
<i>Betula nigra</i>	river birch	Tree	11	11	11	11
<i>Carya glabra var. glabra</i>	pignut hickory	Tree				1
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub	3	3	2	2
<i>Cercis canadensis</i>	eastern redbud	Tree	2	2	2	2
<i>Cornus amomum</i>	silky dogwood	Shrub				1
<i>Diospyros virginiana</i>	common persimmon	Tree	2	2	2	5
<i>Fraxinus americana</i>	white ash	Tree				1
<i>Fraxinus pennsylvanica</i>	green ash	Tree	9	9	9	9
<i>Juglans nigra</i>	black walnut	Tree		4		6
<i>Juniperus virginiana</i>	eastern red cedar	Tree	2	2	2	3
<i>Liquidambar styraciflua</i>	sweetgum	Tree				14
<i>Liriodendron tulipifera</i>	tuliptree	Tree				1
<i>Malus angustifolia</i>	southern crabapple	Tree		1		
<i>Pinus echinata</i>	shortleaf pine	Tree	6	6	6	6
<i>Pinus strobus</i>	eastern white pine	Tree	6	6	6	6
<i>Pinus taeda</i>	loblolly pine	Tree	2	9	2	27
<i>Pinus virginiana</i>	Virginia pine	Tree	7	7	7	7
<i>Platanus occidentalis</i>	American sycamore	Tree	24	27	24	61
<i>Prunus serotina</i>	black cherry	Tree	5	5	5	5
<i>Pyrus calleryana</i>	Callery pear	Exotic				1
<i>Quercus alba</i>	white oak	Tree	33	33	33	33
<i>Quercus falcata</i>	southern red oak	Tree	13	13	12	12
<i>Quercus michauxii</i>	swamp chestnut oak	Tree	15	15	15	15
<i>Quercus nigra</i>	water oak	Tree	10	10	8	8
<i>Quercus phellos</i>	willow oak	Tree	7	7	6	6
<i>Quercus rubra</i>	northern red oak	Tree	4	4	4	4
<i>Salix nigra</i>	black willow	Tree		4		3
<i>Sambucus canadensis</i>	common elderberry	Shrub	1	1	1	3
<i>Ulmus alata</i>	winged elm	Tree		22		7
	Stem count		162	205	157	260
	Size (ares)		17		17	
	Size (acres)		0.42		0.42	
	Species count		19	23	19	28
	Stems per acre		385.6	488.0	373.7	618.9

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 1




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 2




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 3




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 4




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 5




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 6




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 7




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 8




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 9




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 10




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 11




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 12




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 13




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 14




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 15




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 16




Year 1 Monitoring: September 2012




Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

VEGETATION PLOT PHOTOGRAPHS


Vegetation Plot 17




Year 1 Monitoring: September 2012



Year 2 Monitoring: September 2013



Year 3 Monitoring:



Year 4 Monitoring:



Year 5 Monitoring:

APPENDIX D

Stream Survey Data

Cross-sections with Annual Overlays

Longitudinal Profiles with Annual Overlays

Pebble Count Plots with Annual Overlays

Table 10a. Baseline Stream Data Summary

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydraulic Containment Parameter Distributions)

Table 11a. Monitoring Data – Dimension Morphology Summary (Dimensional Parameters – Cross-Sections)

Table 11b. Monitoring Data – Stream Reach Data Summary


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-1, Riffle, SW-Trib, 9+65
Drainage Area (sq mi):	0.08 (51.2 ac)
Date:	11/11/2013
Field Crew:	T. Barrett, C. Dustin



Stream Type
B4

SUMMARY DATA	
Bankfull Elevation:	688.74
Bankfull Cross-Sectional Area:	3.32
Bankfull Width:	6.91
Floodprone Area Elevation:	689.87
Floodprone Width:	13.99
Max Depth at Bankfull:	1.13
Mean Depth at Bankfull:	0.48
W/D Ratio:	14.4
Entrenchment Ratio:	2.02
Bank Height Ratio:	1.0

Station	Elevation	Station	Elevation
0	693.81		
15	692.04		
25	691.58		
40	691.01		
48	691.04		
50	690.85		
53	690.05		
55	689.24		
56	689.09		
58	688.48		
59	688.74		
60.4	687.72		
60.7	687.61		
61	687.67		
62	687.97		
64	688.72		
68	690.06		
76	692.11		
88	692.66		
100	693.74		

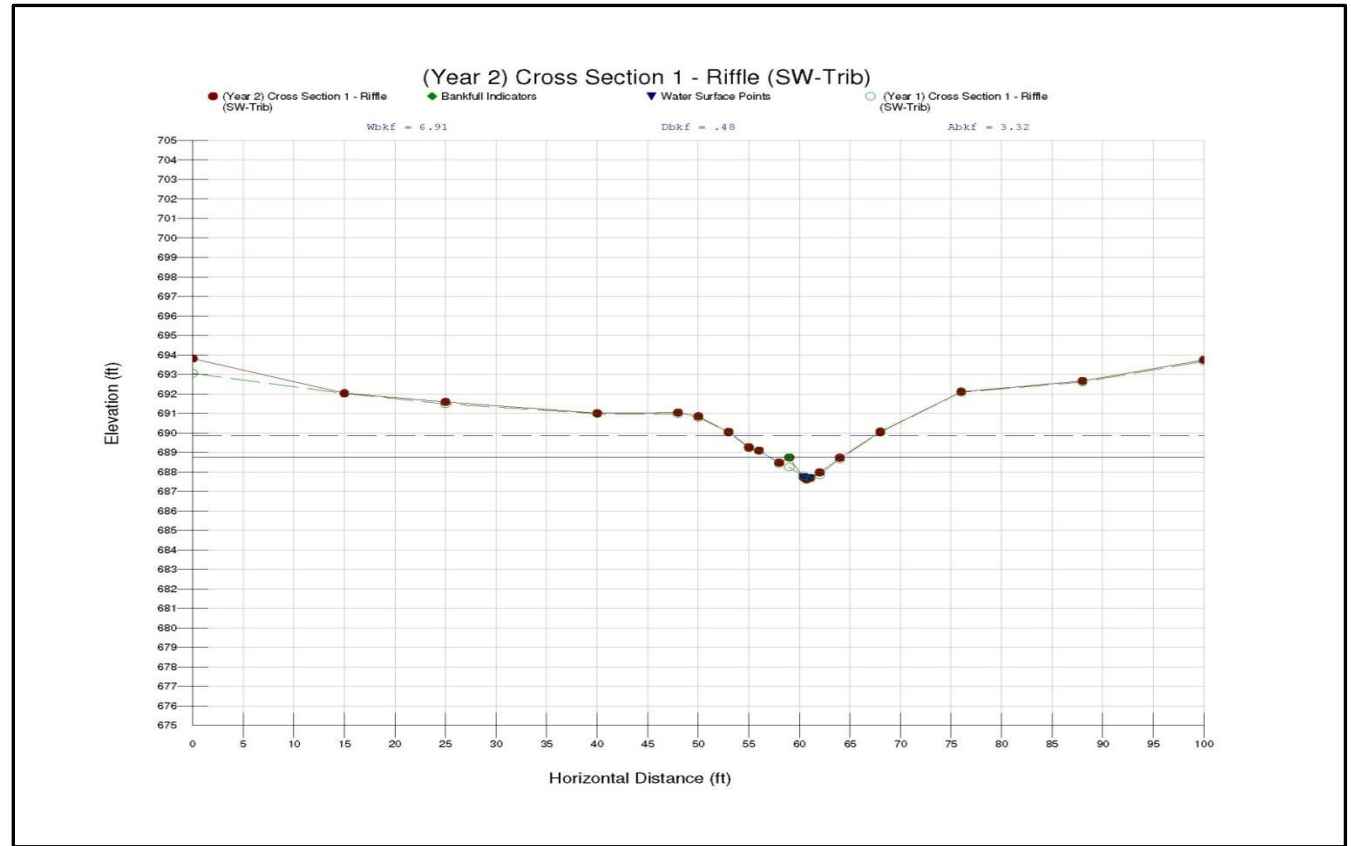


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-2, Pool, SW-Trib, 11+81
Drainage Area (sq mi):	0.08 (51.2 ac)
Date:	11/11/2013
Field Crew:	T. Barrett, C. Dustin

SUMMARY DATA	
Bankfull Elevation:	683.47
Bankfull Cross-Sectional Area:	3.45
Bankfull Width:	7.22
Floodprone Area Elevation:	684.62
Floodprone Width:	14.99
Max Depth at Bankfull:	1.15
Mean Depth at Bankfull:	0.48
W/D Ratio:	15.04
Entrenchment Ratio:	2.08
Bank Height Ratio:	n/a

Stream Type
B4



Station	Elevation	Station	Elevation
0	689.12	100	687.98
25	689.02		
40	688.55		
42	688.47		
48	686.85		
50	686.31		
55	684.64		
58	683.76		
58.5	683.46		
60	683.09		
61.4	682.32		
61.8	682.41		
61.8	682.49		
62.4	682.5		
63	682.89		
63.5	683.14		
65.7	683.47		
68	684.1		
75	685.87		
85	687.48		

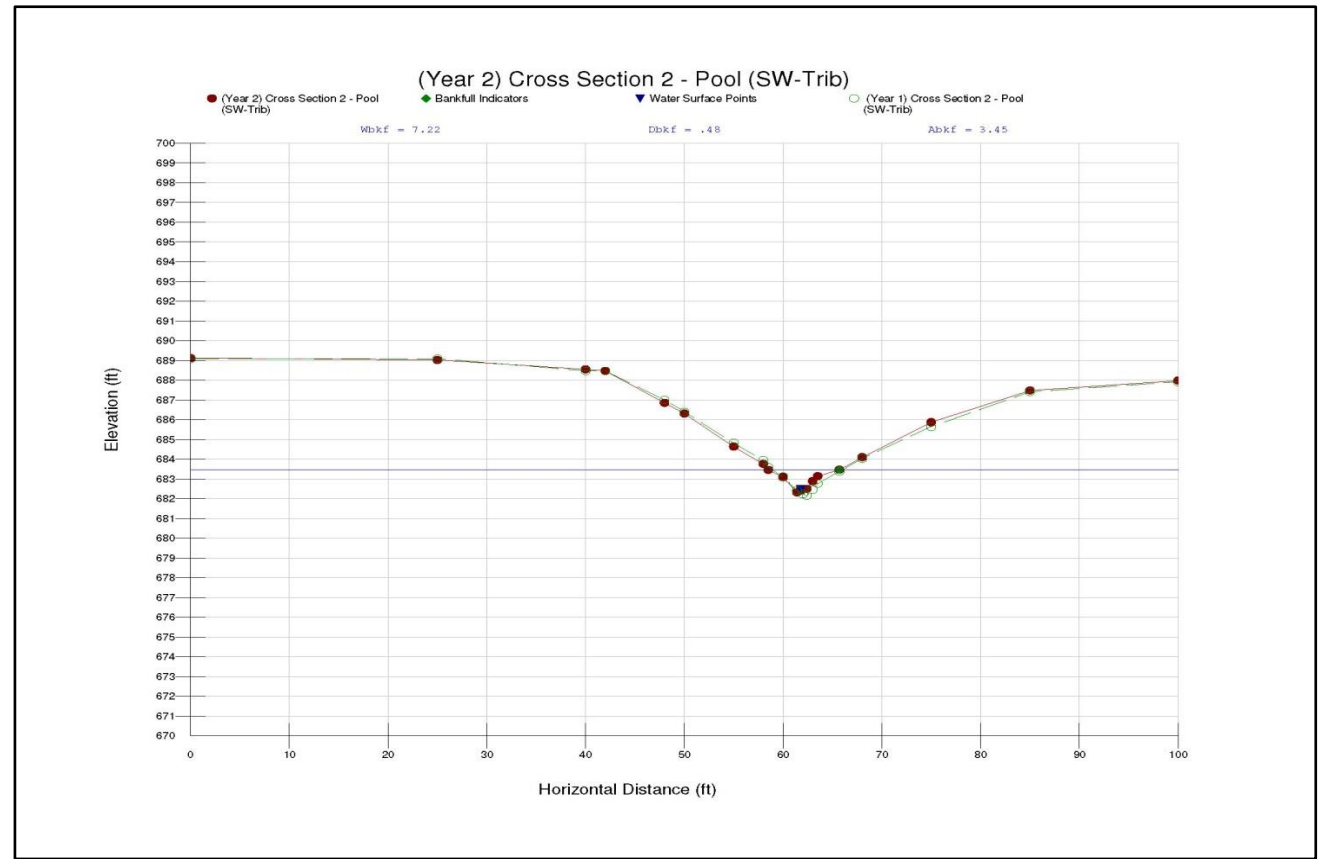


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-3, Riffle, SW-Trib, 13+83
Drainage Area (sq mi):	0.08 (51.2 ac)
Date:	11/11/2013
Field Crew:	T. Barrett, C. Dustin



SUMMARY DATA	
Bankfull Elevation:	678.67
Bankfull Cross-Sectional Area:	1.33
Bankfull Width:	2.73
Floodprone Area Elevation:	679.64
Floodprone Width:	9.19
Max Depth at Bankfull:	0.97
Mean Depth at Bankfull:	0.49
W/D Ratio:	5.57
Entrenchment Ratio:	3.37
Bank Height Ratio:	1.0

Stream Type
B4

Station	Elevation	Station	Elevation
0	681.88	79	682.45
15	682.14	90	682.29
25	682.4		
30	682.35		
35	681.75		
40	680.53		
43	679.56		
44	679.34		
45	679.08		
46	678.67		
46.5	677.93		
47	677.7		
47	677.75		
47.4	677.79		
47.8	678.4		
50	679.04		
51	679.3		
56	681.11		
63	682.4		
69	682.58		

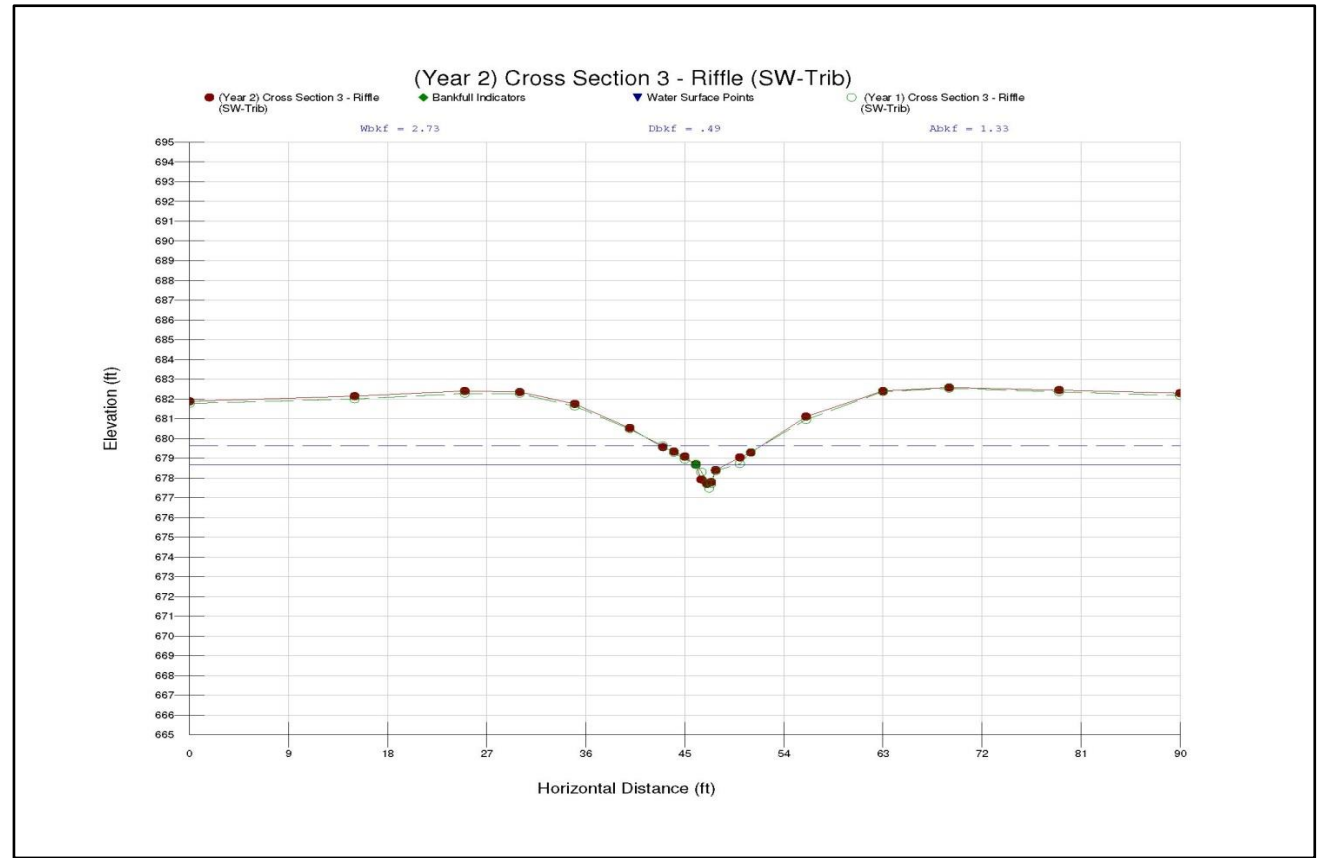


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-4, Pool, Main West, 12+54
Drainage Area (sq mi):	1.28 (819.2 ac)
Date:	11/11/2013
Field Crew:	M. Mickley, B. Dustin



SUMMARY DATA	
Bankfull Elevation:	678.41
Bankfull Cross-Sectional Area:	27.3
Bankfull Width:	16.26
Floodprone Area Elevation:	681.93
Floodprone Width:	100.0
Max Depth at Bankfull:	3.52
Mean Depth at Bankfull:	1.68
W/D Ratio:	9.68
Entrenchment Ratio:	6.15
Bank Height Ratio:	n/a

Stream Type
E4/1

Station	Elevation	Station	Elevation
0	678.7	57	677.44
15	678.54	59	678.27
25	678.75	60	678.41
35	678.55	70	678.59
40	678.73	85	678.73
42	678.79	90	679.28
43	678.69	95	680.07
44	678.31	100	680.28
45	677.8		
46	677.11		
46.7	675.53		
47.5	674.89		
48	674.94		
48.7	674.93		
49.5	675.12		
50.4	675.48		
51	675.82		
52	676.43		
53	676.79		
55	677.03		

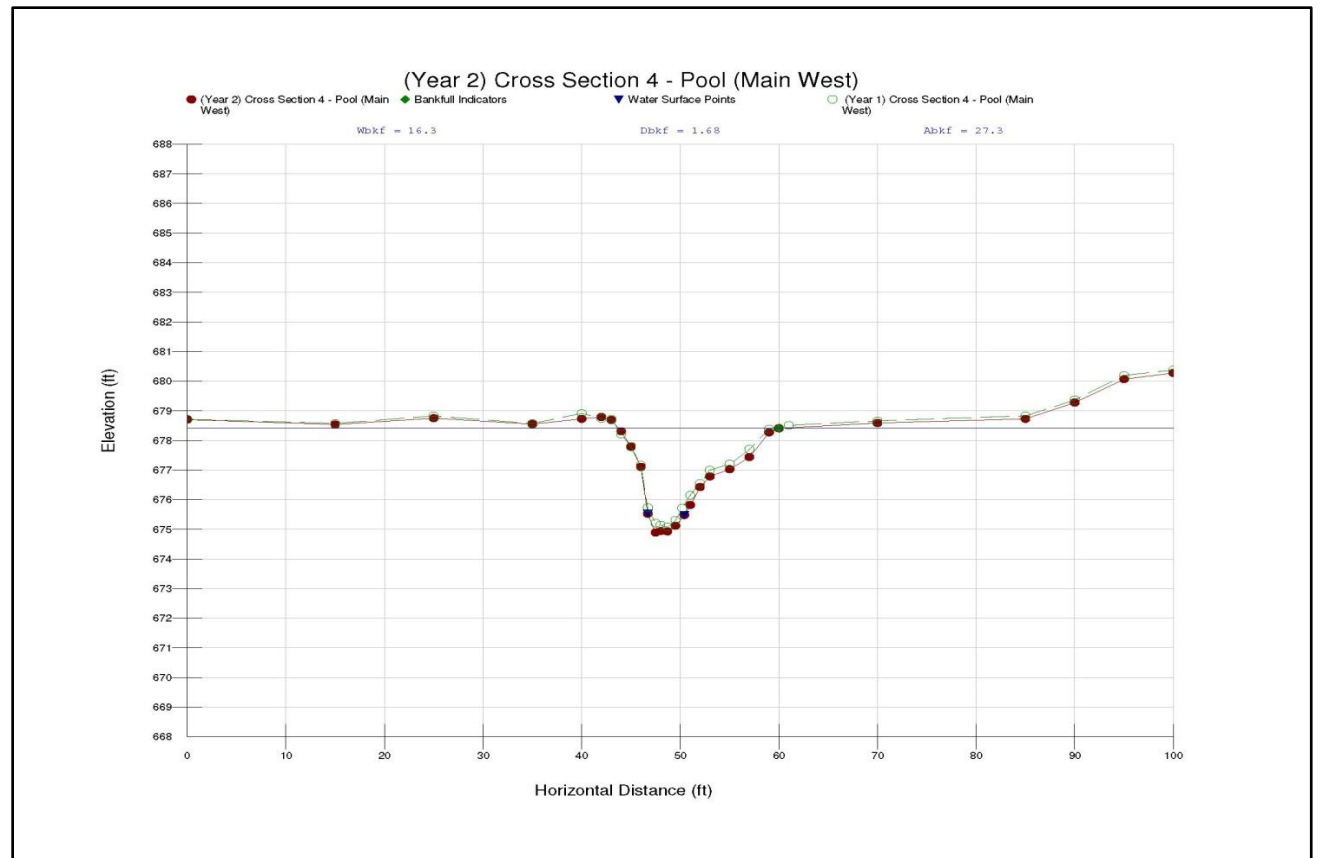


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-5, Pool, Main West, 14+12
Drainage Area (sq mi):	1.28 (819.2 ac)
Date:	11/11/2013
Field Crew:	M. Mickley, B. Dustin

SUMMARY DATA	
Bankfull Elevation:	677.16
Bankfull Cross-Sectional Area:	39.77
Bankfull Width:	24.05
Floodprone Area Elevation:	680.43
Floodprone Width:	115.0
Max Depth at Bankfull:	3.27
Mean Depth at Bankfull:	1.65
W/D Ratio:	14.58
Entrenchment Ratio:	4.78
Bank Height Ratio:	n/a

Stream Type
C4/1



Station	Elevation	Station	Elevation
0	679	64	674.02
8	678.83	65	674.38
14	677.73	65.5	675.18
20	677.4	67	675.89
25	677.41	69	676.24
35	677.04	72	677.09
40	676.96	75	677.47
45	677.34	90	677.41
47	677.42	100	678.37
48	677.16	110	679.16
50	676.76	115	679.47
52	676.23		
54	675.72		
56	675.71		
57	675.54		
57.4	675.25		
58	674.17		
59	674.26		
61	673.89		
63	673.93		

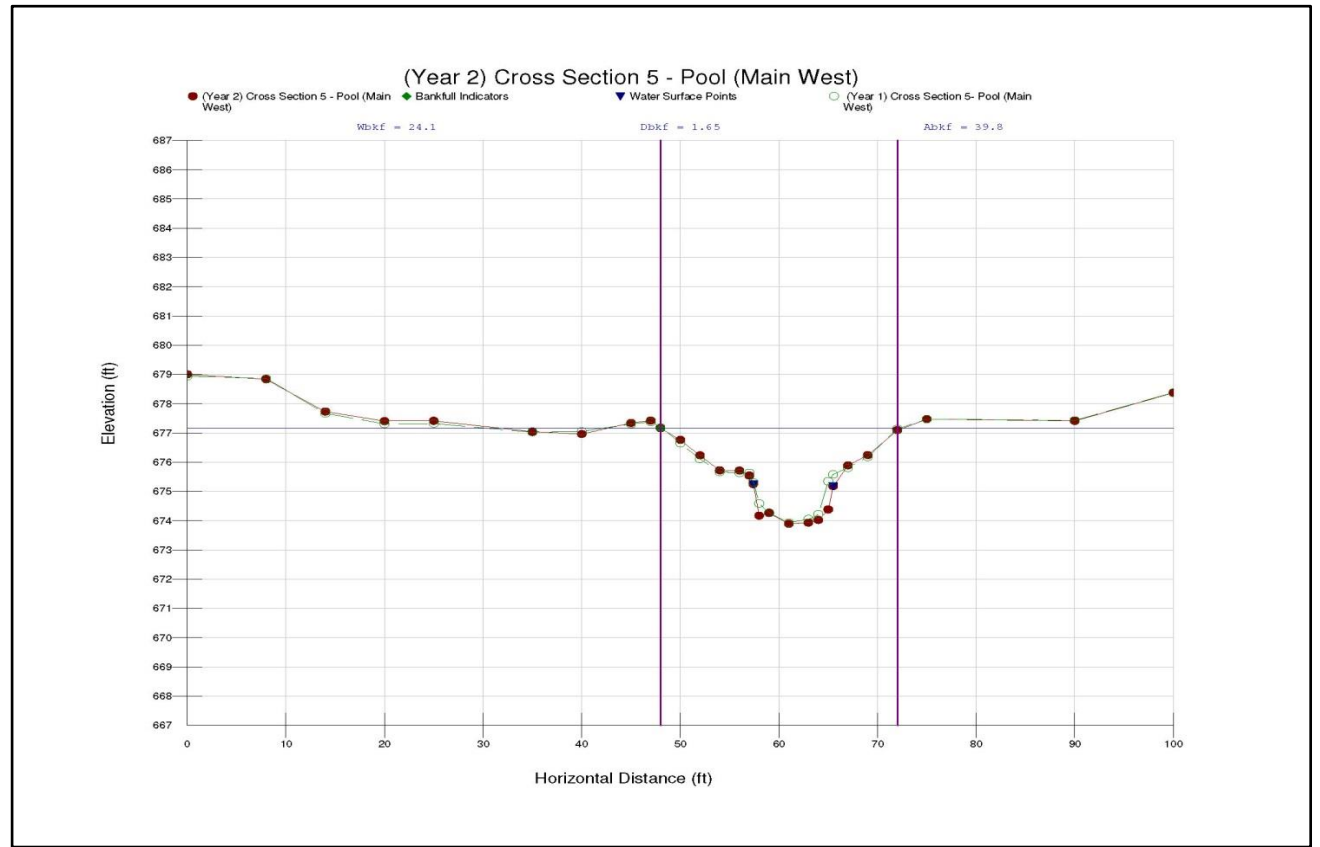


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-6, Riffle, Main Center, 16+30
Drainage Area (sq mi):	1.43 (915.2 ac)
Date:	11/11/2013
Field Crew:	M. Mickley, B. Dustin

SUMMARY DATA	
Bankfull Elevation:	675.66
Bankfull Cross-Sectional Area:	29.51
Bankfull Width:	17.57
Floodprone Area Elevation:	678.53
Floodprone Width:	110.0
Max Depth at Bankfull:	2.87
Mean Depth at Bankfull:	1.68
W/D Ratio:	10.46
Entrenchment Ratio:	6.26
Bank Height Ratio:	1.0

Stream Type
E4



Station	Elevation	Station	Elevation
0	677.25	57	673.53
5	676.88	59	673.73
10	676.87	62	673.96
15	676.91	63	674.24
20	676.88	67	675.83
25	676.95	68	676.07
30	676.61	73	675.96
35	676.03	76	676.12
40	675.79	80	675.96
45	675.84	90	675.87
47	675.77	95	675.82
49	675.66	100	676.33
50	675.26	110	675.98
52	673.62		
52.5	673.02		
53	672.81		
54	672.79		
55	672.88		
55.5	672.99		
56	673.07		

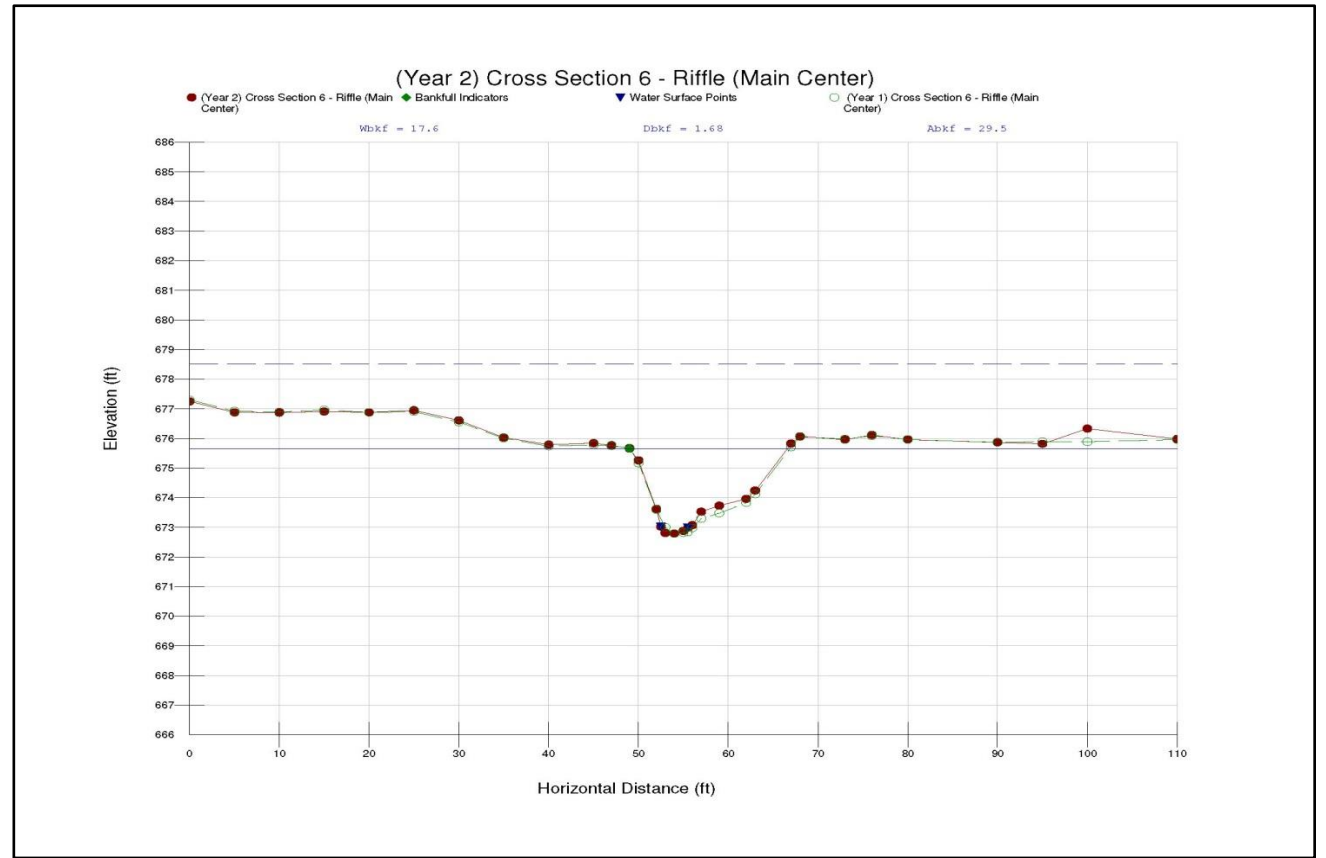


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-7, Pool, Main Center, 18+20
Drainage Area (sq mi):	1.43 (915.2 ac)
Date:	11/11/2013
Field Crew:	M. Mickley, B. Dustin



Stream Type
E4

SUMMARY DATA	
Bankfull Elevation:	674.96
Bankfull Cross-Sectional Area:	39.72
Bankfull Width:	20.43
Floodprone Area Elevation:	679.16
Floodprone Width:	100.0
Max Depth at Bankfull:	4.2
Mean Depth at Bankfull:	1.9
W/D Ratio:	10.53
Entrenchment Ratio:	4.9
Bank Height Ratio:	n/a

Station	Elevation	Station	Elevation
0	676.57	54	672.89
10	675.94	56	673.12
20	675.42	58	673.38
25	675.12	60	673.86
30	674.99	62.5	674.96
35	675.01	65	674.96
38	675.11	70	675.14
40	675.15	80	674.93
41	675.11	90	674.94
43	674.83	100	674.49
45	673.86		
46	673.3		
47	672.79		
48	671.61		
49	670.93		
50	670.76		
50.5	670.96		
51.5	671.16		
52	671.53		
52.5	671.94		

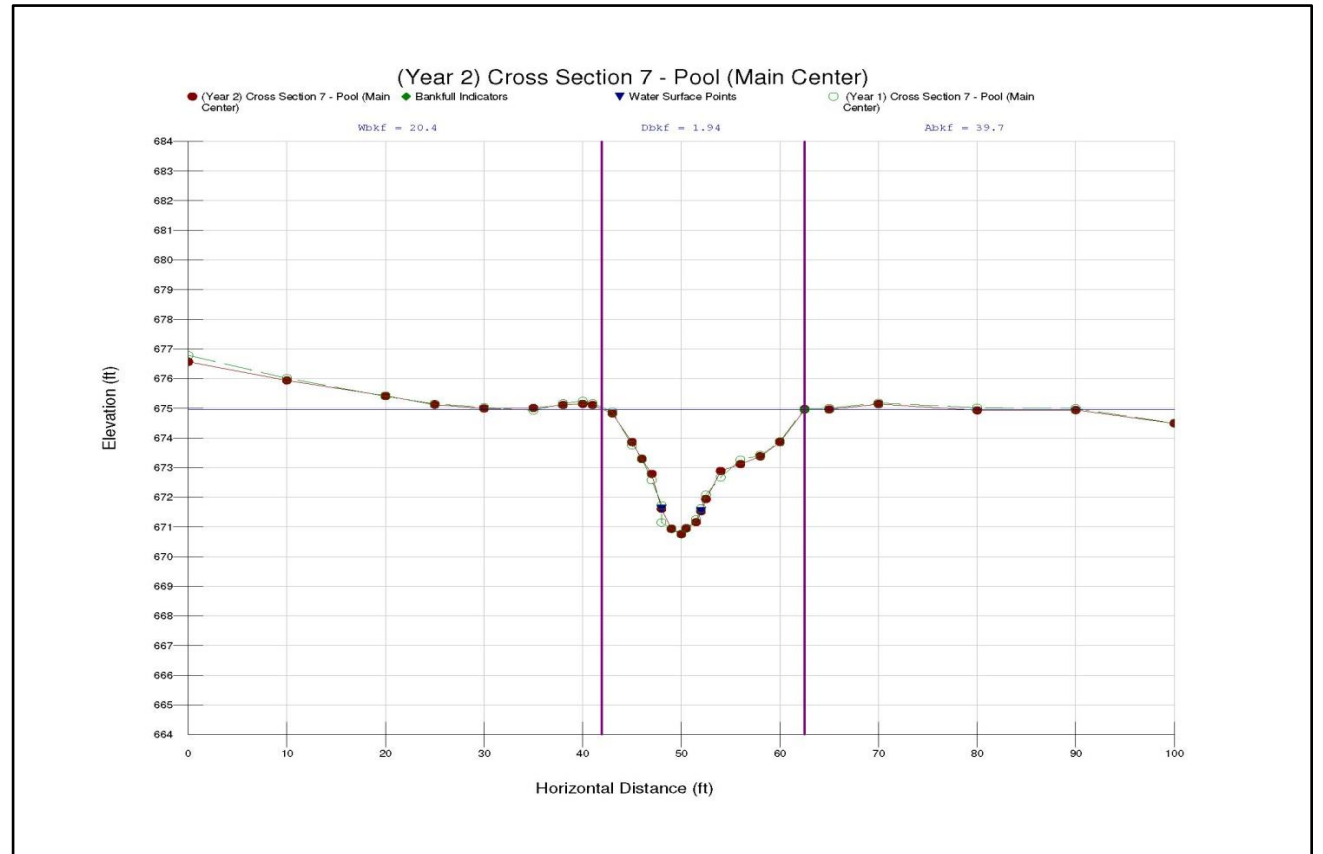


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-8, Riffle, Main Center, 20+04
Drainage Area (sq mi):	1.43 (915.2 ac)
Date:	11/11/2013
Field Crew:	M. Mickley, B. Dustin



Stream Type
C4

SUMMARY DATA	
Bankfull Elevation:	673.72
Bankfull Cross-Sectional Area:	35.63
Bankfull Width:	21.48
Floodprone Area Elevation:	677.43
Floodprone Width:	100.0
Max Depth at Bankfull:	3.71
Mean Depth at Bankfull:	1.66
W/D Ratio:	12.94
Entrenchment Ratio:	4.66
Bank Height Ratio:	1.0

Station	Elevation	Station	Elevation
0	673.46	52	671.35
10	673.6	53	671.74
20	673.6	55	672.25
25	673.81	56	672.57
30	673.83	58.5	673.73
34	673.97	62	673.9
37	673.72	65	674
39	673.53	70	673.93
40	673.17	80	674.04
42	672.62	90	674.14
44	672.1	100	674.13
45	671.91		
46.5	671.41		
47	670.94		
48.5	670.58		
49.5	670.17		
50	670.08		
50.5	670.01		
51	670.23		
51.5	670.57		

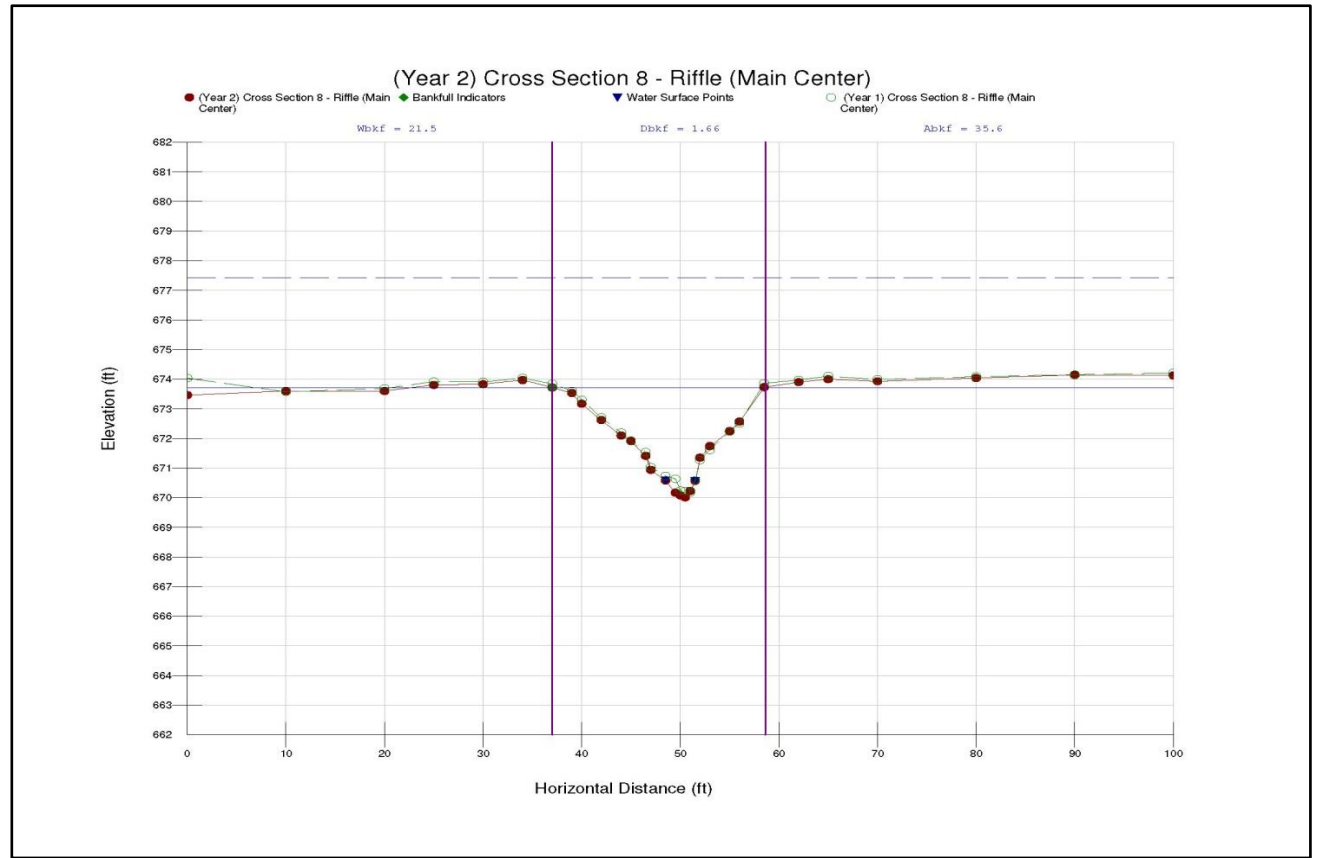


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-9, Pool, Main Center, 21+96
Drainage Area (sq mi):	1.43 (915.2 ac)
Date:	11/11/2013
Field Crew:	M. Mickley, B. Dustin

SUMMARY DATA	
Bankfull Elevation:	673.04
Bankfull Cross-Sectional Area:	37.13
Bankfull Width:	19.73
Floodprone Area Elevation:	677.16
Floodprone Width:	100.0
Max Depth at Bankfull:	4.12
Mean Depth at Bankfull:	1.88
W/D Ratio:	10.49
Entrenchment Ratio:	5.07
Bank Height Ratio:	n/a

Stream Type
E4



Station	Elevation	Station	Elevation
0	672.78	55	673.26
10	672.81	57	673.36
20	672.96	60	673.30
25	673.02	65	673.19
30	672.95	70	673.11
33	673.03	75	673.14
35	673.04	80	673.19
36	672.87	86	673.11
38	672.84	91	673.51
40	672.08	96	673.88
43	671.52	100	674.00
45	671.31		
46	671.15		
46.5	670.43		
47.5	669.08		
49	668.92		
50.5	668.95		
52	669.86		
52.5	670.32		
54.5	672.64		

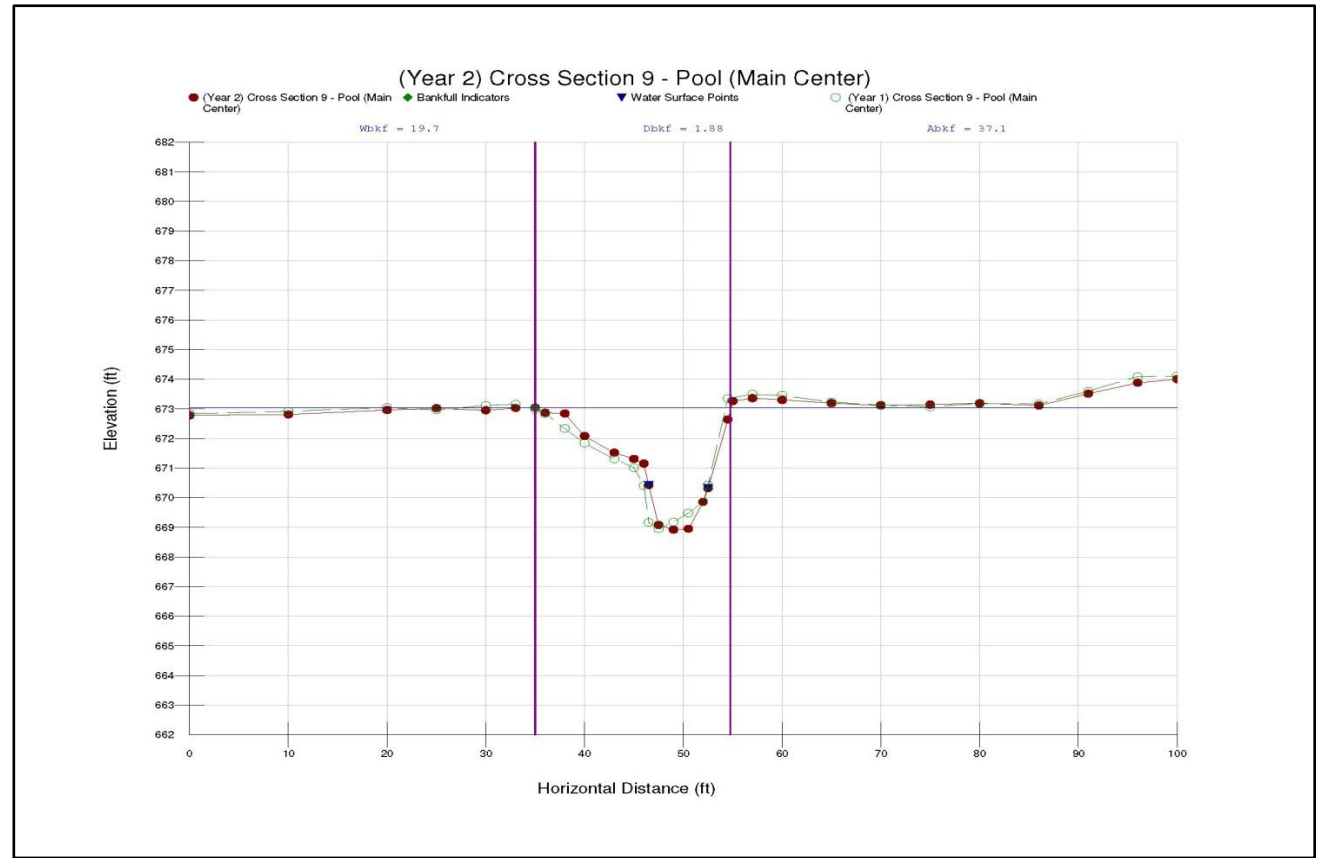


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-10, Riffle, Main Center, 24+66
Drainage Area (sq mi):	1.43 (915.2 ac)
Date:	11/12/2013
Field Crew:	M. Mickley, B. Dustin

SUMMARY DATA	
Bankfull Elevation:	671.07
Bankfull Cross-Sectional Area:	30.13
Bankfull Width:	19.78
Floodprone Area Elevation:	674.28
Floodprone Width:	100.0
Max Depth at Bankfull:	3.21
Mean Depth at Bankfull:	1.52
W/D Ratio:	13.01
Entrenchment Ratio:	5.06
Bank Height Ratio:	1.0

Stream Type
C4



Station	Elevation	Station	Elevation
0	671	59	670.25
10	670.97	61	671.03
20	671.15	63	671.07
30	671.2	65	671.17
35	671.15	70	671.42
38	671.25	80	671.63
42	671.08	90	671.82
43	671.07	100	671.94
45	670.17		
47	669.36		
48.5	668.9		
49	668.76		
51	668.1		
51.5	668.04		
52	667.86		
52.5	667.94		
53	667.96		
54	668.69		
55	669.26		
57	669.7		

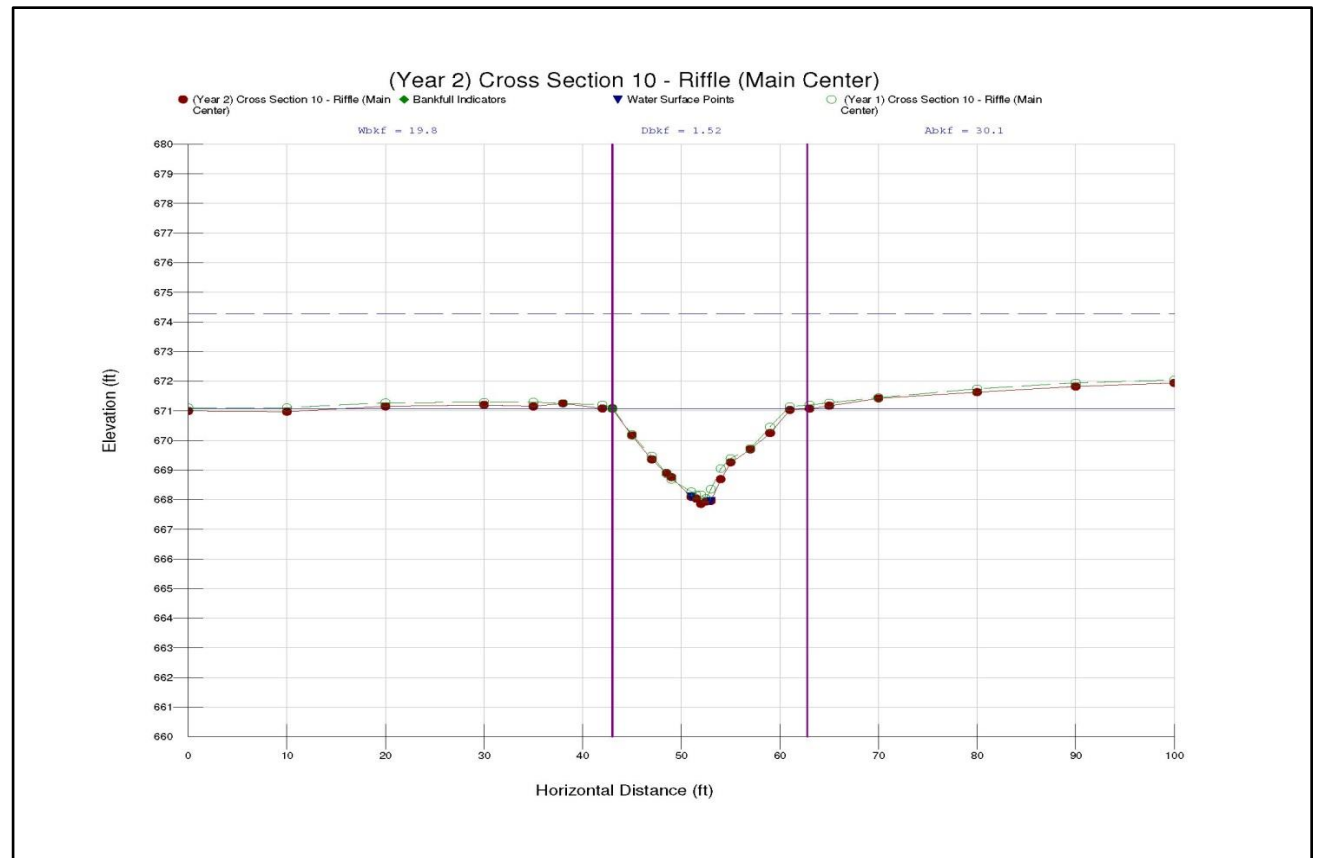


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-11, Pool, Main Center, 27+24
Drainage Area (sq mi):	1.43 (915.2 ac)
Date:	11/12/2013
Field Crew:	M. Mickley, B. Dustin

SUMMARY DATA	
Bankfull Elevation:	669.85
Bankfull Cross-Sectional Area:	29.23
Bankfull Width:	19.95
Floodprone Area Elevation:	673.72
Floodprone Width:	100.0
Max Depth at Bankfull:	3.87
Mean Depth at Bankfull:	1.47
W/D Ratio:	13.57
Entrenchment Ratio:	5.01
Bank Height Ratio:	n/a

Stream Type
C4



Station	Elevation	Station	Elevation
0	669.81	59	669.56
10	669.89	60	669.85
20	669.94	63	669.78
30	669.91	65	669.92
35	669.91	70	669.87
38	669.98	75	669.75
41	669.79	85	669.64
42	669.56	90	669.6
44	668.4	100	669.99
45	667.91		
46	667.15		
47	666.39		
47.5	666.04		
48	665.98		
48.5	666.25		
49	667.09		
50	667.96		
52	668.45		
54	668.55		
57	668.93		

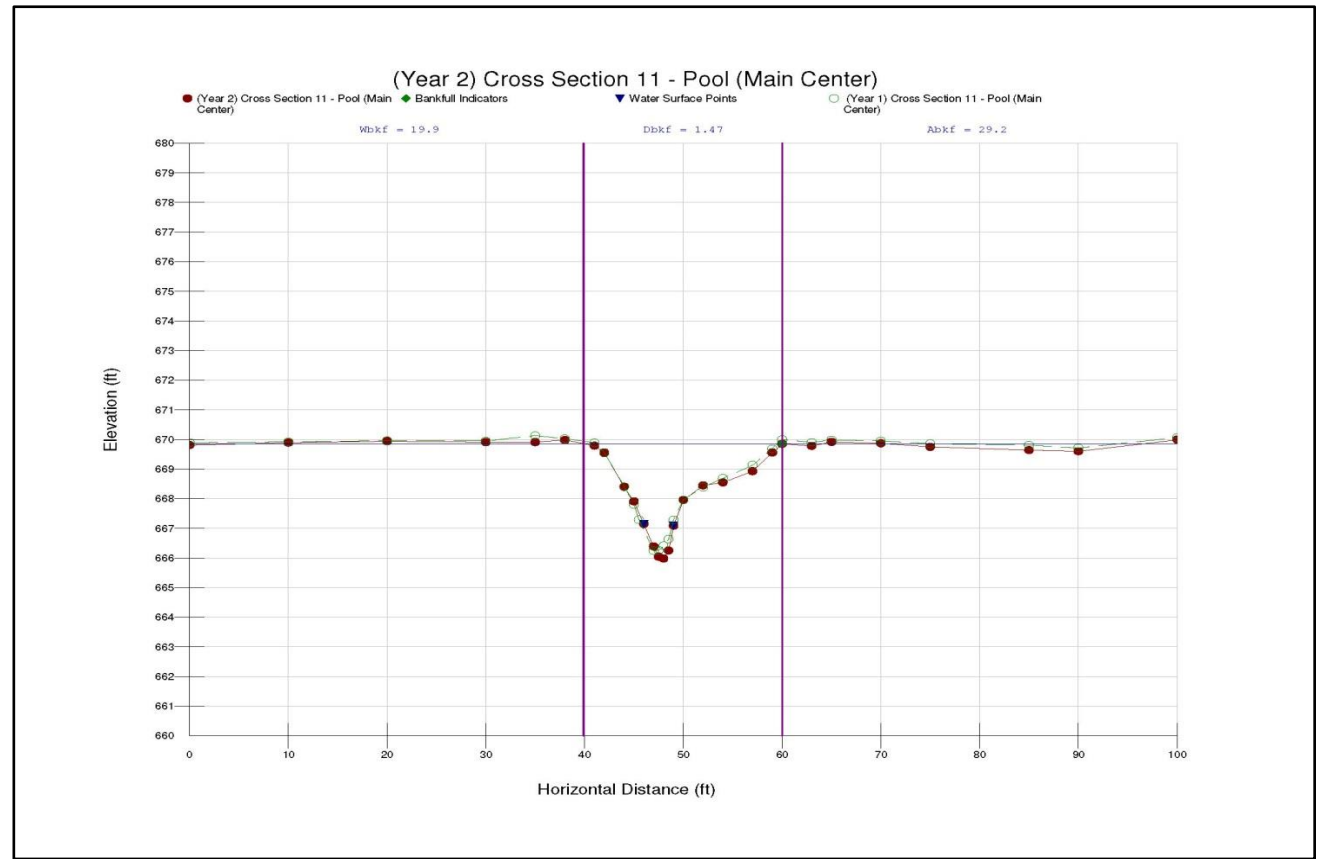


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-12, Riffle, SE-UT, 5+76
Drainage Area (sq mi):	0.04 (25.6 ac)
Date:	11/12/2013
Field Crew:	M. Mickley, B. Dustin

SUMMARY DATA	
Bankfull Elevation:	681.66
Bankfull Cross-Sectional Area:	4.21
Bankfull Width:	7.26
Floodprone Area Elevation:	682.96
Floodprone Width:	30.83
Max Depth at Bankfull:	1.3
Mean Depth at Bankfull:	0.58
W/D Ratio:	12.52
Entrenchment Ratio:	4.25
Bank Height Ratio:	1.0

Stream Type
C5/1b



Station	Elevation	Station	Elevation
0	684.09	72	684.09
6	683.66	80	684.42
10	683.26		
23	682.81		
31	682.89		
33	682.38		
35	681.66		
37.5	681		
38.3	680.53		
38.5	680.4		
39	680.36		
39.5	680.41		
39.8	680.6		
40	681.09		
42.5	681.72		
45.8	682		
50	683.09		
53.5	683.8		
61	683.67		
67	683.94		

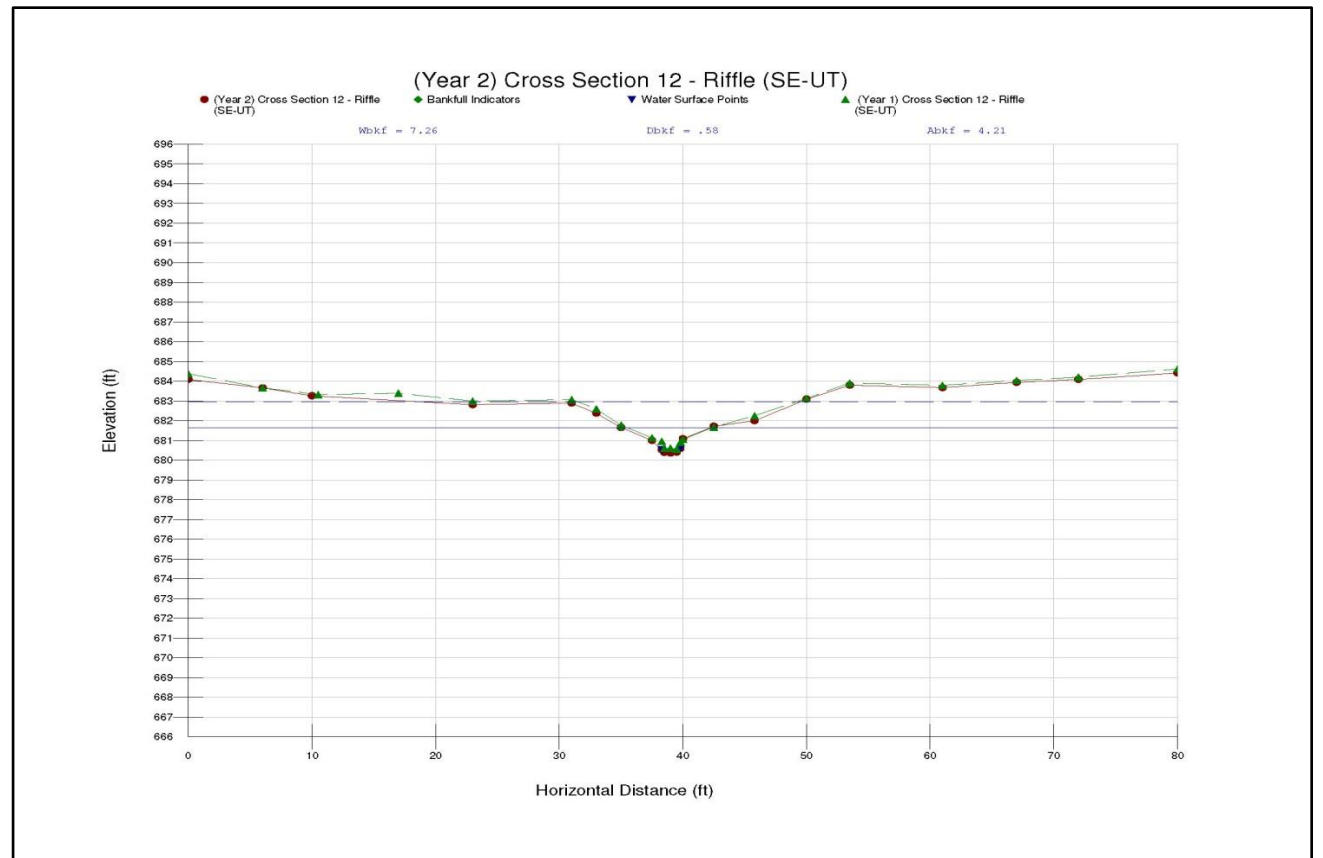


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-13, Pool, SE-UT, 7+70
Drainage Area (sq mi):	0.04 (25.6 ac)
Date:	11/12/2013
Field Crew:	M. Mickley, B. Dustin



Stream Type
C5b

SUMMARY DATA	
Bankfull Elevation:	675.52
Bankfull Cross-Sectional Area:	4.81
Bankfull Width:	10.22
Floodprone Area Elevation:	676.72
Floodprone Width:	18.67
Max Depth at Bankfull:	1.2
Mean Depth at Bankfull:	0.47
W/D Ratio:	21.74
Entrenchment Ratio:	1.83
Bank Height Ratio:	n/a

Station	Elevation	Station	Elevation
0	678.31	69	679.01
5	678.25	74	679.14
9	678.24	80	679.07
22	677.45		
30	676.54		
32	675.52		
36	675.24		
37.5	674.76		
38	674.58		
38.6	674.32		
39.3	674.36		
40.5	674.80		
41	675.15		
41.5	675.39		
43	675.66		
46.5	676.54		
49	677.30		
53	678.37		
57	678.70		
63	679.05		

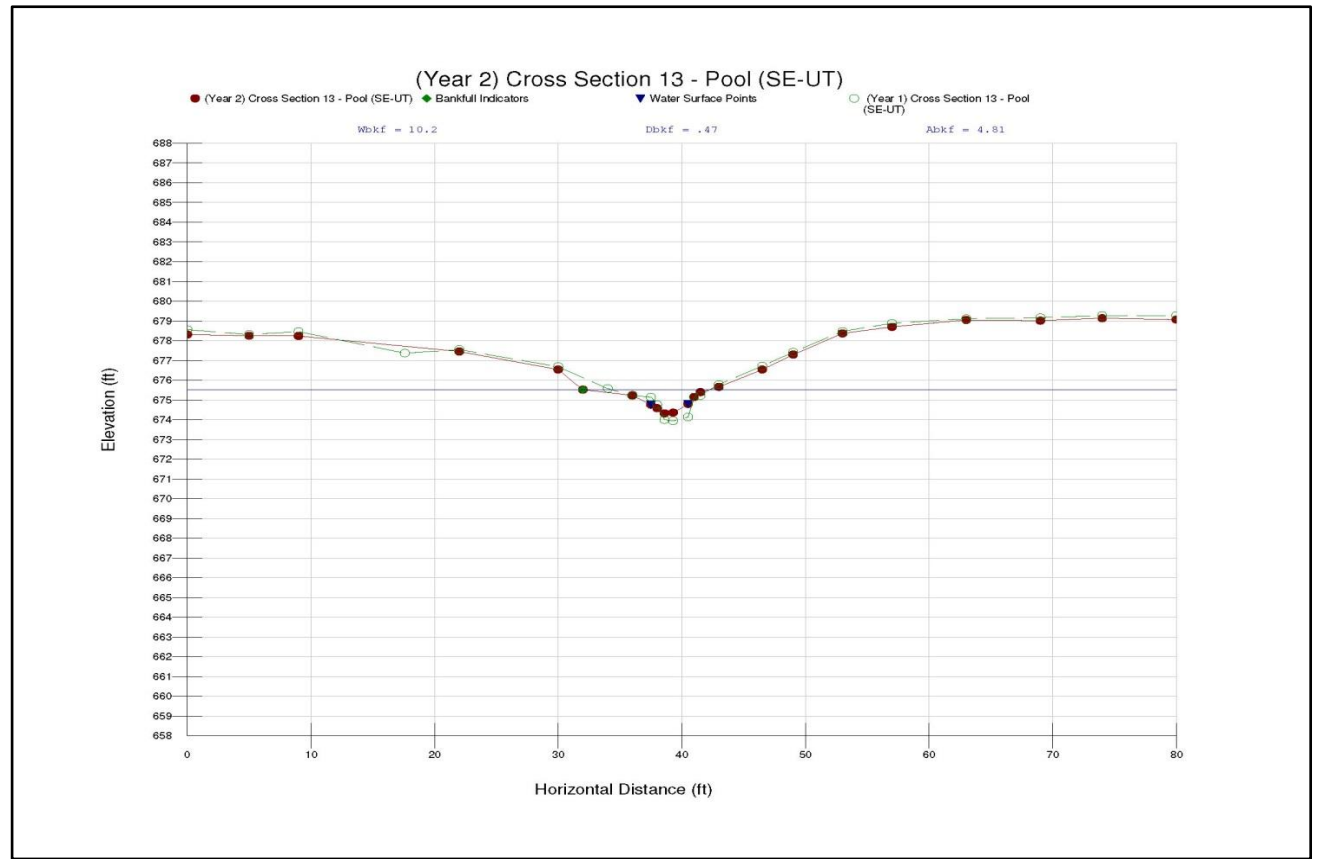


River Basin:	Yadkin - Pee Dee
Watershed:	Uwharrie River
XS ID:	XS-14, Riffle, SE-UT, 8+84
Drainage Area (sq mi):	0.04 (25.6 ac)
Date:	11/12/2013
Field Crew:	M. Mickley, B. Dustin

SUMMARY DATA	
Bankfull Elevation:	672.55
Bankfull Cross-Sectional Area:	4.33
Bankfull Width:	7.48
Floodprone Area Elevation:	673.9
Floodprone Width:	44.35
Max Depth at Bankfull:	1.35
Mean Depth at Bankfull:	0.58
W/D Ratio:	12.9
Entrenchment Ratio:	5.93
Bank Height Ratio:	1.0


Stream Type
C5b




Station	Elevation	Station	Elevation
0	674.18		
6	674.32		
12	674.34		
20	674.34		
25	674.07		
29	673.03		
31	672.55		
33	672.07		
34.2	671.33		
34.6	671.25		
34.8	671.2		
35	671.33		
36	671.79		
37	672.2		
40	672.91		
44	673.63		
50	673.8		
58	673.74		
65	673.27		
70	673.67		

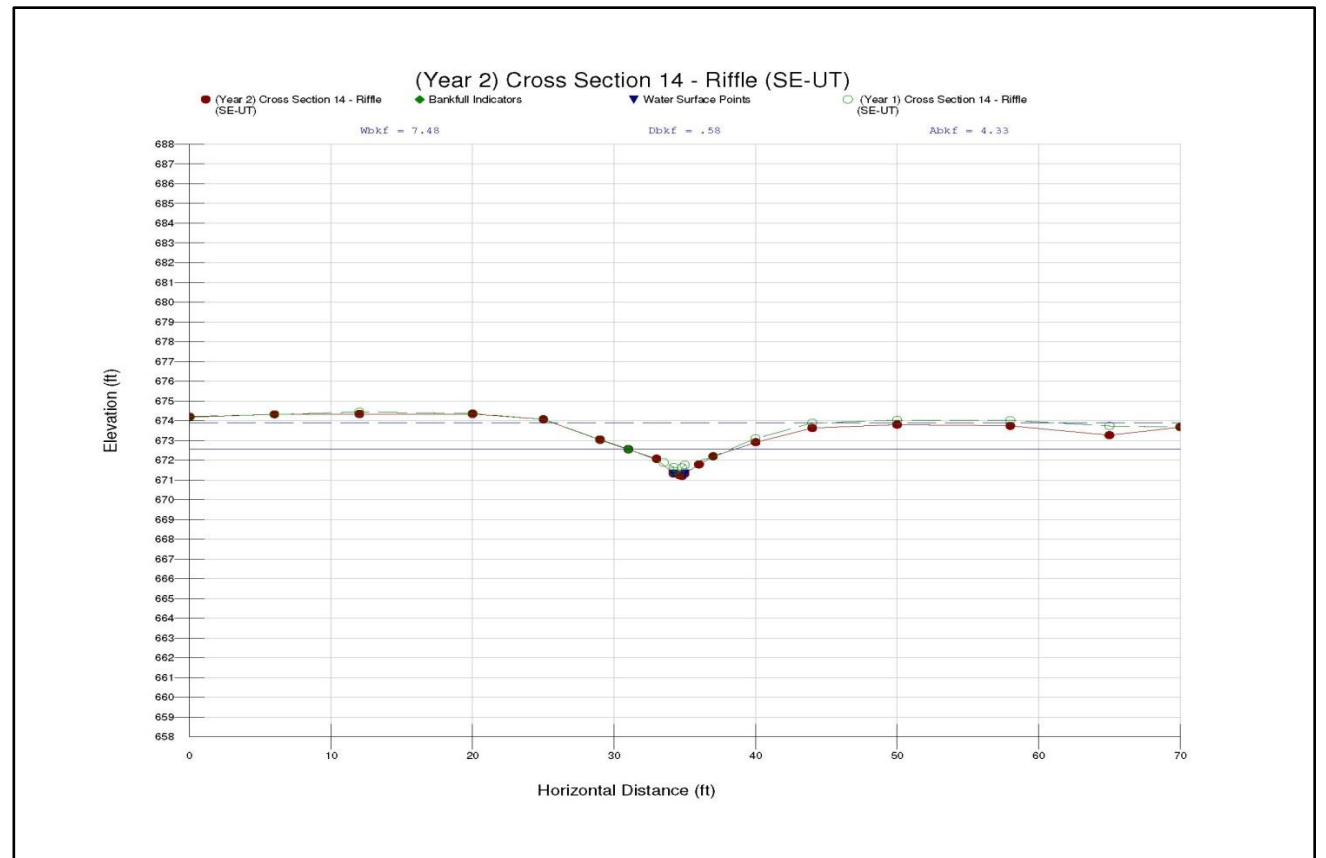


(Year 2) SW-Trib Longitudinal Profile (STA 7+76 -- 15+00)

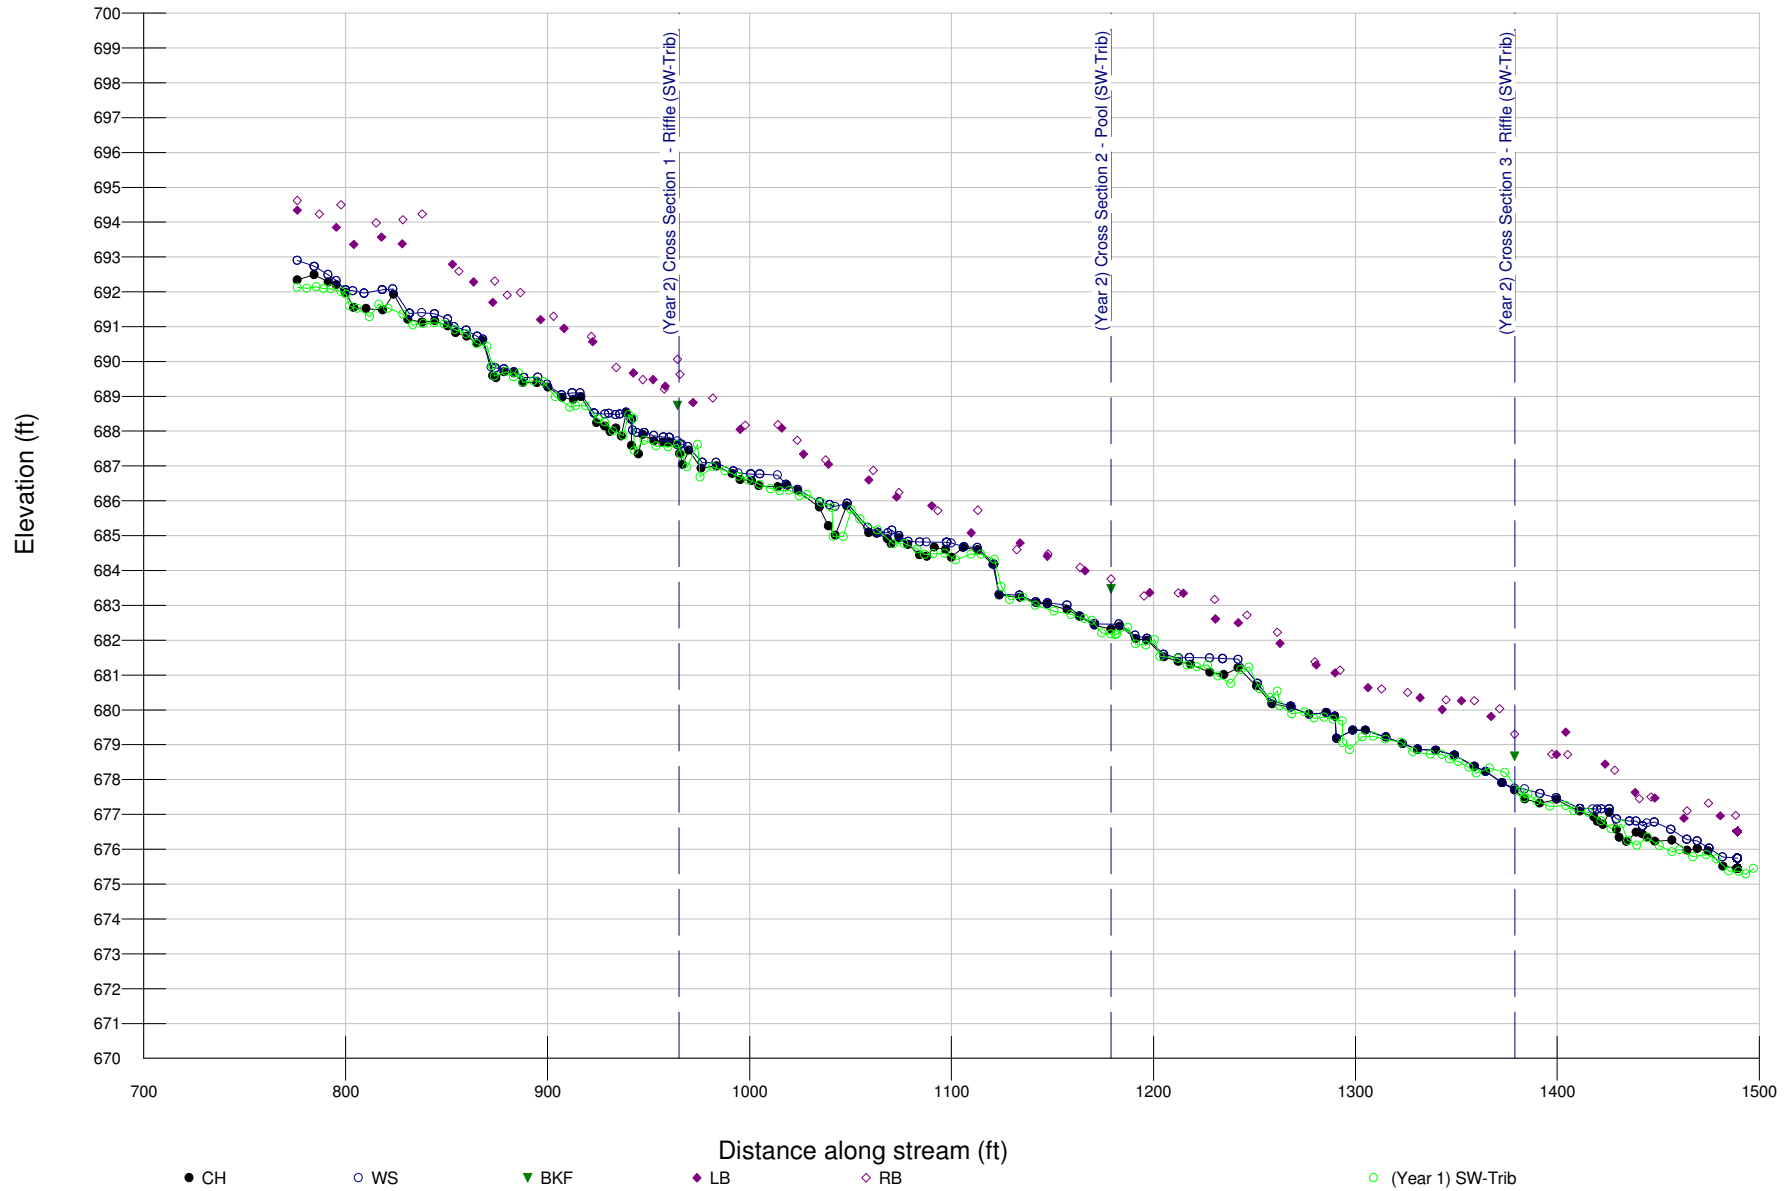


(Year 2) Main West Longitudinal Profile (STA 11+92 -- 14+27)

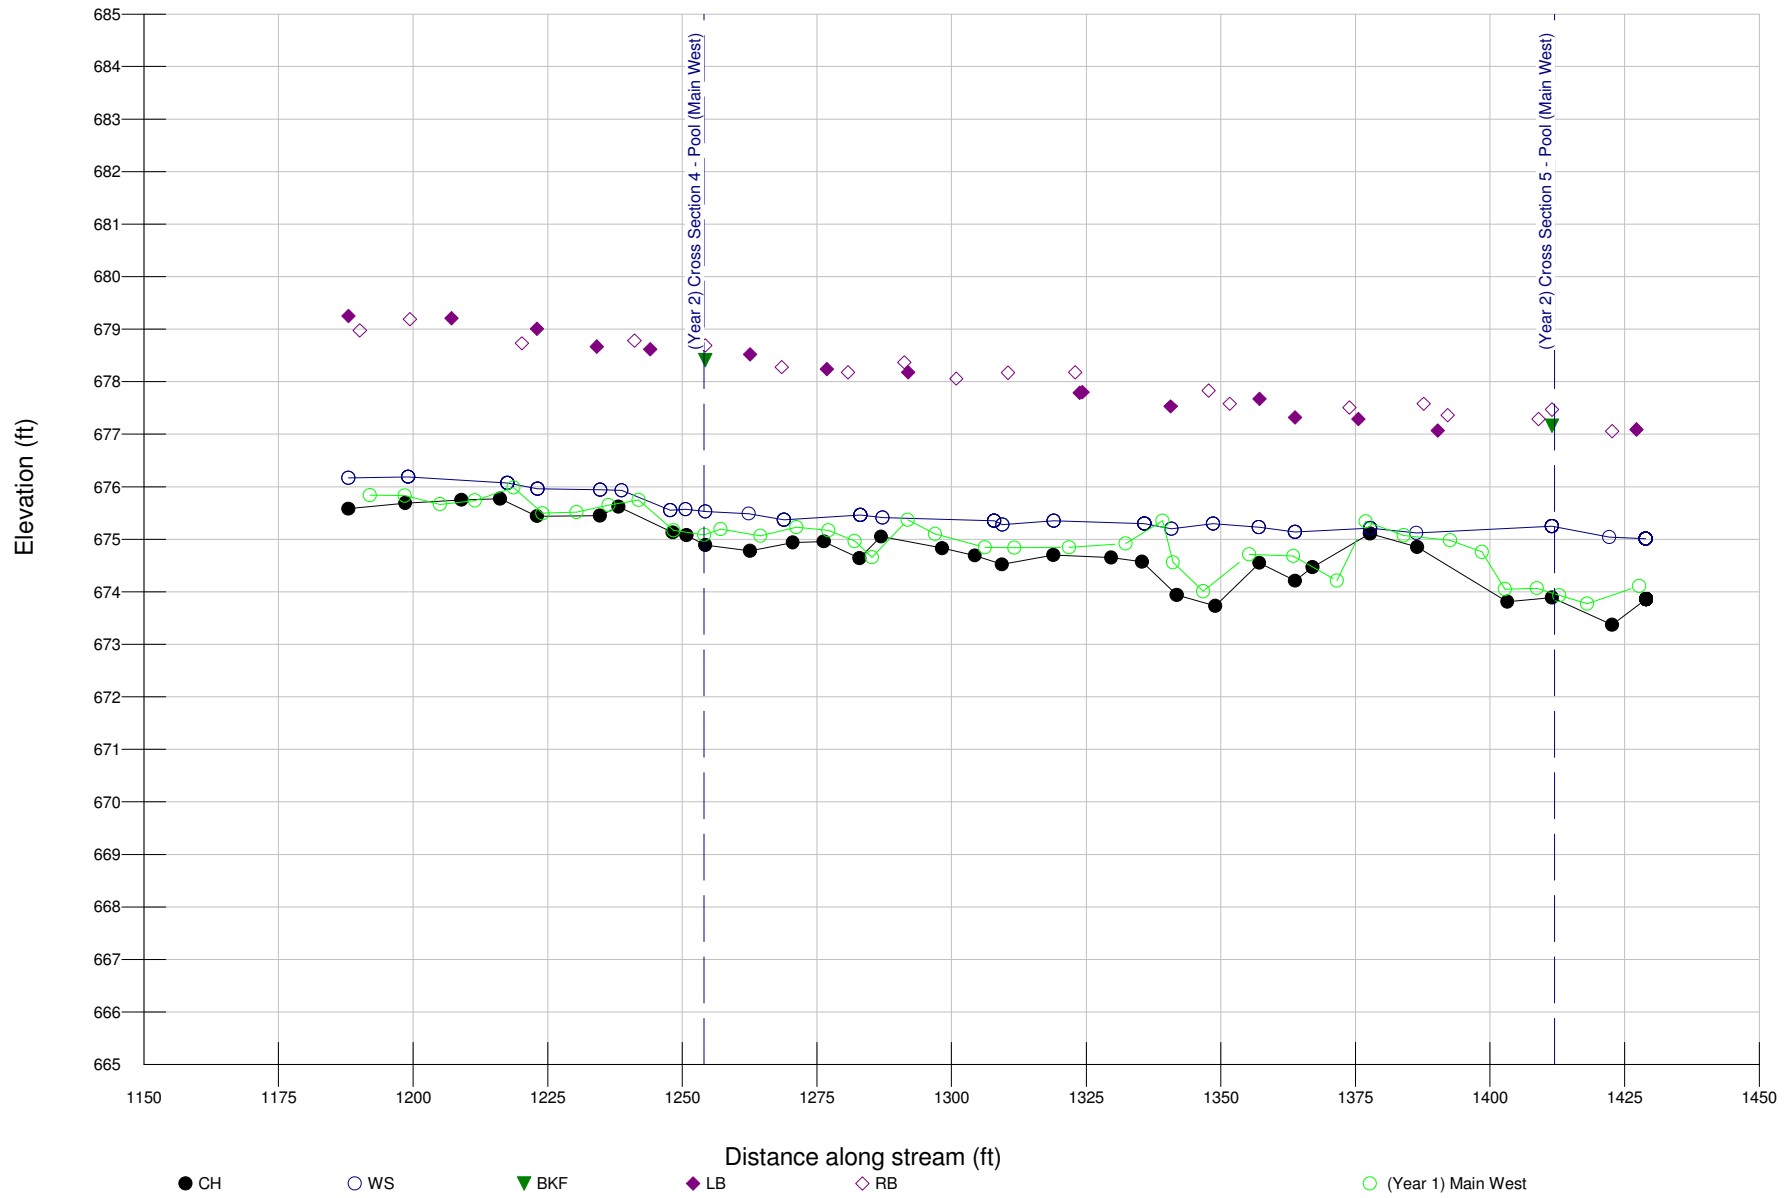

(Year 2) Main Center/Main East Longitudinal Profile (STA 14+27 -- 30+15)


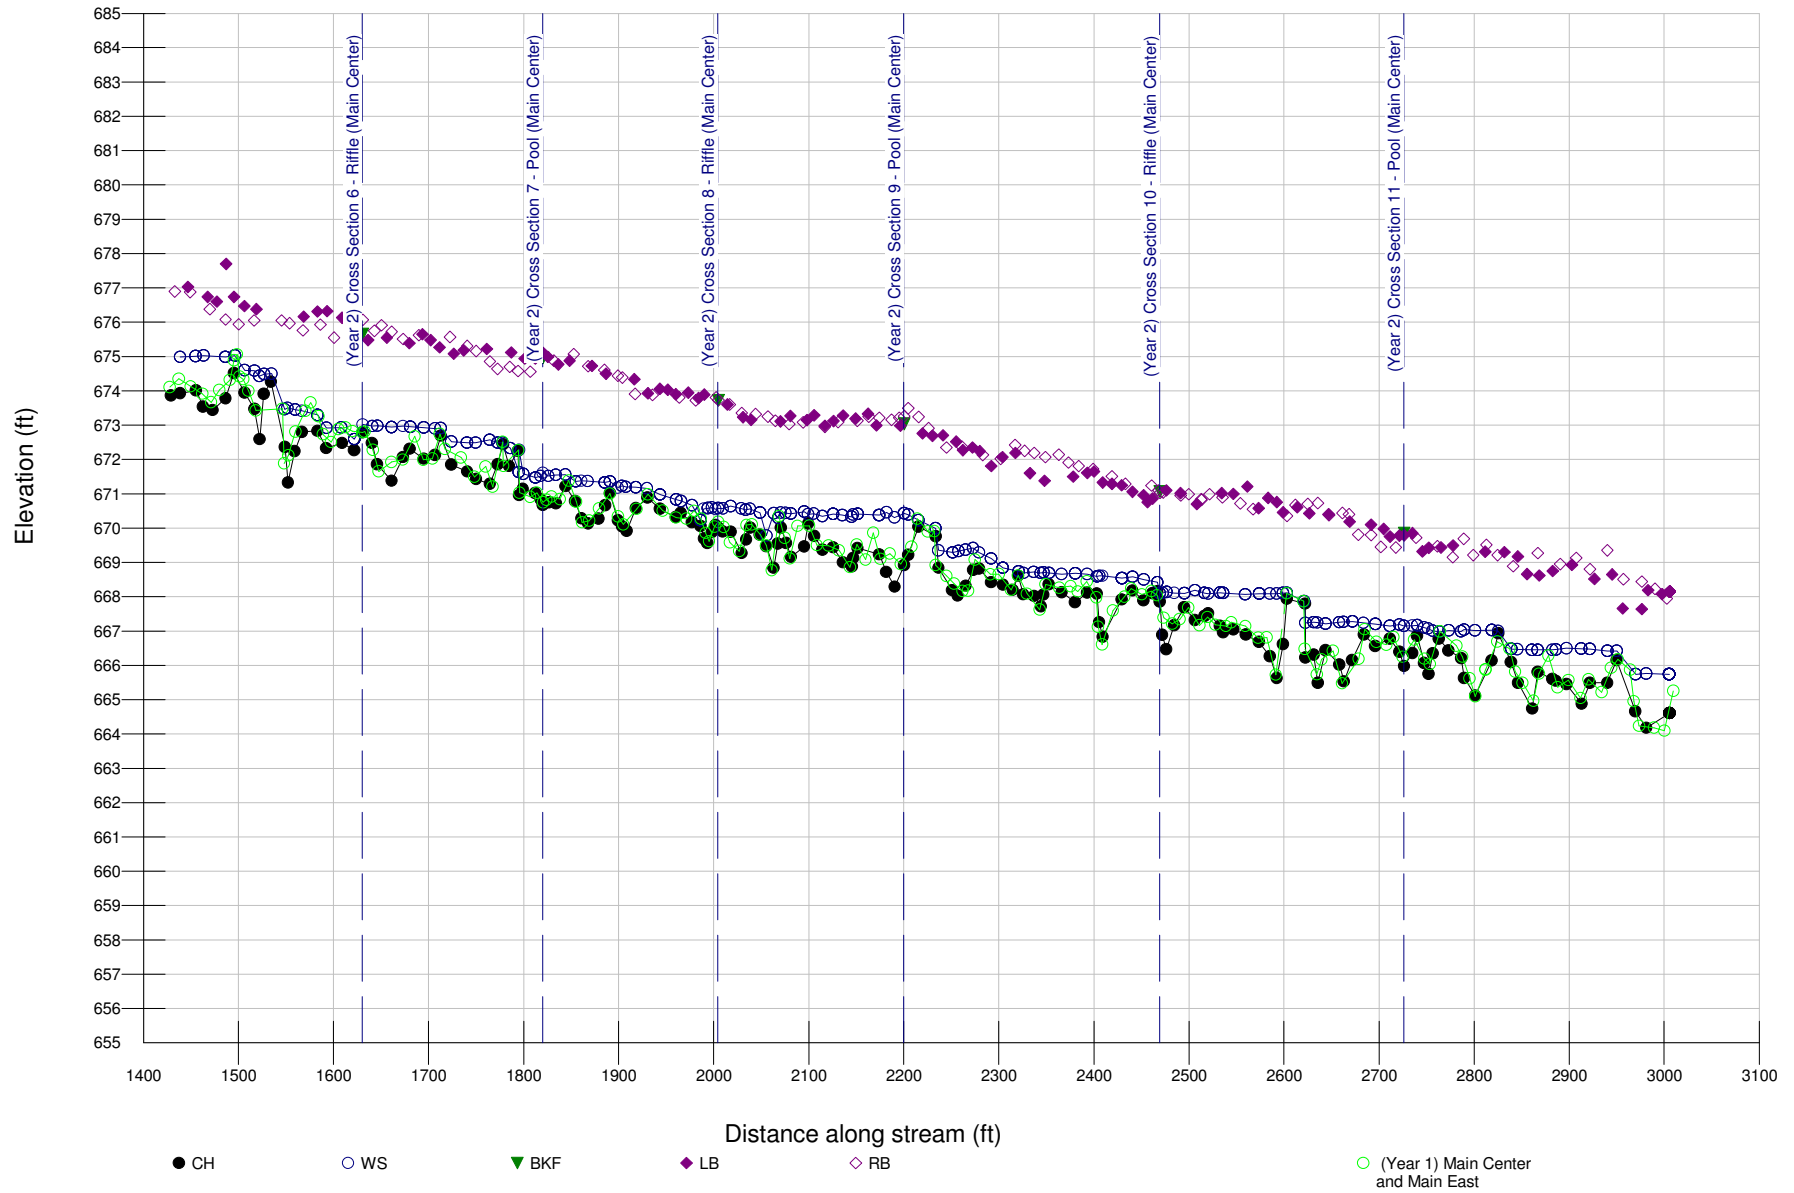


(Year 2) SE-UT Longitudinal Profile (STA 4+83 -- 10+00)

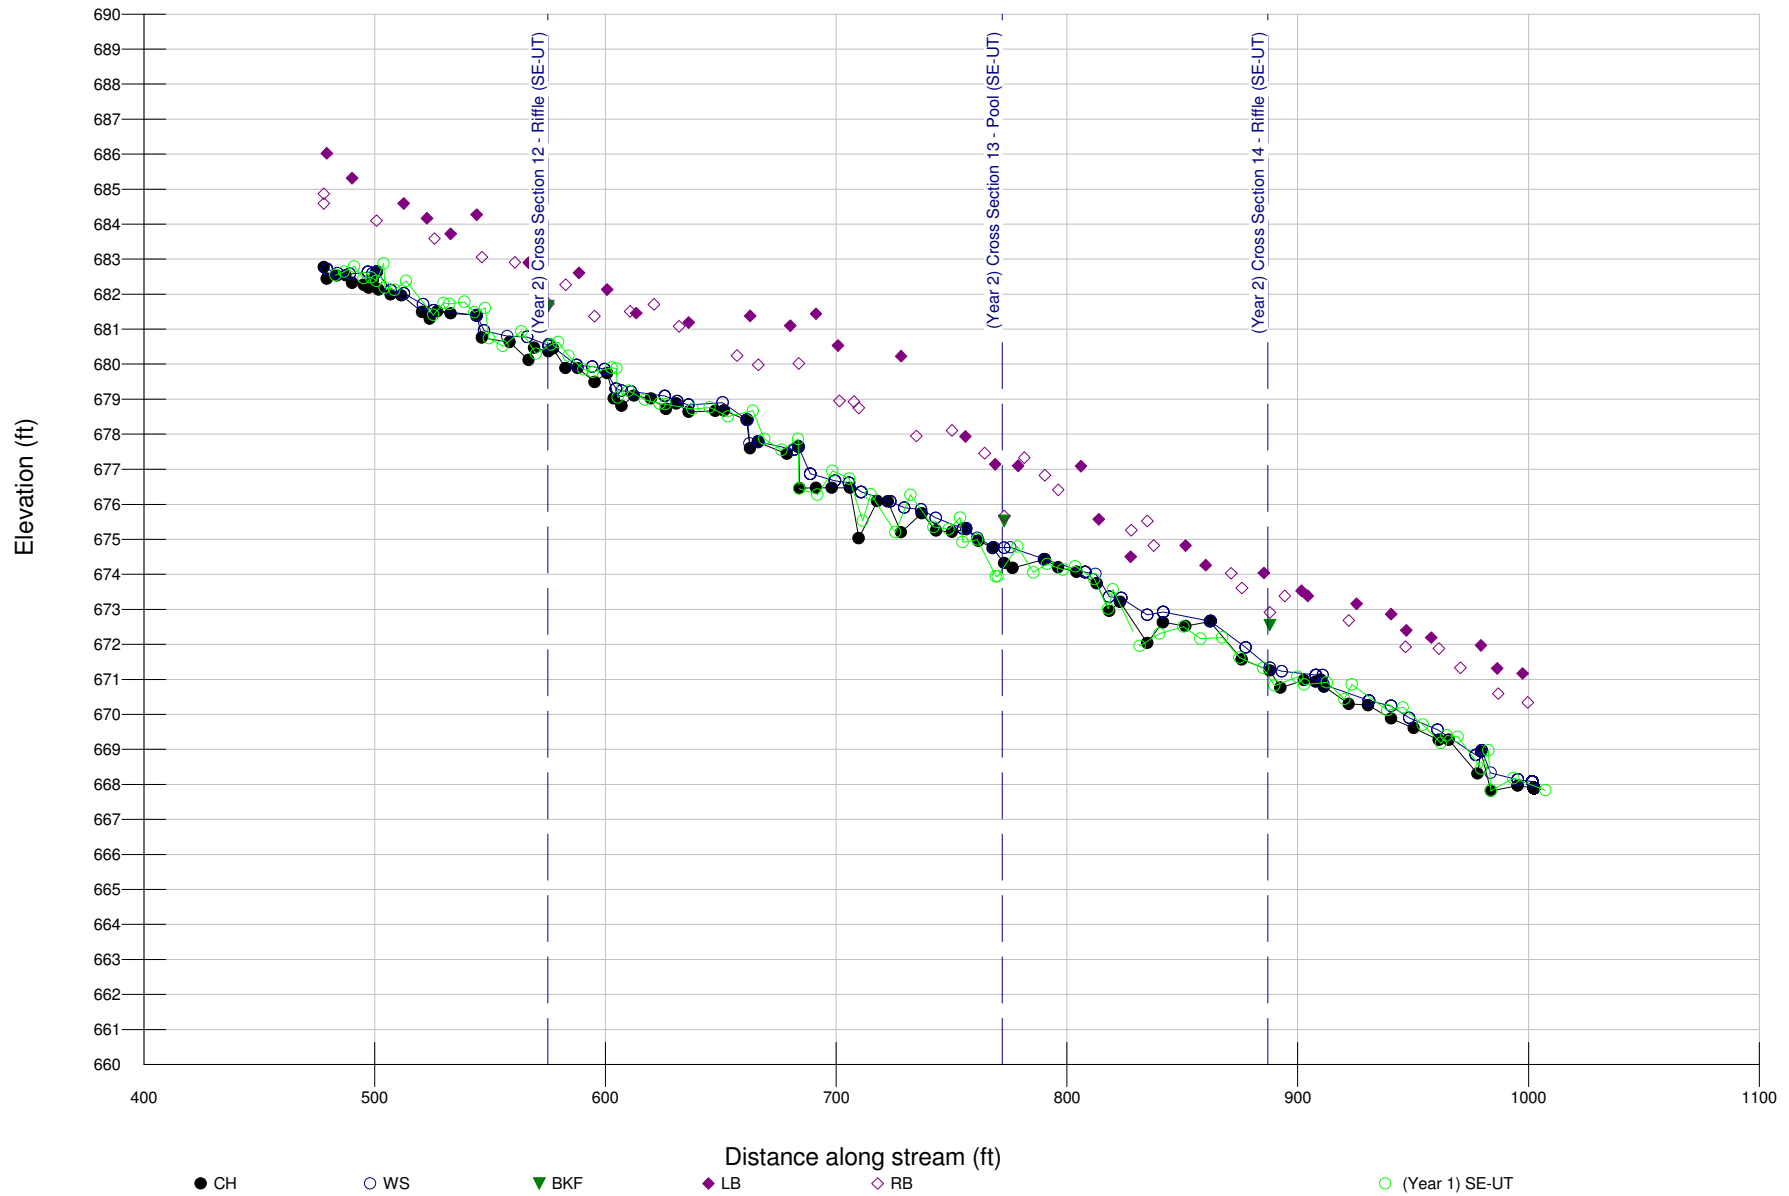



UT to Uwharrie River Stream Restoration Project (#847)					
Reachwide Riffle Pebble Count					
SW-Trib					
MY2 2013					
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	0	0%	0%
Sand	very fine sand	0.125	3	3%	3%
	fine sand	0.25	0	0%	3%
	medium sand	0.5	9	9%	12%
	coarse sand	1	10	10%	22%
	very coarse sand	2	23	23%	45%
Gravel	very fine gravel	4	11	11%	56%
	fine gravel	5.7	19	19%	75%
	fine gravel	8	6	6%	81%
	medium gravel	11.3	4	4%	85%
	medium gravel	16	4	4%	89%
	coarse gravel	22.3	4	4%	93%
	coarse gravel	32	0	0%	93%
	very coarse gravel	45	5	5%	98%
	very coarse gravel	64	2	2%	100%
	Cobble	small cobble	90	0	0%
medium cobble		128	0	0%	100%
large cobble		180	0	0%	100%
very large cobble		256	0	0%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
Bedrock	bedrock	bedrock	0	0%	100%
Total % of whole count			100		

Summary Data	
D50	2.91
D84	10.48
D95	37.2

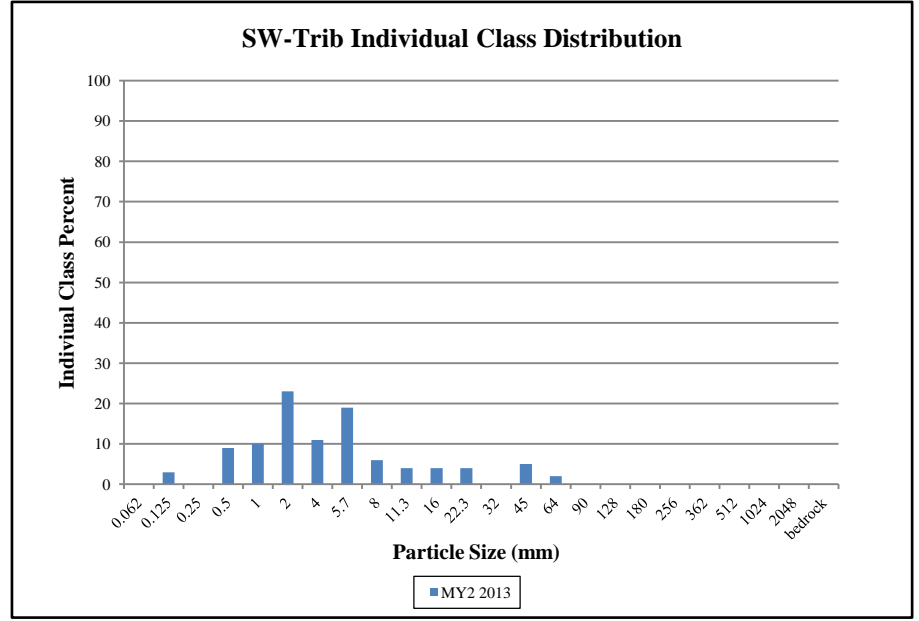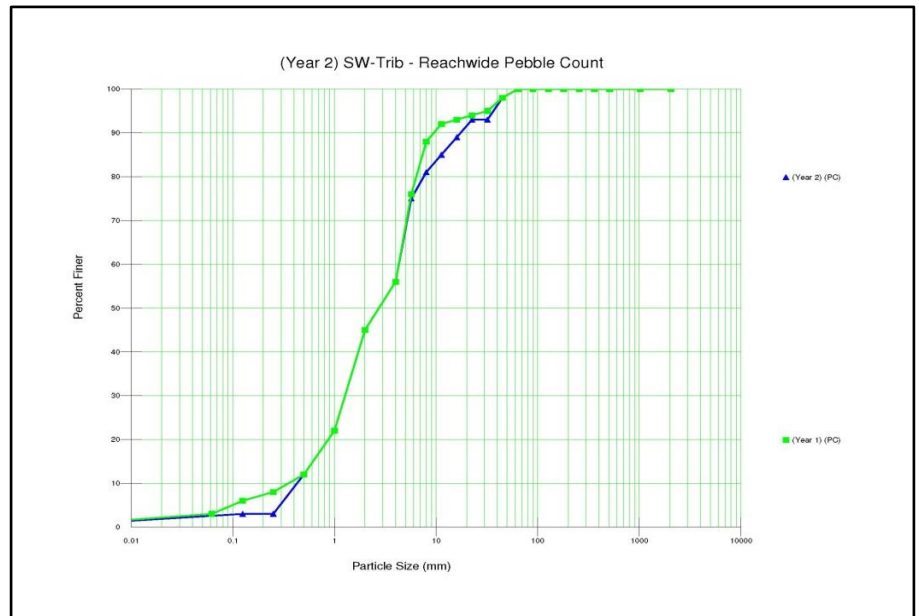

UT to Uwharrie River Stream Restoration Project (#847)					
Reachwide Riffle Pebble Count					
Main Center					
MY2 2013					
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	7	7%	7%
Sand	very fine sand	0.125	4	4%	11%
	fine sand	0.25	5	5%	16%
	medium sand	0.5	1	1%	17%
	coarse sand	1	8	8%	25%
Gravel	very coarse sand	2	15	15%	40%
	very fine gravel	4	0	0%	40%
	fine gravel	5.7	3	3%	43%
	fine gravel	8	4	4%	47%
	medium gravel	11.3	8	8%	55%
	medium gravel	16	7	7%	62%
	coarse gravel	22.3	11	11%	73%
	coarse gravel	32	5	5%	78%
	very coarse gravel	45	12	12%	90%
	very coarse gravel	64	4	4%	94%
Cobble	small cobble	90	3	3%	97%
	medium cobble	128	2	2%	99%
	large cobble	180	1	1%	100%
	very large cobble	256	0	0%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
Bedrock	bedrock	bedrock	0	0%	100%
Total % of whole count			100		

Summary Data	
D50	9.24
D84	38.5
D95	72.67

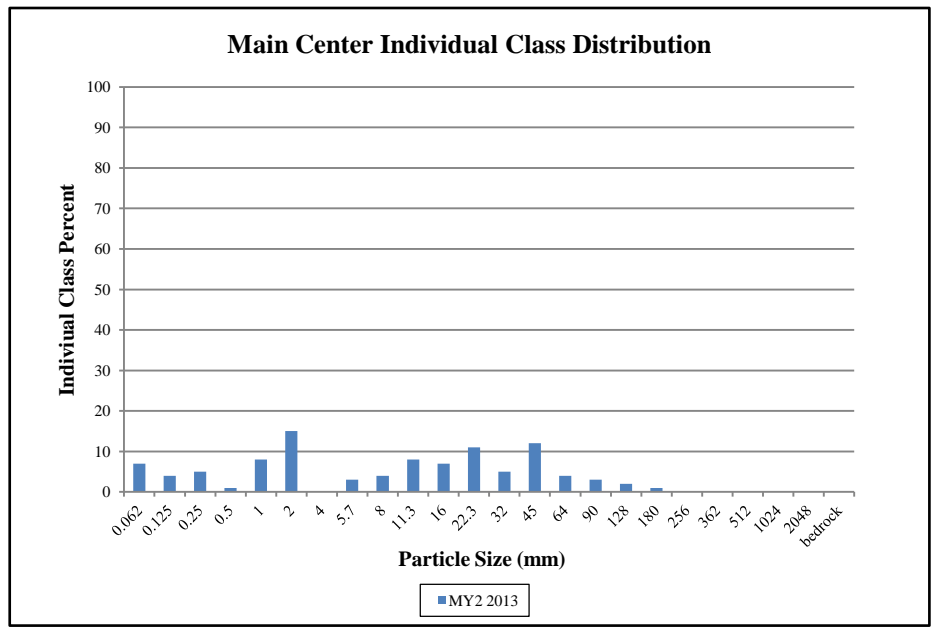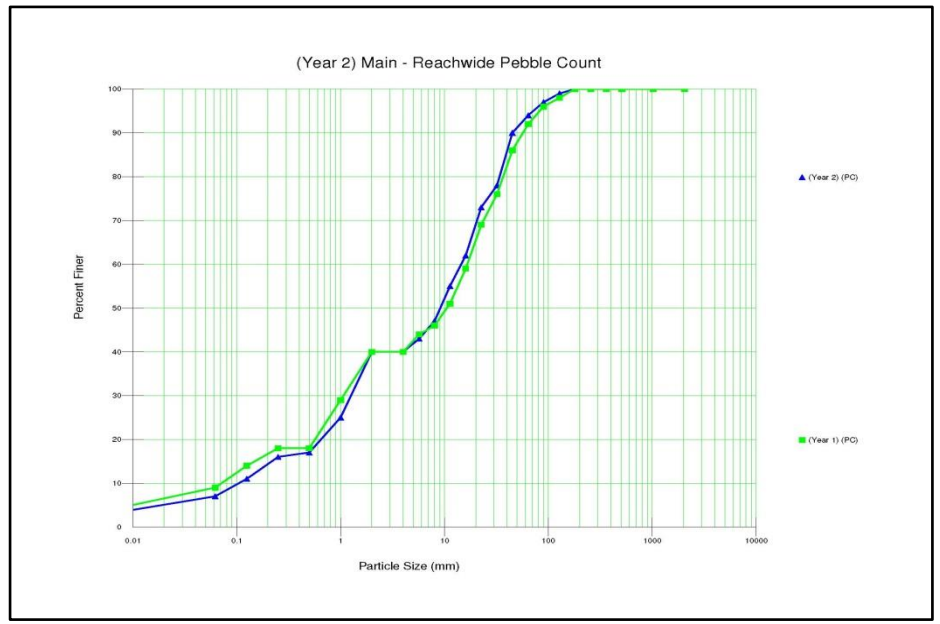

UT to Uwharrie River Stream Restoration Project (#847)					
Reachwide Riffle Pebble Count					
SE-UT					
			MY2 2013		
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	18	18%	18%
Sand	very fine sand	0.125	8	8%	26%
	fine sand	0.25	11	11%	37%
	medium sand	0.5	9	9%	46%
	coarse sand	1	24	24%	70%
	very coarse sand	2	17	17%	87%
Gravel	very fine gravel	4	0	0%	87%
	fine gravel	5.7	3	3%	90%
	fine gravel	8	2	2%	92%
	medium gravel	11.3	4	4%	96%
	medium gravel	16	2	2%	98%
	coarse gravel	22.3	0	0%	98%
	coarse gravel	32	0	0%	98%
	very coarse gravel	45	2	2%	100%
Cobble	very coarse gravel	64	0	0%	100%
	small cobble	90	0	0%	100%
	medium cobble	128	0	0%	100%
	large cobble	180	0	0%	100%
	very large cobble	256	0	0%	100%
Boulder	small boulder	362	0	0%	100%
	small boulder	512	0	0%	100%
	medium boulder	1024	0	0%	100%
	large boulder	2048	0	0%	100%
Bedrock	bedrock	bedrock	0	0%	100%
Total % of whole count			100		

Summary Data	
D50	0.58
D84	1.82
D95	10.48

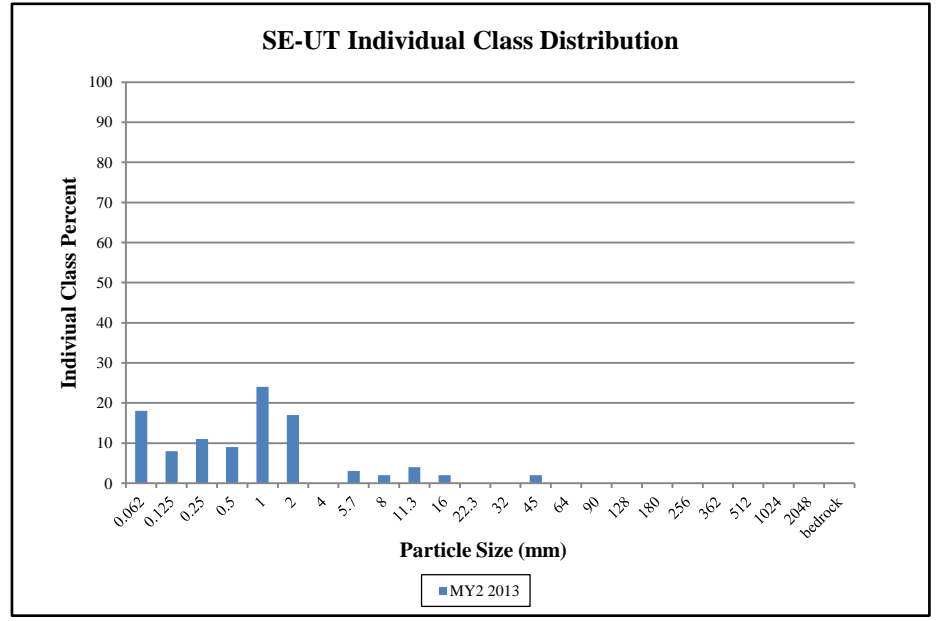
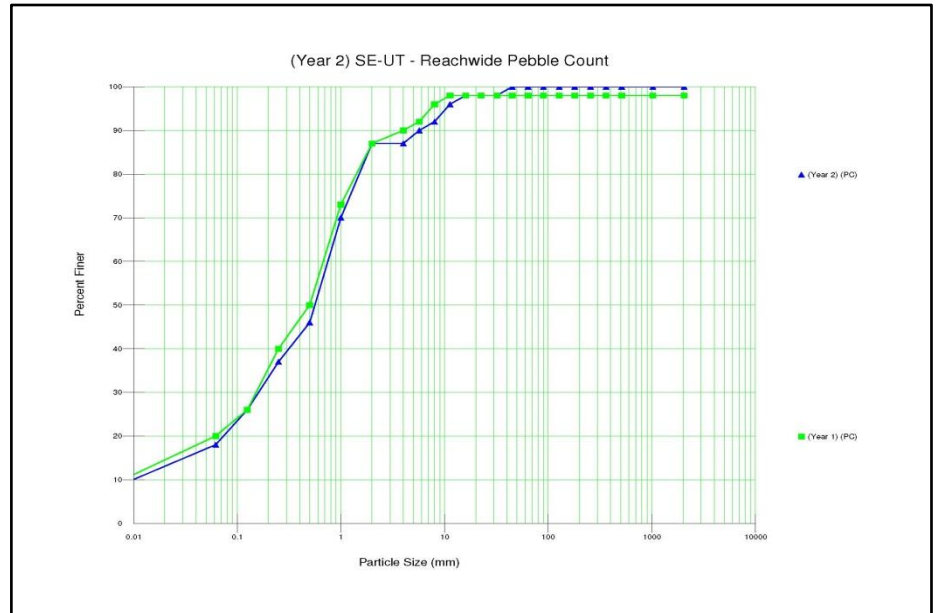


Table 10a. Baseline Stream Data Summary																									
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: NW-UT (338 feet)																									
Parameter	Gauge ²	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline					
Dimension and Substrate - Riffle Only		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n
Bankfull Width (ft)		-	-	-	15.83	15.9		15.97	-	-							-	16.25	-						
Floodprone Width (ft)					20.26	40.13		60	-	-							63.71	88.9	119.7						
Bankfull Mean Depth (ft)		-	-	-	1.35	1.37		1.4	-	-							-	1.35	-						
¹ Bankfull Max Depth (ft)					1.29	1.98		2.64	-	-							1.29	1.98	2.64						
Bankfull Cross Sectional Area (ft ²)		-	-	-	21.5	22.1		21.8	-	-							-	22	-						
Width/Depth Ratio					11.34	11.6		11.86	-	-							-	12	-						
Entrenchment Ratio					1.28	2.52		3.76	-	-							3.92	5.47	7.37						
¹ Bank Height Ratio					1.12	1.85		2.46	-	-							1.00	1.00	1.00						
Profile																									
Riffle Length (ft)					9.77	29.36		56.76	-	-							9.77	29.36	56.76						
Riffle Slope (ft/ft)					0.012	0.025		0.054	-	-							0.012	0.025	0.054						
Pool Length (ft)					19.23	20.25		21.06	-	-							19.23	20.25	21.06						
Pool Max depth (ft)					3.08	3.37		3.86	-	-							3.08	3.37	3.86						
Pool Spacing (ft)					87.59	147.86		208.13	-	-							87.59	147.86	208.13						
Pattern																									
Channel Beltwidth (ft)					NA	NA		NA	-	-							NA	NA	NA						
Radius of Curvature (ft)					NA	NA		NA	-	-							NA	NA	NA						
Rc:Bankfull width (ft/ft)					NA	NA		NA	-	-							NA	NA	NA						
Meander Wavelength (ft)					NA	NA		NA	-	-							NA	NA	NA						
Meander Width Ratio					NA	NA		NA	-	-							NA	NA	NA						
Transport parameters																									
Reach Shear Stress (competency) lb/ft ²								1.163											1.182						
Max part size (mm) mobilized at bankfull								91											93						
Stream Power (transport capacity) W/m ²								-											-						
Additional Reach Parameters																									
Rosgen Classification								E3/1											E3/1						
Bankfull Velocity (fps)								4.14											4.05						
Bankfull Discharge (cfs)								89																	
Valley length (ft)								323																	
Channel Thalweg length (ft)								355											355						
Sinuosity (ft)								1.1											1.1						
Water Surface Slope (Channel) (ft/ft)								0.01423											0.01477						
BF slope (ft/ft)								0.02043											0.01440						
³ Bankfull Floodplain Area (acres)								-											-						
⁴ % of Reach with Eroding Banks								-																	
Channel Stability or Habitat Metric								-																	
Biological or Other								-																	

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.

2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).

3 = Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.

4 = Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data;

5 = Of value/needed only if the n exceeds 3

Table 10a. Baseline Stream Data Summary																									
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: SW-UT (262 feet)																									
Parameter	Gauge ²	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline					
		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n
Dimension and Substrate - Riffle Only																									
Bankfull Width (ft)		-	-	-	11.48	11.5		11.52	-	-	Reference reach data not used for design						-	11.96	-	No baseline data collected.					
Floodprone Width (ft)					13.65	31.64		49.62	-	-		40.03	49.8	67.96											
Bankfull Mean Depth (ft)		-	-	-	1.04	1.14		1.24	-	-		-	1.09	-											
¹ Bankfull Max Depth (ft)					1.22	1.43		2.17	-	-		1.22	1.43	1.77											
Bankfull Cross Sectional Area (ft ²)		-	-	-	11.94	13.1		14.25	-	-		-	13	-											
Width/Depth Ratio					9.25	10.18		11.11	-	-		-	11	-											
Entrenchment Ratio					1.18	2.75		4.32	-	-		3.35	4.16	5.68											
¹ Bank Height Ratio					1.75	2.22		2.75	-	-		1.00	1.00	1.00											
Profile																									
Riffle Length (ft)					2.18	25.77		61.25	-	-							2.18	25.77	61.25						
Riffle Slope (ft/ft)					0.025	0.030		0.034	-	-							0.025	0.030	0.034						
Pool Length (ft)					8.5	11.92		14.39	-	-	Reference reach data not used for design						8.5	11.92	14.39	No baseline data collected.					
Pool Max depth (ft)					2.23	2.49		2.86	-	-		2.23	2.49	2.86											
Pool Spacing (ft)					40.98	52.43		63.87	-	-		40.98	52.43	63.87											
Pattern																									
Channel Beltwidth (ft)					NA	NA		NA	-	-	Reference reach data not used for design						NA	NA	NA	No baseline data collected.					
Radius of Curvature (ft)					NA	NA		NA	-	-		NA	NA	NA											
Rc:Bankfull width (ft/ft)					NA	NA		NA	-	-		NA	NA	NA											
Meander Wavelength (ft)					NA	NA		NA	-	-		NA	NA	NA											
Meander Width Ratio					NA	NA		NA	-	-		NA	NA	NA											
Transport parameters																									
Reach Shear Stress (competency) lb/ft ²								1.607										1.486							
Max part size (mm) mobilized at bankfull								128										118							
Stream Power (transport capacity) W/m ²								-										-							
Additional Reach Parameters																									
Rosgen Classification								E4b			Reference reach data not used for design							E4b	No baseline data collected.						
Bankfull Velocity (fps)								4.07				4.46													
Bankfull Discharge (cfs)		-	-	-				58																	
Valley length (ft)								261																	
Channel Thalweg length (ft)								271																	
Sinuosity (ft)								1.04																	
Water Surface Slope (Channel) (ft/ft)								0.02275																	
BF slope (ft/ft)								0.02597																	
³ Bankfull Floodplain Area (acres)								-																	
⁴ % of Reach with Eroding Banks								-																	
Channel Stability or Habitat Metric								-																	
Biological or Other								-																	

Shaded cells indicate that these will typically not be filled in.

- 1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.
- 2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).
- 3 = Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.
- 4 = Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data;
- 5 = Of value/needed only if the n exceeds 3

Table 10a. Baseline Stream Data Summary																													
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: Main West (1427 feet)																													
Parameter	Gauge ²	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline									
		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n				
Dimension and Substrate - Riffle Only																													
Bankfull Width (ft)		-	-	-	13.83	16.72		18.7	-	-	11.9	15.48		17.7	-	-	-	18.03	-	No baseline data collected.									
Floodprone Width (ft)					46.36	70.06		104.89	-	-	162	171.25		186	-	-	55	277.5	500										
Bankfull Mean Depth (ft)		-	-	-	1.35	1.46		1.58	-	-	1.23	1.29		1.41	-	-	-	1.39	-										
¹ Bankfull Max Depth (ft)					1.27	2.13		2.99	-	-	1.6	1.94		2.12	-	-	1.72	2.08	2.28										
Bankfull Cross Sectional Area (ft ²)		-	-	-	23.01	24.66		25.52	-	-	20	21.33		22.7	-	-	-	25	-										
Width/Depth Ratio					10.22	12.06		13.89	-	-	11.42	12.97		14.33	-	-	-	13	-										
Entrenchment Ratio					2.87	4.36		7.58	-	-	10.06	11.3		14.45	-	-	2.2	15.39	20										
¹ Bank Height Ratio					1.48	1.74		1.92	-	-	1.00	1.06		1.15	-	-	1.00	1.00	1.00										
Profile																													
Riffle Length (ft)					9.21	32.04		73.15	-	-	4.87	9.64		15.7	-	-	4.87	9.64	15.7										
Riffle Slope (ft/ft)					0.007	0.025		0.081	-	-	0.016	0.023		0.027	-	-													
Pool Length (ft)					11.92	26.43		45.48	-	-	14.89	18.82		22.74	-	-	14.89	18.82	22.74	No baseline data collected.									
Pool Max depth (ft)					1.87	2.94		3.39	-	-	2.85	2.87		2.89	-	-	2.85	2.87	2.89										
Pool Spacing (ft)					41.13	110.83		251.18	-	-	35.73	51.98		68.22	-	-	41.62	60.55	79.47										
Pattern																													
Channel Beltwidth (ft)					8.76	27.68		60.42	-	-	12.54	31.92		54.25	-	-	14.61	37.19	63.2	No baseline data collected.									
Radius of Curvature (ft)					10.12	18.07		24.31	-	-	11.73	18.44		25.3	-	-	13.66	21.48	29.47										
Rc:Bankfull width (ft/ft)					0.61	1.08		1.45	-	-	0.76	1.19		1.63	-	-	0.76	1.19	1.63										
Meander Wavelength (ft)					68.83	99.94		145.61	-	-	64.32	80		114	-	-	74.93	93.55	132.81										
Meander Width Ratio					0.52	1.66		3.61	-	-	0.81	2.06		3.51	-	-	0.81	2.06	3.51										
Transport parameters																													
Reach Shear Stress (competency) lb/ft ²								1.136									0.682												
Max part size (mm) mobilized at bankfull								89									52												
Stream Power (transport capacity) W/m ²								-									-												
Additional Reach Parameters																													
Rosgen Classification								E4						CE4/1			CE4/1		No baseline data collected.										
Bankfull Velocity (fps)								4.19									4.28												
Bankfull Discharge (cfs)								107																					
Valley length (ft)								1165						219															
Channel Thalweg length (ft)								1235						309			1422												
Sinuosity (ft)								1.06						1.41			1.27												
Water Surface Slope (Channel) (ft/ft)								0.01264						0.00872			0.01055												
BF slope (ft/ft)								0.01159						0.00781			(0.00773 - 0.00839)												
³ Bankfull Floodplain Area (acres)								-						-			-												
⁴ % of Reach with Eroding Banks								-						Less than 1%															
Channel Stability or Habitat Metric								-						-															
Biological or Other								-						-															

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.

2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).

3 = Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.

4 = Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data;

5 = Of value/needed only if the n exceeds 3

Table 10a. Baseline Stream Data Summary																													
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: Main Center (1513 feet)																													
Parameter	Gauge ²	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline									
Dimension and Substrate - Riffle Only		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n				
Bankfull Width (ft)		-	-	-	11.84	12.2		12.55	-	-	11.9	15.48		17.7	-	-	-	19.08	-	No baseline data collected.									
Floodprone Width (ft)					54.98	65.59		76.2	-	-	162	171.25		186	-	-	191.97	215.64	275.76										
Bankfull Mean Depth (ft)		-	-	-	2.19	2.22		2.25	-	-	1.23	1.29		1.41	-	-	-	1.47	-										
¹ Bankfull Max Depth (ft)					2.15	2.69		3.23	-	-	1.6	1.94		2.12	-	-	1.82	2.2	2.41										
Bankfull Cross Sectional Area (ft ²)		-	-	-	26.66	27.08		27.5	-	-	20	21.33		22.7	-	-	-	28	-										
Width/Depth Ratio					5.26	5.49		5.73	-	-	11.42	12.97		14.33	-	-	-	13	-										
Entrenchment Ratio					4.38	5.41		6.44	-	-	10.06	11.3		14.45	-	-	10.06	11.3	14.45										
¹ Bank Height Ratio					1.69	1.96		2.1	-	-	1.00	1.06		1.15	-	-	1.00	1.00	1.00										
Profile																													
Riffle Length (ft)					7.26	19.27		33.85	-	-	4.87	9.64		15.7	-	-	0.31	0.62	1.01										
Riffle Slope (ft/ft)					0.002	0.013		0.026	-	-	0.016	0.023		0.027	-	-	0.010	0.014	0.016										
Pool Length (ft)					11.98	26.85		55.23	-	-	14.89	18.82		22.74	-	-	18.36	23.2	28.04	No baseline data collected.									
Pool Max depth (ft)					2.96	3.8		4.76	-	-	2.85	2.87		2.89	-	-	3.24	3.26	3.28										
Pool Spacing (ft)					45.62	98.98		249.88	-	-	35.73	51.98		68.22	-	-	44.05	64.08	84.11										
Pattern																													
Channel Beltwidth (ft)					4.48	25.55		60.75	-	-	12.54	31.92		54.25	-	-	15.46	39.35	66.88	No baseline data collected.									
Radius of Curvature (ft)					14.59	21.7		26.88	-	-	11.73	18.44		25.3	-	-	14.46	22.73	31.19										
Rc:Bankfull width (ft/ft)					1.2	1.78		2.2	-	-	0.76	1.19		1.63	-	-	0.76	1.19	1.63										
Meander Wavelength (ft)					37.73	87.68		146.25	-	-	64.32	80		114	-	-	79.3	99	140.55										
Meander Width Ratio					0.37	2.1		4.98	-	-	0.81	2.06		3.51	-	-	0.81	2.06	3.51										
Transport parameters																													
Reach Shear Stress (competency) lb/ft ²								0.749										0.499											
Max part size (mm) mobilized at bankfull								58										38											
Stream Power (transport capacity) W/m ²								-										-											
Additional Reach Parameters																													
Rosgen Classification								E4						CE 4/1				CE 4/1	No baseline data collected.										
Bankfull Velocity (fps)								4.22										4.14											
Bankfull Discharge (cfs)								116																					
Valley length (ft)								1220						219															
Channel Thalweg length (ft)								1330						309				1568											
Sinuosity (ft)								1.09						1.41				1.33											
Water Surface Slope (Channel) (ft/ft)								0.00651						0.00872				0.00534											
BF slope (ft/ft)								0.00655						0.00781				0.00562											
³ Bankfull Floodplain Area (acres)								-						-				-											
⁴ % of Reach with Eroding Banks								-						Less than 1%				-											
Channel Stability or Habitat Metric								-						-				-											
Biological or Other								-						-				-											

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.

2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).

3 = Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.

4 = Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data;

5 = Of value/needed only if the n exceeds 3

Table 10a. Baseline Stream Data Summary																														
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: Main East (1192 feet)																														
Parameter	Gauge ²	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline										
Dimension and Substrate - Riffle Only		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n					
Bankfull Width (ft)		-	-	-	13.46	14.9		16.34	-	-	11.9	15.48		17.7	-	-	-	21.02	-	No baseline data collected.										
Floodprone Width (ft)					109.14	113.16		117.17	-	-	162	171.25		186	-	-	46.2	180.6	315											
Bankfull Mean Depth (ft)		-	-	-	2.04	2.27		2.49	-	-	1.23	1.29		1.41	-	-	-	1.62	-											
¹ Bankfull Max Depth (ft)					2.58	3.19		4.38	-	-	1.6	1.94		2.12	-	-	2	2.43	2.65											
Bankfull Cross Sectional Area (ft ²)		-	-	-	33.41	33.45		33.48	-	-	20	21.33		22.7	-	-	-	34	-											
Width/Depth Ratio					5.41	6.7		7.99	-	-	11.42	12.97		14.33	-	-	-	13	-											
Entrenchment Ratio					7.17	7.64		8.11	-	-	10.06	11.3		14.45	-	-	2.2	8.59	15											
¹ Bank Height Ratio					1.14	1.62		1.93	-	-	1.00	1.06		1.15	-	-	1.00	1.00	1.00											
Profile																														
Riffle Length (ft)					12.63	25.58		66.32	-	-	4.87	9.64		15.7	-	-	6.62	13.1	21.33											
Riffle Slope (ft/ft)					0.003	0.016		0.031	-	-	0.016	0.023		0.027	-	-	0.013	0.019	0.022											
Pool Length (ft)					20	36.17		52.63	-	-	14.89	18.82		22.74	-	-	20.23	25.57	30.89	No baseline data collected.										
Pool Max depth (ft)					3.54	4.46		5.12	-	-	2.85	2.87		2.89	-	-	3.57	3.59	3.62											
Pool Spacing (ft)					41.05	118.95		207.37	-	-	35.73	51.98		68.22	-	-	48.54	70.62	92.68											
Pattern																														
Channel Beltwidth (ft)					12.23	25.4		45.16	-	-	12.54	31.92		54.25	-	-	17.04	43.37	73.7											
Radius of Curvature (ft)					23.16	39.42		54.37	-	-	11.73	18.44		25.3	-	-	15.94	25.05	34.37											
Rc:Bankfull width (ft/ft)					1.55	2.65		3.65	-	-	0.76	1.19		1.63	-	-	0.76	1.19	1.63											
Meander Wavelength (ft)					88.19	127.68		178.67	-	-	64.32	80		114	-	-	87.38	109.09	154.88											
Meander Width Ratio					0.82	1.7		3.03	-	-	0.81	2.06		3.51	-	-	0.81	2.06	3.51											
Transport parameters																														
Reach Shear Stress (competency) lb/ft ²								1.024										0.522												
Max part size (mm) mobilized at bankfull								80										40												
Stream Power (transport capacity) W/m ²								-										-												
Additional Reach Parameters																														
Rosgen Classification								E4						CE 4/1				CE 4/1	No baseline data collected.											
Bankfull Velocity (fps)								4.27										4.2												
Bankfull Discharge (cfs)								143																						
Valley length (ft)								1067						219																
Channel Thalweg length (ft)								1163						309				1195												
Sinuosity (ft)								1.09						1.41				1.25												
Water Surface Slope (Channel) (ft/ft)								0.00826						0.00872				0.0072												
BF slope (ft/ft)								0.00764						0.00781				0.00535												
³ Bankfull Floodplain Area (acres)								-						-				-												
⁴ % of Reach with Eroding Banks								-						Less than 1%				-												
Channel Stability or Habitat Metric								-						-				-												
Biological or Other								-						-				-												

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.

2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).

3 = Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.

4 = Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data;

5 = Of value/needed only if the n exceeds 3

Table 10a. Baseline Stream Data Summary
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: SW-Trib (1509 feet)

Parameter	Gauge ²	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline						
		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n	
Dimension and Substrate - Riffle Only																										
Bankfull Width (ft)		-	-	-	3.92	4.5		5.07	-	-	8.7	10.75		12.6	-	-	-	8	-							
Floodprone Width (ft)					8.51	15.89		23.26	-	-	21.6	26.97		38.36	-	-	14.02	20.81	30.69							
Bankfull Mean Depth (ft)		-	-	-	0.48	0.74		1.01	-	-	0.49	0.73		0.9	-	-	-	0.5	-							
¹ Bankfull Max Depth (ft)					0.9	1.07		1.24	-	-	0.97	1.19		1.3	-	-	0.66	0.81	0.89							
Bankfull Cross Sectional Area (ft ²)		-	-	-	2.43	3.19		3.94	-	-	5.7	7.9		9.8	-	-	-	4	-							
Width/Depth Ratio					3.9	7.24		10.58	-	-	10.66	15.26		24.02	-	-	-	16	-							
Entrenchment Ratio					2.17	3.38		4.59	-	-	1.75	2.6		3.84	-	-	1.75	2.6	3.84							
¹ Bank Height Ratio					1.13	1.82		2.31	-	-	1.03	1.12		1.24	-	-	1.00	1.00	1.00							
Profile																										
Riffle Length (ft)					5.91	13.72		23.67	-	-	4.9	16.93		34.09	-	-	3.65	12.6	25.37							
Riffle Slope (ft/ft)					0.008	0.053		0.152	-	-	0.014	0.038		0.055	-	-	0.009	0.026	0.009							
Pool Length (ft)					6.99	12		19.64	-	-	4.13	6.4		9.01	-	-	3.07	4.76	6.71							
Pool Max depth (ft)					1.29	1.62		1.95	-	-	1.52	1.66		1.78	-	-	1.03	1.13	1.21							
Pool Spacing (ft)					11.13	52.59		176.28	-	-	27.6	34.59		49.44	-	-	20.54	25.74	36.79							
Pattern																										
Channel Beltwidth (ft)					4.44	15.85		37.56	-	-	12	15		18	-	-	8.93	11.16	13.4							
Radius of Curvature (ft)					8.69	17.81		25.68	-	-	8.1	13.4		22.3	-	-	6.03	9.97	16.6							
Rc:Bankfull width (ft/ft)					1.93	3.96		5.74	-	-	0.75	1.25		2.07	-	-	0.75	1.25	2.07							
Meander Wavelength (ft)					54.12	55.36		57.65	-	-	47	59		67	-	-	34.98	43.91	49.86							
Meander Width Ratio					0.99	3.53		8.36	-	-	1.12	1.4		1.67	-	-	1.12	1.4	1.67							
Transport parameters																										
Reach Shear Stress (competency) lb/ft ²								0.76										0.707								
Max part size (mm) mobilized at bankfull								59										59								
Stream Power (transport capacity) W/m ²								-										-								
Additional Reach Parameters																										
Rosgen Classification								E4b						B 4/1a				B 4/1a								
Bankfull Velocity (fps)								3.61										2.19								
Bankfull Discharge (cfs)								9																		
Valley length (ft)								1333						203.6												
Channel Thalweg length (ft)								1440						224				1564								
Sinuosity (ft)								1.08						1.1			1.22									
Water Surface Slope (Channel) (ft/ft)								0.03009						0.04009			0.02664									
BF slope (ft/ft)								0.0289						0.04159			(0.02180 - 0.04359)									
³ Bankfull Floodplain Area (acres)								-						-			-									
⁴ % of Reach with Eroding Banks								-						None												
Channel Stability or Habitat Metric								-						-												
Biological or Other								-						-												

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.

2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).

3 = Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.

4 = Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data;

5 = Of value/needed only if the n exceeds 3

Table 10a. Baseline Stream Data Summary																									
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: SE-UT(1106 feet)																									
Parameter	Gauge ²	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline					
Dimension and Substrate - Riffle Only		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n
Bankfull Width (ft)		-	-	-	3.02	3.1		3.17	-	-	8.7	10.75		12.6	-	-	-	6.32	-						
Floodprone Width (ft)					3.61	4.54		5.46	-	-	21.6	26.97		38.36	-	-	8.4	10.8	13.2						
Bankfull Mean Depth (ft)		-	-	-	0.65	0.67		0.68	-	-	0.49	0.73		0.9	-	-	-	0.4	-						
¹ Bankfull Max Depth (ft)					0.81	0.87		0.92	-	-	0.97	1.19		1.3	-	-	0.52	0.64	0.7						
Bankfull Cross Sectional Area (ft ²)		-	-	-	2.05	2.06		2.07	-	-	5.7	7.9		9.8	-	-	-	2.5	-						
Width/Depth Ratio					4.45	4.65		4.85	-	-	10.66	15.26		24.02	-	-	-	16	-						
Entrenchment Ratio					1.14	1.47		1.81	-	-	1.75	2.6		3.84	-	-	1.4	1.71	2.2						
¹ Bank Height Ratio					2.64	3.17		3.7	-	-	1.03	1.12		1.24	-	-	1.00	1.00	1.00						
Profile																									
Riffle Length (ft)					0.5	10.27		45.5	-	-	4.9	16.93		34.09	-	-	2.88	9.96	20.06						
Riffle Slope (ft/ft)					0.000	0.087		0.459	-	-	0.014	0.038		0.055	-	-	0.009	0.024	0.004						
Pool Length (ft)					2.32	7.8		18.47	-	-	4.13	6.4		9.01	-	-	2.43	3.77	5.3						
Pool Max depth (ft)					1.15	1.32		1.49	-	-	1.52	1.66		1.78	-	-	0.82	0.89	0.96						
Pool Spacing (ft)					13.69	46.05		88.11	-	-	27.6	34.59		49.44	-	-	16.24	20.35	29.09						
Pattern																									
Channel Beltwidth (ft)					17.13	25.49		36.11	-	-	12	15		18	-	-	7.06	8.82	10.59						
Radius of Curvature (ft)					9.88	18.11		32.13	-	-	8.1	13.4		22.3	-	-	4.77	7.88	13.12						
Rc:Bankfull width (ft/ft)					3.19	5.85		10.38	-	-	0.75	1.25		2.07	-	-	0.75	1.25	2.07						
Meander Wavelength (ft)					63.75	90.5		138.87	-	-	47	59		67	-	-	27.65	34.71	39.42						
Meander Width Ratio					5.53	8.24		11.67	-	-	1.12	1.4		1.67	-	-	1.12	1.4	1.67						
Transport parameters																									
Reach Shear Stress (competency) lb/ft ²								0.879									0.499								
Max part size (mm) mobilized at bankfull								68									38								
Stream Power (transport capacity) W/m ²								-									-								
Additional Reach Parameters																									
Rosgen Classification								G5						B 4/1a			B 4/1a								
Bankfull Velocity (fps)								3.68									3.04								
Bankfull Discharge (cfs)								8																	
Valley length (ft)								895						203.6											
Channel Thalweg length (ft)								1020						224			1106								
Sinuosity (ft)								1.14						1.1		1.24									
Water Surface Slope (Channel) (ft/ft)								0.02691						0.04009		0.02474									
BF slope (ft/ft)								0.02948						0.04159		(0.01980 - 0.02739)									
³ Bankfull Floodplain Area (acres)								-						-		-									
⁴ % of Reach with Eroding Banks								-						None											
Channel Stability or Habitat Metric								-						-											
Biological or Other								-						-											

Shaded cells indicate that these will typically not be filled in.

- 1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.
- 2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).
- 3 = Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.
- 4 = Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data;
- 5 = Of value/needed only if the n exceeds 3

Table 10a. Baseline Stream Data Summary
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: N-UT (288 feet)

Parameter	Gauge ²	Regional Curve			Pre-Existing Condition						Reference Reach(es) Data						Design			Monitoring Baseline																																															
		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n																																										
Dimension and Substrate - Riffle Only																																																																			
Bankfull Width (ft)		-	-	-	7.36	7.56		7.76	-	-	11.9	15.48		17.7	-	-	-	13	-	No baseline data collected.																																															
Floodprone Width (ft)					66.47	70.9		75.5	-	-	162	171.25		186	-	-	130.81	146.93	187.9							No baseline data collected.																																									
Bankfull Mean Depth (ft)		-	-	-	1.65	1.71		1.76	-	-	1.23	1.29		1.41	-	-	-	1	-													No baseline data collected.																																			
¹ Bankfull Max Depth (ft)					2.04	2.27		2.55	-	-	1.6	1.94		2.12	-	-	1.24	1.5	1.64																			No baseline data collected.																													
Bankfull Cross Sectional Area (ft ²)		-	-	-	12.82	12.9		12.97	-	-	20	21.33		22.7	-	-	-	13	-																									No baseline data collected.																							
Width/Depth Ratio					4.18	4.44		4.7	-	-	11.42	12.97		14.33	-	-	-	13	-																															No baseline data collected.																	
Entrenchment Ratio					9.03	9.38		9.73	-	-	10.06	11.3		14.45	-	-	10.06	11.3	14.45																																					No baseline data collected.											
¹ Bank Height Ratio					1.1	1.21		1.35	-	-	1.00	1.06		1.15	-	-	1.00	1.00	1.00																																											No baseline data collected.					
Profile																																																																			
Riffle Length (ft)					2.55	14.03		34.73	-	-	4.87	9.64		15.7	-	-	4.09	8.1	13.19	No baseline data collected.																																															
Riffle Slope (ft/ft)					0.000	0.027		0.070	-	-	0.016	0.023		0.027	-	-	0.018	0.027	0.031							No baseline data collected.																																									
Pool Length (ft)					15.89	19.52		23.15	-	-	14.89	18.82		22.74	-	-	12.51	15.81	19.1													No baseline data collected.																																			
Pool Max depth (ft)					2.87	3.08		3.23	-	-	2.85	2.87		2.89	-	-	2.21	2.22	2.24																			No baseline data collected.																													
Pool Spacing (ft)					40.02	80.83		121.64	-	-	35.73	51.98		68.22	-	-	30.02	43.67	57.31																									No baseline data collected.																							
Pattern																																																																			
Channel Beltwidth (ft)					NA	NA		NA	-	-	12.54	31.92		54.25	-	-	10.53	26.81	45.57																															No baseline data collected.																	
Radius of Curvature (ft)					NA	NA		NA	-	-	11.73	18.44		25.3	-	-	9.85	15.49	21.25																																					No baseline data collected.											
Rc:Bankfull width (ft/ft)					NA	NA		NA	-	-	0.76	1.19		1.63	-	-	0.76	1.19	1.63																																											No baseline data collected.					
Meander Wavelength (ft)					NA	NA		NA	-	-	64.32	80		114	-	-	54.03	67.46	95.77	No baseline data collected.																																															
Meander Width Ratio					NA	NA		NA	-	-	0.81	2.06		3.51	-	-	0.81	2.06	3.51							No baseline data collected.																																									
Transport parameters																																																																			
Reach Shear Stress (competency) lb/ft ²								0.781										0.546														No baseline data collected.																																			
Max part size (mm) mobilized at bankfull								60										42																				No baseline data collected.																													
Stream Power (transport capacity) W/m ²								-										-																										No baseline data collected.																							
Additional Reach Parameters																																																																			
Rosgen Classification								E4						CE 4/1				CE 4/1														No baseline data collected.																																			
Bankfull Velocity (fps)								4.02										4.14																				No baseline data collected.																													
Bankfull Discharge (cfs)								52												No baseline data collected.																																															
Valley length (ft)								184						219												No baseline data collected.																																									
Channel Thalweg length (ft)								206						309				300																										No baseline data collected.																							
Sinuosity (ft)								1.12						1.41				1.21																																No baseline data collected.																	
Water Surface Slope (Channel) (ft/ft)								0.01096						0.00872				0.01015																																						No baseline data collected.											
BF slope (ft/ft)								0.0135						0.00781				0.00937																																												No baseline data collected.					
³ Bankfull Floodplain Area (acres)								-						-				-																																																	
⁴ % of Reach with Eroding Banks								-						Less than 1%																		No baseline data collected.																																			
Channel Stability or Habitat Metric								-						-																								No baseline data collected.																													
Biological or Other								-						-						No baseline data collected.																																															

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.

2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).

3 = Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.

4 = Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data;

5 = Of value/needed only if the n exceeds 3

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions) UT to Uwharrie River Stream Enhancement Project (#847) - Reach: NW-UT (338 feet)																					
Parameter	Pre-Existing Condition						Reference Reach(es) Data						Design				As-built/Baseline				
¹ Ri% / Ru% / P% / G% / S%	35	29	18	18	0		Reference reach data not used for design						35	29	18	18	0	No baseline data collected.			
¹ SC% / Sa% / G% / C% / B% / Be%	0	9.8	39.22	47.02	0.98	2.94															
¹ d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)	10.17	47.02	65.37	120.2	228.1	110							156								
² Entrenchment Class <1.5 / 1.5-1.99 / 2.0-4.9 / 5.0-9.9 / >10	114	213	0	0	0																
³ Incision Class <1.2 / 1.2-1.49 / 1.5-1.99 / >2.0	0	0	25	75																	

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions) UT to Uwharrie River Stream Enhancement Project (#847) - Reach: SW-UT (262 feet)																					
Parameter	Pre-Existing Condition						Reference Reach(es) Data						Design				As-built/Baseline				
¹ Ri% / Ru% / P% / G% / S%	38	25	18.5	18.5	0		Reference reach data not used for design						38	25	18.5	18.5	0	No baseline data collected.			
¹ SC% / Sa% / G% / C% / B% / Be%	0	26.26	34.35	33.33	0	6.06															
¹ d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)	1.37	8.72	21.77	120.2	bedr	103							83								
² Entrenchment Class <1.5 / 1.5-1.99 / 2.0-4.9 / 5.0-9.9 / >10	22.2	0	32.8	45	0																
³ Incision Class <1.2 / 1.2-1.49 / 1.5-1.99 / >2.0	0	0	20	80																	

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions) UT to Uwharrie River Stream Enhancement Project (#847) - Reach: Main West (1427 feet)																			
Parameter	Pre-Existing Condition						Reference Reach(es) Data						Design				As-built/Baseline		
¹ Ri% / Ru% / P% / G% / S%	38	25	18.5	18.5	0		26.3	31.6	26.3	15.8	0		25	25	25	25	0	No baseline data collected.	
¹ SC% / Sa% / G% / C% / B% / Be%	0	15.15	24.24	50.51	9.09	1.01	4.23	23	60.09	8.45	0	4.23							
¹ d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)	3.68	44.25	86.74	174.0	476	70.0	142.0	0.36	7.52	17.15	55.6	123.8	76	96					
² Entrenchment Class <1.5 / 1.5-1.99 / 2.0-4.9 / 5.0-9.9 / >10	0	0	75	25	0			0	0	0	0	100							
³ Incision Class <1.2 / 1.2-1.49 / 1.5-1.99 / >2.0	0	25	75	0				100	0	0	0								

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions) UT to Uwharrie River Stream Enhancement Project (#847) - Reach: Main Center (1513 feet)																			
Parameter	Pre-Existing Condition						Reference Reach(es) Data						Design				As-built/Baseline		
¹ Ri% / Ru% / P% / G% / S%	28.3	30	20	21.7	0		26.3	31.6	26.3	15.8	0		25	25	25	25	0	No baseline data collected.	
¹ SC% / Sa% / G% / C% / B% / Be%	0	28.71	56.44	11.88	0.99	1.98	4.23	23	60.09	8.45	0	4.23							
¹ d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)	1.08	8.97	18.89	61.2	169	50.0	45.0	0.36	7.52	17.15	55.6	123.8	76	96					
² Entrenchment Class <1.5 / 1.5-1.99 / 2.0-4.9 / 5.0-9.9 / >10	0	0	20	80	0			0	0	0	0	100							
³ Incision Class <1.2 / 1.2-1.49 / 1.5-1.99 / >2.0	0	0	25	75				100	0	0	0								

Shaded cells indicate that these will typically not be filled in.

1 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave

2 = Entrenchment Class - Assign/bin the reach footage into the classes indicated and provide the percentage of the total reach footage in each class in the table. This will result from the measured cross-sections as well as visual estimates.

3 = Assign/bin the reach footage into the classes indicated and provide the percentage of the total reach footage in each class in the table. This will result from the measured cross-sections as well as the longitudinal profile.

Footnotes 2.3 - These classes are loosely built around the Rosgen classification and hazard ranking breaks, but were adjusted slightly to make for easier assignment to somewhat coarser bins based on visual estimates in the field such that measurement of every segment for ER would not be necessary. The intent here is to provide the reader/consumer of design and monitoring information with a good general sense of the extent of hydrologic containment in the pre-existing and the rehabilitated states as well as comparisons to the reference distributions. ER and BHR have been addressed in prior submissions as a subsample (cross-sections as part of the design survey), however, these subsamples have often focused entirely on facilitating design without providing a thorough pre-construction distribution of these parameters, leaving the reader/consumer with a sample that is weighted heavily on the stable sections of a more complete sample distribution for these parameters, thereby providing the distribution/coverage necessary to provide meaningful comparisons.

**Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: Main East (1192 feet)**

Parameter	Pre-Existing Condition							Reference Reach(es) Data					Design					As-built/Baseline				
¹ Ri% / Ru% / P% / G% / S%	31	31	18	20	0			26.3	31.6	26.3	15.8	0			25	25	25	25	0			No baseline data collected.
¹ SC% / Sa% / G% / C% / B% / Be%	6	31	40	16	1	6		4.23	23	60.09	8.45	0	4.23									
¹ d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)	0.36	1.75	27.3	82.2	Bed	73.0	130.0	0.36	7.52	17.15	55.6	123.8	76	96								
² Entrenchment Class <1.5 / 1.5-1.99 / 2.0-4.9 / 5.0-9.9 / >10	0	25	0	75	0			0	0	0	0	100										
³ Incision Class <1.2 / 1.2-1.49 / 1.5-1.99 / >2.0	20	20	60	0				100	0	0	0											

**Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: SW-Trib (1509 feet)**

Parameter	Pre-Existing Condition							Reference Reach(es) Data					Design					As-built/Baseline				
¹ Ri% / Ru% / P% / G% / S%	45.5	32.7	3	18.8	0			28.6	25	21.4	25	0			25	25	25	25	0			No baseline data collected.
¹ SC% / Sa% / G% / C% / B% / Be%	7.92	40.59	49.51	1.98	0	0		0	30	38	22	5	5									
¹ d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)	0.2	0.63	2.6	16.92	31.92	11	19	0.42	3.67	10.36	123.8	bed										
² Entrenchment Class <1.5 / 1.5-1.99 / 2.0-4.9 / 5.0-9.9 / >10	0.0	33.3	33.3	0.3	0.0			0	50	50	0	0										
³ Incision Class <1.2 / 1.2-1.49 / 1.5-1.99 / >2.0	20	20	20	40				75	25	0	0											

**Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: SE-UT(1106 feet)**

Parameter	Pre-Existing Condition							Reference Reach(es) Data					Design					As-built/Baseline				
¹ Ri% / Ru% / P% / G% / S%	37.5	25	16.7	20.8	0			28.6	25	21.4	25	0			25	25	25	25	0			No baseline data collected.
¹ SC% / Sa% / G% / C% / B% / Be%	20	46	29	3	0	2		0	30	38	22	5	5									
¹ d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)	0.05	0.18	0.59	14.12	64	52	19	0.42	3.67	10.36	123.8	bed										
² Entrenchment Class <1.5 / 1.5-1.99 / 2.0-4.9 / 5.0-9.9 / >10	66.6	33.3	0	0	0			0	50	50	0	0										
³ Incision Class <1.2 / 1.2-1.49 / 1.5-1.99 / >2.0	0	0	0	100				75	25	0	0											

**Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: N-UT (288 feet)**

Parameter	Pre-Existing Condition							Reference Reach(es) Data					Design					As-built/Baseline				
¹ Ri% / Ru% / P% / G% / S%	33.3	25	16.7	25	0			26.3	31.6	26.3	15.8	0			25	25	25	25	0			No baseline data collected.
¹ SC% / Sa% / G% / C% / B% / Be%	7	35	56	2	0	0		4.23	23	60.09	8.45	0	4.23									
¹ d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)	0.33	0.97	10.75	31.3	44	34.0	32.0	0.36	7.52	17.15	55.6	123.8	76	96								
² Entrenchment Class <1.5 / 1.5-1.99 / 2.0-4.9 / 5.0-9.9 / >10	0	0	0	100	0			0	0	0	0	100										
³ Incision Class <1.2 / 1.2-1.49 / 1.5-1.99 / >2.0	60	40	0	0				100	0	0	0											

Shaded cells indicate that these will typically not be filled in.

1 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave

2 = Entrenchment Class - Assign/bin the reach footage into the classes indicated and provide the percentage of the total reach footage in each class in the table. This will result from the measured cross-sections as well as visual estimates.

3 = Assign/bin the reach footage into the classes indicated and provide the percentage of the total reach footage in each class in the table. This will result from the measured cross-sections as well as the longitudinal profile.

Footnotes 2.3 - These classes are loosely built around the Rosgen classification and hazard ranking breaks, but were adjusted slightly to make for easier assignment to somewhat coarser bins based on visual estimates in the field such that measurement of every segment for ER would not be necessary. The intent here is to provide the reader/consumer of design and monitoring information with a good general sense of the extent of hydrologic containment in the pre-existing and the rehabilitated states as well as comparisons to the reference distributions. ER and BHR have been addressed in prior submissions as a subsample (cross-sections as part of the design survey), however, these subsamples have often focused entirely on facilitating design without providing a thorough pre-construction distribution of these parameters, leaving the reader/consumer with a sample that is weighted heavily on the stable sections of a more complete sample distribution for these parameters, thereby providing the distribution/coverage necessary to provide meaningful comparisons.

**Table 11a. Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters – Cross Sections)
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: SW-Trib (724 feet)**

Based on fixed baseline bankfull elevation ¹	Cross Section 1 (Riffle)							Cross Section 2 (Pool)							Cross Section 3 (Riffle)																				
	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+
Record elevation (datum) used	688.7	688.7						683.4	683.5						678.7	678.7																			
Bankfull Width (ft)	6.68	6.91						6.49	7.22						4.05	2.73																			
Floodprone Width (ft)	13.02	13.99						14.59	14.99						11.23	9.19																			
Bankfull Mean Depth (ft)	0.53	0.48						0.57	0.48						0.39	0.49																			
Bankfull Max Depth (ft)	1.02	1.13						1.21	1.15						1.25	0.97																			
Bankfull Cross Sectional Area (ft ²)	3.56	3.32						3.73	3.45						1.59	1.33																			
Bankfull Width/Depth Ratio	12.6	14.4						11.39	15.04						10.38	5.57																			
Bankfull Entrenchment Ratio	1.95	2.02						2.25	2.08						2.77	3.37																			
Bankfull Bank Height Ratio	1.00	1.00						N/A	N/A						1.00	1.00																			
Based on current/developing bankfull feature²																																			
Record elevation (datum) used																																			
Bankfull Width (ft)																																			
Floodprone Width (ft)																																			
Bankfull Mean Depth (ft)																																			
Bankfull Max Depth (ft)																																			
Bankfull Cross Sectional Area (ft ²)																																			
Bankfull Width/Depth Ratio																																			
Bankfull Entrenchment Ratio																																			
Bankfull Bank Height Ratio																																			
Cross Sectional Area between end pins (ft ²)																																			
d50 (mm)																																			

**Table 11a. Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters – Cross Sections)
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: Main West (235 feet)**

Based on fixed baseline bankfull elevation ¹	Cross Section 4 (Pool)							Cross Section 5 (Pool)																											
	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+
Record elevation (datum) used	678.5	678.4						677.1	677.2																										
Bankfull Width (ft)	17.58	16.26						23.84	24.05																										
Floodprone Width (ft)	100+	100+						115	115																										
Bankfull Mean Depth (ft)	1.49	1.68						1.6	1.65																										
Bankfull Max Depth (ft)	3.43	3.52						3.21	3.27																										
Bankfull Cross Sectional Area (ft ²)	26.27	27.3						38.18	39.77																										
Bankfull Width/Depth Ratio	11.8	9.68						14.9	14.58																										
Bankfull Entrenchment Ratio	5.69	6.15						4.82	4.78																										
Bankfull Bank Height Ratio	N/A	N/A						N/A	N/A																										
Based on current/developing bankfull feature²																																			
Record elevation (datum) used																																			
Bankfull Width (ft)																																			
Floodprone Width (ft)																																			
Bankfull Mean Depth (ft)																																			
Bankfull Max Depth (ft)																																			
Bankfull Cross Sectional Area (ft ²)																																			
Bankfull Width/Depth Ratio																																			
Bankfull Entrenchment Ratio																																			
Bankfull Bank Height Ratio																																			
Cross Sectional Area between end pins (ft ²)																																			
d50 (mm)																																			

1 = Widths and depths for monitoring resurvey will be based on the baseline bankfull datum regardless of dimensional/depositional development. Input the elevation used as the datum, which should be consistent and based on the baseline datum established. If the performer has inherited the project and cannot acquire the datum used for prior years this must be discussed with EEP. If this cannot be resolved in time for a given years report submission a footnote in this should be included that states: "It is uncertain if the monitoring datum has been consistent over the monitoring history, which may influence calculated values. Additional data from a prior performer is being acquired to provide confirmation. Values will be recalculated in a future submission based on a consistent datum if determined to be necessary."

2 = Based on the elevation of any dominant depositional feature that develops and is observed at the time of survey. If the baseline datum remains the only significant depositional feature then these two sets of dimensional parameters will be equal, however, if another depositional feature of significance develops above or below the baseline bankfull datum then this should be tracked and quantified in these cells.

**Table 11a. Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters – Cross Sections)
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: Main Center and Main East (1588 feet)**

	Cross Section 6 (Riffle)							Cross Section 7 (Pool)							Cross Section 8 (Riffle)							Cross Section 9 (Pool)							Cross Section 10 (Riffle)							
Based on fixed baseline bankfull elevation ¹	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	
Record elevation (datum) used	675.7	675.7						675.0	675.0						673.8	673.7							673.0	673.0						671.1	671.1					
Bankfull Width (ft)	17.9	17.57						20.2	20.43						21.42	21.48							19.2	19.73						17.86	19.78					
Floodprone Width (ft)	110	110						100+	100+						100+	100+							100+	100+						100+	100+					
Bankfull Mean Depth (ft)	1.76	1.68						2	1.9						1.71	1.66							1.99	1.88						1.59	1.52					
Bankfull Max Depth (ft)	2.88	2.87						4.23	4.2						3.66	3.71							4.03	4.12						3.05	3.21					
Bankfull Cross Sectional Area (ft ²)	31.51	29.51						40.29	39.72						36.71	35.63							38.25	37.13						28.39	30.13					
Bankfull Width/Depth Ratio	10.17	10.46						10.1	10.53						12.53	12.94							9.67	10.49						11.23	13.01					
Bankfull Entrenchment Ratio	6.15	6.26						4.95	4.9						4.67	4.66							5.2	5.07						5.6	5.06					
Bankfull Bank Height Ratio	1.00	1.00						N/A	N/A						1.00	1.00							N/A	N/A						1.00	1.00					
Based on current/developing bankfull feature²																																				
Record elevation (datum) used																																				
Bankfull Width (ft)																																				
Floodprone Width (ft)																																				
Bankfull Mean Depth (ft)																																				
Bankfull Max Depth (ft)																																				
Bankfull Cross Sectional Area (ft ²)																																				
Bankfull Width/Depth Ratio																																				
Bankfull Entrenchment Ratio																																				
Bankfull Bank Height Ratio																																				
Cross Sectional Area between end pins (ft ²)																																				
d50 (mm)																																				
	Cross Section 11 (Pool)																																			
Based on fixed baseline bankfull elevation ¹	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	
Record elevation (datum) used	669.9	669.9																																		
Bankfull Width (ft)	18.66	19.95																																		
Floodprone Width (ft)	100+	100+																																		
Bankfull Mean Depth (ft)	1.54	1.47																																		
Bankfull Max Depth (ft)	3.64	3.87																																		
Bankfull Cross Sectional Area (ft ²)	28.75	29.23																																		
Bankfull Width/Depth Ratio	12.12	13.57																																		
Bankfull Entrenchment Ratio	5.36	5.01																																		
Bankfull Bank Height Ratio	N/A	N/A																																		
Based on current/developing bankfull feature²																																				
Record elevation (datum) used																																				
Bankfull Width (ft)																																				
Floodprone Width (ft)																																				
Bankfull Mean Depth (ft)																																				
Bankfull Max Depth (ft)																																				
Bankfull Cross Sectional Area (ft ²)																																				
Bankfull Width/Depth Ratio																																				
Bankfull Entrenchment Ratio																																				
Bankfull Bank Height Ratio																																				
Cross Sectional Area between end pins (ft ²)																																				
d50 (mm)																																				

1 = Widths and depths for monitoring resurvey will be based on the baseline bankfull datum regardless of dimensional/depositional development. Input the elevation used as the datum, which should be consistent and based on the baseline datum established. If the performer has inherited the project and cannot acquire the datum used for prior years this must be discussed with EEP. If this cannot be resolved in time for a given years report submission a footnote in this should be included that states: "It is uncertain if the monitoring datum has been consistent over the monitoring history, which may influence calculated values. Additional data from a prior performer is being acquired to provide confirmation. Values will be recalculated in a future submission based on a consistent datum if determined to be necessary."

2 = Based on the elevation of any dominant depositional feature that develops and is observed at the time of survey. If the baseline datum remains the only significant depositional feature then these two sets of dimensional parameters will be equal, however, if another depositional feature of significance develops above or below the baseline bankfull datum then this should be tracked and quantified in these cells.

Table 11a. Monitoring Data - Dimensional Morphology Summary (Dimensional Parameters – Cross Sections)
UT to Uwharrie River Stream Enhancement Project (#847) - Segment/Reach: SE-UT (517 feet)

Based on fixed baseline bankfull elevation ¹	Cross Section 12 (Riffle)						Cross Section 13 (Pool)						Cross Section 14 (Riffle)															
	Base	MY1	MY2	MY3	MY4	MY5	MY6	Base	MY1	MY2	MY3	MY4	MY5	MY6	Base	MY1	MY2	MY3	MY4	MY5	MY6	Base	MY1	MY2	MY3	MY4	MY5	MY6
Record elevation (datum) used	681.7	681.7						675.6	675.5						672.6	672.6												
Bankfull Width (ft)	7.08	7.26						8.45	10.22						7.26	7.48												
Floodprone Width (ft)	16.11	30.83						23.18	18.67						24.64	44.35												
Bankfull Mean Depth (ft)	0.5	0.58						0.69	0.47						0.51	0.58												
Bankfull Max Depth (ft)	1.11	1.3						1.64	1.2						1.25	1.35												
Bankfull Cross Sectional Area (ft ²)	3.51	4.21						5.82	4.81						3.71	4.33												
Bankfull Width/Depth Ratio	14.16	12.52						12.25	21.74						14.24	12.9												
Bankfull Entrenchment Ratio	2.28	4.25						2.74	1.83						3.39	5.93												
Bankfull Bank Height Ratio	1.00	1.00						N/A	N/A						1.00	1.00												
Based on current/developing bankfull feature²																												
Record elevation (datum) used																												
Bankfull Width (ft)																												
Floodprone Width (ft)																												
Bankfull Mean Depth (ft)																												
Bankfull Max Depth (ft)																												
Bankfull Cross Sectional Area (ft ²)																												
Bankfull Width/Depth Ratio																												
Bankfull Entrenchment Ratio																												
Bankfull Bank Height Ratio																												
Cross Sectional Area between end pins (ft ²)																												
d50 (mm)																												

These cells may or may not require population in any given year. See footnote 2 below

1 = Widths and depths for monitoring resurvey will be based on the baseline bankfull datum regardless of dimensional/depositional development. Input the elevation used as the datum, which should be consistent and based on the baseline datum established. If the performer has inherited the project and cannot acquire the datum used for prior years this must be discussed with EEP. If this cannot be resolved in time for a given years report submission a footnote in this should be included that states: "It is uncertain if the monitoring datum has been consistent over the monitoring history, which may influence calculated values. Additional data from a prior performer is being acquired to provide confirmation. Values will be recalculated in a future submission based on a consistent datum if determined to be necessary."

2 = Based on the elevation of any dominant depositional feature that develops and is observed at the time of survey. If the baseline datum remains the only significant depositional feature then these two sets of dimensional parameters will be equal, however, if another depositional feature of significance develops above or below the baseline bankfull datum then this should be tracked and quantified in these cells.

Exhibit Table 11b. Monitoring Data - Stream Reach Data Summary																																									
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: SW-Trib (724 feet)																																									
Parameter	Baseline					MY-1					MY-2					MY-3					MY-4					MY-5															
	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n					
Dimension and Substrate - Riffle only																																									
Bankfull Width (ft)						4.05	5.37		6.68		2	2.73	4.82		6.91		2																								
Floodprone Width (ft)						1						9.19	13.99		11.59		2																								
Bankfull Mean Depth (ft)												0.48	0.485		0.49		2																								
¹ Bankfull Max Depth (ft)												0.97	1.05		1.13		2																								
Bankfull Cross Sectional Area (ft ²)						Only pool cross sections exist on Main West Reach											1.33	2.33		3.32		2																			
Width/Depth Ratio						1						5.57	9.99		14.4		2																								
Entrenchment Ratio						1						2.02	2.69		3.37		2																								
¹ Bank Height Ratio						1						1.00	1.00		1.00		2																								
Profile																																									
Riffle Length (ft)						0.61	4.99	4.9	13.19	2.74	36	1.59	8.77	6.49	41.01	8.38	22																								
Riffle Slope (ft/ft)						0.00566	0.08389	0.03966	0.08710	0.15297	36	0.01912	0.05624	0.04528	0.16753	0.03265	22																								
Pool Length (ft)						2.40	9.68	10.02	14.64	3.15	31	4.88	11.60	9.66	28.93	6.45	16																								
Pool Max depth (ft)						0.62	1.24	1.25	1.80	0.28	31	0.54	1.21	1.16	1.81	0.35	17																								
Pool Spacing (ft)						8.54	22.22	22.34	37.32	8.30	30	12.44	30.42	31.38	56.92	15.78	14																								
Pattern																																									
Channel Beltwidth (ft)						6.57	10.8	10.48	15.07	2.51	20																														
Radius of Curvature (ft)						9.83	13.88	13.64	17.44	2.64	28																														
Rc:Bankfull width (ft/ft)						1.831	2.5847	2.54	3.248		28																														
Meander Wavelength (ft)						37	42.87	42.38	50.51	3.41	20																														
Meander Width Ratio						1.223	2.0112	1.952	2.806		20																														
Additional Reach Parameters																																									
Rosgen Classification						B4					B4																														
Channel Thalweg length (ft)						724					724																														
Sinuosity (ft)						1.15					1.15																														
Water Surface Slope (Channel) (ft/ft)						0.02372					0.02474																														
BF slope (ft/ft)						0.02376					0.02422																														
³ Ri% / Ru% / P% / G% / S%						38.3	17.02	32.98	11.7	0		35.6	25.4	30.5	8.5	0																									
³ SC% / Sa% / G% / C% / B% / Be%						3	42	55	0	0	0	0	45	55	0	0	0																								
³ d16 / d35 / d50 / d84 / d95 /						0.7	1.57	2.91	7.23	32		0.7	1.57	2.91	10.48	37.2																									
² % of Reach with Eroding Banks						0%					0%																														
Channel Stability or Habitat Metric						N/A					N/A																														
Biological or Other						N/A					N/A																														

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.

2 = Proportion of reach exhibiting banks that are eroding based on the visual survey from visual assessment table

3 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave

4 = Of value/needed only if the n exceeds 3

Exhibit Table 11b. Monitoring Data - Stream Reach Data Summary																																							
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: Main West (235 feet)																																							
Parameter	Baseline						MY-1						MY-2						MY-3						MY-4						MY-5								
	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n			
Dimension and Substrate - Riffle only																																							
Bankfull Width (ft)																																							
Floodprone Width (ft)																																							
Bankfull Mean Depth (ft)																																							
¹ Bankfull Max Depth (ft)							Only pool cross sections exist on Main West Reach						Only pool cross sections exist on Main West Reach																										
Bankfull Cross Sectional Area (ft ²)																																							
Width/Depth Ratio																																							
Entrenchment Ratio																																							
¹ Bank Height Ratio																																							
Profile																																							
Riffle Length (ft)						2.23	5.47	6.14	7.26	1.91	5	5.94	8.32	8.64	11.34	2.10	5																						
Riffle Slope (ft/ft)						0.0091	0.0225	0.0228	0.0372	0.0128	5	0.00441	0.01943	0.01683	0.04339	0.01446	5																						
Pool Length (ft)						8.1	16.58	12.57	35.19	9.94	8	15.13	18.98	17.43	25.93	5.12	4																						
Pool Max depth (ft)						3.18	3.36	3.29	3.68	0.17	8	3.48	3.61	3.53	3.93	0.19	5																						
Pool Spacing (ft)						19.83	29.2	25.97	44.68	9.23	7	21.61	37.01	32.96	60.50	17.02	4																						
Pattern																																							
Channel Beltwidth (ft)						18.67	29.28	33.64	35.54	9.24	3																												
Radius of Curvature (ft)						24.34	27.54	26.78	32.26	3.87	4																												
Rc:Bankfull width (ft/ft)						See note above						Pattern data will not typically be collected unless visual data, dimensional data or profile data indicate significant shifts from baseline																											
Meander Wavelength (ft)						86.37	91.22		96.06		2																												
Meander Width Ratio						See note above																																	
Additional Reach Parameters																																							
Rosgen Classification						E4/1						CE4/1																											
Channel Thalweg length (ft)						235						235																											
Sinuosity (ft)						1.28						1.28																											
Water Surface Slope (Channel) (ft/ft)						0.0056						0.00575																											
BF slope (ft/ft)						0.0085						0.00783																											
³ Ri% / Ru% / P% / G% / S%						25.0	20.0	40.0	15.0	0		25.0	25.0	25.0	25.0	0																							
³ SC% / Sa% / G% / C% / B% / Be%						9	31	52	8	0	0	7	33	54	6	0	0																						
³ d16 / d35 / d50 / d84 / d95 /						0.19	1.55	10.64	42.4	83.5		0.25	1.67	9.24	38.5	72.67																							
² % of Reach with Eroding Banks						5%						0%																											
Channel Stability or Habitat Metric						N/A						N/A																											
Biological or Other						N/A						N/A																											

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.

2 = Proportion of reach exhibiting banks that are eroding based on the visual survey from visual assessment table

3 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave

4 = Of value/needed only if the n exceeds 3

Exhibit Table 11b. Monitoring Data - Stream Reach Data Summary																																									
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: Main Center and Main East (1588 feet)																																									
Parameter	Baseline					MY-1					MY-2					MY-3					MY-4					MY-5															
	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n					
Dimension and Substrate - Riffle only																																									
Bankfull Width (ft)						17.86	19.06	17.9	21.42	2.04	3	17.57	19.61	19.78	21.48	1.96	3																								
Floodprone Width (ft)						100	103.33	100	110	5.77	3	100	103.3	100	110	5.77	3																								
Bankfull Mean Depth (ft)						1.59	1.69	1.71	1.76	0.09	3	1.52	1.62	1.66	1.68	0.09	3																								
¹ Bankfull Max Depth (ft)						2.88	3.2	3.05	3.66	0.41	3	2.87	3.26	3.21	3.71	0.42	3																								
Bankfull Cross Sectional Area (ft ²)						28.39	32.2	31.51	36.71	4.2	3	29.51	31.76	30.13	35.63	3.37	3																								
Width/Depth Ratio						10.17	11.31	11.23	12.53	1.18	3	10.46	12.14	12.94	13.01	1.45	3																								
Entrenchment Ratio						4.67	5.47	5.6	6.15	0.75	3	4.66	5.33	5.06	6.26	0.83	3																								
¹ Bank Height Ratio						1.00	1.00	1.00	1.00	0.00	3	1.00	1.00	1.00	1.00	0.00	3																								
Profile																																									
Riffle Length (ft)						5.23	12.98	11.86	28.96	6.04	28	3.63	12.91	11.99	26.28	5.99	27																								
Riffle Slope (ft/ft)						0.0013	0.0153	0.0113	0.0700	0.0142	28	0.00066	0.01974	0.01320	0.08619	0.02119	27																								
Pool Length (ft)						11.08	24.93	22.79	44.15	10.63	27	8.53	20.59	19.13	51.83	10.70	27																								
Pool Max depth (ft)						3	4.09	4.12	4.91	0.44	27	3.25	4.33	4.34	4.99	0.39	27																								
Pool Spacing (ft)						20.08	56.26	50.03	108.9	23.02	27	18.05	58.05	54.39	115.72	25.70	26																								
Pattern																																									
Channel Beltwidth (ft)						19.05	36.85	35.75	57.38	11.73	20																														
Radius of Curvature (ft)						22.63	29.81	29.63	35.08	3.56	22																														
Rc:Bankfull width (ft/ft)						1.187	1.564	1.555	1.841		22																														
Meander Wavelength (ft)						78.88	102.95	110.8	119	13.73	18																														
Meander Width Ratio						1.00	1.9334	1.876	3.01		18																														
Additional Reach Parameters																																									
Rosgen Classification						E4					C4																														
Channel Thalweg length (ft)						1588					1588																														
Sinuosity (ft)						1.28					1.28																														
Water Surface Slope (Channel) (ft/ft)						0.00584					0.00597																														
BF slope (ft/ft)						0.00543					0.00544																														
³ Ri% / Ru% / P% / G% / S%						29.17	23.96	28.13	18.75	0		25.0	25.9	25.0	24.1	0																									
³ SC% / Sa% / G% / C% / B% / Be%						9	31	52	8	0	0	7	33	54	6	0	0																								
³ d16 / d35 / d50 / d84 / d95 /						0.19	1.55	10.64	42.4	83.5		0.25	1.67	9.24	38.5	72.67																									
² % of Reach with Eroding Banks						6%					9%																														
Channel Stability or Habitat Metric						N/A					N/A																														
Biological or Other						N/A					N/A																														

Pattern data will not typically be collected unless visual data, dimensional data or profile data indicate significant shifts from baseline

Shaded cells indicate that these will typically not be filled in.

- 1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.
- 2 = Proportion of reach exhibiting banks that are eroding based on the visual survey from visual assessment table
- 3 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave
- 4 = Of value/needed only if the n exceeds 3

Exhibit Table 11b. Monitoring Data - Stream Reach Data Summary																																				
UT to Uwharrie River Stream Enhancement Project (#847) - Reach: SE-UT (517 feet)																																				
Parameter	Baseline					MY-1					MY-2					MY-3					MY-4					MY-5										
	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n
Dimension and Substrate - Riffle only																																				
Bankfull Width (ft)						7.08	7.17		7.26		2	7.26	7.37		7.48		2																			
Floodprone Width (ft)						16.11	20.375		24.64		2	30.83	37.59		44.35		2																			
Bankfull Mean Depth (ft)						0.5	0.51		0.51		2	0.58	0.58		0.58		2																			
¹ Bankfull Max Depth (ft)						1.11	1.18		1.25		2	1.3	1.33		1.35		2																			
Bankfull Cross Sectional Area (ft ²)						3.51	3.61		3.71		2	4.21	4.27		4.33		2																			
Width/Depth Ratio						14.16	14.2		14.24		2	12.52	12.71		12.9		2																			
Entrenchment Ratio						2.28	2.835		3.39		2	4.25	5.09		5.93		2																			
¹ Bank Height Ratio						1.00	1.00		1.00		2	1.00	1.00		1.00		2																			
Profile																																				
Riffle Length (ft)						1.39	6.09	4.91	19.19	4.36	26	0.72	6.92	6.06	16.62	4.00	23																			
Riffle Slope (ft/ft)						0.00974	0.07638	0.04626	0.28489	0.07563	26	0.00267	0.06052	0.03962	0.39232	0.08218	23																			
Pool Length (ft)						3.84	10.82	10.62	20.02	4.07	22	4.23	10.23	3.2	16.72	10.29	19																			
Pool Max depth (ft)						0.74	1.41	1.43	1.99	0.32	22	1.08	1.62	1.58	2.58	0.33	19																			
Pool Spacing (ft)						6.27	22.3	18.75	56.93	11.64	22	6.94	27.65	25.85	57.73	15.49	19																			
Pattern																																				
Channel Beltwidth (ft)						5.57	8.88	8.24	13.15	2.37	13																									
Radius of Curvature (ft)						10.13	13.24	12.58	16.34	2.29	21																									
Rc:Bankfull width (ft/ft)						1.413	1.8466	1.755	2.279		21																									
Meander Wavelength (ft)						30.92	36.99	37.36	41.41	3.34	16																									
Meander Width Ratio						0.777	1.2385	1.149	1.834		16																									
Additional Reach Parameters																																				
Rosgen Classification						C5b					C5b																									
Channel Thalweg length (ft)						517					517																									
Sinuosity (ft)						1.17					1.17																									
Water Surface Slope (Channel) (ft/ft)						0.02925					0.02839																									
BF slope (ft/ft)						0.02975					0.02932																									
³ Ri% / Ru% / P% / G% / S%						39.39	15.15	33.33	12.12	0		39.1	17.2	31.2	12.5	0																				
³ SC% / Sa% / G% / C% / B% / Be%						20	67	11	0	0	2	18	69	13	0	0																				
³ d16 / d35 / d50 / d84 / d95 /						0.05	0.21	0.5	1.79	7.42		0.06	0.23	0.58	1.82	10.48																				
² % of Reach with Eroding Banks						0%					0%																									
Channel Stability or Habitat Metric						N/A					N/A																									
Biological or Other						N/A					N/A																									

Pattern data will not typically be collected unless visual data, dimensional data or profile data indicate significant shifts from baseline

Shaded cells indicate that these will typically not be filled in.

- 1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.
- 2 = Proportion of reach exhibiting banks that are eroding based on the visual survey from visual assessment table
- 3 = Riffle, Run, Pool, Glide, Step; Silt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave
- 4 = Of value/needed only if the n exceeds 3

APPENDIX E

Hydrologic Data

Table 12. Verification of Bankfull Events

Table 12. Verification of Bankfull Events UT to Uwharrie River Stream Restoration Project (#847)			
Date of Data Collection	Date of Occurrence	Method	Photo No. (If Available)
11/12/2013	Unknown	Crest Gauge (Main East) ¹	See photo below

1 - The storm event was measured at 1.4 feet above bankfull elevation.



Crest Gauge (Main East) Leaning Over Following Bankfull Event